



Lower700MHz

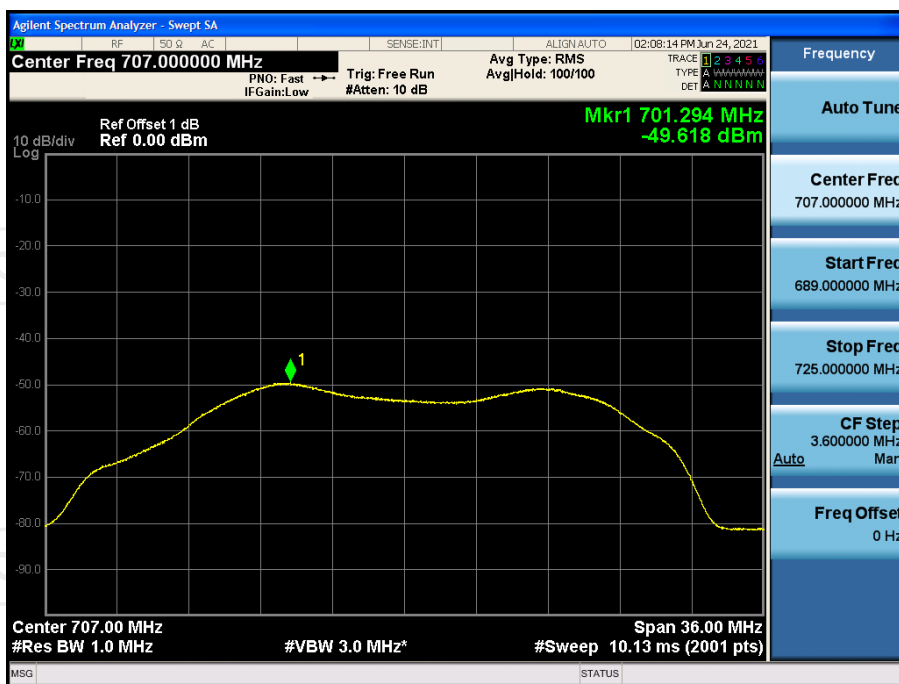


Uplink Noise

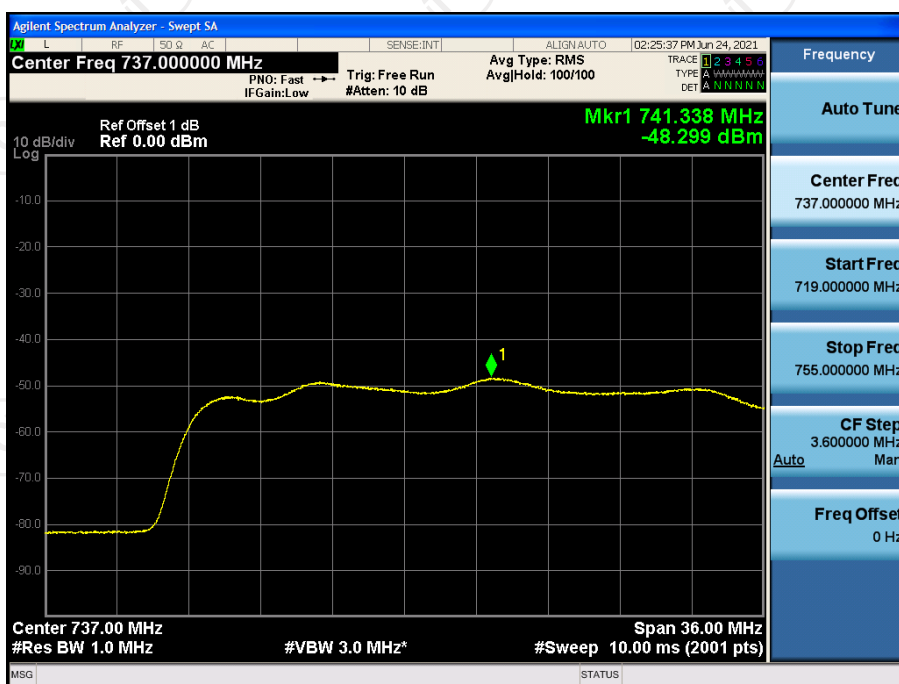

Downlink Noise

Upper700MHz

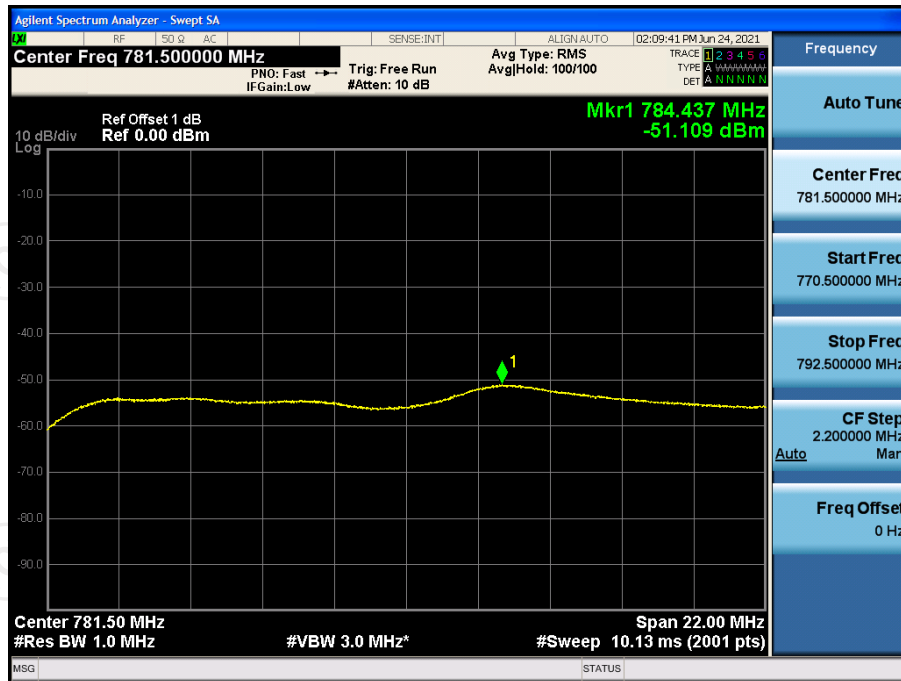


Uplink Noise




Downlink Noise

Variable Noise Timing Test Plots


PCS

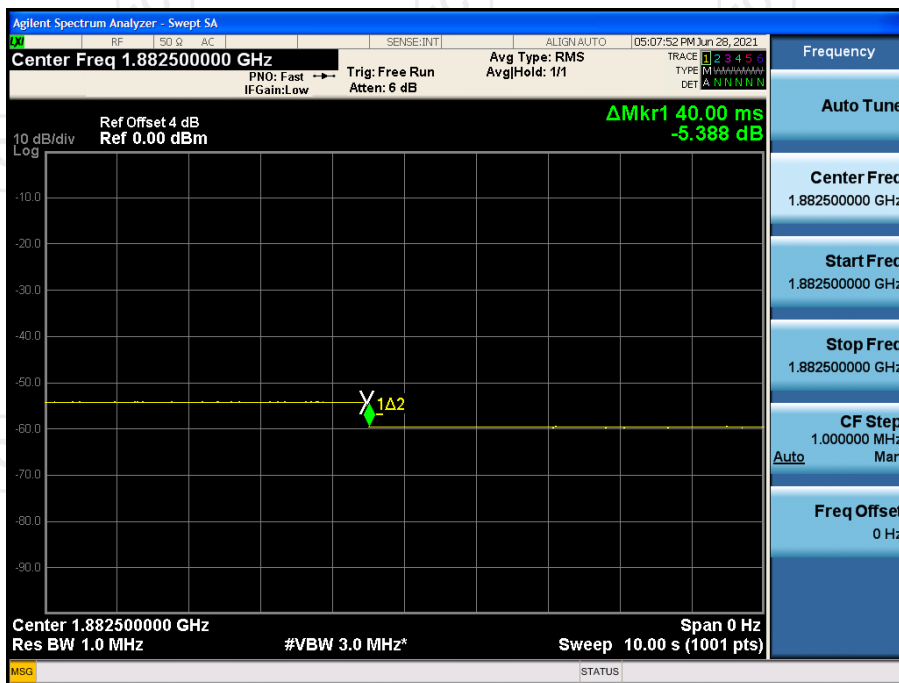


AWS-1

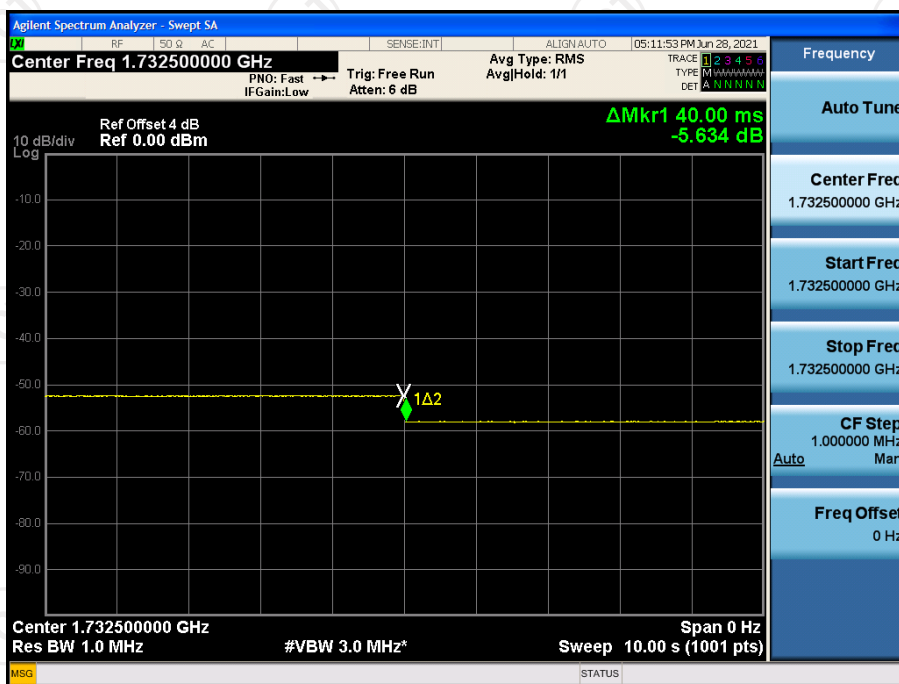


Cellular

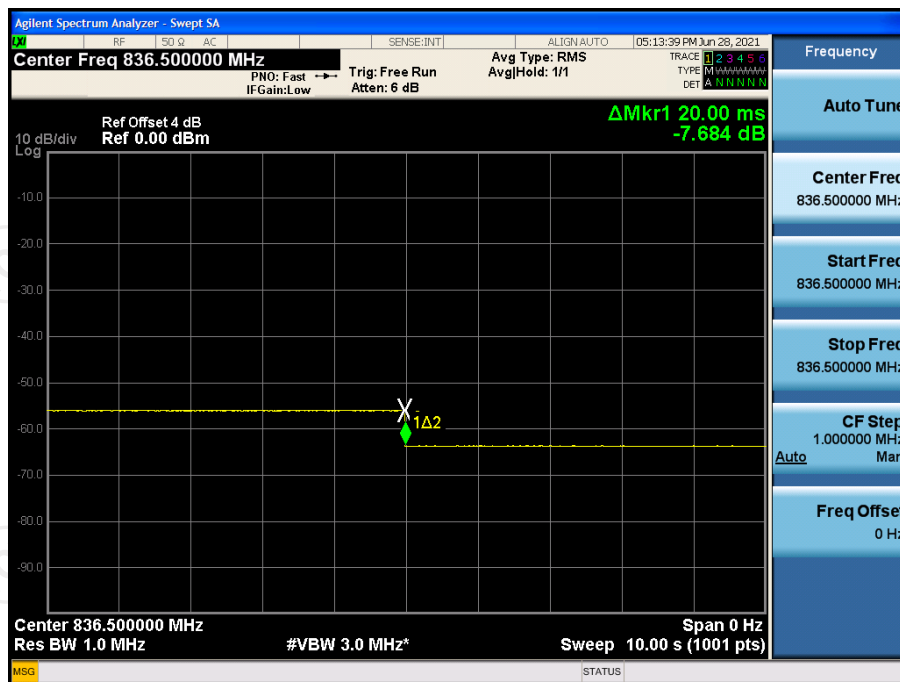

Lower700MHz

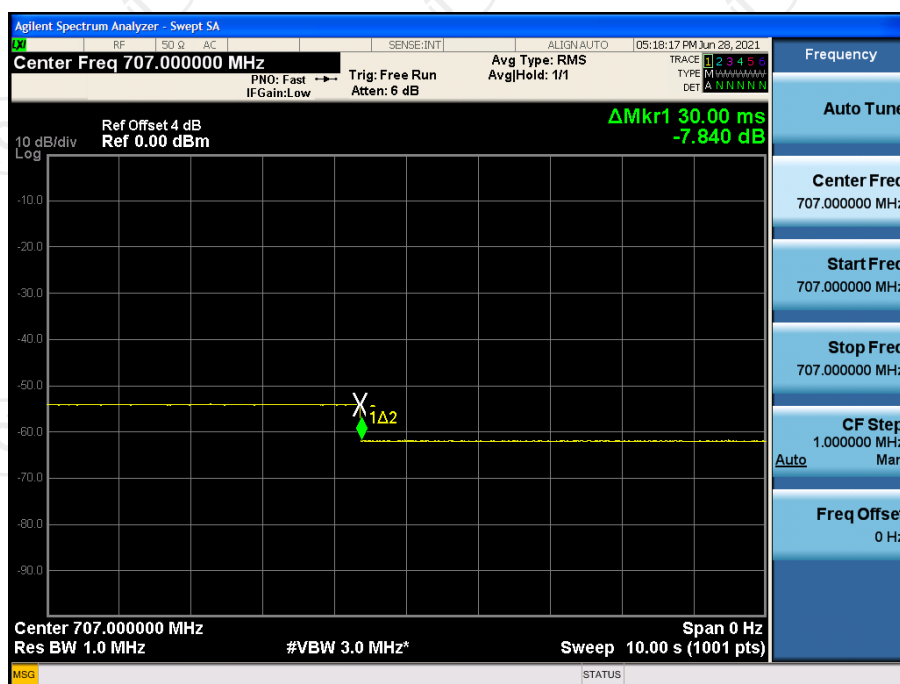


Upper700MHz

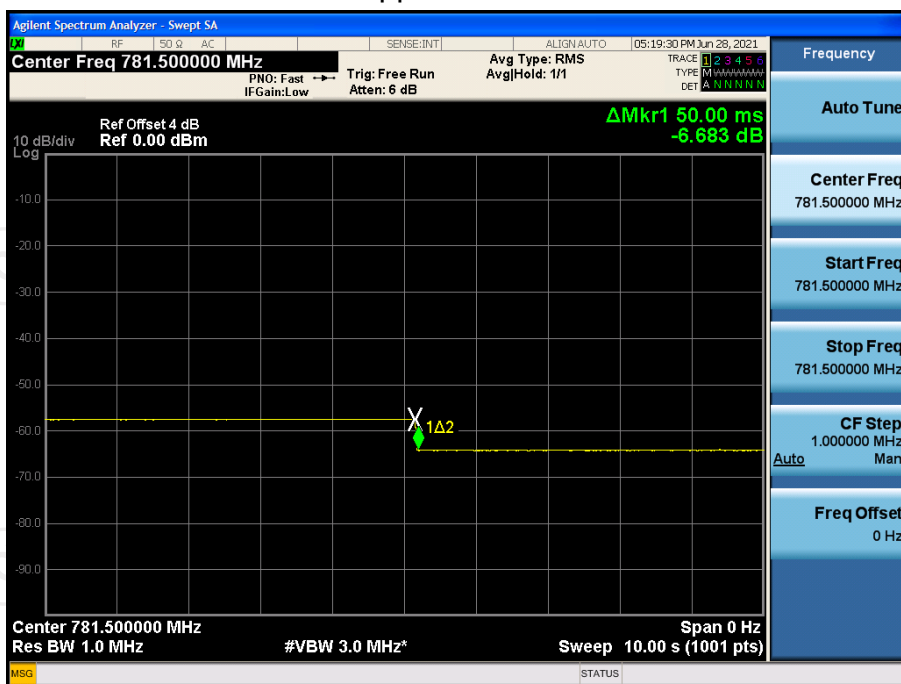

5.7. Uplink Inactivity

5.7.1. Test Specification

Test Requirement:	FCC Part20 Section 20.21(e)(8)(i)(I)
Test Method:	KDB935210 D03 Signal Booster Measurements v04r04
Limit:	20.21(e), When a consumer booster is not serving an active device connection after 5 minutes the uplink noise power shall not exceed -70 dBm/MHz.
Test Setup:	 Figure 3 – Noise limit test setup (also used for 7.8)
Test Procedure:	- Connect the EUT to the test equipment as shown in Set-Up with the uplink output connected to the spectrum analyzer. - Select the RMS power averaging detector. - Set the spectrum analyzer RBW for 1 MHz with the VBW $\geq 3X$ RBW. - Set the center frequency of the spectrum analyzer to the center of the uplink operational band. - Set the span for 0 Hz with a single sweep time for a minimum of 330 seconds. - Start to capture a new trace using MAX HOLD. - After approximately 15 seconds turn on the EUT power. - Once the full spectrum analyzer trace is complete place a MARKER on the leading edge of the pulse and use the DELTA MARKER METHOD to measure the time until the uplink was squelched. - Ensure the noise level for the squelched signal is below the uplink inactivity noise power limit, as specified by the rules. - Capture the Test Plots for inclusion in the test report. - Measure noise using procedures in a) to e). - Repeat steps c) to k) for all operational uplink bands.
Test Result:	PASS

5.7.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 12, 2020	Sep. 11, 2021

5.7.3. Test Data


Uplink Inactivity			
Operation Bands	Measured (s)	Limit (s)	Result
PCS	262.4	300.0	PASS
AWS-1	262.0	300.0	PASS
Cellular	261.7	300.0	PASS
Lower700MHz	262.0	300.0	PASS
Upper700MHz	262.0	300.0	PASS

Test Plots


PCS




AWS-1

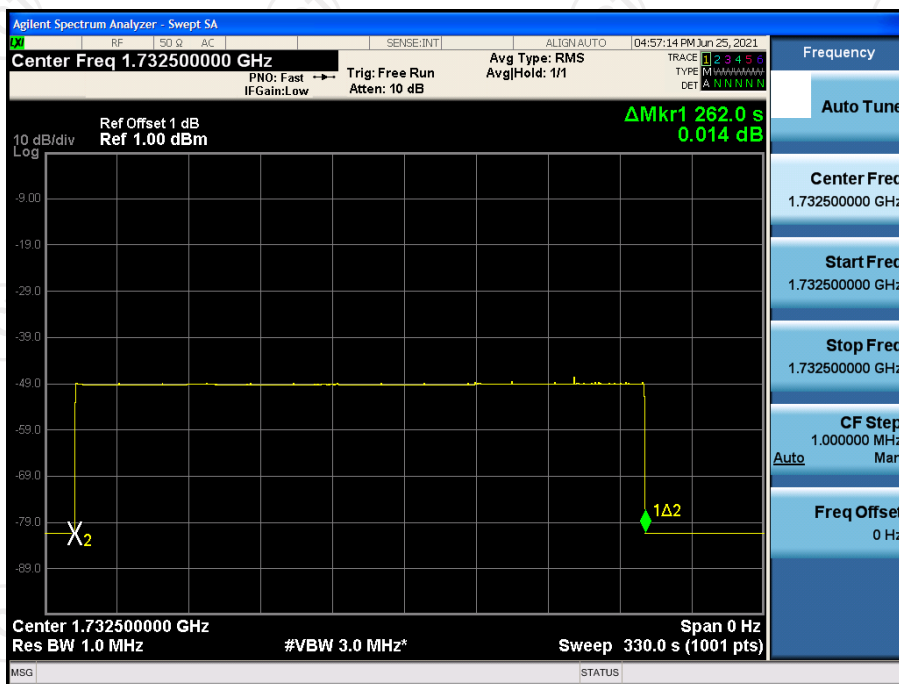


Cellular

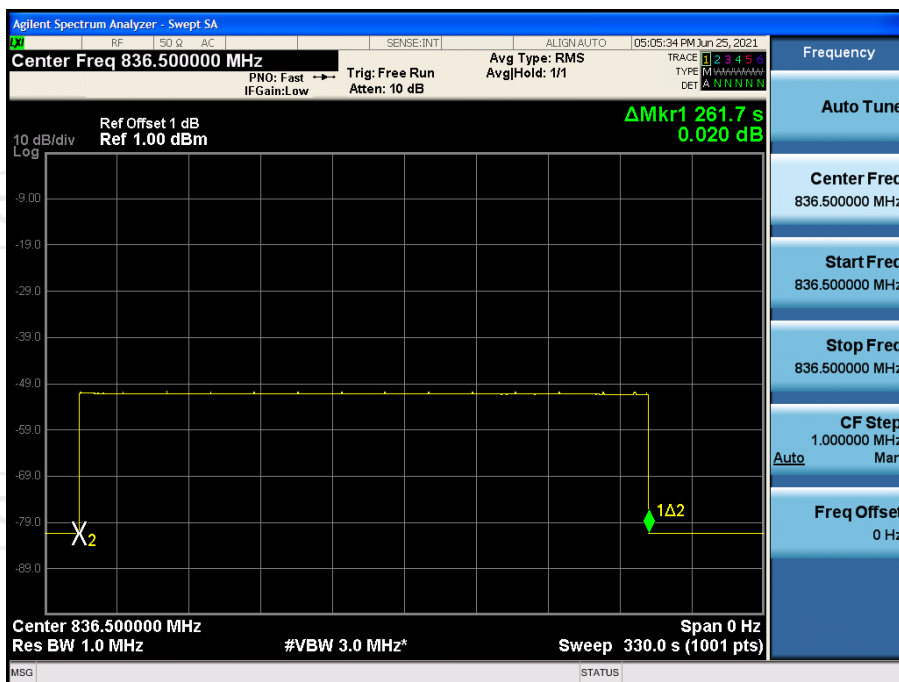

Lower700MHz

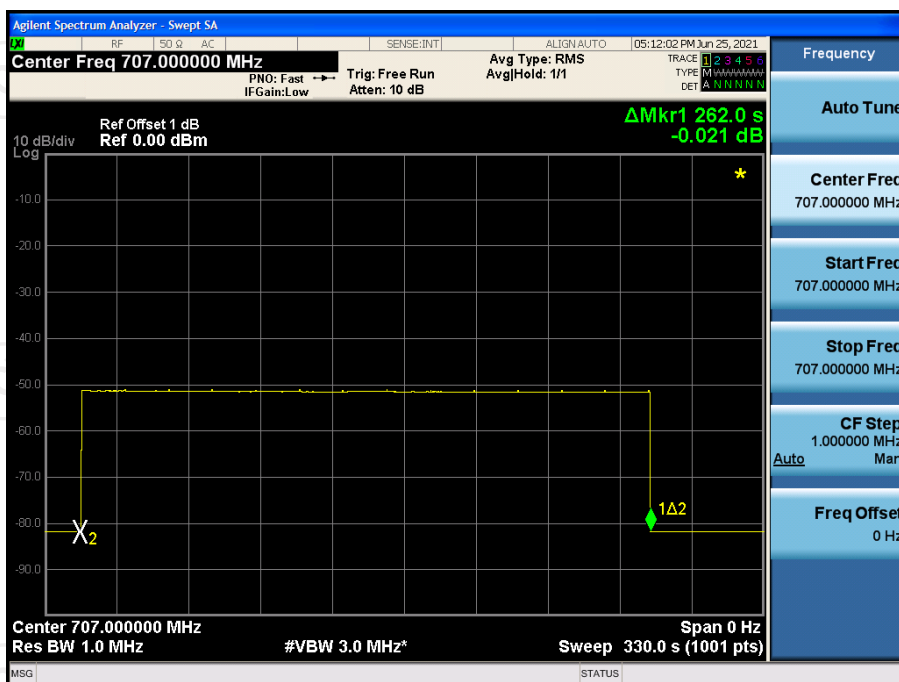


Upper700MHz

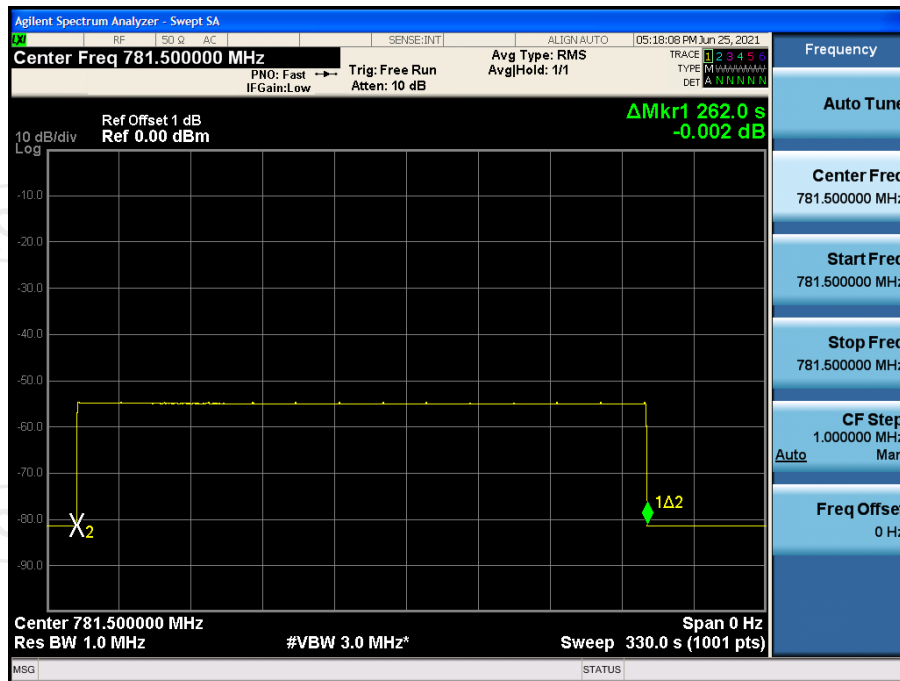

5.8. Variable Booster Gain

5.8.1. Test Specification

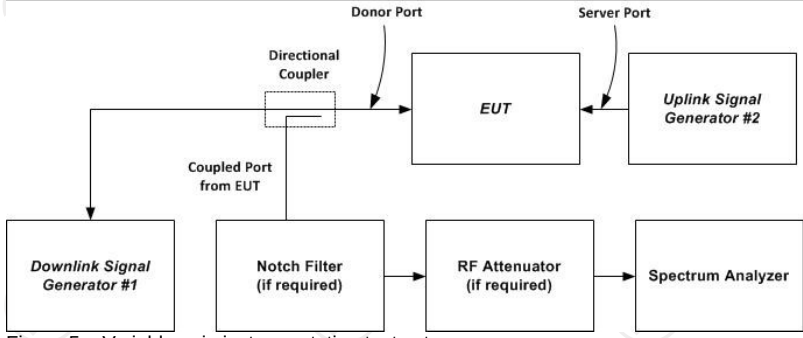Test Requirement:	FCC Part20 Section 120.21(e)(8)(i)(C)(1) FCC Part20 Section 120.21(e)(8)(i)(H)
Test Method:	KDB935210 D03 Signal booster Measurements v04r04
Limit:	-34 dB - RSSI + MSCL
Test Setup:	 Figure 5 – Variable gain instrumentation test setup
Test Procedure:	Variable gain: - Connect the EUT to the test equipment as shown in Figure 5 with the uplink output (donor) port connected to signal generator #1. Affirm that the coupled path of the RF coupler is connected to the spectrum analyzer. - Configure downlink signal generator #1 for AWGN operation with a 99% OBW of 4.1 MHz, tuned to the center of the operational band. - Set the power level and frequency of signal generator #2 to a value that is 5 dB below the AGC level determined from 7.2. The signal type is AWGN with a 99% OBW of 4.1 MHz. - Set RBW = 100 kHz. - Set VBW ≥ 300 kHz. - Select the CHANNEL POWER measurement mode. - Select the power averaging (rms) detector. - Affirm that the number of measurement points per sweep ≥ (2 . span)/RBW. - Sweep time = auto couple or as necessary (but no less than auto couple value). - Trace average at least 10 traces in power averaging (i.e., rms) mode. - Measure the maximum channel power and compute maximum gain when varying the signal generator #1 output to a level from .90 dBm to .20 dBm, as measured at the input port (i.e., downlink signal level at the booster donor port node of Figure 5), in 1 dB steps inside the RSSI-dependent region, and 10 dB steps outside the RSSI-dependent region. Report the six values closest to the limit, including at least two points from within the RSSI-dependent region of operation. See gain limit in charts in Appendix D for uplink gain requirements. Additionally, document that the EUT provides equivalent uplink and downlink gain, and when operating in shutoff mode that the uplink and downlink gain is within the transmit power off mode gain limits. - Repeat 7.9.1b) to 7.9.1k) for all operational uplink bands. Variable uplink gain timing: Variable uplink gain timing is to be measured as follows, using the test setup shown in Figure 5. - Set the spectrum analyzer to the uplink frequency to be

	measured. b) Set the span to 0 Hz with a sweep time of 10 seconds. c) Set the power level of signal generator #1 to the lowest level of the RSSI-dependent gain [see 7.9.1k)]. d) Select MAX HOLD and increase the power level of signal generator #1 by 10 dB for mobile boosters, and by 20 dB for fixed indoor boosters. Signal generator #2 remains same, as described in 7.9.1c). e) Confirm that the uplink gain decreases to the specified levels, within 1 second for mobile devices, and within 3 seconds for fixed devices.13 f) Repeat 7.9.2a) to 7.9.2e) for all operational uplink bands.
Test Result:	PASS

5.8.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Generator	Agilent	E4421B	GB39340839	Jul. 28, 2020	Jul. 27, 2021
Signal Generator	Agilent	N5182A	MY47070282	Sep. 03, 2020	Sep. 02, 2021
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 12, 2020	Sep. 11, 2021
RF Combiner	SUNVNDN	SUD-CS 0800	16230009	Sep. 12, 2020	Sep. 11, 2021
Attenuator	50FP-006-H3	JFW	907763	Sep. 12, 2020	Sep. 11, 2021

5.8.3. Test Data

Mobile station coupling loss (MSCL): the minimum coupling loss (in dB) between the wireless device and the input (server) port of the consumer booster. MSCL must be calculated or measured for each band of operation and provided in compliance test reports. MSCL includes the path loss from the wireless device, and the booster's server antenna gain and cable loss. The wireless device is assumed to be an isotropic (0 dBi) antenna reference. Minimum standoff distances from inside wireless devices to the booster's server antenna must be reasonable and specified by the manufacturer in customer provided installation manuals.

MSCL Calculation							
Operation Bands	Frequency (MHz)	Distance (m)	Path loss (dB)	Indoor Antenna Gain(dBi)	Indoor Cable Loss(dB)	Polarity Loss(dB)	MSCL (dB)
PCS	1850	2	43.86	3	0	3.01	43.87
AWS-1	1710	2	43.18	3	0	3.01	43.19
Cellular	824	2	36.84	3	0	3.01	36.85
Lower700 MHz	698	2	35.40	3	0	3.01	35.41
Upper700 MHz	776	2	36.32	3	0	3.01	36.33

Note : Path loss = $20\log f + 20\log d - 27.5$

Polarity loss = $20\log (1/\sin (45\deg))$ dB = 3.01dB

Variable booster gain							
Operation Band	RSSI (dBm)	Input Power (dBm)	Output Power (dBm)	Measured Gain (dB)	MSCL	Limit	Results
PCS	-80	-42.7	15.69	58.39	43.87	71.98	PASS
	-73	-42.7	15.67	58.37	43.87	71.98	PASS
	-68	-42.7	11.72	54.42	43.87	71.98	PASS
	-64	-42.7	7.82	50.52	43.87	71.98	PASS
	-58	-42.7	1.97	44.67	43.87	67.87	PASS
	-55	-42.7	-1.20	41.50	43.87	64.87	PASS
AWS-1	-80	-43.4	15.67	59.07	43.19	71.27	PASS
	-75	-43.4	15.54	58.94	43.19	71.27	PASS
	-70	-43.4	10.78	54.18	43.19	71.27	PASS
	-66	-43.4	7.12	50.52	43.19	71.27	PASS
	-60	-43.4	1.51	44.91	43.19	69.19	PASS
	-58	-43.4	-0.89	42.51	43.19	67.19	PASS
Cellular	-80	-41.0	14.79	55.79	36.85	64.95	PASS
	-71	-41.0	14.69	55.69	36.85	64.95	PASS
	-66	-41.0	10.35	51.35	36.85	64.95	PASS
	-62	-41.0	7.30	48.30	36.85	64.85	PASS
	-56	-41.0	1.22	42.22	36.85	58.85	PASS
	-51	-41.0	-3.57	37.43	36.85	53.85	PASS
Lower700M	-80	-44.2	15.03	59.23	35.41	63.49	PASS


Hz	-70	-44.2	14.06	58.26	35.41	63.49	PASS
	-65	-44.2	11.36	55.56	35.41	63.49	PASS
	-61	-44.2	8.59	52.79	35.41	62.41	PASS
	-53	-44.2	3.36	47.56	35.41	54.41	PASS
	-49	-44.2	0.51	44.71	35.41	50.41	PASS
Upper700M Hz	-80	-39.4	16.07	55.47	36.33	64.36	PASS
	-70	-39.4	16.04	55.44	36.33	64.36	PASS
	-64	-39.4	12.29	51.69	36.33	64.36	PASS
	-60	-39.4	8.31	47.71	36.33	62.33	PASS
	-56	-39.4	4.72	44.12	36.33	58.33	PASS
	-52	-39.4	0.57	39.97	36.33	54.33	PASS

Variable Uplink Gain Timing


Operation Band	Measured Sec	Limit Sec	Result
PCS	0.03	3.0	PASS
AWS-1	0.06	3.0	PASS
Cellular	0.02	3.0	PASS
Lower700MHz	0.03	3.0	PASS
Upper700MHz	0.03	3.0	PASS

Variable Uplink Gain Timing Test Plots


PCS

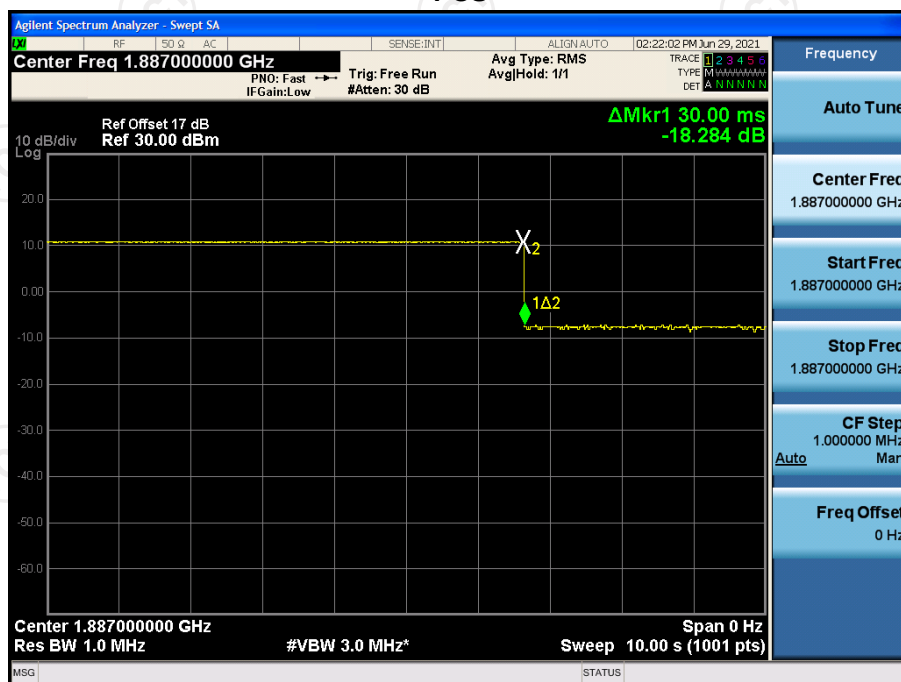


AWS-1

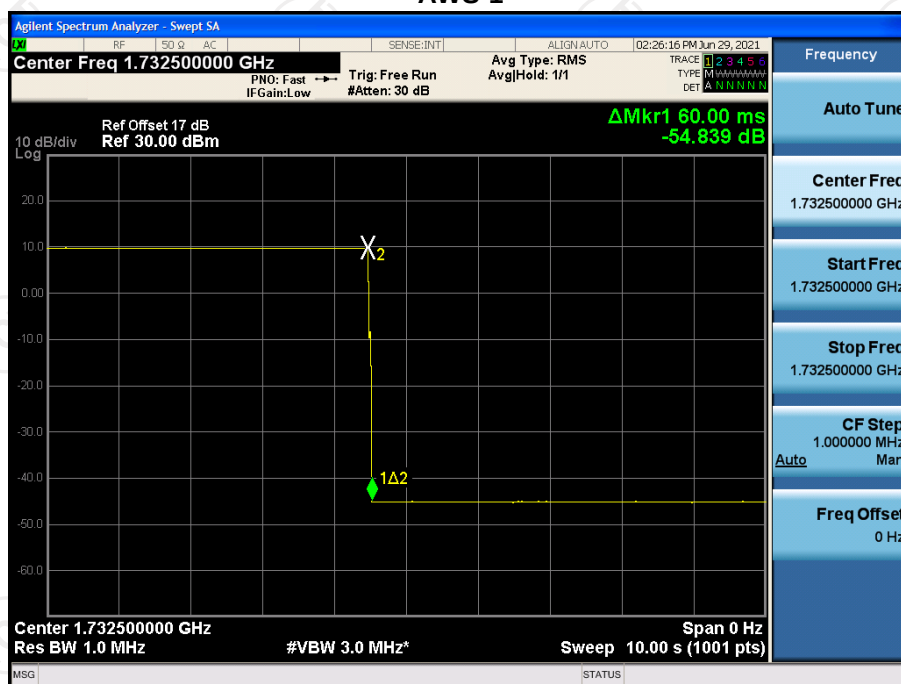


Cellular

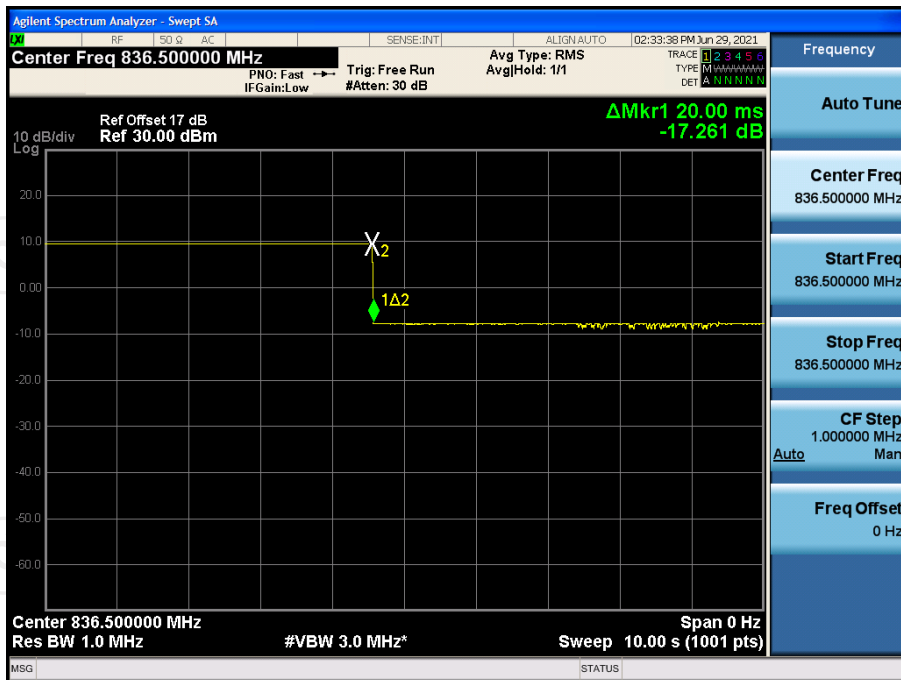

Lower700MHz

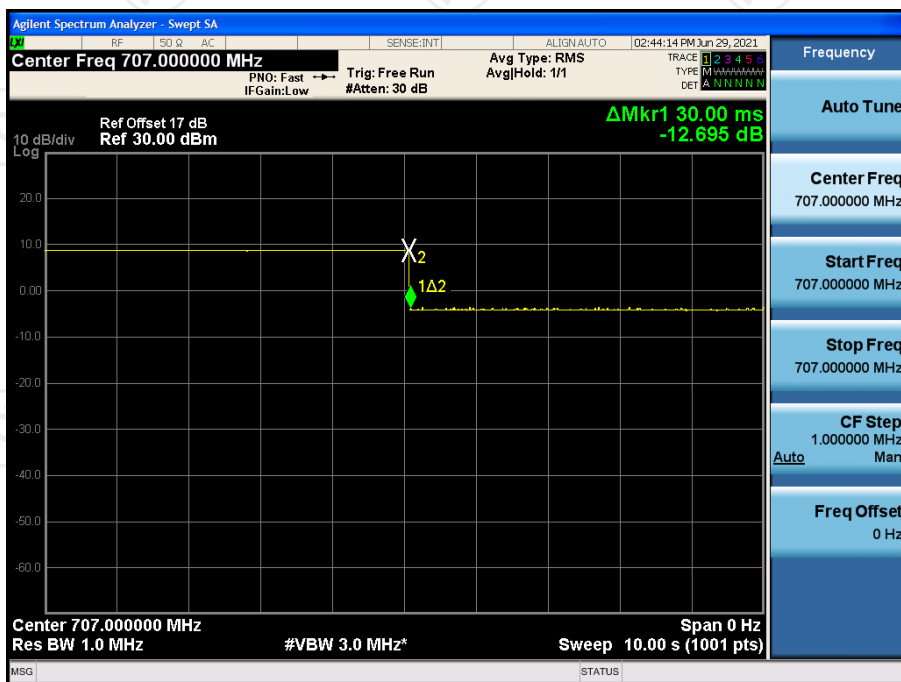


Upper700MHz

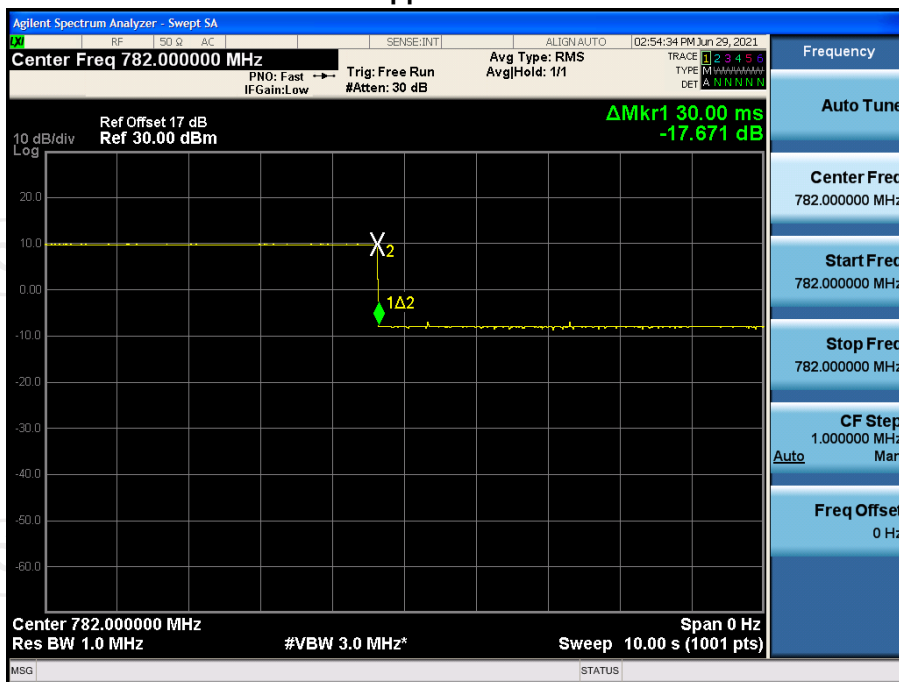

5.9. Occupied Bandwidth

5.9.1. Test Specification

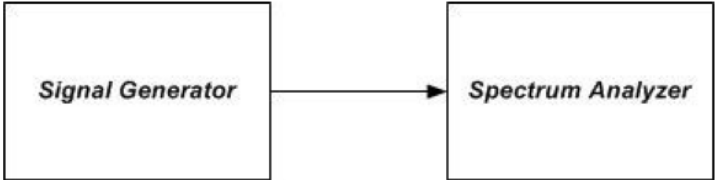Test Requirement:	FCC Part2 Section 2.1049
Test Method:	KDB935210 D03 Signal booster Measurements v04r04
Limit:	N/A
Test setup:	 Figure 6 – Test setup for measuring characteristics of test signals used for subsequent EUT occupied bandwidth testing
Test Procedure:	- Connect the test equipment as shown in Figure 6 to firstly measure the characteristics of the test signals produced by the signal generator. - Set VBW ≥ 3 RBW. - Set the center frequency of the spectrum analyzer to the center of the operational band. The span will be adjusted for each modulation type and OBW as necessary for accurately viewing the signals. - Set the signal generator for power level to match the values obtained from the tests of 7.2. - Set the signal generator modulation type for GSM with a PRBS pattern and allow the trace on the signal generator to stabilize adjusting the span as necessary. - Set the spectrum analyzer RBW for 1% to 5% of the EBW. - Capture the spectrum analyzer trace for inclusion in the test report. - Repeat 7.10c) to 7.10g) for CDMA and W-CDMA modulation, adjusting the span as necessary. AWGN or LTE may be used in place of W-CDMA, as an option. - Repeat 7.10c) to 7.10h) for all uplink and downlink operational bands. - Connect the test equipment as shown in Figure 1, with the uplink output (donor) port connected to the spectrum analyzer, and the server port connected to the signal generator. - Repeat 7.10c) to 7.10i) with this EUT uplink path test setup. - Connect the test equipment as shown in Figure 1, with the downlink output (server) port connected to the spectrum analyzer, and the donor port connected to the signal generator. - Repeat 7.10c) to 7.10j) with this EUT downlink path test setup.
Test results:	PASS

5.9.2. Test Instruments


Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Generator	Agilent	N5182A	MY47070282	Sep. 03, 2020	Sep. 02, 2021
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 12, 2020	Sep. 11, 2021

5.9.3. Test Data


Operation Band		Signal Type	Input OBW [MHz]	Output OBW [MHz]	Results
Uplink	PCS	GSM	0.244	0.240	PASS
		CDMA	1.245	1.247	PASS
		LTE	4.514	4.519	PASS
	AWS-1	GSM	0.244	0.247	PASS
		CDMA	1.249	1.247	PASS
		LTE	4.505	4.522	PASS
	Cellular	GSM	0.246	0.242	PASS
		CDMA	1.246	1.244	PASS
		LTE	4.487	4.512	PASS
	Lower700M Hz	GSM	0.248	0.248	PASS
		CDMA	1.245	1.244	PASS
		LTE	4.512	4.499	PASS
	Upper700M Hz	GSM	0.244	0.247	PASS
		CDMA	1.247	1.245	PASS
		LTE	4.506	4.543	PASS
Downlink	PCS	GSM	0.244	0.244	PASS
		CDMA	1.241	1.248	PASS
		LTE	4.513	4.505	PASS
	AWS-1	GSM	0.247	0.242	PASS
		CDMA	1.249	1.246	PASS
		LTE	4.516	4.516	PASS
	Cellular	GSM	0.248	0.246	PASS
		CDMA	1.248	1.245	PASS
		LTE	4.510	4.508	PASS
	Lower700M Hz	GSM	0.243	0.246	PASS
		CDMA	1.245	1.248	PASS
		LTE	4.511	4.531	PASS
	Upper700M Hz	GSM	0.244	0.244	PASS
		CDMA	1.244	1.247	PASS
		LTE	4.517	4.508	PASS

Test Plots


PCS GSM UL Input

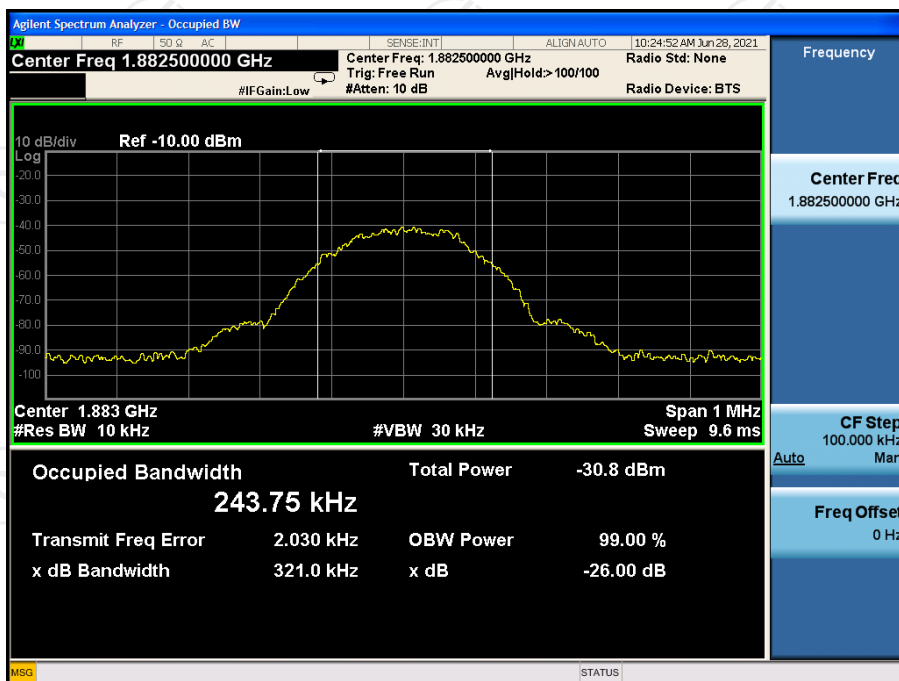


PCS GSM UL output

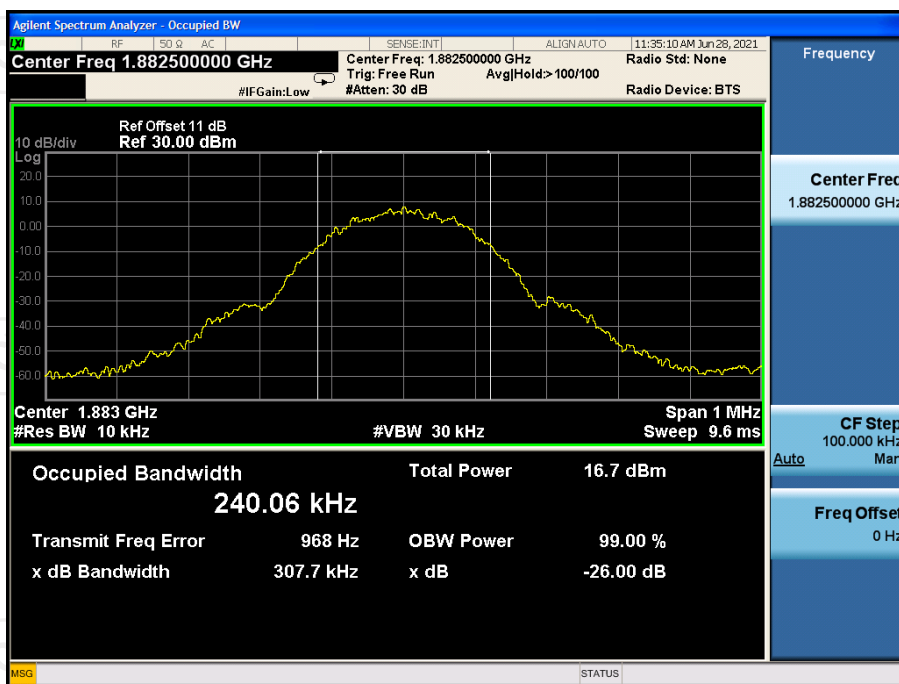


PCS GSM DL Input

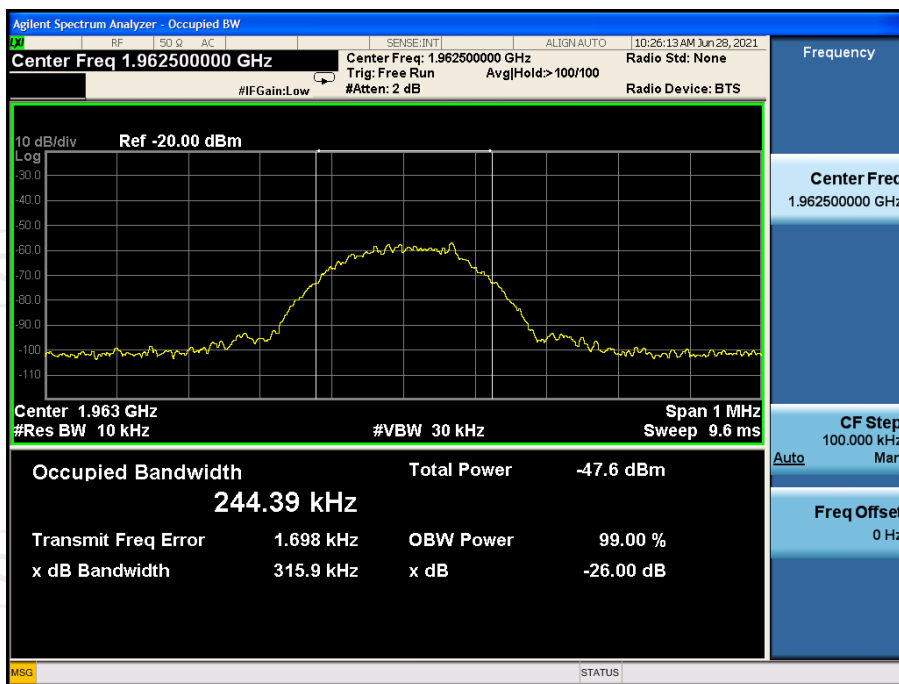


PCS GSM DL Output

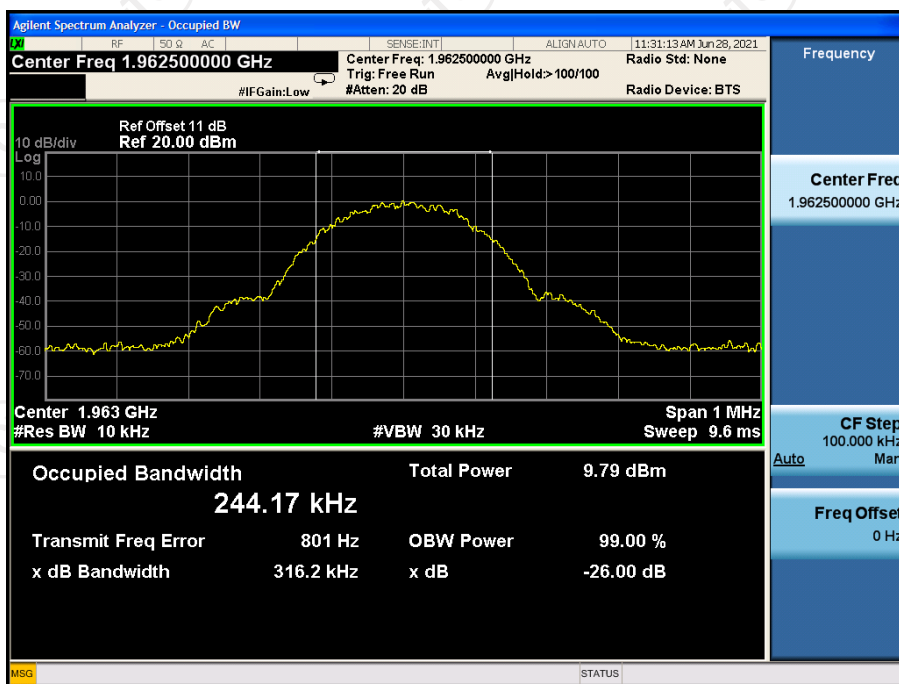


PCS CDMA UL Input

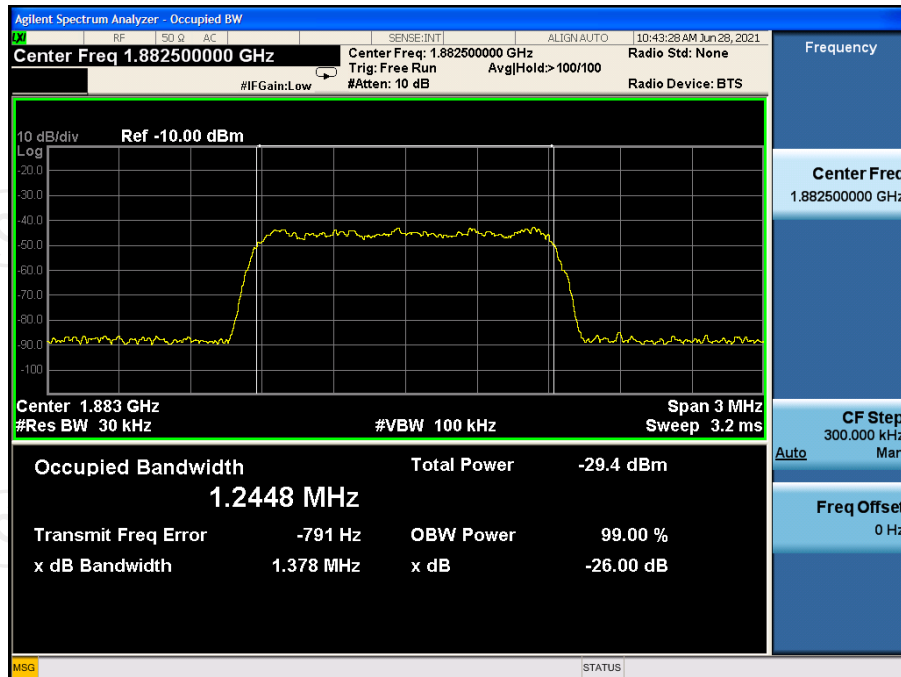


PCS CDMA UL output

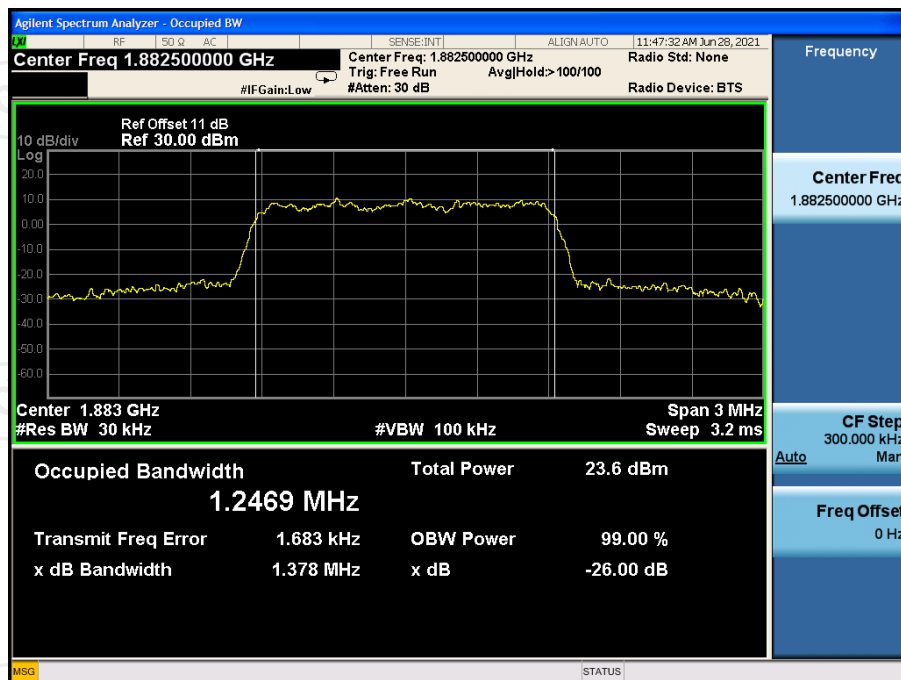


PCS CDMA DL Input

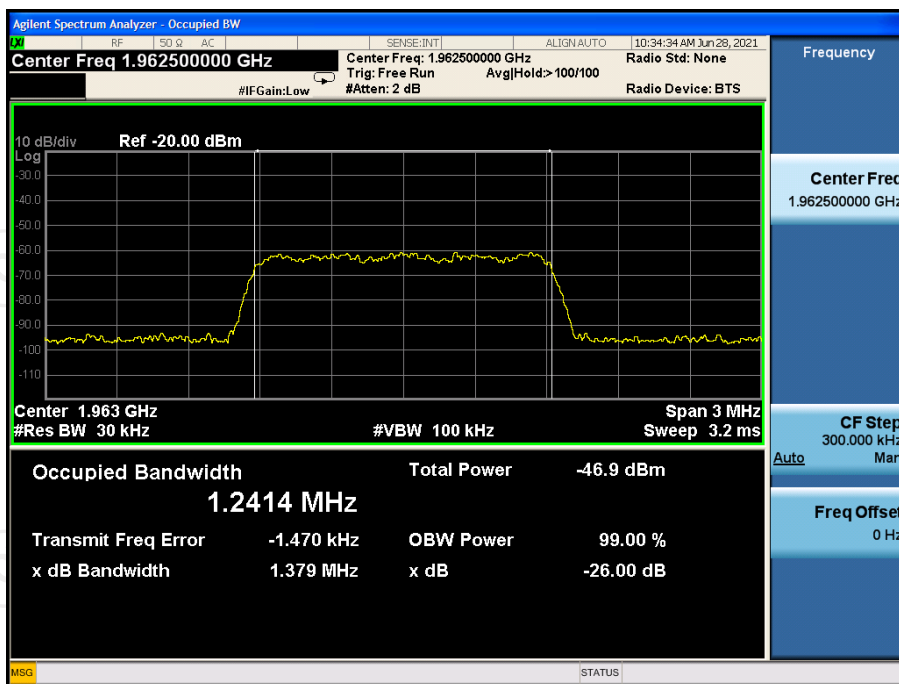


PCS CDMA DL Output

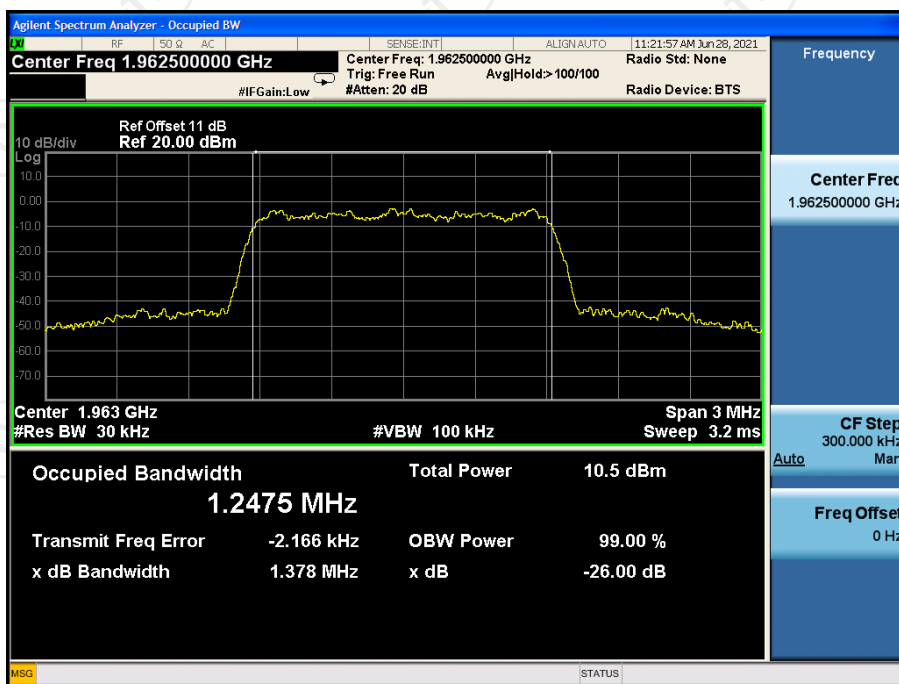


PCS LTE UL Input

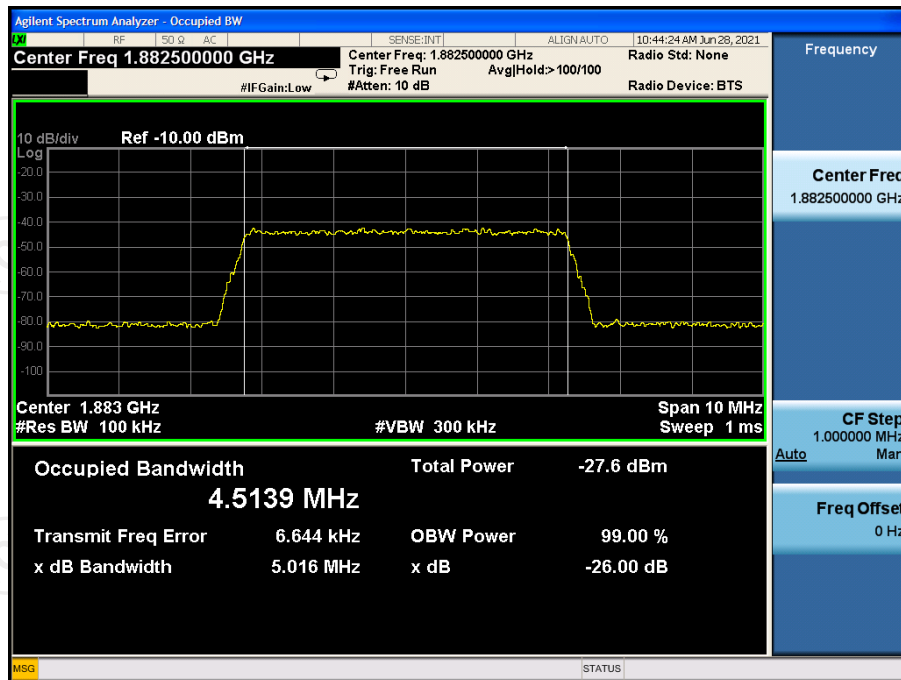


PCS LTE UL output

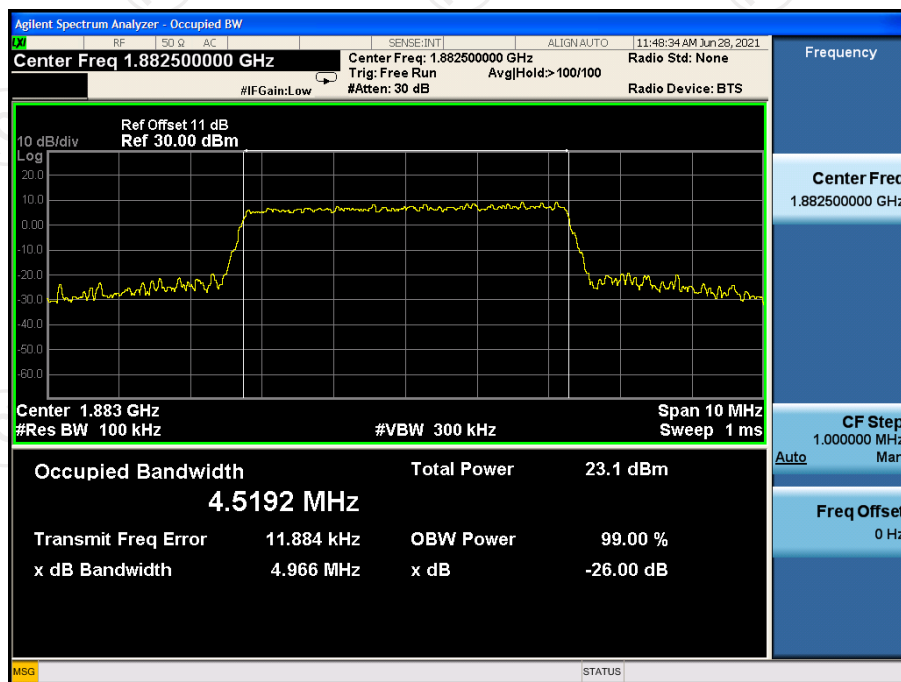


PCS LTE DL Input

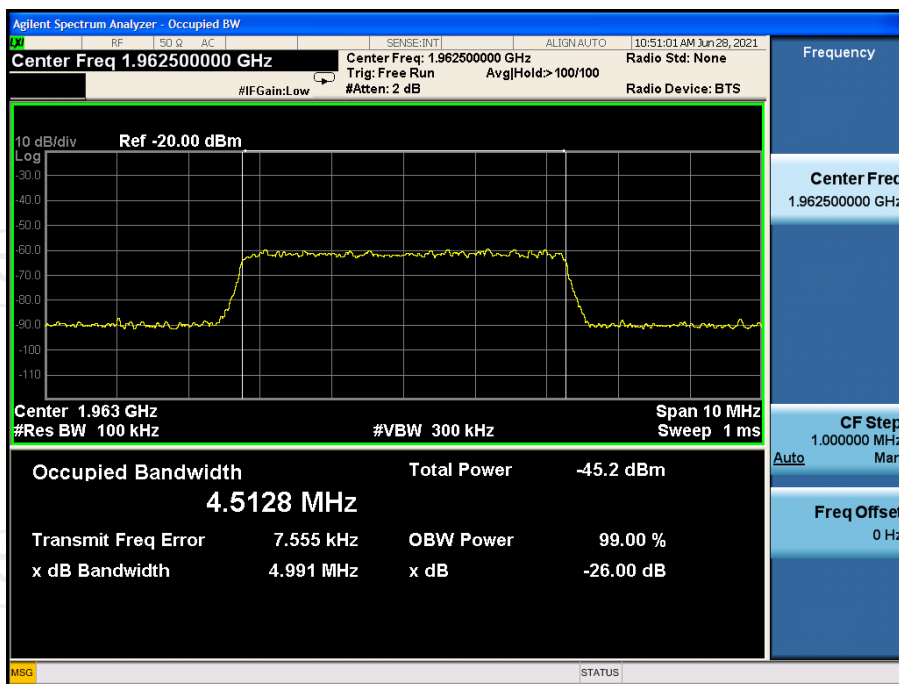


PCS LTE DL Output

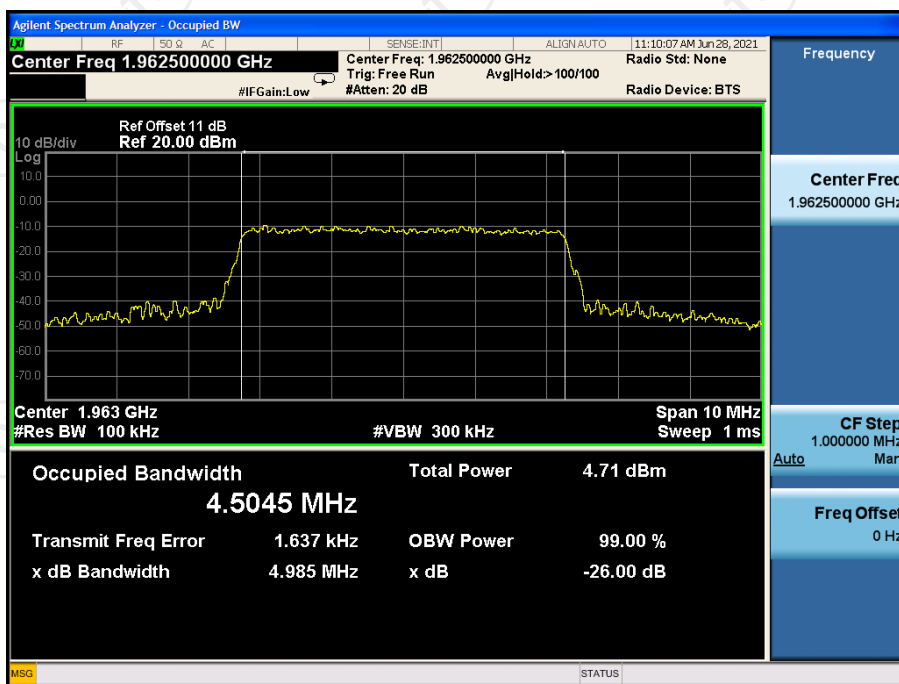


AWS-1 GSM UL Input

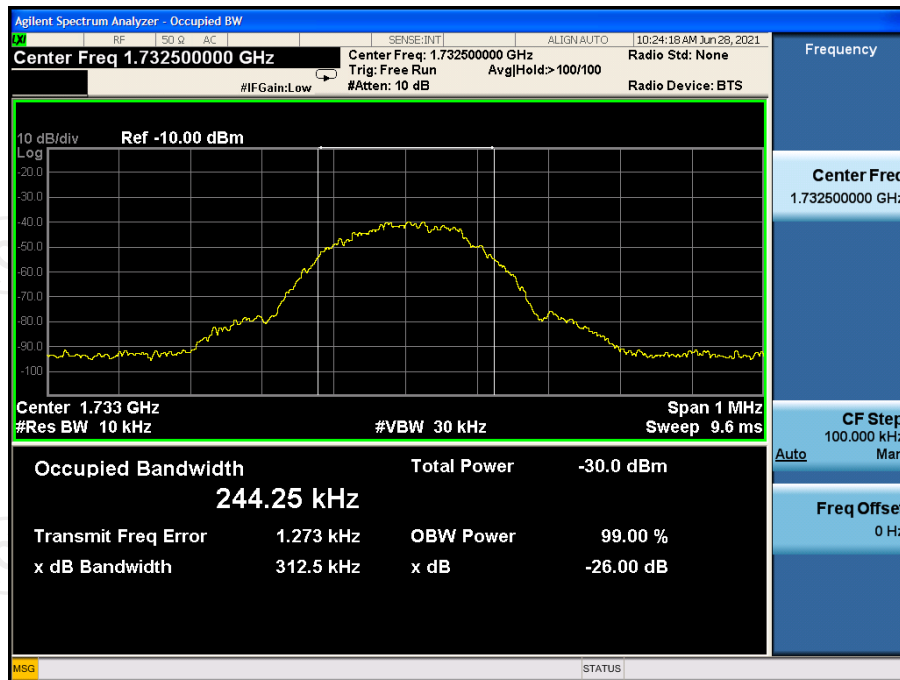


AWS-1 GSM UL output

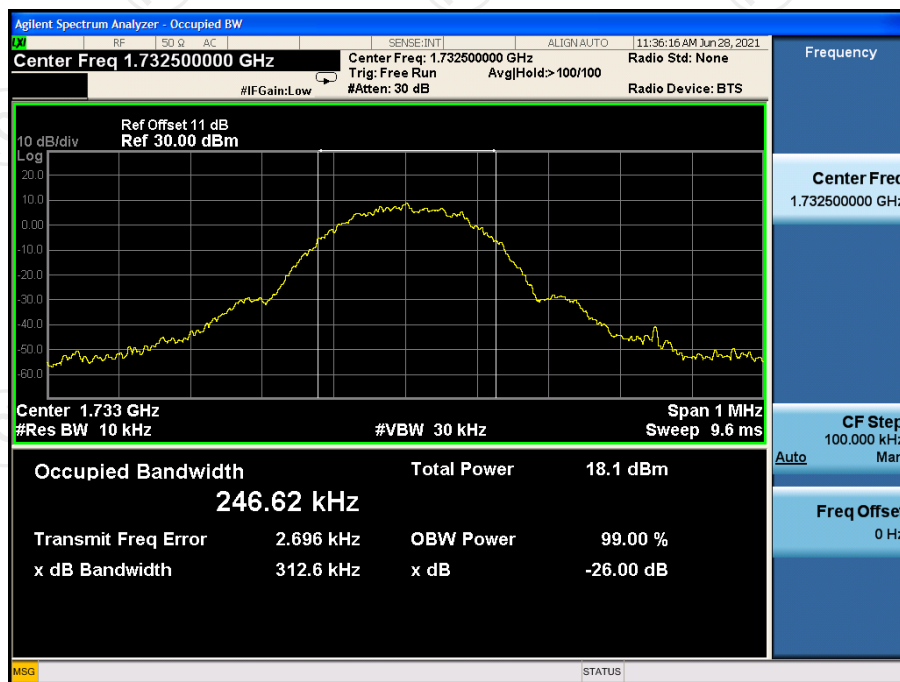


AWS-1 GSM DL Input

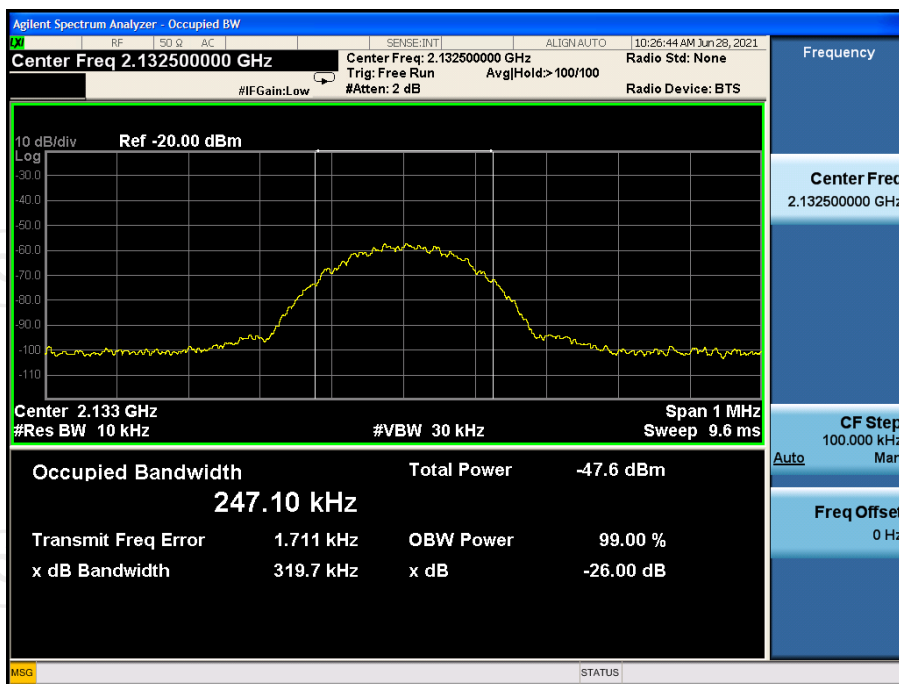


AWS-1 GSM DL Output

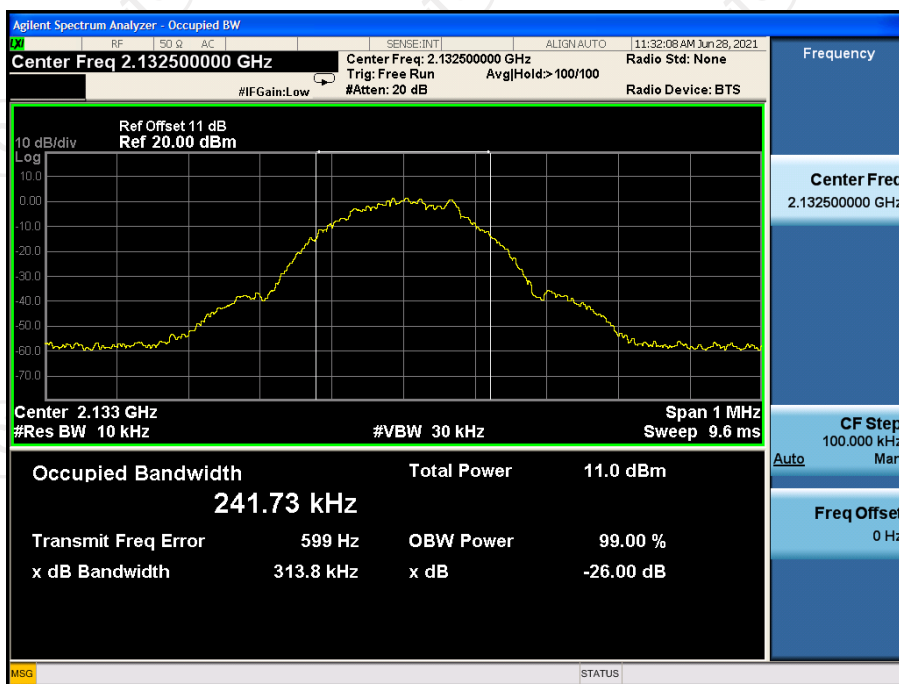


AWS-1 CDMA UL Input

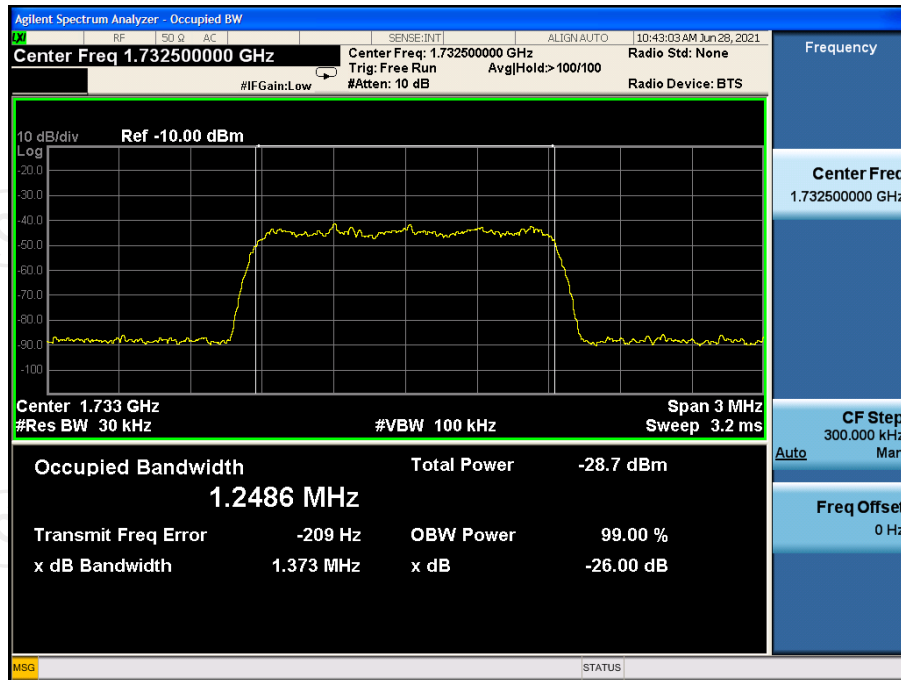


AWS-1 CDMA UL output

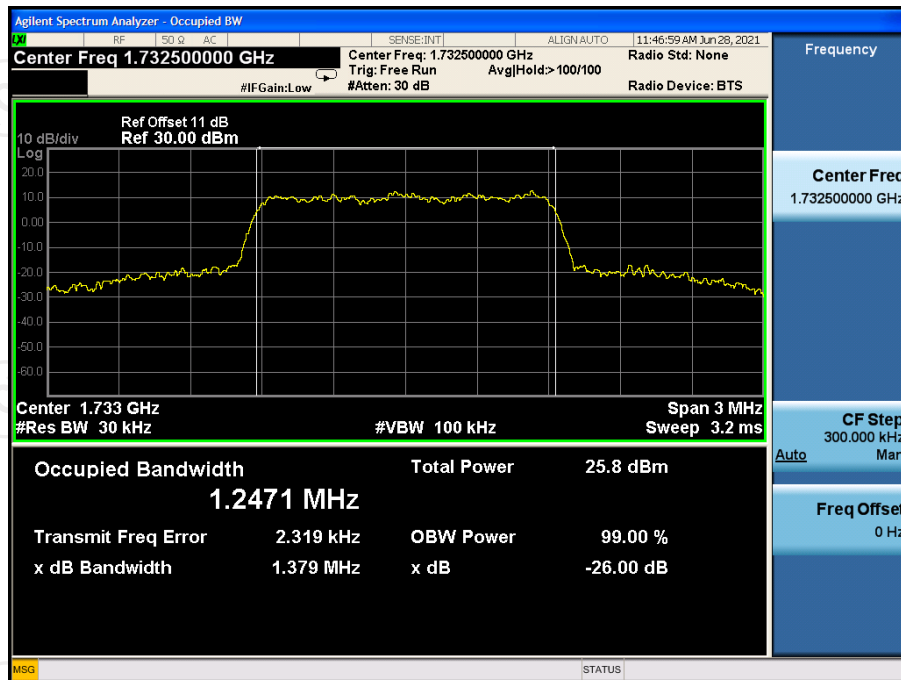


AWS-1 CDMA DL Input

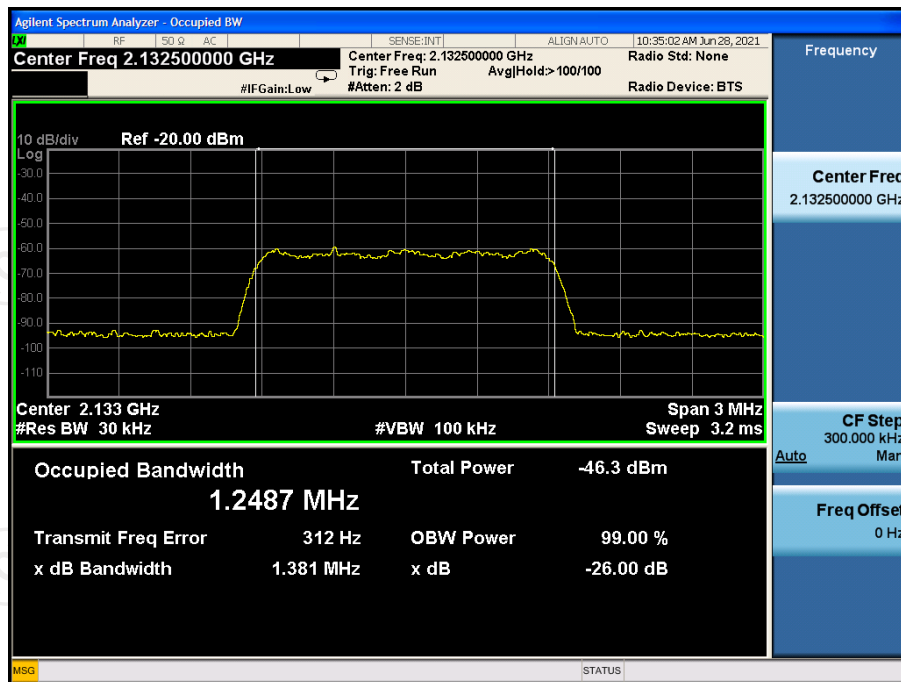


AWS-1 CDMA DL Output

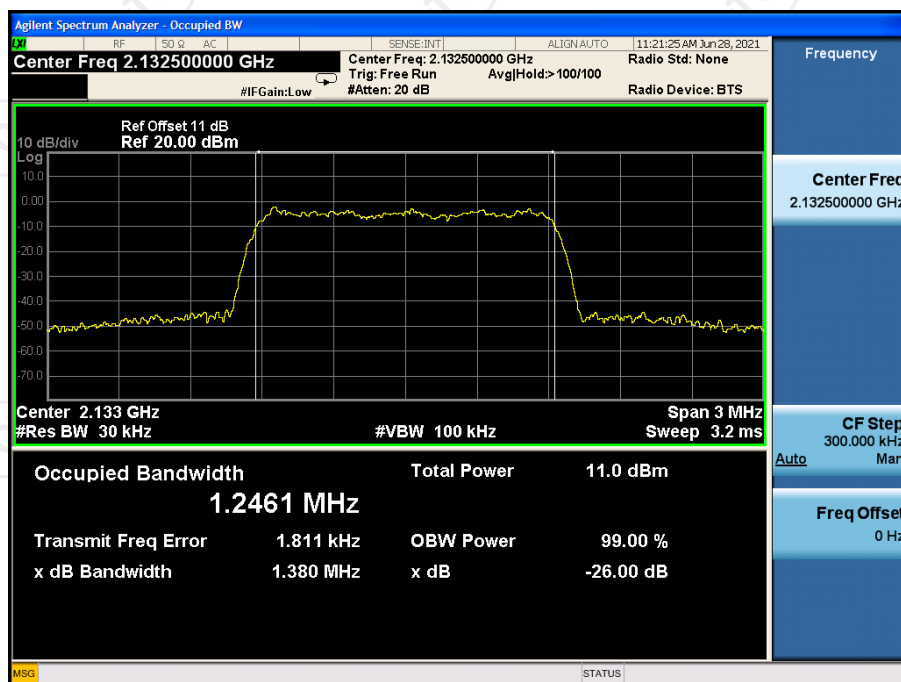


AWS-1 LTE UL Input

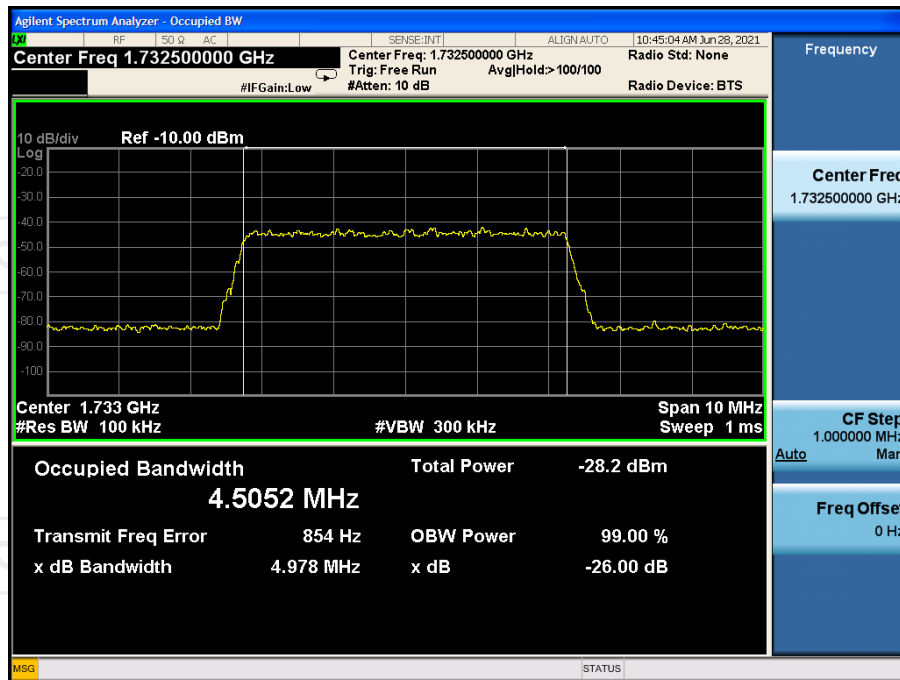


AWS-1 LTE UL output

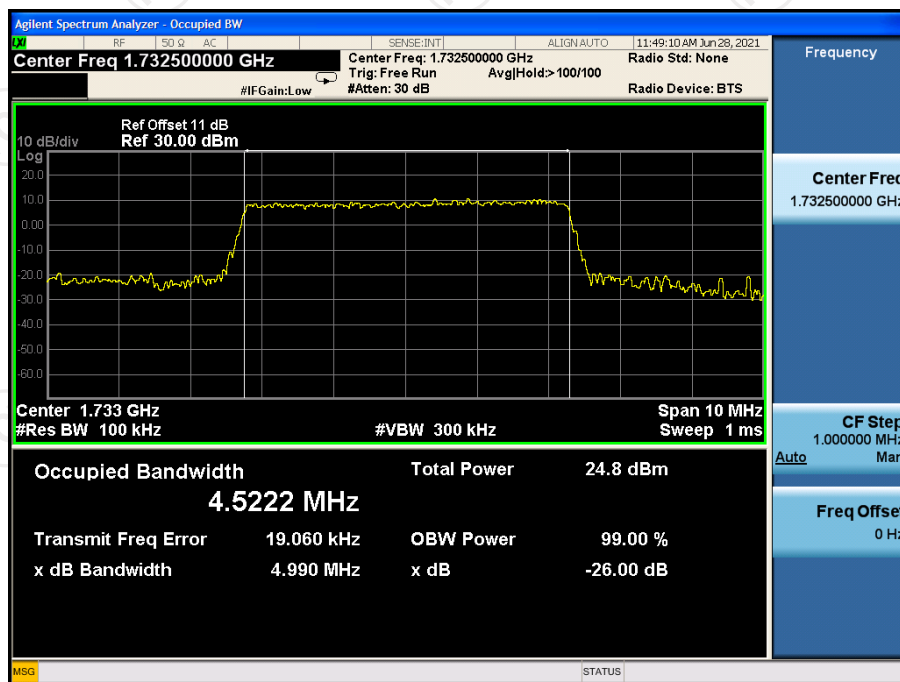


AWS-1 LTE DL Input

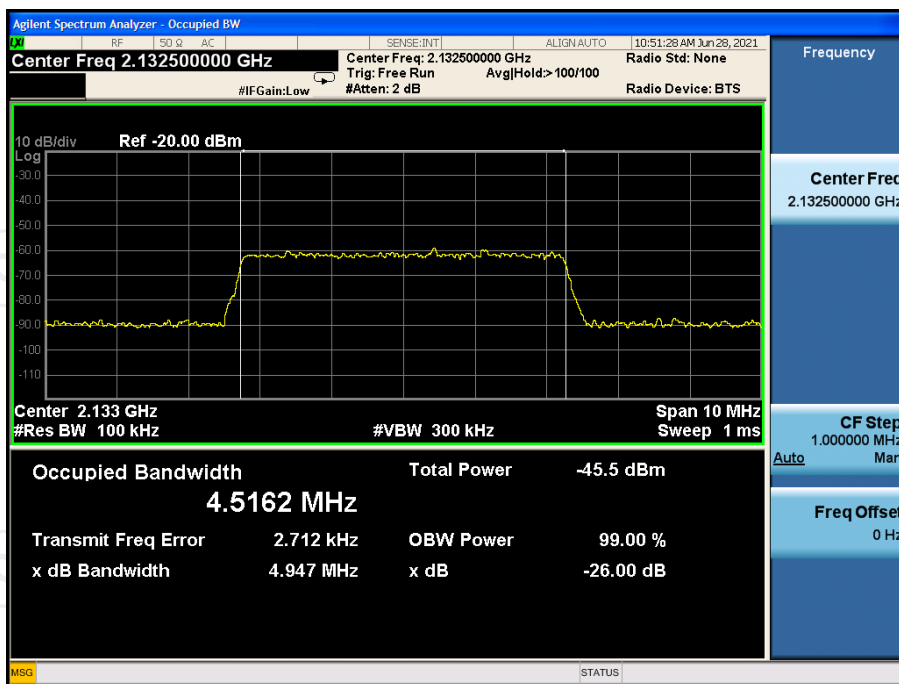


AWS-1 LTE DL Output

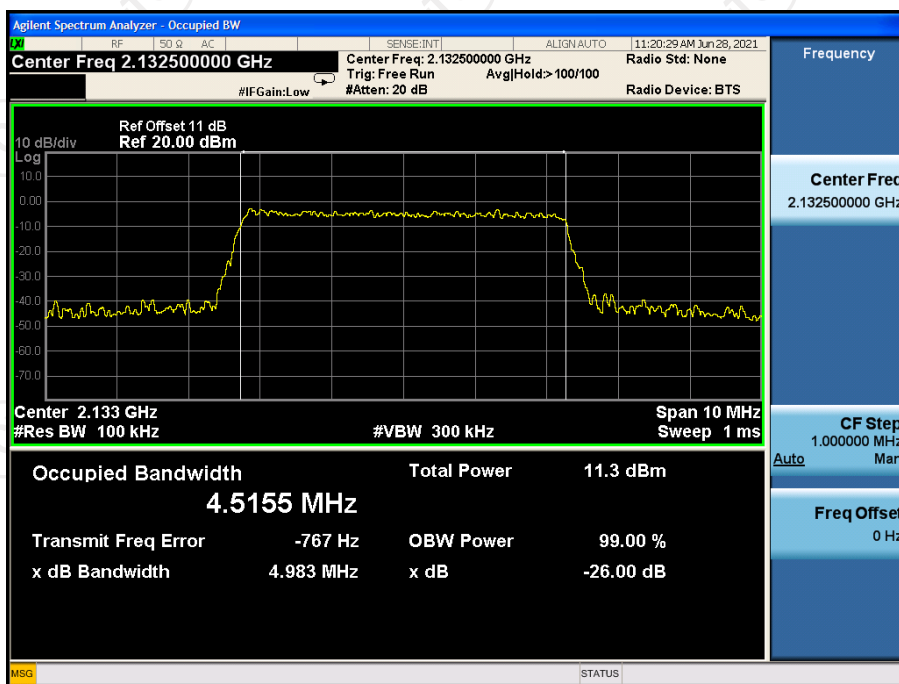


Cellular GSM UL Input

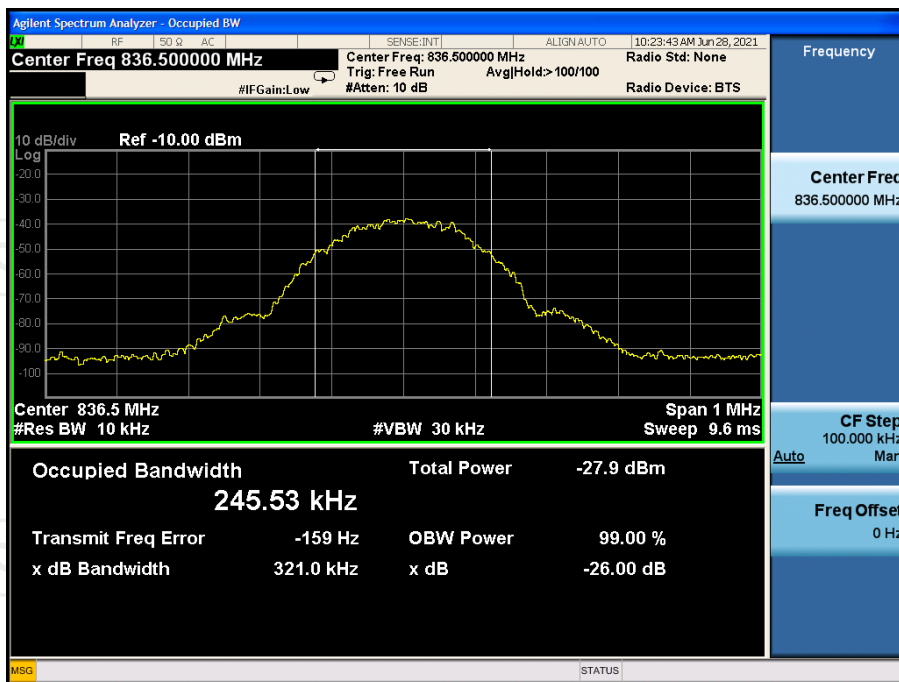


Cellular GSM UL output

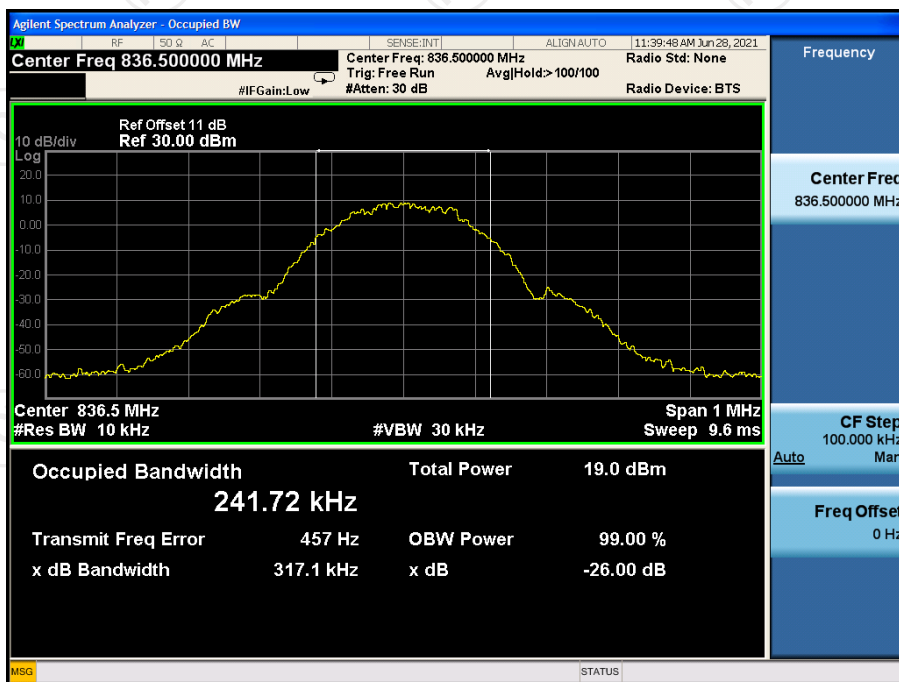


Cellular GSM DL Input

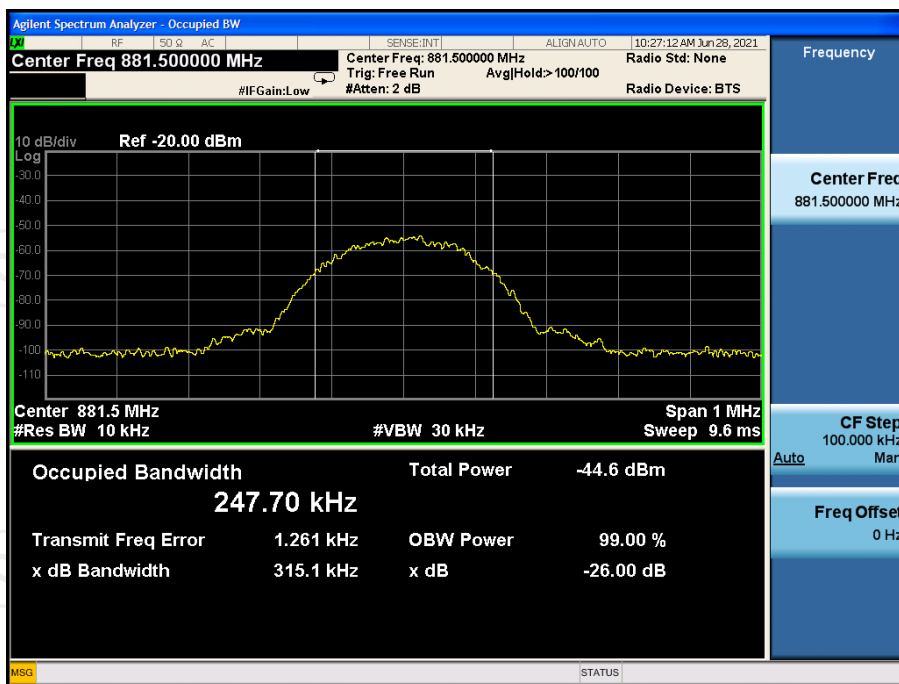


Cellular GSM DL Output

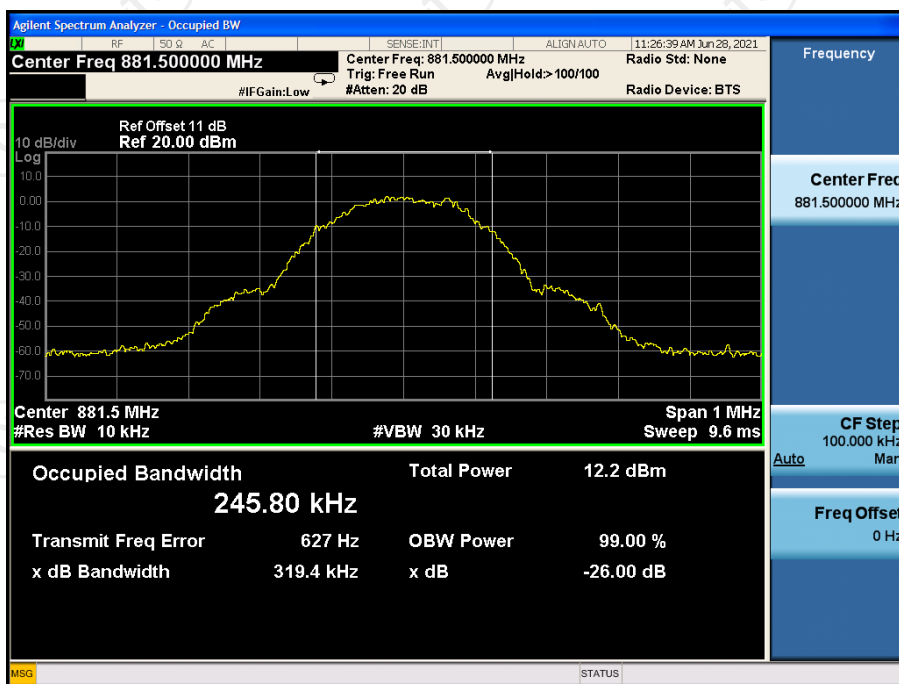


Cellular CDMA UL Input

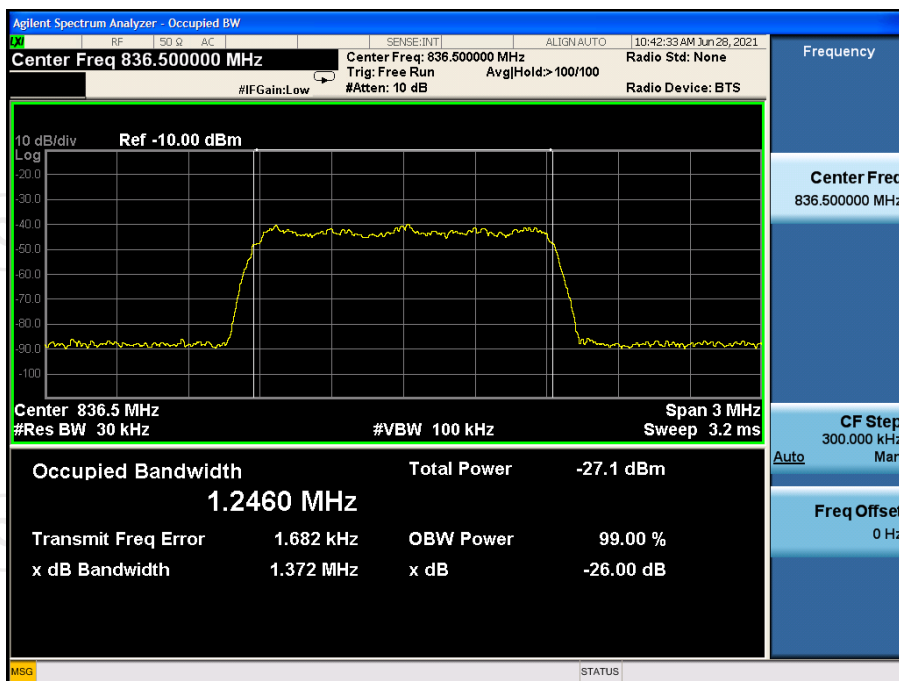


Cellular CDMA UL output

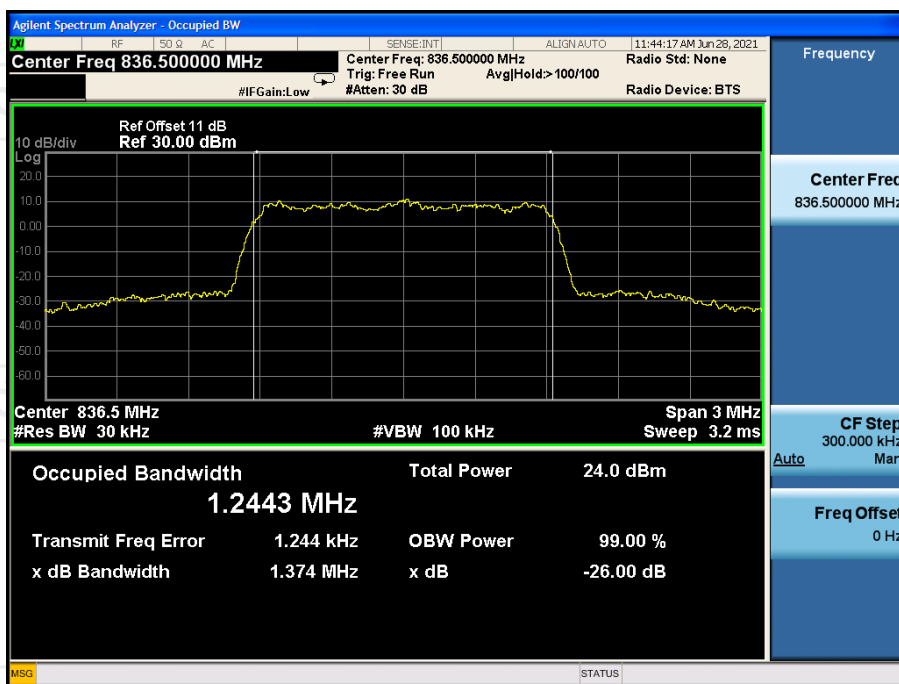


Cellular CDMA DL Input

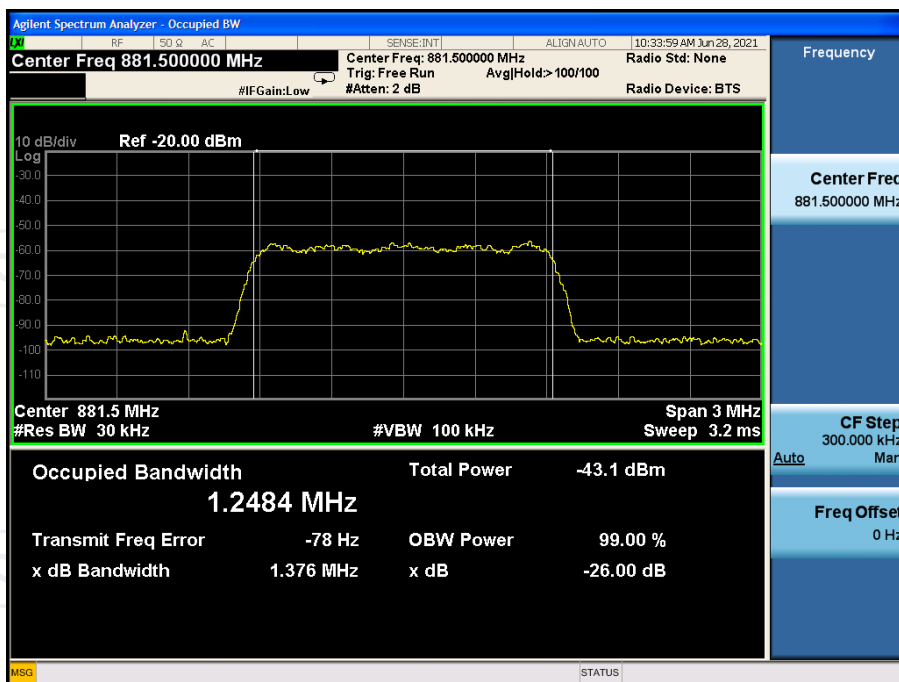


Cellular CDMA DL Output

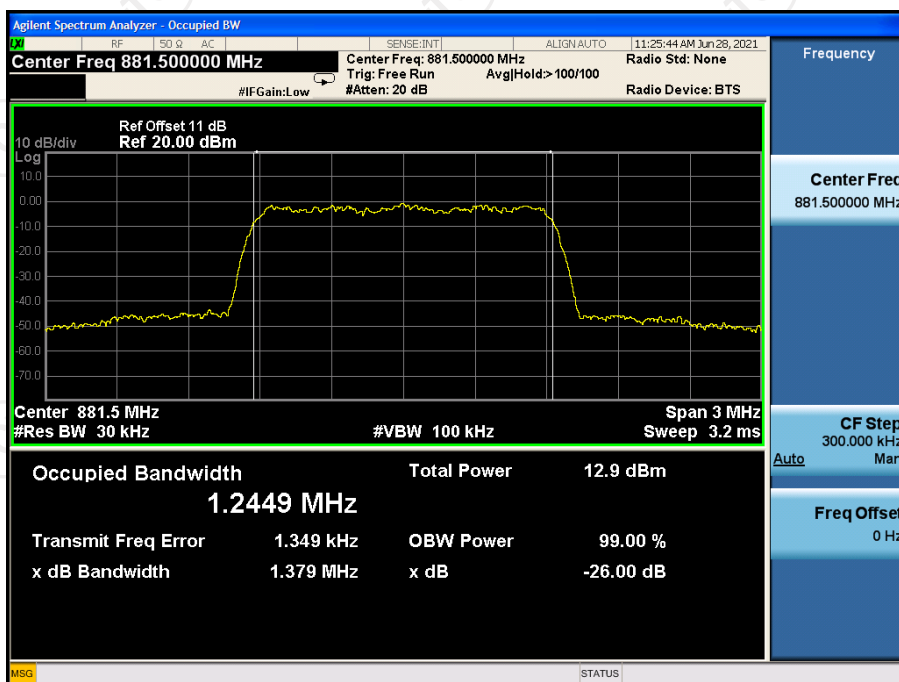


Cellular LTE UL Input

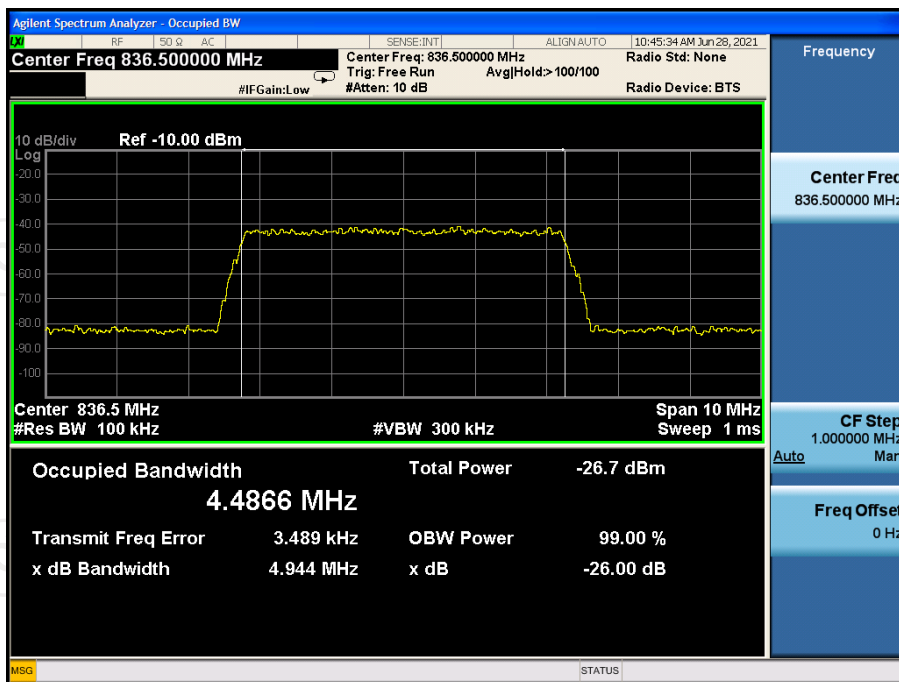


Cellular LTE UL output

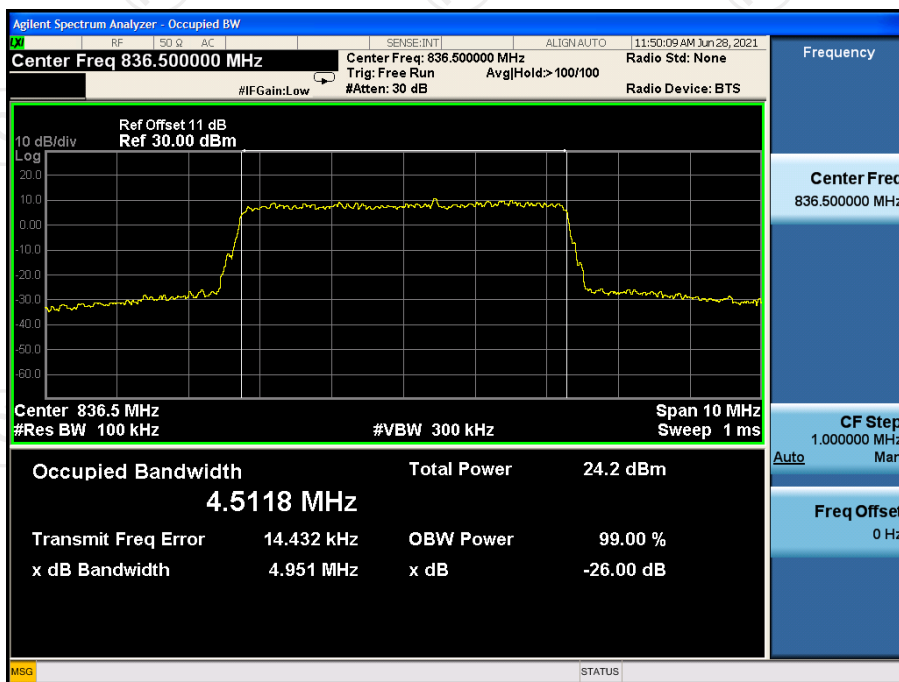


Cellular LTE DL Input

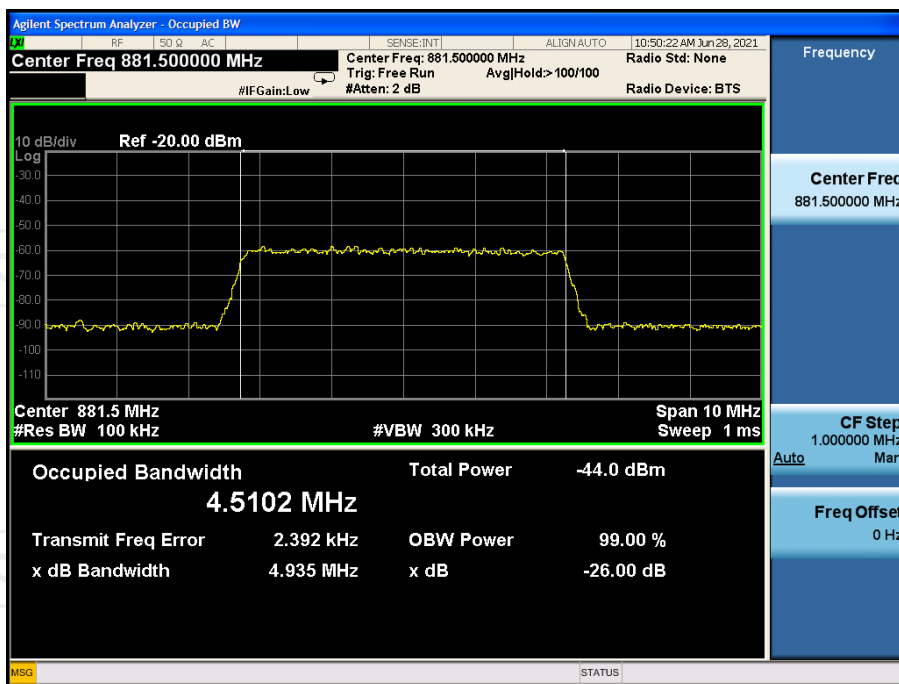


Cellular LTE DL Output

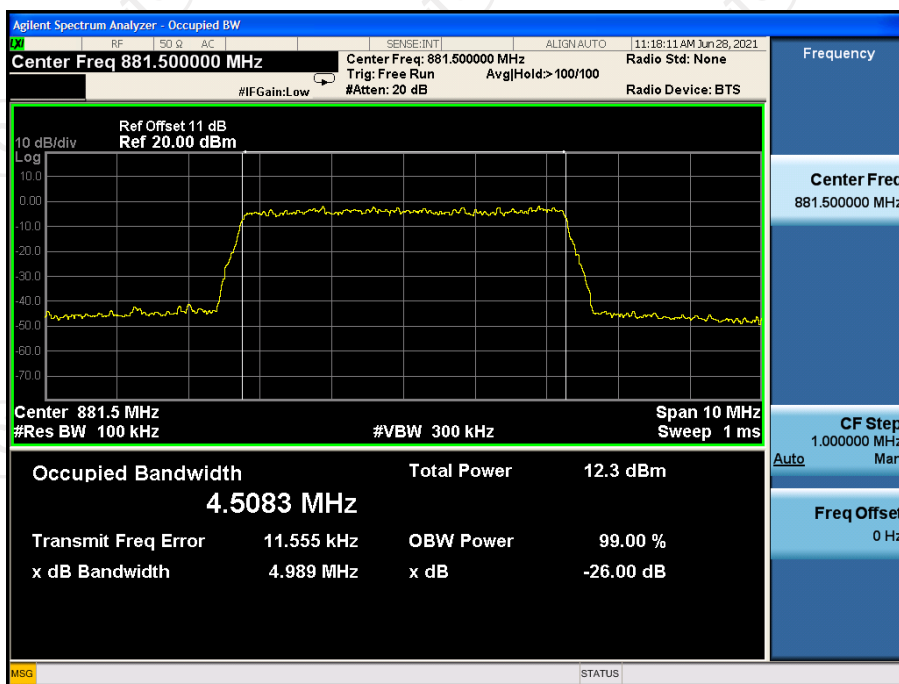


Lower700MHz GSM UL Input

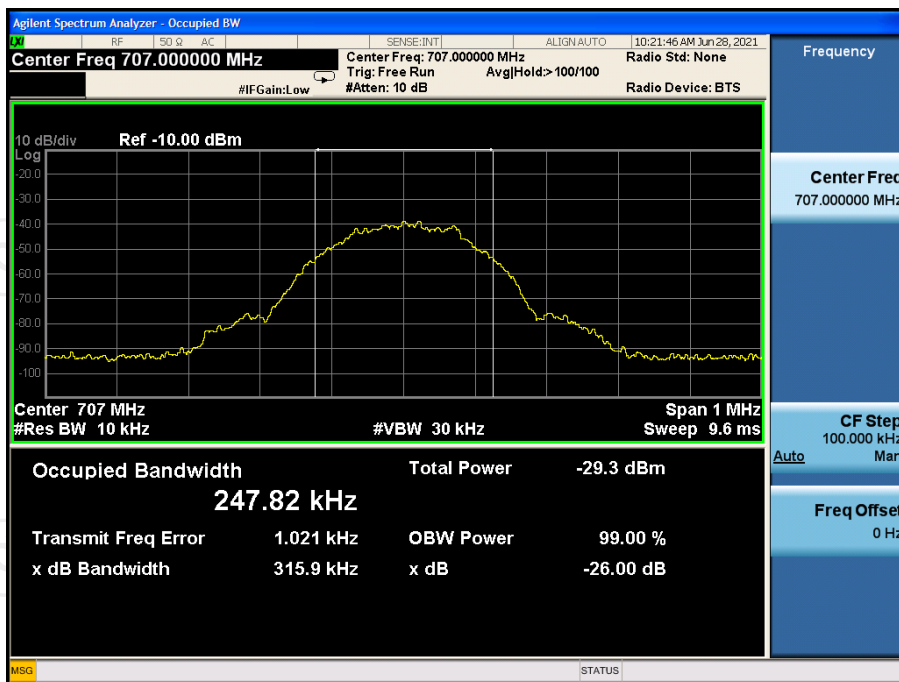


Lower700MHz GSM UL output

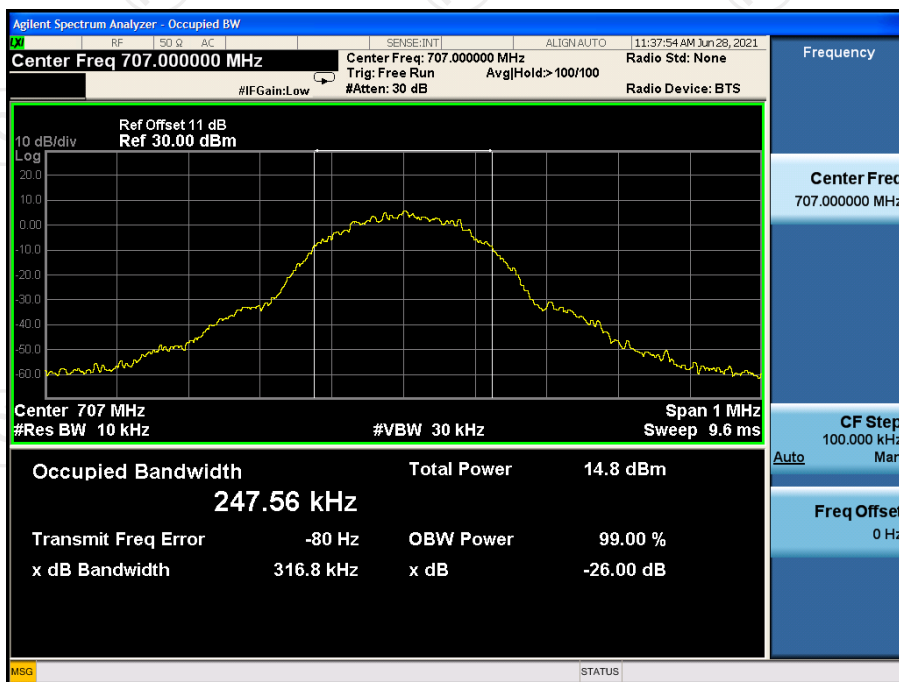


Lower700MHz GSM DL Input

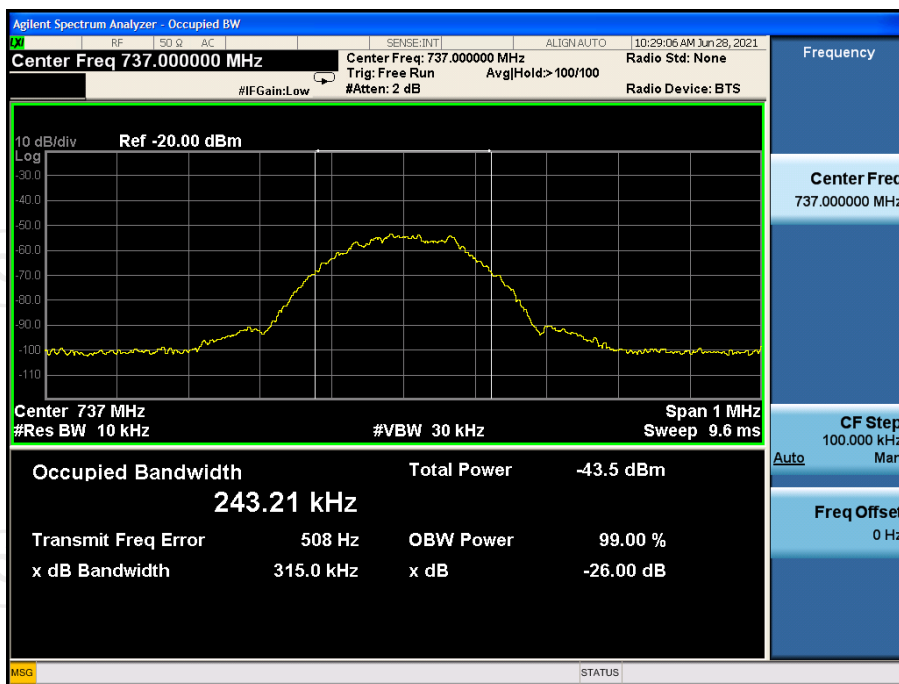


Lower700MHz GSM DL Output

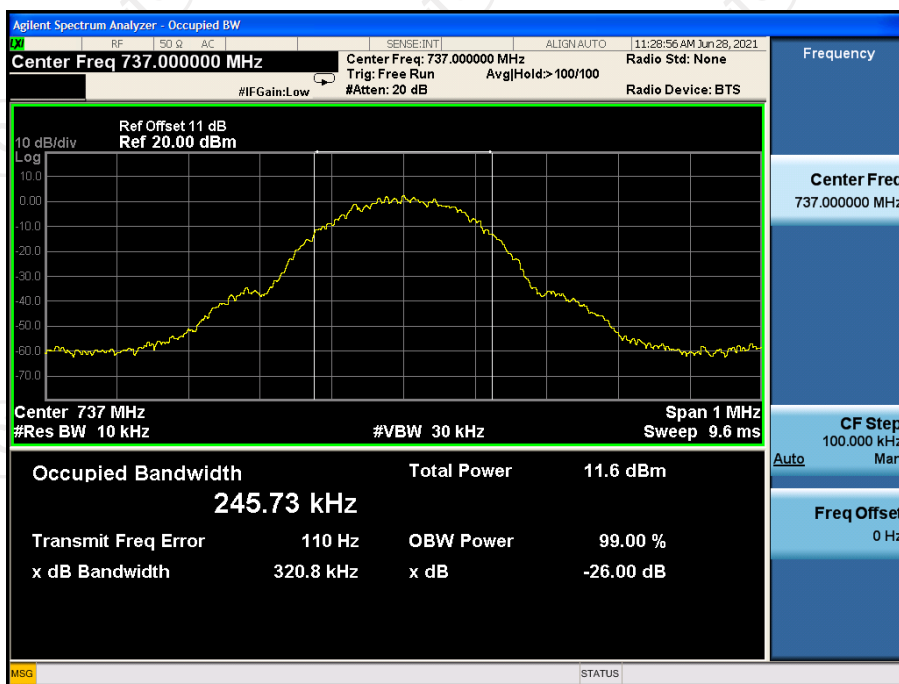


Lower700MHz CDMA UL Input

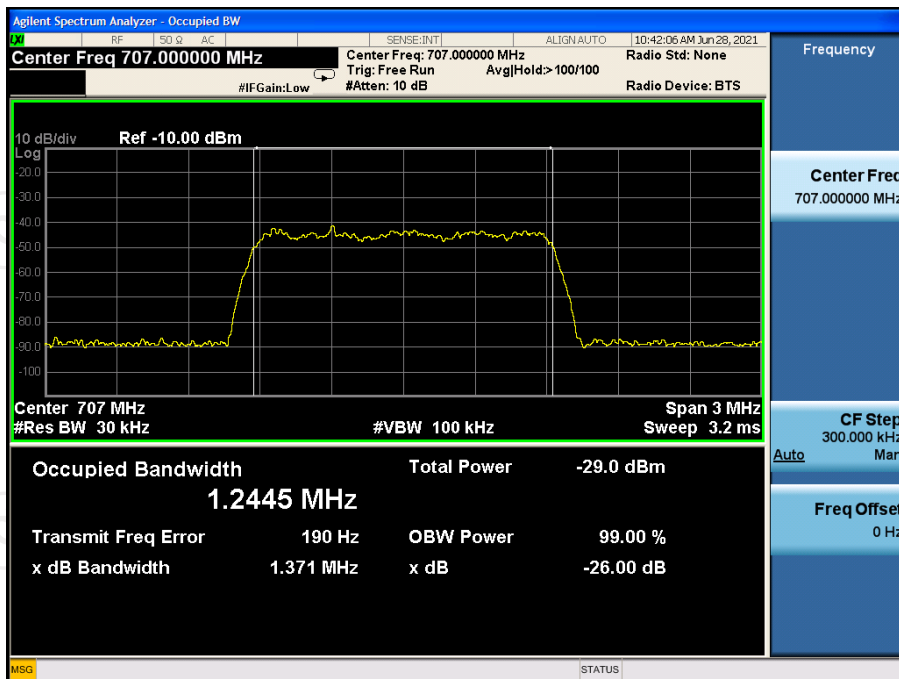


Lower700MHz CDMA UL output

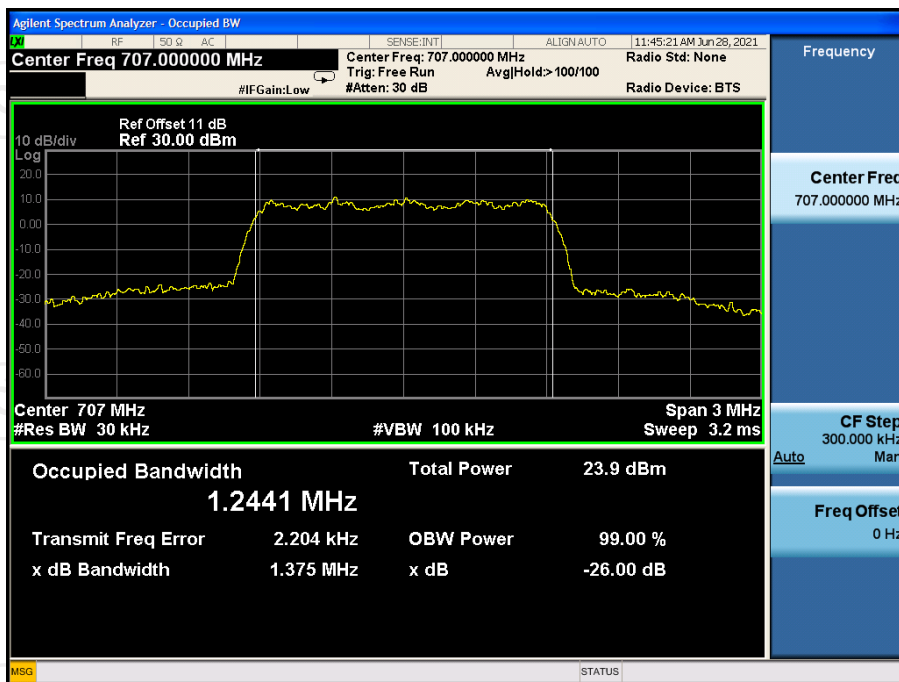


Lower700MHz CDMA DL Input

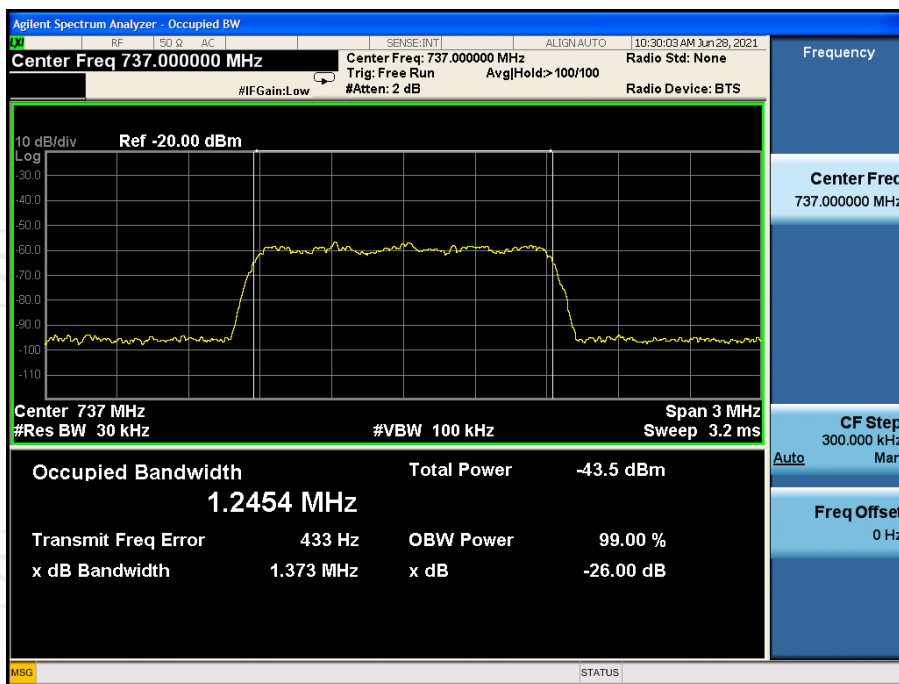


Lower700MHz CDMA DL Output

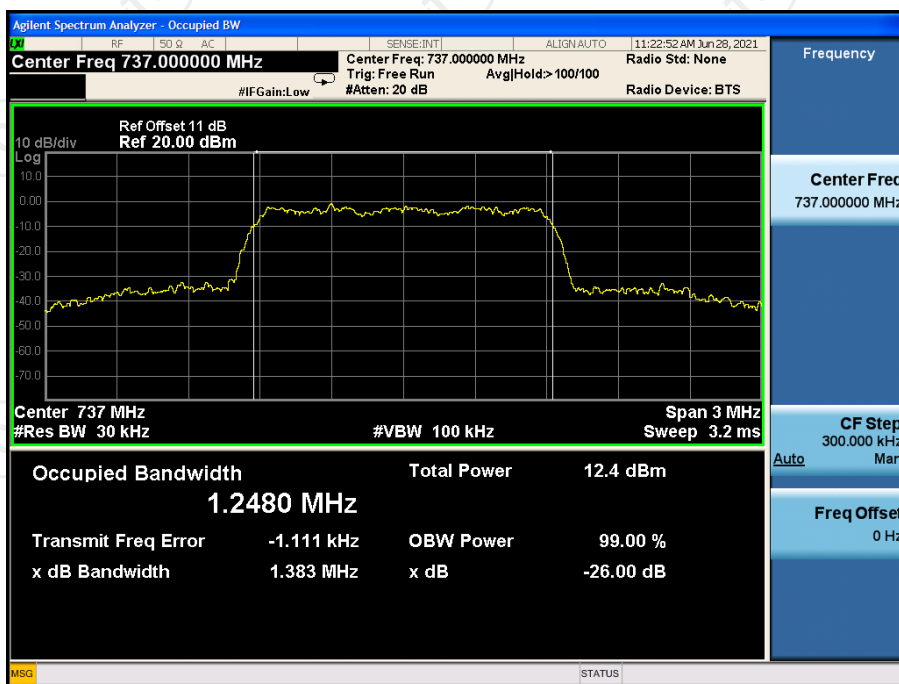


Lower700MHz LTE UL Input

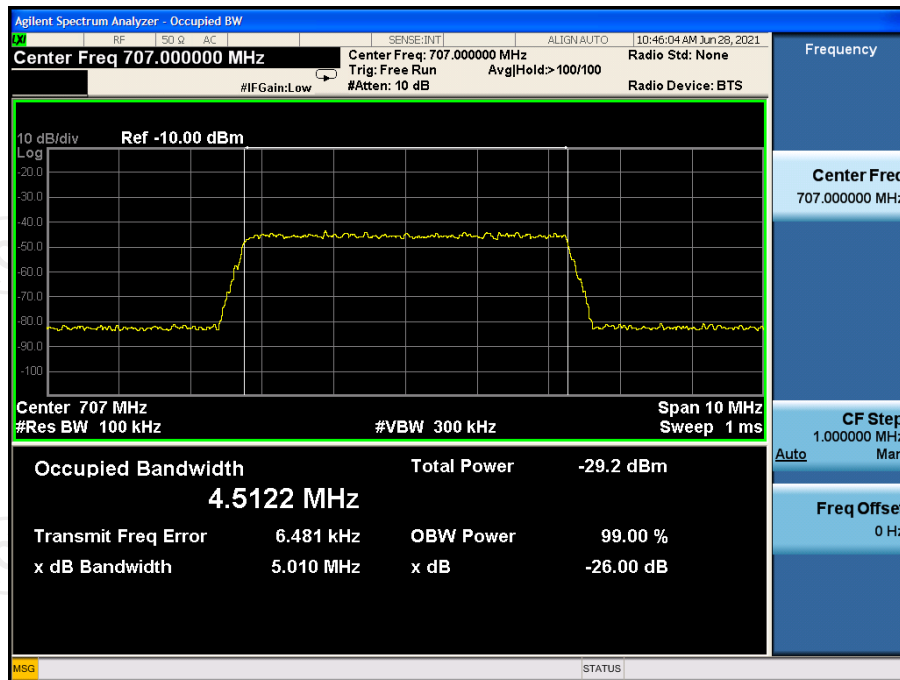


Lower700MHz LTE UL output

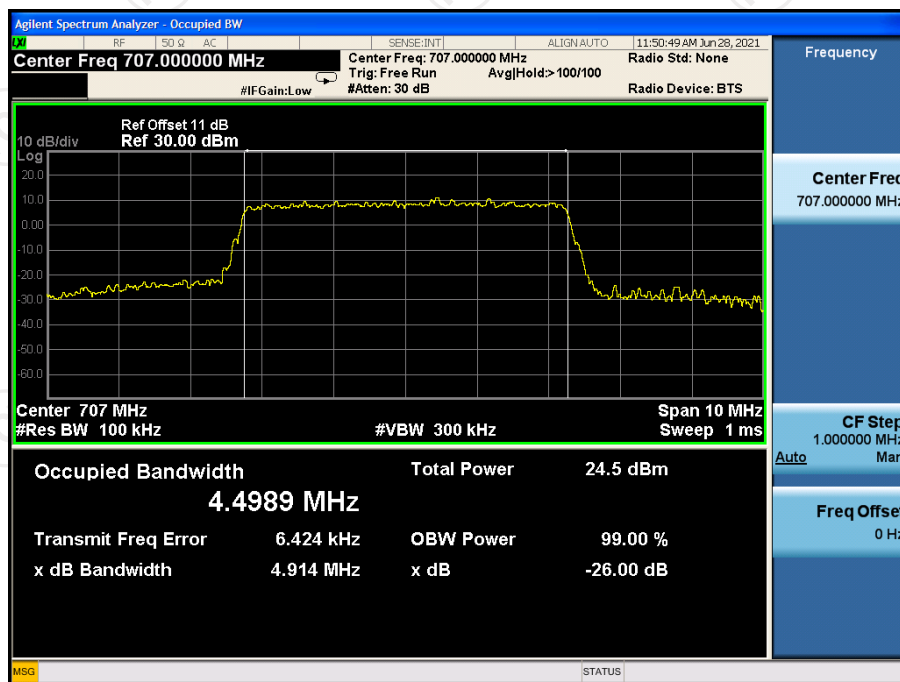


Lower700MHz LTE DL Input

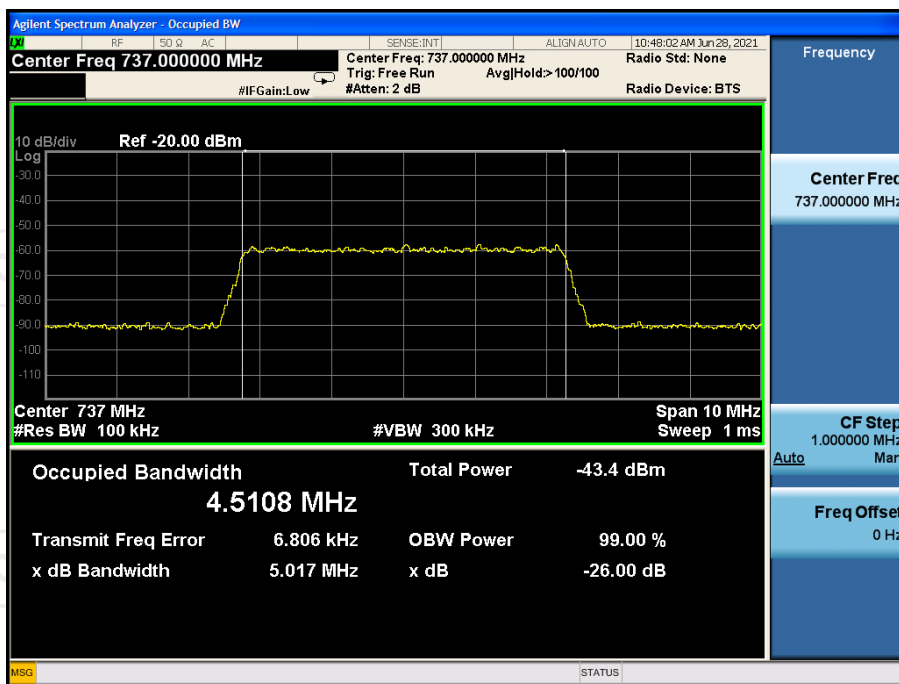


Lower700MHz LTE DL Output

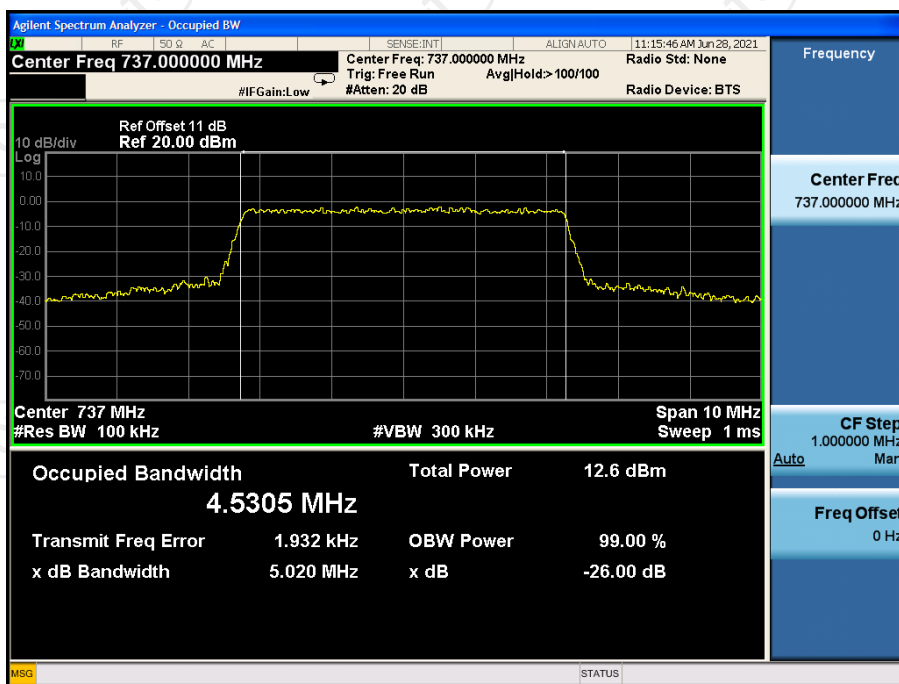


Upper700MHz GSM UL Input

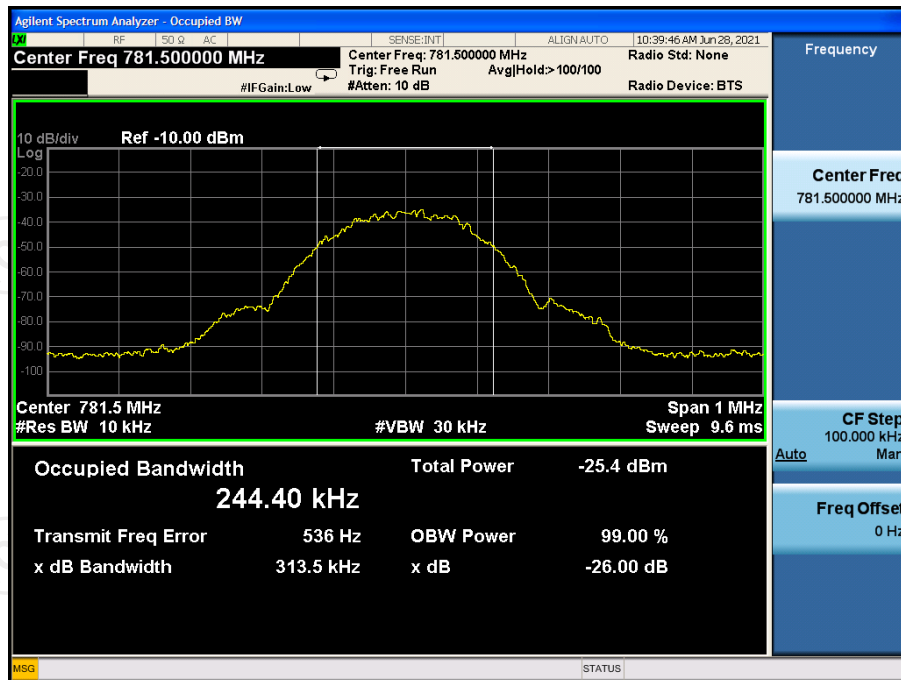


Upper700MHz GSM UL output

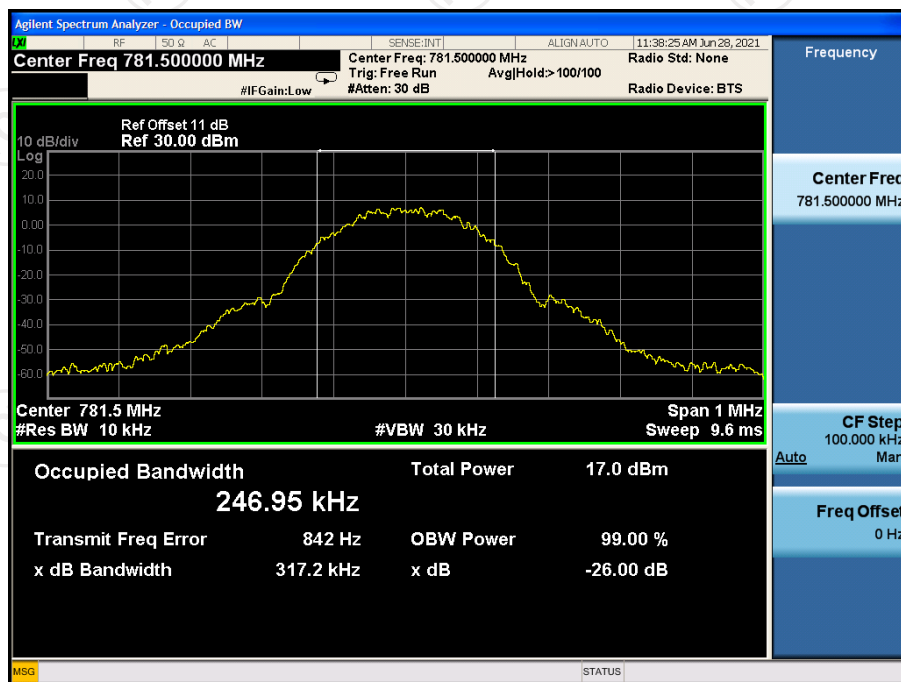


Upper700MHz GSM DL Input

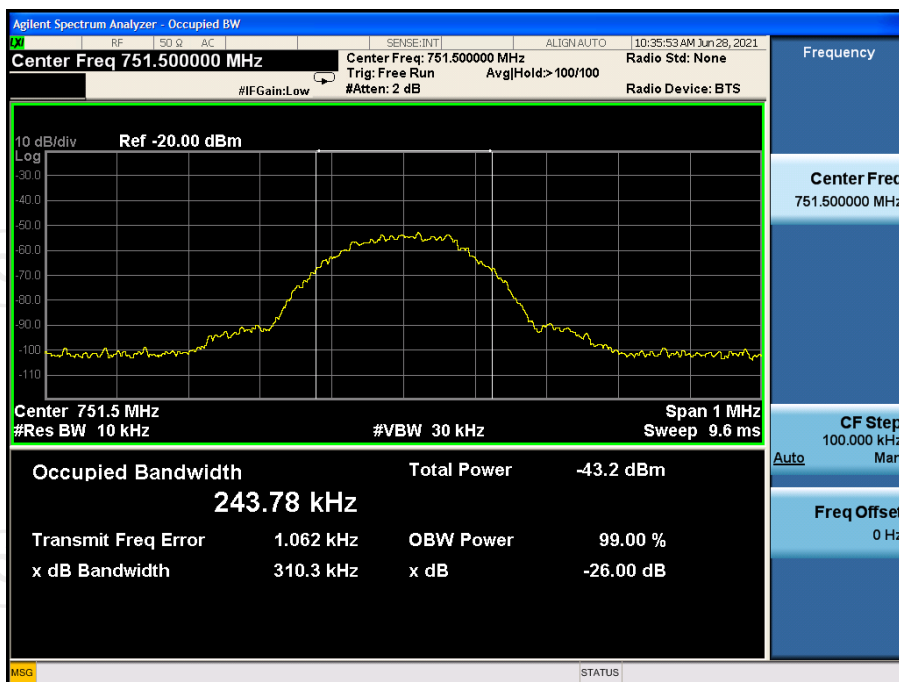


Upper700MHz GSM DL Output

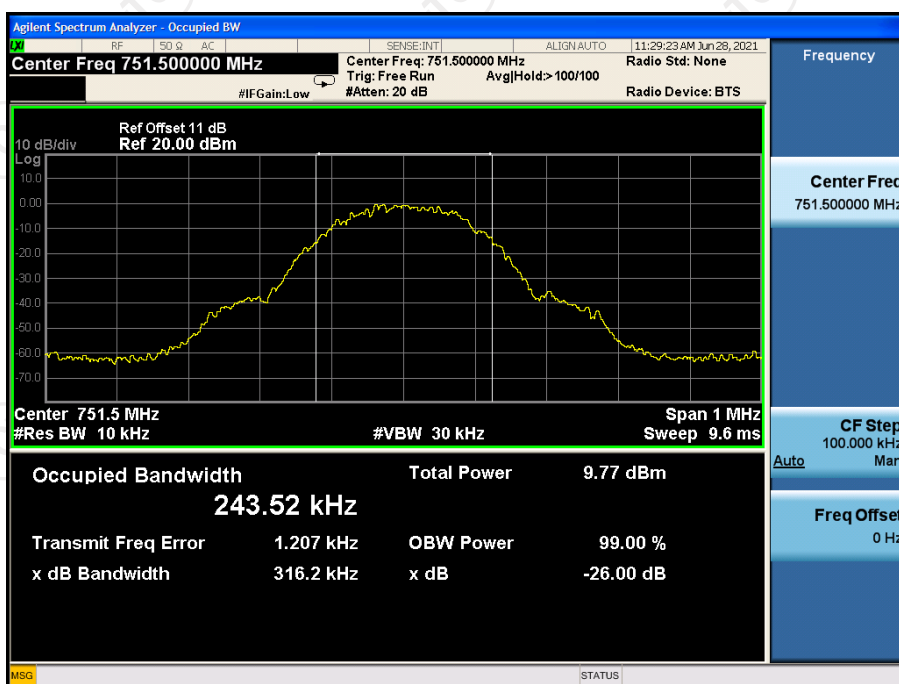


Upper700MHz CDMA UL Input

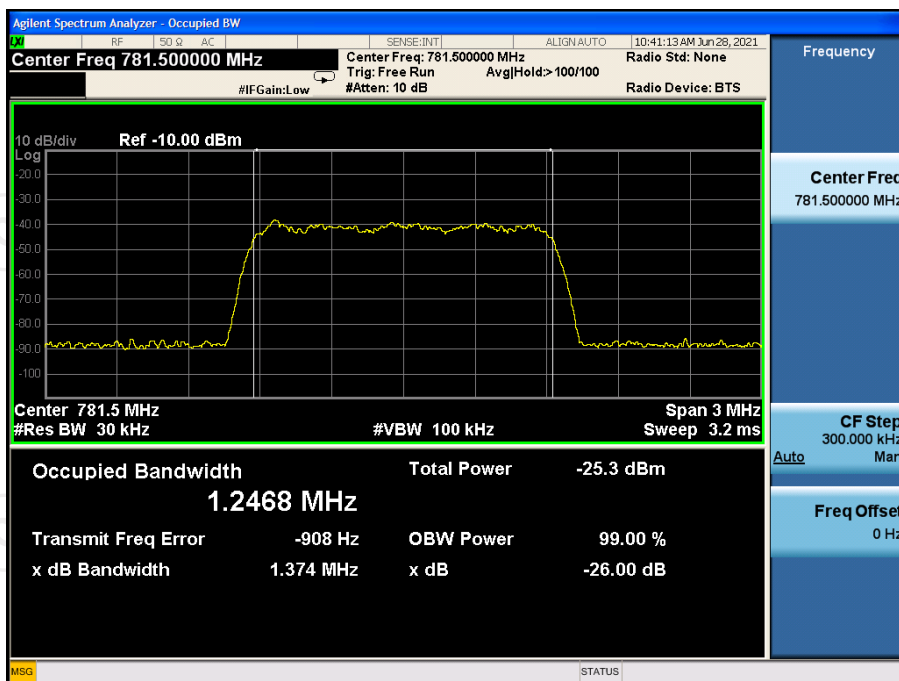


Upper700MHz CDMA UL output

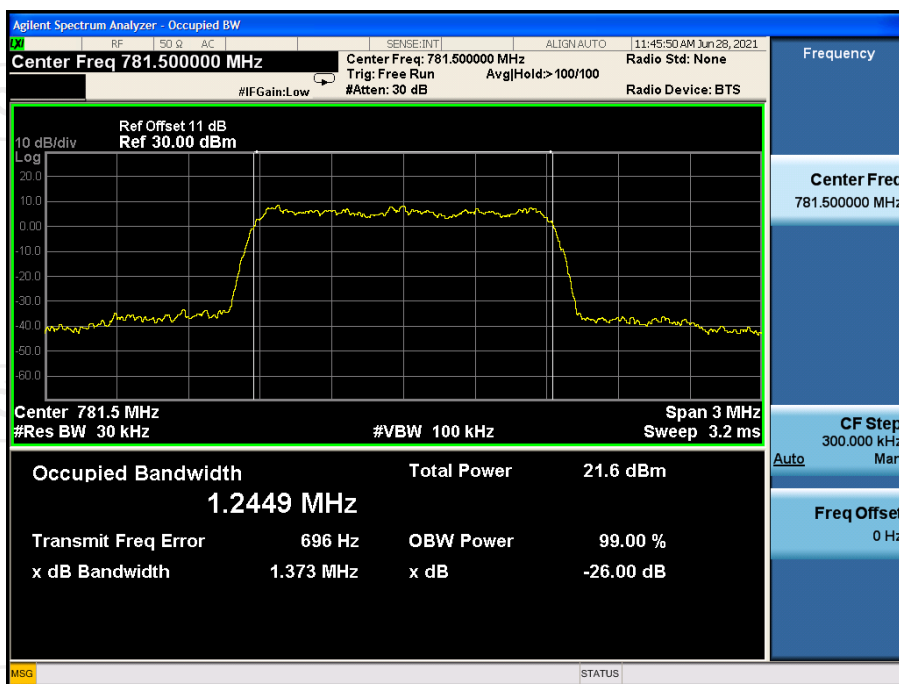


Upper700MHz CDMA DL Input

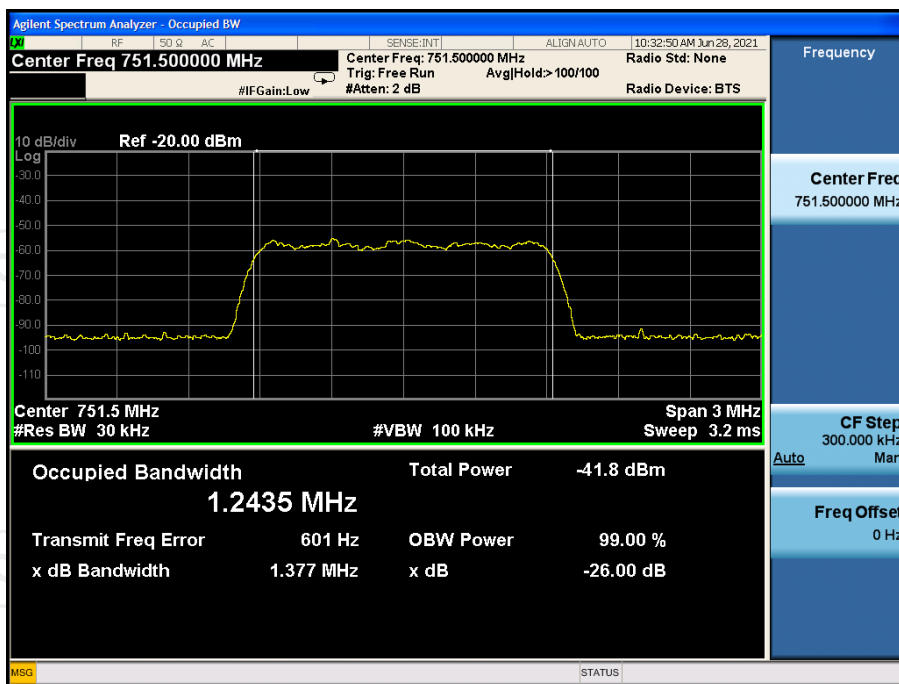


Upper700MHz CDMA DL Output

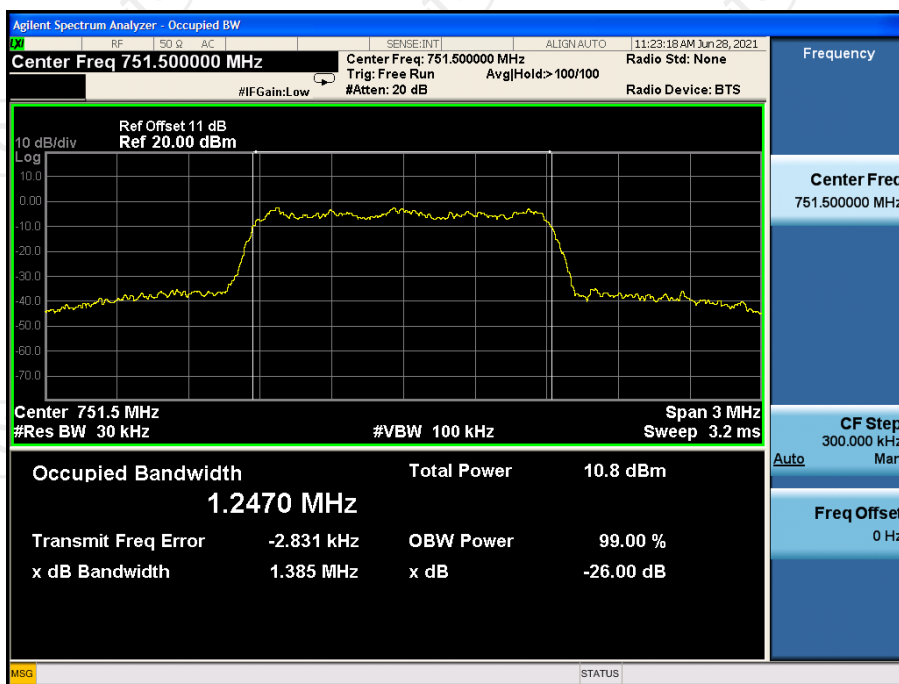


Upper700MHz LTE UL Input

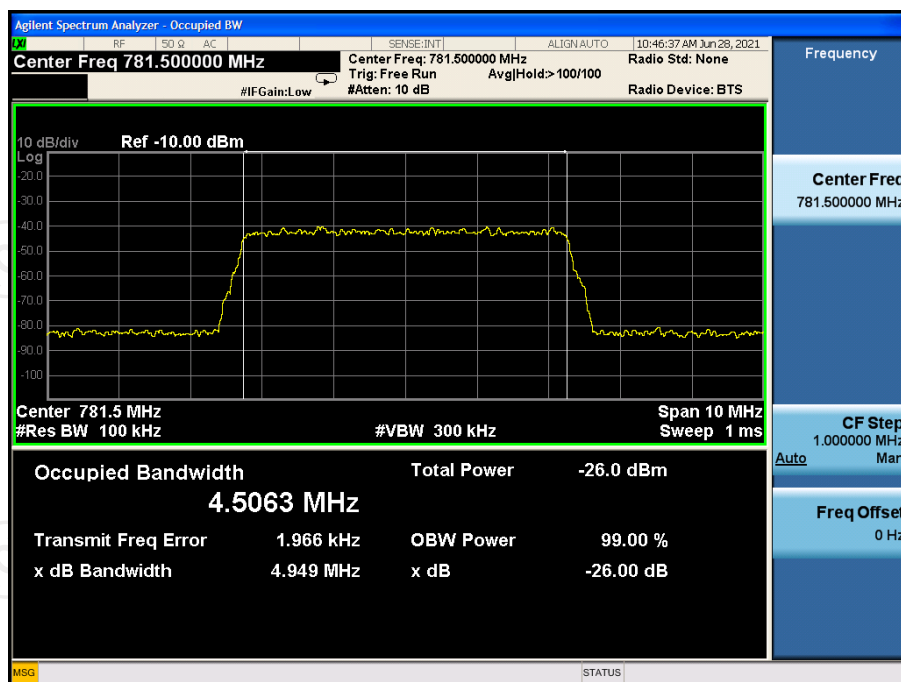


Upper700MHz LTE UL output

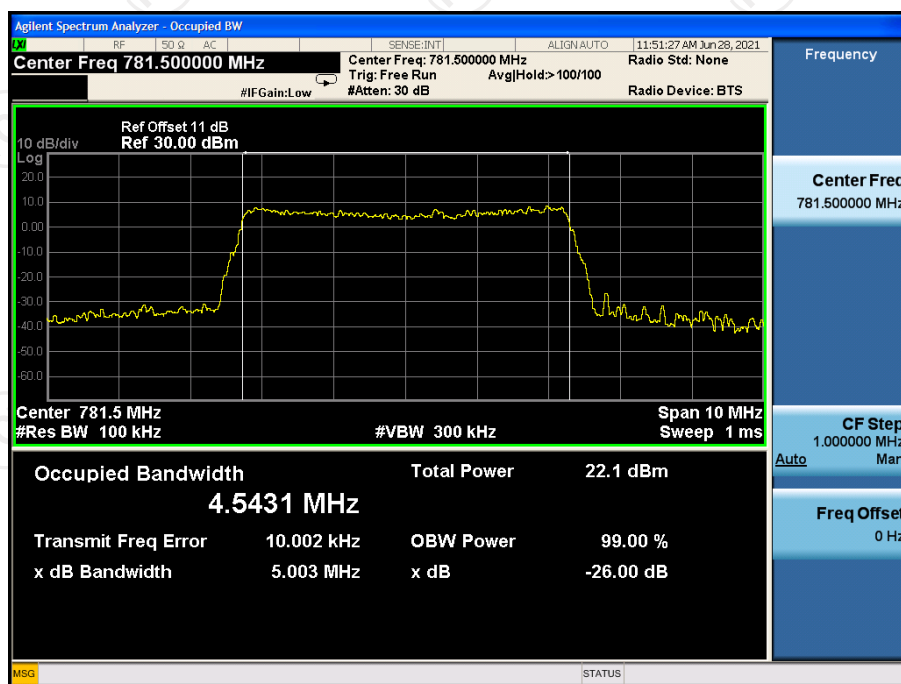

Upper700MHz LTE DL Input


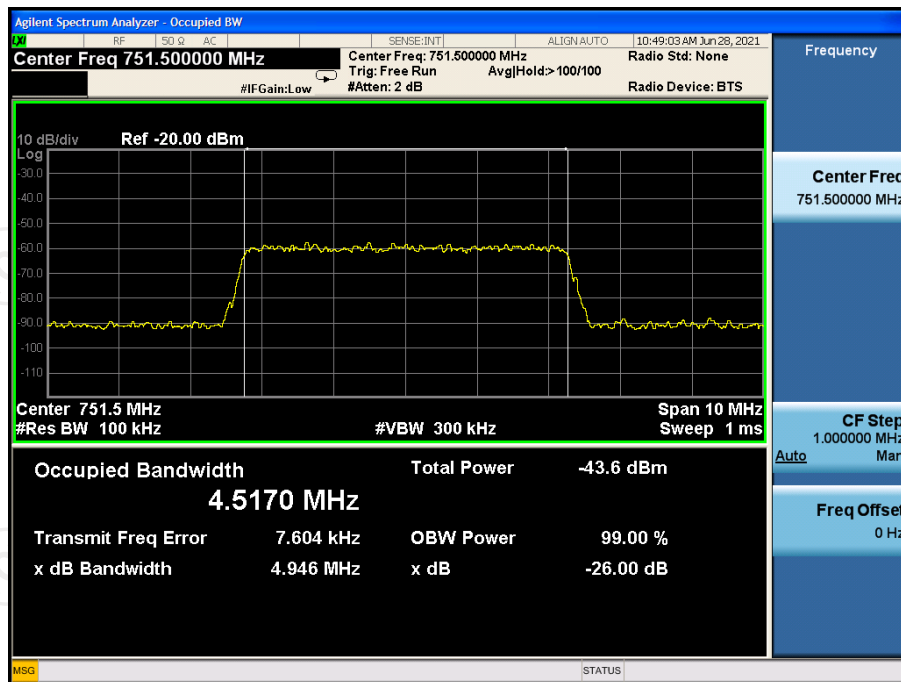


Upper700MHz LTE DL Output

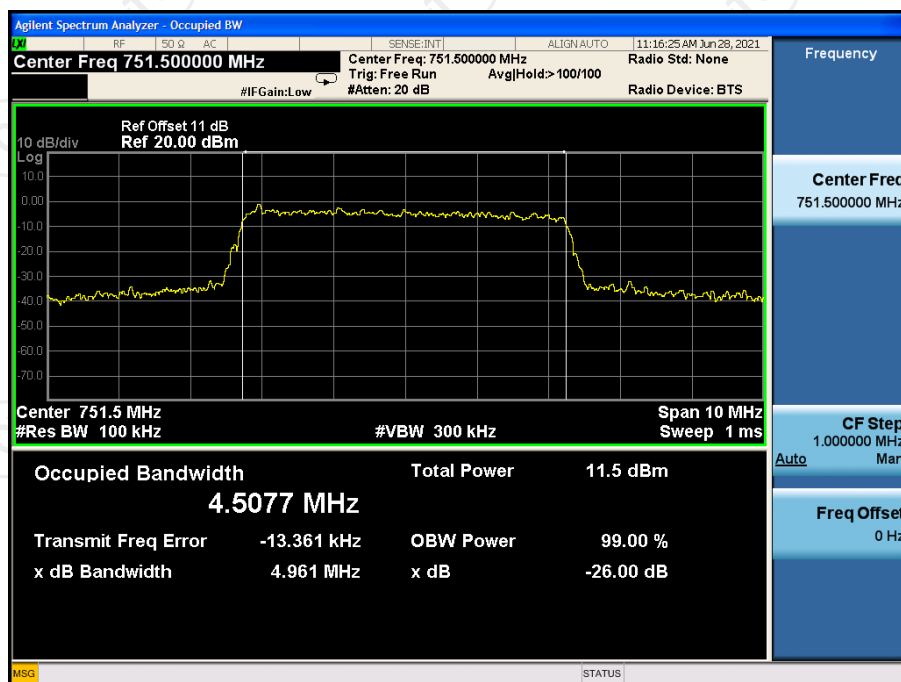

5.10. Oscillation Detection and Mitigation

5.10.1. Test Specification

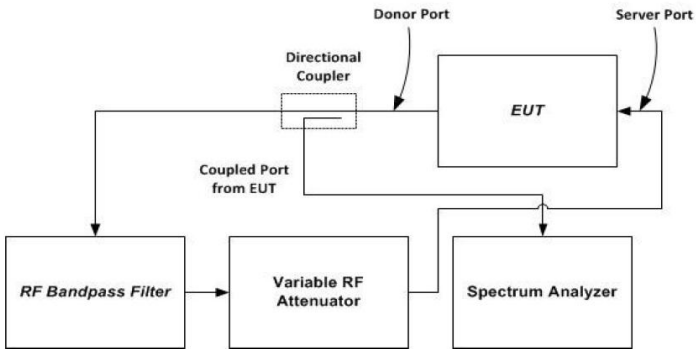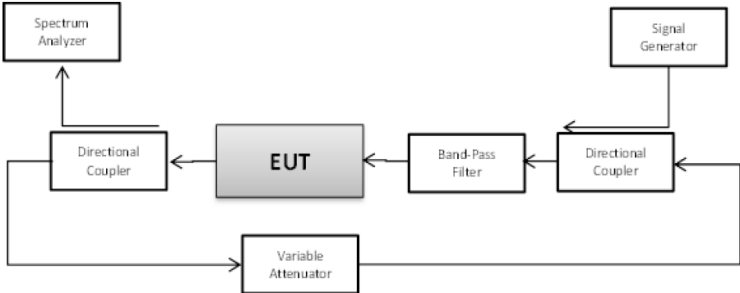Test Requirement:	FCC Part20 Section 20.21(e)(8)(ii)(A)
Test Method:	KDB935210 D03 Signal booster Measurements v04r04
Limit:	Reference to test data bellow
Test setup:	 NOTE—This figure shows the test setup for uplink bands transmission path tests; i.e., signal flow is out from the donor port into the directional coupler. For downlink bands transmission path tests, the feedback signal flow path direction and equipment connections shall be reversed, i.e., signal flow is out from the server port into the directional coupler, and signal flow is into the donor port from the variable RF attenuator. Figure 7 – Oscillation detection (7.11.2) test setup  Figure 8 – Oscillation mitigation/shutdown test setup
Test Procedure:	Oscillation restart tests - Connect the normal-operating mode EUT to the test equipment as shown in Figure 7 beginning with the spectrum analyzer on the uplink output (donor) port. Confirm that the RF coupled path is connected to the spectrum analyzer. NOTE—The band-pass filter shall provide sufficient out-of-band rejection to prevent oscillations from occurring in bands not under test. - Spectrum analyzer settings: - Center frequency at the center of the band under test - Span equal or slightly exceeding the width of the band under test - Continuous sweep, max-hold - RBW$\geq$1 MHz, VBW > 3xRBW - Decrease the variable attenuator until the spectrum analyzer displays a signal within the band under test. Using a marker, identify the approximate center frequency of this signal on the max-hold display, increase the attenuation by 10 dB, then reset the EUT (e.g., cycle ac/dc power). - Repeat 7.11.2c) twice to ensure that the center of the signal

- created by the booster remains within 250 kHz of the spectrum analyzer display center frequency. If the frequency of the signal is unstable, confirm that the spectrum analyzer display is centered between the frequency extremes observed. If the signal is wider than 1 MHz, ensure that the spectrum analyzer display is centered on the signal by increasing the RBW. Reset the EUT (e.g., cycle ac/dc power) after each oscillation event, if necessary. Set the spectrum analyzer sweep trigger level to just below the peak amplitude of the displayed EUT oscillation signal.
- e) Set the spectrum analyzer to zero-span, with a sweep time of 5 seconds, and single-sweep with max-hold. The spectrum analyzer sweep trigger level in this and the subsequent steps shall be the level identified in 7.11.2d).
 - f) Decrease the variable attenuator until the spectrum analyzer sweep is triggered, increase the attenuation by 10 dB, then reset the EUT (e.g., cycle ac/dc power).
 - g) Reset the zero-span trigger of the spectrum analyzer, then repeat 7.11.2f) twice to ensure that the spectrum analyzer is reliably triggered, resetting the EUT (e.g., cycle ac/dc power) after each oscillation event if necessary.
 - h) Reset the zero-span sweep trigger of the spectrum analyzer, and reset the EUT (e.g., cycle ac/dc power).
 - i) Force the EUT into oscillation by reducing the attenuation.
 - j) Use the marker function of the spectrum analyzer to measure the time from the onset of oscillation until the EUT turns off, by setting Marker 1 on the leading edge of the oscillation signal and Marker 2 on the trailing edge. The spectrum analyzer sweep time may be adjusted to improve the time resolution of these cursors.
 - k) Capture the spectrum analyzer zero-span trace for inclusion in the test report. Report the power level associated with the oscillation separately if it can't be displayed on the trace.
 - l) Repeat 7.11.2b) to 7.11.2k) for all operational uplink and downlink bands.
 - m) Set the spectrum analyzer zero-span sweep time for longer than 60 seconds, then measure the restart time for each operational uplink and downlink band.
 - n) Replace the normal-operating mode EUT with the EUT that supports an anti-oscillation test mode.
 - o) Set the spectrum analyzer zero-span time for a minimum of 120 seconds, and a single sweep.
 - p) Manually trigger the spectrum analyzer zero-span sweep, and manually force the booster into oscillation as described in 7.11.2i).
 - q) When the sweep is complete, place cursors between the first two oscillation detections, and save the Test Plots for inclusion in the test report. The time between restarts must match the manufacturer's timing for the test mode, and there shall be no more than 5 restarts.
 - r) Repeat 7.11.2m) to 7.11.2q) for all operational uplink and downlink bands.

Test procedure for measuring oscillation mitigation or shutdown

- a) Connect the normal-operating mode EUT to the test equipment as shown in Figure 8.
- b) Set the spectrum analyzer center frequency to the center of band under test, and use the following settings:
 - 1) RBW=30 kHz, VBW $\geq 3 \times$ RBW,
 - 2) power averaging (rms) detector,
 - 3) trace averages ≥ 100 ,
 - 4) span $\geq 120\%$ of operational band under test

	5) number of sweep points $\geq 2 \times \text{Span/RBW}$. c) Configure the signal generator for AWGN operation with a 99% OBW of 4.1 MHz, tuned to the frequency of 2.5 MHz above the lower edge or below the upper edge of the operating band under test. Adjust the RF output level of the signal generator such that the measured power level of the AWGN signal at the output port of the booster is 30 dB less than the maximum power of the booster for the band under test. Affirm that the input signal is not obstructing the measurement of the strongest oscillation peak in the band, and is not included within the span in the measurement. 1) Boosters with operating spectrum passbands of 10 MHz or less may use a CW signal source at the band edge rather than AWGN. 2) For device passbands greater than 10 MHz, standard CMRS signal sources (i.e., CDMA, W-CDMA, LTE) may be used instead of AWGN at the band edge. d) Set the variable attenuator to a high attenuation setting such that the booster will operate at maximum gain when powered on. Reset the EUT (e.g., cycle ac/dc power). Allow the EUT to complete its boot-up process, to reach full operational gain, and to stabilize its operation. e) Set the variable attenuator such that the insertion loss for the center of the band under test (isolation) between the booster donor port and server port is 5 dB greater than the maximum gain, as recorded in the maximum gain test procedure (see 7.3), for the band under test. f) Verify the EUT shuts down, i.e., to mitigate the oscillations. If the booster does not shut down, measure and verify the peak oscillation level as follows. 1) Allow the spectrum analyzer trace to stabilize. 2) Place the marker at the highest oscillation level occurring within the span, and record its output level and frequency. 3) Set the spectrum analyzer center frequency to the frequency with the highest oscillation signal level, and reduce the span such that the upper and lower adjacent oscillation peaks are within the span. 4) Use the Minimum Search Marker function to find the lowest output level that is within the span, and within the operational band under test, and record its output level and frequency. 5) Affirm that the peak oscillation level measured in 7.11.3f2), does not exceed by 12.0 dB the minimal output level measured in 7.11.3f4). Record the measurement results of 7.11.3f2) and 7.11.3f4) in tabular format for inclusion in the test report. 6) The procedure of 7.11.3f1) to 7.11.3f5) allows the spectrum analyzer trace to stabilize, and verification of shutdown or oscillation level measurement must occur within 300 seconds. g) Decrease the variable attenuator in 1 dB steps, and repeat step 7.11.3f) for each 1 dB step. Continue testing to the level when the insertion loss for the center of band under test (isolation) between the booster donor port and server port is 5 dB lower than the maximum gain (see 7.3). h) Repeat 7.11.3a) to 7.11.3g) for all operational uplink and downlink bands.
Test results:	PASS

5.10.2. Test Instruments

Equipment	Manufacturer	Model	S/N	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 12, 2020	Sep. 11, 2021
Attenuation	AF115A-09-34	JFW	907763	Sep. 12, 2020	Sep. 11, 2021
RF Combiner	SUNVNDN	SUD-CS0800	16230009	Sep. 12, 2020	Sep. 11, 2021
AN03468	Band Pass Filter	4CS10-781.5/E12.2-O/O	N/A	Sep. 12, 2020	Sep. 11, 2021
AN03469	Band Pass Filter	4CS10-751.5/E12-O/O	N/A	Sep. 12, 2020	Sep. 11, 2021
AN02475	1 dB step Attenuator	8494B	N/A	Sep. 12, 2020	Sep. 11, 2021
AN03429	10dB step Attenuator	8496B	N/A	Sep. 12, 2020	Sep. 11, 2021
ANC00082	RF Coupler	722-10-1.500V	N/A	Sep. 12, 2020	Sep. 11, 2021


5.10.3. Test Data

Test results of detection time				
Operation Bands		Detection Time (s)	Limit (s)	Result
Uplink	PCS	0.035	0.300	PASS
	AWS-1	0.045	0.300	PASS
	Cellular	0.030	0.300	PASS
	Lower700MHz	0.050	0.300	PASS
	Upper700MHz	0.035	0.300	PASS
Downlink	PCS	0.070	1.000	PASS
	AWS-1	0.040	1.000	PASS
	Cellular	0.040	1.000	PASS
	Lower700MHz	0.060	1.000	PASS
	Upper700MHz	0.030	1.000	PASS


Test results of restarting time						
Operation Bands		Restarting Time(s)	Limit (s)	Restarting Counts	Limit	Result
Uplink	PCS	/	60	0	5	PASS
	AWS-1	/	60	0	5	PASS
	Cellular	/	60	0	5	PASS
	Lower700 MHz	64.02	60	1	5	PASS
	Upper700 MHz	64.85	60	1	5	PASS
Downlink	PCS	64.51	60	1	5	PASS
	AWS-1	64.53	60	1	5	PASS
	Cellular	64.19	60	1	5	PASS
	Lower700 MHz	64.86	60	1	5	PASS
	Upper700 MHz	/	60	0	5	PASS

Test Plots of detection time


PCS UL

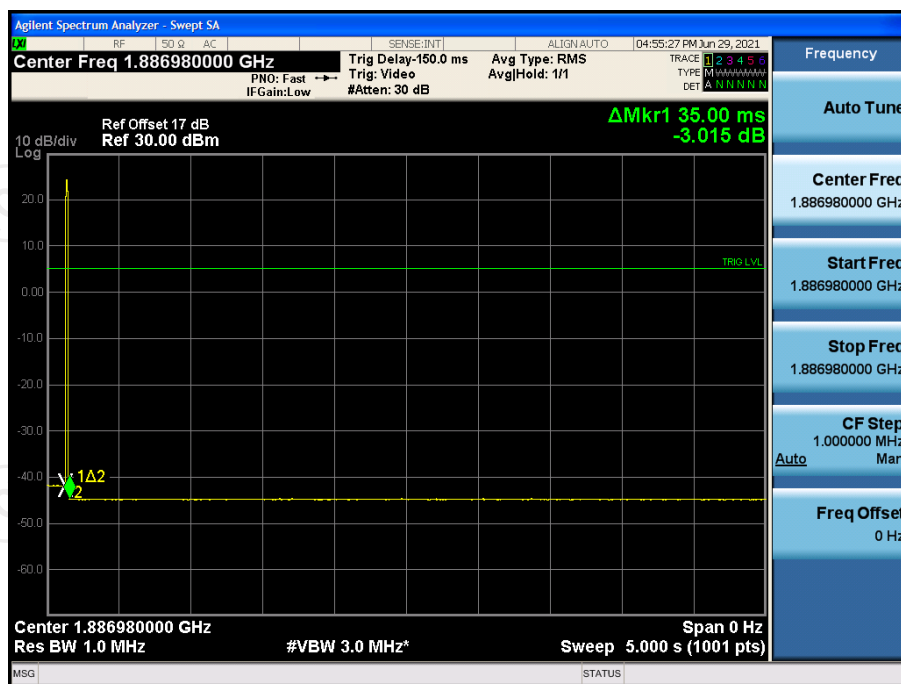


PCS DL

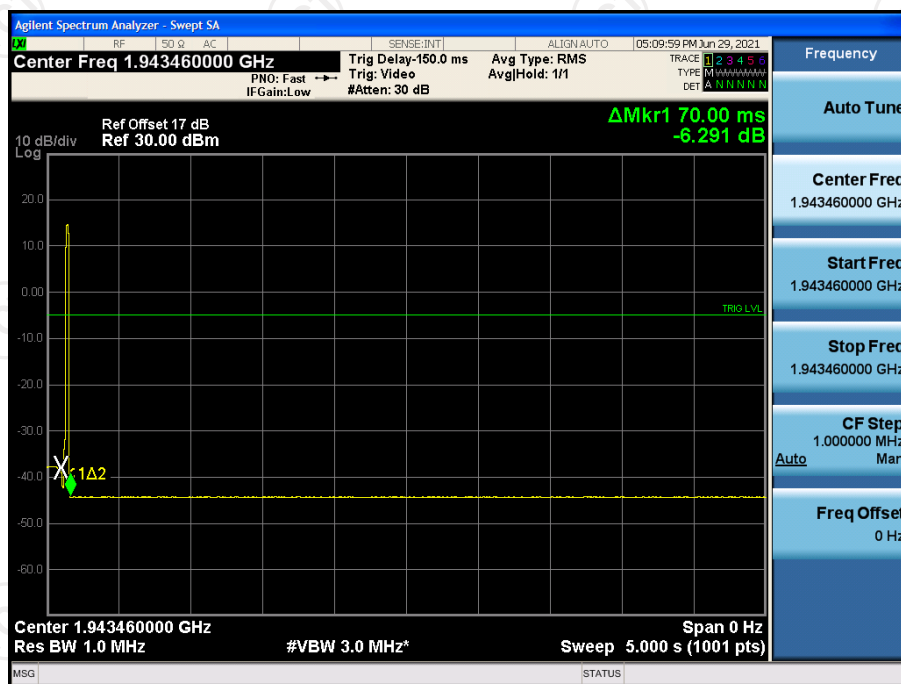


AWS-1 UL

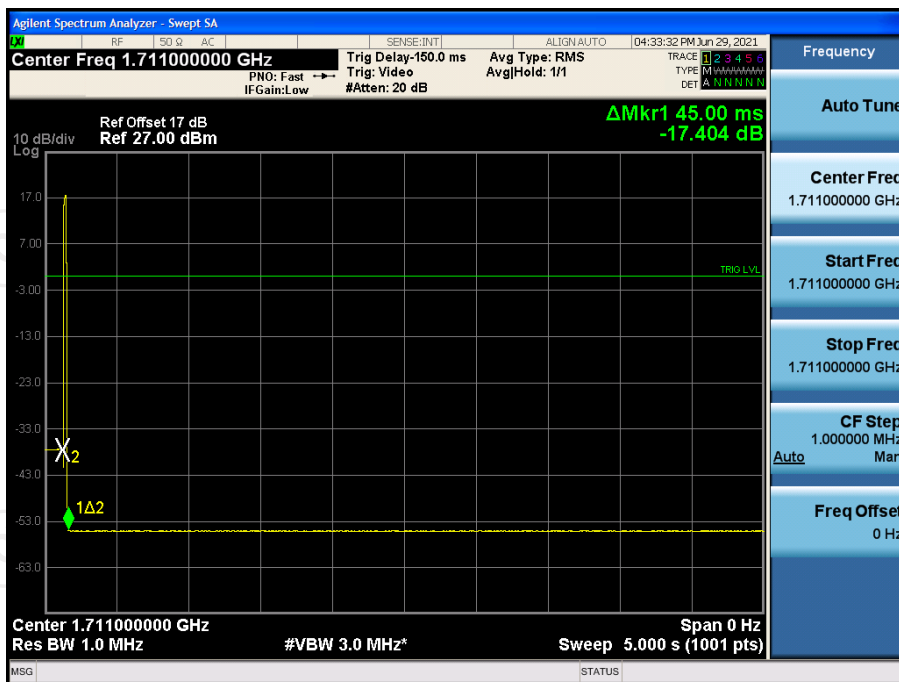


AWS-1 DL

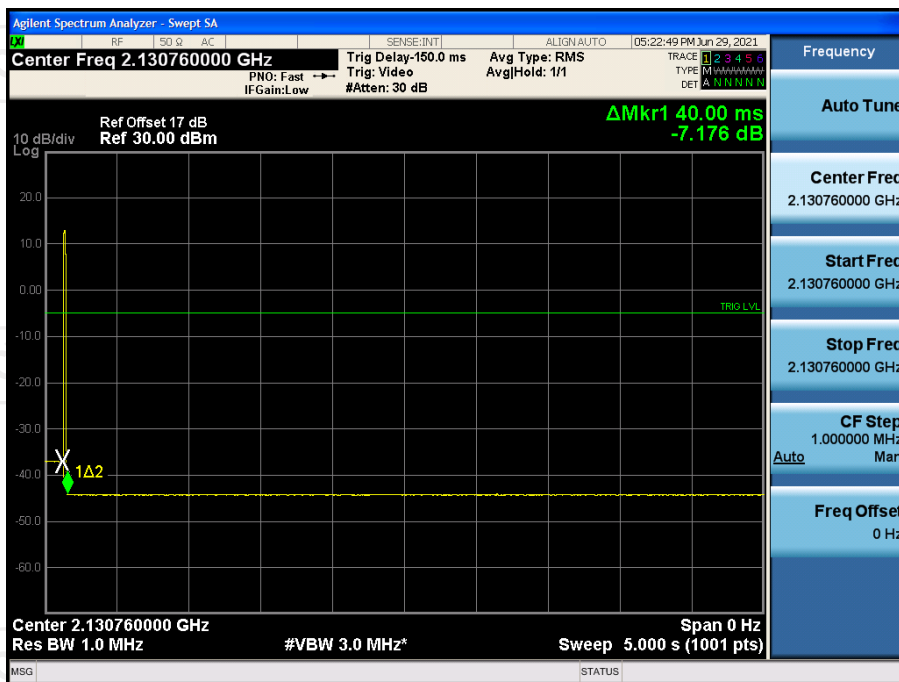


Cellular UL

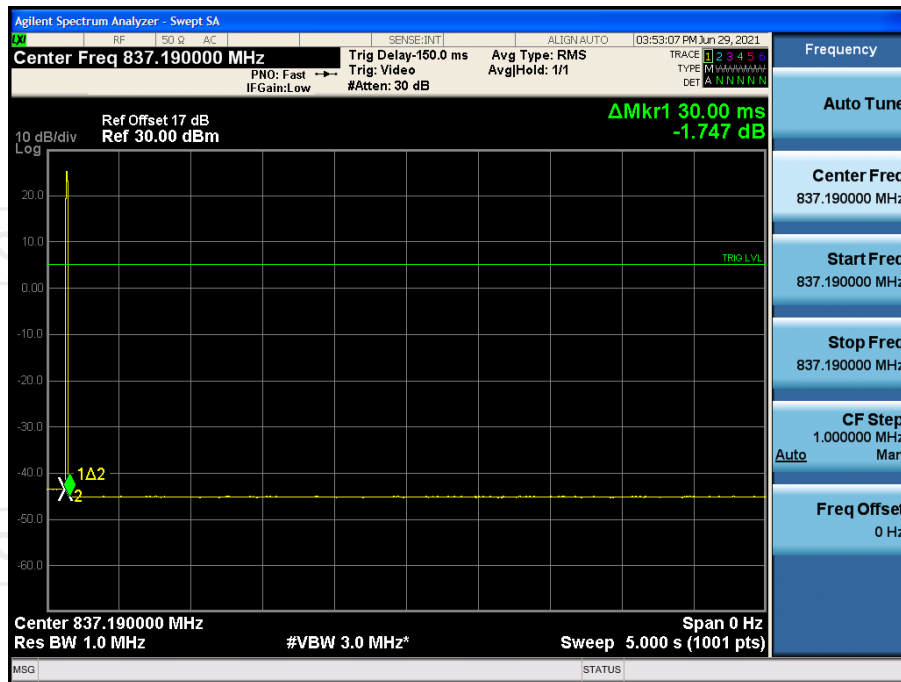


Cellular DL

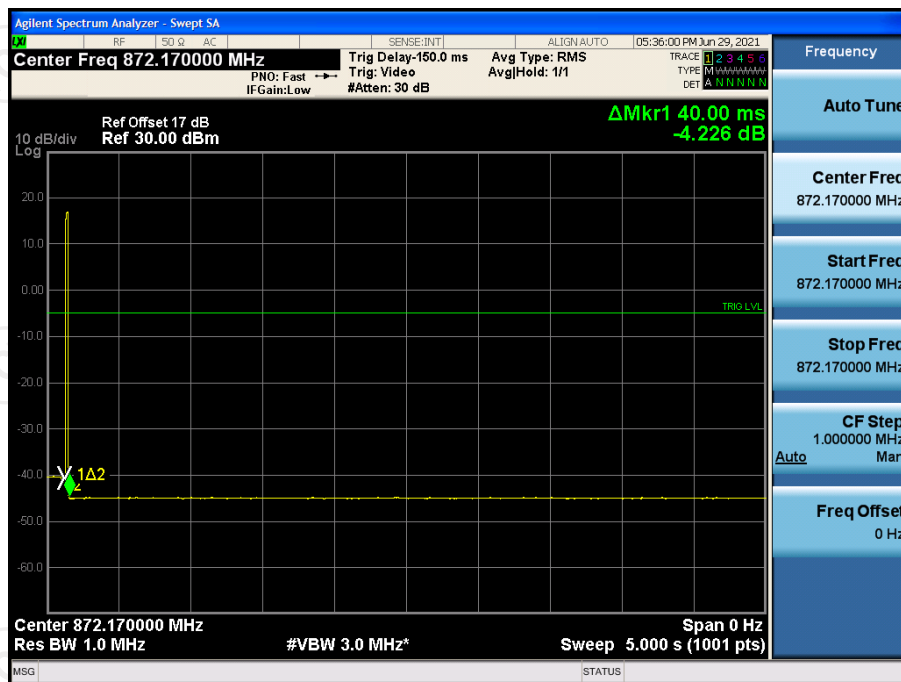


Lower700MHz UL

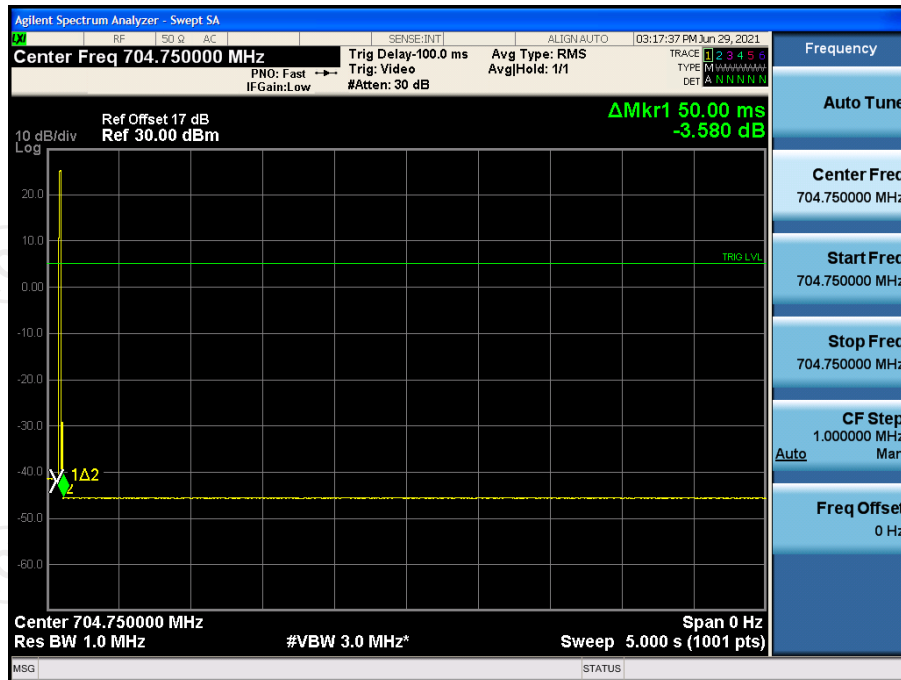


Lower700MHz DL

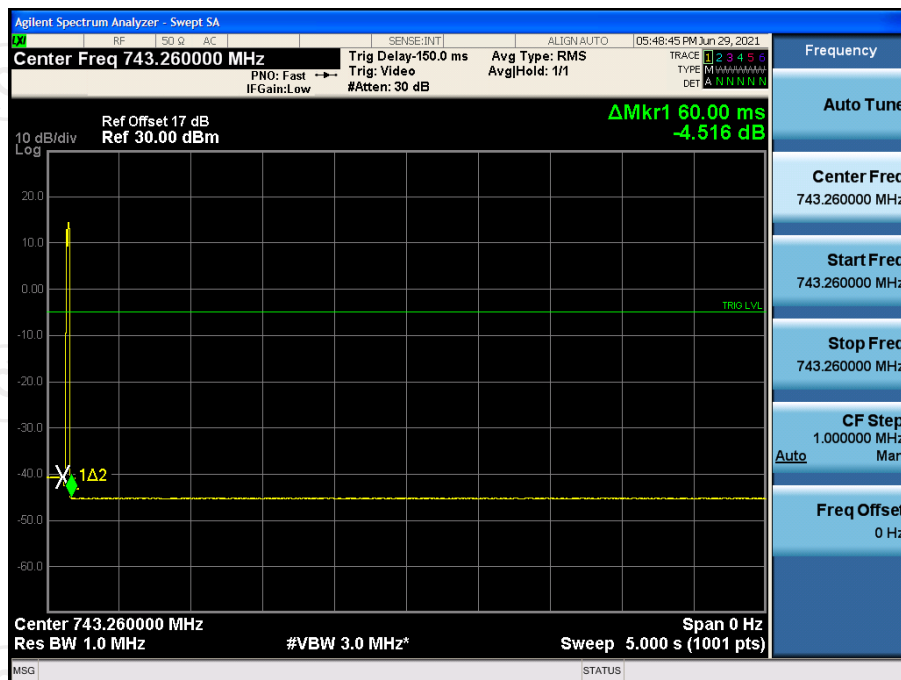

Upper700MHz UL

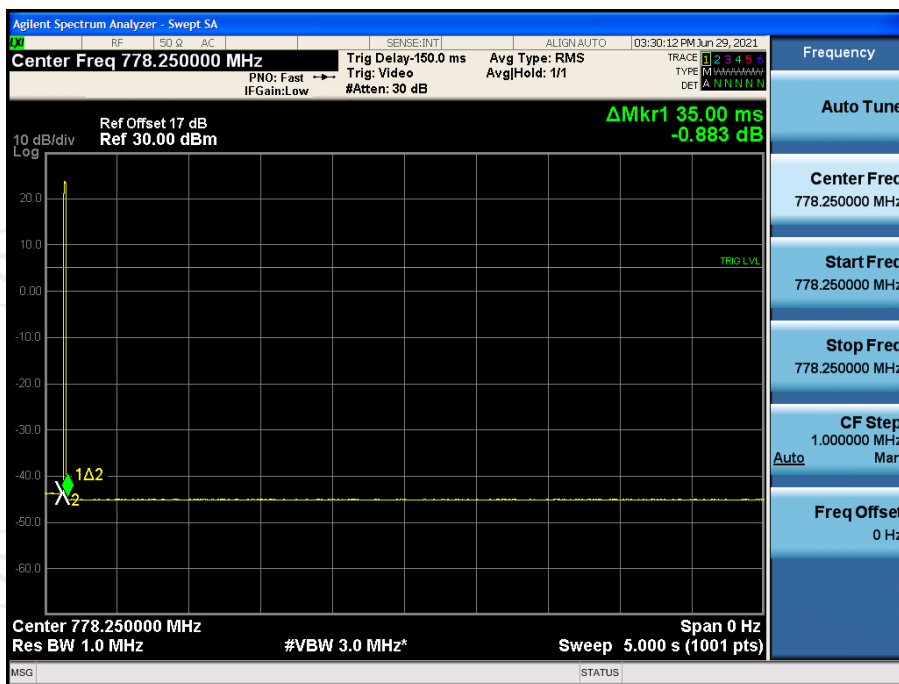


Upper700MHz DL

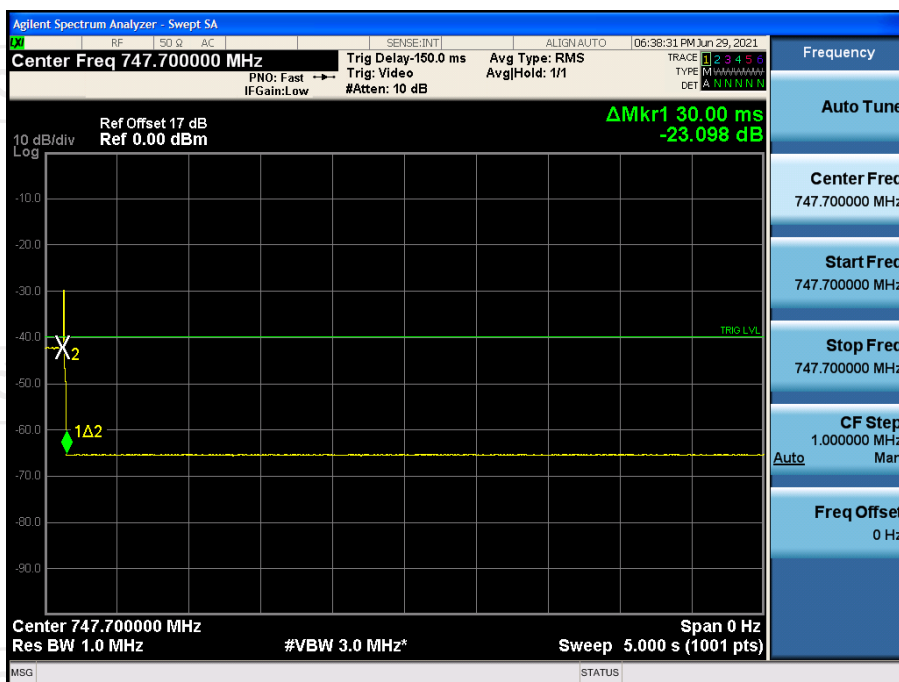


Test Plots of restarting time


PCS UL

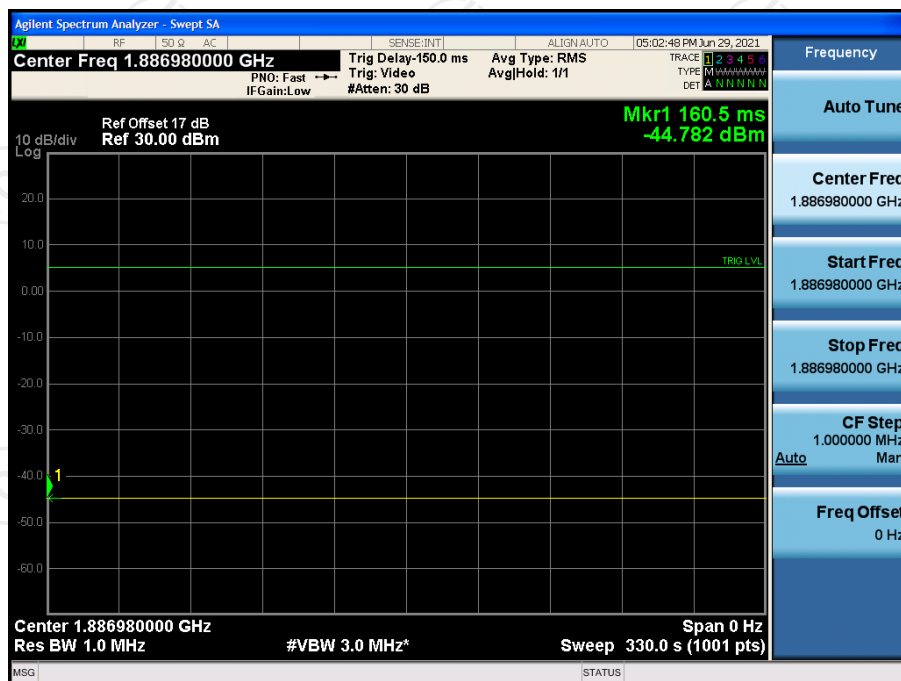


PCS DL

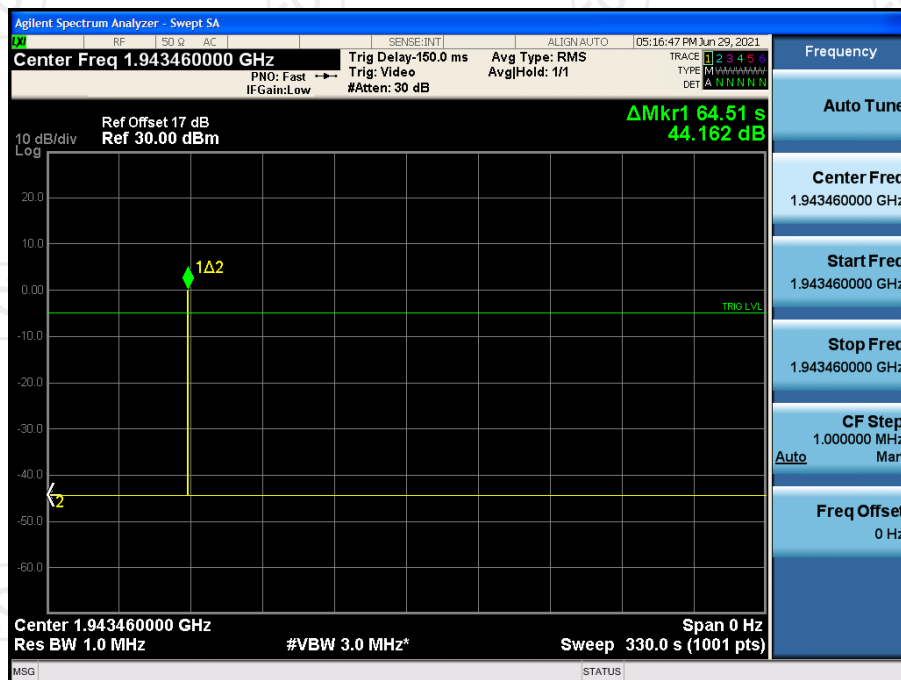


AWS-1 UL

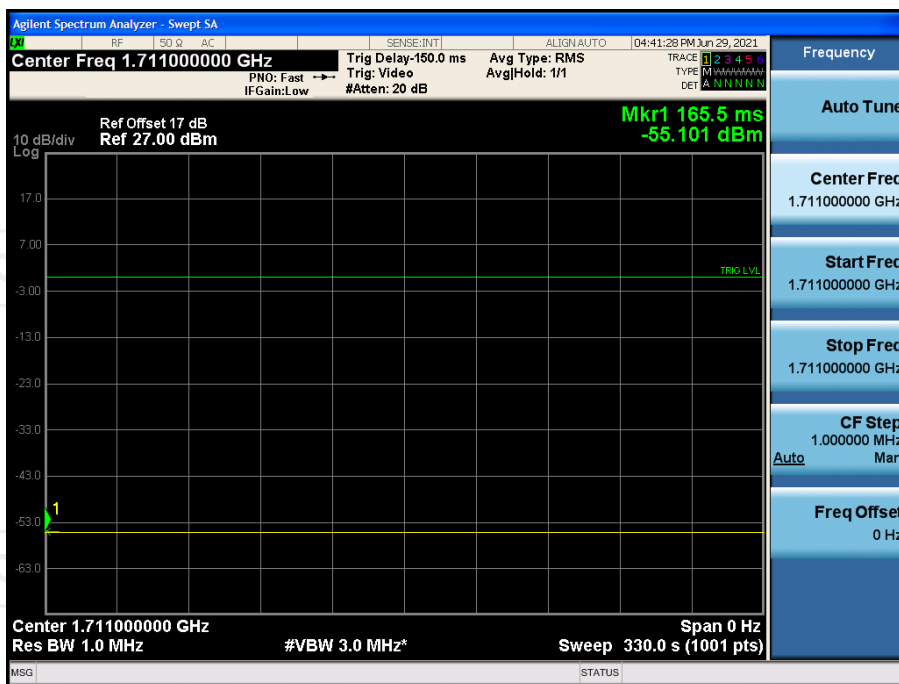


AWS-1 DL

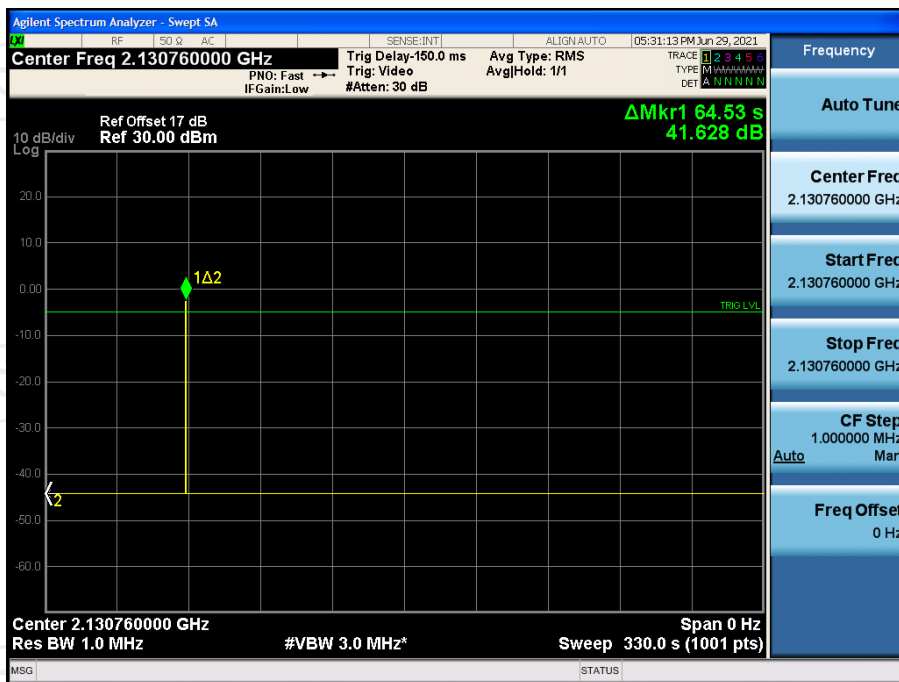


Cellular UL

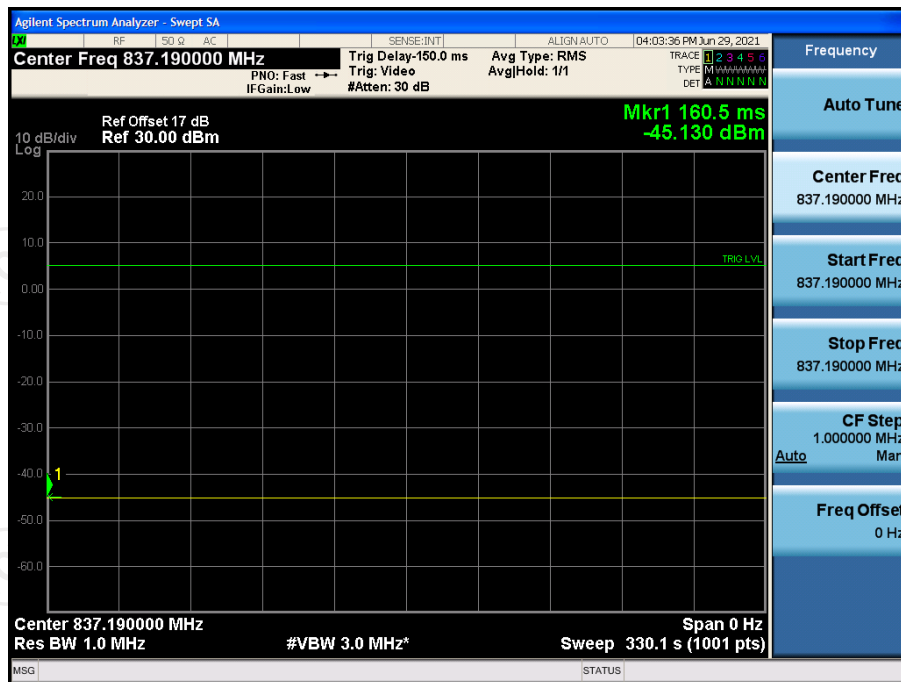


Cellular DL

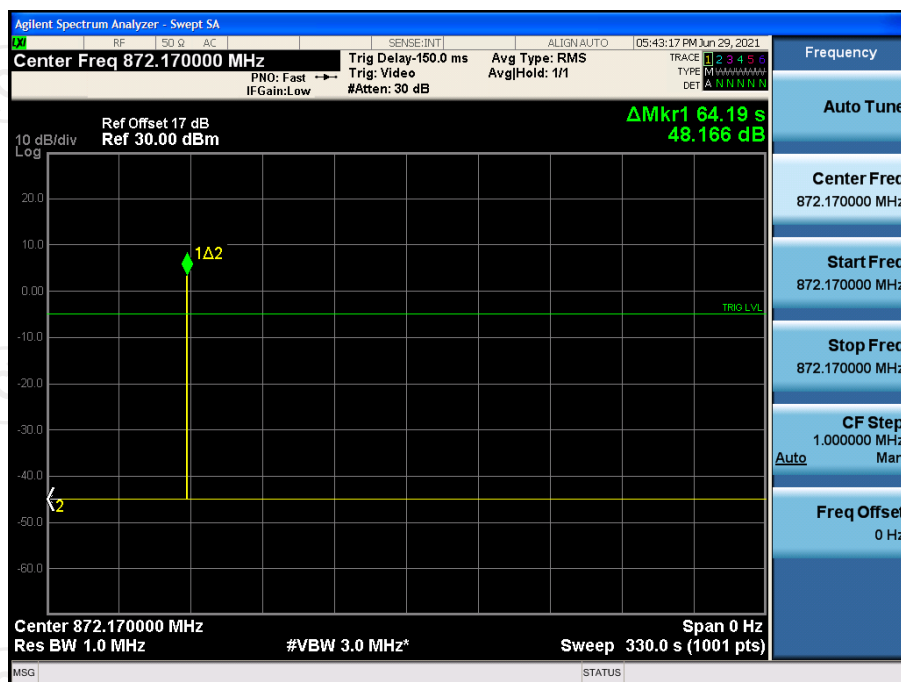


Lower700MHz UL

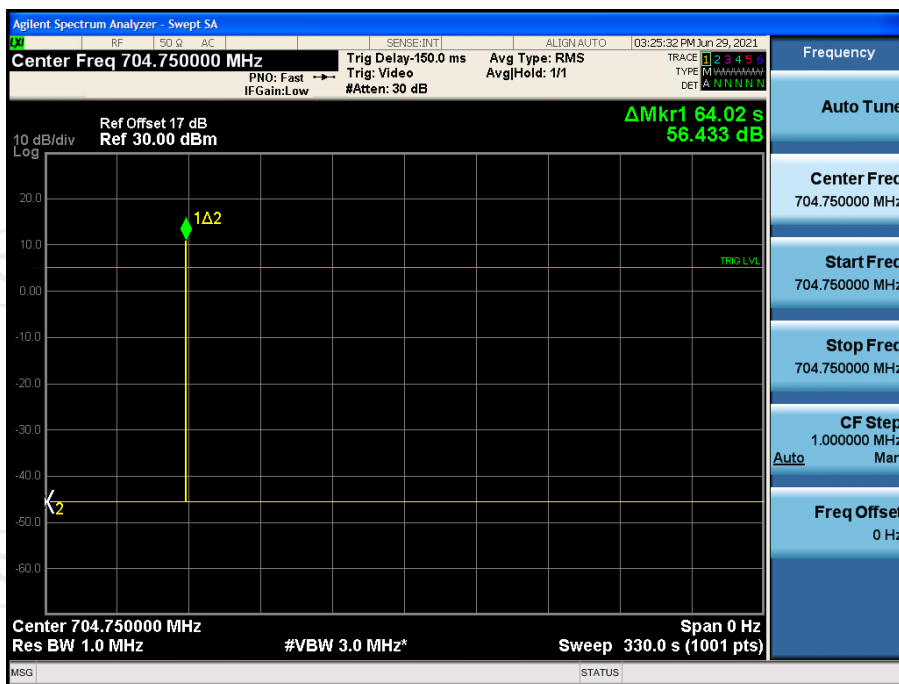


Lower700MHz DL

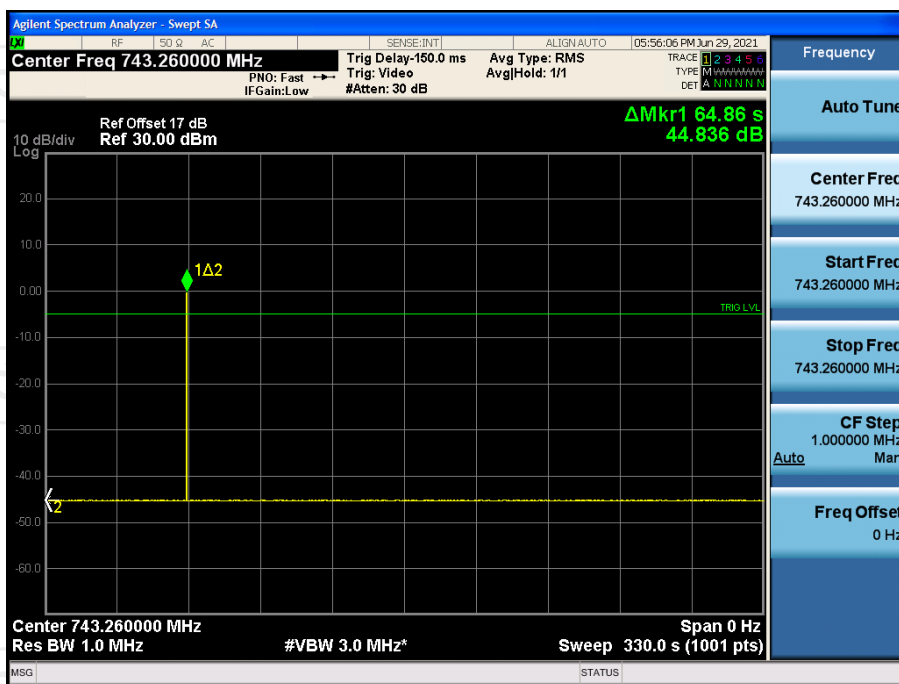

Upper700MHz UL

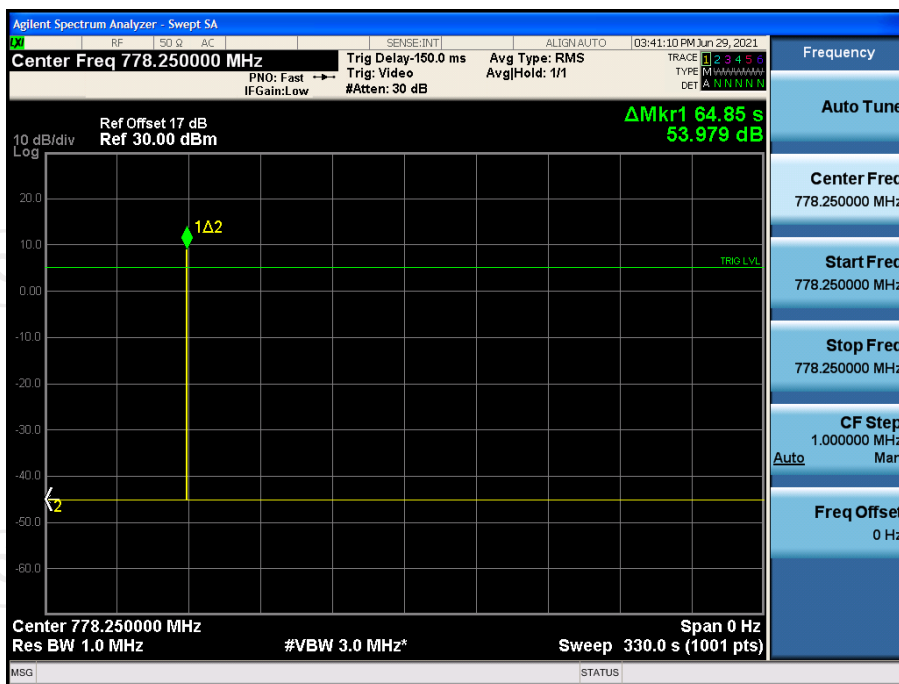

Upper700MHz DL

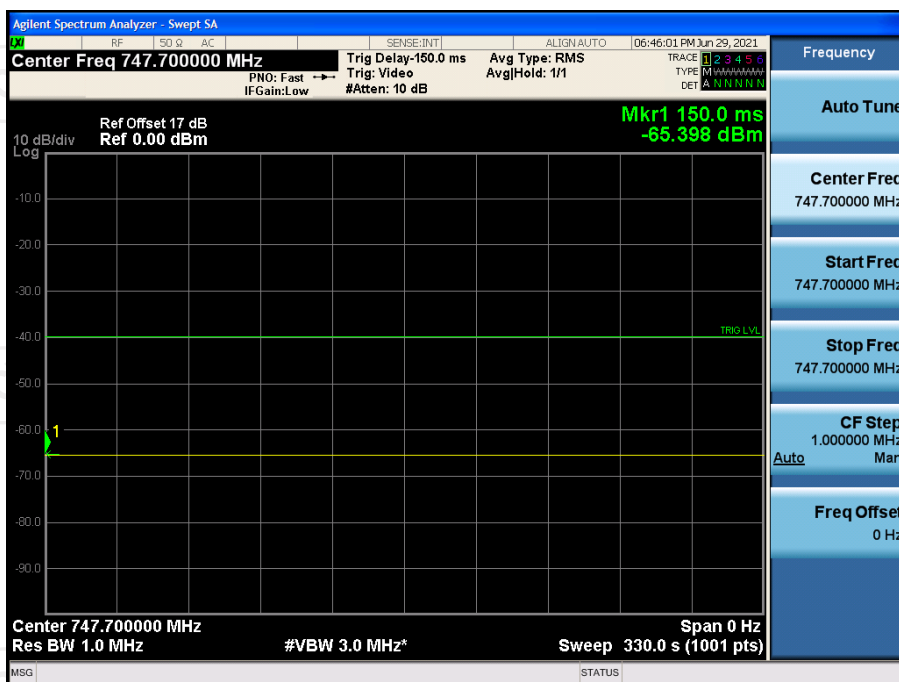

Test results of Mitigation or Shutdown

PCS	Uplink(1850-1915MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	1888.45	-58.61	1883.01	-69.76	11.15	<12	31	300	Pass
+4	1888.45	-57.17	1883.01	-69.68	12.51	<12	22	300	Pass
+3	EUT Shutdown								

PCS	Downlink(1930-1995MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	1943.91	-57.38	1940.63	-65.57	8.19	<12	22	300	Pass
+4	1943.91	-56.50	1940.63	-65.58	9.08	<12	21	300	Pass
+3	1943.91	-56.15	1940.63	-66.09	9.94	<12	19	300	Pass
+2	1943.91	-55.04	1940.63	-66.27	11.23	<12	19	300	Pass
+1	1943.91	-53.84	1940.63	-66.20	12.36	<12	15	300	Pass
0	EUT Shutdown								

AWS-1	Uplink(1710-1755MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	EUT Shutdown								

AWS-1	Downlink(2110-2155MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	2131.84	-56.26	2138.70	-66.66	10.40	<12	35	300	Pass
+4	2131.84	-55.23	2138.70	-66.32	11.09	<12	22	300	Pass
+3	2131.84	-54.66	2138.70	-66.95	12.29	<12	20	300	Pass
+2	EUT Shutdown								

Cellular	Uplink(824-849MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	837.41	-62.60	839.09	-72.50	9.90	<12	30	300	Pass
+4	EUT Shutdown								

Cellular	Downlink(869-894MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	872.06	-56.76	870.53	-68.01	11.25	<12	30	300	Pass
+4	EUT Shutdown								

Lower700M	Uplink(698-716MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	704.82	-58.18	706.54	-70.44	12.26	<12	32	300	Pass
+4	704.82	-55.33	706.54	-70.73	15.40	<12	22	300	Pass
+3	EUT Shutdown								


Lower700M	Downlink(728-746MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	736.66	-57.33	738.04	-69.15	11.82	<12	35	300	Pass
+4	736.66	-56.18	738.04	-69.59	13.41	<12	20	300	Pass
+3	EUT Shutdown								

Upper700M		Uplink(776-787MHz)							
Signal Type		AWGN							
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	778.15	-59.38	776.66	-73.37	13.99	<12	28	300	Pass
+4	778.15	-56.77	776.66	-73.09	16.32	<12	16	300	Pass
+3	EUT Shutdown								

Upper700M		Downlink(746-757MHz)							
Signal Type		AWGN							
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	751.92	-58.37	749.92	-67.76	9.39	<12	16	300	Pass
+4	EUT Shutdown								

6. Radiation Spurious Emission

6.1.1. Test Specification

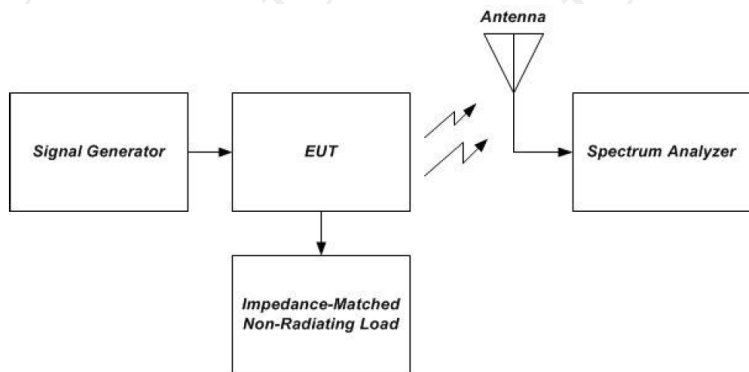Test Requirement:	FCC Part2 Section 2.1053
Test Method:	KDB935210 D03 Signal booster Measurements v04r04
Limit:	-13dBm
Test setup:	 Figure 10 – Radiated spurious emissions test and instrumentation setup
Test Procedure:	- Place the EUT on an OATS or semi-anechoic chamber turntable 3 m from the receiving antenna. - Connect the EUT to the test equipment as shown in Figure 10 beginning with the uplink output (donor) port. - Set the signal generator to produce a CW signal with the frequency set to the center of the operational band under test, and the power level set at PIN as determined from measurement results per 7.2. - Measure the radiated spurious emissions from the EUT from the lowest to the highest frequencies as specified in § 2.1057. Maximize the radiated emissions by using the procedures described in ANSI C63.4. - Capture the peak emissions Test Plotss using a peak detector with Max-Hold for inclusion in the test report. Tabular data is acceptable in lieu of spectrum analyzer Test Plotss. - Repeat 7.12c) through 7.12e) for all uplink and downlink operational bands.
Test results:	PASS

6.1.2. Test Instruments

Radiated Emission				
Name	Model No.	Manufacturer	Date of Cal.	Due Date
EMI Test Receiver	ESIB7	R&S	Jul. 28, 2020	Jul. 27, 2021
Spectrum Analyzer	FSQ40	R&S	Sep. 12, 2020	Sep. 11, 2021
Amplifier	8447D	HP	Sep. 03, 2020	Sep. 02, 2021
Amplifier	EM30265	EM Electronics Corporation CO.,LTD	Sep. 03, 2020	Sep. 02, 2021
Broadband Antenna	VULB9163	Schwarzbeck	Sep. 05, 2020	Sep. 04, 2022
Horn Antenna	BBHA 9120D	Schwarzbeck	Sep. 05, 2020	Sep. 04, 2022
Line-4	RE-high-04	TCT	Sep. 03, 2020	Sep. 02, 2021
Line-8	RE-01	TCT	Jul. 28, 2020	Jul. 27, 2021
Loop antenna	ZN30900A	ZHINAN	Sep. 06, 2020	Sep. 05, 2022
Signal Generator	N5182A	Agilent	Sep. 12, 2020	Sep. 11, 2021

6.1.3. Test data

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
PCS Uplink						
170.24	H	-42.05	-8.05	-50.10	-13.00	-37.10
555.61	V	-55.82	5.91	-49.91		-36.91
3765.0	H	-48.69	4.62	-49.07		-36.07
3765.0	V	-47.16	6.04	-46.12		-33.12
PCS Downlink						
175.14	H	-43.86	-6.95	-50.81	-13.00	-37.81
553.88	V	-55.70	5.97	-49.73		-36.73
3925.00	H	-53.22	8.39	-44.83		-31.83
3925.00	V	-54.63	9.01	-45.62		-32.62

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
AWS-1 Uplink						
115.62	V	-49.15	0.79	-48.36	-13.00	-35.36
115.62	H	-50.43	0.79	-49.64		-36.64
3465.00	V	-48.87	4.32	-49.55		-36.55
3465.00	H	-50.58	4.32	-51.26		-38.26
AWS-1 Downlink						
119.55	V	-51.59	0.83	-50.76	-13.00	-37.76
119.55	H	-53.68	0.83	-52.85		-39.85
4265.00	V	-53.23	4.92	-48.31		-35.31
4265.00	H	-54.75	4.92	-49.83		-36.83

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
Cellular Uplink						
160.54	H	-42.51	-8.05	-50.56	-13.00	-37.56
556.30	V	-56.32	5.91	-50.41		-37.41
1673.00	H	-49.83	4.62	-50.21		-37.21
1673.00	V	-48.21	6.04	-47.17		-34.17
Cellular Downlink						
168.20	H	-44.54	-6.95	-51.49	-13.00	-38.49
552.63	V	-56.04	5.97	-50.07		-37.07
1763.00	H	-53.80	8.39	-45.41		-32.41
1763.00	V	-55.12	9.01	-46.11		-33.11

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
Lower700MHz Uplink						
170.23	H	-42.76	-8.84	-51.60	-13.00	-38.60
553.61	V	-55.11	5.91	-49.20		-36.20
1414.00	H	-43.40	-0.37	-48.77		-35.77
1414.00	V	-44.82	1.25	-48.57		-35.57
Lower700MHz Downlink						
173.26	H	-44.76	-7.01	-51.77	-13.00	-38.77
555.49	V	-54.66	5.28	-49.38		-36.38
1474.36	H	-48.52	-0.19	-48.71		-35.71
1474.36	V	-46.33	1.38	-44.95		-31.95

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
Upper700MHz Uplink						
382.12	H	-42.58	-8.15	-50.73	-13.00	-37.73
382.12	V	-57.05	5.83	-51.22		-38.22
1564.00	H	-43.42	-0.76	-49.18		-36.18
1564.00	V	-45.57	2.76	-47.81		-34.81
Upper700MHz Downlink						
388.26	H	-43.39	-6.82	-50.21	-13.00	-37.21
388.26	V	-47.65	5.68	-41.97		-28.97
1502.00	H	-45.24	-0.72	-45.96		-32.96
1502.00	V	-46.76	1.20	-45.56		-32.56

*****END OF REPORT*****