




Channel 100 (5500MHz)

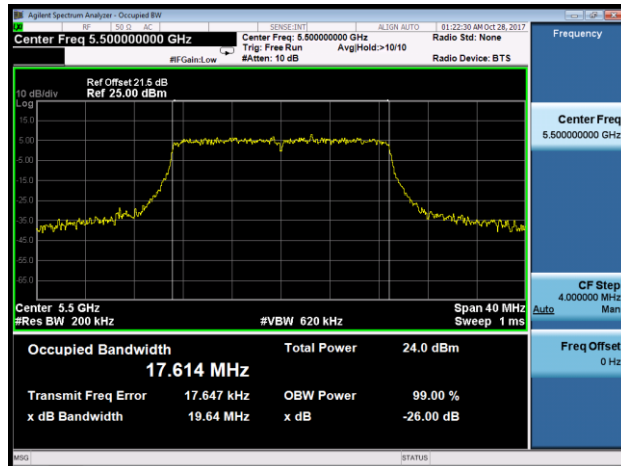


Channel 120 (5600MHz)

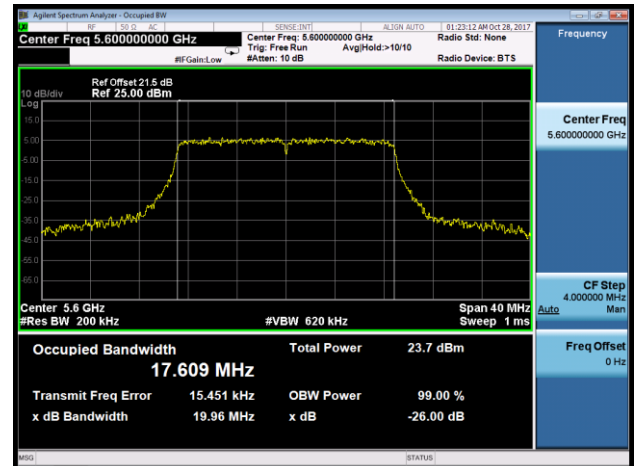


Channel 140 (5700MHz)

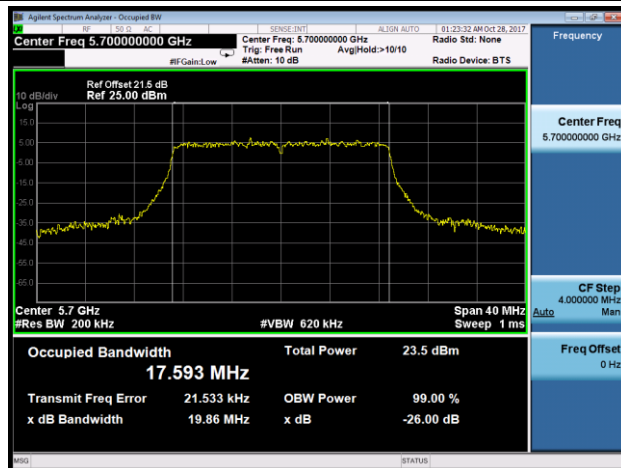


Channel 144 (5720MHz)

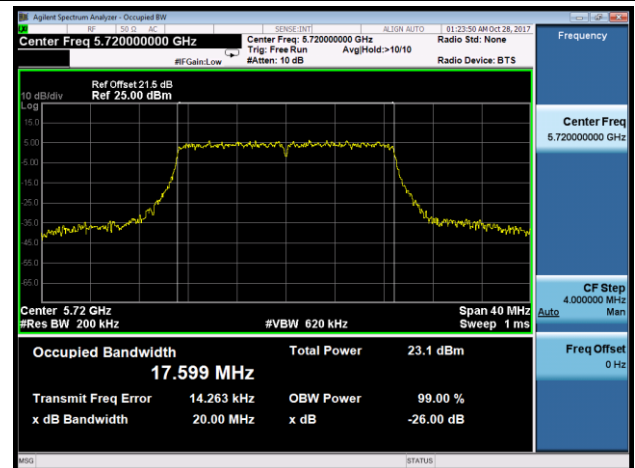


Channel 149 (5745MHz)

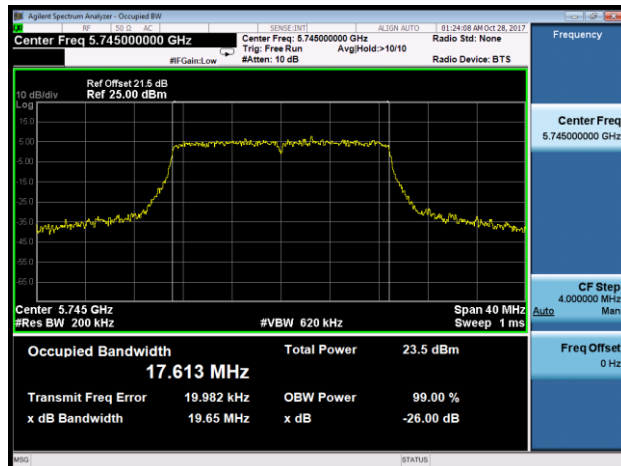

Channel 157 (5785MHz)

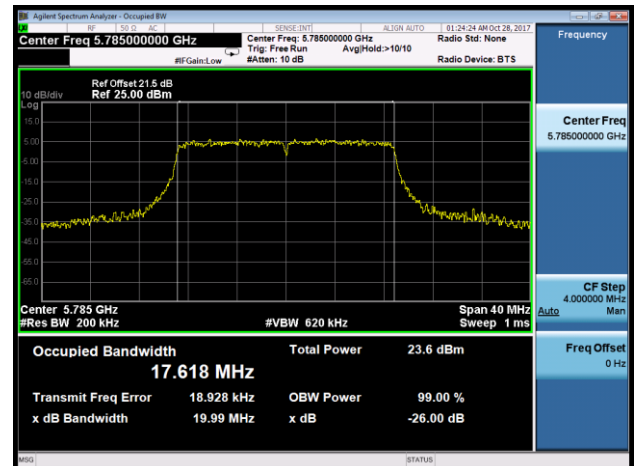


Channel 165 (5825MHz)

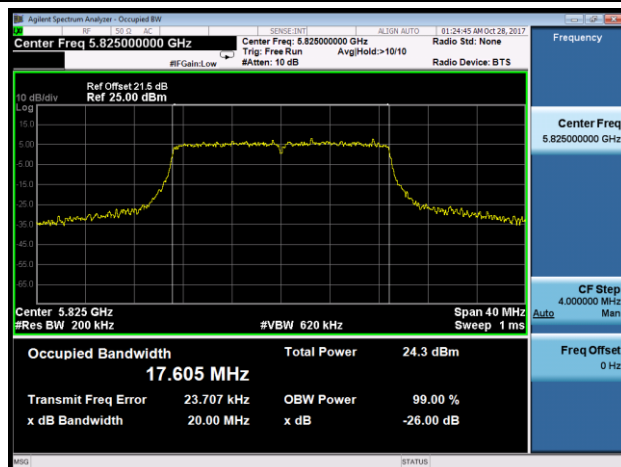


802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth - Ant 1 / Ant 0 + 1


Channel 38 (5190MHz)

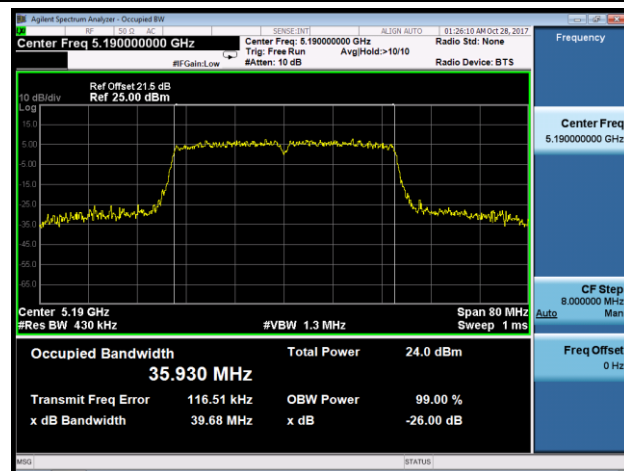


Channel 46 (5230MHz)

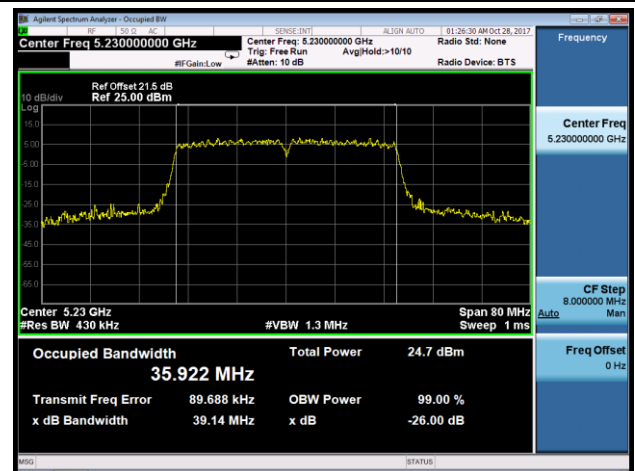


Channel 54 (5270MHz)

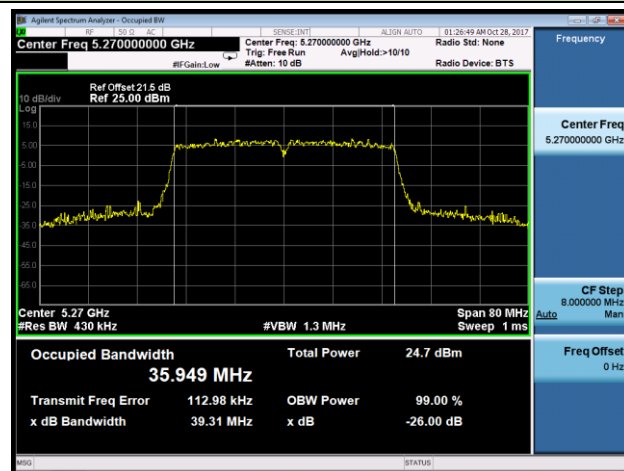


Channel 62 (5310MHz)

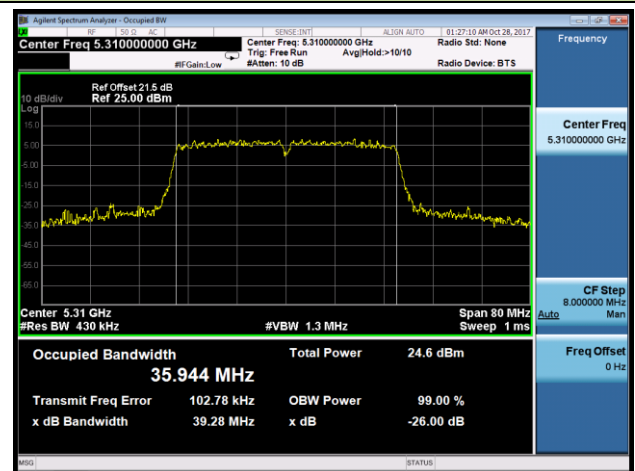


Channel 102 (5510MHz)

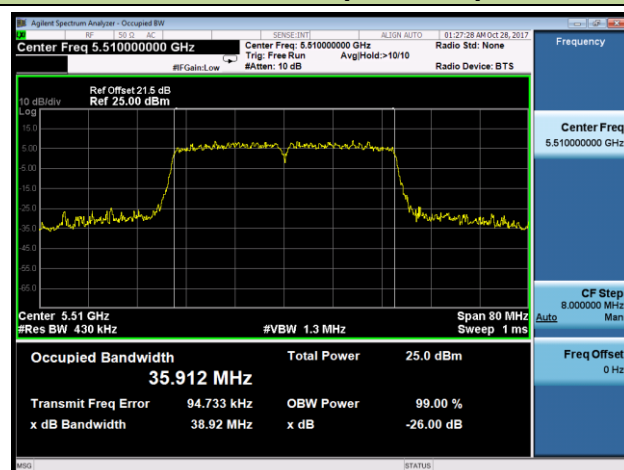


Channel 118 (5590MHz)

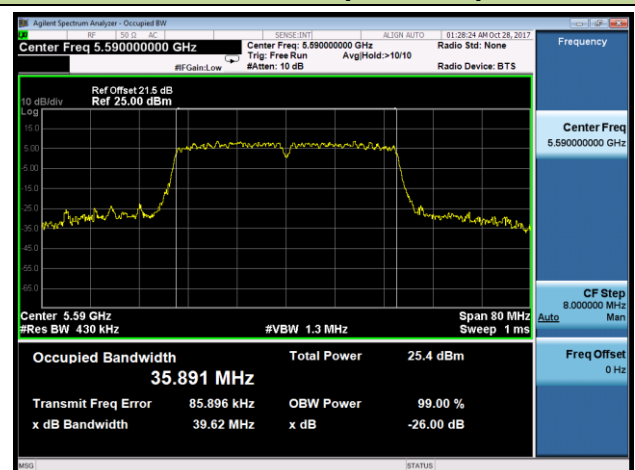


Channel 134 (5670MHz)

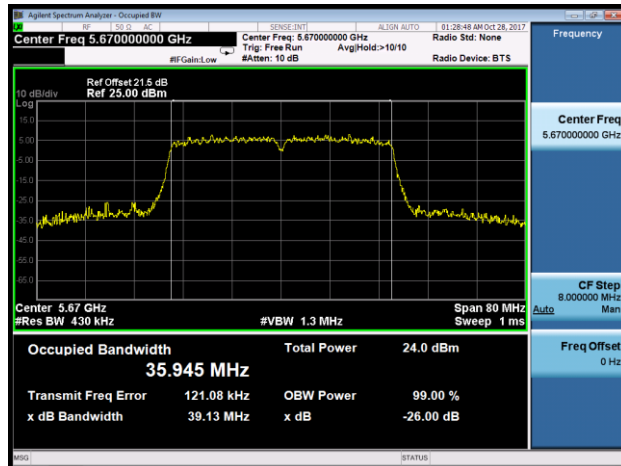


Channel 142 (5710MHz)

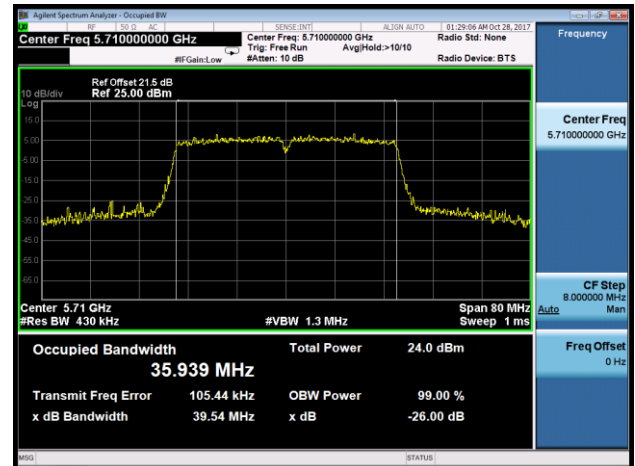

Channel 151 (5755MHz)

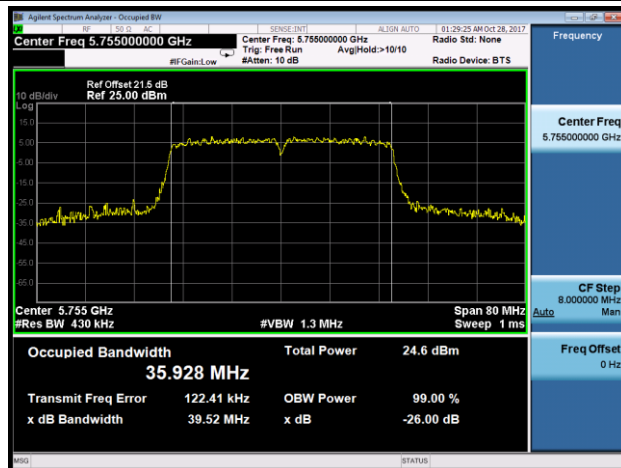

Channel 159 (5795MHz)

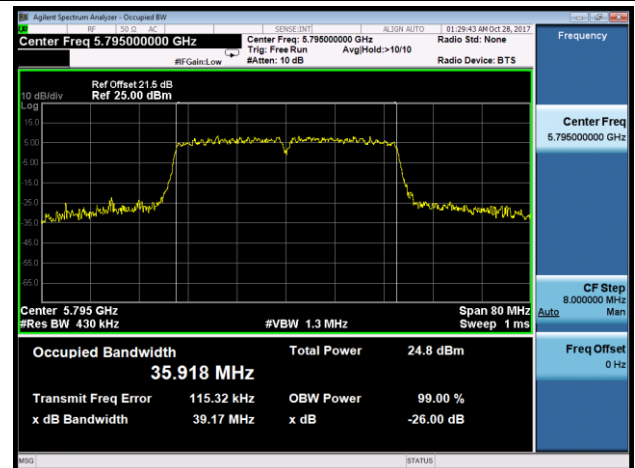


802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth - Ant 1 / Ant 0 + 1


Channel 42 (5210MHz)




Channel 58 (5290MHz)

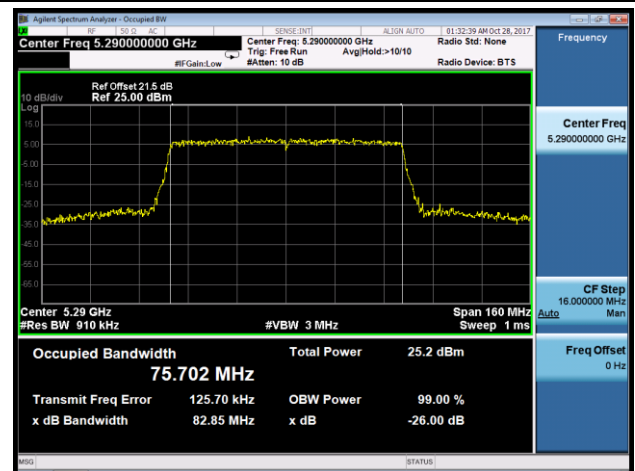


Channel 106 (5530MHz)

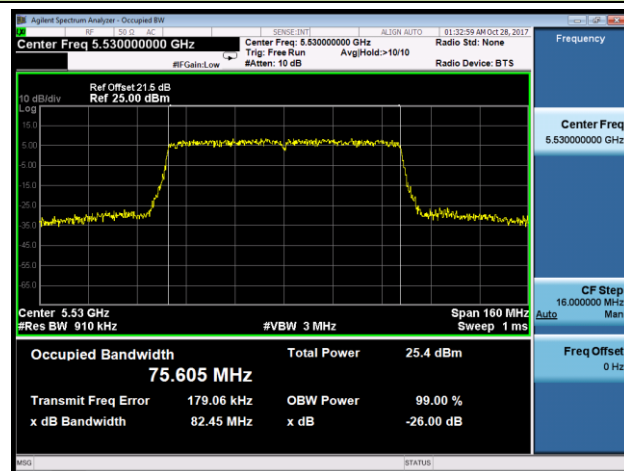


Channel 122 (5610MHz)

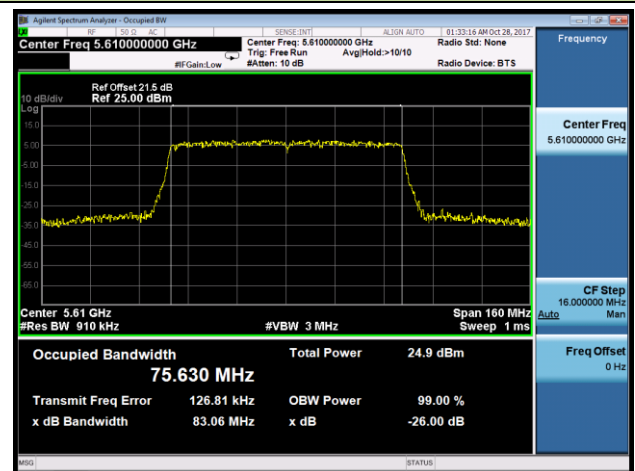

Channel 138 (5690MHz)

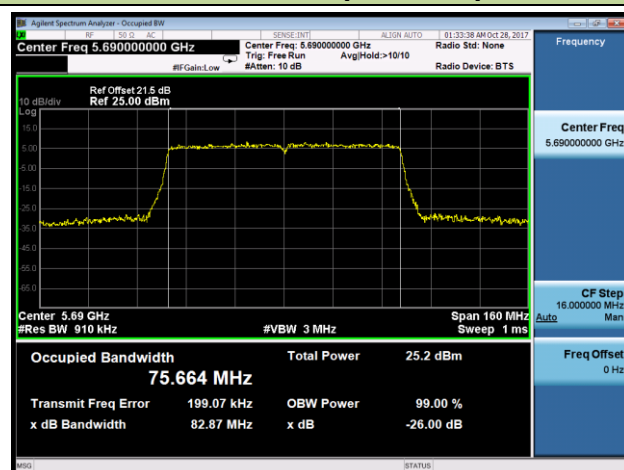

Channel 155 (5775MHz)

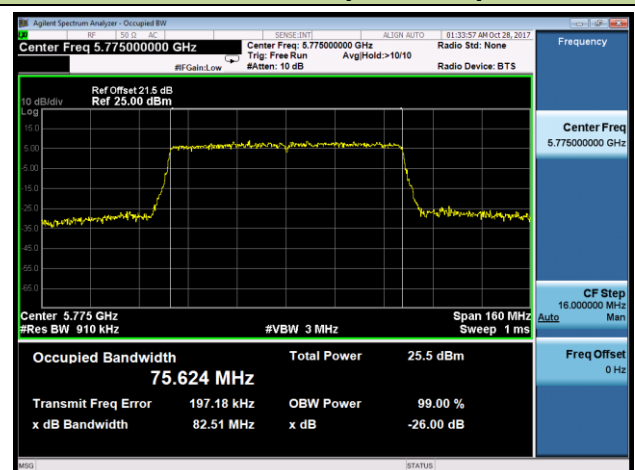

7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

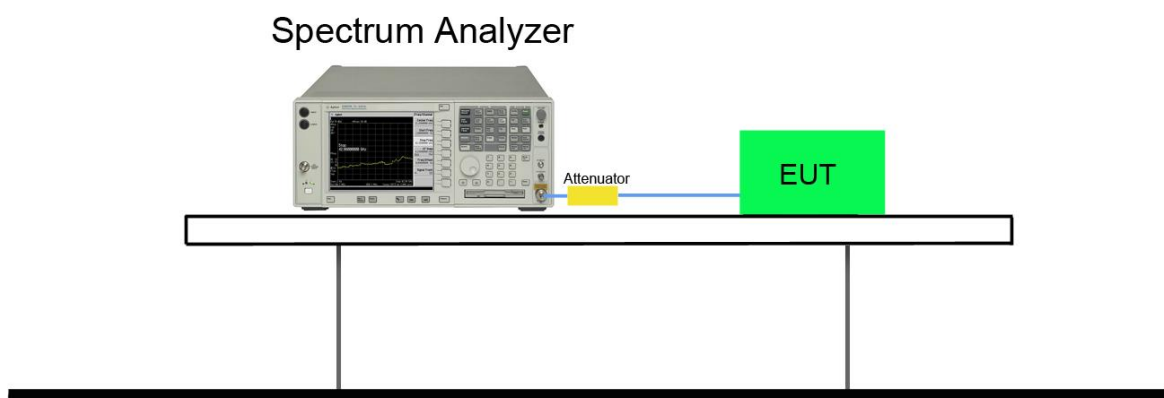


7.3.5.Test Result

Product	ACCESS POINT	Temperature	24°C
Test Engineer	Kevin Ker	Relative Humidity	53%
Test Site	SR2	Test Date	2017/10/18


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 1 / Ant 0 + 1						
802.11a	6Mbps	149	5745	16.34	≥0.5	Pass
802.11a	6Mbps	157	5785	16.34	≥0.5	Pass
802.11a	6Mbps	165	5825	16.34	≥0.5	Pass
802.11n-HT20	MCS0	149	5745	17.61	≥0.5	Pass
802.11n-HT20	MCS0	157	5785	17.60	≥0.5	Pass
802.11n-HT20	MCS0	165	5825	17.59	≥0.5	Pass
802.11n-HT40	MCS0	151	5755	35.30	≥0.5	Pass
802.11n-HT40	MCS0	159	5795	35.26	≥0.5	Pass
802.11ac-VHT20	MCS0	149	5745	17.60	≥0.5	Pass
802.11ac-VHT20	MCS0	157	5785	17.60	≥0.5	Pass
802.11ac-VHT20	MCS0	165	5825	17.58	≥0.5	Pass
802.11ac-VHT40	MCS0	151	5755	35.15	≥0.5	Pass
802.11ac-VHT40	MCS0	159	5795	35.13	≥0.5	Pass
802.11ac-VHT80	MCS0	155	5775	76.42	≥0.5	Pass

802.11a 6dB Bandwidth - Ant 1 / Ant 0 + 1


Channel 149 (5745MHz)

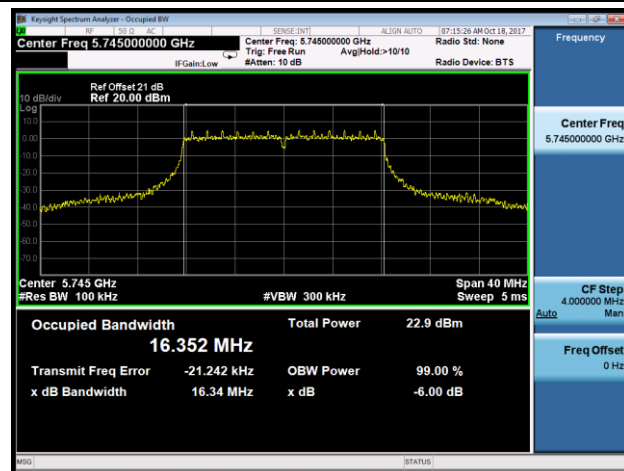

Channel 157 (5785MHz)

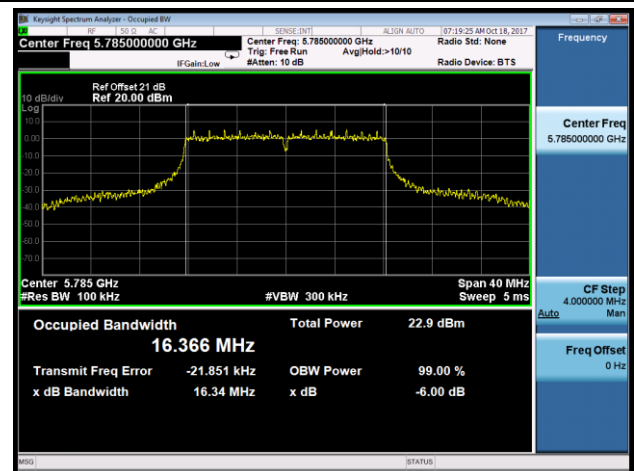


Channel 165 (5825MHz)

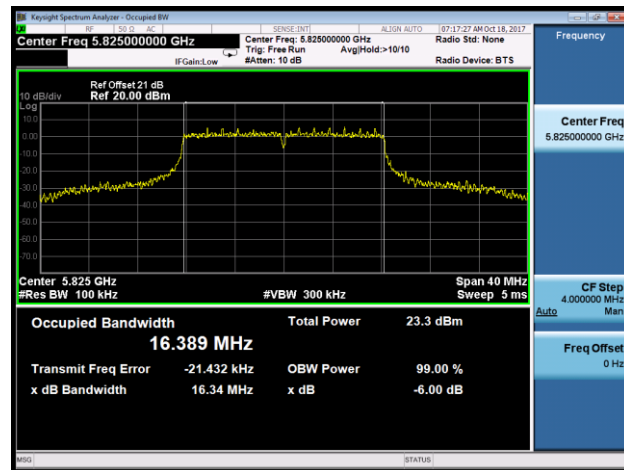


802.11n-HT20 6dB Bandwidth - Ant 1 / Ant 0 + 1


Channel 149 (5745MHz)

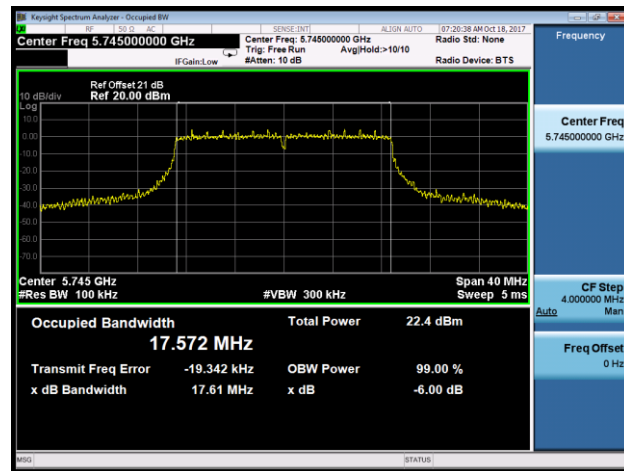

Channel 157 (5785MHz)

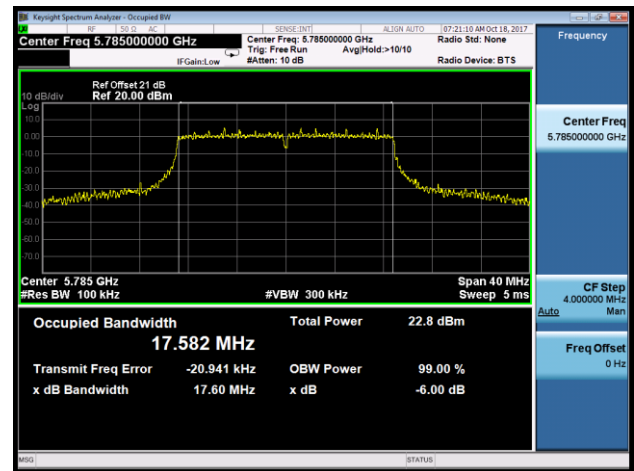


Channel 165 (5825MHz)

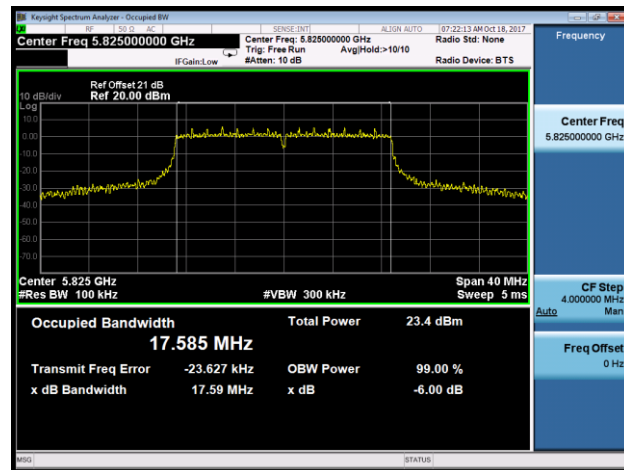


802.11n-HT40 6dB Bandwidth - Ant 1 / Ant 0 + 1

Channel 151 (5755MHz)

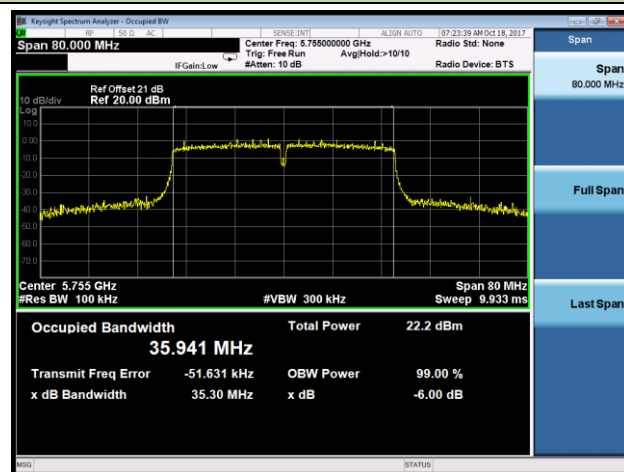


Channel 159 (5795MHz)

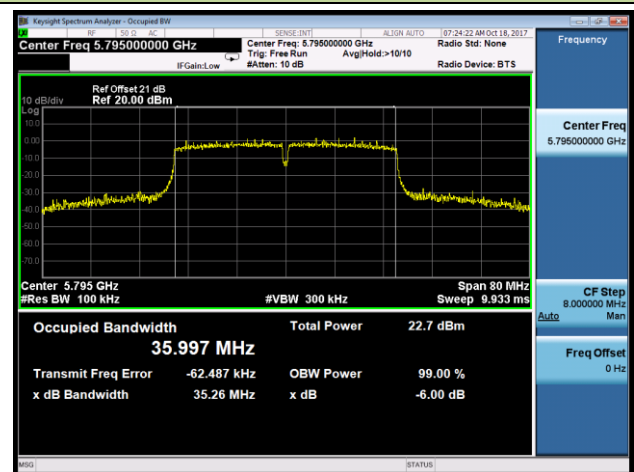


802.11ac-VHT20 6dB Bandwidth - Ant 1 / Ant 0 + 1


Channel 149 (5745MHz)

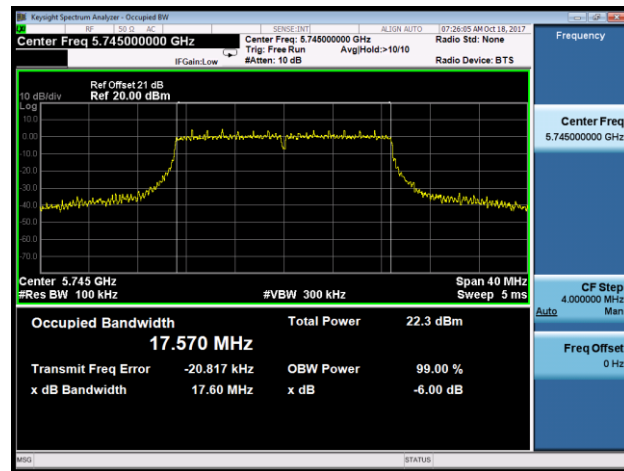

Channel 157 (5785MHz)

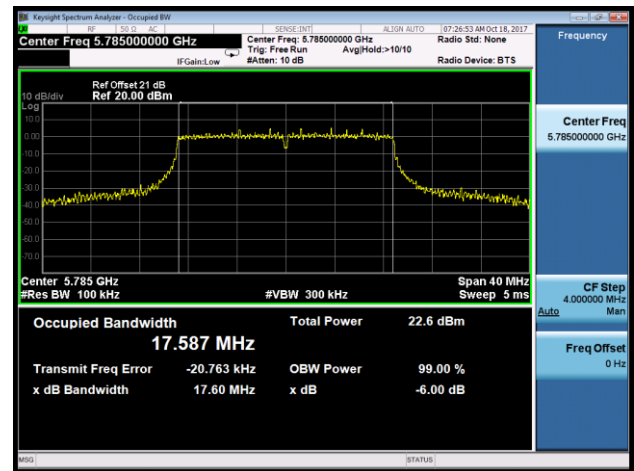


Channel 165 (5825MHz)

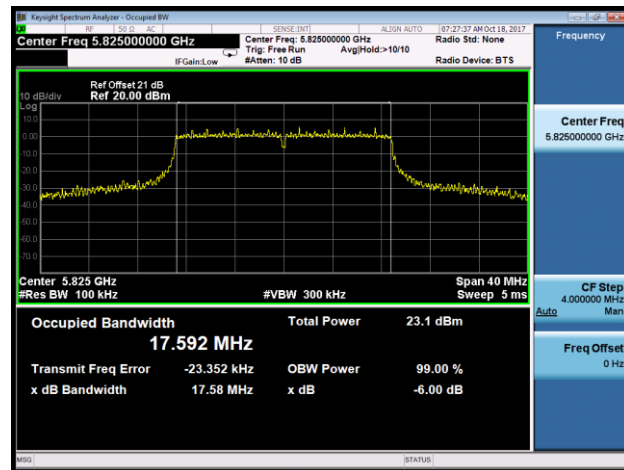


802.11ac-VHT40 6dB Bandwidth - Ant 1 / Ant 0 + 1

Channel 151 (5755MHz)

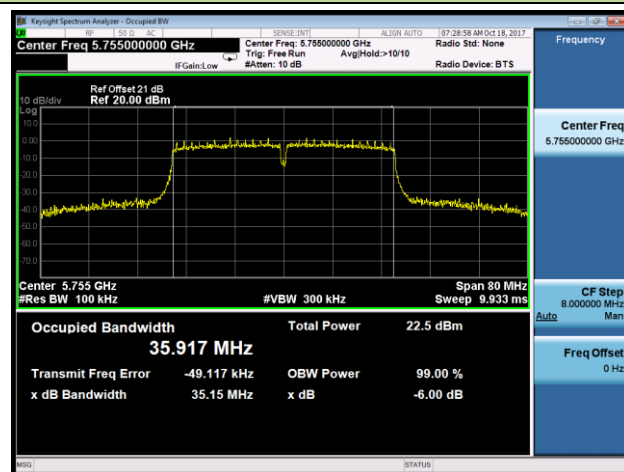


Channel 159 (5795MHz)

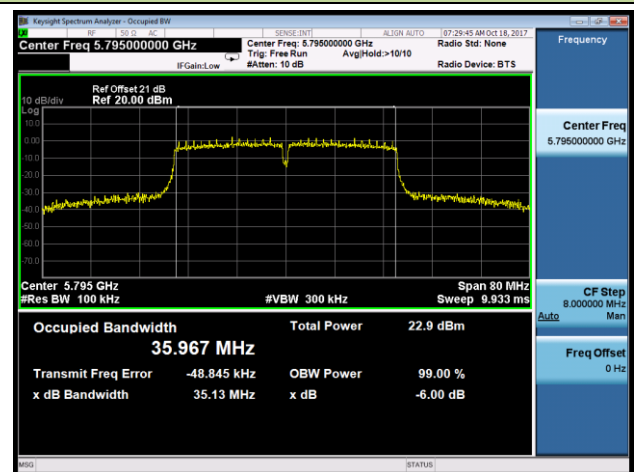

802.11ac-VHT80 6dB Bandwidth - Ant 1 / Ant 0 + 1

Channel 155 (5775MHz)

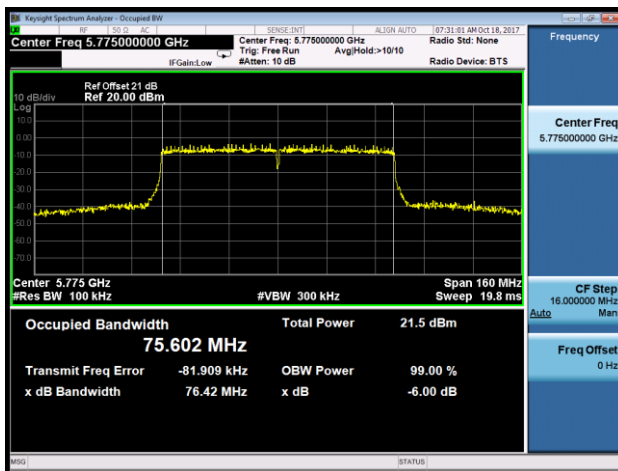

7.4. Output Power Measurement

7.4.1. Test Limit

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For an indoor access point operating in the band 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (23.98dBm) or 11dBm +10 log (26dB BW).

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.4.2. Test Procedure Used

KDB 789033D02v01r04- Section E)3)b) Method PM-G

7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

7.4.4. Test Setup

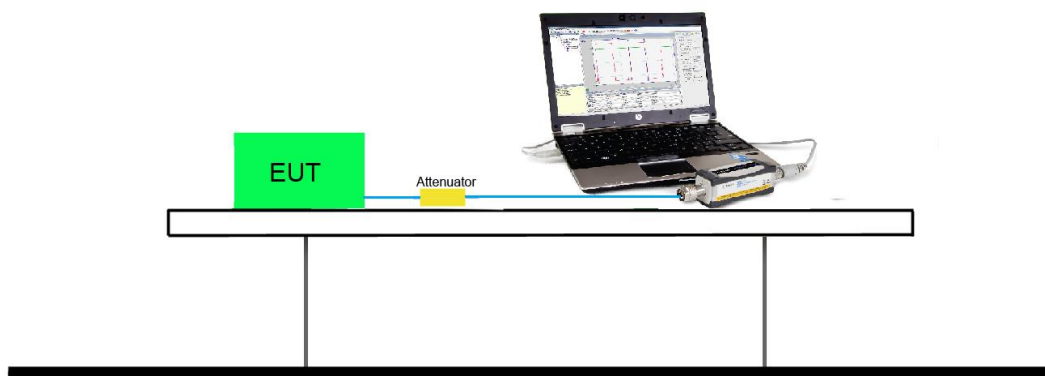

7.4.5. Test Result

Output Power - Spot Check Test Data (M/N: APINP303)

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 (CDD Mode)								
11a	MCS0	36	5180	17.87	18.47	21.19	≤ 30.00	Pass
11a	MCS0	44	5220	17.95	18.26	21.12	≤ 30.00	Pass
11a	MCS0	48	5240	18.18	18.53	21.37	≤ 30.00	Pass
11n-HT20	MCS0	149	5745	17.87	18.54	21.23	≤ 30.00	Pass
11n-HT20	MCS0	157	5785	18.42	18.35	21.40	≤ 30.00	Pass
11n-HT20	MCS0	165	5825	18.49	18.27	21.39	≤ 30.00	Pass
11n-HT40	MCS0	38	5190	17.24	17.71	20.49	≤ 30.00	Pass
11ac-VHT20	MCS0	100	5500	16.09	16.25	19.18	≤ 23.93	Pass
11ac-VHT20	MCS0	120	5600	15.73	16.12	18.94	≤ 23.93	Pass
11ac-VHT20	MCS0	140	5700	16.44	16.69	19.58	≤ 23.93	Pass
11ac-VHT20	MCS0	144	5720	16.39	16.92	19.67	≤ 22.76	Pass
11ac-VHT80	MCS0	58	5290	14.71	15.42	18.09	≤ 23.98	Pass
11ac-VHT80	MCS0	106	5530	16.07	16.6	19.35	≤ 23.98	Pass

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: Detail limit calculation see page 55.

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 (Beam-Forming Mode)								
11n-HT20	MCS0	52	5260	16.04	16.52	19.30	≤ 21.07	Pass
11n-HT20	MCS0	60	5300	16.14	16.46	19.31	≤ 21.07	Pass
11n-HT20	MCS0	64	5320	16.34	16.82	19.60	≤ 21.07	Pass
11ac-VHT80	MCS0	155	5775	18.37	18.38	21.39	≤ 27.09	Pass

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2:

UNII-2, Average Power Limit (dBm) = 23.98dBm - (5.9dBi + 3.01dBi - 6dBi) = 21.07dBm.

UNII-3, Average Power Limit (dBm) = 30dBm - (5.9dBi + 3.01dBi - 6dBi) = 27.09dBm.

Reference Original Test Data

Note 1: Some test data (gray marker) was retested due to the antenna gain increase of 0.2dB and all test limits were also recalculated again.

Note 2: Power output test was verified over all data rates of each mode shown as below table, and then choose the data rate that can cause maximum power output for final test of each channel.

For Ant 0 / Ant 0 + 1port:

Test Mode	Bandwidth	Channel	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
802.11a	20	36	5180	6Mbps	18.08
				24Mbps	17.92
				54Mbps	17.84
802.11n	20	36	5180	MCS0	18.11
				MCS3	17.98
				MCS7	17.84
802.11n	40	38	5190	MCS0	17.34
				MCS3	17.28
				MCS7	17.16
802.11ac	20	36	5180	MCS0	18.10
				MCS4	18.02
				MCS8	17.96
802.11ac	40	38	5190	MCS0	17.28
				MCS4	17.19
				MCS9	17.11
802.11ac	80	42	5210	MCS0	16.71
				MCS4	16.63
				MCS9	16.57

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 (CDD Mode)								
11a	MCS0	36	5180	18.08	18.55	21.33	≤ 30.00	Pass
11a	MCS0	44	5220	18.22	18.58	21.41	≤ 30.00	Pass
11a	MCS0	48	5240	18.22	18.72	21.49	≤ 30.00	Pass
11a	6Mbps	52	5260	15.77	16.29	19.05	≤ 23.72	Pass
11a	6Mbps	60	5300	15.42	16.05	18.76	≤ 23.72	Pass
11a	6Mbps	64	5320	16.02	16.33	19.19	≤ 23.72	Pass
11a	6Mbps	100	5500	16.07	16.26	19.18	≤ 23.72	Pass
11a	6Mbps	120	5600	15.55	15.34	18.46	≤ 23.72	Pass
11a	6Mbps	140	5700	16.26	16.41	19.35	≤ 23.72	Pass
11a	6Mbps	144	5720	16.24	16.50	19.38	≤ 22.58	Pass
11a	6Mbps	149	5745	18.23	18.62	21.44	≤ 30.00	Pass
11a	6Mbps	157	5785	18.58	18.59	21.60	≤ 30.00	Pass
11a	6Mbps	165	5825	18.57	18.48	21.54	≤ 30.00	Pass
11n-HT20	MCS0	36	5180	18.11	18.70	21.43	≤ 30.00	Pass
11n-HT20	MCS0	44	5220	18.25	18.74	21.51	≤ 30.00	Pass
11n-HT20	MCS0	48	5240	18.28	18.75	21.53	≤ 30.00	Pass
11n-HT20	MCS0	52	5260	16.46	16.52	19.50	≤ 23.98	Pass
11n-HT20	MCS0	60	5300	16.27	16.79	19.55	≤ 23.98	Pass
11n-HT20	MCS0	64	5320	16.53	16.92	19.74	≤ 23.98	Pass
11n-HT20	MCS0	100	5500	16.26	16.52	19.40	≤ 23.98	Pass
11n-HT20	MCS0	120	5600	16.14	16.22	19.19	≤ 23.98	Pass
11n-HT20	MCS0	140	5700	16.70	16.88	19.80	≤ 23.98	Pass
11n-HT20	MCS0	144	5720	16.67	16.88	19.79	≤ 22.78	Pass
11n-HT20	MCS0	149	5745	18.25	18.77	21.53	≤ 30.00	Pass
11n-HT20	MCS0	157	5785	18.56	18.57	21.58	≤ 30.00	Pass
11n-HT20	MCS0	165	5825	18.56	18.52	21.55	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 (CDD Mode)								
11n-HT40	MCS0	38	5190	17.34	17.84	20.61	≤ 30.00	Pass
11n-HT40	MCS0	46	5230	18.25	18.68	21.48	≤ 30.00	Pass
11n-HT40	MCS0	54	5270	18.22	18.75	21.50	≤ 23.98	Pass
11n-HT40	MCS0	62	5310	16.64	17.42	20.06	≤ 23.98	Pass
11n-HT40	MCS0	102	5510	17.24	17.92	20.60	≤ 23.98	Pass
11n-HT40	MCS0	118	5590	18.06	18.78	21.45	≤ 23.98	Pass
11n-HT40	MCS0	134	5670	18.22	18.56	21.40	≤ 23.98	Pass
11n-HT40	MCS0	142	5710	18.20	18.71	21.47	≤ 23.98	Pass
11n-HT40	MCS0	151	5755	18.56	17.81	21.21	≤ 30.00	Pass
11n-HT40	MCS0	159	5795	18.68	18.64	21.67	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	18.10	18.70	21.42	≤ 30.00	Pass
11ac-VHT20	MCS0	44	5220	18.19	18.70	21.46	≤ 30.00	Pass
11ac-VHT20	MCS0	48	5240	18.27	18.77	21.54	≤ 30.00	Pass
11ac-VHT20	MCS0	52	5260	16.22	16.62	19.43	≤ 23.93	Pass
11ac-VHT20	MCS0	60	5300	16.13	16.94	19.56	≤ 23.93	Pass
11ac-VHT20	MCS0	64	5320	16.07	16.42	19.26	≤ 23.93	Pass
11ac-VHT20	MCS0	100	5500	16.11	16.58	19.36	≤ 23.93	Pass
11ac-VHT20	MCS0	120	5600	16.13	16.28	19.22	≤ 23.93	Pass
11ac-VHT20	MCS0	140	5700	16.64	16.95	19.81	≤ 23.93	Pass
11ac-VHT20	MCS0	144	5720	16.63	17.02	19.84	≤ 22.76	Pass
11ac-VHT20	MCS0	149	5745	18.18	18.70	21.46	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	18.63	18.50	21.58	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	18.56	18.54	21.56	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 (CDD Mode)								
11ac-VHT40	MCS0	38	5190	17.28	17.72	20.52	≤ 30.00	Pass
11ac-VHT40	MCS0	46	5230	18.42	18.72	21.58	≤ 30.00	Pass
11ac-VHT40	MCS0	54	5270	18.36	18.78	21.59	≤ 23.98	Pass
11ac-VHT40	MCS0	62	5310	16.61	16.61	19.62	≤ 23.98	Pass
11ac-VHT40	MCS0	102	5510	17.23	17.73	20.50	≤ 23.98	Pass
11ac-VHT40	MCS0	118	5590	18.06	18.73	21.42	≤ 23.98	Pass
11ac-VHT40	MCS0	134	5670	18.20	18.41	21.32	≤ 23.98	Pass
11ac-VHT40	MCS0	142	5710	18.06	18.57	21.33	≤ 23.98	Pass
11ac-VHT40	MCS0	151	5755	18.43	18.65	21.55	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	18.61	18.51	21.57	≤ 30.00	Pass
11ac-VHT80	MCS0	42	5210	16.23	16.52	19.39	≤ 30.00	Pass
11ac-VHT80	MCS0	58	5290	14.89	15.60	18.27	≤ 23.98	Pass
11ac-VHT80	MCS0	106	5530	16.40	16.86	19.65	≤ 23.98	Pass
11ac-VHT80	MCS0	122	5610	17.84	18.13	21.00	≤ 23.98	Pass
11ac-VHT80	MCS0	138	5690	17.85	18.08	20.98	≤ 23.98	Pass
11ac-VHT80	MCS0	155	5775	18.44	18.60	21.53	≤ 30.00	Pass

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: For 5250-5350MHz & 5470-5725MHz, the conducted power limit is as below.

802.11a: $11 + 10 \log_{10} (18.72\text{MHz}) = 23.72\text{dBm} < 23.98\text{dBm}$;

802.11n-HT20: $11 + 10 \log_{10} (19.86\text{MHz}) = 23.98\text{dBm} = 23.98\text{dBm}$;

802.11n-HT40: $11 + 10 \log_{10} B > 23.98\text{dBm}$;

802.11ac-VHT20: $11 + 10 \log_{10} (19.64\text{MHz}) = 23.93\text{dBm} < 23.98\text{dBm}$;

802.11ac-VHT40: $11 + 10 \log_{10} B > 23.98\text{dBm}$;

802.11ac-VHT80: $11 + 10 \log_{10} B > 23.98\text{dBm}$.

Note 3: For straddle channel, the conducted power limit is as below.

802.11a CH144: $11 + 10 \log_{10} (14.385\text{MHz}) = 22.58\text{dBm} < 23.98\text{dBm}$;

802.11n-HT20 CH144: $11 + 10 \log_{10} (15.07\text{MHz}) = 22.78\text{dBm} = 23.98\text{dBm}$;

802.11ac-VHT20 CH144: $11 + 10 \log_{10} (15.00\text{MHz}) = 22.76\text{dBm} < 23.98\text{dBm}$;

802.11n-HT40/ac-VHT40/ac-VHT80: $11 + 10 \log_{10} B > 23.98\text{dBm}$;

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 (Beam-Forming Mode)								
11n-HT20	MCS0	36	5180	18.11	18.70	21.43	≤ 27.09	Pass
11n-HT20	MCS0	44	5220	18.25	18.74	21.51	≤ 27.09	Pass
11n-HT20	MCS0	48	5240	18.28	18.75	21.53	≤ 27.09	Pass
11n-HT20	MCS0	52	5260	16.46	16.52	19.50	≤ 21.07	Pass
11n-HT20	MCS0	60	5300	16.27	16.79	19.55	≤ 21.07	Pass
11n-HT20	MCS0	64	5320	16.53	16.92	19.74	≤ 21.07	Pass
11n-HT20	MCS0	100	5500	16.26	16.52	19.40	≤ 21.07	Pass
11n-HT20	MCS0	120	5600	16.14	16.22	19.19	≤ 21.07	Pass
11n-HT20	MCS0	140	5700	16.70	16.88	19.80	≤ 21.07	Pass
11n-HT20	MCS0	144	5720	16.67	16.88	19.79	≤ 19.87	Pass
11n-HT20	MCS0	149	5745	18.25	18.77	21.53	≤ 27.09	Pass
11n-HT20	MCS0	157	5785	18.56	18.57	21.58	≤ 27.09	Pass
11n-HT20	MCS0	165	5825	18.56	18.52	21.55	≤ 27.09	Pass
11n-HT40	MCS0	38	5190	17.82	18.35	21.10	≤ 27.09	Pass
11n-HT40	MCS0	46	5230	18.02	18.41	21.23	≤ 27.09	Pass
11n-HT40	MCS0	54	5270	17.48	17.96	20.74	≤ 21.07	Pass
11n-HT40	MCS0	62	5310	17.88	18.44	21.18	≤ 21.07	Pass
11n-HT40	MCS0	102	5510	17.48	17.70	20.60	≤ 21.07	Pass
11n-HT40	MCS0	118	5590	17.68	18.23	20.97	≤ 21.07	Pass
11n-HT40	MCS0	134	5670	17.91	18.05	20.99	≤ 21.07	Pass
11n-HT40	MCS0	142	5710	17.86	18.22	21.05	≤ 21.07	Pass
11n-HT40	MCS0	151	5755	18.19	18.41	21.31	≤ 27.09	Pass
11n-HT40	MCS0	159	5795	18.78	18.54	21.67	≤ 27.09	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 (Beam-Forming Mode)								
11ac-VHT20	MCS0	36	5180	18.10	18.70	21.42	≤ 27.09	Pass
11ac-VHT20	MCS0	44	5220	18.19	18.70	21.46	≤ 27.09	Pass
11ac-VHT20	MCS0	48	5240	18.27	18.77	21.54	≤ 27.09	Pass
11ac-VHT20	MCS0	52	5260	16.22	16.62	19.43	≤ 21.02	Pass
11ac-VHT20	MCS0	60	5300	16.13	16.94	19.56	≤ 21.02	Pass
11ac-VHT20	MCS0	64	5320	16.07	16.42	19.26	≤ 21.02	Pass
11ac-VHT20	MCS0	100	5500	16.11	16.58	19.36	≤ 21.02	Pass
11ac-VHT20	MCS0	120	5600	16.13	16.28	19.22	≤ 21.02	Pass
11ac-VHT20	MCS0	140	5700	16.64	16.95	19.81	≤ 21.02	Pass
11ac-VHT20	MCS0	144	5720	16.63	17.02	19.84	≤ 19.85	Pass
11ac-VHT20	MCS0	149	5745	18.18	18.70	21.46	≤ 27.09	Pass
11ac-VHT20	MCS0	157	5785	18.63	18.50	21.58	≤ 27.09	Pass
11ac-VHT20	MCS0	165	5825	18.56	18.54	21.56	≤ 27.09	Pass
11ac-VHT40	MCS0	38	5190	17.83	18.48	21.18	≤ 27.09	Pass
11ac-VHT40	MCS0	46	5230	18.03	18.47	21.27	≤ 27.09	Pass
11ac-VHT40	MCS0	54	5270	17.52	17.97	20.76	≤ 21.07	Pass
11ac-VHT40	MCS0	62	5310	17.43	17.86	20.66	≤ 21.07	Pass
11ac-VHT40	MCS0	102	5510	17.53	17.78	20.67	≤ 21.07	Pass
11ac-VHT40	MCS0	118	5590	17.66	18.21	20.95	≤ 21.07	Pass
11ac-VHT40	MCS0	134	5670	17.87	18.04	20.97	≤ 21.07	Pass
11ac-VHT40	MCS0	142	5710	17.83	18.22	21.04	≤ 21.07	Pass
11ac-VHT40	MCS0	151	5755	18.20	18.42	21.32	≤ 27.09	Pass
11ac-VHT40	MCS0	159	5795	18.82	18.57	21.71	≤ 27.09	Pass
11ac-VHT80	MCS0	42	5210	18.24	18.62	21.44	≤ 27.09	Pass
11ac-VHT80	MCS0	58	5290	17.68	18.06	20.88	≤ 21.07	Pass
11ac-VHT80	MCS0	106	5530	17.44	17.98	20.73	≤ 21.07	Pass
11ac-VHT80	MCS0	122	5610	17.83	18.03	20.94	≤ 21.07	Pass
11ac-VHT80	MCS0	138	5690	17.62	17.78	20.71	≤ 21.07	Pass
11ac-VHT80	MCS0	155	5775	18.68	18.58	21.64	≤ 27.09	Pass

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: For UNII-1 & UNII-3, Average Power Limit (dBm) = 30dBm - (5.9dBi + 3.01dBi - 6dBi) = 27.09dBm.

Note 3: For UNII-2A & UNII-2C, the conducted power limit is as below.

802.11ac-VHT20: $11 + 10 \log_{10} (19.64\text{MHz}) = 23.93\text{dBm} < 23.98\text{dBm}$.

Average Power Limit (dBm) = 23.93dBm - (5.9dBi + 3.01dBi - 6dBi) = 21.02dBm.

802.11n-HT20: $11 + 10 \log_{10} (19.86\text{MHz}) = 23.98\text{dBm} = 23.98\text{dBm}$.

802.11n-HT40: $11 + 10 \log_{10} B > 23.98\text{dBm}$.

802.11ac-VHT40: $11 + 10 \log_{10} B > 23.98\text{dBm}$.

802.11ac-VHT80: $11 + 10 \log_{10} B > 23.98\text{dBm}$.

Average Power Limit (dBm) = 23.98dBm - (5.9dBi + 3.01dBi - 6dBi) = 21.07dBm.

Note 3: For straddle channel, the conducted power limit is as below.

802.11n-HT20 CH144: $11 + 10 \log_{10} (15.07\text{MHz}) = 22.78\text{dBm} < 23.98\text{dBm}$;

Average Power Limit (dBm) = 22.78dBm - (5.9dBi + 3.01dBi - 6dBi) = 19.87dBm.

802.11ac-VHT20 CH144: $11 + 10 \log_{10} (15.00\text{MHz}) = 22.76\text{dBm} < 23.98\text{dBm}$;

Average Power Limit (dBm) = 22.76dBm - (5.9dBi + 3.01dBi - 6dBi) = 19.85dBm.

802.11n-HT40/ac-VHT40/ac-VHT80: $11 + 10 \log_{10} B > 23.98\text{dBm}$;

Average Power Limit (dBm) = 23.98dBm - (5.9dBi + 3.01dBi - 6dBi) = 21.07dBm.

7.5. Transmit Power Control

7.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


7.5.2. Test Procedure Used

KDB 789033 D02v01- Section E)3)b) Method PM-G

7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.5.4. Test Setup

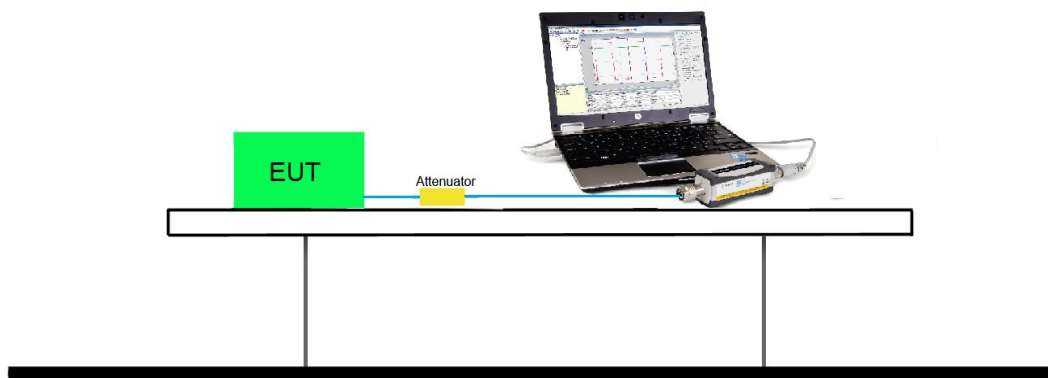

7.5.5. Test Result

It gets addressed in the operational description.

7.6. Power Spectral Density Measurement

7.6.1. Test Limit

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the band 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


7.6.2. Test Procedure Used

KDB 789033 D02v02r01 - SectionF

7.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
RBW = 100 kHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
11. When the measurement bandwidth of Maximum PSD is specified in 500 kHz, add a constant factor $10 \cdot \log(500\text{kHz}/100\text{kHz}) = 6.99$ dB to the measured result.

7.6.4. Test Setup

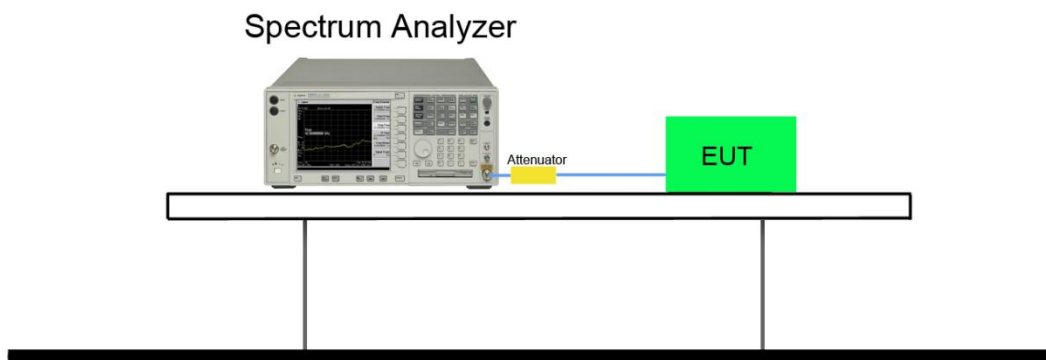

7.6.5. Test Result

Some test data (gray marker) was retested due to the antenna gain increase of 0.2dB and all test limits were also recalculated again.

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm/ MHz)	Ant 1 PSD (dBm/ MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/ MHz)	Result
Ant 0 + 1 (CDD Mode)									
11a	6Mbps	36	5180	6.38	6.28	95.80	9.53	≤ 14.29	Pass
11a	6Mbps	44	5220	6.89	7.08	95.80	10.18	≤ 14.29	Pass
11a	6Mbps	48	5240	7.21	7.33	95.80	10.47	≤ 14.29	Pass
11a	6Mbps	52	5260	4.46	4.88	95.80	7.87	≤ 8.09	Pass
11a	6Mbps	60	5300	4.50	4.59	95.80	7.74	≤ 8.09	Pass
11a	6Mbps	64	5320	4.38	5.06	95.80	7.93	≤ 8.09	Pass
11a	6Mbps	100	5500	4.43	5.03	95.80	7.94	≤ 8.09	Pass
11a	6Mbps	120	5600	4.56	4.53	95.80	7.74	≤ 8.09	Pass
11a	6Mbps	140	5700	4.67	4.64	95.80	7.85	≤ 8.09	Pass
11a	6Mbps	144	5720	4.50	4.68	95.80	7.79	≤ 8.09	Pass
11n-HT20	MCS0	36	5180	6.20	6.61	98.21	9.42	≤ 14.29	Pass
11n-HT20	MCS0	44	5220	6.74	7.31	98.21	10.04	≤ 14.29	Pass
11n-HT20	MCS0	48	5240	6.89	7.36	98.21	10.14	≤ 14.29	Pass
11n-HT20	MCS0	52	5260	4.89	4.99	98.21	7.95	≤ 8.09	Pass
11n-HT20	MCS0	60	5300	4.77	5.34	98.21	8.07	≤ 8.09	Pass
11n-HT20	MCS0	64	5320	4.75	5.25	98.21	8.02	≤ 8.09	Pass
11n-HT20	MCS0	100	5500	4.61	5.15	98.21	7.90	≤ 8.09	Pass
11n-HT20	MCS0	120	5600	4.87	4.85	98.21	7.87	≤ 8.09	Pass
11n-HT20	MCS0	140	5700	4.95	4.99	98.21	7.98	≤ 8.09	Pass
11n-HT20	MCS0	144	5720	5.15	4.88	98.21	8.03	≤ 8.09	Pass
11n-HT40	MCS0	38	5190	2.82	3.10	95.21	6.19	≤ 14.29	Pass
11n-HT40	MCS0	46	5230	4.20	4.63	95.21	7.64	≤ 14.29	Pass
11n-HT40	MCS0	54	5270	4.30	4.39	95.21	7.57	≤ 8.09	Pass
11n-HT40	MCS0	62	5310	2.43	2.68	95.21	5.78	≤ 8.09	Pass
11n-HT40	MCS0	102	5510	3.09	3.55	95.21	6.55	≤ 8.09	Pass
11n-HT40	MCS0	118	5590	3.93	4.69	95.21	7.55	≤ 8.09	Pass
11n-HT40	MCS0	134	5670	3.40	3.72	95.21	6.79	≤ 8.09	Pass
11n-HT40	MCS0	142	5710	3.72	4.02	95.21	7.10	≤ 8.09	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm/ MHz)	Ant 1 PSD (dBm/ MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/ MHz)	Result
Ant 0 + 1 (CDD Mode)									
11ac-VHT20	MCS0	36	5180	6.36	6.71	98.04	9.55	≤ 14.09	Pass
11ac-VHT20	MCS0	44	5220	6.77	7.25	98.04	10.03	≤ 14.09	Pass
11ac-VHT20	MCS0	48	5240	7.13	7.54	98.04	10.35	≤ 14.09	Pass
11ac-VHT20	MCS0	52	5260	4.88	5.03	98.04	7.97	≤ 8.09	Pass
11ac-VHT20	MCS0	60	5300	4.88	5.10	98.04	8.00	≤ 8.09	Pass
11ac-VHT20	MCS0	64	5320	4.64	4.91	98.04	7.79	≤ 8.09	Pass
11ac-VHT20	MCS0	100	5500	4.77	4.95	98.04	7.87	≤ 8.09	Pass
11ac-VHT20	MCS0	120	5600	4.56	4.91	98.04	7.75	≤ 8.09	Pass
11ac-VHT20	MCS0	140	5700	4.75	5.12	98.04	7.95	≤ 8.09	Pass
11ac-VHT20	MCS0	144	5720	5.05	5.02	98.04	8.05	≤ 8.09	Pass
11ac-VHT40	MCS0	38	5190	2.53	3.22	95.24	6.11	≤ 14.09	Pass
11ac-VHT40	MCS0	46	5230	4.33	4.71	95.24	7.75	≤ 14.09	Pass
11ac-VHT40	MCS0	54	5270	4.17	4.36	95.24	7.49	≤ 8.09	Pass
11ac-VHT40	MCS0	62	5310	2.54	2.85	95.24	5.92	≤ 8.09	Pass
11ac-VHT40	MCS0	102	5510	2.96	3.67	95.24	6.55	≤ 8.09	Pass
11ac-VHT40	MCS0	118	5590	3.81	4.35	95.24	7.31	≤ 8.09	Pass
11ac-VHT40	MCS0	134	5670	3.65	3.93	95.24	7.01	≤ 8.09	Pass
11ac-VHT40	MCS0	142	5710	3.69	3.99	95.24	7.06	≤ 8.09	Pass
11ac-VHT80	MCS0	42	5210	-0.74	-0.63	92.21	2.68	≤ 14.09	Pass
11ac-VHT80	MCS0	58	5290	-2.72	-2.29	92.21	0.86	≤ 8.09	Pass
11ac-VHT80	MCS0	106	5530	-0.71	-0.37	92.21	2.83	≤ 8.09	Pass
11ac-VHT80	MCS0	122	5610	0.26	0.43	92.21	3.71	≤ 8.09	Pass
11ac-VHT80	MCS0	138	5690	-0.07	0.24	92.21	3.45	≤ 8.09	Pass

Note 1: When EUT duty cycle ≥ 98%, Total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$.

Note 2: When EUT duty cycle < 98%, Total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\} + 10 \cdot \log (1/\text{duty cycle})$.

Note 3: For UNII-1 band, PSD Limit (dBm/MHz) = 17dBm/MHz - (8.91dBi - 6dBi) = 14.09dBm/MHz.

For UNII-2A and UNII-2C bands, PSD Limit (dBm/MHz) = 11dBm/MHz - (8.91dBi - 6dBi) = 8.09dBm/MHz.

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm/ MHz)	Ant 1 PSD (dBm/ MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/ MHz)	Result
Ant 0 + 1 (Beam-Forming Mode)									
11n-HT20	MCS0	36	5180	6.20	6.61	98.21	9.42	≤ 14.09	Pass
11n-HT20	MCS0	44	5220	6.74	7.31	98.21	10.04	≤ 14.09	Pass
11n-HT20	MCS0	48	5240	6.89	7.36	98.21	10.14	≤ 14.09	Pass
11n-HT20	MCS0	52	5260	4.89	4.99	98.21	7.95	≤ 8.09	Pass
11n-HT20	MCS0	60	5300	4.77	5.34	98.21	8.07	≤ 8.09	Pass
11n-HT20	MCS0	64	5320	4.75	5.25	98.21	8.02	≤ 8.09	Pass
11n-HT20	MCS0	100	5500	4.61	5.15	98.21	7.90	≤ 8.09	Pass
11n-HT20	MCS0	120	5600	4.87	4.85	98.21	7.87	≤ 8.09	Pass
11n-HT20	MCS0	140	5700	4.95	4.99	98.21	7.98	≤ 8.09	Pass
11n-HT20	MCS0	144	5720	5.15	4.88	98.21	8.03	≤ 8.09	Pass
11n-HT40	MCS0	38	5190	3.49	3.99	95.21	6.97	≤ 14.09	Pass
11n-HT40	MCS0	46	5230	3.63	3.75	95.21	6.91	≤ 14.09	Pass
11n-HT40	MCS0	54	5270	2.83	3.22	95.21	6.25	≤ 8.09	Pass
11n-HT40	MCS0	62	5310	3.21	3.56	95.21	6.61	≤ 8.09	Pass
11n-HT40	MCS0	102	5510	3.58	4.08	95.21	7.06	≤ 8.09	Pass
11n-HT40	MCS0	118	5590	3.61	4.28	95.21	7.18	≤ 8.09	Pass
11n-HT40	MCS0	134	5670	3.78	3.96	95.21	7.09	≤ 8.09	Pass
11n-HT40	MCS0	142	5710	4.01	4.08	95.21	7.27	≤ 8.09	Pass
11ac-VHT20	MCS0	36	5180	6.36	6.71	98.04	9.55	≤ 14.09	Pass
11ac-VHT20	MCS0	44	5220	6.77	7.25	98.04	10.03	≤ 14.09	Pass
11ac-VHT20	MCS0	48	5240	7.13	7.54	98.04	10.35	≤ 14.09	Pass
11ac-VHT20	MCS0	52	5260	4.88	5.03	98.04	7.97	≤ 8.09	Pass
11ac-VHT20	MCS0	60	5300	4.88	5.10	98.04	8.00	≤ 8.09	Pass
11ac-VHT20	MCS0	64	5320	4.64	4.91	98.04	7.79	≤ 8.09	Pass
11ac-VHT20	MCS0	100	5500	4.77	4.95	98.04	7.87	≤ 8.09	Pass
11ac-VHT20	MCS0	120	5600	4.56	4.91	98.04	7.75	≤ 8.09	Pass
11ac-VHT20	MCS0	140	5700	4.75	5.12	98.04	7.95	≤ 8.09	Pass
11ac-VHT20	MCS0	144	5720	5.05	5.02	98.04	8.05	≤ 8.09	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm/ MHz)	Ant 1 PSD (dBm/ MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/ MHz)	Result
Ant 0 + 1 (Beam-Forming Mode)									
11ac-VHT40	MCS0	38	5190	3.64	4.15	95.24	7.12	≤ 14.09	Pass
11ac-VHT40	MCS0	46	5230	3.58	4.02	95.24	7.03	≤ 14.09	Pass
11ac-VHT40	MCS0	54	5270	2.92	3.28	95.24	6.33	≤ 8.09	Pass
11ac-VHT40	MCS0	62	5310	2.78	3.23	95.24	6.23	≤ 8.09	Pass
11ac-VHT40	MCS0	102	5510	3.73	3.98	95.24	7.08	≤ 8.09	Pass
11ac-VHT40	MCS0	118	5590	3.93	4.48	95.24	7.44	≤ 8.09	Pass
11ac-VHT40	MCS0	134	5670	3.77	3.75	95.24	6.98	≤ 8.09	Pass
11ac-VHT40	MCS0	142	5710	3.86	4.20	95.24	7.26	≤ 8.09	Pass
11ac-VHT80	MCS0	42	5210	0.37	0.73	92.21	3.92	≤ 14.09	Pass
11ac-VHT80	MCS0	58	5290	-0.25	0.10	92.21	3.29	≤ 8.09	Pass
11ac-VHT80	MCS0	106	5530	-0.24	0.34	92.21	3.42	≤ 8.09	Pass
11ac-VHT80	MCS0	122	5610	0.85	0.88	92.21	4.23	≤ 8.09	Pass
11ac-VHT80	MCS0	138	5690	0.29	0.21	92.21	3.61	≤ 8.09	Pass

Note 1: When EUT duty cycle ≥ 98%, Total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$.

Note 2: When EUT duty cycle < 98%, Total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\} + 10 \cdot \log (1/\text{duty cycle})$.

Note 3: For UNII-1 band, PSD Limit (dBm/MHz) = 17dBm/MHz - (8.91dBi - 6dBi) = 14.09dBm/MHz.

For UNII-2A and UNII-2C bands, PSD Limit (dBm/MHz) = 11dBm/MHz - (8.91dBi - 6dBi) = 8.09dBm/MHz.

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm/100kHz)	Ant 1 PSD (dBm/100kHz)	Duty Cycle (%)	Constant Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
Ant 0 + 1 (CDD Mode)										
11a	6Mbps	149	5745	-2.15	-2.02	95.80	6.99	8.10	≤ 27.09	Pass
11a	6Mbps	157	5785	-1.36	-1.86	95.80	6.99	8.58	≤ 27.09	Pass
11a	6Mbps	165	5825	-1.80	-1.82	95.80	6.99	8.38	≤ 27.09	Pass
11n-HT20	MCS0	149	5745	-2.41	-1.87	98.21	6.99	7.87	≤ 27.09	Pass
11n-HT20	MCS0	157	5785	-1.54	-1.51	98.21	6.99	8.48	≤ 27.09	Pass
11n-HT20	MCS0	165	5825	-2.09	-1.63	98.21	6.99	8.15	≤ 27.09	Pass
11n-HT40	MCS0	151	5755	-4.90	-4.53	95.21	6.99	5.50	≤ 27.09	Pass
11n-HT40	MCS0	159	5795	-4.79	-4.95	95.21	6.99	5.34	≤ 27.09	Pass
11ac-VHT20	MCS0	149	5745	-2.24	-1.89	98.04	6.99	7.94	≤ 27.09	Pass
11ac-VHT20	MCS0	157	5785	-1.56	-1.44	98.04	6.99	8.50	≤ 27.09	Pass
11ac-VHT20	MCS0	165	5825	-1.98	-1.68	98.04	6.99	8.17	≤ 27.09	Pass
11ac-VHT40	MCS0	151	5755	-4.71	-4.60	95.24	6.99	5.56	≤ 27.09	Pass
11ac-VHT40	MCS0	159	5795	-4.62	-4.72	95.24	6.99	5.54	≤ 27.09	Pass
11ac-VHT80	MCS0	155	5775	-8.35	-8.59	92.21	6.99	1.88	≤ 27.09	Pass

Note 1: When EUT duty cycle ≥ 98%, Total PSD (dBm/500kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\} + \text{Constant Factor}$.

Note 2: When EUT duty cycle < 98%, Total PSD (dBm/500kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\} + 10 \cdot \log (1/\text{duty cycle}) + \text{Constant Factor}$.

Note 3: PSD Limit (dBm/500kHz) = 30dBm/500kHz - (8.91dBi - 6dBi) = 27.09dBm/500kHz.

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm/100kHz)	Ant 1 PSD (dBm/100kHz)	Duty Cycle (%)	Constant Factor	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
Ant 0 + 1 (Beam-Forming Mode)										
11n-HT20	MCS0	149	5745	-2.41	-1.87	98.21	6.99	7.87	≤ 27.09	Pass
11n-HT20	MCS0	157	5785	-1.54	-1.51	98.21	6.99	8.48	≤ 27.09	Pass
11n-HT20	MCS0	165	5825	-2.09	-1.63	98.21	6.99	8.15	≤ 27.09	Pass
11n-HT40	MCS0	151	5755	-5.25	-4.72	95.21	6.99	5.24	≤ 27.09	Pass
11n-HT40	MCS0	159	5795	-4.47	-4.72	95.21	6.99	5.62	≤ 27.09	Pass
11ac-VHT20	MCS0	149	5745	-2.24	-1.89	98.04	6.99	7.94	≤ 27.09	Pass
11ac-VHT20	MCS0	157	5785	-1.56	-1.44	98.04	6.99	8.50	≤ 27.09	Pass
11ac-VHT20	MCS0	165	5825	-1.98	-1.68	98.04	6.99	8.17	≤ 27.09	Pass
11ac-VHT40	MCS0	151	5755	-5.00	-4.80	95.24	6.99	5.31	≤ 27.09	Pass
11ac-VHT40	MCS0	159	5795	-4.37	-4.54	95.24	6.99	5.76	≤ 27.09	Pass
11ac-VHT80	MCS0	155	5775	-8.25	-7.57	92.21	6.99	2.46	≤ 27.09	Pass


Note 1: When EUT duty cycle ≥ 98%, Total PSD (dBm/500kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\} + \text{Constant Factor}$.

Note 2: When EUT duty cycle < 98%, Total PSD (dBm/500kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\} + 10 \cdot \log (1/\text{duty cycle}) + \text{Constant Factor}$.


Note 3: PSD Limit (dBm/500kHz) = 30dBm/500kHz - (5.9dBi + 3.01dBi - 6dBi) = 27.09dBm/500kHz.

802.11a Power Spectral Density - Ant 0 / Ant 0 + 1 (CDD Mode)


Channel 36 (5180MHz)

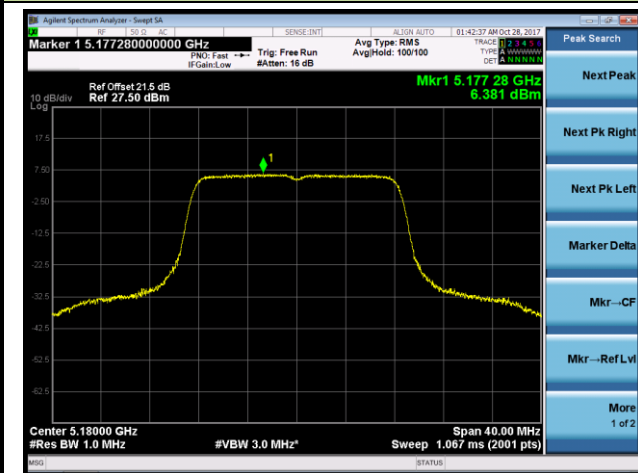


Channel 44 (5220MHz)

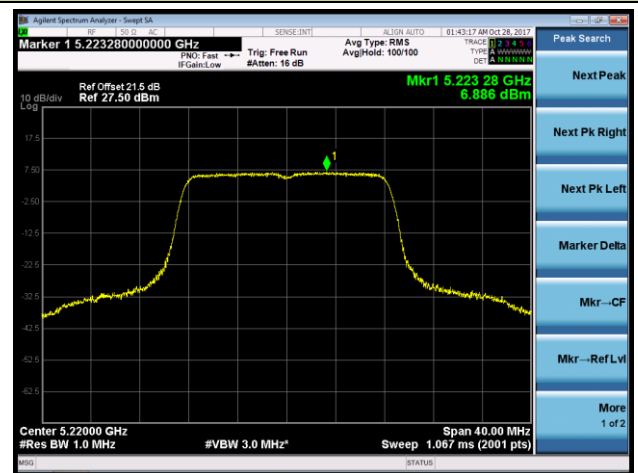


Channel 48 (5240MHz)

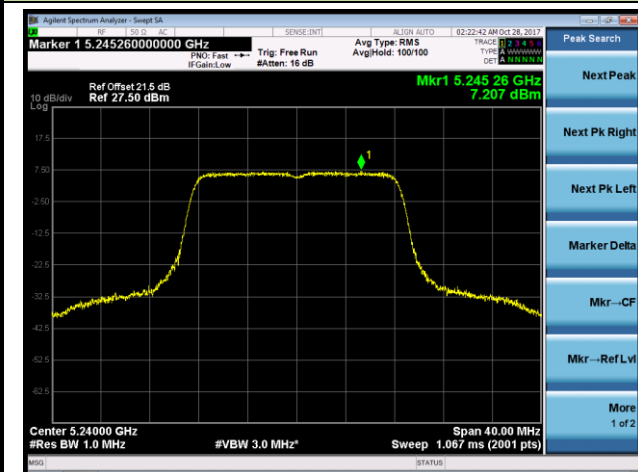


Channel 52 (5260MHz)

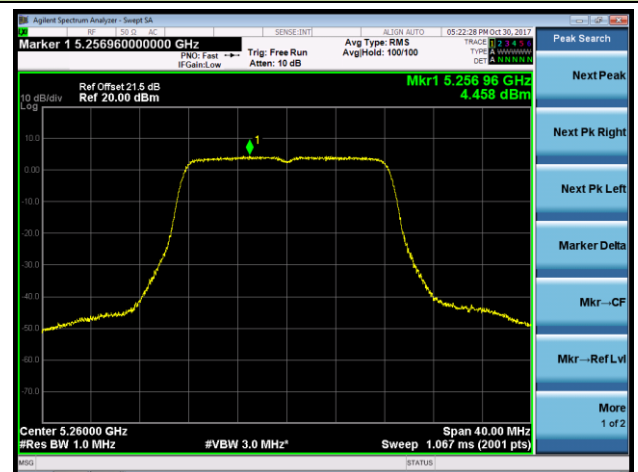


Channel 60 (5300MHz)

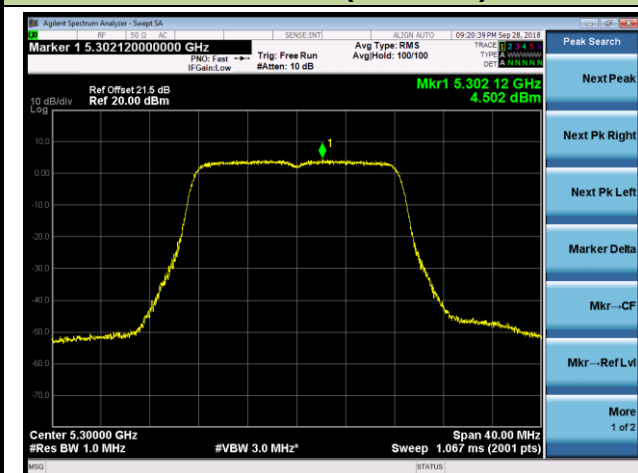


Channel 64 (5320MHz)

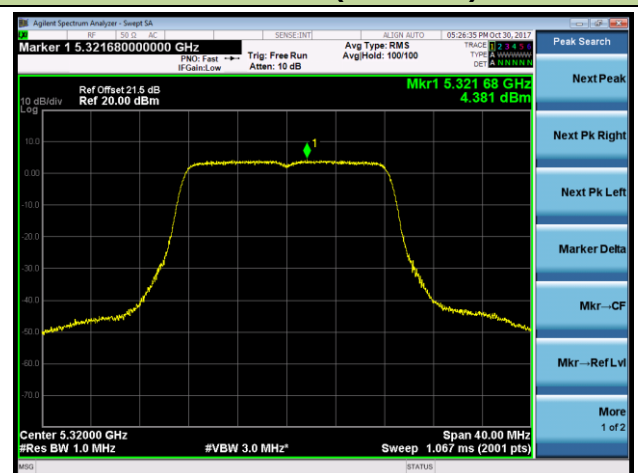


Channel 100 (5500MHz)

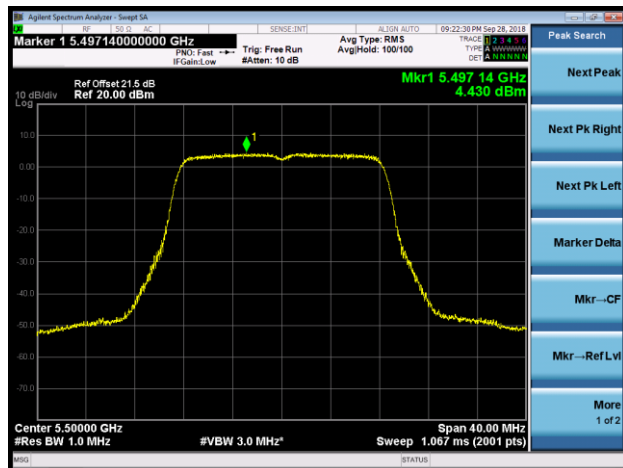


Channel 120 (5600MHz)

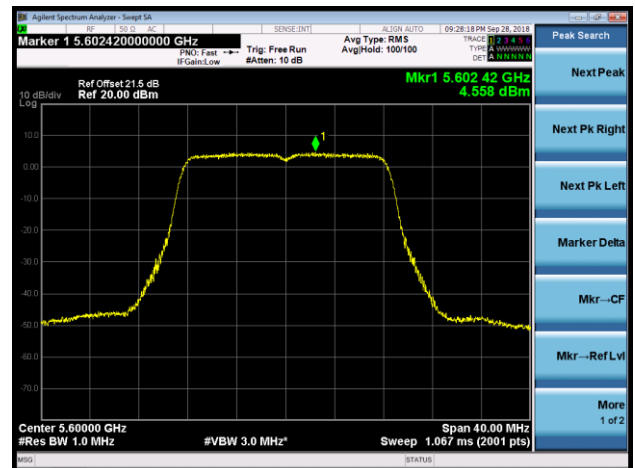


Channel 140 (5700MHz)

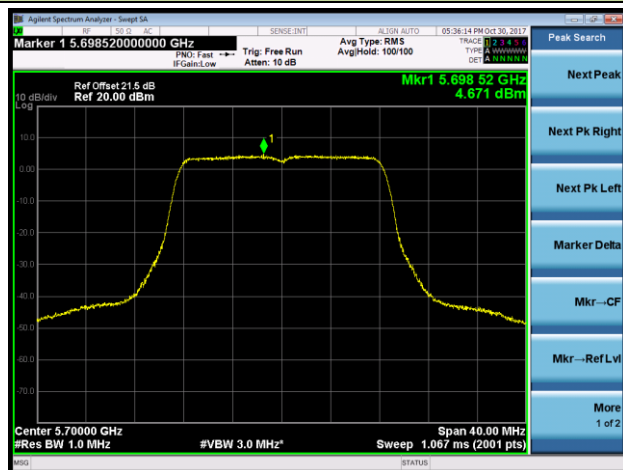


Channel 144 (5720MHz)

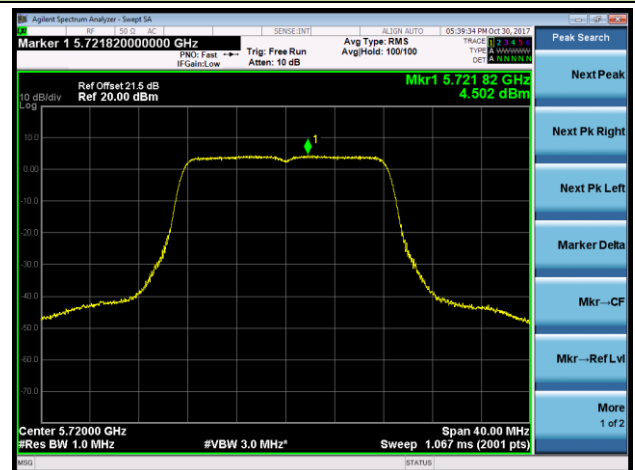


Channel 149 (5745MHz)

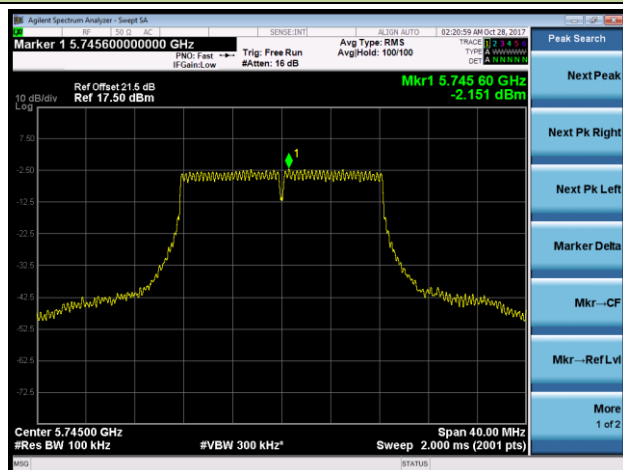

Channel 157 (5785MHz)

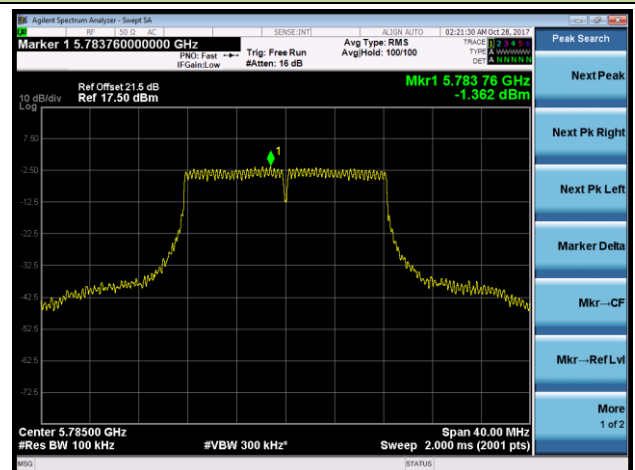


Channel 165 (5825MHz)

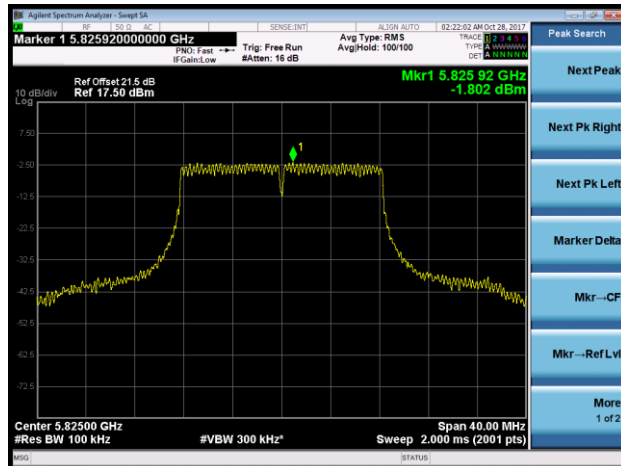


802.11n-HT20 Power Spectral Density - Ant 0 / Ant 0 + 1 (CDD Mode)


Channel 36 (5180MHz)

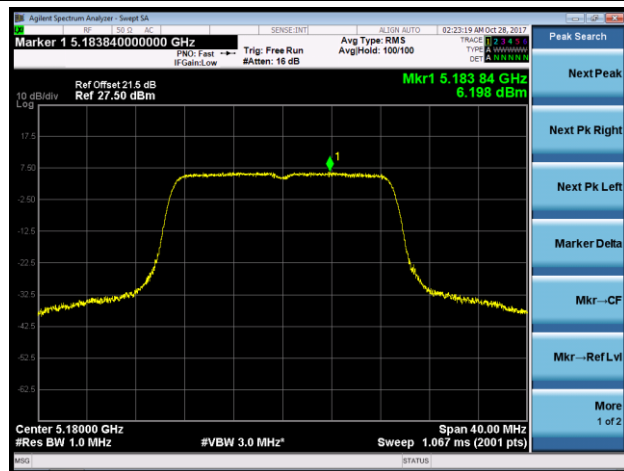


Channel 44 (5220MHz)

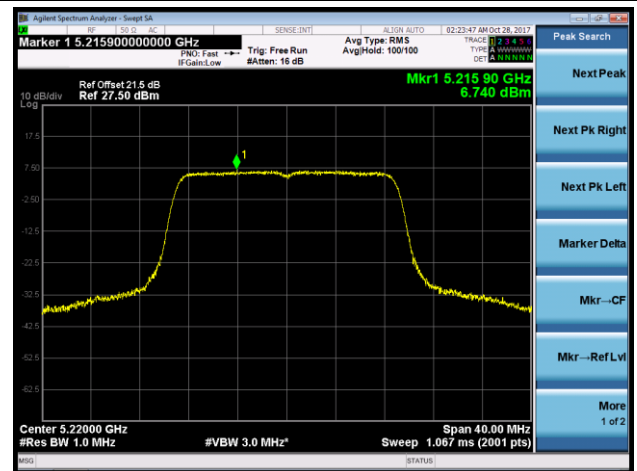


Channel 48 (5240MHz)

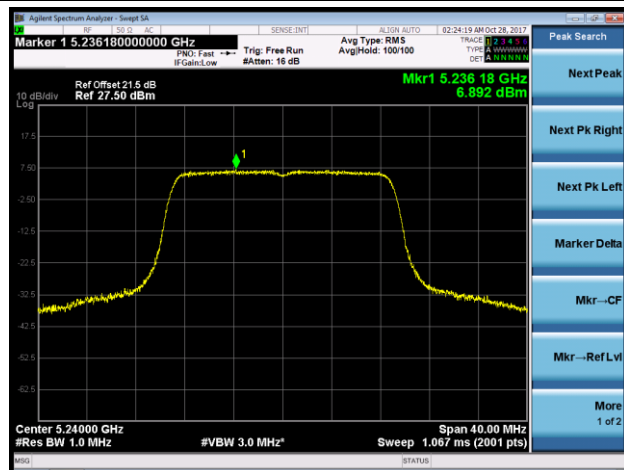

Channel 52 (5260MHz)

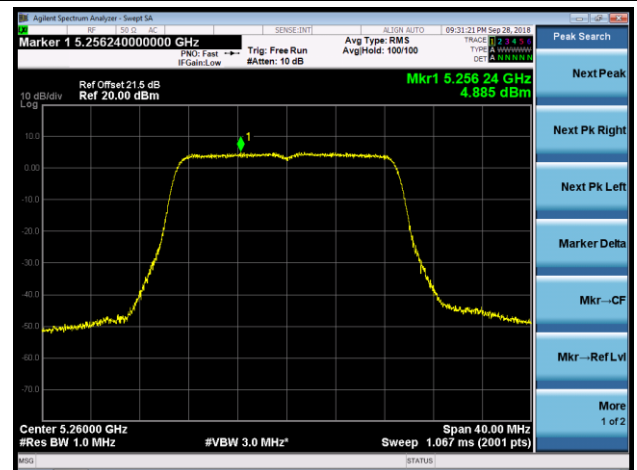

Channel 60 (5300MHz)

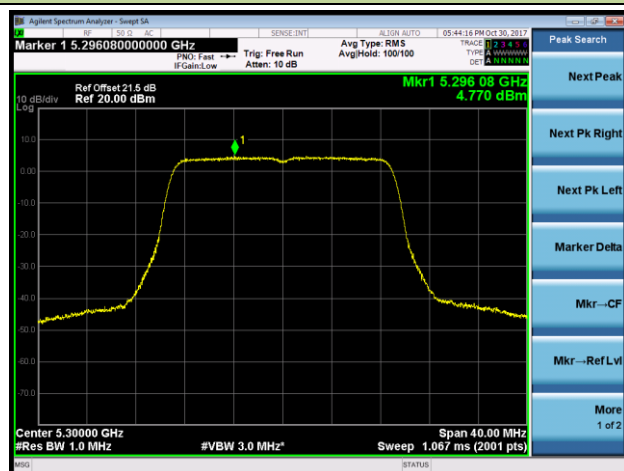

Channel 64 (5320MHz)

