

NNHHS4-65A-R5



16-port sector antenna, 4x 698-896 MHz and 4x 1695-2360 MHz, 65° HPBW, and 8 x 3400-4000 MHz, 90° HPBW, 5 x RETs

- Multi-band FDD antenna featuring C-Band 8T8R functionality
- Includes a separate RET for C-band array
- Feature the same dimensions as existing 8 and 12-port FDD capable antennas
- New endcap designs provide improved wind loading performance

General Specifications

Antenna Type	Sector- and beamforming
Band	Multiband
Calibration Connector Interface	4.3-10 Female
Calibration Connector Quantity	1
Color	Light gray
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, mid band	4
RF Connector Quantity, low band	4
RF Connector Quantity, total	16

Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	2 female 2 male
Input Voltage	10–30 Vdc
Internal RET	High band (1) Low band (2) Mid band (2)
Power Consumption, active state, maximum	8 W


NNHHS4-65A-R5

Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0

Dimensions

Width	498 mm 19.606 in
Depth	197 mm 7.756 in
Length	1499 mm 59.016 in
Net Weight, without mounting kit	33 kg 72.752 lb
TDD Column Spacing	41 mm 1.614 in

Array Layout

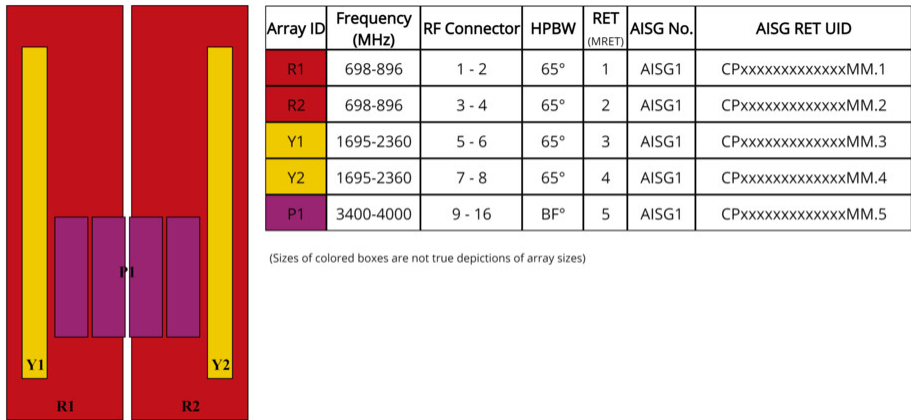

Port Configuration

NNHHS4-65A-R5



Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2360 MHz 3400 – 4000 MHz 698 – 896 MHz
Polarization	±45°
Total Input Power, maximum	1,400 W @ 50 °C

Electrical Specifications

Frequency Band, MHz	698–806	806–896	1695–1880	1850–1990	1920–2180	2300–2360	3400–3800	3700–4000
Gain, dBi	13.6	14	16.9	17.4	17.9	18.3	16.4	16.6
Beamwidth, Horizontal, degrees	59	53	60	60	62	62	83	70
Beamwidth, Vertical, degrees	17.1	15.1	6.3	5.8	5.5	5	6.1	5.8
Beam Tilt, degrees	2–16	2–16	2–12	2–12	2–12	2–12	0–10	0–10
USLS (First Lobe), dB	19	14	18	19	19	19	15	14
Front-to-Back Ratio at 180°, dB	29	29	31	34	34	31	29	30
Coupling level, Amp, Antenna port to Cal port, dB							-26	-26
Coupling level, max Amp Δ, Antenna port to Cal port, dB							±2	±2

NNHHS4-65A-R5

Coupler, max Amp Δ , Antenna port to Cal port, dB							0.9	0.9
Coupler, max Phase Δ , Antenna port to Cal port, degrees							7	7
Isolation, Cross Polarization, dB	25	25	25	25	25	25	25	25
Isolation, Inter-band, dB	25	25	25	25	25	25	25	25
Isolation, Co-polarization, dB	25	25	25	25	25	25	19	19
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-145	-145
Input Power per Port at 50°C, maximum, watts	300	300	250	250	250	250	75	75

Electrical Specifications, BASTA

Frequency Band, MHz	698–806	806–896	1695–1880	1850–1990	1920–2180	2300–2360	3400–3800	3700–4000
Gain by all Beam Tilts, average, dBi	13.3	13.6	16.3	17.1	17.5	18	15.7	16.1
Gain by all Beam Tilts Tolerance, dB	±0.5	±0.5	±0.9	±0.4	±0.5	±0.8	±0.8	±0.7
Beamwidth, Horizontal Tolerance, degrees	±7.5	±7.7	±5.3	±4.5	±4.6	±7.1	±23.5	±15.8
Beamwidth, Vertical Tolerance, degrees	±1.2	±1.2	±0.4	±0.3	±0.3	±0.2	±0.4	±0.3
USLS, beampeak to 20° above beampeak, dB			14	15	15	17	14	13
CPR at Boresight, dB	22	21	19	20	19	20	15	14
CPR at Sector, dB	14	9	9	7	7	10	6	6

Electrical Specifications, Broadcast 65°

Frequency Band, MHz	3400–3800	3700–4000
Gain, dBi	18.3	18.9
Beamwidth, Horizontal, degrees	65	65
Beamwidth, Vertical, degrees	6.2	5.9
Front-to-Back Total Power at 180° ± 30°, dB	26	26
USLS (First Lobe), dB	17	17

Electrical Specifications, Service Beam

NNHHS4-65A-R5

Frequency Band, MHz	3400–3800	3700–4000
Steered 0° Gain, dBi	21.3	21.6
Steered 0° Beamwidth, Horizontal, degrees	24	24
Steered 0° Front-to-Back Total Power at 180° ± 30°, dB	29	29
Steered 0° Horizontal Sidelobe, dB	14	14
Steered 30° Gain, dBi	19.7	20.1
Steered 30° Beamwidth, Horizontal, degrees	29	26
Steered 30° Front-to-Back Total Power at 180° ± 30°, dB	28	27

Electrical Specifications, Soft Split

Frequency Band, MHz	3400–3800	3700–4000
Gain, dBi	19.6	19.9
Beamwidth, Horizontal, degrees	33	30
Front-to-Back Total Power at 180° ± 30°, dB	28	27
Horizontal Sidelobe, dB	17	16

Mechanical Specifications

Effective Projective Area (EPA), frontal	0.47 m ² 5.059 ft ²
Effective Projective Area (EPA), lateral	0.14 m ² 1.507 ft ²
Wind Loading at Velocity, frontal	112.0 lbf @ 150 km/h 498.0 N @ 150 km/h
Wind Loading at Velocity, lateral	148.0 N @ 150 km/h 33.3 lbf @ 150 km/h
Wind Loading at Velocity, maximum	134.2 lbf @ 150 km/h 597.0 N @ 150 km/h
Wind Loading at Velocity, rear	342.0 N @ 150 km/h 76.9 lbf @ 150 km/h
Wind Speed, maximum	241.402 km/h 150 mph

Packaging and Weights

Width, packed	599 mm 23.583 in
Depth, packed	349 mm 13.74 in
Length, packed	1634 mm 64.331 in
Weight, gross	45.9 kg 101.192 lb

NNHHS4-65A-R5

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted




Included Products

BSAMNT-3	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
------------------	---

BSAMNT-3

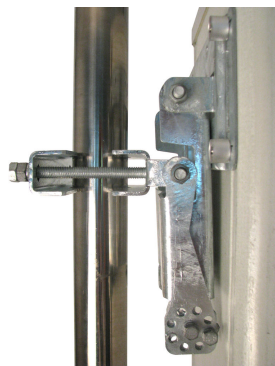

Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

General Specifications

Application	Outdoor
Color	Silver

Dimensions

Compatible Diameter, maximum	115 mm 4.528 in
Compatible Diameter, minimum	60 mm 2.362 in

Material Specifications

Material Type	Galvanized steel
---------------	------------------

Packaging and Weights

Included	Brackets Hardware
Packaging quantity	1
Weight, net	6.2 kg 13.669 lb

Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant

