



802.11ac-VHT80 26dB Bandwidth


Channel 42 (5210MHz)

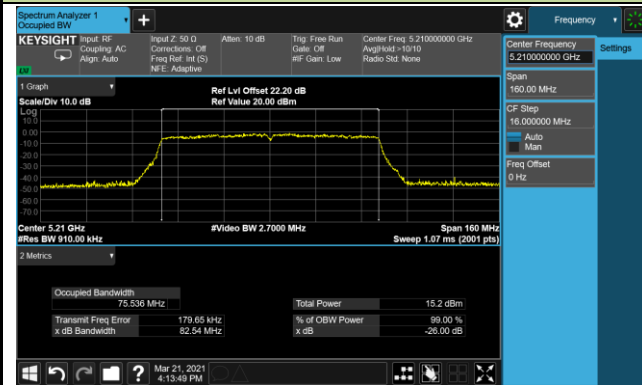


Channel 58 (5290MHz)

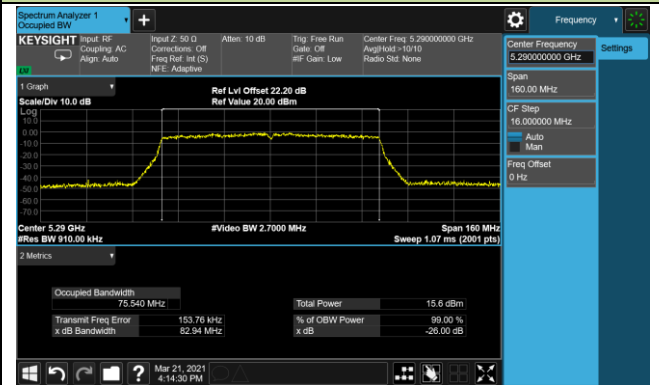


Channel 106 (5530MHz)

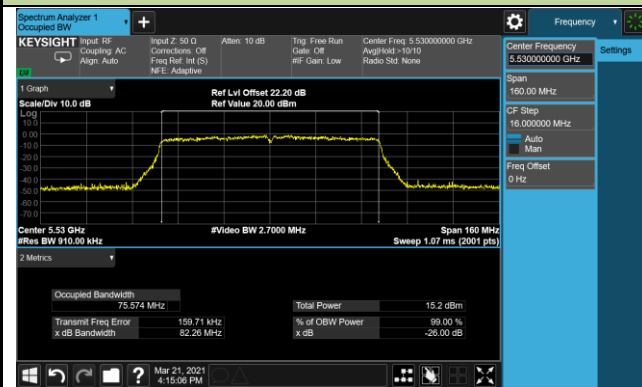

Channel 122 (5610MHz)

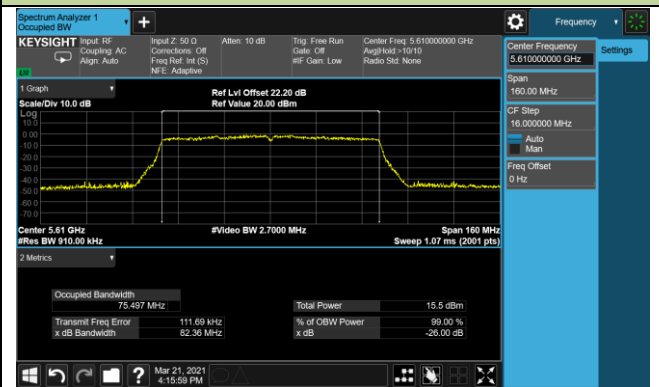

Channel 138(5690MHz)

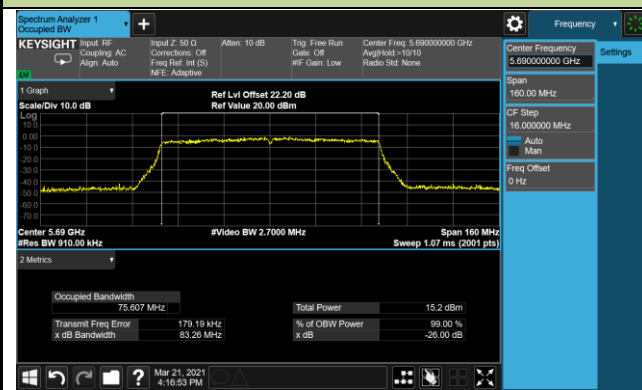

Channel 155 (5775MHz)




Product	Mobile Computer	Test Engineer	Liz Yuan
Test Site	WZ-SR3	Test Date	2021/04/30
Test Item	Occupied bandwidth falls within the 5250-5350 MHz band		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	F _H (MHz)	Limit (MHz)
802.11a	6Mbps	48	5240	5248.38	< 5250
802.11n-HT20	MCS0	48	5240	5248.92	< 5250
802.11n-HT40	MCS0	46	5230	5248.16	< 5250
802.11ac-VHT20	MCS0	48	5240	5248.94	< 5250
802.11ac-VHT40	MCS0	46	5230	5248.20	< 5250
802.11ac-VHT80	MCS0	42	5210	5247.88	< 5250

99% Occupied Bandwidth


802.11a Channel 48 (5240MHz)

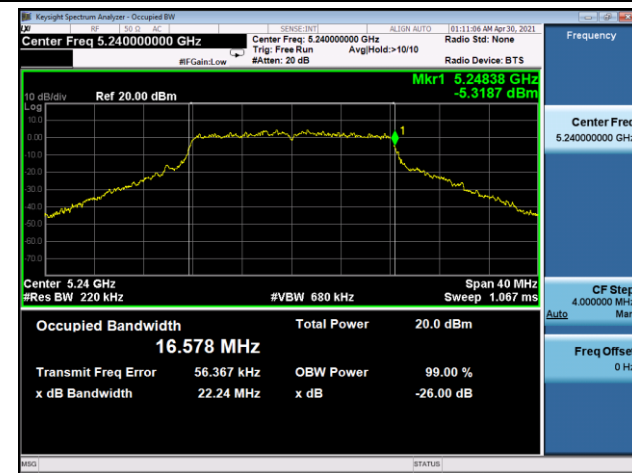


802.11n-HT20 Channel 48 (5240MHz)

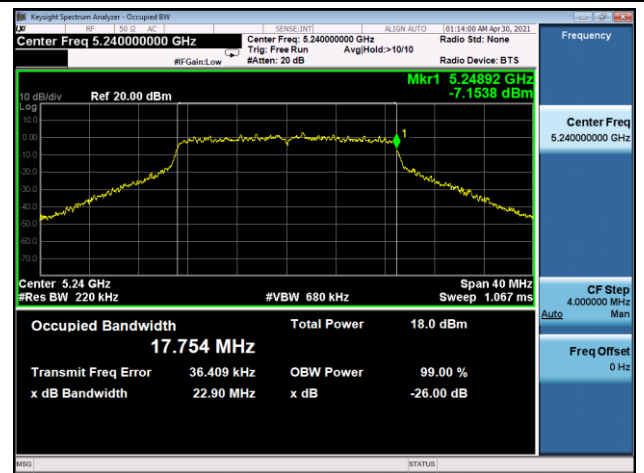


802.11n-HT40 Channel 46 (5230MHz)

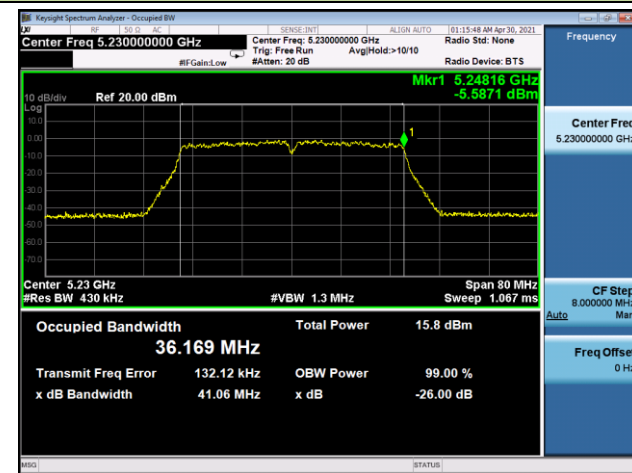


802.11ac-VHT20 Channel 48 (5240MHz)

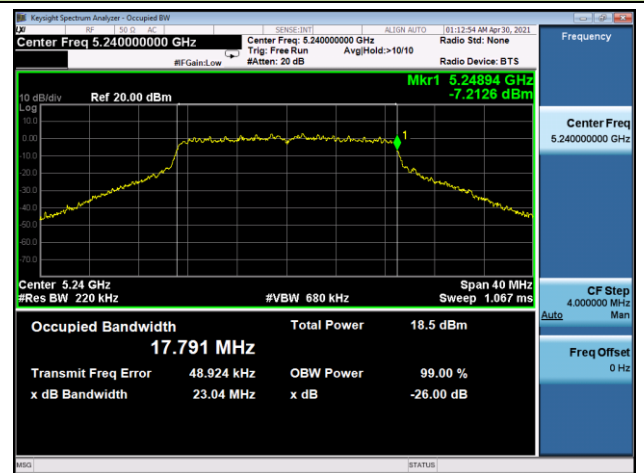

802.11ac-VHT40 Channel 46 (5230MHz)

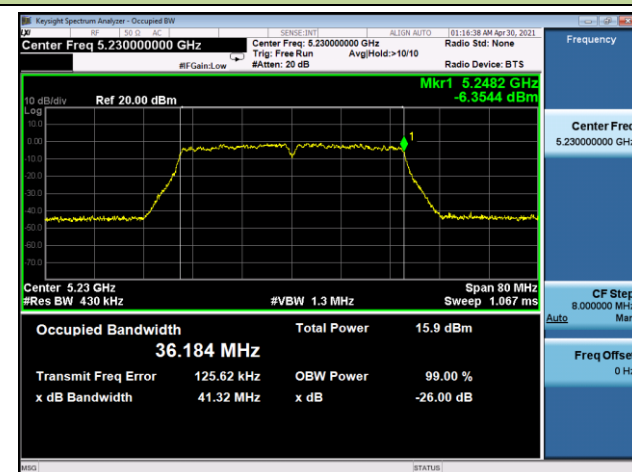

802.11ac-VHT80 Channel 42 (5210MHz)

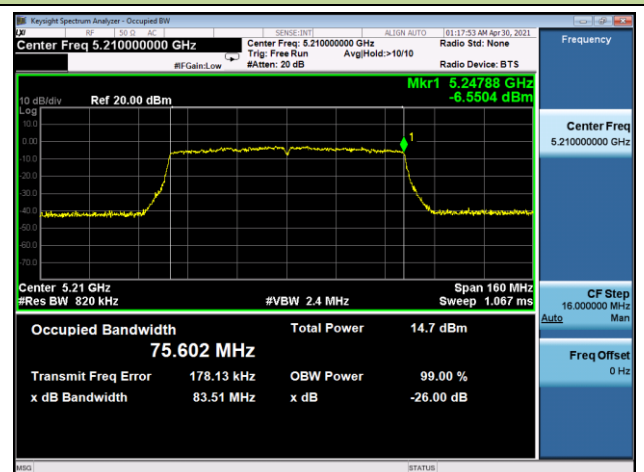

6.3. 6dB Bandwidth Measurement

6.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.3.2. Test Procedure Used

KDB 789033 D02v02r01 - Section C.2

6.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = Max hold.
6. Sweep = Auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.4. Test Setup

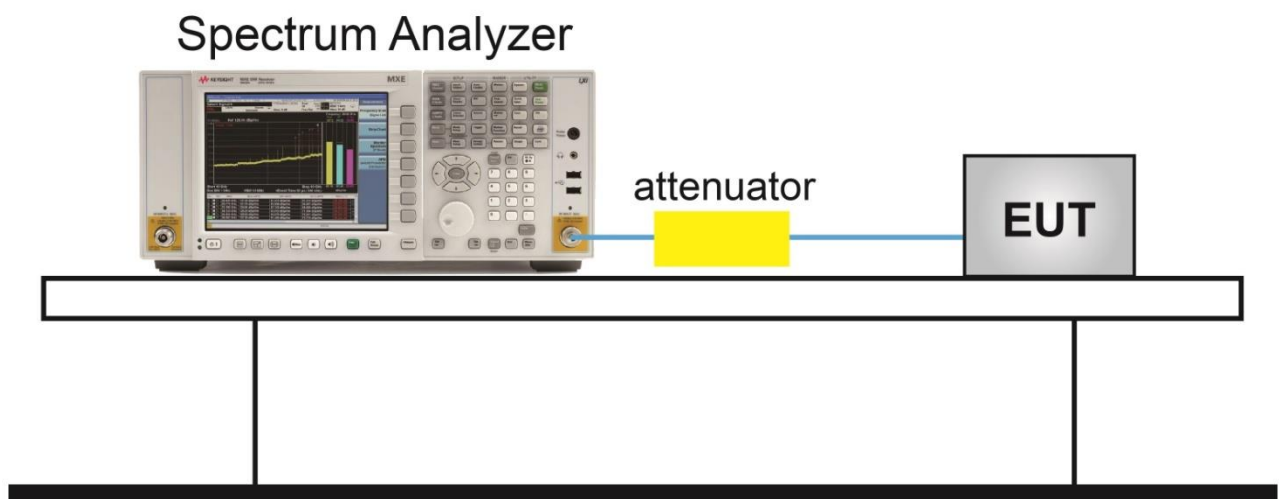


6.3.5. Test Result

Test Site	WZ-TR3	Test Engineer	Luis Yang
Test Date	2021/03/21		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	6Mbps	149	5745	14.79	≥ 0.5	Pass
802.11a	6Mbps	157	5785	15.43	≥ 0.5	Pass
802.11a	6Mbps	165	5825	16.30	≥ 0.5	Pass
802.11n-HT20	MCS0	149	5745	15.46	≥ 0.5	Pass
802.11n-HT20	MCS0	157	5785	16.57	≥ 0.5	Pass
802.11n-HT20	MCS0	165	5825	17.61	≥ 0.5	Pass
802.11n-HT40	MCS0	151	5755	35.08	≥ 0.5	Pass
802.11n-HT40	MCS0	159	5795	35.17	≥ 0.5	Pass
802.11ac-VHT20	MCS0	149	5745	16.30	≥ 0.5	Pass
802.11ac-VHT20	MCS0	157	5785	15.69	≥ 0.5	Pass
802.11ac-VHT20	MCS0	165	5825	16.86	≥ 0.5	Pass
802.11ac-VHT40	MCS0	151	5755	35.35	≥ 0.5	Pass
802.11ac-VHT40	MCS0	159	5795	35.10	≥ 0.5	Pass
802.11ac-VHT80	MCS0	155	5775	75.18	≥ 0.5	Pass

802.11a 6dB Bandwidth

Channel 149 (5745MHz)

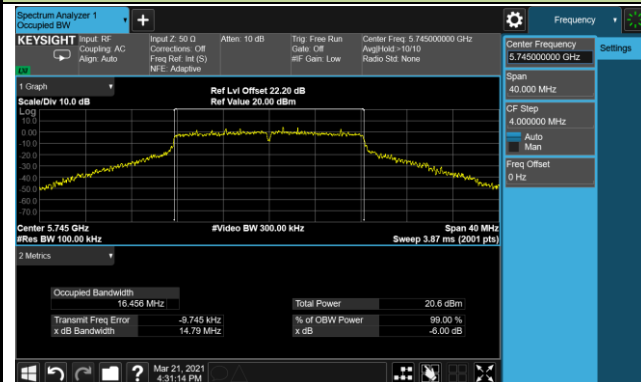

Channel 157 (5785MHz)

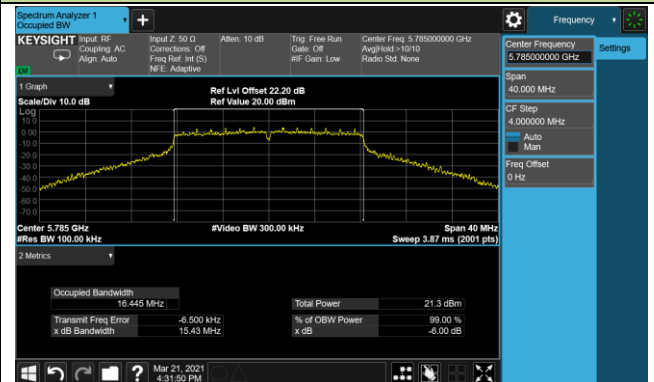


Channel 165 (5825MHz)




802.11n-HT20 6dB Bandwidth


Channel 149 (5745MHz)

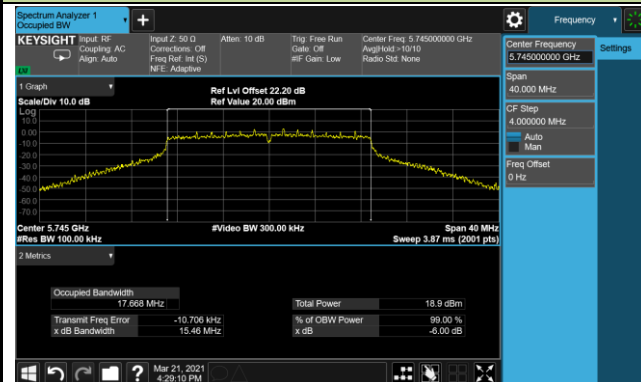

Channel 157 (5785MHz)

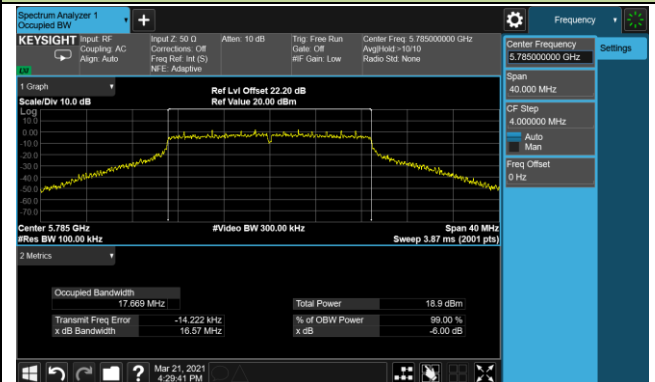


Channel 165 (5825MHz)

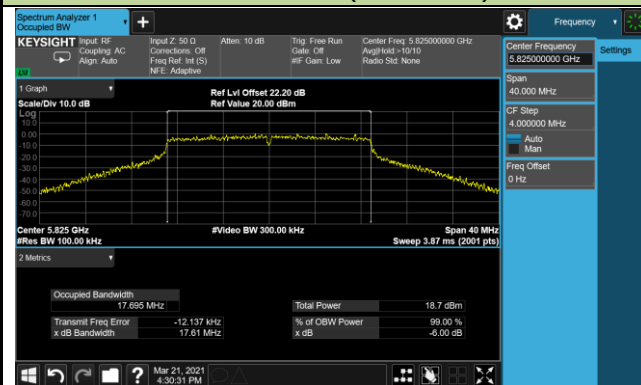


802.11n-HT40 6dB Bandwidth

Channel 151 (5755MHz)

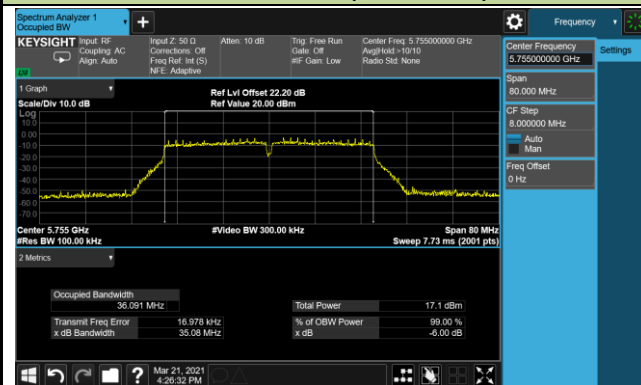


Channel 159 (5795MHz)

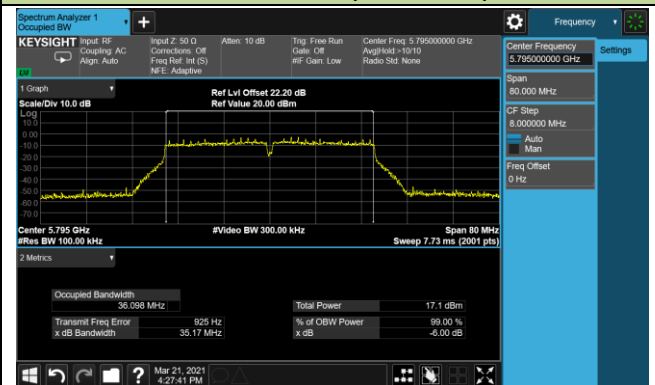


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

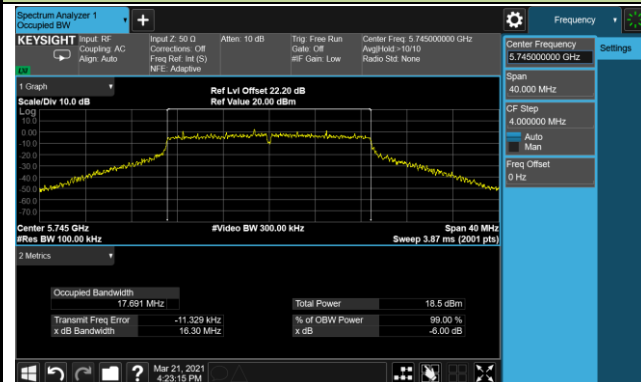

Channel 157 (5785MHz)

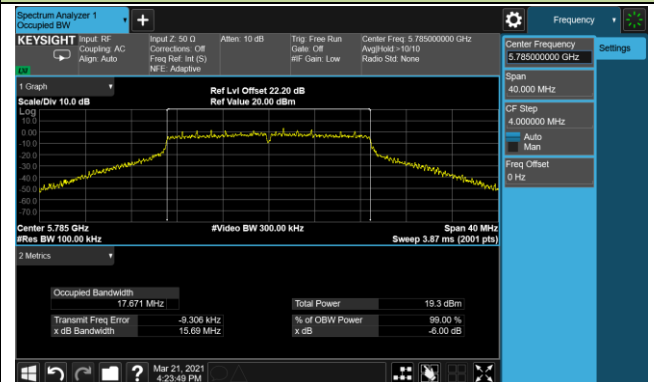


Channel 165 (5825MHz)

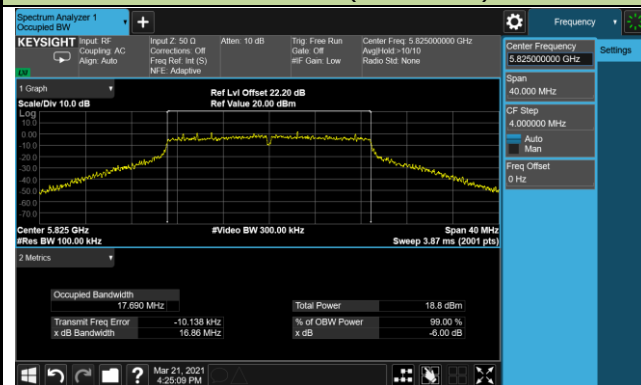


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

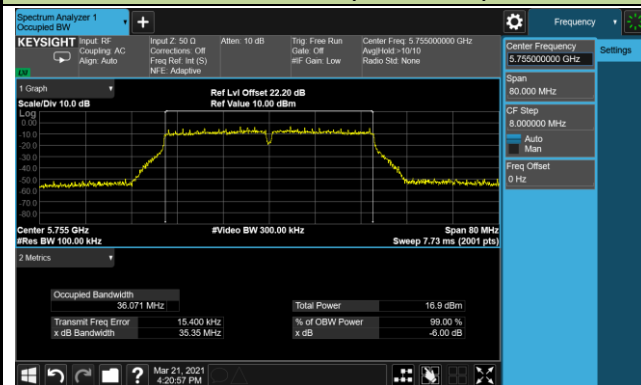


Channel 159 (5795MHz)

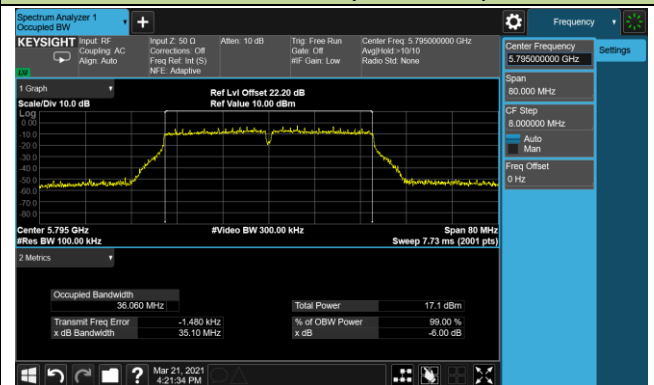

802.11ac-VHT80 6dB Bandwidth

Channel 155 (5775MHz)

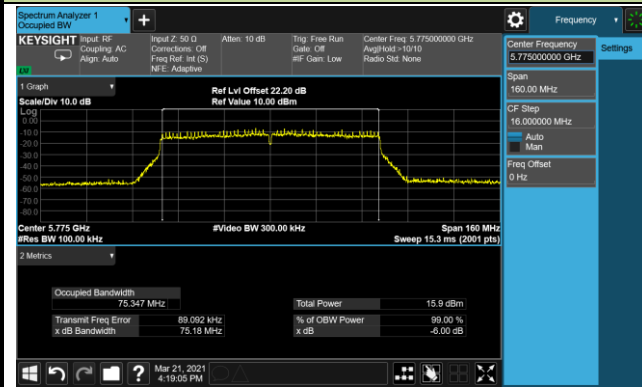

6.4. Output Power Measurement

6.4.1. Test Limit

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


6.4.2. Test Procedure Used

KDB 789033D02v02r01- Section E)3)b) Method PM-G

6.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.4.4. Test Setup

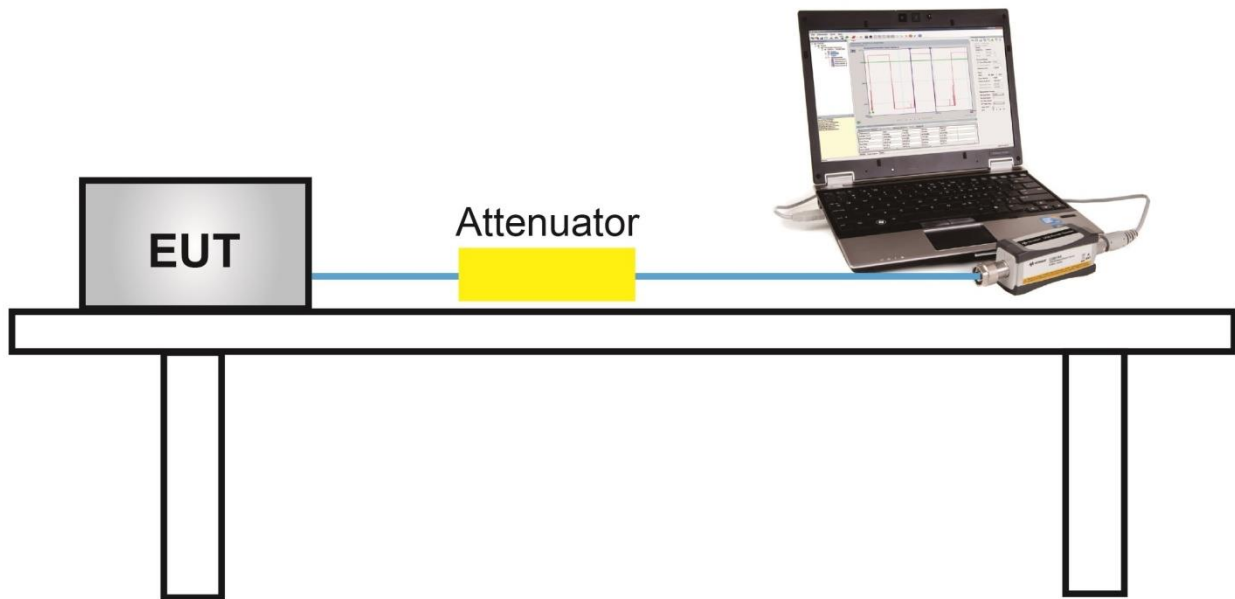

6.4.5. Test Result

Output power test was verified over all data rates of each mode shown as below table, and then choose the maximum output power (gray marker) for final test of each channel.

Test Mode	Bandwidth	Channel No.	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
802.11a	20	36	5180	6Mbps	14.19
				24Mbps	14.02
				54Mbps	13.89
802.11n	20	36	5180	MCS0	12.28
				MCS4	12.20
				MCS7	12.09
802.11n	40	38	5190	MCS0	10.10
				MCS4	10.01
				MCS7	9.85
802.11ac	20	36	5180	MCS0	12.42
				MCS4	12.21
				MCS8	12.05
802.11ac	40	38	5190	MCS0	10.05
				MCS4	9.98
				MCS9	9.79
802.11ac	80	42	5210	MCS0	7.98
				MCS4	7.89
				MCS9	7.74

Test Site	WZ-TR3	Test Engineer	Luis Yang
Test Date	2021/03/16		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Average Power Limit (dBm)	Result
11a	6Mbps	36	5180	14.19	≤ 23.98	Pass
11a	6Mbps	44	5220	14.26	≤ 23.98	Pass
11a	6Mbps	48	5240	14.35	≤ 23.98	Pass
11a	6Mbps	52	5260	14.18	≤ 23.98	Pass
11a	6Mbps	60	5300	14.36	≤ 23.98	Pass
11a	6Mbps	64	5320	14.19	≤ 23.98	Pass
11a	6Mbps	100	5500	14.38	≤ 23.98	Pass
11a	6Mbps	116	5580	14.40	≤ 23.98	Pass
11a	6Mbps	120	5600	14.42	≤ 23.98	Pass
11a	6Mbps	140	5700	14.36	≤ 23.98	Pass
11a	6Mbps	144	5720	14.24	≤ 23.18	Pass
11a	6Mbps	149	5745	14.43	≤ 30.00	Pass
11a	6Mbps	157	5785	14.24	≤ 30.00	Pass
11a	6Mbps	165	5825	14.50	≤ 30.00	Pass
11n-HT20	MCS0	36	5180	12.28	≤ 23.98	Pass
11n-HT20	MCS0	44	5220	12.11	≤ 23.98	Pass
11n-HT20	MCS0	48	5240	12.26	≤ 23.98	Pass
11n-HT20	MCS0	52	5260	12.06	≤ 23.98	Pass
11n-HT20	MCS0	60	5300	12.33	≤ 23.98	Pass
11n-HT20	MCS0	64	5320	12.12	≤ 23.98	Pass
11n-HT20	MCS0	100	5500	12.00	≤ 23.98	Pass
11n-HT20	MCS0	116	5580	12.06	≤ 23.98	Pass
11n-HT20	MCS0	120	5600	12.13	≤ 23.98	Pass
11n-HT20	MCS0	140	5700	12.16	≤ 23.98	Pass
11n-HT20	MCS0	144	5720	11.94	≤ 23.18	Pass
11n-HT20	MCS0	149	5745	12.42	≤ 30.00	Pass
11n-HT20	MCS0	157	5785	12.47	≤ 30.00	Pass
11n-HT20	MCS0	165	5825	12.46	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Average Power Limit(dBm)	Result
11n-HT40	MCS0	38	5190	10.10	≤ 23.98	Pass
11n-HT40	MCS0	46	5230	9.96	≤ 23.98	Pass
11n-HT40	MCS0	54	5270	10.12	≤ 23.98	Pass
11n-HT40	MCS0	62	5310	10.35	≤ 23.98	Pass
11n-HT40	MCS0	102	5510	10.47	≤ 23.98	Pass
11n-HT40	MCS0	110	5500	9.93	≤ 23.98	Pass
11n-HT40	MCS0	118	5590	10.45	≤ 23.98	Pass
11n-HT40	MCS0	134	5670	10.20	≤ 23.98	Pass
11n-HT40	MCS0	142	5710	10.28	≤ 23.98	Pass
11n-HT40	MCS0	151	5755	10.05	≤ 30.00	Pass
11n-HT40	MCS0	159	5795	10.28	≤ 30.00	Pass
11ac-VHT20	MCS0	36	5180	12.42	≤ 23.98	Pass
11ac-VHT20	MCS0	44	5220	12.19	≤ 23.98	Pass
11ac-VHT20	MCS0	48	5240	12.40	≤ 23.98	Pass
11ac-VHT20	MCS0	52	5260	12.19	≤ 23.98	Pass
11ac-VHT20	MCS0	60	5300	12.43	≤ 23.98	Pass
11ac-VHT20	MCS0	64	5320	12.43	≤ 23.98	Pass
11ac-VHT20	MCS0	100	5500	12.16	≤ 23.98	Pass
11ac-VHT20	MCS0	116	5580	12.26	≤ 23.98	Pass
11ac-VHT20	MCS0	120	5600	12.25	≤ 23.98	Pass
11ac-VHT20	MCS0	140	5700	11.95	≤ 23.98	Pass
11ac-VHT20	MCS0	144	5720	12.00	≤ 23.18	Pass
11ac-VHT20	MCS0	149	5745	12.35	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	12.26	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	12.40	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Average Power Limit(dBm)	Result
11ac-VHT40	MCS0	38	5190	10.05	≤ 23.98	Pass
11ac-VHT40	MCS0	46	5230	10.07	≤ 23.98	Pass
11ac-VHT40	MCS0	54	5270	10.16	≤ 23.98	Pass
11ac-VHT40	MCS0	62	5310	10.01	≤ 23.98	Pass
11ac-VHT40	MCS0	102	5510	10.28	≤ 23.98	Pass
11ac-VHT40	MCS0	110	5500	10.00	≤ 23.98	Pass
11ac-VHT40	MCS0	118	5590	10.48	≤ 23.98	Pass
11ac-VHT40	MCS0	134	5670	10.19	≤ 23.98	Pass
11ac-VHT40	MCS0	142	5710	10.23	≤ 23.98	Pass
11ac-VHT40	MCS0	151	5755	10.03	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	10.28	≤ 30.00	Pass
11ac-VHT80	MCS0	42	5210	7.98	≤ 23.98	Pass
11ac-VHT80	MCS0	58	5290	8.46	≤ 23.98	Pass
11ac-VHT80	MCS0	106	5530	8.24	≤ 23.98	Pass
11ac-VHT80	MCS0	112	5610	8.13	≤ 23.98	Pass
11ac-VHT80	MCS0	138	5690	8.20	≤ 23.98	Pass
11ac-VHT80	MCS0	155	5775	8.22	≤ 30.00	Pass

Note: Max Conducted Output Power Limit Calculation as below:

For Channel 144 (5720MHz), $11+10*\log (5\text{MHz} + \text{BW}_{26\text{dB}}/2) = 23.18\text{dBm} < 23.98\text{dBm}$

6.5. Transmit Power Control

6.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm.


6.5.2. Test Procedure Used

KDB 789033 D02v01- Section E)3)b) Method PM-G

6.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.5.4. Test Setup

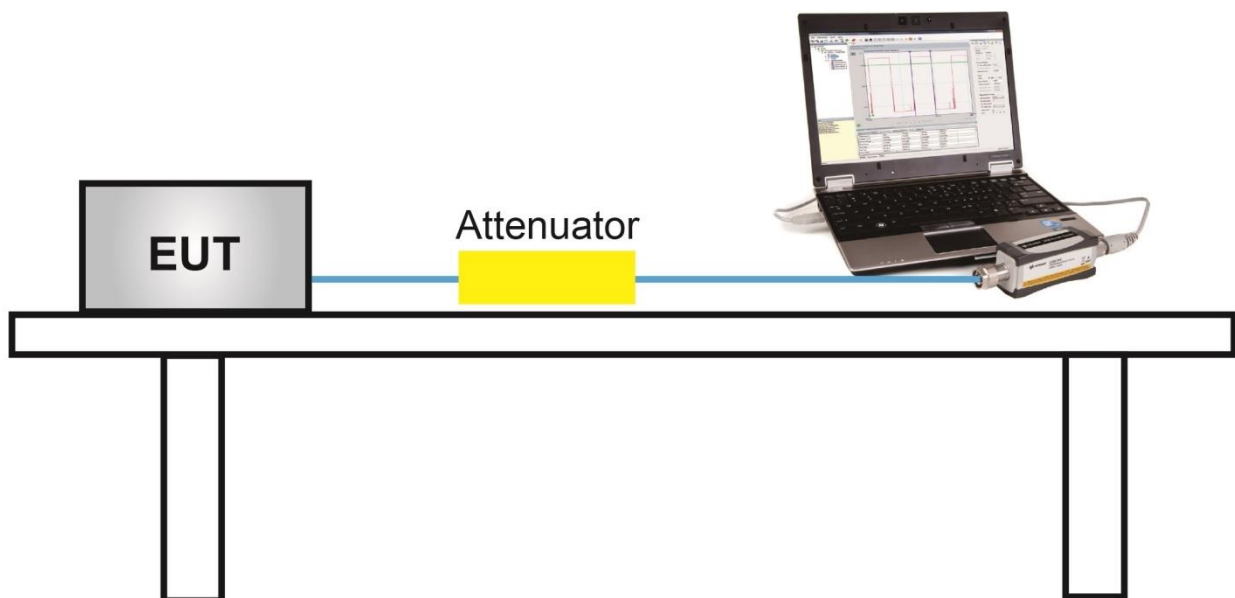

6.5.5. Test Result

A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

6.6. Power Spectral Density Measurement

6.6.1. Test Limit

For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


6.6.2. Test Procedure Used

KDB 789033 D02v02r01 - Section F

6.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation.
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
If measurement bandwidth of Maximum PSD is specified in 500 kHz, RBW = 510kHz
4. VBW = 3MHz
If measurement bandwidth of Maximum PSD is specified in 500 kHz, VBW = 1.5MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = Power averaging (Average)
7. Trace average at least 100 traces in power averaging (rms) mode
8. Sweep time = Auto
9. Trigger = Free run
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.6.4. Test Setup

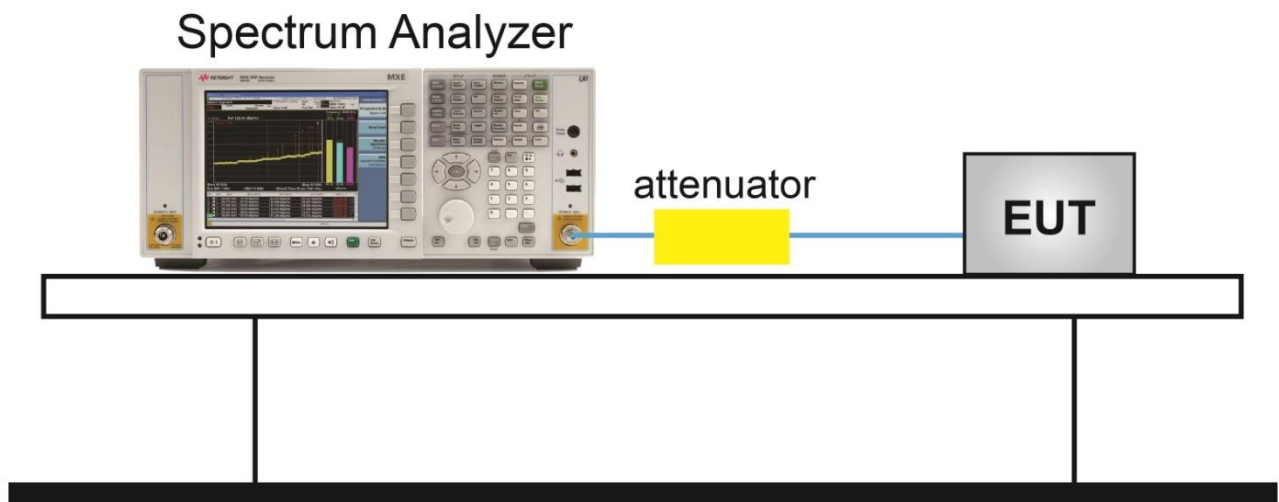

6.6.5. Test Result

Test Site	WZ-TR3	Test Engineer	Luis Yang
Test Date	2021/03/21	Test Item	Power Spectral Density (NII-1 & NII-2A & NII-2C)

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)	Duty Cycle (%)	Final PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11a	6Mbps	36	5180	3.50	98.05	3.50	≤ 11.00	Pass
11a	6Mbps	44	5220	3.48	98.05	3.48	≤ 11.00	Pass
11a	6Mbps	48	5240	3.81	98.05	3.81	≤ 11.00	Pass
11a	6Mbps	52	5260	3.64	98.05	3.64	≤ 11.00	Pass
11a	6Mbps	60	5300	4.06	98.05	4.06	≤ 11.00	Pass
11a	6Mbps	64	5320	3.90	98.05	3.90	≤ 11.00	Pass
11a	6Mbps	100	5500	3.69	98.05	3.69	≤ 11.00	Pass
11a	6Mbps	116	5580	3.90	98.05	3.90	≤ 11.00	Pass
11a	6Mbps	120	5600	4.08	98.05	4.08	≤ 11.00	Pass
11a	6Mbps	140	5700	4.07	98.05	4.07	≤ 11.00	Pass
11a	6Mbps	144	5720	4.05	98.05	4.05	≤ 11.00	Pass
11n-HT20	MCS0	36	5180	1.13	97.65	1.23	≤ 11.00	Pass
11n-HT20	MCS0	44	5220	1.23	97.65	1.33	≤ 11.00	Pass
11n-HT20	MCS0	48	5240	1.36	97.65	1.46	≤ 11.00	Pass
11n-HT20	MCS0	52	5260	1.30	97.65	1.40	≤ 11.00	Pass
11n-HT20	MCS0	60	5300	1.44	97.65	1.54	≤ 11.00	Pass
11n-HT20	MCS0	64	5320	1.37	97.65	1.47	≤ 11.00	Pass
11n-HT20	MCS0	100	5500	1.31	97.65	1.42	≤ 11.00	Pass
11n-HT20	MCS0	116	5580	1.31	97.65	1.41	≤ 11.00	Pass
11n-HT20	MCS0	120	5600	1.81	97.65	1.92	≤ 11.00	Pass
11n-HT20	MCS0	140	5700	1.55	97.65	1.65	≤ 11.00	Pass
11n-HT20	MCS0	144	5720	1.19	97.65	1.29	≤ 11.00	Pass

Note: When EUT duty cycle ≥ 98%, Final PSD (dBm/MHz) = PSD (dBm/MHz)

When EUT duty cycle < 98%, Final PSD (dBm/MHz) = PSD (dBm/MHz) + 10*log (1/Duty Cycle)

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)	Duty Cycle (%)	Final PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
11n-HT40	MCS0	38	5190	-3.78	96.11	-3.61	≤ 11.00	Pass
11n-HT40	MCS0	46	5230	-3.58	96.11	-3.40	≤ 11.00	Pass
11n-HT40	MCS0	54	5270	-3.38	96.11	-3.21	≤ 11.00	Pass
11n-HT40	MCS0	62	5310	-3.02	96.11	-2.84	≤ 11.00	Pass
11n-HT40	MCS0	102	5510	-3.41	96.11	-3.24	≤ 11.00	Pass
11n-HT40	MCS0	110	5550	-3.64	96.11	-3.47	≤ 11.00	Pass
11n-HT40	MCS0	118	5590	-3.25	96.11	-3.07	≤ 11.00	Pass
11n-HT40	MCS0	134	5670	-3.10	96.11	-2.93	≤ 11.00	Pass
11n-HT40	MCS0	142	5710	-3.59	96.11	-3.41	≤ 11.00	Pass
11ac-VHT20	MCS0	36	5180	1.13	97.71	1.23	≤ 11.00	Pass
11ac-VHT20	MCS0	44	5220	0.95	97.71	1.05	≤ 11.00	Pass
11ac-VHT20	MCS0	48	5240	1.18	97.71	1.28	≤ 11.00	Pass
11ac-VHT20	MCS0	52	5260	1.30	97.71	1.40	≤ 11.00	Pass
11ac-VHT20	MCS0	60	5300	1.68	97.71	1.78	≤ 11.00	Pass
11ac-VHT20	MCS0	64	5320	1.72	97.71	1.82	≤ 11.00	Pass
11ac-VHT20	MCS0	100	5500	1.13	97.71	1.23	≤ 11.00	Pass
11ac-VHT20	MCS0	116	5580	1.39	97.71	1.49	≤ 11.00	Pass
11ac-VHT20	MCS0	120	5600	1.76	97.71	1.86	≤ 11.00	Pass
11ac-VHT20	MCS0	140	5700	1.40	97.71	1.50	≤ 11.00	Pass
11ac-VHT20	MCS0	144	5720	1.64	97.71	1.74	≤ 11.00	Pass
11ac-VHT40	MCS0	38	5190	-3.98	95.66	-3.78	≤ 11.00	Pass
11ac-VHT40	MCS0	46	5230	-3.88	95.66	-3.69	≤ 11.00	Pass
11ac-VHT40	MCS0	54	5270	-3.53	95.66	-3.33	≤ 11.00	Pass
11ac-VHT40	MCS0	62	5310	-3.80	95.66	-3.61	≤ 11.00	Pass
11ac-VHT40	MCS0	102	5510	-3.37	95.66	-3.17	≤ 11.00	Pass
11ac-VHT40	MCS0	110	5550	-3.56	95.66	-3.37	≤ 11.00	Pass
11ac-VHT40	MCS0	118	5590	-3.32	95.66	-3.12	≤ 11.00	Pass
11ac-VHT40	MCS0	134	5670	-3.45	95.66	-3.25	≤ 11.00	Pass
11ac-VHT40	MCS0	142	5710	-3.21	95.66	-3.02	≤ 11.00	Pass
11ac-VHT80	MCS0	42	5210	-9.11	92.42	-8.76	≤ 11.00	Pass
11ac-VHT80	MCS0	58	5290	-8.42	92.42	-8.08	≤ 11.00	Pass
11ac-VHT80	MCS0	106	5530	-8.49	92.42	-8.15	≤ 11.00	Pass
11ac-VHT80	MCS0	122	5610	-8.97	92.42	-8.62	≤ 11.00	Pass
11ac-VHT80	MCS0	138	5690	-8.82	92.42	-8.48	≤ 11.00	Pass

Note: When EUT duty cycle $\geq 98\%$, Final PSD (dBm/MHz) = PSD (dBm/MHz)

When EUT duty cycle $< 98\%$, Final PSD (dBm/MHz) = PSD (dBm/MHz) + $10 \cdot \log(1/\text{Duty Cycle})$

Test Site	WZ-TR3	Test Engineer	Luis Yang
Test Date	2021/03/21	Test Item	Power Spectral Density (NII-3)

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/510kHz)	Duty Cycle (%)	Final PSD (dBm/510kHz)	Limit (dBm/500kHz)	Result
11a	6Mbps	149	5745	1.35	98.05	1.35	≤ 30.00	Pass
11a	6Mbps	157	5785	1.57	98.05	1.57	≤ 30.00	Pass
11a	6Mbps	165	5825	1.49	98.05	1.49	≤ 30.00	Pass
11n-HT20	MCS0	149	5745	-1.32	97.65	-1.22	≤ 30.00	Pass
11n-HT20	MCS0	157	5785	-1.02	97.65	-0.92	≤ 30.00	Pass
11n-HT20	MCS0	165	5825	-0.98	97.65	-0.87	≤ 30.00	Pass
11n-HT40	MCS0	151	5755	-6.47	96.11	-6.30	≤ 30.00	Pass
11n-HT40	MCS0	159	5795	-6.15	96.11	-5.97	≤ 30.00	Pass
11ac-VHT20	MCS0	149	5745	-0.75	97.71	-0.65	≤ 30.00	Pass
11ac-VHT20	MCS0	157	5785	-1.02	97.71	-0.92	≤ 30.00	Pass
11ac-VHT20	MCS0	165	5825	-0.94	97.71	-0.84	≤ 30.00	Pass
11ac-VHT40	MCS0	151	5755	-6.23	95.66	-6.03	≤ 30.00	Pass
11ac-VHT40	MCS0	159	5795	-5.90	95.66	-5.71	≤ 30.00	Pass
11ac-VHT80	MCS0	155	5775	-11.68	92.42	-11.34	≤ 30.00	Pass

Note:

When EUT duty cycle > 98%, Final PSD (dBm / 500kHz) = PSD (dBm / 500kHz).

When EUT duty cycle < 98%, Final PSD (dBm / 500kHz) = PSD (dBm / 500kHz) + 10*log(1/Duty cycle)

802.11a Power Spectral Density

Channel 36 (5180MHz)



Channel 44 (5220MHz)




Channel 48 (5240MHz)




Channel 52 (5260MHz)




Channel 60 (5300MHz)

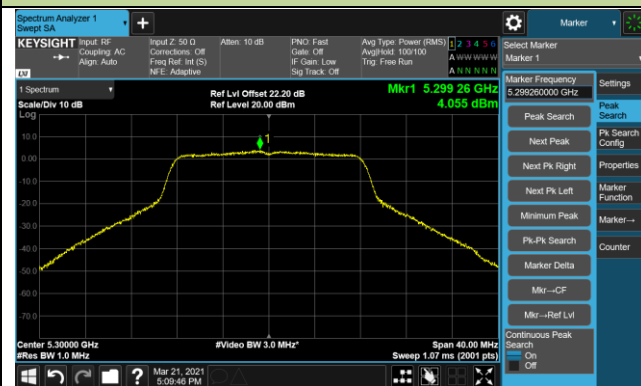

Channel 64 (5320MHz)

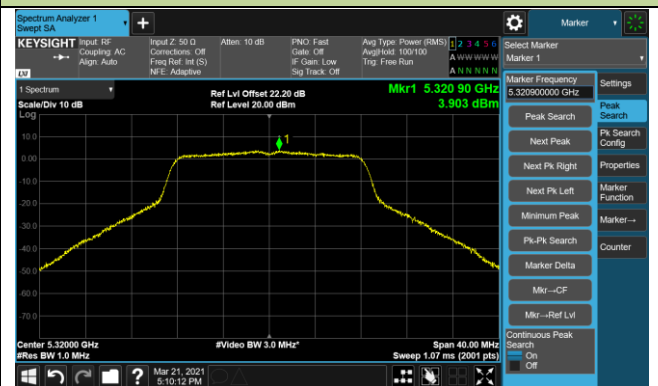

Channel 100 (5500MHz)

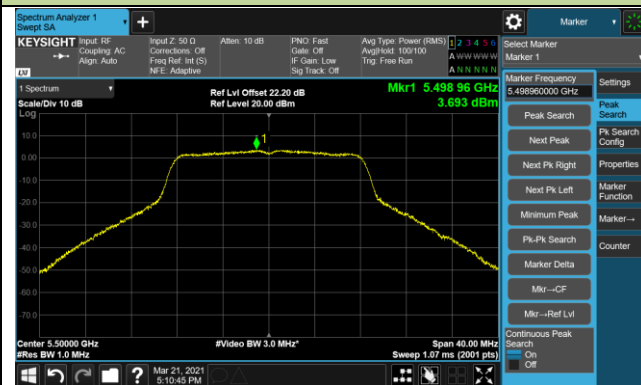

Channel 116 (5580MHz)




802.11a Power Spectral Density

Channel 120 (5600MHz)



Channel 140 (5700MHz)

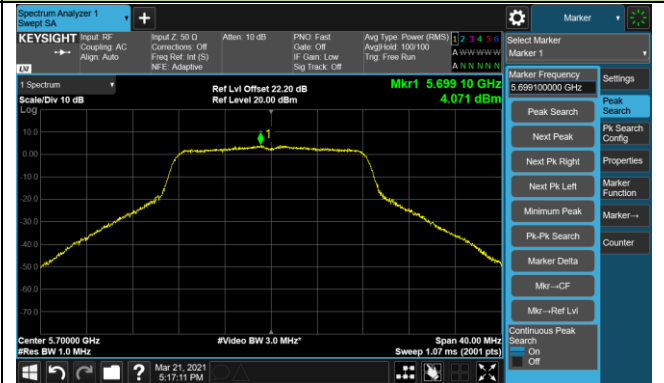


Channel 144 (5720MHz)



Channel 149 (5745MHz)



Channel 157 (5785MHz)

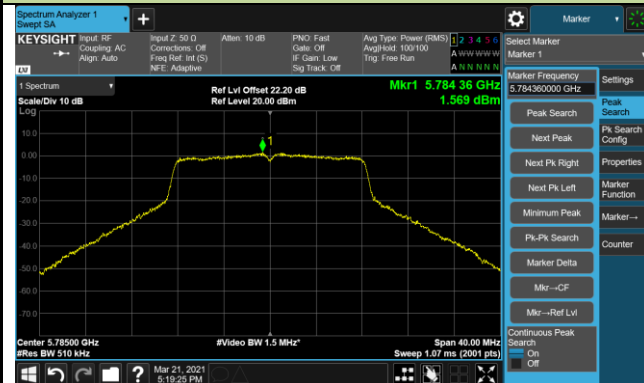


Channel 165 (5825MHz)



802.11n-HT20 Power Spectral Density

Channel 36 (5180MHz)

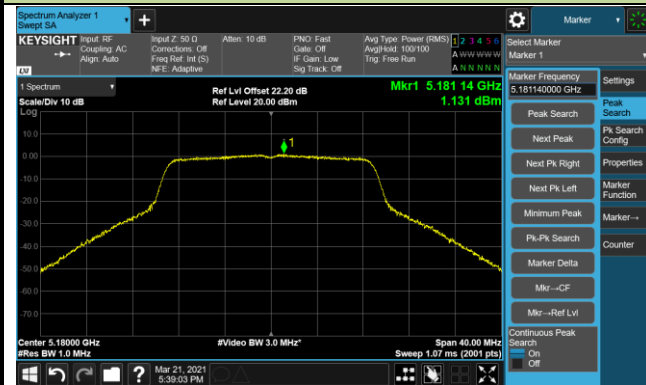

Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 52 (5260MHz)



Channel 60 (5300MHz)



Channel 64 (5320MHz)



Channel 100 (5500MHz)



Channel 116 (5580MHz)



802.11n-HT20 Power Spectral Density


Channel 120 (5600MHz)




Channel 140 (5700MHz)



Channel 144 (5720MHz)

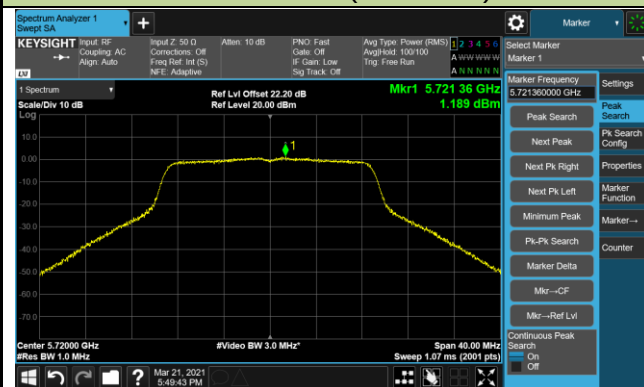

Channel 149 (5745MHz)

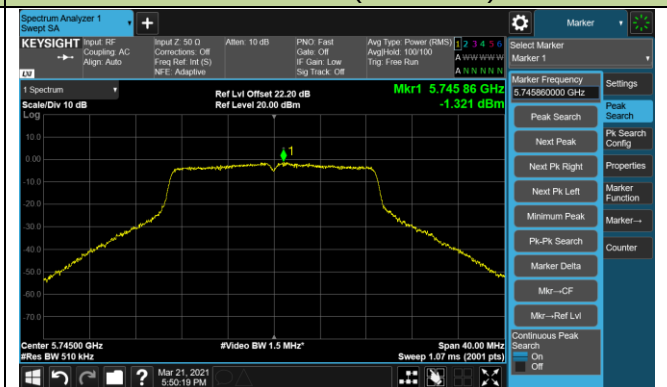

Channel 157 (5785MHz)




Channel 165 (5825MHz)




802.11n-HT40 Power Spectral Density


Channel 38 (5190MHz)

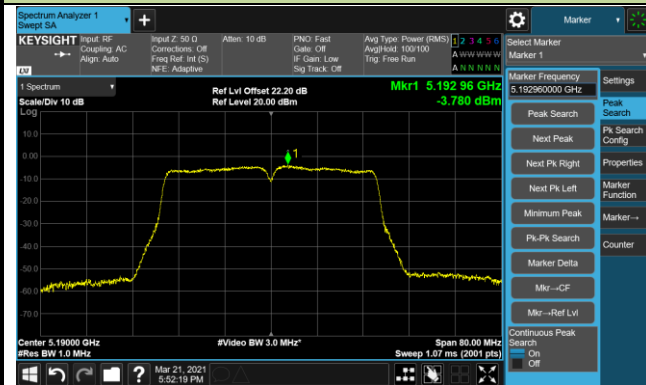

Channel 46 (5230MHz)

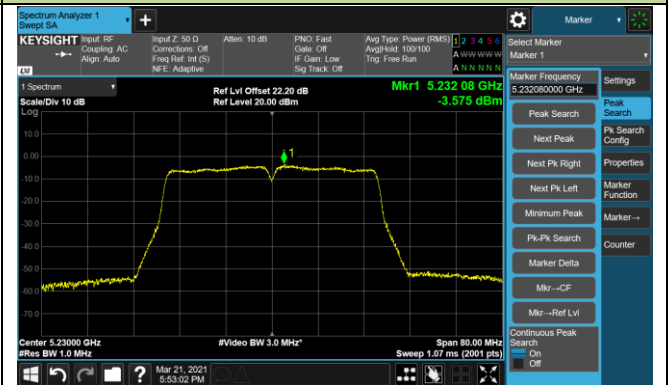


Channel 54 (5270MHz)

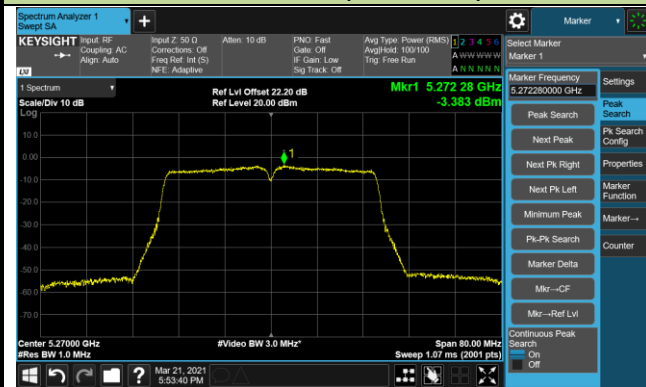


Channel 62 (5310MHz)




Channel 102 (5510MHz)

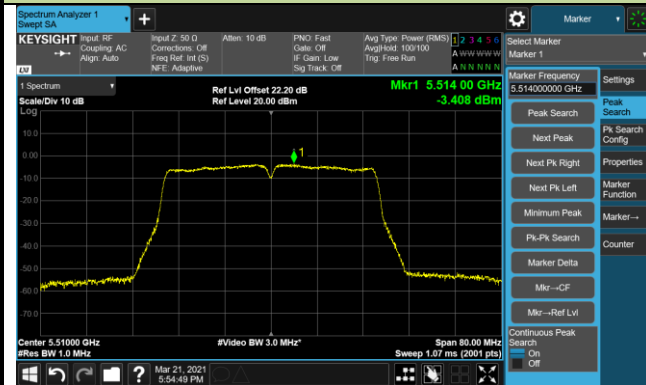

Channel 110 (5550MHz)

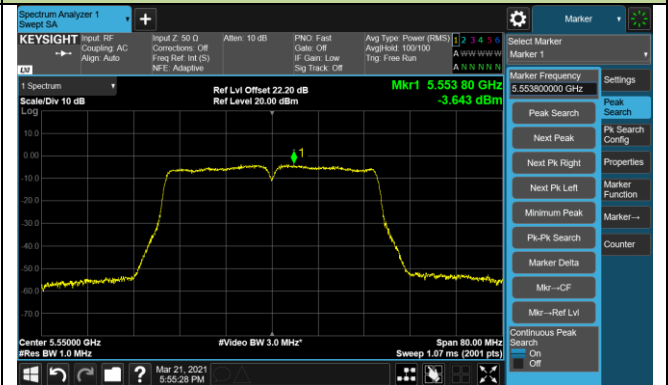

Channel 118 (5590MHz)

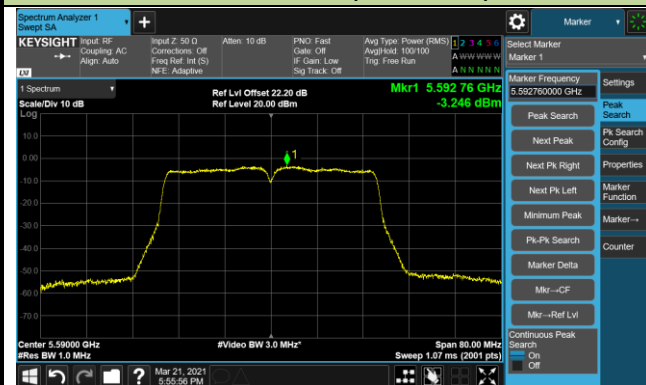


Channel 134 (5670MHz)




802.11n-HT40 Power Spectral Density

Channel 142 (5710MHz)

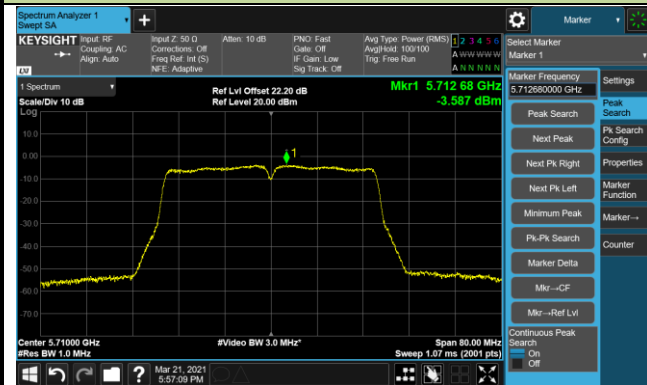

Channel 151 (5755MHz)

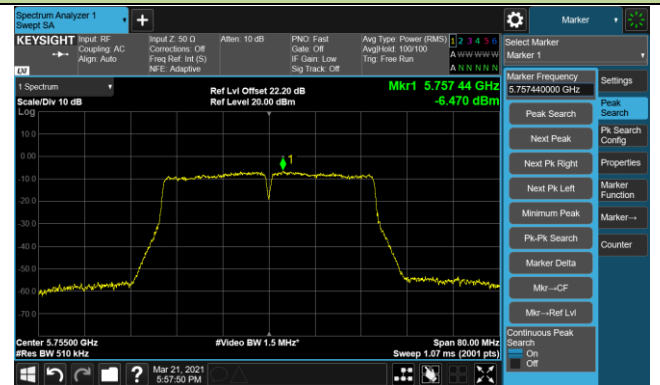

Channel 159 (5795MHz)

