


|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/23 - 15:07 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT20 at channel 5500 MHz |                          |

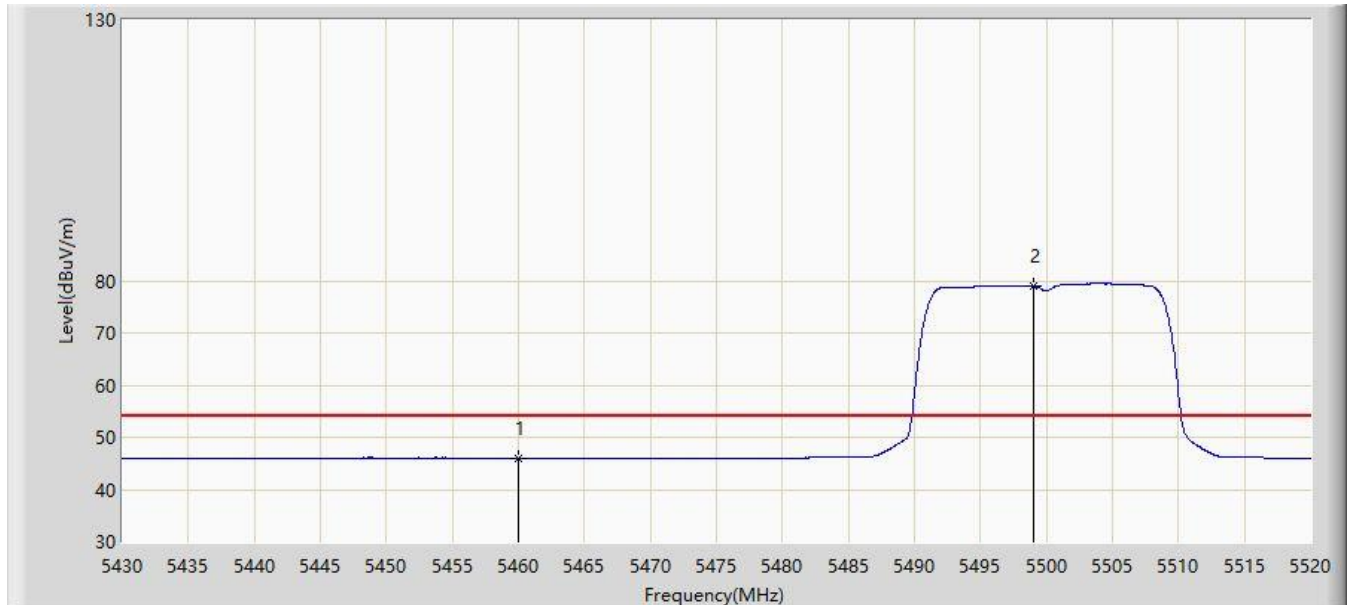


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5460.000        | 46.007                 | 41.567               | -7.993      | 54.000         | 4.440       | AV   |
| 2  | *    | 5499.075        | 78.980                 | 74.495               | N/A         | N/A            | 4.485       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/23 - 15:09 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Horizontal     |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT20 at channel 5700 MHz |                          |

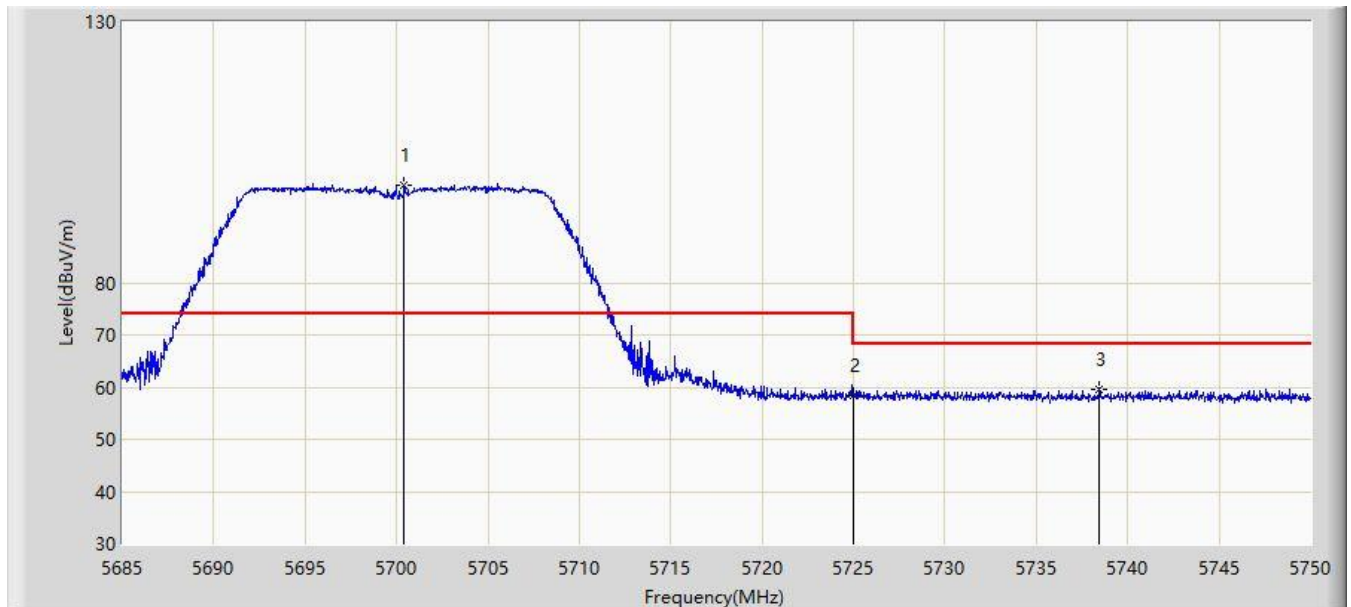


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5700.405        | 98.793                 | 93.468               | N/A         | N/A            | 5.325       | PK   |
| 2  |      | 5725.000        | 58.385                 | 52.907               | -9.815      | 68.200         | 5.478       | PK   |
| 3  |      | 5738.462        | 59.709                 | 54.165               | -8.491      | 68.200         | 5.544       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/23 - 15:09 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT20 at channel 5700 MHz |                          |

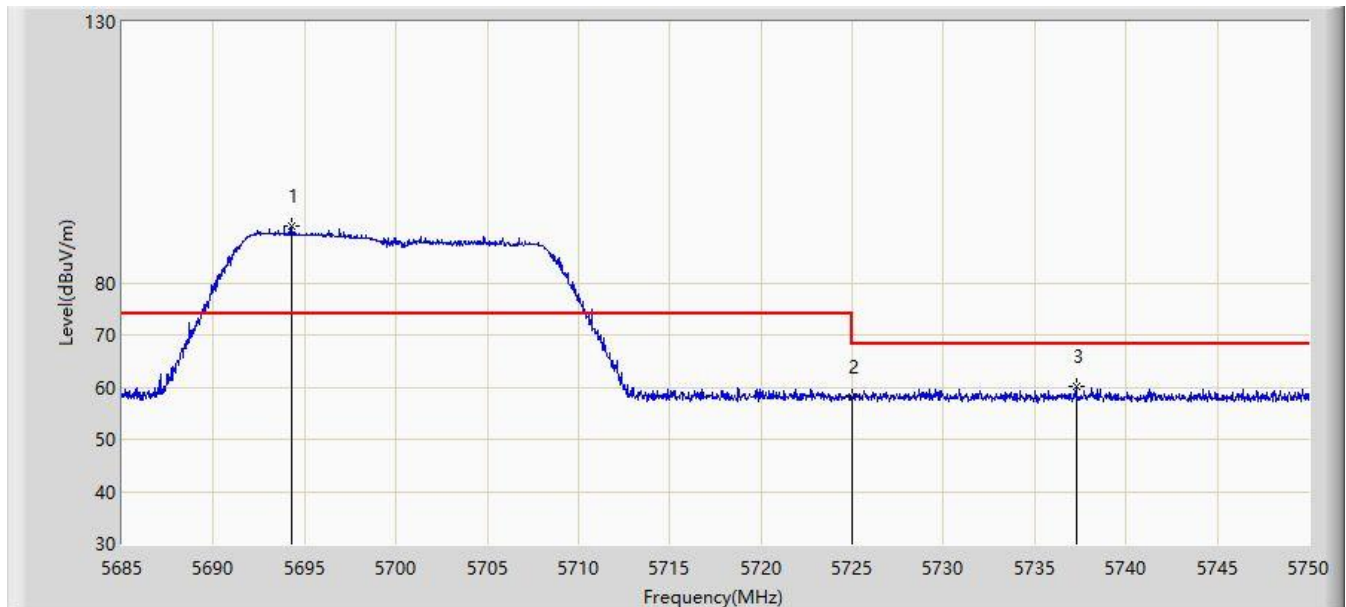


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5694.295        | 90.758                 | 85.533               | N/A         | N/A            | 5.224       | PK   |
| 2  |      | 5725.000        | 58.025                 | 52.547               | -10.175     | 68.200         | 5.478       | PK   |
| 3  |      | 5737.260        | 60.039                 | 54.501               | -8.161      | 68.200         | 5.538       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/23 - 15:10 |
| Limit: FCC_Part15.407_Band Edge(3m)                     | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Horizontal     |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745 MHz |                          |

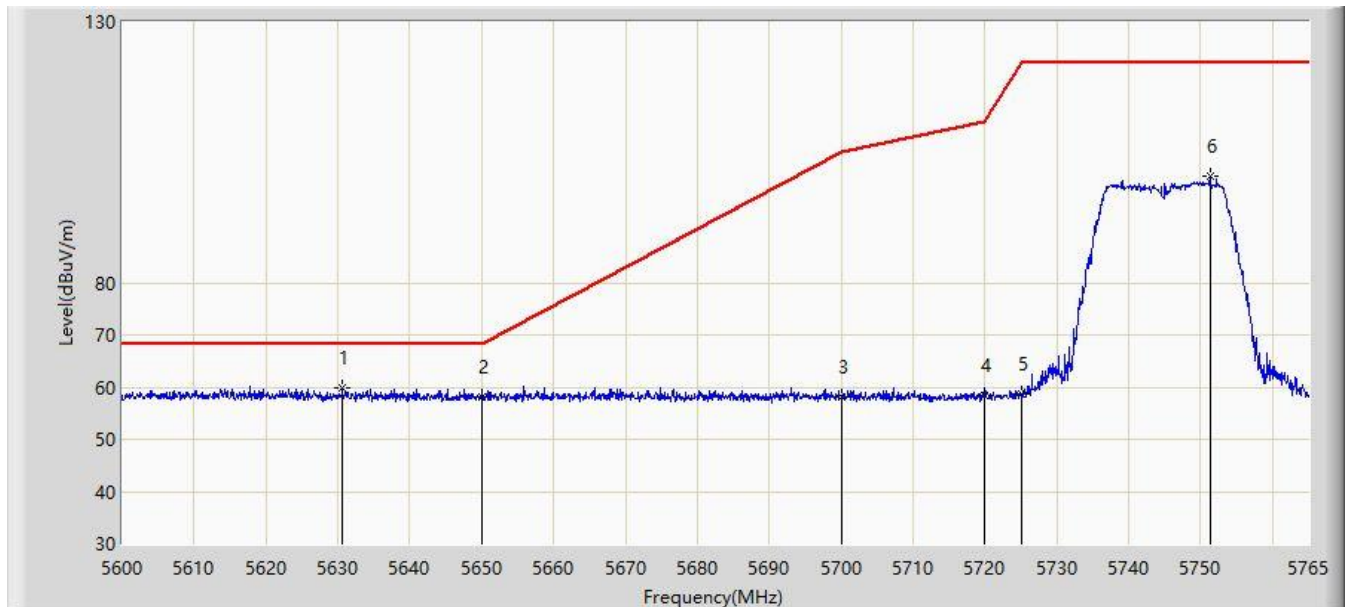


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5630.607        | 59.713                 | 54.519               | -8.487      | 68.200         | 5.194       | PK   |
| 2  |      | 5650.000        | 58.046                 | 52.710               | -10.154     | 68.200         | 5.336       | PK   |
| 3  |      | 5700.000        | 58.217                 | 52.899               | -46.983     | 105.200        | 5.318       | PK   |
| 4  |      | 5720.000        | 58.543                 | 53.069               | -52.257     | 110.800        | 5.474       | PK   |
| 5  |      | 5725.000        | 58.594                 | 53.116               | -63.606     | 122.200        | 5.478       | PK   |
| 6  |      | 5751.305        | 100.295                | 94.564               | N/A         | N/A            | 5.732       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/23 - 15:17 |
| Limit: FCC_Part15.407_Band Edge(3m)                     | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745 MHz |                          |

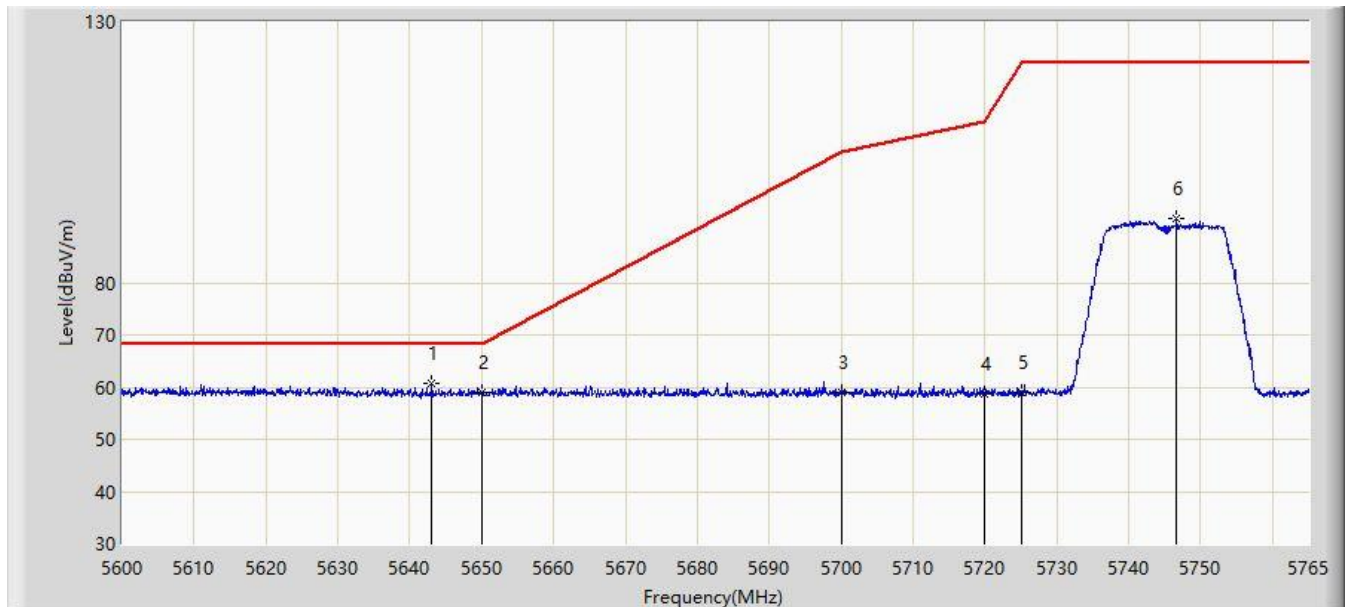


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5643.065        | 60.634                 | 55.411               | -7.566      | 68.200         | 5.223       | PK   |
| 2  |      | 5650.000        | 58.894                 | 53.558               | -9.306      | 68.200         | 5.336       | PK   |
| 3  |      | 5700.000        | 58.930                 | 53.612               | -46.270     | 105.200        | 5.318       | PK   |
| 4  |      | 5720.000        | 58.799                 | 53.325               | -52.001     | 110.800        | 5.474       | PK   |
| 5  |      | 5725.000        | 58.945                 | 53.467               | -63.255     | 122.200        | 5.478       | PK   |
| 6  |      | 5746.685        | 92.443                 | 86.803               | N/A         | N/A            | 5.640       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/23 - 15:27 |
| Limit: FCC_Part15.407_Band Edge(3m)                     | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Horizontal     |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825 MHz |                          |

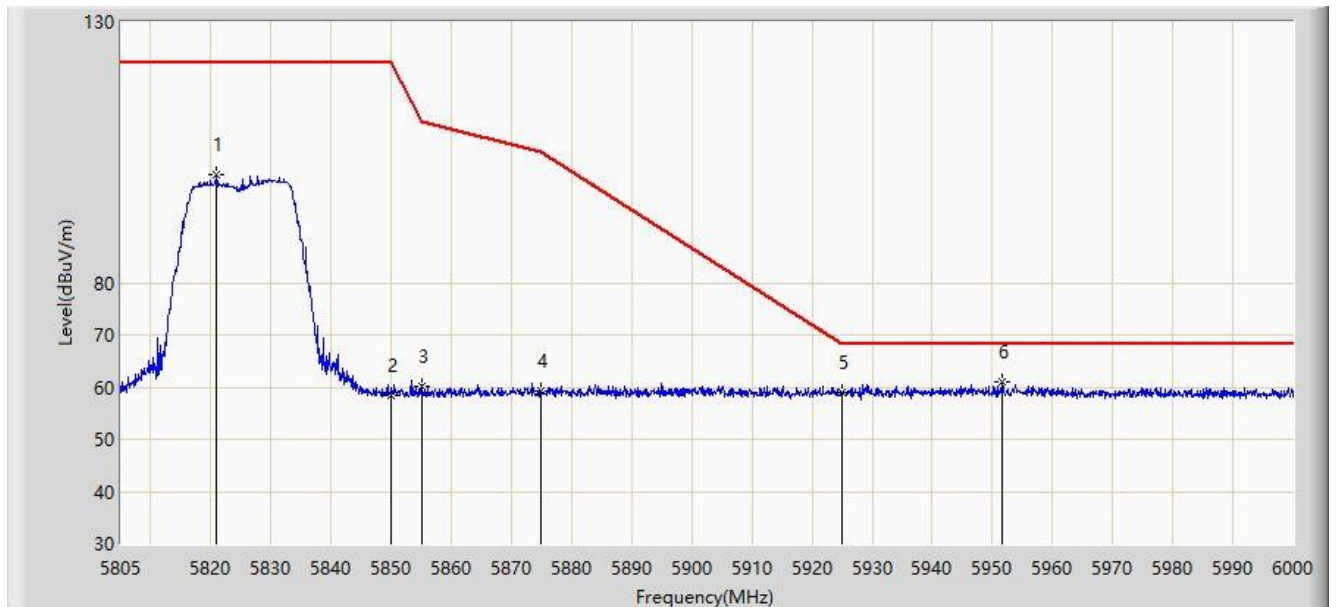


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5820.893        | 100.646                | 94.844               | N/A         | N/A            | 5.801       | PK   |
| 2  |      | 5850.000        | 58.482                 | 52.513               | -63.718     | 122.200        | 5.968       | PK   |
| 3  |      | 5855.000        | 60.075                 | 54.100               | -50.725     | 110.800        | 5.975       | PK   |
| 4  |      | 5875.000        | 59.320                 | 53.307               | -45.880     | 105.200        | 6.013       | PK   |
| 5  |      | 5925.000        | 59.026                 | 52.891               | -9.174      | 68.200         | 6.136       | PK   |
| 6  | *    | 5951.542        | 60.877                 | 54.836               | -7.323      | 68.200         | 6.041       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/23 - 15:29 |
| Limit: FCC_Part15.407_Band Edge(3m)                     | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825 MHz |                          |

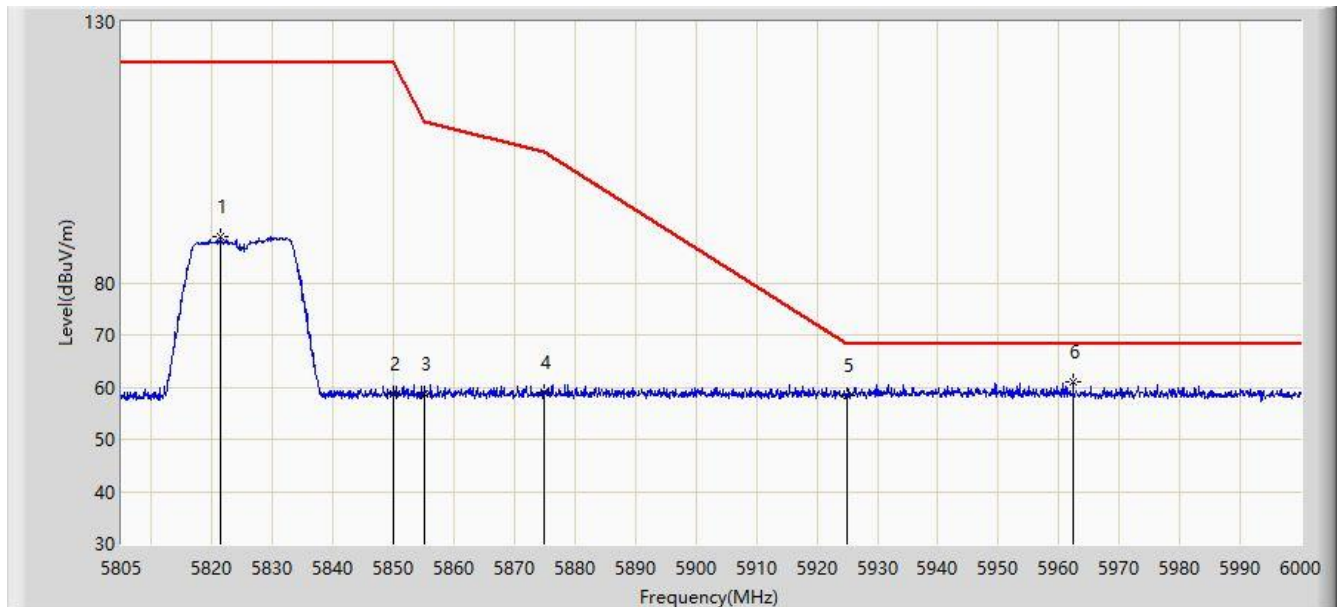


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5821.478        | 88.799                 | 83.002               | N/A         | N/A            | 5.797       | PK   |
| 2  |      | 5850.000        | 58.603                 | 52.634               | -63.597     | 122.200        | 5.968       | PK   |
| 3  |      | 5855.000        | 58.793                 | 52.818               | -52.007     | 110.800        | 5.975       | PK   |
| 4  |      | 5875.000        | 59.128                 | 53.115               | -46.072     | 105.200        | 6.013       | PK   |
| 5  |      | 5925.000        | 58.429                 | 52.294               | -9.771      | 68.200         | 6.136       | PK   |
| 6  | *    | 5962.365        | 61.116                 | 55.134               | -7.084      | 68.200         | 5.981       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/23 - 15:33 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Horizontal     |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190 MHz |                          |

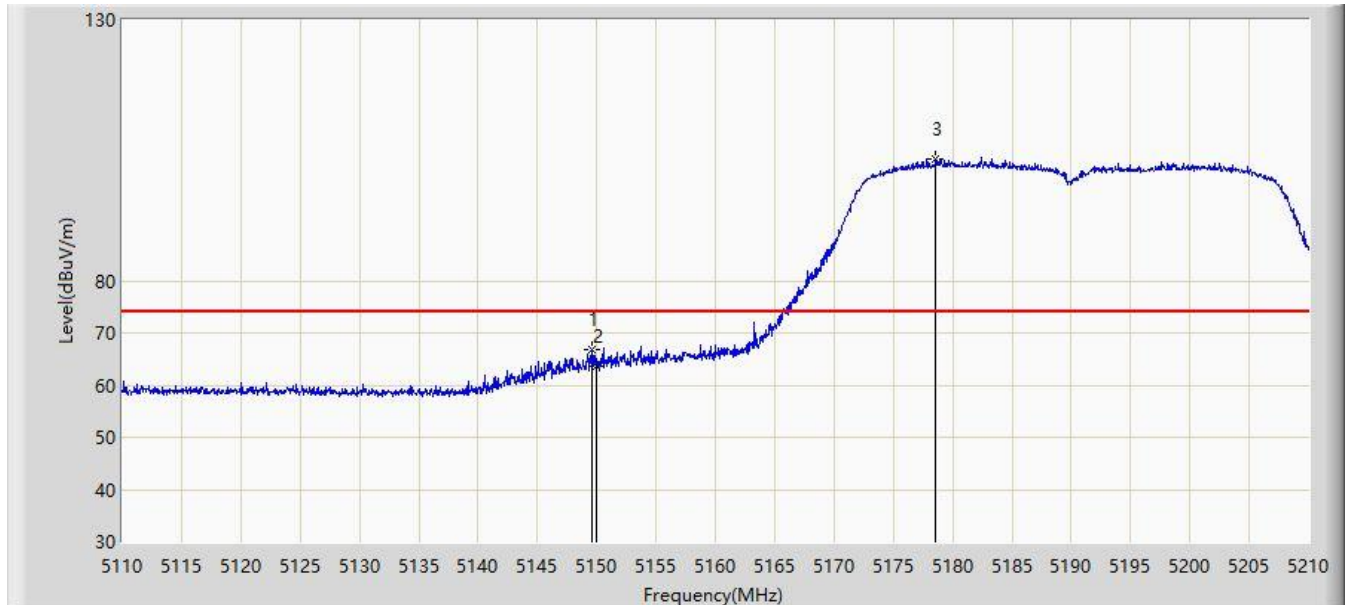


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5149.650        | 66.899                 | 62.461               | -7.101      | 74.000         | 4.438       | PK   |
| 2  |      | 5150.000        | 63.500                 | 59.058               | -10.500     | 74.000         | 4.442       | PK   |
| 3  | *    | 5178.600        | 103.426                | 98.929               | N/A         | N/A            | 4.497       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 11:38 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Horizontal     |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190 MHz |                          |

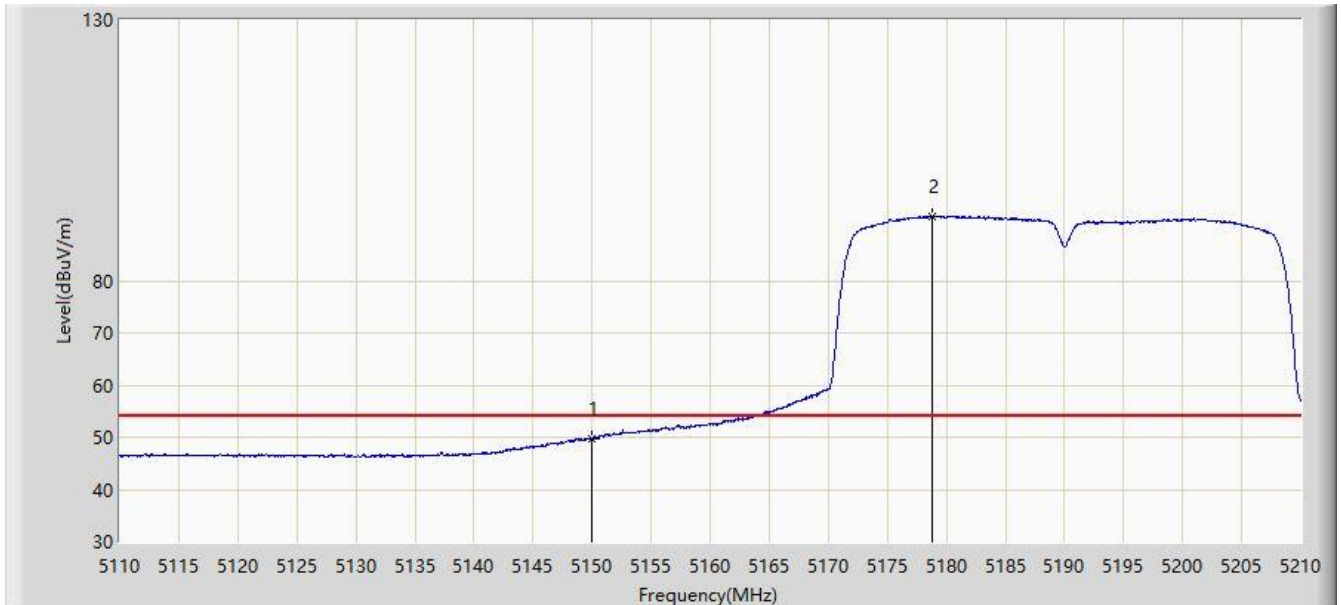


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5150.000        | 49.806                 | 45.364               | -4.194      | 54.000         | 4.442       | AV   |
| 2  | *    | 5178.750        | 92.326                 | 87.830               | N/A         | N/A            | 4.496       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 11:40 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190 MHz |                          |

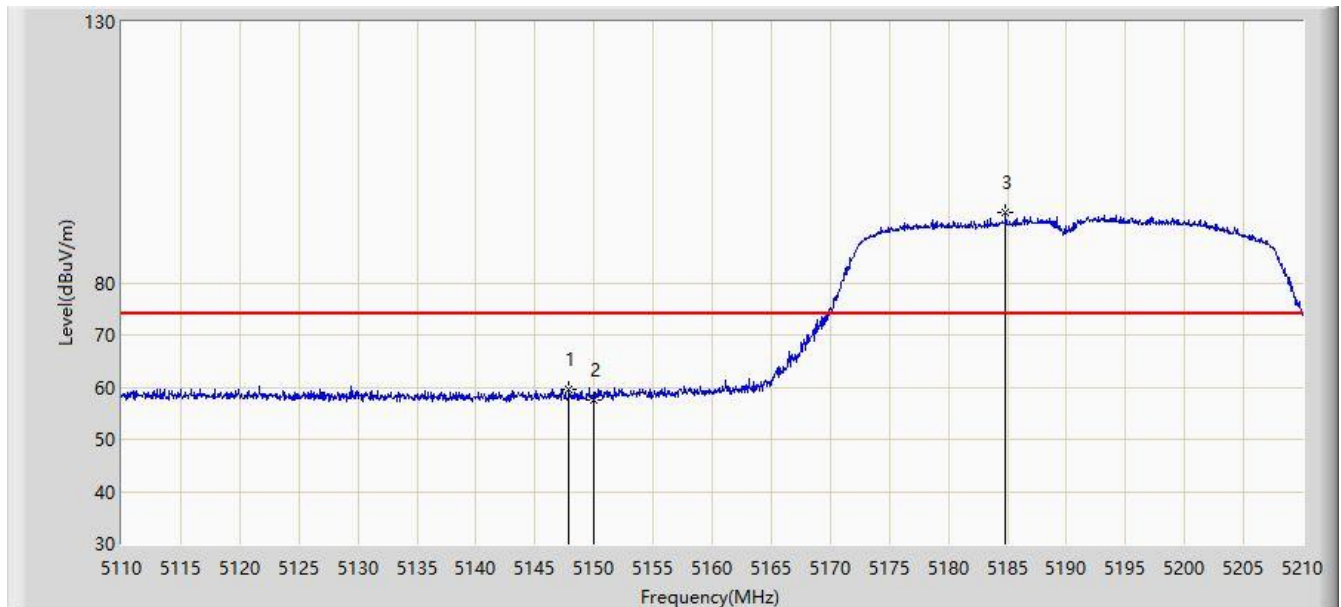


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5147.900        | 59.704                 | 55.284               | -14.296     | 74.000         | 4.419       | PK   |
| 2  |      | 5150.000        | 57.470                 | 53.028               | -16.530     | 74.000         | 4.442       | PK   |
| 3  | *    | 5184.850        | 93.390                 | 88.956               | N/A         | N/A            | 4.435       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 11:40 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190 MHz |                          |

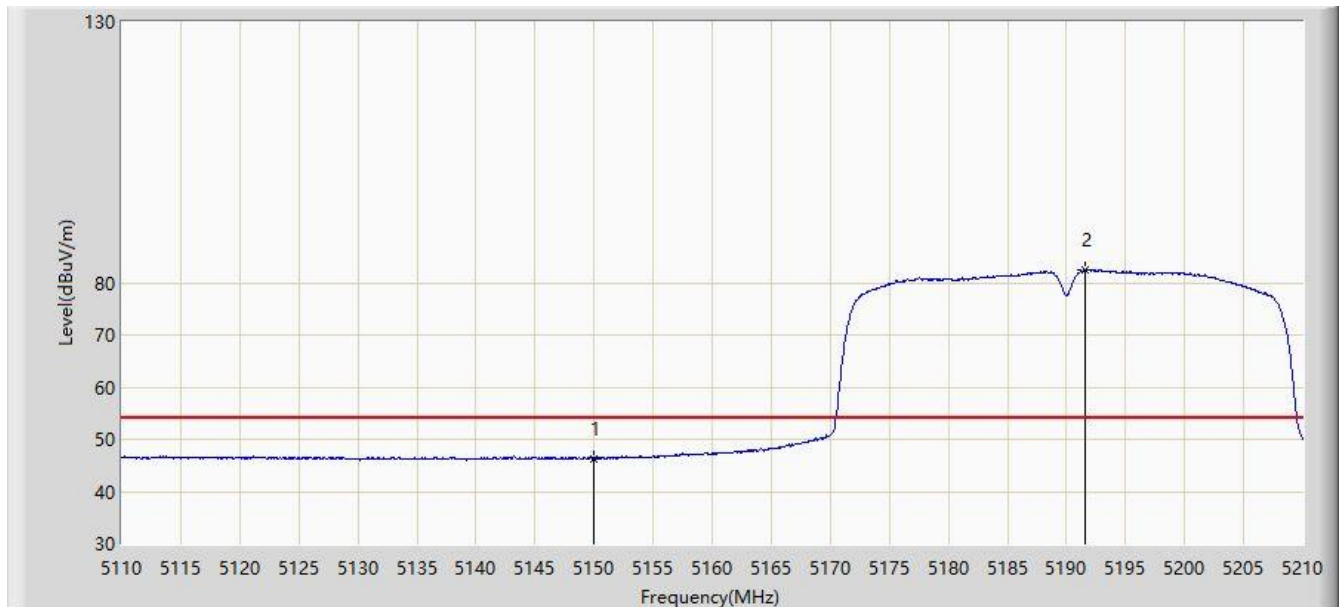


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5150.000        | 46.306                 | 41.864               | -7.694      | 54.000         | 4.442       | AV   |
| 2  | *    | 5191.600        | 82.397                 | 78.042               | N/A         | N/A            | 4.355       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 11:42 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310 MHz |                          |

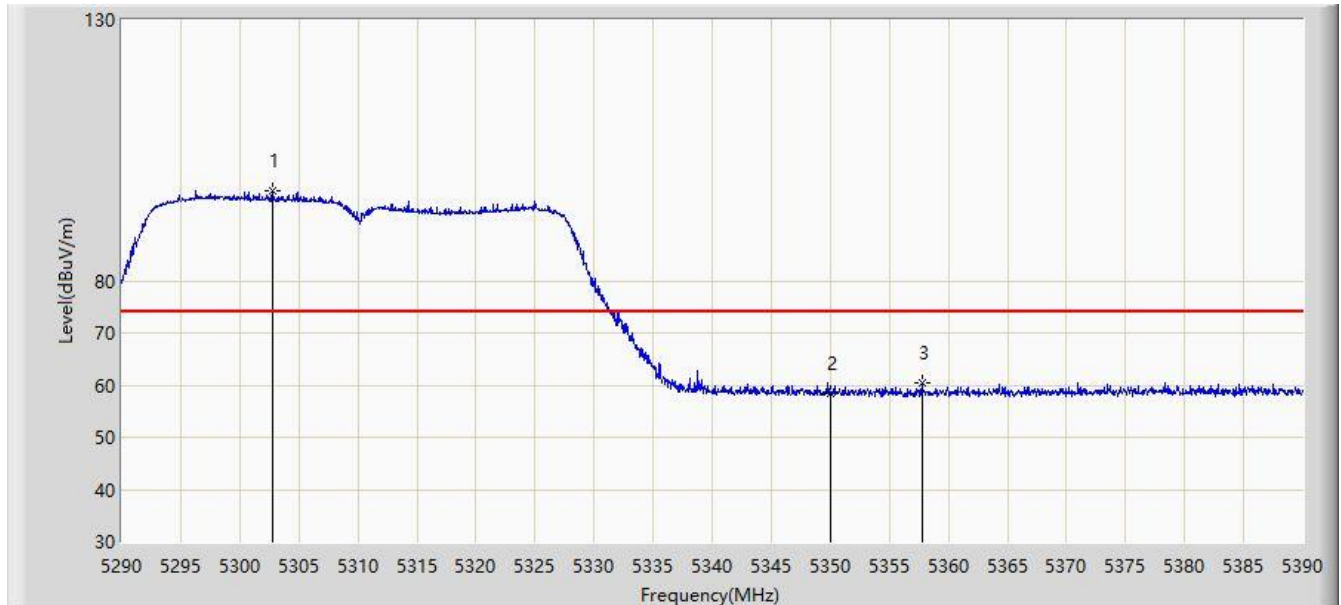


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5302.750        | 97.298                 | 92.911               | N/A         | N/A            | 4.387       | PK   |
| 2  |      | 5350.000        | 58.352                 | 54.175               | -15.648     | 74.000         | 4.177       | PK   |
| 3  |      | 5357.750        | 60.298                 | 56.089               | -13.702     | 74.000         | 4.210       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 11:45 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310 MHz |                          |

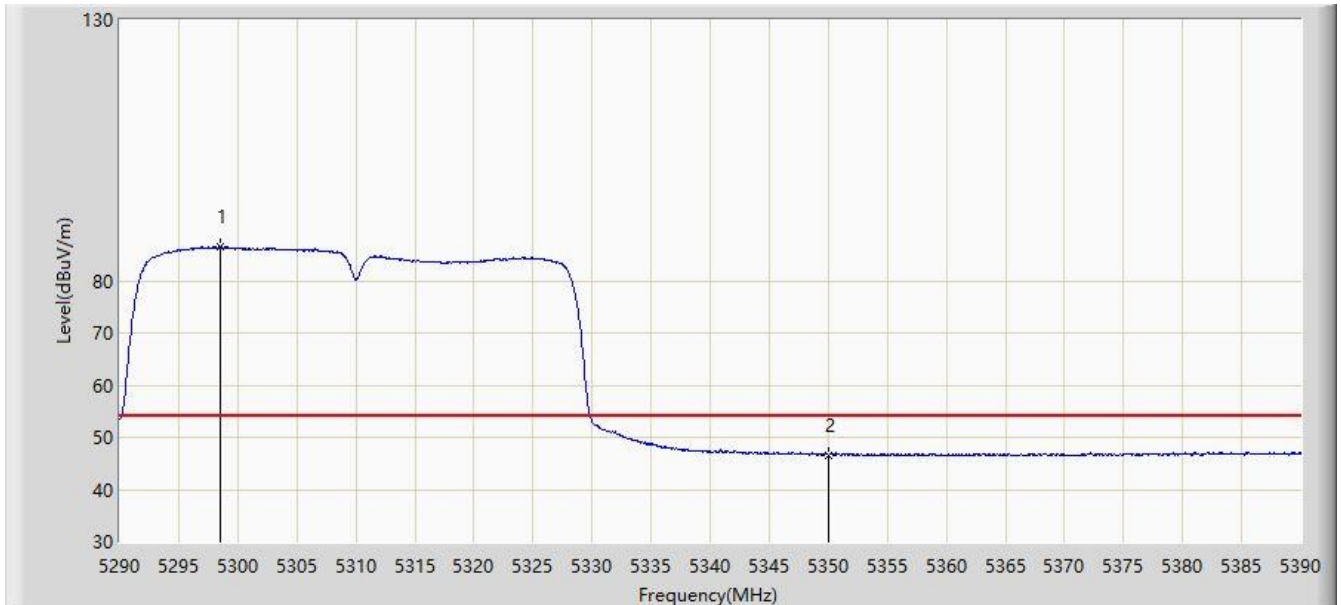


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5298.500        | 86.380                 | 81.971               | N/A         | N/A            | 4.409       | AV   |
| 2  |      | 5350.000        | 46.602                 | 42.425               | -7.398      | 54.000         | 4.177       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 11:46 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Horizontal     |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310 MHz |                          |

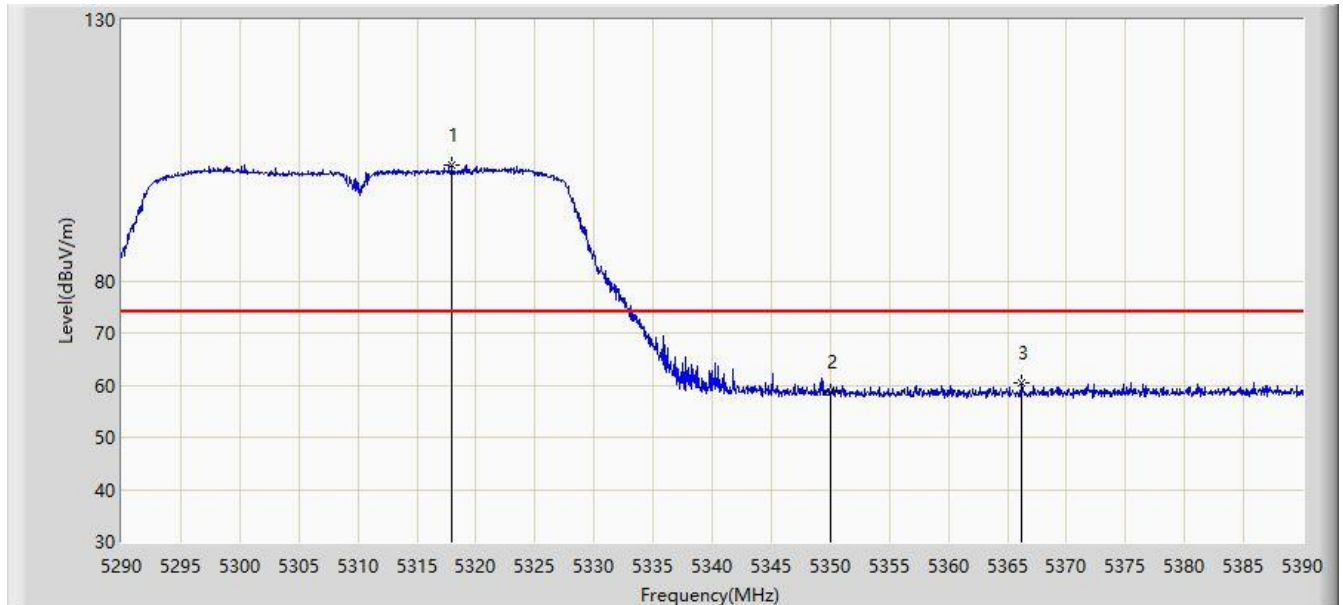


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5317.950        | 102.218                | 98.145               | N/A         | N/A            | 4.073       | PK   |
| 2  |      | 5350.000        | 58.705                 | 54.528               | -15.295     | 74.000         | 4.177       | PK   |
| 3  |      | 5366.250        | 60.511                 | 56.275               | -13.489     | 74.000         | 4.237       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 11:51 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Horizontal     |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310 MHz |                          |

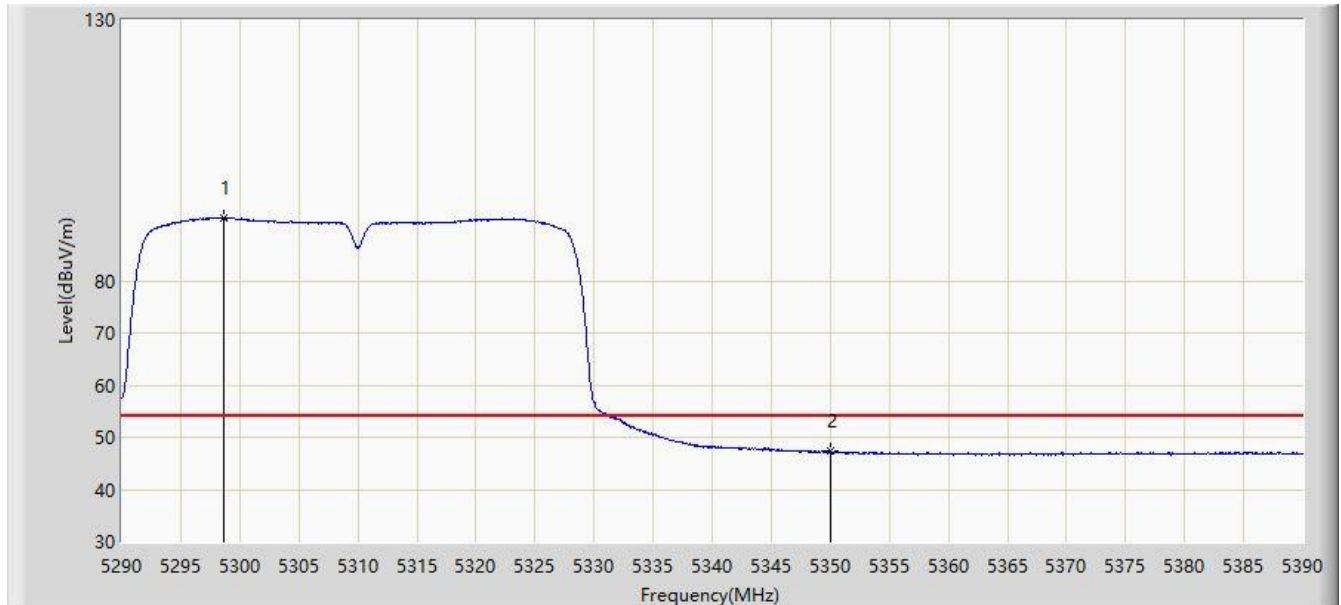


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5298.650        | 91.999                 | 87.589               | N/A         | N/A            | 4.410       | AV   |
| 2  |      | 5350.000        | 47.296                 | 43.119               | -6.704      | 54.000         | 4.177       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 11:53 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Horizontal     |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510 MHz |                          |

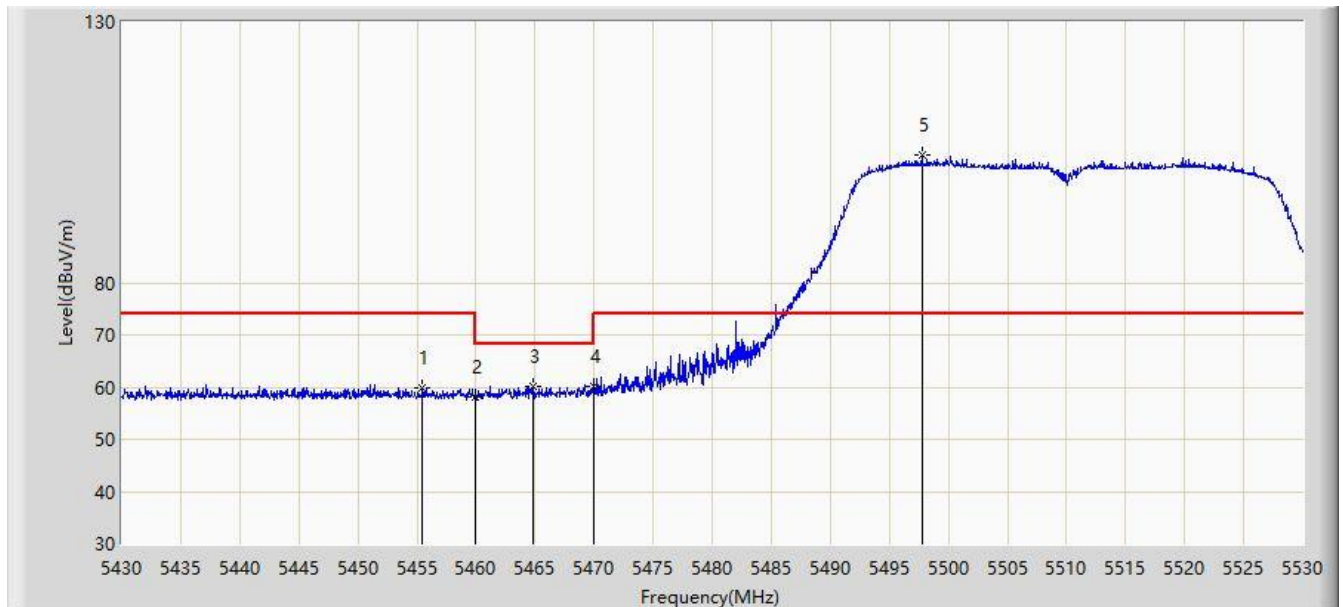


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5455.450        | 59.989                 | 55.556               | -14.011     | 74.000         | 4.433       | PK   |
| 2  |      | 5460.000        | 58.249                 | 53.809               | -15.751     | 74.000         | 4.440       | PK   |
| 3  |      | 5464.800        | 60.093                 | 55.646               | -8.107      | 68.200         | 4.448       | PK   |
| 4  |      | 5470.000        | 60.240                 | 55.784               | -7.960      | 68.200         | 4.455       | PK   |
| 5  | *    | 5497.750        | 104.491                | 99.994               | N/A         | N/A            | 4.496       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 11:54 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Horizontal     |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510 MHz |                          |

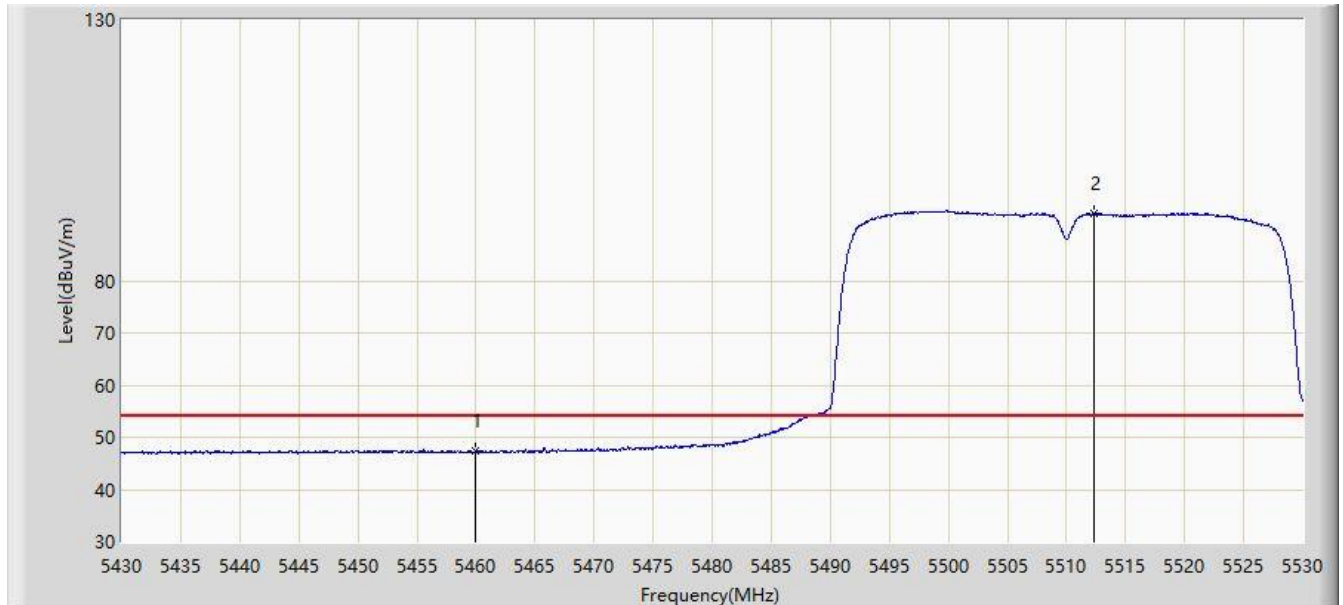


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5460.000        | 47.250                 | 42.810               | -6.750      | 54.000         | 4.440       | AV   |
| 2  | *    | 5512.300        | 92.911                 | 88.302               | N/A         | N/A            | 4.609       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 11:54 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510 MHz |                          |

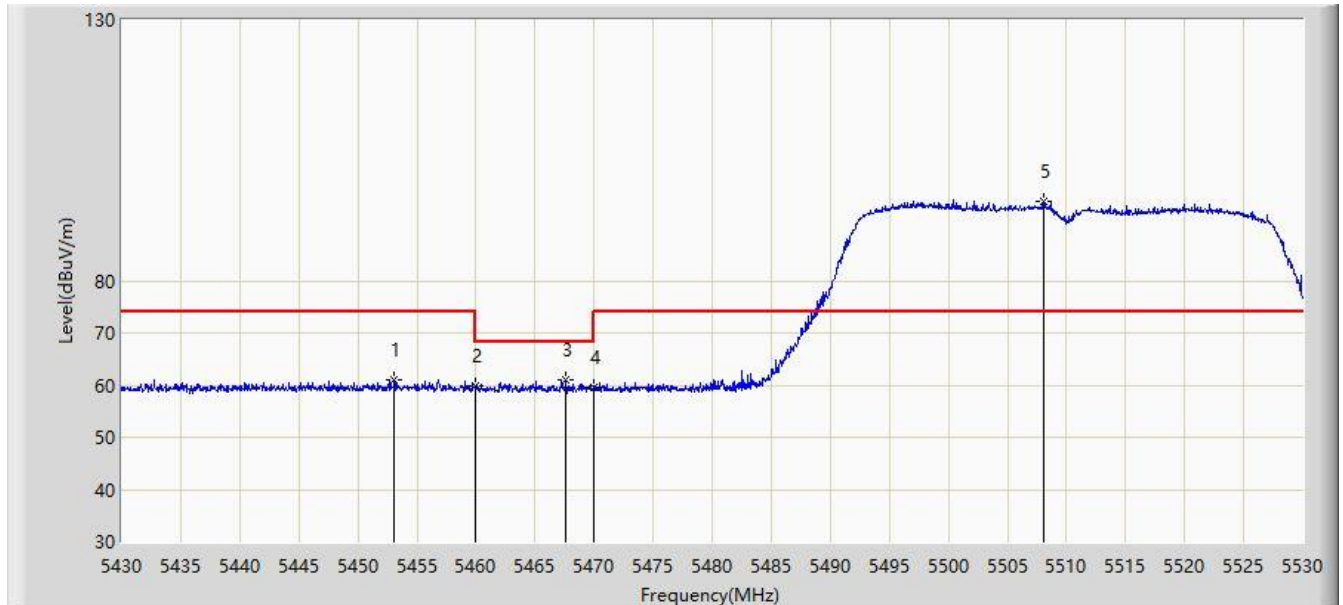


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5453.050        | 60.966                 | 56.520               | -13.034     | 74.000         | 4.446       | PK   |
| 2  |      | 5460.000        | 59.777                 | 55.337               | -14.223     | 74.000         | 4.440       | PK   |
| 3  |      | 5467.650        | 60.987                 | 56.535               | -7.213      | 68.200         | 4.452       | PK   |
| 4  |      | 5470.000        | 59.710                 | 55.254               | -8.490      | 68.200         | 4.455       | PK   |
| 5  | *    | 5508.100        | 95.093                 | 90.586               | N/A         | N/A            | 4.507       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 12:00 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510 MHz |                          |

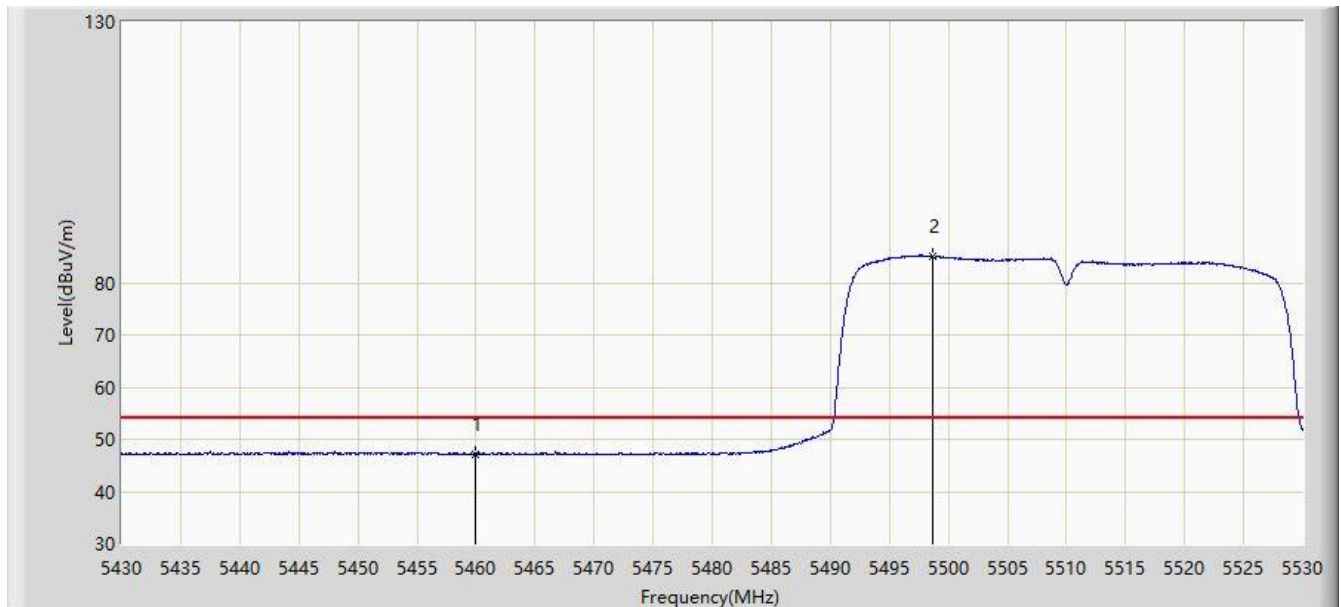


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5460.000        | 47.180                 | 42.740               | -6.820      | 54.000         | 4.440       | AV   |
| 2  | *    | 5498.650        | 85.144                 | 80.655               | N/A         | N/A            | 4.489       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 13:16 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5670 MHz |                          |

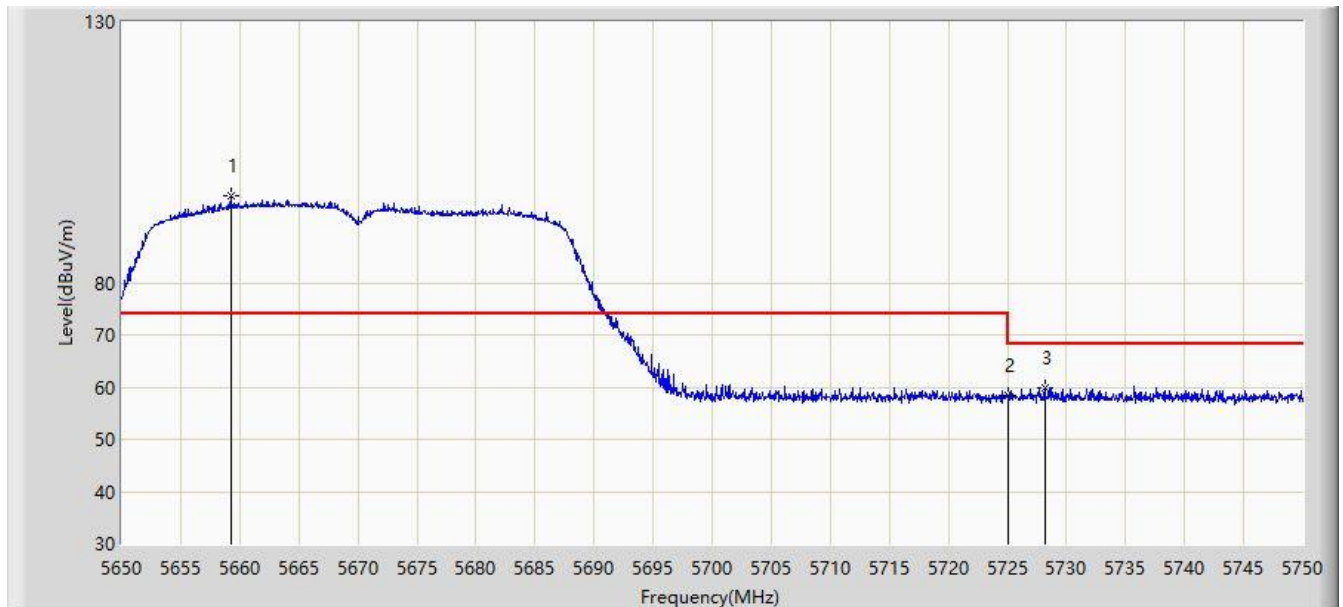


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5659.250        | 96.760                 | 91.297               | N/A         | N/A            | 5.464       | PK   |
| 2  |      | 5725.000        | 58.357                 | 52.879               | -9.843      | 68.200         | 5.478       | PK   |
| 3  |      | 5728.150        | 59.716                 | 54.226               | -8.484      | 68.200         | 5.491       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 13:17 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Horizontal     |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5670 MHz |                          |

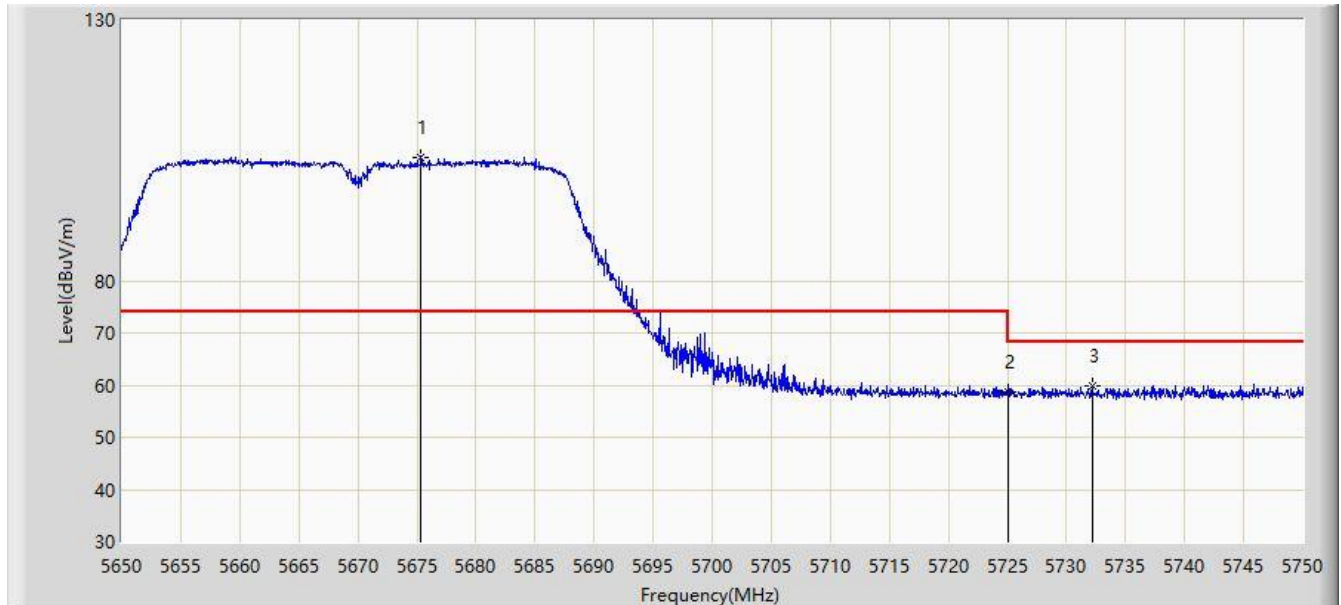


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5675.350        | 103.768                | 98.350               | N/A         | N/A            | 5.417       | PK   |
| 2  |      | 5725.000        | 58.614                 | 53.136               | -9.586      | 68.200         | 5.478       | PK   |
| 3  |      | 5732.150        | 59.952                 | 54.441               | -8.248      | 68.200         | 5.510       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 13:18 |
| Limit: FCC_Part15.407_Band Edge(3m)                     | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Horizontal     |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5755 MHz |                          |

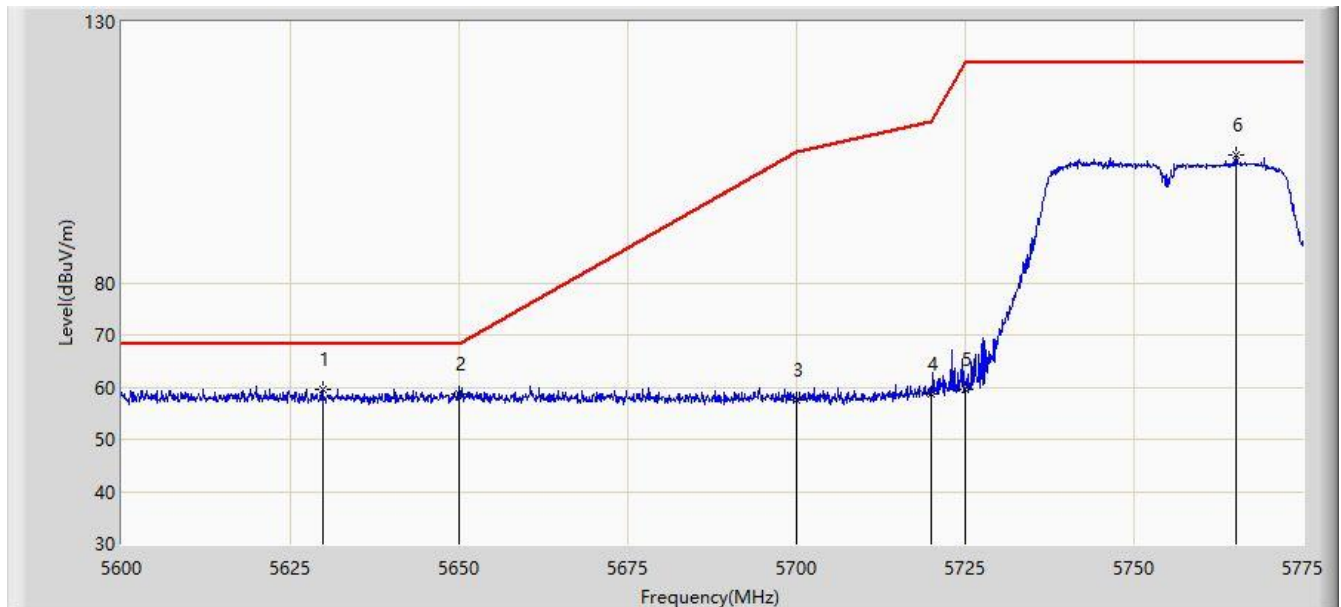


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5629.837        | 59.547                 | 54.352               | -8.653      | 68.200         | 5.195       | PK   |
| 2  |      | 5650.000        | 58.601                 | 53.265               | -9.599      | 68.200         | 5.336       | PK   |
| 3  |      | 5700.000        | 57.440                 | 52.122               | -47.760     | 105.200        | 5.318       | PK   |
| 4  |      | 5720.000        | 58.644                 | 53.170               | -52.156     | 110.800        | 5.474       | PK   |
| 5  |      | 5725.000        | 59.596                 | 54.118               | -62.604     | 122.200        | 5.478       | PK   |
| 6  |      | 5765.025        | 104.467                | 98.621               | N/A         | N/A            | 5.846       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 13:19 |
| Limit: FCC_Part15.407_Band Edge(3m)                     | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5755 MHz |                          |

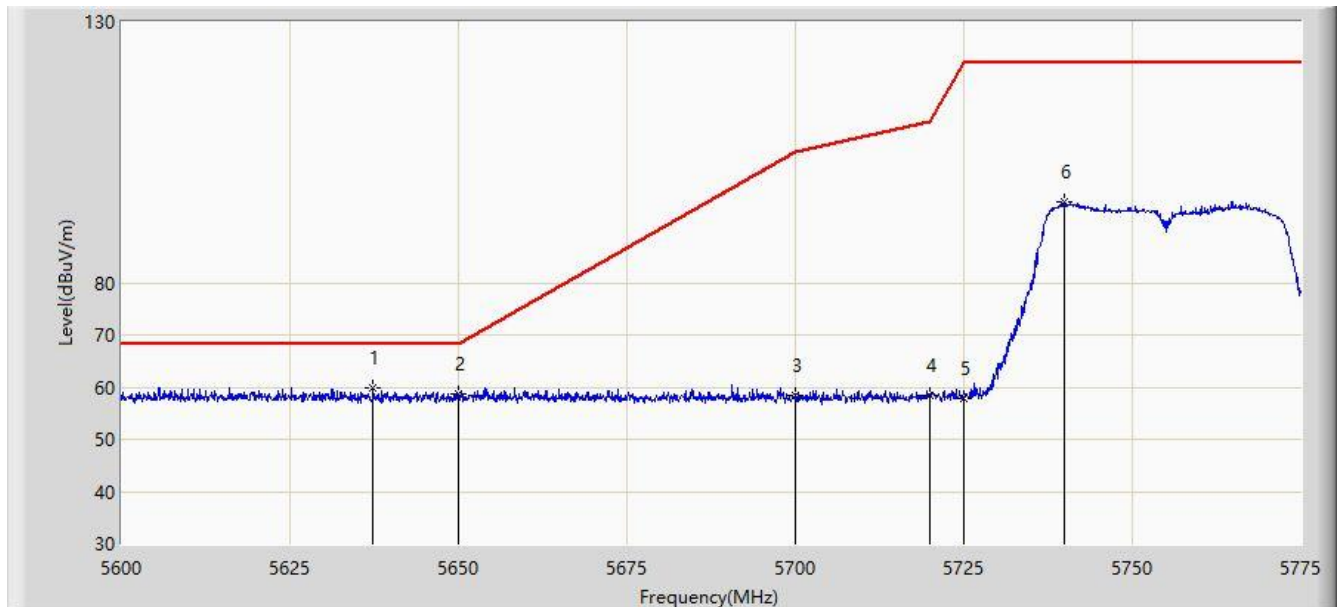


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5637.362        | 59.740                 | 54.549               | -8.460      | 68.200         | 5.191       | PK   |
| 2  |      | 5650.000        | 58.626                 | 53.290               | -9.574      | 68.200         | 5.336       | PK   |
| 3  |      | 5700.000        | 58.455                 | 53.137               | -46.745     | 105.200        | 5.318       | PK   |
| 4  |      | 5720.000        | 58.302                 | 52.828               | -52.498     | 110.800        | 5.474       | PK   |
| 5  |      | 5725.000        | 57.879                 | 52.401               | -64.321     | 122.200        | 5.478       | PK   |
| 6  |      | 5739.825        | 95.517                 | 89.966               | N/A         | N/A            | 5.551       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 13:22 |
| Limit: FCC_Part15.407_Band Edge(3m)                     | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Vertical       |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5795 MHz |                          |

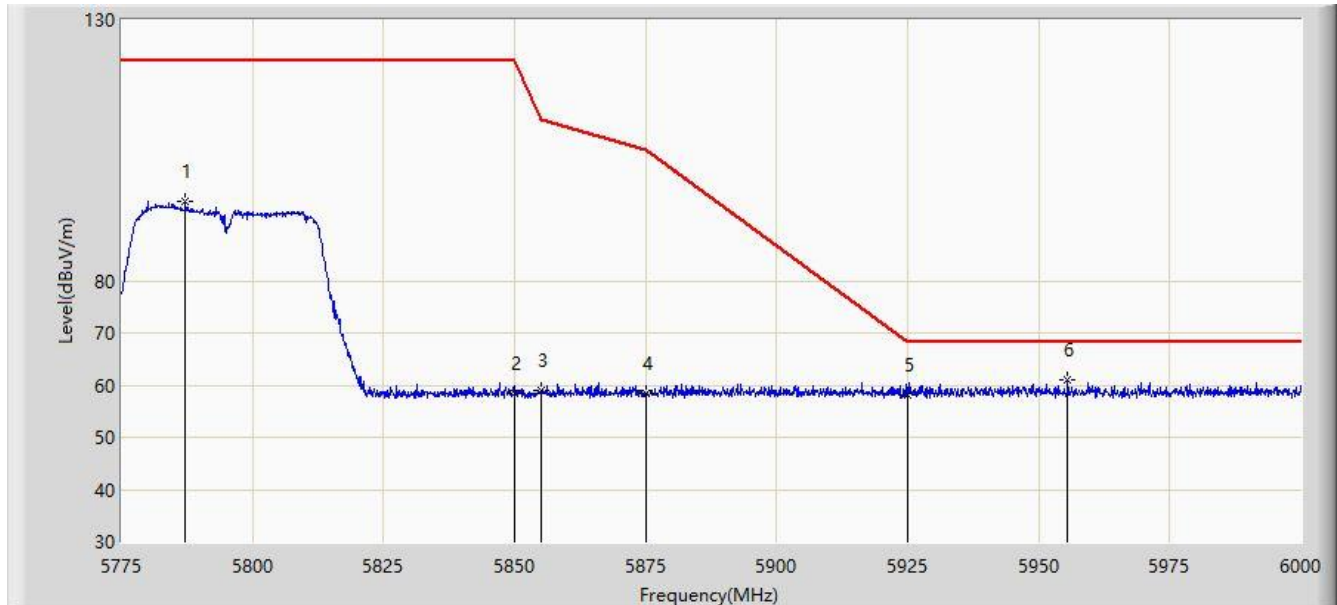


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5787.263        | 95.168                 | 89.375               | N/A         | N/A            | 5.793       | PK   |
| 2  |      | 5850.000        | 58.301                 | 52.332               | -63.899     | 122.200        | 5.968       | PK   |
| 3  |      | 5855.000        | 59.001                 | 53.026               | -51.799     | 110.800        | 5.975       | PK   |
| 4  |      | 5875.000        | 58.358                 | 52.345               | -46.842     | 105.200        | 6.013       | PK   |
| 5  |      | 5925.000        | 58.121                 | 51.986               | -10.079     | 68.200         | 6.136       | PK   |
| 6  | *    | 5955.562        | 60.972                 | 54.953               | -7.228      | 68.200         | 6.019       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2020/02/24 - 13:24 |
| Limit: FCC_Part15.407_Band Edge(3m)                     | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                            | Polarity: Horizontal     |
| EUT: Mobile Computer                                    | Power: Power by PC       |
| Test Mode: Transmit by 802.11n-HT40 at channel 5795 MHz |                          |

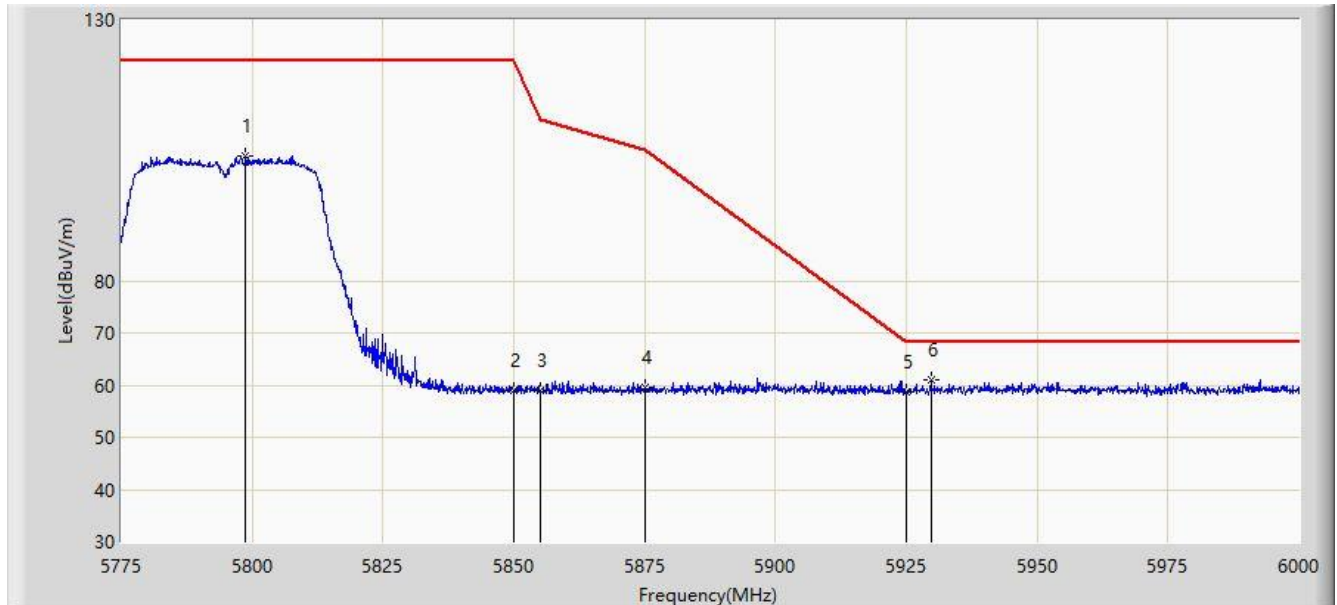


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5798.737        | 104.047                | 98.191               | N/A         | N/A            | 5.856       | PK   |
| 2  |      | 5850.000        | 58.924                 | 52.955               | -63.276     | 122.200        | 5.968       | PK   |
| 3  |      | 5855.000        | 58.854                 | 52.879               | -51.946     | 110.800        | 5.975       | PK   |
| 4  |      | 5875.000        | 59.428                 | 53.415               | -45.772     | 105.200        | 6.013       | PK   |
| 5  |      | 5925.000        | 58.626                 | 52.491               | -9.574      | 68.200         | 6.136       | PK   |
| 6  | *    | 5929.687        | 61.131                 | 54.974               | -7.069      | 68.200         | 6.156       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:27 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180 MHz |                          |

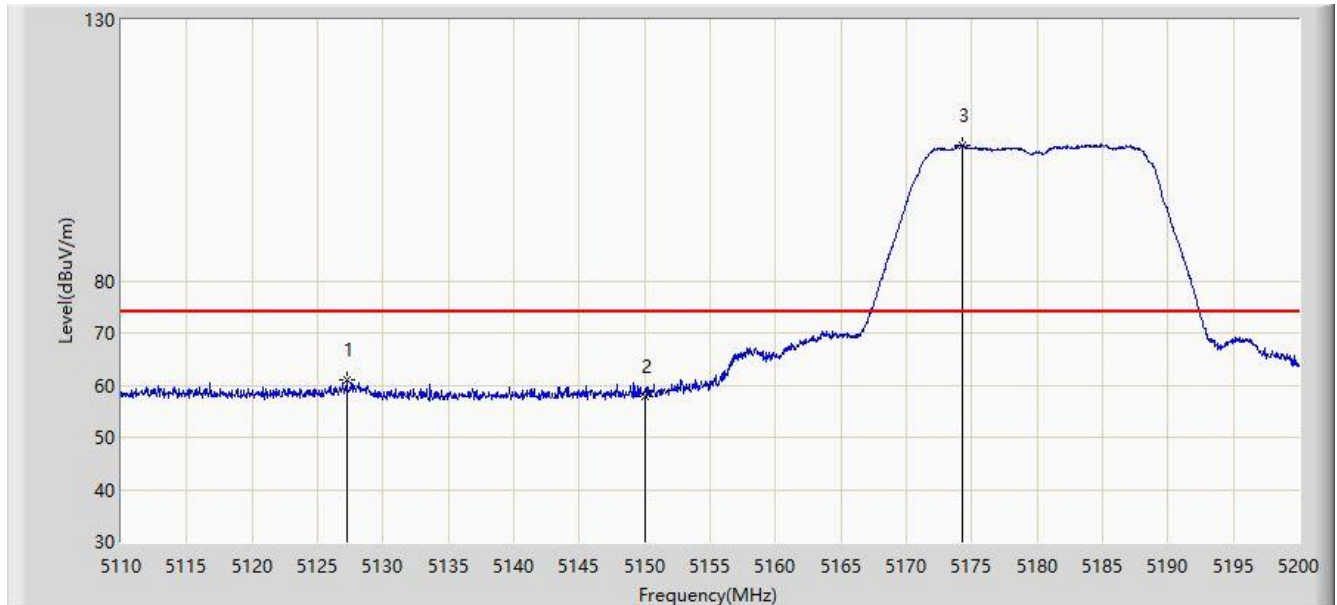


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5127.235        | 60.969                 | 56.524               | -13.031     | 74.000         | 4.444       | PK   |
| 2  |      | 5150.000        | 57.826                 | 53.384               | -16.174     | 74.000         | 4.442       | PK   |
| 3  | *    | 5174.260        | 106.008                | 101.474              | N/A         | N/A            | 4.534       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:31 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180 MHz |                          |

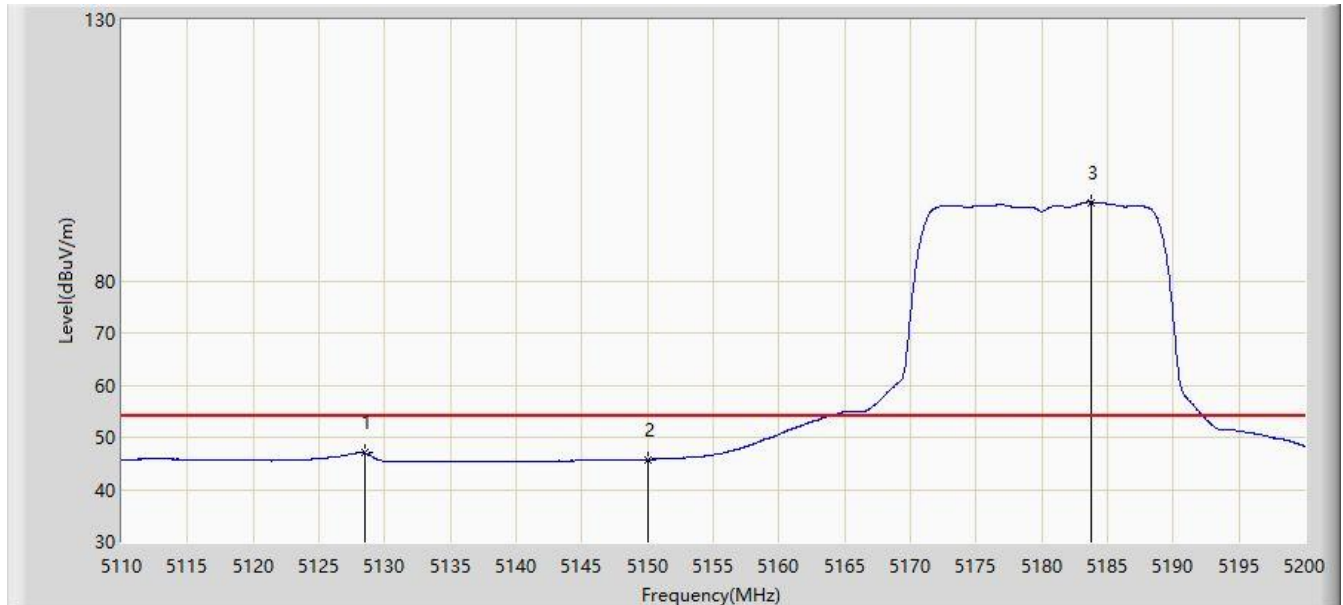


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5128.450        | 47.010                 | 42.572               | -6.990      | 54.000         | 4.438       | AV   |
| 2  |      | 5150.000        | 45.789                 | 41.347               | -8.211      | 54.000         | 4.442       | AV   |
| 3  | *    | 5183.710        | 95.068                 | 90.620               | N/A         | N/A            | 4.447       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:32 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180 MHz |                          |

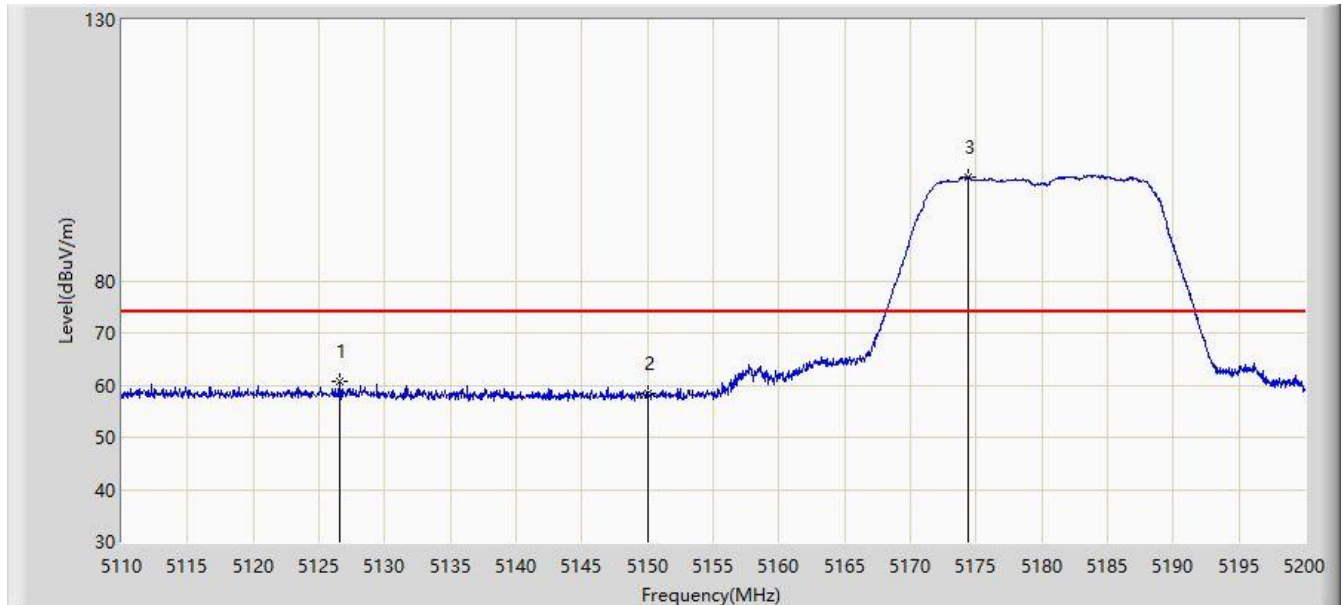


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5126.560        | 60.813                 | 56.364               | -13.187     | 74.000         | 4.449       | PK   |
| 2  |      | 5150.000        | 58.392                 | 53.950               | -15.608     | 74.000         | 4.442       | PK   |
| 3  | *    | 5174.350        | 99.863                 | 95.330               | N/A         | N/A            | 4.532       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:33 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180 MHz |                          |

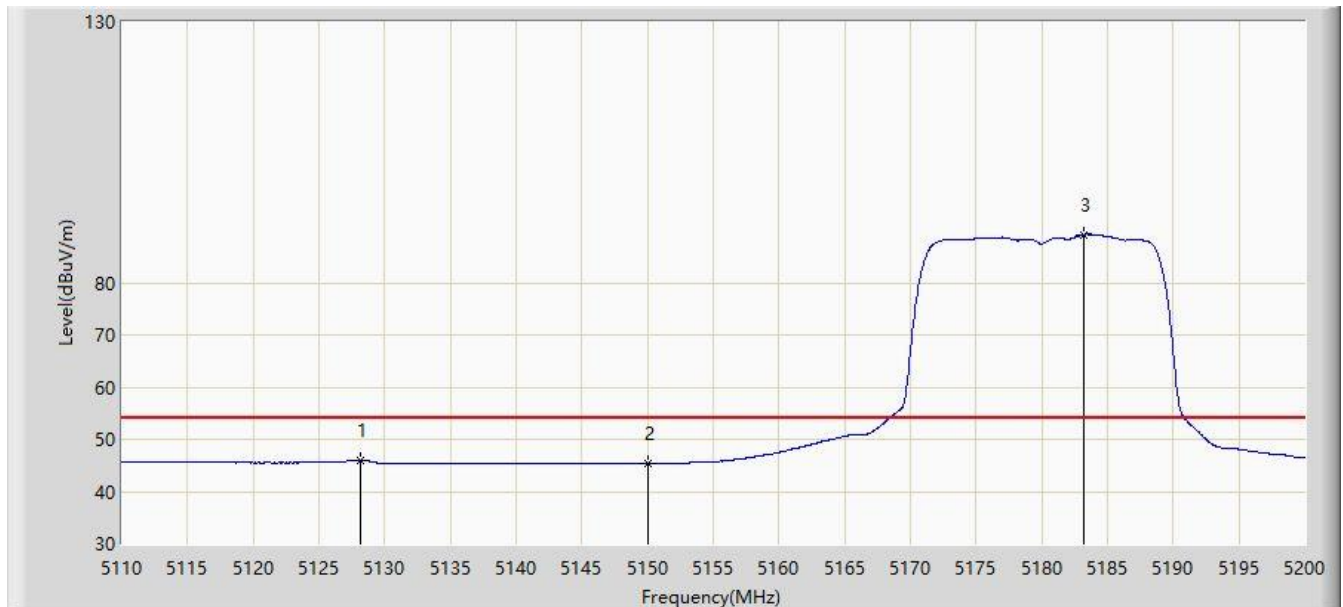


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5128.135        | 45.986                 | 41.547               | -8.014      | 54.000         | 4.440       | AV   |
| 2  |      | 5150.000        | 45.404                 | 40.962               | -8.596      | 54.000         | 4.442       | AV   |
| 3  | *    | 5183.170        | 89.212                 | 84.758               | N/A         | N/A            | 4.454       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:34 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320 MHz |                          |

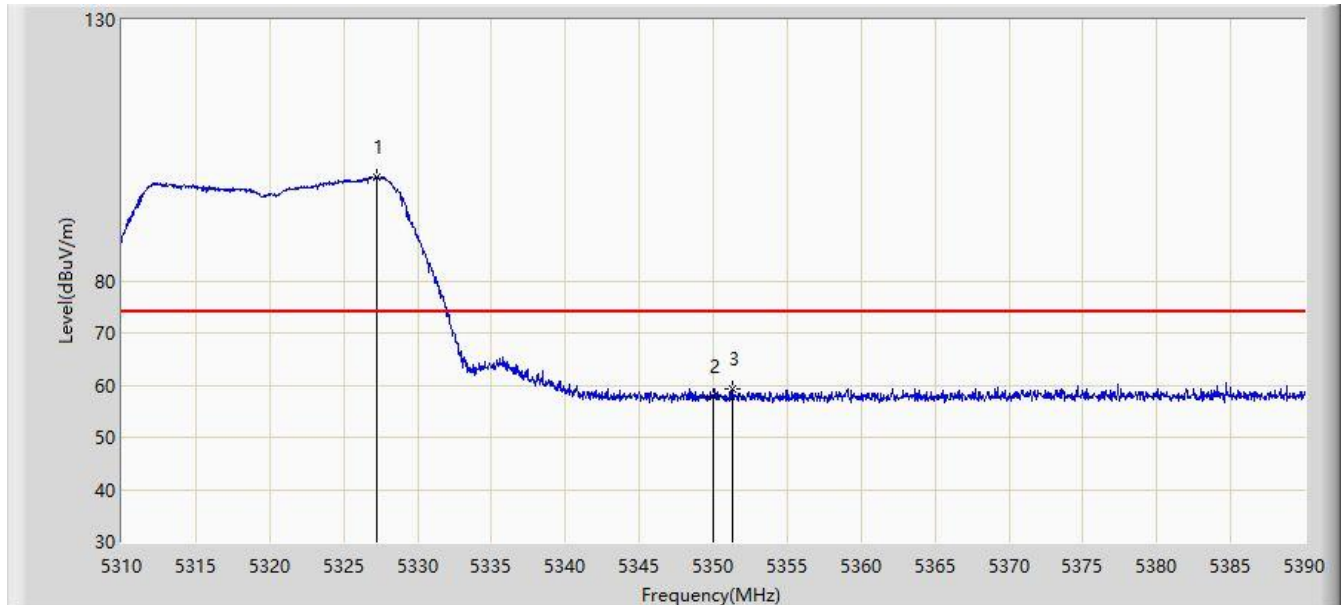


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5327.280        | 99.766                 | 95.693               | N/A         | N/A            | 4.074       | PK   |
| 2  |      | 5350.000        | 57.821                 | 53.644               | -16.179     | 74.000         | 4.177       | PK   |
| 3  |      | 5351.320        | 59.388                 | 55.202               | -14.612     | 74.000         | 4.186       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:36 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320 MHz |                          |

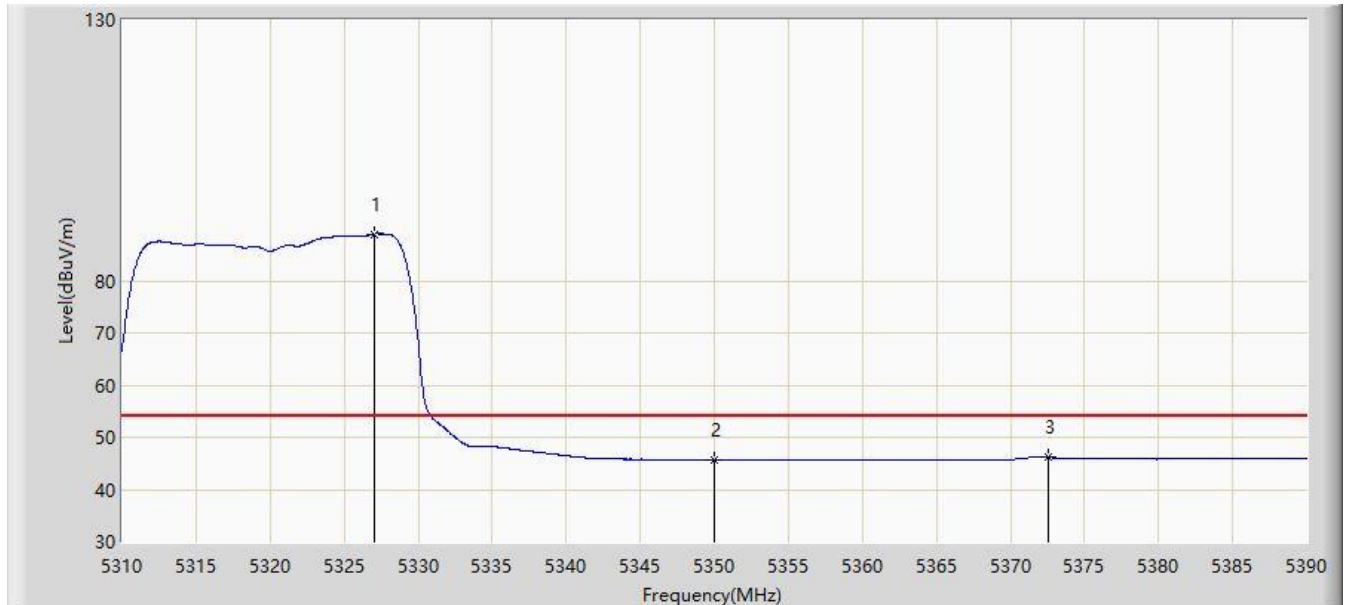


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5327.000        | 88.914                 | 84.841               | N/A         | N/A            | 4.073       | AV   |
| 2  |      | 5350.000        | 45.698                 | 41.521               | -8.302      | 54.000         | 4.177       | AV   |
| 3  |      | 5372.520        | 46.128                 | 41.807               | -7.872      | 54.000         | 4.321       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:36 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320 MHz |                          |

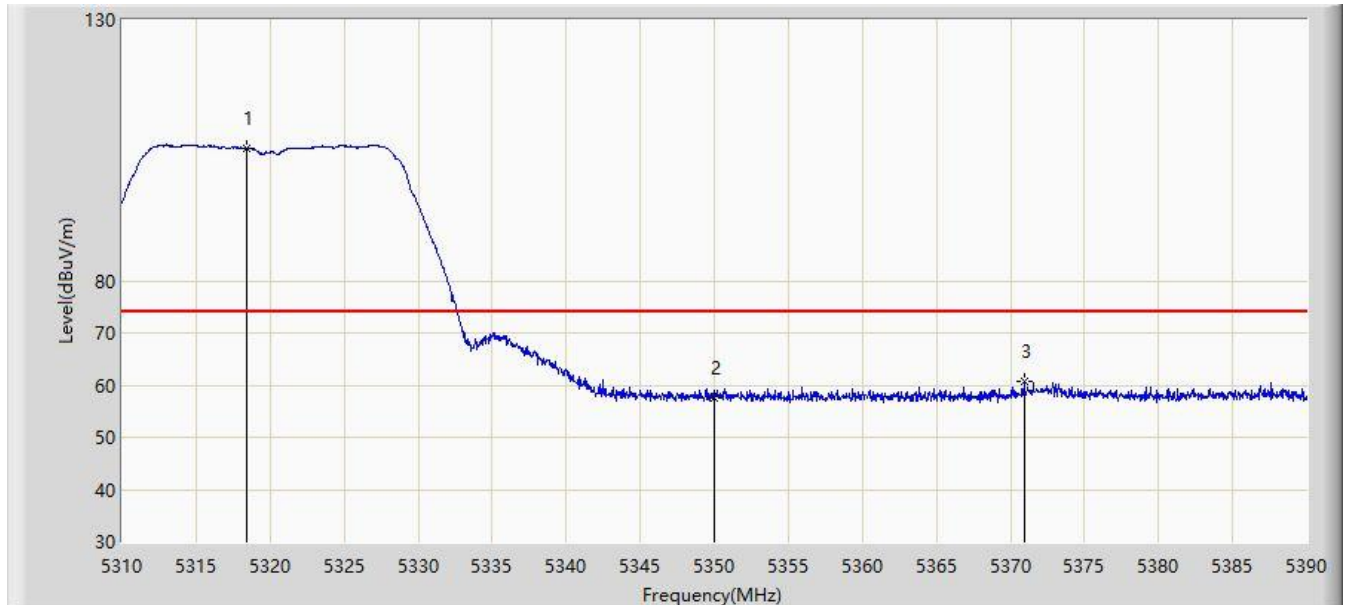


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5318.400        | 105.443                | 101.371              | N/A         | N/A            | 4.072       | PK   |
| 2  |      | 5350.000        | 57.452                 | 53.275               | -16.548     | 74.000         | 4.177       | PK   |
| 3  |      | 5370.920        | 60.844                 | 56.558               | -13.156     | 74.000         | 4.286       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:37 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320 MHz |                          |

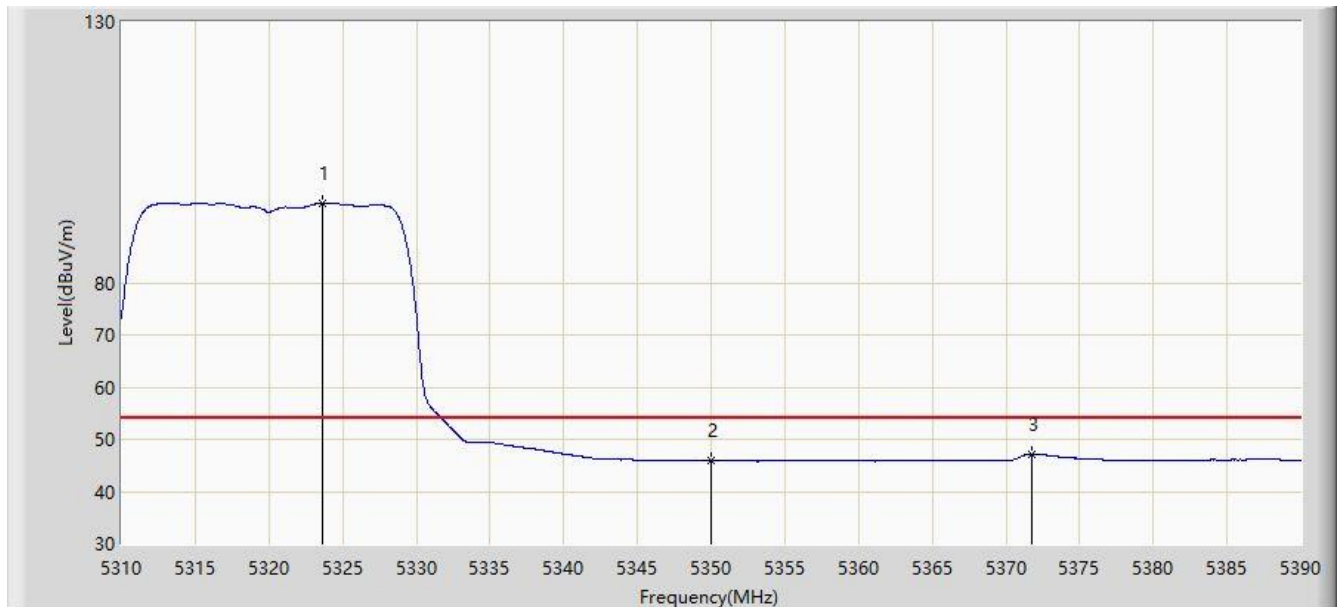


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5323.640        | 95.188                 | 91.115               | N/A         | N/A            | 4.073       | AV   |
| 2  |      | 5350.000        | 45.907                 | 41.730               | -8.093      | 54.000         | 4.177       | AV   |
| 3  |      | 5371.760        | 47.238                 | 42.933               | -6.762      | 54.000         | 4.305       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:38 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500 MHz |                          |

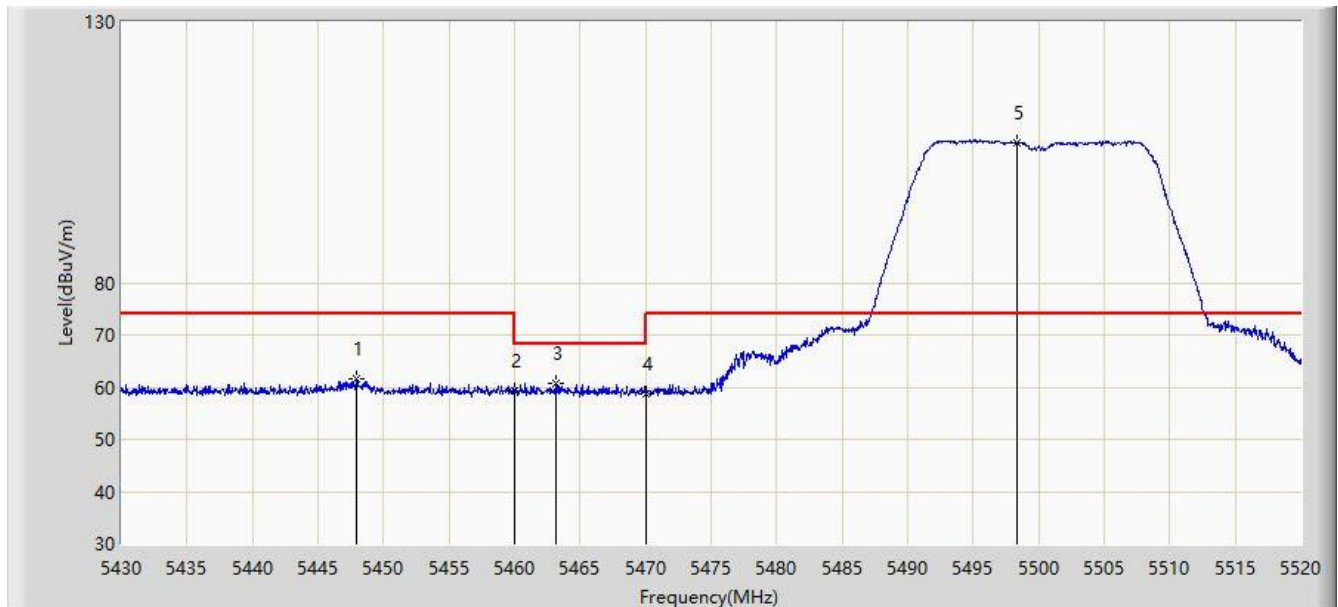


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5447.955        | 61.470                 | 56.941               | -12.530     | 74.000         | 4.530       | PK   |
| 2  |      | 5460.000        | 59.408                 | 54.968               | -14.592     | 74.000         | 4.440       | PK   |
| 3  |      | 5463.210        | 60.599                 | 56.154               | -7.601      | 68.200         | 4.445       | PK   |
| 4  |      | 5470.000        | 58.693                 | 54.237               | -9.507      | 68.200         | 4.455       | PK   |
| 5  | *    | 5498.400        | 106.885                | 102.394              | N/A         | N/A            | 4.491       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:41 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500 MHz |                          |

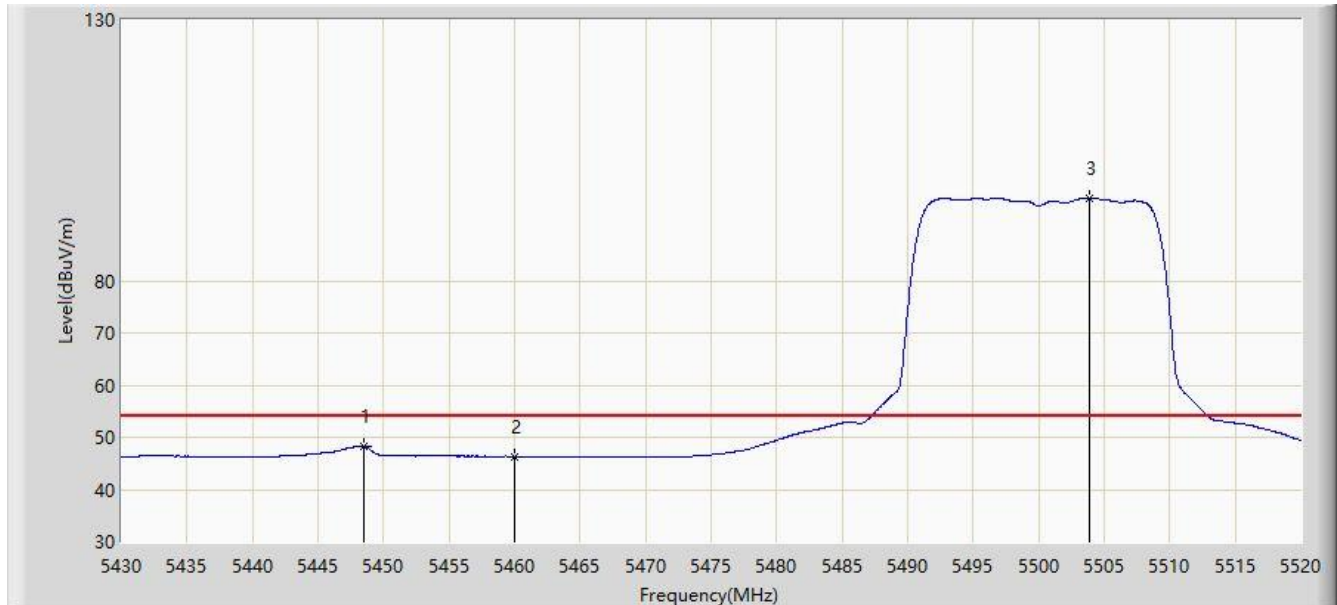


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5448.450        | 48.262                 | 43.741               | -5.738      | 54.000         | 4.521       | AV   |
| 2  |      | 5460.000        | 46.363                 | 41.923               | -7.637      | 54.000         | 4.440       | AV   |
| 3  | *    | 5503.845        | 95.763                 | 91.321               | N/A         | N/A            | 4.442       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:42 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500 MHz |                          |

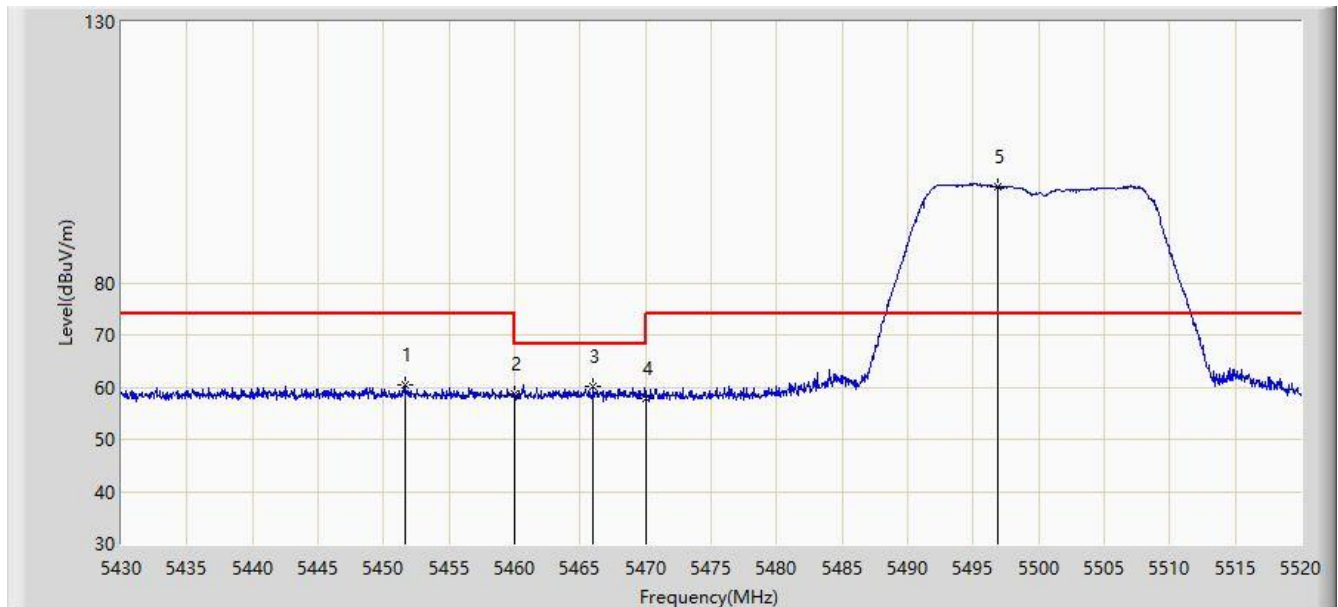


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5451.690        | 60.307                 | 55.839               | -13.693     | 74.000         | 4.469       | PK   |
| 2  |      | 5460.000        | 58.564                 | 54.124               | -15.436     | 74.000         | 4.440       | PK   |
| 3  |      | 5466.000        | 60.179                 | 55.730               | -8.021      | 68.200         | 4.449       | PK   |
| 4  |      | 5470.000        | 57.845                 | 53.389               | -10.355     | 68.200         | 4.455       | PK   |
| 5  | *    | 5496.870        | 98.479                 | 93.974               | N/A         | N/A            | 4.505       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:43 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500 MHz |                          |

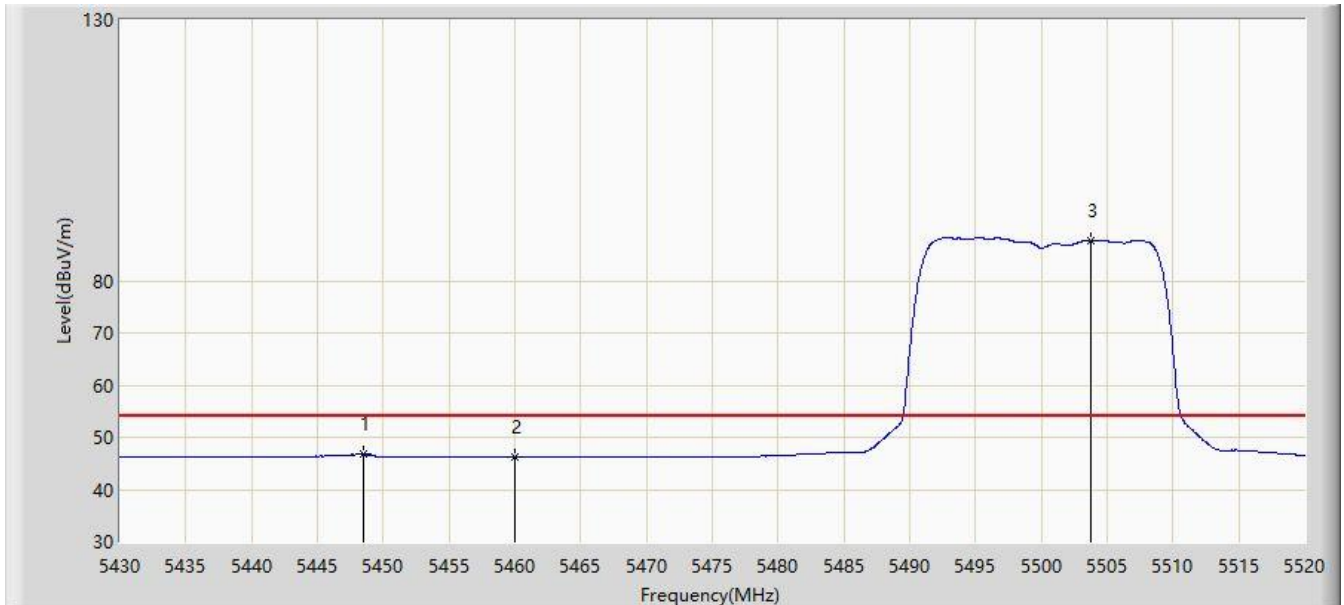


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5448.450        | 46.699                 | 42.178               | -7.301      | 54.000         | 4.521       | AV   |
| 2  |      | 5460.000        | 46.249                 | 41.809               | -7.751      | 54.000         | 4.440       | AV   |
| 3  | *    | 5503.710        | 87.679                 | 83.236               | N/A         | N/A            | 4.442       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:44 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5700 MHz |                          |

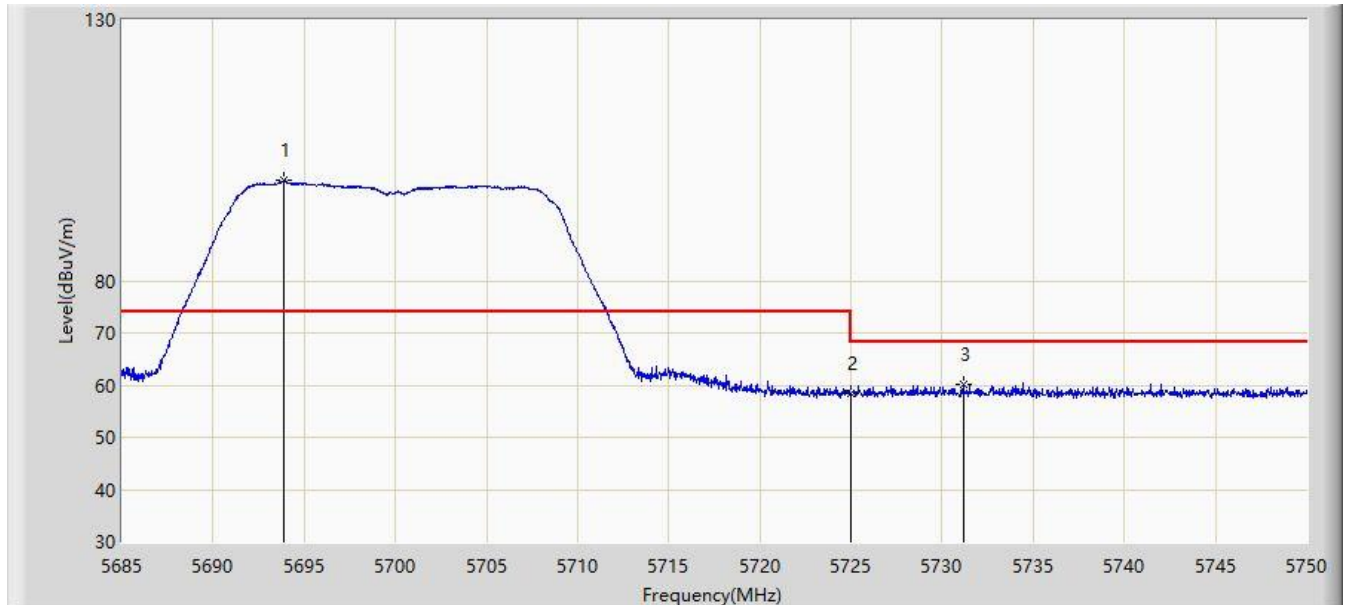


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5693.905        | 99.163                 | 93.945               | N/A         | N/A            | 5.218       | PK   |
| 2  |      | 5725.000        | 58.506                 | 53.028               | -9.694      | 68.200         | 5.478       | PK   |
| 3  |      | 5731.183        | 60.276                 | 54.770               | -7.924      | 68.200         | 5.507       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:46 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5700 MHz |                          |

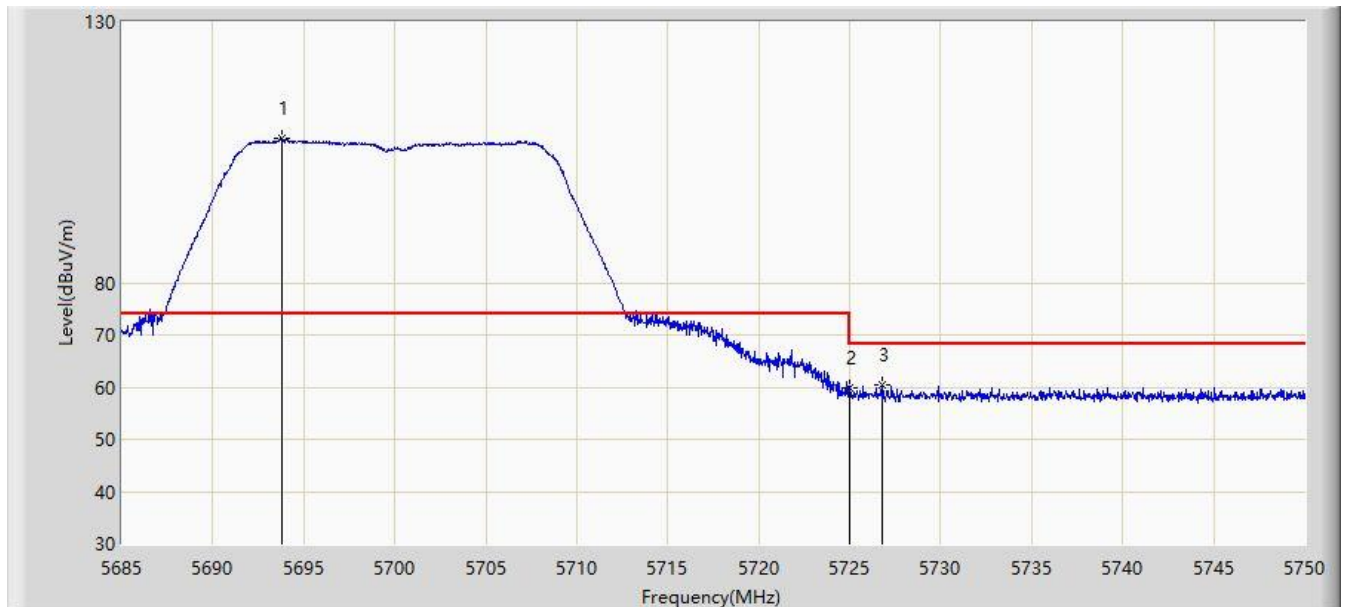


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5693.775        | 107.622                | 102.406              | N/A         | N/A            | 5.216       | PK   |
| 2  |      | 5725.000        | 59.780                 | 54.302               | -8.420      | 68.200         | 5.478       | PK   |
| 3  |      | 5726.763        | 60.359                 | 54.876               | -7.841      | 68.200         | 5.484       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:47 |
| Limit: FCC_Part15.407_Band Edge(3m)                       | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5745 MHz |                          |

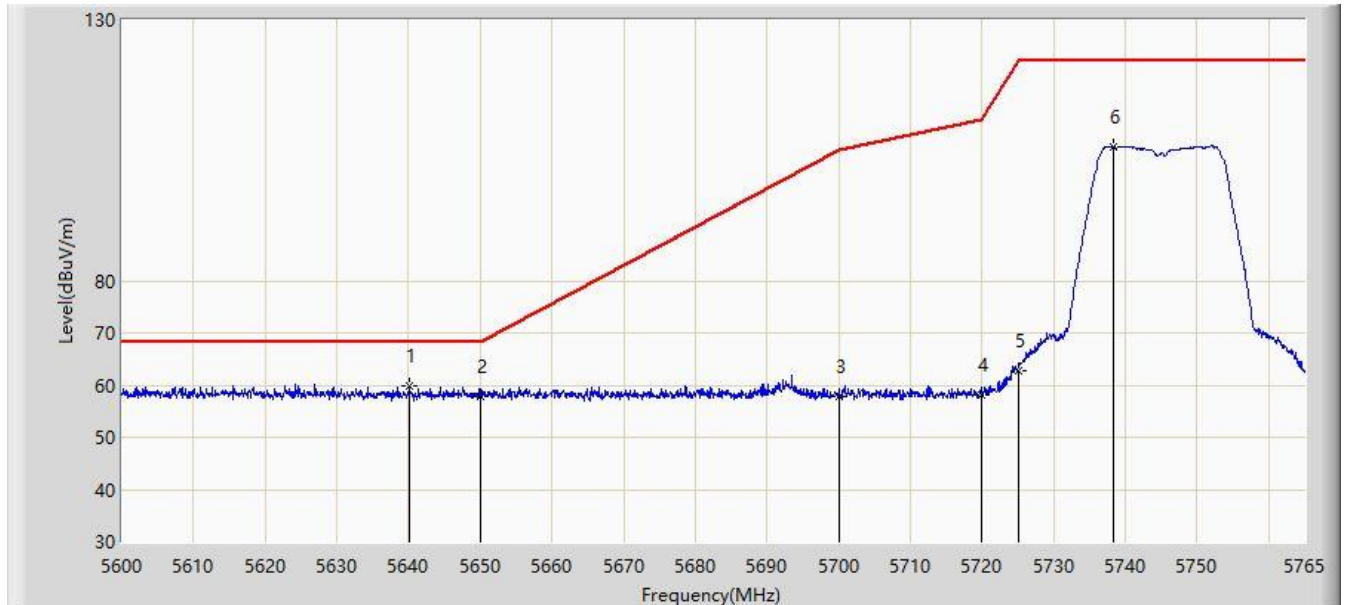


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5640.095        | 59.975                 | 54.785               | -8.225      | 68.200         | 5.190       | PK   |
| 2  |      | 5650.000        | 57.967                 | 52.631               | -10.233     | 68.200         | 5.336       | PK   |
| 3  |      | 5700.000        | 57.872                 | 52.554               | -47.328     | 105.200        | 5.318       | PK   |
| 4  |      | 5720.000        | 58.004                 | 52.530               | -52.796     | 110.800        | 5.474       | PK   |
| 5  |      | 5725.000        | 62.700                 | 57.222               | -59.500     | 122.200        | 5.478       | PK   |
| 6  |      | 5738.270        | 105.631                | 100.088              | N/A         | N/A            | 5.544       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:49 |
| Limit: FCC_Part15.407_Band Edge(3m)                       | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5745 MHz |                          |

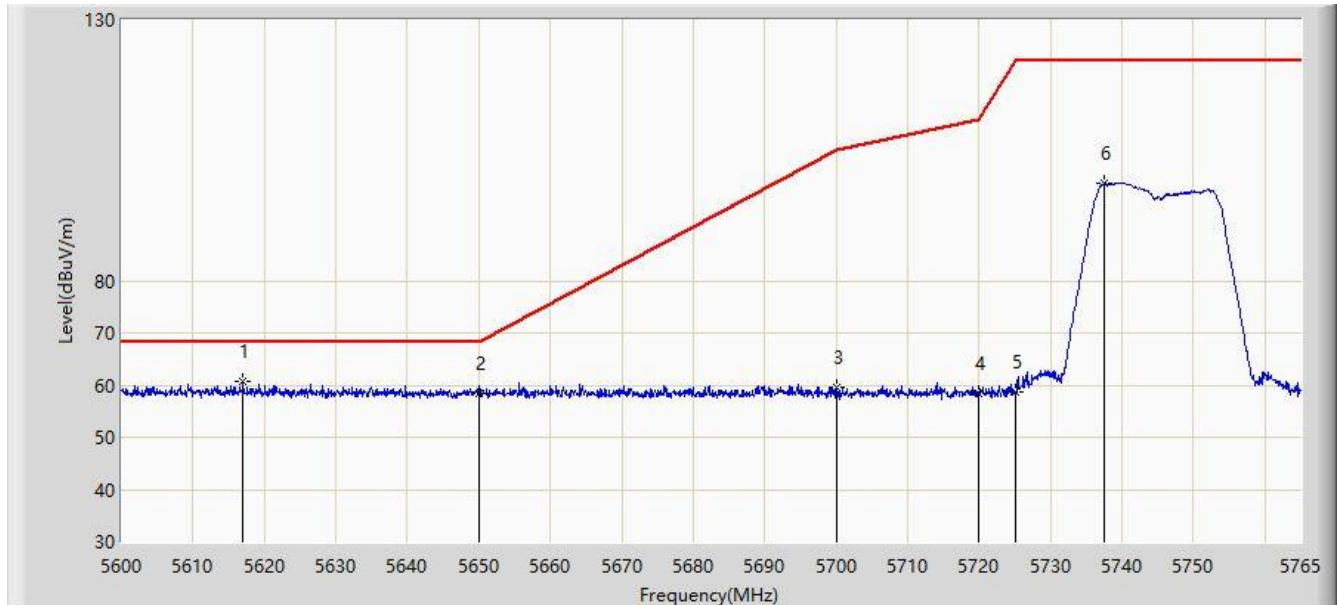


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5616.995        | 60.795                 | 55.707               | -7.405      | 68.200         | 5.088       | PK   |
| 2  |      | 5650.000        | 58.437                 | 53.101               | -9.763      | 68.200         | 5.336       | PK   |
| 3  |      | 5700.000        | 59.553                 | 54.235               | -45.647     | 105.200        | 5.318       | PK   |
| 4  |      | 5720.000        | 58.444                 | 52.970               | -52.356     | 110.800        | 5.474       | PK   |
| 5  |      | 5725.000        | 58.696                 | 53.218               | -63.504     | 122.200        | 5.478       | PK   |
| 6  |      | 5737.527        | 98.797                 | 93.258               | N/A         | N/A            | 5.539       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:50 |
| Limit: FCC_Part15.407_Band Edge(3m)                       | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5825 MHz |                          |

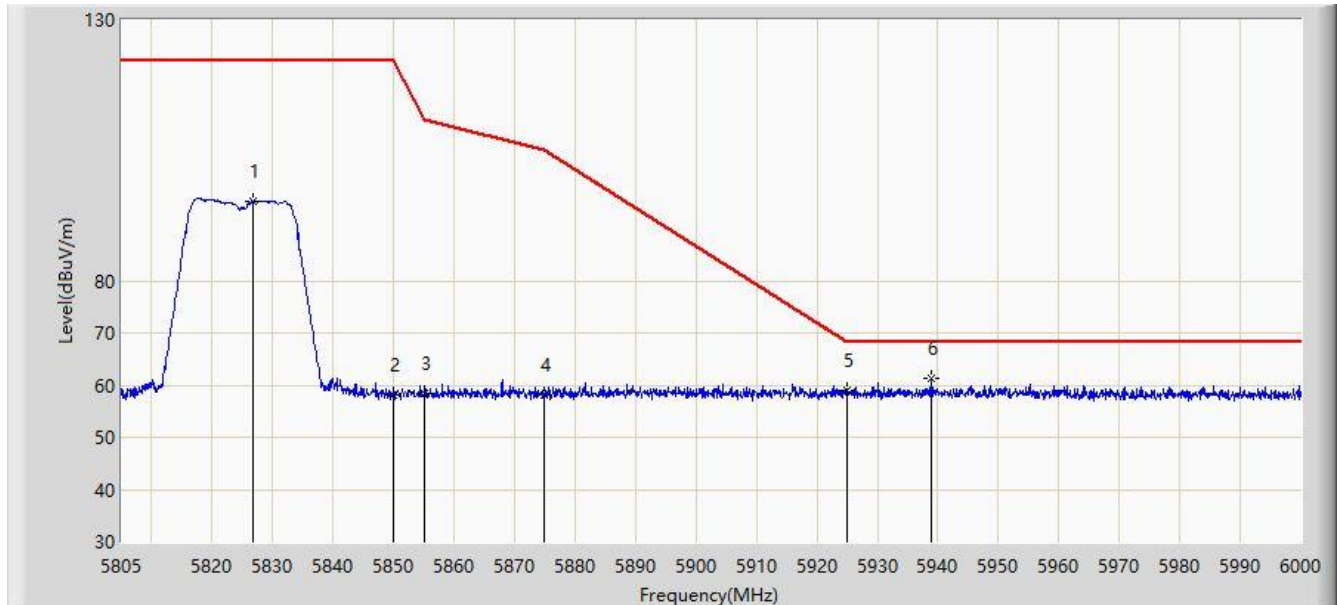


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5826.743        | 95.165                 | 89.412               | N/A         | N/A            | 5.754       | PK   |
| 2  |      | 5850.000        | 58.105                 | 52.136               | -64.095     | 122.200        | 5.968       | PK   |
| 3  |      | 5855.000        | 58.394                 | 52.419               | -52.406     | 110.800        | 5.975       | PK   |
| 4  |      | 5875.000        | 58.162                 | 52.149               | -47.038     | 105.200        | 6.013       | PK   |
| 5  |      | 5925.000        | 59.101                 | 52.966               | -9.099      | 68.200         | 6.136       | PK   |
| 6  | *    | 5938.965        | 61.168                 | 55.058               | -7.032      | 68.200         | 6.109       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:51 |
| Limit: FCC_Part15.407_Band Edge(3m)                       | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5825 MHz |                          |

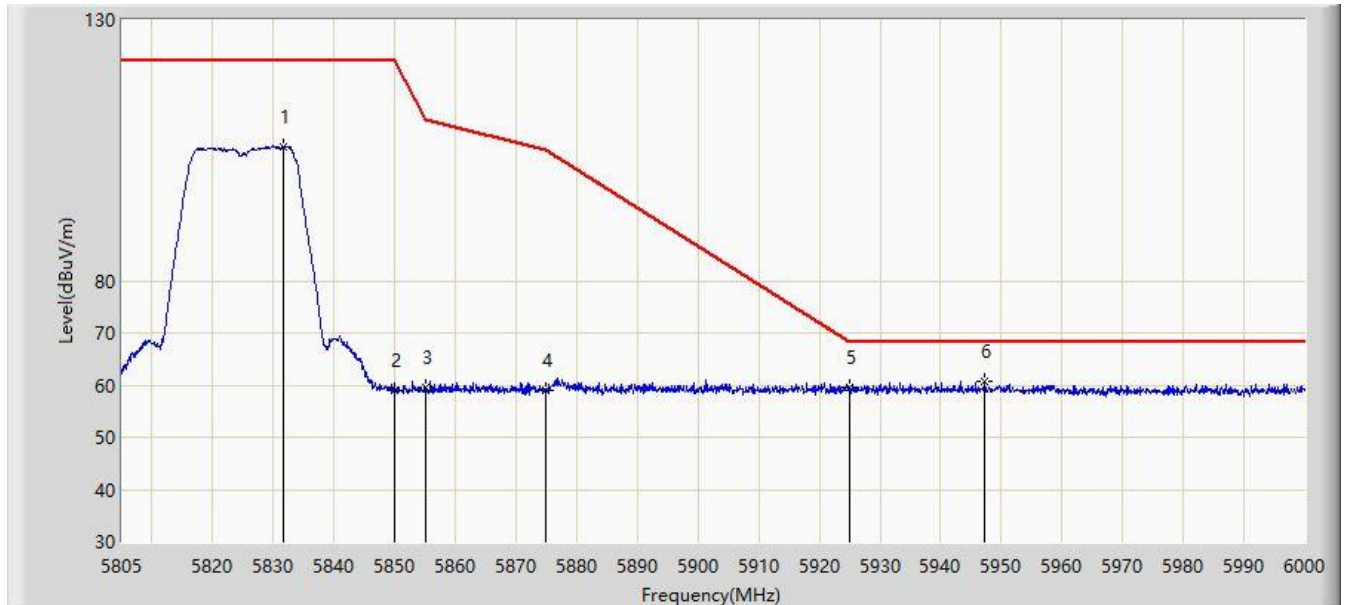


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5831.715        | 105.645                | 99.854               | N/A         | N/A            | 5.791       | PK   |
| 2  |      | 5850.000        | 59.115                 | 53.146               | -63.085     | 122.200        | 5.968       | PK   |
| 3  |      | 5855.000        | 59.701                 | 53.726               | -51.099     | 110.800        | 5.975       | PK   |
| 4  |      | 5875.000        | 58.968                 | 52.955               | -46.232     | 105.200        | 6.013       | PK   |
| 5  |      | 5925.000        | 59.554                 | 53.419               | -8.646      | 68.200         | 6.136       | PK   |
| 6  | *    | 5947.252        | 60.597                 | 54.532               | -7.603      | 68.200         | 6.065       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:53 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190 MHz |                          |

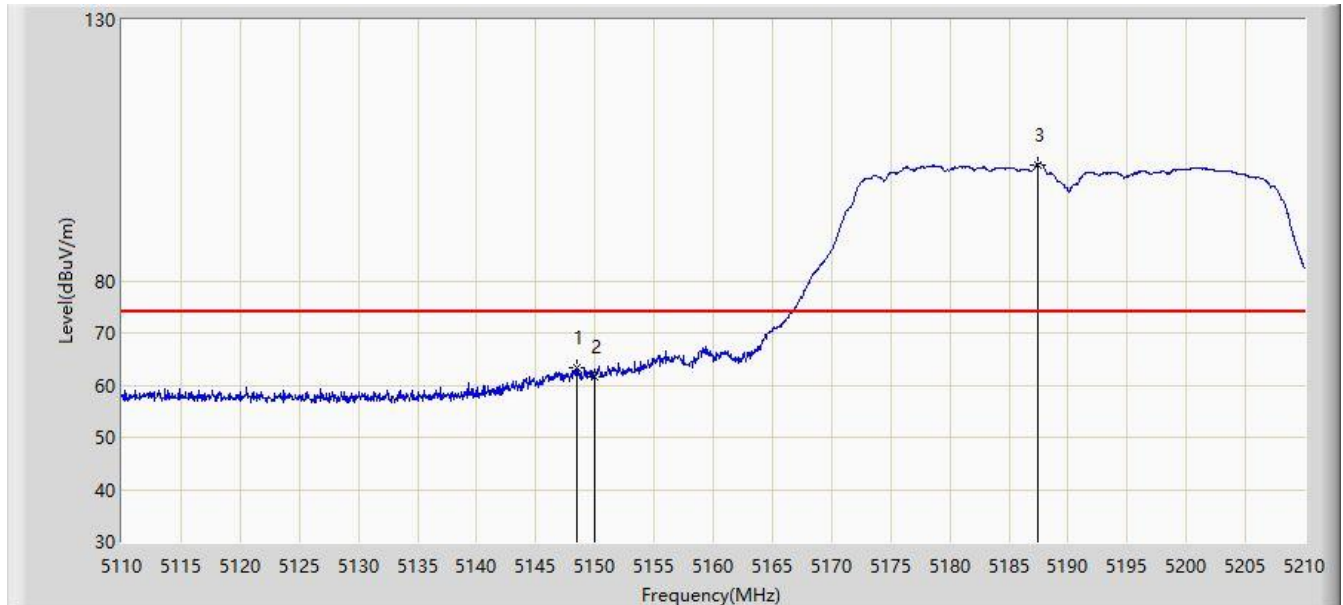


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5148.450        | 63.196                 | 58.771               | -10.804     | 74.000         | 4.424       | PK   |
| 2  |      | 5150.000        | 61.483                 | 57.041               | -12.517     | 74.000         | 4.442       | PK   |
| 3  | *    | 5187.400        | 102.283                | 97.878               | N/A         | N/A            | 4.405       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:55 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190 MHz |                          |

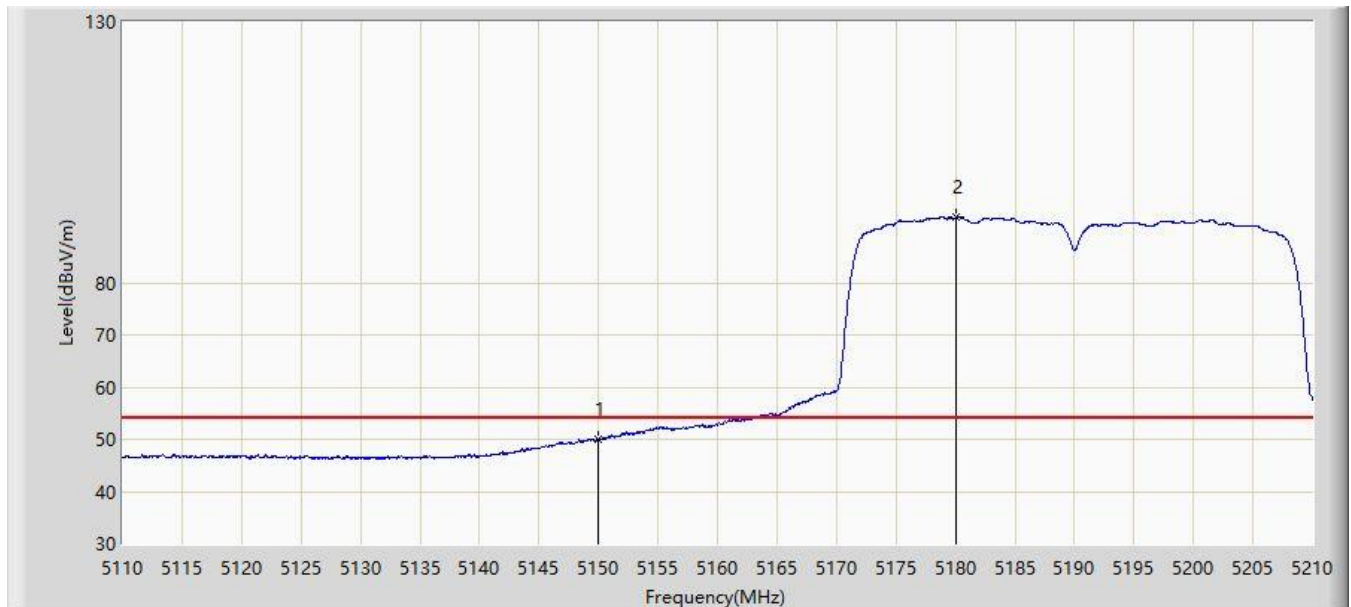


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5150.000        | 49.874                 | 45.432               | -4.126      | 54.000         | 4.442       | AV   |
| 2  | *    | 5180.100        | 92.569                 | 88.085               | N/A         | N/A            | 4.484       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:56 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190 MHz |                          |

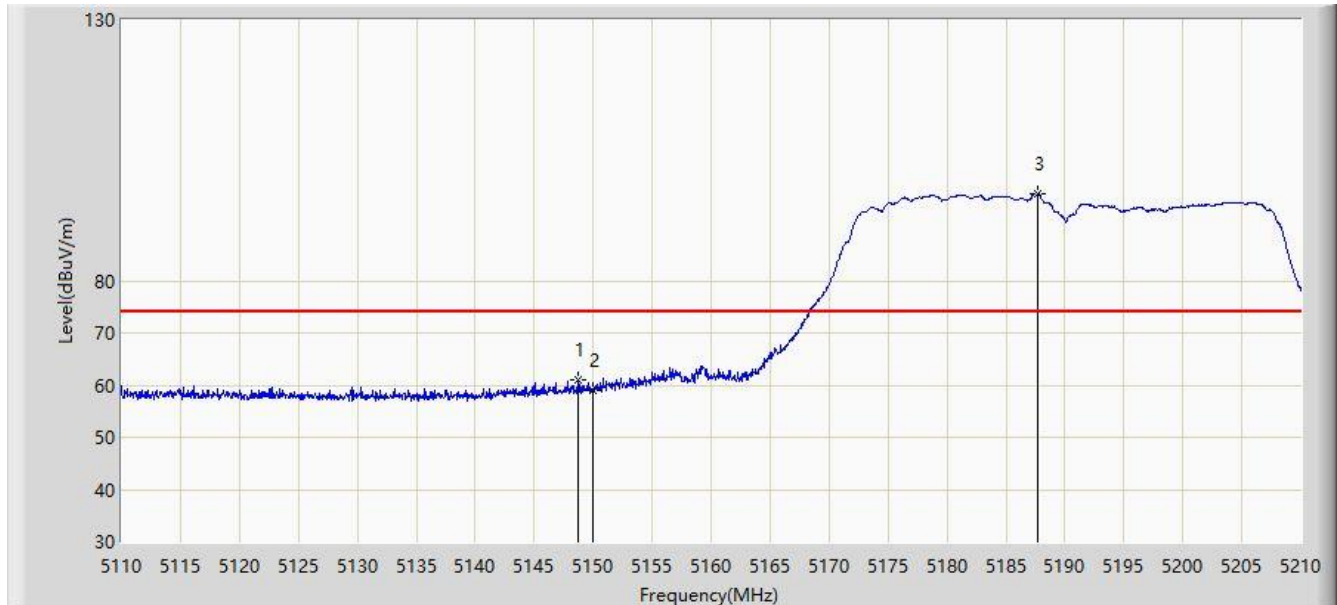


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5148.700        | 61.084                 | 56.656               | -12.916     | 74.000         | 4.428       | PK   |
| 2  |      | 5150.000        | 59.112                 | 54.670               | -14.888     | 74.000         | 4.442       | PK   |
| 3  | *    | 5187.700        | 96.792                 | 92.391               | N/A         | N/A            | 4.402       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:57 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190 MHz |                          |

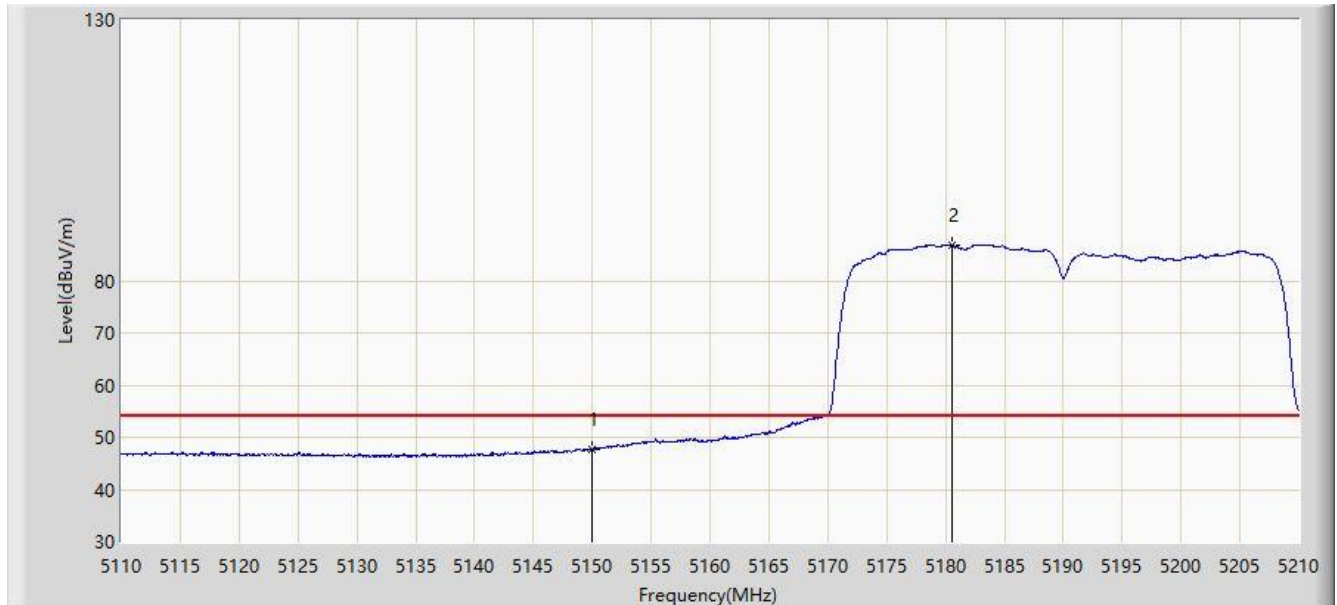


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5150.000        | 47.763                 | 43.321               | -6.237      | 54.000         | 4.442       | AV   |
| 2  | *    | 5180.550        | 86.752                 | 82.272               | N/A         | N/A            | 4.480       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 13:59 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310 MHz |                          |

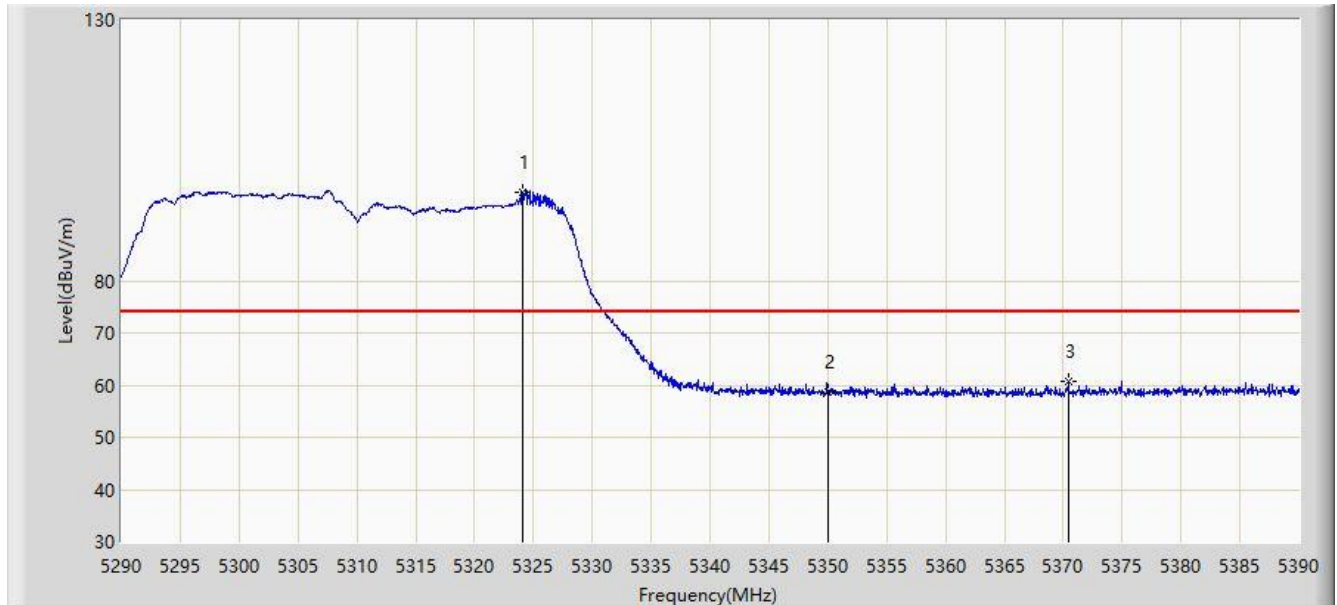


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5324.100        | 97.006                 | 92.933               | N/A         | N/A            | 4.073       | PK   |
| 2  |      | 5350.000        | 58.766                 | 54.589               | -15.234     | 74.000         | 4.177       | PK   |
| 3  |      | 5370.450        | 60.592                 | 56.316               | -13.408     | 74.000         | 4.277       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:01 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310 MHz |                          |

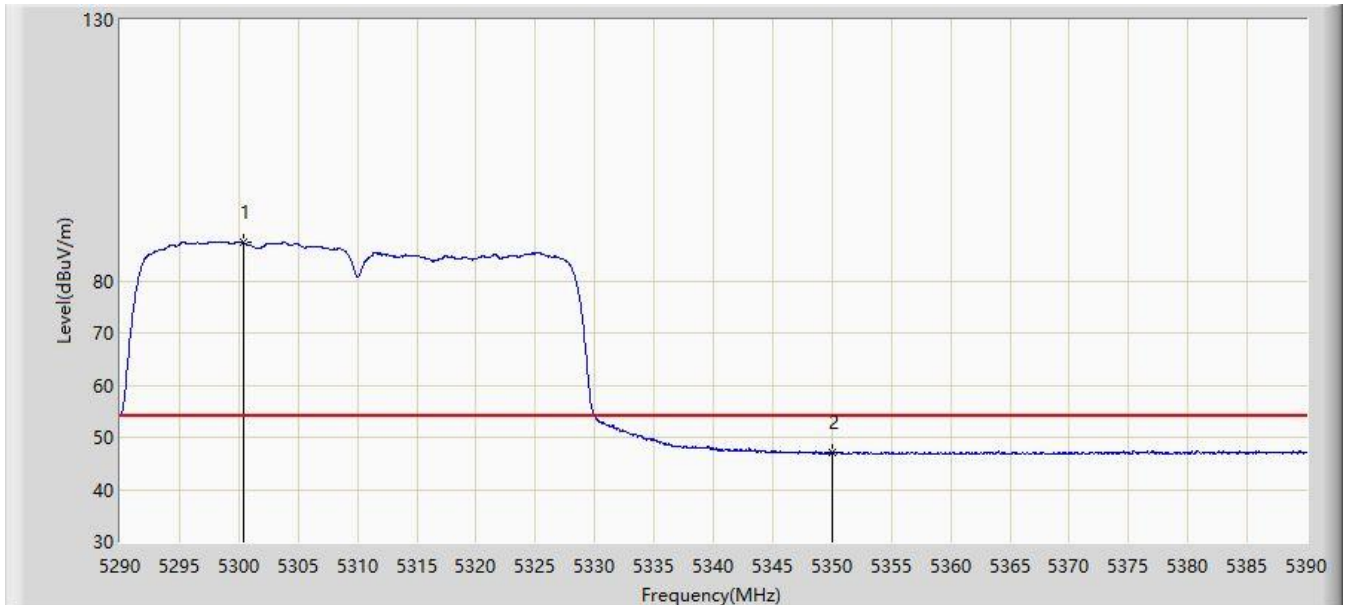


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5300.350        | 87.318                 | 82.899               | N/A         | N/A            | 4.420       | AV   |
| 2  |      | 5350.000        | 47.008                 | 42.831               | -6.992      | 54.000         | 4.177       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:02 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310 MHz |                          |

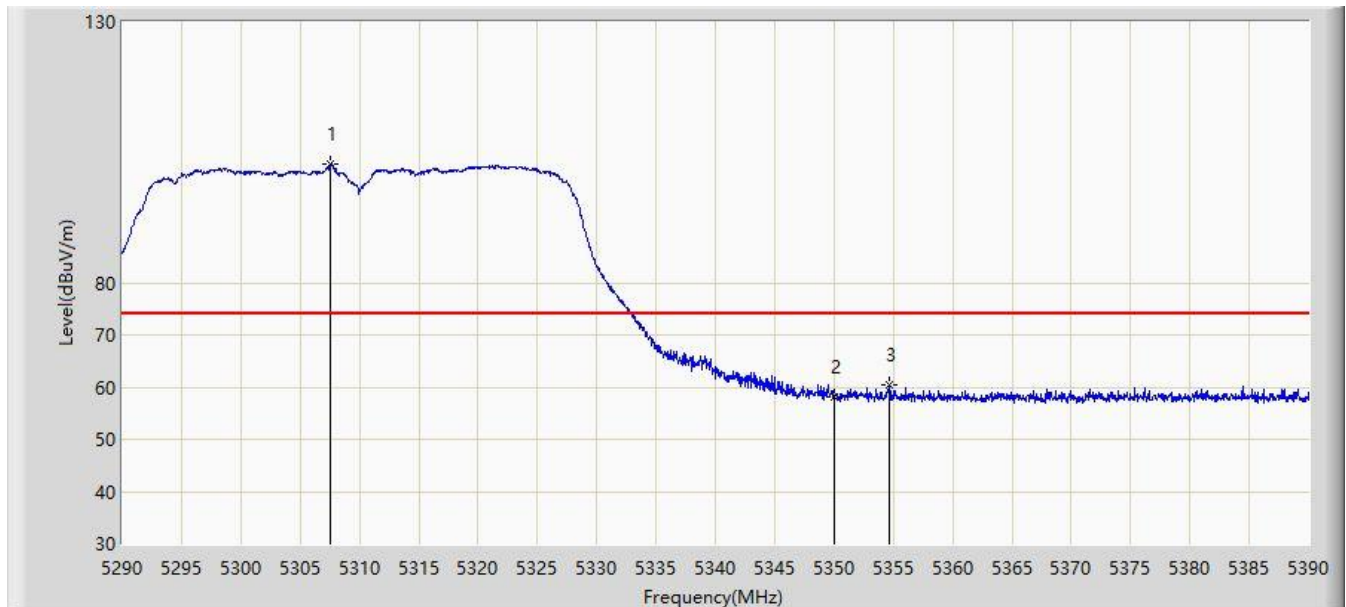


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5307.550        | 102.616                | 98.328               | N/A         | N/A            | 4.288       | PK   |
| 2  |      | 5350.000        | 58.009                 | 53.832               | -15.991     | 74.000         | 4.177       | PK   |
| 3  |      | 5354.600        | 60.509                 | 56.310               | -13.491     | 74.000         | 4.199       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:03 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310 MHz |                          |

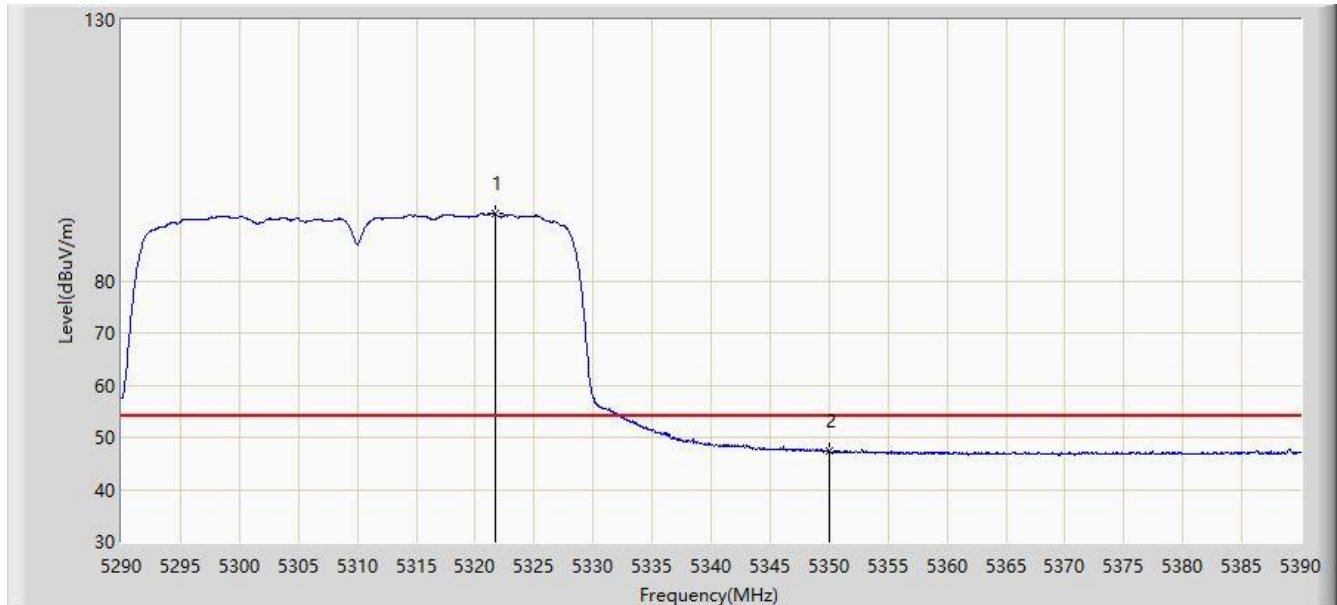


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5321.650        | 93.002                 | 88.930               | N/A         | N/A            | 4.072       | AV   |
| 2  |      | 5350.000        | 47.278                 | 43.101               | -6.722      | 54.000         | 4.177       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:03 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510 MHz |                          |

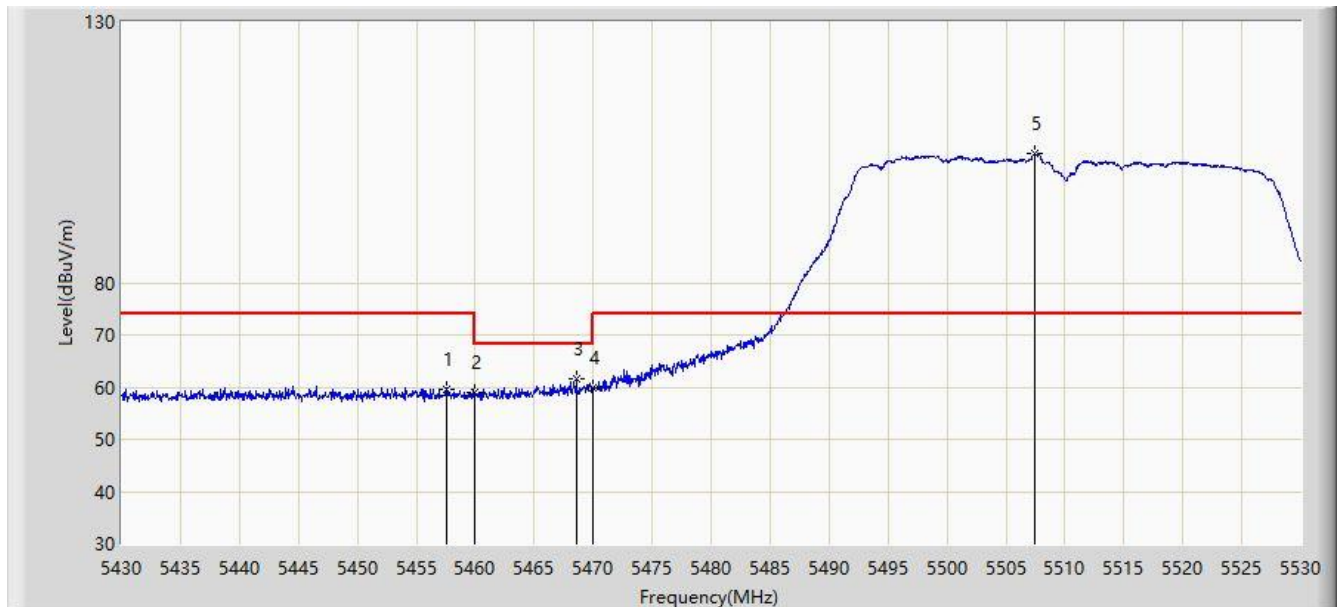


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5457.550        | 59.710                 | 55.274               | -14.290     | 74.000         | 4.436       | PK   |
| 2  |      | 5460.000        | 58.912                 | 54.472               | -15.088     | 74.000         | 4.440       | PK   |
| 3  |      | 5468.550        | 61.531                 | 57.078               | -6.669      | 68.200         | 4.453       | PK   |
| 4  |      | 5470.000        | 59.840                 | 55.384               | -8.360      | 68.200         | 4.455       | PK   |
| 5  | *    | 5507.400        | 104.707                | 100.218              | N/A         | N/A            | 4.489       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:05 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510 MHz |                          |

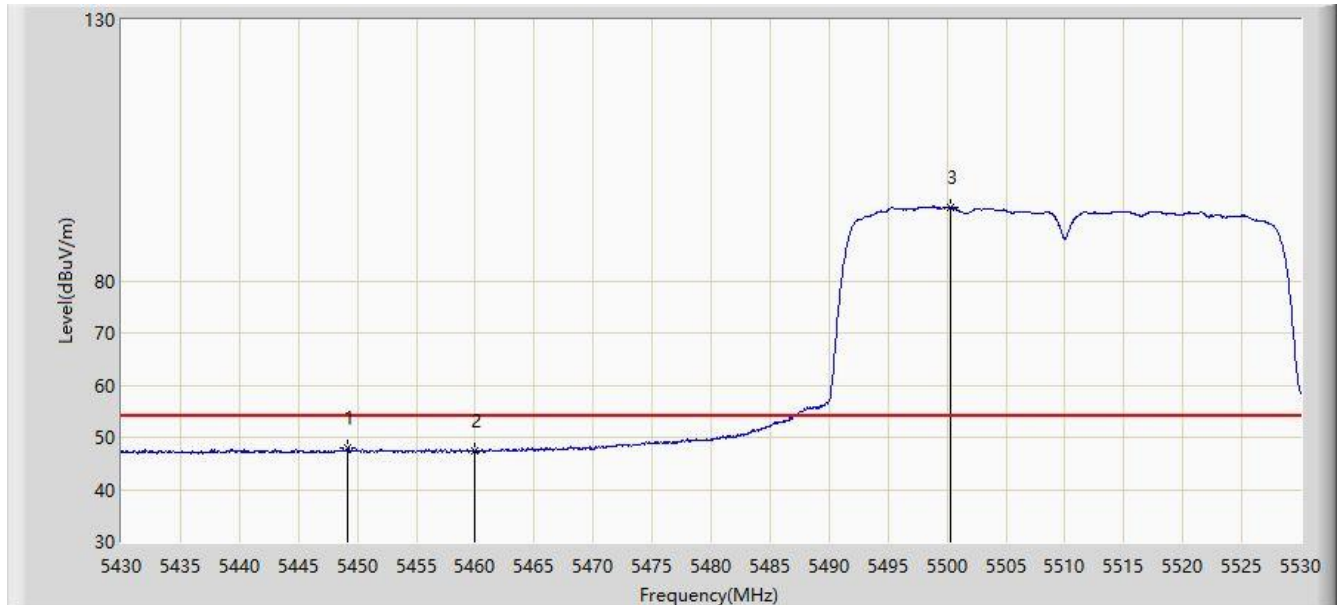


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5449.200        | 47.985                 | 43.476               | -6.015      | 54.000         | 4.509       | AV   |
| 2  |      | 5460.000        | 47.395                 | 42.955               | -6.605      | 54.000         | 4.440       | AV   |
| 3  | *    | 5500.250        | 94.140                 | 89.666               | N/A         | N/A            | 4.474       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:05 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510 MHz |                          |

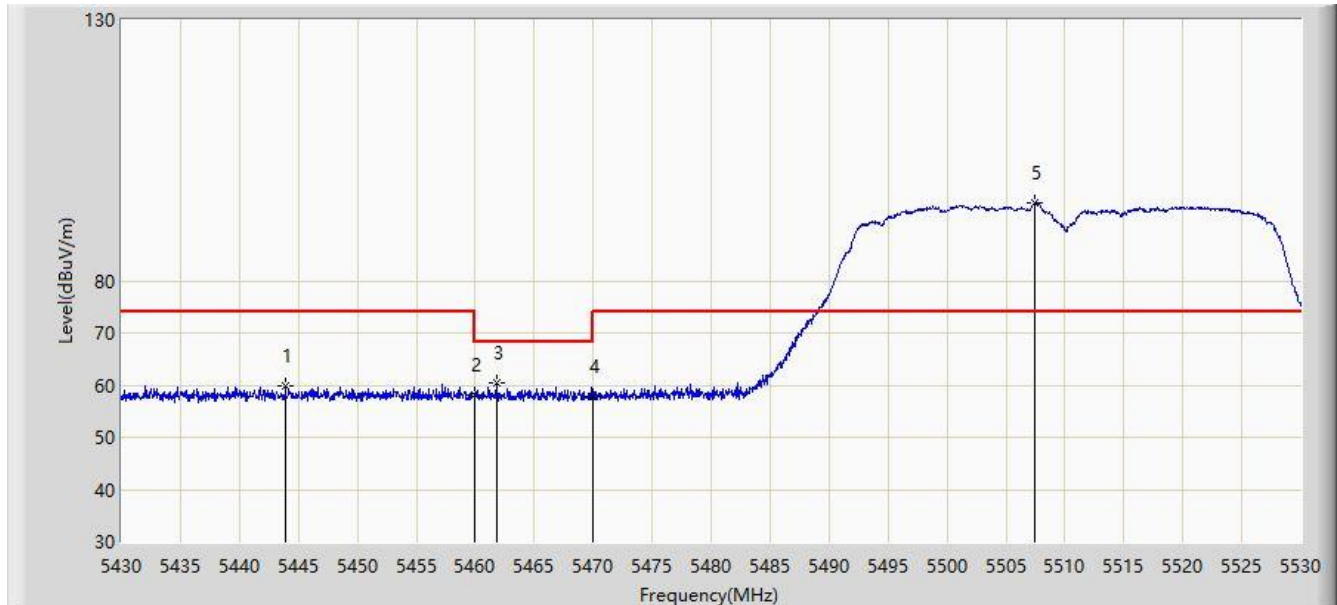


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5443.900        | 59.804                 | 55.208               | -14.196     | 74.000         | 4.595       | PK   |
| 2  |      | 5460.000        | 58.253                 | 53.813               | -15.747     | 74.000         | 4.440       | PK   |
| 3  |      | 5461.800        | 60.416                 | 55.973               | -7.784      | 68.200         | 4.442       | PK   |
| 4  |      | 5470.000        | 57.840                 | 53.384               | -10.360     | 68.200         | 4.455       | PK   |
| 5  | *    | 5507.450        | 94.829                 | 90.338               | N/A         | N/A            | 4.491       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:06 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510 MHz |                          |

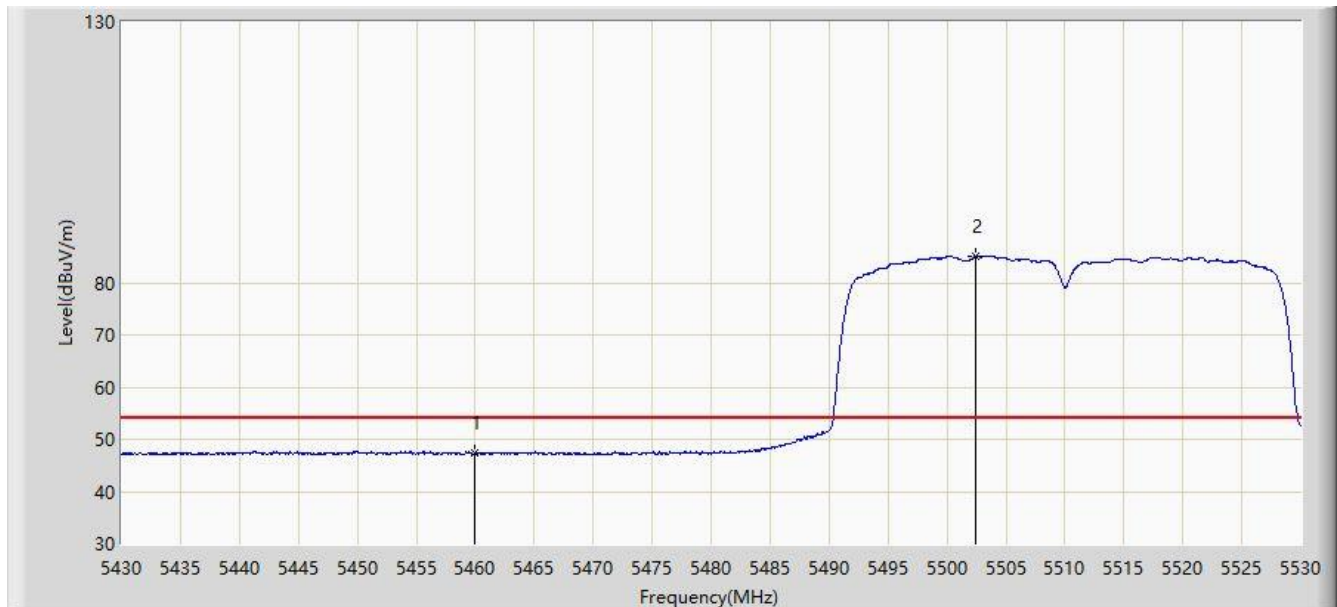


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5460.000        | 47.284                 | 42.844               | -6.716      | 54.000         | 4.440       | AV   |
| 2  | *    | 5502.400        | 84.968                 | 80.513               | N/A         | N/A            | 4.455       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:09 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5670 MHz |                          |

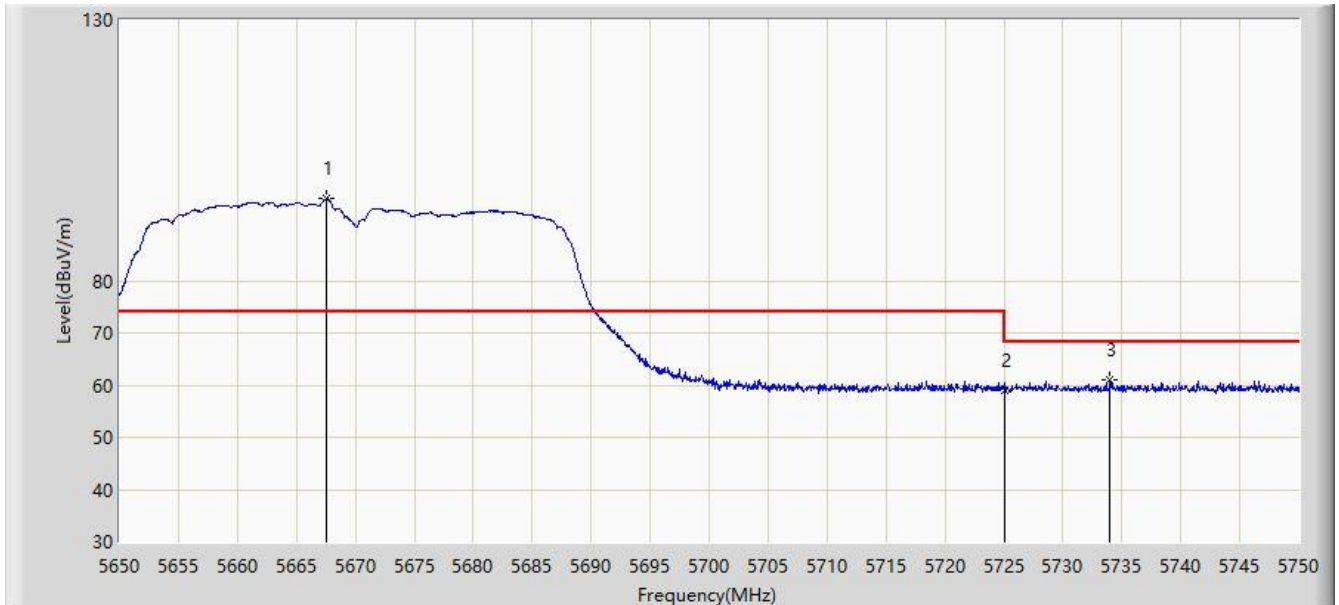


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5667.550        | 95.709                 | 90.267               | N/A         | N/A            | 5.442       | PK   |
| 2  |      | 5725.000        | 58.972                 | 53.494               | -9.228      | 68.200         | 5.478       | PK   |
| 3  |      | 5734.000        | 60.977                 | 55.456               | -7.223      | 68.200         | 5.521       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:17 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5670 MHz |                          |

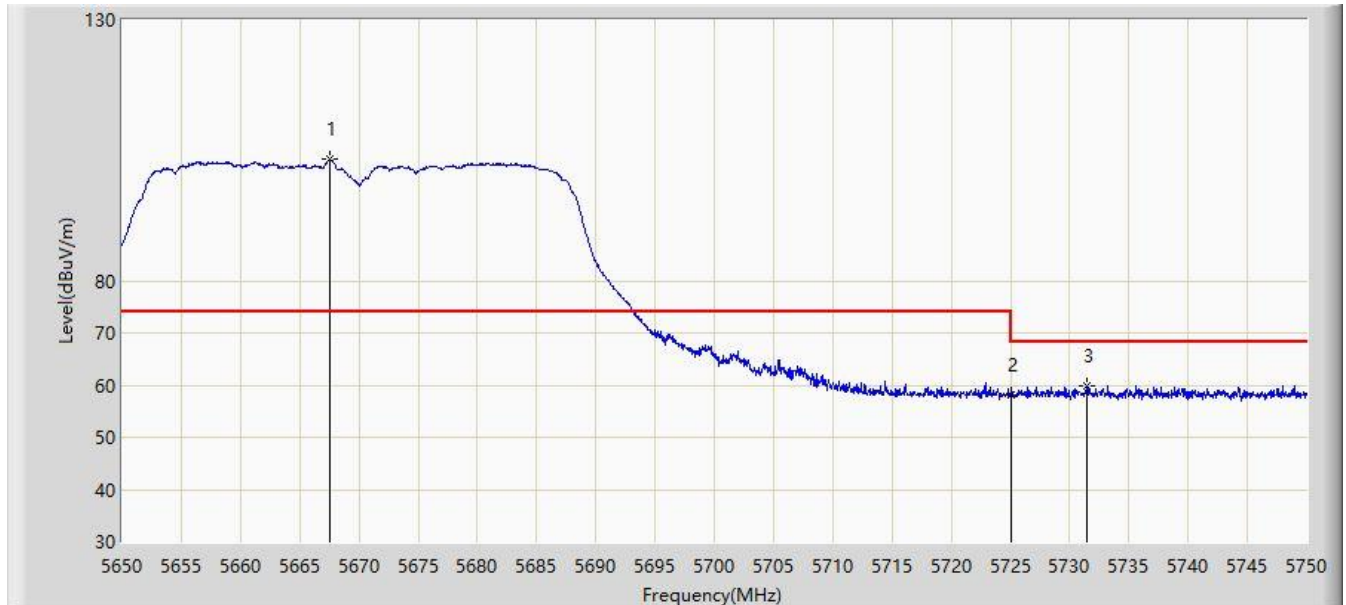


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5667.500        | 103.265                | 97.823               | N/A         | N/A            | 5.442       | PK   |
| 2  |      | 5725.000        | 58.121                 | 52.643               | -10.079     | 68.200         | 5.478       | PK   |
| 3  |      | 5731.400        | 59.772                 | 54.265               | -8.428      | 68.200         | 5.507       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:22 |
| Limit: FCC_Part15.407_Band Edge(3m)                       | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5755 MHz |                          |

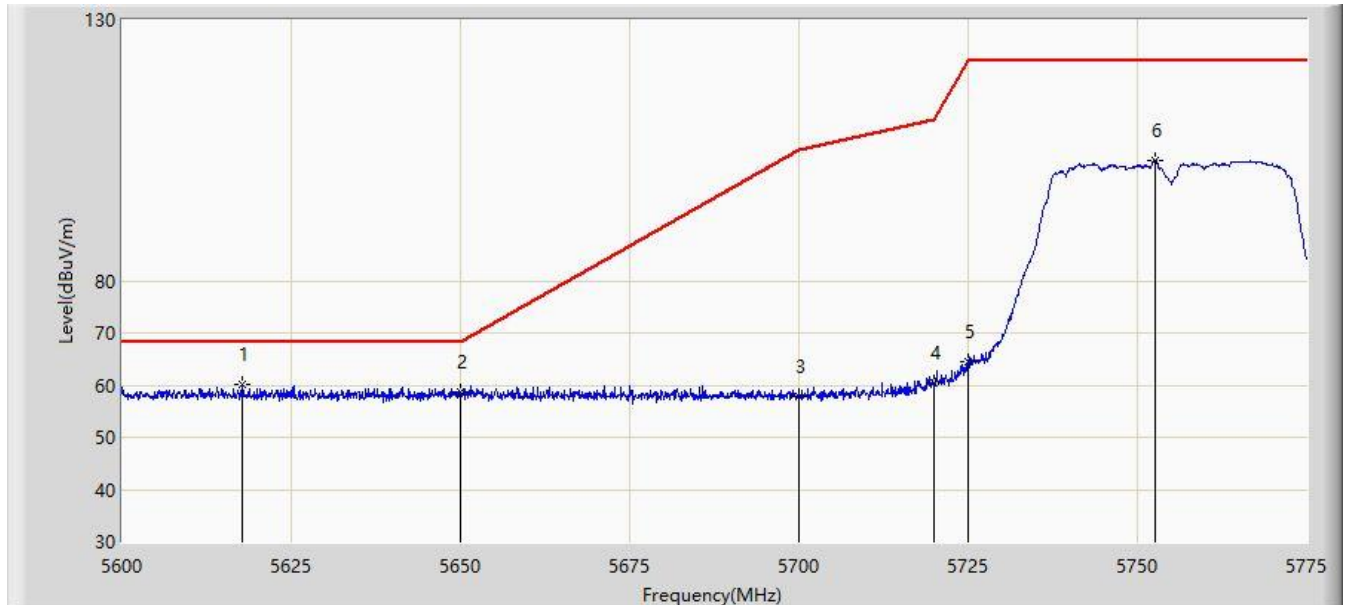


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5617.850        | 60.270                 | 55.168               | -7.930      | 68.200         | 5.101       | PK   |
| 2  |      | 5650.000        | 58.628                 | 53.292               | -9.572      | 68.200         | 5.336       | PK   |
| 3  |      | 5700.000        | 57.729                 | 52.411               | -47.471     | 105.200        | 5.318       | PK   |
| 4  |      | 5720.000        | 60.510                 | 55.036               | -50.290     | 110.800        | 5.474       | PK   |
| 5  |      | 5725.000        | 64.375                 | 58.897               | -57.825     | 122.200        | 5.478       | PK   |
| 6  |      | 5752.600        | 103.146                | 97.389               | N/A         | N/A            | 5.757       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:23 |
| Limit: FCC_Part15.407_Band Edge(3m)                       | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5755 MHz |                          |

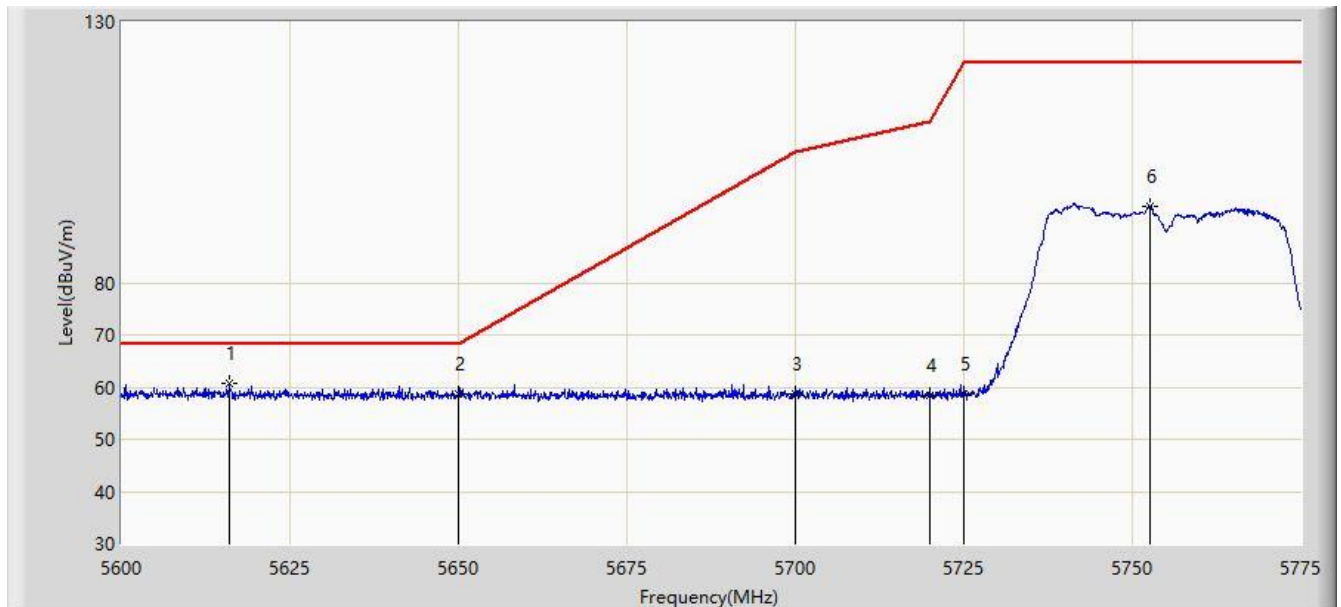


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5615.925        | 60.691                 | 55.619               | -7.509      | 68.200         | 5.072       | PK   |
| 2  |      | 5650.000        | 58.813                 | 53.477               | -9.387      | 68.200         | 5.336       | PK   |
| 3  |      | 5700.000        | 58.706                 | 53.388               | -46.494     | 105.200        | 5.318       | PK   |
| 4  |      | 5720.000        | 58.475                 | 53.001               | -52.325     | 110.800        | 5.474       | PK   |
| 5  |      | 5725.000        | 58.647                 | 53.169               | -63.553     | 122.200        | 5.478       | PK   |
| 6  |      | 5752.600        | 94.763                 | 89.006               | N/A         | N/A            | 5.757       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:25 |
| Limit: FCC_Part15.407_Band Edge(3m)                       | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5795 MHz |                          |

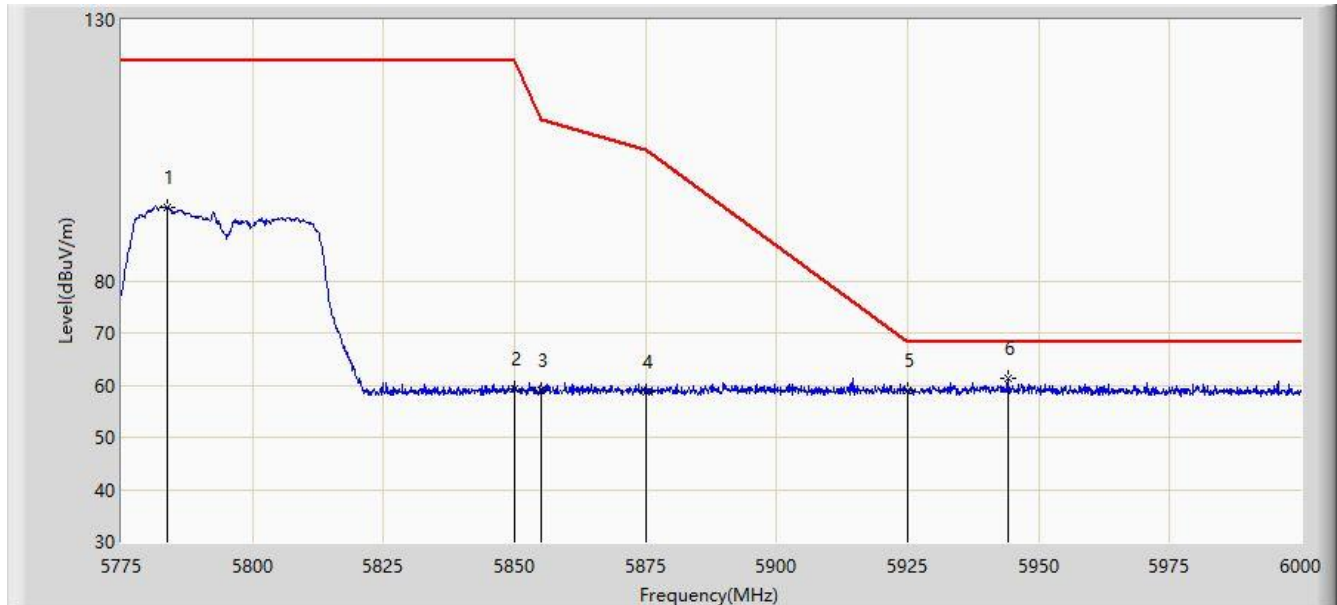


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5783.663        | 94.148                 | 88.383               | N/A         | N/A            | 5.764       | PK   |
| 2  |      | 5850.000        | 59.297                 | 53.328               | -62.903     | 122.200        | 5.968       | PK   |
| 3  |      | 5855.000        | 59.020                 | 53.045               | -51.780     | 110.800        | 5.975       | PK   |
| 4  |      | 5875.000        | 58.611                 | 52.598               | -46.589     | 105.200        | 6.013       | PK   |
| 5  |      | 5925.000        | 58.988                 | 52.853               | -9.212      | 68.200         | 6.136       | PK   |
| 6  | *    | 5944.087        | 61.293                 | 55.211               | -6.907      | 68.200         | 6.082       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:26 |
| Limit: FCC_Part15.407_Band Edge(3m)                       | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5795 MHz |                          |

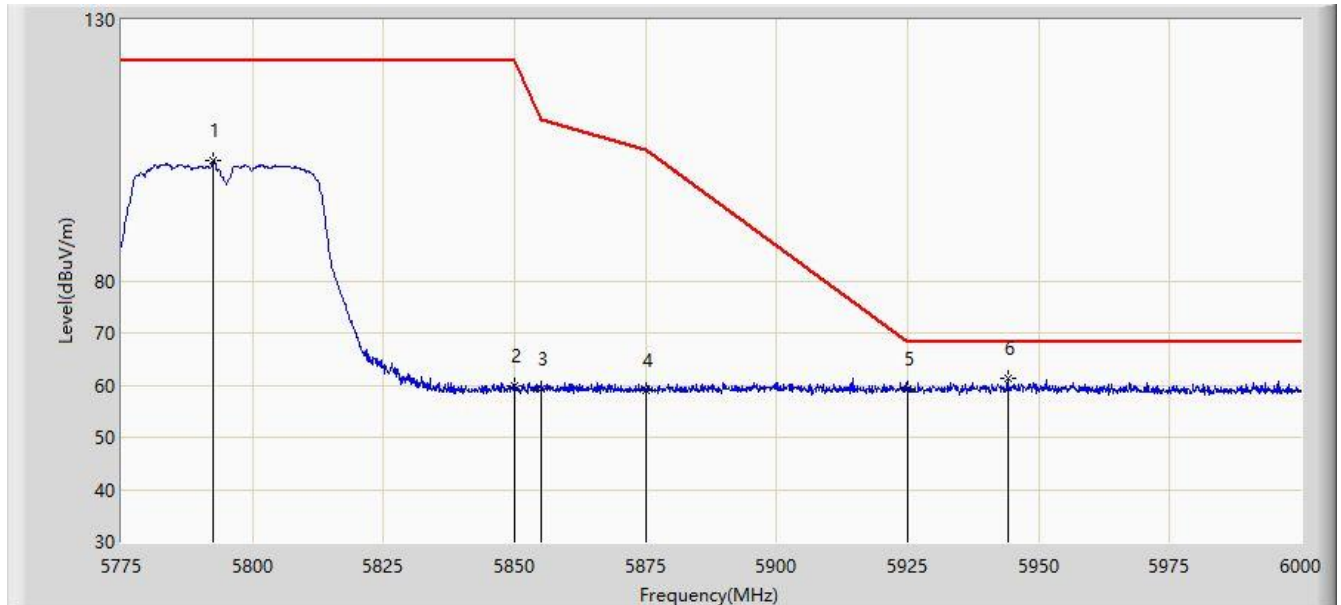


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5792.437        | 102.943                | 97.109               | N/A         | N/A            | 5.834       | PK   |
| 2  |      | 5850.000        | 59.734                 | 53.765               | -62.466     | 122.200        | 5.968       | PK   |
| 3  |      | 5855.000        | 59.133                 | 53.158               | -51.667     | 110.800        | 5.975       | PK   |
| 4  |      | 5875.000        | 58.883                 | 52.870               | -46.317     | 105.200        | 6.013       | PK   |
| 5  |      | 5925.000        | 59.280                 | 53.145               | -8.920      | 68.200         | 6.136       | PK   |
| 6  | *    | 5944.087        | 61.293                 | 55.211               | -6.907      | 68.200         | 6.082       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:27 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210 MHz |                          |

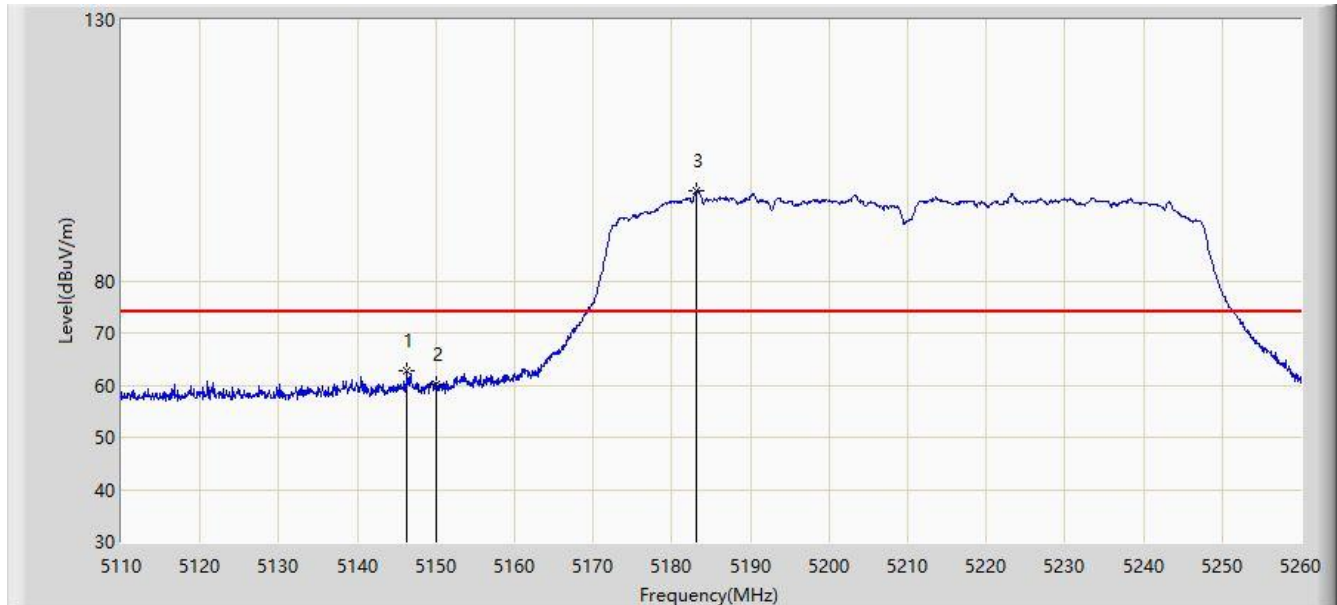


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5146.300        | 62.665                 | 58.245               | -11.335     | 74.000         | 4.420       | PK   |
| 2  |      | 5150.000        | 60.156                 | 55.714               | -13.844     | 74.000         | 4.442       | PK   |
| 3  | *    | 5183.200        | 97.302                 | 92.848               | N/A         | N/A            | 4.454       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:30 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210 MHz |                          |

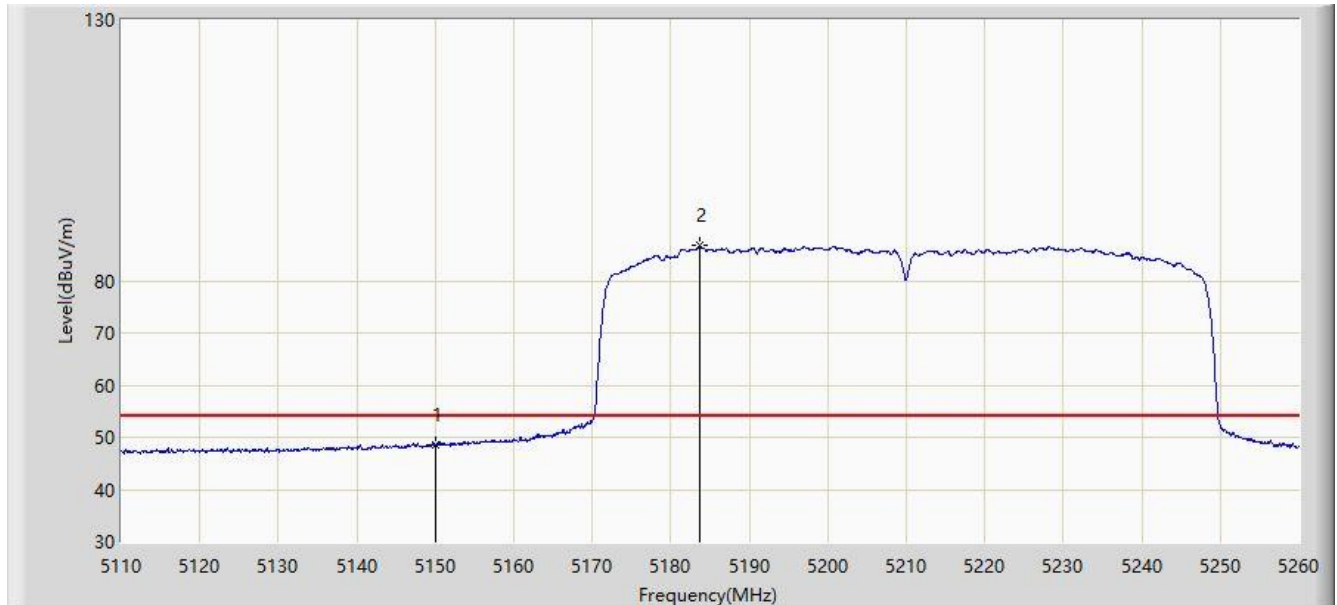


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5150.000        | 48.656                 | 44.214               | -5.344      | 54.000         | 4.442       | AV   |
| 2  | *    | 5183.650        | 86.708                 | 82.260               | N/A         | N/A            | 4.449       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:31 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210 MHz |                          |

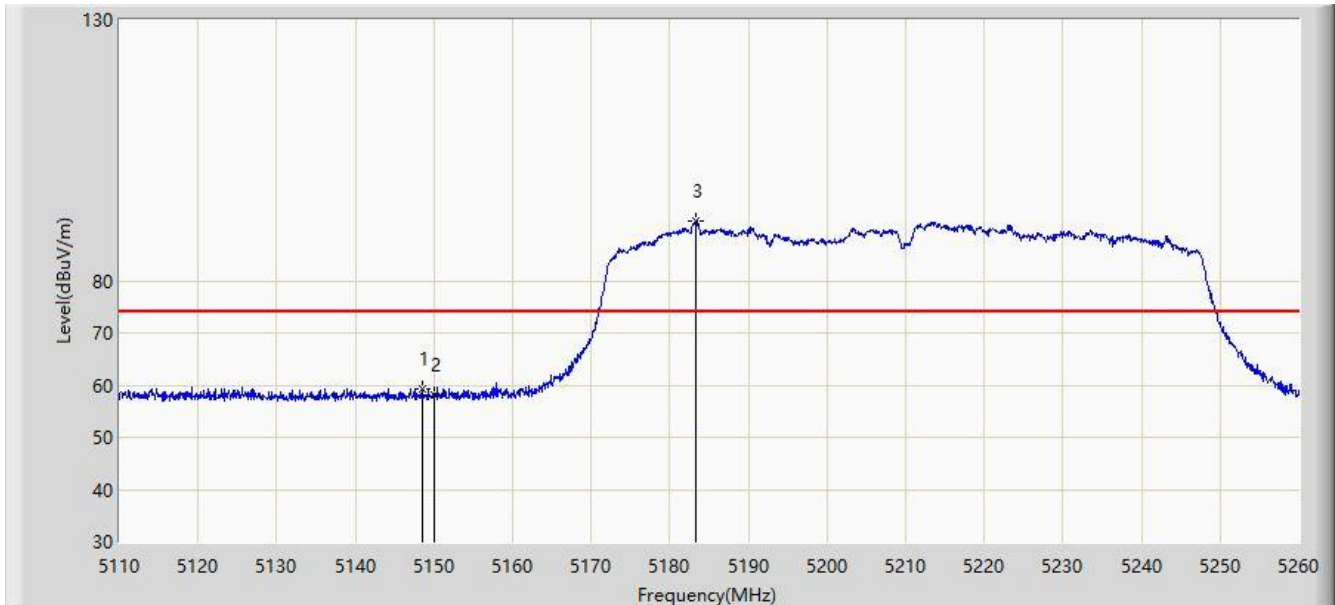


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5148.625        | 59.375                 | 54.948               | -14.625     | 74.000         | 4.427       | PK   |
| 2  |      | 5150.000        | 58.154                 | 53.712               | -15.846     | 74.000         | 4.442       | PK   |
| 3  | *    | 5183.350        | 91.519                 | 87.067               | N/A         | N/A            | 4.452       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:32 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210 MHz |                          |

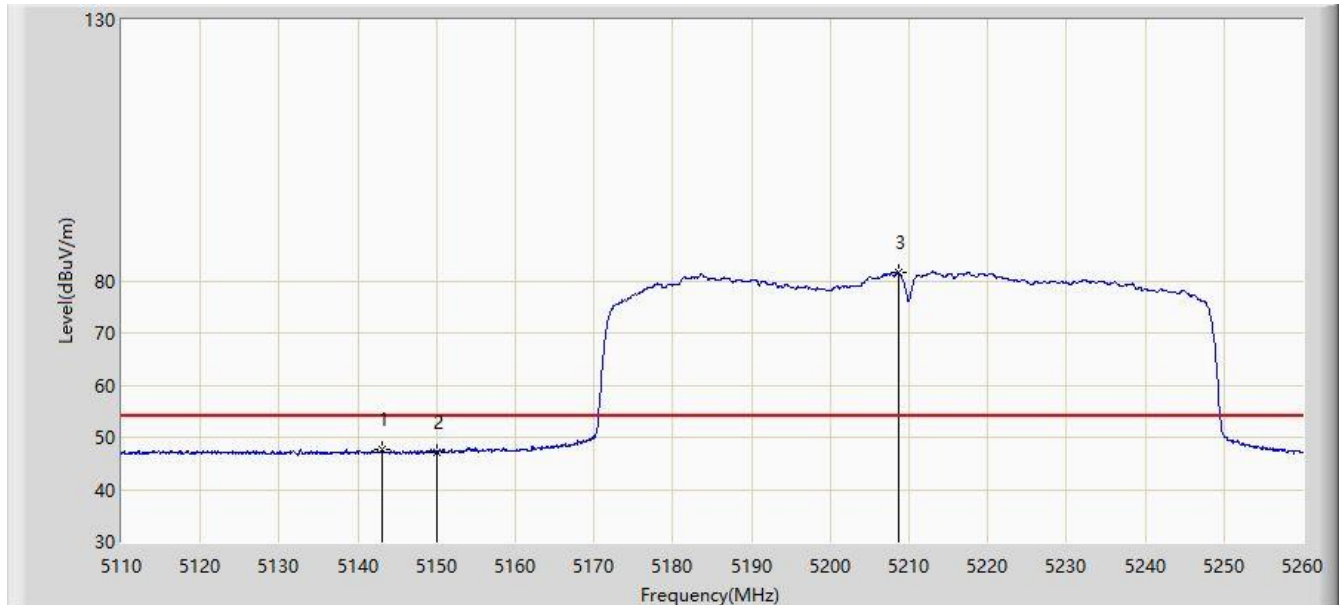


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5143.000        | 47.800                 | 43.380               | -6.200      | 54.000         | 4.421       | AV   |
| 2  |      | 5150.000        | 47.230                 | 42.788               | -6.770      | 54.000         | 4.442       | AV   |
| 3  | *    | 5208.625        | 81.486                 | 77.279               | N/A         | N/A            | 4.207       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:33 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290 MHz |                          |

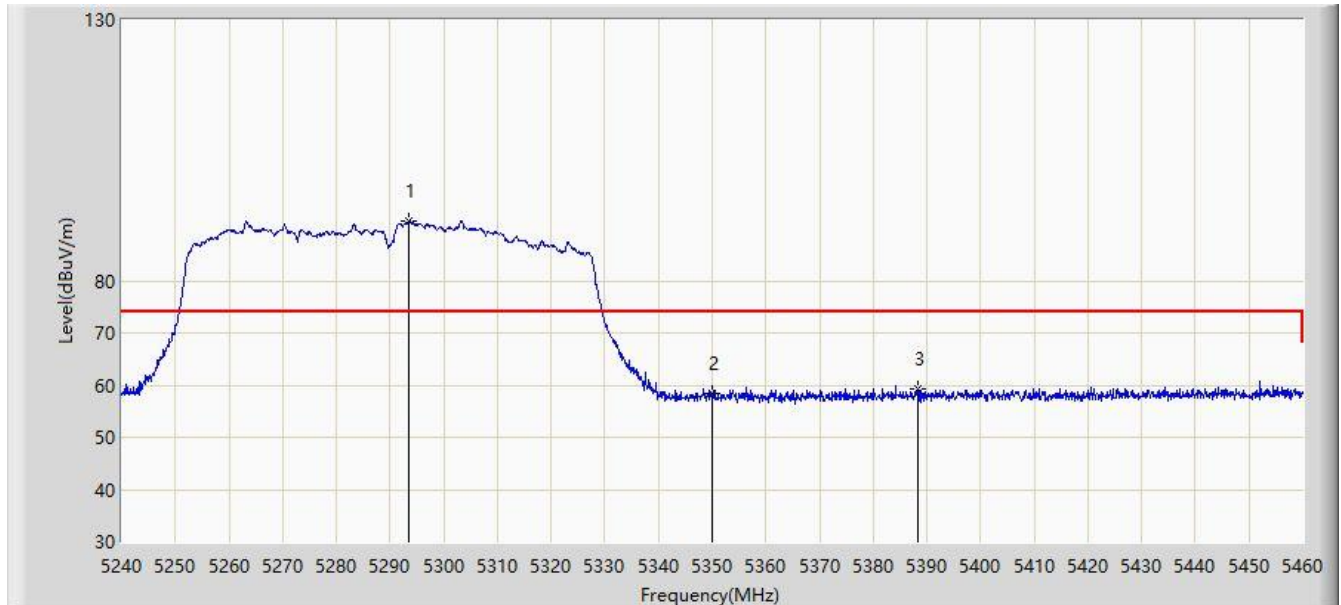


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5293.460        | 91.464                 | 87.083               | N/A         | N/A            | 4.381       | PK   |
| 2  |      | 5350.000        | 58.272                 | 54.095               | -15.728     | 74.000         | 4.177       | PK   |
| 3  |      | 5388.390        | 59.364                 | 54.745               | -14.636     | 74.000         | 4.620       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:35 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290 MHz |                          |

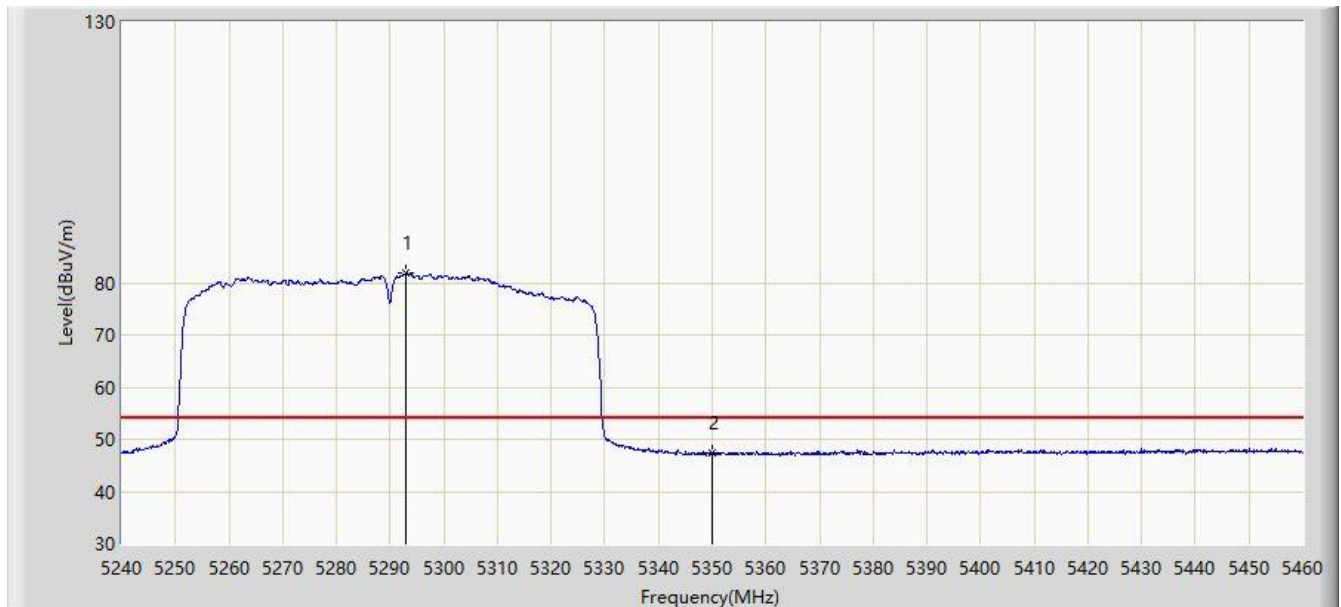


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5292.910        | 81.823                 | 77.445               | N/A         | N/A            | 4.378       | AV   |
| 2  |      | 5350.000        | 47.438                 | 43.261               | -6.562      | 54.000         | 4.177       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:36 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290 MHz |                          |

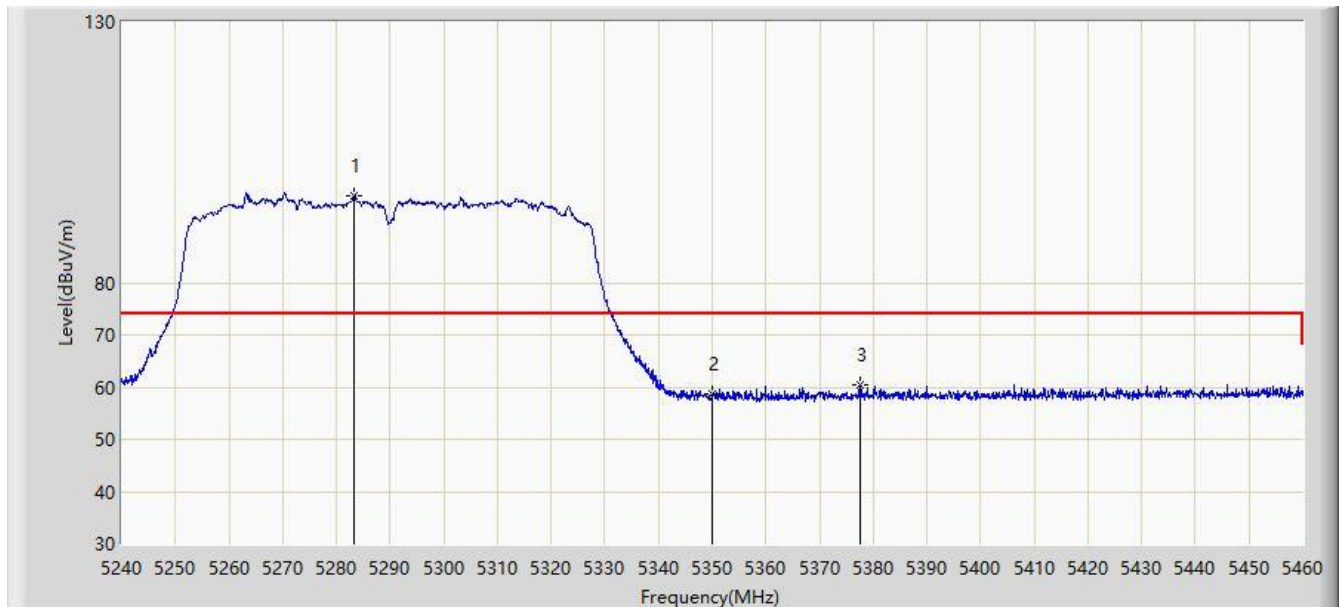


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5283.340        | 96.744                 | 92.421               | N/A         | N/A            | 4.323       | PK   |
| 2  |      | 5350.000        | 58.685                 | 54.508               | -15.315     | 74.000         | 4.177       | PK   |
| 3  |      | 5377.500        | 60.322                 | 55.894               | -13.678     | 74.000         | 4.428       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:36 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290 MHz |                          |

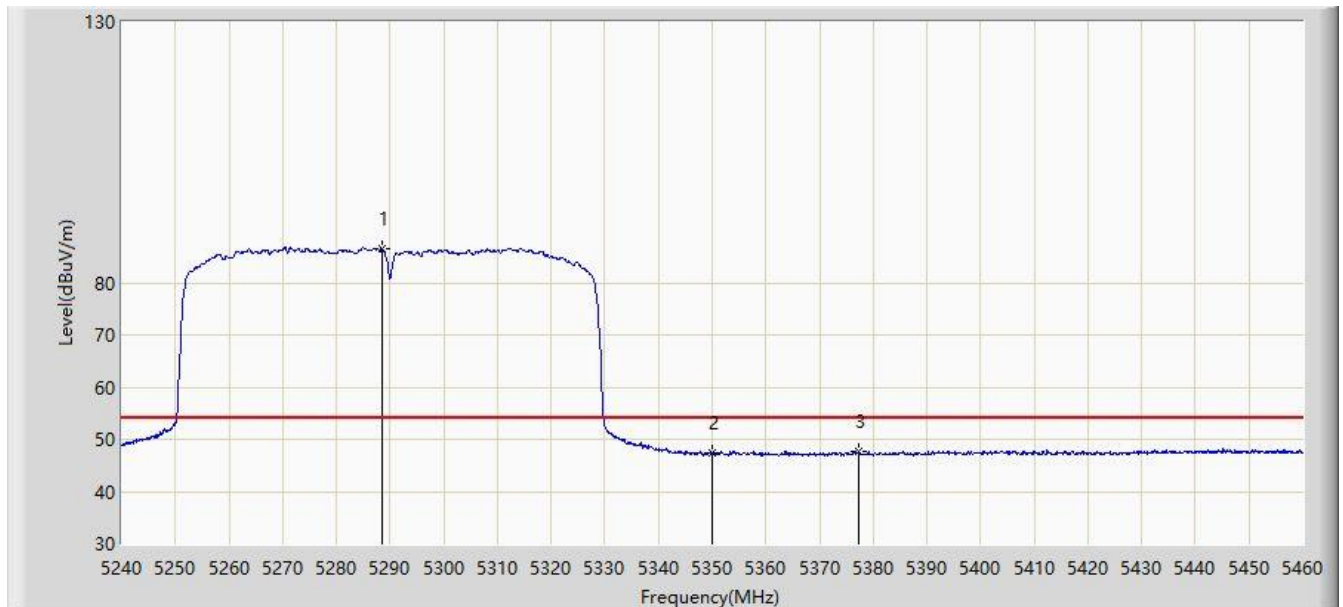


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5288.510        | 86.599                 | 82.246               | N/A         | N/A            | 4.353       | AV   |
| 2  |      | 5350.000        | 47.368                 | 43.191               | -6.632      | 54.000         | 4.177       | AV   |
| 3  |      | 5377.170        | 47.759                 | 43.338               | -6.241      | 54.000         | 4.420       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:38 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530 MHz |                          |

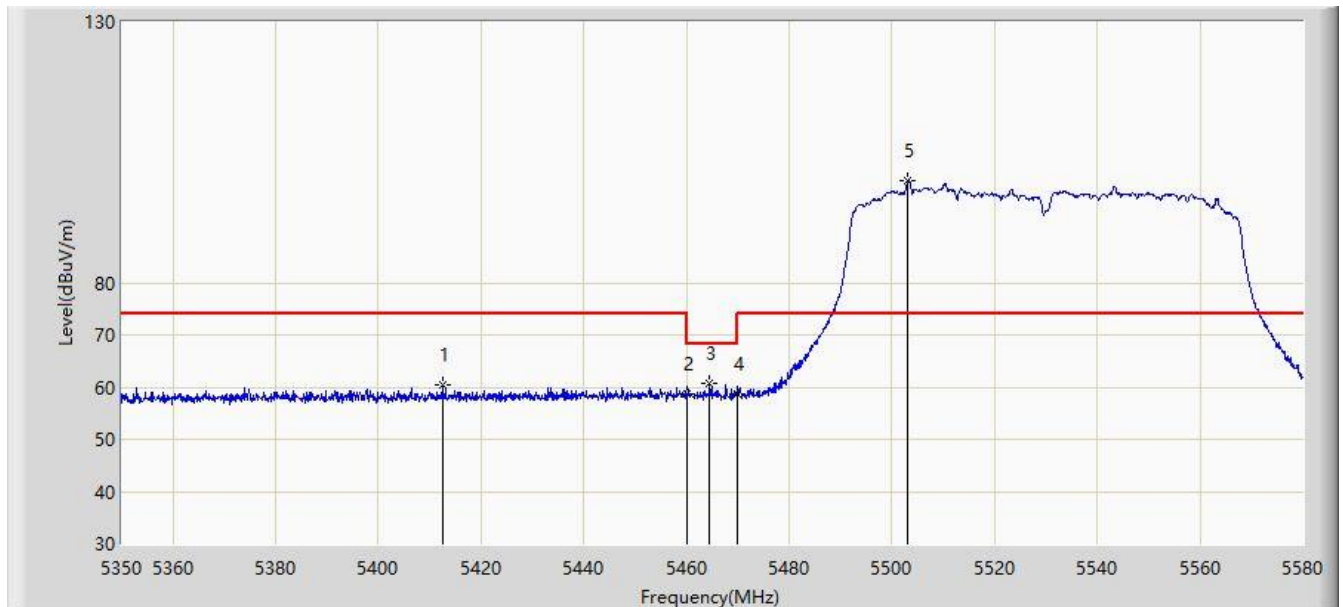


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5412.445        | 60.331                 | 55.675               | -13.669     | 74.000         | 4.656       | PK   |
| 2  |      | 5460.000        | 58.663                 | 54.223               | -15.337     | 74.000         | 4.440       | PK   |
| 3  |      | 5464.425        | 60.767                 | 56.320               | -7.433      | 68.200         | 4.447       | PK   |
| 4  |      | 5470.000        | 58.647                 | 54.191               | -9.553      | 68.200         | 4.455       | PK   |
| 5  | *    | 5503.180        | 99.521                 | 95.073               | N/A         | N/A            | 4.448       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:39 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530 MHz |                          |

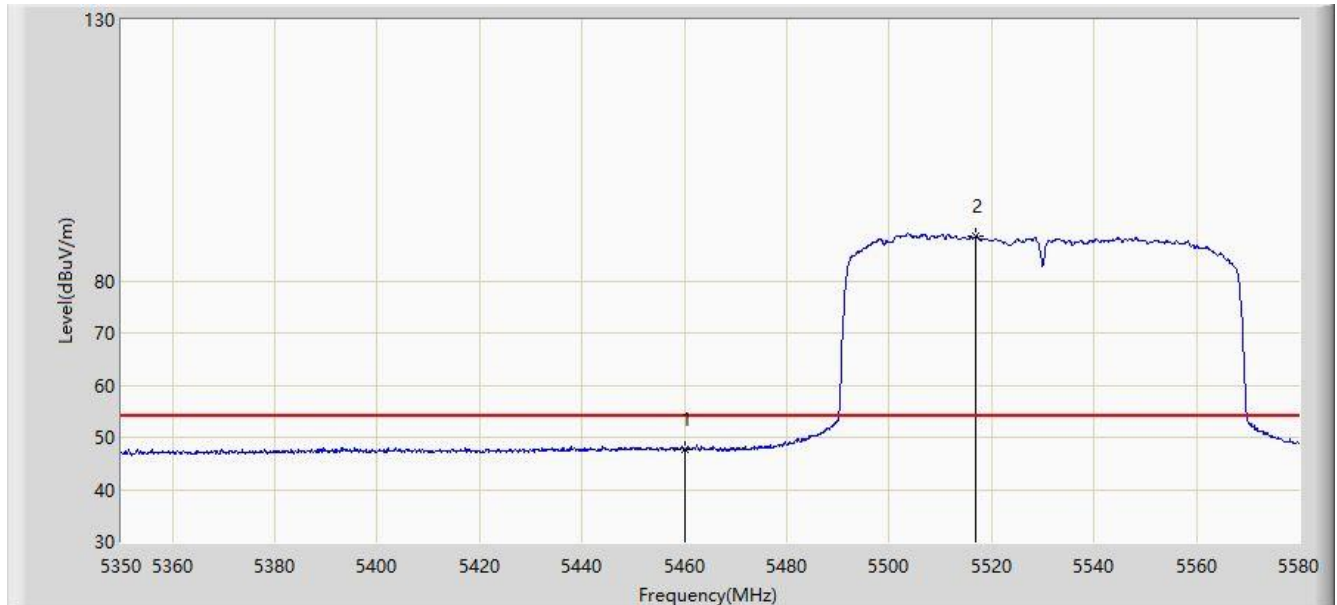


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5460.000        | 47.626                 | 43.186               | -6.374      | 54.000         | 4.440       | AV   |
| 2  | *    | 5516.980        | 88.543                 | 83.821               | N/A         | N/A            | 4.723       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:39 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530 MHz |                          |

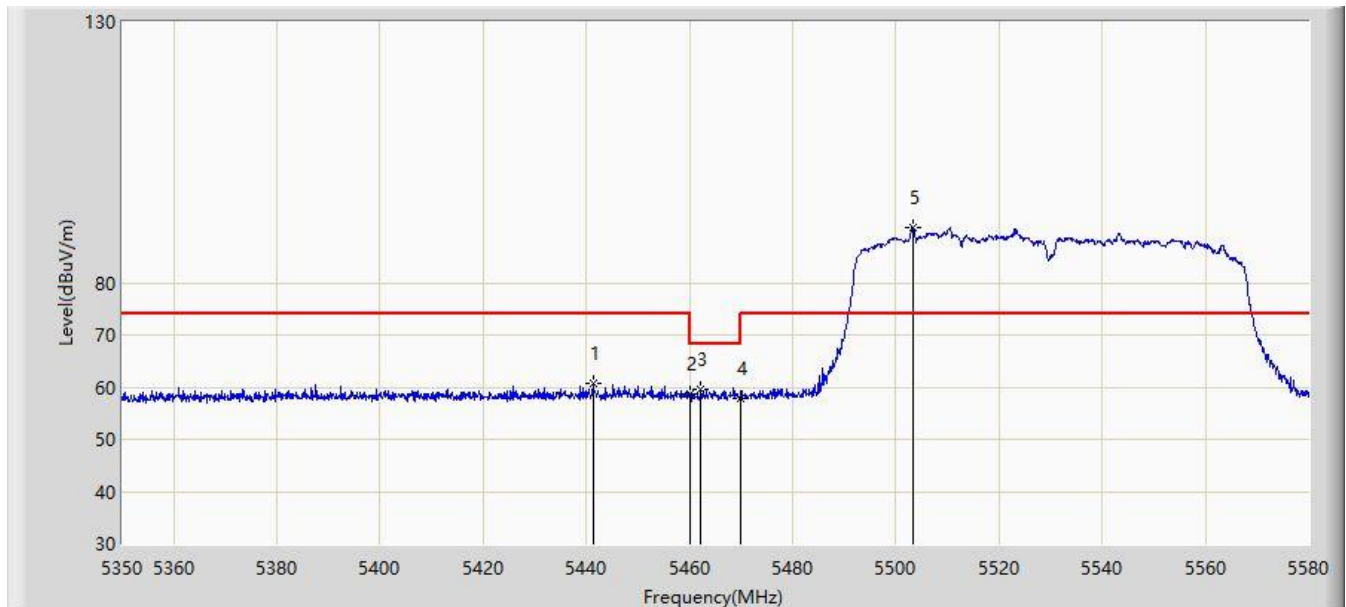


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5441.310        | 60.754                 | 56.116               | -13.246     | 74.000         | 4.638       | PK   |
| 2  |      | 5460.000        | 58.778                 | 54.338               | -15.222     | 74.000         | 4.440       | PK   |
| 3  |      | 5462.240        | 59.621                 | 55.178               | -8.579      | 68.200         | 4.443       | PK   |
| 4  |      | 5470.000        | 57.889                 | 53.433               | -10.311     | 68.200         | 4.455       | PK   |
| 5  | *    | 5503.295        | 90.462                 | 86.015               | N/A         | N/A            | 4.447       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:40 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530 MHz |                          |

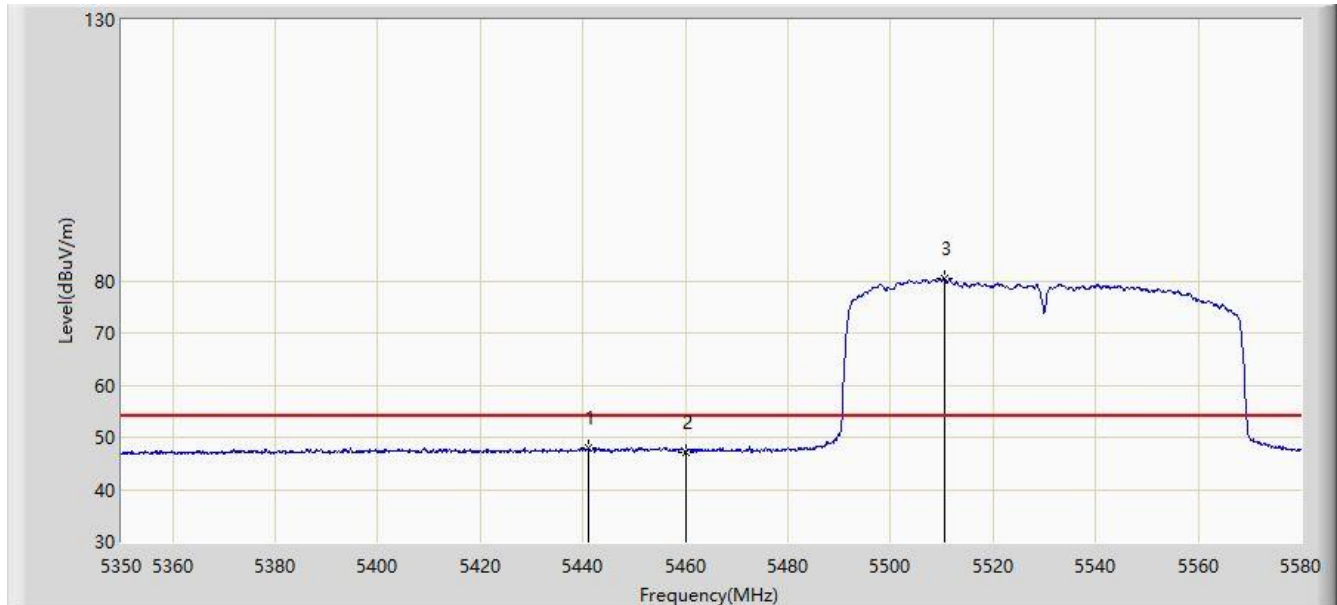


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5440.965        | 47.859                 | 43.215               | -6.141      | 54.000         | 4.644       | AV   |
| 2  |      | 5460.000        | 47.223                 | 42.783               | -6.777      | 54.000         | 4.440       | AV   |
| 3  | *    | 5510.540        | 80.304                 | 75.738               | N/A         | N/A            | 4.566       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:41 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5610 MHz |                          |

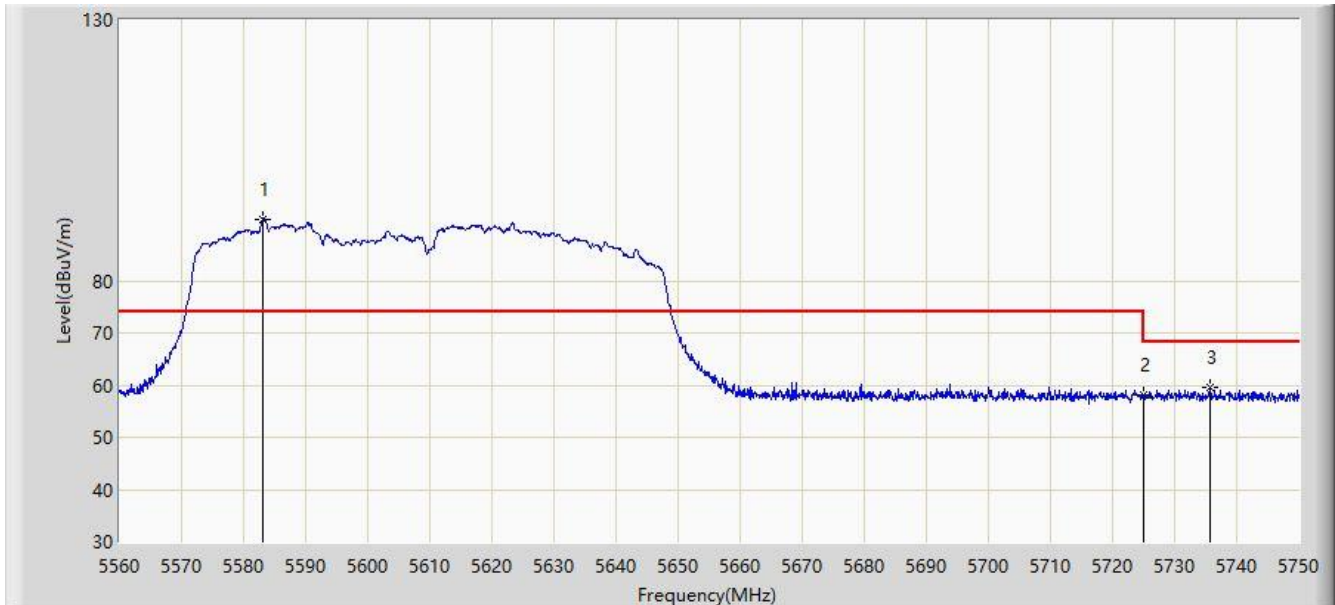


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5583.085        | 91.767                 | 87.000               | N/A         | N/A            | 4.767       | PK   |
| 2  |      | 5725.000        | 58.070                 | 52.592               | -10.130     | 68.200         | 5.478       | PK   |
| 3  |      | 5735.750        | 59.662                 | 54.132               | -8.538      | 68.200         | 5.530       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:42 |
| Limit: FCC_Part15.209_RE(3m)                              | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5610 MHz |                          |

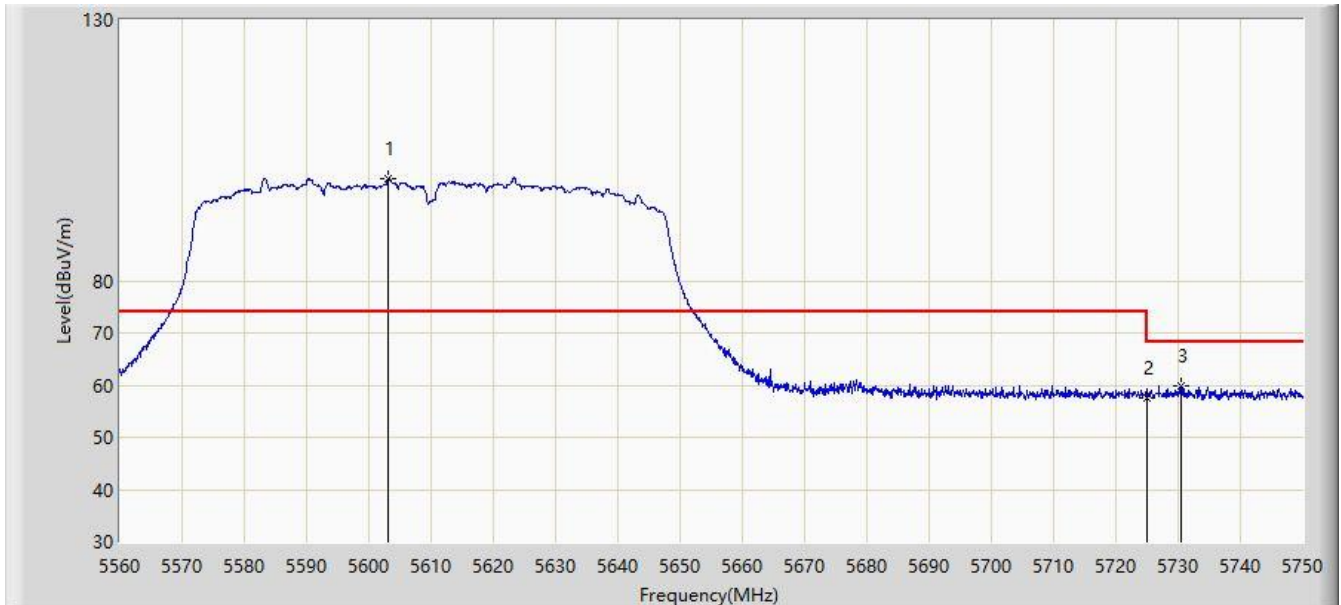


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 5603.035        | 99.522                 | 94.633               | N/A         | N/A            | 4.889       | PK   |
| 2  |      | 5725.000        | 57.620                 | 52.142               | -10.580     | 68.200         | 5.478       | PK   |
| 3  |      | 5730.430        | 59.808                 | 54.306               | -8.392      | 68.200         | 5.502       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:43 |
| Limit: FCC_Part15.407_Band Edge(3m)                       | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5775 MHz |                          |

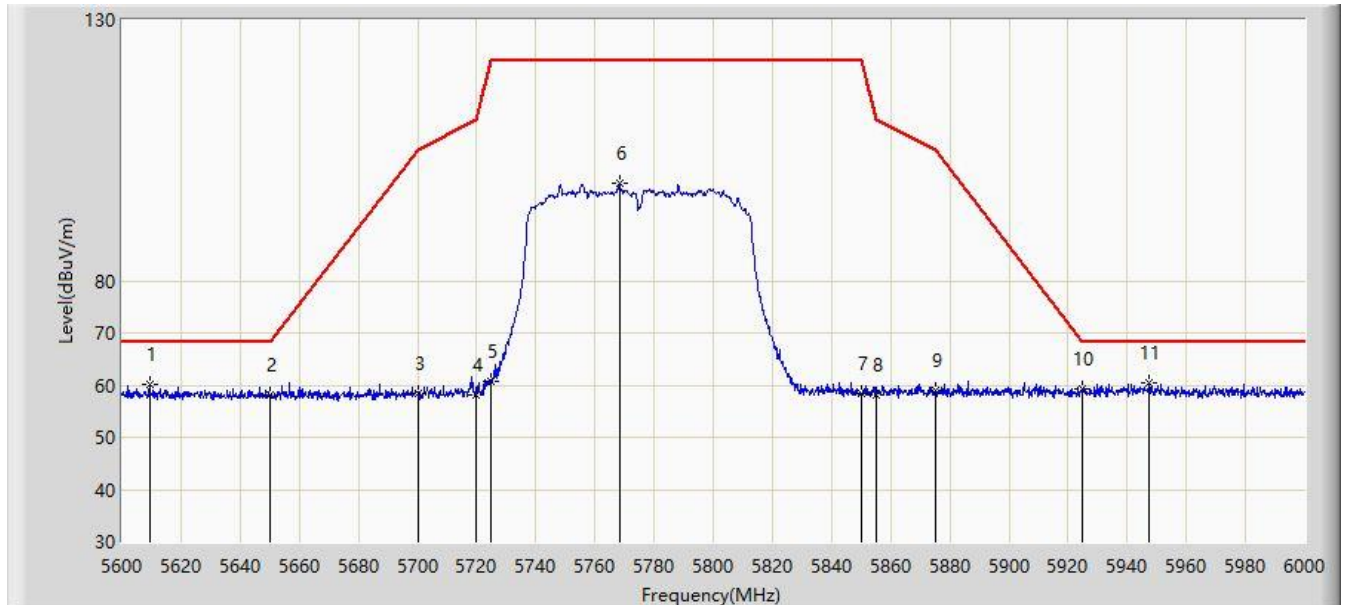


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5609.400        | 60.252                 | 55.282               | -7.948      | 68.200         | 4.971       | PK   |
| 2  |      | 5650.000        | 58.243                 | 52.907               | -9.957      | 68.200         | 5.336       | PK   |
| 3  |      | 5700.000        | 58.528                 | 53.210               | -46.672     | 105.200        | 5.318       | PK   |
| 4  |      | 5720.000        | 58.234                 | 52.760               | -52.566     | 110.800        | 5.474       | PK   |
| 5  |      | 5725.000        | 60.801                 | 55.323               | -61.399     | 122.200        | 5.478       | PK   |
| 6  |      | 5768.200        | 98.612                 | 92.801               | N/A         | N/A            | 5.810       | PK   |
| 7  |      | 5850.000        | 58.269                 | 52.300               | -63.931     | 122.200        | 5.968       | PK   |
| 8  |      | 5855.000        | 58.133                 | 52.158               | -52.667     | 110.800        | 5.975       | PK   |
| 9  |      | 5875.000        | 59.018                 | 53.005               | -46.182     | 105.200        | 6.013       | PK   |
| 10 |      | 5925.000        | 59.141                 | 53.006               | -9.059      | 68.200         | 6.136       | PK   |
| 11 | *    | 5947.600        | 60.323                 | 54.260               | -7.877      | 68.200         | 6.063       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Site: AC2                                                 | Time: 2020/02/24 - 14:45 |
| Limit: FCC_Part15.407_Band Edge(3m)                       | Engineer: Kyrie Xie      |
| Probe: AC2_BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: Mobile Computer                                      | Power: Power by PC       |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5775 MHz |                          |

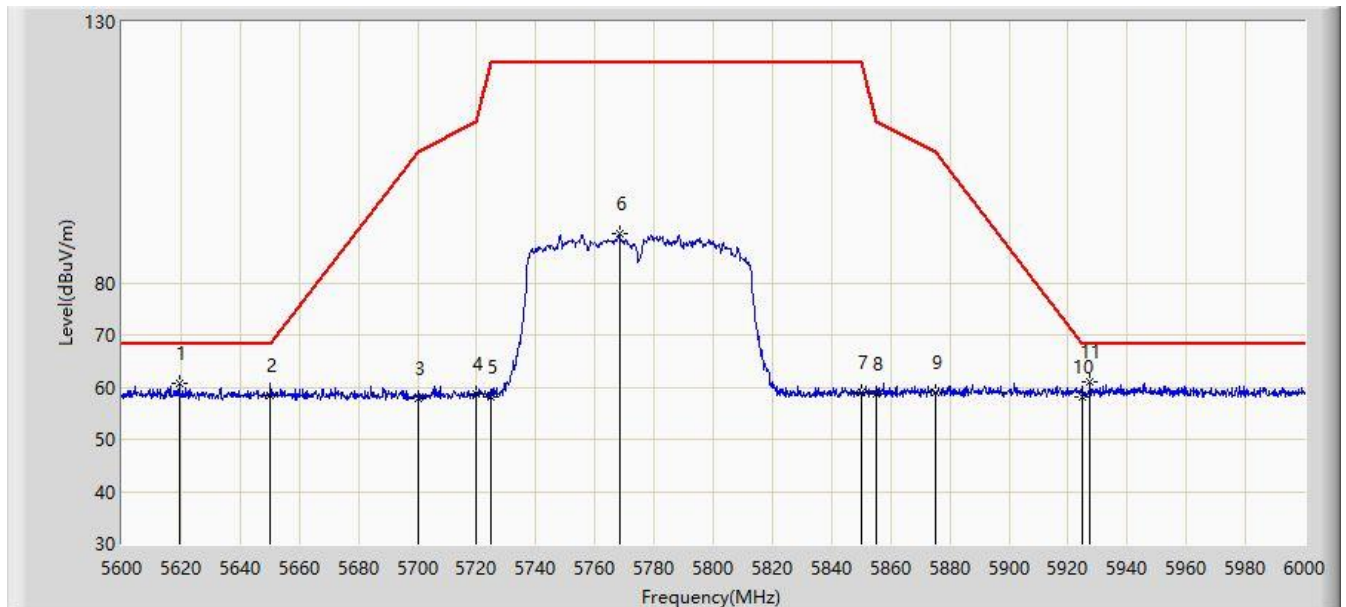

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 5619.400        | 60.789                 | 55.663               | -7.411      | 68.200         | 5.126       | PK   |
| 2  |      | 5650.000        | 58.458                 | 53.122               | -9.742      | 68.200         | 5.336       | PK   |
| 3  |      | 5700.000        | 57.822                 | 52.504               | -47.378     | 105.200        | 5.318       | PK   |
| 4  |      | 5720.000        | 58.581                 | 53.107               | -52.219     | 110.800        | 5.474       | PK   |
| 5  |      | 5725.000        | 58.178                 | 52.700               | -64.022     | 122.200        | 5.478       | PK   |
| 6  |      | 5768.400        | 89.330                 | 83.522               | N/A         | N/A            | 5.809       | PK   |
| 7  |      | 5850.000        | 59.077                 | 53.108               | -63.123     | 122.200        | 5.968       | PK   |
| 8  |      | 5855.000        | 58.605                 | 52.630               | -52.195     | 110.800        | 5.975       | PK   |
| 9  |      | 5875.000        | 58.875                 | 52.862               | -46.325     | 105.200        | 6.013       | PK   |
| 10 |      | 5925.000        | 58.137                 | 52.002               | -10.063     | 68.200         | 6.136       | PK   |
| 11 | *    | 5927.400        | 61.075                 | 54.929               | -7.125      | 68.200         | 6.147       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

## 7.10. AC Conducted Emissions Measurement


### 7.10.1. TestLimit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |                 |                      |
|-----------------------------------------------|-----------------|----------------------|
| Frequency (MHz)                               | QP (dB $\mu$ V) | Average (dB $\mu$ V) |
| 0.15 - 0.50                                   | 66 - 56         | 56 - 46              |
| 0.50 - 5.0                                    | 56              | 46                   |
| 5.0 - 30                                      | 60              | 50                   |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.10.2. Test Setup

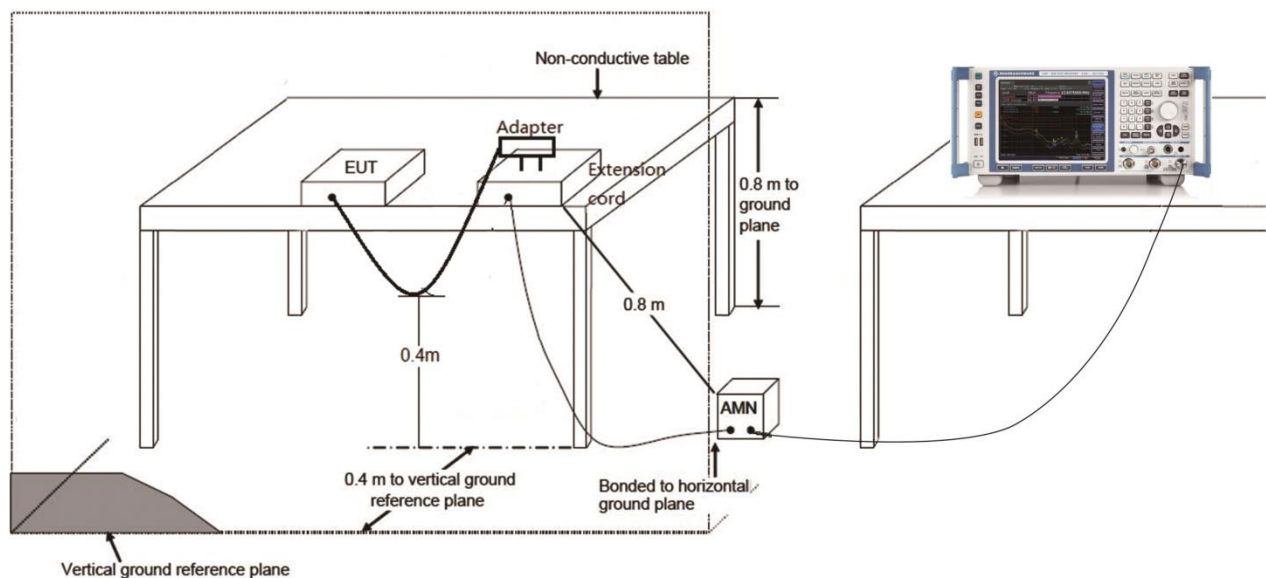

### 7.10.3.Test Result

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: SR2                                                | Time: 2020/02/26 - 10:02 |
| Limit: FCC_Part15.207_CE_AC Power                        | Engineer: Andy Zhu       |
| Probe: ENV216_101683_Filter On                           | Polarity: Line           |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by 802.11a at Channel 5180MHz |                          |

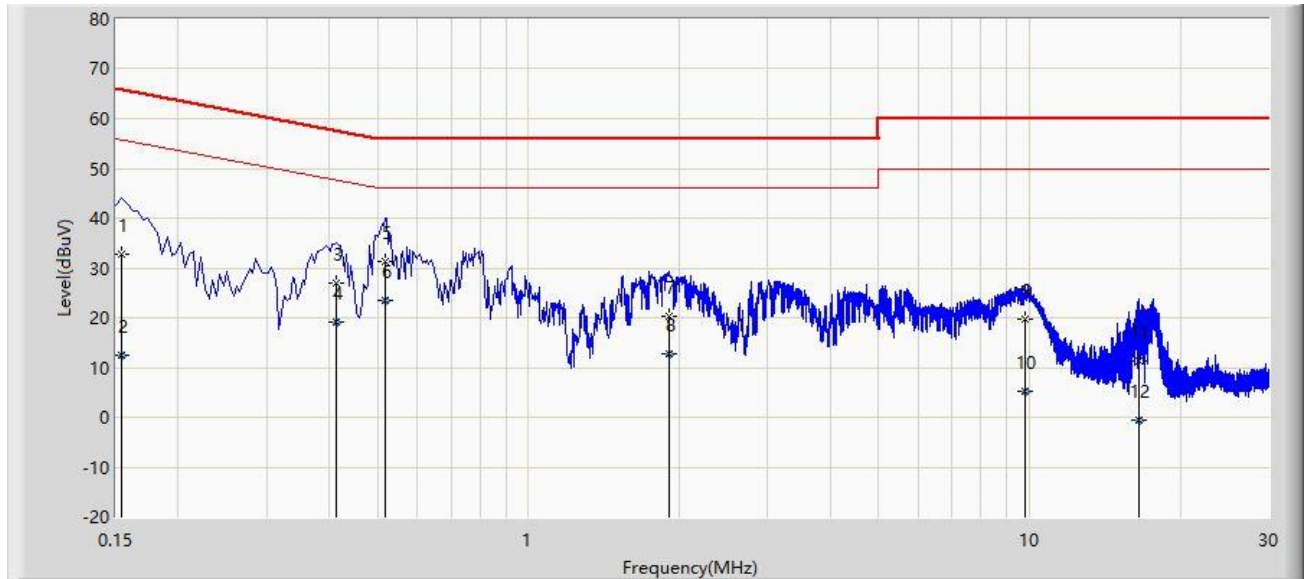


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.154           | 32.662               | 21.958               | -33.120     | 65.781       | 10.704      | QP   |
| 2  |      |      | 0.154           | 12.467               | 1.763                | -43.314     | 55.781       | 10.704      | AV   |
| 3  |      |      | 0.414           | 26.904               | 16.797               | -30.663     | 57.568       | 10.107      | QP   |
| 4  |      |      | 0.414           | 19.157               | 9.050                | -28.410     | 47.568       | 10.107      | AV   |
| 5  |      |      | 0.518           | 31.399               | 21.228               | -24.601     | 56.000       | 10.171      | QP   |
| 6  |      |      | 0.518           | 23.574               | 13.403               | -22.426     | 46.000       | 10.171      | AV   |
| 7  |      |      | 1.914           | 20.403               | 10.473               | -35.597     | 56.000       | 9.930       | QP   |
| 8  |      |      | 1.914           | 12.727               | 2.797                | -33.273     | 46.000       | 9.930       | AV   |
| 9  |      | *    | 9.818           | 19.596               | 9.650                | -40.404     | 60.000       | 9.946       | QP   |
| 10 |      |      | 9.818           | 5.299                | -4.647               | -44.701     | 50.000       | 9.946       | AV   |
| 11 |      |      | 16.530          | 11.367               | 1.318                | -48.633     | 60.000       | 10.049      | QP   |
| 12 |      |      | 16.530          | -0.485               | -10.533              | -50.485     | 50.000       | 10.049      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)



|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: SR2                                                | Time: 2020/02/26 - 10:15 |
| Limit: FCC_Part15.207_CE_AC Power                        | Engineer: Andy Zhu       |
| Probe: ENV216_101683_Filter On                           | Polarity: Neutral        |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by 802.11a at Channel 5180MHz |                          |

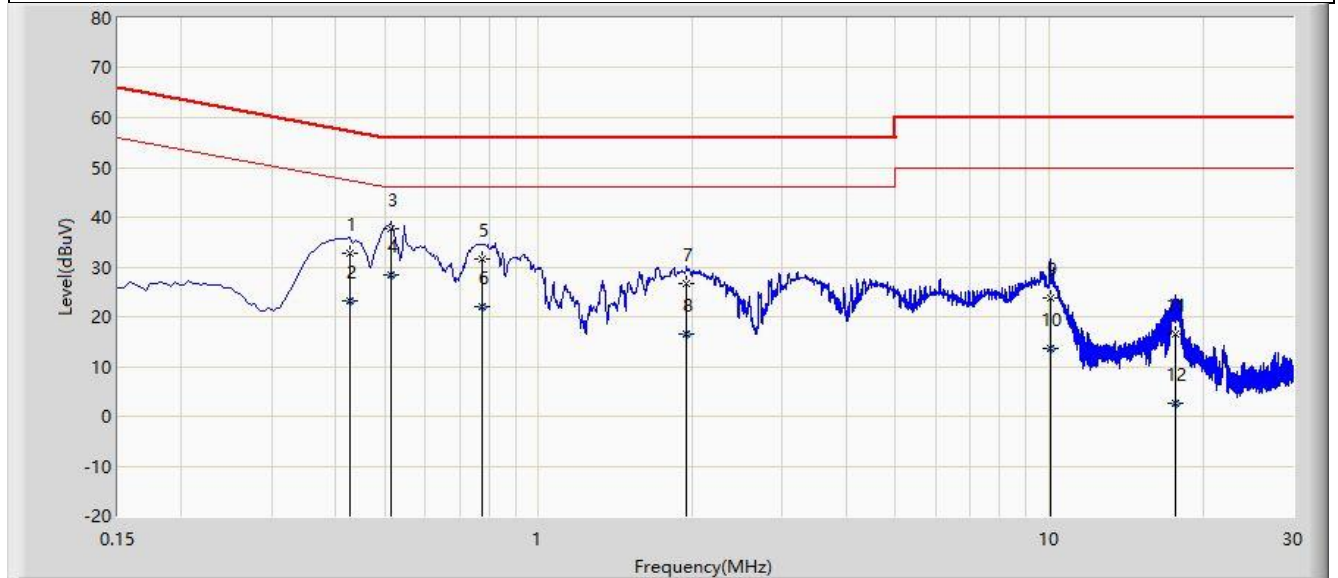

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.426           | 32.712               | 22.571               | -24.618     | 57.330       | 10.141      | QP   |
| 2  |      |      | 0.426           | 23.318               | 13.177               | -24.012     | 47.330       | 10.141      | AV   |
| 3  |      |      | 0.514           | 37.738               | 27.539               | -18.262     | 56.000       | 10.200      | QP   |
| 4  |      |      | 0.514           | 28.453               | 18.254               | -17.547     | 46.000       | 10.200      | AV   |
| 5  |      |      | 0.774           | 31.699               | 21.627               | -24.301     | 56.000       | 10.071      | QP   |
| 6  |      |      | 0.774           | 22.044               | 11.972               | -23.956     | 46.000       | 10.071      | AV   |
| 7  |      | *    | 1.946           | 26.597               | 16.649               | -29.403     | 56.000       | 9.948       | QP   |
| 8  |      |      | 1.946           | 16.536               | 6.587                | -29.464     | 46.000       | 9.948       | AV   |
| 9  |      |      | 10.074          | 23.669               | 13.689               | -36.331     | 60.000       | 9.981       | QP   |
| 10 |      |      | 10.074          | 13.741               | 3.761                | -36.259     | 50.000       | 9.981       | AV   |
| 11 |      |      | 17.702          | 16.393               | 6.299                | -43.607     | 60.000       | 10.094      | QP   |
| 12 |      |      | 17.702          | 2.654                | -7.440               | -47.346     | 50.000       | 10.094      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)



## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Mobile Computer** is in compliance with Part 15E of the FCC rules & ISED rules.

\_\_\_\_\_ The End \_\_\_\_\_

## **Appendix A - Test Setup Photograph**

Refer to “2001RSU045-UT” file.

## **Appendix B-EUT Photograph**

Refer to “2001RSU045-UE” file.