

NOTES:

**§ 74.637 Emissions and emission limitations.**

(a) The mean power of emissions shall be attenuated below the mean transmitter power (PMEAN) in accordance with the following schedule:

(1) When using frequency modulation:

(i) On any frequency removed from the assigned (center) frequency by more than 50% up to and including 100% of the authorized bandwidth: At least 25 dB in any 100 kHz reference bandwidth (BREF);

(ii) On any frequency removed from the assigned (center) frequency by more than 100% up to and including 250% of the authorized bandwidth: At least 35 dB in any 100 kHz reference bandwidth;

(iii) On any frequency removed from the assigned (center) frequency by more than 250% of the authorized bandwidth: At least  $43 + 10 \log_{10}(\text{PMEAN in watts})$  dB, or 80 dB, whichever is the lesser attenuation, in any 100kHz reference bandwidth.

(2) For Digital Modulation:

(i) For operating frequencies below 15 GHz, in any 4 kHz reference bandwidth (BREF), the center frequency of which is removed from the assigned frequency by more than 50 percent up to and including 250 percent of the authorized bandwidth: As specified by the following equation but in no event less than 50 decibels:

$$A = 35 + 0.8 (G - 50) + 10 \log_{10} B.$$

(Attenuation greater than 80 decibels is not required.)

Where:

A = Attenuation (in decibels) below the mean output power level.

G = Percent removed from the carrier frequency.

B = Authorized bandwidth in megahertz.

Compliance curves drawn at  $A(\text{dB}) = 35 + 0.8(G - 50) + 10 \log B - 13.9$

Where:

A= Attenuation required

G= percent of bandwidth removed from carrier

B=authorized Bandwidth in Mhz

Compliance curves include the compliance factor for measurements made with a 100KHz resolution bandwidth which is:

$$10 \log (B_{\text{RES}} / B_{\text{REF}}) = 10 \log (4\text{E}3 / 100\text{E}3) = -13.9\text{db}$$

**Reference Level Offset Note:**

The following Measurements were made with the transmitter output connected to a 20 db directional coupler connected to the spectrum analyzer by a six foot coaxial cable. The thru path of the directional coupler was connected directly to a 30 db attenuator connected to a power meter used to monitor the output power. A 22dB reference level offset was entered into the spectrum analyzer in order to show the true output level of the Transmitter.

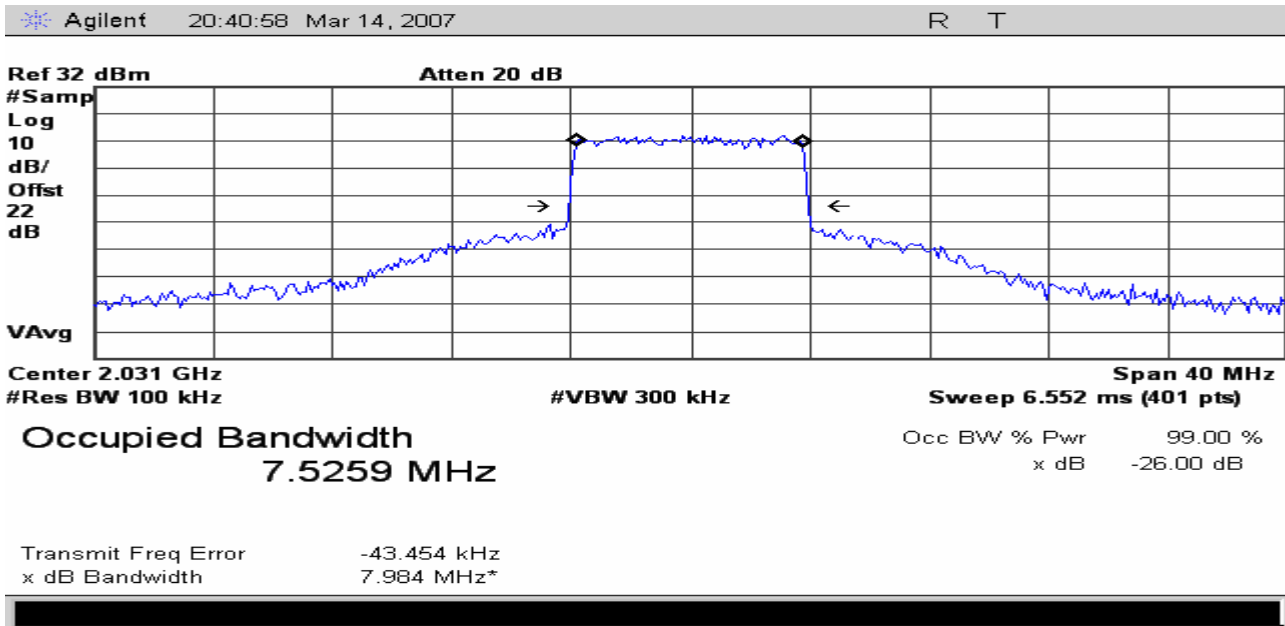
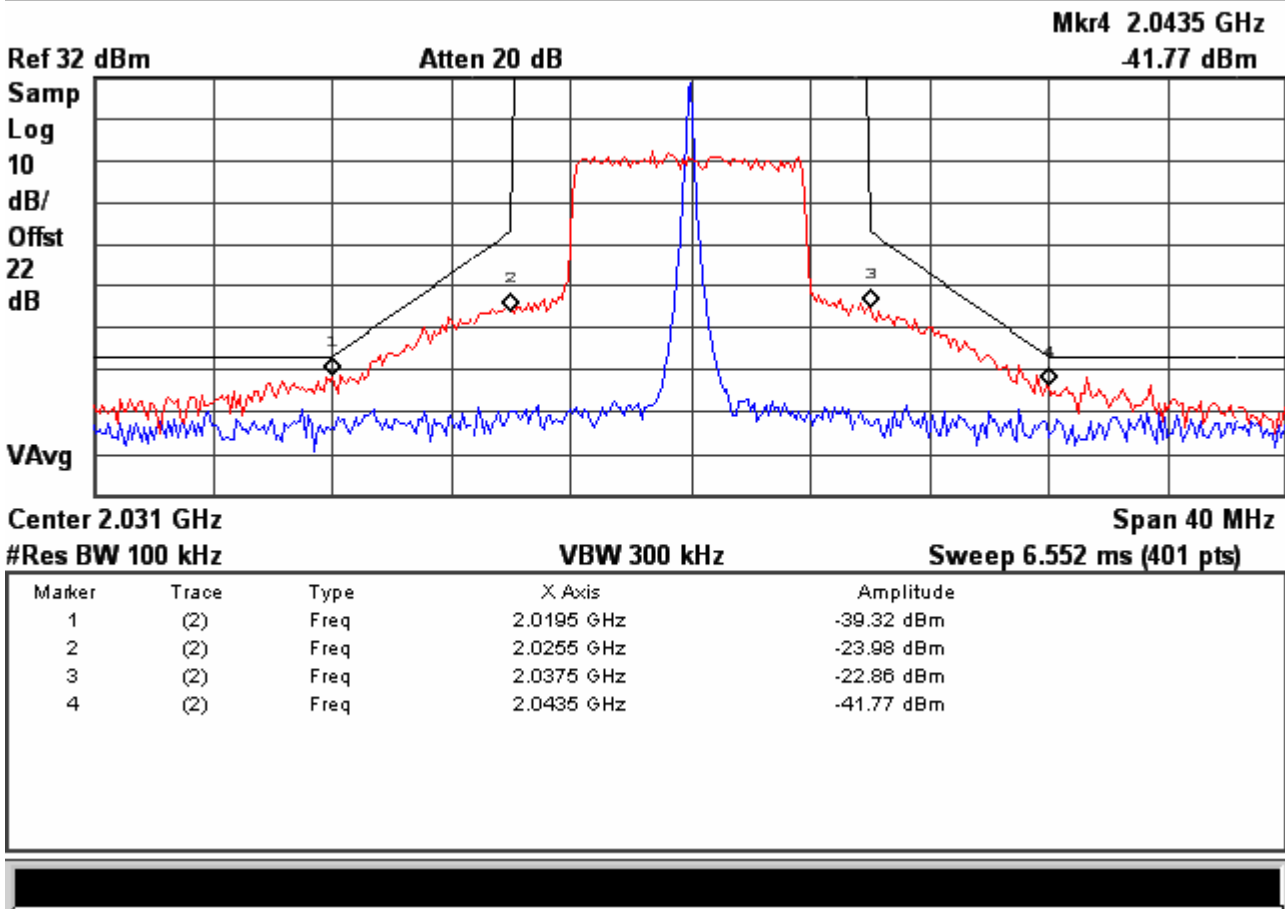


Figure 1

Occupied Bandwidth measurement; Modulation overlaying Mask and measured Power Bandwidth. COFDM modulation, 8 MHz 16QAM color Bars with Audio

Channel 1 BAS relo frequency

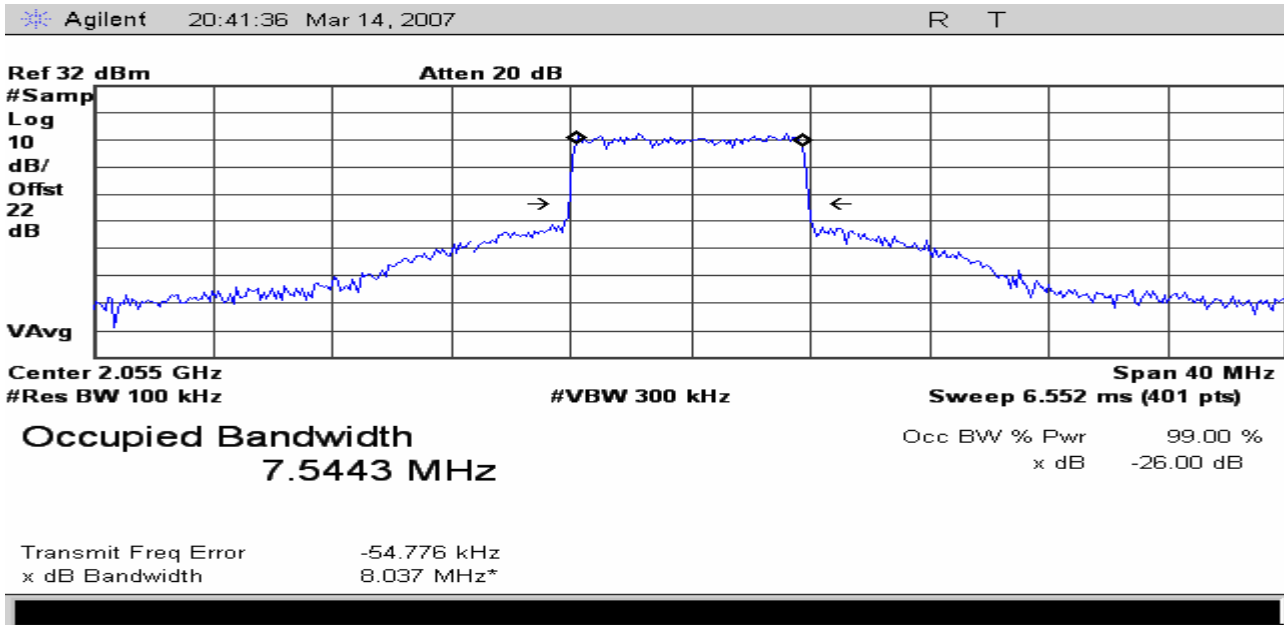
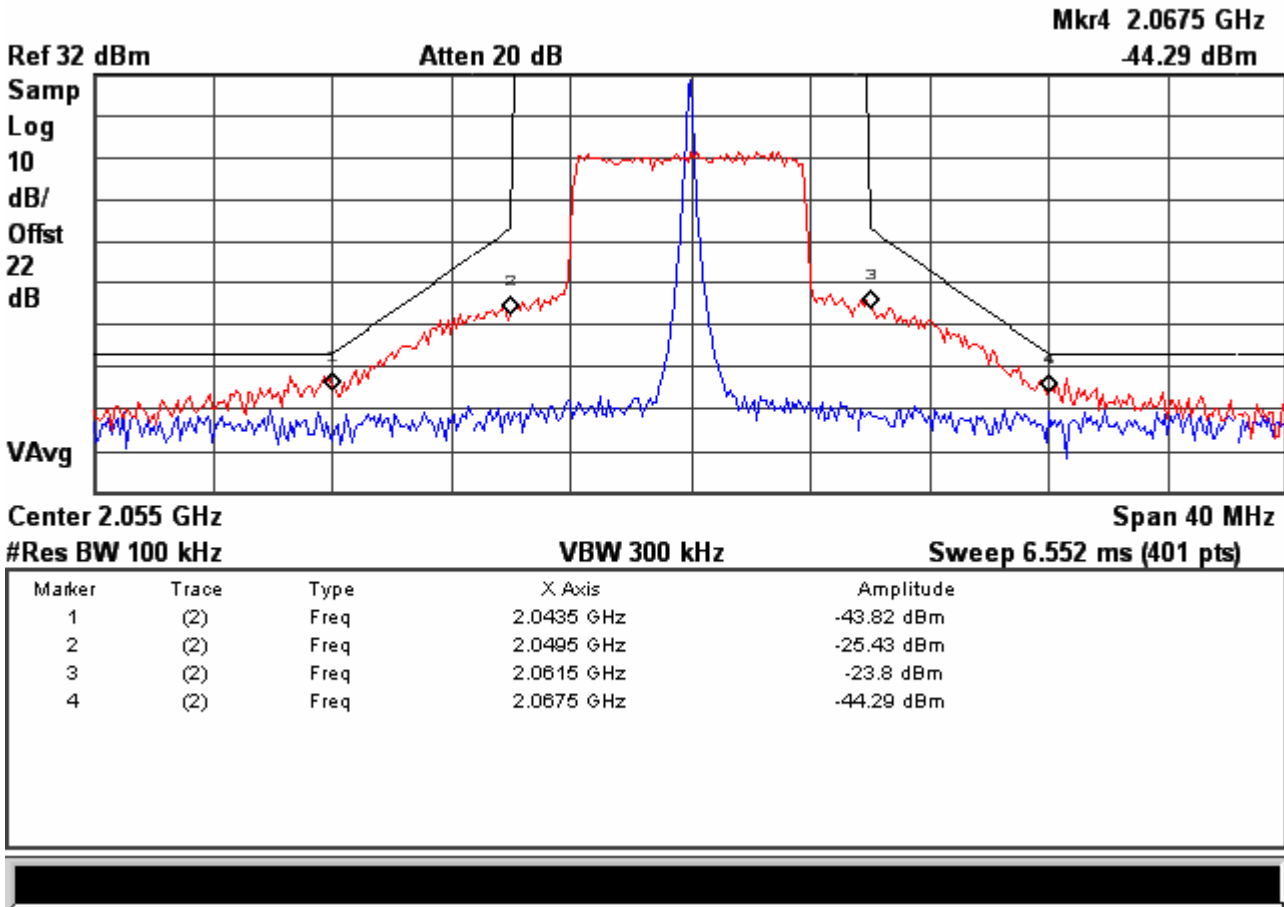


Figure 2  
Occupied Bandwidth measurement; Modulation overlaying Mask and measured Power Bandwidth. COFDM modulation, 8 MHz 16 QAM, Color Bars with Audio

Channel 3 BAS relo frequency

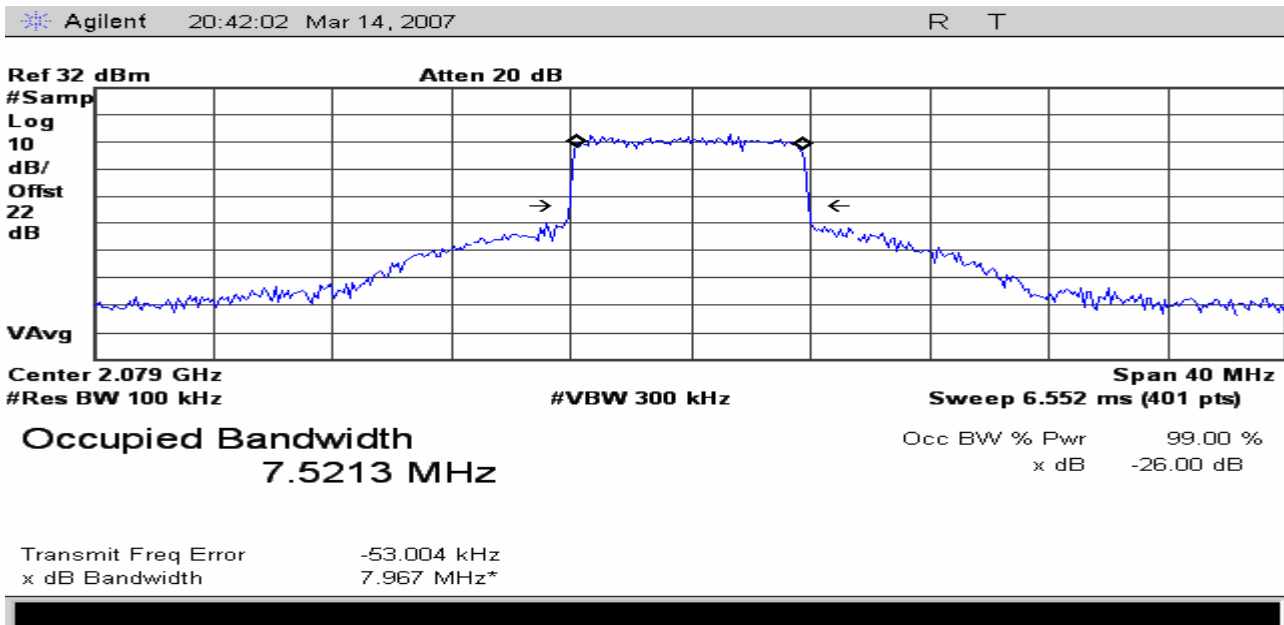
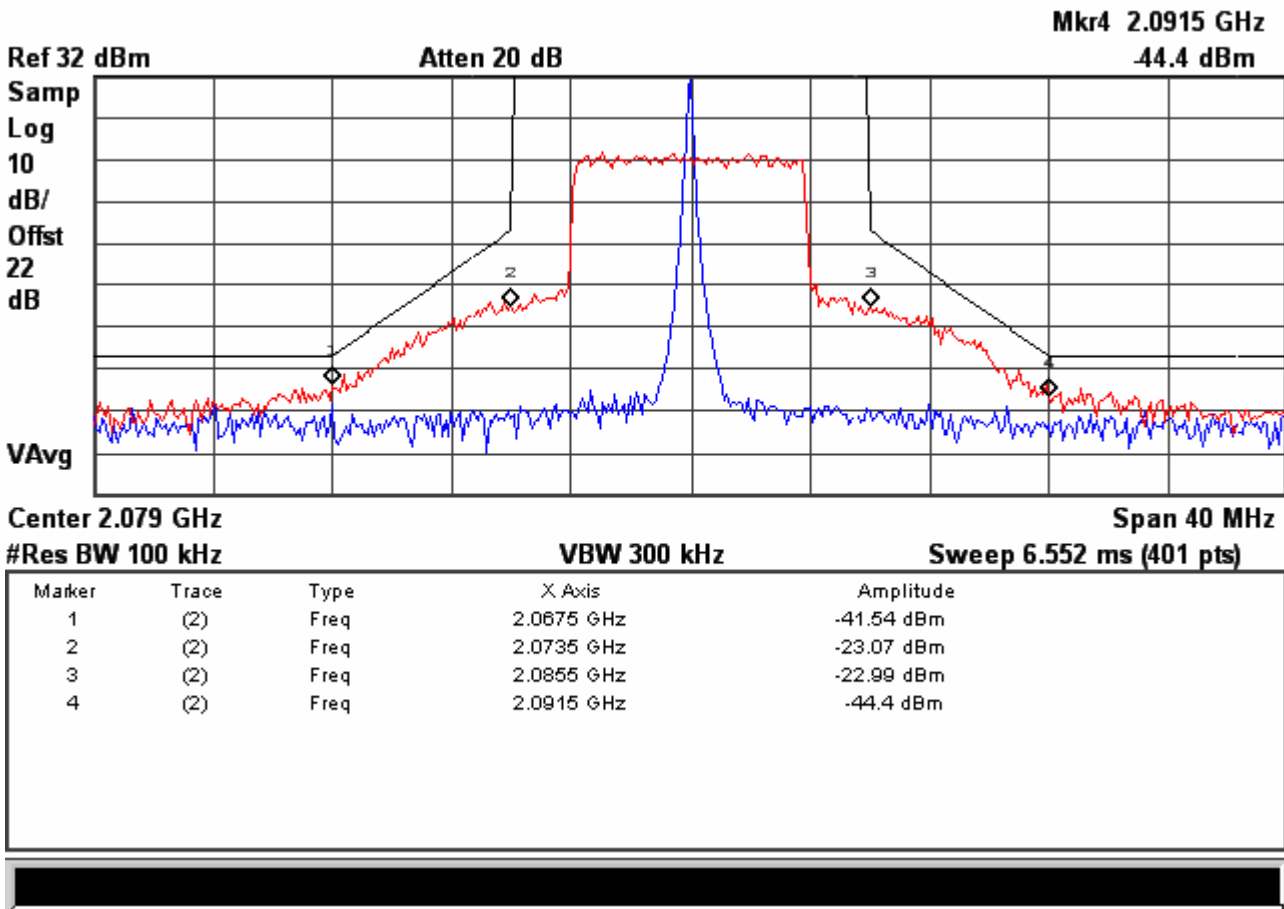


Figure 3  
Occupied Bandwidth measurement; Modulation overlaying Mask and measured Power Bandwidth. COFDM modulation, 8 MHz 16QAM, Color Bars with Audio

Channel 5 BAS relo frequency

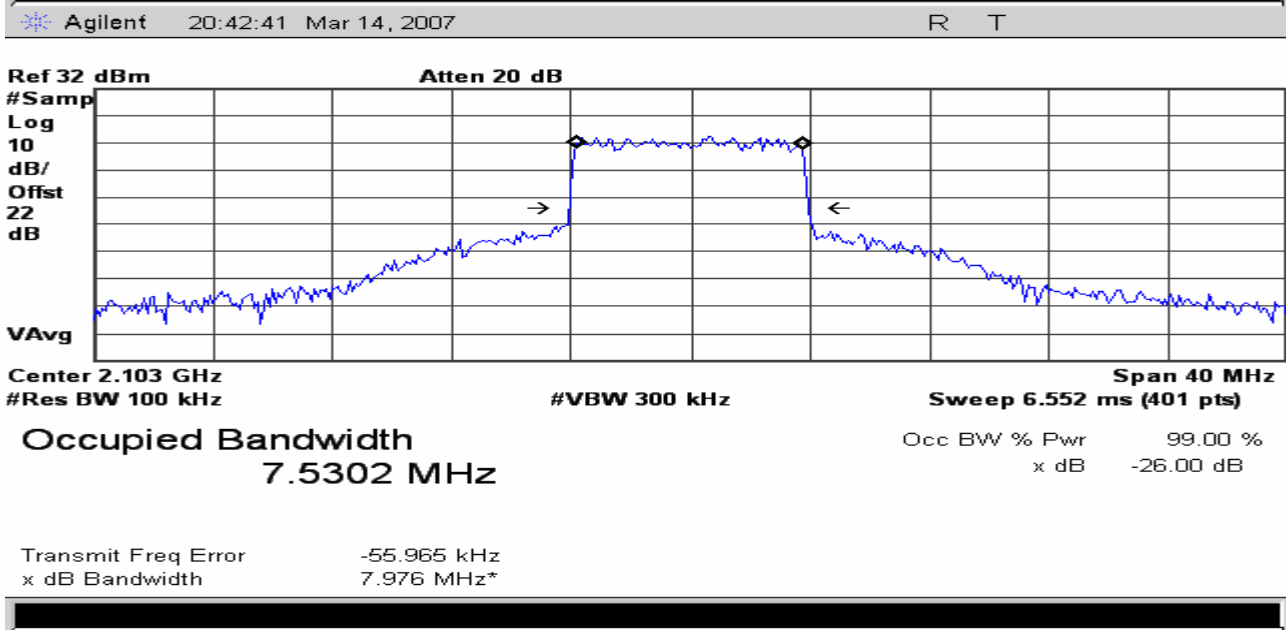
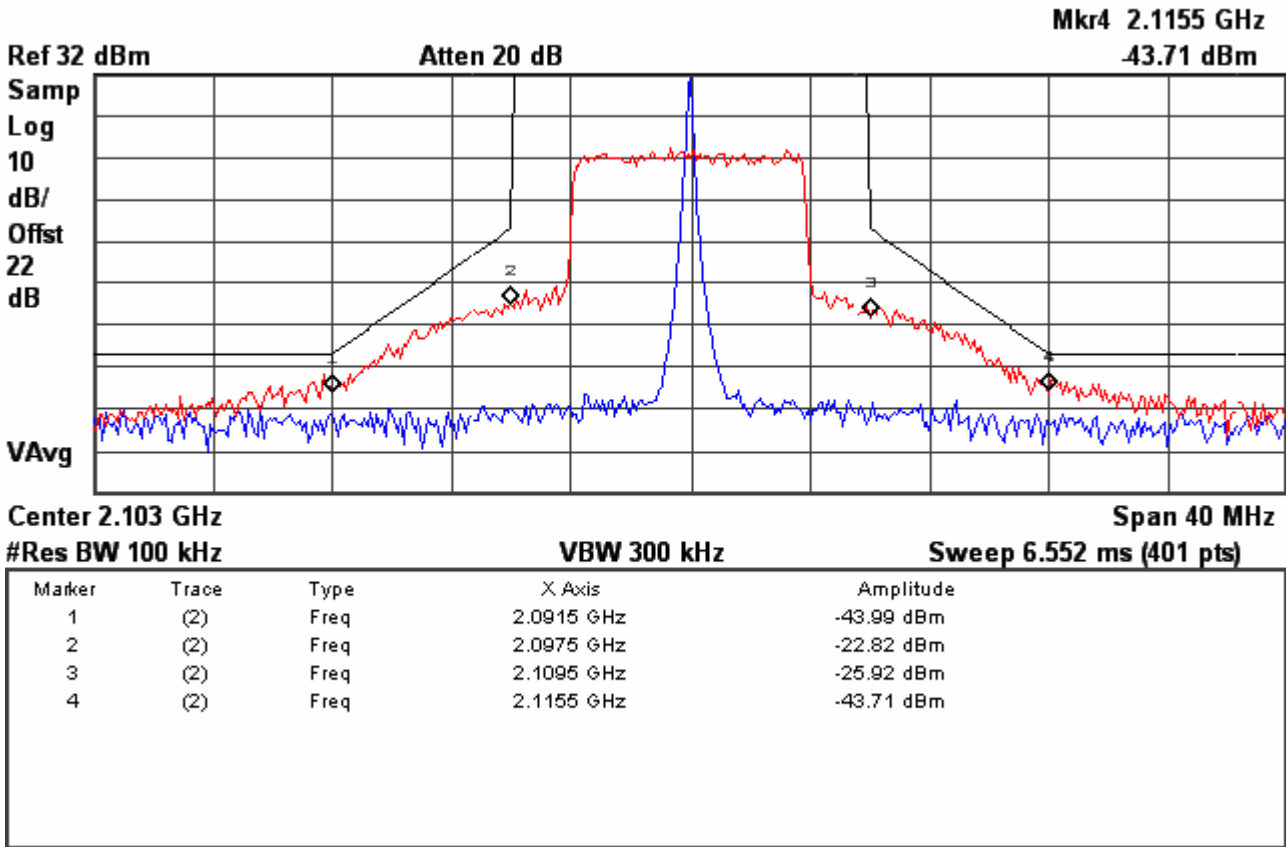


Figure 4  
Occupied Bandwidth measurement; Modulation overlaying Mask and measured Power Bandwidth. COFDM modulation, 8 MHz 16QAM, Color Bars with Audio

Channel 7 BAS relo frequency



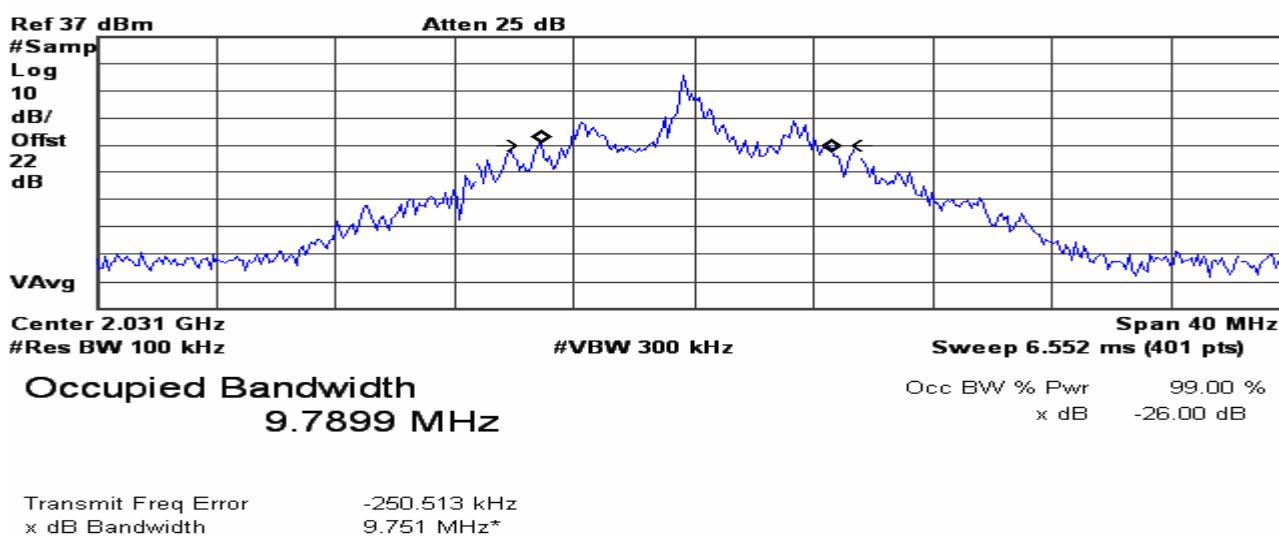


Figure 5  
Occupied Bandwidth measurement; Modulation overlaying Mask and measured Power Bandwidth. FM , +/- 3 MHz Deviation ,Color Bars with Audio

Channel 1 BAS relo frequency

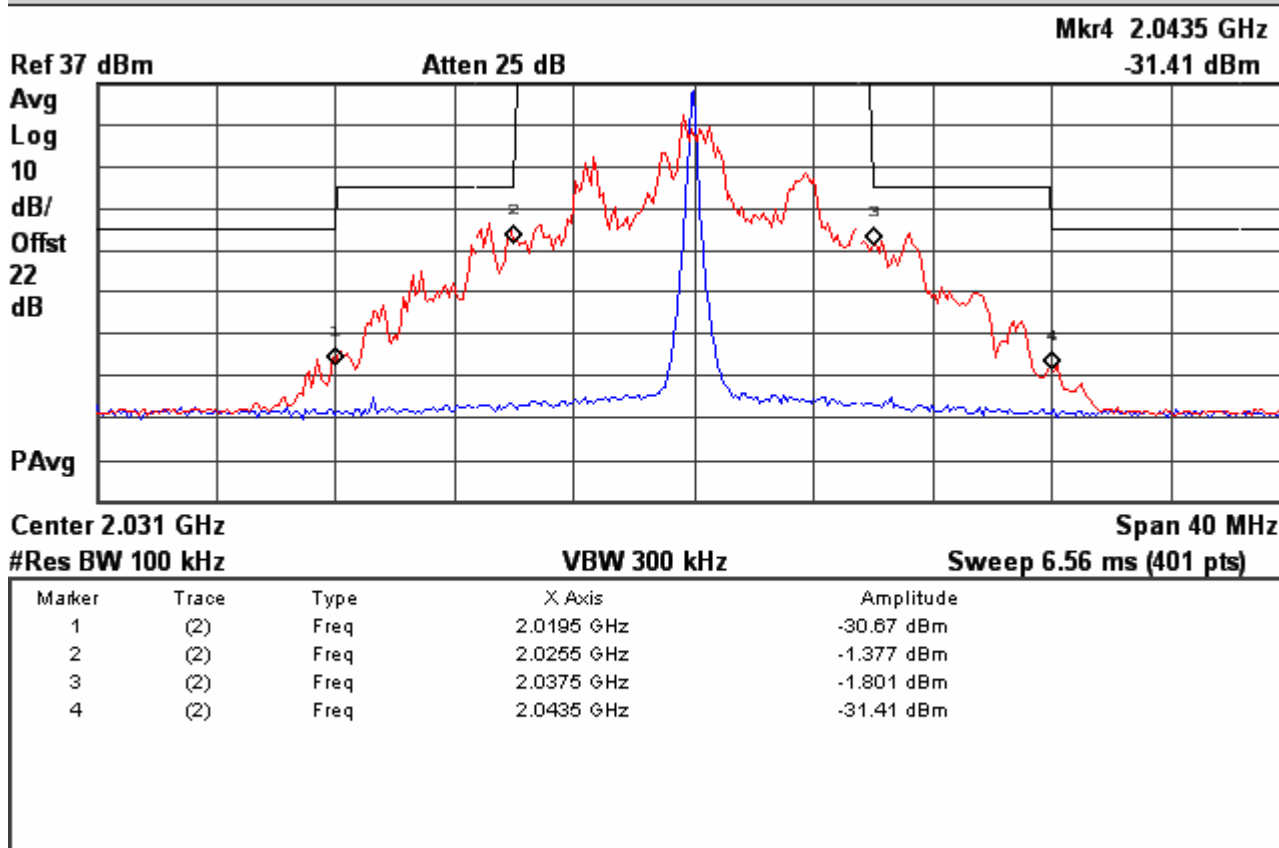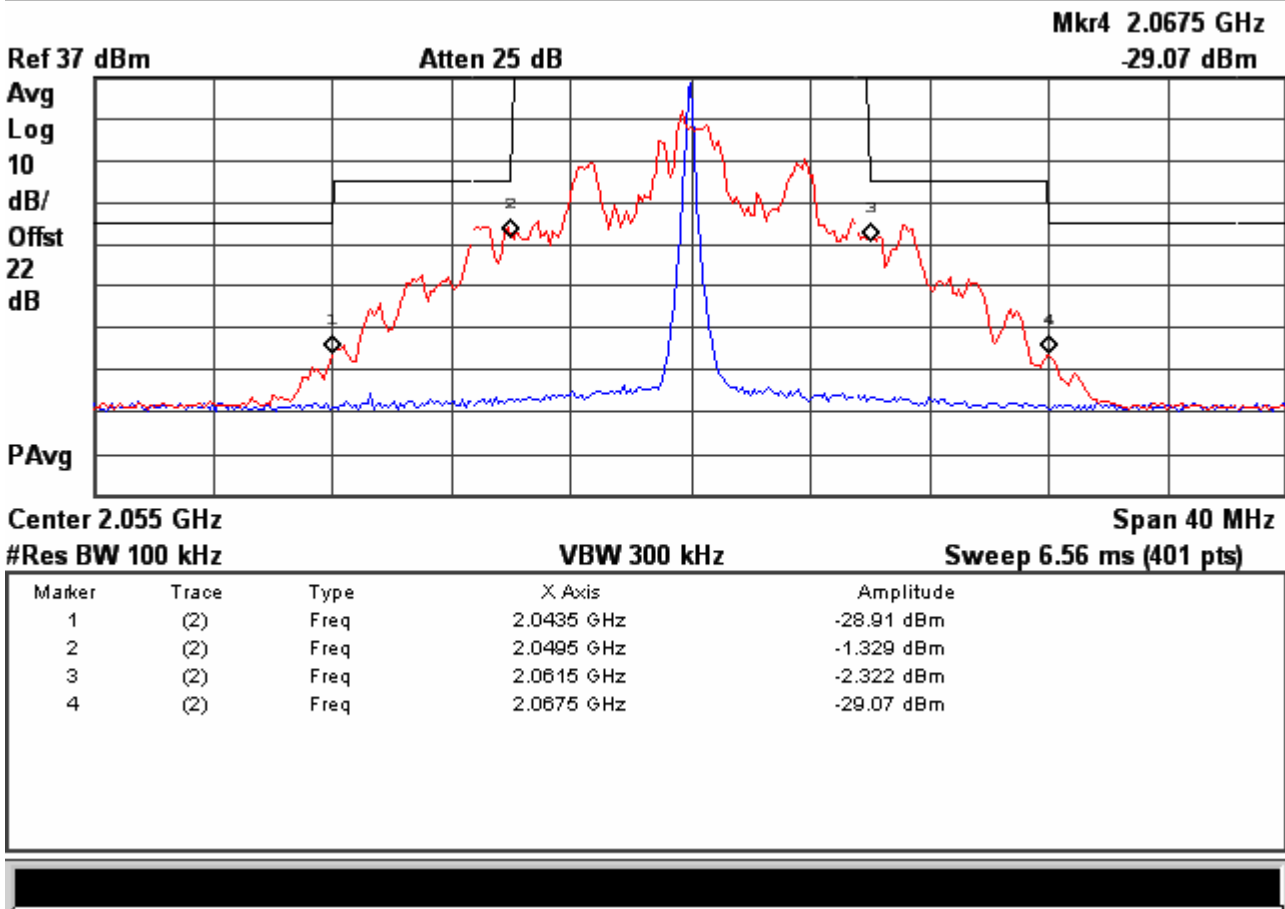


Center 2.055 GHz

#Res BW 100 kHz

VBW 300 kHz

Span 40 MHz

Sweep 6.56 ms (401 pts)

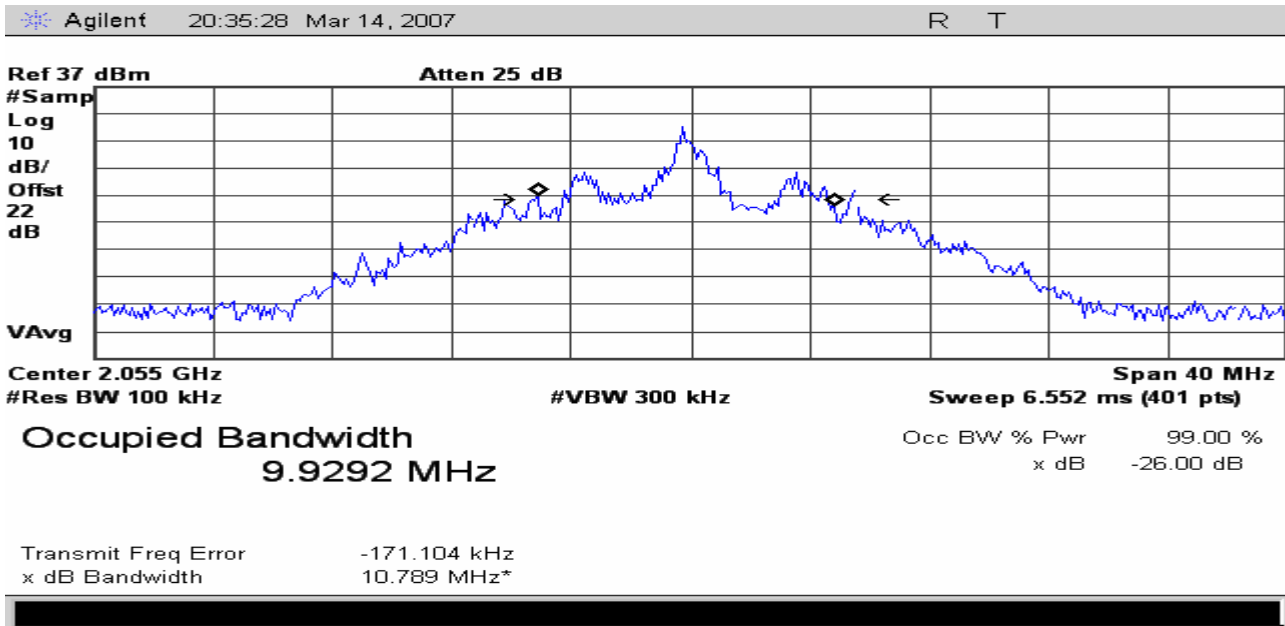

Center 2.055 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 40 MHz

Sweep 6.552 ms (401 pts)

Occupied Bandwidth

9.9292 MHz

Occ BW % Pwr

99.00 %

x dB

-26.00 dB

Transmit Freq Error

-171.104 kHz

x dB Bandwidth

10.789 MHz\*

Figure 6  
Occupied Bandwidth measurement; Modulation overlaying Mask and measured Power Bandwidth. FM , +/- 3 MHz Deviation ,Color Bars with Audio  
  
Channel 3 BAS relo frequency

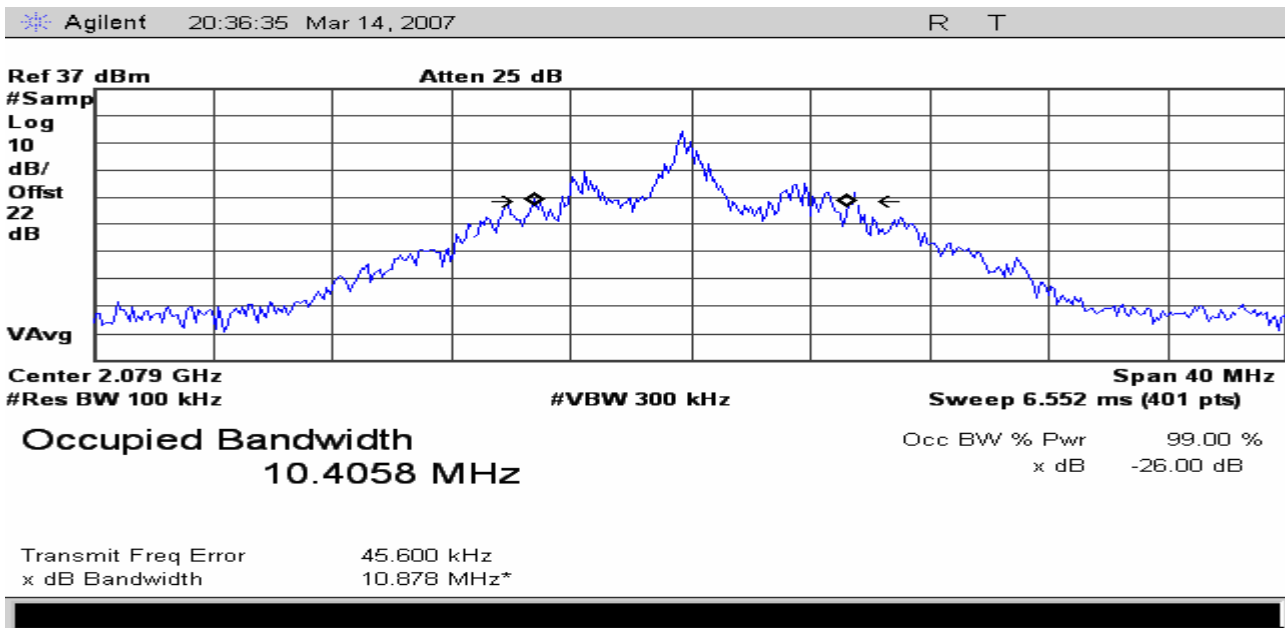
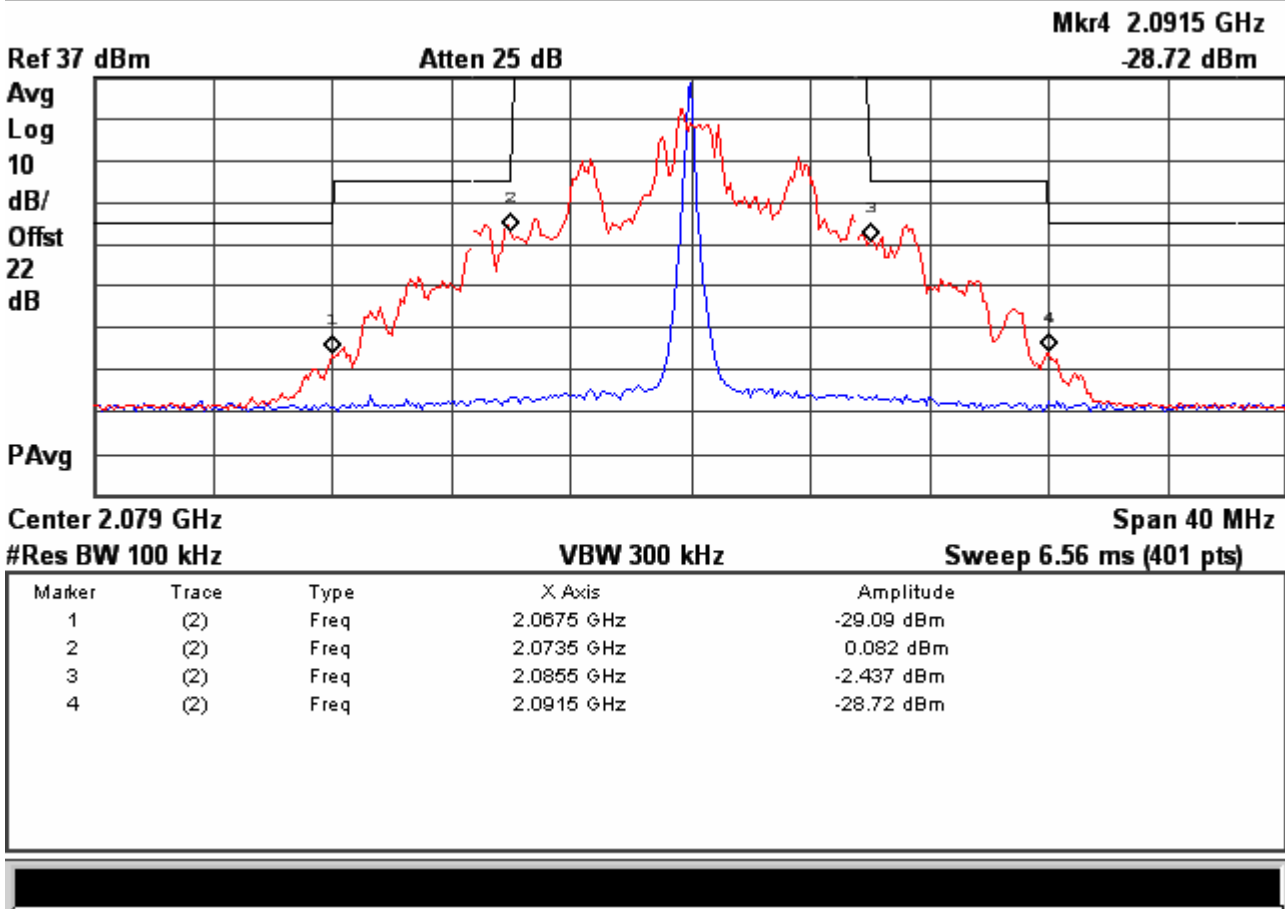


Figure 7

Occupied Bandwidth measurement; Modulation overlaying Mask and measured Power Bandwidth. FM , +/- 3 MHz Deviation ,Color Bars with Audio

Channel 5 BAS relo frequency



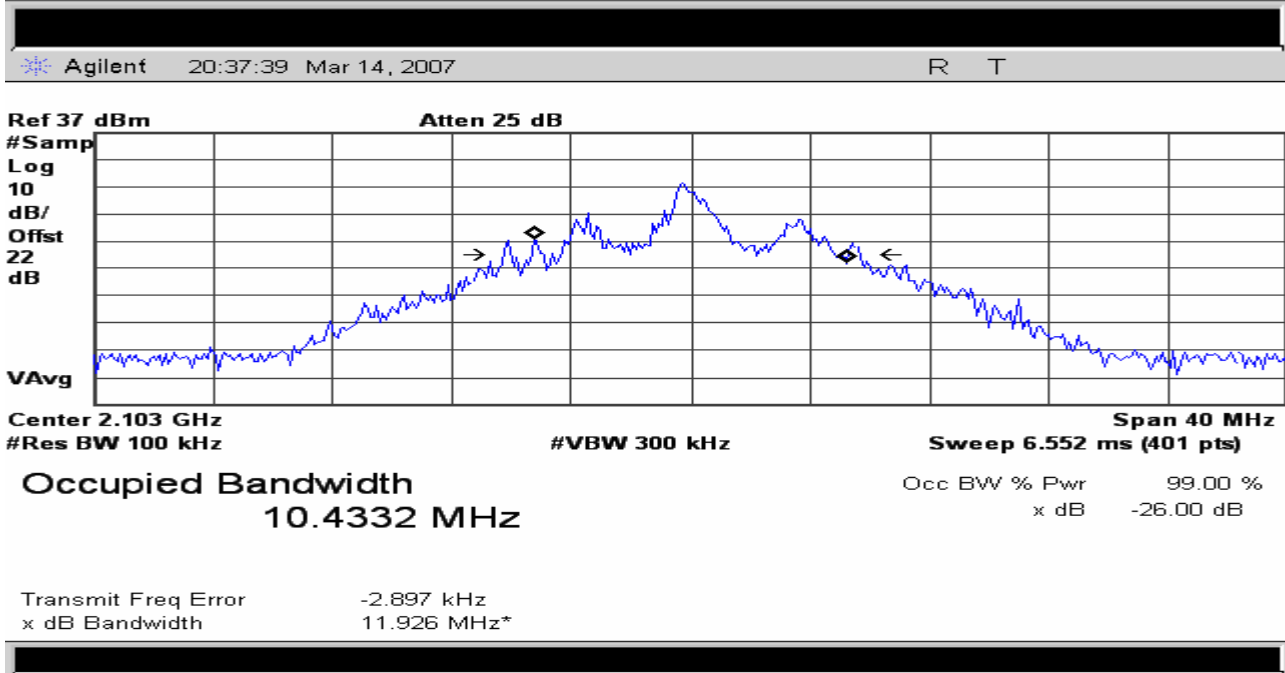
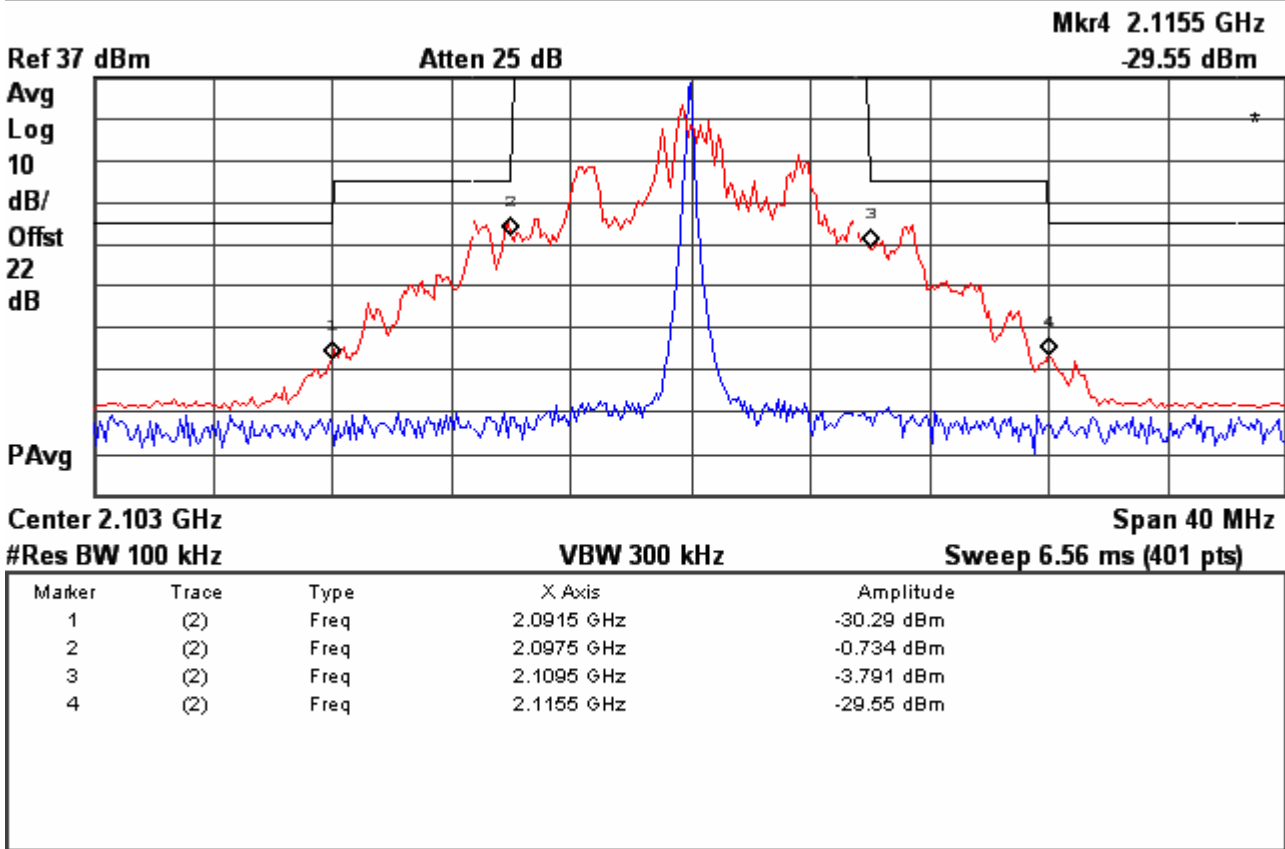


Figure 8  
Occupied Bandwidth measurement; Modulation overlaying Mask and measured Power Bandwidth. FM , +/- 3 MHz Deviation ,Color Bars with Audio

Channel 7 BAS relo frequency