



## Test Report

# IW-6300H Series Access Point

Cisco Industrial Wireless Hazardous Location Access Point

FCC ID: LDKESW6300

IC ID: 2461D-ESW6300

**5250-5350 MHz**

Outside Antennas, 7dBi Gain

Against the following Specifications:

CFR47 Part 15.407


RSS-247



Cisco Systems

170 West Tasman Drive

San Jose, CA 95134

|                                                             |                                                                                            |
|-------------------------------------------------------------|--------------------------------------------------------------------------------------------|
|                                                             |        |
| <b>Author:</b> Julian Land<br><b>Tested By:</b> Julian Land | <b>Approved By:</b> Adam Walb<br><b>Title:</b> MGR. IoT Compliance<br><b>Revision:</b> 1.0 |

This report replaces any previously entered test report under EDCS – **18429922**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 11644123.



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

|                                                                                  |           |
|----------------------------------------------------------------------------------|-----------|
| <b>SECTION 1: OVERVIEW .....</b>                                                 | <b>3</b>  |
| <b>SECTION 2: ASSESSMENT INFORMATION .....</b>                                   | <b>4</b>  |
| 2.1 GENERAL .....                                                                | 4         |
| 2.2 DATE OF TESTING.....                                                         | 6         |
| 2.3 REPORT ISSUE DATE .....                                                      | 6         |
| 2.4 TESTING FACILITIES .....                                                     | 6         |
| 2.5 EQUIPMENT ASSESSED (EUT).....                                                | 7         |
| 2.6 EUT DESCRIPTION.....                                                         | 7         |
| <b>SECTION 3: RESULT SUMMARY.....</b>                                            | <b>10</b> |
| 3.1 RESULTS SUMMARY TABLE .....                                                  | 10        |
| <b>SECTION 4: SAMPLE DETAILS.....</b>                                            | <b>12</b> |
| 4.1 SAMPLE DETAILS .....                                                         | 12        |
| 4.2 SYSTEM DETAILS .....                                                         | 12        |
| 4.3 MODE OF OPERATION DETAILS.....                                               | 12        |
| <b>APPENDIX A: EMISSION TEST RESULTS .....</b>                                   | <b>13</b> |
| CONDUCTED TEST SETUP DIAGRAM.....                                                | 13        |
| TARGET MAXIMUM CHANNEL POWER .....                                               | 13        |
| A.1 DUTY CYCLE .....                                                             | 15        |
| A.2 99% AND 26DB BANDWIDTH .....                                                 | 18        |
| A.3 MAXIMUM CONDUCTED OUTPUT POWER .....                                         | 22        |
| A.4 POWER SPECTRAL DENSITY .....                                                 | 27        |
| A.5 CONDUCTED SPURIOUS EMISSIONS .....                                           | 32        |
| A.6 CONDUCTED BANDEDGE.....                                                      | 41        |
| <b>APPENDIX B: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST.....</b>          | <b>47</b> |
| <b>APPENDIX C: ABBREVIATION KEY AND DEFINITIONS.....</b>                         | <b>48</b> |
| <b>APPENDIX D: PHOTOGRAPHS OF TEST SETUPS .....</b>                              | <b>49</b> |
| <b>APPENDIX E: SOFTWARE USED TO PERFORM TESTING .....</b>                        | <b>52</b> |
| <b>APPENDIX F: TEST PROCEDURES .....</b>                                         | <b>53</b> |
| <b>APPENDIX G: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01).....</b> | <b>54</b> |



## **Section 1: Overview**

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

|                        |
|------------------------|
| <b>Specifications:</b> |
| CFR47 Part 15.407      |

## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

|                      |                                      |
|----------------------|--------------------------------------|
| Temperature          | 15°C to 35°C (54°F to 95°F)          |
| Atmospheric Pressure | 860mbar to 1060mbar (25.4" to 31.3") |
| Humidity             | 10% to 75*%                          |
- e) All AC testing was performed at one or more of the following supply voltages:  
110V 60 Hz (+/-20%)

### Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

## Measurement Uncertainty Values

|                                   |                         |
|-----------------------------------|-------------------------|
| voltage and power measurements    | $\pm 2$ dB              |
| conducted EIRP measurements       | $\pm 1.4$ dB            |
| radiated measurements             | $\pm 3.2$ dB            |
| frequency measurements            | $\pm 2.4 \cdot 10^{-7}$ |
| temperature measurements          | $\pm 0.54^\circ$        |
| humidity measurements             | $\pm 2.3\%$             |
| DC and low frequency measurements | $\pm 2.5\%$             |

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Radiated emissions (expanded uncertainty, confidence interval 95%)

|                    |            |
|--------------------|------------|
| 30 MHz - 300 MHz   | +/- 3.8 dB |
| 300 MHz - 1000 MHz | +/- 4.3 dB |
| 1 GHz - 10 GHz     | +/- 4.0 dB |
| 10 GHz - 18GHz     | +/- 8.2 dB |
| 18GHz - 26.5GHz    | +/- 4.1 dB |
| 26.5GHz - 40GHz    | +/- 3.9 dB |

Conducted emissions (expanded uncertainty, confidence interval 95%)

|                |             |
|----------------|-------------|
| 30 MHz – 40GHz | +/- 0.38 dB |
|----------------|-------------|

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

**This report must not be reproduced except in full, without written approval of Cisco Systems.**

**2.2 Date of testing**

18-Nov-19 - 18-Nov-19

**2.3 Report Issue Date**

(REPORT\_DATE)

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

**2.4 Testing facilities**

This assessment was performed by:

**Testing Laboratory**

Cisco Systems, Inc.  
125 West Tasman Drive (Building P)  
San Jose, CA 95134  
USA

**Headquarters**

Cisco Systems, Inc.,  
170 West Tasman Drive  
San Jose, CA 95134,  
USA

**Registration Numbers for Industry Canada**

| <b>Cisco System Site</b> | <b>Address</b>                                    | <b>Site Identifier</b> |
|--------------------------|---------------------------------------------------|------------------------|
| Building P, 10m Chamber  | 125 West Tasman Dr<br>San Jose, CA 95134          | Company #: 2461N-2     |
| Building P, 5m Chamber   | 125 West Tasman Dr<br>San Jose, CA 95134          | Company #: 2461N-1     |
| Building I, 5m Chamber   | 285 W. Tasman Drive<br>San Jose, California 95134 | Company #: 2461M-1     |
| Building 7, 5m Chamber   | 425 E. Tasman Drive<br>San Jose, California 95134 | Company #: 2461N-3     |

**Test Engineers**

Julian Land



## **2.5 Equipment Assessed (EUT)**

IW 6300H

## **2.6 EUT Description**

The radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

802.11a - Non HT20, Two Antennas, 6 to 54 Mbps, 1ss

802.11a - Non HT20 Beam Forming, Two Antennas, 6 to 54 Mbps, 1ss

802.11n/ac - HT/VHT20, One Antenna, M0 to M7, 1ss

802.11n/ac - HT/VHT20, Two Antennas, M0 to M7, 1ss

802.11n/ac - HT/VHT20, Two Antennas, M8 to M15, 2ss

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M0 to M7, 1ss

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M8 to M15, 2ss

802.11n/ac - HT/VHT20 STBC, Two Antennas, M0 to M7, 2ss

802.11a - Non HT40, One Antenna, 6 to 54 Mbps, 1ss

802.11a - Non HT40, Two Antennas, 6 to 54 Mbps, 1ss

802.11n/ac - HT/VHT40, One Antenna, M0 to M7, 1ss

802.11n/ac - HT/VHT40, Two Antennas, M0 to M7, 1ss

802.11n/ac - HT/VHT40, Two Antennas, M8 to M15, 2ss

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M0 to M7, 1ss

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M8 to M15, 2ss

802.11n/ac - HT/VHT40 STBC, Two Antennas, M0 to M7, 2ss

802.11a - Non HT80, One Antenna, 6 to 54 Mbps, 1ss

802.11a - Non HT80, Two Antennas, 6 to 54 Mbps, 1ss

802.11ac - VHT80, One Antenna, M0 to M9 1ss

802.11ac - VHT80, Two Antennas, M0 to M9 1ss

802.11ac - VHT80, Two Antennas, M0 to M9 2ss

802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M9 1ss

802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M9 2ss

802.11ac - VHT80 STBC, Two Antennas, M0 to M9 2ss

802.11a - Non HT20, One Antenna, 6 to 54 Mbps, 1ss



#### **Model / PID Differences**

IW-6300H-AC-x-K9, IW-6300H-DC-x-K9, IW-6300-DCW-x-K9 and ESW-6300-CON-x-K9, all have the same identical components, electronics circuitries, PCB layout and enclosure.

The only differences are listed as below:

IW-6300H-AC-x-K9  
IW-6300H-DC-x-K9  
IW-6300-DCW-x-K9  
ESW-6300-CON-x-K9

Where “x” can be replaced with another letter to indicate country domain.

Domain letters: A, B, C, D, E, F, H, I, L, M, N, Q, R, S, T, Z

Where “AC” is Alternating Current (AC power supply)

Where “DC” is Direct Current (DC power supply), 54V native input

Where “DCW” is Direct Current; wide range 10-36VDC

Where “K9” is encryption software.





The following antennas are supported by this product series.

The data included in this report represent the worst case data for all antennas.

| Frequency        | Part Number        | Antenna Type                                  | Antenna Gain<br>(dBi) | >30<br>degree 5<br>GHz<br>Antenna<br>Gain<br>(dBi) |
|------------------|--------------------|-----------------------------------------------|-----------------------|----------------------------------------------------|
| <b>2.4 GHz</b>   | AIR-ANT2450V-N     | Single Band Omni                              | <b>5</b>              | <b>NA</b>                                          |
|                  | AIR-ANT2450V-N-HZ  | Single Band Omni, Hazloc                      | <b>5</b>              | <b>NA</b>                                          |
|                  | AIR-ANT2480V-N     | Single Band Omni                              | <b>8</b>              | <b>NA</b>                                          |
|                  | AIR-ANT2450HG-N    | Horizontal Polarized Omni                     | <b>5</b>              | <b>NA</b>                                          |
|                  | AIR-ANT2450VG-N    | Vertical Polarized Omni                       | <b>5</b>              | <b>NA</b>                                          |
|                  | AIR-ANT2413P2M-N   | Single Band, Dual Polarized Directional Patch | <b>13</b>             | <b>NA</b>                                          |
| <b>5 GHz</b>     | AIR-ANT5180V-N     | Single Band Omni                              | <b>8</b>              | <b>-3</b>                                          |
|                  | AIR-ANT5150HG-N    | Horizontal Polarized Omni                     | <b>5</b>              | <b>-5</b>                                          |
|                  | AIR-ANT5150VG-N    | Vertical Polarized Omni                       | <b>5</b>              | <b>-6</b>                                          |
|                  | AIR-ANT5114P2M-N   | Single Band, Dual Polarized Directional Patch | <b>13</b>             | <b>5</b>                                           |
| <b>2.4/5 GHz</b> | AIR-ANT2547V-N=    | Dual-band Omni                                | <b>4 / 7</b>          | <b>-6</b>                                          |
|                  | AIR-ANT2547VG-N=   | Dual-band Omni, Gray                          | <b>4 / 7</b>          | <b>-6</b>                                          |
|                  | AIR-ANT2547V-N-HZ= | Dual-band Omni, Hazloc                        | <b>4 / 7</b>          | <b>-6</b>                                          |
|                  | AIR-ANT2568VG-N    | Dual-band Omni                                | <b>6 / 8</b>          | <b>3</b>                                           |
|                  | AIR-ANT2588P3M-N=  | Dual-band/Dual Polarized Directional, Patch   | <b>8 / 8</b>          | <b>1</b>                                           |
|                  | AIR-ANT2513P4M-N   | Dual-band Polarization Diverse Patch Array    | <b>13 / 13</b>        | <b>-5</b>                                          |



### Section 3: Result Summary

#### 3.1 Results Summary Table

##### Conducted emissions

| Basic Standard             | Technical Requirements / Details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Result |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 15.407                     | <p><b>99% &amp; 26 dB Bandwidth:</b><br/>The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.</p> <p>The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.</p> | Pass   |
| 15.407                     | <p><b>Output Power:</b><br/>For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>                                  | Pass   |
| 15.407                     | <p><b>Power Spectral Density</b><br/>The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>                                                                                                                                                                                       | Pass   |
| 15.407                     | <p><b>Conducted Spurious Emissions / Band-Edge:</b><br/>2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</p>                                                                                                                                                                                                                                                                                                                                                        | Pass   |
| 15.407<br>15.205<br>15.209 | <p><b>Restricted band:</b><br/>Unwanted emissions must comply with the general field strength limits set forth in §15.209.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                           | Pass   |

**Radiated Emissions (General requirements)**

| Basic Standard             | Technical Requirements / Details                                                                                                                                                                                                   | Result |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| 15.407<br>15.205<br>15.209 | <b>TX Spurious Emissions:</b><br>Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the field strength limits table in this section. | Pass   |
| 15.207                     | <b>AC conducted Emissions:</b><br>U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.                                                                                 | Pass   |



## Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

### 4.1 Sample Details

| Sample No. | Equipment Details | Manufacturer        | Hardware Rev. | Firmware Rev. | Software Rev. | Serial Number |
|------------|-------------------|---------------------|---------------|---------------|---------------|---------------|
| S01        | IW-6300H-DC-B-K9  | Cisco Systems, Inc. | 11            | 9.1.8.1       | 9.0.5.5-W8964 | FOC23241G16   |
| S02        | FSP150-AWAN3      | FSP Group Inc.      | -             | -             | -             | H00000063     |

### 4.2 System Details

| System # | Description          | Samples  |
|----------|----------------------|----------|
| 1        | EUT and Power Supply | S01, S02 |

### 4.3 Mode of Operation Details

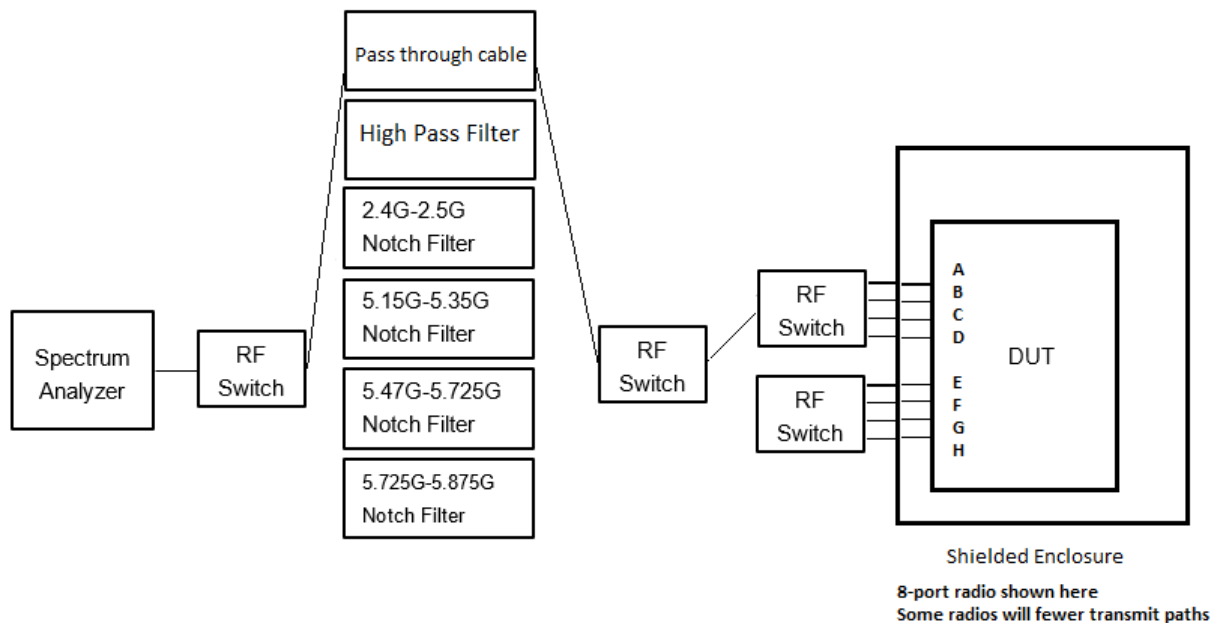
| Mode# | Description             | Comments                                       |
|-------|-------------------------|------------------------------------------------|
| 1     | Continuous Transmitting | Continuous Transmitting $\geq 98\%$ duty cycle |

All measurements were made in accordance with

- ANSI C63.10:2013
- KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- KDB 662911 D01 Multiple Transmitter Output v02r01

## Appendix A: Emission Test Results

### Conducted Test Setup Diagram



### Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

| Operating Mode                               | Maximum Channel Power (dBm) |      |      |  |
|----------------------------------------------|-----------------------------|------|------|--|
|                                              | Frequency (MHz)             |      |      |  |
|                                              | 5260                        | 5300 | 5320 |  |
| Non HT20, 6 to 54 Mbps                       | 20                          | 20   | 20   |  |
| Non HT20 Beam Forming, 6 to 54 Mbps          | 14                          | 15   | 14   |  |
| HT/VHT20, M0 to M15                          | 20                          | 20   | 20   |  |
| HT/VHT20 Beam Forming, M0 to M15             | 19                          | 19   | 18   |  |
| HT/VHT20 STBC, M0 to M7                      | 19                          | 19   | 18   |  |
|                                              | 5270                        | 5310 |      |  |
| Non HT40, 6 to 54 Mbps                       | 21                          | 17   |      |  |
| HT/VHT40, M0 to M15                          | 21                          | 18   |      |  |
| HT/VHT40 Beam Forming, M0 to M15             | 19                          | 18   |      |  |
| HT/VHT40 STBC, M0 to M7                      | 19                          | 18   |      |  |
|                                              | 5290                        |      |      |  |
| Non HT80, 6 to 54 Mbps                       | 14                          |      |      |  |
| VHT80, M0 to M9, M0 to M9 1-2ss              | 17                          |      |      |  |
| VHT80 Beam Forming, M0 to M9, M0 to M9 1-2ss | 17                          |      |      |  |



|                          |    |  |  |  |
|--------------------------|----|--|--|--|
| VHT80 STBC, M0 to M9 1ss | 17 |  |  |  |
|--------------------------|----|--|--|--|



## A.1 Duty Cycle

### Duty Cycle Test Requirement

From KDB 789033 D02 General UNII Test Procedures New Rules v02r01

#### B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

1. All measurements are to be performed with the EUT transmitting at 100 percent duty cycle at its maximum power control level; however, if 100 percent duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.

### Duty Cycle Test Method

From KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

#### B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW  $\geq$  EBW if possible; otherwise, set RBW to the largest available value. Set VBW  $\geq$  RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$ , where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

### Duty Cycle Test Information

|                                   |                                                  |
|-----------------------------------|--------------------------------------------------|
| <b>Tested By :</b><br>Julian Land | <b>Date of testing:</b><br>18-Nov-19 - 18-Nov-19 |
| <b>Test Result : PASS</b>         |                                                  |

#### Test Equipment

See Appendix B for list of test equipment

#### Samples, Systems, and Modes

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |



### Duty Cycle Data Table

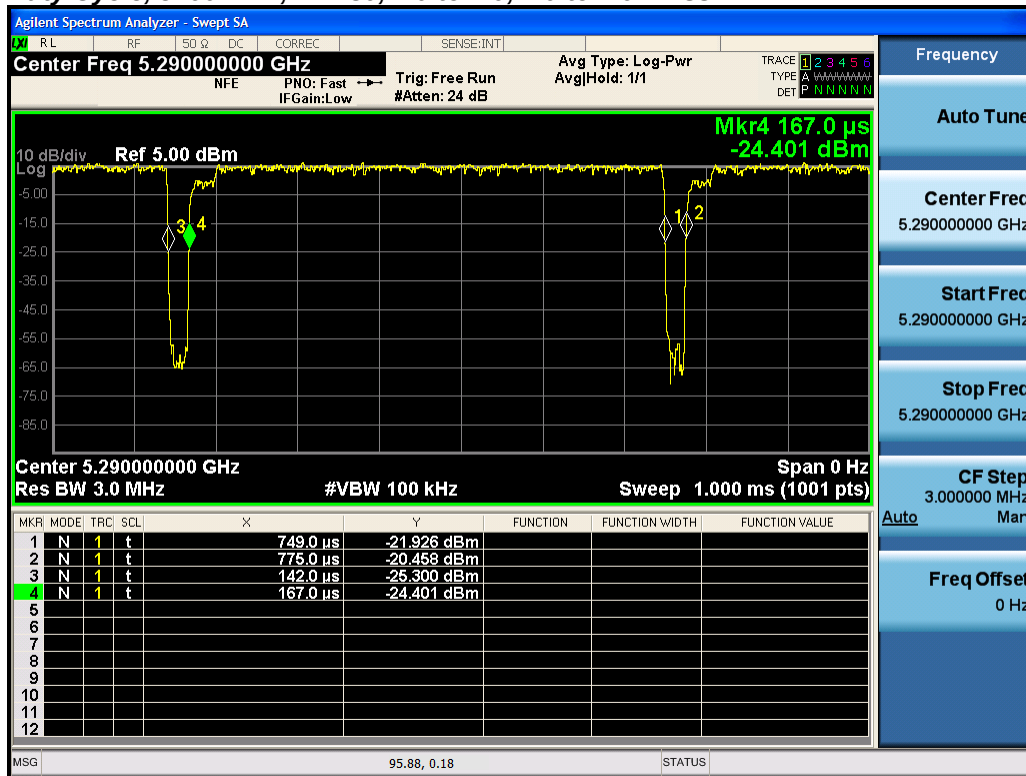
Duty Cycle table and screen captures are shown below for power/psd modes.

| Frequency | Mode                                   | Data Rate   | Duty Cycle correction (dB) |
|-----------|----------------------------------------|-------------|----------------------------|
| 5260      | Non HT20, 6 to 54 Mbps                 | 6           | 0.0                        |
|           | HT/VHT20, M0 to M15                    | m0          | 0.0                        |
|           |                                        |             |                            |
| 5270      | Non HT40, 6 to 54 Mbps                 | 6           | 0.0                        |
|           | HT/VHT40, M0 to M15                    | m0          | 0.1                        |
|           |                                        |             |                            |
| 5290      | Non HT80, 6 to 54 Mbps                 | 6           | 0.0                        |
|           | <b>VHT80, M0 to M9, M0 to M9 1-2ss</b> | <b>m0x1</b> | <b>0.2</b>                 |
|           |                                        |             |                            |
| 5300      | Non HT20, 6 to 54 Mbps                 | 6           | 0.0                        |
|           | HT/VHT20, M0 to M15                    | m0          | 0.0                        |
|           |                                        |             |                            |
| 5310      | Non HT40, 6 to 54 Mbps                 | 6           | 0.0                        |
|           | HT/VHT40, M0 to M15                    | m0          | 0.1                        |
|           |                                        |             |                            |
| 5320      | Non HT20, 6 to 54 Mbps                 | 6           | 0.0                        |
|           | HT/VHT20, M0 to M15                    | m0          | 0.0                        |





**Duty Cycle, 5290 MHz, VHT80, M0 to M9, M0 to M9 1-2ss**





## A.2 99% and 26dB Bandwidth

### 99% and 26dB Bandwidth Test Requirement

There is no requirement for the value of bandwidth.

However, the 26dB BW (EBW) is used to calculate the power limits in 15.407 (a) (2). Power measurements are made using the 99% Bandwidth as the integration bandwidth.

### 99% and 26dB Bandwidth Test Procedure

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

**Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

**Section D. 99 Percent Occupied Bandwidth**

**ANSI C63.10: 2013**

#### 99% BW

##### Test Parameters

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 \cdot$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).

**Ref KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

**Section C. Measurement Bandwidth, Section 1**

#### 26 BW

##### Test parameters

X dB BW = -26dB (using the OBW function of the spectrum analyzer)

##### Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

**Samples, Systems, and Modes**

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                   |                                                  |
|-----------------------------------|--------------------------------------------------|
| <b>Tested By :</b><br>Julian Land | <b>Date of testing:</b><br>18-Nov-19 - 18-Nov-19 |
| <b>Test Result : PASS</b>         |                                                  |

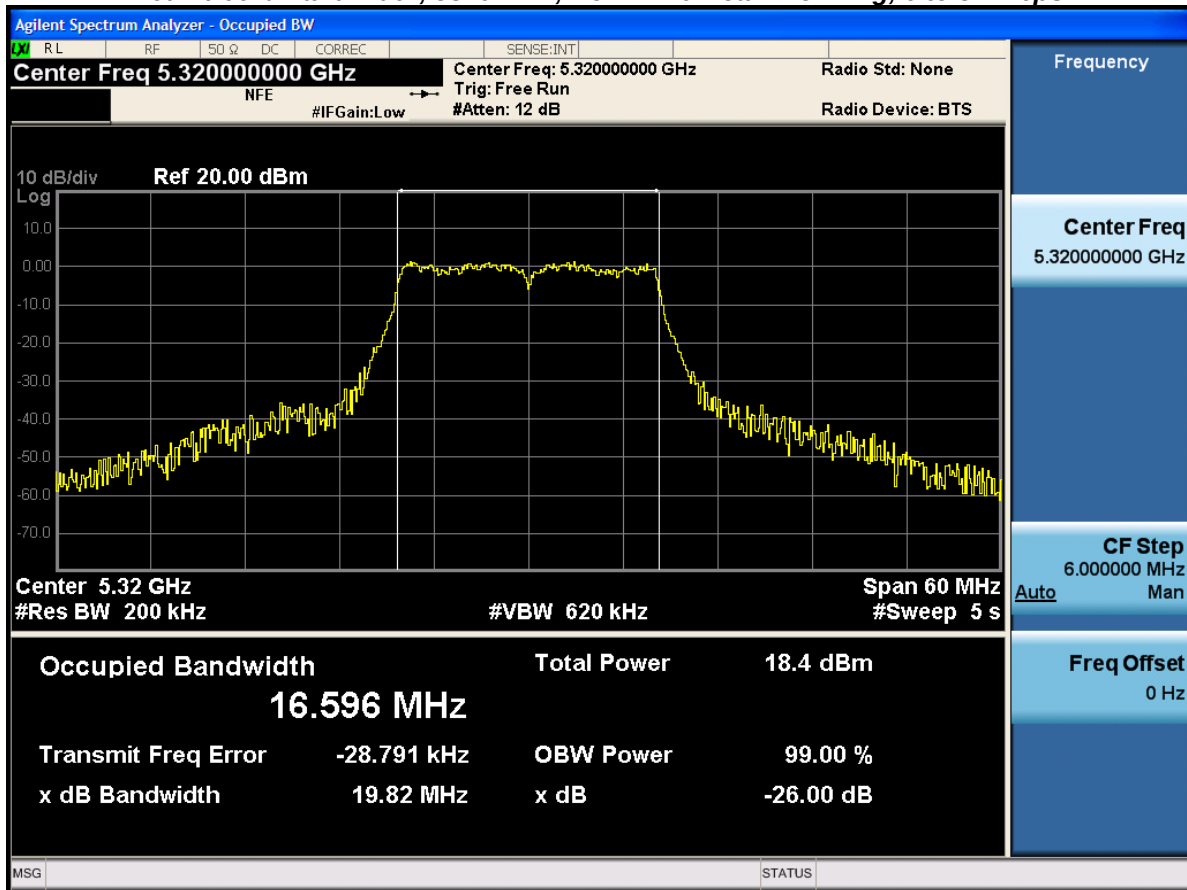
**Test Equipment**

See Appendix B for list of test equipment



99% and 26dB Bandwidth

| Frequency (MHz) | Mode                            | Data Rate (Mbps) | 26dB BW (MHz) | 99% BW (MHz)  |
|-----------------|---------------------------------|------------------|---------------|---------------|
| 5260            | Non HT20, 6 to 54 Mbps          | 6                | 19.8          | 16.617        |
|                 | HT/VHT20, M0 to M15             | m0               | 20.2          | 17.642        |
| 5270            | Non HT40, 6 to 54 Mbps          | 6                | 41.3          | 36.389        |
|                 | HT/VHT40, M0 to M15             | m0               | 40.6          | 36.238        |
| 5290            | Non HT80, 6 to 54 Mbps          | 6                | 83.0          | 76.350        |
|                 | VHT80, M0 to M9, M0 to M9 1-2ss | m0x1             | 82.1          | 76.407        |
| 5300            | Non HT20, 6 to 54 Mbps          | 6                | 19.7          | 16.612        |
|                 | HT/VHT20, M0 to M15             | m0               | 20.1          | 17.641        |
| 5310            | Non HT40, 6 to 54 Mbps          | 6                | 41.0          | 36.401        |
|                 | HT/VHT40, M0 to M15             | m0               | 40.5          | 36.182        |
| 5320            | <b>Non HT20, 6 to 54 Mbps</b>   | <b>6</b>         | <b>19.8</b>   | <b>16.596</b> |
|                 | HT/VHT20, M0 to M15             | m0               | 20.1          | 17.635        |

**26dB / 99% Bandwidth, 5320 MHz, Non HT20 Beam Forming, 6 to 54 Mbps**

## A.3 Maximum Conducted Output Power

### Maximum Conducted Output Power Test Requirement

**15.407 (2)** For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. ... If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**15.407 (5)** The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Referencing “644545 D03 Guidance for IEEE 802.11ac v01”, covering signals that cross the boundary between two adjacent UNII bands, the FCC describes a procedure to measure EBW, power, and PSD in each UNII band. For the case of a 160MHz signal equally distributed between UNII-1 and UNII-2a, we apply the following alternate procedure.

Rather than measure:

- The half of the signal in UNII-1, measured against the 30dBm power / 17dBm/MHz PSD limits
- The half of the signal in UNII-2a, measured against the 24dBm power / 11dBm/MHz PSD limits

If a 160MHz signal (equally distributed between the two bands) produces a total power of 27dBm across the entire 160 MHz EBW, the total power in each band would be half of the total, or 24dBm (which meets both the UNII-1 and UNII-2a limits), and would have a PSD no greater than 11dBm/MHz in either sub-band.

Given these facts, we have measured the complete 160 MHz EBW (across both sub-bands) against 27dBm power and 11dBm/MHz PSD limits, rather than individual sub band measurements against the individual sub band limits.”

### Maximum Conducted Output Power Test Procedure

**Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

**ANSI C63.10: 2013**

#### Maximum Conducted Output Power

##### Test Procedure

1. Set the radio in the continuous transmitting mode at full power
2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument’s band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges.
3. Capture graphs and record pertinent measurement data.

**Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

**2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2**

#### Maximum Conducted Output Power

##### Test parameters

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- (i) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section II.B.
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz.
- (iv) Set VBW  $\geq$  3 MHz.
- (v) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run”.
- (ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth)

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

#### Samples, Systems, and Modes

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

**Tested By :**

Julian Land

**Date of testing:**

18-Nov-19 - 18-Nov-19

**Test Result : PASS**

#### Test Equipment

See Appendix B for list of test equipment



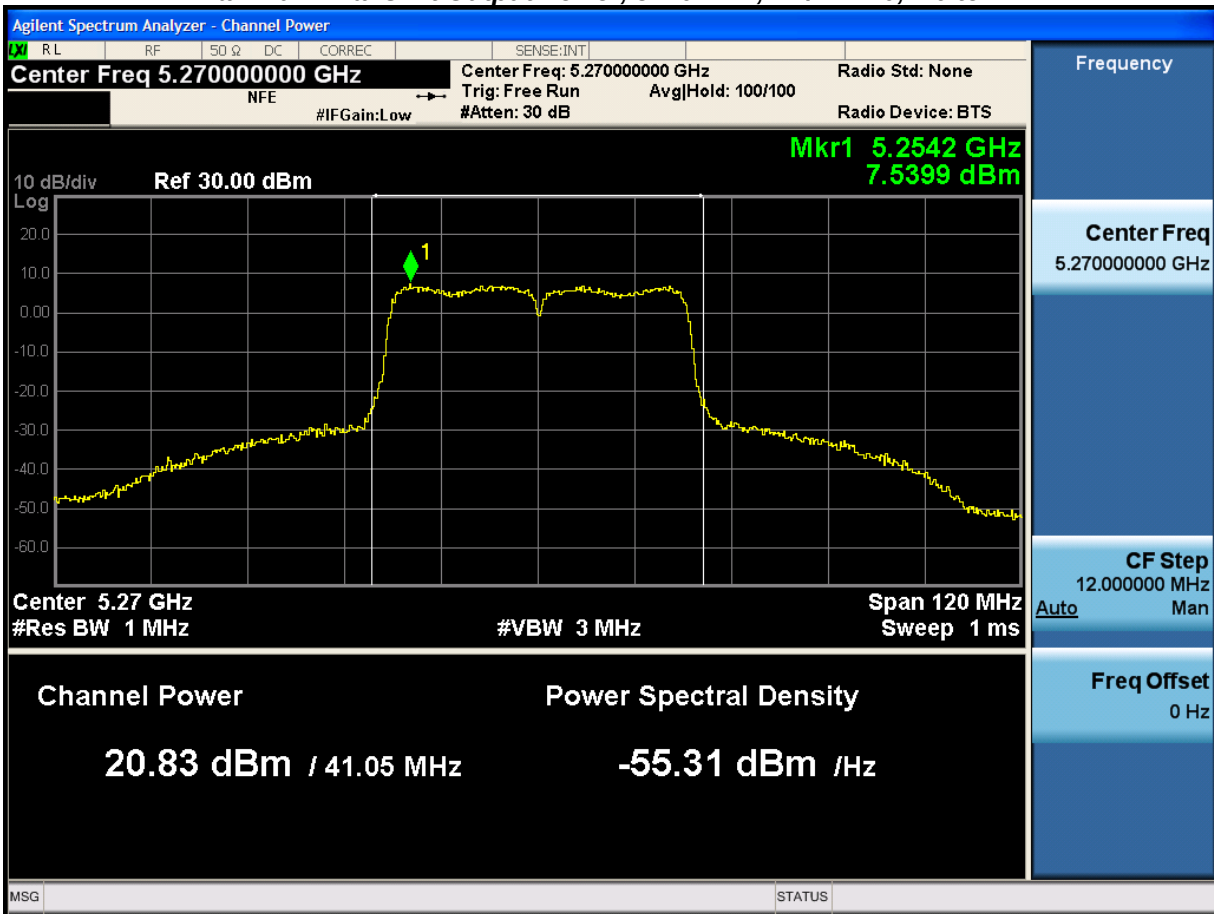
## Maximum Output Power

| Frequency (MHz) | Mode                                | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Max Power (dBm) | Tx 2 Max Power (dBm) | Duty Cycle Correction (dB) | Total Tx Channel Power (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------------------|----------|-------------------------------|----------------------|----------------------|----------------------------|------------------------------|-------------|-------------|
| 5260            | Non HT20, 6 to 54 Mbps              | 1        | 7                             | 20.3                 |                      | 0.0                        | 20.3                         | 23.0        | 2.67        |
|                 | Non HT20, 6 to 54 Mbps              | 2        | 7                             | 14.1                 | 14.3                 | 0.0                        | 17.2                         | 23.0        | 5.76        |
|                 | Non HT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | 10.8                 | 11.4                 | 0.0                        | 14.2                         | 20.0        | 5.85        |
|                 | HT/VHT20, M0 to M7                  | 1        | 7                             | 20.4                 |                      | 0.0                        | 20.4                         | 23.0        | 2.56        |
|                 | HT/VHT20, M0 to M7                  | 2        | 7                             | 14.2                 | 14.5                 | 0.0                        | 17.4                         | 23.0        | 5.59        |
|                 | HT/VHT20, M8 to M15                 | 2        | 7                             | 15.2                 | 16.0                 | 0.0                        | 18.7                         | 23.0        | 4.33        |
|                 | HT/VHT20 Beam Forming, M0 to M7     | 2        | 10                            | 12.1                 | 12.5                 | 0.0                        | 15.4                         | 20.0        | 4.64        |
|                 | HT/VHT20 Beam Forming, M8 to M15    | 2        | 7                             | 15.2                 | 16.0                 | 0.0                        | 18.7                         | 23.0        | 4.33        |
|                 | HT/VHT20 STBC, M0 to M7             | 2        | 7                             | 15.2                 | 16.0                 | 0.0                        | 18.7                         | 23.0        | 4.33        |
| 5270            | Non HT40, 6 to 54 Mbps              | 1        | 7                             | 20.5                 |                      | 0.0                        | 20.5                         | 23.0        | 2.46        |
|                 | Non HT40, 6 to 54 Mbps              | 2        | 7                             | 14.7                 | 15.0                 | 0.0                        | 17.9                         | 23.0        | 5.10        |
|                 | <b>HT/VHT40, M0 to M7</b>           | <b>1</b> | <b>7</b>                      | <b>20.8</b>          |                      | <b>0.1</b>                 | <b>20.9</b>                  | <b>23.0</b> | <b>2.15</b> |
|                 | HT/VHT40, M0 to M7                  | 2        | 7                             | 15.7                 | 16.5                 | 0.1                        | 19.2                         | 23.0        | 3.82        |
|                 | HT/VHT40, M8 to M15                 | 2        | 7                             | 15.7                 | 16.5                 | 0.1                        | 19.2                         | 23.0        | 3.82        |
|                 | HT/VHT40 Beam Forming, M0 to M7     | 2        | 10                            | 10.5                 | 10.9                 | 0.1                        | 13.8                         | 20.0        | 6.23        |
|                 | HT/VHT40 Beam Forming, M8 to M15    | 2        | 7                             | 15.7                 | 16.5                 | 0.1                        | 19.2                         | 23.0        | 3.82        |
|                 | HT/VHT40 STBC, M0 to M7             | 2        | 7                             | 15.7                 | 16.5                 | 0.1                        | 19.2                         | 23.0        | 3.82        |
| 5290            | Non HT80, 6 to 54 Mbps              | 1        | 7                             | 13.8                 |                      | 0.0                        | 13.8                         | 23.0        | 9.16        |
|                 | Non HT80, 6 to 54 Mbps              | 2        | 7                             | 10.0                 | 10.2                 | 0.0                        | 13.2                         | 23.0        | 9.85        |
|                 | VHT80, M0 to M9 1ss                 | 1        | 7                             | 14.5                 |                      | 0.2                        | 14.7                         | 23.0        | 8.32        |
|                 | VHT80, M0 to M9 1ss                 | 2        | 7                             | 13.4                 | 13.5                 | 0.2                        | 16.6                         | 23.0        | 6.36        |
|                 | VHT80, M0 to M9 2ss                 | 2        | 7                             | 13.4                 | 13.5                 | 0.2                        | 16.6                         | 23.0        | 6.36        |
|                 | VHT80 Beam Forming, M0 to M9 1ss    | 2        | 10                            | 10.2                 | 10.6                 | 0.2                        | 13.6                         | 20.0        | 6.40        |
|                 | VHT80 Beam Forming, M0 to M9 2ss    | 2        | 7                             | 13.4                 | 13.5                 | 0.2                        | 16.6                         | 23.0        | 6.36        |
|                 | VHT80 STBC, M0 to M9 1ss            | 2        | 7                             | 13.4                 | 13.5                 | 0.2                        | 16.6                         | 23.0        | 6.36        |
| 5300            | Non HT20, 6 to 54 Mbps              | 1        | 7                             | 19.7                 |                      | 0.0                        | 19.7                         | 23.0        | 3.27        |
|                 | Non HT20, 6 to 54 Mbps              | 2        | 7                             | 13.9                 | 13.4                 | 0.0                        | 16.7                         | 23.0        | 6.30        |
|                 | Non HT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | 11.7                 | 11.5                 | 0.0                        | 14.6                         | 20.0        | 5.36        |





|      |                                     |   |    |      |      |     |      |      |      |
|------|-------------------------------------|---|----|------|------|-----|------|------|------|
|      | HT/VHT20, M0 to M7                  | 1 | 7  | 19.8 |      | 0.0 | 19.8 | 23.0 | 3.16 |
|      | HT/VHT20, M0 to M7                  | 2 | 7  | 14.0 | 13.6 | 0.0 | 16.9 | 23.0 | 6.14 |
|      | HT/VHT20, M8 to M15                 | 2 | 7  | 16.0 | 16.1 | 0.0 | 19.1 | 23.0 | 3.90 |
|      | HT/VHT20 Beam Forming, M0 to M7     | 2 | 10 | 11.9 | 11.8 | 0.0 | 14.9 | 20.0 | 5.10 |
|      | HT/VHT20 Beam Forming, M8 to M15    | 2 | 7  | 16.0 | 16.1 | 0.0 | 19.1 | 23.0 | 3.90 |
|      | HT/VHT20 STBC, M0 to M7             | 2 | 7  | 16.0 | 16.1 | 0.0 | 19.1 | 23.0 | 3.90 |
|      |                                     |   |    |      |      |     |      |      |      |
| 5310 | Non HT40, 6 to 54 Mbps              | 1 | 7  | 17.1 |      | 0.0 | 17.1 | 23.0 | 5.86 |
|      | Non HT40, 6 to 54 Mbps              | 2 | 7  | 14.2 | 13.9 | 0.0 | 17.1 | 23.0 | 5.90 |
|      | HT/VHT40, M0 to M7                  | 1 | 7  | 17.1 |      | 0.1 | 17.2 | 23.0 | 5.85 |
|      | HT/VHT40, M0 to M7                  | 2 | 7  | 14.9 | 14.6 | 0.1 | 17.8 | 23.0 | 5.19 |
|      | HT/VHT40, M8 to M15                 | 2 | 7  | 14.9 | 14.6 | 0.1 | 17.8 | 23.0 | 5.19 |
|      | HT/VHT40 Beam Forming, M0 to M7     | 2 | 10 | 10.9 | 10.7 | 0.1 | 13.9 | 20.0 | 6.14 |
|      | HT/VHT40 Beam Forming, M8 to M15    | 2 | 7  | 14.9 | 14.6 | 0.1 | 17.8 | 23.0 | 5.19 |
|      | HT/VHT40 STBC, M0 to M7             | 2 | 7  | 14.9 | 14.6 | 0.1 | 17.8 | 23.0 | 5.19 |
|      |                                     |   |    |      |      |     |      |      |      |
| 5320 | Non HT20, 6 to 54 Mbps              | 1 | 7  | 19.7 |      | 0.0 | 19.7 | 23.0 | 3.27 |
|      | Non HT20, 6 to 54 Mbps              | 2 | 7  | 15.0 | 14.0 | 0.0 | 17.6 | 23.0 | 5.43 |
|      | Non HT20 Beam Forming, 6 to 54 Mbps | 2 | 10 | 11.0 | 10.4 | 0.0 | 13.8 | 20.0 | 6.25 |
|      | HT/VHT20, M0 to M7                  | 1 | 7  | 19.8 |      | 0.0 | 19.8 | 23.0 | 3.16 |
|      | HT/VHT20, M0 to M7                  | 2 | 7  | 14.1 | 13.2 | 0.0 | 16.7 | 23.0 | 6.27 |
|      | HT/VHT20, M8 to M15                 | 2 | 7  | 15.1 | 14.2 | 0.0 | 17.7 | 23.0 | 5.27 |
|      | HT/VHT20 Beam Forming, M0 to M7     | 2 | 10 | 11.1 | 10.6 | 0.0 | 13.9 | 20.0 | 6.09 |
|      | HT/VHT20 Beam Forming, M8 to M15    | 2 | 7  | 15.1 | 14.2 | 0.0 | 17.7 | 23.0 | 5.27 |
|      | HT/VHT20 STBC, M0 to M7             | 2 | 7  | 15.1 | 14.2 | 0.0 | 17.7 | 23.0 | 5.27 |

**Maximum Transmit Output Power, 5270 MHz, HT/VHT40, M0 to M7****Antenna A**



## A.4 Power Spectral Density

### Power Spectral Density Test Requirement

**15.407** (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**15.407** (5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Referencing “644545 D03 Guidance for IEEE 802.11ac v01”, covering signals that cross the boundary between two adjacent UNII bands, the FCC describes a procedure to measure EBW, power, and PSD in each UNII band. For the case of a 160MHz signal equally distributed between UNII-1 and UNII-2a, we apply the following alternate procedure.

Rather than measure:

- The half of the signal in UNII-1, measured against the 30dBm power / 17dBm/MHz PSD limits
- The half of the signal in UNII-2a, measured against the 24dBm power / 11dBm/MHz PSD limits

If a 160MHz signal (equally distributed between the two bands) produces a total power of 27dBm across the entire 160 MHz EBW, the total power in each band would be half of the total, or 24dBm (which meets both the UNII-1 and UNII-2a limits), and would have a PSD no greater than 11dBm/MHz in either sub-band.

Given these facts, we have measured the complete 160 MHz EBW (across both sub-bands) against 27dBm power and 11dBm/MHz PSD limits, rather than individual sub band measurements against the individual sub band limits.”

### Power Spectral Density Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

#### F. Maximum Power Spectral Density (PSD)

##### Power Spectral Density

##### Test Procedure

The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add 10 log(1/x), where x is the duty cycle, to the peak of the spectrum.  
b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth.



## Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

## 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2

**Power Spectral Density**

## Test parameters

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- (i) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section II.B.
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz.
- (iv) Set VBW  $\geq$  3 MHz.
- (v) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run”.
- (ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth)

**F. Maximum Power Spectral Density (PSD)**

- 2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- 3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the peak of the spectrum.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. (See ANSI C63.10 section 14.3.2.2)

**Samples, Systems, and Modes**

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                   |                                                  |
|-----------------------------------|--------------------------------------------------|
| <b>Tested By :</b><br>Julian Land | <b>Date of testing:</b><br>18-Nov-19 - 18-Nov-19 |
| <b>Test Result : PASS</b>         |                                                  |

**Test Equipment**

See Appendix B for list of test equipment

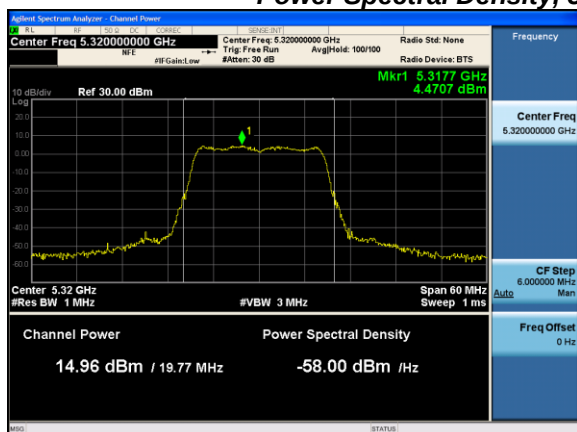
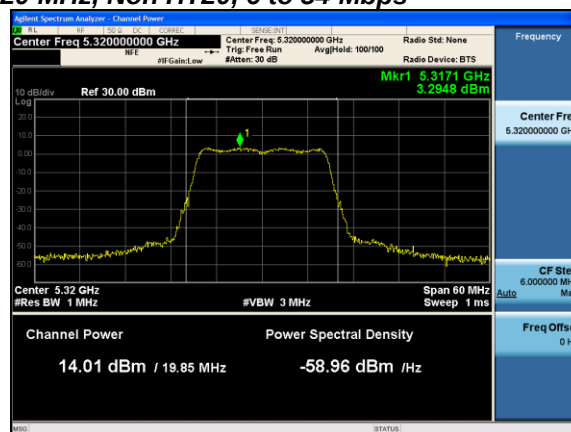


## Power Spectral Density

| Frequency (MHz) | Mode                                | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 PSD (dBm/MHz) | Tx 2 PSD (dBm/MHz) | Duty Cycle Correction (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) |
|-----------------|-------------------------------------|----------|-------------------------------|--------------------|--------------------|----------------------------|---------------------|-----------------|-------------|
| 5260            | Non HT20, 6 to 54 Mbps              | 1        | 7                             | 9.9                |                    | 0.0                        | 9.9                 | 10.0            | 0.07        |
|                 | Non HT20, 6 to 54 Mbps              | 2        | 10                            | 3.4                | 4.0                | 0.0                        | 6.8                 | 7.0             | 0.25        |
|                 | Non HT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | 0.1                | 1.0                | 0.0                        | 3.6                 | 7.0             | 3.38        |
|                 | HT/VHT20, M0 to M7                  | 1        | 7                             | 9.6                |                    | 0.0                        | 9.6                 | 10.0            | 0.36        |
|                 | HT/VHT20, M0 to M7                  | 2        | 10                            | 3.4                | 3.6                | 0.0                        | 6.6                 | 7.0             | 0.44        |
|                 | HT/VHT20, M8 to M15                 | 2        | 7                             | 4.6                | 5.1                | 0.0                        | 7.9                 | 10.0            | 2.09        |
|                 | HT/VHT20 Beam Forming, M0 to M7     | 2        | 10                            | 1.4                | 1.4                | 0.0                        | 4.5                 | 7.0             | 2.55        |
|                 | HT/VHT20 Beam Forming, M8 to M15    | 2        | 7                             | 4.6                | 5.1                | 0.0                        | 7.9                 | 10.0            | 2.09        |
|                 | HT/VHT20 STBC, M0 to M7             | 2        | 7                             | 4.6                | 5.1                | 0.0                        | 7.9                 | 10.0            | 2.09        |
| 5270            | Non HT40, 6 to 54 Mbps              | 1        | 7                             | 7.2                |                    | 0.0                        | 7.2                 | 10.0            | 2.76        |
|                 | Non HT40, 6 to 54 Mbps              | 2        | 10                            | 1.3                | 1.5                | 0.0                        | 4.5                 | 7.0             | 2.55        |
|                 | HT/VHT40, M0 to M7                  | 1        | 7                             | 7.5                |                    | 0.1                        | 7.6                 | 10.0            | 2.45        |
|                 | HT/VHT40, M0 to M7                  | 2        | 10                            | 1.7                | 2.4                | 0.1                        | 5.1                 | 7.0             | 1.88        |
|                 | HT/VHT40, M8 to M15                 | 2        | 7                             | 1.7                | 2.4                | 0.1                        | 5.1                 | 10.0            | 4.88        |
|                 | HT/VHT40 Beam Forming, M0 to M7     | 2        | 10                            | -3.4               | -2.6               | 0.1                        | 0.1                 | 7.0             | 6.92        |
|                 | HT/VHT40 Beam Forming, M8 to M15    | 2        | 7                             | 1.7                | 2.4                | 0.1                        | 5.1                 | 10.0            | 4.88        |
|                 | HT/VHT40 STBC, M0 to M7             | 2        | 7                             | 1.7                | 2.4                | 0.1                        | 5.1                 | 10.0            | 4.88        |
| 5290            | Non HT80, 6 to 54 Mbps              | 1        | 7                             | -2.7               |                    | 0.0                        | -2.7                | 10.0            | 12.66       |
|                 | Non HT80, 6 to 54 Mbps              | 2        | 10                            | -6.7               | -6.4               | 0.0                        | -3.5                | 7.0             | 10.50       |
|                 | VHT80, M0 to M9 1ss                 | 1        | 7                             | -2.7               |                    | 0.2                        | -2.5                | 10.0            | 12.52       |
|                 | VHT80, M0 to M9 1ss                 | 2        | 10                            | -3.8               | -3.8               | 0.2                        | -0.6                | 7.0             | 7.61        |
|                 | VHT80, M0 to M9 2ss                 | 2        | 7                             | -3.8               | -3.8               | 0.2                        | -0.6                | 10.0            | 10.61       |
|                 | VHT80 Beam Forming, M0 to M9 1ss    | 2        | 10                            | -6.8               | -6.4               | 0.2                        | -3.4                | 7.0             | 10.40       |
|                 | VHT80 Beam Forming, M0 to M9 2ss    | 2        | 7                             | -3.8               | -3.8               | 0.2                        | -0.6                | 10.0            | 10.61       |
|                 | VHT80 STBC, M0 to M9 1ss            | 2        | 7                             | -3.8               | -3.8               | 0.2                        | -0.6                | 10.0            | 10.61       |



|      |                                     |          |           |            |            |            |            |            |             |
|------|-------------------------------------|----------|-----------|------------|------------|------------|------------|------------|-------------|
| 5300 | Non HT20, 6 to 54 Mbps              | 1        | 7         | 9.1        |            | 0.0        | 9.1        | 10.0       | 0.87        |
|      | Non HT20, 6 to 54 Mbps              | 2        | 10        | 3.6        | 2.9        | 0.0        | 6.3        | 7.0        | 0.69        |
|      | Non HT20 Beam Forming, 6 to 54 Mbps | 2        | 10        | 1.1        | 1.2        | 0.0        | 4.2        | 7.0        | 2.81        |
|      | HT/VHT20, M0 to M7                  | 1        | 7         | 8.8        |            | 0.0        | 8.8        | 10.0       | 1.16        |
|      | HT/VHT20, M0 to M7                  | 2        | 10        | 3.3        | 2.6        | 0.0        | 6.0        | 7.0        | 0.98        |
|      | HT/VHT20, M8 to M15                 | 2        | 7         | 5.4        | 5.4        | 0.0        | 8.5        | 10.0       | 1.55        |
|      | HT/VHT20 Beam Forming, M0 to M7     | 2        | 10        | 1.2        | 1.4        | 0.0        | 4.4        | 7.0        | 2.64        |
|      | HT/VHT20 Beam Forming, M8 to M15    | 2        | 7         | 5.4        | 5.4        | 0.0        | 8.5        | 10.0       | 1.55        |
|      | HT/VHT20 STBC, M0 to M7             | 2        | 7         | 5.4        | 5.4        | 0.0        | 8.5        | 10.0       | 1.55        |
| 5310 | Non HT40, 6 to 54 Mbps              | 1        | 7         | 3.8        |            | 0.0        | 3.8        | 10.0       | 6.16        |
|      | Non HT40, 6 to 54 Mbps              | 2        | 10        | 0.7        | 0.9        | 0.0        | 3.9        | 7.0        | 3.15        |
|      | HT/VHT40, M0 to M7                  | 1        | 7         | 3.6        |            | 0.1        | 3.7        | 10.0       | 6.35        |
|      | HT/VHT40, M0 to M7                  | 2        | 10        | 1.1        | 0.9        | 0.1        | 4.1        | 7.0        | 2.94        |
|      | HT/VHT40, M8 to M15                 | 2        | 7         | 1.1        | 0.9        | 0.1        | 4.1        | 10.0       | 5.94        |
|      | HT/VHT40 Beam Forming, M0 to M7     | 2        | 10        | -2.8       | -2.7       | 0.1        | 0.3        | 7.0        | 6.69        |
|      | HT/VHT40 Beam Forming, M8 to M15    | 2        | 7         | 1.1        | 0.9        | 0.1        | 4.1        | 10.0       | 5.94        |
|      | HT/VHT40 STBC, M0 to M7             | 2        | 7         | 1.1        | 0.9        | 0.1        | 4.1        | 10.0       | 5.94        |
| 5320 | Non HT20, 6 to 54 Mbps              | 1        | 7         | 9.2        |            | 0.0        | 9.2        | 10.0       | 0.77        |
|      | <b>Non HT20, 6 to 54 Mbps</b>       | <b>2</b> | <b>10</b> | <b>4.5</b> | <b>3.3</b> | <b>0.0</b> | <b>7.0</b> | <b>7.0</b> | <b>0.02</b> |
|      | Non HT20 Beam Forming, 6 to 54 Mbps | 2        | 10        | 0.7        | -0.1       | 0.0        | 3.4        | 7.0        | 3.64        |
|      | HT/VHT20, M0 to M7                  | 1        | 7         | 9.0        |            | 0.0        | 9.0        | 10.0       | 0.96        |
|      | HT/VHT20, M0 to M7                  | 2        | 10        | 3.3        | 2.2        | 0.0        | 5.8        | 7.0        | 1.16        |
|      | HT/VHT20, M8 to M15                 | 2        | 7         | 4.5        | 3.6        | 0.0        | 7.1        | 10.0       | 2.87        |
|      | HT/VHT20 Beam Forming, M0 to M7     | 2        | 10        | 0.1        | -0.1       | 0.0        | 3.1        | 7.0        | 3.94        |
|      | HT/VHT20 Beam Forming, M8 to M15    | 2        | 7         | 4.5        | 3.6        | 0.0        | 7.1        | 10.0       | 2.87        |
|      | HT/VHT20 STBC, M0 to M7             | 2        | 7         | 4.5        | 3.6        | 0.0        | 7.1        | 10.0       | 2.87        |

**Power Spectral Density, 5320 MHz, Non HT20, 6 to 54 Mbps****Antenna A****Antenna B**



## A.5 Conducted Spurious Emissions

### Conducted Spurious Emissions Test Requirement

**15.407(b) Undesirable emission limits.** Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

### Conducted Spurious Emissions Test Procedure

**KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

**Ref.** ANSI C63.10: 2013

| Conducted Spurious Emissions<br>Test Procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <ol style="list-style-type: none"> <li>1. Connect the antenna port(s) to the spectrum analyzer input.</li> <li>2. Place the radio in continuous transmit mode</li> <li>3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).</li> <li>4. Use the peak marker function to determine the maximum spurs amplitude level.</li> <li>5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. (see ANSI C63.10:2013 section 14.3.2.2)</li> <li>6. Capture graphs and record pertinent measurement data.</li> </ol> |  |

**Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)**

**KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)**

| Conducted Spurious Emissions<br>Test parameters           |                                                              |
|-----------------------------------------------------------|--------------------------------------------------------------|
| <b>Peak</b><br>RBW = 1 MHz<br>VBW ≥ 3 MHz<br>Sweep = Auto | <b>Average</b><br>RBW = 1 MHz<br>VBW ≥ 3 MHz<br>Sweep = Auto |





|                                      |                                   |
|--------------------------------------|-----------------------------------|
| Detector = Peak<br>Trace = Max Hold. | Detector = RMS<br>Power Averaging |
|--------------------------------------|-----------------------------------|

Add the max antenna gain + ground reflection factor (4.7 dB for frequencies between 30 MHz and 1000 MHz, and 0 dB for frequencies > 1000 MHz).

**Samples, Systems, and Modes**

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                   |                                                  |
|-----------------------------------|--------------------------------------------------|
| <b>Tested By :</b><br>Julian Land | <b>Date of testing:</b><br>18-Nov-19 - 18-Nov-19 |
| <b>Test Result : PASS</b>         |                                                  |

**Test Equipment**

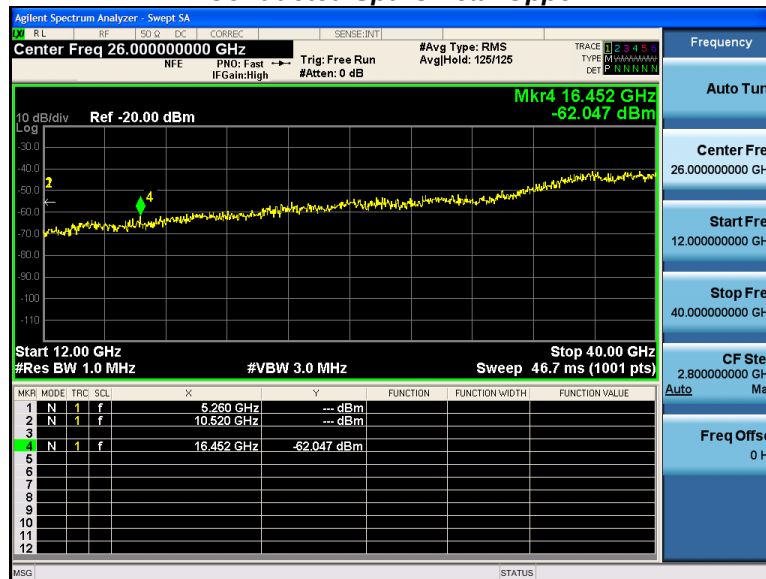
See Appendix B for list of test equipment



### Conducted Spurs Average Upper



### Conducted Spurs Peak Upper



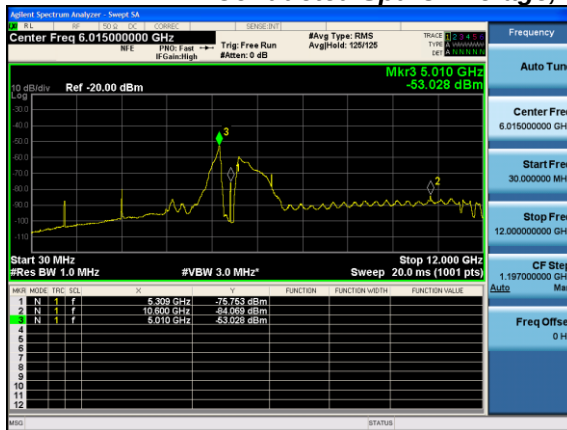
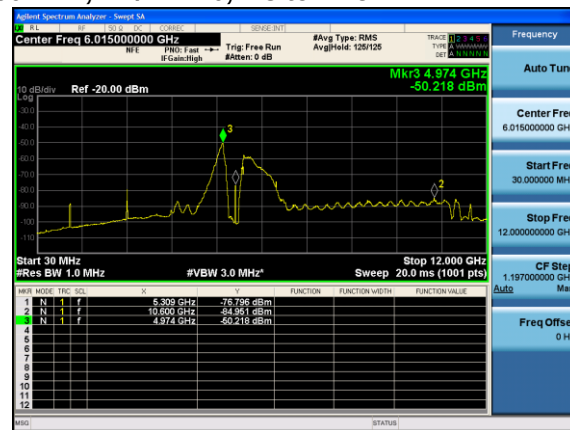


Conducted Spurious Emissions Average Table

| Frequency (MHz) | Mode                                | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm) | Tx 2 Spur Power (dBm) | Duty Cycle Correction (dB) | Total Conducted Spur (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------------------|----------|-------------------------------|-----------------------|-----------------------|----------------------------|----------------------------|-------------|-------------|
| 5260            | Non HT20, 6 to 54 Mbps              | 1        | 7                             | -48.7                 |                       | 0.0                        | -41.7                      | -41.25      | 0.42        |
|                 | Non HT20, 6 to 54 Mbps              | 2        | 7                             | -53.7                 | -51.6                 | 0.0                        | -42.5                      | -41.25      | 1.23        |
|                 | Non HT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | -58.3                 | -52.8                 | 0.0                        | -41.7                      | -41.25      | 0.44        |
|                 | HT/VHT20, M0 to M7                  | 1        | 7                             | -48.7                 |                       | 0.0                        | -41.7                      | -41.25      | 0.41        |
|                 | HT/VHT20, M0 to M7                  | 2        | 7                             | -53.6                 | -51.6                 | 0.0                        | -42.4                      | -41.25      | 1.18        |
|                 | HT/VHT20, M8 to M15                 | 2        | 7                             | -53.2                 | -50.7                 | 0.0                        | -41.7                      | -41.25      | 0.47        |
|                 | HT/VHT20 Beam Forming, M0 to M7     | 2        | 10                            | -58.0                 | -52.5                 | 0.0                        | -41.4                      | -41.25      | 0.13        |
|                 | HT/VHT20 Beam Forming, M8 to M15    | 2        | 7                             | -53.2                 | -50.7                 | 0.0                        | -41.7                      | -41.25      | 0.47        |
|                 | HT/VHT20 STBC, M0 to M7             | 2        | 7                             | -53.2                 | -50.7                 | 0.0                        | -41.7                      | -41.25      | 0.47        |
| 5270            | Non HT40, 6 to 54 Mbps              | 1        | 7                             | -48.6                 |                       | 0.0                        | -41.6                      | -41.25      | 0.31        |
|                 | Non HT40, 6 to 54 Mbps              | 2        | 7                             | -53.2                 | -51.0                 | 0.0                        | -41.9                      | -41.25      | 0.66        |
|                 | HT/VHT40, M0 to M7                  | 1        | 7                             | -48.5                 |                       | 0.1                        | -41.4                      | -41.25      | 0.20        |
|                 | HT/VHT40, M0 to M7                  | 2        | 7                             | -52.9                 | -50.3                 | 0.1                        | -41.3                      | -41.25      | 0.10        |
|                 | HT/VHT40, M8 to M15                 | 2        | 7                             | -52.9                 | -50.3                 | 0.1                        | -41.3                      | -41.25      | 0.10        |
|                 | HT/VHT40 Beam Forming, M0 to M7     | 2        | 10                            | -58.2                 | -55.5                 | 0.1                        | -43.6                      | -41.25      | 2.33        |
|                 | HT/VHT40 Beam Forming, M8 to M15    | 2        | 7                             | -52.9                 | -50.3                 | 0.1                        | -41.3                      | -41.25      | 0.10        |
|                 | HT/VHT40 STBC, M0 to M7             | 2        | 7                             | -52.9                 | -50.3                 | 0.1                        | -41.3                      | -41.25      | 0.10        |
| 5290            | Non HT80, 6 to 54 Mbps              | 1        | 7                             | -49.5                 |                       | 0.0                        | -42.5                      | -41.25      | 1.21        |
|                 | Non HT80, 6 to 54 Mbps              | 2        | 7                             | -54.4                 | -53.1                 | 0.0                        | -43.7                      | -41.25      | 2.40        |
|                 | VHT80, M0 to M9 1ss                 | 1        | 7                             | -53.4                 |                       | 0.2                        | -46.2                      | -41.25      | 4.97        |
|                 | VHT80, M0 to M9 1ss                 | 2        | 7                             | -53.6                 | -51.6                 | 0.2                        | -42.3                      | -41.25      | 1.04        |
|                 | VHT80, M0 to M9 2ss                 | 2        | 7                             | -53.6                 | -51.6                 | 0.2                        | -42.3                      | -41.25      | 1.04        |
|                 | VHT80 Beam Forming, M0 to M9 1ss    | 2        | 10                            | -58.6                 | -55.1                 | 0.2                        | -43.3                      | -41.25      | 2.06        |
|                 | VHT80 Beam Forming, M0 to M9 2ss    | 2        | 7                             | -53.6                 | -51.6                 | 0.2                        | -42.3                      | -41.25      | 1.04        |
|                 | VHT80 STBC, M0 to M9 1ss            | 2        | 7                             | -53.6                 | -51.6                 | 0.2                        | -42.3                      | -41.25      | 1.04        |
| 5300            | Non HT20, 6 to 54 Mbps              | 1        | 7                             | -49.0                 |                       | 0.0                        | -42.0                      | -41.25      | 0.72        |
|                 | Non HT20, 6 to 54 Mbps              | 2        | 7                             | -54.0                 | -51.9                 | 0.0                        | -42.8                      | -41.25      | 1.53        |



|      |                                     |          |          |              |              |            |              |               |             |
|------|-------------------------------------|----------|----------|--------------|--------------|------------|--------------|---------------|-------------|
|      | Non HT20 Beam Forming, 6 to 54 Mbps | 2        | 10       | -57.9        | -52.8        | 0.0        | -41.6        | -41.25        | 0.35        |
|      | HT/VHT20, M0 to M7                  | 1        | 7        | -49.1        |              | 0.0        | -42.1        | -41.25        | 0.81        |
|      | HT/VHT20, M0 to M7                  | 2        | 7        | -53.9        | -51.8        | 0.0        | -42.7        | -41.25        | 1.42        |
|      | <b>HT/VHT20, M8 to M15</b>          | <b>2</b> | <b>7</b> | <b>-53.0</b> | <b>-50.2</b> | <b>0.0</b> | <b>-41.3</b> | <b>-41.25</b> | <b>0.07</b> |
|      | HT/VHT20 Beam Forming, M0 to M7     | 2        | 10       | -57.8        | -52.7        | 0.0        | -41.5        | -41.25        | 0.24        |
|      | HT/VHT20 Beam Forming, M8 to M15    | 2        | 7        | -53.0        | -50.2        | 0.0        | -41.3        | -41.25        | 0.07        |
|      | HT/VHT20 STBC, M0 to M7             | 2        | 7        | -53.0        | -50.2        | 0.0        | -41.3        | -41.25        | 0.07        |
| 5310 | Non HT40, 6 to 54 Mbps              | 1        | 7        | -49.4        |              | 0.0        | -42.4        | -41.25        | 1.11        |
|      | Non HT40, 6 to 54 Mbps              | 2        | 7        | -53.5        | -51.3        | 0.0        | -42.2        | -41.25        | 0.96        |
|      | HT/VHT40, M0 to M7                  | 1        | 7        | -52.3        |              | 0.1        | -45.2        | -41.25        | 4.00        |
|      | HT/VHT40, M0 to M7                  | 2        | 7        | -53.3        | -50.8        | 0.1        | -41.8        | -41.25        | 0.56        |
|      | HT/VHT40, M8 to M15                 | 2        | 7        | -53.3        | -50.8        | 0.1        | -41.8        | -41.25        | 0.56        |
|      | HT/VHT40 Beam Forming, M0 to M7     | 2        | 10       | -57.9        | -53.1        | 0.1        | -41.8        | -41.25        | 0.56        |
|      | HT/VHT40 Beam Forming, M8 to M15    | 2        | 7        | -53.3        | -50.8        | 0.1        | -41.8        | -41.25        | 0.56        |
|      | HT/VHT40 STBC, M0 to M7             | 2        | 7        | -53.3        | -50.8        | 0.1        | -41.8        | -41.25        | 0.56        |
| 5320 | Non HT20, 6 to 54 Mbps              | 1        | 7        | -48.7        |              | 0.0        | -41.7        | -41.25        | 0.42        |
|      | Non HT20, 6 to 54 Mbps              | 2        | 7        | -53.2        | -51.0        | 0.0        | -41.9        | -41.25        | 0.67        |
|      | Non HT20 Beam Forming, 6 to 54 Mbps | 2        | 10       | -57.6        | -52.9        | 0.0        | -41.6        | -41.25        | 0.35        |
|      | HT/VHT20, M0 to M7                  | 1        | 7        | -48.8        |              | 0.0        | -41.8        | -41.25        | 0.51        |
|      | HT/VHT20, M0 to M7                  | 2        | 7        | -53.4        | -51.5        | 0.0        | -42.3        | -41.25        | 1.04        |
|      | HT/VHT20, M8 to M15                 | 2        | 7        | -53.2        | -50.9        | 0.0        | -41.8        | -41.25        | 0.60        |
|      | HT/VHT20 Beam Forming, M0 to M7     | 2        | 10       | -57.4        | -52.9        | 0.0        | -41.5        | -41.25        | 0.29        |
|      | HT/VHT20 Beam Forming, M8 to M15    | 2        | 7        | -53.2        | -50.9        | 0.0        | -41.8        | -41.25        | 0.60        |
|      | HT/VHT20 STBC, M0 to M7             | 2        | 7        | -53.2        | -50.9        | 0.0        | -41.8        | -41.25        | 0.60        |

**Conducted Spurs Average, 5300 MHz, HT/VHT20, M8 to M15****Antenna A****Antenna B**

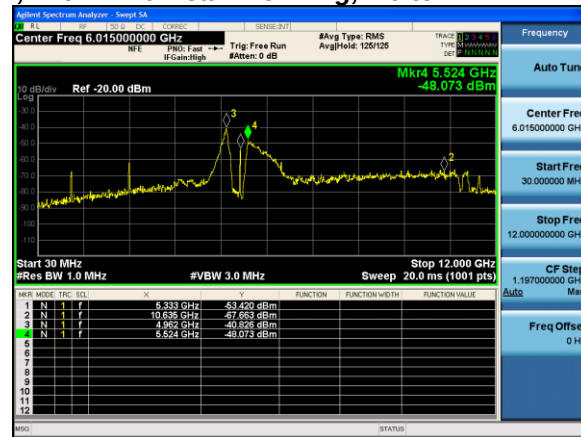


Conducted Spurious Emissions Peak Table

| Frequency (MHz) | Mode                                | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Spur Power (dBm) | Tx 2 Spur Power (dBm) | Tx 3 Spur Power (dBm) | Total Conducted Spur (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------------------|----------|-------------------------------|-----------------------|-----------------------|-----------------------|----------------------------|-------------|-------------|
| 5260            | Non HT20, 6 to 54 Mbps              | 1        | 7                             | -38.2                 |                       | 0.0                   | -31.2                      | -21.25      | 9.92        |
|                 | Non HT20, 6 to 54 Mbps              | 2        | 7                             | -43.1                 | -41.0                 | 0.0                   | -31.9                      | -21.25      | 10.63       |
|                 | Non HT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | -47.6                 | -42.7                 | 0.0                   | -31.4                      | -21.25      | 10.20       |
|                 | HT/VHT20, M0 to M7                  | 1        | 7                             | -37.8                 |                       | 0.0                   | -30.8                      | -21.25      | 9.51        |
|                 | HT/VHT20, M0 to M7                  | 2        | 7                             | -42.9                 | -41.3                 | 0.0                   | -32.0                      | -21.25      | 10.72       |
|                 | HT/VHT20, M8 to M15                 | 2        | 7                             | -42.1                 | -40.2                 | 0.0                   | -31.0                      | -21.25      | 9.74        |
|                 | HT/VHT20 Beam Forming, M0 to M7     | 2        | 10                            | -48.2                 | -41.1                 | 0.0                   | -30.3                      | -21.25      | 9.03        |
|                 | HT/VHT20 Beam Forming, M8 to M15    | 2        | 7                             | -42.1                 | -40.2                 | 0.0                   | -31.0                      | -21.25      | 9.74        |
|                 | HT/VHT20 STBC, M0 to M7             | 2        | 7                             | -42.1                 | -40.2                 | 0.0                   | -31.0                      | -21.25      | 9.74        |
| 5270            | Non HT40, 6 to 54 Mbps              | 1        | 7                             | -38.1                 |                       | 0.0                   | -31.1                      | -21.25      | 9.81        |
|                 | Non HT40, 6 to 54 Mbps              | 2        | 7                             | -43.7                 | -41.4                 | 0.0                   | -32.3                      | -21.25      | 11.10       |
|                 | HT/VHT40, M0 to M7                  | 1        | 7                             | -37.5                 |                       | 0.1                   | -30.4                      | -21.25      | 9.20        |
|                 | HT/VHT40, M0 to M7                  | 2        | 7                             | -42.8                 | -40.1                 | 0.1                   | -31.2                      | -21.25      | 9.93        |
|                 | HT/VHT40, M8 to M15                 | 2        | 7                             | -42.8                 | -40.1                 | 0.1                   | -31.2                      | -21.25      | 9.93        |
|                 | HT/VHT40 Beam Forming, M0 to M7     | 2        | 10                            | -48.1                 | -44.3                 | 0.1                   | -32.7                      | -21.25      | 11.49       |
|                 | HT/VHT40 Beam Forming, M8 to M15    | 2        | 7                             | -42.8                 | -40.1                 | 0.1                   | -31.2                      | -21.25      | 9.93        |
|                 | HT/VHT40 STBC, M0 to M7             | 2        | 7                             | -42.8                 | -40.1                 | 0.1                   | -31.2                      | -21.25      | 9.93        |
| 5290            | Non HT80, 6 to 54 Mbps              | 1        | 7                             | -39.0                 |                       | 0.0                   | -32.0                      | -21.25      | 10.71       |
|                 | Non HT80, 6 to 54 Mbps              | 2        | 7                             | -43.4                 | -43.2                 | 0.0                   | -33.2                      | -21.25      | 12.00       |
|                 | VHT80, M0 to M9 1ss                 | 1        | 7                             | -43.4                 |                       | 0.2                   | -36.2                      | -21.25      | 14.97       |
|                 | VHT80, M0 to M9 1ss                 | 2        | 7                             | -42.2                 | -40.5                 | 0.2                   | -31.1                      | -21.25      | 9.82        |
|                 | VHT80, M0 to M9 2ss                 | 2        | 7                             | -42.2                 | -40.5                 | 0.2                   | -31.1                      | -21.25      | 9.82        |
|                 | VHT80 Beam Forming, M0 to M9 1ss    | 2        | 10                            | -47.8                 | -45.1                 | 0.2                   | -33.1                      | -21.25      | 11.80       |
|                 | VHT80 Beam Forming, M0 to M9 2ss    | 2        | 7                             | -42.2                 | -40.5                 | 0.2                   | -31.1                      | -21.25      | 9.82        |
|                 | VHT80 STBC, M0 to M9 1ss            | 2        | 7                             | -42.2                 | -40.5                 | 0.2                   | -31.1                      | -21.25      | 9.82        |



|      |                                        |          |           |              |              |            |              |               |             |
|------|----------------------------------------|----------|-----------|--------------|--------------|------------|--------------|---------------|-------------|
| 5300 | Non HT20, 6 to 54 Mbps                 | 1        | 7         | -38.4        |              | 0.0        | -31.4        | -21.25        | 10.12       |
|      | Non HT20, 6 to 54 Mbps                 | 2        | 7         | -43.7        | -41.7        | 0.0        | -32.5        | -21.25        | 11.29       |
|      | Non HT20 Beam Forming, 6 to 54 Mbps    | 2        | 10        | -47.0        | -41.9        | 0.0        | -30.7        | -21.25        | 9.45        |
|      | HT/VHT20, M0 to M7                     | 1        | 7         | -38.7        |              | 0.0        | -31.7        | -21.25        | 10.41       |
|      | HT/VHT20, M0 to M7                     | 2        | 7         | -42.7        | -41.8        | 0.0        | -32.2        | -21.25        | 10.92       |
|      | HT/VHT20, M8 to M15                    | 2        | 7         | -42.2        | -40.7        | 0.0        | -31.3        | -21.25        | 10.08       |
|      | HT/VHT20 Beam Forming, M0 to M7        | 2        | 10        | -47.3        | -42.5        | 0.0        | -31.2        | -21.25        | 9.96        |
|      | HT/VHT20 Beam Forming, M8 to M15       | 2        | 7         | -42.2        | -40.7        | 0.0        | -31.3        | -21.25        | 10.08       |
|      | HT/VHT20 STBC, M0 to M7                | 2        | 7         | -42.2        | -40.7        | 0.0        | -31.3        | -21.25        | 10.08       |
| 5310 | Non HT40, 6 to 54 Mbps                 | 1        | 7         | -38.3        |              | 0.0        | -31.3        | -21.25        | 10.01       |
|      | Non HT40, 6 to 54 Mbps                 | 2        | 7         | -43.0        | -40.4        | 0.0        | -31.5        | -21.25        | 10.21       |
|      | HT/VHT40, M0 to M7                     | 1        | 7         | -42.3        |              | 0.1        | -35.2        | -21.25        | 14.00       |
|      | HT/VHT40, M0 to M7                     | 2        | 7         | -43.3        | -40.6        | 0.1        | -31.7        | -21.25        | 10.43       |
|      | HT/VHT40, M8 to M15                    | 2        | 7         | -43.3        | -40.6        | 0.1        | -31.7        | -21.25        | 10.43       |
|      | HT/VHT40 Beam Forming, M0 to M7        | 2        | 10        | -48.4        | -42.7        | 0.1        | -31.6        | -21.25        | 10.36       |
|      | HT/VHT40 Beam Forming, M8 to M15       | 2        | 7         | -43.3        | -40.6        | 0.1        | -31.7        | -21.25        | 10.43       |
|      | HT/VHT40 STBC, M0 to M7                | 2        | 7         | -43.3        | -40.6        | 0.1        | -31.7        | -21.25        | 10.43       |
| 5320 | Non HT20, 6 to 54 Mbps                 | 1        | 7         | -38.5        |              | 0.0        | -31.5        | -21.25        | 10.22       |
|      | Non HT20, 6 to 54 Mbps                 | 2        | 7         | -42.5        | -41.4        | 0.0        | -31.9        | -21.25        | 10.62       |
|      | Non HT20 Beam Forming, 6 to 54 Mbps    | 2        | 10        | -46.9        | -42.5        | 0.0        | -31.1        | -21.25        | 9.87        |
|      | HT/VHT20, M0 to M7                     | 1        | 7         | -37.6        |              | 0.0        | -30.6        | -21.25        | 9.31        |
|      | HT/VHT20, M0 to M7                     | 2        | 7         | -42.8        | -39.4        | 0.0        | -30.7        | -21.25        | 9.47        |
|      | HT/VHT20, M8 to M15                    | 2        | 7         | -41.8        | -40.9        | 0.0        | -31.3        | -21.25        | 10.02       |
|      | <b>HT/VHT20 Beam Forming, M0 to M7</b> | <b>2</b> | <b>10</b> | <b>-47.1</b> | <b>-40.8</b> | <b>0.0</b> | <b>-29.8</b> | <b>-21.25</b> | <b>8.59</b> |
|      | HT/VHT20 Beam Forming, M8 to M15       | 2        | 7         | -41.8        | -40.9        | 0.0        | -31.3        | -21.25        | 10.02       |
|      | HT/VHT20 STBC, M0 to M7                | 2        | 7         | -41.8        | -40.9        | 0.0        | -31.3        | -21.25        | 10.02       |

**Conducted Spurs Peak, 5320 MHz, HT/VHT20 Beam Forming, M0 to M7****Antenna A****Antenna B**





## A.6 Conducted Bandedge

### Conducted Band Edge Test Requirement

**15.407(b) Undesirable emission limits.** Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

#### KDB 789033 D02 General UNII Test Procedures New Rules v02r01

#### 2. Unwanted Emissions that fall Outside of the Restricted Bands

- a) For all measurements, follow the requirements in II.G.3. *“General Requirements for Unwanted Emissions Measurements.”*
- b) At frequencies below 1000 MHz, use the procedure described in II.G.4. *“Procedure for Unwanted Emissions Measurements Below 1000 MHz.”*
- c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in II.G.5., *“Procedure for Unwanted Emissions Measurements Above 1000 MHz.”*
- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.<sup>3</sup>

### Conducted Band Edge Test Procedure

#### KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Ref. ANSI C63.10: 2013

#### Conducted Spurious Emissions

##### Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Use the peak marker function to determine the maximum spurs amplitude level.
5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. (see ANSI C63.10:2013 section 14.3.2.2)
6. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)

KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)

#### Conducted Spurious Emissions

##### Test parameters



|                                                                                                        |                                                                                                        |
|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| <b>Peak</b><br>RBW = 1 MHz<br>VBW $\geq$ 3 MHz<br>Sweep = Auto<br>Detector = Peak<br>Trace = Max Hold. | <b>Average</b><br>RBW = 1 MHz<br>VBW $\geq$ 3 MHz<br>Sweep = Auto<br>Detector = RMS<br>Power Averaging |
|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|

**Samples, Systems, and Modes**

| System Number | Description | Samples | System under test                   | Support equipment                   |
|---------------|-------------|---------|-------------------------------------|-------------------------------------|
| 1             | EUT         | S01     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            |
|               | Support     | S02     | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

|                                   |                                                  |
|-----------------------------------|--------------------------------------------------|
| <b>Tested By :</b><br>Julian Land | <b>Date of testing:</b><br>18-Nov-19 - 18-Nov-19 |
| <b>Test Result : PASS</b>         |                                                  |

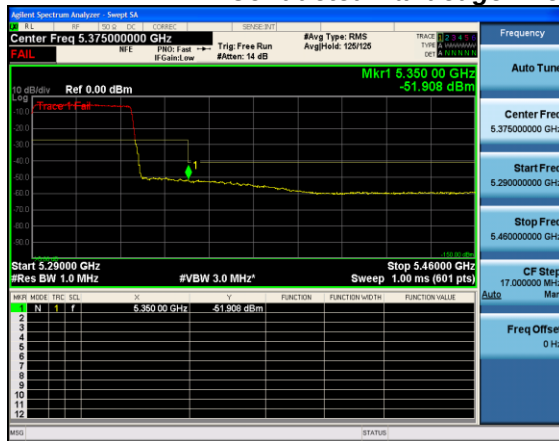
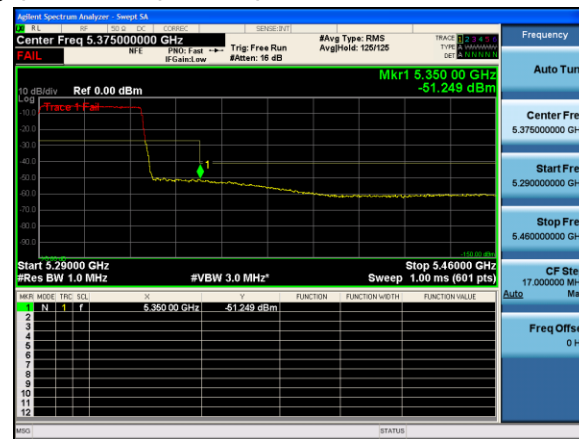
**Test Equipment**

See Appendix B for list of test equipment



## Conducted Bandedge Average Table

| Frequency (MHz) | Mode                                | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Bandedge Level (dBm) | Tx 2 Bandedge Level (dBm) | Duty Cycle Correction (dB) | Total Tx Bandedge Level (dBm) | Limit (dBm)   | Margin (dB) |
|-----------------|-------------------------------------|----------|-------------------------------|---------------------------|---------------------------|----------------------------|-------------------------------|---------------|-------------|
| 5290            | Non HT80, 6 to 54 Mbps              | 1        | 7                             | -48.6                     |                           | 0.0                        | -41.6                         | -41.25        | 0.31        |
|                 | Non HT80, 6 to 54 Mbps              | 2        | 7                             | -54.6                     | -55.4                     | 0.0                        | -44.9                         | -41.25        | 3.68        |
|                 | VHT80, M0 to M9 1ss                 | 1        | 7                             | -50.0                     |                           | 0.2                        | -42.8                         | -41.25        | 1.57        |
|                 | <b>VHT80, M0 to M9 1ss</b>          | <b>2</b> | <b>7</b>                      | <b>-51.9</b>              | <b>-51.2</b>              | <b>0.2</b>                 | <b>-41.3</b>                  | <b>-41.25</b> | <b>0.09</b> |
|                 | VHT80, M0 to M9 2ss                 | 2        | 7                             | -51.9                     | -51.2                     | 0.2                        | -41.3                         | -41.25        | 0.09        |
|                 | VHT80 Beam Forming, M0 to M9 1ss    | 2        | 10                            | -55.7                     | -55.1                     | 0.2                        | -42.2                         | -41.25        | 0.95        |
|                 | VHT80 Beam Forming, M0 to M9 2ss    | 2        | 7                             | -51.9                     | -51.2                     | 0.2                        | -41.3                         | -41.25        | 0.09        |
|                 | VHT80 STBC, M0 to M9 1ss            | 2        | 7                             | -51.9                     | -51.2                     | 0.2                        | -41.3                         | -41.25        | 0.09        |
| 5310            | Non HT40, 6 to 54 Mbps              | 1        | 7                             | -48.8                     |                           | 0.0                        | -41.8                         | -41.25        | 0.51        |
|                 | Non HT40, 6 to 54 Mbps              | 2        | 7                             | -55.5                     | -56.1                     | 0.0                        | -45.7                         | -41.25        | 4.49        |
|                 | HT/VHT40, M0 to M7                  | 1        | 7                             | -48.6                     |                           | 0.1                        | -41.5                         | -41.25        | 0.30        |
|                 | HT/VHT40, M0 to M7                  | 2        | 7                             | -53.4                     | -52.4                     | 0.1                        | -42.8                         | -41.25        | 1.56        |
|                 | HT/VHT40, M8 to M15                 | 2        | 7                             | -53.4                     | -52.4                     | 0.1                        | -42.8                         | -41.25        | 1.56        |
|                 | HT/VHT40 Beam Forming, M0 to M7     | 2        | 10                            | -60.1                     | -58.6                     | 0.1                        | -46.2                         | -41.25        | 4.98        |
|                 | HT/VHT40 Beam Forming, M8 to M15    | 2        | 7                             | -53.4                     | -52.4                     | 0.1                        | -42.8                         | -41.25        | 1.56        |
|                 | HT/VHT40 STBC, M0 to M7             | 2        | 7                             | -53.4                     | -52.4                     | 0.1                        | -42.8                         | -41.25        | 1.56        |
| 5320            | Non HT20, 6 to 54 Mbps              | 1        | 7                             | -54.7                     |                           | 0.0                        | -47.7                         | -41.25        | 6.42        |
|                 | Non HT20, 6 to 54 Mbps              | 2        | 7                             | -58.0                     | -59.4                     | 0.0                        | -48.6                         | -41.25        | 7.35        |
|                 | Non HT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | -62.7                     | -60.5                     | 0.0                        | -48.4                         | -41.25        | 7.17        |
|                 | HT/VHT20, M0 to M7                  | 1        | 7                             | -53.0                     |                           | 0.0                        | -46.0                         | -41.25        | 4.71        |
|                 | HT/VHT20, M0 to M7                  | 2        | 7                             | -58.2                     | -59.1                     | 0.0                        | -48.6                         | -41.25        | 7.32        |
|                 | HT/VHT20, M8 to M15                 | 2        | 7                             | -57.6                     | -58.8                     | 0.0                        | -48.1                         | -41.25        | 6.85        |
|                 | HT/VHT20 Beam Forming, M0 to M7     | 2        | 10                            | -61.9                     | -60.5                     | 0.0                        | -48.1                         | -41.25        | 6.84        |
|                 | HT/VHT20 Beam Forming, M8 to M15    | 2        | 7                             | -57.6                     | -58.8                     | 0.0                        | -48.1                         | -41.25        | 6.85        |
|                 | HT/VHT20 STBC, M0 to M7             | 2        | 7                             | -57.6                     | -58.8                     | 0.0                        | -48.1                         | -41.25        | 6.85        |

**Conducted Bandedge Average, 5290 MHz, VHT80, M0 to M9 1ss****Antenna A****Antenna B**

## Conducted Bandedge Peak Table

| Frequency (MHz) | Mode                                | Tx Paths | Correlated Antenna Gain (dBi) | Tx 1 Bandedge Level (dBm) | Tx 2 Bandedge Level (dBm) | Total Tx Bandedge Level (dBm) | Limit (dBm)   | Margin (dB) |
|-----------------|-------------------------------------|----------|-------------------------------|---------------------------|---------------------------|-------------------------------|---------------|-------------|
| 5290            | Non HT80, 6 to 54 Mbps              | 1        | 7                             | -36.4                     |                           | -29.4                         | -21.25        | 8.11        |
|                 | Non HT80, 6 to 54 Mbps              | 2        | 7                             | -43.6                     | -45.6                     | -34.4                         | -21.25        | 13.19       |
|                 | VHT80, M0 to M9 1ss                 | 1        | 7                             | -39.1                     |                           | -31.9                         | -21.25        | 10.67       |
|                 | VHT80, M0 to M9 1ss                 | 2        | 7                             | -40.1                     | -38.5                     | -29.0                         | -21.25        | 7.78        |
|                 | VHT80, M0 to M9 2ss                 | 2        | 7                             | -40.1                     | -38.5                     | -29.0                         | -21.25        | 7.78        |
|                 | VHT80 Beam Forming, M0 to M9 1ss    | 2        | 10                            | -43.6                     | -41.5                     | -29.2                         | -21.25        | 7.98        |
|                 | VHT80 Beam Forming, M0 to M9 2ss    | 2        | 7                             | -40.1                     | -38.5                     | -29.0                         | -21.25        | 7.78        |
|                 | VHT80 STBC, M0 to M9 1ss            | 2        | 7                             | -40.1                     | -38.5                     | -29.0                         | -21.25        | 7.78        |
| 5310            | Non HT40, 6 to 54 Mbps              | 1        | 7                             | -32.2                     |                           | -25.2                         | -21.25        | 3.91        |
|                 | <b>Non HT40, 6 to 54 Mbps</b>       | <b>2</b> | <b>7</b>                      | <b>-32.7</b>              | <b>-32.2</b>              | <b>-22.4</b>                  | <b>-21.25</b> | <b>1.14</b> |
|                 | HT/VHT40, M0 to M7                  | 1        | 7                             | -32.6                     |                           | -25.5                         | -21.25        | 4.30        |
|                 | HT/VHT40, M0 to M7                  | 2        | 7                             | -35.7                     | -38.8                     | -26.9                         | -21.25        | 5.67        |
|                 | HT/VHT40, M8 to M15                 | 2        | 7                             | -35.7                     | -38.8                     | -26.9                         | -21.25        | 5.67        |
|                 | HT/VHT40 Beam Forming, M0 to M7     | 2        | 10                            | -37.5                     | -40.2                     | -25.6                         | -21.25        | 4.33        |
|                 | HT/VHT40 Beam Forming, M8 to M15    | 2        | 7                             | -35.7                     | -38.8                     | -26.9                         | -21.25        | 5.67        |
|                 | HT/VHT40 STBC, M0 to M7             | 2        | 7                             | -35.7                     | -38.8                     | -26.9                         | -21.25        | 5.67        |
| 5320            | Non HT20, 6 to 54 Mbps              | 1        | 7                             | -41.1                     |                           | -34.1                         | -21.25        | 12.82       |
|                 | Non HT20, 6 to 54 Mbps              | 2        | 7                             | -45.1                     | -45.8                     | -35.4                         | -21.25        | 14.14       |
|                 | Non HT20 Beam Forming, 6 to 54 Mbps | 2        | 10                            | -50.5                     | -48.4                     | -36.3                         | -21.25        | 15.03       |
|                 | HT/VHT20, M0 to M7                  | 1        | 7                             | -38.7                     |                           | -31.7                         | -21.25        | 10.41       |
|                 | HT/VHT20, M0 to M7                  | 2        | 7                             | -45.7                     | -44.3                     | -34.9                         | -21.25        | 13.64       |
|                 | HT/VHT20, M8 to M15                 | 2        | 7                             | -45.2                     | -45.0                     | -35.0                         | -21.25        | 13.79       |
|                 | HT/VHT20 Beam Forming, M0 to M7     | 2        | 10                            | -46.6                     | -48.4                     | -34.4                         | -21.25        | 13.10       |
|                 | HT/VHT20 Beam Forming, M8 to M15    | 2        | 7                             | -45.2                     | -45.0                     | -35.0                         | -21.25        | 13.79       |
|                 | HT/VHT20 STBC, M0 to M7             | 2        | 7                             | -45.2                     | -45.0                     | -35.0                         | -21.25        | 13.79       |

Hydant Spectrum Analyzer - Swept SA

Center Freq 5.385000000 GHz

FAIL

Trig: Free Run

#Avg Type: Log-Per

ArgLevel: 100/100

Trk2 5.35326 GHz

-32.722 dBm

Ref 10.00 dBm

Trace T-Fail

Start 5.31000 GHz

#Res BW 1.0 MHz

#VBW 3.0 MHz

Stop 5.46000 GHz

Sweep 1.00 ms (601 pts)

| WR | MODE | TRF | SCF | X           | Y           | FUNCTION | FUNCTION VALUE | FUNCTION VALUE |
|----|------|-----|-----|-------------|-------------|----------|----------------|----------------|
| 1  | N    | 1   | F   | 5.35000 GHz | -45.012 dBm |          |                |                |
| 2  | N    | 1   | F   | 5.35326 GHz | -32.722 dBm |          |                |                |

**Spectrum Analyzer**

**Center Freq 5.35000000 GHz**

**Mkr2 5.353 25 GHz -32.241 dBm**

| MWR MODE | TRG | SOL | X | Y            | FUNCTION    | FUNCTION WIDTH | FUNCTION VALUE |
|----------|-----|-----|---|--------------|-------------|----------------|----------------|
| 1        | N   | I   | F | 5.350 00 GHz | -47.196 dbm |                |                |
| 2        | N   | I   | F | 5.353 25 GHz | -32.241 dbm |                |                |
| 3        |     |     |   |              |             |                |                |
| 4        |     |     |   |              |             |                |                |
| 5        |     |     |   |              |             |                |                |
| 6        |     |     |   |              |             |                |                |
| 7        |     |     |   |              |             |                |                |
| 8        |     |     |   |              |             |                |                |
| 9        |     |     |   |              |             |                |                |
| 10       |     |     |   |              |             |                |                |
| 11       |     |     |   |              |             |                |                |
| 12       |     |     |   |              |             |                |                |

**Start 5.31000 GHz Stop 5.46000 GHz**

**#Res BW 1.0 MHz #VBW 3.0 MHz Sweep 1.00 ms (601 pts)**

This document is uncontrolled. Please refer to the electronic copy within EDCS for the most up to date version.  
Cisco Systems, Inc. Company Confidential

**Appendix B: List of Test Equipment Used to perform the test**

| Equip#                                     | Manufacturer/ Model              | Description                           | Last Cal          | Next Due          |
|--------------------------------------------|----------------------------------|---------------------------------------|-------------------|-------------------|
| <b>RF Conducted at output antenna port</b> |                                  |                                       |                   |                   |
| 7329                                       | OMEGA/CT485B                     | Chart Recorder                        | 18 Feb. 2019      | 18 Feb. 2020      |
| 49516                                      | Keysight (Agilent/HP) / N9030A   | PXA Signal Analyzer, 3Hz to 50GHz     | 29 Nov. 2019      | 29 Nov. 2019      |
| 55097                                      | Nattional Instruments / PXI-1042 | Chassis PXI                           | Cal Not Required  | Cal Not Required  |
| 56089                                      | National Instruments / PXI-2796  | 40GHz Dual 6x1 Multiplexer (SP6T)     | Verify Before Use | Verify Before Use |
| 56328                                      | Pasternack / PE5019-1            | Torque Wrench                         | 13 Feb. 2019      | 13 Feb. 2020      |
| 57233                                      | Nattional Instruments / PXI-8115 | Embedded Controller                   | Cal Not Required  | Cal Not Required  |
| 57253                                      | National Instruments / PXI-2796  | 40GHz Dual 6x1 Multiplexer (SP6T)     | Verify Before Use | Verify Before Use |
| 57254                                      | National Instruments / PXI-2799  | Switch 1x1                            | Verify Before Use | Verify Before Use |
| 57479                                      | CISCO / ATIL                     | Automation Test Insertion Loss System | Verify Before Use | Verify Before Use |

## Appendix C: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

| Abbreviation | Description                                                          | Abbreviation | Description                        |
|--------------|----------------------------------------------------------------------|--------------|------------------------------------|
| EMC          | Electro Magnetic Compatibility                                       | °F           | Degrees Fahrenheit                 |
| EMI          | Electro Magnetic Interference                                        | °C           | Degrees Celsius                    |
| EUT          | Equipment Under Test                                                 | Temp         | Temperature                        |
| ITE          | Information Technology Equipment                                     | S/N          | Serial Number                      |
| TAP          | Test Assessment Schedule                                             | Qty          | Quantity                           |
| ESD          | Electro Static Discharge                                             | emf          | Electromotive force                |
| EFT          | Electric Fast Transient                                              | RMS          | Root mean square                   |
| EDCS         | Engineering Document Control System                                  | Qp           | Quasi Peak                         |
| Config       | Configuration                                                        | Av           | Average                            |
| CIS#         | Cisco Number (unique identification number for Cisco test equipment) | Pk           | Peak                               |
| Cal          | Calibration                                                          | kHz          | Kilohertz (1x10 <sup>3</sup> )     |
| EN           | European Norm                                                        | MHz          | MegaHertz (1x10 <sup>6</sup> )     |
| IEC          | International Electro technical Commission                           | GHz          | Gigahertz (1x10 <sup>9</sup> )     |
| CISPR        | International Special Committee on Radio Interference                | H            | Horizontal                         |
| CDN          | Coupling/Decoupling Network                                          | V            | Vertical                           |
| LISN         | Line Impedance Stabilization Network                                 | dB           | decibel                            |
| PE           | Protective Earth                                                     | V            | Volt                               |
| GND          | Ground                                                               | kV           | Kilovolt (1x10 <sup>3</sup> )      |
| L1           | Line 1                                                               | μV           | Microvolt (1x10 <sup>-6</sup> )    |
| L2           | Line2                                                                | A            | Amp                                |
| L3           | Line 3                                                               | μA           | Micro Amp (1x10 <sup>-6</sup> )    |
| DC           | Direct Current                                                       | mS           | Milli Second (1x10 <sup>-3</sup> ) |
| RAW          | Uncorrected measurement value, as indicated by the measuring device  | μS           | Micro Second (1x10 <sup>-6</sup> ) |
| RF           | Radio Frequency                                                      | μS           | Micro Second (1x10 <sup>-6</sup> ) |
| SLCE         | Signal Line Conducted Emissions                                      | m            | Meter                              |
| Meas dist    | Measurement distance                                                 | Spec dist    | Specification distance             |
| N/A or NA    | Not Applicable                                                       | SL           | Signal Line (or Telecom Line)      |
| P            | Power Line                                                           | L            | Live Line                          |
| N            | Neutral Line                                                         | R            | Return                             |
| S            | Supply                                                               | AC           | Alternating Current                |



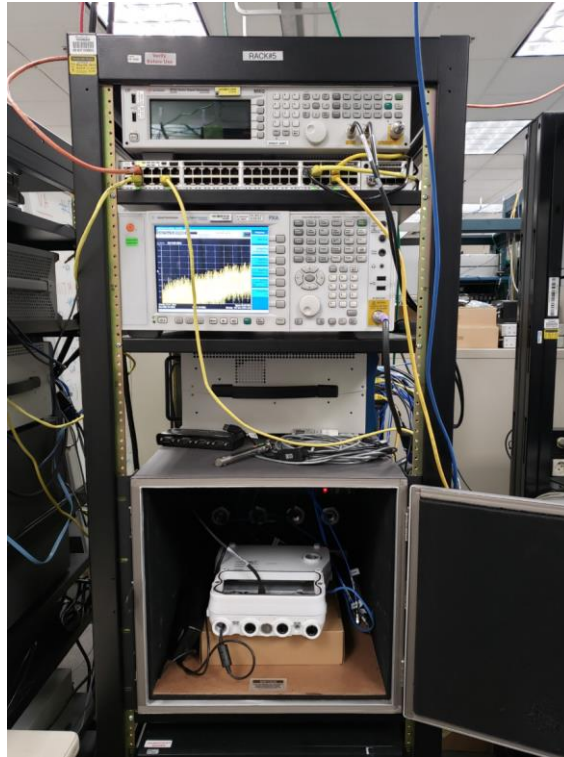
## Appendix D: Photographs of Test Setups

### Title: EUT Pictures





**Title: Radio Conducted Test Setup**





## **Appendix E: Software Used to Perform Testing**

EMIsoft Vasona, version 6.024



## **Appendix F: Test Procedures**

Measurements were made in accordance with

- KDB 789033 - D02 General UNII Test Procedures New Rules v02r01
- KDB 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

|                              |                |
|------------------------------|----------------|
| FCC 5GHz Test Procedures     | EDCS # 1445048 |
| FCC 5GHz RSE Test Procedures | EDCS # 1511600 |



## **Appendix G: Scope of Accreditation (A2LA certificate number 1178-01)**

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

# **End**