


|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2020/07/24 - 00:49 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                        | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz |                          |

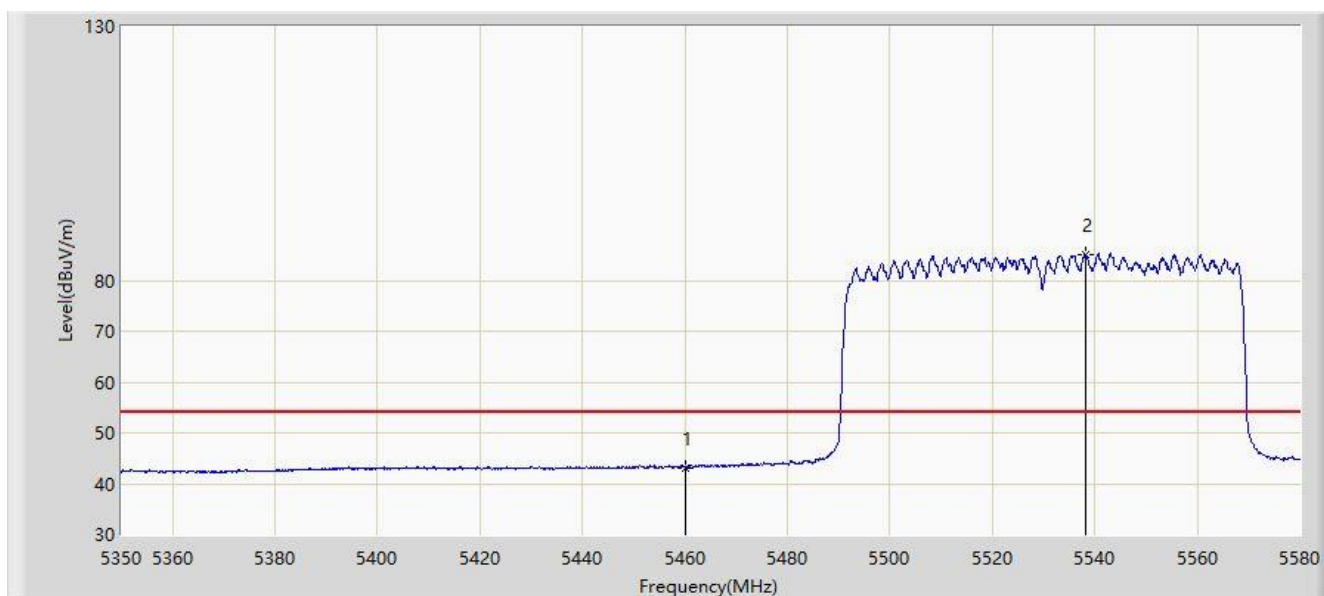


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 43.140                 | 38.912               | -10.860     | 54.000         | 4.228       | AV   |
| 2  |      | *    | 5538.140        | 85.180                 | 80.787               | N/A         | N/A            | 4.393       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2020/07/24 - 00:51 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                        | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz |                          |

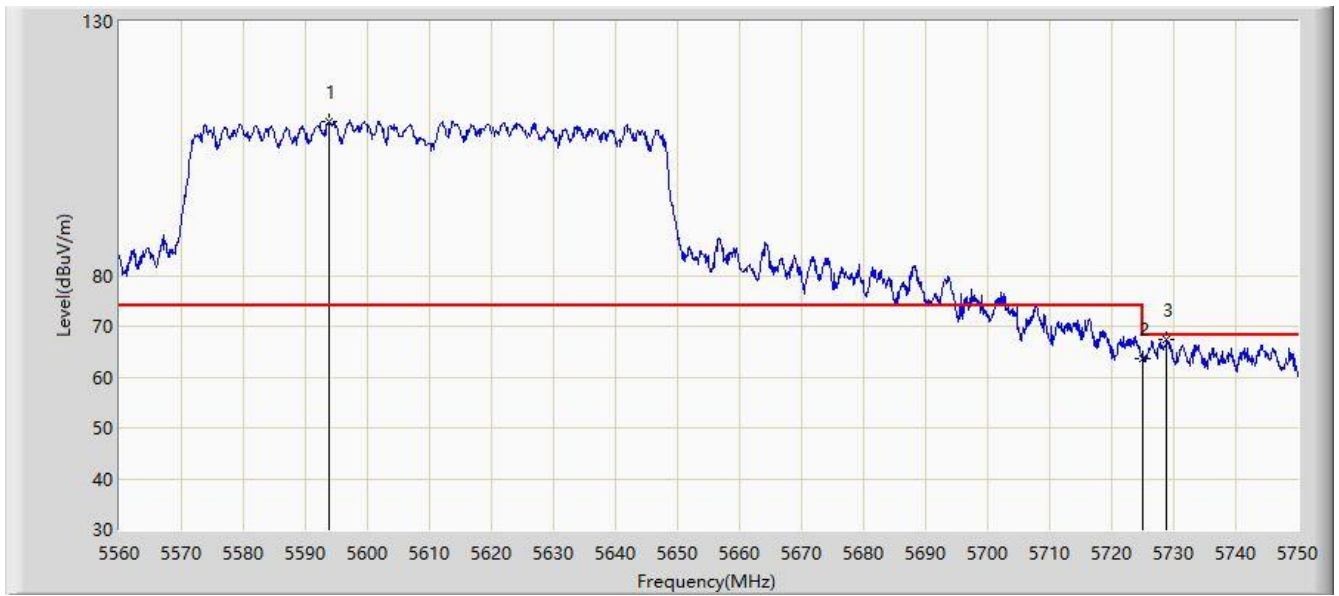


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5593.725        | 110.355                | 105.782              | N/A         | N/A            | 4.573       | PK   |
| 2  |      |      | 5725.000        | 63.740                 | 58.741               | -4.460      | 68.200         | 4.999       | PK   |
| 3  |      |      | 5728.910        | 67.341                 | 62.329               | -0.859      | 68.200         | 5.012       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2020/07/24 - 00:54 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                        | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz |                          |

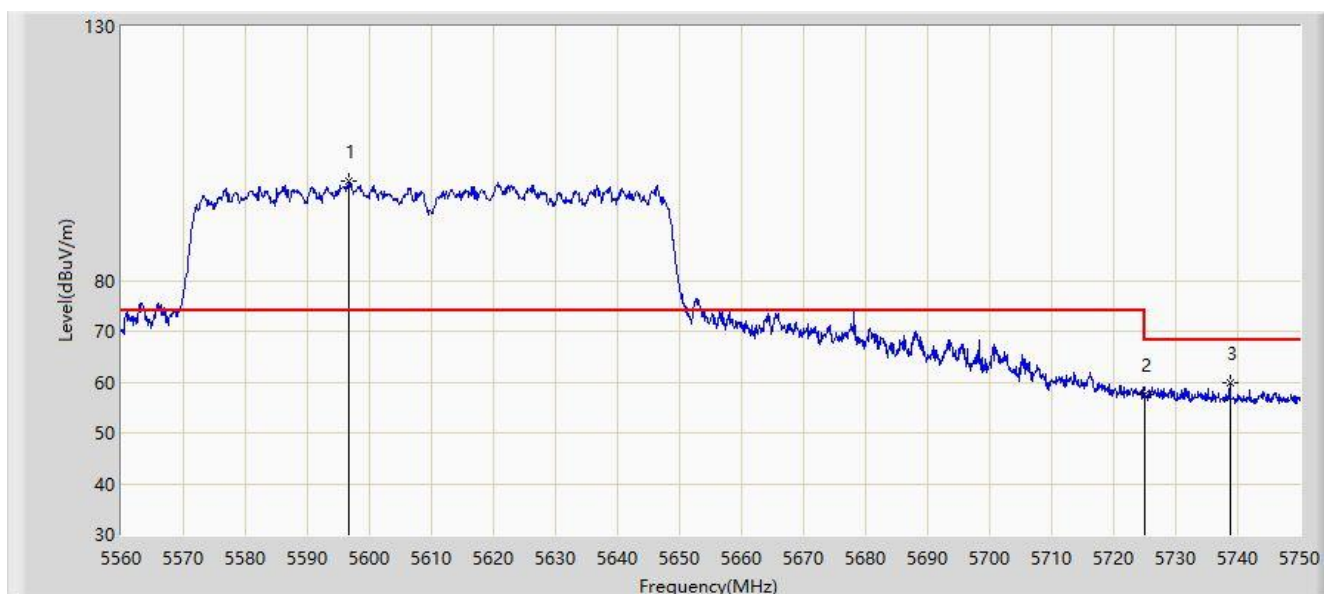


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5596.765        | 99.511                 | 94.928               | N/A         | N/A            | 4.584       | PK   |
| 2  |      |      | 5725.000        | 57.500                 | 52.501               | -10.700     | 68.200         | 4.999       | PK   |
| 3  |      |      | 5738.695        | 59.824                 | 54.781               | -8.376      | 68.200         | 5.043       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2020/07/24 - 01:00 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                           | Polarity: Horizontal     |
| EUT: ACCESS POINT                                        | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz |                          |

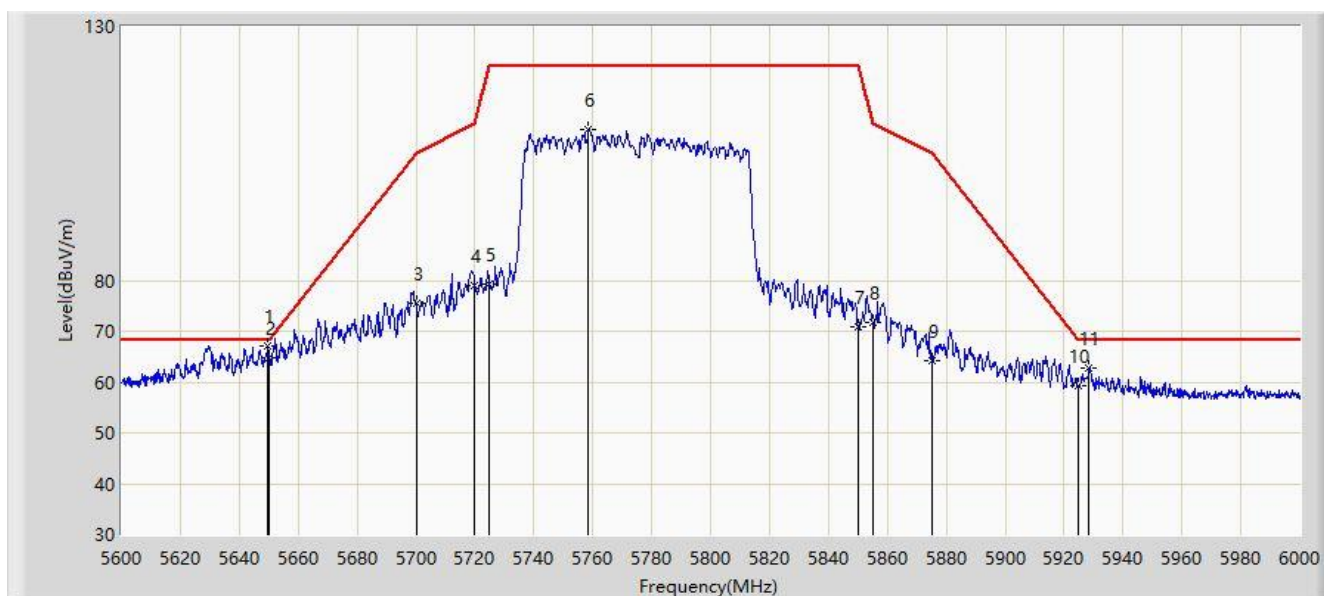


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5649.800        | 67.229                 | 62.473               | -0.971      | 68.200         | 4.756       | PK   |
| 2  |      |      | 5650.000        | 64.660                 | 59.903               | -3.540      | 68.200         | 4.756       | PK   |
| 3  |      |      | 5700.000        | 75.478                 | 70.560               | -29.722     | 105.200        | 4.918       | PK   |
| 4  |      |      | 5720.000        | 78.865                 | 73.882               | -31.935     | 110.800        | 4.983       | PK   |
| 5  |      |      | 5725.000        | 79.208                 | 74.209               | -42.992     | 122.200        | 4.999       | PK   |
| 6  |      |      | 5758.600        | 109.733                | 104.626              | N/A         | N/A            | 5.108       | PK   |
| 7  |      |      | 5850.000        | 70.783                 | 65.379               | -51.417     | 122.200        | 5.404       | PK   |
| 8  |      |      | 5855.000        | 71.824                 | 66.404               | -38.976     | 110.800        | 5.420       | PK   |
| 9  |      |      | 5875.000        | 64.283                 | 58.799               | -40.917     | 105.200        | 5.485       | PK   |
| 10 |      |      | 5925.000        | 59.289                 | 53.642               | -8.911      | 68.200         | 5.647       | PK   |
| 11 |      |      | 5928.400        | 62.813                 | 57.155               | -5.387      | 68.200         | 5.658       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2020/07/24 - 01:03 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                           | Polarity: Vertical       |
| EUT: ACCESS POINT                                        | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz |                          |

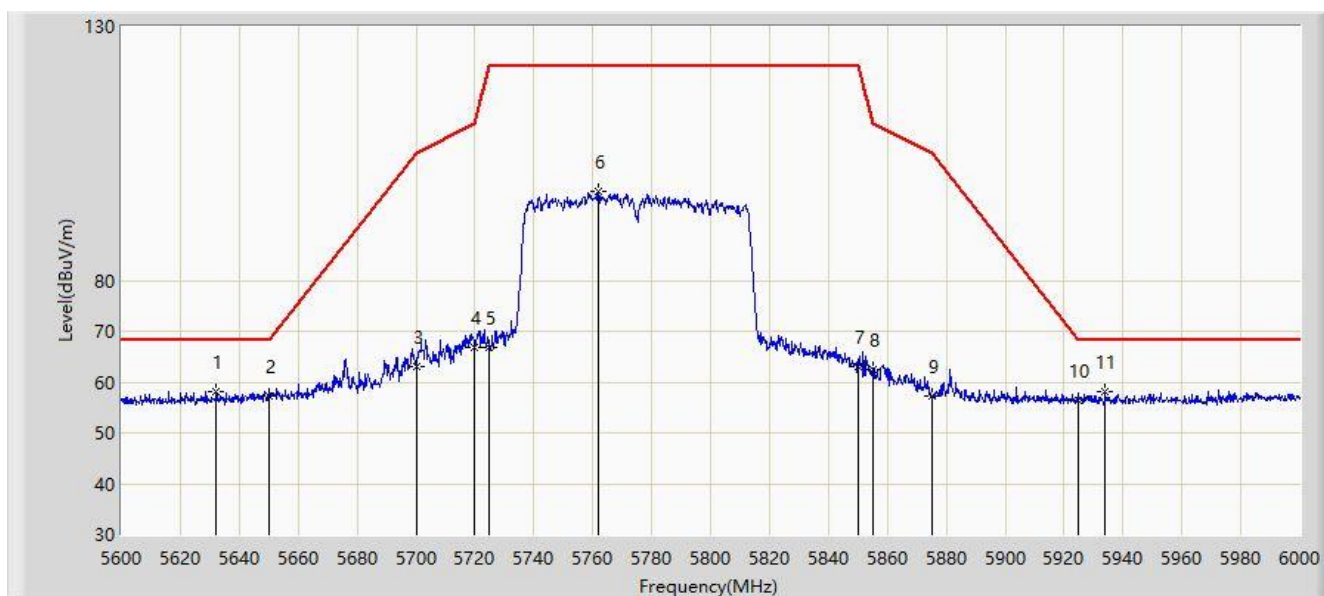

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5632.200        | 57.979                 | 53.280               | -10.221     | 68.200         | 4.699       | PK   |
| 2  |      |      | 5650.000        | 57.182                 | 52.425               | -11.018     | 68.200         | 4.756       | PK   |
| 3  |      |      | 5700.000        | 62.983                 | 58.065               | -42.217     | 105.200        | 4.918       | PK   |
| 4  |      |      | 5720.000        | 66.683                 | 61.700               | -44.117     | 110.800        | 4.983       | PK   |
| 5  |      |      | 5725.000        | 66.770                 | 61.771               | -55.430     | 122.200        | 4.999       | PK   |
| 6  |      |      | 5761.800        | 97.548                 | 92.430               | N/A         | N/A            | 5.118       | PK   |
| 7  |      |      | 5850.000        | 62.973                 | 57.569               | -59.227     | 122.200        | 5.404       | PK   |
| 8  |      |      | 5855.000        | 62.552                 | 57.132               | -48.248     | 110.800        | 5.420       | PK   |
| 9  |      |      | 5875.000        | 57.126                 | 51.642               | -48.074     | 105.200        | 5.485       | PK   |
| 10 |      |      | 5925.000        | 56.381                 | 50.734               | -11.819     | 68.200         | 5.647       | PK   |
| 11 |      | *    | 5933.800        | 58.063                 | 52.387               | -10.137     | 68.200         | 5.675       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 19:53 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5147.440        | 69.868                 | 65.965               | -4.132      | 74.000         | 3.904       | PK   |
| 2  |      |      | 5150.000        | 69.593                 | 65.687               | -4.407      | 74.000         | 3.906       | PK   |
| 3  |      | *    | 5177.005        | 117.169                | 113.235              | N/A         | N/A            | 3.934       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 19:54 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz |                          |

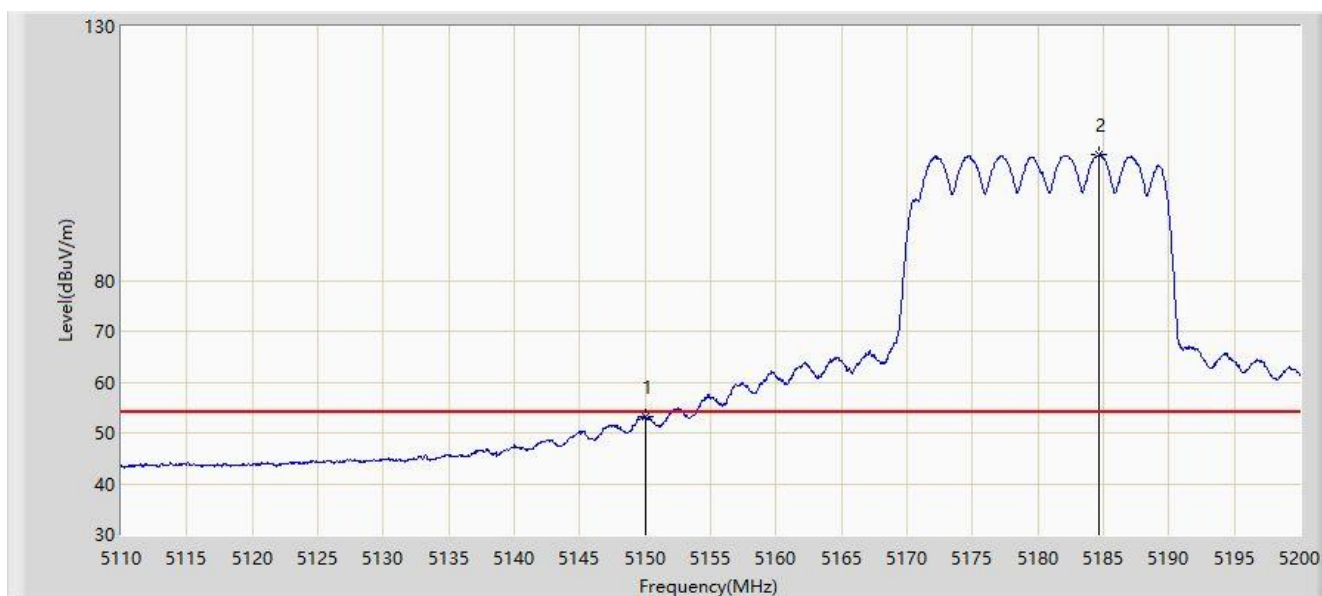

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.325                 | 49.419               | -0.675      | 54.000         | 3.906       | AV   |
| 2  |      | *    | 5184.700        | 104.729                | 100.787              | N/A         | N/A            | 3.943       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 19:57 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5148.385        | 61.784                 | 57.880               | -12.216     | 74.000         | 3.904       | PK   |
| 2  |      |      | 5150.000        | 57.911                 | 54.005               | -16.089     | 74.000         | 3.906       | PK   |
| 3  |      | *    | 5185.870        | 106.167                | 102.224              | N/A         | N/A            | 3.943       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 19:58 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz |                          |

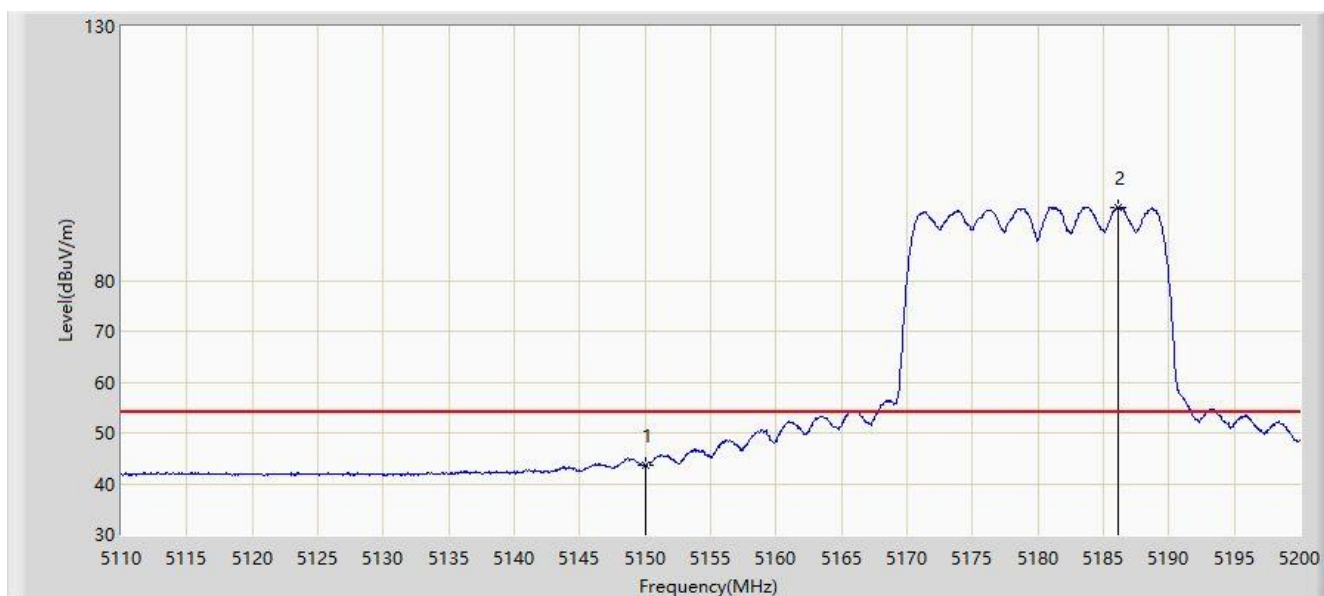


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 43.482                 | 39.576               | -10.518     | 54.000         | 3.906       | AV   |
| 2  |      | *    | 5186.140        | 94.451                 | 90.507               | N/A         | N/A            | 3.943       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:11 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz |                          |

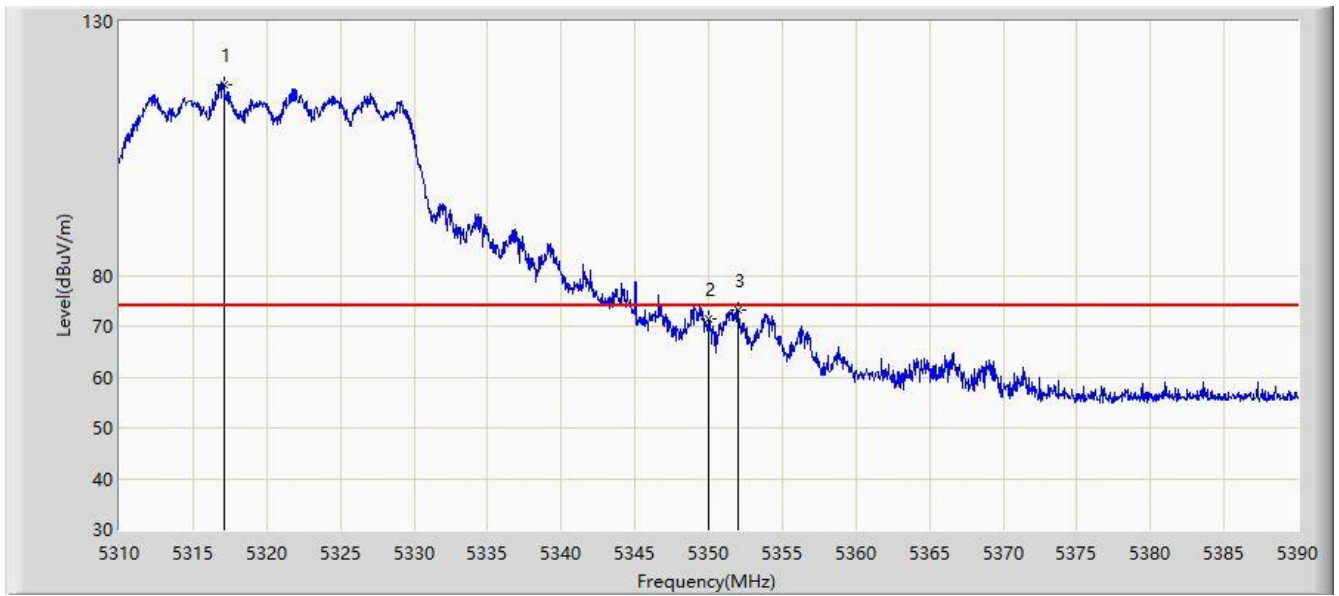


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5317.080        | 117.491                | 113.411              | N/A         | N/A            | 4.079       | PK   |
| 2  |      |      | 5350.000        | 71.405                 | 67.291               | -2.595      | 74.000         | 4.114       | PK   |
| 3  |      |      | 5352.000        | 73.261                 | 69.145               | -0.739      | 74.000         | 4.116       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:12 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz |                          |

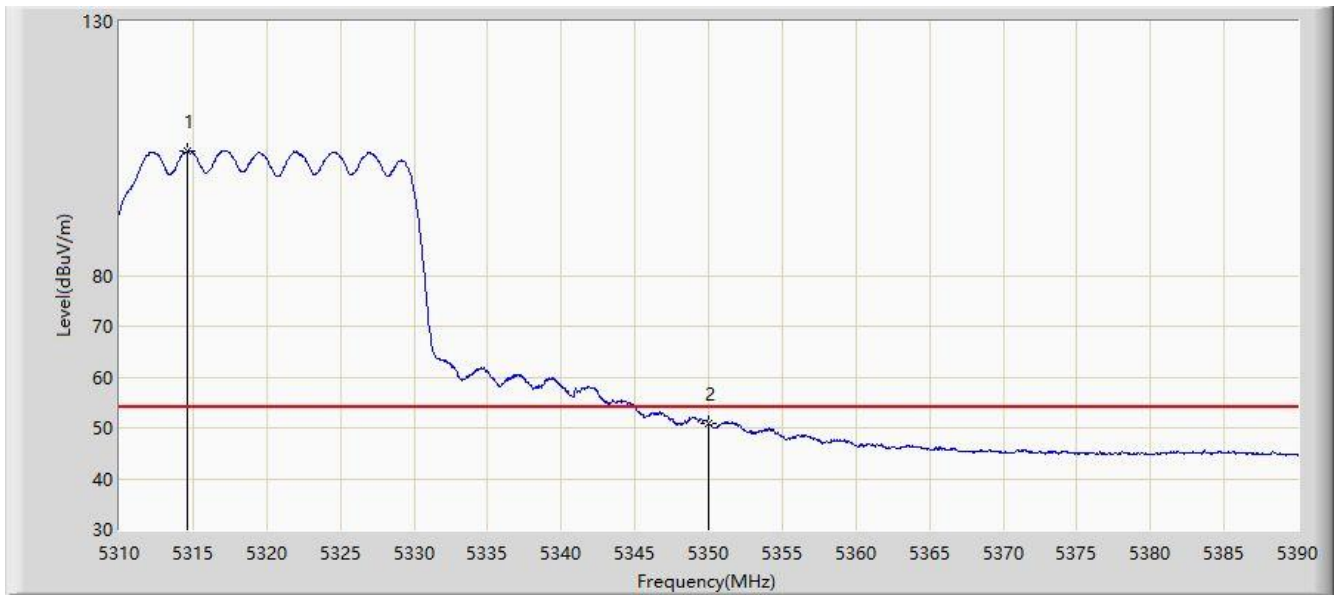


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5314.640        | 104.477                | 100.399              | N/A         | N/A            | 4.077       | AV   |
| 2  |      |      | 5350.000        | 50.797                 | 46.683               | -3.203      | 54.000         | 4.114       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:13 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz |                          |

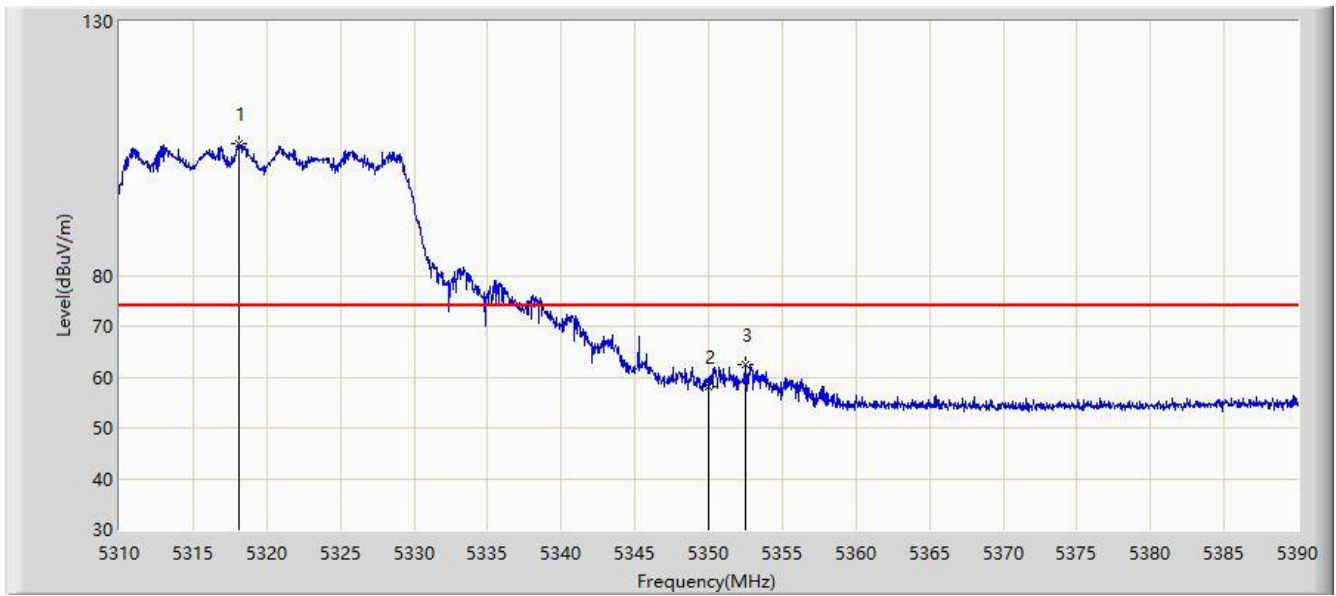


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5318.080        | 105.855                | 101.774              | N/A         | N/A            | 4.081       | PK   |
| 2  |      |      | 5350.000        | 58.163                 | 54.049               | -15.837     | 74.000         | 4.114       | PK   |
| 3  |      |      | 5352.520        | 62.492                 | 58.375               | -11.508     | 74.000         | 4.116       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:13 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz |                          |

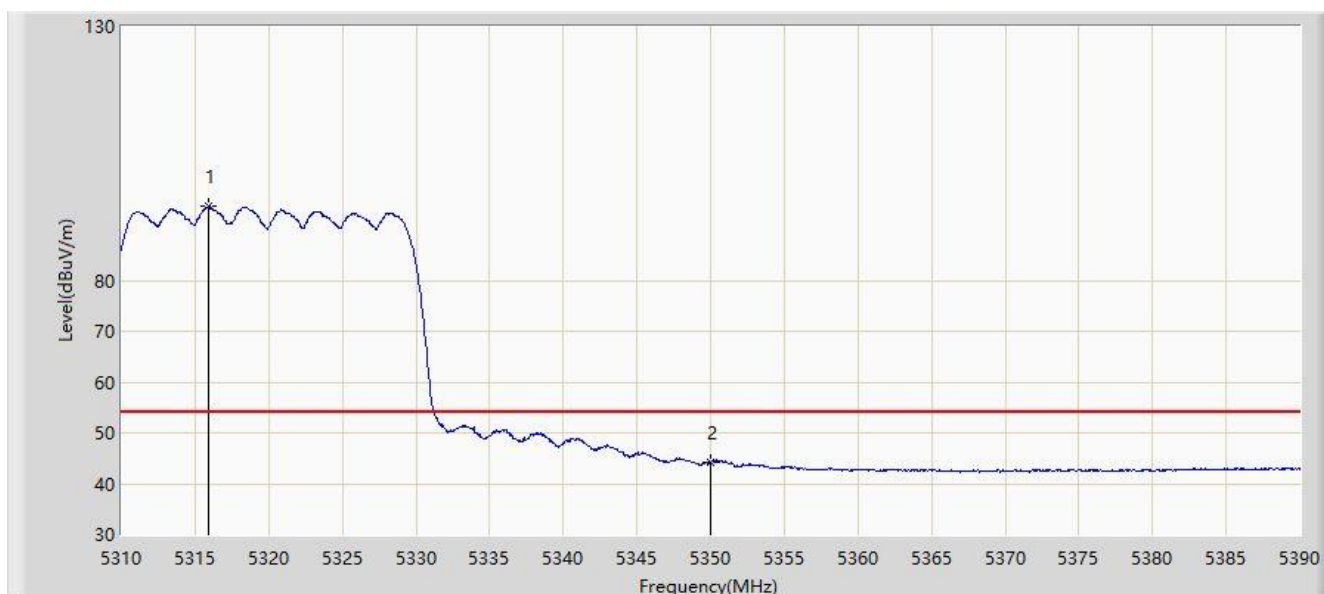


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5315.920        | 94.506                 | 90.427               | N/A         | N/A            | 4.079       | AV   |
| 2  |      |      | 5350.000        | 44.280                 | 40.166               | -9.720      | 54.000         | 4.114       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 20:43 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz |                          |

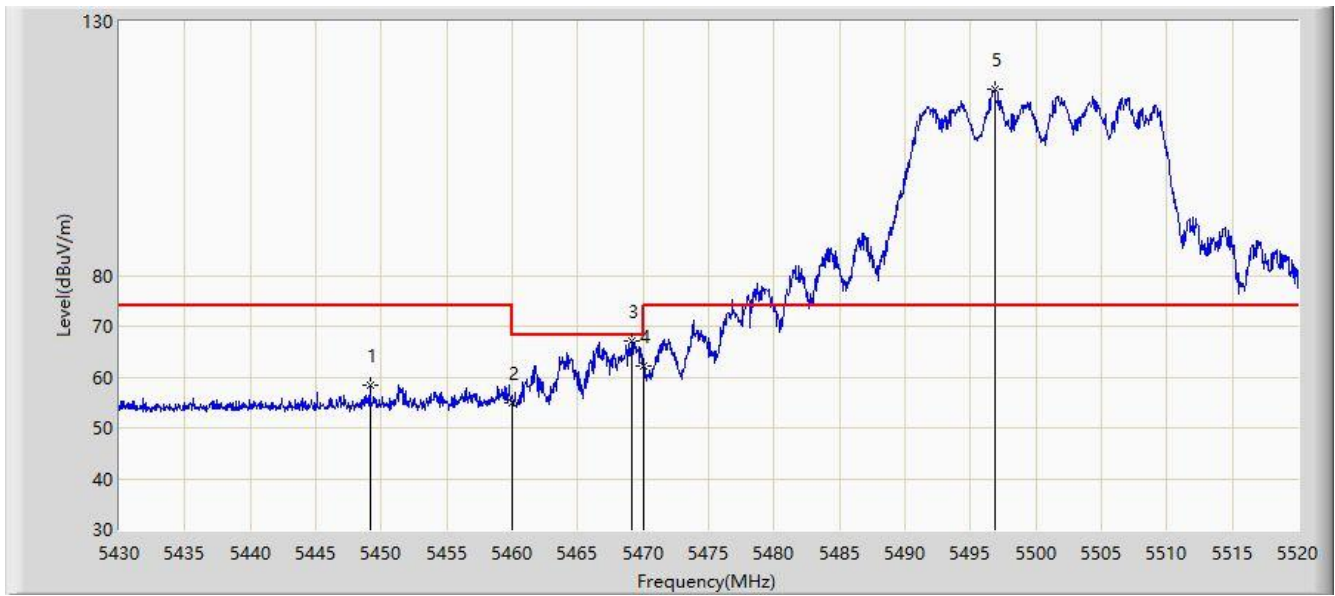


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5449.125        | 58.472                 | 54.256               | -15.528     | 74.000         | 4.216       | PK   |
| 2  |      |      | 5460.000        | 54.813                 | 50.585               | -19.187     | 74.000         | 4.228       | PK   |
| 3  |      |      | 5469.105        | 67.068                 | 62.830               | -1.132      | 68.200         | 4.239       | PK   |
| 4  |      |      | 5470.000        | 62.138                 | 57.899               | -6.062      | 68.200         | 4.238       | PK   |
| 5  |      | *    | 5496.870        | 116.713                | 112.440              | N/A         | N/A            | 4.273       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 20:46 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz |                          |

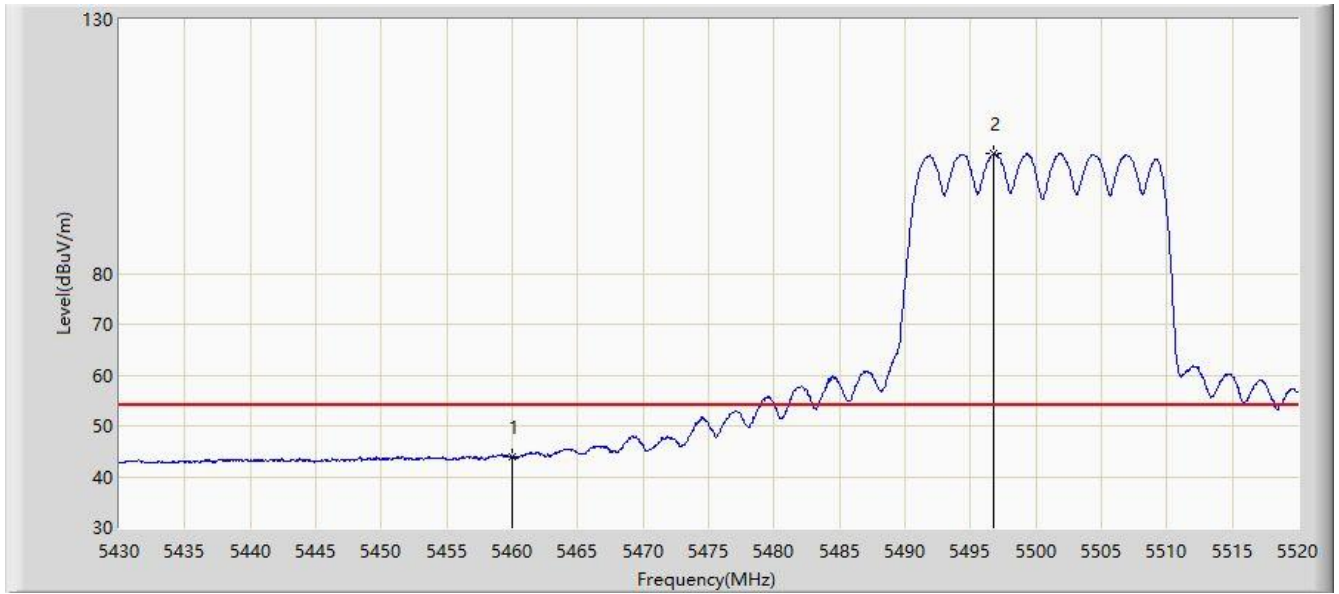


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 43.966                 | 39.738               | -10.034     | 54.000         | 4.228       | AV   |
| 2  |      | *    | 5496.780        | 103.489                | 99.216               | N/A         | N/A            | 4.273       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 20:47 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz |                          |

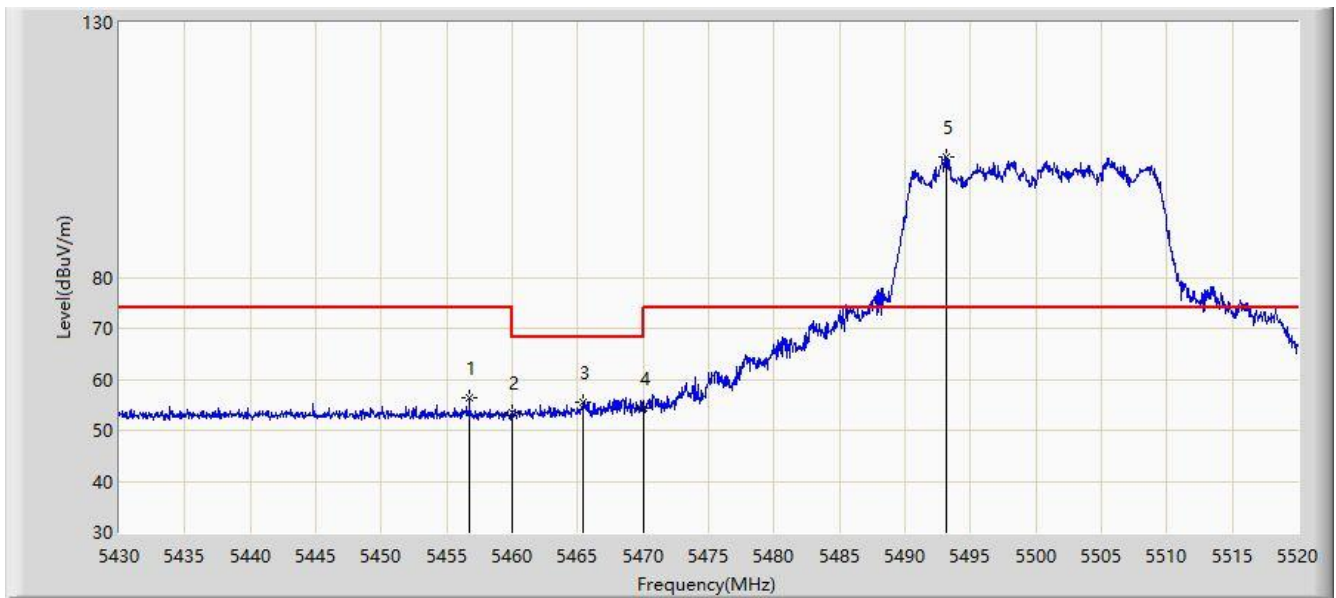


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5456.730        | 56.395                 | 52.171               | -17.605     | 74.000         | 4.224       | PK   |
| 2  |      |      | 5460.000        | 53.399                 | 49.171               | -20.601     | 74.000         | 4.228       | PK   |
| 3  |      |      | 5465.460        | 55.630                 | 51.396               | -12.570     | 68.200         | 4.234       | PK   |
| 4  |      |      | 5470.000        | 54.409                 | 50.170               | -13.791     | 68.200         | 4.238       | PK   |
| 5  |      | *    | 5493.135        | 103.616                | 99.349               | N/A         | N/A            | 4.268       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 20:48 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz |                          |

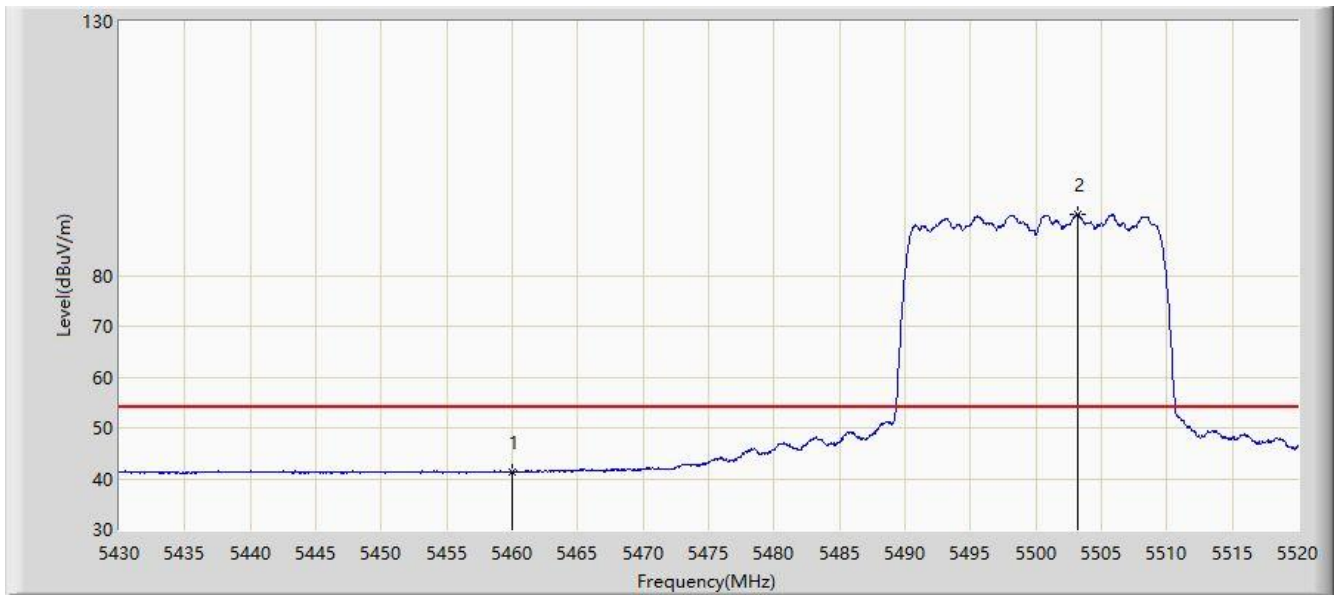


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 41.394                 | 37.166               | -12.606     | 54.000         | 4.228       | AV   |
| 2  |      | *    | 5503.170        | 91.964                 | 87.681               | N/A         | N/A            | 4.283       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:14 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz |                          |

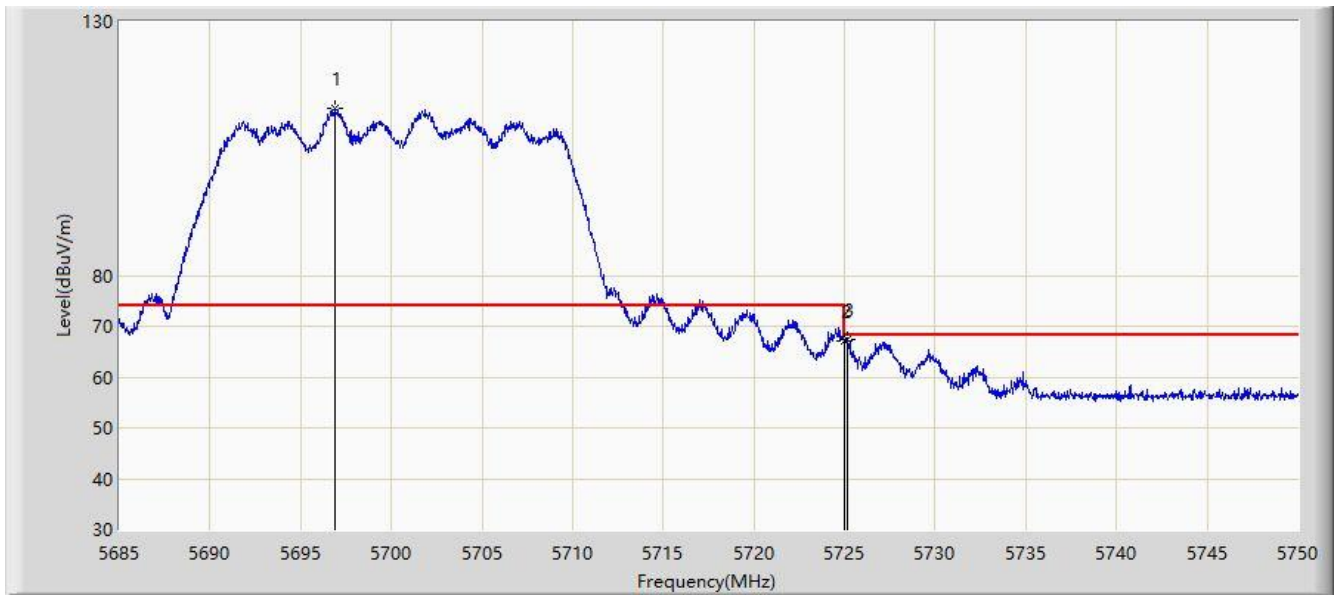


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5696.862        | 112.993                | 108.085              | N/A         | N/A            | 4.908       | PK   |
| 2  |      |      | 5725.000        | 67.014                 | 62.015               | -1.186      | 68.200         | 4.999       | PK   |
| 3  |      |      | 5725.170        | 67.435                 | 62.435               | -0.765      | 68.200         | 5.000       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:19 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz |                          |

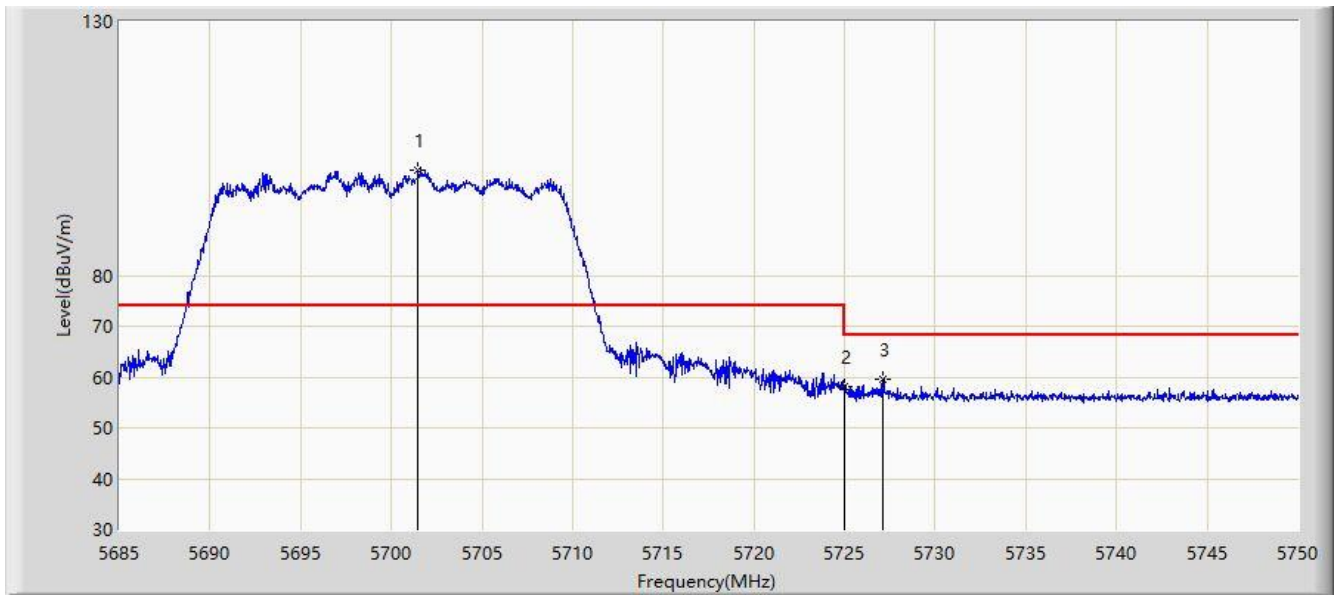


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5701.478        | 100.756                | 95.833               | N/A         | N/A            | 4.922       | PK   |
| 2  |      |      | 5725.000        | 58.068                 | 53.069               | -10.132     | 68.200         | 4.999       | PK   |
| 3  |      |      | 5727.152        | 59.449                 | 54.443               | -8.751      | 68.200         | 5.007       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 22:35 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz |                          |

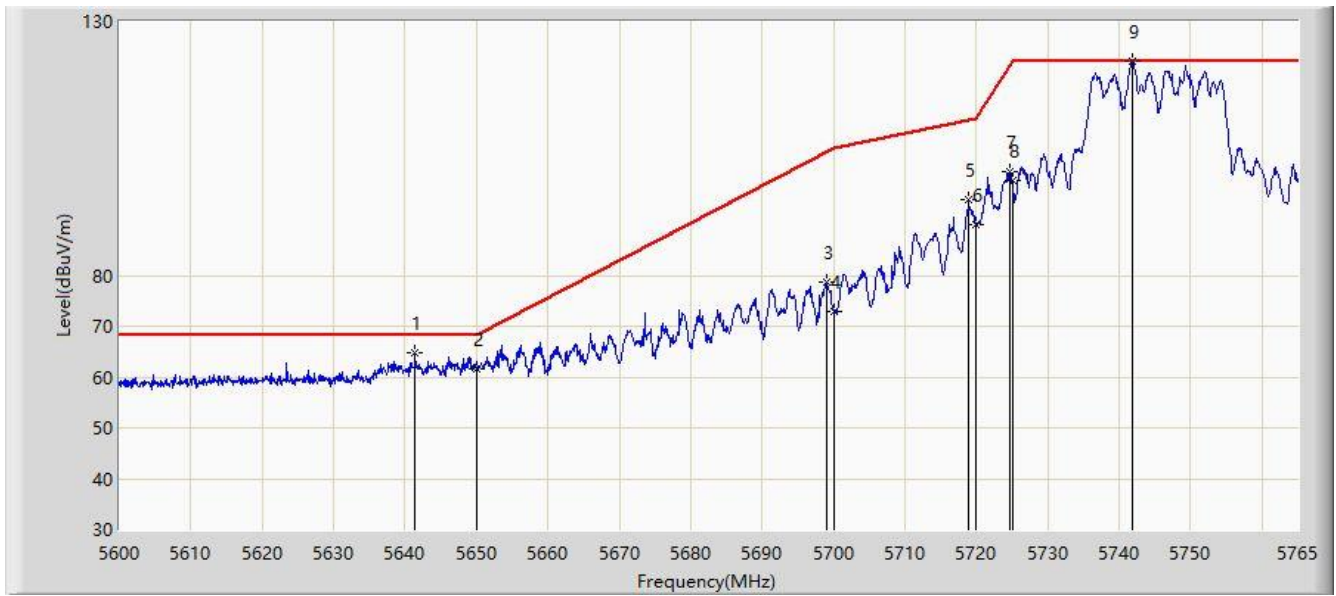


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5641.415        | 64.766                 | 60.037               | -3.434      | 68.200         | 4.729       | PK   |
| 2  |      |      | 5650.000        | 61.495                 | 56.738               | -6.705      | 68.200         | 4.756       | PK   |
| 3  |      |      | 5699.000        | 78.642                 | 73.727               | -25.822     | 104.463        | 4.914       | PK   |
| 4  |      |      | 5700.000        | 72.813                 | 67.895               | -32.387     | 105.200        | 4.918       | PK   |
| 5  |      |      | 5718.882        | 94.784                 | 89.805               | -15.703     | 110.487        | 4.979       | PK   |
| 6  |      |      | 5720.000        | 90.063                 | 85.080               | -20.737     | 110.800        | 4.983       | PK   |
| 7  |      |      | 5724.658        | 100.410                | 95.412               | -21.010     | 121.421        | 4.999       | PK   |
| 8  |      |      | 5725.000        | 98.566                 | 93.567               | -23.634     | 122.200        | 4.999       | PK   |
| 9  |      | *    | 5741.817        | 122.230                | 117.177              | N/A         | N/A            | 5.053       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 22:39 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz |                          |

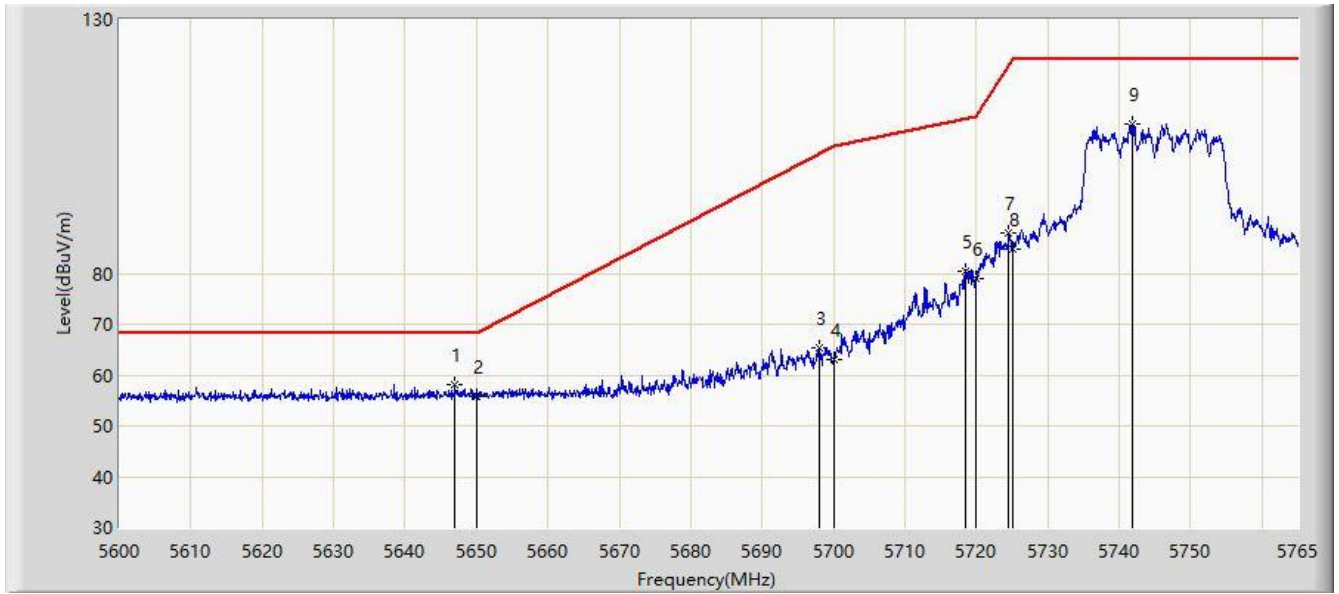


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5647.025        | 58.224                 | 53.477               | -9.976      | 68.200         | 4.748       | PK   |
| 2  |      |      | 5650.000        | 55.930                 | 51.173               | -12.270     | 68.200         | 4.756       | PK   |
| 3  |      |      | 5697.928        | 65.274                 | 60.363               | -38.399     | 103.673        | 4.911       | PK   |
| 4  |      |      | 5700.000        | 63.170                 | 58.252               | -42.030     | 105.200        | 4.918       | PK   |
| 5  |      |      | 5718.388        | 80.486                 | 75.508               | -29.864     | 110.349        | 4.977       | PK   |
| 6  |      |      | 5720.000        | 79.127                 | 74.144               | -31.673     | 110.800        | 4.983       | PK   |
| 7  |      |      | 5724.575        | 88.080                 | 83.082               | -33.151     | 121.231        | 4.998       | PK   |
| 8  |      |      | 5725.000        | 84.801                 | 79.802               | -37.399     | 122.200        | 4.999       | PK   |
| 9  |      |      | 5741.817        | 109.461                | 104.408              | N/A         | N/A            | 5.053       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 22:41 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz |                          |

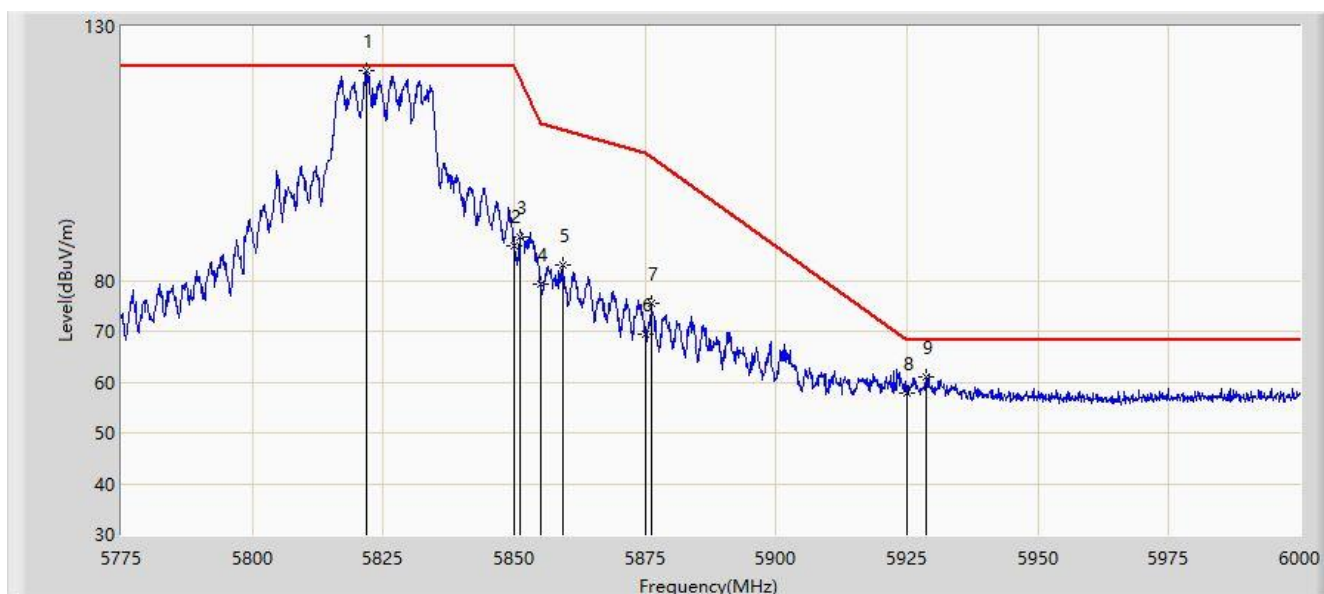


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5821.687        | 121.365                | 116.052              | N/A         | N/A            | 5.312       | PK   |
| 2  |      |      | 5850.000        | 86.908                 | 81.504               | -35.292     | 122.200        | 5.404       | PK   |
| 3  |      |      | 5851.163        | 88.688                 | 83.280               | -30.860     | 119.547        | 5.408       | PK   |
| 4  |      |      | 5855.000        | 79.251                 | 73.831               | -31.549     | 110.800        | 5.420       | PK   |
| 5  |      |      | 5859.263        | 82.907                 | 77.473               | -26.698     | 109.605        | 5.435       | PK   |
| 6  |      |      | 5875.000        | 69.348                 | 63.864               | -35.852     | 105.200        | 5.485       | PK   |
| 7  |      |      | 5876.250        | 75.516                 | 70.028               | -28.755     | 104.271        | 5.489       | PK   |
| 8  |      |      | 5925.000        | 57.902                 | 52.255               | -10.298     | 68.200         | 5.647       | PK   |
| 9  |      |      | 5928.788        | 60.952                 | 55.293               | -7.248      | 68.200         | 5.659       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 22:44 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz |                          |

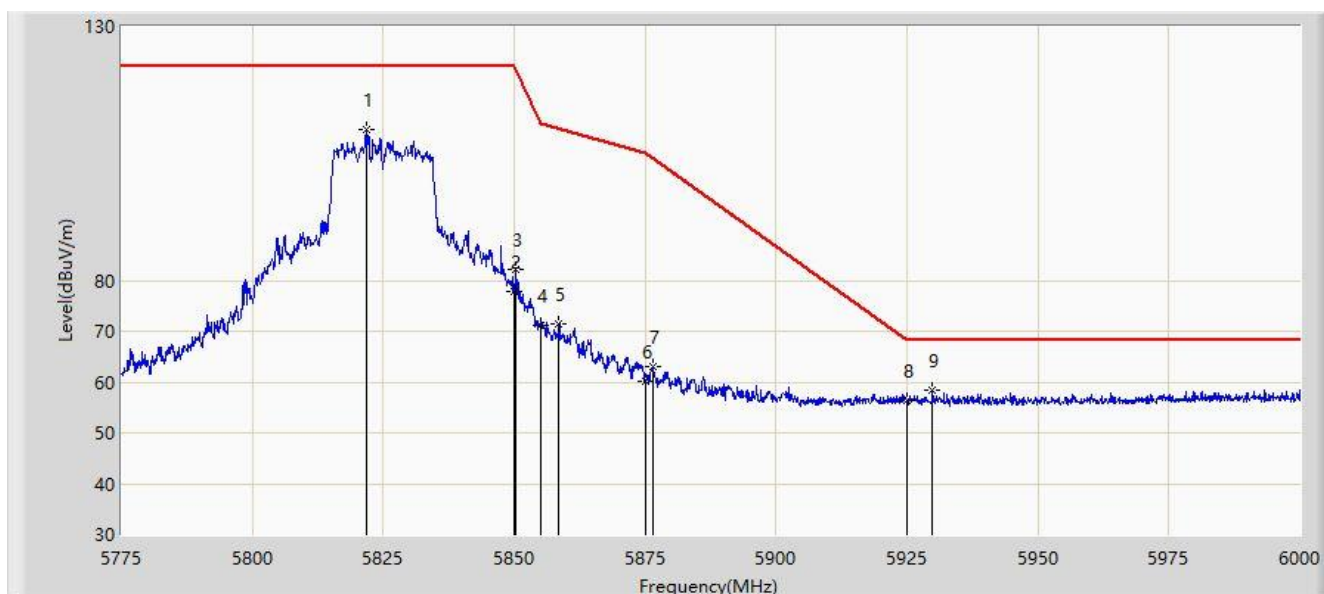


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5821.687        | 109.616                | 104.303              | N/A         | N/A            | 5.312       | PK   |
| 2  |      |      | 5850.000        | 77.706                 | 72.302               | -44.494     | 122.200        | 5.404       | PK   |
| 3  |      |      | 5850.375        | 82.068                 | 76.663               | -39.276     | 121.345        | 5.405       | PK   |
| 4  |      |      | 5855.000        | 71.200                 | 65.780               | -39.600     | 110.800        | 5.420       | PK   |
| 5  |      |      | 5858.587        | 71.515                 | 66.083               | -38.279     | 109.794        | 5.432       | PK   |
| 6  |      |      | 5875.000        | 60.245                 | 54.761               | -44.955     | 105.200        | 5.485       | PK   |
| 7  |      |      | 5876.475        | 62.976                 | 57.487               | -41.128     | 104.104        | 5.489       | PK   |
| 8  |      |      | 5925.000        | 56.395                 | 50.748               | -11.805     | 68.200         | 5.647       | PK   |
| 9  |      | *    | 5929.913        | 58.497                 | 52.834               | -9.703      | 68.200         | 5.663       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 23:18 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz |                          |

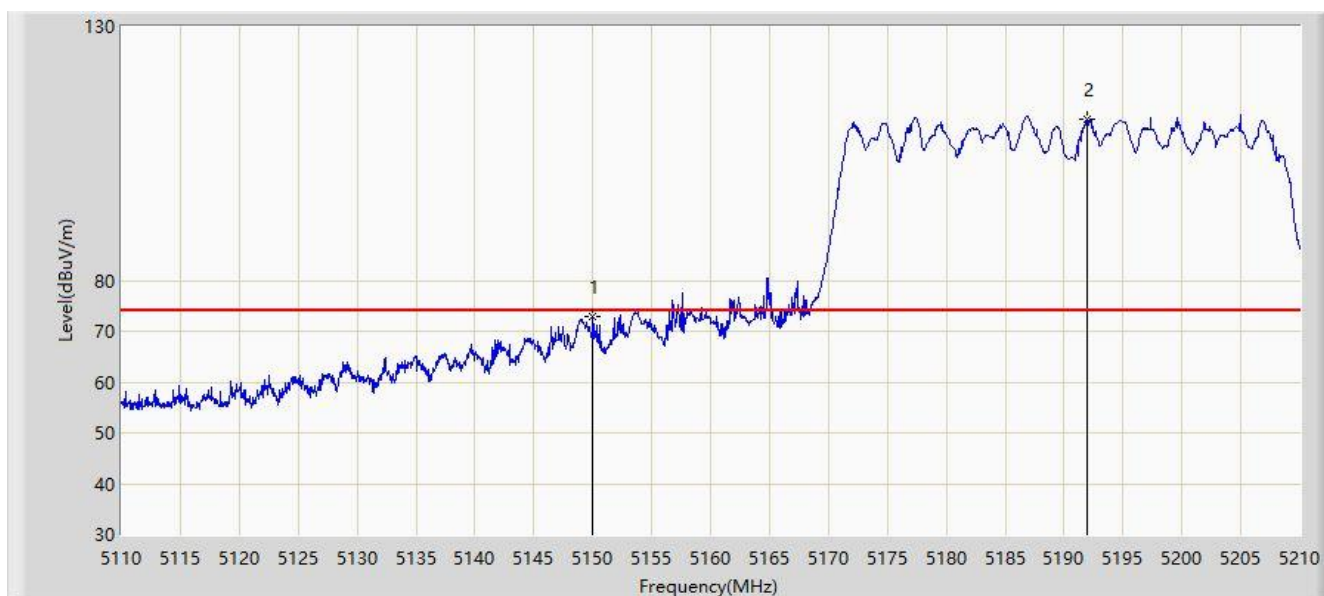


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 72.958                 | 69.052               | -1.042      | 74.000         | 3.906       | PK   |
| 2  |      | *    | 5191.950        | 111.859                | 107.910              | N/A         | N/A            | 3.950       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 23:22 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz |                          |

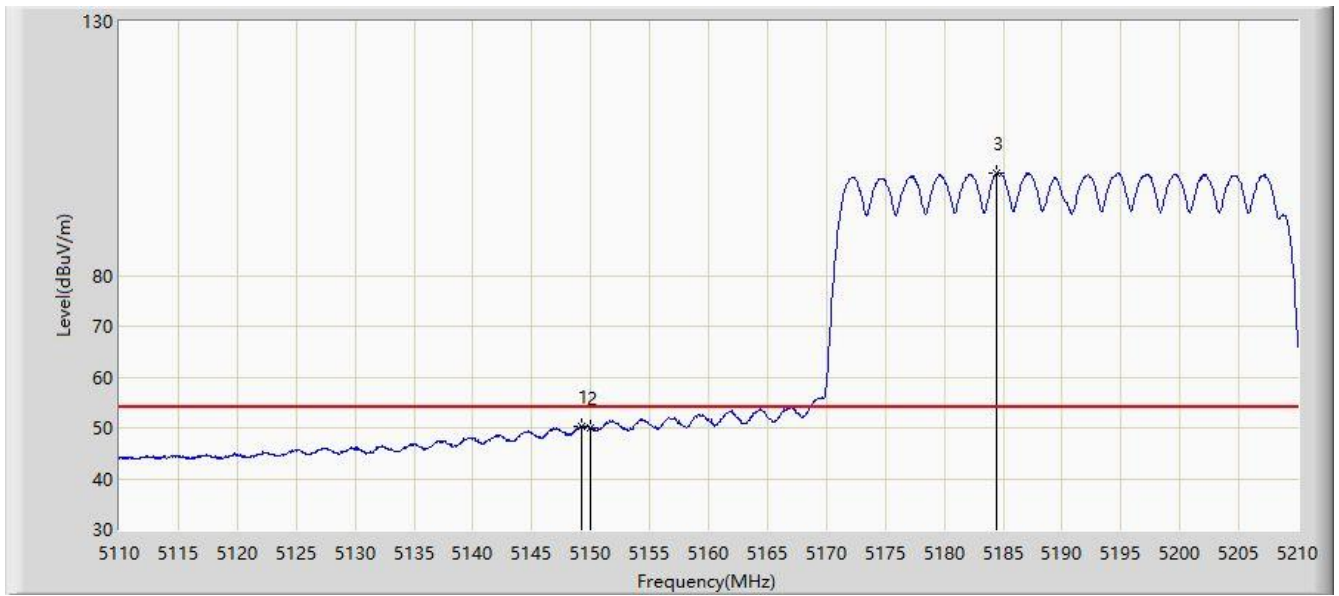


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.250        | 50.432                 | 46.527               | -3.568      | 54.000         | 3.905       | AV   |
| 2  |      |      | 5150.000        | 50.060                 | 46.154               | -3.940      | 54.000         | 3.906       | AV   |
| 3  |      | *    | 5184.400        | 100.114                | 96.172               | N/A         | N/A            | 3.941       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 23:24 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz |                          |

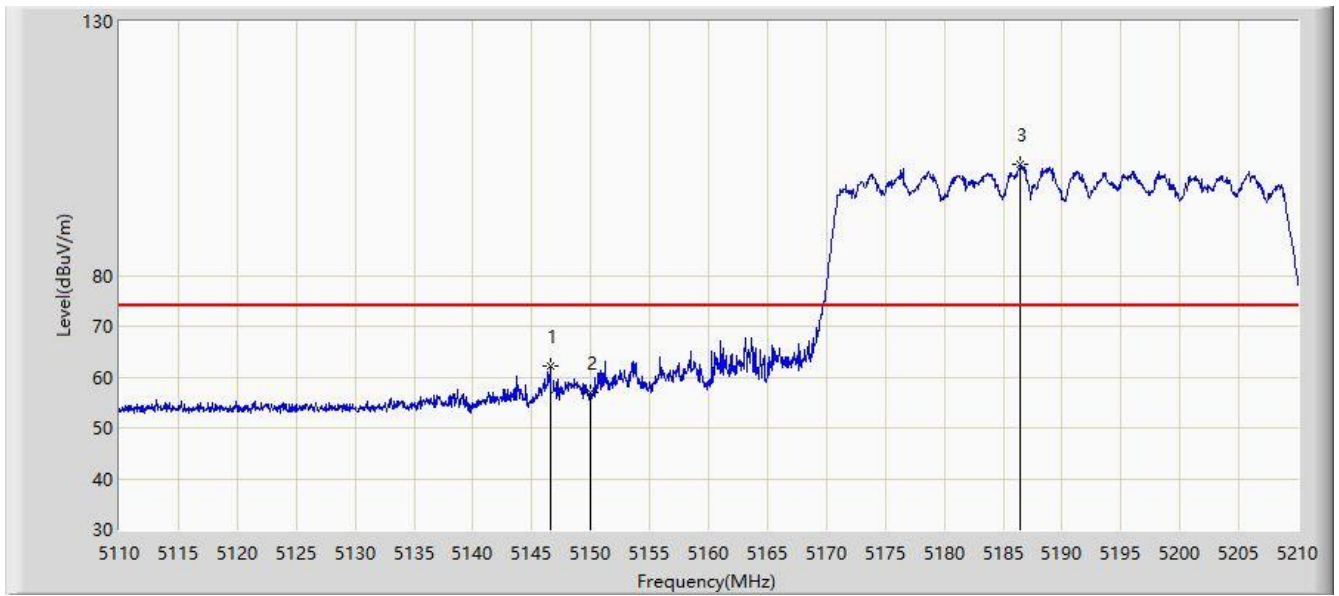


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5146.550        | 62.060                 | 58.157               | -11.940     | 74.000         | 3.903       | PK   |
| 2  |      |      | 5150.000        | 57.050                 | 53.144               | -16.950     | 74.000         | 3.906       | PK   |
| 3  |      | *    | 5186.500        | 101.758                | 97.814               | N/A         | N/A            | 3.944       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 23:25 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz |                          |

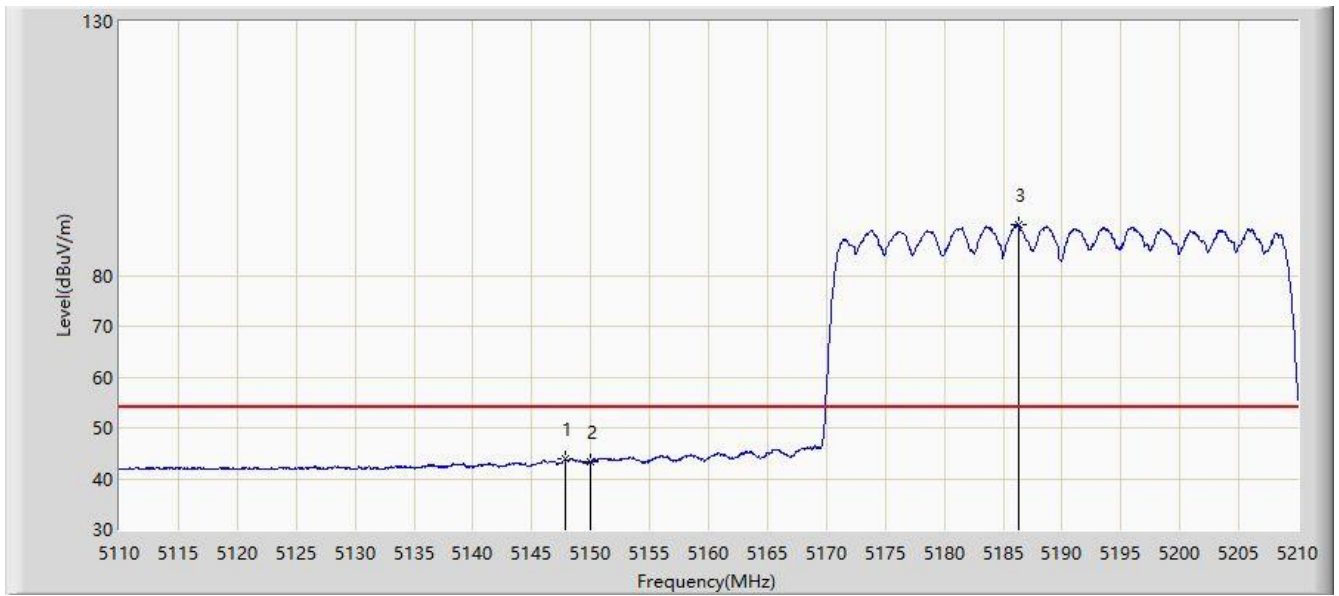


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5147.800        | 43.821                 | 39.917               | -10.179     | 54.000         | 3.904       | AV   |
| 2  |      |      | 5150.000        | 43.229                 | 39.323               | -10.771     | 54.000         | 3.906       | AV   |
| 3  |      | *    | 5186.300        | 89.895                 | 85.951               | N/A         | N/A            | 3.944       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 23:30 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz |                          |

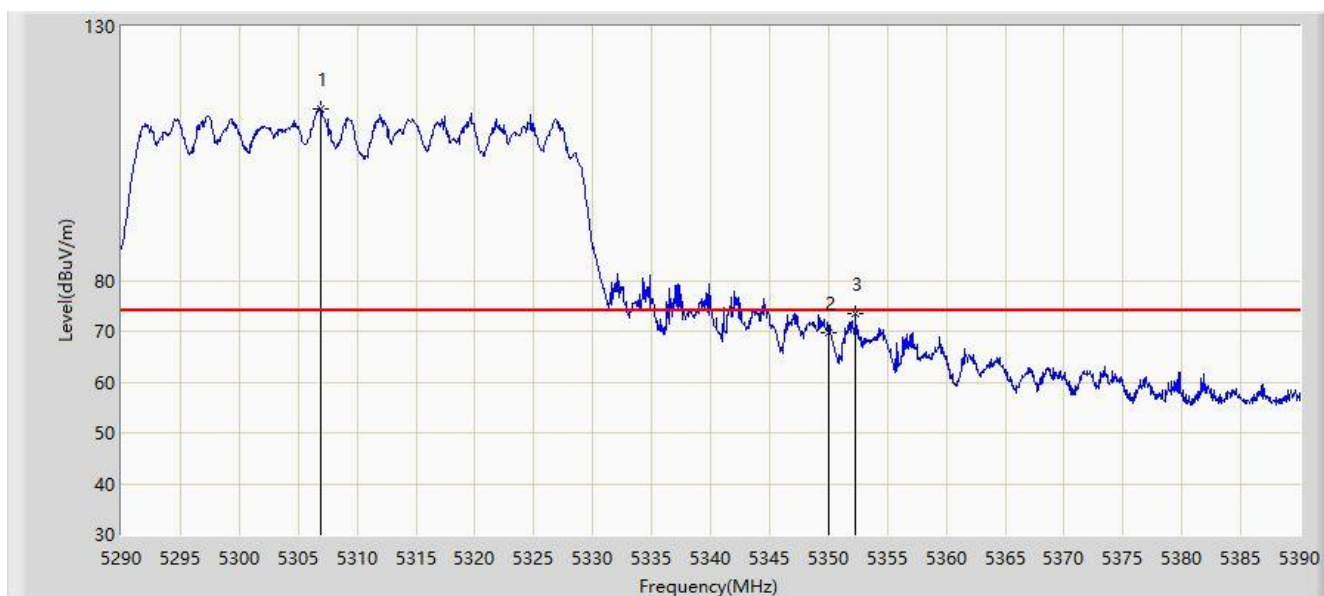


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5306.900        | 113.838                | 109.769              | N/A         | N/A            | 4.069       | PK   |
| 2  |      |      | 5350.000        | 69.604                 | 65.490               | -4.396      | 74.000         | 4.114       | PK   |
| 3  |      |      | 5352.300        | 73.414                 | 69.298               | -0.586      | 74.000         | 4.116       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 23:31 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz |                          |

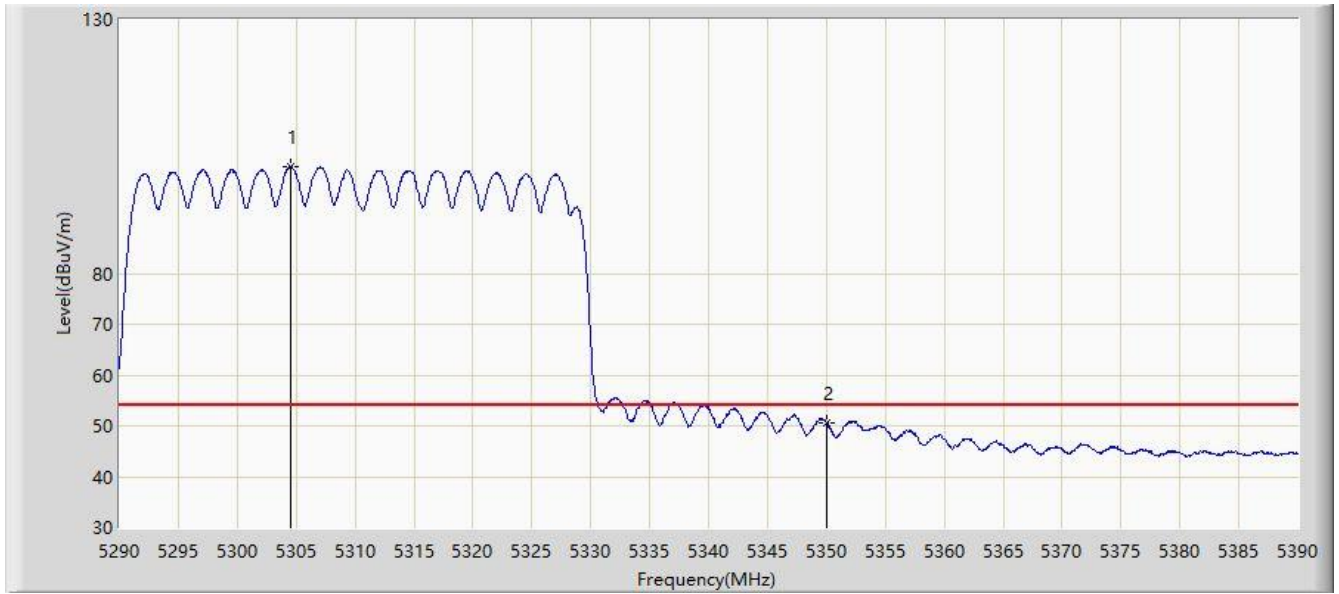


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5304.550        | 101.000                | 96.933               | N/A         | N/A            | 4.067       | AV   |
| 2  |      |      | 5350.000        | 50.678                 | 46.564               | -3.322      | 54.000         | 4.114       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 23:33 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz |                          |

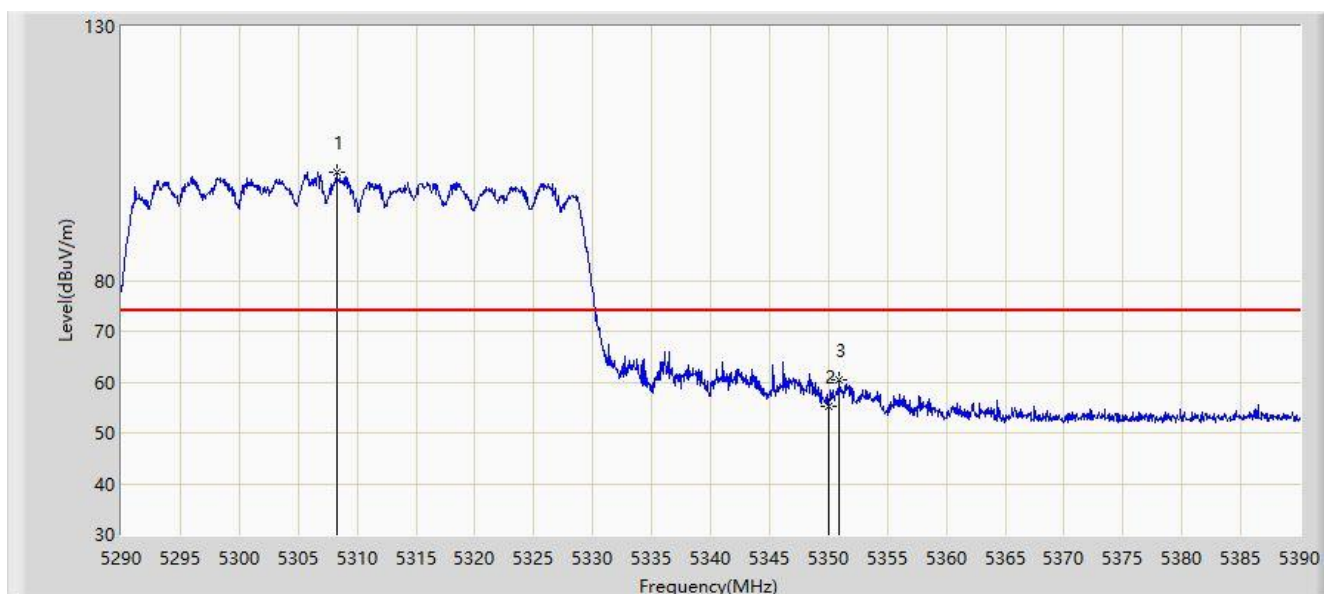


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5308.250        | 101.311                | 97.240               | N/A         | N/A            | 4.071       | PK   |
| 2  |      |      | 5350.000        | 55.190                 | 51.076               | -18.810     | 74.000         | 4.114       | PK   |
| 3  |      |      | 5350.900        | 60.404                 | 56.289               | -13.596     | 74.000         | 4.114       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/16 - 23:34 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz |                          |

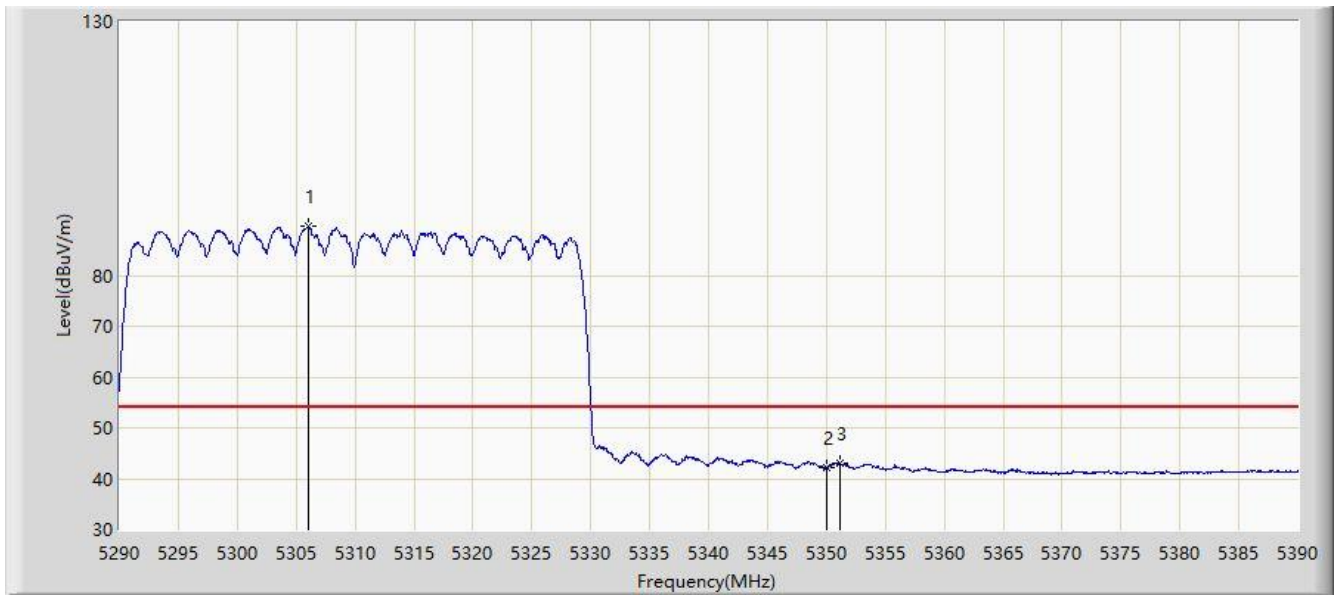


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5306.000        | 89.582                 | 85.513               | N/A         | N/A            | 4.069       | AV   |
| 2  |      |      | 5350.000        | 42.225                 | 38.111               | -11.775     | 54.000         | 4.114       | AV   |
| 3  |      |      | 5351.200        | 43.007                 | 38.892               | -10.993     | 54.000         | 4.115       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:22 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz |                          |

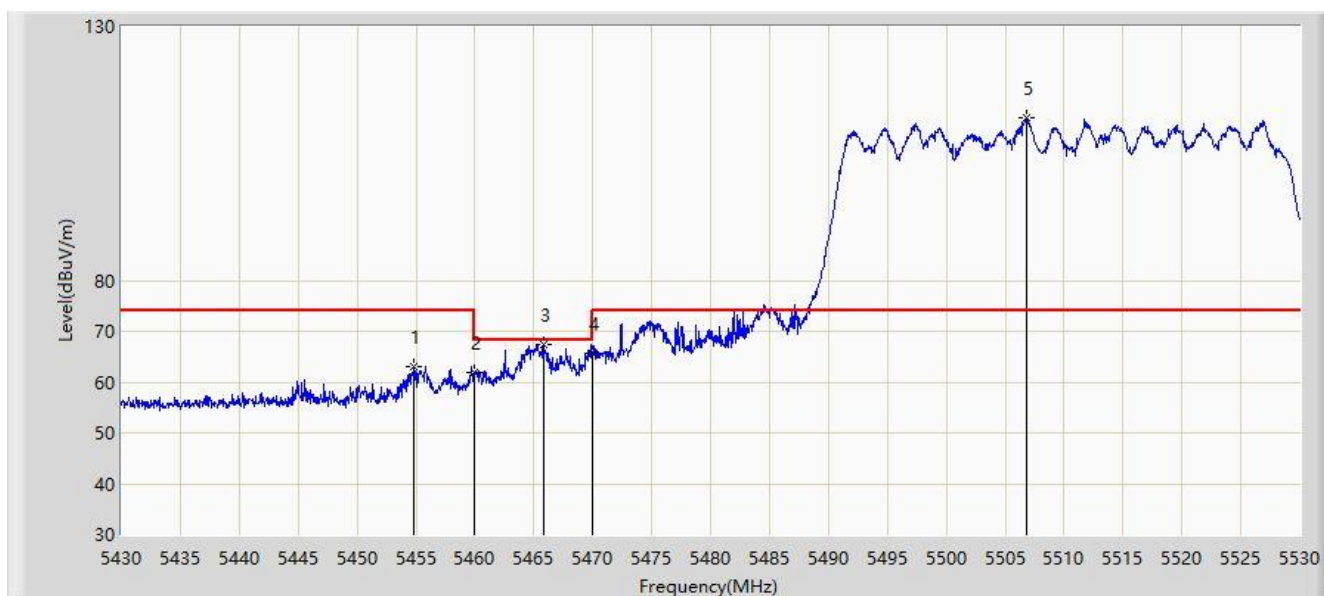


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5454.850        | 63.092                 | 58.870               | -10.908     | 74.000         | 4.223       | PK   |
| 2  |      |      | 5460.000        | 61.803                 | 57.575               | -12.197     | 74.000         | 4.228       | PK   |
| 3  |      |      | 5465.900        | 67.257                 | 63.023               | -0.943      | 68.200         | 4.235       | PK   |
| 4  |      |      | 5470.000        | 65.516                 | 61.277               | -2.684      | 68.200         | 4.238       | PK   |
| 5  |      | *    | 5506.800        | 111.907                | 107.615              | N/A         | N/A            | 4.292       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:25 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz |                          |

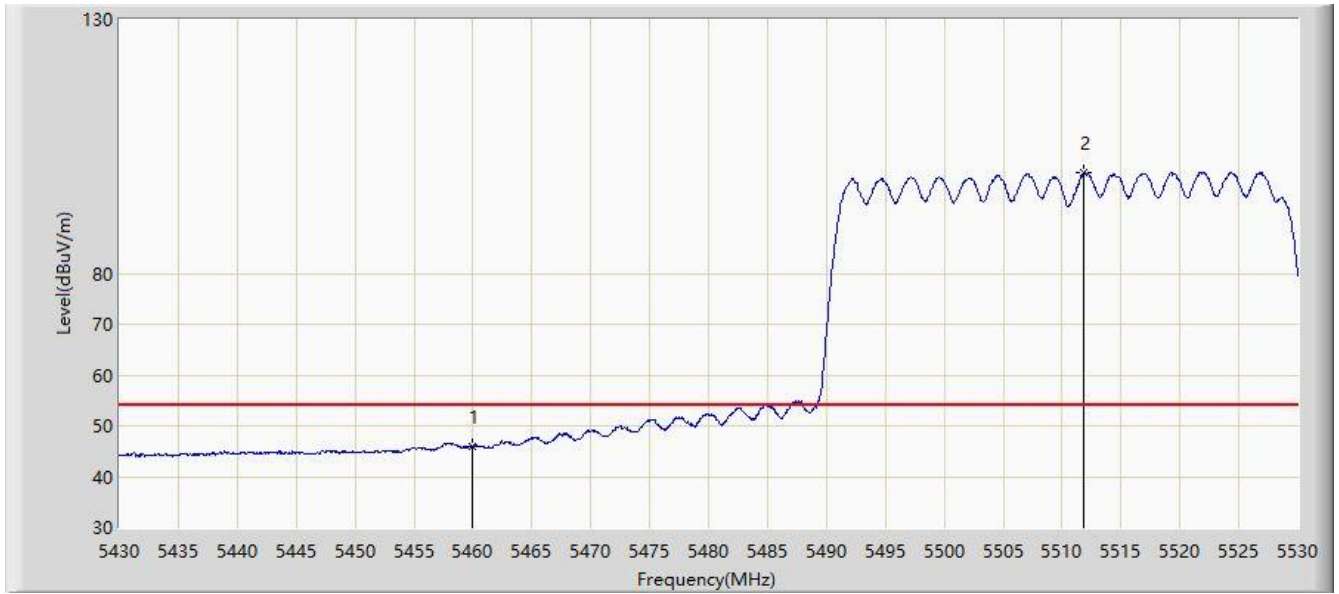


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 45.940                 | 41.712               | -8.060      | 54.000         | 4.228       | AV   |
| 2  |      | *    | 5511.850        | 99.810                 | 95.501               | N/A         | N/A            | 4.309       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:26 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz |                          |

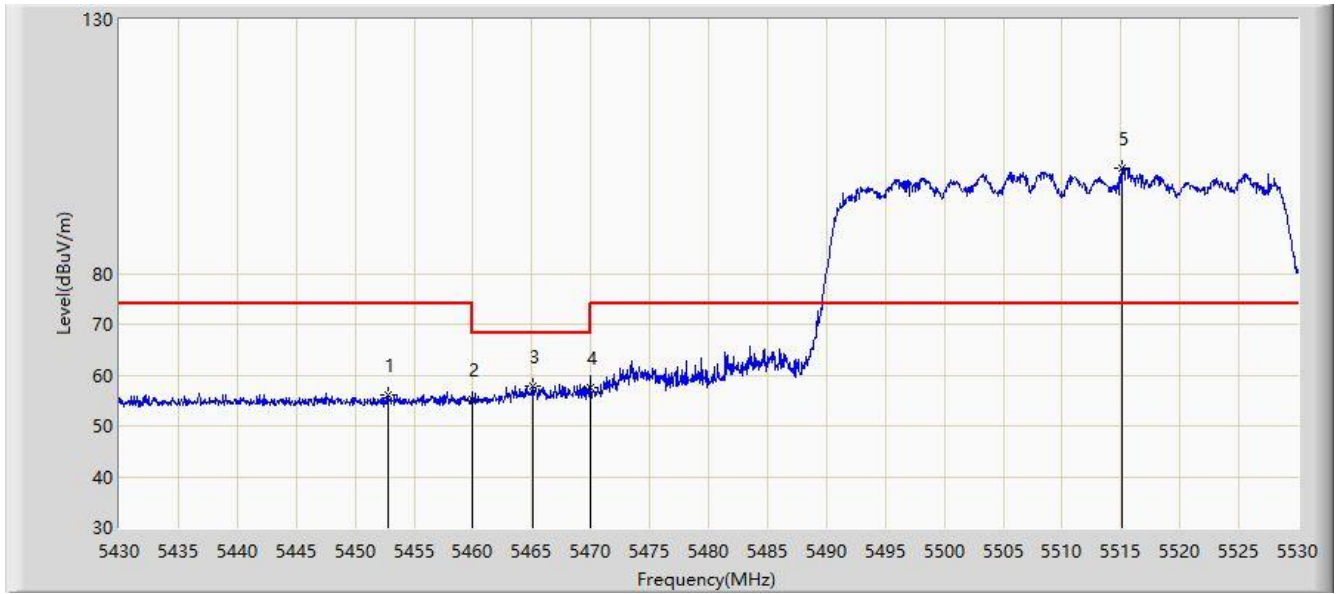


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5452.850        | 56.015                 | 51.795               | -17.985     | 74.000         | 4.219       | PK   |
| 2  |      |      | 5460.000        | 55.163                 | 50.935               | -18.837     | 74.000         | 4.228       | PK   |
| 3  |      |      | 5465.050        | 57.863                 | 53.630               | -10.337     | 68.200         | 4.233       | PK   |
| 4  |      |      | 5470.000        | 57.532                 | 53.293               | -10.668     | 68.200         | 4.238       | PK   |
| 5  |      | *    | 5515.150        | 100.735                | 96.416               | N/A         | N/A            | 4.319       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:27 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz |                          |

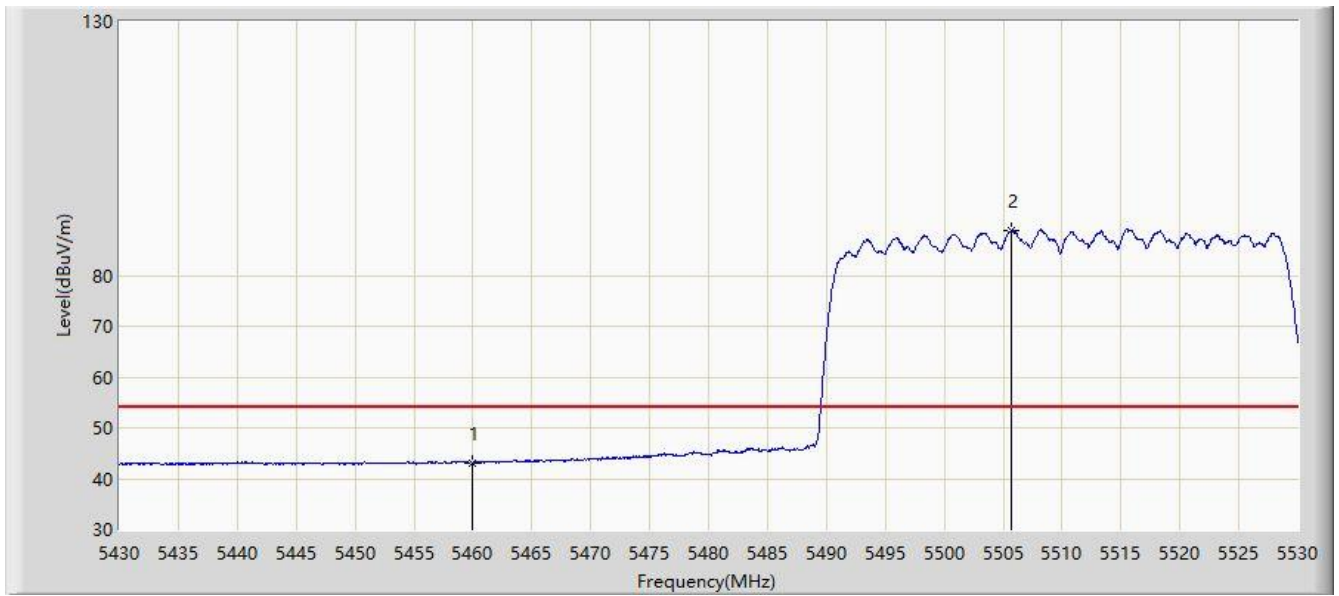


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 43.046                 | 38.818               | -10.954     | 54.000         | 4.228       | AV   |
| 2  |      | *    | 5505.750        | 88.923                 | 84.634               | N/A         | N/A            | 4.289       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:29 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz |                          |

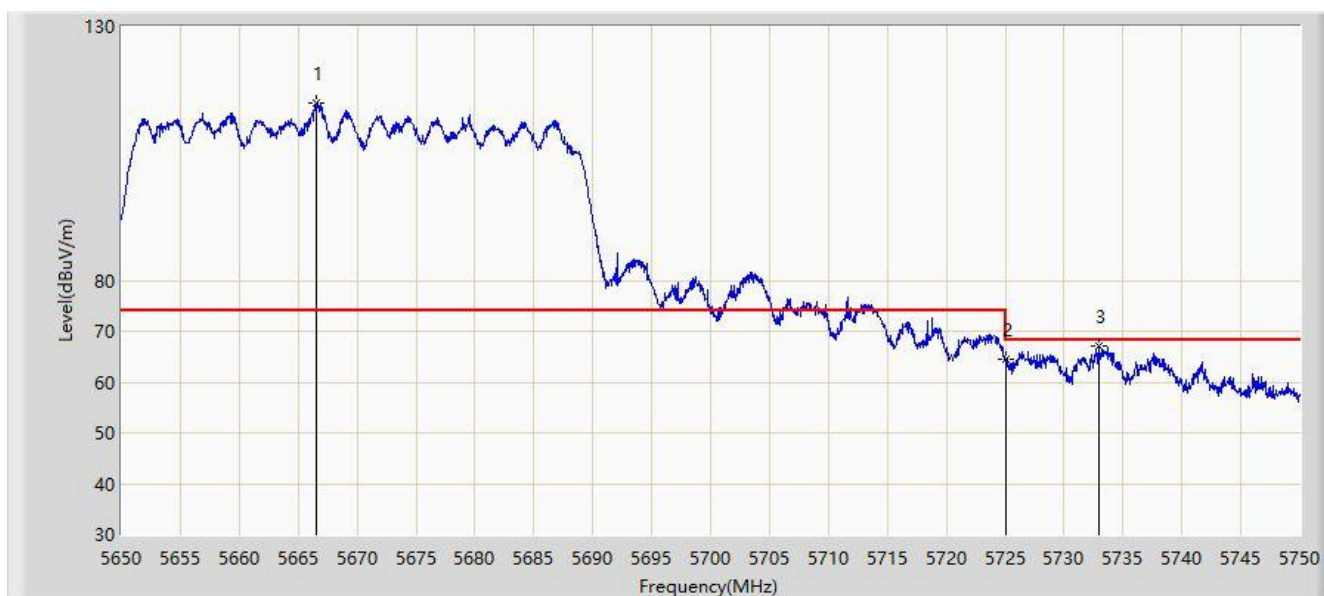

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5666.600        | 114.882                | 110.072              | N/A         | N/A            | 4.810       | PK   |
| 2  |      |      | 5725.000        | 64.558                 | 59.559               | -3.642      | 68.200         | 4.999       | PK   |
| 3  |      |      | 5733.000        | 67.227                 | 62.202               | -0.973      | 68.200         | 5.024       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:30 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5655.400        | 102.257                | 97.483               | N/A         | N/A            | 4.774       | PK   |
| 2  |      |      | 5725.000        | 57.618                 | 52.619               | -10.582     | 68.200         | 4.999       | PK   |
| 3  |      |      | 5732.550        | 59.322                 | 54.298               | -8.878      | 68.200         | 5.023       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:31 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5755MHz |                          |

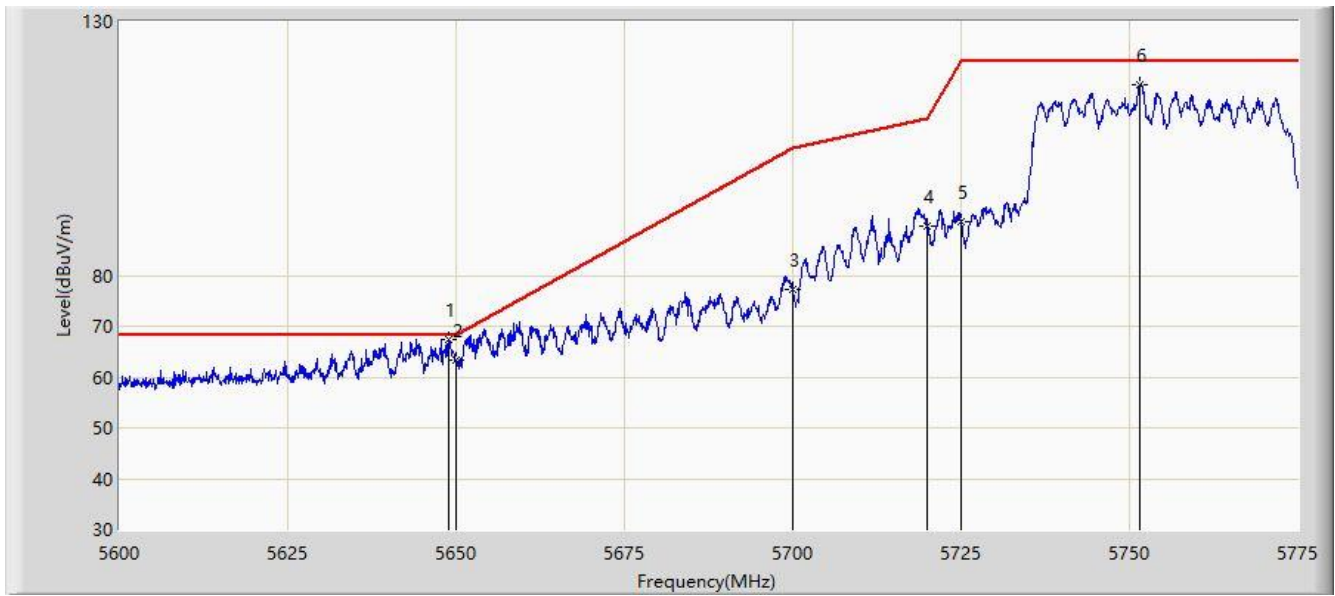


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5648.825        | 67.436                 | 62.683               | -0.764      | 68.200         | 4.752       | PK   |
| 2  |      |      | 5650.000        | 63.257                 | 58.500               | -4.943      | 68.200         | 4.756       | PK   |
| 3  |      |      | 5700.000        | 77.303                 | 72.385               | -27.897     | 105.200        | 4.918       | PK   |
| 4  |      |      | 5720.000        | 89.736                 | 84.753               | -21.064     | 110.800        | 4.983       | PK   |
| 5  |      |      | 5725.000        | 90.520                 | 85.521               | -31.680     | 122.200        | 4.999       | PK   |
| 6  |      |      | 5751.550        | 117.467                | 112.382              | N/A         | N/A            | 5.085       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:33 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5755MHz |                          |

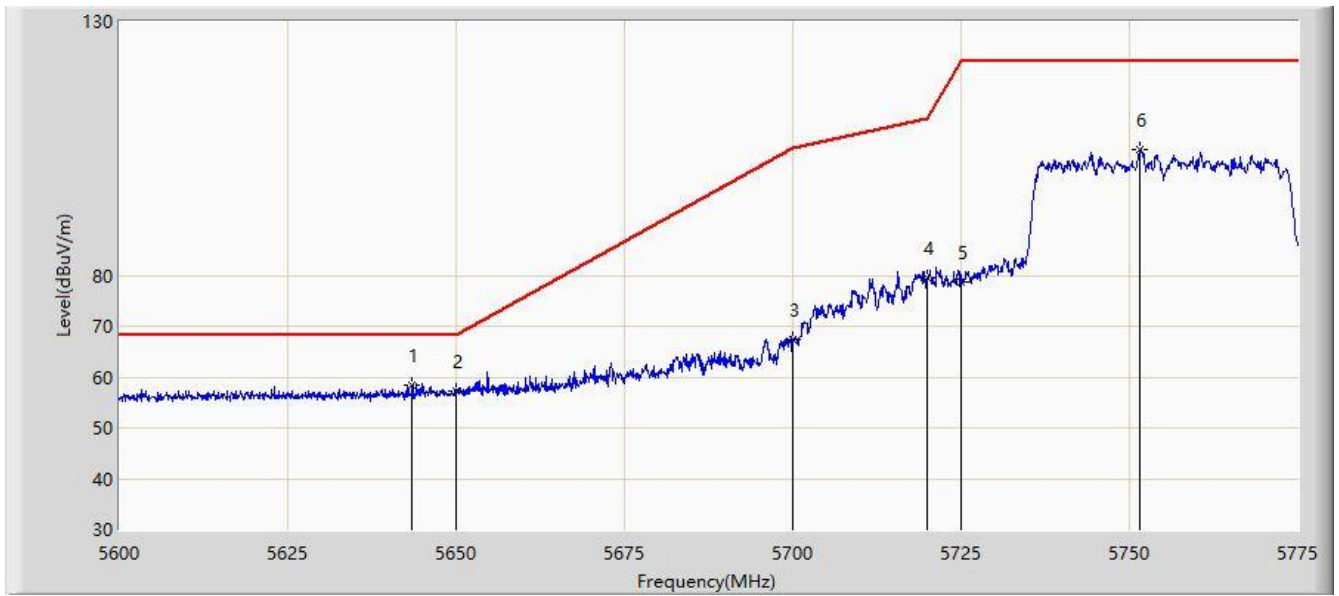


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5643.400        | 58.491                 | 53.756               | -9.709      | 68.200         | 4.736       | PK   |
| 2  |      |      | 5650.000        | 57.198                 | 52.441               | -11.002     | 68.200         | 4.756       | PK   |
| 3  |      |      | 5700.000        | 67.268                 | 62.350               | -37.932     | 105.200        | 4.918       | PK   |
| 4  |      |      | 5720.000        | 79.454                 | 74.471               | -31.346     | 110.800        | 4.983       | PK   |
| 5  |      |      | 5725.000        | 78.805                 | 73.806               | -43.395     | 122.200        | 4.999       | PK   |
| 6  |      |      | 5751.550        | 104.673                | 99.588               | N/A         | N/A            | 5.085       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/17 - 00:06 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5795MHz |                          |

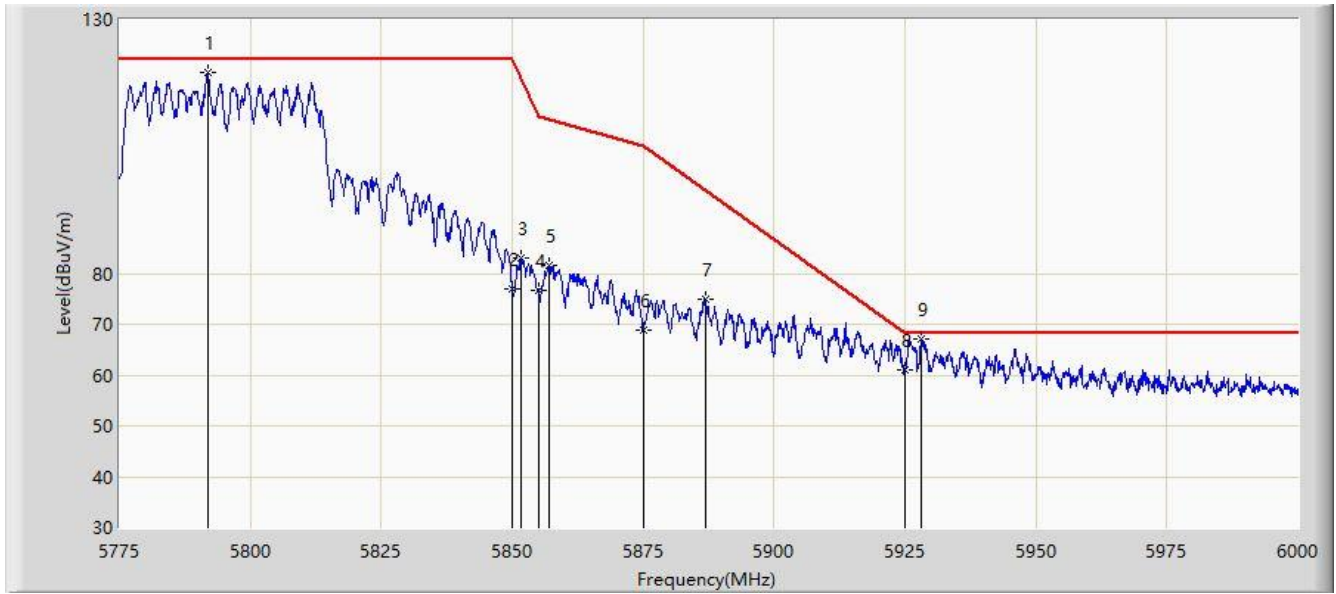


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5791.987        | 119.484                | 114.268              | N/A         | N/A            | 5.216       | PK   |
| 2  |      |      | 5850.000        | 77.060                 | 71.656               | -45.140     | 122.200        | 5.404       | PK   |
| 3  |      |      | 5851.612        | 83.187                 | 77.778               | -35.336     | 118.524        | 5.409       | PK   |
| 4  |      |      | 5855.000        | 76.667                 | 71.247               | -34.133     | 110.800        | 5.420       | PK   |
| 5  |      |      | 5857.125        | 81.499                 | 76.072               | -28.705     | 110.204        | 5.427       | PK   |
| 6  |      |      | 5875.000        | 68.812                 | 63.328               | -36.388     | 105.200        | 5.485       | PK   |
| 7  |      |      | 5887.050        | 74.920                 | 69.396               | -21.335     | 96.254         | 5.524       | PK   |
| 8  |      |      | 5925.000        | 61.059                 | 55.412               | -7.141      | 68.200         | 5.647       | PK   |
| 9  |      | *    | 5928.225        | 67.103                 | 61.446               | -1.097      | 68.200         | 5.658       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/17 - 00:09 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at channel 5795MHz |                          |

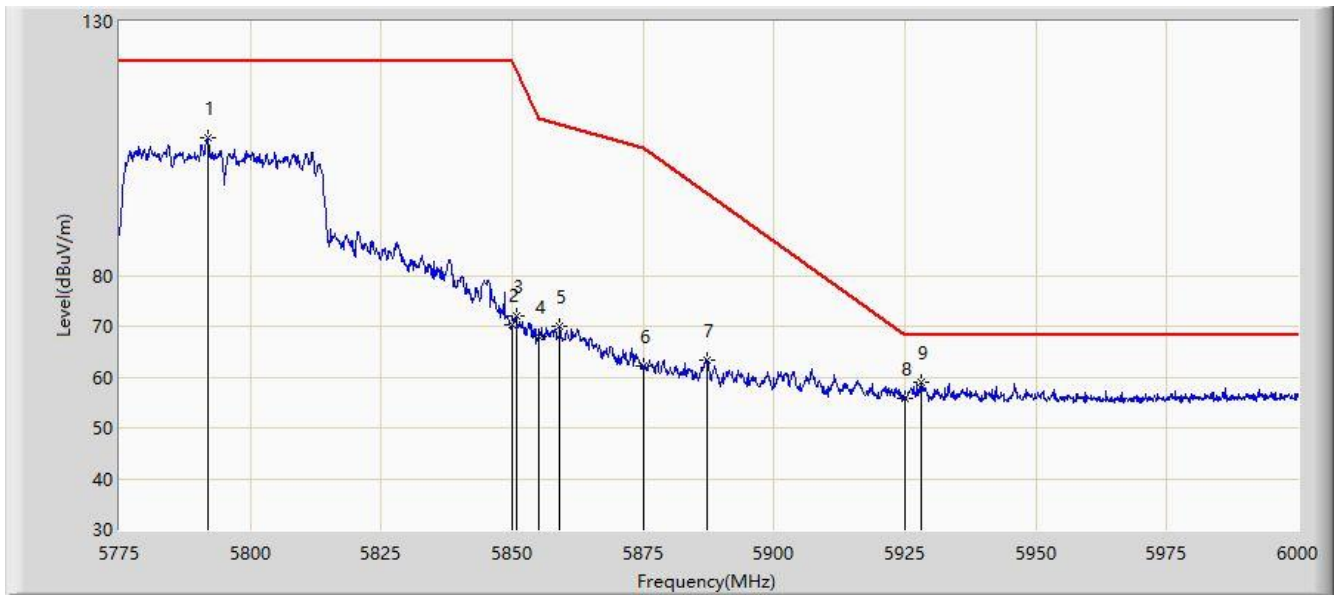


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5791.875        | 107.203                | 101.987              | N/A         | N/A            | 5.216       | PK   |
| 2  |      |      | 5850.000        | 70.203                 | 64.799               | -51.997     | 122.200        | 5.404       | PK   |
| 3  |      |      | 5850.825        | 72.027                 | 66.620               | -48.292     | 120.318        | 5.407       | PK   |
| 4  |      |      | 5855.000        | 67.966                 | 62.546               | -42.834     | 110.800        | 5.420       | PK   |
| 5  |      |      | 5859.038        | 70.004                 | 64.571               | -39.663     | 109.668        | 5.434       | PK   |
| 6  |      |      | 5875.000        | 62.260                 | 56.776               | -42.940     | 105.200        | 5.485       | PK   |
| 7  |      |      | 5887.163        | 63.307                 | 57.783               | -32.863     | 96.170         | 5.524       | PK   |
| 8  |      |      | 5925.000        | 55.746                 | 50.099               | -12.454     | 68.200         | 5.647       | PK   |
| 9  |      | *    | 5928.000        | 58.845                 | 53.188               | -9.355      | 68.200         | 5.656       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:35 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz |                          |

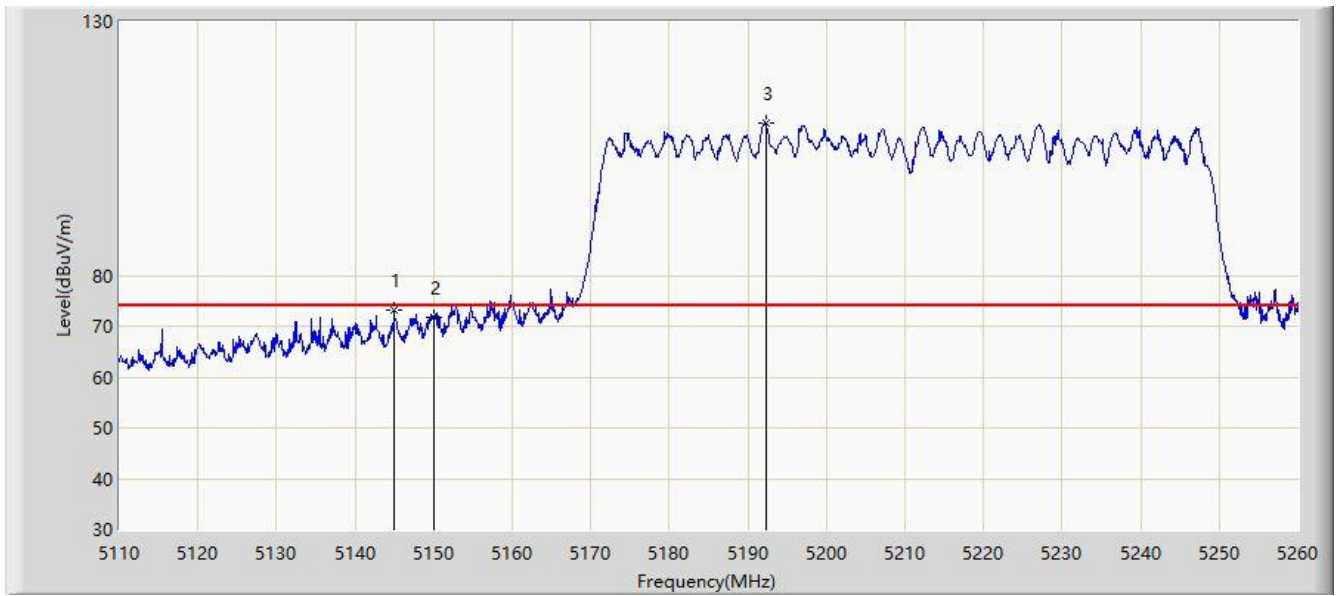


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5144.950        | 73.222                 | 69.321               | -0.778      | 74.000         | 3.900       | PK   |
| 2  |      |      | 5150.000        | 71.802                 | 67.896               | -2.198      | 74.000         | 3.906       | PK   |
| 3  |      | *    | 5192.275        | 109.995                | 106.045              | N/A         | N/A            | 3.950       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:38 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz |                          |

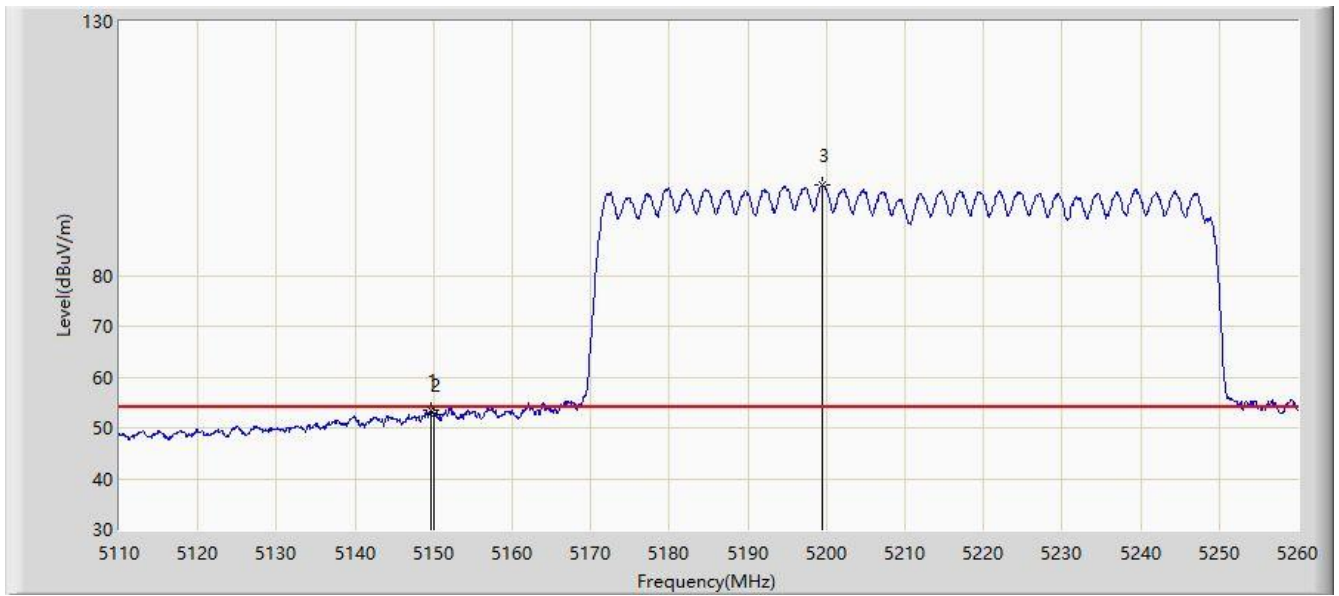


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.675        | 53.357                 | 49.451               | -0.643      | 54.000         | 3.905       | AV   |
| 2  |      |      | 5150.000        | 52.502                 | 48.596               | -1.498      | 54.000         | 3.906       | AV   |
| 3  |      | *    | 5199.550        | 97.871                 | 93.914               | N/A         | N/A            | 3.957       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:39 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz |                          |

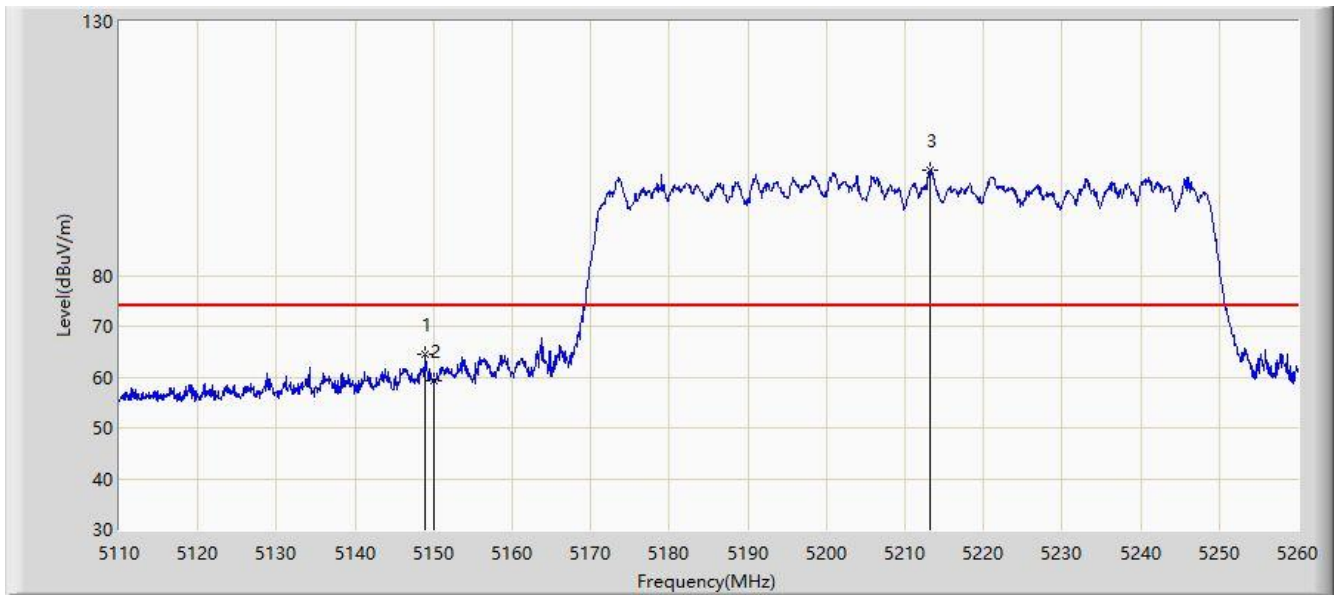


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.000        | 64.417                 | 60.512               | -9.583      | 74.000         | 3.906       | PK   |
| 2  |      |      | 5150.000        | 59.278                 | 55.372               | -14.722     | 74.000         | 3.906       | PK   |
| 3  |      | *    | 5213.275        | 100.799                | 96.826               | N/A         | N/A            | 3.972       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:40 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz |                          |

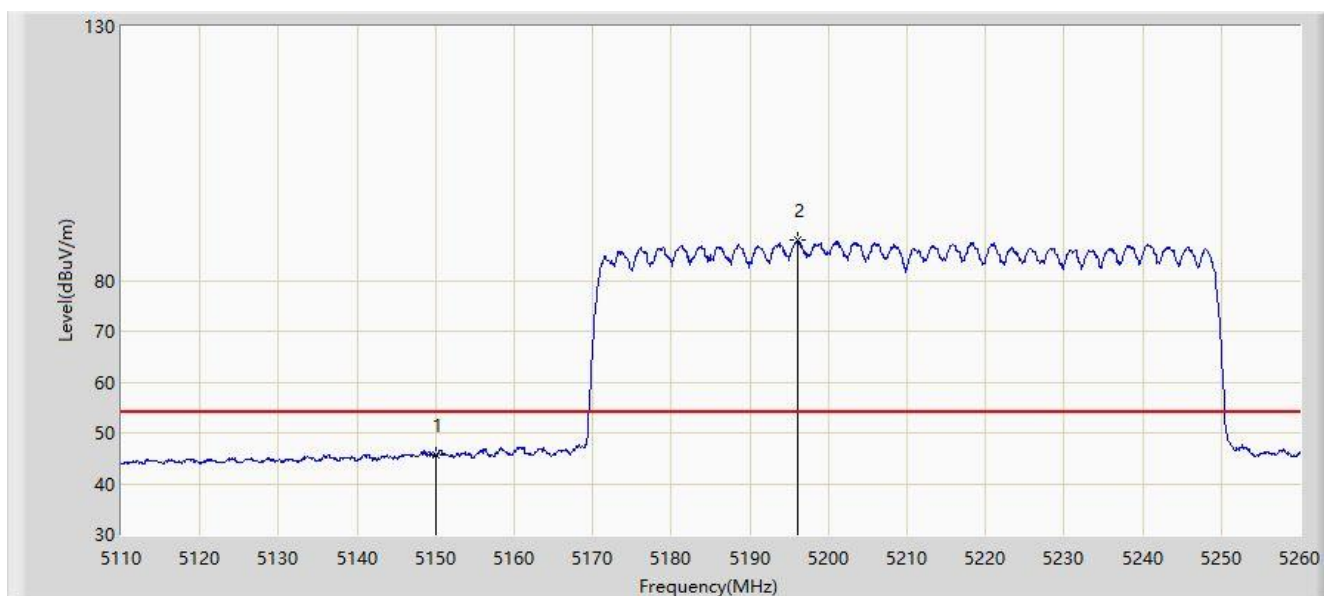


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 45.786                 | 41.880               | -8.214      | 54.000         | 3.906       | AV   |
| 2  |      | *    | 5196.100        | 87.958                 | 84.004               | N/A         | N/A            | 3.953       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:42 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz |                          |

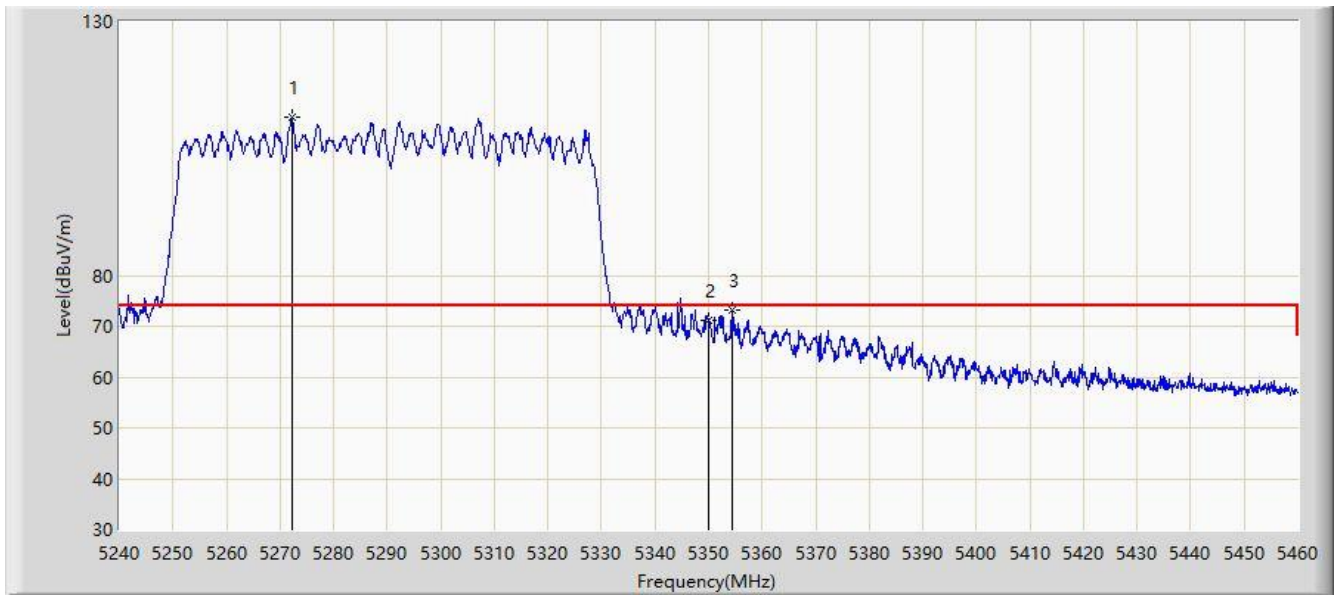


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5272.120        | 111.127                | 107.095              | N/A         | N/A            | 4.032       | PK   |
| 2  |      |      | 5350.000        | 71.169                 | 67.055               | -2.831      | 74.000         | 4.114       | PK   |
| 3  |      |      | 5354.290        | 73.092                 | 68.974               | -0.908      | 74.000         | 4.118       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:45 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz |                          |

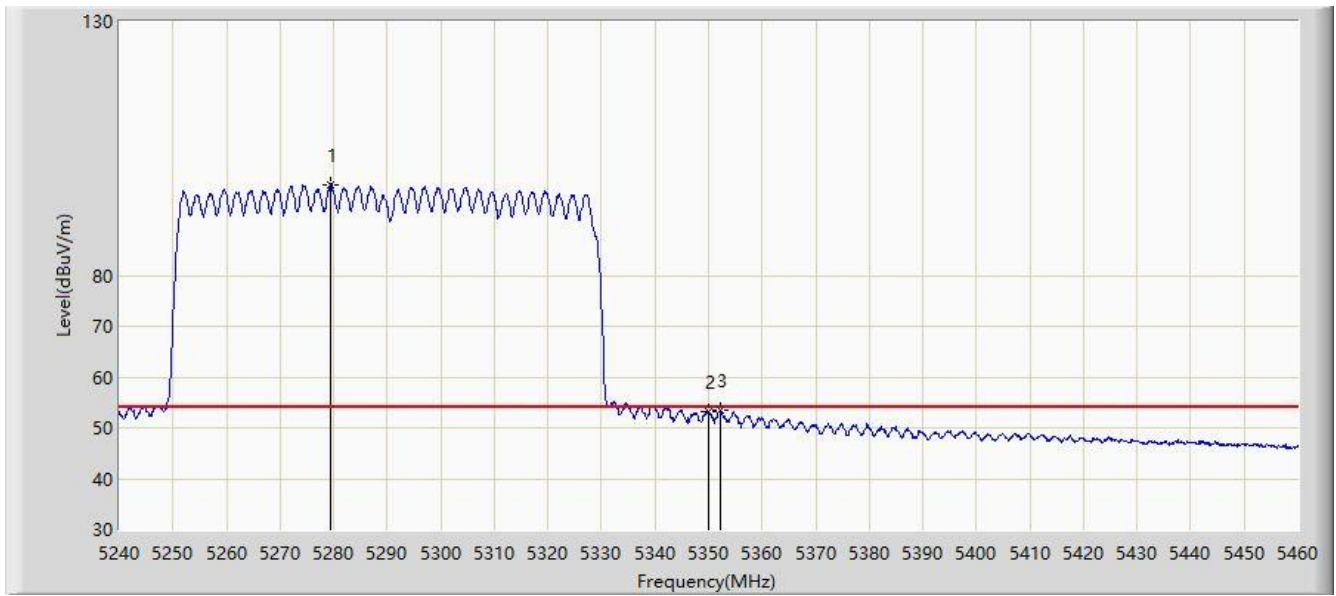


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5279.380        | 97.937                 | 93.897               | N/A         | N/A            | 4.039       | AV   |
| 2  |      |      | 5350.000        | 53.118                 | 49.004               | -0.882      | 54.000         | 4.114       | AV   |
| 3  |      |      | 5352.090        | 53.486                 | 49.370               | -0.514      | 54.000         | 4.116       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:48 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz |                          |

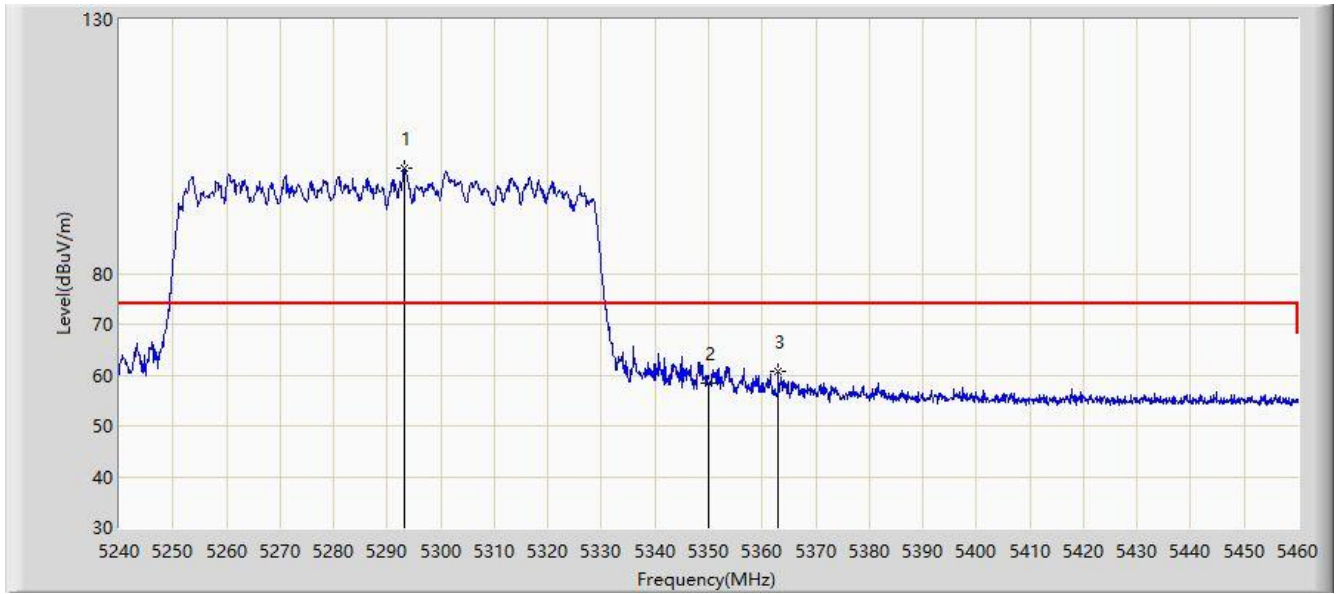


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5293.240        | 100.678                | 96.623               | N/A         | N/A            | 4.055       | PK   |
| 2  |      |      | 5350.000        | 58.514                 | 54.400               | -15.486     | 74.000         | 4.114       | PK   |
| 3  |      |      | 5363.090        | 60.857                 | 56.730               | -13.143     | 74.000         | 4.127       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:49 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz |                          |

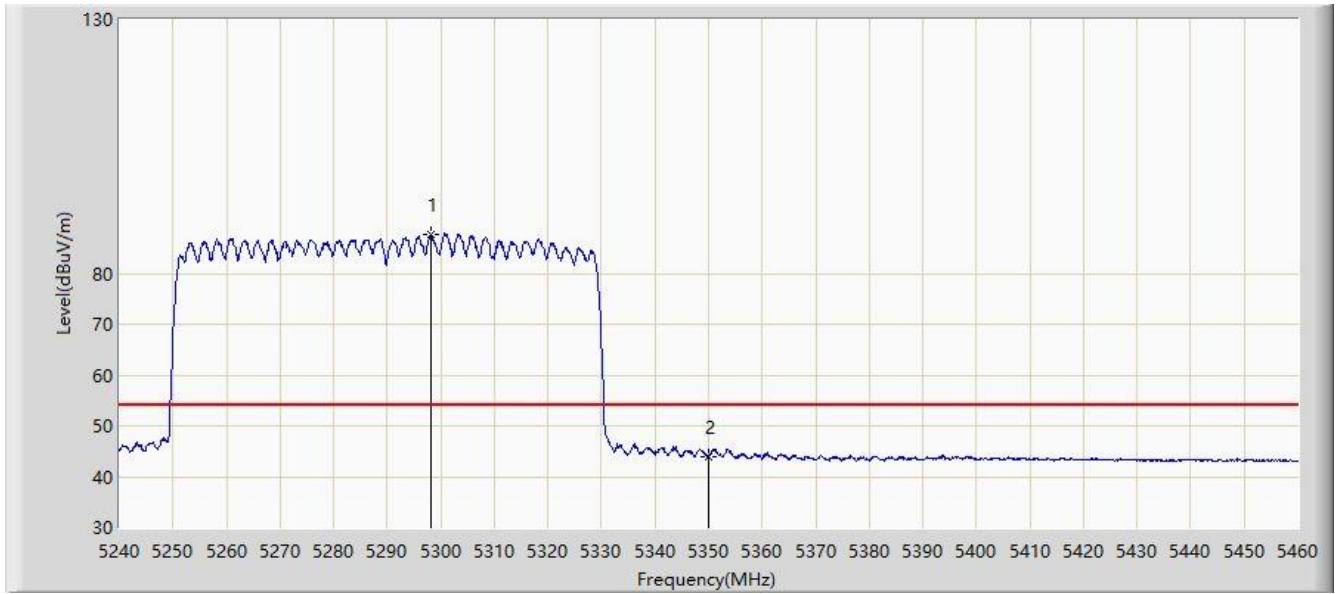


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5298.080        | 87.717                 | 83.657               | N/A         | N/A            | 4.060       | AV   |
| 2  |      |      | 5350.000        | 43.997                 | 39.883               | -10.003     | 54.000         | 4.114       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/17 - 00:42 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz |                          |

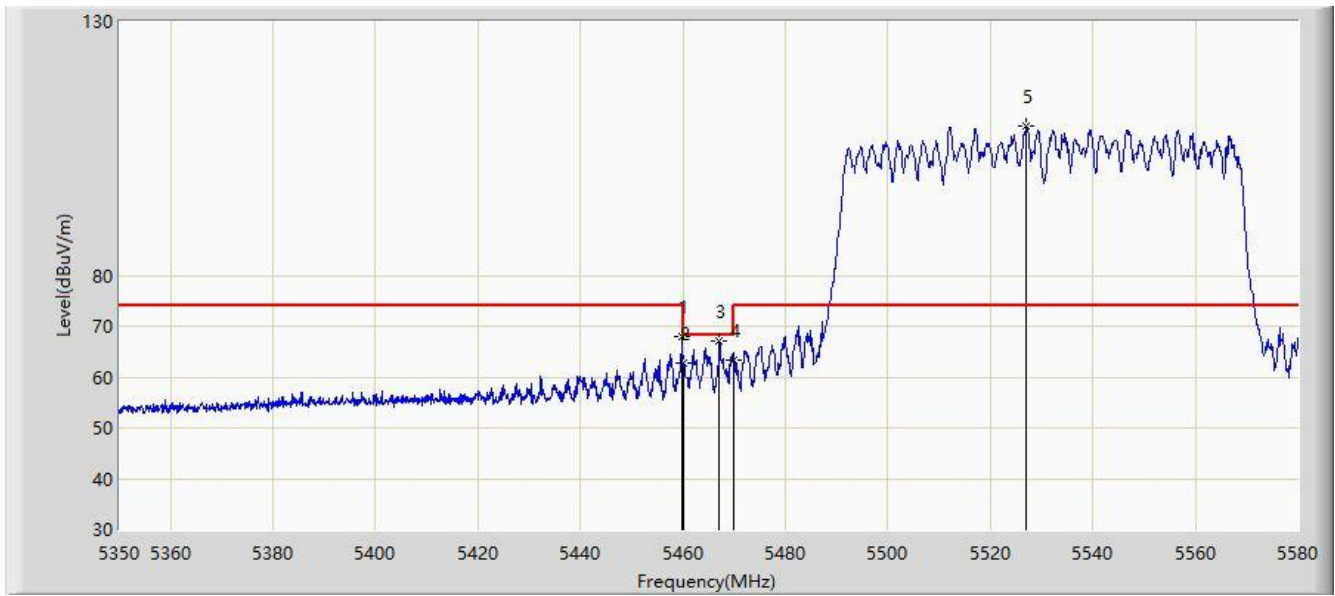


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5459.710        | 67.902                 | 63.675               | -6.098      | 74.000         | 4.228       | PK   |
| 2  |      |      | 5460.000        | 62.626                 | 58.398               | -11.374     | 74.000         | 4.228       | PK   |
| 3  |      |      | 5467.070        | 67.155                 | 62.919               | -1.045      | 68.200         | 4.235       | PK   |
| 4  |      |      | 5470.000        | 63.380                 | 59.141               | -4.820      | 68.200         | 4.238       | PK   |
| 5  |      | *    | 5527.100        | 109.444                | 105.086              | N/A         | N/A            | 4.358       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/17 - 00:45 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz |                          |

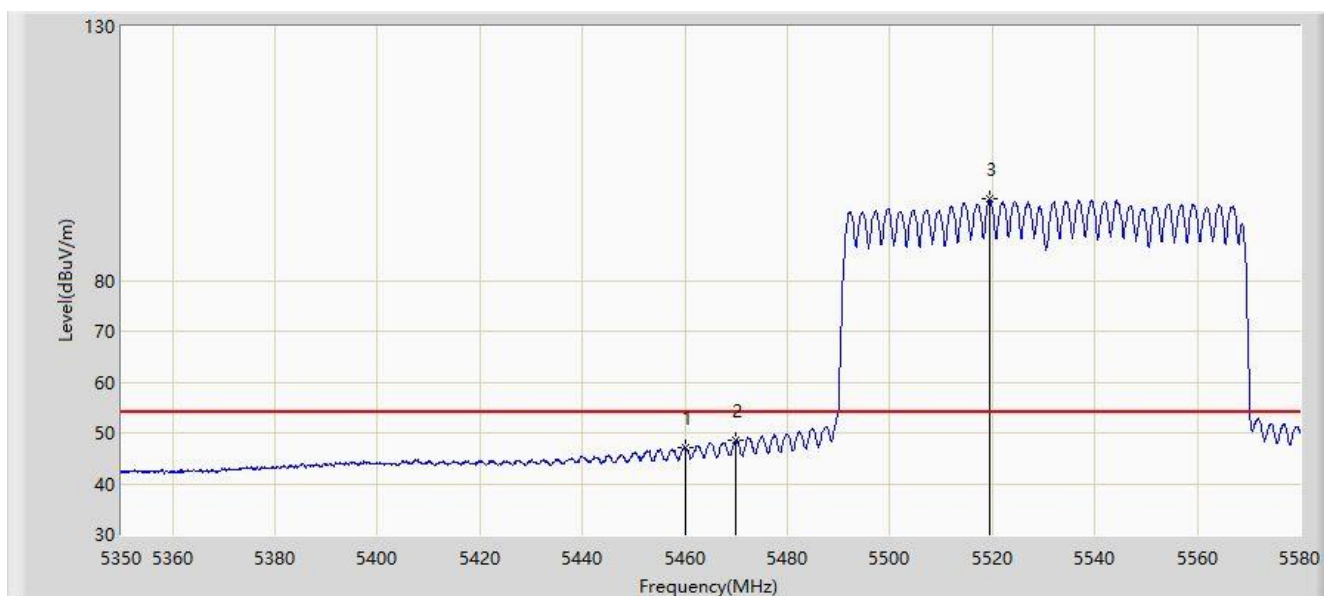


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 47.071                 | 42.843               | -6.929      | 54.000         | 4.228       | AV   |
| 2  |      |      | 5470.000        | 48.678                 | 44.439               | -5.322      | 54.000         | 4.238       | AV   |
| 3  |      | *    | 5519.395        | 96.029                 | 91.696               | N/A         | N/A            | 4.333       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/17 - 00:46 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz |                          |

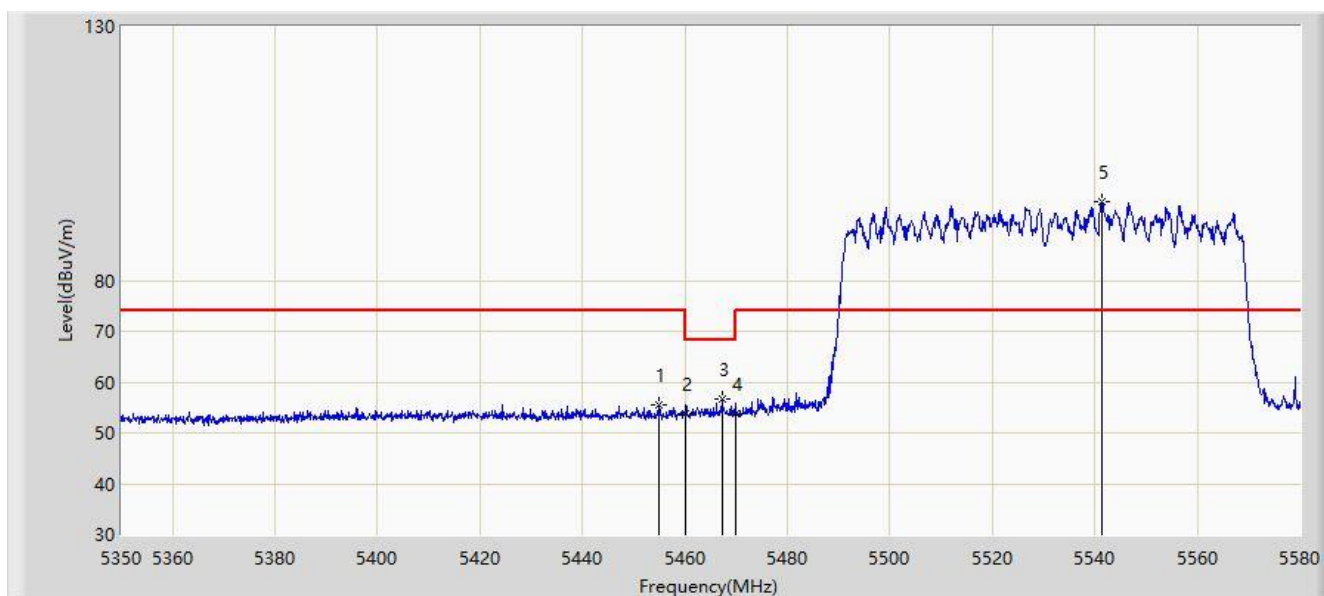


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5454.880        | 55.443                 | 51.221               | -18.557     | 74.000         | 4.223       | PK   |
| 2  |      |      | 5460.000        | 53.693                 | 49.465               | -20.307     | 74.000         | 4.228       | PK   |
| 3  |      |      | 5467.185        | 56.809                 | 52.573               | -11.391     | 68.200         | 4.236       | PK   |
| 4  |      |      | 5470.000        | 53.874                 | 49.635               | -14.326     | 68.200         | 4.238       | PK   |
| 5  |      | *    | 5541.360        | 95.508                 | 91.104               | N/A         | N/A            | 4.404       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/17 - 00:48 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz |                          |

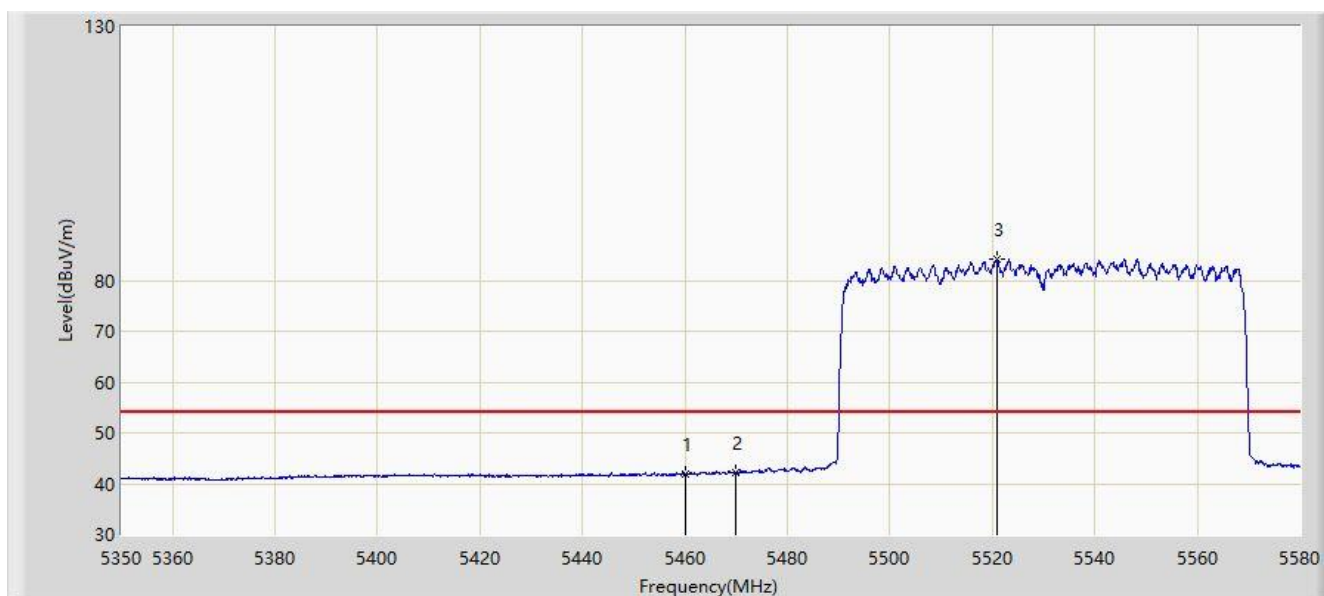


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5460.000        | 41.813                 | 37.585               | -12.187     | 54.000         | 4.228       | AV   |
| 2  |      |      | 5470.000        | 42.037                 | 37.798               | -11.963     | 54.000         | 4.238       | AV   |
| 3  |      | *    | 5520.890        | 84.245                 | 79.907               | N/A         | N/A            | 4.338       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 01:50 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz |                          |

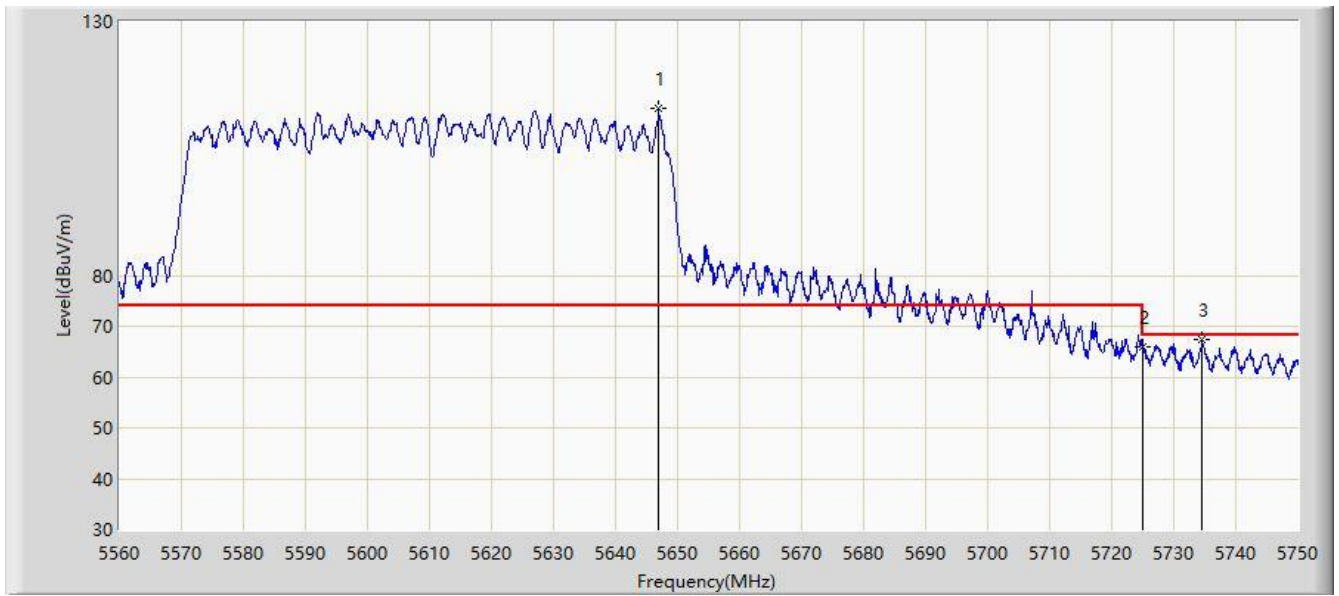


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5647.020        | 112.794                | 108.047              | N/A         | N/A            | 4.748       | PK   |
| 2  |      |      | 5725.000        | 65.954                 | 60.955               | -2.246      | 68.200         | 4.999       | PK   |
| 3  |      |      | 5734.610        | 67.369                 | 62.339               | -0.831      | 68.200         | 5.031       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/24 - 02:02 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz |                          |

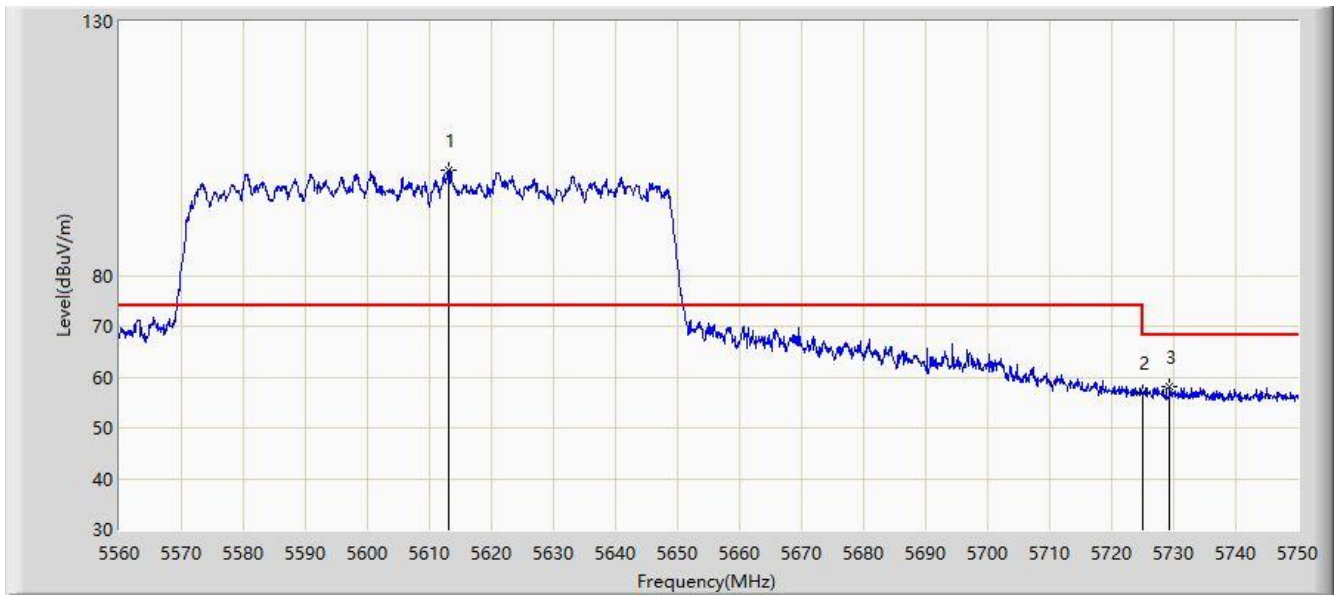


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5613.200        | 100.836                | 96.200               | N/A         | N/A            | 4.637       | PK   |
| 2  |      |      | 5725.000        | 56.851                 | 51.852               | -11.349     | 68.200         | 4.999       | PK   |
| 3  |      |      | 5729.385        | 58.247                 | 53.234               | -9.953      | 68.200         | 5.013       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/17 - 01:07 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Horizontal     |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz |                          |

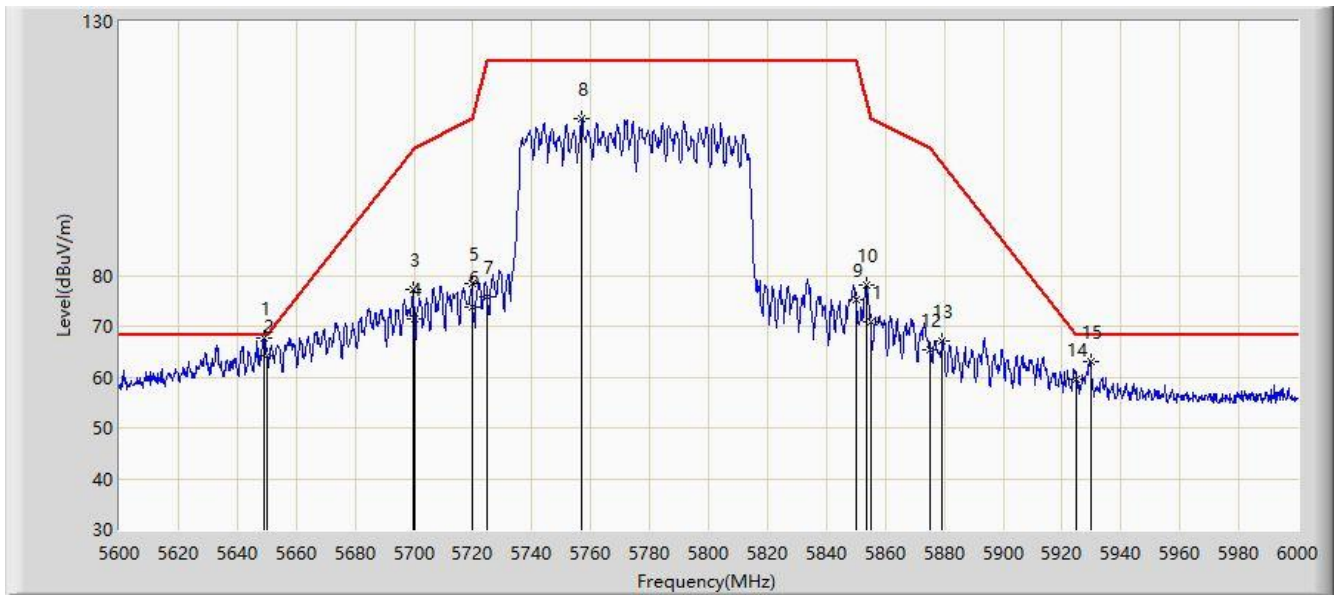


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5649.000        | 67.694                 | 62.941               | -0.506      | 68.200         | 4.753       | PK   |
| 2  |      |      | 5650.000        | 64.300                 | 59.543               | -3.900      | 68.200         | 4.756       | PK   |
| 3  |      |      | 5699.600        | 77.119                 | 72.202               | -27.787     | 104.905        | 4.917       | PK   |
| 4  |      |      | 5700.000        | 71.389                 | 66.471               | -33.811     | 105.200        | 4.918       | PK   |
| 5  |      |      | 5719.600        | 78.308                 | 73.326               | -32.381     | 110.688        | 4.981       | PK   |
| 6  |      |      | 5720.000        | 73.812                 | 68.829               | -36.988     | 110.800        | 4.983       | PK   |
| 7  |      |      | 5725.000        | 75.698                 | 70.699               | -46.502     | 122.200        | 4.999       | PK   |
| 8  |      |      | 5757.000        | 110.960                | 105.858              | N/A         | N/A            | 5.102       | PK   |
| 9  |      |      | 5850.000        | 75.277                 | 69.873               | -46.923     | 122.200        | 5.404       | PK   |
| 10 |      |      | 5853.600        | 78.063                 | 72.647               | -35.928     | 113.991        | 5.416       | PK   |
| 11 |      |      | 5855.000        | 70.768                 | 65.348               | -40.032     | 110.800        | 5.420       | PK   |
| 12 |      |      | 5875.000        | 65.292                 | 59.808               | -39.908     | 105.200        | 5.485       | PK   |
| 13 |      |      | 5879.400        | 67.224                 | 61.726               | -34.707     | 101.931        | 5.498       | PK   |
| 14 |      |      | 5925.000        | 59.491                 | 53.844               | -8.709      | 68.200         | 5.647       | PK   |
| 15 |      |      | 5929.600        | 63.039                 | 57.377               | -5.161      | 68.200         | 5.662       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2020/07/17 - 01:10 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Jay Chu        |
| Probe: BBHA 9120D (1GHz~18GHz)                          | Polarity: Vertical       |
| EUT: ACCESS POINT                                       | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz |                          |

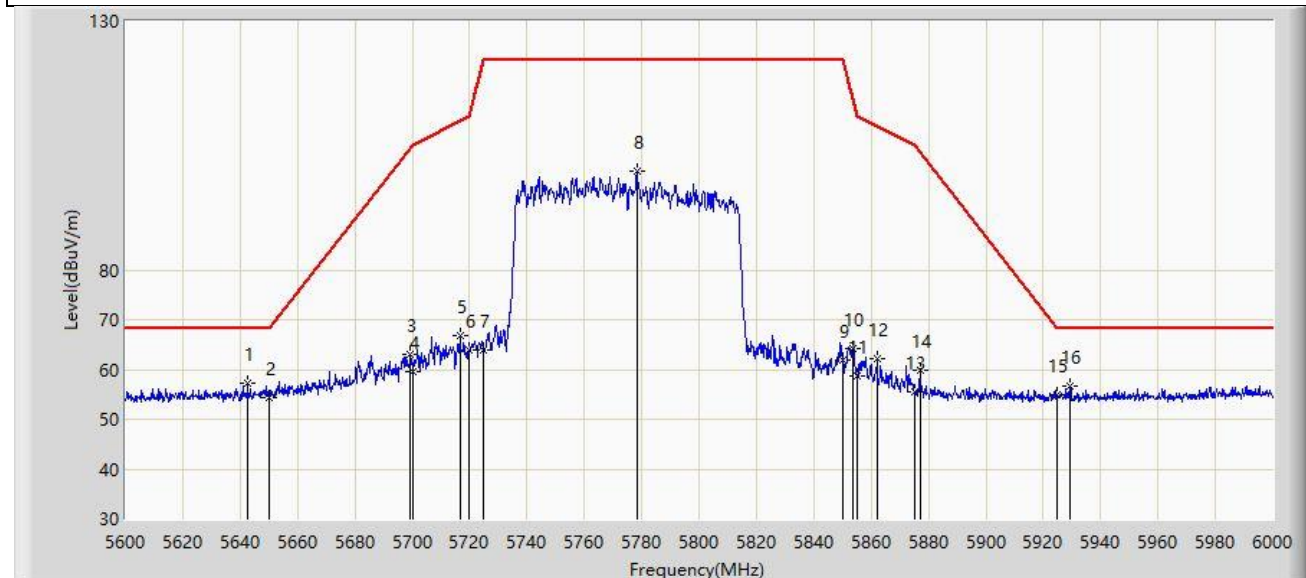

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5642.600        | 57.165                 | 52.432               | -11.035     | 68.200         | 4.733       | PK   |
| 2  |      |      | 5650.000        | 54.392                 | 49.635               | -13.808     | 68.200         | 4.756       | PK   |
| 3  |      |      | 5699.200        | 63.000                 | 58.085               | -41.610     | 104.611        | 4.915       | PK   |
| 4  |      |      | 5700.000        | 59.595                 | 54.677               | -45.605     | 105.200        | 4.918       | PK   |
| 5  |      |      | 5716.600        | 66.853                 | 61.881               | -42.997     | 109.849        | 4.972       | PK   |
| 6  |      |      | 5720.000        | 63.852                 | 58.869               | -46.948     | 110.800        | 4.983       | PK   |
| 7  |      |      | 5725.000        | 63.905                 | 58.906               | -58.295     | 122.200        | 4.999       | PK   |
| 8  |      |      | 5778.400        | 99.793                 | 94.620               | N/A         | N/A            | 5.172       | PK   |
| 9  |      |      | 5850.000        | 61.795                 | 56.391               | -60.405     | 122.200        | 5.404       | PK   |
| 10 |      |      | 5853.600        | 64.324                 | 58.908               | -49.667     | 113.991        | 5.416       | PK   |
| 11 |      |      | 5855.000        | 58.802                 | 53.382               | -51.998     | 110.800        | 5.420       | PK   |
| 12 |      |      | 5862.200        | 62.178                 | 56.734               | -46.604     | 108.782        | 5.443       | PK   |
| 13 |      |      | 5875.000        | 55.418                 | 49.934               | -49.782     | 105.200        | 5.485       | PK   |
| 14 |      |      | 5877.000        | 59.819                 | 54.328               | -43.895     | 103.714        | 5.490       | PK   |
| 15 |      |      | 5925.000        | 54.809                 | 49.162               | -13.391     | 68.200         | 5.647       | PK   |
| 16 |      |      | 5929.200        | 56.577                 | 50.917               | -11.623     | 68.200         | 5.660       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

## 7.10. AC Conducted Emissions Measurement


### 7.10.1. Test Limit

| FCC Part 15.207 Limits |                 |                 |
|------------------------|-----------------|-----------------|
| Frequency (MHz)        | QP (dB $\mu$ V) | AV (dB $\mu$ V) |
| 0.15 - 0.50            | 66 - 56         | 56 – 46         |
| 0.50 - 5.0             | 56              | 46              |
| 5.0 - 30               | 60              | 50              |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.10.2. Test Setup

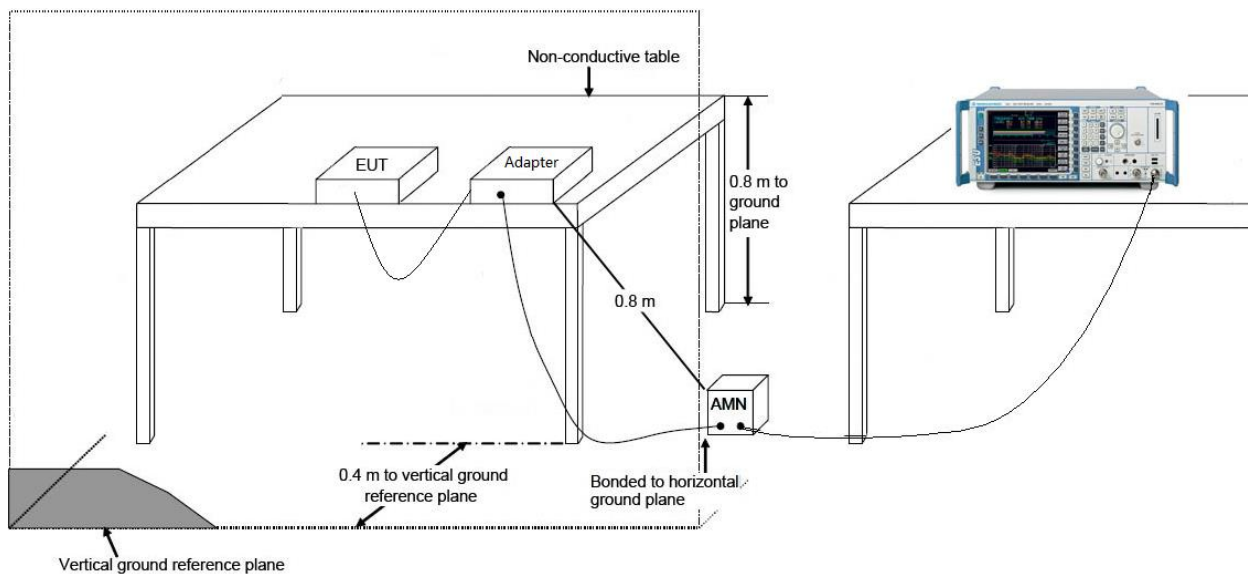

### 7.10.3.Test Result

|                                                                 |                          |
|-----------------------------------------------------------------|--------------------------|
| Site: SR2                                                       | Time: 2020/08/06 - 14:20 |
| Limit: FCC_Part15.207_CE                                        | Engineer: Jay Chu        |
| Probe: ENV216_Filter On                                         | Polarity: Line           |
| EUT: ACCESS POINT                                               | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by 802.11ac-VHT40 at channel 5755MHz |                          |

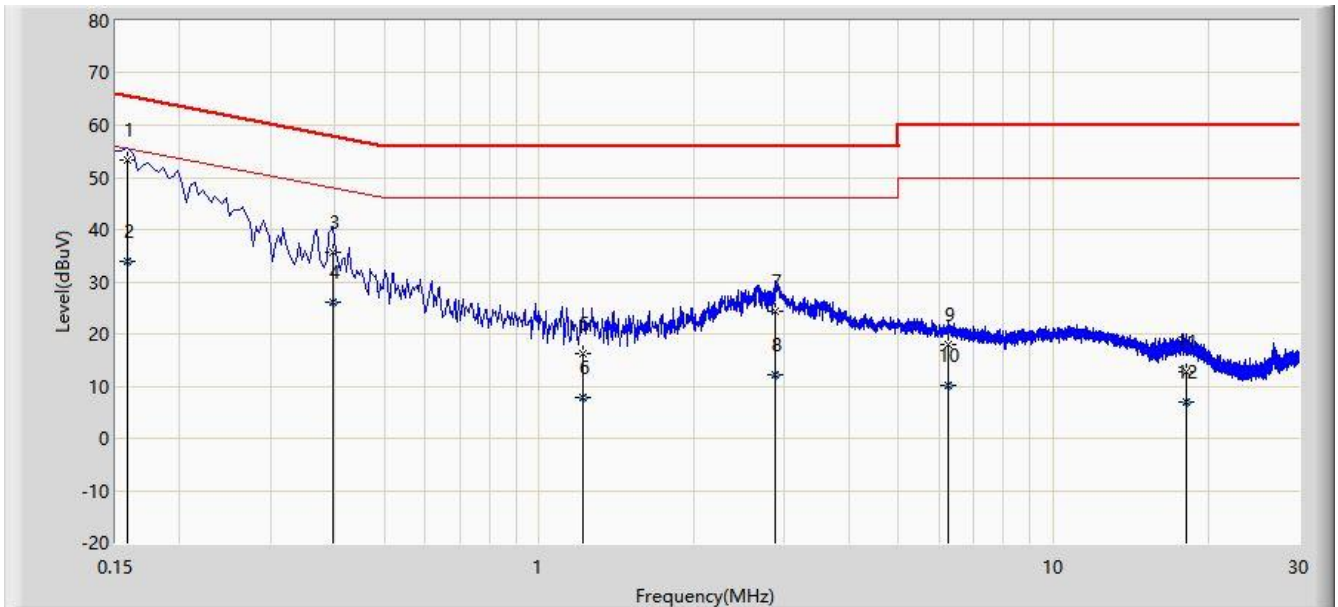


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      | *    | 0.158           | 53.457               | 43.846               | -12.111     | 65.568       | 9.611       | QP   |
| 2  |      |      | 0.158           | 33.808               | 24.197               | -21.760     | 55.568       | 9.611       | AV   |
| 3  |      |      | 0.398           | 35.542               | 25.918               | -22.353     | 57.895       | 9.624       | QP   |
| 4  |      |      | 0.398           | 26.180               | 16.556               | -21.715     | 47.895       | 9.624       | AV   |
| 5  |      |      | 1.214           | 16.274               | 6.608                | -39.726     | 56.000       | 9.666       | QP   |
| 6  |      |      | 1.214           | 7.808                | -1.858               | -38.192     | 46.000       | 9.666       | AV   |
| 7  |      |      | 2.882           | 24.376               | 14.673               | -31.624     | 56.000       | 9.703       | QP   |
| 8  |      |      | 2.882           | 12.190               | 2.487                | -33.810     | 46.000       | 9.703       | AV   |
| 9  |      |      | 6.262           | 17.991               | 8.216                | -42.009     | 60.000       | 9.775       | QP   |
| 10 |      |      | 6.262           | 10.018               | 0.243                | -39.982     | 50.000       | 9.775       | AV   |
| 11 |      |      | 18.098          | 12.726               | 2.759                | -47.274     | 60.000       | 9.967       | QP   |
| 12 |      |      | 18.098          | 6.945                | -3.022               | -43.055     | 50.000       | 9.967       | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

|                                                                 |                          |
|-----------------------------------------------------------------|--------------------------|
| Site: SR2                                                       | Time: 2020/08/06 - 14:28 |
| Limit: FCC_Part15.207_CE                                        | Engineer: Jay Chu        |
| Probe: ENV216_Filter On                                         | Polarity: Neutral        |
| EUT: ACCESS POINT                                               | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by 802.11ac-VHT40 at channel 5755MHz |                          |

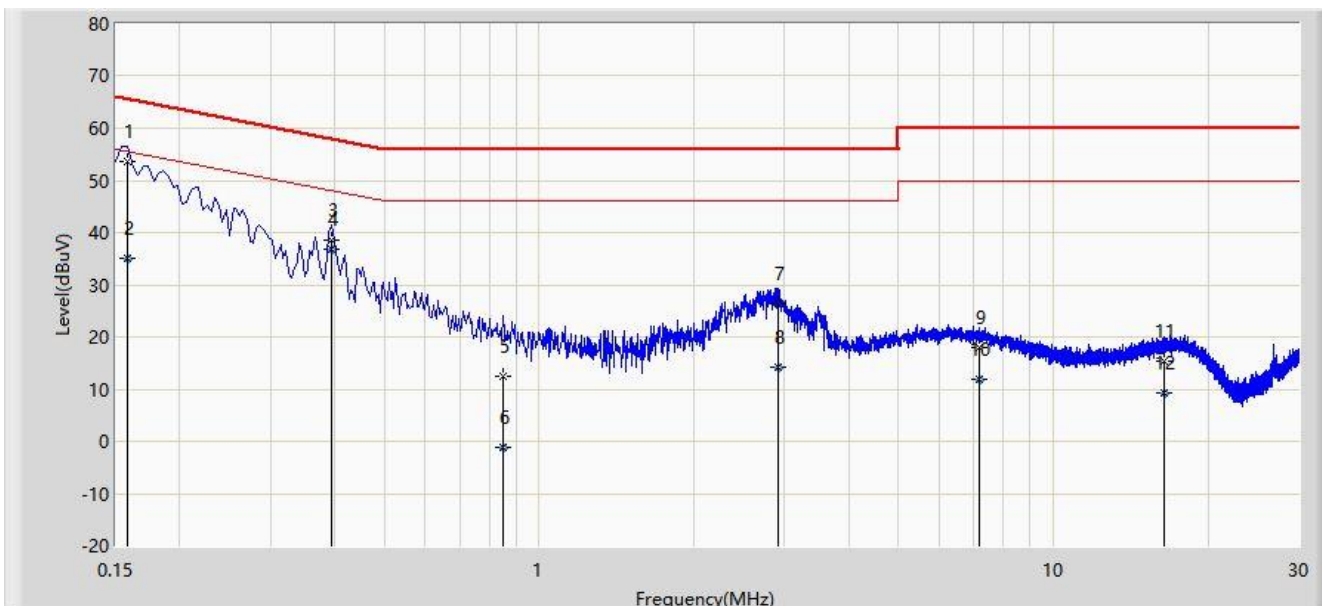

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.158           | 53.736               | 44.115               | -11.832     | 65.568       | 9.621       | QP   |
| 2  |      |      | 0.158           | 35.209               | 25.588               | -20.359     | 55.568       | 9.621       | AV   |
| 3  |      |      | 0.394           | 38.504               | 28.870               | -19.475     | 57.979       | 9.634       | QP   |
| 4  |      | *    | 0.394           | 36.678               | 27.044               | -11.301     | 47.979       | 9.634       | AV   |
| 5  |      |      | 0.850           | 12.474               | 2.813                | -43.526     | 56.000       | 9.661       | QP   |
| 6  |      |      | 0.850           | -1.048               | -10.709              | -47.048     | 46.000       | 9.661       | AV   |
| 7  |      |      | 2.918           | 26.296               | 16.588               | -29.704     | 56.000       | 9.708       | QP   |
| 8  |      |      | 2.918           | 14.227               | 4.519                | -31.773     | 46.000       | 9.708       | AV   |
| 9  |      |      | 7.190           | 17.901               | 8.090                | -42.099     | 60.000       | 9.811       | QP   |
| 10 |      |      | 7.190           | 11.950               | 2.139                | -38.050     | 50.000       | 9.811       | AV   |
| 11 |      |      | 16.382          | 15.315               | 5.314                | -44.685     | 60.000       | 10.001      | QP   |
| 12 |      |      | 16.382          | 9.240                | -0.761               | -40.760     | 50.000       | 10.001      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

---

The End

## **Appendix A – Test Setup Photograph**

Refer to “2007TW0002-UT” file.

## **Appendix B – EUT Photograph**

Refer to “2007TW0002-UE” file.