


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	ORIGINAL RELEASE	05/13/21	ELE/JTB

ITEM NO.	PART NUMBER	QTY.
1	FHX0001-01 WINDOW MAT'L	1
2	FHX0001-01-CT04	1
3	FHX0002-01-CT04	1
4	GA0003 TEST RANGE SOURCE POL DRIVE	1
5	GA0014 (O-RING 1.549 ID X 1.755 OD X .103)	4
6	GA0039 (O-RING 4.739 ID X 4.879 OD X .070 THK)	1
7	GA0105	1
8	HW#1005	6
9	HW#10FW04	6
10	HW#10LW	6
11	HW#8003	4
12	HW#8009	8
13	HW#8015	4
14	HW#8025	4
15	HW#8FW02	9
16	HW#8LW	12
17	RF112-0011-01	1
18	RF112-0020-01	1
19	TR01-0159-01	1
20	VI00164	1

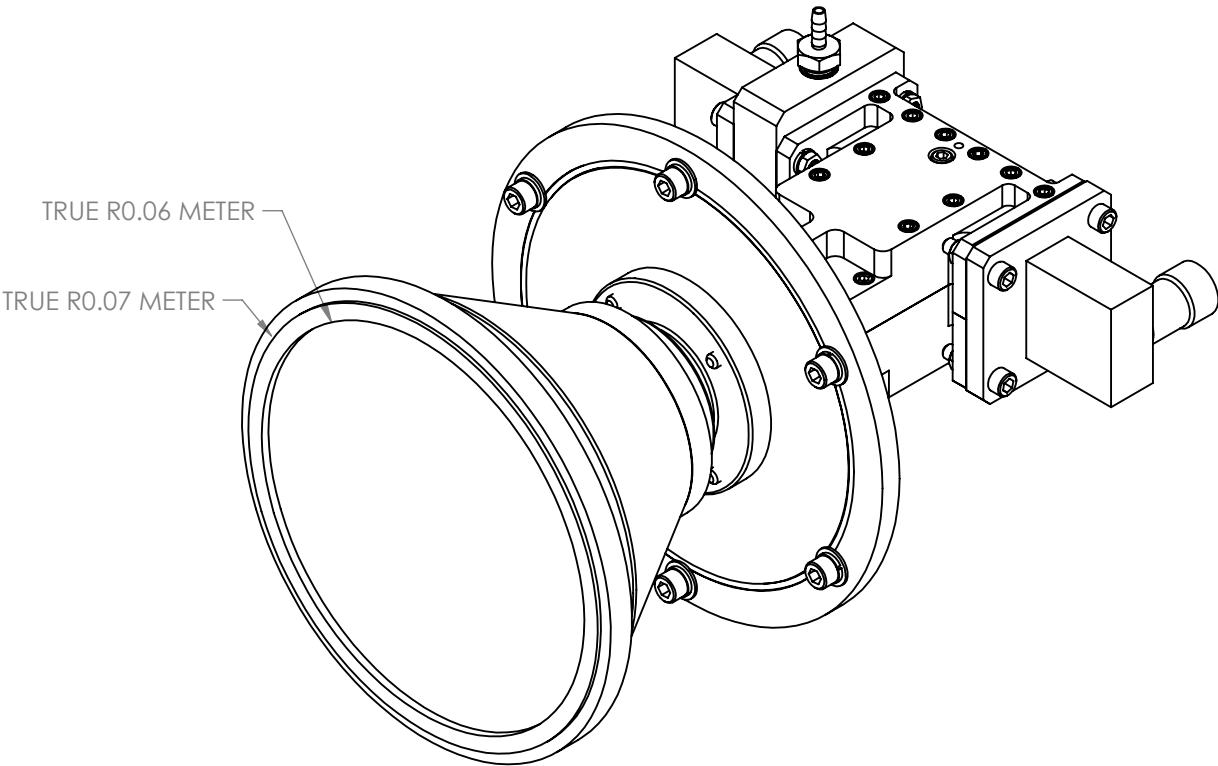

TR01-0168-01

3.107
- EST. WEIGHT -

! DO NOT SCALE DRAWING !		REFERENCE SEPARATE BOM FOR SPECIFIC INFO		CONFIDENTIAL AND PROPRIETARY						
UNLESS OTHERWISE SPECIFIED ! INTERPRET DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994. DIMENSIONS ARE IN INCHES. DIMENSIONS SHOWN IN () ARE FOR REFERENCE ONLY. TOLERANCES ARE: FRACTIONS: DECIMALS: ANGLES ± DETAILS ± 1/16 .XX ± .03 0.5 DEG ASSY'S ± 1/8 .XXX ± .005	MATERIAL	APPROVALS	DATE	 1969 WILLOW LAKE DRIVE WHITE OAK, TX 75693 USA 903-295-3400		TITLE: ASSY-SOURCE FEED-X BAND TX/RX WR112 TEST RANGE CONFIG	CODE ID. NO. 4LP18	SIZE B	DWG NO. TR01-0168	REV A
	PER PARTS LIST/BOM	DRAWN E.ELLIS	05/13/21							
	FINISH (IF APPLICABLE)	CHECKED -	-							
	NONE	DESIGNER								
DRILL HOLE TOLERANCE (DRILL) .013 thru .125 = +.005/- .001 .126 thru .250 = +.007/- .003 .251 thru .750 = +.008/- .003 .751 thru 1.000 = +.009/- .004 1.001 thru 2.000 = +.012/- .005	EXPORT CONTROL WARNING - Do not disclose this document or its contents to non-U.S. persons, or transmit this document or its contents outside the United States without the written permission of Sat-Lite Technologies and required U.S. Government approvals.		MANUFACTURING -	-	SCALE: 1:2	CONTRACT NO. TR01	SHEET 1 OF 1			
			PROJECT -	-						
			PRODUCT MGR -	-						
THREADED HOLE LOCATIONAL TOLERANCE TO BE VERIFIED VIA MINOR DIAMETER	UNLESS OTHERWISE SPECIFIED! PART TO BE FREE OF BURRS & SHARP EDGES. COMMERCIAL TOLERANCES TO STOCK SIZES APPLY.		DESIGN -	-						