



Specifications

GLI-METRO RK Specifications

OUTPUT PORTS


- » Number of ports 1

ELECTRICAL SPECIFICATIONS

- » Input/Output impedance 50Ω
- » SWR all ports (typical)
 - Input: 2:1
 - Output: 2:1
- » Bandwidth
 - L1 1575.42±15 MHz
- » Gain (typical) 0-55dB
- » Gain flatness <3 dB
- » Noise figure <3 dB
- » AC input level 110 VAC
230VAC UK
230VAC European
- » DC input level 12 - 28 VDC
- » Active Antenna Output Power Supply Output 6.8V

PHYSICAL SPECIFICATIONS

- » RF connectors
 - N (m, f)
 - SMA (m, f)
 - TNC (m, f)
 - SMB (f)
 - SMC (f)
 - BNC (m, f)
- » RS232 Serial Connector DB9(F) DCE
- » Weight 1.1 lbs (499 g)
- » Size: 5.87" x 3.15" x 1.9"
(149.1mm x 80mm x 48.3mm)
- » Operating temperature -40 to +85°C

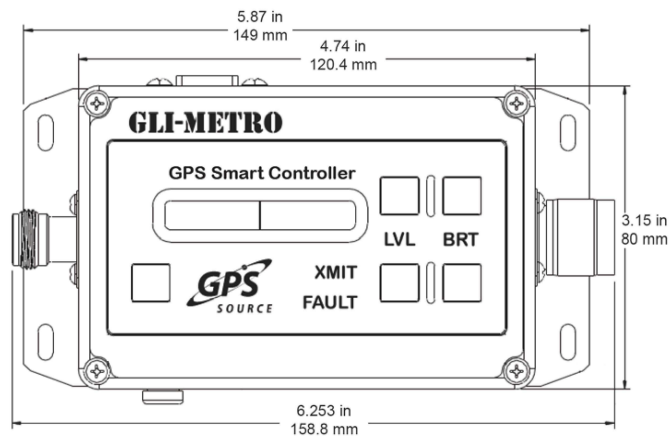

REPEATER NOTICE: Due to current regulatory considerations, GPS Repeater kits are only available for sale to: International Customers (outside the U.S.), agencies of the US Federal Government, parties operating under the direction of the US Federal Government, or parties that have received an STA or Experimental License under part 5 of the FCC rules, or parties that will be operating GPS Repeaters in a shielded room.



64 N. Mission Drive | Pueblo, West, CO 81007 | T: 719.561.9520 | F: 719.565.0890 | sales@gpssource.com

www.gpssource.com

An AS9100 Certified Company