



Highest Channel 99% Occupied Bandwidth



Highest Channel -26dBc Bandwidth kHz

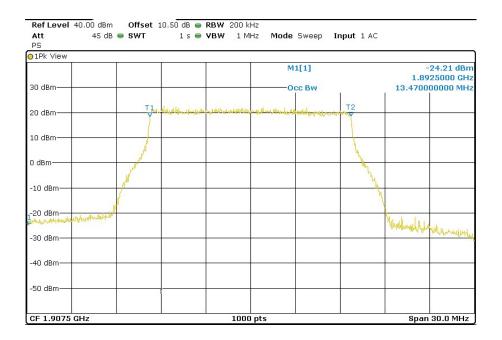

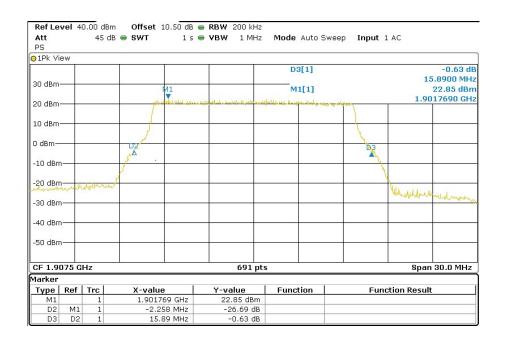

LTE 16QAM MODULATION. BW = 15 MHz

Lowest Channel 99% Occupied Bandwidth




Lowest Channel -26dBc Bandwidth kHz





Middle Channel 99% Occupied Bandwidth

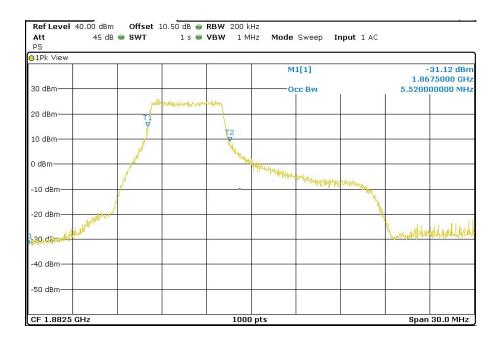


Middle Channel -26dBc Bandwidth kHz






Highest Channel 99% Occupied Bandwidth

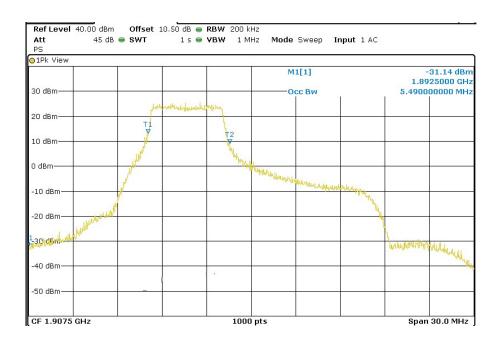


Highest Channel -26dBc Bandwidth kHz

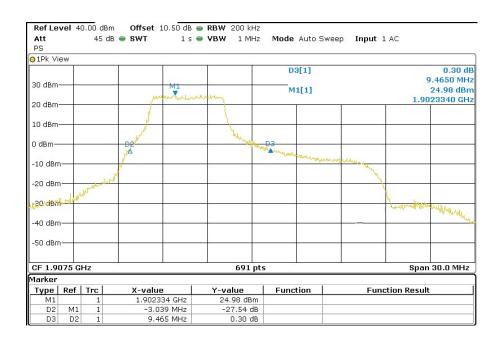




LTE QPSK MODULATION. BW = 20 MHz

Lowest Channel 99% Occupied Bandwidth

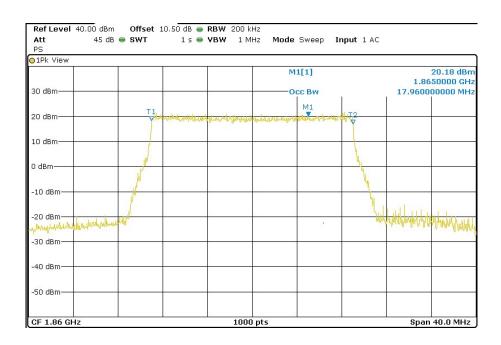


Lowest Channel -26dBc Bandwidth kHz

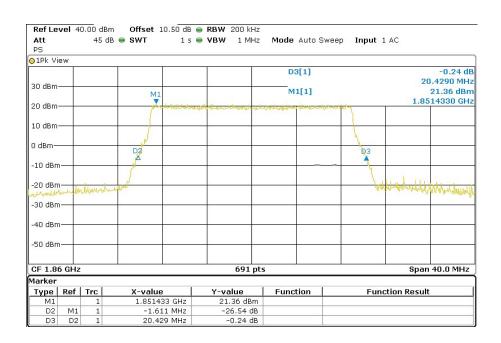




Middle Channel 99% Occupied Bandwidth

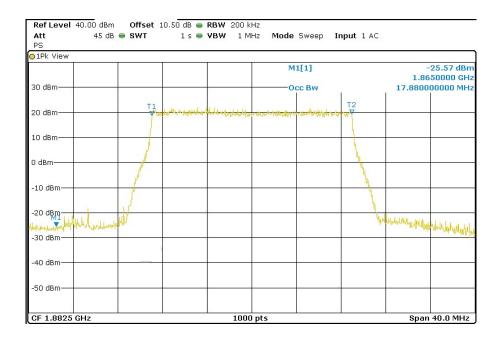


Middle Channel -26dBc Bandwidth kHz

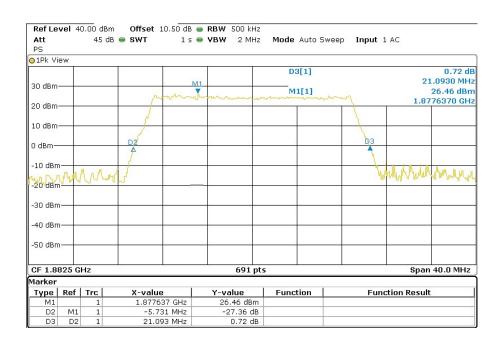




Highest Channel 99% Occupied Bandwidth

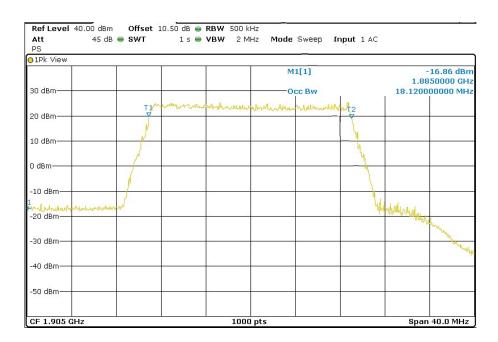


Highest Channel -26dBc Bandwidth kHz

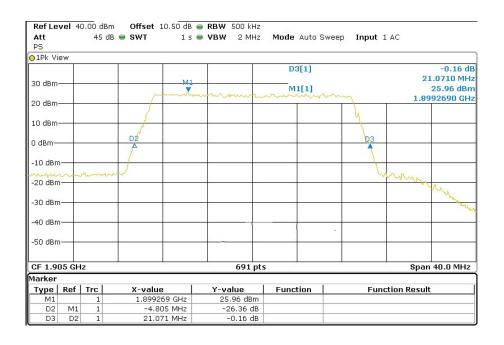




LTE 16QAM MODULATION. BW = 20 MHz

Lowest Channel 99% Occupied Bandwidth

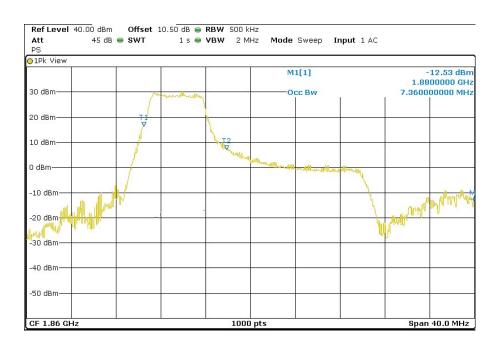


Lowest Channel -26dBc Bandwidth kHz

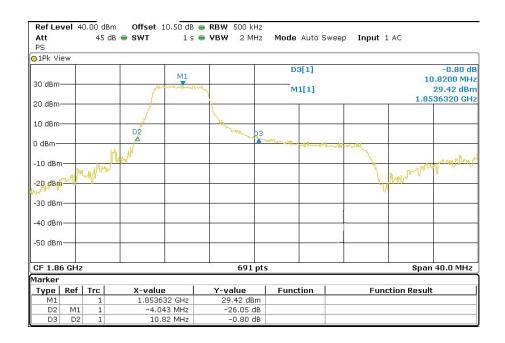



Middle Channel 99% Occupied Bandwidth

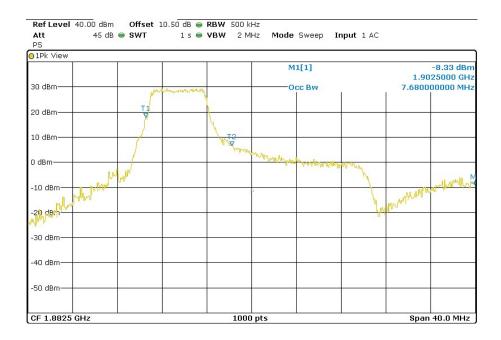

Middle Channel -26dBc Bandwidth kHz






Highest Channel 99% Occupied Bandwidth



Highest Channel -26dBc Bandwidth kHz

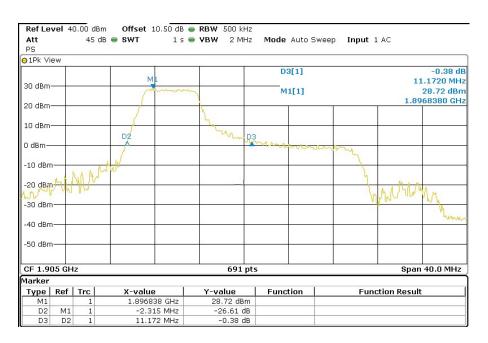



TEST A.5: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

LIMITS:	Product standard:	FCC Part 24 / IC RSS-133
LIMITS:	Test standard:	FCC §2.1051 and § 24.238/ RSS-133 Clause 6.5

LIMITS

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. P in watts.

At Po transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes 43+10log (Po). and the level in dBm relative to Po becomes:

Po (dBm) - [43 + 10 log (Po in watts)] = -13 dBm


TEST SETUP

The EUT RF output connector was connected to a spectrum analyzer and to the Universal Radio Communication Tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50-ohm attenuator and a power splitter.

The spectrum was investigated from 9 kHz to 26 GHz for LTE Band 25.

The reading of the spectrum analyzer is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyzer.

For LTE mode the configuration of Resource Blocks and modulation which is the worst case for conducted power was used.

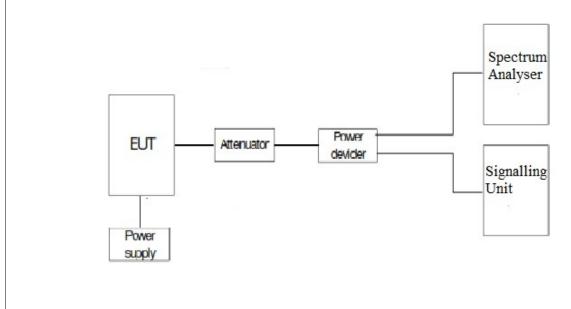



TESTED SAMPLE	S:	S/01	
TESTED CONDITIONS I	MODES:	тс	C#01
TEST RESULTS:		P/	ASS
Frequency range 9 kHz – 26 Gł	<u></u>		
LTE QPSK MODULATION. BW	= 1.4 MHz		
Lowest Channel			
Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)	
1930.859	-26.48	< ± 1.20	
Middle Channel			
Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)	
1962.539	-27.14	< ± 1.20	_
Highest Channel			_
Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)	
1994.229	-27.05	< ± 1.20	
LTE QPSK MODULATION. BW Lowest Channel Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)	
1931.669	-26.05	< ± 1.20	-
Middle Channel			_
Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)	
1962.539	-25.85	< ± 1.20	
Highest Channel			
Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)	
1993.419	-25.56	< ± 1.20	_
LTE QPSK MODULATION. BW	= 5 MHz		
Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)	
1931.669	-28.27	< ± 1.20	
Middle Channel			
Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)	
1966.599	-25.5	< ± 1.20	
Highest Channel			_
Spurious frequency (GHz)	Level (dBm)	Measurement uncertainty (dB)	
1993.419	-28.11	< ± 1.20	




TEST RESULTS (Cor	nt):	
·	•	
LTE QPSK MODULATION. BW	= 10 MHz	
Lowest Channel		
Spurious frequency (GHz)	Level (dBm) Measurement uncertainty (dB)
1938.979	-28.86	< ± 1.20
Middle Channel		
Spurious frequency (GHz)	Level (dBm) Measurement uncertainty (dB)
1961.729	-28.58	< ± 1.20
Highest Channel		
Spurious frequency (GHz)	Level (dBm) Measurement uncertainty (dB)
1990.979	-28.22	< ± 1.20
Lowest Channel Spurious frequency (GHz) 1936.539	Level (dBm) Measurement uncertainty (dB) < ± 1.20
	-20.4	< ± 1.20
Middle Channel	Laval (dDas	NA
Spurious frequency (GHz)	Level (dBm	(dB)
1966.599	-27.98	< ± 1.20
Highest Channel		N 1
Spurious frequency (GHz)	Level (dBm	(dB)
1988.539	-28.58	< ± 1.20
LTE QPSK MODULATION. BW Lowest Channel Spurious frequency (GHz)	z = 20 MHz Level (dBm) Measurement uncertainty (dB)
1939.789	-28.27	< ± 1.20
Middle Channel		
Spurious frequency (GHz)	Level (dBm) Measurement uncertainty (dB)
1964.979	-28.5	< ± 1.20
Highest Channel		
Spurious frequency (GHz)	Level (dBm) Measurement uncertainty (dB)
1979.599	-28.32	< ± 1.20
		+




LTE QPSK MODULATION. BW = 1.4MHz

Lowest Channel

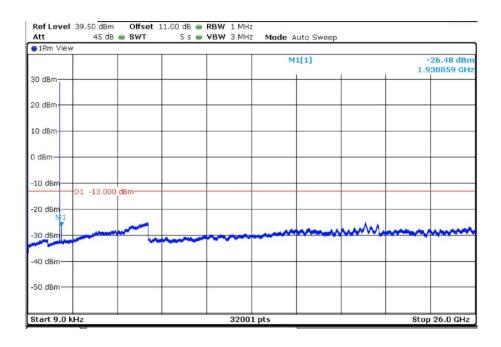


Middle Channel

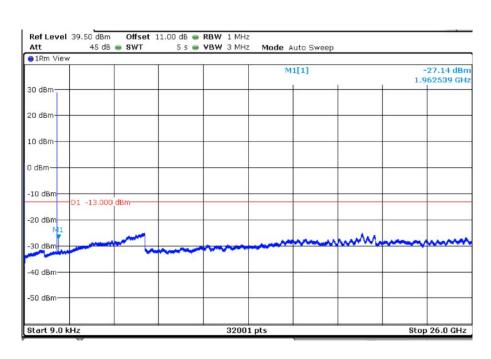




Highest Channel

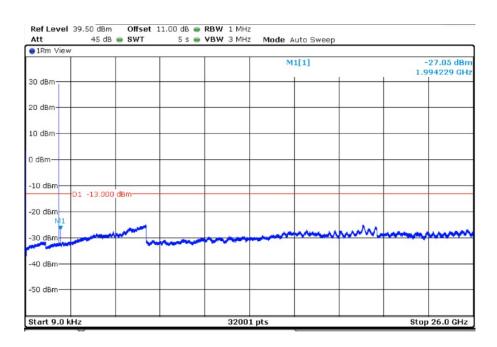


LTE QPSK MODULATION. BW = 3 MHz


Lowest Channel

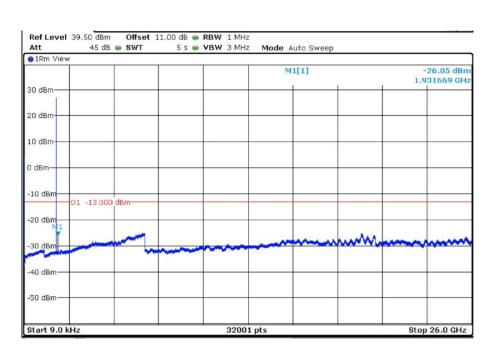



Middle Channel

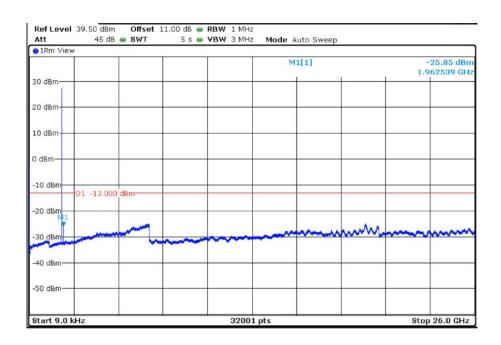


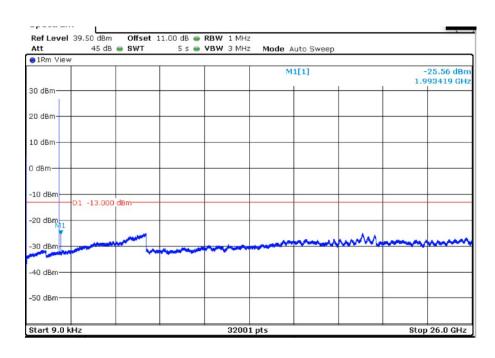




LTE QPSK MODULATION. BW = 5 MHz

Lowest Channel

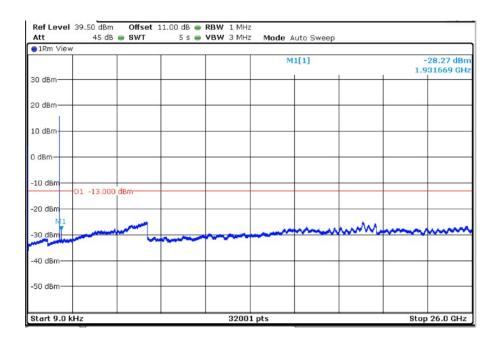


Middle Channel

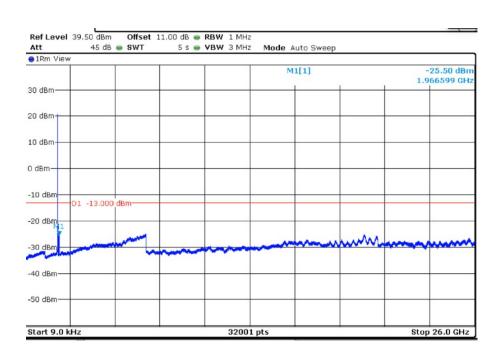




Highest Channel

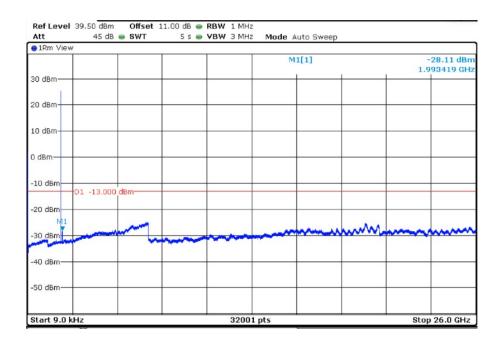


LTE QPSK MODULATION. BW = 10 MHz


Lowest Channel

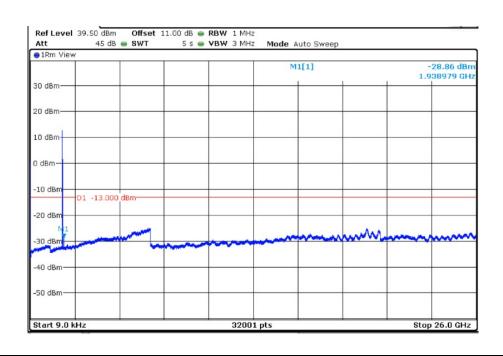



Middle Channel

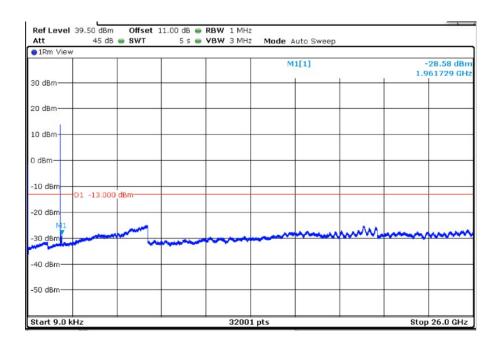


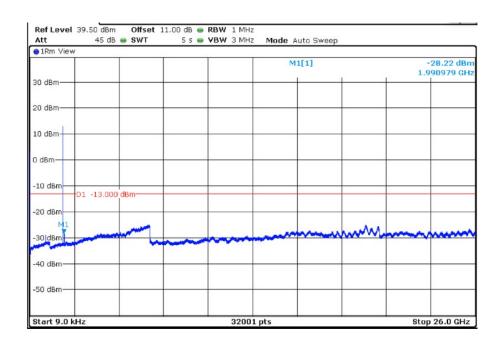




LTE QPSK MODULATION. BW = 15 MHz

Lowest Channel

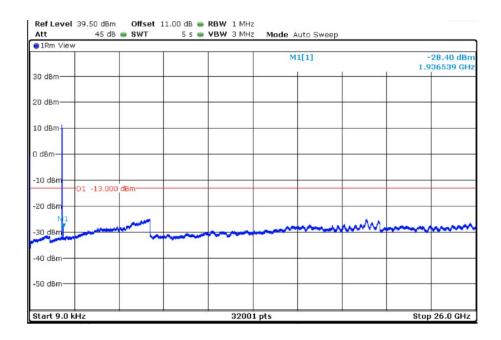


Middle Channel

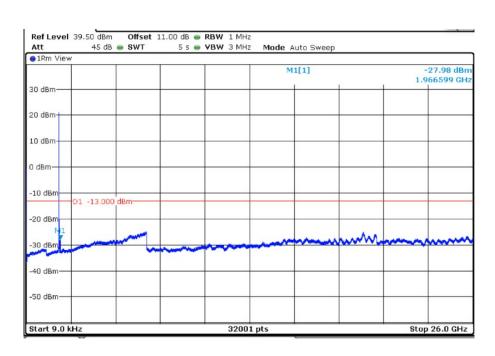




Highest Channel

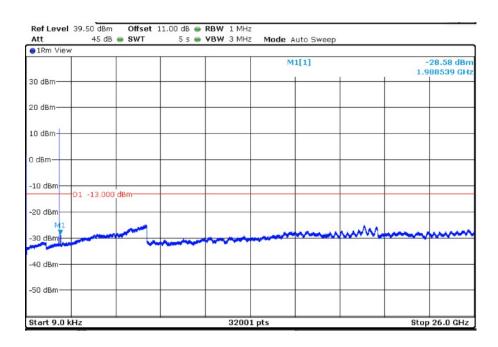


LTE QPSK MODULATION. BW = 20 MHz


Lowest Channel

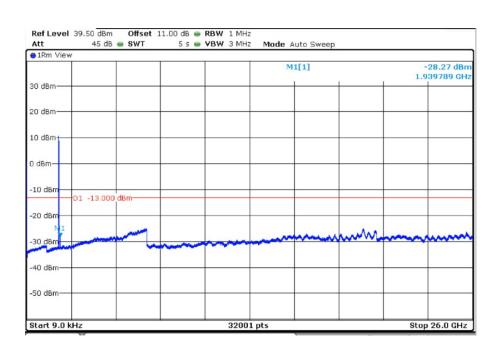



Middle Channel

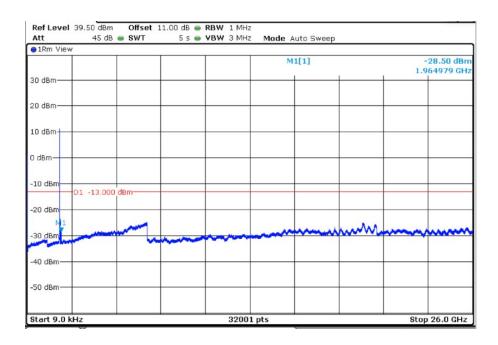

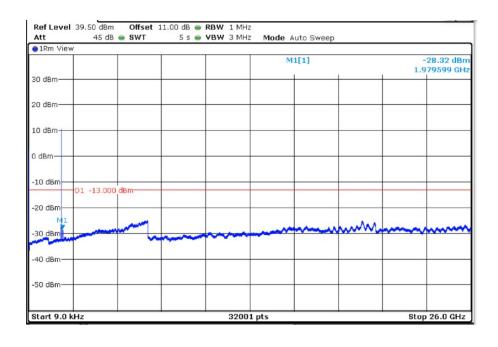



TEST A.6: SPURIOUS EMISSIONS AT ANTENNA TERMINALS AT BLOCK EDGES

1 114170	Product standard:	FCC Part 24 / IC RSS-133
LIMITS:	Test standard:	FCC § 24.238 and FCC §2.1051 / RSS 133- Clause 6.6

LIMITS

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. P in watts.

At Po transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes 43+10log (Po). and the level in dBm relative to Po becomes:

Po (dBm) - [43 + 10 log (Po in watts)] = -13 dBm


TEST SETUP

The EUT RF output connector was connected to a spectrum analyzer and to the Universal Radio Communication Tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50 ohm attenuator and a power splitter.

The reading of the spectrum analyzer is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyzer.

For LTE mode the configuration of modulation which is the worst case for conducted power was used.

As indicated in FCC part 24, in the 1 MHz bands immediately outside and adjacent to the licensee's frequency block or band, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

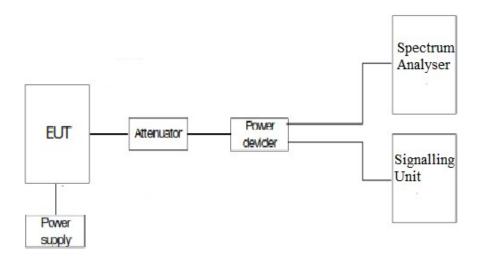





TES	TED SAMPLES:	:		S	/01		
TESTED C	TESTED CONDITIONS MODES:			TC#01			
TE	TEST RESULTS:			P.A	ISS		
LTE QPSK MODULATION	RB=1.	RB=1.	RB=1.	RB=1.	RB=1.	RB=1.	
	Offset=0.	Offset $=0$.	Offset =0.	Offset =0.	Offset =0.	Offset =0.	
	BW=1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 MHz	BW = 20 MHz	
Maximum measured level at lowest Block Edge at antenna port (dBm)	-16.88	-17.34	-18.04	-15.86	-15.93	-19.7	
F			Ī				
LTE QPSK MODULATION:	RB= All.	RB= All.	RB= All.	RB= All.	RB= All.	RB= All.	
):	Offset=0.	Offset $=0$.	Offset =0.	Offset =0.	Offset =0.	Offset =0.	
	BW=1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 MHz	BW = 20 MHz	
Maximum measured level at lowest Block Edge at antenna port (dBm)	-22.15	-20.24	-15.48	-16.26	-20.39	-21.09	
LTE QPSK MODULATION:	RB= 1.	RB= 1.	RB= 1.	RB= 1.	RB= 1.	RB= 1.	
	Offset=Max.	Offset=Max.	Offset=Max.	Offset=Max.	Offset=Max.	Offset=Max.	
	BW=1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 MHz	BW = 20 MHz	
Maximum measured level at highest Block Edge at antenna port (dBm)	-18.43	-17.77	-15.31	-15.41	-17.39	-20.45	
LTE QPSK MODULATION:	RB= All.	RB= All.	RB= All.	RB= All.	RB= All.	RB= All.	
	Offset=0.	Offset $=0$.	Offset =0.	Offset =0.	Offset =0.	Offset =0.	
	BW=1.4 MHz	BW = 3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 MHz	BW = 20 MHz	
Maximum measured level at highest Block Edge at antenna port (dBm)	-16.01	-24.39	-14.82	-18.23	-21.76	-26.61	



LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 1.4 MHz

Lowest Channel

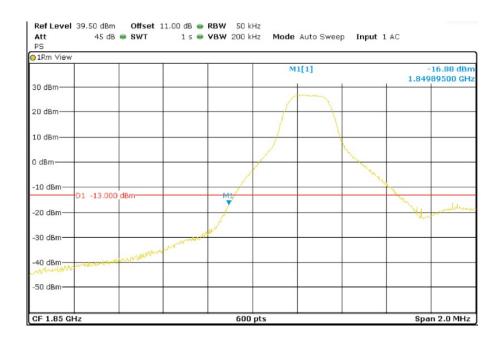

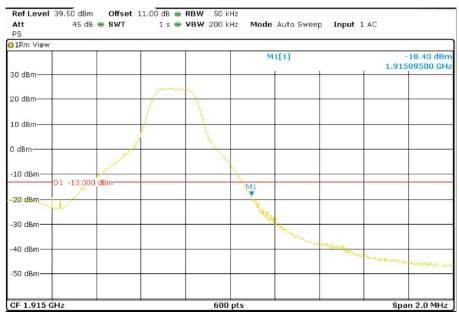



LTE QPSK MODULATION. RB = 6. Offset = 0. BW = 1.4 MHz

Lowest Channel









LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 3 MHz

Lowest Channel

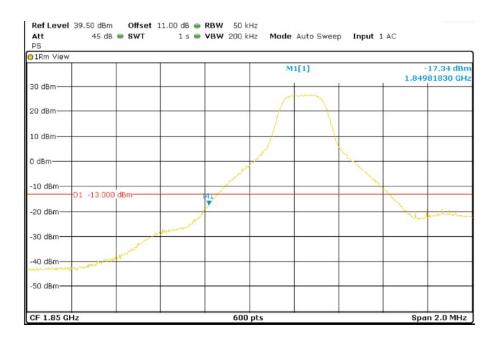

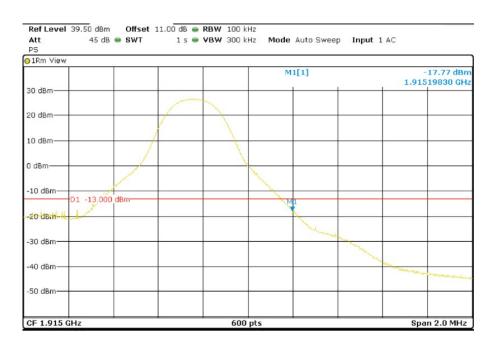



LTE QPSK MODULATION. RB = 15. Offset = 0. BW = 3 MHz

Lowest Channel








LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 5 MHz

Lowest Channel

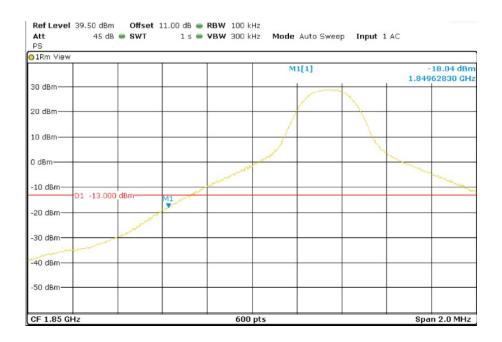






LTE QPSK MODULATION. RB = 25. Offset = 0. BW = 5 MHz

Lowest Channel

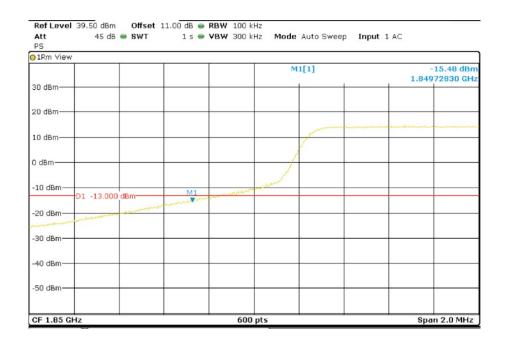






LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 10 MHz

Lowest Channel

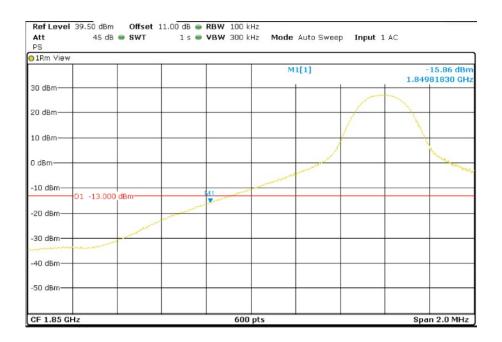







LTE QPSK MODULATION. RB = 50. Offset = 0. BW = 10 MHz

Lowest Channel

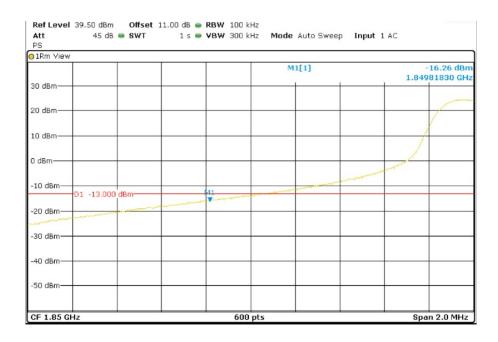

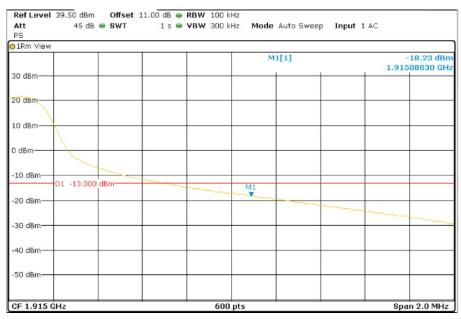




LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 15 MHz

Lowest Channel




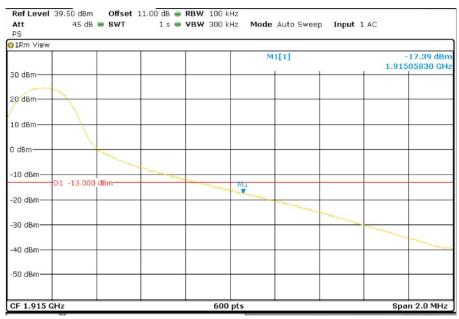



LTE QPSK MODULATION. RB = 75. Offset = 0. BW = 15 MHz

Lowest Channel

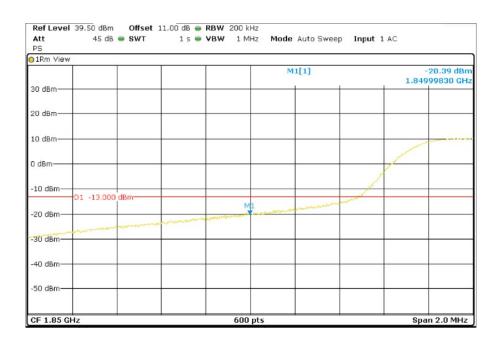






LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 20 MHz

Lowest Channel




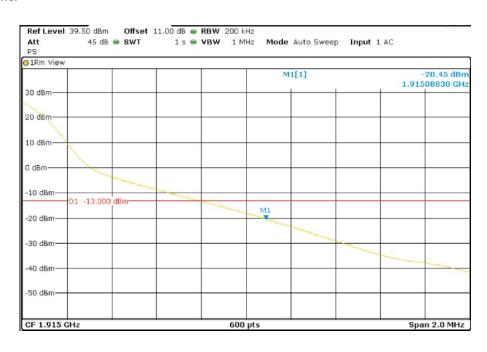




LTE QPSK MODULATION. RB = 100. Offset = 0. BW = 20 MHz

Lowest Channel

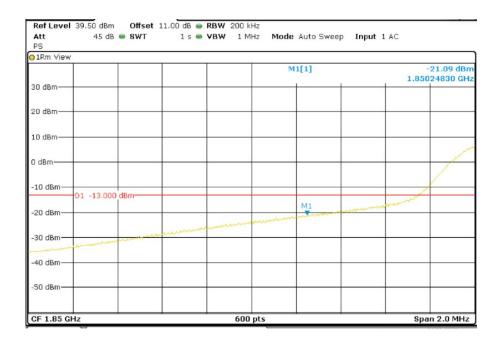

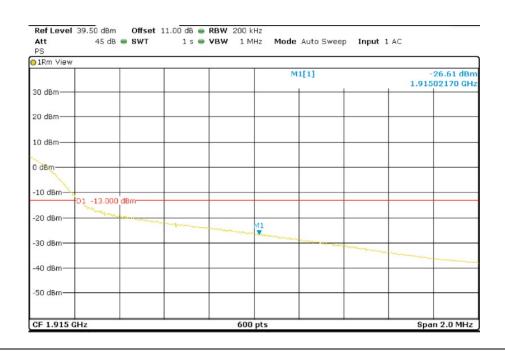



TEST A.7: RADIATED EMISSIONS

	Product standard:	FCC Part 24 / IC RSS-133
LIMITS:	Test standard:	FCC §2.1053 and §24.238 /RSS-133 Clause 6.6

LIMITS

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. P in watts.

At Po transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes 43+10log (Po). and the level in dBm relative to Po becomes:

Po (dBm) - [43 + 10 log (Po in watts)] = -13 dBm


TEST SETUP

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to at least the 10th harmonic of the highest frequency generated within the equipment.


The EUT was placed on a non-conductive stand at a 3-meter distance from the measuring antenna for measurements below 1 GHz and at 1-meter distance for measurements above 1 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum reading was recorded.

Radiated measurements < 1GHz

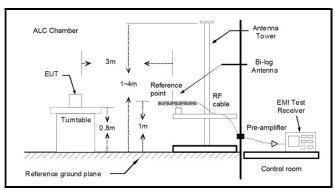

Radiated measurements > 1GHz

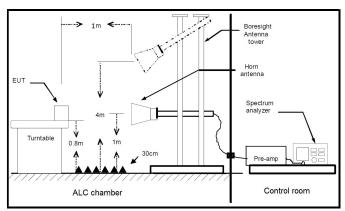



TESTED SAMPLES:	S/01	
TESTED CONDITIONS MODES:	TC#01	
TEST RESULTS:	PASS	

RESULTS

A preliminary scan determined the QPSK 1.4 MHz bandwidth as the worst case. The configuration of Resource Blocks which is the worst case for conducted power was used.

The following plots show the results for this configuration.


No spurious signal was found at less than 20dB respect to the limit in all the frequency ranges.

LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 1.4 MHz

TEST RESULTS (Cont):	Low Channel
----------------------	-------------

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
60.425667	-67.52	-57.68	
806.291000	-46.48	-40.70	

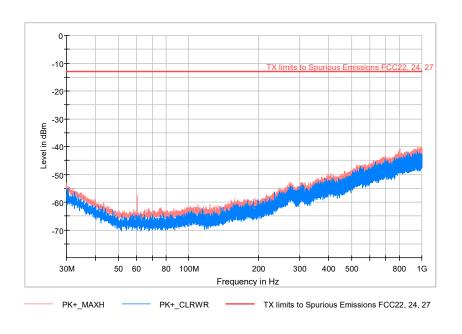



TEST RESULTS (Cont): Low Channel

FREQUENCY RANGE: 1-18 GHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
1250.000000	-37.33	-36.56	
1851.000000	17.83	31.13	Fundamental
1930.500000	-16.84	-14.96	

