



FCC Test Report

Report No.: CJPS-ESH-P24021016B-2

FCC ID: 2AL5X-YP2022015

Product: Pet Smart Feeder

Test Model: YP2022015, SRQ0171

Received Date: Mar.01, 2024

Test Date: Mar.01 to Apr.02, 2024

Issued Date: Apr.03, 2024

Applicant: Hangzhou Tianyuan Pet Products Co., Ltd

Address: No.10-1,Xingling Rd, Xingqiao Town, Linping, Yuhang, Hangzhou, 311100, China

Manufacturer: Hangzhou Tianyuan Pet Products Co., Ltd

Address: No.10-1,Xingling Rd, Xingqiao Town, Linping, Yuhang, Hangzhou, 311100, China

Issued By: BUREAU VERITAS ADT (Shanghai) Corporation

Lab Address: No. 829, Xinzhuan Road, Shanghai, P.R.China (201612)

**FCC Registration /
Designation Number:** 176467/ CN1213



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



Table of Contents

| | |
|--|----|
| Release Control Record..... | 4 |
| 1 Certificate of Conformity | 5 |
| 2 Summary of Test Results | 6 |
| 2.1 Test Instruments | 7 |
| 2.2 Measurement Uncertainty | 8 |
| 2.3 Modification Record | 8 |
| 3 General Information..... | 9 |
| 3.1 General Description of EUT..... | 9 |
| 3.2 Description of Support Unit | 9 |
| 3.3 Description of Test Modes | 10 |
| 3.3.1 Test Mode Applicability: | 11 |
| 3.3.2 Test Condition: | 12 |
| 3.4 General Description of Applied Standards | 13 |
| 4 Test Procedure and Results..... | 14 |
| 4.1 AC Power Conducted Emission..... | 14 |
| 4.1.1 Limits | 14 |
| 4.1.2 Test Procedures | 14 |
| 4.1.3 Deviation from Test Standard..... | 14 |
| 4.1.4 Test Setup..... | 15 |
| 4.1.5 EUT Operating Conditions..... | 15 |
| 4.1.6 Test Results | 16 |
| 4.2 Minimum 6dB Bandwidth..... | 22 |
| 4.2.1 Limit..... | 22 |
| 4.2.2 Test Setup..... | 22 |
| 4.2.3 Test Procedures | 22 |
| 4.2.4 Deviation of Test Standard..... | 22 |
| 4.2.5 Test Results | 23 |
| 4.3 Conducted Output Power | 25 |
| 4.3.1 Limit..... | 25 |
| 4.3.2 Test Setup..... | 25 |
| 4.3.3 Test Procedures | 25 |
| 4.3.4 Deviation of Test Standard..... | 25 |



| | | |
|-------|---|----|
| 4.3.5 | Test Results | 26 |
| 4.4 | Power Spectral Density | 28 |
| 4.4.1 | Limit | 28 |
| 4.4.2 | Test Setup | 28 |
| 4.4.3 | Test Procedures | 28 |
| 4.4.4 | Deviation of Test Standard | 28 |
| 4.4.5 | Test Results | 29 |
| 4.5 | Conducted Band Edges Measurement | 31 |
| 4.5.1 | Limit | 31 |
| 4.5.2 | Test Setup | 31 |
| 4.5.3 | Test Procedures | 31 |
| 4.5.4 | Deviation of Test Standard | 31 |
| 4.5.5 | Test Results | 32 |
| 4.6 | Conducted Spurious Emissions | 34 |
| 4.6.1 | Limit | 34 |
| 4.6.2 | Test Setup | 34 |
| 4.6.3 | Test Procedures | 34 |
| 4.6.4 | Deviation of Test Standard | 34 |
| 4.6.5 | Test Results | 35 |
| 4.7 | Emissions in restricted frequency bands | 39 |
| 4.7.1 | Test Limit | 39 |
| 4.7.2 | Test Procedure Reference | 40 |
| 4.7.3 | Test Procedures | 40 |
| 4.7.4 | Test Setup | 41 |
| 4.7.5 | Test Results | 42 |
| 4.8 | Radiated Emission Measurement | 44 |
| 4.8.1 | Limits | 44 |
| 4.8.2 | Test Procedures | 44 |
| 4.8.3 | Deviation from Test Standard | 45 |
| 4.8.4 | Test Setup | 46 |
| 4.8.5 | EUT Operating Conditions | 47 |
| 4.8.6 | Test Results | 47 |
| 5 | Pictures of Test Arrangements | 52 |



Release Control Record

| Issue No. | Description | Date Issued |
|-----------------------|------------------|--------------|
| CJPS-ESH-P24021016B-2 | Original release | Apr.03, 2024 |



1 Certificate of Conformity

Product: Pet Smart Feeder

Brand: **petstar**

Test Model: YP2022015, SRQ0171

Applicant: Hangzhou Tianyuan Pet Products Co., Ltd

Test Date: Mar.01 to Apr.02, 2024

Standards: **47 CFR FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10:2020

The above equipment has been tested by **BUREAU VERITAS ADT (Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : _____

yan.zhou

Date: _____

Apr.03, 2024

Yan ZHOU
Project Engineer

Approved by : _____

Sean YU

Date: _____

Apr.03, 2024

Sean YU

RF Supervisor

2 Summary of Test Results

The EUT has been tested according to the following specifications:

| 47 CFR FCC Part 15, Subpart C (SECTION 15.247) | | | |
|--|---|--------|--------------------------------|
| FCC Clause | Test Item | Result | Remarks |
| 15.203 | Antenna Requirement | PASS | No antenna connector is used. |
| 15.207 | AC Power Conducted Emission | PASS | Meet the requirement of limit. |
| 15.247(a)(2) | Minimum 6dB Bandwidth | PASS | Meet the requirement of limit. |
| 15.247(b) | Conducted Output Power | PASS | Meet the requirement of limit. |
| 15.247(e) | Power Spectral Density | PASS | Meet the requirement of limit. |
| 15.247(d) | Conducted Band Edges Measurement | PASS | Meet the requirement of limit. |
| 15.247(d) | Conducted Spurious Emissions | PASS | Meet the requirement of limit. |
| 15.247(d) | Emissions in restricted frequency bands | PASS | Meet the requirement of limit. |
| 15.205 / 15.209 / 15.247(d) | Radiated Emissions Measurement | PASS | Meet the requirement of limit. |



2.1 Test Instruments

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|-------------------------------|-----------------------------|-------------|------------|-----------|-----------|
| Hybrid Antenna(30MHz-1GHz) | Schwarzbeck | VULB9168 | E1A1012 | 8/17/2023 | 8/16/2025 |
| Horn Antenna(1GHz -18GHz) | Schwarzbeck | BBHA9120D | E1A1017 | 7/25/2022 | 7/24/2024 |
| Horn Antenna(18GHz-40GHz) | Com-Power | AH-840 | E1A1040 | 7/25/2022 | 7/24/2024 |
| Pre-Amplifier(0.1MHz~1300MHz) | Agilent | 8447D | E1A2001 | 2/18/2024 | 2/17/2025 |
| Pre-Amplifier(18GHz-40GHz) | EMC Instruments Corporation | EMC184045SE | E1A2008 | 8/11/2023 | 8/10/2024 |
| EMI Test Receiver | R&S | ESR7 | E1R1005 | 2/18/2024 | 2/17/2025 |
| EMI Test Spectrum | Keysight | N9030B | E1S1003 | 8/29/2023 | 8/28/2024 |
| Signal Analyzer | Keysight | N9020A | E1S1004 | 2/19/2024 | 2/18/2025 |
| LISN(single phase) | Rohde&Schwarz | ENV216 | E1L1011 | 9/1/2023 | 8/31/2024 |
| RF Control Unit | Toscend | JS0806-2 | E1C5003 | N/A | N/A |
| Test Software | Toscend | JS32-CE | 5.0.0.1 | N/A | N/A |
| Test Software | Toscend | JS32-RE | 5.0.0 | N/A | N/A |
| Test Software | Toscend | JS1120-3 | V3.2.22 | N/A | N/A |

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

| Measurement | Frequency | Expanded Uncertainty ($k=2$) (\pm) |
|------------------------------------|----------------|---|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz | 1.83 dB |
| Radiated Emissions up to 1 GHz | 30MHz ~ 1GHz | 5.36 dB |
| Radiated Emissions above 1 GHz | 1GHz ~ 6GHz | 3.47 dB |
| | 6GHz ~ 18GHz | 3.75 dB |
| | 18GHz ~ 40GHz | 3.30 dB |

2.3 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

| | |
|-----------------------|------------------------------|
| Product | Pet Smart Feeder |
| Brand | Petstar |
| Test Model | YP2022015, SRQ0171 |
| Model Difference | -- |
| Power Rating | DC 5V 1A, Powered by adaptor |
| Modulation Type | GFSK |
| Modulation Technology | Bluetooth Low Energy 4.2 |
| Operating Frequency | 2402MHz ~ 2480MHz |
| Number of Channel | 40 |
| Antenna Type | PCB Antenna |
| Antenna Connector | -- |
| Antenna Gain | 2.54 dBi |

Note:

1. For more details, please refer to the User's manual of the EUT.

3.2 Description of Support Unit

| DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. |
|-------------|--|-----------------|------------|
| Adaptor | Guangdong Keerda Electronics Co., Ltd | DZ007AHL050100U | NA |
| Adaptor | Shenzhen Flypower Technology Co., Ltd. | PS06H050K1000UD | NA |


3.3 Description of Test Modes

40 channels are provided for Bluetooth LE.

| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 0 | 2402 MHz | 20 | 2442 MHz |
| 1 | 2404 MHz | 21 | 2444 MHz |
| 2 | 2406 MHz | 22 | 2446 MHz |
| 3 | 2408 MHz | 23 | 2448 MHz |
| 4 | 2410 MHz | 24 | 2450 MHz |
| 5 | 2412 MHz | 25 | 2452 MHz |
| 6 | 2414 MHz | 26 | 2454 MHz |
| 7 | 2416 MHz | 27 | 2456 MHz |
| 8 | 2418 MHz | 28 | 2458 MHz |
| 9 | 2420 MHz | 29 | 2460 MHz |
| 10 | 2422 MHz | 30 | 2462 MHz |
| 11 | 2424 MHz | 31 | 2464 MHz |
| 12 | 2426 MHz | 32 | 2466 MHz |
| 13 | 2428 MHz | 33 | 2468 MHz |
| 14 | 2430 MHz | 34 | 2470 MHz |
| 15 | 2432 MHz | 35 | 2472 MHz |
| 16 | 2434 MHz | 36 | 2474 MHz |
| 17 | 2436 MHz | 37 | 2476 MHz |
| 18 | 2438 MHz | 38 | 2478 MHz |
| 19 | 2440 MHz | 39 | 2480 MHz |

3.4 DESCRIPTION OF SYSTEM UNDER TEST

RADIATED TEST CONFIGURATION

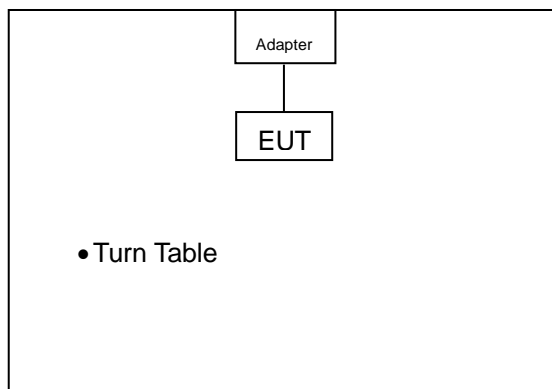

3.4.1 Test Mode Applicability:

| EUT Configure Mode | Applicable to | | | | Description |
|--------------------|---------------|---------|-----|------|-------------|
| | RE ≥ 1G | RE < 1G | PLC | APCM | |
| - | √ | √ | √ | √ | - |

Where **RE≥1G**: Radiated Emission above 1GHz **RE< 1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE |
|--------------------|------|-------------------|----------------|-----------------|
| - | BLE | 0 to 39 | 0, 19, 39 | GFSK |

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE |
|--------------------|------|-------------------|----------------|-----------------|
| - | BLE | 0 to 39 | 0 | GFSK |

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE |
|--------------------|------|-------------------|----------------|-----------------|
| - | BLE | 0 to 39 | 0 | GFSK |

Antenna Port Conducted Measurement

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TYPE |
|--------------------|------|-------------------|----------------|-----------------|
| - | BLE | 0 to 39 | 0, 19, 39 | GFSK |

3.4.2 Test Condition:

| Applicable to | Normal Environmental Conditions | Normal Input Power |
|---------------|---------------------------------|-----------------------------|
| RE ≥ 1G | 25deg. C, 60%RH | DC 5V1A, Powered by adaptor |
| RE < 1G | 25deg. C, 60%RH | DC 5V1A, Powered by adaptor |
| PLC | 25deg. C, 60%RH | DC 5V1A, Powered by adaptor |
| APCM | 25deg. C, 60%RH | DC 5V1A, Powered by adaptor |



3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10:2020

All relaxed test items have been performed and recorded as per the above standard.

4 Test Procedure and Results

4.1 AC Power Conducted Emission

4.1.1 Limits

| Frequency (MHz) | Conducted Limit (dBuV) | |
|-----------------|------------------------|---------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.1.2 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.1.3 Deviation from Test Standard

No deviation.

4.1.4 Test Setup

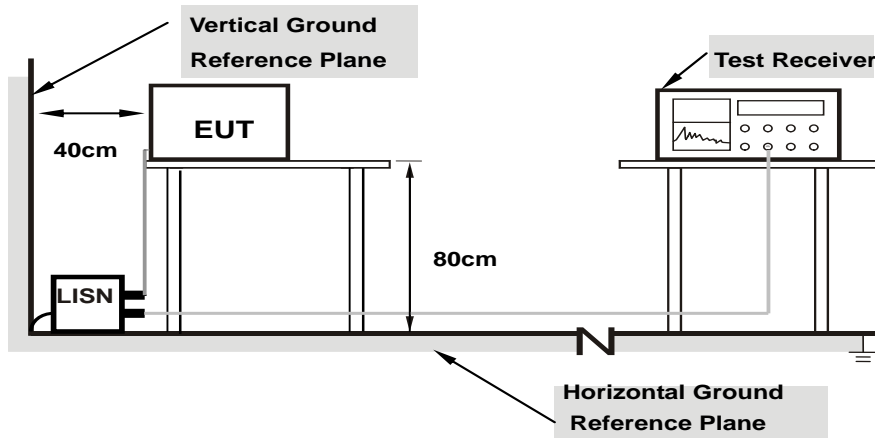

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.5 EUT Operating Conditions


Same as 4.1.6.

4.1.6 Test Results

Adaptor Model: DZ007AHL050100U

Phase: L Voltage: 120V 60Hz

Test Graph

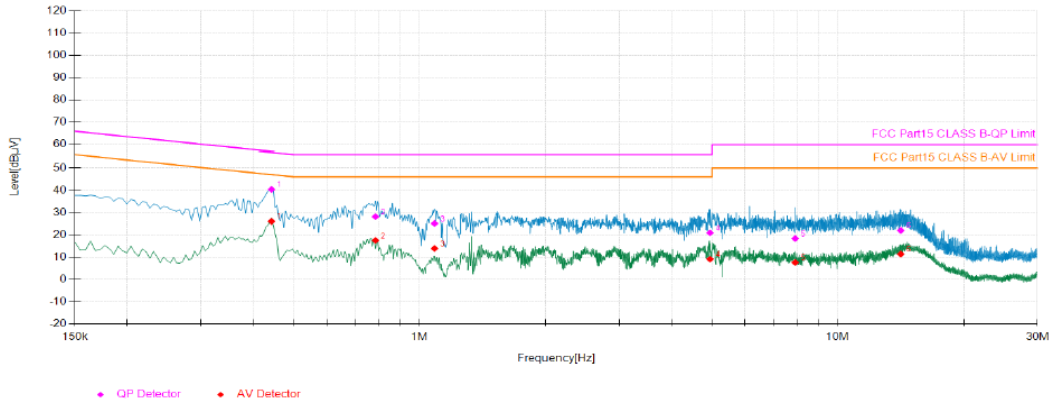

Final Data List


| NO. | Freq. [MHz] | Factor [dB] | QP Reading [dBµV] | QP Value [dBµV] | QP Limit [dBµV] | QP Margin [dB] | AV Reading [dBµV] | AV Value [dBµV] | AV Limit [dBµV] | AV Margin [dB] |
|-----|-------------|-------------|-------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|
| 1 | 0.44 | 9.59 | 30.79 | 40.38 | 57.01 | 16.63 | 16.42 | 26.01 | 47.01 | 21.00 |
| 2 | 0.78 | 9.41 | 18.71 | 28.12 | 56.00 | 27.88 | 8.04 | 17.45 | 46.00 | 28.55 |
| 3 | 1.09 | 9.44 | 15.63 | 25.07 | 56.00 | 30.93 | 4.41 | 13.85 | 46.00 | 32.15 |
| 4 | 4.95 | 9.75 | 11.09 | 20.84 | 56.00 | 35.16 | -0.66 | 9.09 | 46.00 | 36.91 |
| 5 | 7.90 | 9.85 | 8.48 | 18.33 | 60.00 | 41.67 | -2.26 | 7.59 | 50.00 | 42.41 |
| 6 | 14.13 | 10.13 | 11.81 | 21.94 | 60.00 | 38.06 | 1.24 | 11.37 | 50.00 | 38.63 |

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Limit value - Emission level
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase: N Voltage: 120V 60Hz

Test Graph

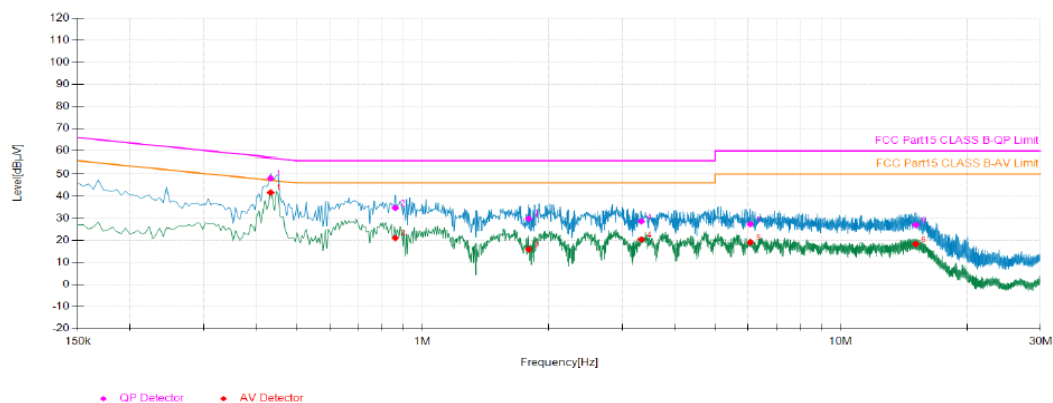

Final Data List


| NO. | Freq. [MHz] | Factor [dB] | QP Reading [dBµV] | QP Value [dBµV] | QP Limit [dBµV] | QP Margin [dB] | AV Reading [dBµV] | AV Value [dBµV] | AV Limit [dBµV] | AV Margin [dB] |
|-----|-------------|-------------|-------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|
| 1 | 0.43 | 9.58 | 38.53 | 48.11 | 57.19 | 9.08 | 32.02 | 41.60 | 47.19 | 5.59 |
| 2 | 0.86 | 9.43 | 25.25 | 34.68 | 56.00 | 21.32 | 11.56 | 20.99 | 46.00 | 25.01 |
| 3 | 1.79 | 9.56 | 20.26 | 29.82 | 56.00 | 26.18 | 6.33 | 15.89 | 46.00 | 30.11 |
| 4 | 3.34 | 9.72 | 18.81 | 28.53 | 56.00 | 27.47 | 10.63 | 20.35 | 46.00 | 25.65 |
| 5 | 6.08 | 9.76 | 17.49 | 27.25 | 60.00 | 32.75 | 9.28 | 19.04 | 50.00 | 30.96 |
| 6 | 15.11 | 10.17 | 16.77 | 26.94 | 60.00 | 33.06 | 8.12 | 18.29 | 50.00 | 31.71 |

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Limit value - Emission level
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase: L Voltage: 220V 50Hz

Test Graph

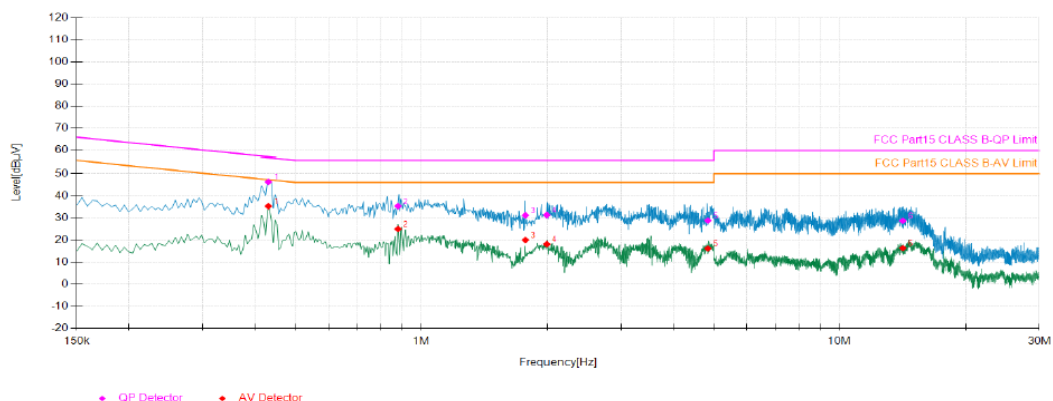


| Final Data List | | | | | | | | | | |
|-----------------|-------------|-------------|-------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|
| NO. | Freq. [MHz] | Factor [dB] | QP Reading [dBµV] | QP Value [dBµV] | QP Limit [dBµV] | QP Margin [dB] | AV Reading [dBµV] | AV Value [dBµV] | AV Limit [dBµV] | AV Margin [dB] |
| 1 | 0.43 | 9.58 | 36.67 | 46.25 | 57.24 | 10.99 | 25.68 | 35.26 | 47.24 | 11.98 |
| 2 | 0.88 | 9.40 | 25.90 | 35.30 | 56.00 | 20.70 | 15.54 | 24.94 | 46.00 | 21.06 |
| 3 | 1.77 | 9.57 | 21.57 | 31.14 | 56.00 | 24.86 | 10.39 | 19.96 | 46.00 | 26.04 |
| 4 | 1.99 | 9.62 | 21.68 | 31.30 | 56.00 | 24.70 | 8.46 | 18.08 | 46.00 | 27.92 |
| 5 | 4.84 | 9.72 | 19.08 | 28.80 | 56.00 | 27.20 | 6.41 | 16.13 | 46.00 | 29.87 |
| 6 | 14.15 | 10.01 | 18.68 | 28.69 | 60.00 | 31.31 | 6.28 | 16.29 | 50.00 | 33.71 |

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Limit value - Emission level
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase: N Voltage: 220V 50Hz

Test Graph

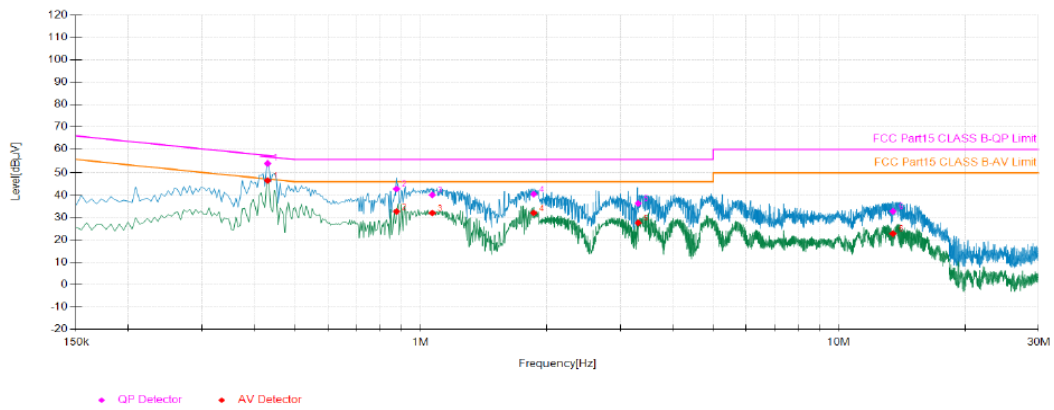

| Final Data List | | | | | | | | | | |
|-----------------|-------------|-------------|-------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|
| NO. | Freq. [MHz] | Factor [dB] | QP Reading [dBµV] | QP Value [dBµV] | QP Limit [dBµV] | QP Margin [dB] | AV Reading [dBµV] | AV Value [dBµV] | AV Limit [dBµV] | AV Margin [dB] |
| 1 | 0.43 | 9.57 | 44.66 | 54.23 | 57.24 | 3.01 | 37.00 | 46.57 | 47.24 | 0.67 |
| 2 | 0.88 | 9.42 | 33.36 | 42.78 | 56.00 | 13.22 | 23.28 | 32.70 | 46.00 | 13.30 |
| 3 | 1.07 | 9.41 | 30.70 | 40.11 | 56.00 | 15.89 | 22.62 | 32.03 | 46.00 | 13.97 |
| 4 | 1.86 | 9.56 | 30.88 | 40.44 | 56.00 | 15.56 | 22.52 | 32.08 | 46.00 | 13.92 |
| 5 | 3.31 | 9.70 | 26.60 | 36.30 | 56.00 | 19.70 | 17.89 | 27.59 | 46.00 | 18.41 |
| 6 | 13.46 | 10.07 | 22.73 | 32.80 | 60.00 | 27.20 | 12.69 | 22.76 | 50.00 | 27.24 |


REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Limit value - Emission level
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Adaptor Model: PS06H050K1000UD

Phase: L Voltage: 120V 60Hz

Test Graph

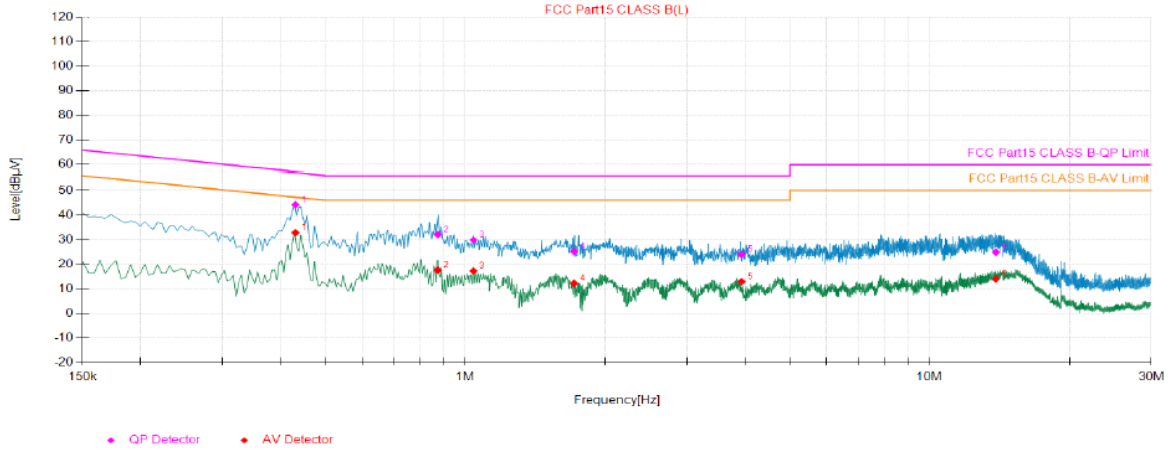


| Final Data List | | | | | | | | | | |
|-----------------|-------------|-------------|-------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|
| NO. | Freq. [MHz] | Factor [dB] | QP Reading [dBµV] | QP Value [dBµV] | QP Limit [dBµV] | QP Margin [dB] | AV Reading [dBµV] | AV Value [dBµV] | AV Limit [dBµV] | AV Margin [dB] |
| 1 | 0.43 | 9.58 | 34.56 | 44.14 | 57.23 | 13.09 | 23.24 | 32.82 | 47.23 | 14.41 |
| 2 | 0.87 | 9.40 | 22.65 | 32.05 | 56.00 | 23.95 | 8.20 | 17.60 | 46.00 | 28.40 |
| 3 | 1.04 | 9.41 | 20.41 | 29.82 | 56.00 | 26.18 | 7.85 | 17.26 | 46.00 | 28.74 |
| 4 | 1.72 | 9.56 | 15.60 | 25.16 | 56.00 | 30.84 | 2.61 | 12.17 | 46.00 | 33.83 |
| 5 | 3.93 | 9.70 | 14.31 | 24.01 | 56.00 | 31.99 | 3.15 | 12.85 | 46.00 | 33.15 |
| 6 | 13.88 | 10.02 | 14.83 | 24.85 | 60.00 | 35.15 | 3.97 | 13.99 | 50.00 | 36.01 |

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Limit value - Emission level
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase: N Voltage: 120V 60Hz

Test Graph

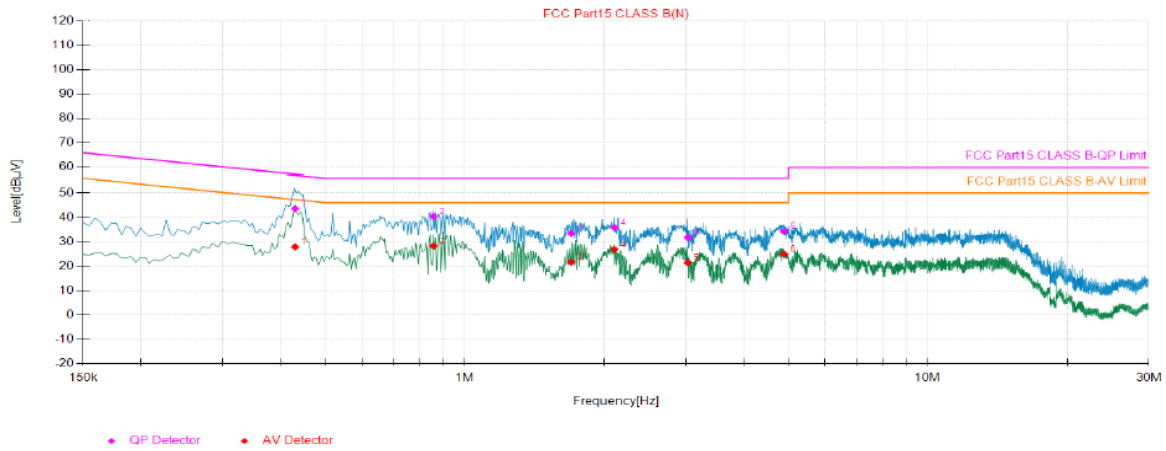

Final Data List

| NO. | Freq. [MHz] | Factor [dB] | QP Reading [dBµV] | QP Value [dBµV] | QP Limit [dBµV] | QP Margin [dB] | AV Reading [dBµV] | AV Value [dBµV] | AV Limit [dBµV] | AV Margin [dB] |
|-----|-------------|-------------|-------------------|-----------------|-----------------|----------------|-------------------|-----------------|-----------------|----------------|
| 1 | 0.43 | 9.57 | 33.99 | 43.56 | 57.24 | 13.68 | 18.27 | 27.84 | 47.24 | 19.40 |
| 2 | 0.86 | 9.42 | 30.92 | 40.34 | 56.00 | 15.66 | 18.77 | 28.19 | 46.00 | 17.81 |
| 3 | 1.70 | 9.53 | 23.84 | 33.37 | 56.00 | 22.63 | 12.16 | 21.69 | 46.00 | 24.31 |
| 4 | 2.11 | 9.59 | 26.27 | 35.86 | 56.00 | 20.14 | 17.25 | 26.84 | 46.00 | 19.16 |
| 5 | 3.03 | 9.70 | 22.03 | 31.73 | 56.00 | 24.27 | 11.64 | 21.34 | 46.00 | 24.66 |
| 6 | 4.89 | 9.71 | 24.54 | 34.25 | 56.00 | 21.75 | 15.21 | 24.92 | 46.00 | 21.08 |

REMARKS:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Limit value - Emission level
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

4.2 Minimum 6dB Bandwidth

4.2.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz

4.2.2 Test Setup

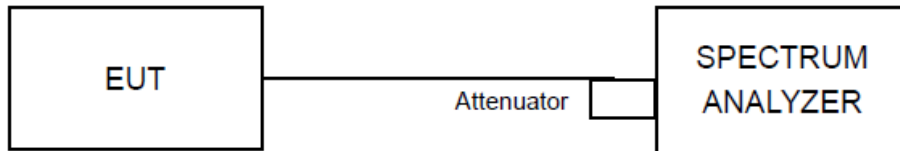

4.2.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” for compliance to FCC 47CFR 15.247 requirements (clause 8.2).

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW \geq 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function.

4.2.4 Deviation of Test Standard

No deviation.

4.2.5 Test Results


DTS Bandwidth

| TestMode | Antenna | Freq(MHz) | DTS BW [MHz] | Limit[MHz] | Verdict |
|----------|---------|-----------|--------------|------------|---------|
| BLE_1M | Ant1 | 2402 | 0.644 | 0.5 | PASS |
| | | 2440 | 0.652 | 0.5 | PASS |
| | | 2480 | 0.652 | 0.5 | PASS |



BUREAU
VERITAS

BLE_1M_Ant1_2402

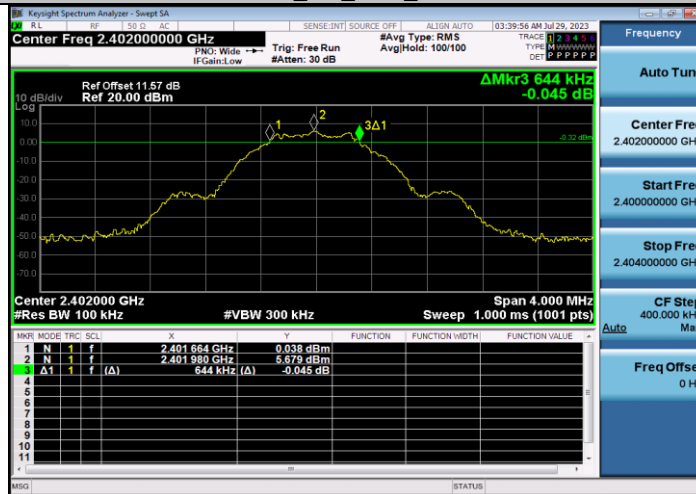

BLE_1M_Ant1_2440



BLE_1M_Ant1_2480




4.3 Conducted Output Power

4.3.1 Limit

For systems using digital modulation in the 2400 – 2483.5 MHz bands: 1 Watt (30 dBm)

4.3.2 Test Setup

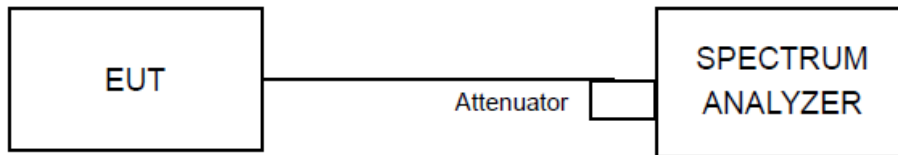

4.3.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” for compliance to FCC 47CFR 15.247 requirements (clause 9.2.2.4).

- a) Set RBW \geq DTS bandwidth
- b) Set VBW \geq 3 RBW.
- c) Set Span \geq 3 RBW.
- d) Sweep time = auto couple.
- e) Detector = peak
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize
- h) Use peak marker function to determine the peak amplitude level.

4.3.4 Deviation of Test Standard

No deviation.



BUREAU
VERITAS


4.3.5 Test Results

| TestMode | Antenna | Freq(MHz) | Conducted Peak Power[dBm] | Conducted Limit[dBm] | EIRP[dBm] | EIRP Limit[dBm] | Verdict |
|----------|---------|-----------|---------------------------|----------------------|-----------|-----------------|---------|
| BLE_1M | Ant1 | 2402 | 5.90 | ≤30 | 8.44 | ≤36 | PASS |
| | | 2440 | 6.19 | ≤30 | 8.73 | ≤36 | PASS |
| | | 2480 | 5.78 | ≤30 | 8.32 | ≤36 | PASS |




BUREAU
VERITAS


BLE_1M_Ant1_2402

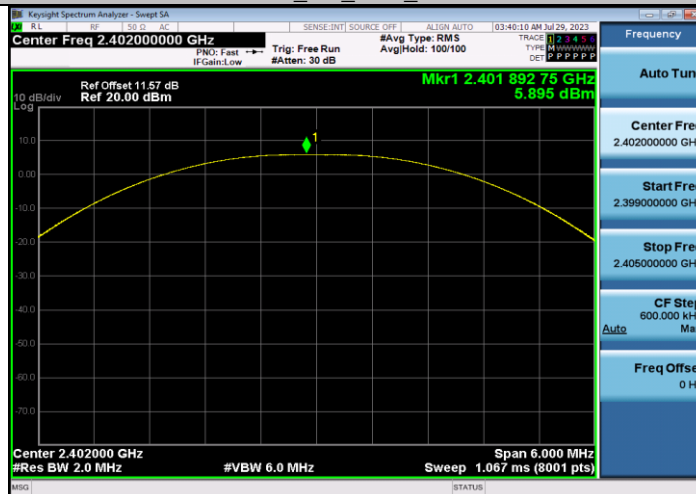

BLE_1M_Ant1_2440

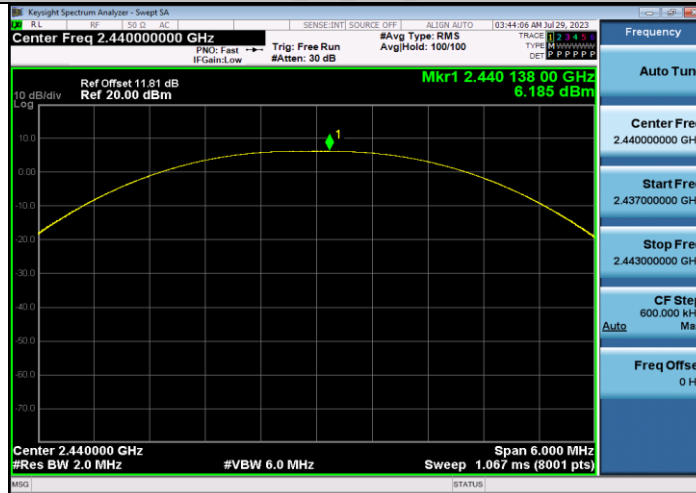

BLE_1M_Ant1_2480

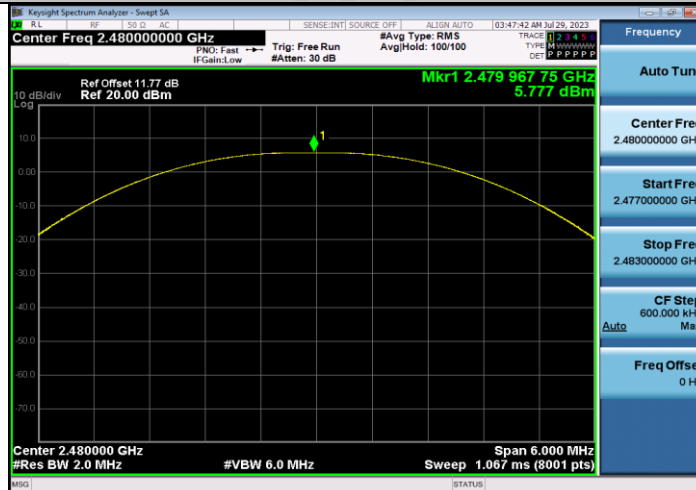


4.4 Power Spectral Density

4.4.1 Limit

The Maximum of Power Spectral Density Measurement is 8 dBm.

4.4.2 Test Setup

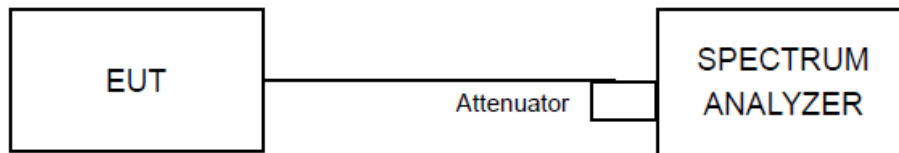

4.4.3 Test Procedures

The power output per FCC § 15.247(e) was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 10.5) for compliance to FCC 47CFR 15.247 requirements.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.4.4 Deviation of Test Standard

No deviation.




BUREAU
VERITAS


4.4.5 Test Results

| TestMode | Antenna | Freq(MHz) | Result[dBm/3kHz] | Limit[dBm/3kHz] | Verdict |
|----------|---------|-----------|------------------|-----------------|---------|
| BLE_1M | Ant1 | 2402 | -9.36 | ≤8.00 | PASS |
| | | 2440 | -10.43 | ≤8.00 | PASS |
| | | 2480 | -10.12 | ≤8.00 | PASS |


BLE_1M_Ant1_2402

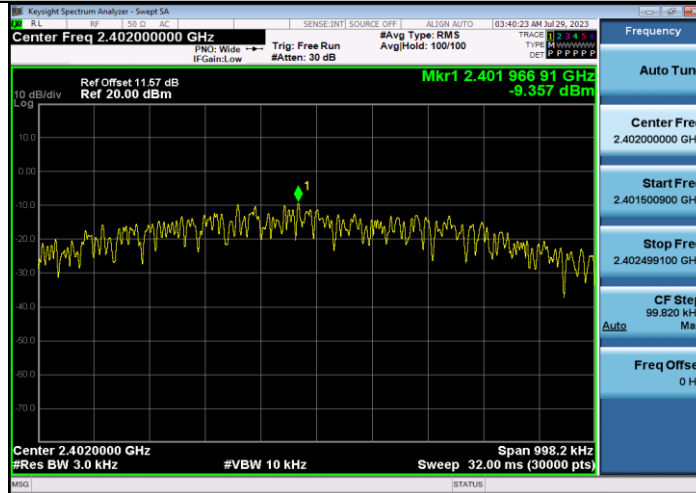

BLE_1M_Ant1_2440

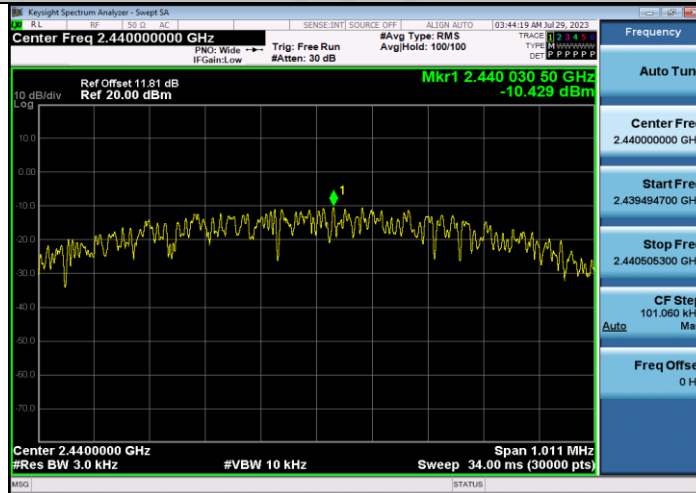

BLE_1M_Ant1_2480

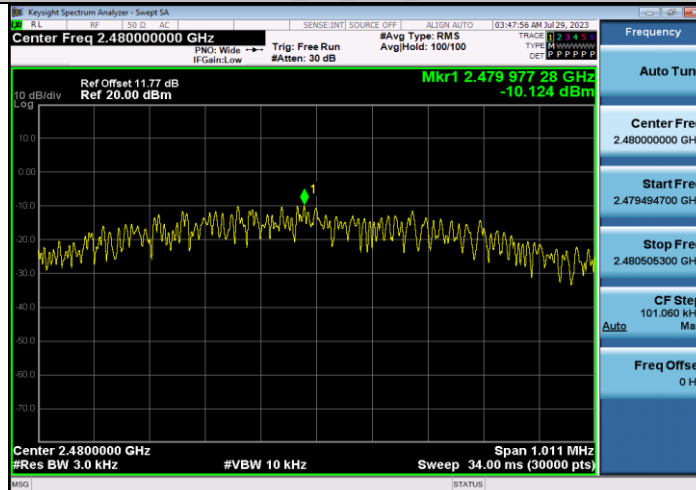


4.5 Conducted Band Edges Measurement

4.5.1 Limit

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.5.2 Test Setup

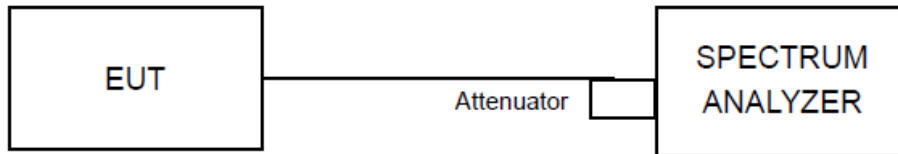

4.5.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.5.4 Deviation of Test Standard

No deviation.




BUREAU
VERITAS


4.5.5 Test Results

| TestMode | Antenna | ChName | Freq(MHz) | RefLevel[dBm] | Result[dBm] | Limit[dBm] | Verdict |
|----------|---------|--------|-----------|---------------|-------------|------------|---------|
| BLE_1M | Ant1 | Low | 2402 | 5.73 | -48.39 | ≤-14.27 | PASS |
| | | High | 2480 | 5.53 | -48.17 | ≤-14.47 | PASS |

BLE_1M_Ant1_Low_2402

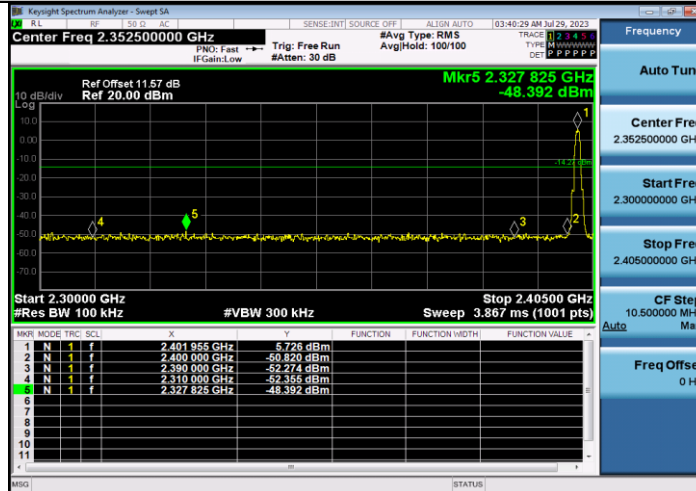

BLE_1M_Ant1_High_2480

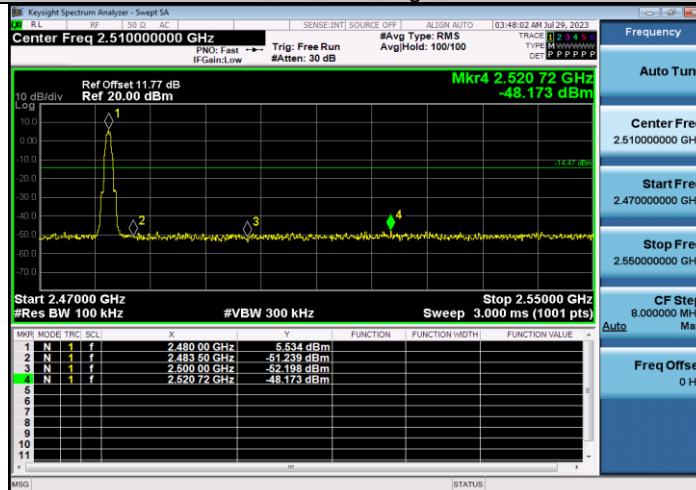


4.6 Conducted Spurious Emissions

4.6.1 Limit

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.6.2 Test Setup

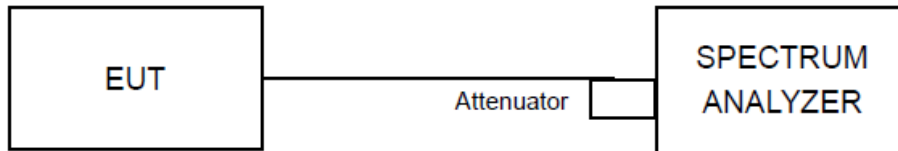

4.6.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.4 Deviation of Test Standard

No deviation.


4.6.5 Test Results

| TestMode | Antenna | Freq(MHz) | FreqRange [MHz] | RefLevel [dBm] | Result[dBm] | Limit[dBm] | Verdict |
|----------|---------|-----------|-----------------|----------------|-------------|------------|---------|
| BLE_1M | Ant1 | 2402 | Reference | 3.86 | 3.86 | --- | PASS |
| | | | 30~1000 | 3.86 | -59.93 | ≤-16.14 | PASS |
| | | | 1000~26500 | 3.86 | -43.53 | ≤-16.14 | PASS |
| | | 2440 | Reference | 3.77 | 3.77 | --- | PASS |
| | | | 30~1000 | 3.77 | -60.25 | ≤-16.23 | PASS |
| | | | 1000~26500 | 3.77 | -43.47 | ≤-16.23 | PASS |
| | | 2480 | Reference | 4.76 | 4.76 | --- | PASS |
| | | | 30~1000 | 4.76 | -60.58 | ≤-15.24 | PASS |
| | | | 1000~26500 | 4.76 | -44.09 | ≤-15.24 | PASS |


BLE_1M_Ant1_2402_0~Reference



BLE_1M_Ant1_2402_30~1000

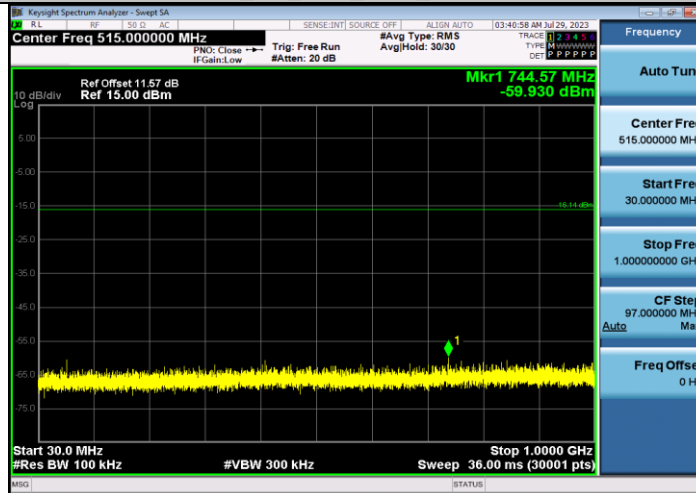


BLE_1M_Ant1_2402_1000~26500

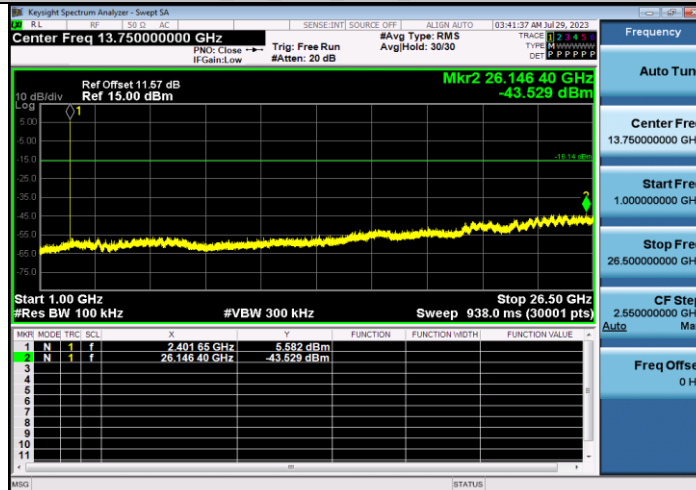


BLE_1M_Ant1_2440_0~Reference



BLE_1M_Ant1_2440_30~1000

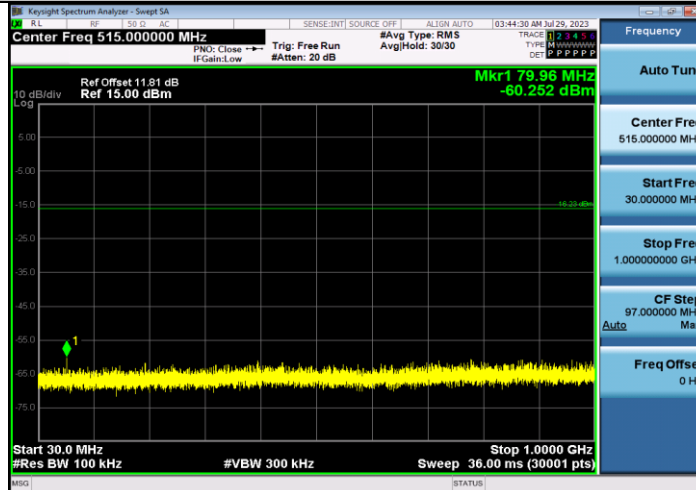


BLE_1M_Ant1_2440_1000~26500

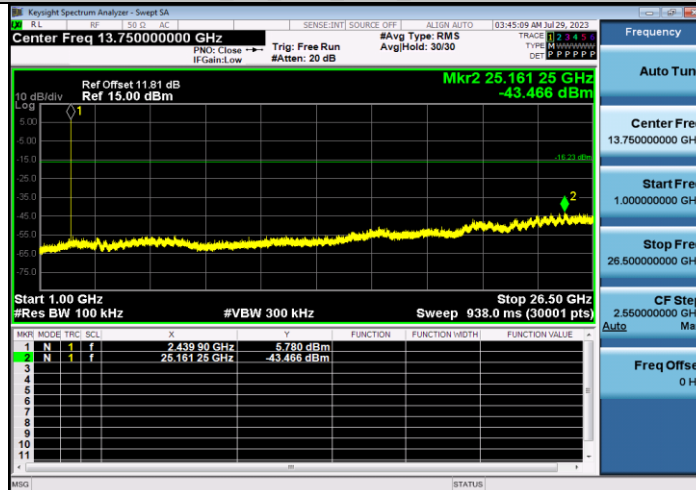


BLE_1M_Ant1_2480_0~Reference



BLE_1M_Ant1_2480_30~1000

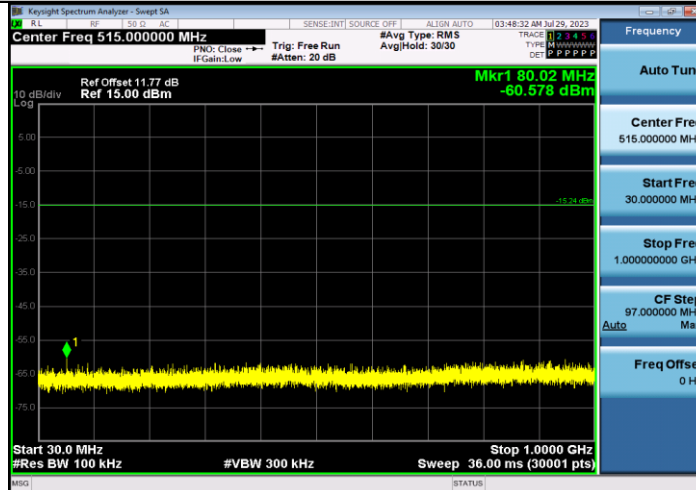

BLE_1M_Ant1_2480_1000~26500

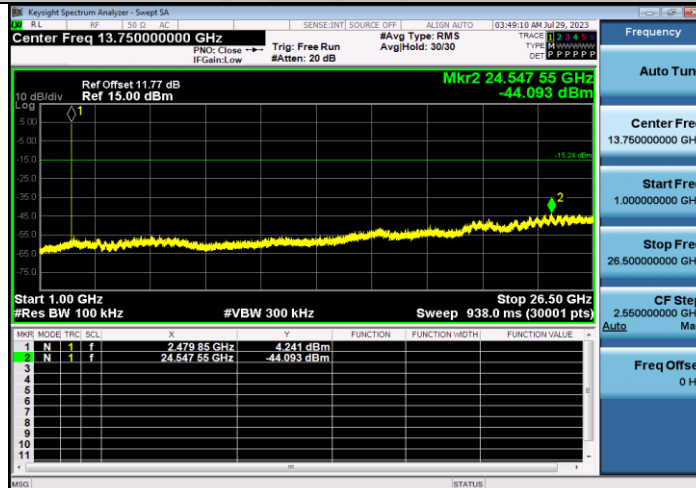



4.7 Emissions in restricted frequency bands

4.7.1 Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency (MHz) | Frequency (MHz) | Frequency (MHz) | Frequency (GHz) |
|---------------------|---------------------|--------------------|--------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| 1 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (2) |
| 13.36 - 13.41 | -- | -- | -- |



All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 | | |
|---|--------------------------|-------------------------------|
| Frequency [MHz] | Field Strength [uV/m] | Measured Distance [Meters] |
| 0.009 - 0.490 | 2400/F (kHz) | 300 |
| 0.490 - 1.705 | 24000/F (kHz) | 30 |
| 1.705 - 30 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

4.7.2 Test Procedure Reference

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

4.7.3 Test Procedures

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
3. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize


4.7.4 Test Setup

For Radiated emission above 1GHz

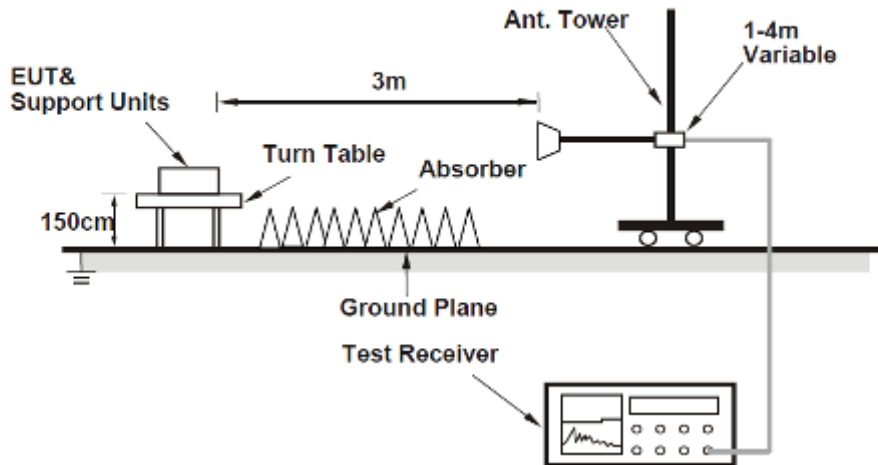

4.7.5 Test Results


BLE_2402/ Horizontal

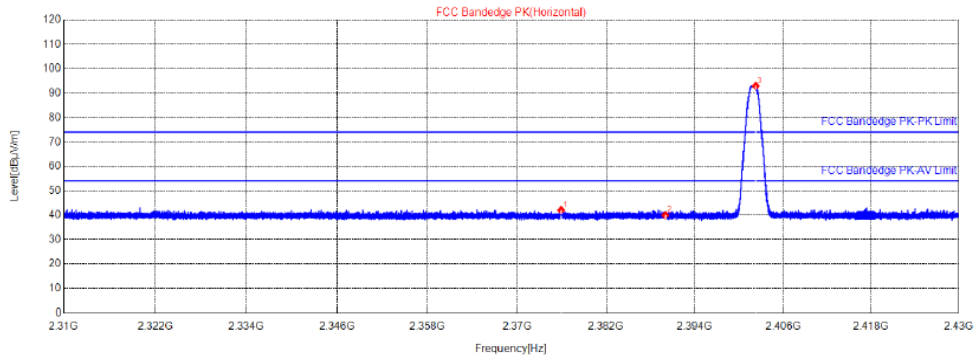

Suspected List

| NO. | Freq. [MHz] | Reading [dBµV/m] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity | Detector |
|-----|-------------|------------------|----------------|----------------|-------------|-------------|-----------|------------|----------|
| 1 | 2375.946 | 45.24 | 41.98 | 74.00 | 32.02 | 155 | 2 | Horizontal | PK |
| 2 | 2390.004 | 43.20 | 39.92 | 74.00 | 34.08 | 155 | 293 | Horizontal | PK |
| 3 | 2402.25 | 96.25 | 92.96 | 74.00 | -18.96 | 155 | 269 | Horizontal | PK |


BLE_2402/ Vertical

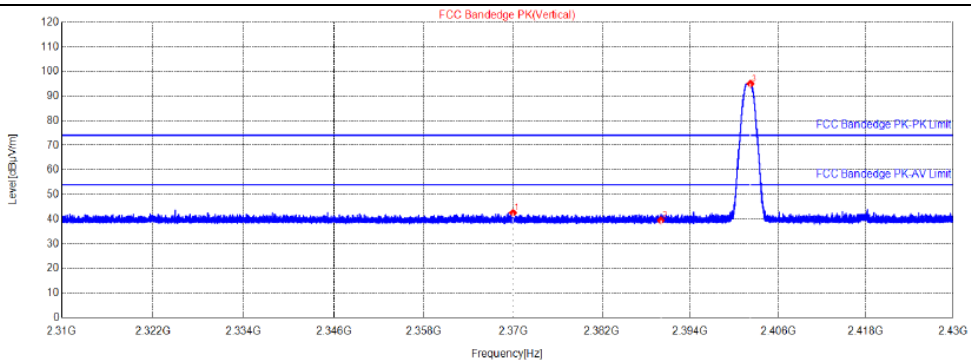

Suspected List

| NO. | Freq. [MHz] | Reading [dBµV/m] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity | Detector |
|-----|-------------|------------------|----------------|----------------|-------------|-------------|-----------|----------|----------|
| 1 | 2370.006 | 45.79 | 42.55 | 74.00 | 31.45 | 155 | 249 | Vertical | PK |
| 2 | 2390.004 | 42.76 | 39.48 | 74.00 | 34.52 | 155 | 342 | Vertical | PK |
| 3 | 2402.208 | 98.26 | 94.97 | 74.00 | -20.97 | 155 | 241 | Vertical | PK |


BLE_2480/ Horizontal

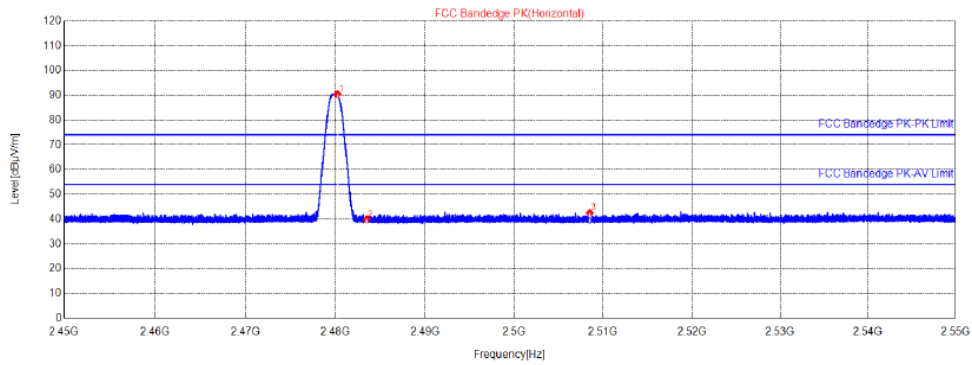

Suspected List

| NO. | Freq. [MHz] | Reading [dBµV/m] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity | Detector |
|-----|-------------|------------------|----------------|----------------|-------------|-------------|-----------|------------|----------|
| 1 | 2480.245 | 93.75 | 90.44 | 74.00 | -16.44 | 155 | 128 | Horizontal | PK |
| 2 | 2483.5 | 43.13 | 39.82 | 74.00 | 34.18 | 155 | 321 | Horizontal | PK |
| 3 | 2508.51 | 45.70 | 42.42 | 74.00 | 31.58 | 155 | 191 | Horizontal | PK |

BLE_2480/ Vertical

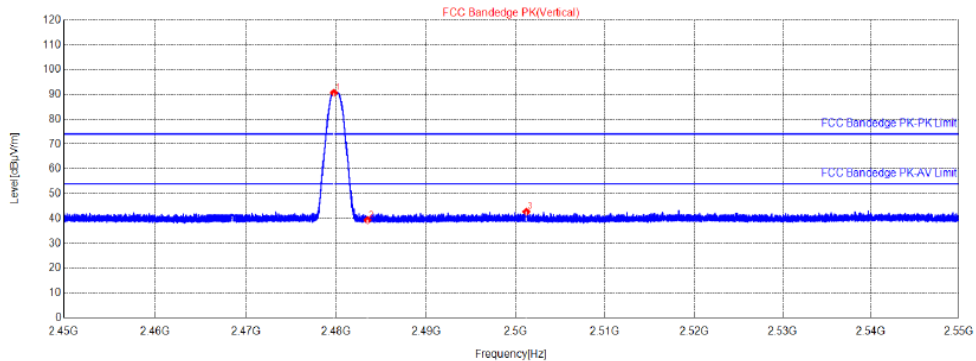

Suspected List

| NO. | Freq. [MHz] | Reading [dBµV/m] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity | Detector |
|-----|-------------|------------------|----------------|----------------|-------------|-------------|-----------|----------|----------|
| 1 | 2479.77 | 93.97 | 90.66 | 74.00 | -16.66 | 155 | 244 | Vertical | PK |
| 2 | 2483.5 | 42.64 | 39.33 | 74.00 | 34.67 | 155 | 57 | Vertical | PK |
| 3 | 2501.195 | 45.99 | 42.72 | 74.00 | 31.28 | 155 | 34 | Vertical | PK |

4.8 Radiated Emission Measurement

4.8.1 Limits

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009 ~ 0.490 | 2400/F (kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F (kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.8.2 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degree to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotate table was turned from 0 degree to 360 degree to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for RMS Average (Duty cycle < 98 %) for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle \geq 98 %) for Average detection (AV) at frequency above 1 GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup


For Radiated emission below 30MHz

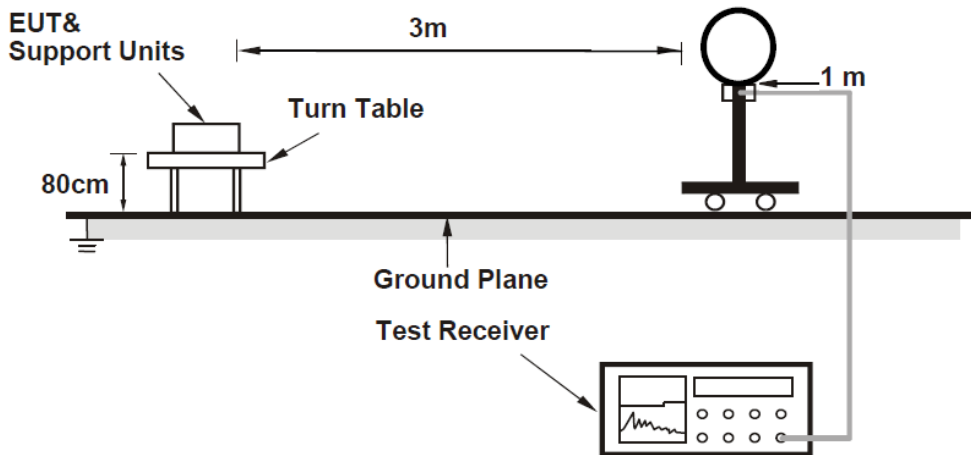

For Radiated emission 30MHz to 1GHz

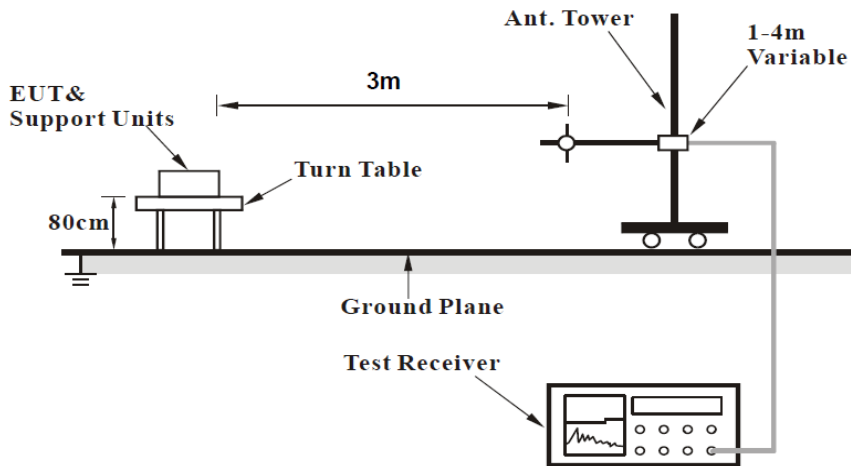

For Radiated emission above 1GHz

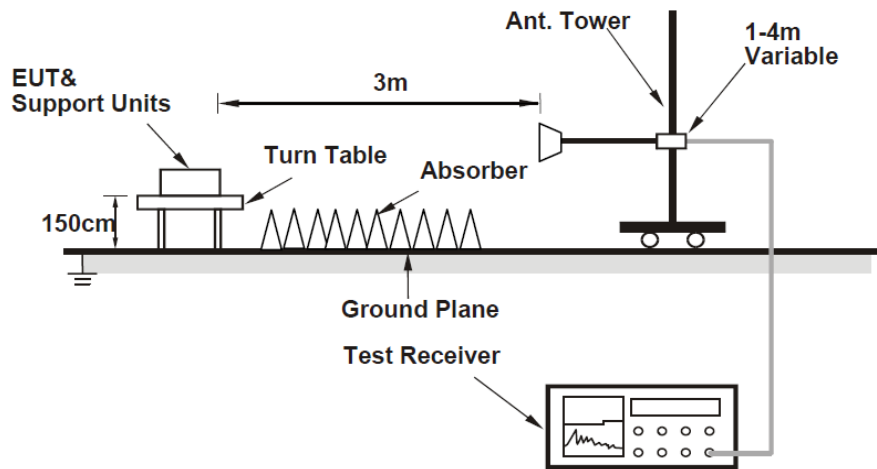

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.8.6 Test Results

Radiated Emissions Range 9kHz~30MHz


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Radiated Emissions Range 30MHz~1GHz

Below is the worst test data

| | | | |
|-----------------|--------------|-------------------|-----------------|
| Channel | BLE_2402 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 30MHz ~ 1GHz | Antenna Polarity | Horizontal |

Test Plot:

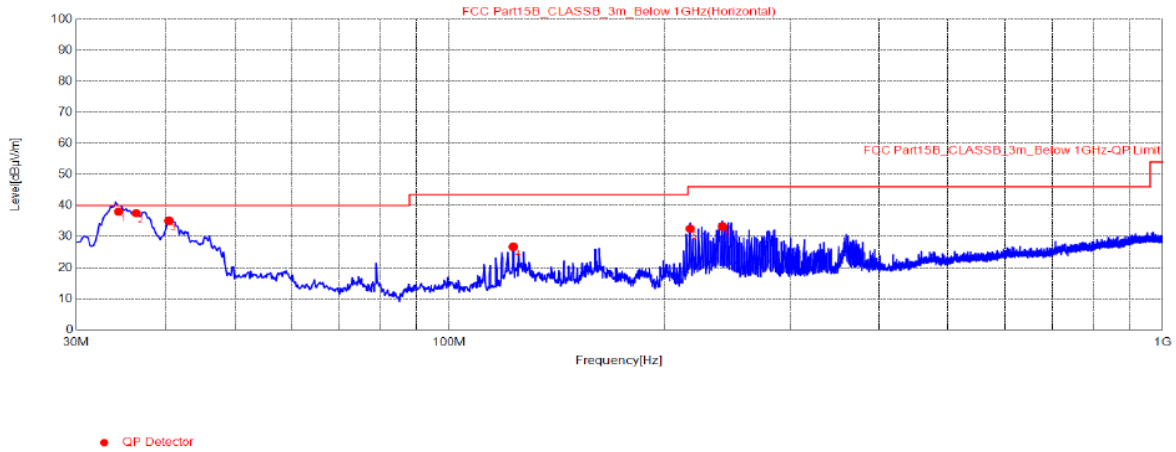

Final Data List


| NO. | Freq.[MHz] | Reading [dBµV] | Factor [dB] | Value [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Detector | Height [cm] | Angle[°] | Polarity |
|-----|------------|----------------|-------------|----------------|----------------|-------------|----------|-------------|----------|------------|
| 1 | 34.39 | 49.49 | -11.43 | 38.06 | 40.00 | 1.94 | QP | 106.2 | 177.6 | Horizontal |
| 2 | 36.40 | 48.7 | -11.19 | 37.51 | 40.00 | 2.49 | QP | 134 | 300 | Horizontal |
| 3 | 40.48 | 45.91 | -10.83 | 35.08 | 40.00 | 4.92 | QP | 123 | 347 | Horizontal |
| 4 | 122.93 | 37.86 | -11.18 | 26.68 | 43.50 | 16.82 | QP | 102 | 132 | Horizontal |
| 5 | 217.60 | 44.86 | -12.35 | 32.51 | 46.00 | 13.49 | QP | 155 | 153 | Horizontal |
| 6 | 241.65 | 43.58 | -10.36 | 33.22 | 46.00 | 12.78 | QP | 154 | 48 | Horizontal |

REMARKS:

1. Emission Level(dBuV/m) = Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

| | | | |
|------------------------|---------------|--------------------------|-----------------|
| Channel | BLE_2402_Ant1 | Detector Function | Quasi-Peak (QP) |
| Frequency Range | 30MHz ~ 1GHz | Antenna Polarity | Vertical |

Test Plot:

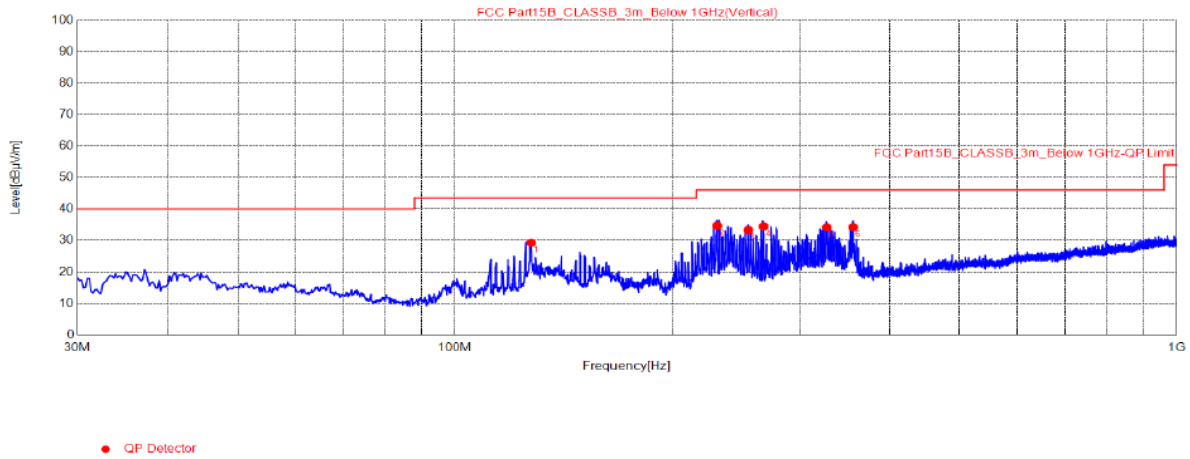

Final Data List

| NO. | Freq.[MHz] | Reading [dBµV] | Factor [dB] | Value [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Detector | Height [cm] | Angle[°] | Polarity |
|-----|-------------|----------------|-------------|----------------|----------------|-------------|----------|-------------|----------|----------|
| 1 | 127.58 | 40.32 | -11.07 | 29.25 | 43.50 | 14.25 | QP | 142 | 119 | Vertical |
| 2 | 230.79 | 46.41 | -11.73 | 34.68 | 46.00 | 11.32 | QP | 120 | 41 | Vertical |
| 3 | 254.85 | 43.19 | -9.92 | 33.27 | 46.00 | 12.73 | QP | 135 | 176 | Vertical |
| 4 | 267.65 | 43.65 | -9.19 | 34.46 | 46.00 | 11.54 | QP | 153 | 179 | Vertical |
| 5 | 327.40 | 41.48 | -7.31 | 34.17 | 46.00 | 11.83 | QP | 119 | 339 | Vertical |
| 6 | 356.31 | 41.15 | -6.96 | 34.19 | 46.00 | 11.81 | QP | 104 | 91 | Vertical |

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

Radiated Emission Range 1GHz~10th Harmonic

Below is the worst test data

| | | | |
|------------------------|---------------|--------------------------|--------------|
| Channel | BLE_2402_Ant1 | Detector Function | Peak (PK) |
| Frequency Range | 1GHz ~ 25GHz | | Average (AV) |

| Spurious Emission Level | | | | | | | |
|-------------------------|-----------------|-------------------------|----------------|-------------|--------------------------|------------------|----------|
| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Correction Factor (dB/m) | Antenna Polarity | Detector |
| 1 | 7206.7000 | 41.31 | 74.00 | 32.69 | -8.16 | H | PK |
| 2 | 7206.7000 | 35.20 | 54.00 | 18.80 | -8.16 | H | AV |
| 3 | 7206.7000 | 41.69 | 74.00 | 32.31 | -8.16 | V | PK |
| 4 | 7206.7000 | 34.58 | 54.00 | 19.42 | -8.16 | V | AV |

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

| | | | |
|------------------------|---------------|--------------------------|--------------|
| Channel | BLE_2440_Ant1 | Detector Function | Peak (PK) |
| Frequency Range | 1GHz ~ 25GHz | | Average (AV) |

| Spurious Emission Level | | | | | | | |
|-------------------------|-----------------|-------------------------|----------------|-------------|--------------------------|------------------|----------|
| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Correction Factor (dB/m) | Antenna Polarity | Detector |
| 1 | 7320.6000 | 40.59 | 74.00 | 33.41 | -8.13 | H | PK |
| 2 | 7320.6000 | 35.08 | 54.00 | 18.92 | -8.13 | H | AV |
| 3 | 7320.6000 | 41.52 | 74.00 | 32.48 | -8.13 | V | PK |
| 4 | 7320.6000 | 34.37 | 54.00 | 19.63 | -8.13 | V | AV |

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

| | | | |
|------------------------|---------------|--------------------------|--------------|
| Channel | BLE_2480_Ant1 | Detector Function | Peak (PK) |
| Frequency Range | 1GHz ~ 25GHz | | Average (AV) |

| Spurious Emission Level | | | | | | | |
|-------------------------|-----------------|-------------------------|----------------|-------------|--------------------------|------------------|----------|
| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Correction Factor (dB/m) | Antenna Polarity | Detector |
| 1 | 2480.7000 | 39.35 | 74.00 | 34.65 | -17.26 | H | PK |
| 2 | 2480.7000 | 33.41 | 54.00 | 20.59 | -17.26 | H | AV |
| 3 | 7441.3000 | 40.92 | 74.00 | 33.08 | -8.11 | V | PK |
| 4 | 7441.3000 | 34.53 | 54.00 | 19.47 | -8.11 | V | AV |

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

--- END ---