



FCC ID: 2ASXC-TMO-SKW-01
Report No.: T200825W02-RP5



Page: 1 / 80
Rev.: 01

FCC 47 CFR PART 27 SUBPART C, H

TEST REPORT

For

SyncUP Kids Watch

Model No.: TMUS-SKW-1, TMUS-SKW-M

Trade Name: T-Mobile

Issued to

**T-mobile Usa, Inc.
12920 Se 38th Street, Bellevue, Washington, United States, 98006.**

Issued by

**Compliance Certification Services Inc.
Wugu Laboratory
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)
Issued Date: June 8, 2021**

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	March 25, 2021	Initial Issue	ALL	Doris Chu
01	June 8, 2021	See the following Note Rev. (01)	P.12, P.10, P.38, P.40, P.74	Doris Chu

Rev. (01)

1. Added FCC register lab number in section 6.1.
2. Revised equipment list in section 5.2.
3. Added how to Calculation the Offset in section 8.5.
4. Revised test data in section 8.5.
5. Revised Test Configuration in section 8.7.

TABLE OF CONTENTS

1.	TEST RESULT CERTIFICATION	4
2.	EUT DESCRIPTION	5
3.	TEST METHODOLOGY	6
3.1	DESCRIPTION OF TEST TYPE	6
3.2	THE WORST MODE OF MEASUREMENT	7
4.	TEST SUMMARY	8
5.	INSTRUMENT CALIBRATION	9
5.1	MEASURING INSTRUMENT CALIBRATION	9
5.2	MEASUREMENT EQUIPMENT USED	9
5.3	MEASUREMENT UNCERTAINTY	11
6.	FACILITIES AND ACCREDITATIONS	12
6.1	FACILITIES	12
6.2	EQUIPMENT	12
6.3	LABORATORY ACCREDITATIONS AND LISTING	12
7.	SETUP OF EQUIPMENT UNDER TEST	13
7.1	SETUP CONFIGURATION OF EUT	13
7.2	SUPPORT EQUIPMENT	13
8.	TEST PROCEDURE AND RESULT	14
8.1	ERP MEASUREMENT	14
8.2	FREQUENCY STABILITY MEASUREMENT	19
8.3	OCCUPIED BANDWIDTH MEASUREMENT	22
8.4	PEAK TO AVERAGE POWER RATIO	28
8.5	BAND EDGE MEASUREMENT	38
8.6	CONDUCTED SPURIOUS EMISSIONS	55
8.7	RADIATED EMISSION MEASUREMENT	72
	APPENDIX A PHOTOGRAPHS OF TEST SETUP	A-1

1. TEST RESULT CERTIFICATION

Applicant: T-mobile Usa, Inc.
12920 Se 38th Street, Bellevue, Washington, United States,
98006.

Manufacturer: T-mobile Usa, Inc.
12920 Se 38th Street, Bellevue, Washington, United States,
98006.

Equipment Under Test: SyncUP Kids Watch

Trade Name: T-Mobile

Model No.: TMUS-SKW-1, TMUS-SKW-M

Date of Test: September 14 ~ 17, 2020; December 29 ~ 30, 2020

APPLICABLE STANDARDS	
Standard	TEST RESULT
FCC Part 27, Subpart C, H, FCC Part 2	No non-compliance noted
Statements of Conformity	
Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.	

The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:



Kevin Tsai
Deputy Manager
Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product	SyncUP Kids Watch		
Model No.	TMUS-SKW-1, TMUS-SKW-M		
Model Discrepancy	Preload profiles in SIM IC are different, but the SIM IC is the same. TMUS-SKW-1 is T-Mobile SKU, TMUS-SKW-M is MPCS SKU.		
Trade	T-Mobile		
Received Date	August 25, 2020		
Power Supply	1. Power from Adapter. PHIHONG TECHNOLOGY / AN05A-050E I/P: 100-240VAC, 0.2A, 50-60Hz O/P: 5.0VDC, 1.0A 2. Power from Battery. EVE / P0963 Rated Capacity: 3.85V, 495mAh, 1.91Wh		
Modulation Technology	LTE Band 12	QPSK, 16QAM	
Frequency Range	LTE Band 12 Channel Bandwidth: 1.4MHz	669.7MHz ~ 715.3MHz	
	LTE Band 12 Channel Bandwidth: 3MHz	700.5MHz ~ 714.5MHz	
	LTE Band 12 Channel Bandwidth: 5MHz	701.5MHz ~ 713.5MHz	
	LTE Band 12 Channel Bandwidth: 10MHz	704MHz ~ 711MHz	
Transmit Power (ERP Power)	LTE Band 12 Channel Bandwidth: 1.4MHz	QPSK	10.05 dBm
		16QAM	8.79 dBm
	LTE Band 12 Channel Bandwidth: 3MHz	QPSK	10.07 dBm
		16QAM	8.80 dBm
	LTE Band 12 Channel Bandwidth: 5MHz	QPSK	10.09 dBm
		16QAM	8.81 dBm
	LTE Band 12 Channel Bandwidth: 10MHz	QPSK	10.16 dBm
		16QAM	8.85 dBm
Antenna Specification	Antenna type: PIFA Antenna Band 12: -10.52 dBi		

Remark:

- For more details, please refer to the User's manual of the EUT.
- Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.
- Disclaimer: The variant model numbers / trademarks are assessed as identical in hardware and software to each other, hence all variants are fully covered by the test results in this test report without further verification test.

3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST TYPE

The EUT (model: TMUS-SKW-1) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

LTE Band 12: 699 MHz ~ 716 MHz

Three channels had been tested for each channel bandwidth.

Channel Bandwidth	1.4MHz		3MHz		5MHz		10MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
Low CH	23017	699.7	23025	700.5	23035	701.5	23060	704
Middle CH	23095	707.5	23095	707.5	23095	707.5	23095	707.5
High CH	23173	715.3	23165	714.5	23155	713.5	23130	711

3.2 THE WORST MODE OF MEASUREMENT

3.2.1 The worst mode of measurement

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT power by Adapter Mode 2: EUT power by Battery
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☐ Placed in fixed position at X-Plane (E2-Plane) ☒ Placed in fixed position at Y-Plane (E1-Plane) ☐ Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by Adapter Mode 2: EUT power by Battery
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, for radiated measurement. The worst case(Y-Plane) were recorded in this report

4. TEST SUMMARY

FCC Standard Section	Report Section	Test Item	Result
-	2	Antenna Requirement	Pass
27.50(c)	8.1	ERP Measurement	Pass
2.1055, 27.54	8.2	Frequency Stability v.s. temperature measurement	Pass
2.1049	8.3	Occupied Bandwidth Measurement	Pass
27.50(b)	8.4	Peak to Average Ratio	Pass
27.53(g)	8.5	Conducted Band Edge	Pass
27.53(g)	8.6	Conducted Spurious Emission	Pass
27.53(g)	8.7	Spurious Radiation Measurement	Pass

5. INSTRUMENT CALIBRATION

5.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

5.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Date for September 14 ~ 17, 2020

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Coaxial Cable	Woken	WC12	CC001	06/29/2020	06/28/2021
Signal Analyzer	R&S	FSV 40	101073	09/25/2019	09/24/2020
Wideband Radio Communication Tester	R&S	CMW 500	116875	07/19/2020	07/18/2021
Software	N/A				

Test Date for December 29 ~ 30, 2020

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Coaxial Cable	Woken	WC12	CC001	06/29/2020	06/28/2021
Radio Communication Analyzer	Anritsu	MT-8820C	6201240043	07/17/2020	07/16/2021
Signal Analyzer	R&S	FSV 40	101073	09/17/2020	09/16/2021
Software	N/A				

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/25/2020	02/24/2021
Bilog Antenna	Sunol Sciences	JB3	A030105	07/24/2020	07/23/2021
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/25/2020	02/24/2021
Coaxial Cable	EMCI	EMC105	190914+327109/4	09/19/2020	09/18/2021
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/15/2020	01/14/2021
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	09/30/2020	09/29/2021
Loop Ant	COM-POWER	AL-130	121051	03/27/2020	03/26/2021
Pre-Amplifier	EMEC	EM330	060609	02/25/2020	02/24/2021
Pre-Amplifier	HP	8449B	3008A00965	02/25/2020	02/24/2021
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	07/24/2020	07/23/2021
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Horn Antenna	SCHWARZBECK	BBHA 9120D	779	03/09/2020	03/08/2021
Bilog Antenna	Sunol Sciences	JB1	A052609	02/23/2020	02/22/2021
S.G.	Agilent	E8257C	US42340383	07/21/2020	07/20/2021
Radio Communication Analyzer	Anritsu	MT-8820C	6201240043	07/17/2020	07/16/2021
Software	e3 6.11-20180413				

5.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

6. FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- ☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- ☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- ☐ No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

Canada Registration number: 2324G

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC public Access Link (PAL) database, FCC Registration No. :444940, the FCC Designation No.:TW1309

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.

7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

7.2 SUPPORT EQUIPMENT

No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(J)	TOSHIBA	PT345T-00L002	N/A	PD97260H
2	DC Power Supplies	GW Instek	SPS-3610	GPE880163	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8. TEST PROCEDURE AND RESULT

8.1 ERP MEASUREMENT

LIMIT

According to FCC §2.1046

FCC 27.50 (c) (10): The portable stations (hand-held devices) in the 600MHz uplink band and the 698-746MHz band, and fixed and mobile stations in the 600MHz uplink band are limited to 3 Watts ERP.

TEST PROCEDURES

CONDUCTED POWER MEASUREMENT:

1. The transmitter output power was connected to the call box.
2. Set EUT at maximum output power via call box.
3. Set Call box at lowest, middle and highest channels for each band and modulation.

TEST RESULTS

No non-compliance noted.

TEST RESULTS

Temperature: 24.1°C

Humidity: 50.5% RH

Tested by: Rick Lee

Test date: December 30, 2020

LTE Band 12

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	ERP Power (dBm)
Band 12	1.4M	23017	699.7	QPSK	1	0	0	22.65	9.98
					1	2	0	22.28	9.61
					1	5	0	22.24	9.57
					3	0	1	21.37	8.70
					3	1	1	21.31	8.64
					3	2	1	21.42	8.75
					6	0	1	21.34	8.67
				16QAM	1	0	1	21.33	8.66
					1	2	1	21.32	8.65
					1	5	1	21.36	8.69
					3	0	2	20.38	7.71
					3	1	2	20.46	7.79
					3	2	2	20.32	7.65
					6	0	2	20.28	7.61
		23095	707.5	QPSK	1	0	0	22.68	10.01
					1	2	0	22.43	9.76
					1	5	0	22.42	9.75
					3	0	1	21.33	8.66
					3	1	1	21.36	8.69
					3	2	1	21.41	8.74
					6	0	1	21.34	8.67
				16QAM	1	0	1	21.46	8.79
					1	2	1	21.34	8.67
					1	5	1	21.39	8.72
					3	0	2	20.35	7.68
					3	1	2	20.39	7.72
					3	2	2	20.32	7.65
					6	0	2	20.31	7.64
		23173	715.3	QPSK	1	0	0	22.72	10.05
					1	2	0	22.40	9.73
					1	5	0	22.42	9.75
					3	0	1	21.25	8.58
					3	1	1	21.38	8.71
					3	2	1	21.41	8.74
					6	0	1	21.34	8.67
				16QAM	1	0	1	21.35	8.68
					1	2	1	21.31	8.64
					1	5	1	21.30	8.63
					3	0	2	20.35	7.68
					3	1	2	20.33	7.66
					3	2	2	20.31	7.64
					6	0	2	20.39	7.72

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	ERP Power (dBm)
Band 12	3M	23025	700.5	QPSK	1	0	0	22.68	10.01
					1	7	0	22.31	9.64
					1	14	0	22.27	9.60
					8	0	1	21.40	8.73
					8	4	1	21.34	8.67
					8	7	1	21.45	8.78
					15	0	1	21.37	8.70
				16QAM	1	0	1	21.36	8.69
					1	7	1	21.35	8.68
					1	14	1	21.39	8.72
					8	0	2	20.41	7.74
					8	4	2	20.49	7.82
					8	7	2	20.35	7.68
					15	0	2	20.31	7.64
		23095	707.5	QPSK	1	0	0	22.69	10.02
					1	7	0	22.44	9.77
					1	14	0	22.43	9.76
					8	0	1	21.34	8.67
					8	4	1	21.37	8.70
					8	7	1	21.42	8.75
					15	0	1	21.35	8.68
				16QAM	1	0	1	21.47	8.80
					1	7	1	21.35	8.68
					1	14	1	21.40	8.73
					8	0	2	20.36	7.69
					8	4	2	20.40	7.73
					8	7	2	20.33	7.66
					15	0	2	20.32	7.65
		23165	714.5	QPSK	1	0	0	22.74	10.07
					1	7	0	22.42	9.75
					1	14	0	22.44	9.77
					8	0	1	21.27	8.60
					8	4	1	21.40	8.73
					8	7	1	21.43	8.76
					15	0	1	21.36	8.69
				16QAM	1	0	1	21.37	8.70
					1	7	1	21.33	8.66
					1	14	1	21.32	8.65
					8	0	2	20.37	7.70
					8	4	2	20.35	7.68
					8	7	2	20.33	7.66
					15	0	2	20.41	7.74

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	ERP Power (dBm)
Band 12	5M	23035	701.5	QPSK	1	0	0	22.70	10.03
					1	12	0	22.33	9.66
					1	24	0	22.29	9.62
					12	0	1	21.42	8.75
					12	6	1	21.36	8.69
					12	11	1	21.47	8.80
					25	0	1	21.39	8.72
				16QAM	1	0	1	21.38	8.71
					1	12	1	21.37	8.70
					1	24	1	21.41	8.74
					12	0	2	20.43	7.76
					12	6	2	20.51	7.84
					12	11	2	20.37	7.70
					25	0	2	20.33	7.66
		23095	707.5	QPSK	1	0	0	22.70	10.03
					1	12	0	22.45	9.78
					1	24	0	22.44	9.77
					12	0	1	21.35	8.68
					12	6	1	21.38	8.71
					12	11	1	21.43	8.76
					25	0	1	21.36	8.69
				16QAM	1	0	1	21.48	8.81
					1	12	1	21.36	8.69
					1	24	1	21.41	8.74
					12	0	2	20.37	7.70
					12	6	2	20.41	7.74
					12	11	2	20.34	7.67
					25	0	2	20.33	7.66
		23155	713.5	QPSK	1	0	0	22.76	10.09
					1	12	0	22.44	9.77
					1	24	0	22.46	9.79
					12	0	1	21.29	8.62
					12	6	1	21.42	8.75
					12	11	1	21.45	8.78
					25	0	1	21.38	8.71
				16QAM	1	0	1	21.39	8.72
					1	12	1	21.35	8.68
					1	24	1	21.34	8.67
					12	0	2	20.39	7.72
					12	6	2	20.37	7.70
					12	11	2	20.35	7.68
					25	0	2	20.43	7.76

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power(dBm)	ERP Power (dBm)
Band 12	10M	23060	704.0	QPSK	1	0	0	22.75	10.08
					1	24	0	22.38	9.71
					1	49	0	22.34	9.67
					25	0	1	21.47	8.80
					25	12	1	21.41	8.74
					25	24	1	21.52	8.85
					50	0	1	21.44	8.77
				16QAM	1	0	1	21.43	8.76
					1	24	1	21.42	8.75
					1	49	1	21.46	8.79
					25	0	2	20.48	7.81
					25	12	2	20.56	7.89
					25	24	2	20.42	7.75
					50	0	2	20.38	7.71
		23095	707.5	QPSK	1	0	0	22.74	10.07
					1	24	0	22.49	9.82
					1	49	0	22.48	9.81
					25	0	1	21.39	8.72
					25	12	1	21.42	8.75
					25	24	1	21.47	8.80
					50	0	1	21.40	8.73
				16QAM	1	0	1	21.52	8.85
					1	24	1	21.40	8.73
					1	49	1	21.45	8.78
					25	0	2	20.41	7.74
					25	12	2	20.45	7.78
					25	24	2	20.38	7.71
					50	0	2	20.37	7.70
		23130	711.0	QPSK	1	0	0	22.83	10.16
					1	24	0	22.51	9.84
					1	49	0	22.53	9.86
					25	0	1	21.36	8.69
					25	12	1	21.49	8.82
					25	24	1	21.52	8.85
					50	0	1	21.45	8.78
				16QAM	1	0	1	21.46	8.79
					1	24	1	21.42	8.75
					1	49	1	21.41	8.74
					25	0	2	20.46	7.79
					25	12	2	20.44	7.77
					25	24	2	20.42	7.75
					50	0	2	20.50	7.83

8.2 FREQUENCY STABILITY MEASUREMENT

LIMIT

According to the FCC part 27.54 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation."

TEST PROCEDURE

Use Anritsu 8820 with frequency Error measurement capability.

Temp = -10°C to +55°C

Voltage= 85% to 115% of the nominal value.

NOTE: The frequency error was recorded frequency error from the communication simulator.

TEST RESULTS

Temperature: 24.1°C

Humidity: 50.5% RH

Tested by: Rick Lee

Test date: December 30, 2020

FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT: LTE Band 12

Reference Frequency: LTE Band 12 Max Bandwidth QPSK, 707.5 MHz				
Limit: ± 2.5 ppm = 1768.75 Hz				
Power Supply	Environment	Frequency Error	Frequency Error	Limit (ppm)
Vdc	Temperature (°C)	(Hz)	(ppm)	(ppm)
3.8	55	0.01	0.000014	+/- 2.5
3.8	40	0.01	0.000014	
3.8	30	0.00	0.000000	
3.8	20	0.00	0.000000	
3.8	10	0.02	0.000028	
3.8	0	0.00	0.000000	
3.8	-10	-0.01	-0.000014	

Reference Frequency: LTE Band 12 Max Bandwidth 16QAM, 707.5 MHz				
Limit: ± 2.5 ppm = 1768.75 Hz				
Power Supply	Environment	Frequency Error	Frequency Error	Limit (ppm)
Vdc	Temperature (°C)	(Hz)	(ppm)	(ppm)
3.8	55	0.01	0.000014	+/- 2.5
3.8	40	-0.01	-0.000014	
3.8	30	0.02	0.000028	
3.8	20	0.00	0.000000	
3.8	10	0.03	0.000042	
3.8	0	0.02	0.000028	
3.8	-10	0.01	0.000014	

**FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT:
LTE Band 12**

Reference Frequency: LTE Band 12 Max Bandwidth QPSK, 707.5 MHz				
Limit: ± 2.5 ppm = 1768.75 Hz				
Power Supply	Environment	Frequency Error	Frequency Error	Limit (ppm)
Vdc	Temperature (°C)	(Hz)	(ppm)	(ppm)
3.23	20	0.00	0.000000	+/- 2.5
3.8	20	0.00	0.000000	
4.37	20	-0.01	-0.000014	

Reference Frequency: LTE Band 12 Max Bandwidth 16QAM, 707.5 MHz				
Limit: ± 2.5 ppm = 1768.75 Hz				
Power Supply	Environment	Frequency Error	Frequency Error	Limit (ppm)
Vdc	Temperature (°C)	(Hz)	(ppm)	(ppm)
3.23	20	0.01	0.000014	+/- 2.5
3.8	20	0.00	0.000000	
4.37	20	0.01	0.000014	

8.3 OCCUPIED BANDWIDTH MEASUREMENT

LIMITS

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

TEST PROCEDURES

KDB 971168 D01 Power Meas License Digital Systems – Section 4.2

1. The occupied bandwidth was measured with the spectrum analyzer at the lowest, middle and highest channels in each band and different modulation. The 99% and -26dB bandwidth was measured and recorded.
2. RBW = 1-5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max. hold

TEST RESULTS

Temperature: 24.1°C

Humidity: 50.5% RH

Tested by: Rick Lee

Test date: September 14, 2020

LTE Band 12


Band	BW (MHz)	Channel	Frequency (MHz)	Mode	OBW(99%)(MHz)	26 dB Bandwidth(MHz)
12	1.4	Middle	707.5	QPSK	1.0941	1.3068
		Middle	707.5	16QAM	1.0984	1.3068
	3	Middle	707.5	QPSK	2.6918	2.9653
		Middle	707.5	16QAM	2.6831	2.9393
	5	Middle	707.5	QPSK	4.4718	4.8790
		Middle	707.5	16QAM	4.4718	4.8640
	10	Middle	707.5	QPSK	8.9146	9.6110
		Middle	707.5	16QAM	8.8857	9.6110

Report No.: T200825W02-RP5

LTE Band 12

CHANNEL BANDWIDTH: 1.4MHz / QPSK


CH Mid

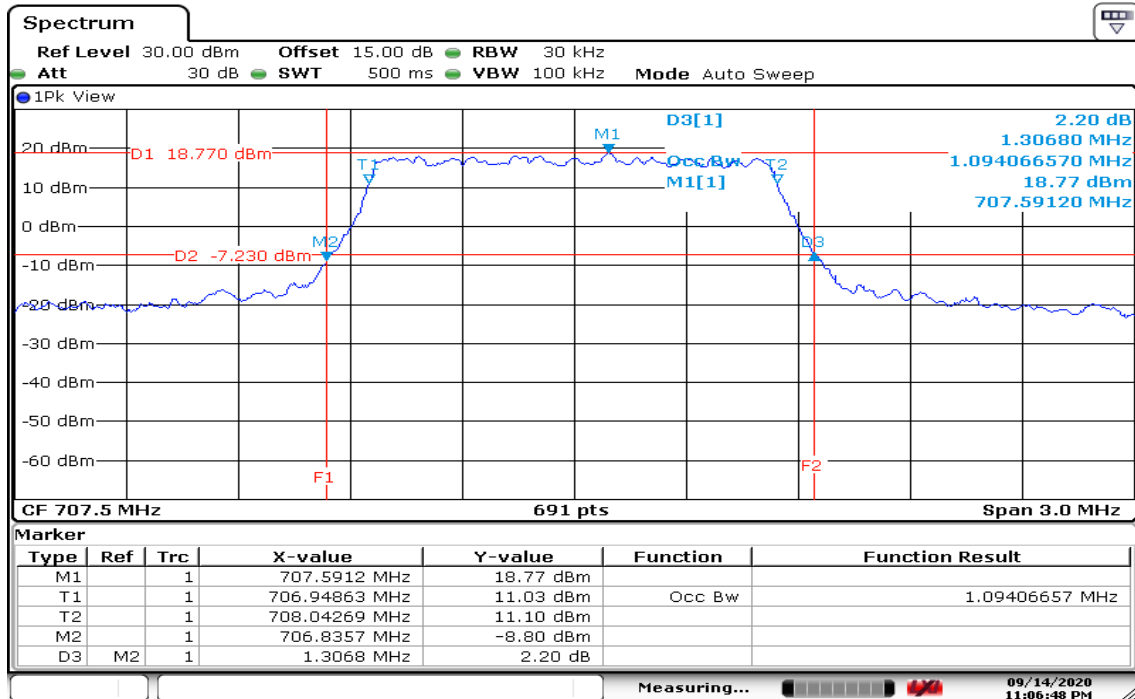

Date: 14 SEP 2020 23:06:49

CHANNEL BANDWIDTH: 1.4MHz / 16QAM


CH Mid

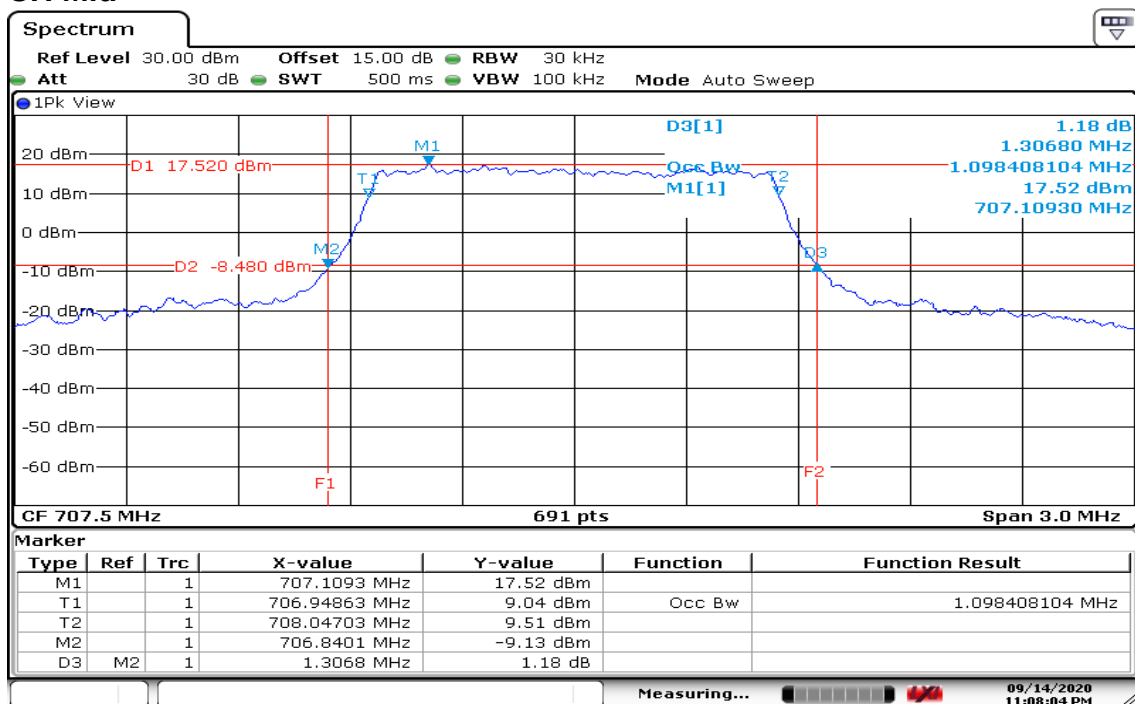

Date: 14 SEP 2020 23:08:04


Report No.: T200825W02-RP5

CHANNEL BANDWIDTH: 3MHz / QPSK CH Mid

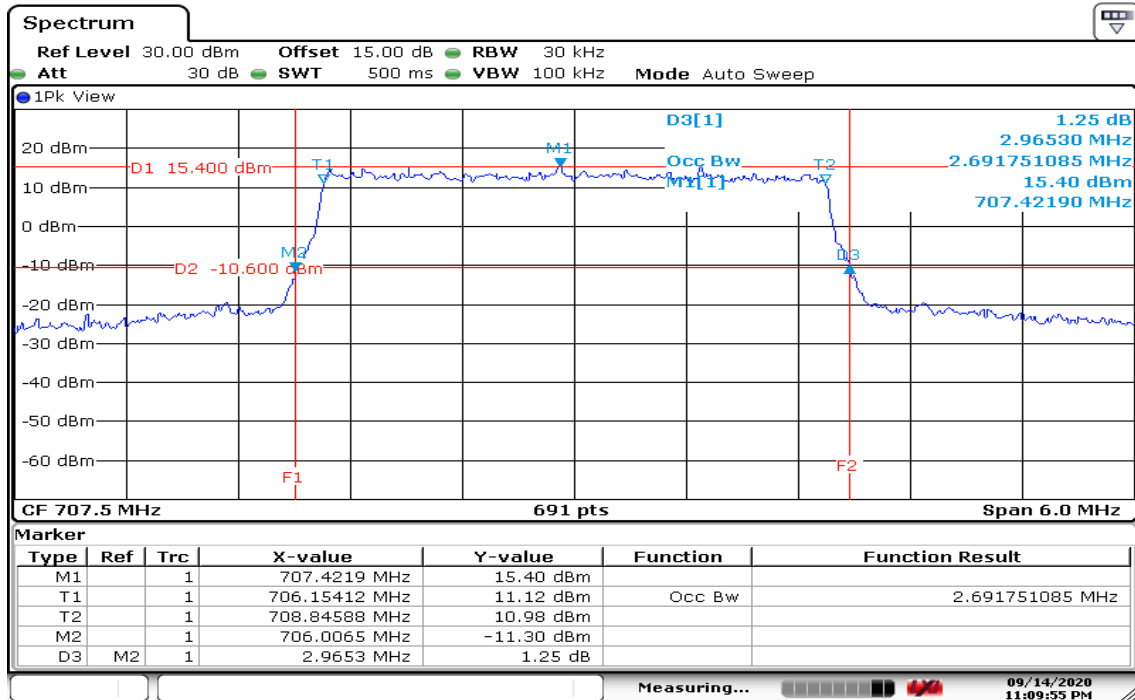

Date: 14 SEP 2020 23:09:55


CHANNEL BANDWIDTH: 3MHz / 16QAM CH Mid

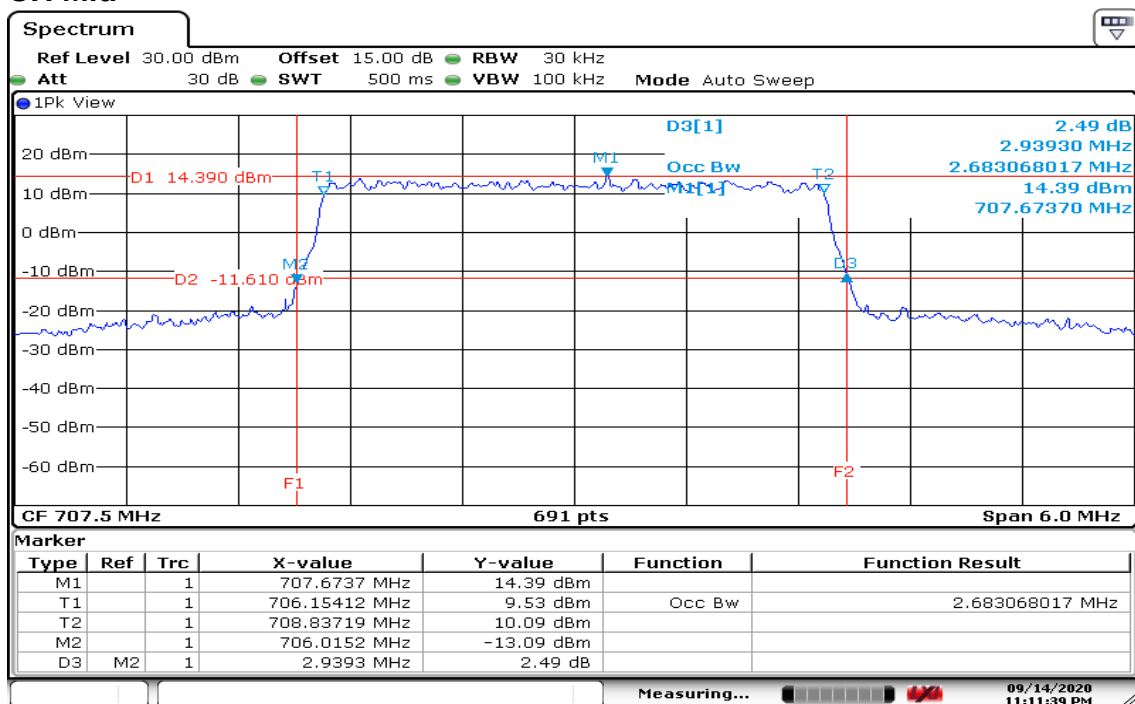

Date: 14 SEP 2020 23:11:39


Report No.: T200825W02-RP5

CHANNEL BANDWIDTH: 5MHz / QPSK CH Mid

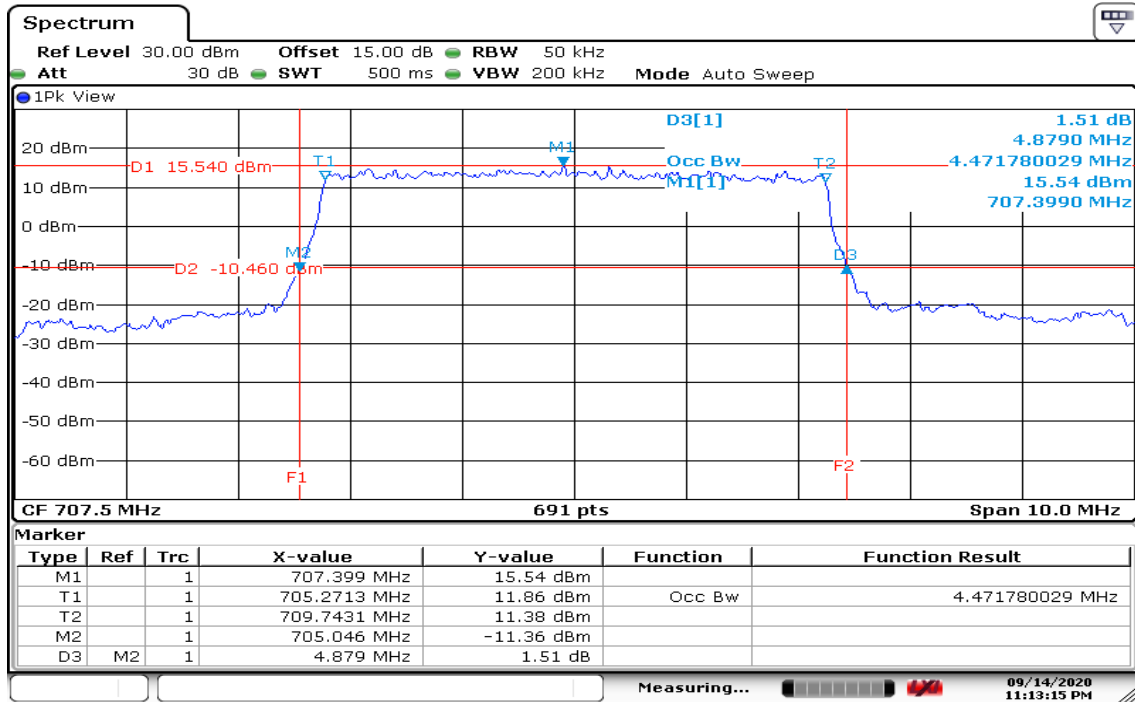


Date: 14 SEP 2020 23:13:16

CHANNEL BANDWIDTH: 5MHz / 16QAM CH Mid

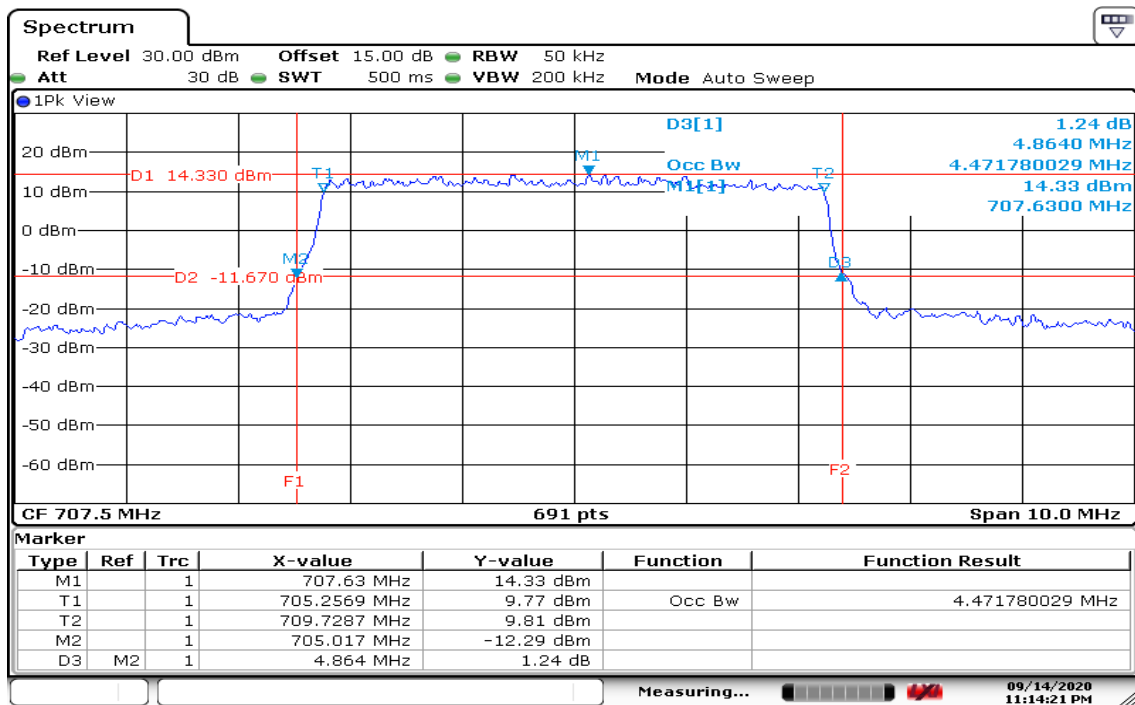


Date: 14 SEP 2020 23:14:22

CHANNEL BANDWIDTH: 10MHz / QPSK CH Mid

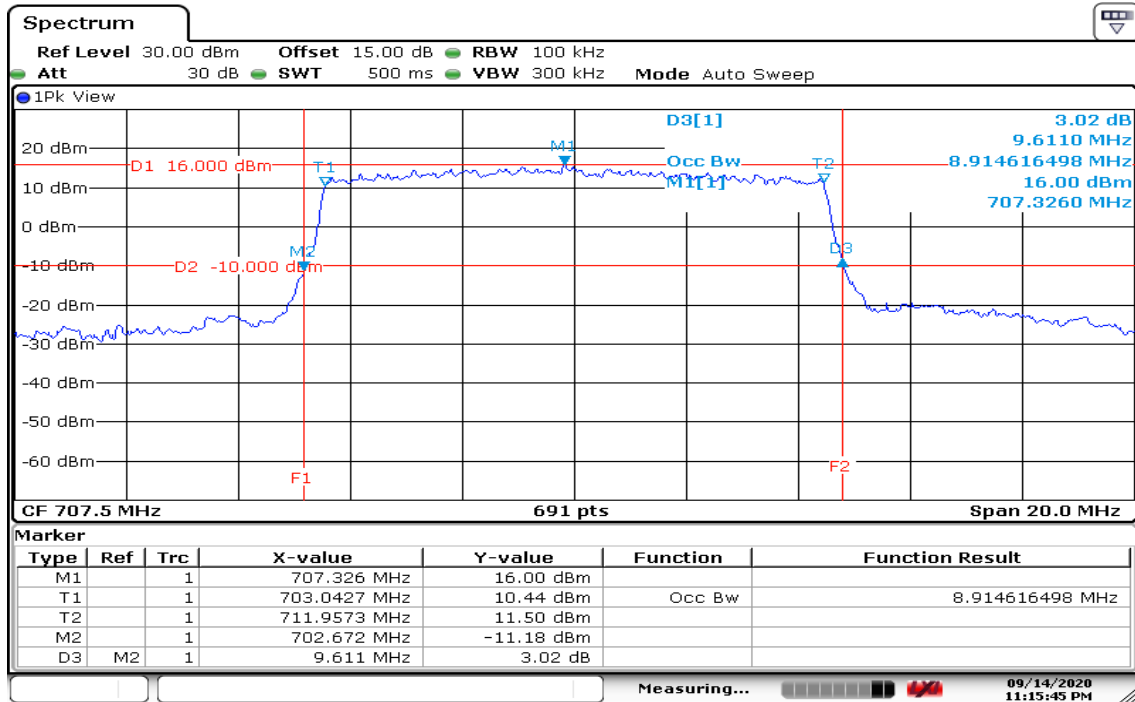

Date: 14 SEP 2020 23:15:46

CHANNEL BANDWIDTH: 10MHz / 16QAM CH Mid

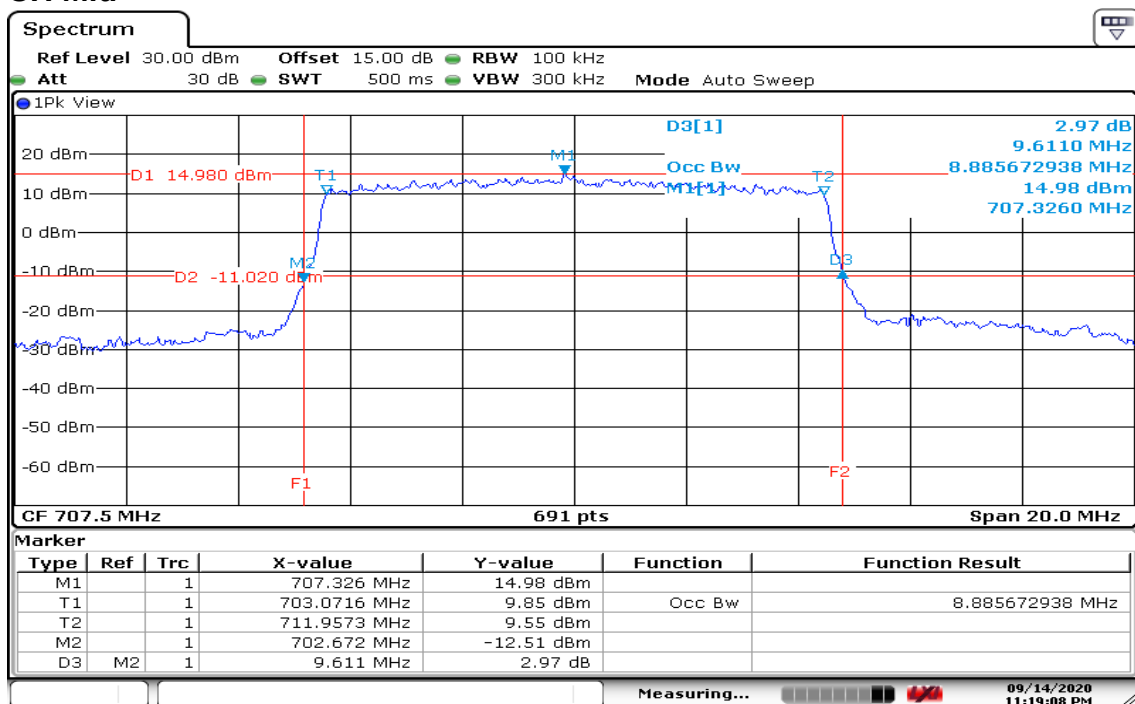

Date: 14 SEP 2020 23:19:08

8.4 PEAK TO AVERAGE POWER RATIO

LIMIT

In measuring transmissions in this band using an average power technique, peak-to-average power ratio (PAPR) of the transmission may not exceed 13 dB.

TEST PROCEDURES

1. According to KDB 971168D01.
2. The EUT was connect to spectrum analyzer and call box.
3. Set the CCDF function in spectrum analyzer.
4. The highest RF output power were measured and recorded the maximum PAPR level associated with a probability of 0.1%.
5. Record the Peak to Average Power Ratio.

TEST RESULTS

Temperature: 24.1°C

Humidity: 50.5% RH

Tested by: Rick Lee

Test date: September 17, 2020

LTE Band 12


CHANNEL BANDWIDTH:

	Channel	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
1.4MHz / QPSK / 1RB	23095	707.5	3.10
3MHz / QPSK / 1RB	23095	707.5	3.22
5MHz / QPSK / 1RB	23095	707.5	3.16
10MHz / QPSK / 1RB	23095	707.5	3.68
1.4MHz / QPSK / FULL RB	23095	707.5	4.55
3MHz / QPSK / FULL RB	23095	707.5	4.43
5MHz / QPSK / FULL RB	23095	707.5	4.35
10MHz / QPSK / FULL RB	23095	707.5	4.23
1.4MHz / 16QAM / 1RB	23095	707.5	4.35
3MHz / 16QAM / 1RB	23095	707.5	4.06
5MHz / 16QAM / 1RB	23095	707.5	4.20
10MHz / 16QAM / 1RB	23095	707.5	4.87
1.4MHz / 16QAM / FULL RB	23095	707.5	5.42
3MHz / 16QAM / FULL RB	23095	707.5	5.45
5MHz / 16QAM / FULL RB	23095	707.5	5.42
10MHz / 16QAM / FULL RB	23095	707.5	4.26

Note: We selected worst case to performed test in middle channel, the results can be meet other channel.


LTE Band 12

CHANNEL BANDWIDTH: 1.4MHz / QPSK/1RB

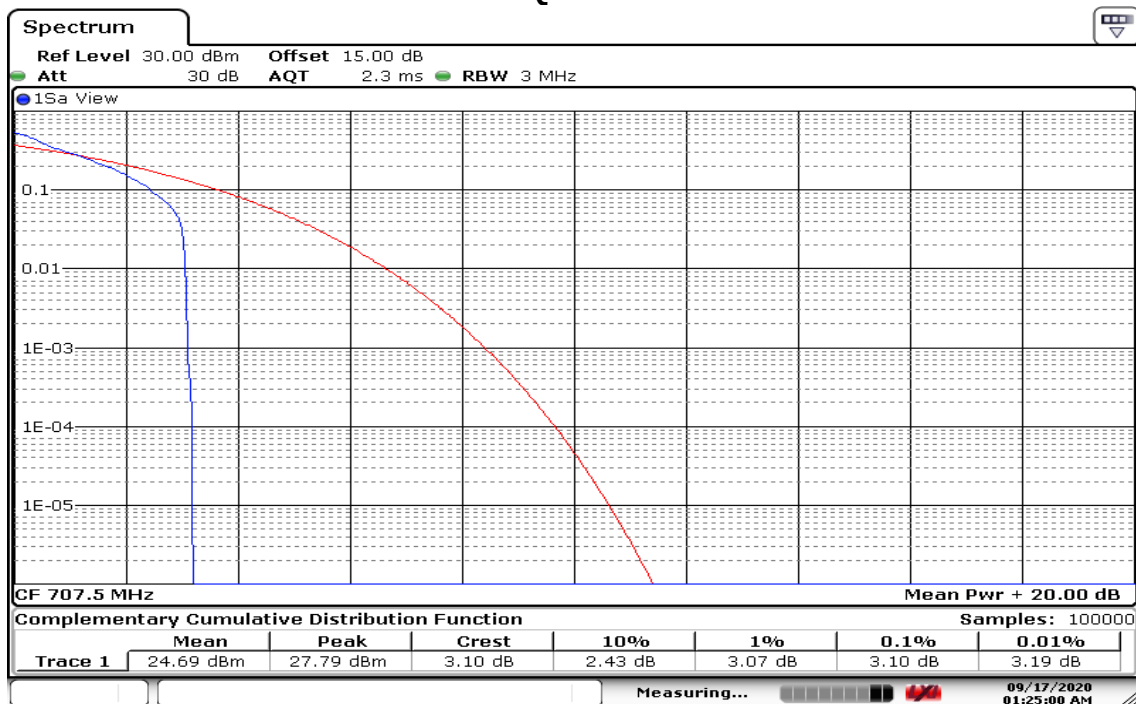


Date: 17 SEP 2020 01:25:00

CHANNEL BANDWIDTH: 3MHz / QPSK /1RB

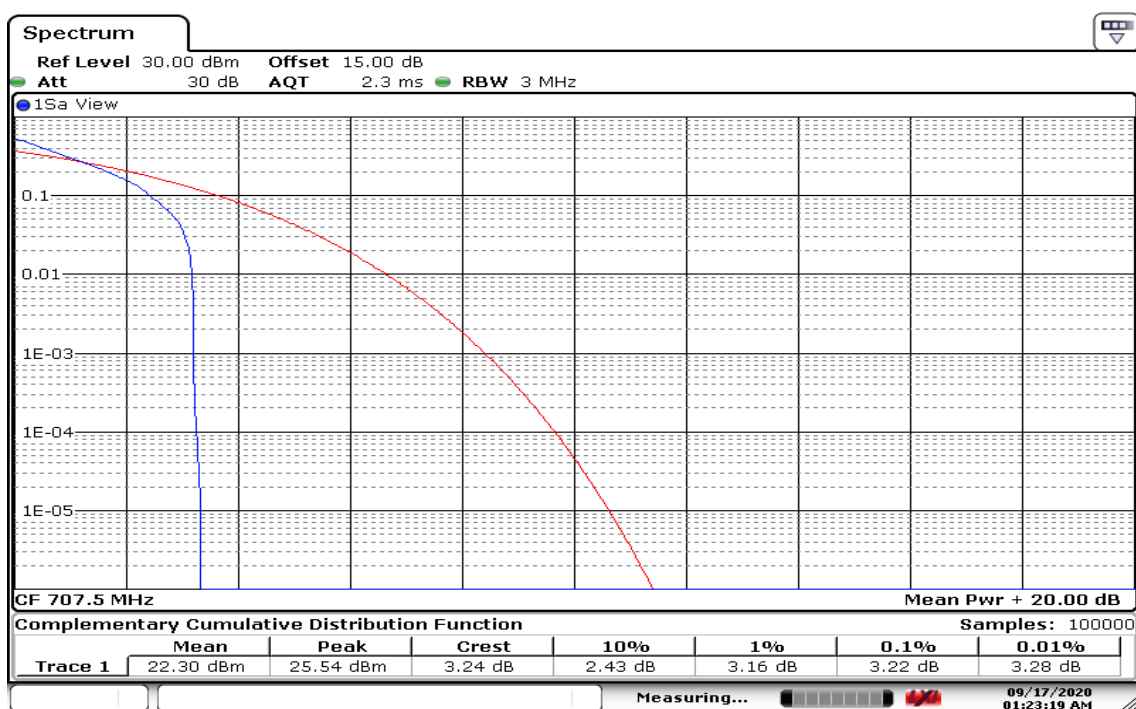


Date: 17 SEP 2020 01:23:20

CHANNEL BANDWIDTH: 5MHz / QPSK/1RB

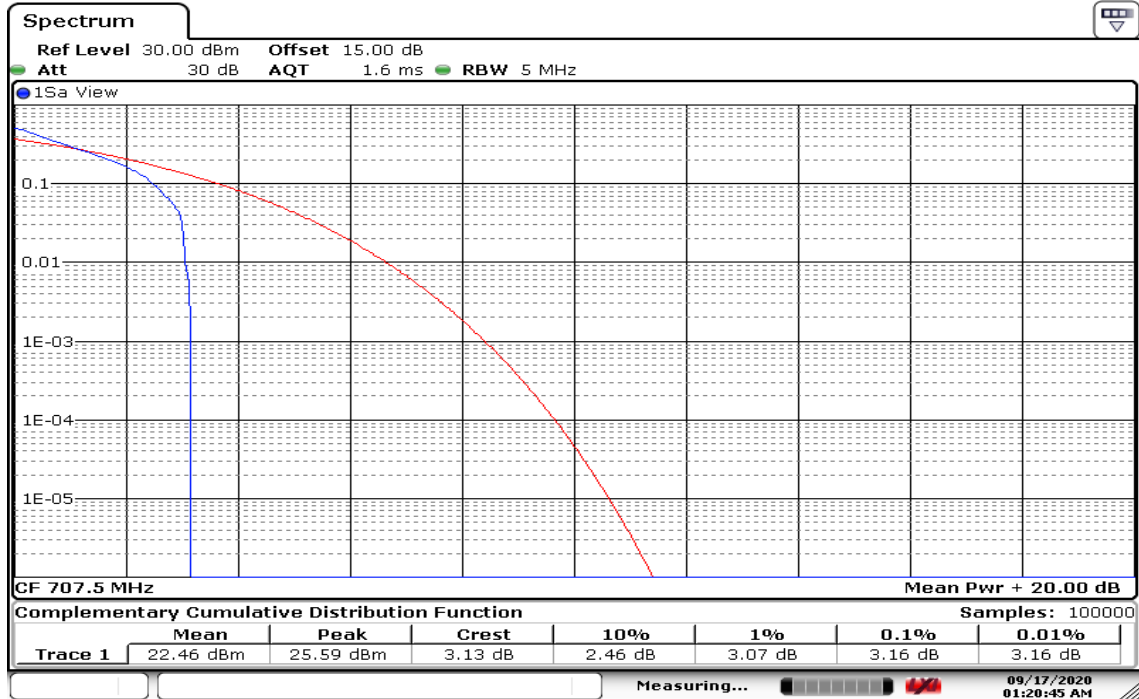


Date: 17 SEP 2020 01:20:45

CHANNEL BANDWIDTH: 10MHz / QPSK /1RB

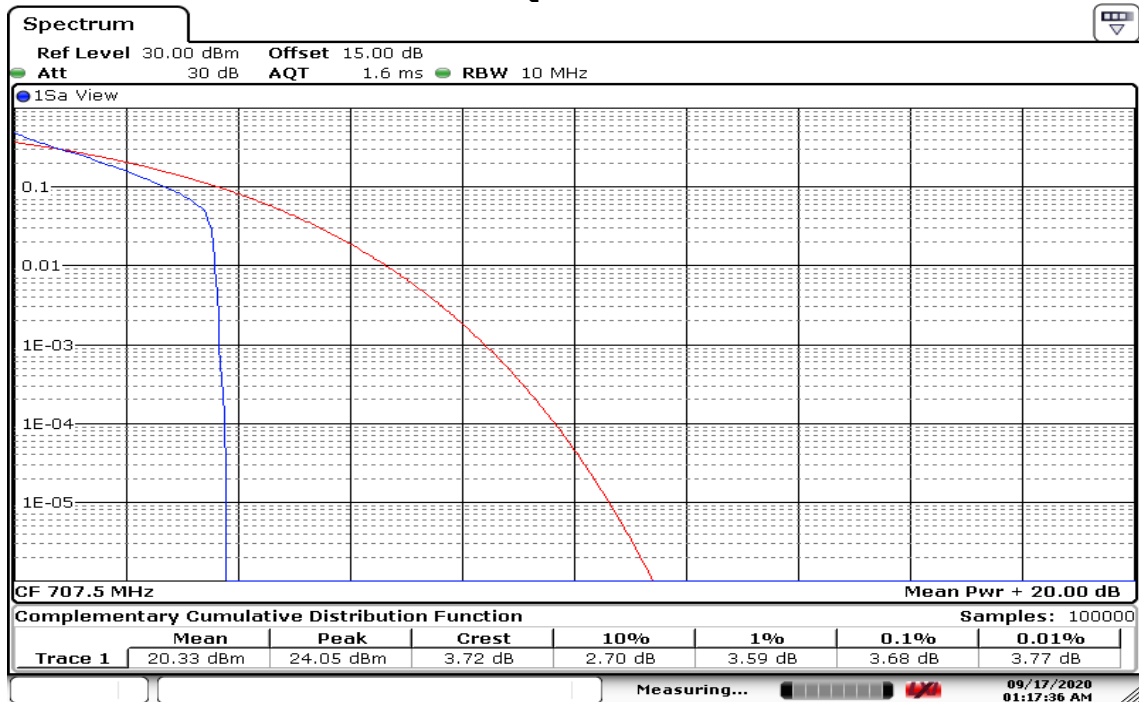


Date: 17 SEP 2020 01:17:36

CHANNEL BANDWIDTH: 1.4MHz / QPSK/ FULL RB

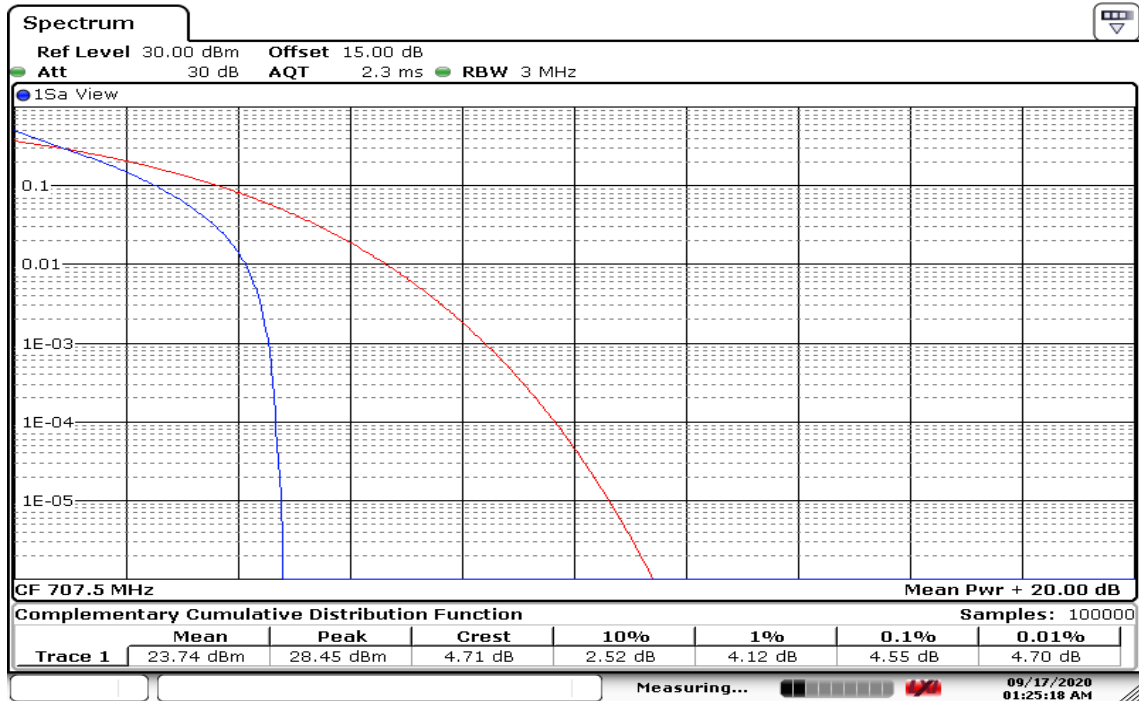


Date: 17 SEP 2020 01:25:19

CHANNEL BANDWIDTH: 3MHz / QPSK / FULL RB

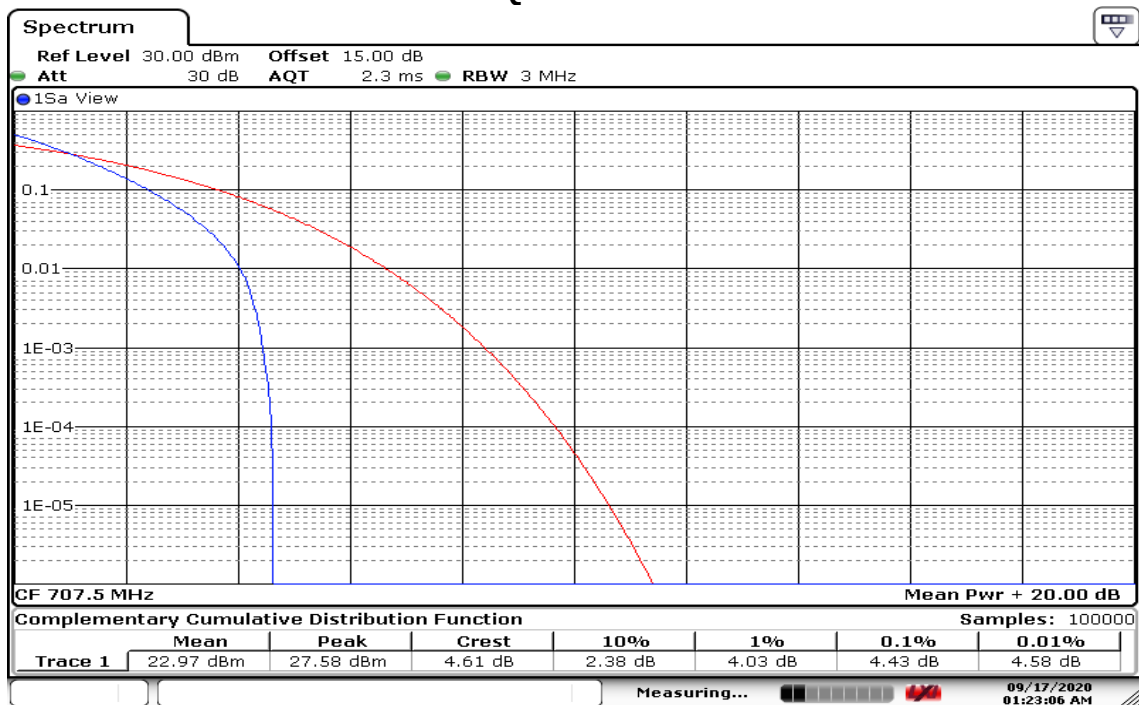


Date: 17 SEP 2020 01:23:07

CHANNEL BANDWIDTH: 5MHz / QPSK/ FULL RB

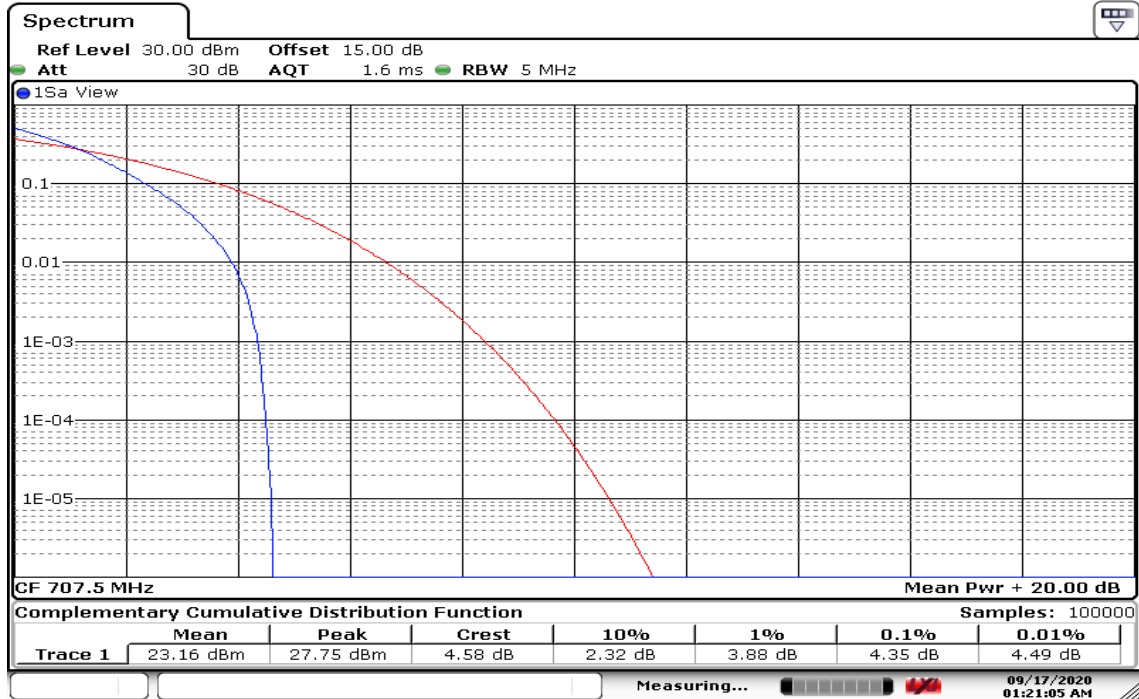


Date: 17 SEP 2020 01:21:06

CHANNEL BANDWIDTH: 10MHz / QPSK / FULL RB

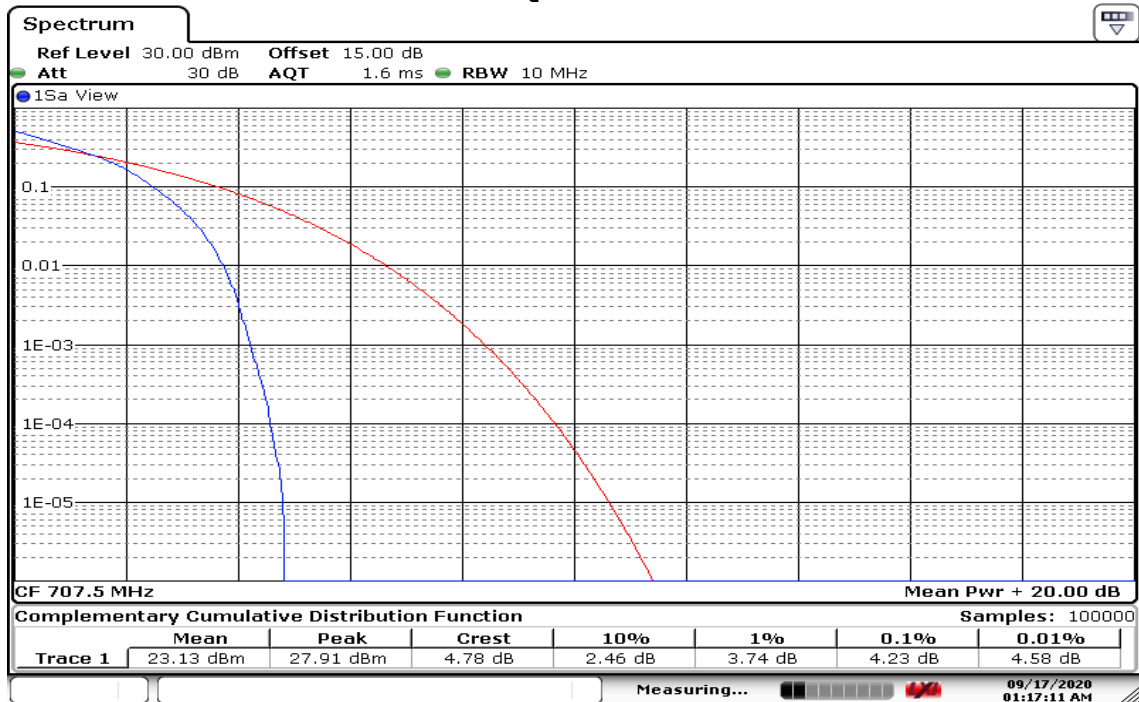


Date: 17 SEP 2020 01:17:12

CHANNEL BANDWIDTH: 1.4MHz / 16QAM / 1RB

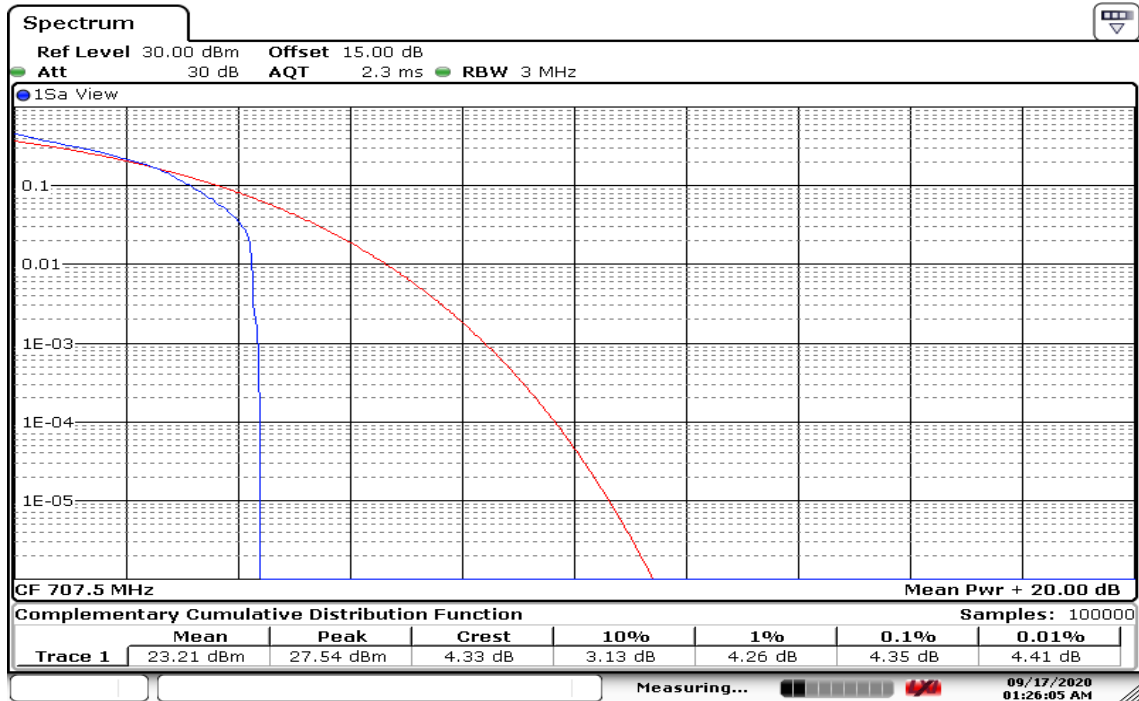


Date: 17 SEP 2020 01:26:05

CHANNEL BANDWIDTH: 3MHz / 16QAM / 1RB

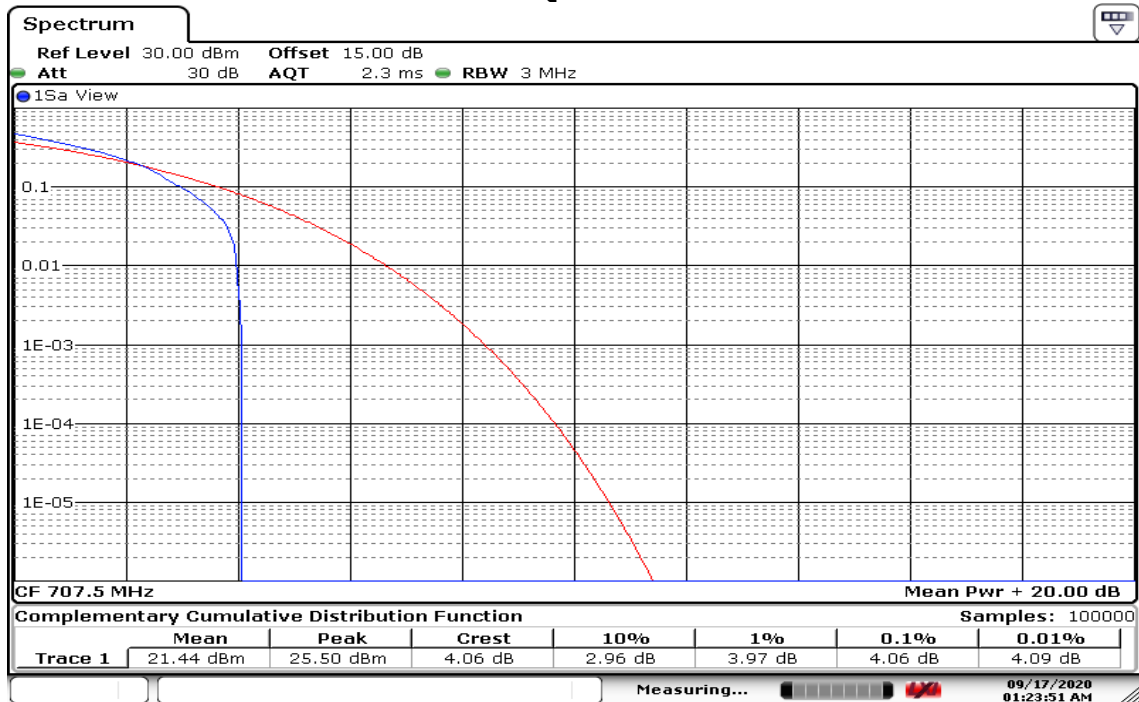


Date: 17 SEP 2020 01:23:51

CHANNEL BANDWIDTH: 5MHz / 16QAM /1RB

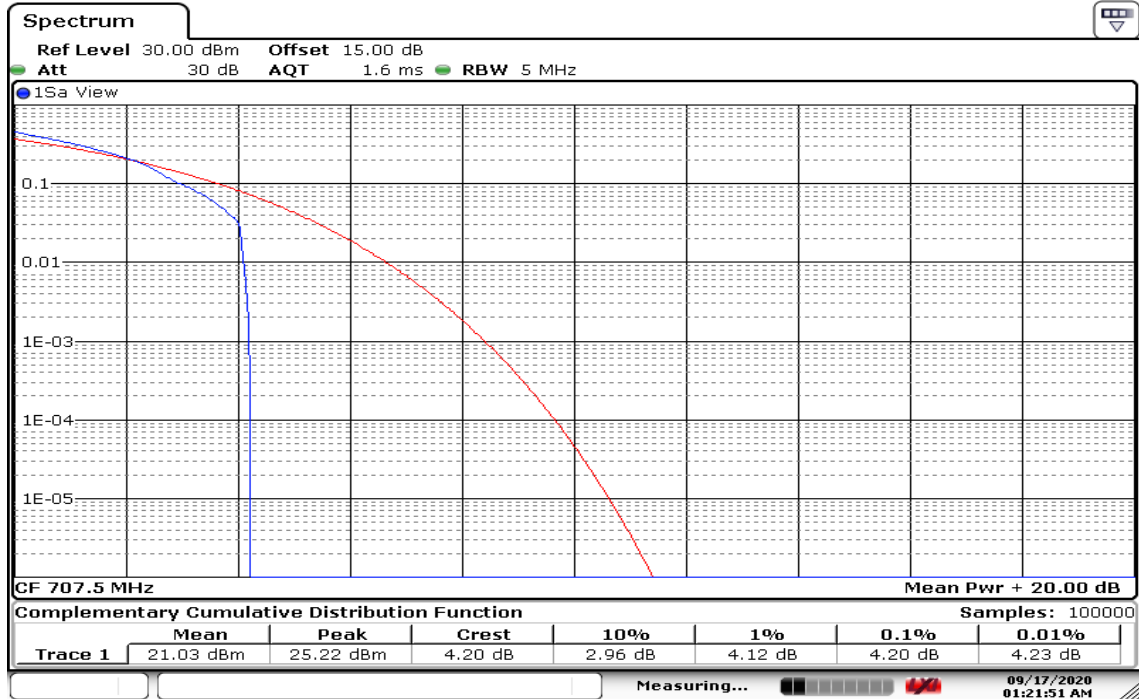


Date: 17 SEP 2020 01:21:51

CHANNEL BANDWIDTH: 10MHz / 16QAM /1RB

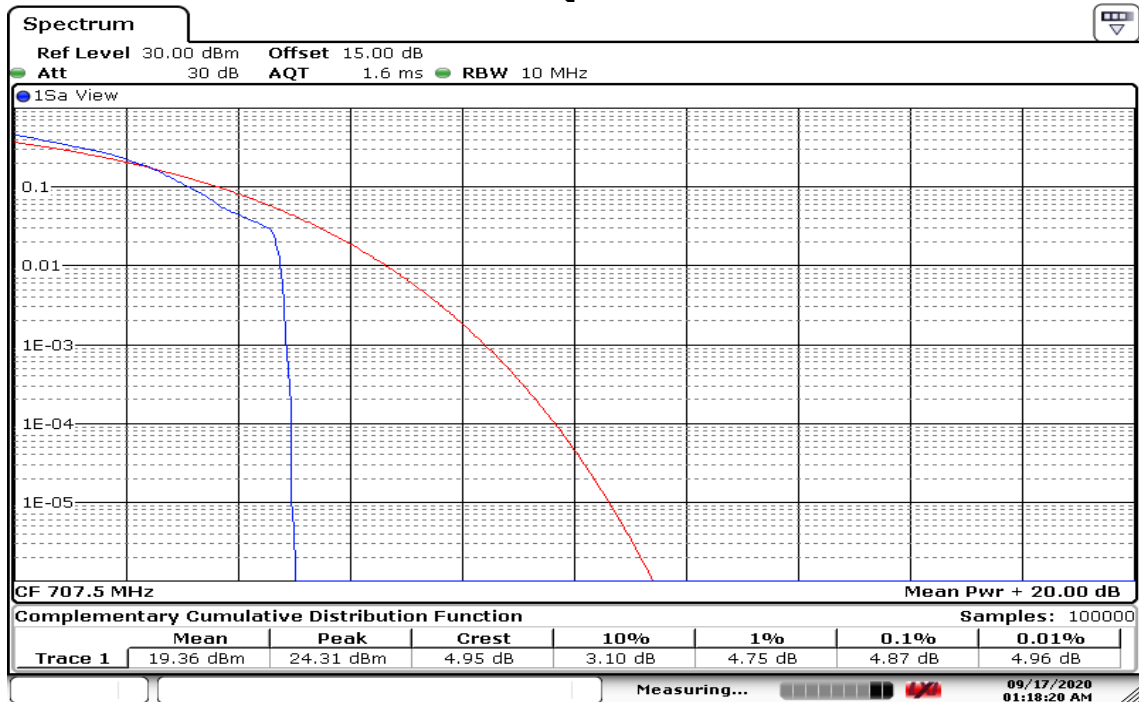


Date: 17 SEP 2020 01:18:20

CHANNEL BANDWIDTH: 1.4MHz / 16QAM / FULL RB

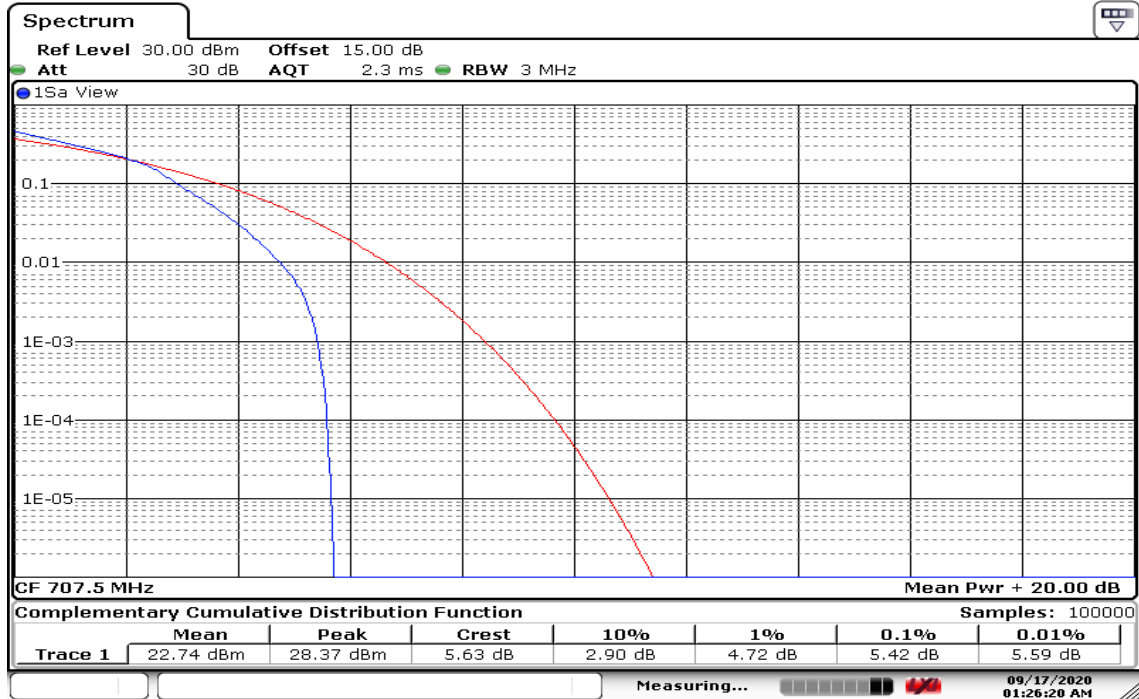


Date: 17 SEP 2020 01:26:20

CHANNEL BANDWIDTH: 3MHz / 16QAM / FULL RB

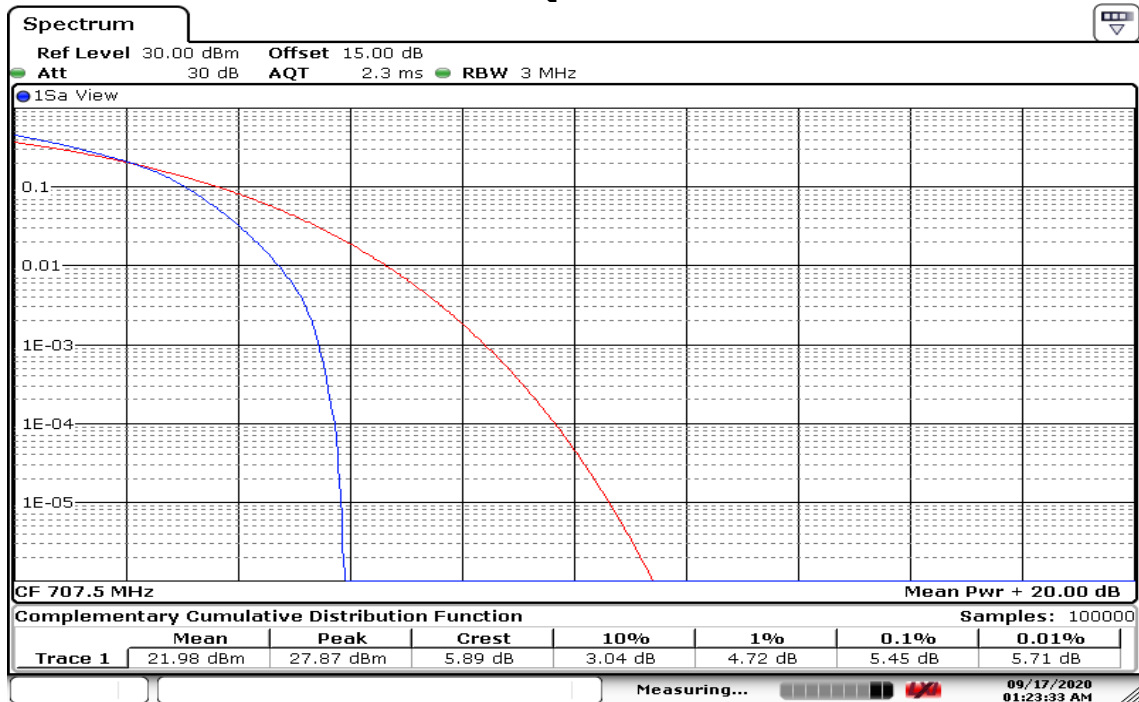


Date: 17 SEP 2020 01:23:33

CHANNEL BANDWIDTH: 5MHz / 16QAM / FULL RB

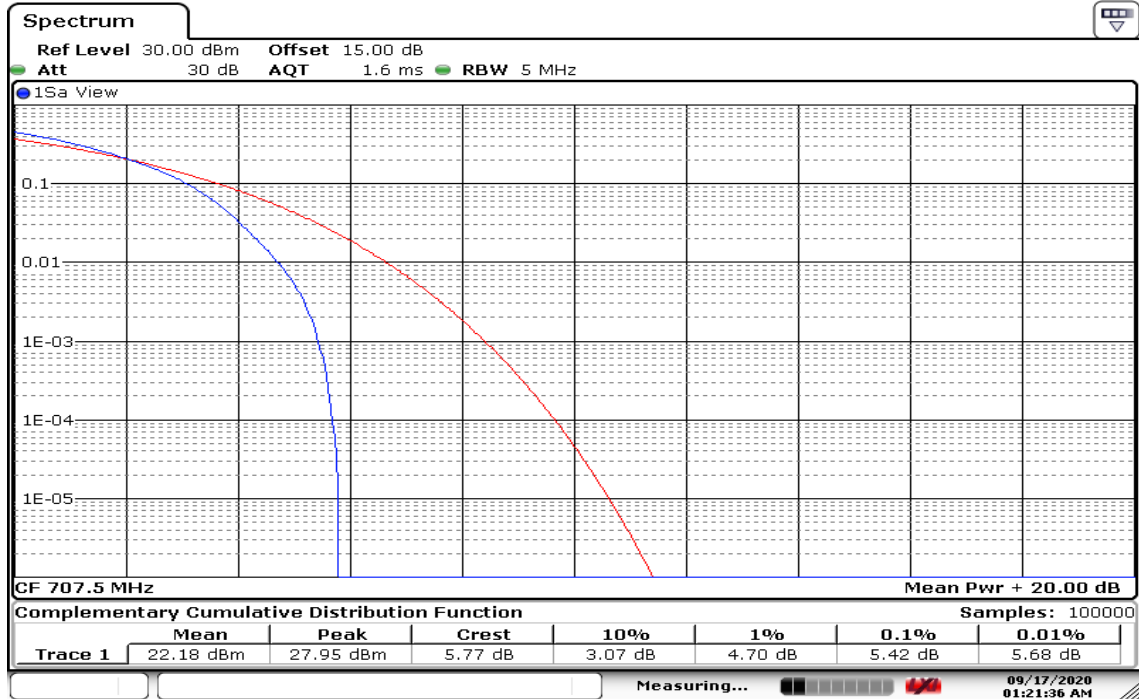

Date: 17 SEP 2020 01:21:37

CHANNEL BANDWIDTH: 10MHz / 16QAM / FULL RB

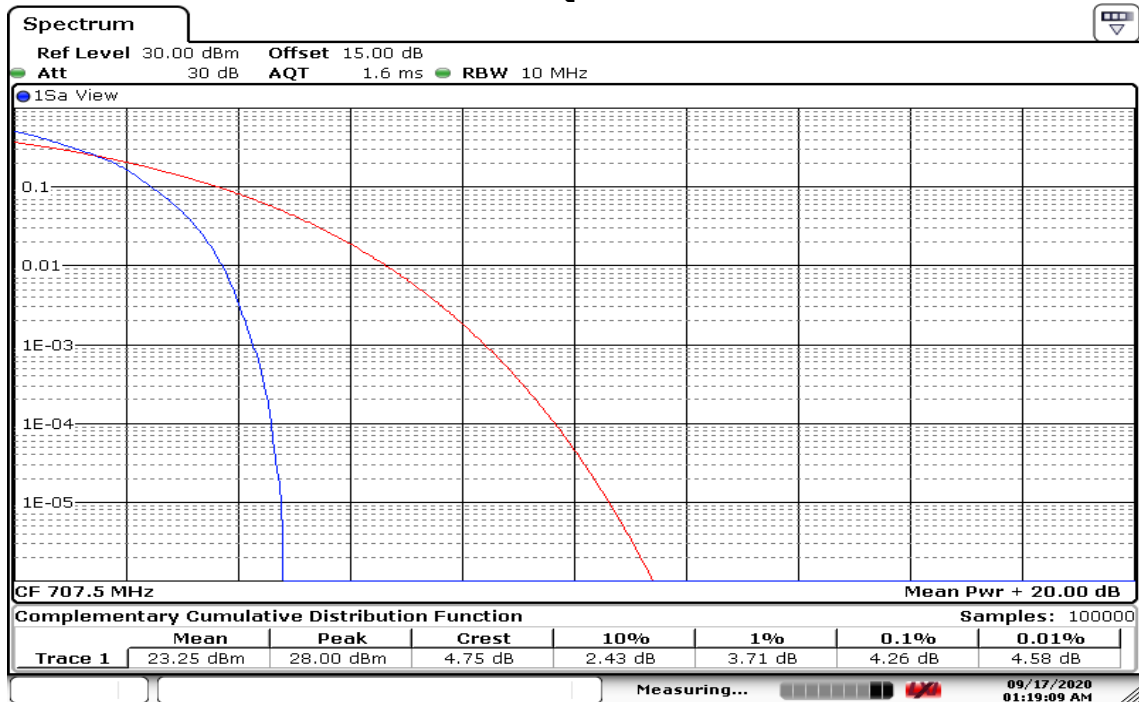

Date: 17 SEP 2020 01:19:09

8.5 BAND EDGE MEASUREMENT

LIMIT

Part 27.53 (g), Band 12

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

TEST PROCEDURES

KDB 971168 D01 Power Meas License Digital Systems – Section 6.0

1. RBW $\geq$ 1% of the emission bandwidth
2. VBW $\geq$ 3 x RBW
3. Span was set large enough so as to capture all out of emissions near the band edge.

TEST RESULTS:

Offset= cable loss+ splitter loss +attenuator

$1.21+3.78+10=14.99$ (Rounding = 15)

* cable loss:1.21

* splitter loss:3.78

* attenuator:10

Temperature: 24.1°C

Humidity: 50.5% RH


Tested by: Rick Lee

Test date: September 17, 2020

LTE Band 12

CHANNEL BANDWIDTH: 1.4MHz / QPSK / 1RB ALLOCATION

LOWER BAND EDGE

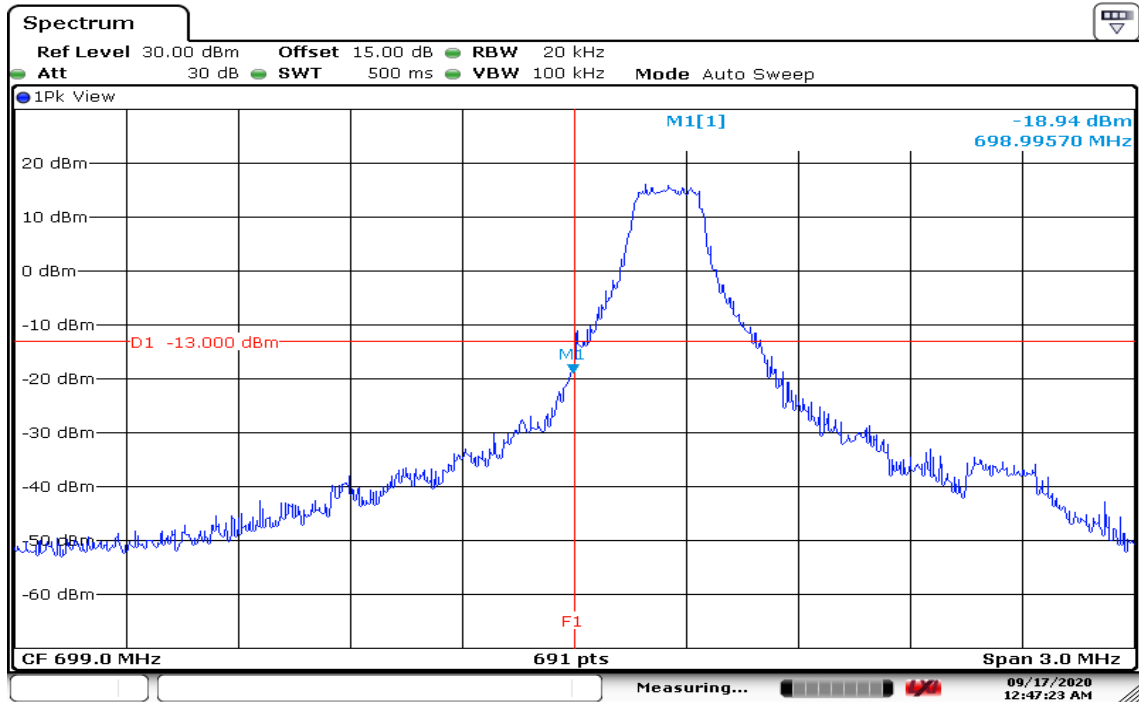


Date: 17 SEP 2020 00:47:22

HIGHER BAND EDGE




Date: 17 SEP 2020 00:50:45

CHANNEL BANDWIDTH: 3MHz / QPSK / 1RB ALLOCATION LOWER BAND EDGE

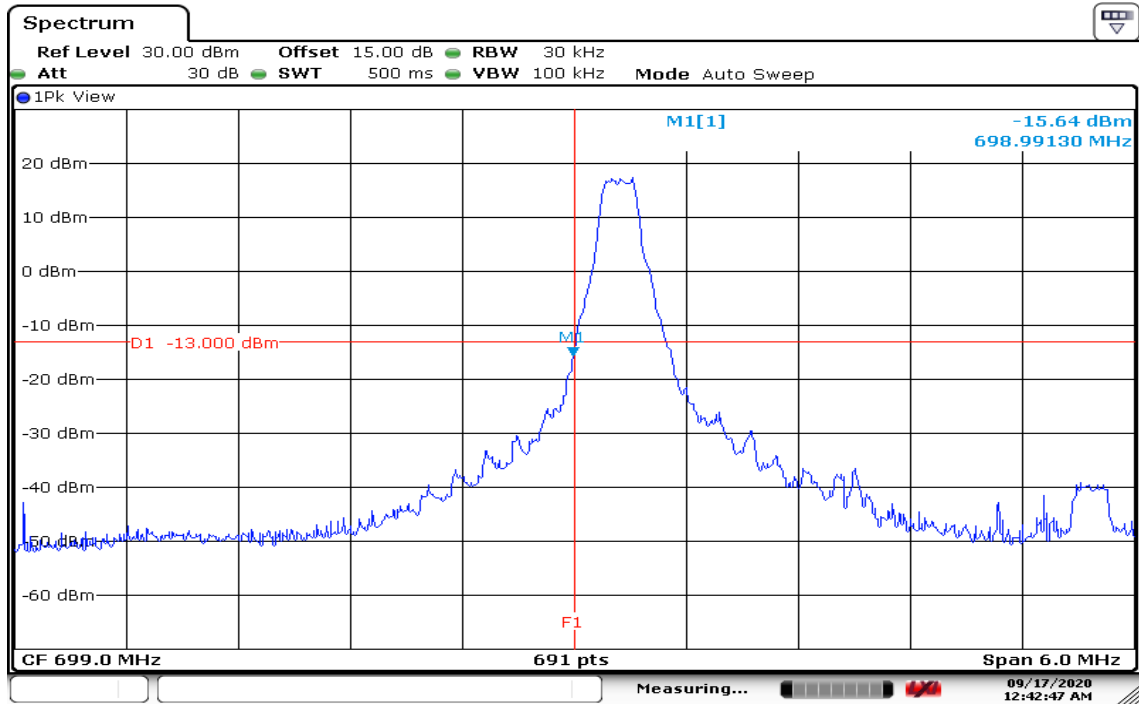


Date: 17..SEP.2020 00:42:47

HIGHER BAND EDGE

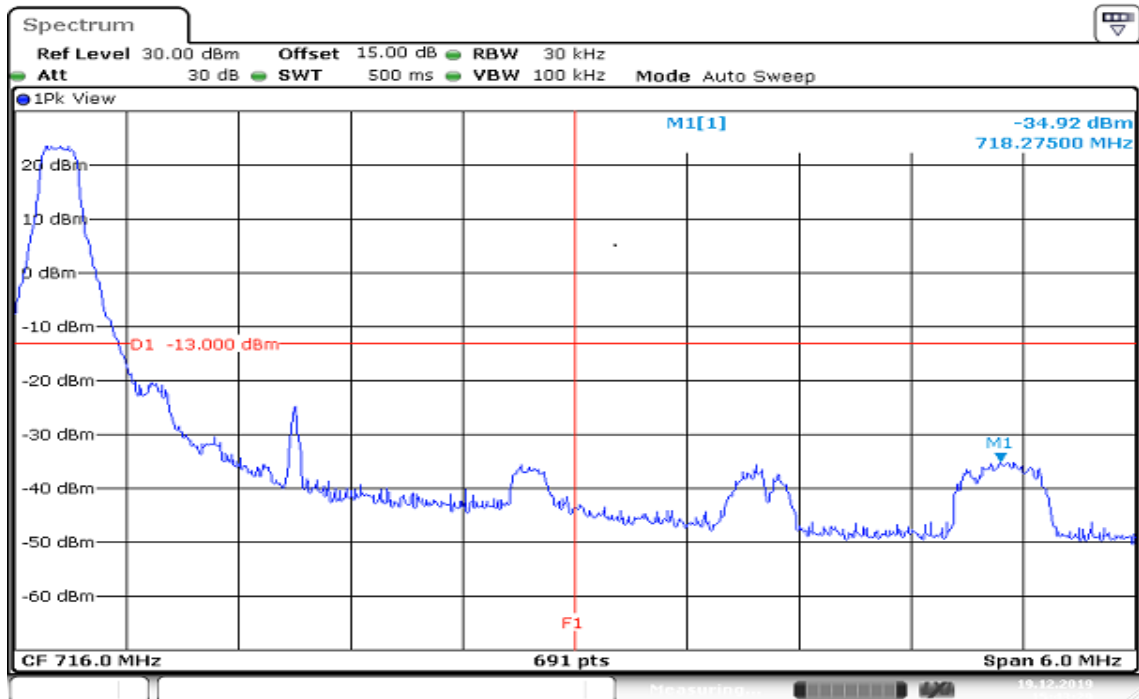


Date: 17..SEP.2020: 15:43:29

CHANNEL BANDWIDTH: 5MHz / QPSK / 1RB ALLOCATION LOWER BAND EDGE

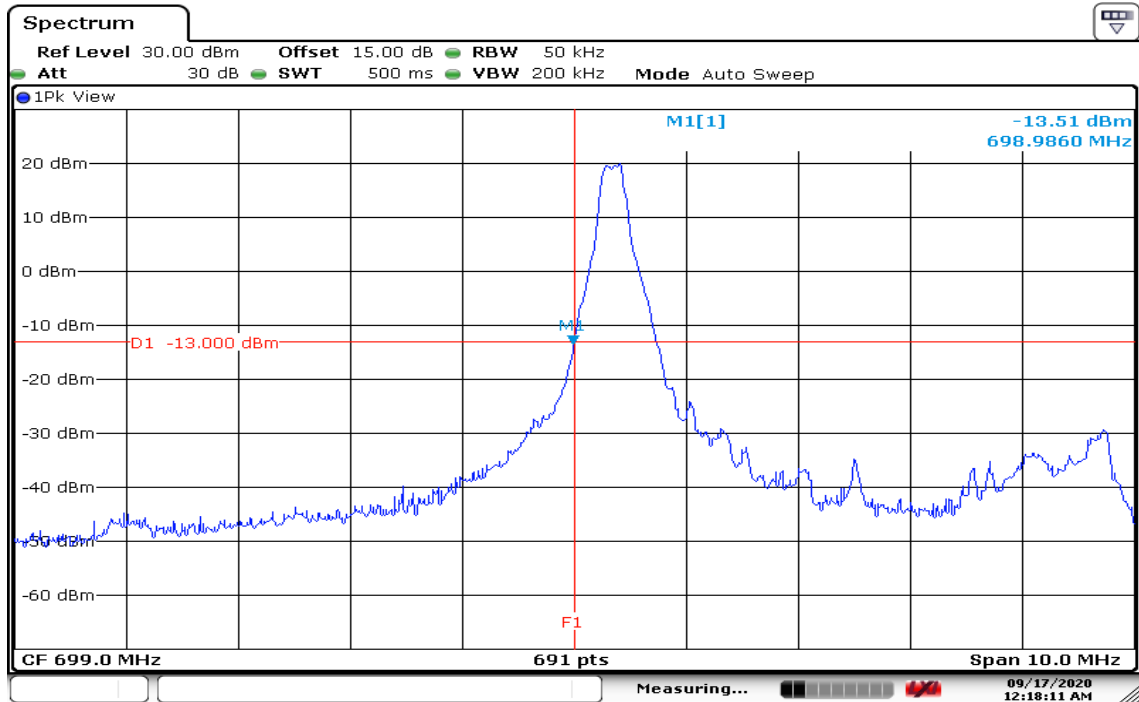


Date: 17 SEP 2020 00:18:11

HIGHER BAND EDGE

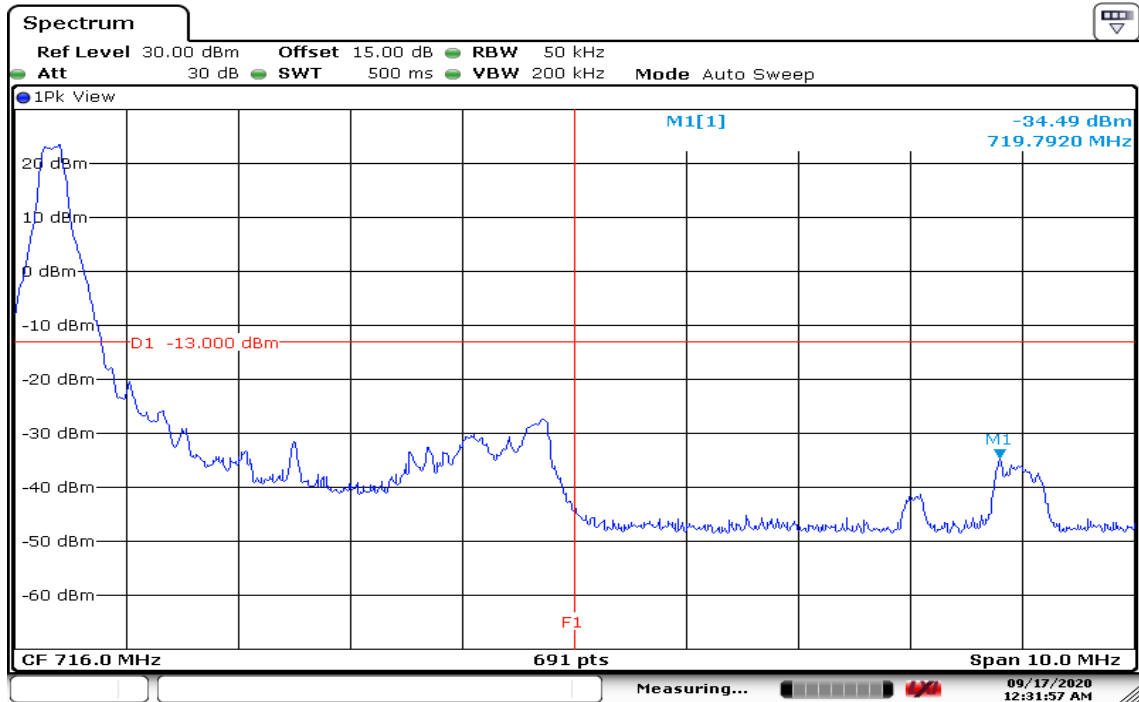


Date: 17 SEP 2020 00:31:57

CHANNEL BANDWIDTH: 10MHz / QPSK / 1RB ALLOCATION LOWER BAND EDGE

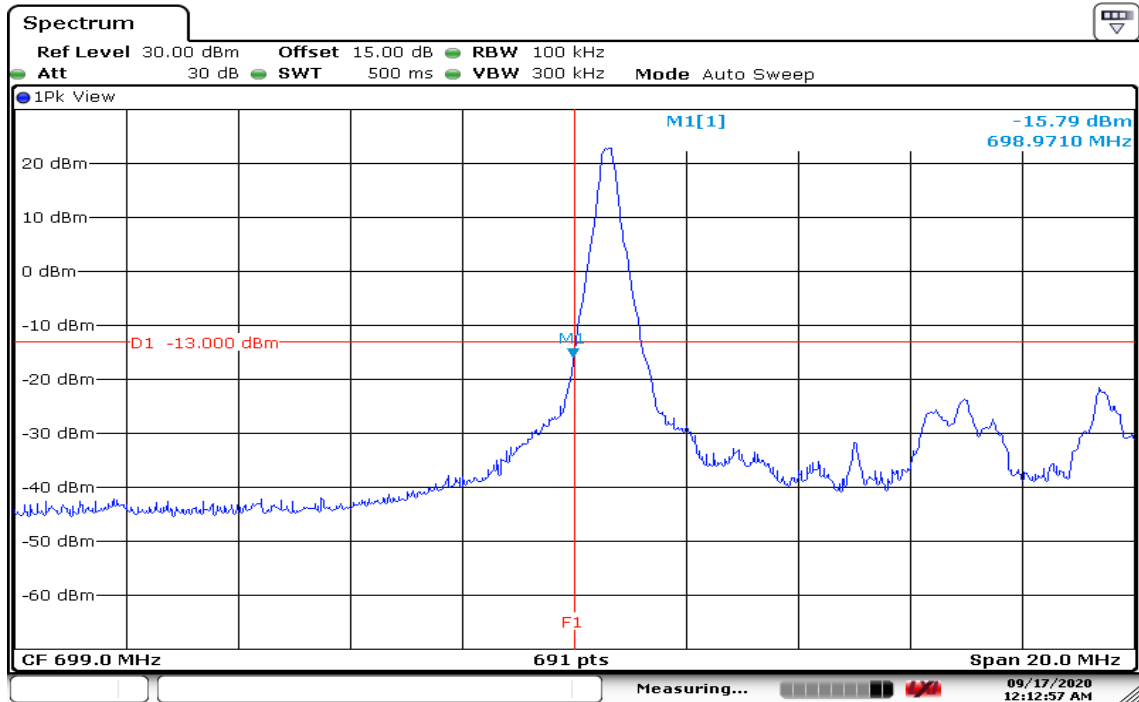


Date: 17 SEP 2020 00:12:57

HIGHER BAND EDGE

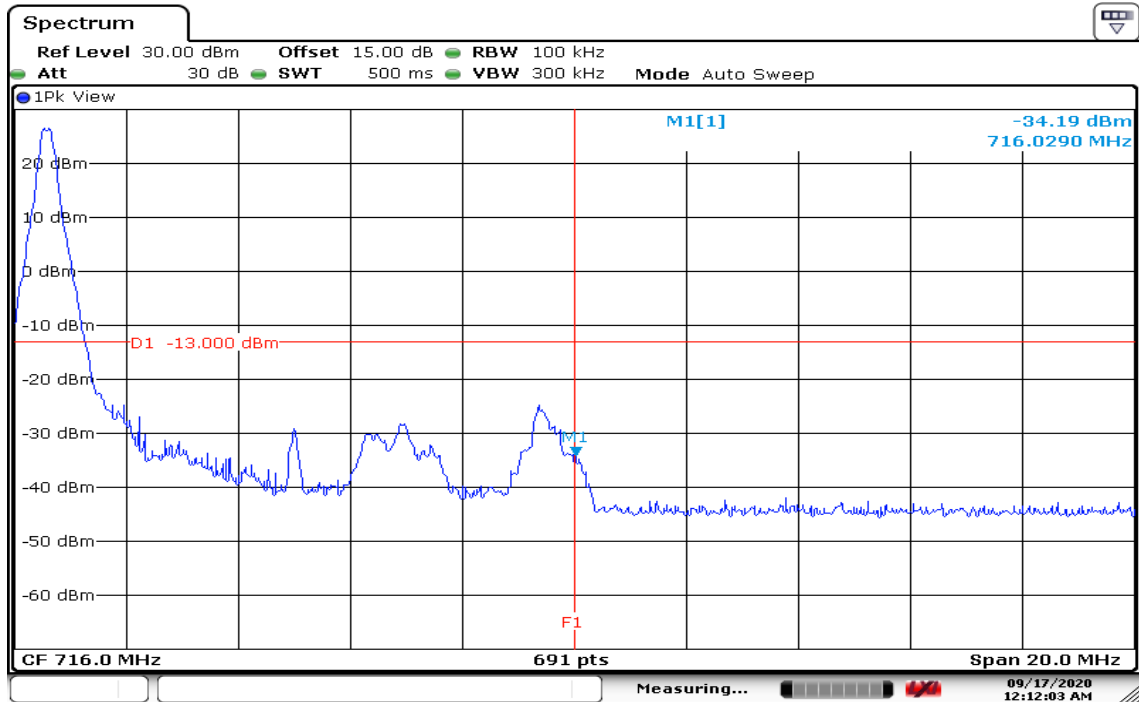


Date: 17 SEP 2020 00:12:04

CHANNEL BANDWIDTH: 1.4MHz / QPSK / FULLRB ALLOCATION LOWER BAND EDGE

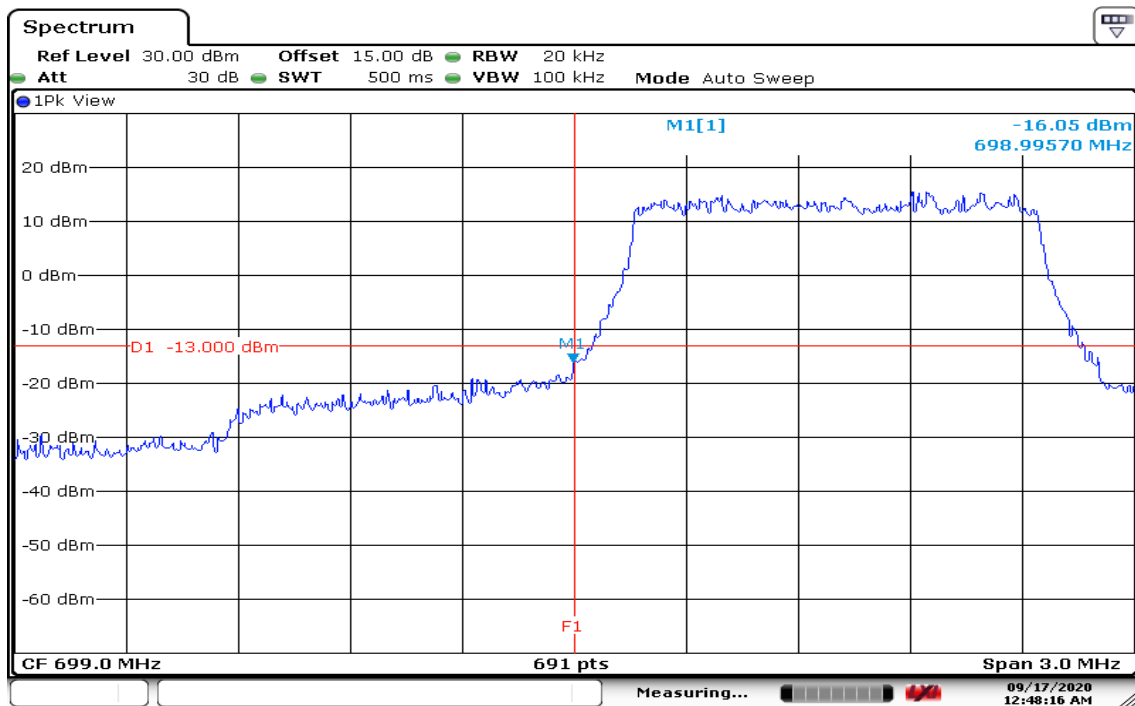


Date: 17 SEP 2020 00:48:16

HIGHER BAND EDGE

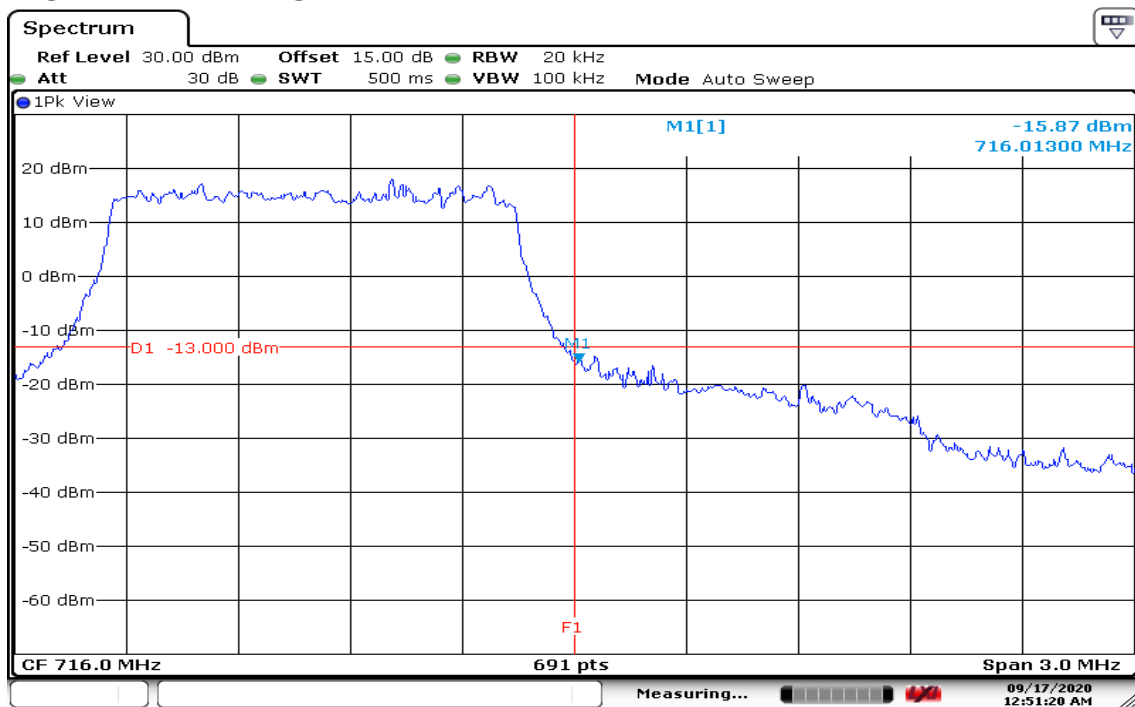


Date: 17 SEP 2020 00:51:20

CHANNEL BANDWIDTH: 3MHz / QPSK / FULLRB ALLOCATION LOWER BAND EDGE

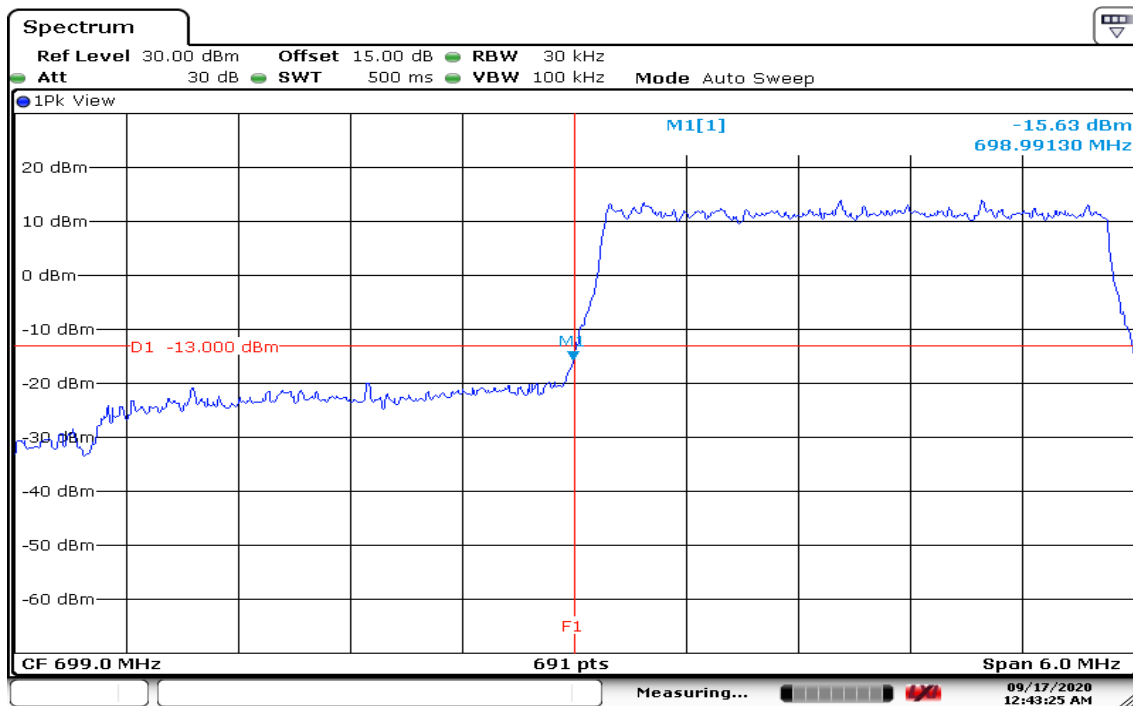


Date: 17 SEP 2020 00:43:26

HIGHER BAND EDGE

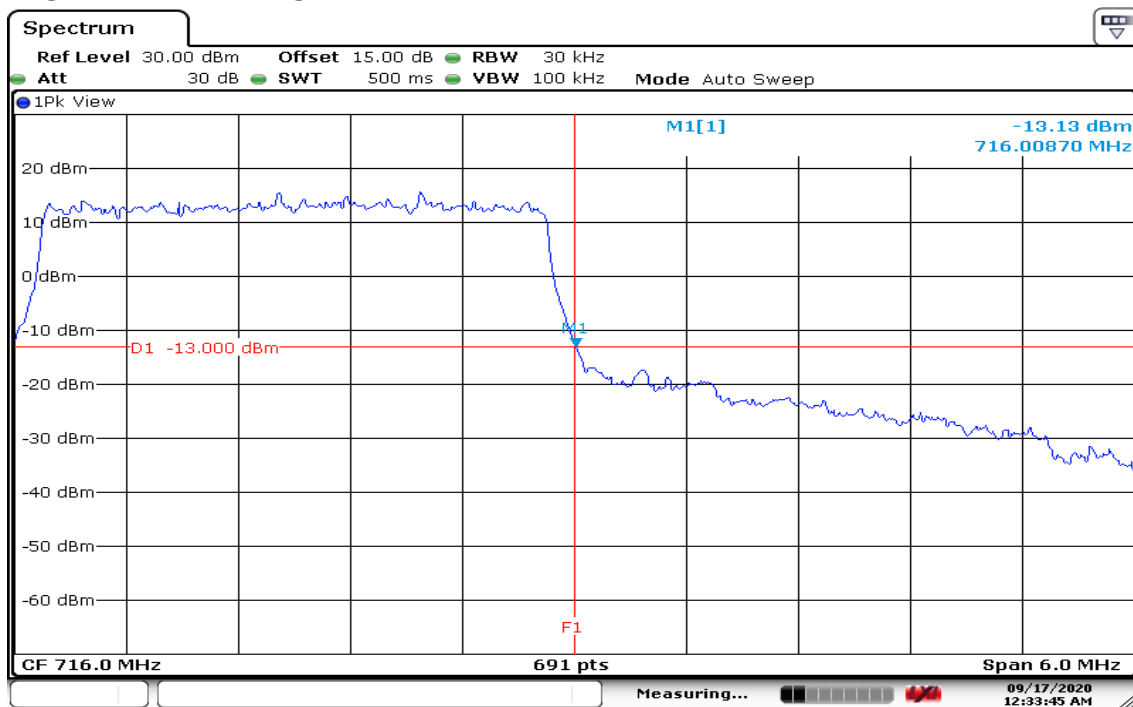


Date: 17 SEP 2020 00:43:45

CHANNEL BANDWIDTH: 5MHz / QPSK / FULLRB ALLOCATION LOWER BAND EDGE

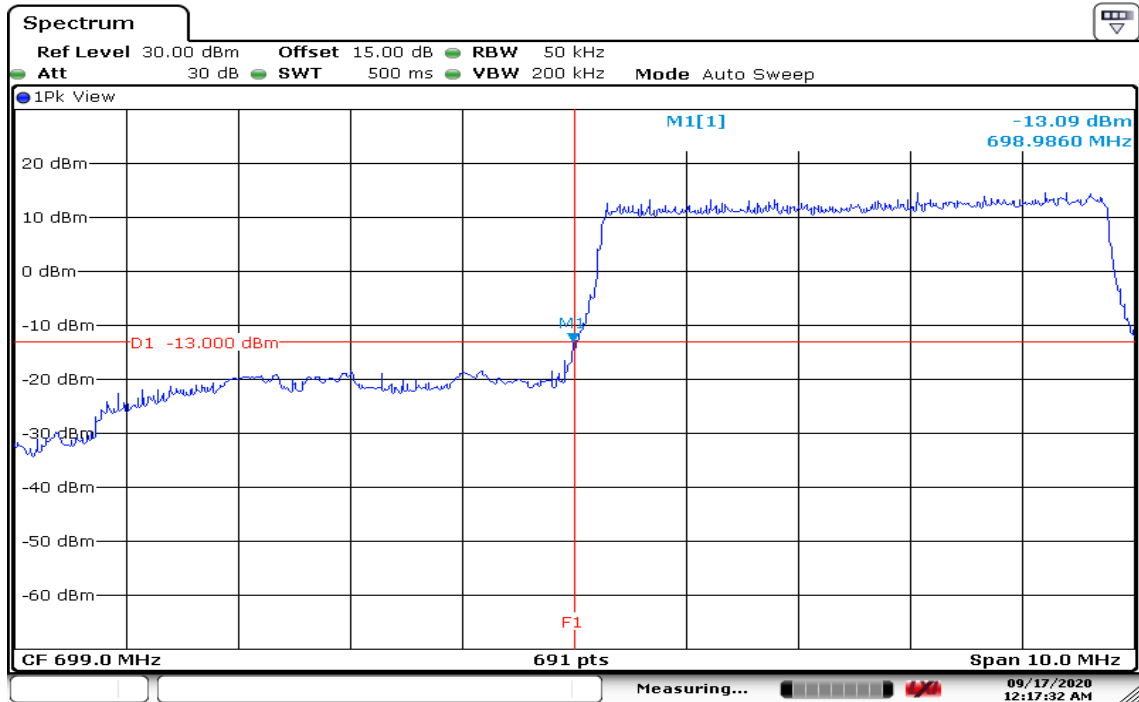


Date: 17 SEP 2020 00:17:33

HIGHER BAND EDGE

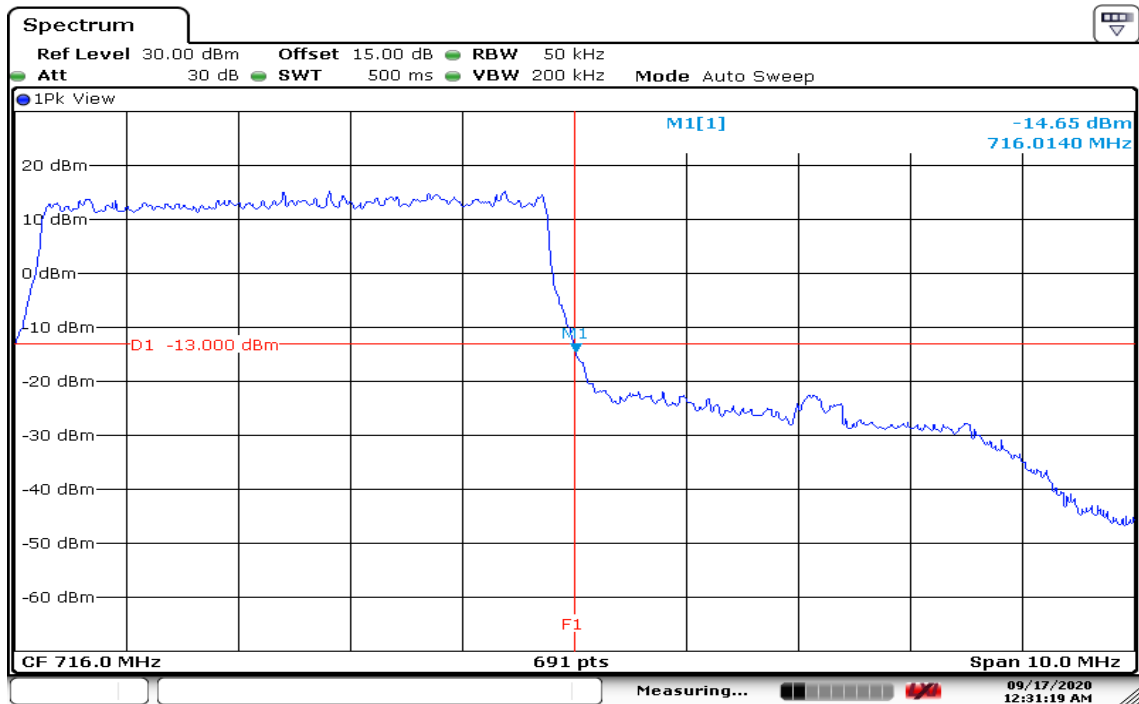


Date: 17 SEP 2020 00:31:20

CHANNEL BANDWIDTH: 10MHz / QPSK / FULLRB ALLOCATION LOWER BAND EDGE

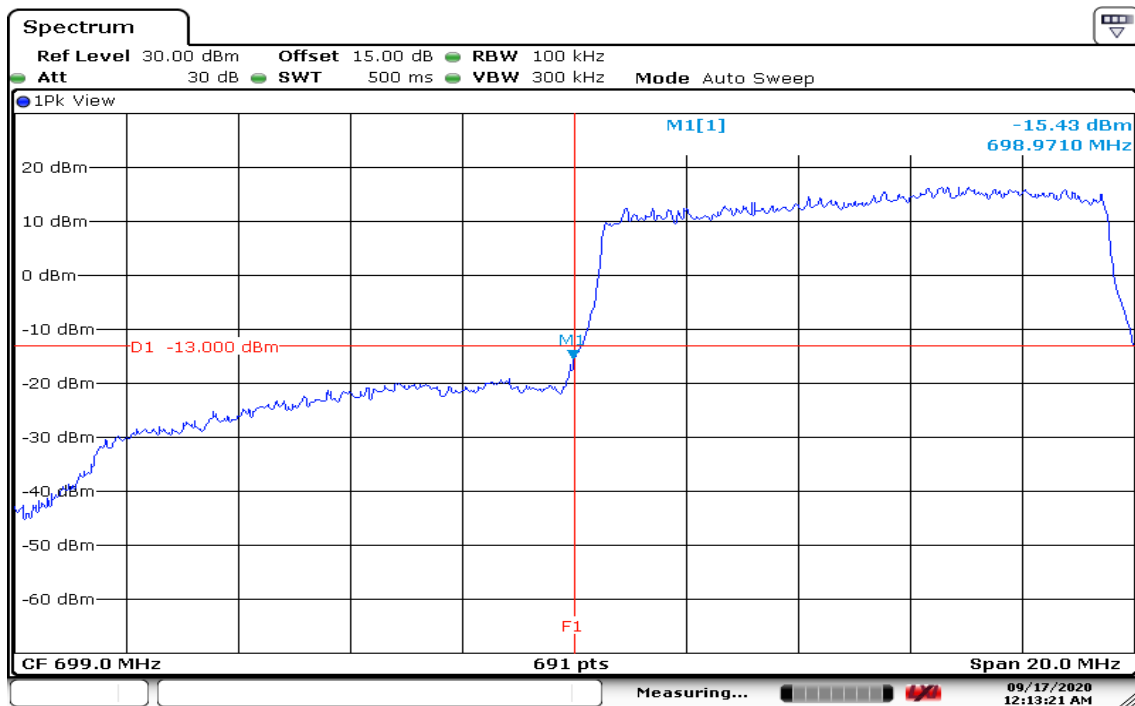


Date: 17 SEP 2020 00:13:22

HIGHER BAND EDGE

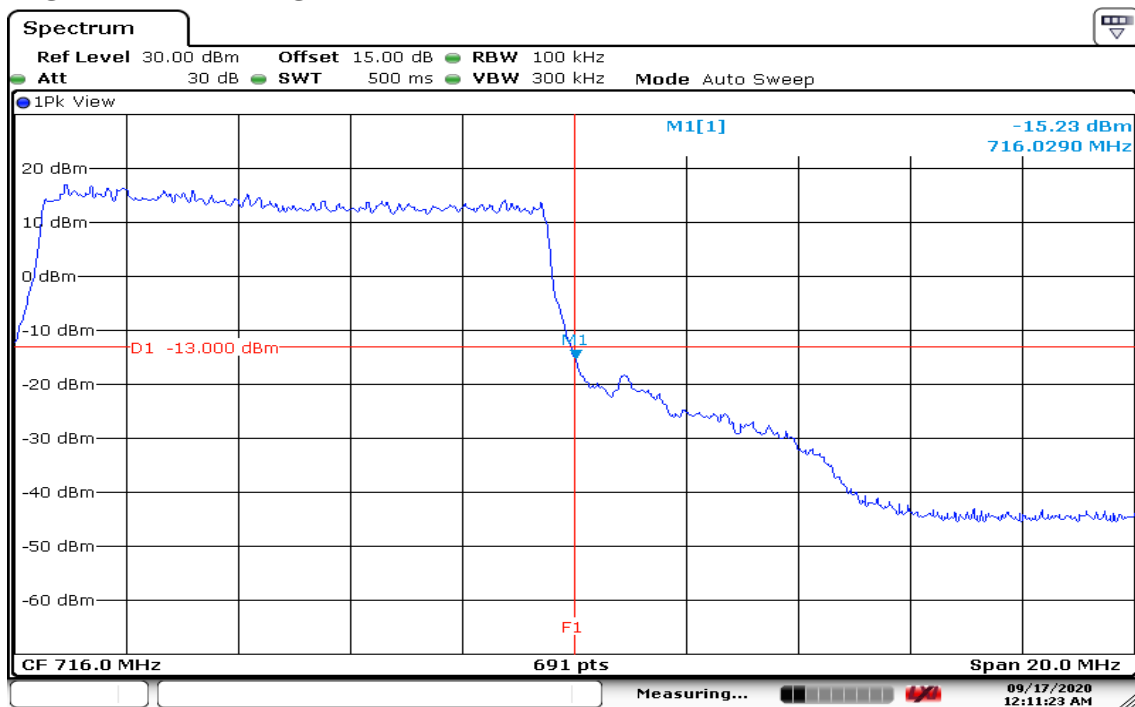

Date: 17 SEP 2020 00:11:23

CHANNEL BANDWIDTH: 1.4MHz / 16QAM/ 1RB ALLOCATION LOWER BAND EDGE

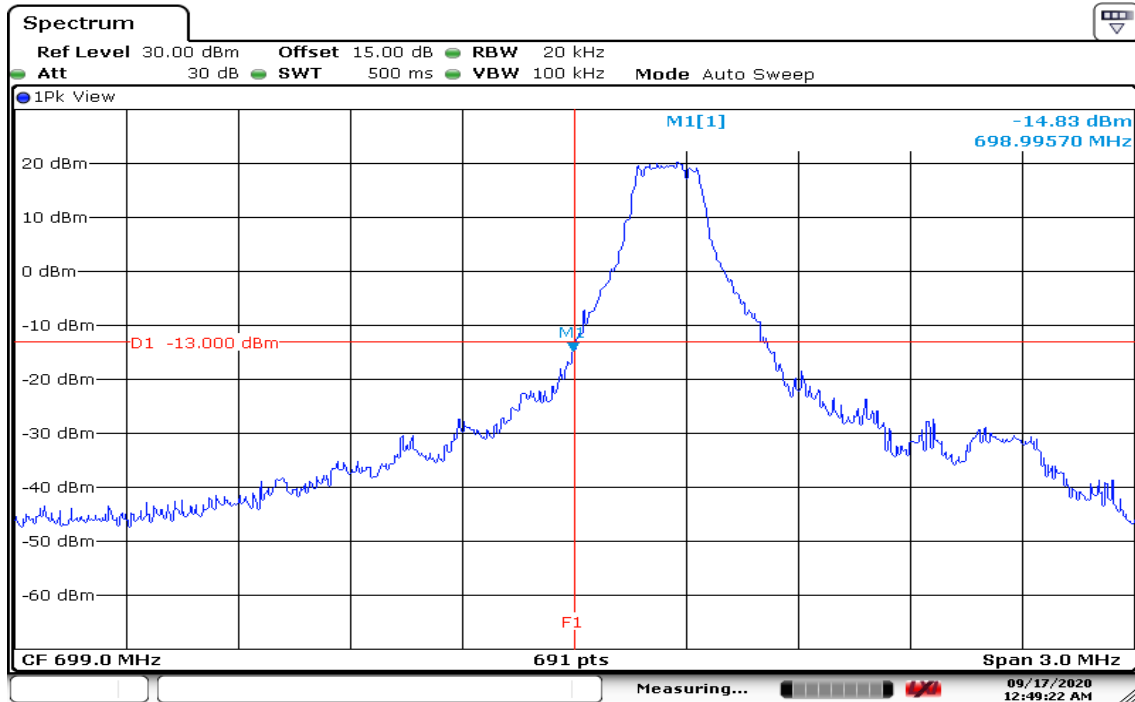


Date: 17 SEP 2020 00:49:22

HIGHER BAND EDGE




Date: 17 SEP 2020 00:50:20

CHANNEL BANDWIDTH: 3MHz / 16QAM/ 1RB ALLOCATION LOWER BAND EDGE

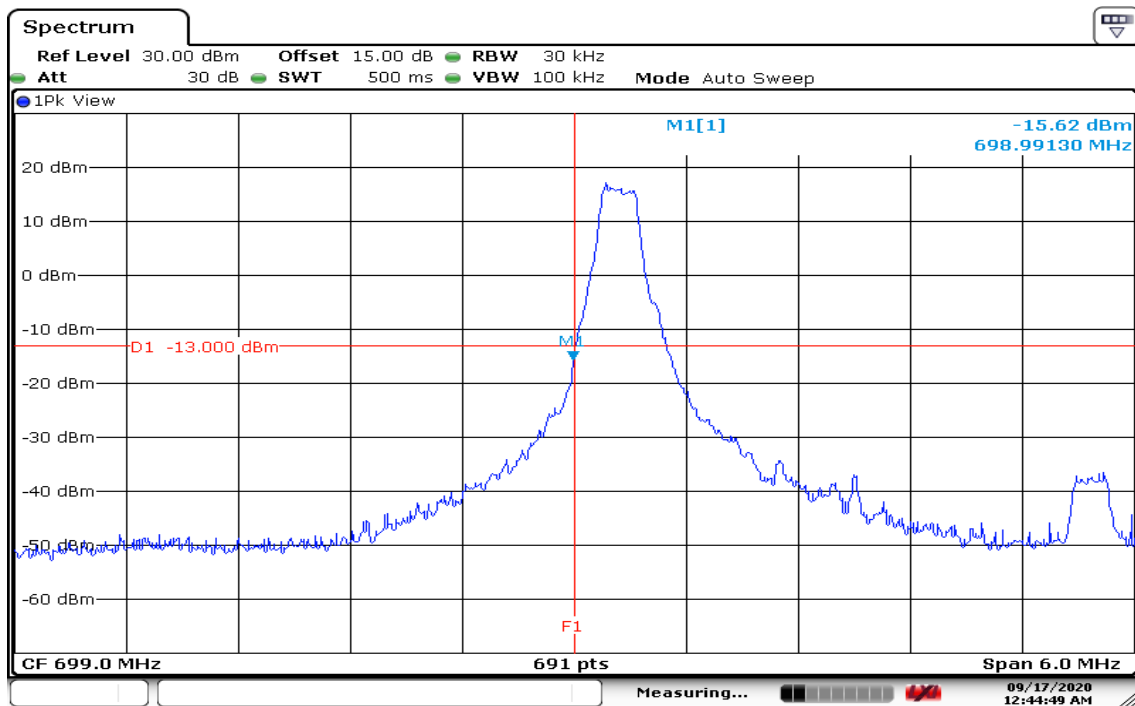


Date: 17 SEP 2020 00:44:50

HIGHER BAND EDGE

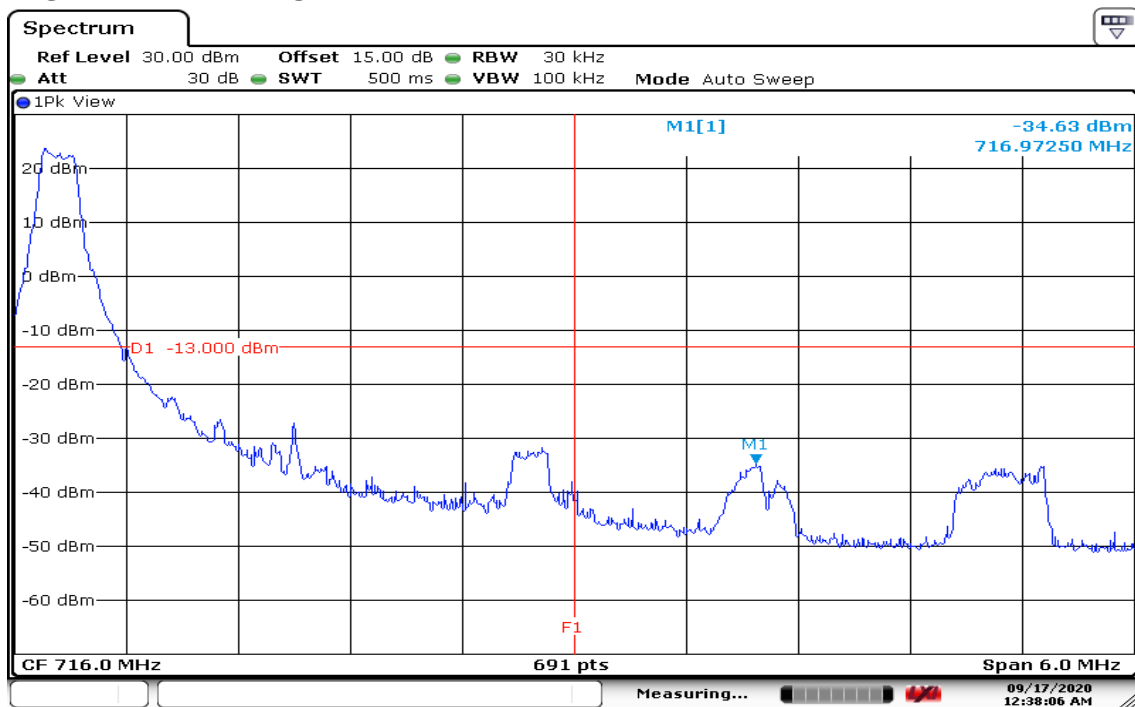


Date: 17 SEP 2020 00:38:07

CHANNEL BANDWIDTH: 5MHz / 16QAM/ 1RB ALLOCATION LOWER BAND EDGE

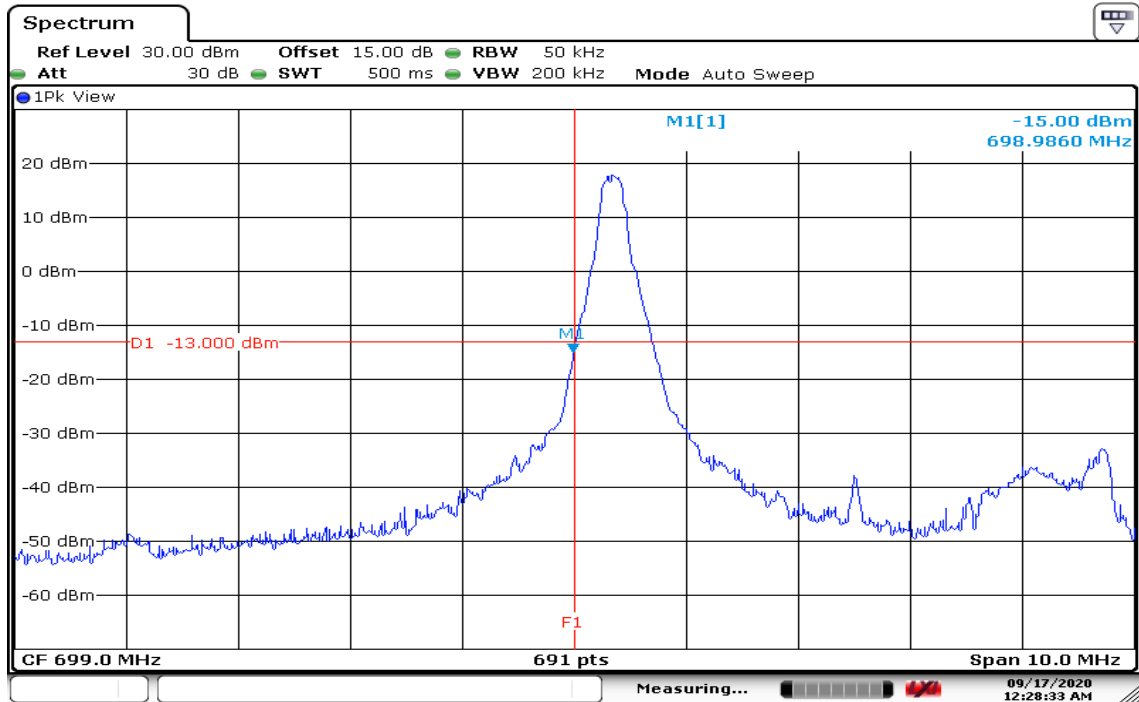


Date: 17 SEP 2020 00:28:33

HIGHER BAND EDGE

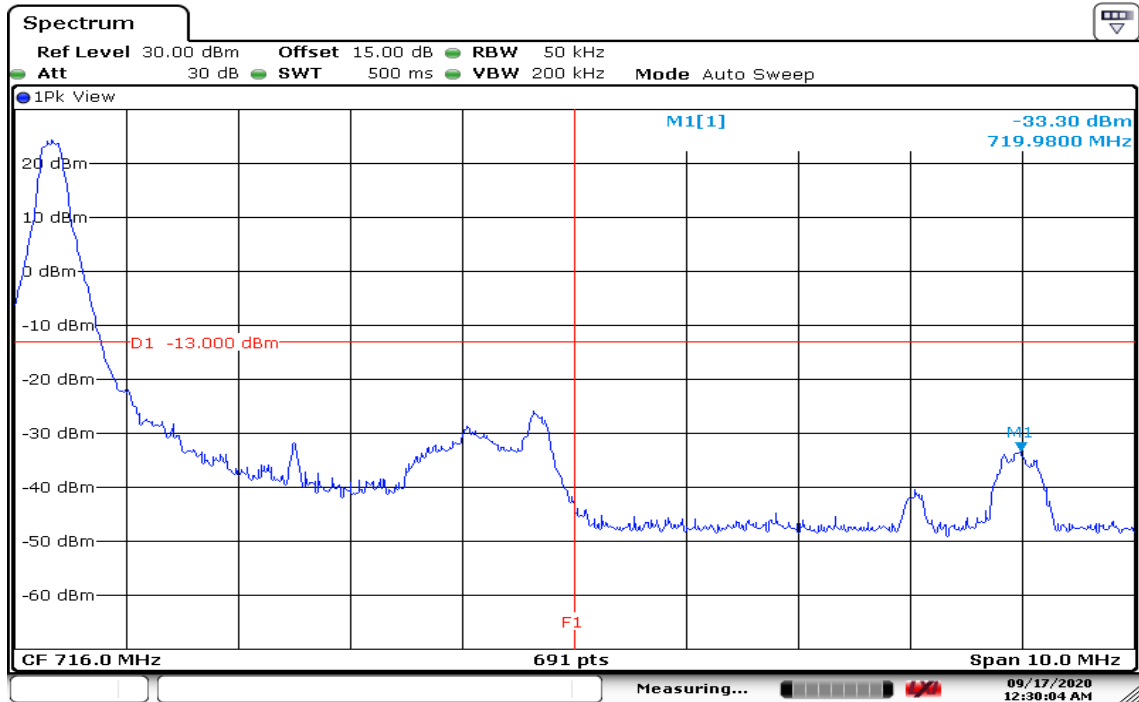


Date: 17 SEP 2020 00:30:05

CHANNEL BANDWIDTH: 10MHz / 16QAM/ 1RB ALLOCATION LOWER BAND EDGE

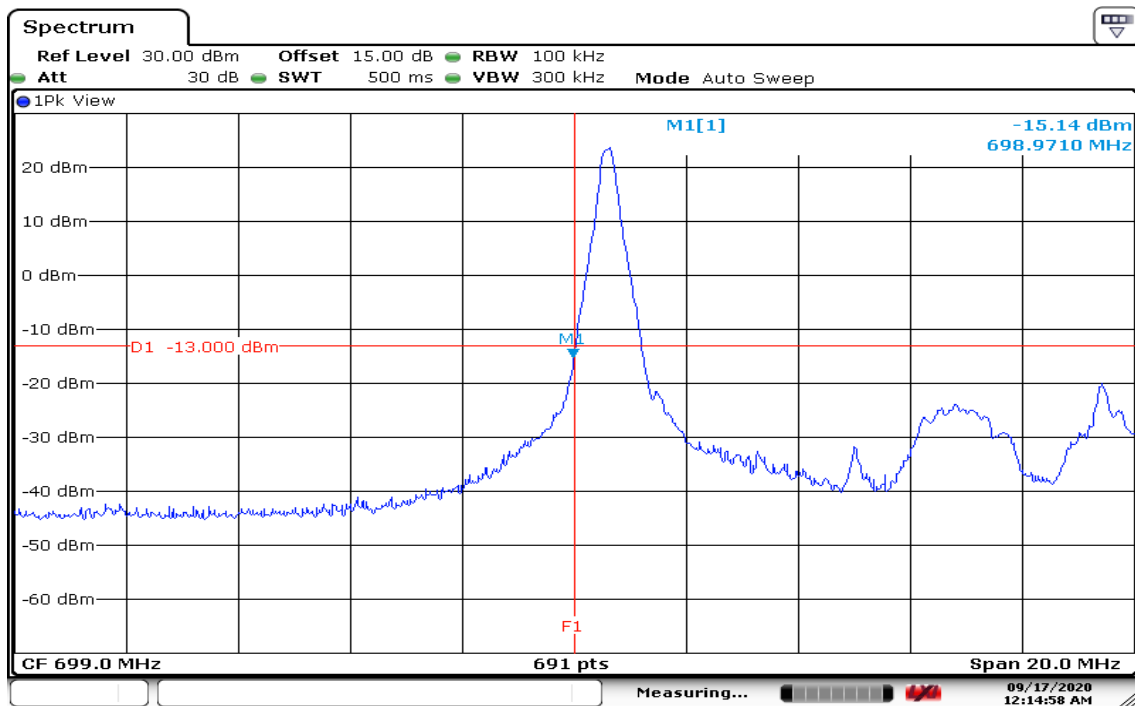


Date: 17 SEP 2020 00:14:58

HIGHER BAND EDGE

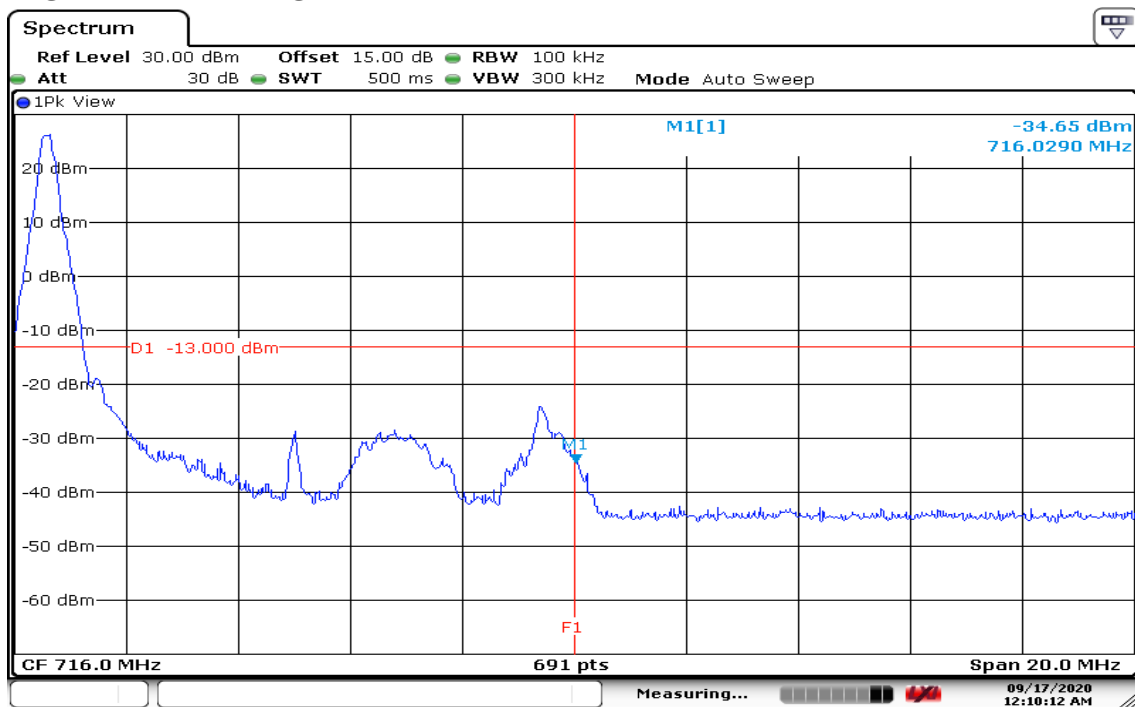


Date: 17 SEP 2020 00:10:12

CHANNEL BANDWIDTH: 1.4MHz / 16QAM/ FULLRB ALLOCATION LOWER BAND EDGE

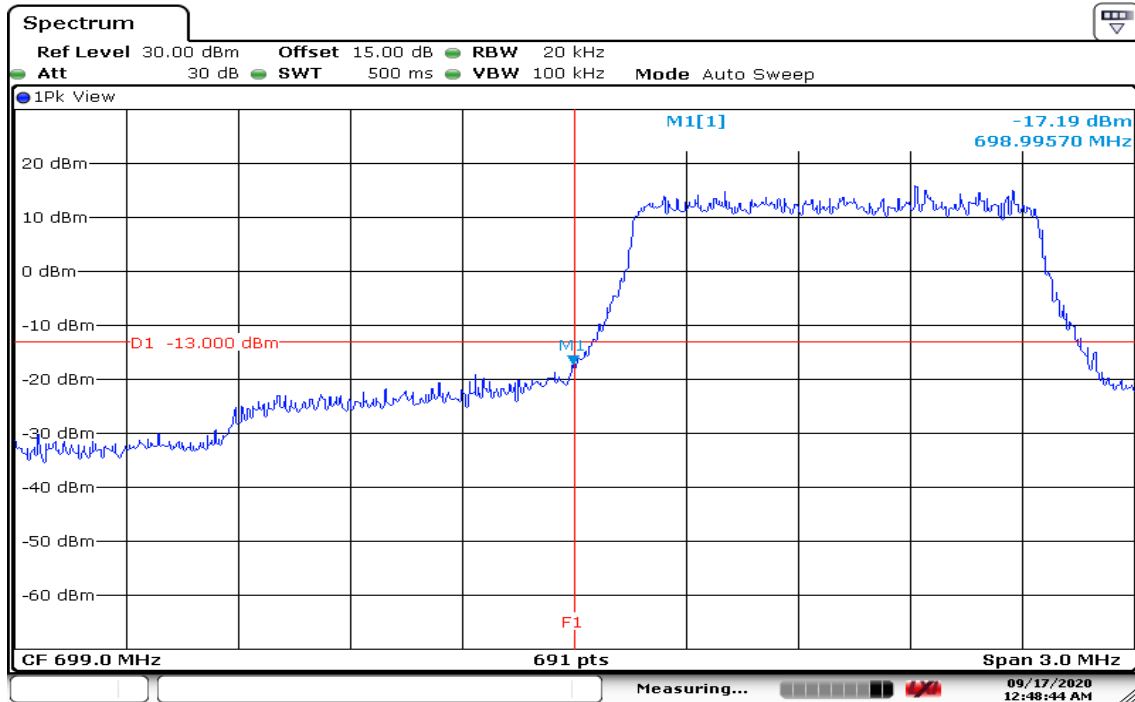


Date: 17 SEP 2020 00:48:44

HIGHER BAND EDGE

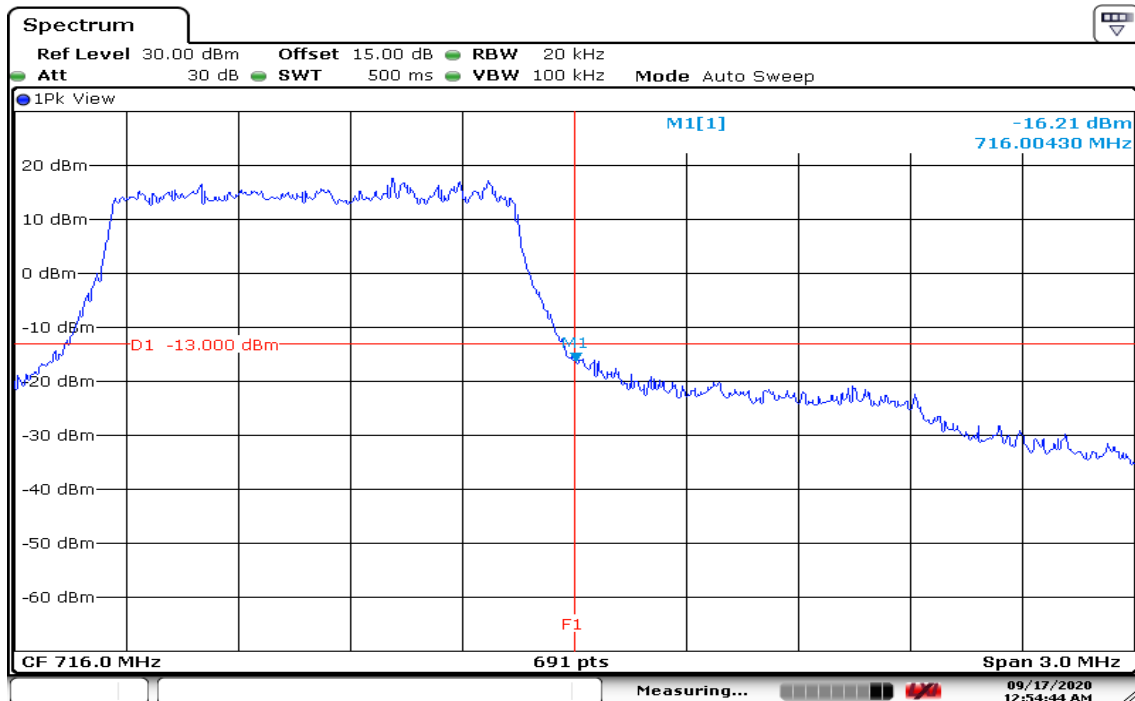


Date: 17 SEP 2020 00:54:44

CHANNEL BANDWIDTH: 3MHz / 16QAM/ FULLRB ALLOCATION LOWER BAND EDGE

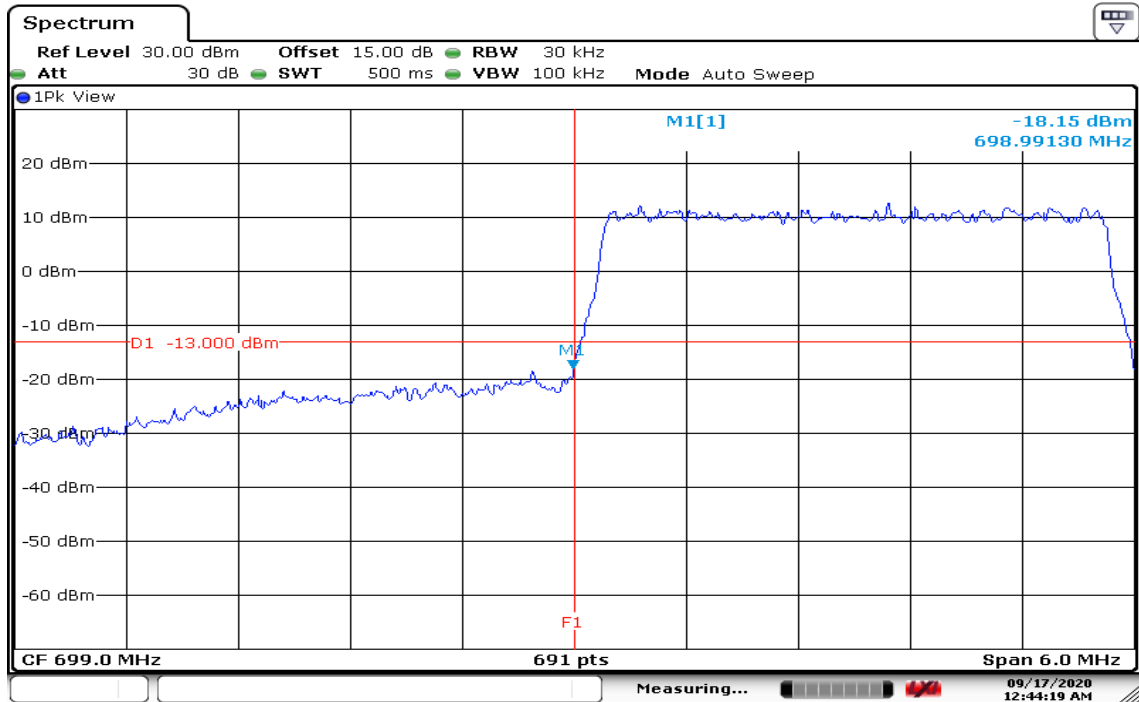


Date: 17 SEP 2020 00:44:20

HIGHER BAND EDGE

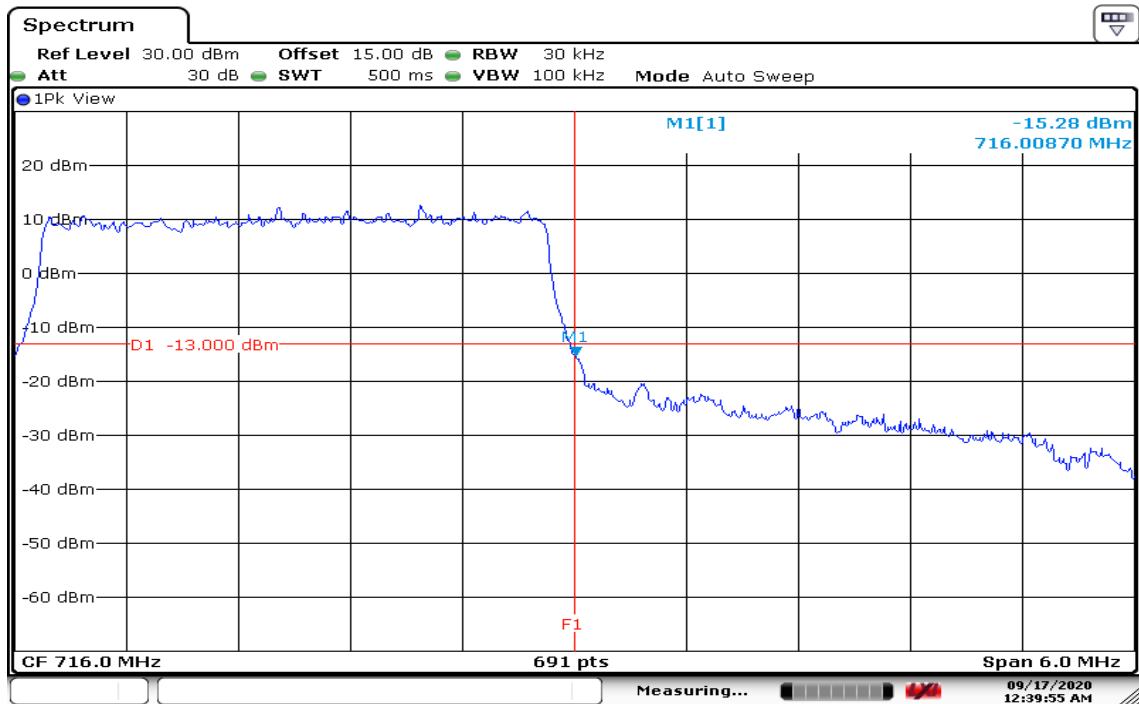


Date: 17 SEP 2020 00:39:56

CHANNEL BANDWIDTH: 5MHz / 16QAM/ FULLRB ALLOCATION LOWER BAND EDGE

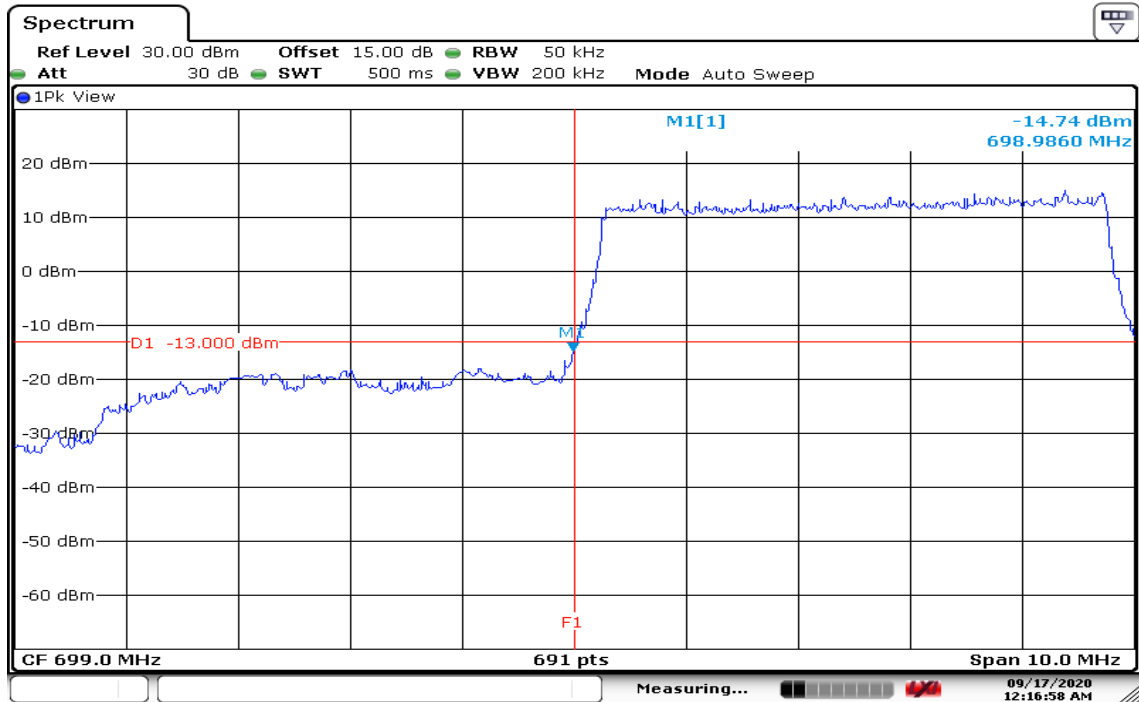

Date: 17 SEP 2020 00:16:58


HIGHER BAND EDGE

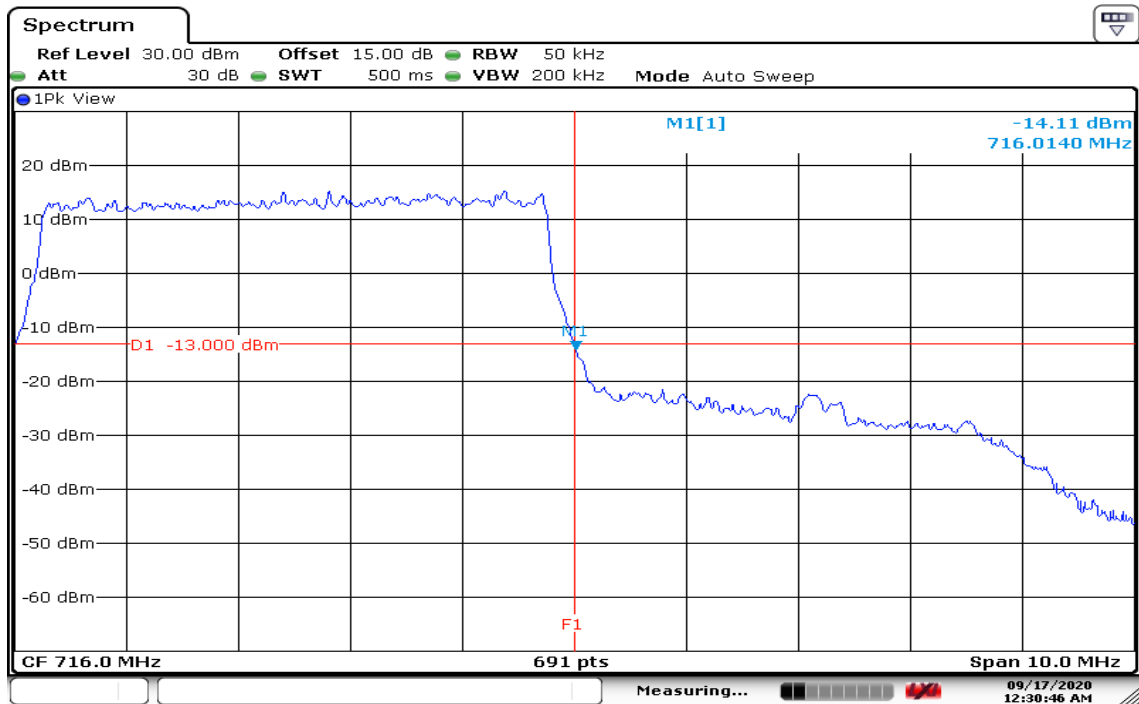

Date: 17 SEP 2020 00:30:46


Report No.: T200825W02-RP5

CHANNEL BANDWIDTH: 10MHz / 16QAM/ FULLRB ALLOCATION LOWER BAND EDGE

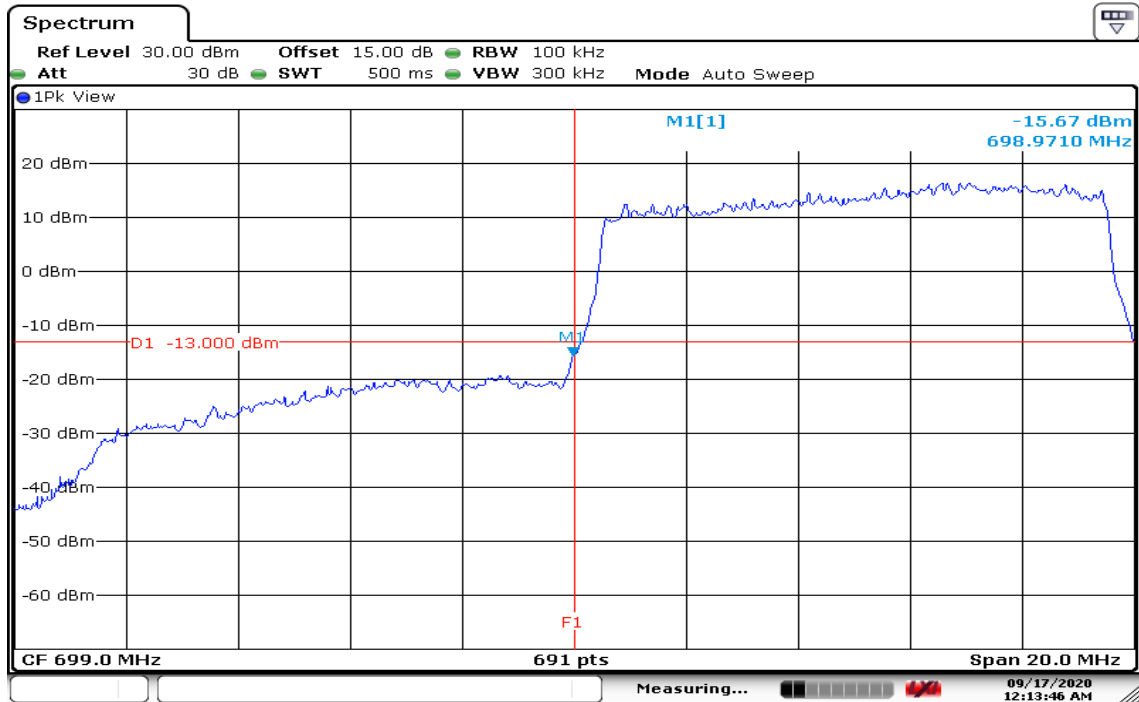

Date: 17 SEP 2020 00:13:46

HIGHER BAND EDGE

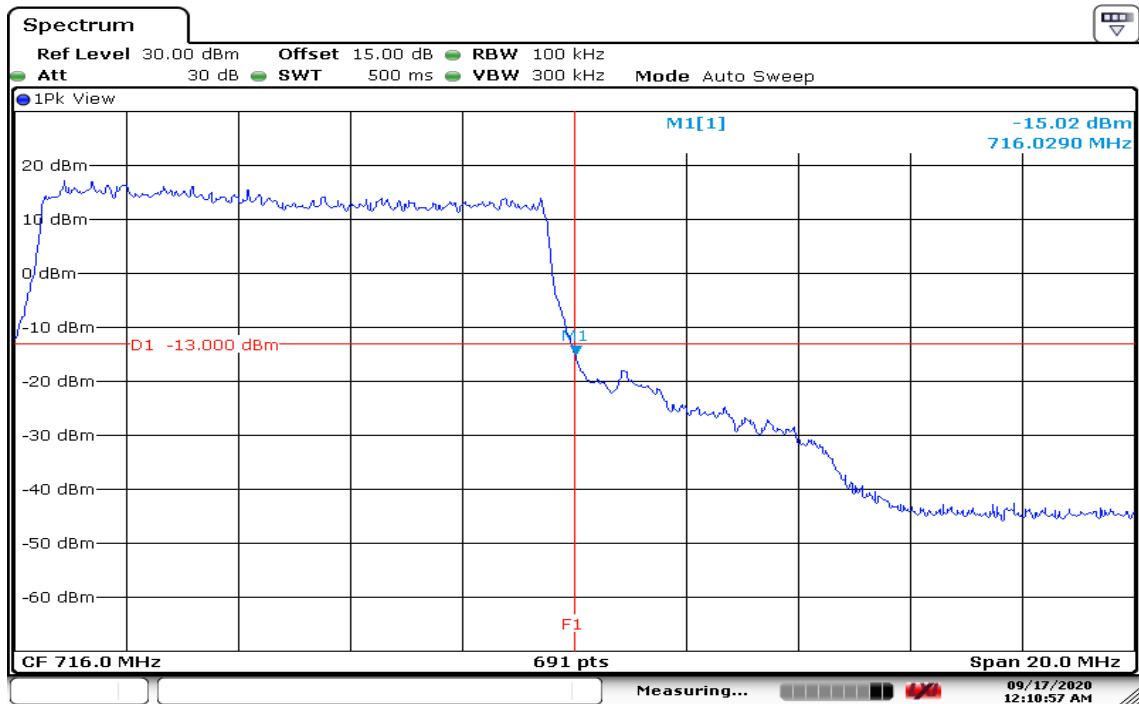

Date: 17 SEP 2020 00:10:58

8.6 CONDUCTED SPURIOUS EMISSIONS

LIMITS

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

TEST PROCEDURES

1. According to KDB 971168D01, photograph 6.0
2. The EUT was connect to spectrum analyzer and call box.
3. The RF output of EUT was connected to the spectrum analyzer.
4. Set the spectrum analyzer , RBW=1MHz, VBW=3MHz.
5. Record the maximum spurious emission.
6. The fundamental frequency should be excluded against the limit in operating band.

TEST RESULTS

Temperature: 24.1°C

Humidity: 50.5% RH


Tested by: Rick Lee

Test date: September 17, 2020

LTE Band 12


CHANNEL BANDWIDTH: 1.4MHz /QPSK / 1RB

CH Low

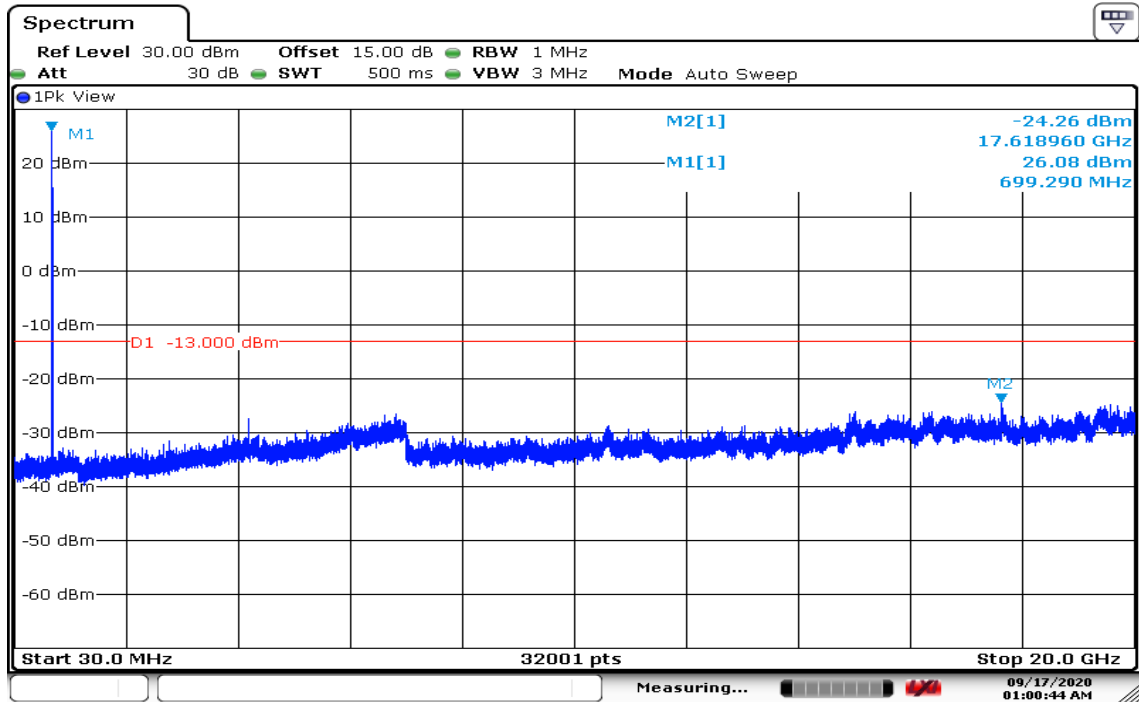


Date: 17 SEP 2020 01:00:44

CH Mid

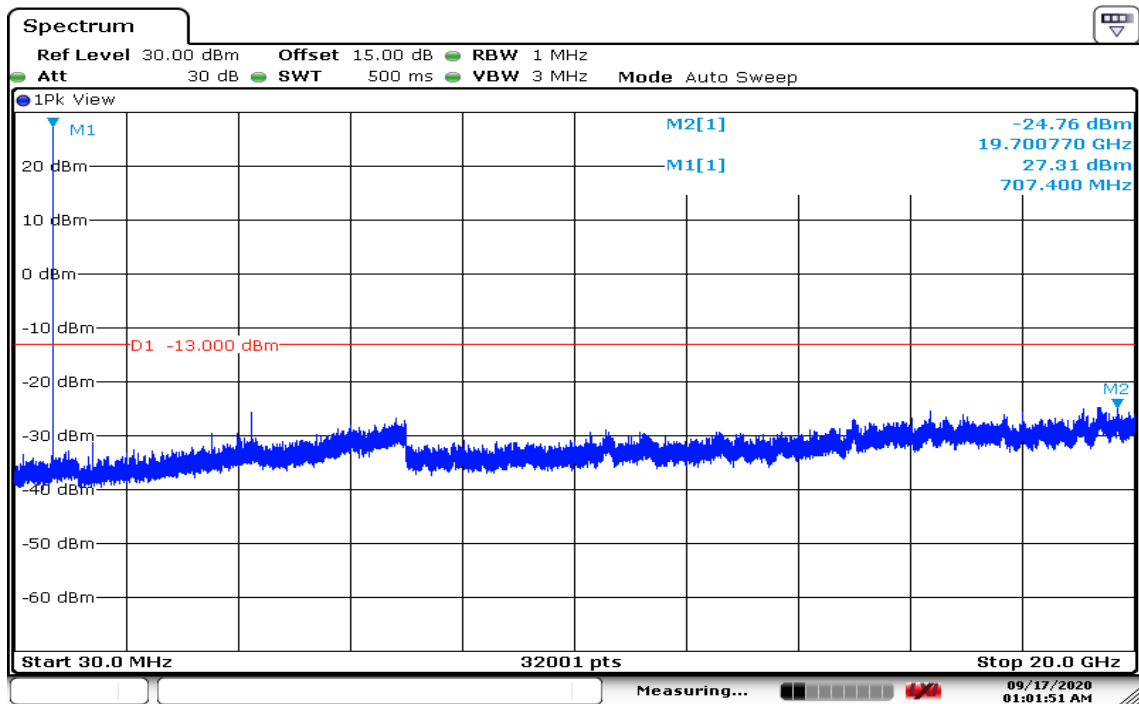

Date: 17 SEP 2020 01:01:51

CH High

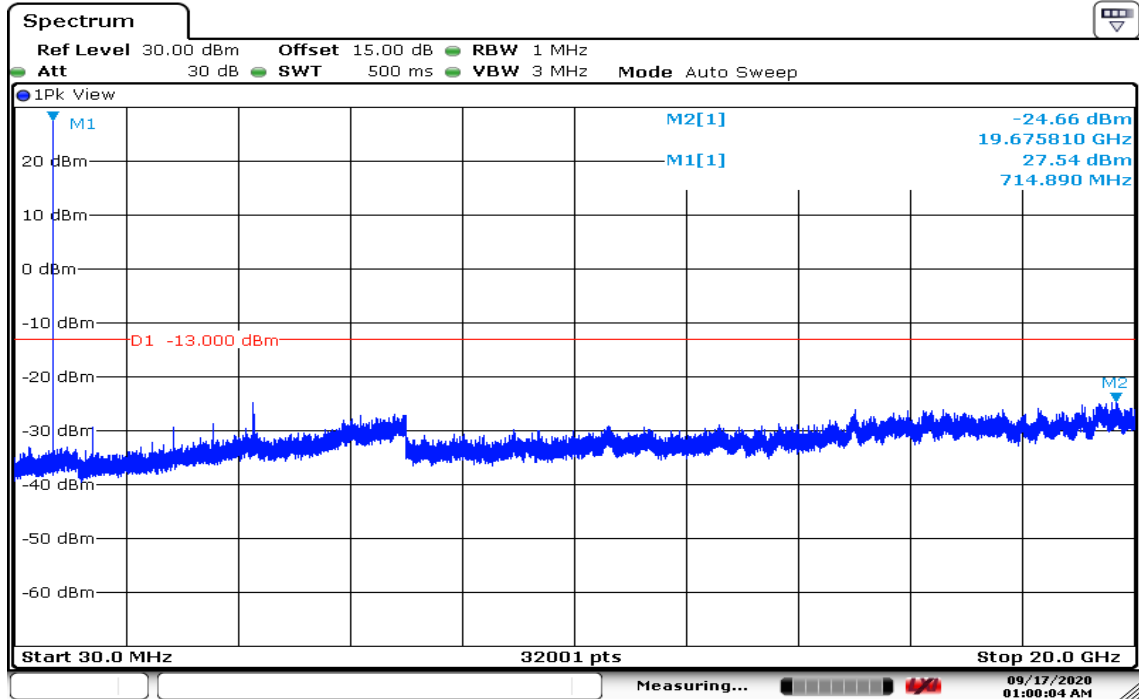


Date: 17 SEP 2020 01:00:04

Report No.: T200825W02-RP5


Page: 58 / 80
Rev.: 01

CHANNEL BANDWIDTH: 3MHz /QPSK / 1RB CH Low

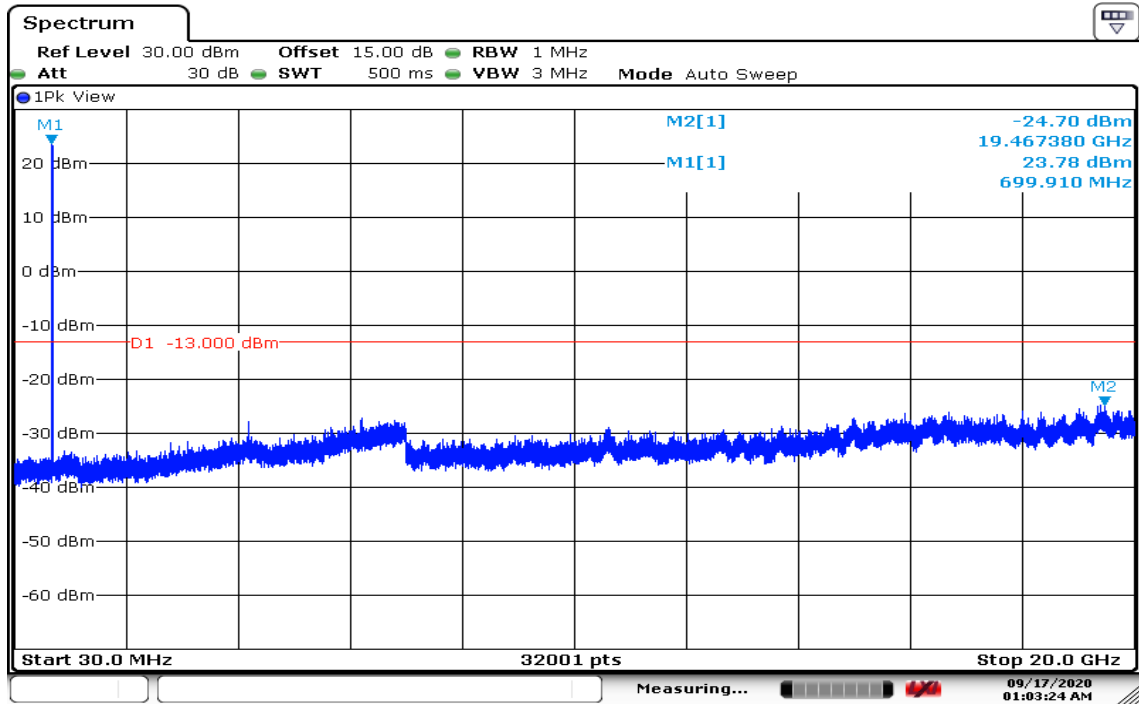


Date: 17 SEP 2020 01:03:24

CH Mid

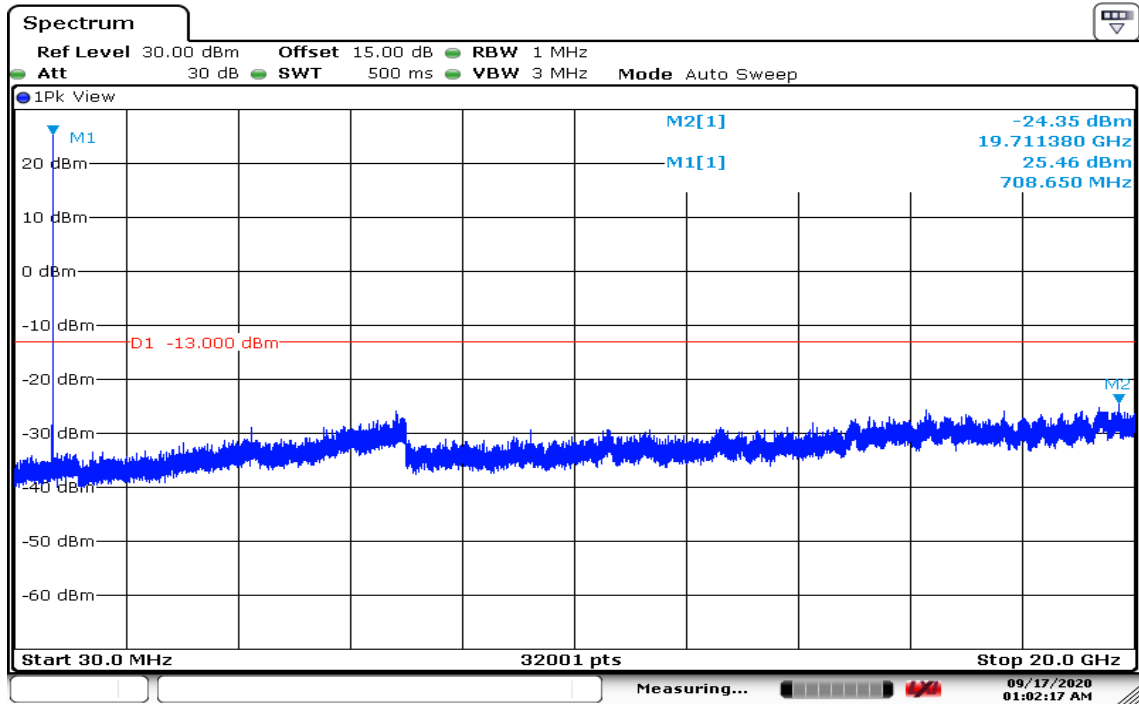

Date: 17 SEP 2020 01:02:17


CH High

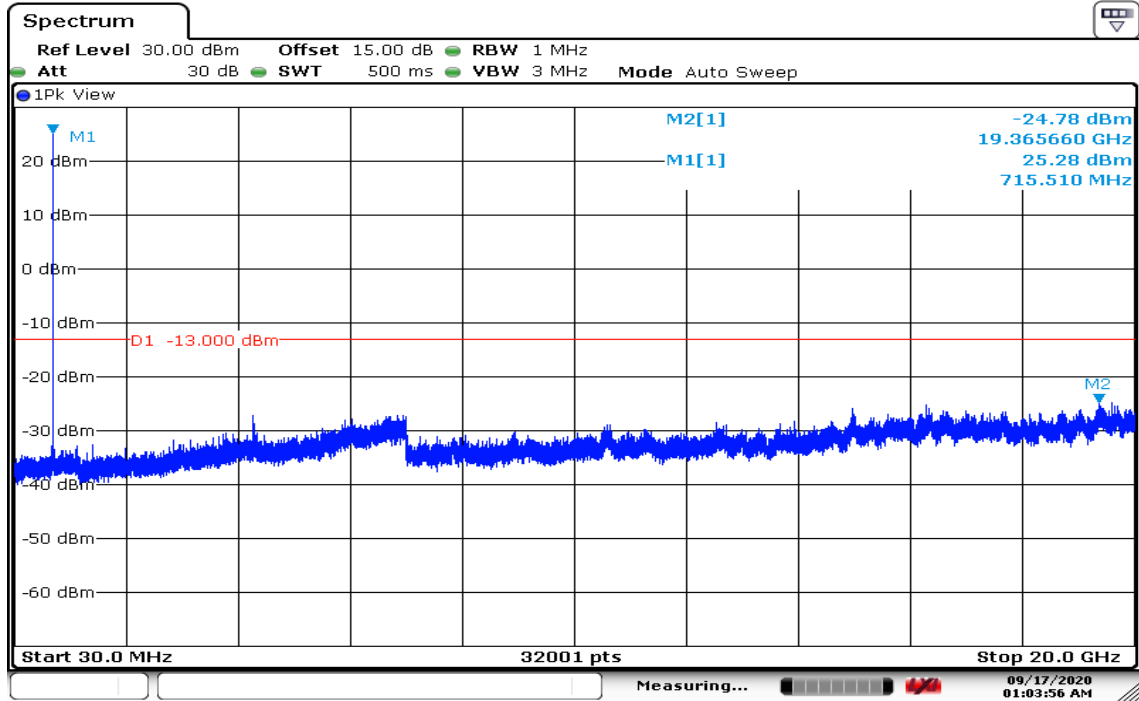

Date: 17 SEP 2020 01:03:57


Report No.: T200825W02-RP5

CHANNEL BANDWIDTH: 5MHz /QPSK / 1RB CH Low

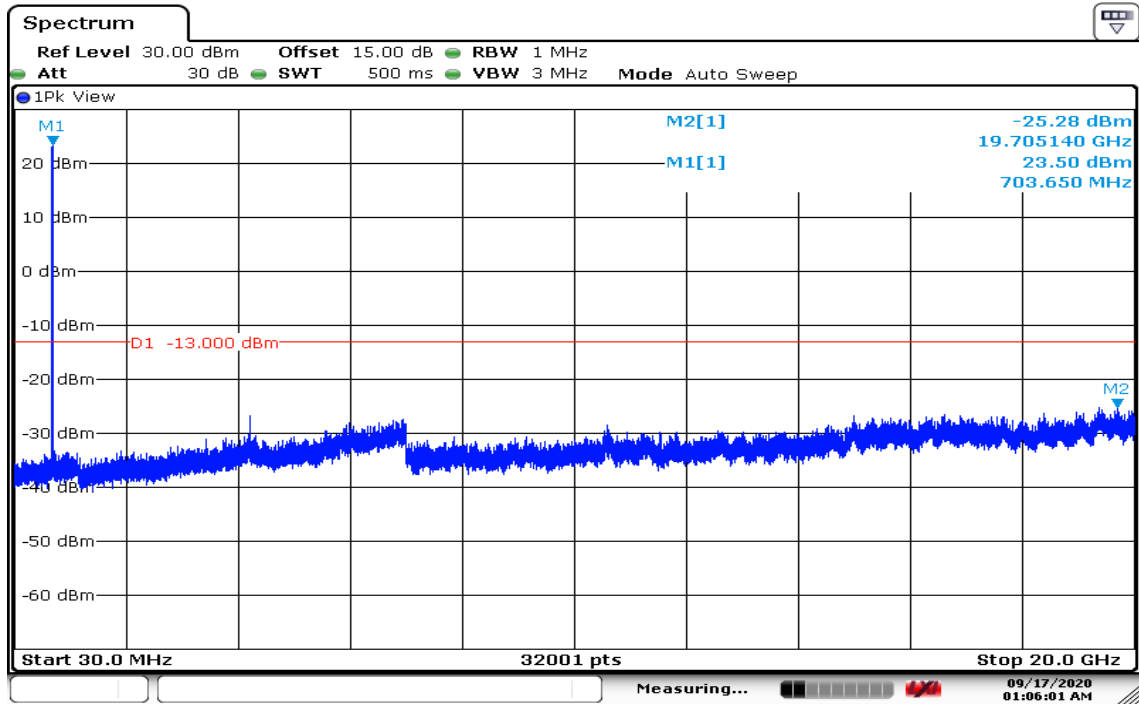


Date: 17 SEP 2020 01:06:01

CH Mid

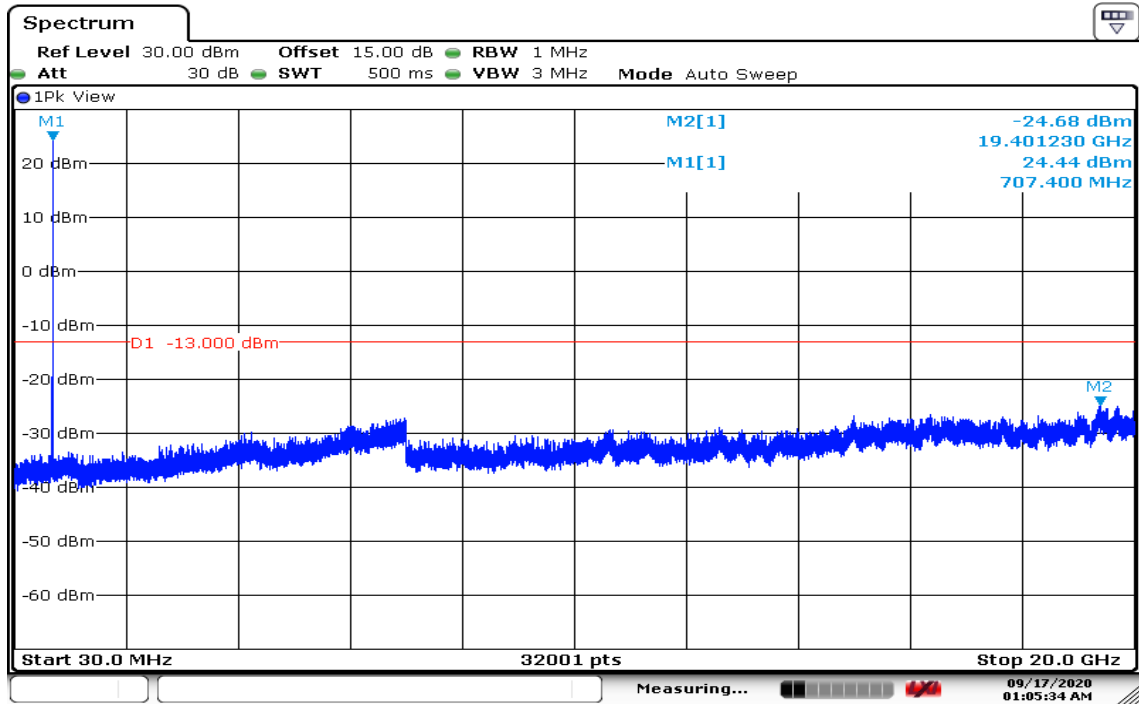

Date: 17 SEP 2020 01:05:34


CH High

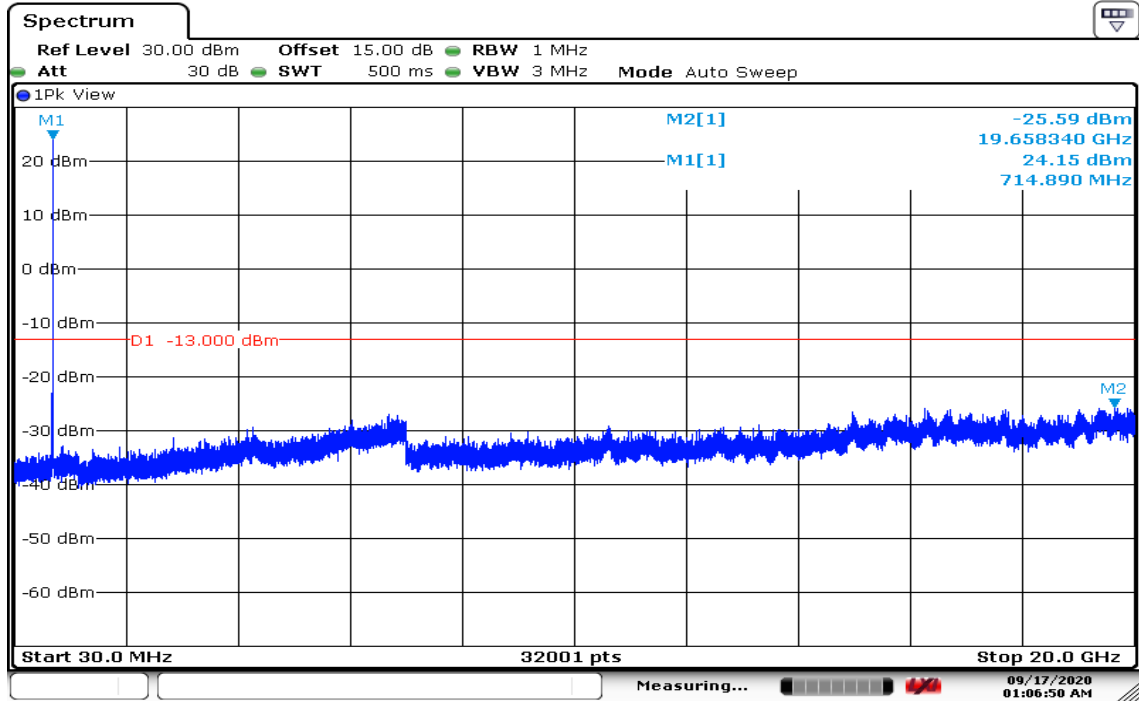

Date: 17 SEP 2020 01:06:50


Report No.: T200825W02-RP5

CHANNEL BANDWIDTH: 10MHz /QPSK / 1RB CH Low

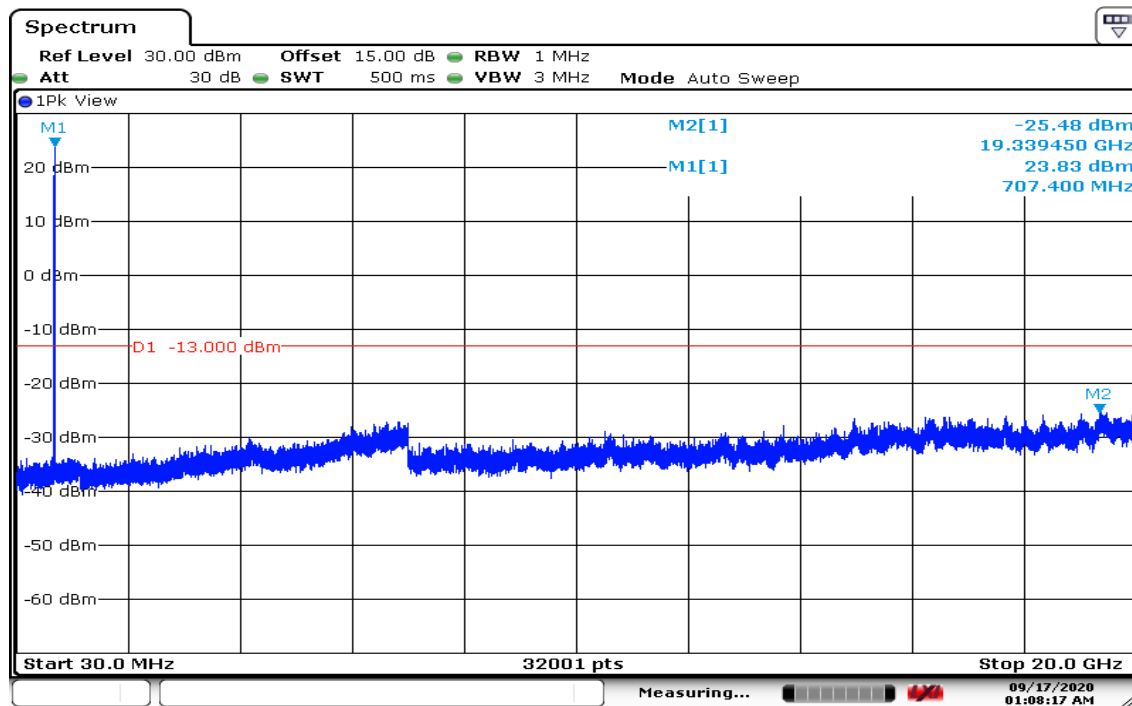


Date: 17 SEP 2020 01:08:17

CH Mid

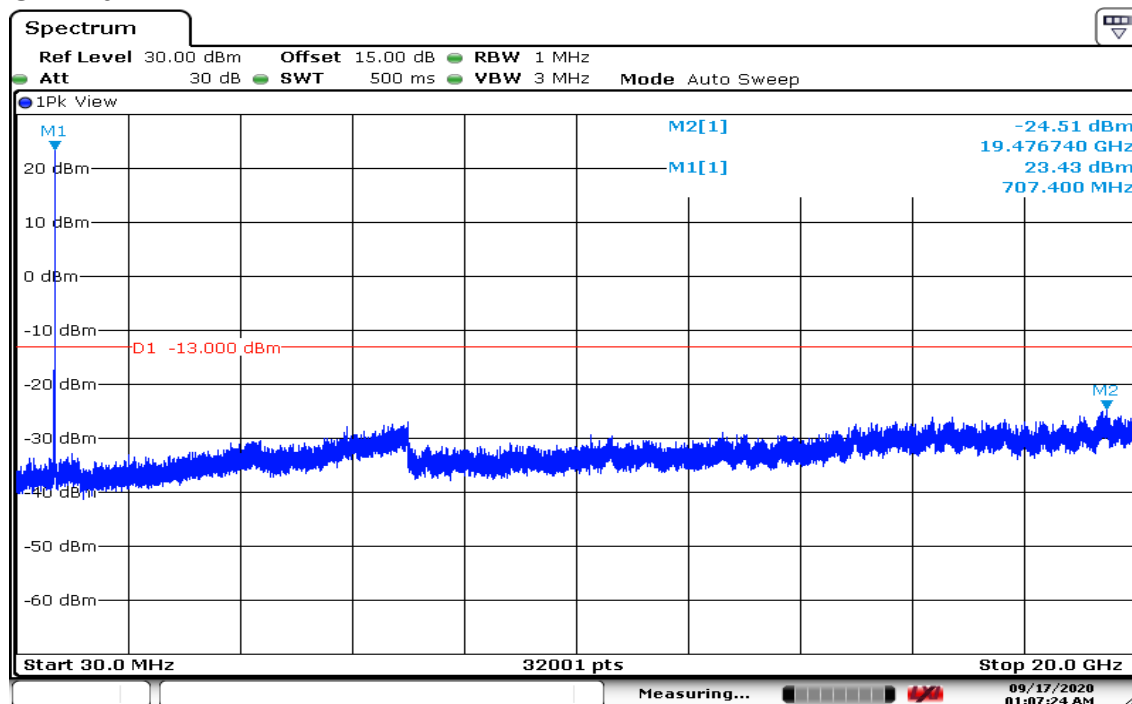


Date: 17 SEP 2020 01:07:25

CH High

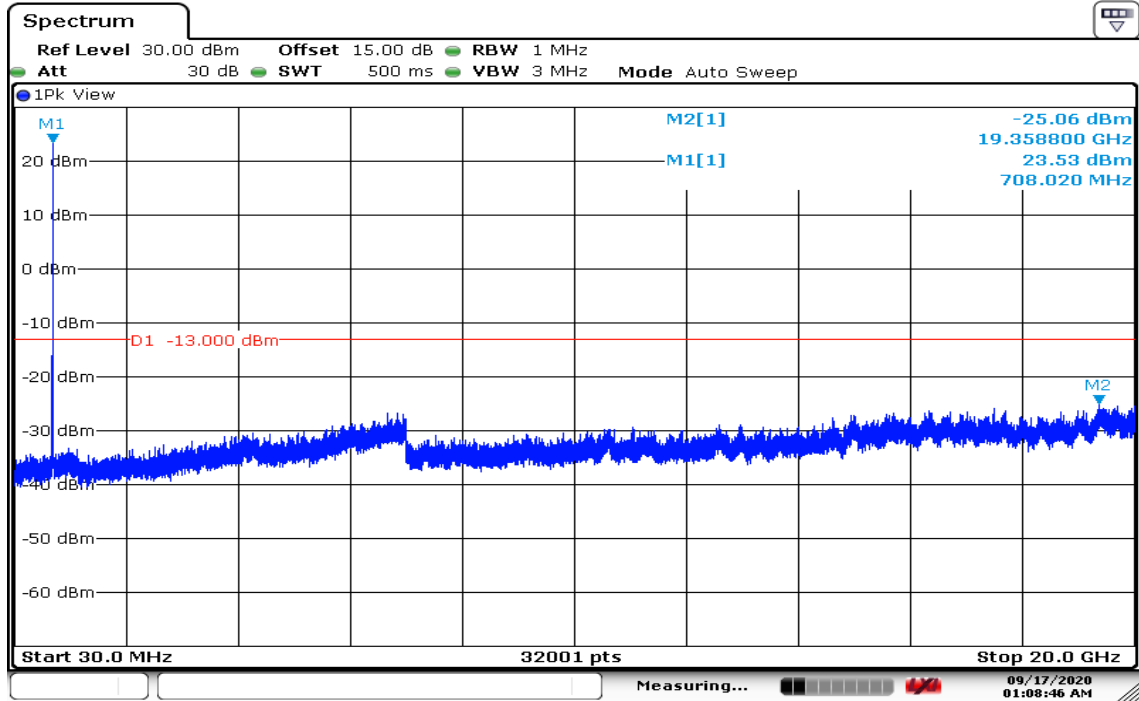


Date: 17 SEP 2020 01:08:46

CHANNEL BANDWIDTH: 1.4MHz /16QAM / 1RB CH Low

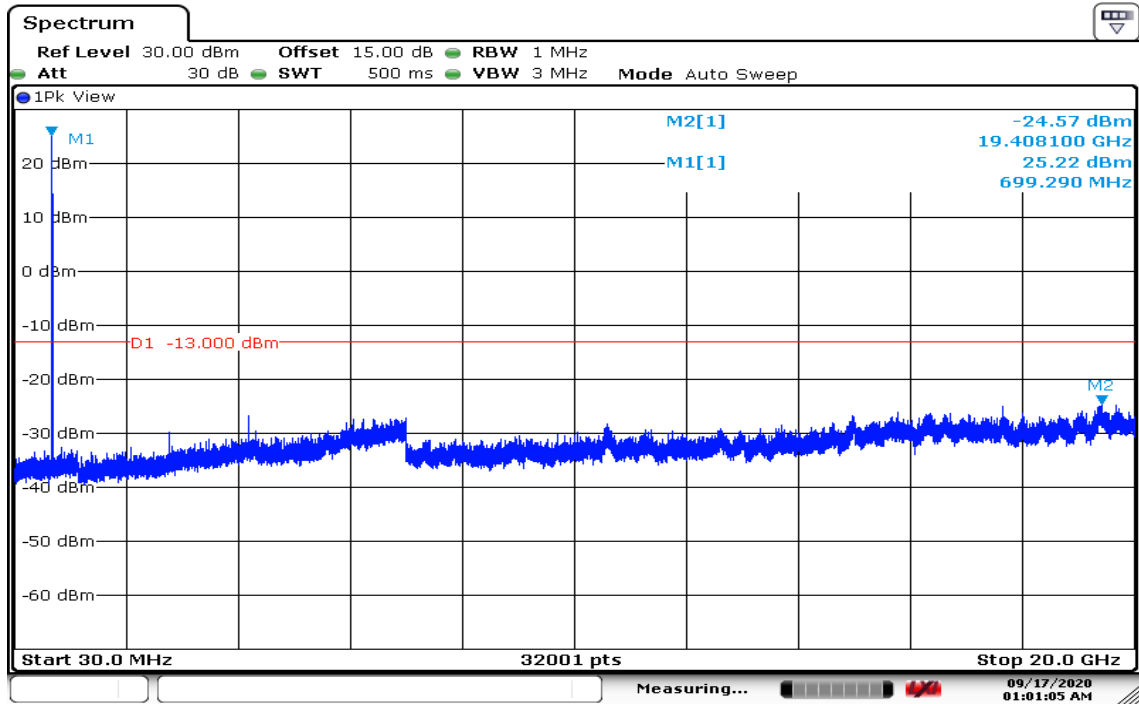


Date: 17 SEP 2020 01:01:05

CH Mid

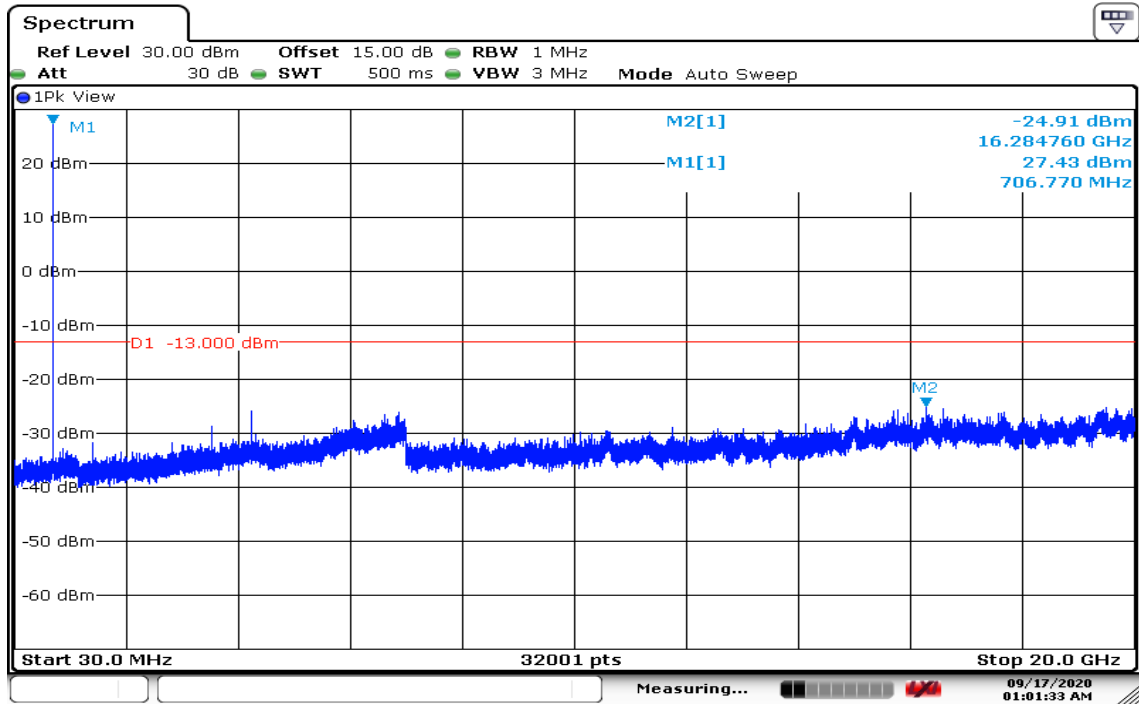

Date: 17 SEP 2020 01:01:34

CH High

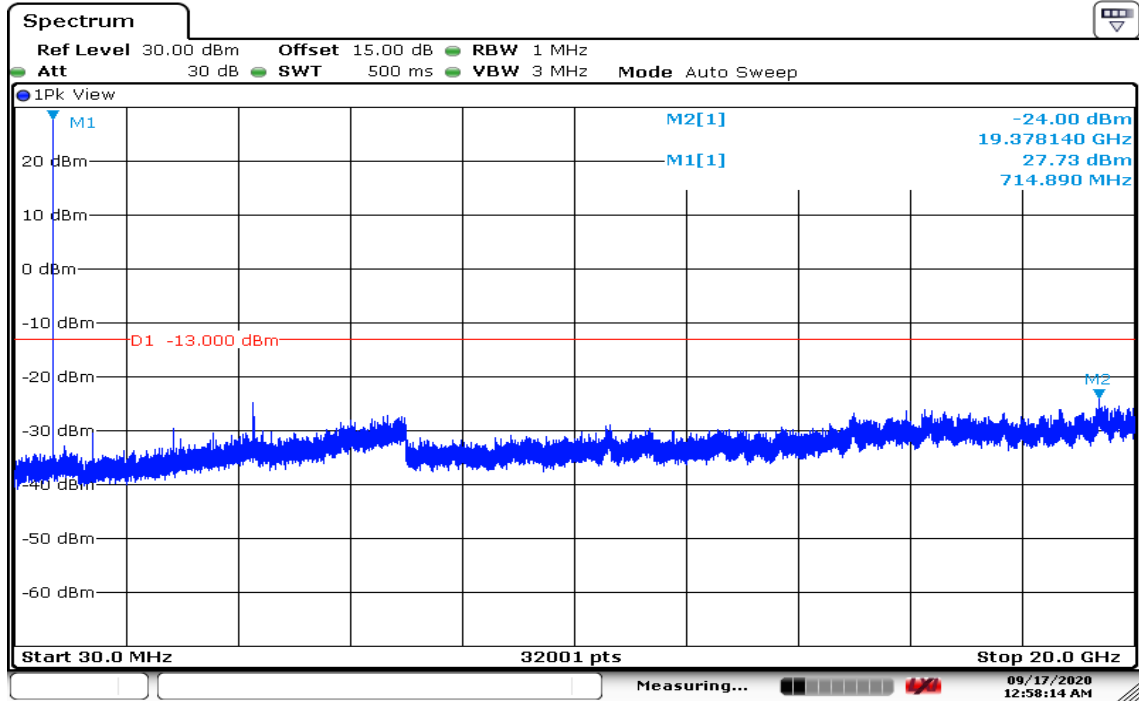


Date: 17 SEP 2020 00:58:14

Report No.: T200825W02-RP5


Page: 66 / 80
Rev.: 01

CHANNEL BANDWIDTH: 3MHz /16QAM / 1RB CH Low

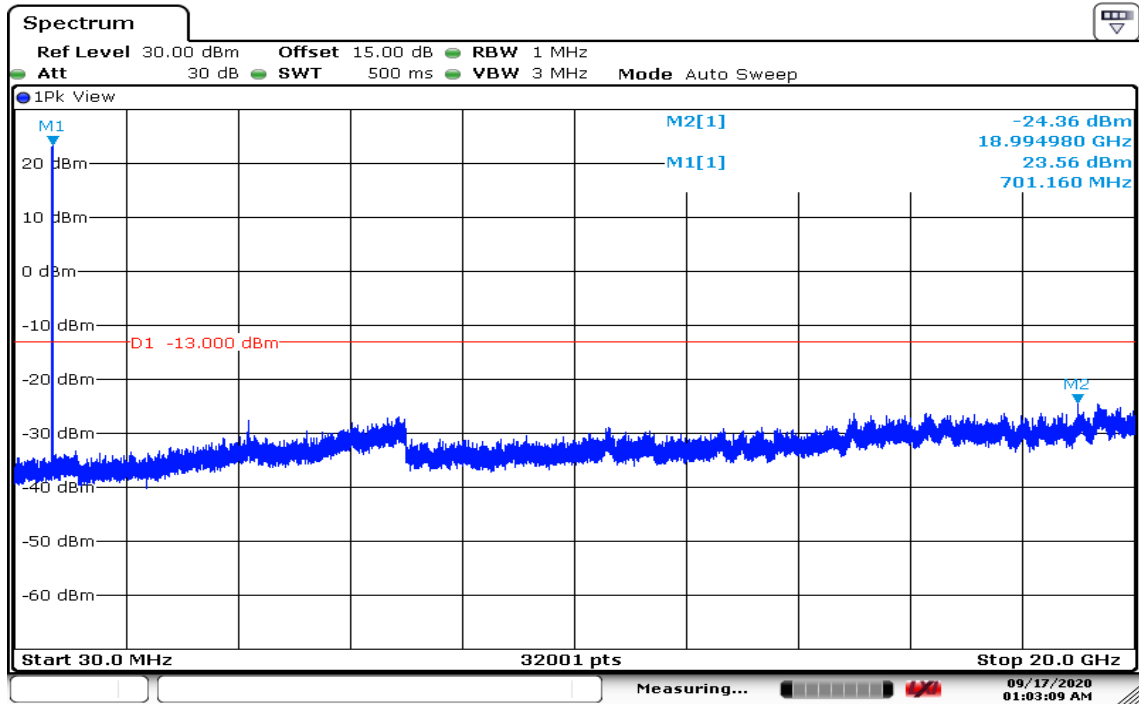


Date: 17 SEP 2020 01:03:09

CH Mid

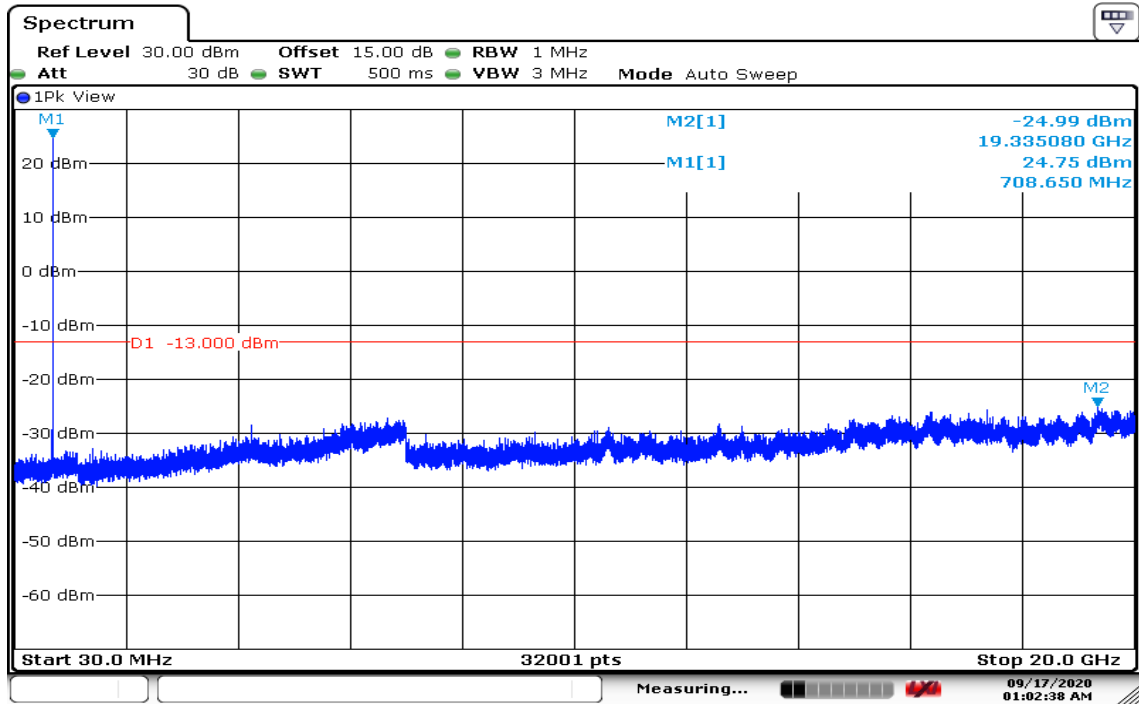


Date: 17 SEP 2020 01:02:38

CH High

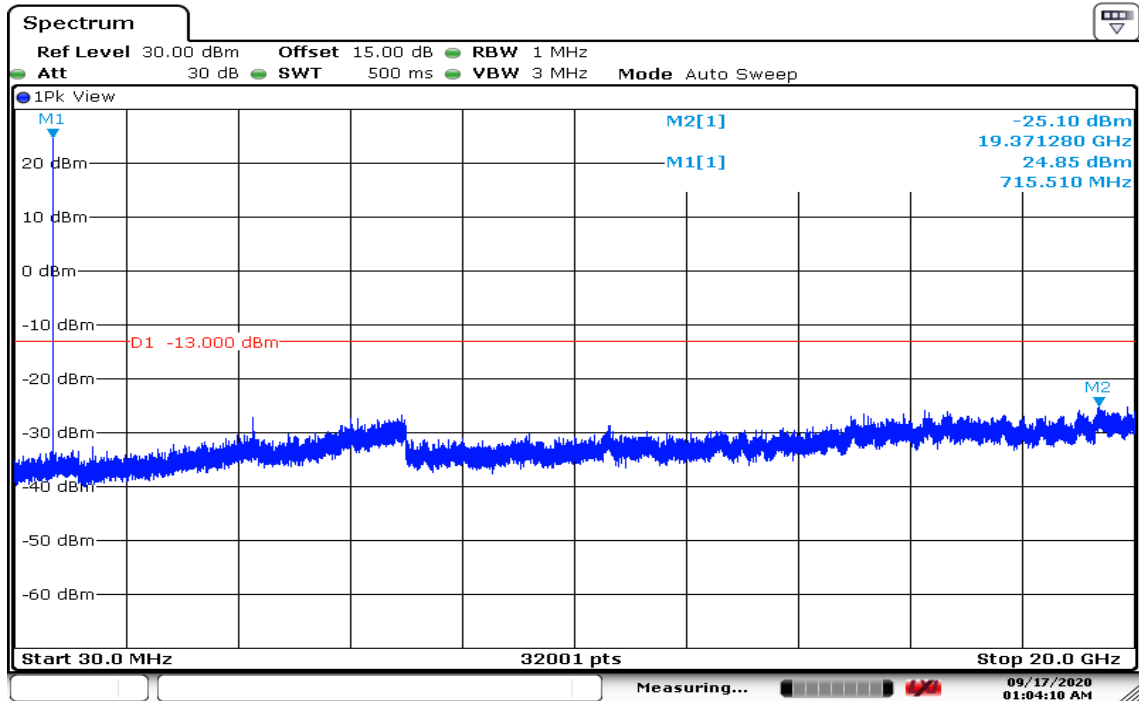


Date: 17 SEP 2020 01:04:11

CHANNEL BANDWIDTH:5MHz /16QAM / 1RB CH Low

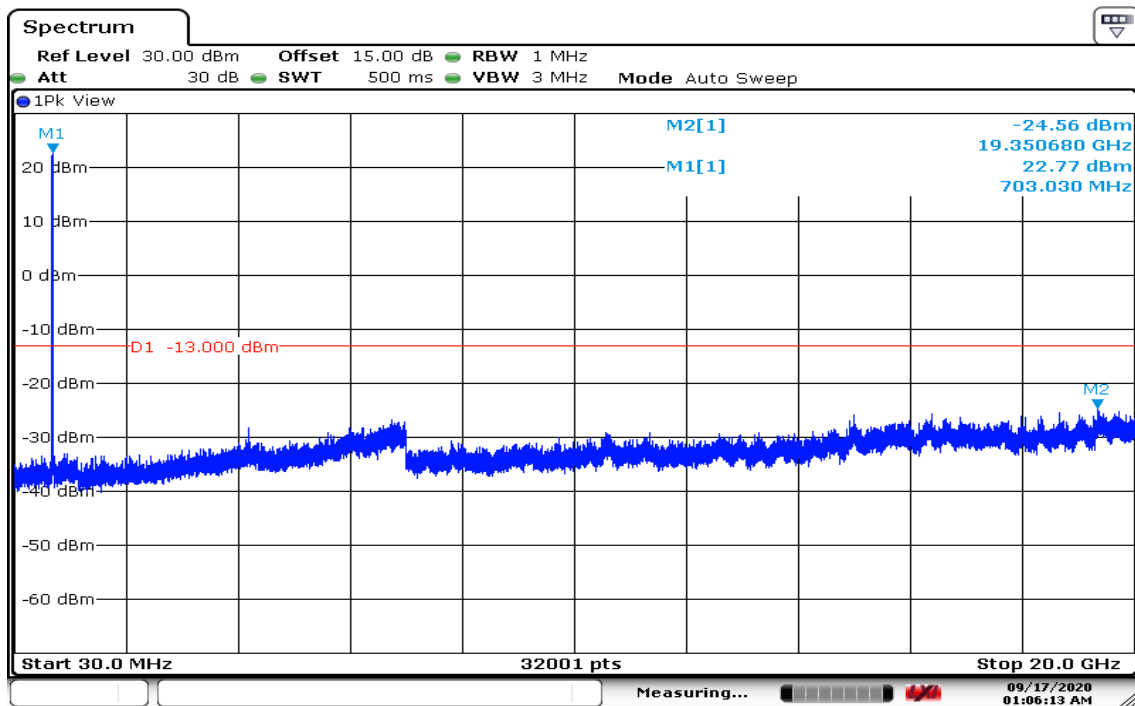


Date: 17 SEP 2020 01:06:14

CH Mid

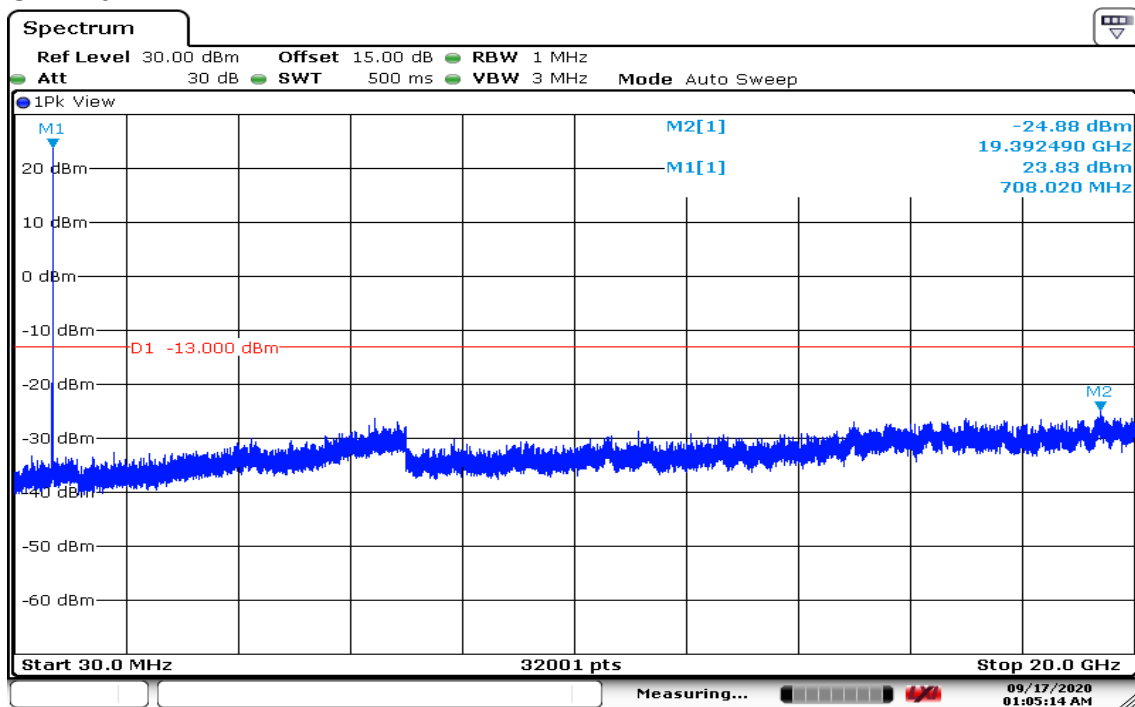

Date: 17 SEP 2020 01:05:15


CH High

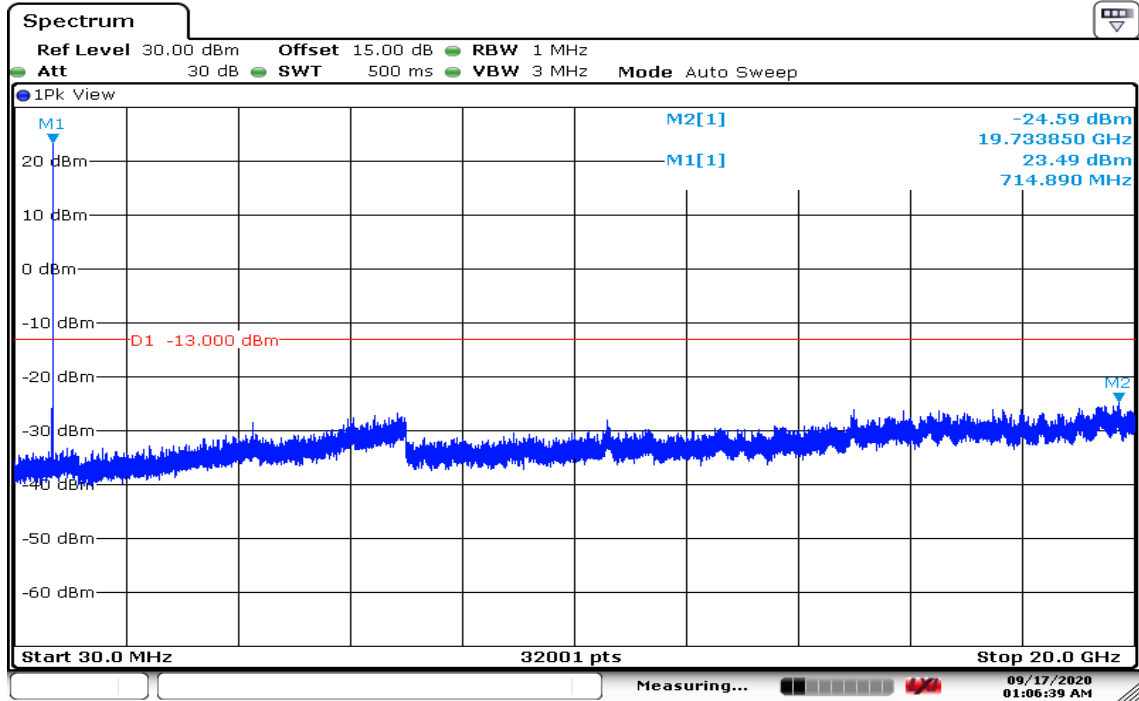

Date: 17 SEP 2020 01:06:38


Report No.: T200825W02-RP5

CHANNEL BANDWIDTH:10MHz /16QAM / 1RB CH Low

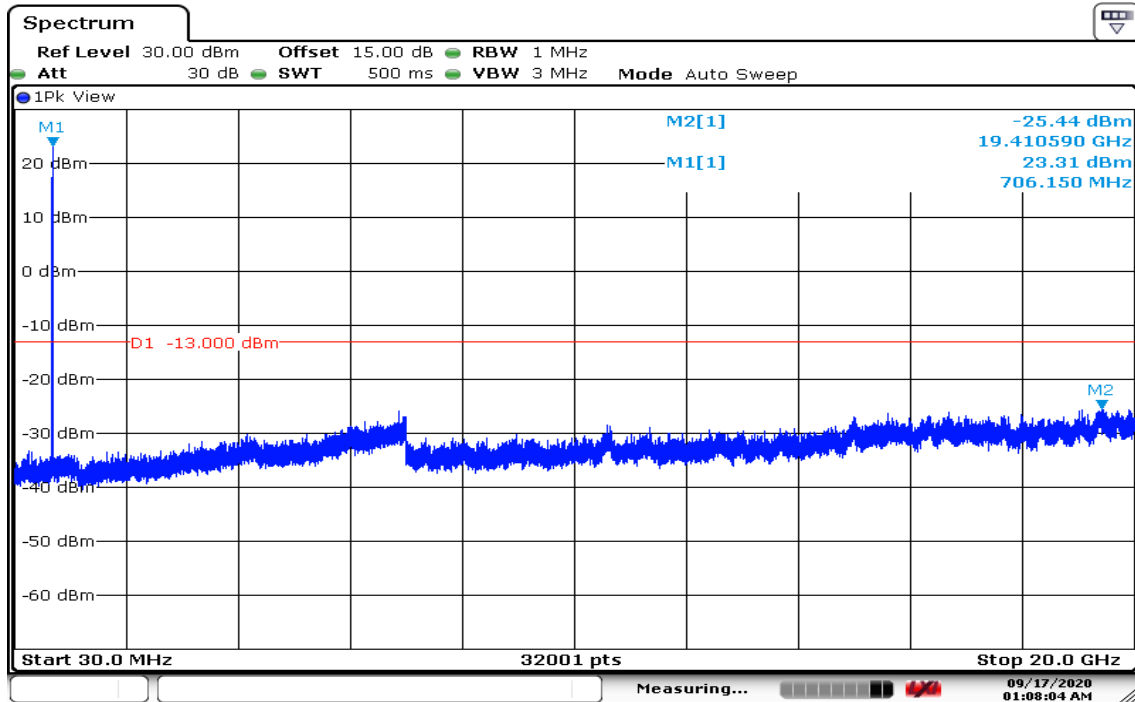


Date: 17 SEP 2020 01:08:04

CH Mid

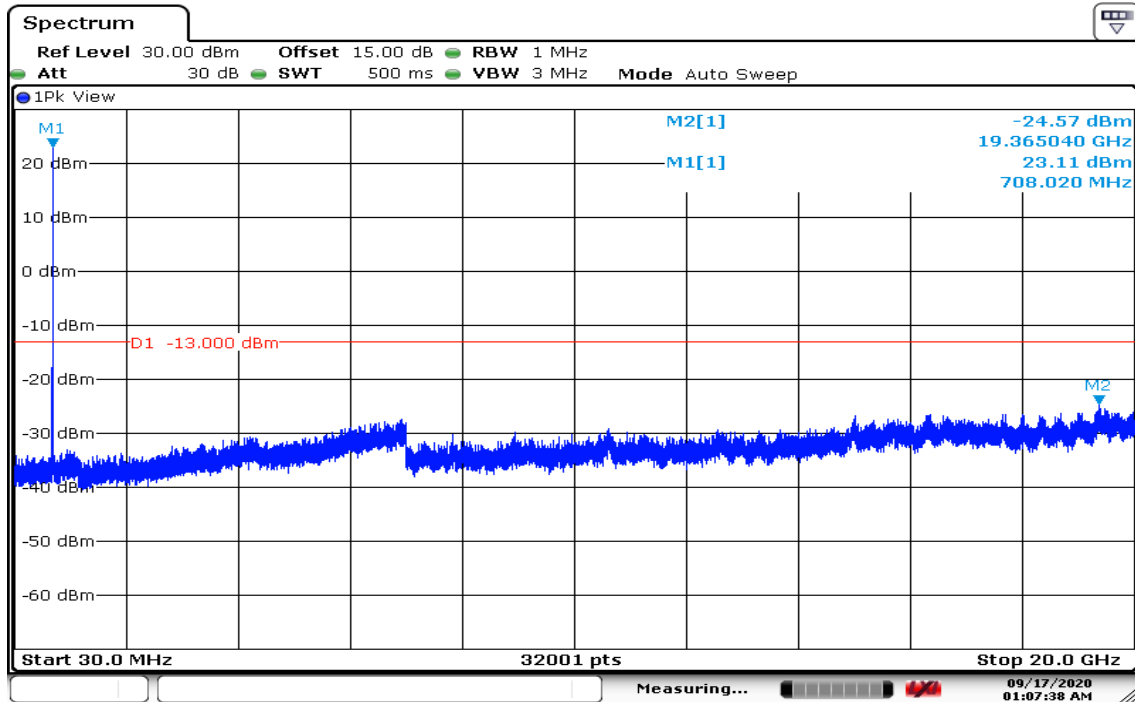

Date: 17 SEP 2020 01:07:39

CH High

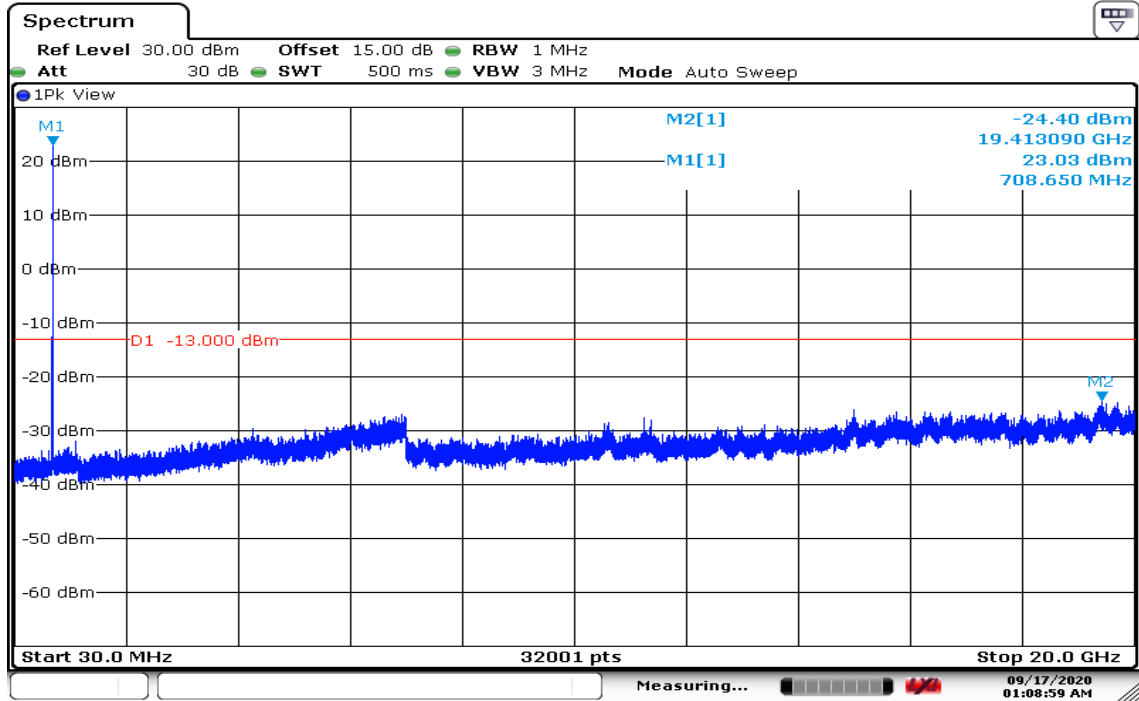

Date: 17 SEP 2020 01:09:00

8.7 RADIATED EMISSION MEASUREMENT


LIMITS

FCC §27.53(g), Band 12


(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Test Configuration


Below 1 GHz

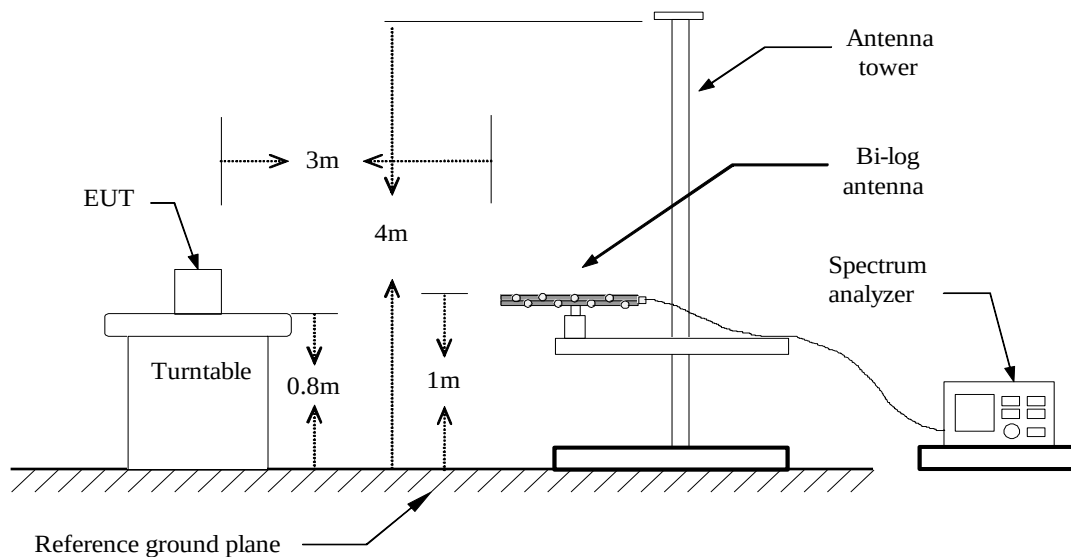

Above 1 GHz

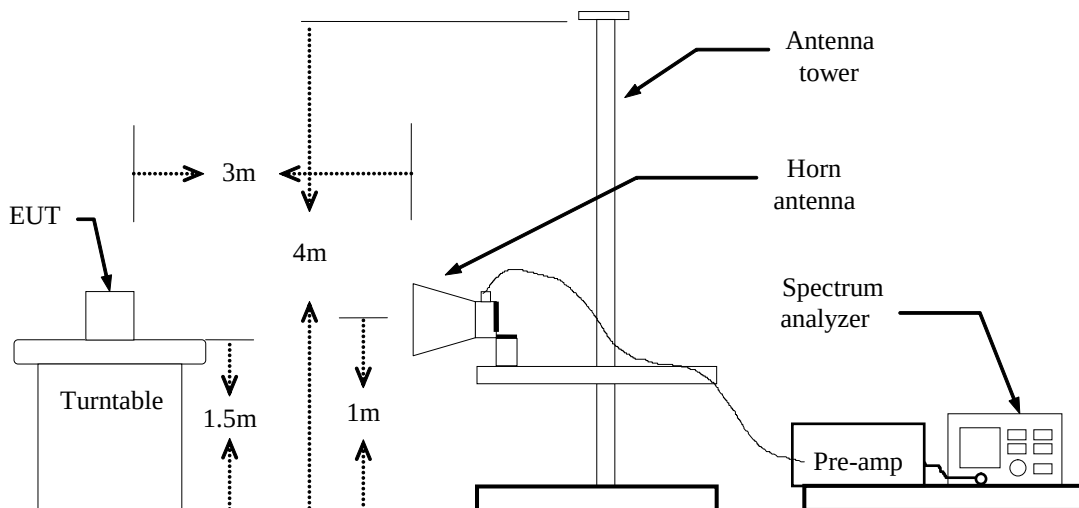

Substituted Method Test Set-up

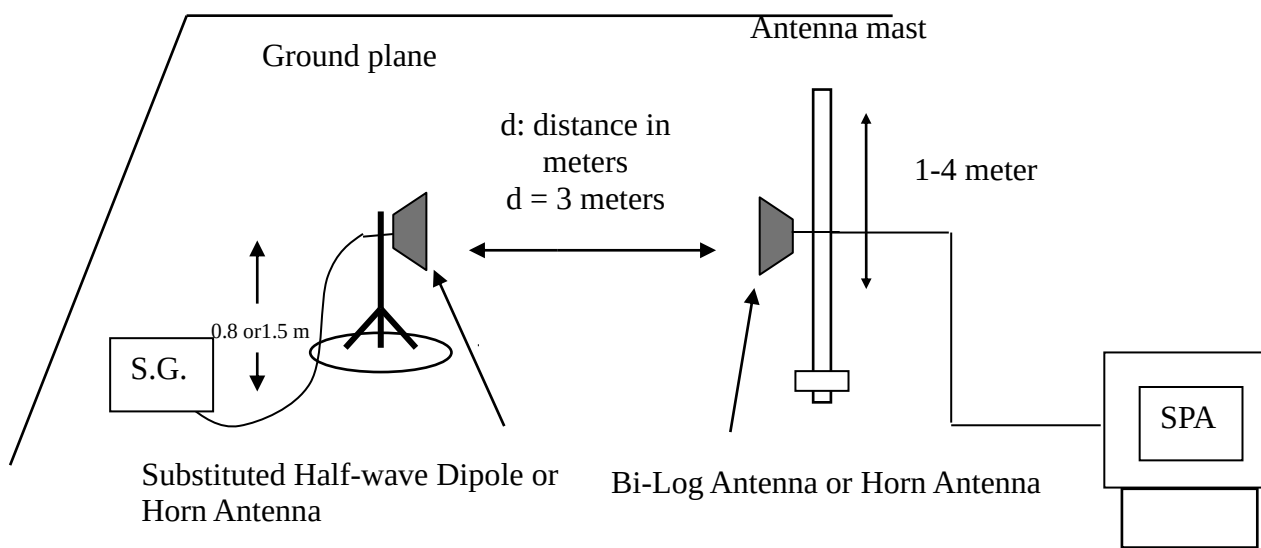

TEST PROCEDURES

1. According to KDB 971168 D01 and TIA-603-E.
2. The EUT was placed on a turntable
 - (1) Below 1G : 0.8m
 - (2) Above 1G : 1.5m
 - (3) EUT set 3m from the receiving antenna
 - (4) The table was rotated 360 degrees of the highest spurious emission to determine the position.
3. Set the spectrum analyzer , RBW=1MHz, VBW=3MHz.
4. A horn antenna was driven by a signal generator.
5. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

Test Results

LTE Band 12 / BW: 20MHz / QPSK / RB =1, RB Offset = 0

Operation Mode: Tx / Low CH

Test Date:

December 29, 2020

Temperature: 20.4°C


Tested by:

Ray Li

Humidity: 66% RH

Polarity:

Ver.

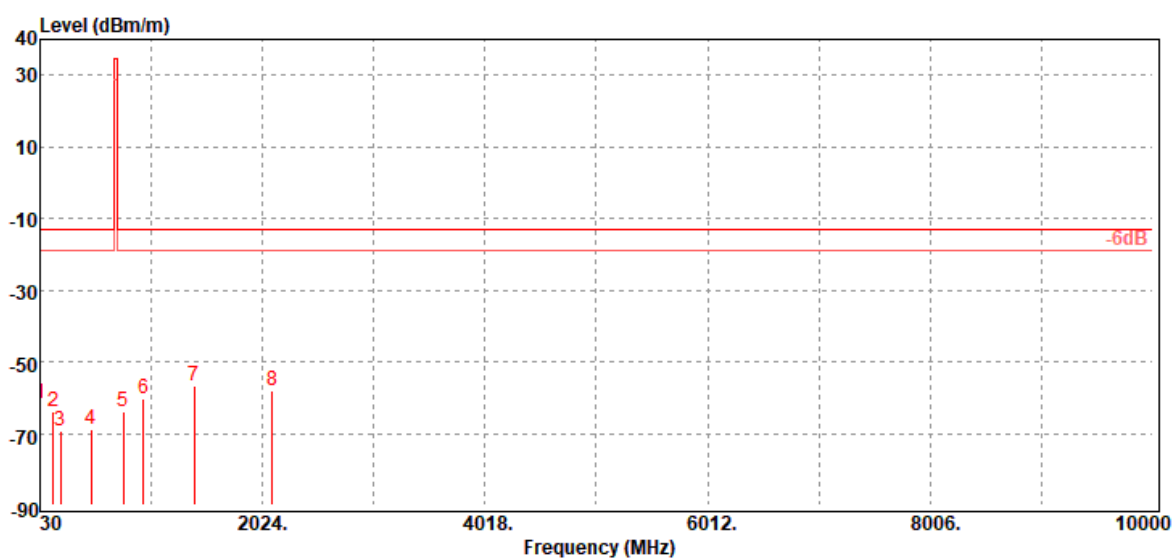

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
34.85	-61.87	-36.07	-25.32	-0.48	-13.00	-48.87	V
149.31	-63.72	-55.55	-7.17	-1.00	-13.00	-50.72	V
214.30	-69.36	-66.06	-2.10	-1.20	-13.00	-56.36	V
488.81	-68.75	-64.69	-2.22	-1.84	-13.00	-55.75	V
778.84	-63.90	-60.08	-1.48	-2.34	-13.00	-50.90	V
953.44	-60.27	-56.45	-1.20	-2.62	-13.00	-47.27	V
1408.00	-56.86	-61.66	8.05	-3.25	-13.00	-43.86	V
2112.00	-57.89	-63.48	9.70	-4.11	-13.00	-44.89	V

Operation Mode: Tx / Low CH


Test Date: December 29, 2020

Temperature: 20.4°C

Tested by: Ray Li

Humidity: 66% RH

Polarity: Hor.

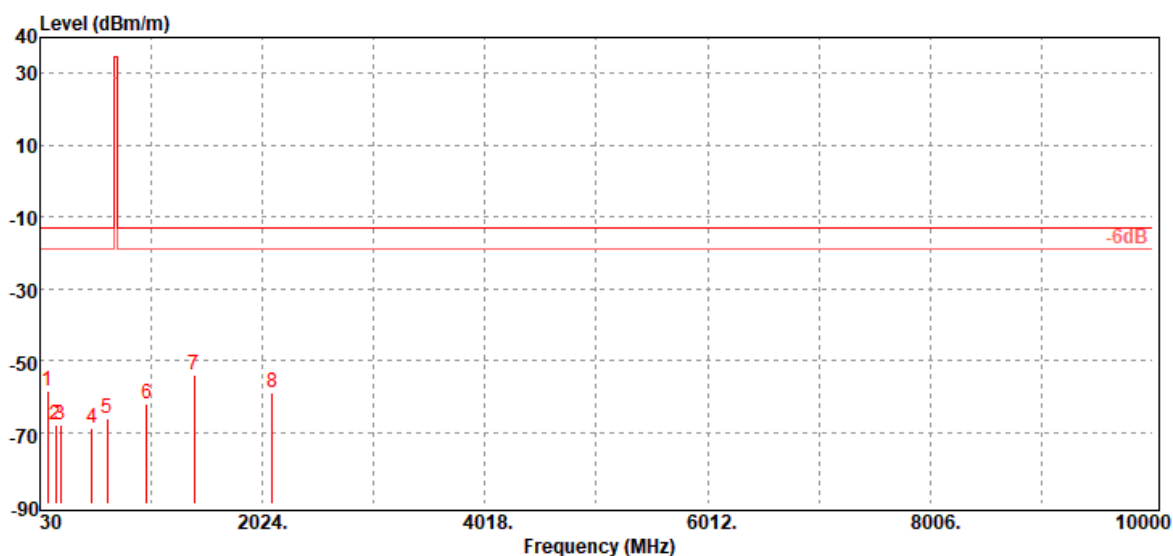

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
100.81	-58.71	-49.43	-8.46	-0.82	-13.00	-45.71	H
173.56	-67.96	-61.89	-4.99	-1.08	-13.00	-54.96	H
214.30	-67.87	-64.57	-2.10	-1.20	-13.00	-54.87	H
495.60	-68.71	-64.85	-2.00	-1.86	-13.00	-55.71	H
634.31	-66.06	-62.27	-1.67	-2.12	-13.00	-53.06	H
987.39	-62.07	-58.01	-1.40	-2.66	-13.00	-49.07	H
1408.00	-54.14	-58.94	8.05	-3.25	-13.00	-41.14	H
2112.00	-58.83	-64.42	9.70	-4.11	-13.00	-45.83	H

Operation Mode: Tx / Mid CH


Test Date: December 29, 2020

Temperature: 20.4°C

Tested by: Ray Li

Humidity: 66% RH

Polarity: Ver.

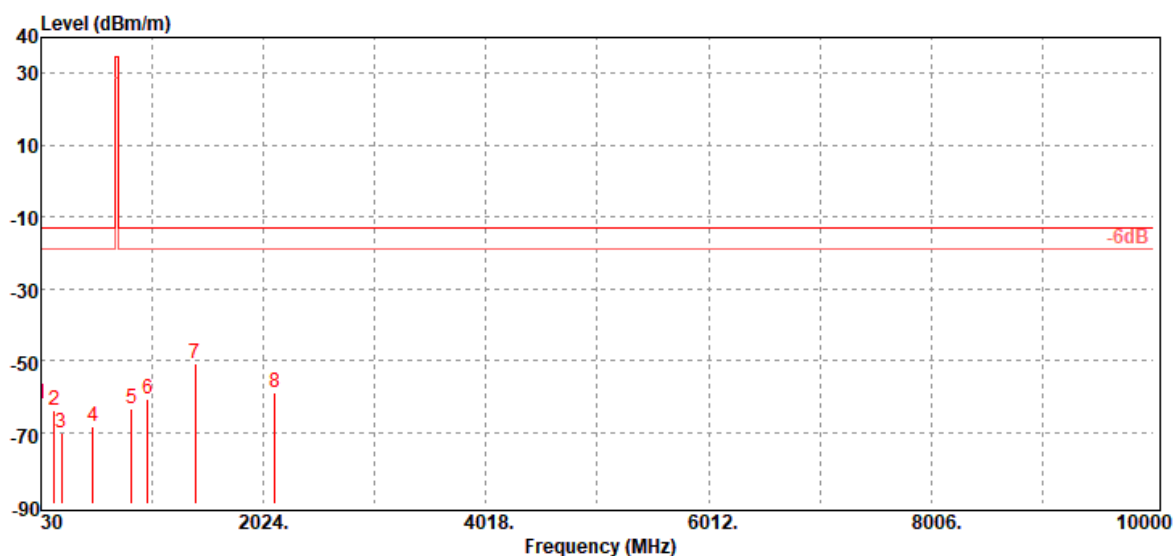

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
32.91	-61.91	-34.25	-27.19	-0.47	-13.00	-48.91	V
149.31	-64.00	-55.83	-7.17	-1.00	-13.00	-51.00	V
211.39	-70.01	-66.72	-2.10	-1.19	-13.00	-57.01	V
493.66	-68.53	-64.63	-2.05	-1.85	-13.00	-55.53	V
838.01	-63.44	-59.56	-1.44	-2.44	-13.00	-50.44	V
987.39	-60.63	-56.57	-1.40	-2.66	-13.00	-47.63	V
1415.00	-50.82	-55.66	8.09	-3.25	-13.00	-37.82	V
2122.50	-58.85	-64.35	9.62	-4.12	-13.00	-45.85	V

Operation Mode: Tx / Mid CH


Test Date: December 29, 2020

Temperature: 20.4°C

Tested by: Ray Li

Humidity: 66% RH

Polarity: Hor.

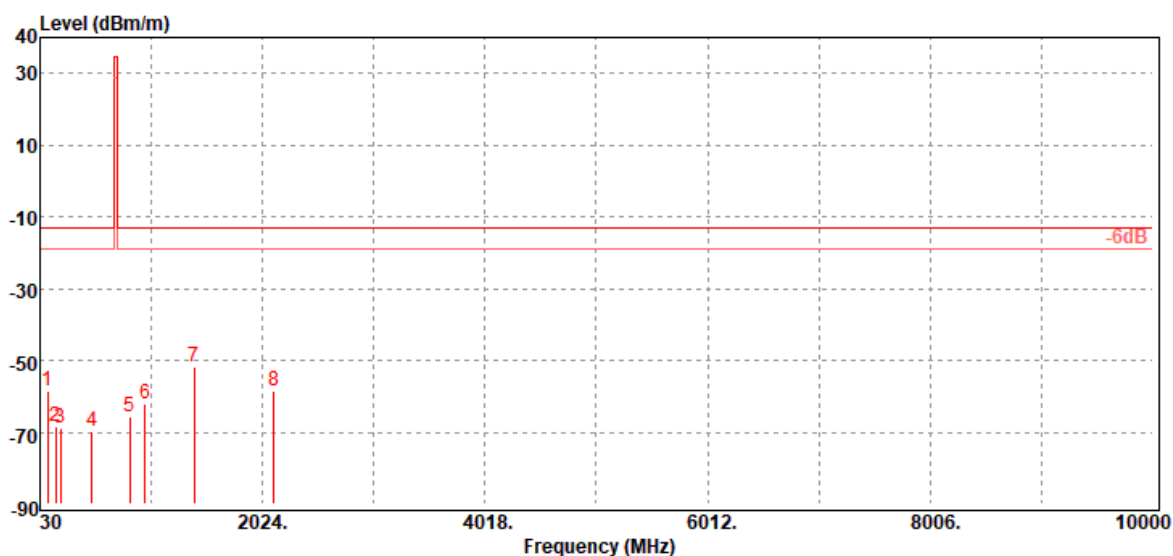

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
100.81	-58.46	-49.18	-8.46	-0.82	-13.00	-45.46	H
172.59	-68.19	-61.97	-5.14	-1.08	-13.00	-55.19	H
214.30	-68.71	-65.41	-2.10	-1.20	-13.00	-55.71	H
498.51	-69.85	-65.98	-2.00	-1.87	-13.00	-56.85	H
833.16	-65.69	-61.76	-1.50	-2.43	-13.00	-52.69	H
968.96	-62.08	-58.14	-1.30	-2.64	-13.00	-49.08	H
1415.00	-51.81	-56.65	8.09	-3.25	-13.00	-38.81	H
2122.50	-58.67	-64.17	9.62	-4.12	-13.00	-45.67	H

Operation Mode: Tx / High CH


Test Date: December 29, 2020

Temperature: 20.4°C

Tested by: Ray Li

Humidity: 66% RH

Polarity: Ver.

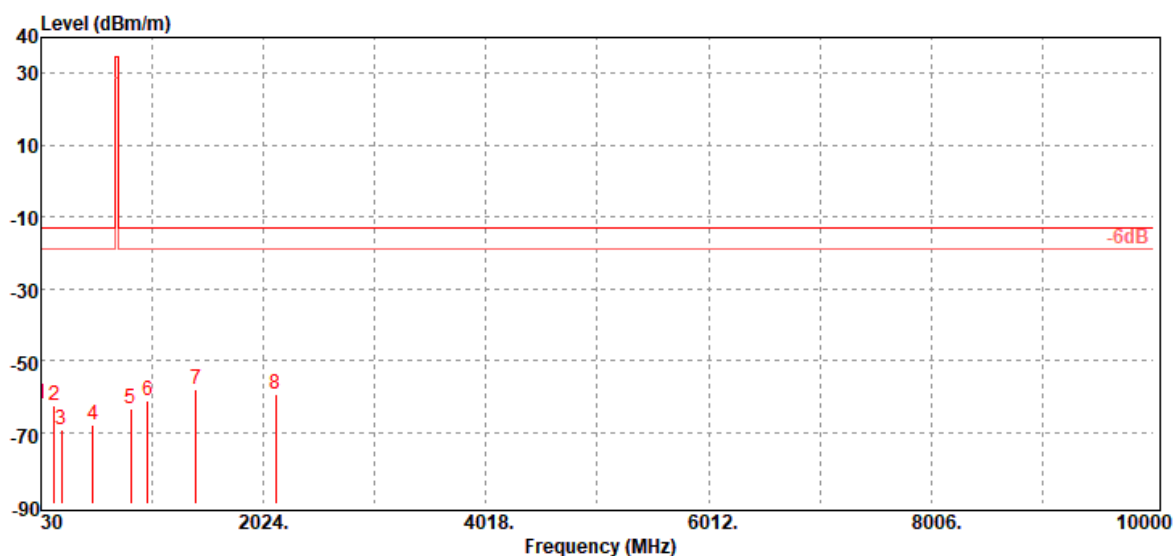

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
34.85	-62.02	-36.22	-25.32	-0.48	-13.00	-49.02	V
149.31	-62.51	-54.34	-7.17	-1.00	-13.00	-49.51	V
212.36	-69.41	-66.11	-2.10	-1.20	-13.00	-56.41	V
497.54	-68.06	-64.20	-2.00	-1.86	-13.00	-55.06	V
835.10	-63.63	-59.70	-1.50	-2.43	-13.00	-50.63	V
988.36	-61.29	-57.23	-1.40	-2.66	-13.00	-48.29	V
1422.00	-58.22	-63.09	8.13	-3.26	-13.00	-45.22	V
2133.00	-59.44	-64.84	9.54	-4.14	-13.00	-46.44	V

Operation Mode: Tx / High CH


Test Date: December 29, 2020

Temperature: 20.4°C

Tested by: Ray Li

Humidity: 66% RH

Polarity: Hor.

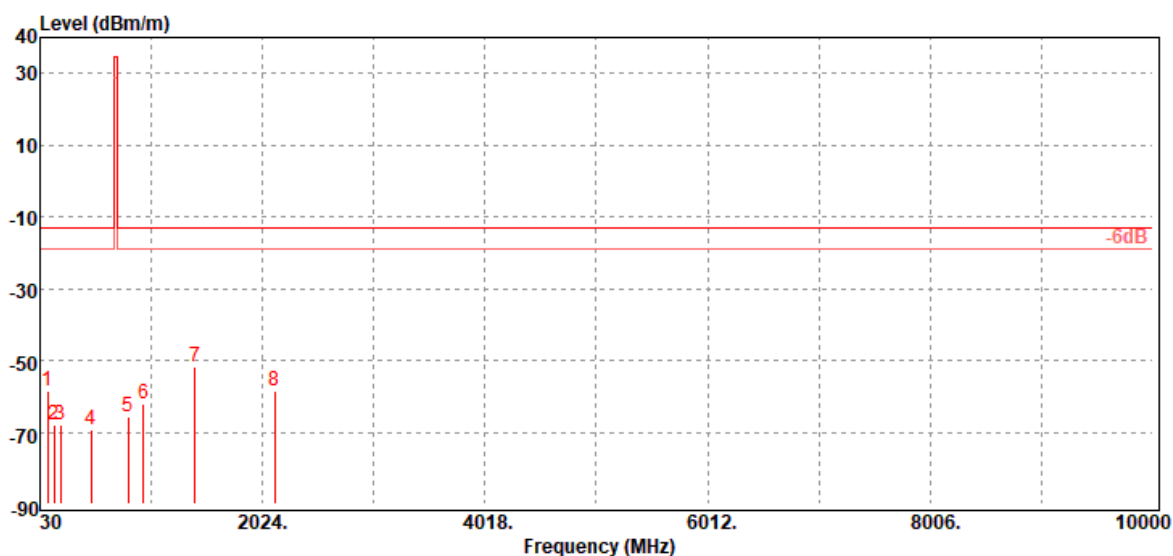

Freq. MHz	ERP/EIRP dBm	SG Output Level dBm	Antenna Gain dBd/dBi	Cable Loss dB	Limit dBm	Margin dB	Antenna Polarization (V/H)
100.81	-58.65	-49.37	-8.46	-0.82	-13.00	-45.65	H
154.16	-68.05	-60.25	-6.78	-1.02	-13.00	-55.05	H
212.36	-67.87	-64.57	-2.10	-1.20	-13.00	-54.87	H
487.84	-69.25	-65.17	-2.24	-1.84	-13.00	-56.25	H
823.46	-65.79	-61.85	-1.53	-2.41	-13.00	-52.79	H
954.41	-62.19	-58.37	-1.20	-2.62	-13.00	-49.19	H
1422.00	-51.75	-56.62	8.13	-3.26	-13.00	-38.75	H
2133.00	-58.72	-64.12	9.54	-4.14	-13.00	-45.72	H

- End of Test Report -