

FCC PART 15.407

TEST REPORT

For

TimeLink USA, Inc.

5171 Glenwood Ave. Suite 321 Raleigh, NC 27612, Raleigh, North Carolina, United States

FCC ID:2AWMS-DISPLAY

Report Type: Original Report	Product Name: Interactive Flat Panel Display
Report Number: RDG200731008-00B	
Report Date: 2020-09-24	
Ivan Cao 	
Reviewed By: Assistant Manager	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	11
BLOCK DIAGRAM OF TEST SETUP	13
SUMMARY OF TEST RESULTS	14
FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	15
APPLICABLE STANDARD	15
FCC §15.203- ANTENNA REQUIREMENT.....	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	17
FCC §15.207(a)- CONDUCTED EMISSIONS.....	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST PROCEDURE	19
TEST DATA	20
FCC §15.209, §15.205 , §15.407(b) –UNWANTED EMISSION.....	22
APPLICABLE STANDARD	22
EUT SETUP	23
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	24
TEST PROCEDURE	24
CORRECTED AMPLITUDE & MARGIN CALCULATION	25
TEST EQUIPMENT LIST AND DETAILS.....	26
TEST DATA	26
FCC §15.407(a)(e)–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	48
APPLICABLE STANDARD	48
TEST EQUIPMENT LIST AND DETAILS.....	48
TEST PROCEDURE	48
TEST DATA	48
FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER.....	83
APPLICABLE STANDARD	83
TEST EQUIPMENT LIST AND DETAILS.....	84
TEST PROCEDURE	84

TEST DATA	84
FCC §15.407(a) - POWER SPECTRAL DENSITY	86
APPLICABLE STANDARD	86
TEST PROCEDURE	87
TEST EQUIPMENT LIST AND DETAILS.....	87
TEST DATA	87

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Interactive Flat Panel Display
EUT Model:	TM86D
Multiple Models:	TM65D, TM65C, TP65E, TP65P, TB65E, TB65P, V3-65, X3-65, V2-65, X2-65, TM65*, TB65*, TC65* (* can be letter A to Z) , TM75D, TM75C, TP75E, TP75P, TB75E, TB75P, V3-75, X3-75, V2-75, X2-75, TM75*, TB75*, TC75* (* can be letter A to Z) TM86C, TP86E, TP86P, TB86E, TB86P, V3-86, X3-86, V2-86, X2-86, TM86*, TB86*, TC86* (* can be letter A to Z)
Operation Frequency:	5180-5240 MHz(802.11a/n ht20) 5190-5230 MHz(802.11n ht40) 5745-5825MHz(802.11a/n ht20) 5755-5795 MHz(802.11n ht40)
Maximum Output Power (Conducted):	Module 1: 5150-5250 MHz:15.9 dBm 5725-5850 MHz:15.9 dBm Module 2: 5150-5250 MHz:16.08 dBm 5725-5850 MHz:16.30 dBm
Modulation Type:	OFDM
Rated Input Voltage:	AC 120V
Serial Number:	RDG200731008-RF-S1
EUT Received Date:	2020.08.03
EUT Received Status:	Good

Note: The series product, models are electrically identical. Model: TM86D was full tested. The difference between them please refers to the declaration letter for details.

Objective

This type approval report is prepared on behalf of **TimeLink USA, Inc.** in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AWMS-DISPLAY.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “△”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

The device have two RF module supports 2.4G and 5G Wi-Fi. The system support 802.11a/n ht20/n ht40.

For 5150~5250 MHz band, 7 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240

For 802.11a, 802.11n ht20 channel 36, 40 and 48 was tested, for 802.11n ht40 channel 38, 46 were tested.

For 5725~5850MHz band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
157	5785	/	/

For 802.11a, 802.11n ht20 channel 149, 157 and 165 was tested, for 802.11n ht40 channel 151, 159 were tested.

EUT Exercise Software

For module 1, the software “REALTEK WLAN TEST TOOL.apk” was used for testing, which was provided by Manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The device supports SISO and MIMO at 802.11n mode, per pre-test, MIMO 2TX mode was the worst and reported. The maximum power was configured as below table, that provided by the Manufacturer:

Band	Mode	Channel	Frequency (MHz)	Data rate	Power level Setting	
					Chain 0	Chain 1
5150 - 5250 MHz	802.11a	Low	5180	6Mbps	60	60
		Middle	5200	6Mbps	60	60
		High	5240	6Mbps	60	60
	802.11n ht20	Low	5180	MCS8	60	60
		Middle	5200	MCS8	60	60
		High	5240	MCS8	60	60
	802.11n ht40	Low	5190	MCS8	55	55
		High	5230	MCS8	55	55
5725 - 5850 MHz	802.11a	Low	5745	6Mbps	57	57
		Middle	5785	6Mbps	57	57
		High	5825	6Mbps	57	57
	802.11n ht20	Low	5745	MCS8	62	57
		Middle	5785	MCS8	62	57
		High	5825	MCS8	62	57
	802.11n ht40	Low	5755	MCS8	62	58
		High	5795	MCS8	62	58

For module 2, the software “MPTool.exe” was used for testing, which was provided by Manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The device supports SISO and MIMO at 802.11n and ac mode, per pre-test, MIMO 2TX mode was the worst and reported. The maximum power was configured as below table, that provided by the Manufacturer:


Band	Mode	Channel	Frequency (MHz)	Data rate	Power level Setting	
					Chain 0	Chain 1
5150 - 5250 MHz	802.11a	Low	5180	6Mbps	55	60
		Middle	5200	6Mbps	55	60
		High	5240	6Mbps	55	60
	802.11n ht20	Low	5180	MCS8	58	60
		Middle	5200	MCS8	58	60
		High	5240	MCS8	58	60
	802.11n ht40	Low	5190	MCS8	52	50
		High	5230	MCS8	52	50
5725 - 5850 MHz	802.11a	Low	5745	6Mbps	57	54
		Middle	5785	6Mbps	57	54
		High	5825	6Mbps	57	54
	802.11n ht20	Low	5745	MCS8	58	56
		Middle	5785	MCS8	58	56
		High	5825	MCS8	58	56
	802.11n ht40	Low	5755	MCS8	50	48
		High	5795	MCS8	50	48

The duty cycle as below:

Module	Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
1	802.11 a	1.392	1.872	74.36
	802.11n ht20	0.680	1.160	58.62
	802.11n ht40	0.356	0.848	41.98
2	802.11 a	1.376	1.868	73.66
	802.11n ht20	0.678	1.166	58.15
	802.11n ht40	0.360	0.842	42.76


Module 1:

802.11a

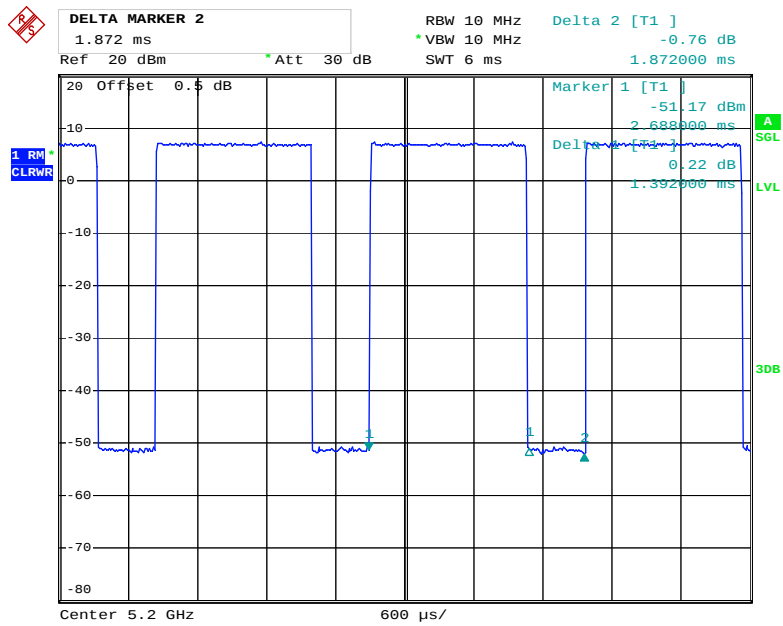


Date: 3.SEP.2020 06:58:10

802.11n ht20

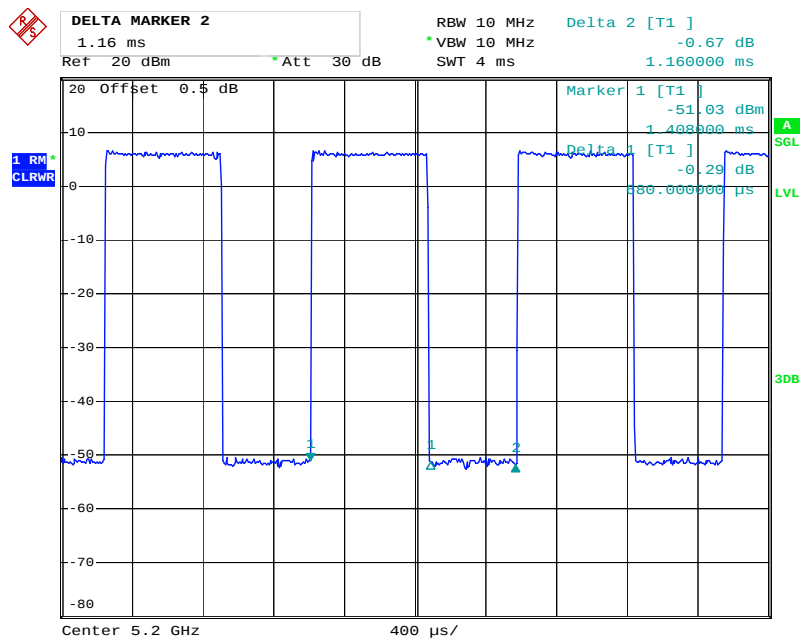

Date: 3.SEP.2020 06:59:28


802.11n ht40

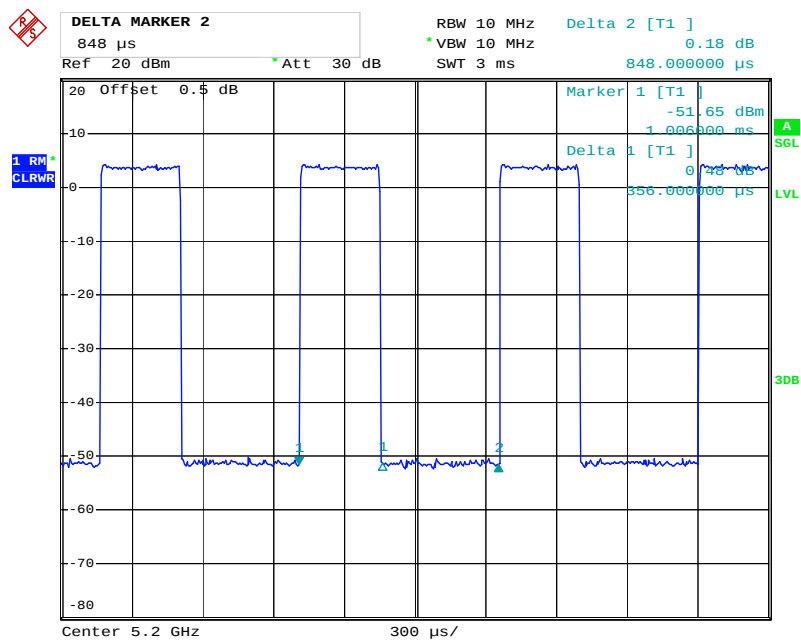

Date: 3.SEP.2020 07:01:43


Module 2:

802.11a

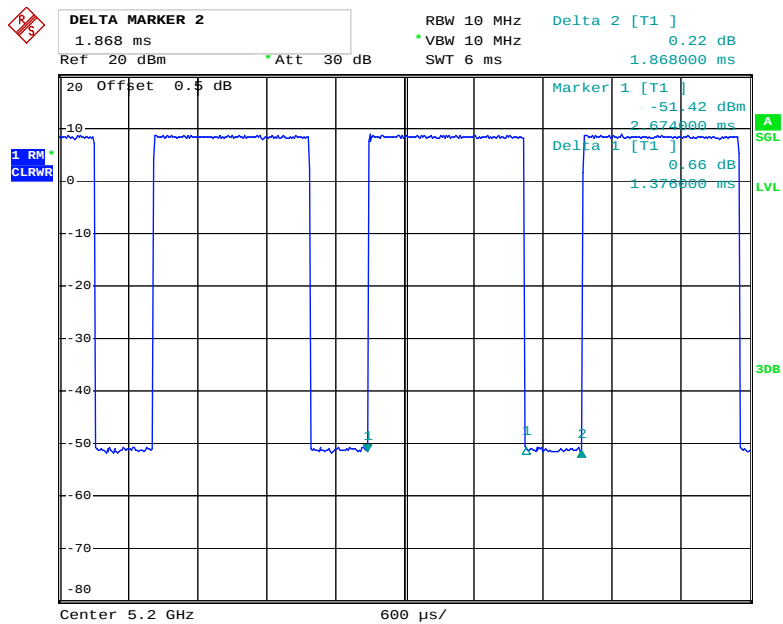


Date: 3.SEP.2020 07:03:42

802.11n ht20

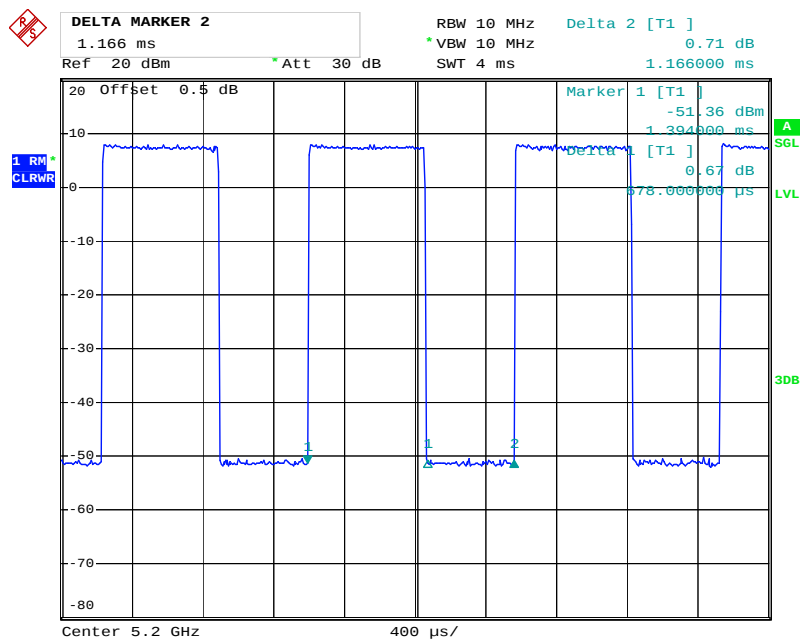

Date: 3.SEP.2020 07:04:51

802.11n ht40

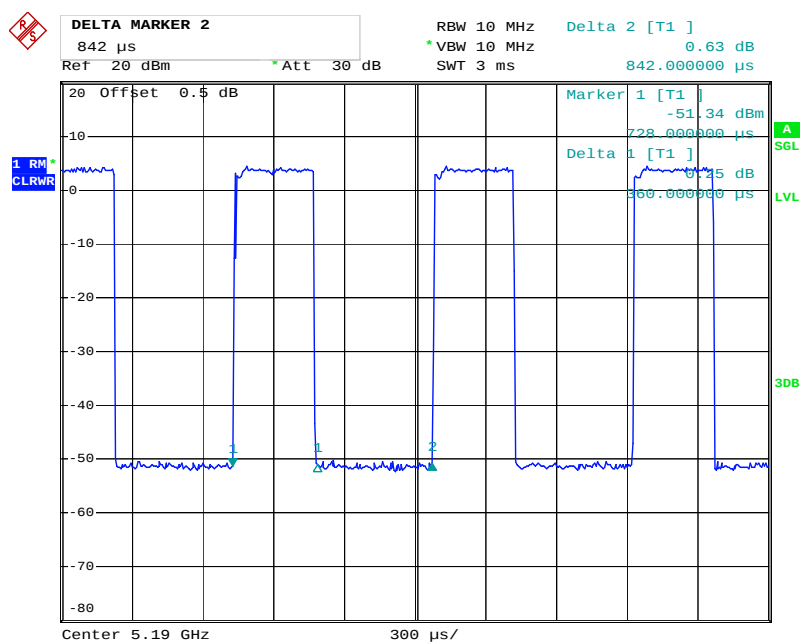

Date: 3.SEP.2020 07:06:21

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Lenovo	Laptop 1	Thinkpad E450	PF-0MRADG
Lenovo	Laptop 2	Thinkpad E450	PF-0MEDAE
DELL	Laptop 3	PP27LA	586N3Q1
HUAWEI	Router	HG8245Q2	2102311RGB6RH1000053
SanDisk	TF Card	UHS-I-128G	9292DVDSV0XZ
DELL	Monitor	U3011t	CN-OPH5NY-74445-16T-290L
Kingston	USB Disk	Z3	Z3-20182547
TOSHIBA	SSD	XS700	952511PSSD1E250GB
MI	Earphone	MIHE02	MIHE23150

External I/O Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB-C Cable	Yes	No	1.2	EUT	SSD
HDMI Cable	Yes	Yes	5	EUT	Laptop 1
HDMI Cable	Yes	Yes	5	EUT	Monitor
VGA Cable	Yes	Yes	5	EUT	Laptop 2
RJ45 Cable	Yes	Yes	10	EUT	Router
DP Cable	Yes	Yes	5	EUT	Laptop 3
RJ45 Cable	Yes	Yes	10	EUT	Laptop 3
Earphone Cable	Yes	No	1.2	EUT	Earphone

Block Diagram of Test Setup

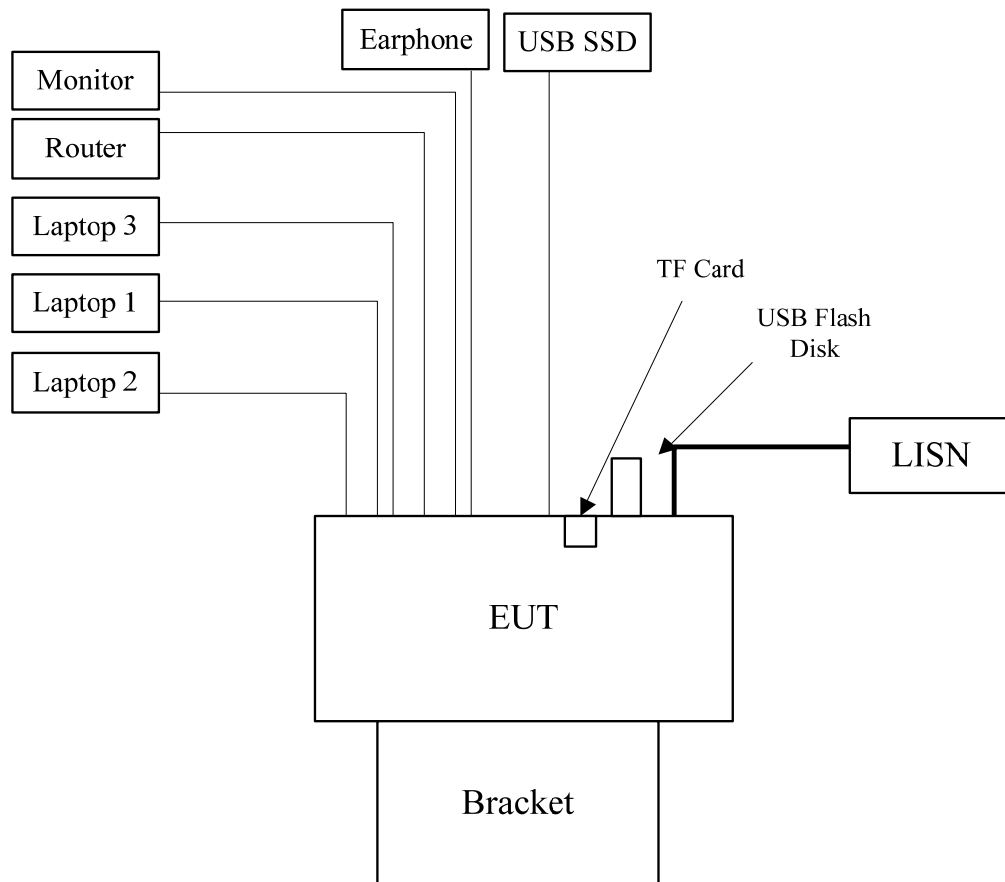

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
FCC§15.203	Antenna Requirement	Compliance
FCC§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
FCC§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliance
FCC§15.407(b)	Out Of Band Emissions	Compliance
FCC§15.407(a) (e)	Emission Bandwidth	Compliance
FCC§15.407(a)	Conducted Transmitter Output Power	Compliance
FCC§15.407 (a)	Power Spectral Density	Compliance

FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain fac vhtor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Module	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Module 1	2412-2462	3.24	2.11	26	398.11	20.00	0.17	1.0
	5150-5250	4.97	3.14	16	39.81	20.00	0.025	1.0
	5725-5850	4.97	3.14	16	39.81	20.00	0.025	1.0
Module 2	2412-2462	3.24	2.11	30	1000.00	20.00	0.42	1.0
	5150-5250	4.97	3.14	17	50.12	20.00	0.031	1.0
	5725-5850	4.97	3.14	17	50.12	20.00	0.031	1.0

The Module 1 and 2 can transmit simultaneously:

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$= S_{Module1} / S_{Limit-Module1} + S_{Module2} / S_{Limit-Module2}$$

$$= 0.17/1 + 0.42/1$$

$$= 0.59$$

$$< 1.0$$

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203- ANTENNA REQUIREMENT**Applicable Standard**

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has 4 external identical antenna use a unique type of connector to attach to the EUT, fulfill the requirement of this section. Please refer to the EUT photos and below information:

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
Dipole	50	3.24 dBi/2.4-2.5GHz 4.97 dBi/5.15-5.85GHz


Result: Compliance.

FCC §15.207(a)– CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (6).

EUT Setup

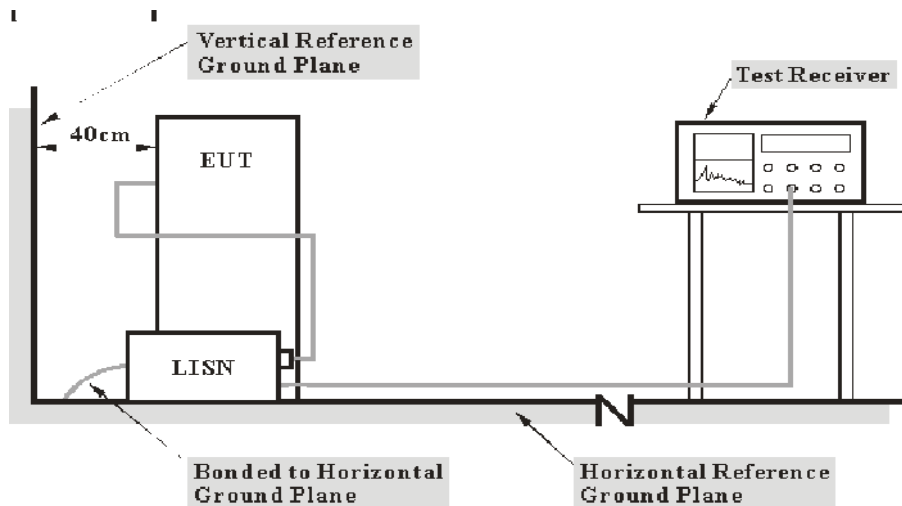

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV 216	101614	2020-09-12	2021-09-12
R&S	EMI Test Receiver	ESCI	101121	2020-07-07	2021-07-07
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2020-09-05	2021-09-05
R&S	Test Software	EMC32	Version 9.10.00	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.


The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

Test Data**Environmental Conditions**


Temperature:	26.1 °C
Relative Humidity:	67 %
ATM Pressure:	100.7 kPa
Tester:	Barry Yang
Test Date:	2020-09-17

Test Result: Compliance

Test Mode: Transmitting(module 1 802.11a chain 0,5845 MHz was the worst)

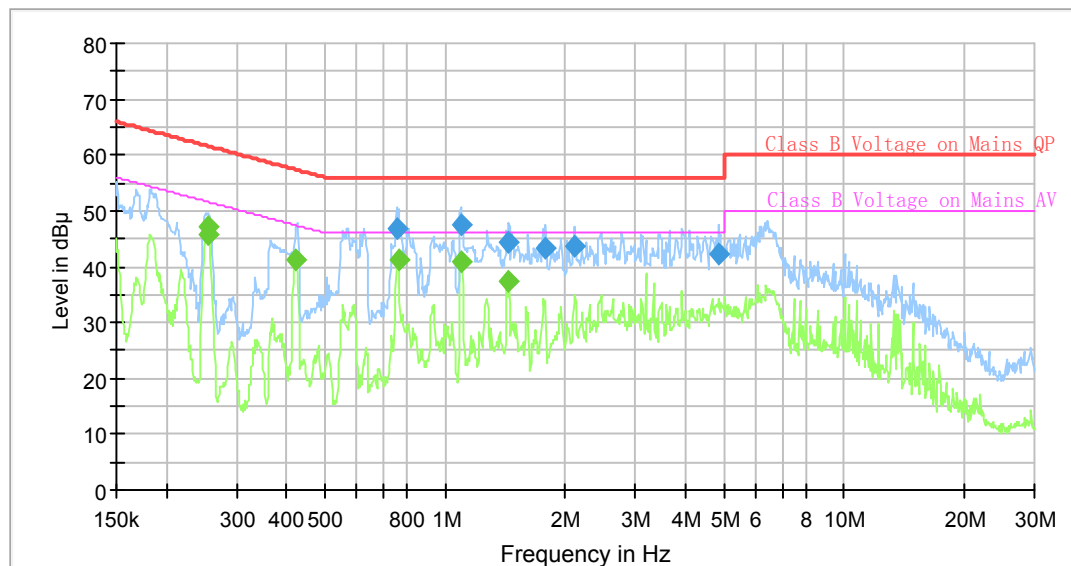AC120 V, 60 Hz, Line:**Final Result**

Frequency (MHz)	QuasiPeak (dB μV)	Average (dB μV)	Limit (dB μV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.253237	---	47.33	51.65	4.32	9.000	L1	9.6
0.255776	---	45.78	51.57	5.79	9.000	L1	9.6
0.421178	---	41.16	47.42	6.26	9.000	L1	9.6
0.754910	46.71	---	56.00	9.29	9.000	L1	9.7
0.762478	---	41.13	46.00	4.87	9.000	L1	9.7
1.097362	47.56	---	56.00	8.44	9.000	L1	9.7
1.102849	---	40.84	46.00	5.16	9.000	L1	9.7
1.443721	44.39	---	56.00	11.61	9.000	L1	9.7
1.443721	---	37.42	46.00	8.58	9.000	L1	9.7
1.789056	43.23	---	56.00	12.77	9.000	L1	9.7
2.109133	43.66	---	56.00	12.34	9.000	L1	9.7
4.851056	42.17	---	56.00	13.83	9.000	L1	9.7

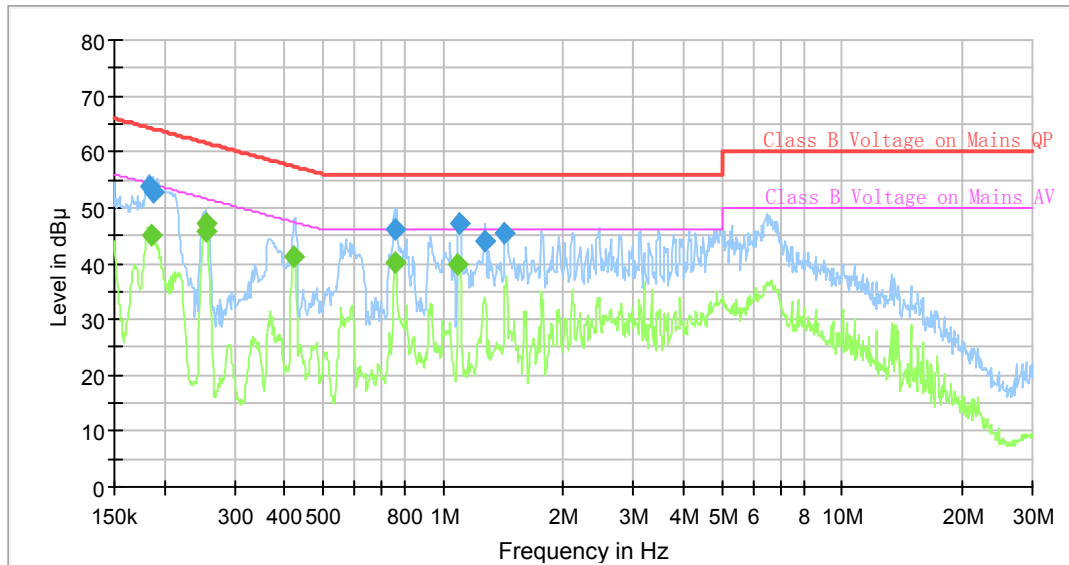AC120 V, 60 Hz, Neutral:**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.183119	53.83	---	64.34	10.51	9.000	N	9.6
0.185880	---	45.18	54.22	9.04	9.000	N	9.6
0.186809	52.70	---	64.18	11.48	9.000	N	9.6
0.253237	---	47.31	51.65	4.34	9.000	N	9.6
0.255776	---	45.78	51.57	5.79	9.000	N	9.6
0.421178	---	41.08	47.42	6.34	9.000	N	9.6
0.754910	46.09	---	56.00	9.91	9.000	N	9.6
0.754910	---	40.28	46.00	5.72	9.000	N	9.6
1.091902	---	39.86	46.00	6.14	9.000	N	9.6
1.097362	47.15	---	56.00	8.85	9.000	N	9.6
1.274476	44.02	---	56.00	11.98	9.000	N	9.6
1.422280	45.30	---	56.00	10.70	9.000	N	9.6

FCC §15.209, §15.205 , §15.407(b) –UNWANTED EMISSION

Applicable Standard

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufac vhturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufac vhturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.


(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.


EUT Setup Below 1 GHz:

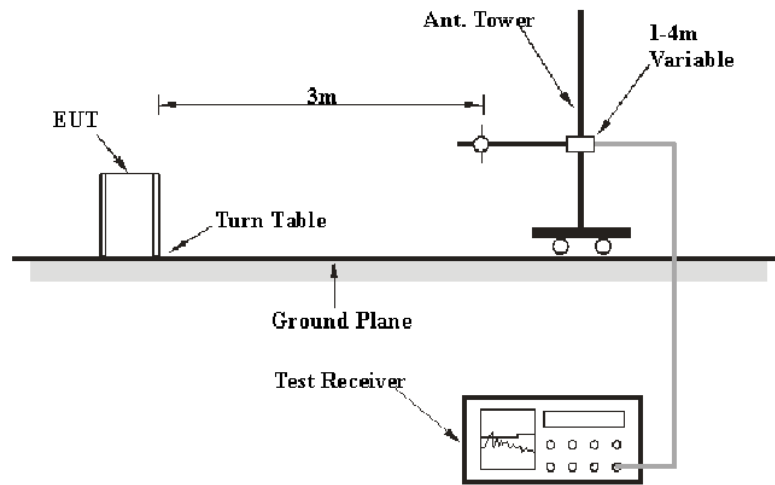

1-26.5 GHz:

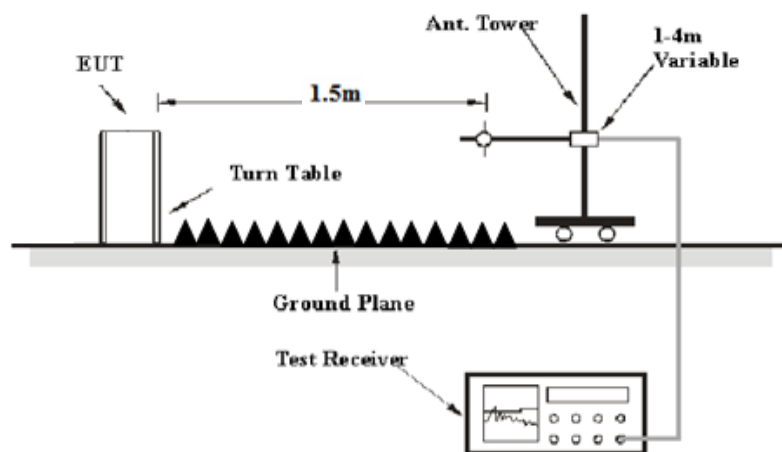

26.5-40 GHz:

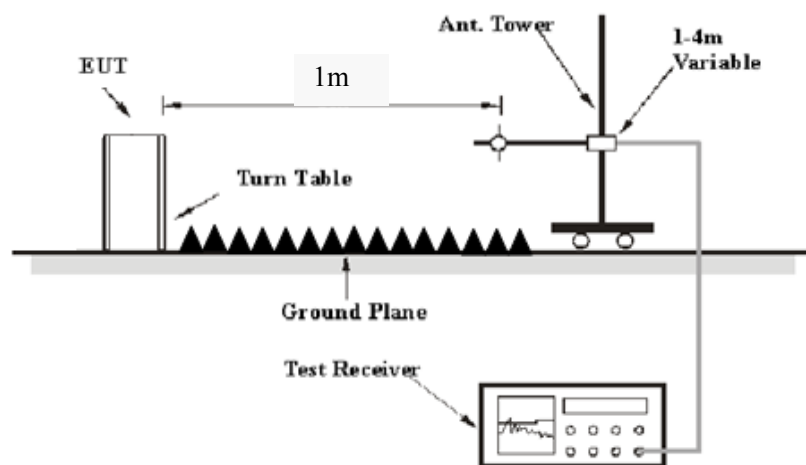

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A , above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB= 6.02 dB
or

Distance extrapolation factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation factor. The basic equation is as follows:

$$\begin{aligned} &\text{Corrected Amplitude} \\ &= \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} - \text{Distance extrapolation factor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz Test					
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2020-09-24	2021-09-24
Sonoma	Amplifier	310N	185914	2019-10-13	2020-10-13
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz Test					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2017-12-06	2020-12-05
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2017-12-06	2020-12-05
R&S	Spectrum Analyzer	FSP 38	100478	2020-07-07	2021-07-07
Agilent	Spectrum Analyzer	E4440A	SG43360054	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2020-06-27	2021-06-27
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2020-06-27	2021-06-27
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sinoscite	Bandstop Filters	BSF5150-5850MN-0899-003	0899003	2020-05-06	2021-05-06
Mini Circuits	High Pass Filter	VHF-6010+	31118	2020-06-16	2021-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	20.9°C	29°C
Relative Humidity:	42%	45 %
ATM Pressure:	100.7kPa	100.1kPa
Tester:	Michael Zhang	Felix Wang
Test Date:	2020-09-15	2020-09-17


Test Mode: Transmitting

1) Below 1GHz (Module 1, 802.11a Chain 1 5240 MHz was the worst):

Horizontal:

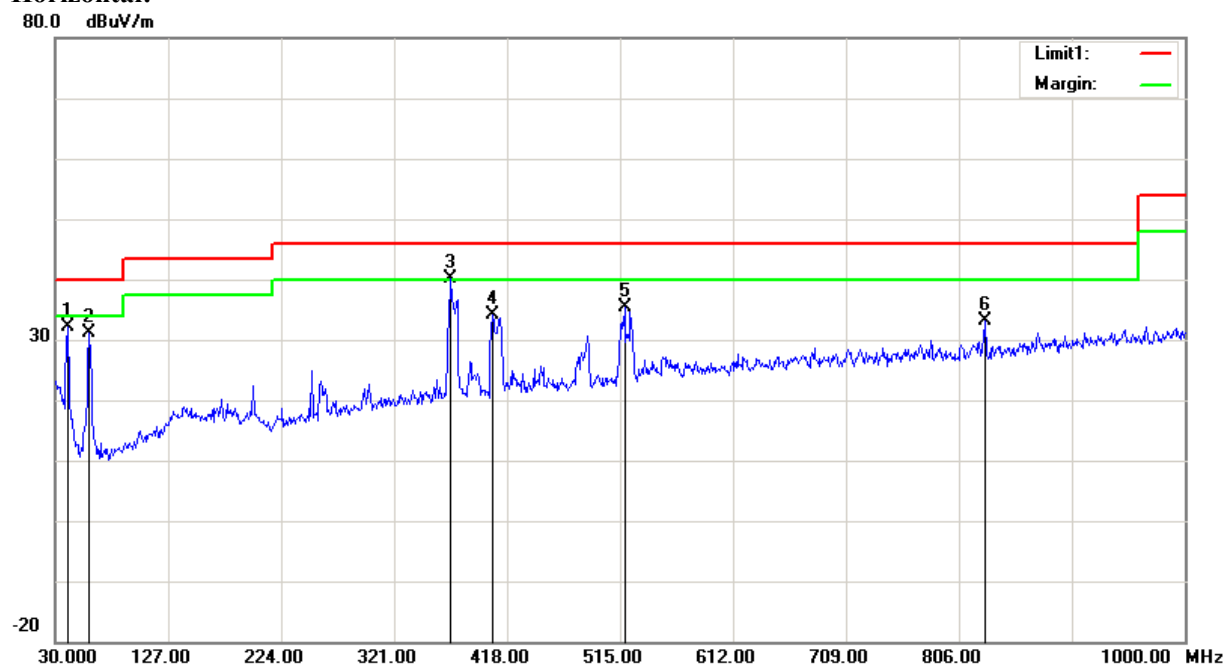

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
40.6700	42.00	peak	-9.87	32.13	40.00	7.87
59.1000	47.84	peak	-16.64	31.20	40.00	8.80
369.5000	46.04	peak	-6.01	40.03	46.00	5.97
405.3900	39.24	peak	-5.02	34.22	46.00	11.78
518.8800	38.09	peak	-2.68	35.41	46.00	10.59
828.3100	31.43	peak	1.74	33.17	46.00	12.83

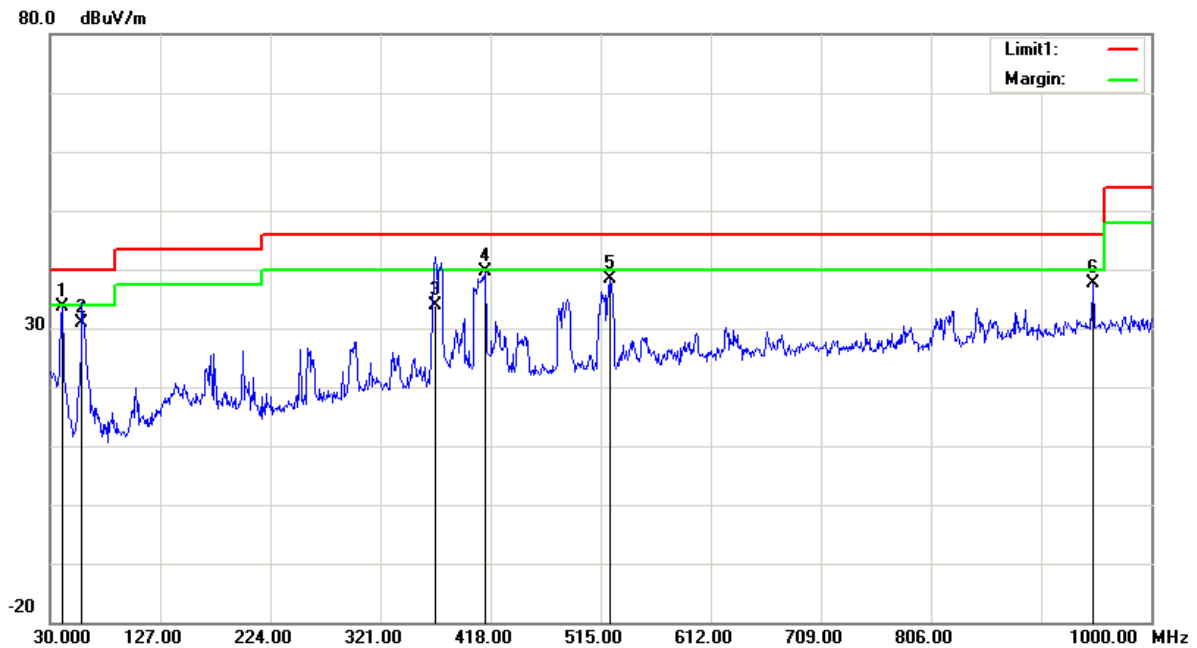Vertical:

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
40.6700	43.59	peak	-9.87	33.72	40.00	6.28
58.1300	47.71	QP	-16.71	31.00	40.00	9.00
369.5000	39.81	QP	-6.01	33.80	46.00	12.20
413.1500	44.54	peak	-4.88	39.66	46.00	6.34
523.7300	40.78	peak	-2.52	38.26	46.00	7.74
948.5900	32.78	peak	4.77	37.55	46.00	8.45

2) 1GHz-40GHz:
Main Module 1
5150-5250MHz
802.11a, Chain 0:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5180 MHz									
5180.00	95.36	PK	H	33.59	3.58	25.67	106.86	N/A	N/A
5180.00	87.24	AV	H	33.59	3.58	25.67	98.74	N/A	N/A
5180.00	88.64	PK	V	33.59	3.58	25.67	100.14	N/A	N/A
5180.00	80.55	AV	V	33.59	3.58	25.67	92.05	N/A	N/A
5150.00	49.55	PK	H	33.54	3.56	25.66	60.99	74.00	13.01
5150.00	33.39	AV	H	33.54	3.56	25.66	44.83	54.00	9.17
10360.00	43.86	PK	H	38.17	6.29	25.46	62.86	68.20	5.34
15540.00	35.99	PK	H	38.06	8.85	24.27	58.63	74.00	15.37
15540.00	23.56	AV	H	38.06	8.85	24.27	46.20	54.00	7.80
Middle Channel: 5200 MHz									
5200.00	99.12	PK	H	33.62	3.60	25.68	110.66	N/A	N/A
5200.00	90.92	AV	H	33.62	3.60	25.68	102.46	N/A	N/A
5200.00	92.19	PK	V	33.62	3.60	25.68	103.73	N/A	N/A
5200.00	84.21	AV	V	33.62	3.60	25.68	95.75	N/A	N/A
10400.00	44.15	PK	H	38.18	6.32	25.46	63.19	68.20	5.01
15600.00	36.82	PK	H	38.00	8.83	24.31	59.34	74.00	14.66
15600.00	24.65	AV	H	38.00	8.83	24.31	47.17	54.00	6.83
High Channel: 5240 MHz									
5240.00	98.53	PK	H	33.68	3.52	25.58	110.15	N/A	N/A
5240.00	90.29	AV	H	33.68	3.52	25.58	101.91	N/A	N/A
5240.00	91.35	PK	V	33.68	3.52	25.58	102.97	N/A	N/A
5240.00	83.46	AV	V	33.68	3.52	25.58	95.08	N/A	N/A
5350.00	40.70	PK	H	33.86	3.52	25.42	52.66	74.00	21.34
5350.00	27.89	AV	H	33.86	3.52	25.42	39.85	54.00	14.15
10480.00	41.20	PK	H	38.20	6.37	25.47	60.30	68.20	7.90
15720.00	36.28	PK	H	37.88	8.79	24.39	58.56	74.00	15.44
15720.00	24.09	AV	H	37.88	8.79	24.39	46.37	54.00	7.63

Chain 1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5180 MHz									
5180.00	94.46	PK	H	33.59	3.58	25.67	105.96	N/A	N/A
5180.00	85.90	AV	H	33.59	3.58	25.67	97.40	N/A	N/A
5180.00	90.27	PK	V	33.59	3.58	25.67	101.77	N/A	N/A
5180.00	81.96	AV	V	33.59	3.58	25.67	93.46	N/A	N/A
5150.00	51.47	PK	H	33.54	3.56	25.66	62.91	74.00	11.09
5150.00	37.08	AV	H	33.54	3.56	25.66	48.52	54.00	5.48
10360.00	35.15	PK	H	38.17	6.29	25.46	54.15	68.20	14.05
15540.00	36.02	PK	H	38.06	8.85	24.27	58.66	74.00	15.34
15540.00	23.67	AV	H	38.06	8.85	24.27	46.31	54.00	7.69
Middle Channel: 5200 MHz									
5200.00	95.70	PK	H	33.62	3.60	25.68	107.24	N/A	N/A
5200.00	87.15	AV	H	33.62	3.60	25.68	98.69	N/A	N/A
5200.00	91.56	PK	V	33.62	3.60	25.68	103.10	N/A	N/A
5200.00	83.37	AV	V	33.62	3.60	25.68	94.91	N/A	N/A
10400.00	35.86	PK	H	38.18	6.32	25.46	54.90	68.20	13.30
15600.00	37.12	PK	H	38.00	8.83	24.31	59.64	74.00	14.36
15600.00	24.86	AV	H	38.00	8.83	24.31	47.38	54.00	6.62
High Channel: 5240 MHz									
5240.00	94.06	PK	H	33.68	3.52	25.58	105.68	N/A	N/A
5240.00	85.80	AV	H	33.68	3.52	25.58	97.42	N/A	N/A
5240.00	89.92	PK	V	33.68	3.52	25.58	101.54	N/A	N/A
5240.00	70.79	AV	V	33.68	3.52	25.58	82.41	N/A	N/A
5350.00	39.57	PK	H	33.86	3.52	25.42	51.53	74.00	22.47
5350.00	26.78	AV	H	33.86	3.52	25.42	38.74	54.00	15.26
10480.00	35.79	PK	H	38.20	6.37	25.47	54.89	68.20	13.31
15720.00	36.26	PK	H	37.88	8.79	24.39	58.54	74.00	15.46
15720.00	24.17	AV	H	37.88	8.79	24.39	46.45	54.00	7.55

802.11n ht20(2Tx mode was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5180 MHz									
5180.00	98.64	PK	H	33.59	3.58	25.67	110.14	N/A	N/A
5180.00	88.35	AV	H	33.59	3.58	25.67	99.85	N/A	N/A
5180.00	92.98	PK	V	33.59	3.58	25.67	104.48	N/A	N/A
5180.00	82.76	AV	V	33.59	3.58	25.67	94.26	N/A	N/A
5150.00	51.31	PK	H	33.54	3.56	25.66	62.75	74.00	11.25
5150.00	36.60	AV	H	33.54	3.56	25.66	48.04	54.00	5.96
10360.00	43.20	PK	H	38.17	6.29	25.46	62.20	68.20	6.00
15540.00	36.05	PK	H	38.06	8.85	24.27	58.69	74.00	15.31
15540.00	24.11	AV	H	38.06	8.85	24.27	46.75	54.00	7.25
Middle Channel: 5200 MHz									
5200.00	97.40	PK	H	33.62	3.60	25.68	108.94	N/A	N/A
5200.00	87.12	AV	H	33.62	3.60	25.68	98.66	N/A	N/A
5200.00	91.35	PK	V	33.62	3.60	25.68	102.89	N/A	N/A
5200.00	81.16	AV	V	33.62	3.60	25.68	92.70	N/A	N/A
10400.00	40.76	PK	H	38.18	6.32	25.46	59.80	68.20	8.40
15600.00	36.02	PK	H	38.00	8.83	24.31	58.54	74.00	15.46
15600.00	24.07	AV	H	38.00	8.83	24.31	46.59	54.00	7.41
High Channel: 5240 MHz									
5240.00	98.60	PK	H	33.68	3.52	25.58	110.22	N/A	N/A
5240.00	88.74	AV	H	33.68	3.52	25.58	100.36	N/A	N/A
5240.00	92.85	PK	V	33.68	3.52	25.58	104.47	N/A	N/A
5240.00	82.67	AV	V	33.68	3.52	25.58	94.29	N/A	N/A
5350.00	39.59	PK	H	33.86	3.52	25.42	51.55	74.00	22.45
5350.00	27.06	AV	H	33.86	3.52	25.42	39.02	54.00	14.98
10480.00	43.07	PK	H	38.20	6.37	25.47	62.17	68.20	6.03
15720.00	36.11	PK	H	37.88	8.79	24.39	58.39	74.00	15.61
15720.00	24.18	AV	H	37.88	8.79	24.39	46.46	54.00	7.54

802.11n ht40(2Tx mode was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5190 MHz									
5190.00	91.31	PK	H	33.60	3.59	25.68	102.82	N/A	N/A
5190.00	81.70	AV	H	33.60	3.59	25.68	93.21	N/A	N/A
5190.00	85.26	PK	V	33.60	3.59	25.68	96.77	N/A	N/A
5190.00	75.65	AV	V	33.60	3.59	25.68	87.16	N/A	N/A
5150.00	52.35	PK	H	33.54	3.56	25.66	63.79	74.00	10.21
5150.00	38.95	AV	H	33.54	3.56	25.66	50.39	54.00	3.61
10380.00	35.67	PK	H	38.18	6.31	25.46	54.70	68.20	13.50
15570.00	36.85	PK	H	38.03	8.84	24.29	59.43	74.00	14.57
15570.00	24.67	AV	H	38.03	8.84	24.29	47.25	54.00	6.75
High Channel: 5230 MHz									
5230.00	92.61	PK	H	33.67	3.54	25.60	104.22	N/A	N/A
5230.00	83.55	AV	H	33.67	3.54	25.60	95.16	N/A	N/A
5230.00	86.54	PK	V	33.67	3.54	25.60	98.15	N/A	N/A
5230.00	77.38	AV	V	33.67	3.54	25.60	88.99	N/A	N/A
5350.00	39.21	PK	H	33.86	3.52	25.42	51.17	74.00	22.83
5350.00	26.83	AV	H	33.86	3.52	25.42	38.79	54.00	15.21
10460.00	36.39	PK	H	38.19	6.36	25.47	55.47	68.20	12.73
15690.00	36.40	PK	H	37.91	8.80	24.37	58.74	74.00	15.26
15690.00	24.31	AV	H	37.91	8.80	24.37	46.65	54.00	7.35

5725-5850MHz
802.11a, Chain 0

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5745 MHz									
5745.00	98.72	PK	H	34.20	3.69	24.67	111.94	N/A	N/A
5745.00	89.54	AV	H	34.20	3.69	24.67	102.76	N/A	N/A
5745.00	91.43	PK	V	34.20	3.69	24.67	104.65	N/A	N/A
5745.00	82.32	AV	V	34.20	3.69	24.67	95.54	N/A	N/A
5725.00	74.75	PK	H	34.19	3.69	24.77	87.86	122.20	34.34
5720.00	64.63	PK	H	34.19	3.69	24.79	77.72	110.80	33.08
5700.00	47.47	PK	H	34.18	3.68	24.89	60.44	105.20	44.76
5650.00	40.41	PK	H	34.16	3.63	25.03	53.17	68.20	15.03
11490.00	36.83	PK	H	38.99	6.59	25.51	56.90	74.00	17.10
11490.00	24.08	AV	H	38.99	6.59	25.51	44.15	54.00	9.85
17235.00	35.65	PK	H	41.56	8.78	23.72	62.27	68.20	5.93
Middle Channel: 5785 MHz									
5785.00	99.37	PK	H	34.21	3.71	24.47	112.82	N/A	N/A
5785.00	90.14	AV	H	34.21	3.71	24.47	103.59	N/A	N/A
5785.00	92.29	PK	V	34.21	3.71	24.47	105.74	N/A	N/A
5785.00	83.36	AV	V	34.21	3.71	24.47	96.81	N/A	N/A
11570.00	37.31	PK	H	39.00	6.61	25.46	57.46	74.00	16.54
11570.00	25.13	AV	H	39.00	6.61	25.46	45.28	54.00	8.72
17355.00	35.54	PK	H	42.26	8.81	23.60	63.01	68.20	5.19
High Channel: 5825 MHz									
5825.00	96.46	PK	H	34.23	3.73	24.38	110.04	N/A	N/A
5825.00	87.29	AV	H	34.23	3.73	24.38	100.87	N/A	N/A
5825.00	89.57	PK	V	34.23	3.73	24.38	103.15	N/A	N/A
5825.00	80.42	AV	V	34.23	3.73	24.38	94.00	N/A	N/A
5850.00	63.43	PK	H	34.24	3.75	24.37	77.05	122.20	45.15
5855.00	60.38	PK	H	34.24	3.75	24.36	74.01	110.80	36.79
5875.00	46.57	PK	H	34.25	3.77	24.35	60.24	105.20	44.96
5925.00	39.66	PK	H	34.27	3.80	24.27	53.46	68.20	14.74
11650.00	39.19	PK	H	39.00	6.64	25.41	59.42	74.00	14.58
11650.00	27.03	AV	H	39.00	6.64	25.41	47.26	54.00	6.74
17475.00	36.02	PK	H	42.96	8.84	23.48	64.34	68.20	3.86

Chain 1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5745 MHz									
5745.00	98.55	PK	H	34.20	3.69	24.67	111.77	N/A	N/A
5745.00	90.34	AV	H	34.20	3.69	24.67	103.56	N/A	N/A
5745.00	94.60	PK	V	34.20	3.69	24.67	107.82	N/A	N/A
5745.00	86.49	AV	V	34.20	3.69	24.67	99.71	N/A	N/A
5725.00	70.58	PK	H	34.19	3.69	24.77	83.69	122.20	38.51
5720.00	60.46	PK	H	34.19	3.69	24.79	73.55	110.80	37.25
5700.00	49.24	PK	H	34.18	3.68	24.89	62.21	105.20	42.99
5650.00	39.85	PK	H	34.16	3.63	25.03	52.61	68.20	15.59
11490.00	35.50	PK	H	38.99	6.59	25.51	55.57	74.00	18.43
11490.00	23.36	AV	H	38.99	6.59	25.51	43.43	54.00	10.57
17235.00	35.27	PK	H	41.56	8.78	23.72	61.89	68.20	6.31
Middle Channel: 5785 MHz									
5785.00	98.07	PK	H	34.21	3.71	24.47	111.52	N/A	N/A
5785.00	90.00	AV	H	34.21	3.71	24.47	103.45	N/A	N/A
5785.00	94.15	PK	V	34.21	3.71	24.47	107.60	N/A	N/A
5785.00	86.18	AV	V	34.21	3.71	24.47	99.63	N/A	N/A
11570.00	35.85	PK	H	39.00	6.61	25.46	56.00	74.00	18.00
11570.00	23.67	AV	H	39.00	6.61	25.46	43.82	54.00	10.18
17355.00	36.05	PK	H	42.26	8.81	23.60	63.52	68.20	4.68
High Channel: 5825 MHz									
5825.00	96.91	PK	H	34.23	3.73	24.38	110.49	N/A	N/A
5825.00	88.55	AV	H	34.23	3.73	24.38	102.13	N/A	N/A
5825.00	92.67	PK	V	34.23	3.73	24.38	106.25	N/A	N/A
5825.00	84.54	AV	V	34.23	3.73	24.38	98.12	N/A	N/A
5850.00	54.51	PK	H	34.24	3.75	24.37	68.13	122.20	54.07
5855.00	52.06	PK	H	34.24	3.75	24.36	65.69	110.80	45.11
5875.00	42.65	PK	H	34.25	3.77	24.35	56.32	105.20	48.88
5925.00	40.42	PK	H	34.27	3.80	24.27	54.22	68.20	13.98
11650.00	36.06	PK	H	39.00	6.64	25.41	56.29	74.00	17.71
11650.00	23.89	AV	H	39.00	6.64	25.41	44.12	54.00	9.88
17475.00	35.25	PK	H	42.96	8.84	23.48	63.57	68.20	4.63

802.11n ht20(2Tx mode was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5745 MHz									
5745.00	101.40	PK	H	34.20	3.69	24.67	114.62	N/A	N/A
5745.00	91.14	AV	H	34.20	3.69	24.67	104.36	N/A	N/A
5745.00	95.05	PK	V	34.20	3.69	24.67	108.27	N/A	N/A
5745.00	85.01	AV	V	34.20	3.69	24.67	98.23	N/A	N/A
5725.00	72.06	PK	H	34.19	3.69	24.77	85.17	122.20	37.03
5720.00	63.76	PK	H	34.19	3.69	24.79	76.85	110.80	33.95
5700.00	49.12	PK	H	34.18	3.68	24.89	62.09	105.20	43.11
5650.00	39.83	PK	H	34.16	3.63	25.03	52.59	68.20	15.61
11490.00	35.67	PK	H	38.99	6.59	25.51	55.74	74.00	18.26
11490.00	23.41	AV	H	38.99	6.59	25.51	43.48	54.00	10.52
17235.00	35.12	PK	H	41.56	8.78	23.72	61.74	68.20	6.46
Middle Channel: 5785 MHz									
5785.00	100.35	PK	H	34.21	3.71	24.47	113.80	N/A	N/A
5785.00	100.12	AV	H	34.21	3.71	24.47	113.57	N/A	N/A
5785.00	94.15	PK	V	34.21	3.71	24.47	107.60	N/A	N/A
5785.00	84.03	AV	V	34.21	3.71	24.47	97.48	N/A	N/A
11570.00	36.12	PK	H	39.00	6.61	25.46	56.27	74.00	17.73
11570.00	24.03	AV	H	39.00	6.61	25.46	44.18	54.00	9.82
17355.00	35.31	PK	H	42.26	8.81	23.60	62.78	68.20	5.42
High Channel: 5825 MHz									
5825.00	100.02	PK	H	34.23	3.73	24.38	113.60	N/A	N/A
5825.00	89.82	AV	H	34.23	3.73	24.38	103.40	N/A	N/A
5825.00	94.53	PK	V	34.23	3.73	24.38	108.11	N/A	N/A
5825.00	84.21	AV	V	34.23	3.73	24.38	97.79	N/A	N/A
5850.00	61.60	PK	H	34.24	3.75	24.37	75.22	122.20	46.98
5855.00	57.48	PK	H	34.24	3.75	24.36	71.11	110.80	39.69
5875.00	42.77	PK	H	34.25	3.77	24.35	56.44	105.20	48.76
5925.00	40.73	PK	H	34.27	3.80	24.27	54.53	68.20	13.67
11650.00	37.65	PK	H	39.00	6.64	25.41	57.88	74.00	16.12
11650.00	25.21	AV	H	39.00	6.64	25.41	45.44	54.00	8.56
17475.00	35.54	PK	H	42.96	8.84	23.48	63.86	68.20	4.34

802.11n ht40(2Tx mode was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5755 MHz									
5755.00	97.53	PK	H	34.20	3.70	24.62	110.81	N/A	N/A
5755.00	88.20	AV	H	34.20	3.70	24.62	101.48	N/A	N/A
5755.00	90.15	PK	V	34.20	3.70	24.62	103.43	N/A	N/A
5755.00	80.56	AV	V	34.20	3.70	24.62	93.84	N/A	N/A
5725.00	75.13	PK	H	34.19	3.69	24.77	88.24	122.20	33.96
5720.00	73.24	PK	H	34.19	3.69	24.79	86.33	110.80	24.47
5700.00	57.36	PK	H	34.18	3.68	24.89	70.33	105.20	34.87
5650.00	44.32	PK	H	34.16	3.63	25.03	57.08	68.20	11.12
11510.00	35.59	PK	H	39.00	6.59	25.50	55.68	74.00	18.32
11510.00	23.18	AV	H	39.00	6.59	25.50	43.27	54.00	10.73
17265.00	35.32	PK	H	41.74	8.79	23.69	62.16	68.20	6.04
High Channel: 5795 MHz									
5795.00	96.10	PK	H	34.22	3.71	24.42	109.61	N/A	N/A
5795.00	86.93	AV	H	34.22	3.71	24.42	100.44	N/A	N/A
5795.00	88.81	PK	V	34.22	3.71	24.42	102.32	N/A	N/A
5795.00	89.21	AV	V	34.22	3.71	24.42	102.72	N/A	N/A
5850.00	56.45	PK	H	34.24	3.75	24.37	70.07	122.20	52.13
5855.00	55.52	PK	H	34.24	3.75	24.36	69.15	110.80	41.65
5875.00	48.32	PK	H	34.25	3.77	24.35	61.99	105.20	43.21
5925.00	36.35	PK	H	34.27	3.80	24.27	50.15	68.20	18.05
11590.00	36.28	PK	H	39.00	6.62	25.45	56.45	74.00	17.55
11590.00	24.12	AV	H	39.00	6.62	25.45	44.29	54.00	9.71
17385.00	35.36	PK	H	42.43	8.82	23.57	63.04	68.20	5.16

Module 2:
5150-5250MHz
802.11a, Chain 0

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5180 MHz									
5180.00	98.97	PK	H	33.59	3.58	25.67	110.47	N/A	N/A
5180.00	87.13	AV	H	33.59	3.58	25.67	98.63	N/A	N/A
5180.00	90.01	PK	V	33.59	3.58	25.67	101.51	N/A	N/A
5180.00	78.52	AV	V	33.59	3.58	25.67	90.02	N/A	N/A
5150.00	57.69	PK	H	33.54	3.56	25.66	69.13	74.00	4.87
5150.00	39.52	AV	H	33.54	3.56	25.66	50.96	54.00	3.04
10360.00	36.87	PK	H	38.17	6.29	25.46	55.87	74.00	18.13
15540.00	35.78	PK	H	38.06	8.85	24.27	58.42	74.00	15.58
15540.00	23.12	AV	H	38.06	8.85	24.27	45.76	54.00	8.24
Middle Channel: 5200 MHz									
5200.00	99.75	PK	H	33.62	3.60	25.68	111.29	N/A	N/A
5200.00	88.41	AV	H	33.62	3.60	25.68	99.95	N/A	N/A
5200.00	90.79	PK	V	33.62	3.60	25.68	102.33	N/A	N/A
5200.00	89.41	AV	V	33.62	3.60	25.68	100.95	N/A	N/A
10400.00	37.50	PK	H	38.18	6.32	25.46	56.54	68.20	11.66
15600.00	36.02	PK	H	38.00	8.83	24.31	58.54	74.00	15.46
15600.00	23.51	AV	H	38.00	8.83	24.31	46.03	54.00	7.97
High Channel: 5240 MHz									
5240.00	99.05	PK	H	33.68	3.52	25.58	110.67	N/A	N/A
5240.00	87.39	AV	H	33.68	3.52	25.58	99.01	N/A	N/A
5240.00	90.12	PK	V	33.68	3.52	25.58	101.74	N/A	N/A
5240.00	88.62	AV	V	33.68	3.52	25.58	100.24	N/A	N/A
5350.00	39.63	PK	H	33.86	3.52	25.42	51.59	74.00	22.41
5350.00	27.66	AV	H	33.86	3.52	25.42	39.62	54.00	14.38
10480.00	37.15	PK	H	38.20	6.37	25.47	56.25	68.20	11.95
15720.00	35.90	PK	H	37.88	8.79	24.39	58.18	74.00	15.82
15720.00	23.41	AV	H	37.88	8.79	24.39	45.69	54.00	8.31

Chain 1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5180 MHz									
5180.00	98.47	PK	H	33.59	3.58	25.67	109.97	N/A	N/A
5180.00	87.02	AV	H	33.59	3.58	25.67	98.52	N/A	N/A
5180.00	90.69	PK	V	33.59	3.58	25.67	102.19	N/A	N/A
5180.00	89.41	AV	V	33.59	3.58	25.67	100.91	N/A	N/A
5150.00	44.75	PK	H	33.54	3.56	25.66	56.19	74.00	17.81
5150.00	32.91	AV	H	33.54	3.56	25.66	44.35	54.00	9.65
10360.00	36.25	PK	H	38.17	6.29	25.46	55.25	68.20	12.95
15540.00	36.11	PK	H	38.06	8.85	24.27	58.75	74.00	15.25
15540.00	23.89	AV	H	38.06	8.85	24.27	46.53	54.00	7.47
Middle Channel: 5200 MHz									
5200.00	99.68	PK	H	33.62	3.60	25.68	111.22	N/A	N/A
5200.00	88.32	AV	H	33.62	3.60	25.68	99.86	N/A	N/A
5200.00	90.87	PK	V	33.62	3.60	25.68	102.41	N/A	N/A
5200.00	79.41	AV	V	33.62	3.60	25.68	90.95	N/A	N/A
10400.00	35.62	PK	H	38.18	6.32	25.46	54.66	68.20	13.54
15600.00	36.21	PK	H	38.00	8.83	24.31	58.73	74.00	15.27
15600.00	24.10	AV	H	38.00	8.83	24.31	46.62	54.00	7.38
High Channel: 5240 MHz									
5240.00	98.31	PK	H	33.68	3.52	25.58	109.93	N/A	N/A
5240.00	88.88	AV	H	33.68	3.52	25.58	100.50	N/A	N/A
5240.00	90.54	PK	V	33.68	3.52	25.58	102.16	N/A	N/A
5240.00	79.32	AV	V	33.68	3.52	25.58	90.94	N/A	N/A
5350.00	37.50	PK	H	33.86	3.52	25.42	49.46	74.00	24.54
5350.00	24.46	AV	H	33.86	3.52	25.42	36.42	54.00	17.58
10480.00	35.50	PK	H	38.20	6.37	25.47	54.60	68.20	13.60
15720.00	36.25	PK	H	37.88	8.79	24.39	58.53	74.00	15.47
15720.00	24.03	AV	H	37.88	8.79	24.39	46.31	54.00	7.69

802.11n ht20(2Tx mode was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5180 MHz									
5180.00	99.85	PK	H	33.59	3.58	25.67	111.35	N/A	N/A
5180.00	90.25	AV	H	33.59	3.58	25.67	101.75	N/A	N/A
5180.00	90.29	PK	V	33.59	3.58	25.67	101.79	N/A	N/A
5180.00	80.58	AV	V	33.59	3.58	25.67	92.08	N/A	N/A
5150.00	47.90	PK	H	33.54	3.56	25.66	59.34	74.00	14.66
5150.00	32.85	AV	H	33.54	3.56	25.66	44.29	54.00	9.71
10360.00	36.02	PK	H	38.17	6.29	25.46	55.02	68.20	13.18
15540.00	36.10	PK	H	38.06	8.85	24.27	58.74	74.00	15.26
15540.00	23.54	AV	H	38.06	8.85	24.27	46.18	54.00	7.82
Middle Channel: 5200 MHz									
5200.00	98.58	PK	H	33.62	3.60	25.68	110.12	N/A	N/A
5200.00	89.58	AV	H	33.62	3.60	25.68	101.12	N/A	N/A
5200.00	89.98	PK	V	33.62	3.60	25.68	101.52	N/A	N/A
5200.00	80.32	AV	V	33.62	3.60	25.68	91.86	N/A	N/A
10400.00	36.12	PK	H	38.18	6.32	25.46	55.16	68.20	13.04
15600.00	36.02	PK	H	38.00	8.83	24.31	58.54	74.00	15.46
15600.00	23.58	AV	H	38.00	8.83	24.31	46.10	54.00	7.90
High Channel: 5240 MHz									
5240.00	97.80	PK	H	33.68	3.52	25.58	109.42	N/A	N/A
5240.00	88.73	AV	H	33.68	3.52	25.58	100.35	N/A	N/A
5240.00	89.41	PK	V	33.68	3.52	25.58	101.03	N/A	N/A
5240.00	80.12	AV	V	33.68	3.52	25.58	91.74	N/A	N/A
5350.00	40.37	PK	H	33.86	3.52	25.42	52.33	74.00	21.67
5350.00	29.84	AV	H	33.86	3.52	25.42	41.80	54.00	12.20
10480.00	36.46	PK	H	38.20	6.37	25.47	55.56	68.20	12.64
15720.00	35.41	PK	H	37.88	8.79	24.39	57.69	74.00	16.31
15720.00	23.12	AV	H	37.88	8.79	24.39	45.40	54.00	8.60

802.11n ht40(2Tx mode was the worst):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5190 MHz									
5190.00	93.03	PK	H	33.60	3.59	25.68	104.54	N/A	N/A
5190.00	84.48	AV	H	33.60	3.59	25.68	95.99	N/A	N/A
5190.00	87.56	PK	V	33.60	3.59	25.68	99.07	N/A	N/A
5190.00	77.42	AV	V	33.60	3.59	25.68	88.93	N/A	N/A
5150.00	52.36	PK	H	33.54	3.56	25.66	63.80	74.00	10.20
5150.00	30.78	AV	H	33.54	3.56	25.66	42.22	54.00	11.78
10380.00	36.02	PK	H	38.18	6.31	25.46	55.05	68.20	13.15
15570.00	35.21	PK	H	38.03	8.84	24.29	57.79	74.00	16.21
15570.00	23.54	AV	H	38.03	8.84	24.29	46.12	54.00	7.88
High Channel: 5230 MHz									
5230.00	92.95	PK	H	33.67	3.54	25.60	104.56	N/A	N/A
5230.00	84.43	AV	H	33.67	3.54	25.60	96.04	N/A	N/A
5230.00	86.87	PK	V	33.67	3.54	25.60	98.48	N/A	N/A
5230.00	78.41	AV	V	33.67	3.54	25.60	90.02	N/A	N/A
5350.00	36.69	PK	H	33.86	3.52	25.42	48.65	74.00	25.35
5350.00	26.81	AV	H	33.86	3.52	25.42	38.77	54.00	15.23
10460.00	36.32	PK	H	38.19	6.36	25.47	55.40	68.20	12.80
15690.00	36.14	PK	H	37.91	8.80	24.37	58.48	74.00	15.52
15690.00	23.20	AV	H	37.91	8.80	24.37	45.54	54.00	8.46

5725-5850MHz**802.11a, Chain 0:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5745 MHz									
5745.00	97.45	PK	H	34.20	3.69	24.67	110.67	N/A	N/A
5745.00	88.52	AV	H	34.20	3.69	24.67	101.74	N/A	N/A
5745.00	93.40	PK	V	34.20	3.69	24.67	106.62	N/A	N/A
5745.00	84.51	AV	V	34.20	3.69	24.67	97.73	N/A	N/A
5725.00	58.70	PK	H	34.19	3.69	24.77	71.81	122.20	50.39
5720.00	54.60	PK	H	34.19	3.69	24.79	67.69	110.80	43.11
5700.00	39.90	PK	H	34.18	3.68	24.89	52.87	105.20	52.33
5650.00	36.77	PK	H	34.16	3.63	25.03	49.53	68.20	18.67
11490.00	35.97	PK	H	38.99	6.59	25.51	56.04	74.00	17.96
11490.00	24.01	AV	H	38.99	6.59	25.51	44.08	54.00	9.92
17235.00	35.26	PK	H	41.56	8.78	23.72	61.88	68.20	6.32
Middle Channel: 5785 MHz									
5785.00	97.10	PK	H	34.21	3.71	24.47	110.55	N/A	N/A
5785.00	87.82	AV	H	34.21	3.71	24.47	101.27	N/A	N/A
5785.00	92.29	PK	V	34.21	3.71	24.47	105.74	N/A	N/A
5785.00	83.13	AV	V	34.21	3.71	24.47	96.58	N/A	N/A
11570.00	35.49	PK	H	39.00	6.61	25.46	55.64	74.00	18.36
11570.00	23.45	AV	H	39.00	6.61	25.46	43.60	54.00	10.40
17355.00	35.89	PK	H	42.26	8.81	23.60	63.36	68.20	4.84
High Channel: 5825 MHz									
5825.00	95.41	PK	H	34.23	3.73	24.38	108.99	N/A	N/A
5825.00	86.17	AV	H	34.23	3.73	24.38	99.75	N/A	N/A
5825.00	89.58	PK	V	34.23	3.73	24.38	103.16	N/A	N/A
5825.00	79.99	AV	V	34.23	3.73	24.38	93.57	N/A	N/A
5850.00	44.64	PK	H	34.24	3.75	24.37	58.26	122.20	63.94
5855.00	39.08	PK	H	34.24	3.75	24.36	52.71	110.80	58.09
5875.00	36.69	PK	H	34.25	3.77	24.35	50.36	105.20	54.84
5925.00	36.41	PK	H	34.27	3.80	24.27	50.21	68.20	17.99
11650.00	35.62	PK	H	39.00	6.64	25.41	55.85	74.00	18.15
11650.00	23.56	AV	H	39.00	6.64	25.41	43.79	54.00	10.21
17475.00	35.19	PK	H	42.96	8.84	23.48	63.51	68.20	4.69

Chain 1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5745 MHz									
5745.00	97.12	PK	H	34.20	3.69	24.67	110.34	N/A	N/A
5745.00	87.81	AV	H	34.20	3.69	24.67	101.03	N/A	N/A
5745.00	89.60	PK	V	34.20	3.69	24.67	102.82	N/A	N/A
5745.00	80.13	AV	V	34.20	3.69	24.67	93.35	N/A	N/A
5725.00	48.82	PK	H	34.19	3.69	24.77	61.93	122.20	60.27
5720.00	42.31	PK	H	34.19	3.69	24.79	55.40	110.80	55.40
5700.00	36.04	PK	H	34.18	3.68	24.89	49.01	105.20	56.19
5650.00	35.22	PK	H	34.16	3.63	25.03	47.98	68.20	20.22
11490.00	36.00	PK	H	38.99	6.59	25.51	56.07	74.00	17.93
11490.00	23.63	AV	H	38.99	6.59	25.51	43.70	54.00	10.30
17235.00	35.48	PK	H	41.56	8.78	23.72	62.10	68.20	6.10
Middle Channel: 5785 MHz									
5785.00	96.78	PK	H	34.21	3.71	24.47	110.23	N/A	N/A
5785.00	87.22	AV	H	34.21	3.71	24.47	100.67	N/A	N/A
5785.00	89.85	PK	V	34.21	3.71	24.47	103.30	N/A	N/A
5785.00	80.36	AV	V	34.21	3.71	24.47	93.81	N/A	N/A
11570.00	35.24	PK	H	39.00	6.61	25.46	55.39	74.00	18.61
11570.00	23.78	AV	H	39.00	6.61	25.46	43.93	54.00	10.07
17355.00	35.63	PK	H	42.26	8.81	23.60	63.10	68.20	5.10
High Channel: 5825 MHz									
5825.00	96.56	PK	H	34.23	3.73	24.38	110.14	N/A	N/A
5825.00	87.47	AV	H	34.23	3.73	24.38	101.05	N/A	N/A
5825.00	88.13	PK	V	34.23	3.73	24.38	101.71	N/A	N/A
5825.00	79.59	AV	V	34.23	3.73	24.38	93.17	N/A	N/A
5850.00	52.28	PK	H	34.24	3.75	24.37	65.90	122.20	56.30
5855.00	44.44	PK	H	34.24	3.75	24.36	58.07	110.80	52.73
5875.00	38.42	PK	H	34.25	3.77	24.35	52.09	105.20	53.11
5925.00	36.03	PK	H	34.27	3.80	24.27	49.83	68.20	18.37
11650.00	35.57	PK	H	39.00	6.64	25.41	55.80	74.00	18.20
11650.00	24.35	AV	H	39.00	6.64	25.41	44.58	54.00	9.42
17475.00	35.50	PK	H	42.96	8.84	23.48	63.82	68.20	4.38




802.11n ht20(2Tx mode was the worst):


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5745 MHz									
5745.00	101.00	PK	H	34.20	3.69	24.67	114.22	N/A	N/A
5745.00	92.43	AV	H	34.20	3.69	24.67	105.65	N/A	N/A
5745.00	93.12	PK	V	34.20	3.69	24.67	106.34	N/A	N/A
5745.00	84.56	AV	V	34.20	3.69	24.67	97.78	N/A	N/A
5725.00	65.30	PK	H	34.19	3.69	24.77	78.41	122.20	43.79
5720.00	59.73	PK	H	34.19	3.69	24.79	72.82	110.80	37.98
5700.00	42.23	PK	H	34.18	3.68	24.89	55.20	105.20	50.00
5650.00	37.96	PK	H	34.16	3.63	25.03	50.72	68.20	17.48
11490.00	35.69	PK	H	38.99	6.59	25.51	55.76	74.00	18.24
11490.00	24.56	AV	H	38.99	6.59	25.51	44.63	54.00	9.37
17235.00	36.01	PK	H	41.56	8.78	23.72	62.63	68.20	5.57
Middle Channel: 5785 MHz									
5785.00	100.30	PK	H	34.21	3.71	24.47	113.75	N/A	N/A
5785.00	90.21	AV	H	34.21	3.71	24.47	103.66	N/A	N/A
5785.00	91.29	PK	V	34.21	3.71	24.47	104.74	N/A	N/A
5785.00	82.01	AV	V	34.21	3.71	24.47	95.46	N/A	N/A
11570.00	35.49	PK	H	39.00	6.61	25.46	55.64	74.00	18.36
11570.00	24.01	AV	H	39.00	6.61	25.46	44.16	54.00	9.84
17355.00	35.63	PK	H	42.26	8.81	23.60	63.10	68.20	5.10
High Channel: 5825 MHz									
5825.00	99.97	PK	H	34.23	3.73	24.38	113.55	N/A	N/A
5825.00	90.77	AV	H	34.23	3.73	24.38	104.35	N/A	N/A
5825.00	93.04	PK	V	34.23	3.73	24.38	106.62	N/A	N/A
5825.00	83.56	AV	V	34.23	3.73	24.38	97.14	N/A	N/A
5850.00	55.30	PK	H	34.24	3.75	24.37	68.92	122.20	53.28
5855.00	51.68	PK	H	34.24	3.75	24.36	65.31	110.80	45.49
5875.00	40.70	PK	H	34.25	3.77	24.35	54.37	105.20	50.83
5925.00	38.02	PK	H	34.27	3.80	24.27	51.82	68.20	16.38
11650.00	35.45	PK	H	39.00	6.64	25.41	55.68	74.00	18.32
11650.00	24.13	AV	H	39.00	6.64	25.41	44.36	54.00	9.64
17475.00	36.01	PK	H	42.96	8.84	23.48	64.33	68.20	3.87

802.11n ht40(2Tx mode was the worst):



Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Fac vhtor (dB/m)					
Low Channel: 5755 MHz									
5755.00	97.44	PK	H	34.20	3.70	24.62	110.72	N/A	N/A
5755.00	88.70	AV	H	34.20	3.70	24.62	101.98	N/A	N/A
5755.00	90.14	PK	V	34.20	3.70	24.62	103.42	N/A	N/A
5755.00	80.59	AV	V	34.20	3.70	24.62	93.87	N/A	N/A
5725.00	68.18	PK	H	34.19	3.69	24.77	81.29	122.20	40.91
5720.00	65.74	PK	H	34.19	3.69	24.79	78.83	110.80	31.97
5700.00	52.26	PK	H	34.18	3.68	24.89	65.23	105.20	39.97
5650.00	41.06	PK	H	34.16	3.63	25.03	53.82	68.20	14.38
11510.00	35.26	PK	H	39.00	6.59	25.50	55.35	74.00	18.65
11510.00	23.24	AV	H	39.00	6.59	25.50	43.33	54.00	10.67
17265.00	35.70	PK	H	41.74	8.79	23.69	62.54	68.20	5.66
High Channel: 5795 MHz									
5795.00	95.97	PK	H	34.22	3.71	24.42	109.48	N/A	N/A
5795.00	86.60	AV	H	34.22	3.71	24.42	100.11	N/A	N/A
5795.00	86.71	PK	V	34.22	3.71	24.42	100.22	N/A	N/A
5795.00	77.54	AV	V	34.22	3.71	24.42	91.05	N/A	N/A
5850.00	48.83	PK	H	34.24	3.75	24.37	62.45	122.20	59.75
5855.00	47.93	PK	H	34.24	3.75	24.36	61.56	110.80	49.24
5875.00	42.59	PK	H	34.25	3.77	24.35	56.26	105.20	48.94
5925.00	39.13	PK	H	34.27	3.80	24.27	52.93	68.20	15.27
11590.00	35.89	PK	H	39.00	6.62	25.45	56.06	74.00	17.94
11590.00	24.13	AV	H	39.00	6.62	25.45	44.30	54.00	9.70
17385.00	35.56	PK	H	42.43	8.82	23.57	63.24	68.20	4.96



Test Plots(For worst mode 802.11a chain 0 5825MHz)
Horizontal

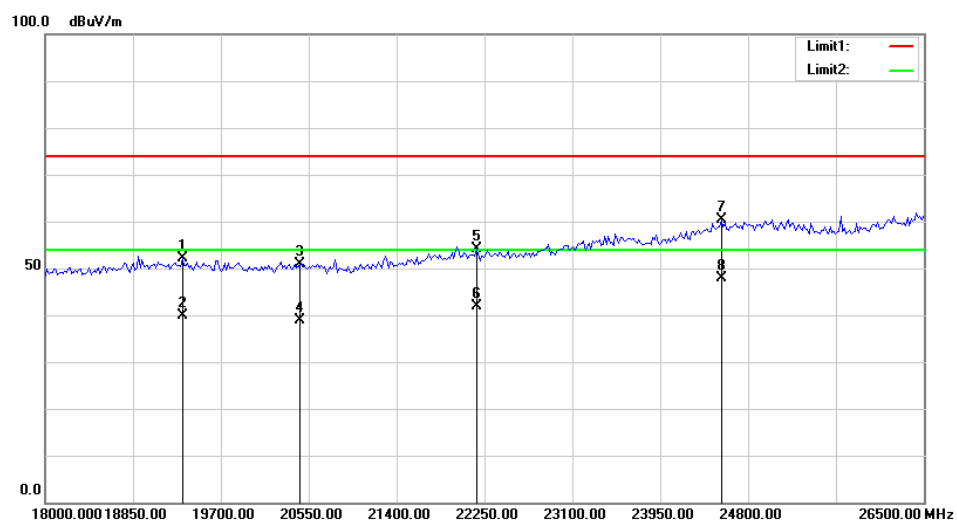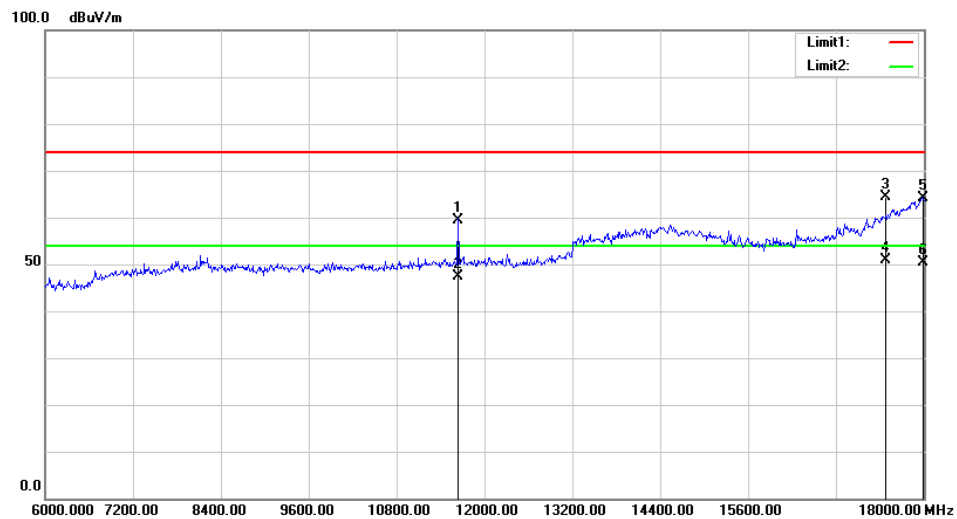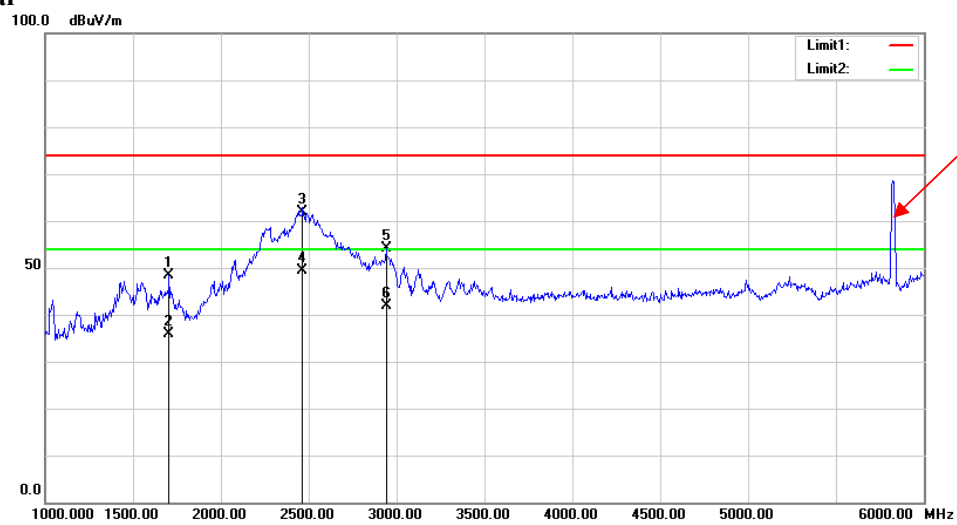

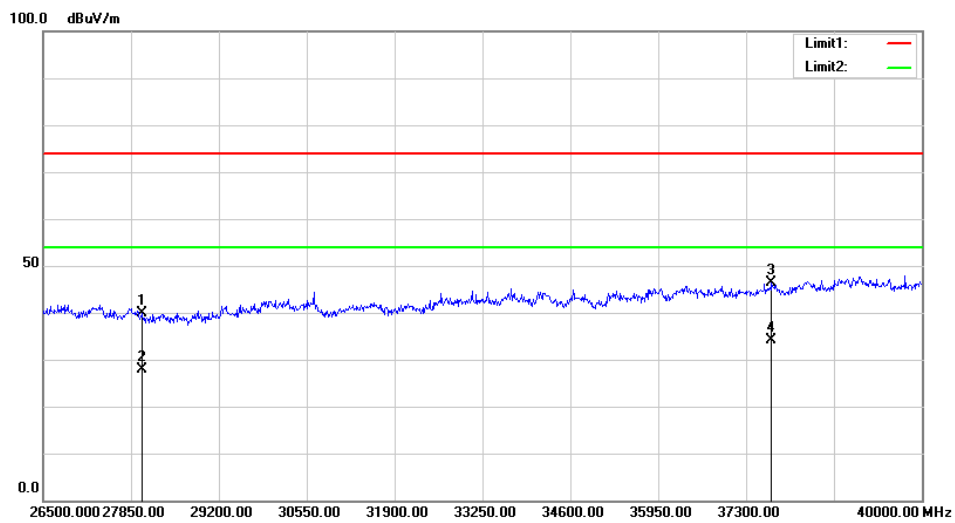

Vertical

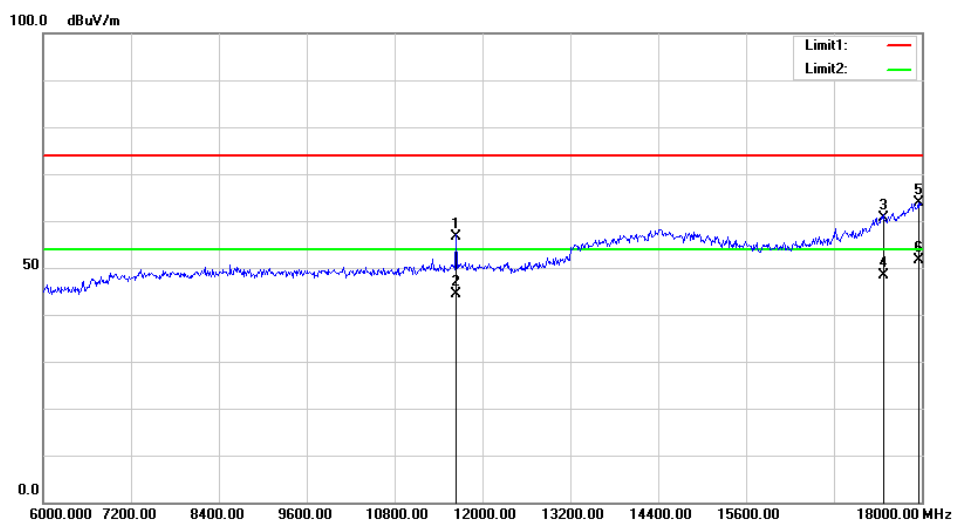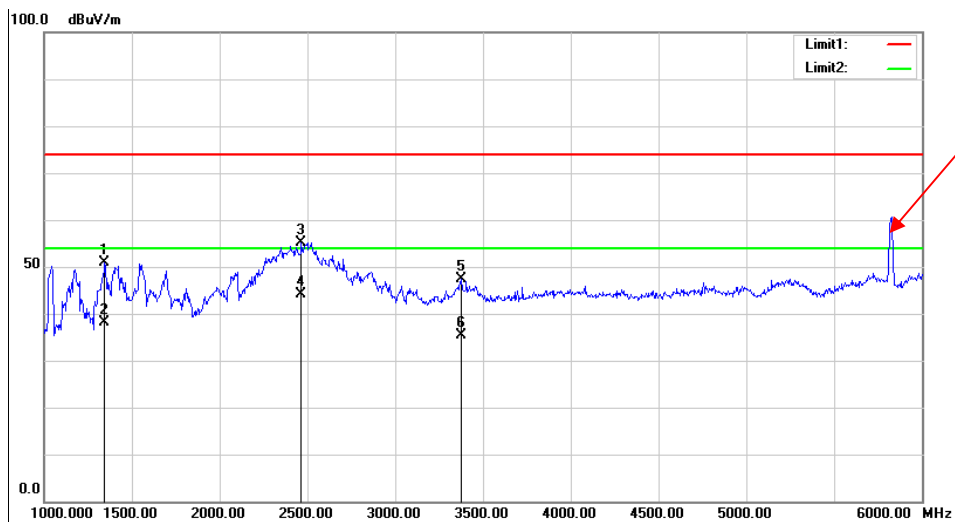

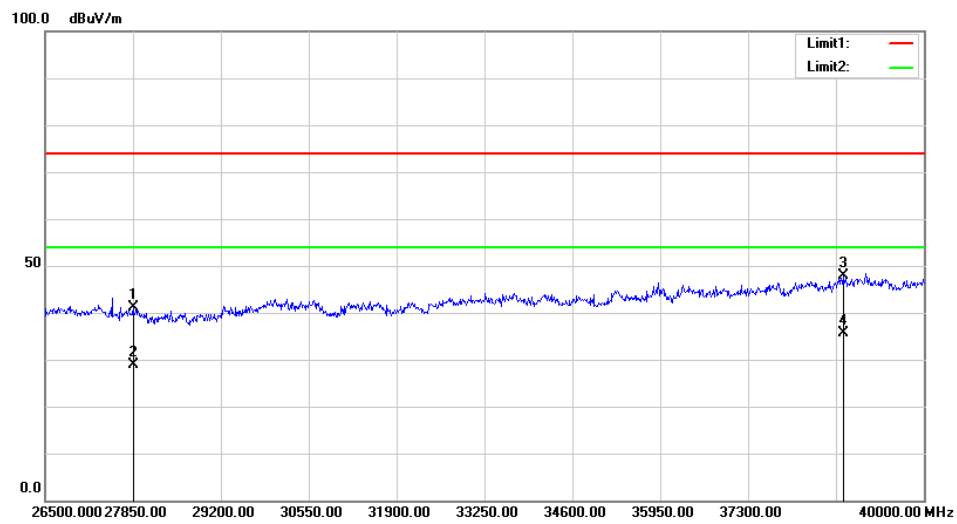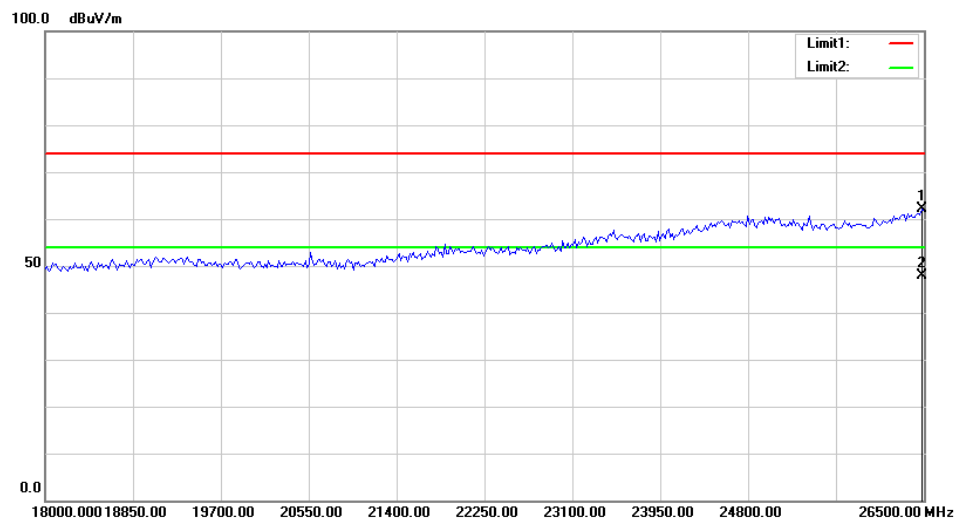

FCC §15.407(a)(e)–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH**Applicable Standard**

15.407(a) (e).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-05-09	2021-05-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data**Environmental Conditions**

Temperature:	24.3 ~ 28.9 °C
Relative Humidity:	64~73 %
ATM Pressure:	100.1~100.9 kPa
Tester:	Rennes Guo
Test Date:	2020-09-03~2020-09-19

Test Result: Pass.

Please refer to the following tables and plots.

Test mode: Transmitting (test was only performed at chain 0)

Module 1:

5150-5250MHz:

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5180	18.880	16.480
	5200	18.880	16.560
	5240	18.880	16.480
802.11n ht20	5180	19.680	17.680
	5200	19.680	17.680
	5240	19.680	17.600
802.11n ht40	5190	40.960	36.480
	5230	40.640	36.480

5725-5850MHz:

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	6 dB Emission Bandwidth Limits (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5745	16.320	≥0.5	16.480
	5785	16.080	≥0.5	16.480
	5825	16.240	≥0.5	16.480
802.11n ht20	5745	17.520	≥0.5	17.600
	5785	17.360	≥0.5	17.600
	5825	17.440	≥0.5	17.600
802.11n ht40	5755	35.680	≥0.5	36.320
	5795	35.680	≥0.5	36.320

Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz or 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.

Module 2:
5150-5250MHz:

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5180	18.960	16.480
	5200	18.960	16.480
	5240	18.880	16.480
802.11n ht20	5180	19.760	17.680
	5200	19.760	17.680
	5240	19.760	17.600
802.11n ht40	5190	40.800	36.480
	5230	40.800	36.480


5725-5850MHz:

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	6 dB Emission Bandwidth Limits (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5745	16.240	≥ 0.5	16.480
	5785	16.240	≥ 0.5	16.480
	5825	16.160	≥ 0.5	16.480
802.11n ht20	5745	17.520	≥ 0.5	17.600
	5785	17.360	≥ 0.5	17.600
	5825	17.520	≥ 0.5	17.680
802.11n ht40	5755	35.520	≥ 0.5	36.160
	5795	35.520	≥ 0.5	36.320

Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz or 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.


Main Module
5150-5250MHz:
26dB Emission Bandwidth:

802.11a Low Channel

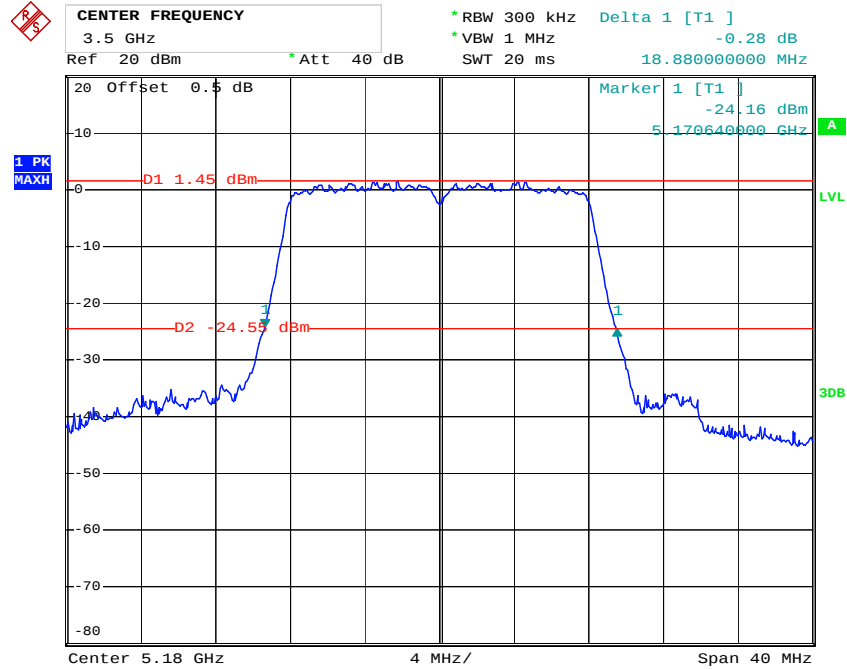


Date: 5.SEP.2020 00:22:00

802.11a Middle Channel

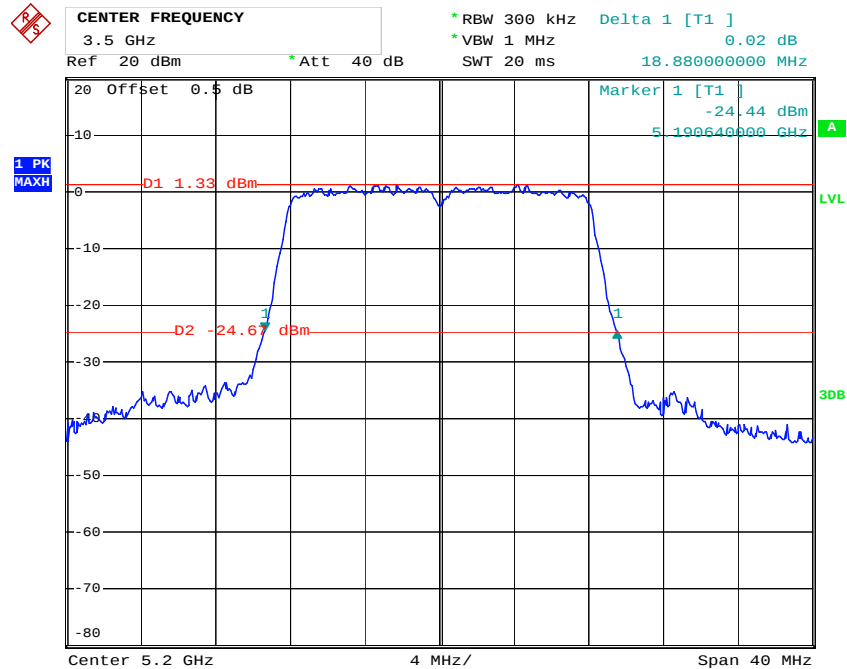


Date: 5.SEP.2020 00:23:08

802.11a High Channel

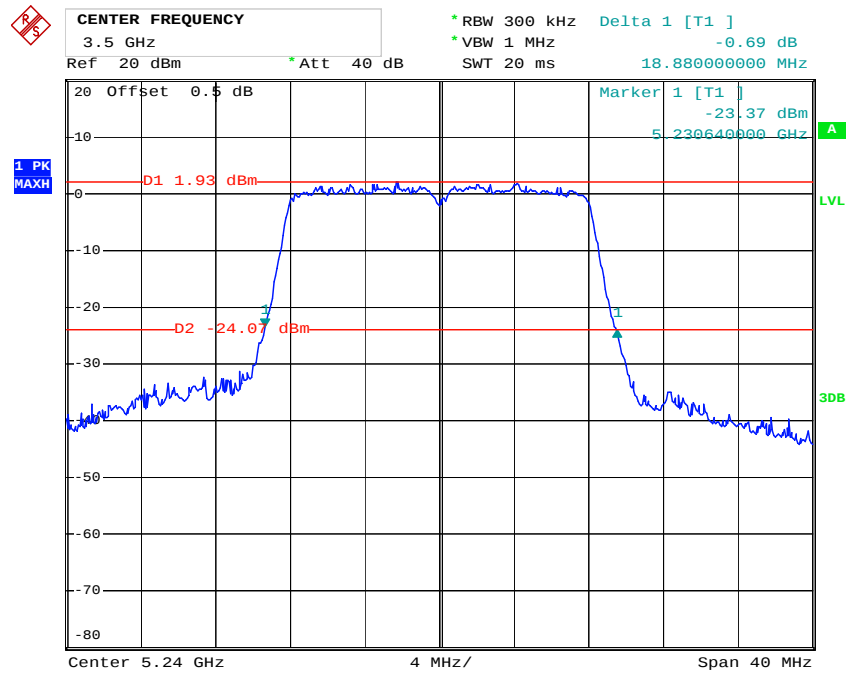


Date: 5.SEP.2020 00:23:51

802.11n ht20 Low Channel

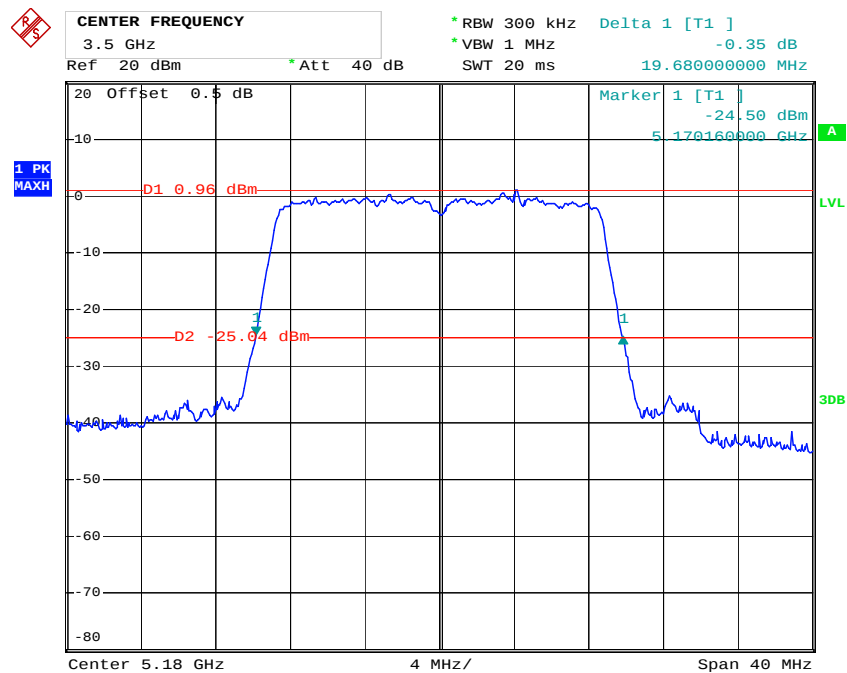


Date: 5.SEP.2020 00:25:08

802.11n ht20 Middle Channel

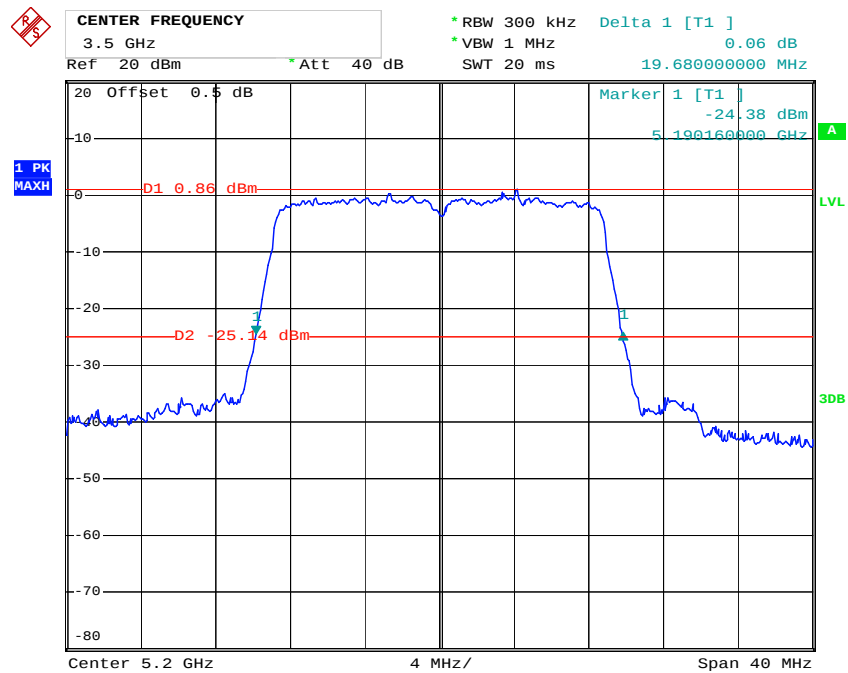


Date: 5.SEP.2020 00:25:56

802.11n ht20 High Channel

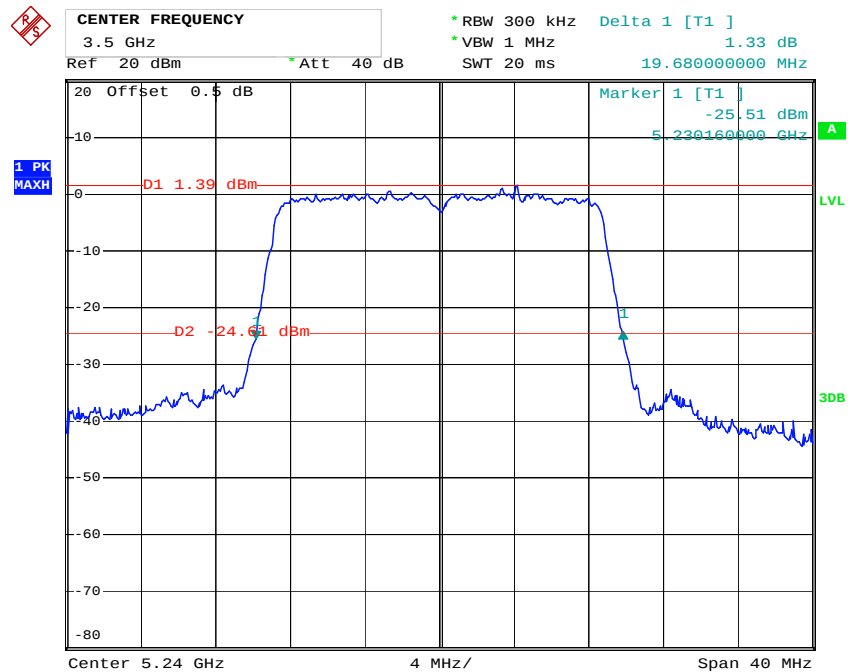


Date: 5.SEP.2020 00:26:42

802.11n ht40 Low Channel

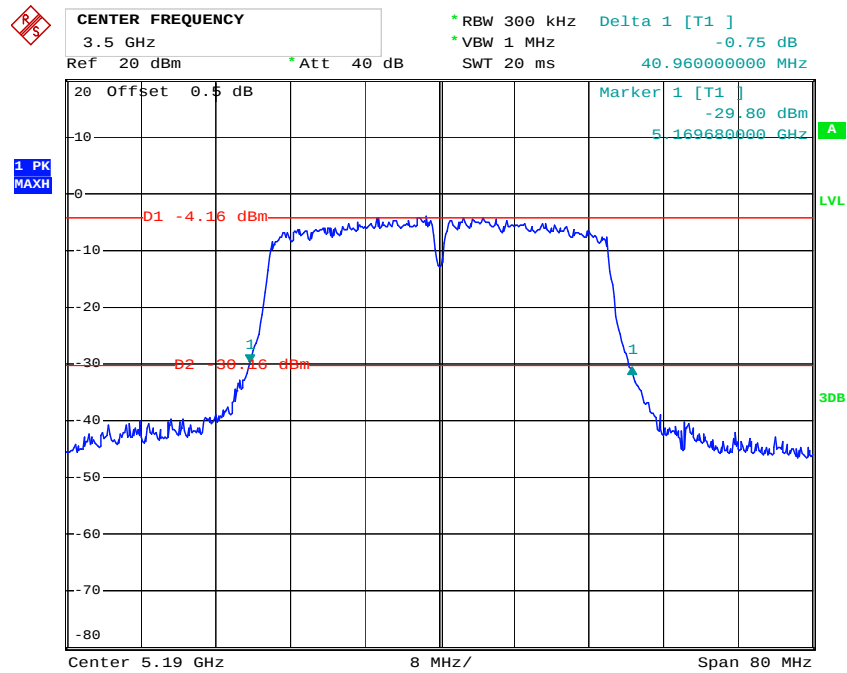


Date: 5.SEP.2020 00:27:27


802.11n ht40 High Channel

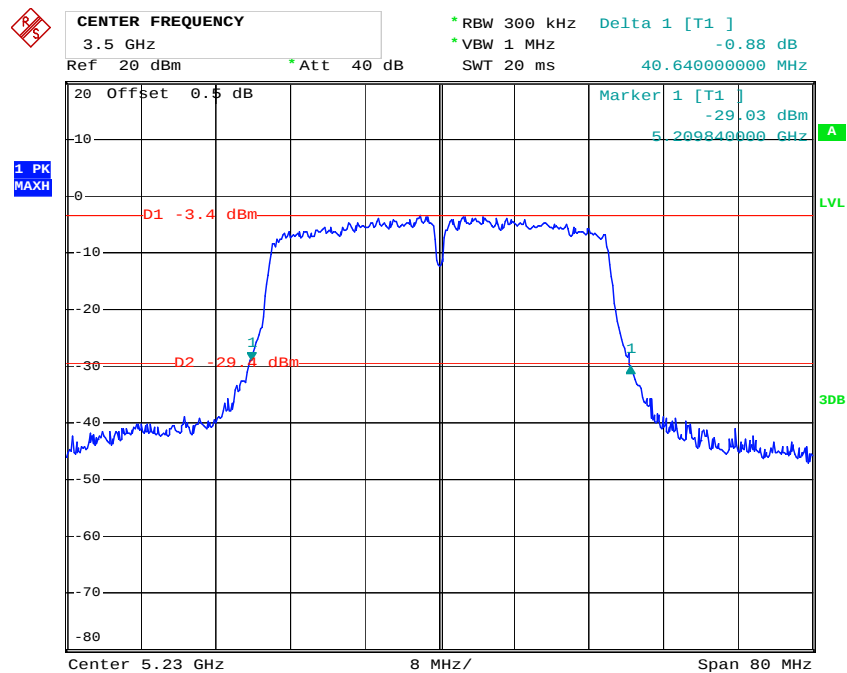

Date: 5.SEP.2020 00:28:02

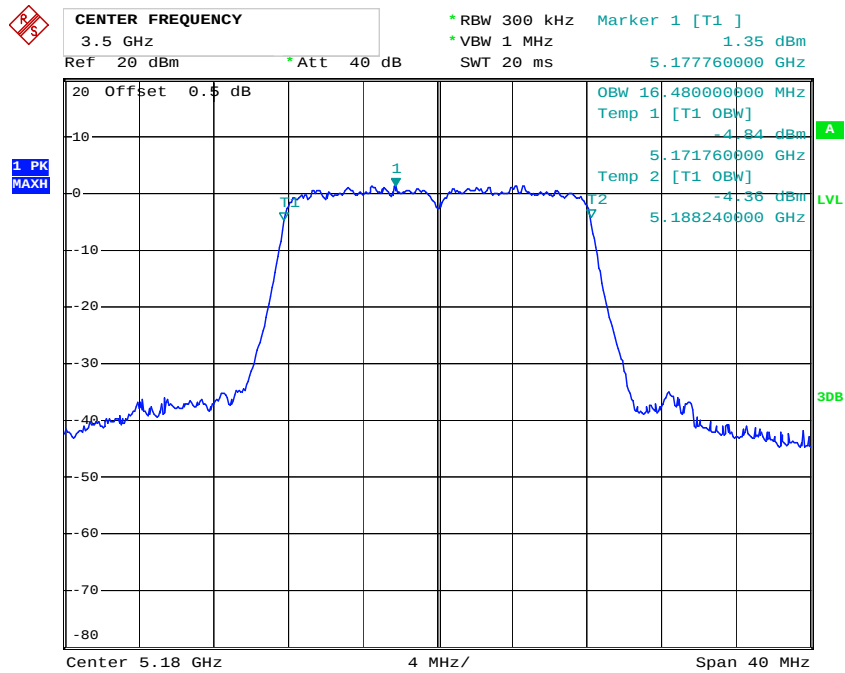
99% Occupied Bandwidth:**802.11a Low Channel**

Date: 3.SEP.2020 04:44:40

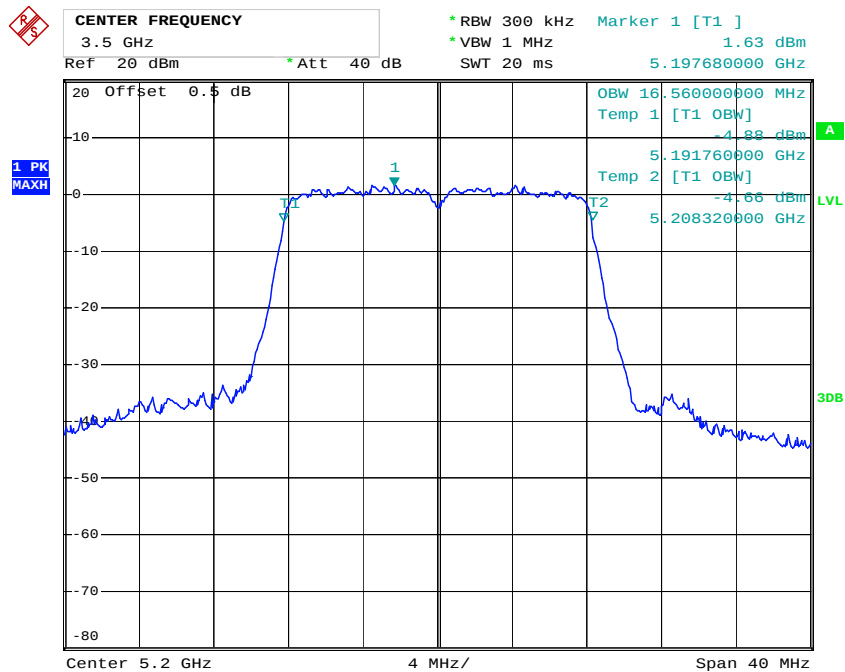802.11a Middle Channel


Date: 3.SEP.2020 04:45:24

802.11a High Channel

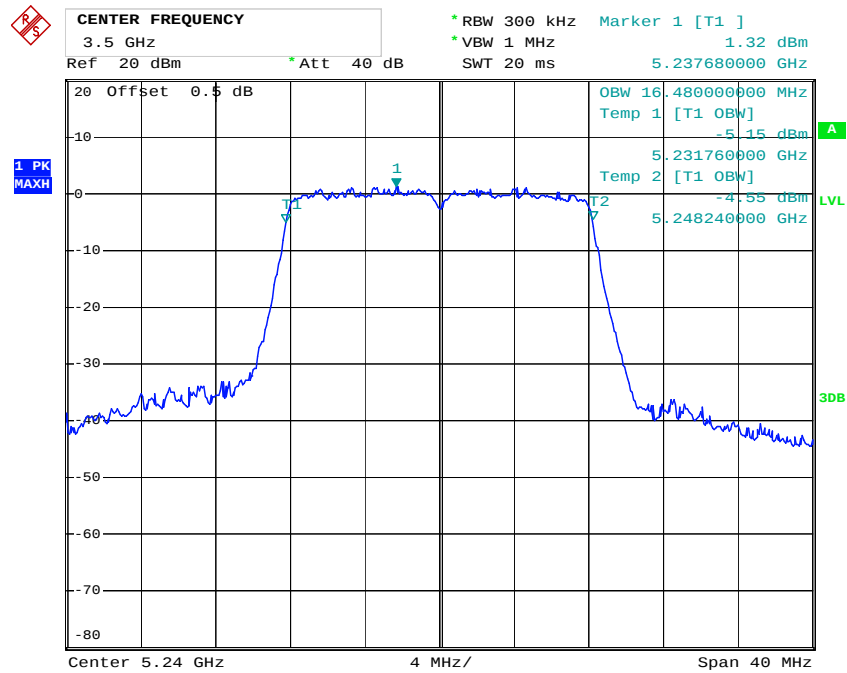


Date: 3.SEP.2020 04:46:22

802.11n ht20 Low Channel

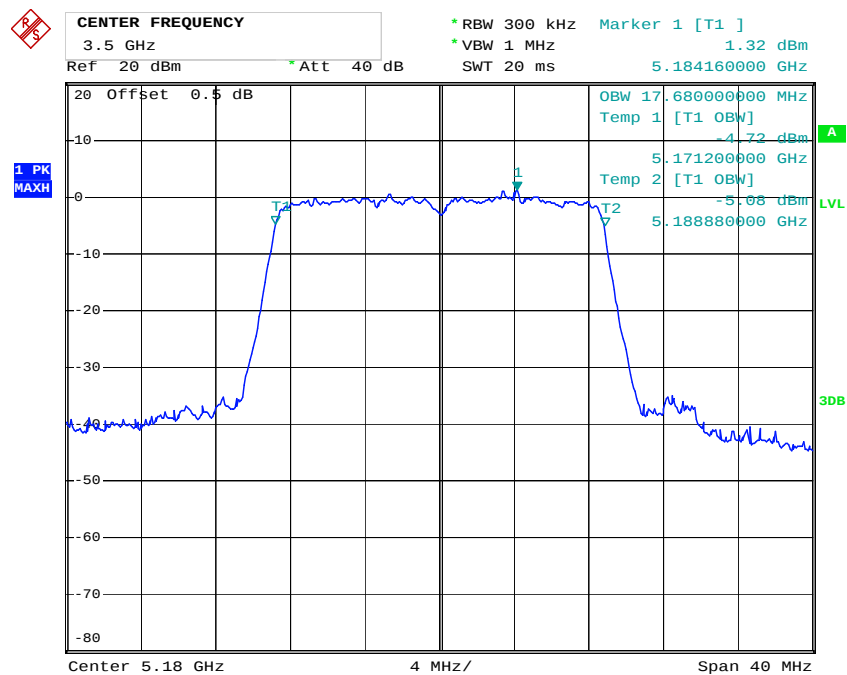


Date: 3.SEP.2020 04:48:06

802.11n ht20 Middle Channel

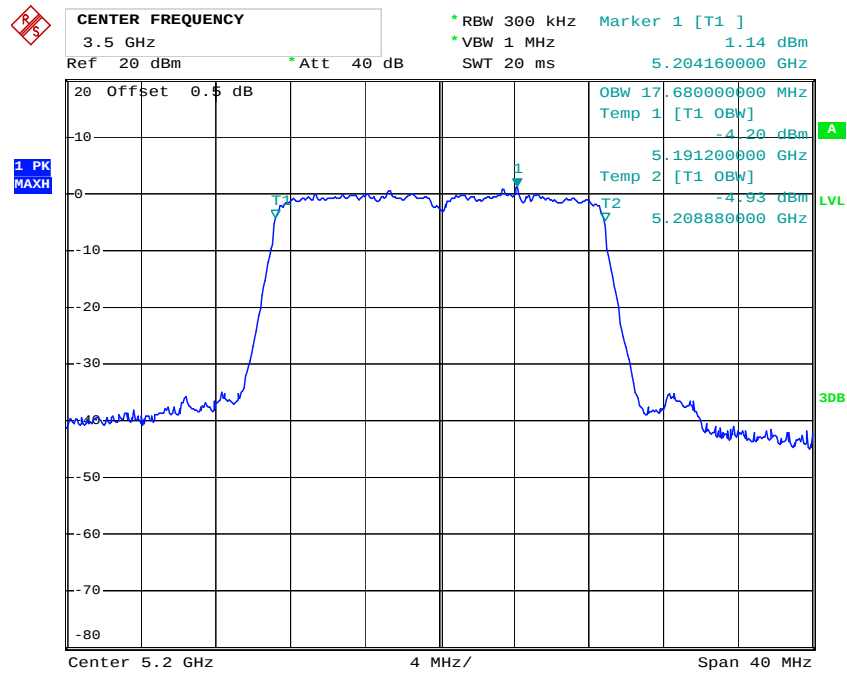


Date: 3.SEP.2020 04:49:22

802.11n ht20 High Channel

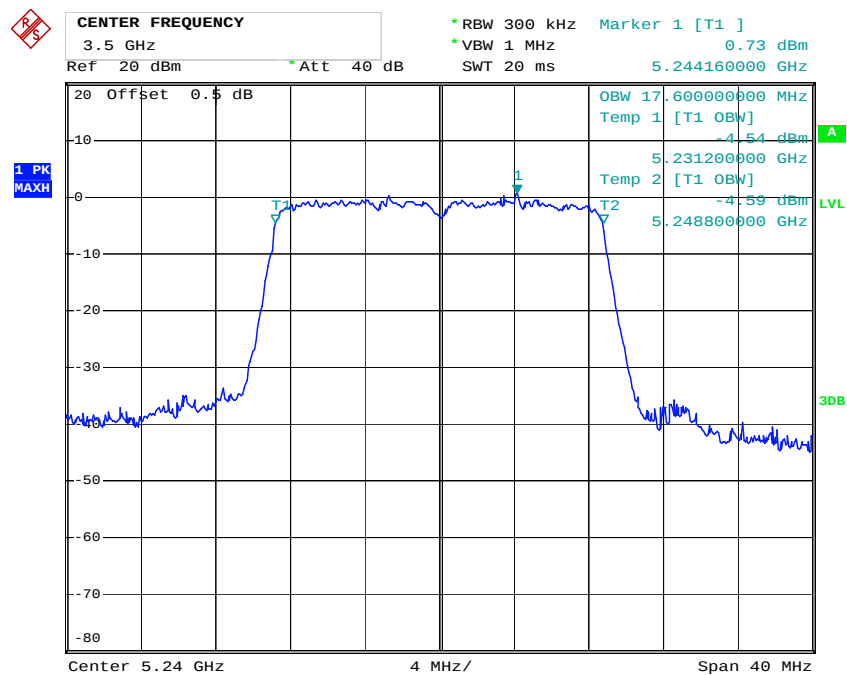


Date: 3.SEP.2020 04:50:11

802.11n ht40 Low Channel

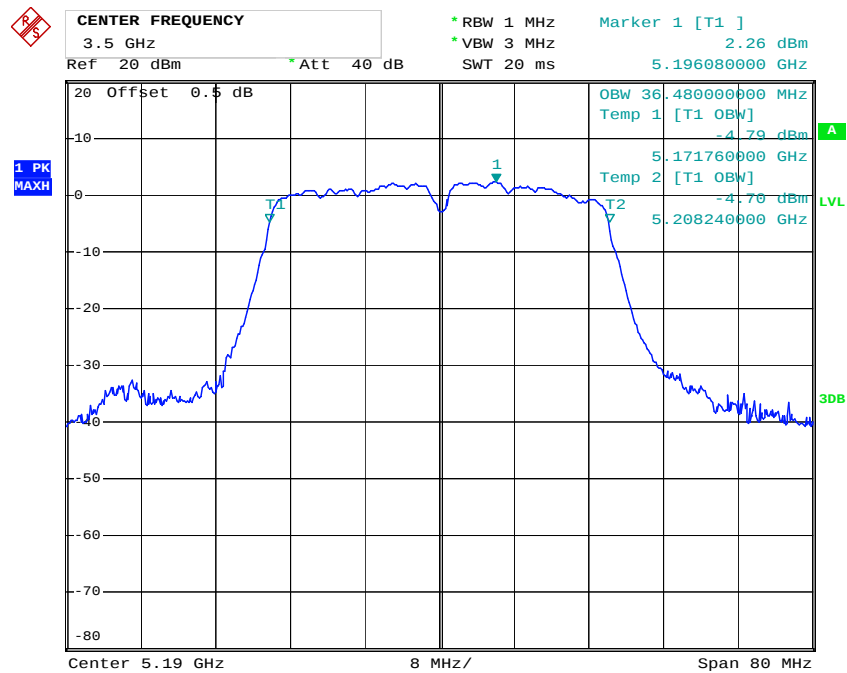

Date: 3.SEP.2020 04:51:34


802.11n ht40 High Channel

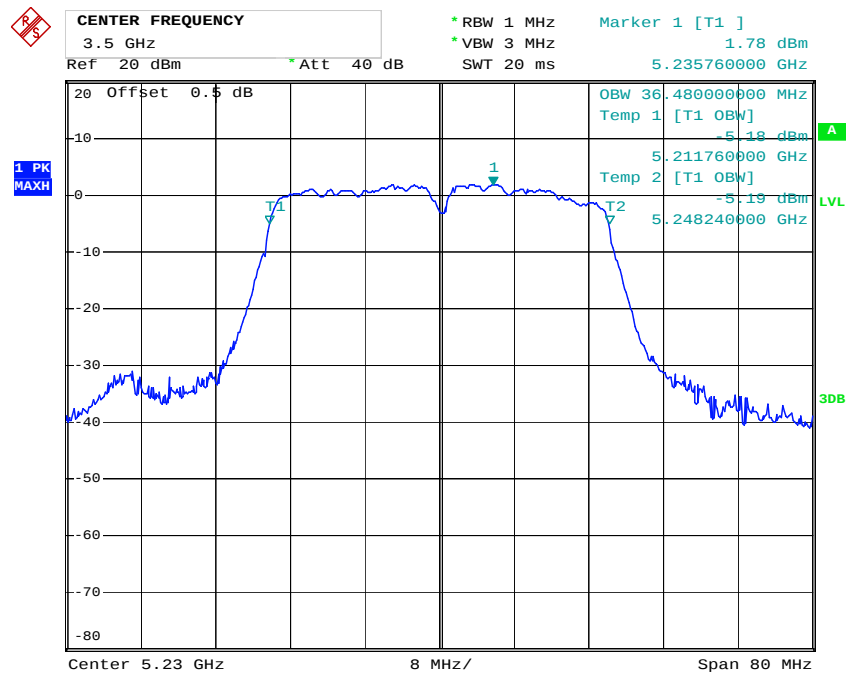

Date: 3.SEP.2020 04:52:35


**5725-5850MHz:
6dB Emission Bandwidth:**

802.11a Low Channel

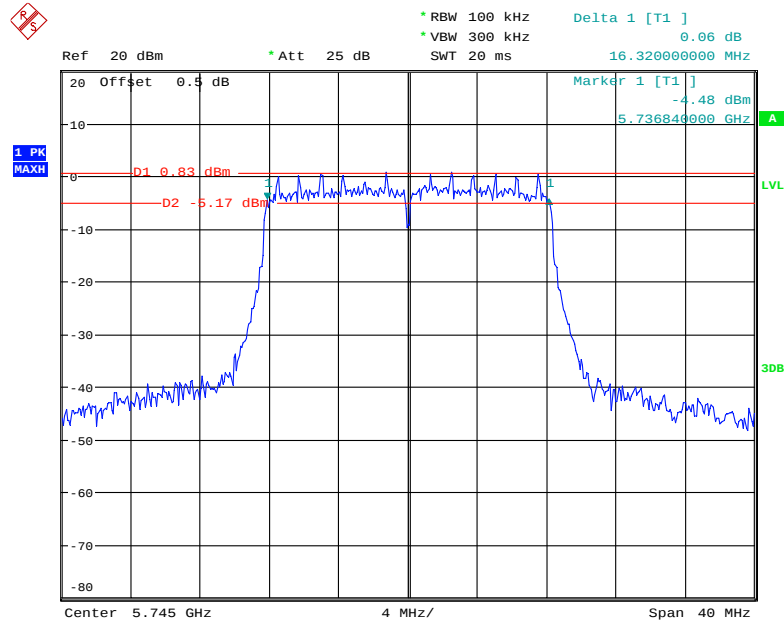


Date: 19.SEP.2020 14:37:12


802.11a Middle Channel

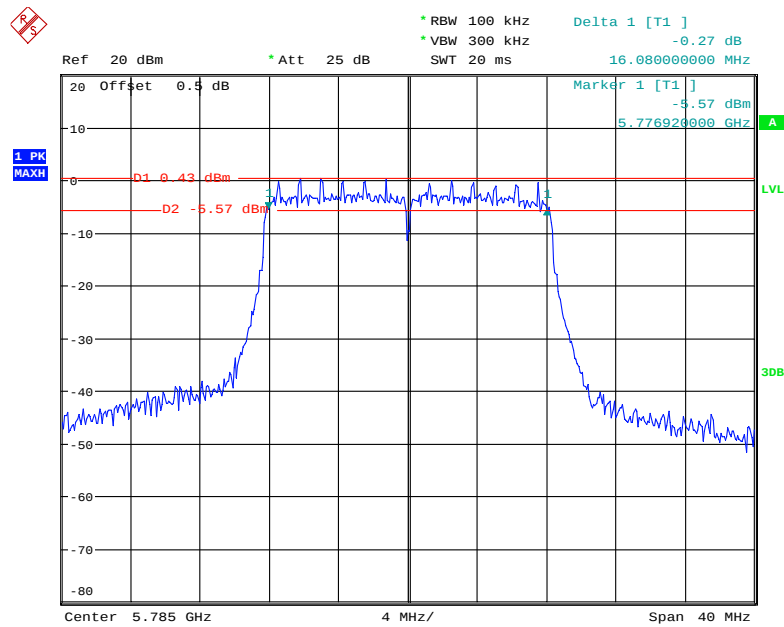

Date: 19.SEP.2020 14:38:19

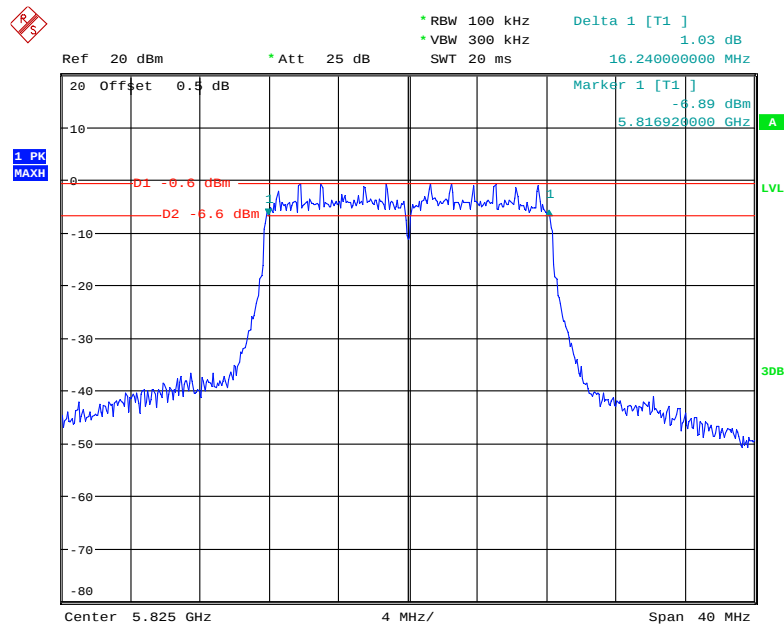
802.11a High Channel

Date: 19.SEP.2020 14:39:14

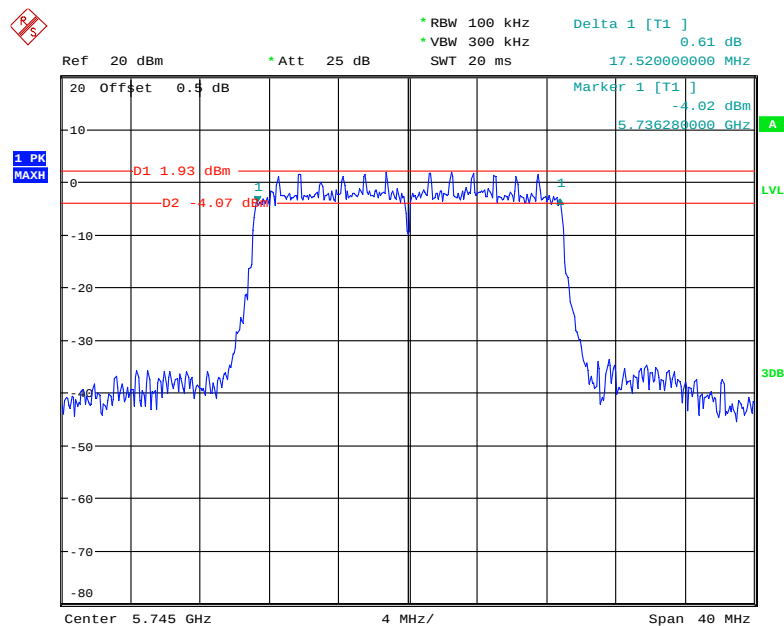802.11n ht20 Low Channel


Date: 19.SEP.2020 14:42:02

802.11n ht20 Middle Channel

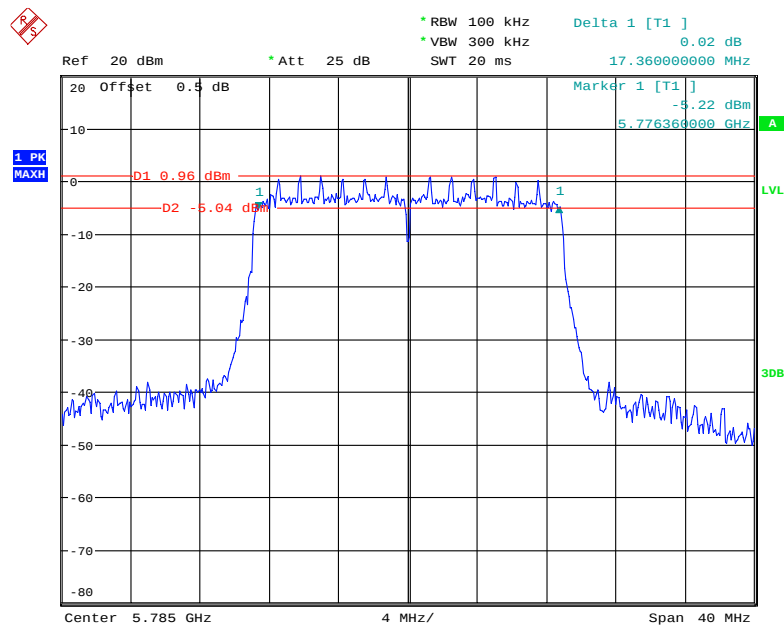


Date: 19.SEP.2020 14:44:16

802.11n ht20 High Channel

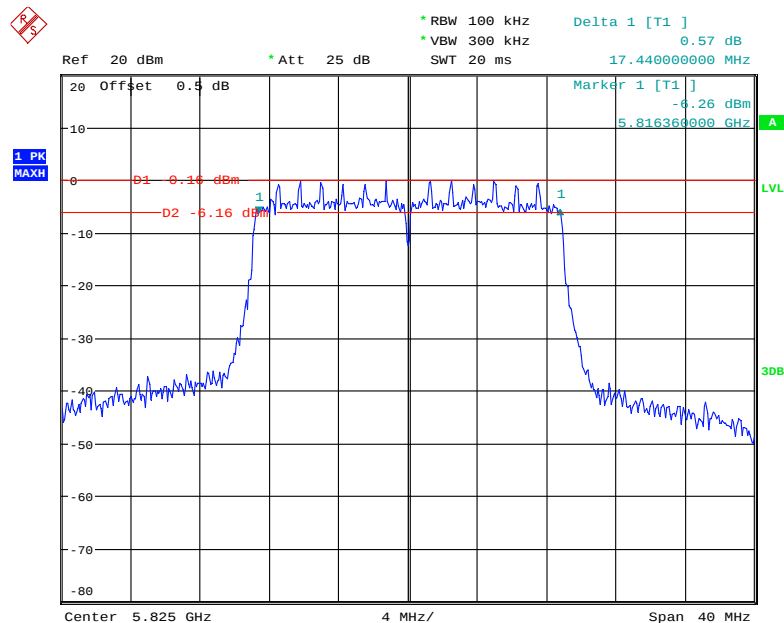


Date: 19.SEP.2020 14:46:54

802.11n ht40 Low Channel

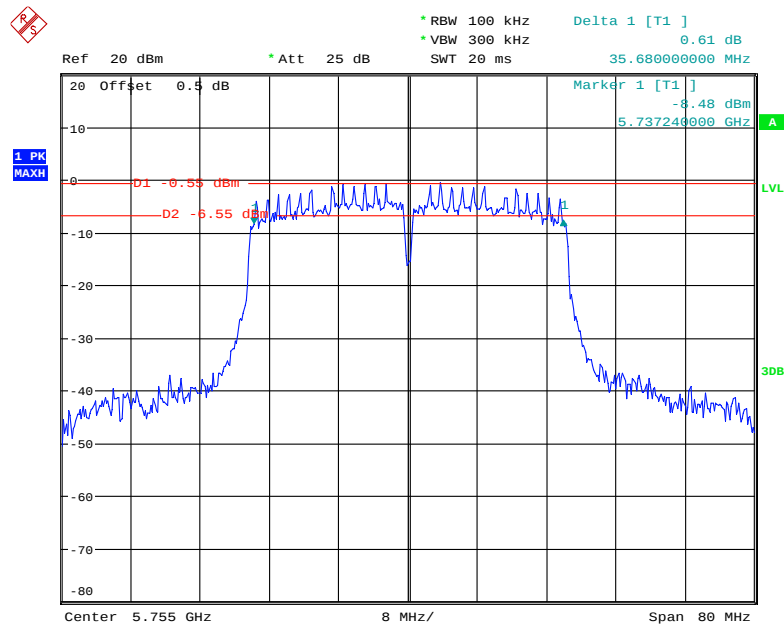


Date: 19.SEP.2020 14:48:07


802.11n ht40 High Channel

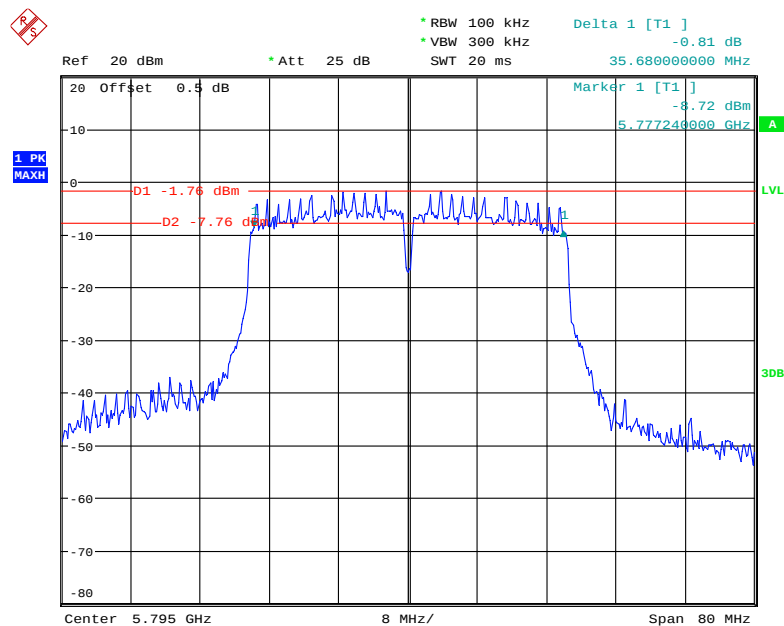

Date: 19.SEP.2020 14:48:59

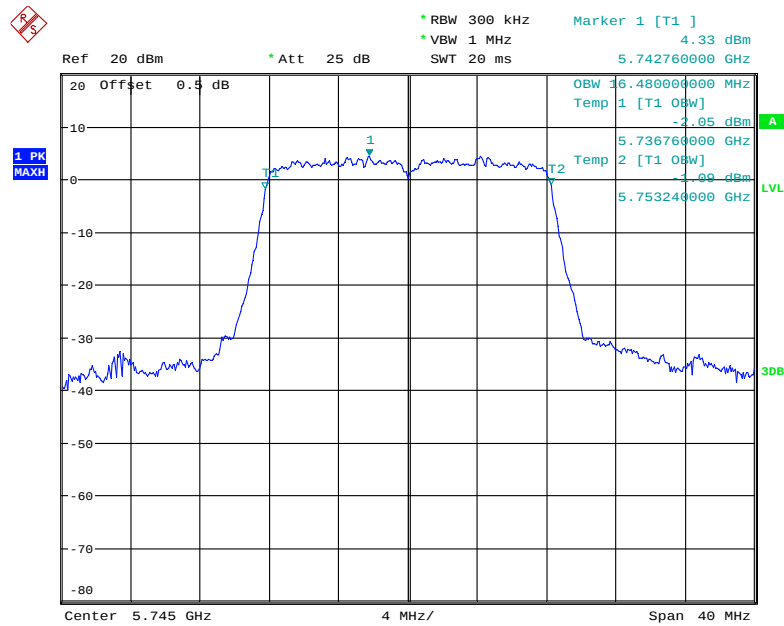
99% Occupied Bandwidth:**802.11a Low Channel**

Date: 19.SEP.2020 14:37:23

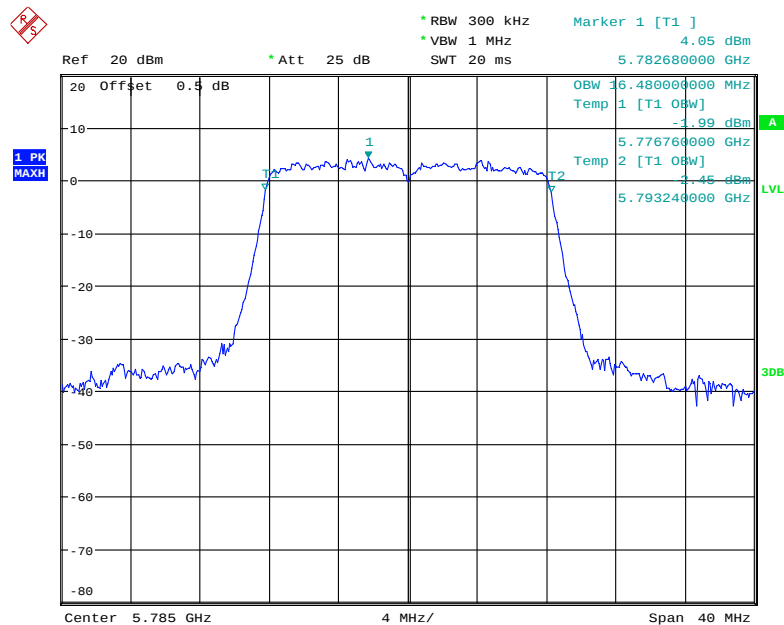802.11a Middle Channel


Date: 19.SEP.2020 14:38:31

802.11a High Channel

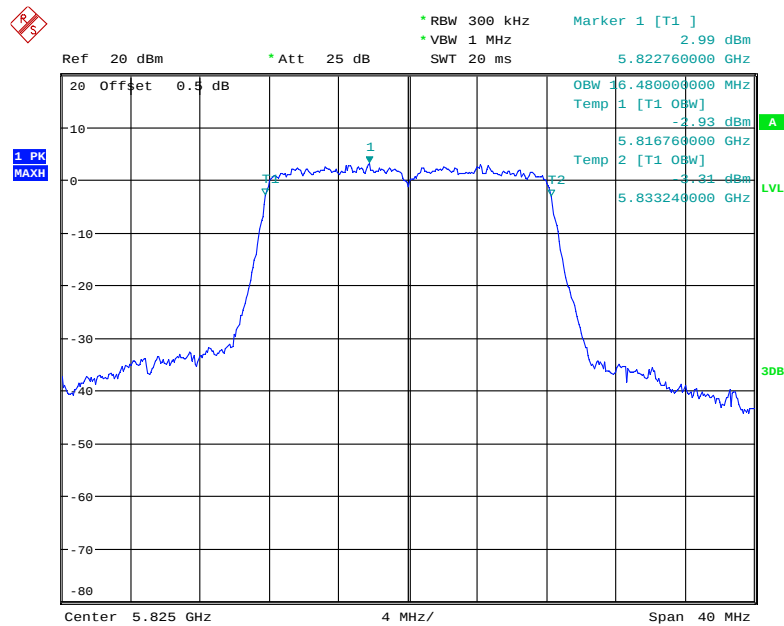


Date: 19.SEP.2020 14:39:25

802.11n ht20 Low Channel

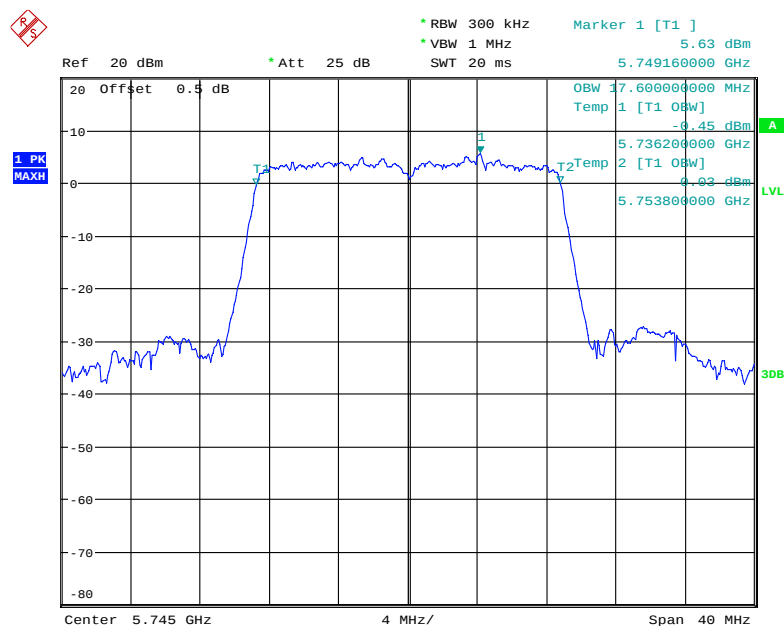


Date: 19.SEP.2020 14:42:14

802.11n ht20 Middle Channel

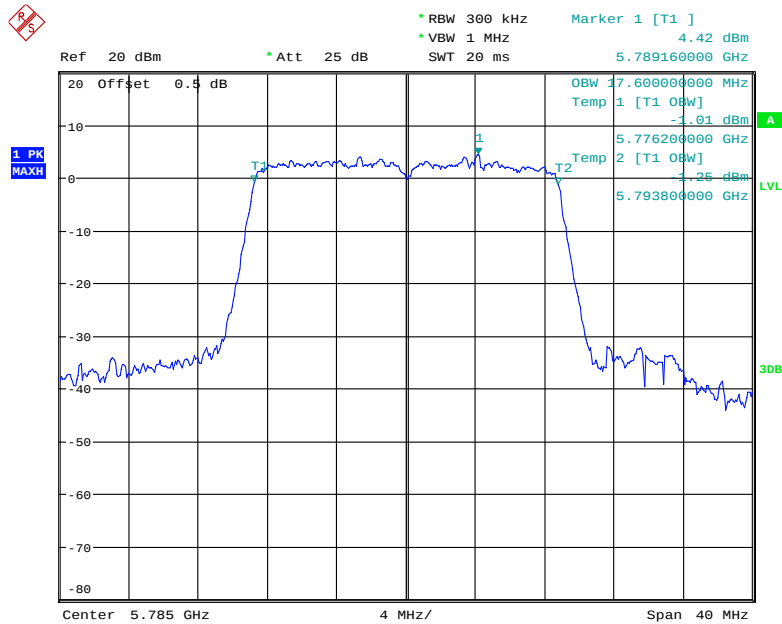


Date: 19.SEP.2020 14:44:28

802.11n ht20 High Channel

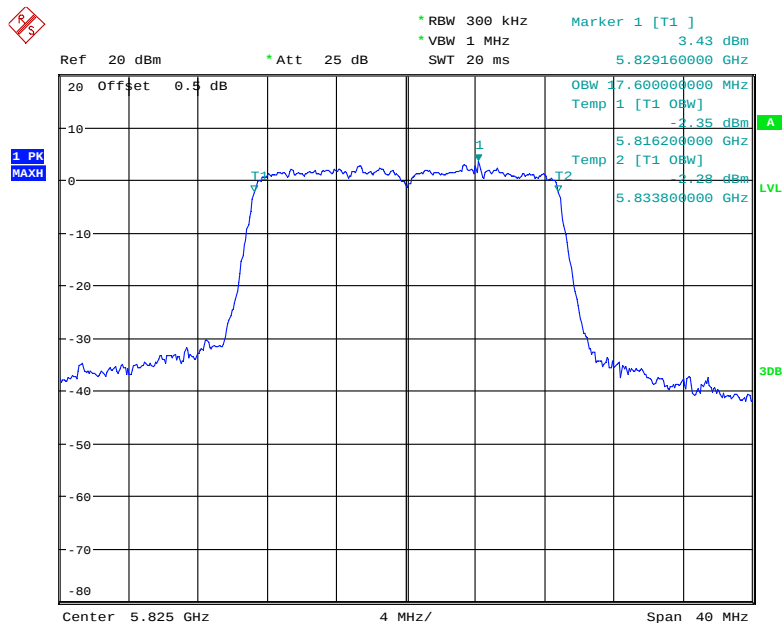


Date: 19.SEP.2020 14:47:06

802.11n ht40 Low Channel

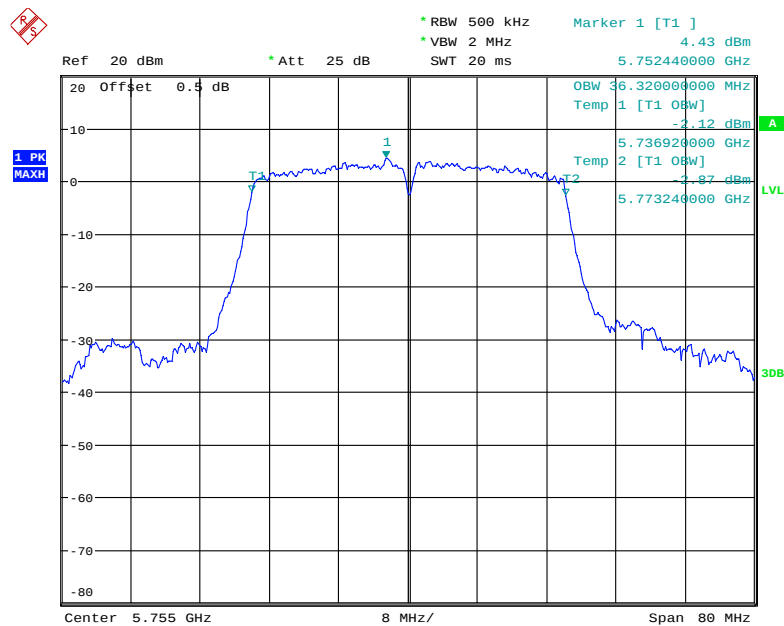

Date: 19.SEP.2020 14:48:19


802.11n ht40 High Channel

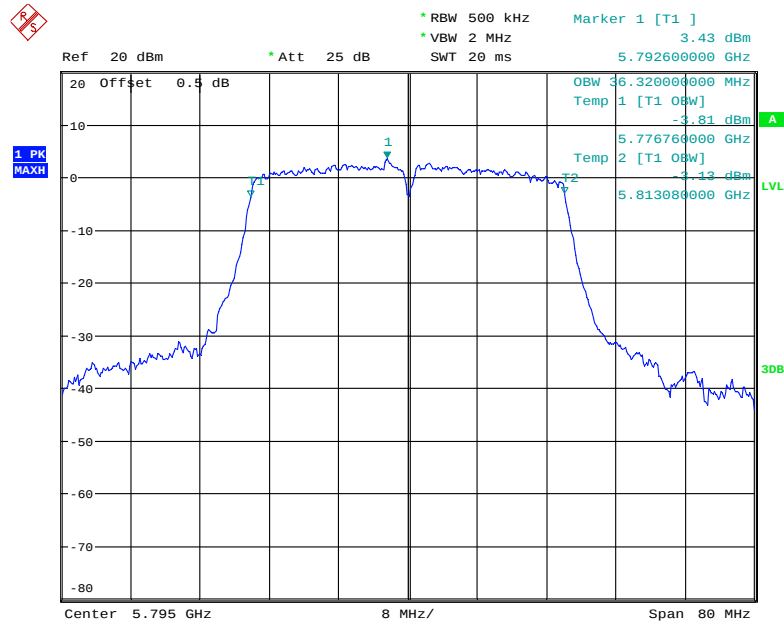

Date: 19.SEP.2020 14:49:11


Module 2:
5150-5250MHz:
26dB Emission Bandwidth:

802.11a Low Channel

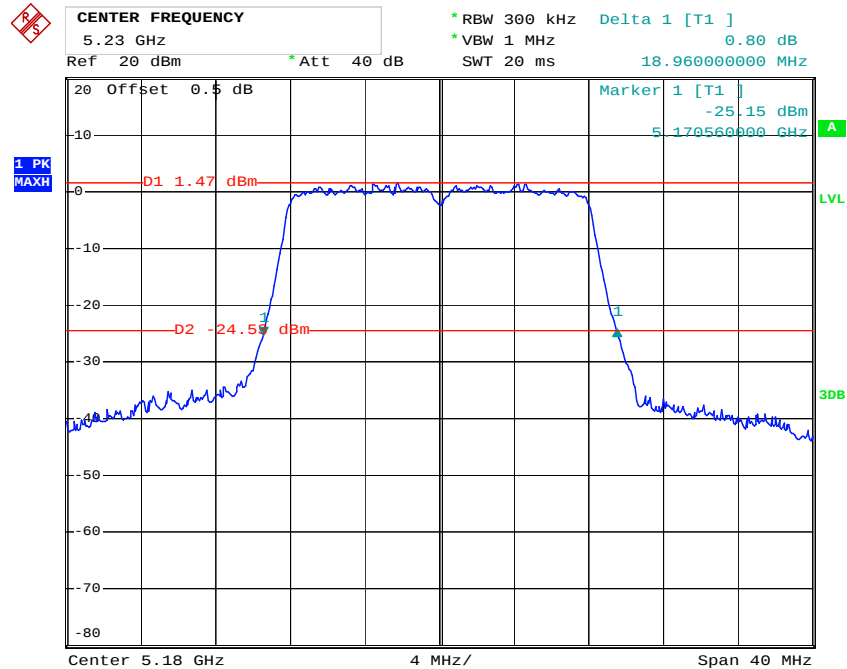


Date: 5.SEP.2020 00:34:02

802.11a Middle Channel

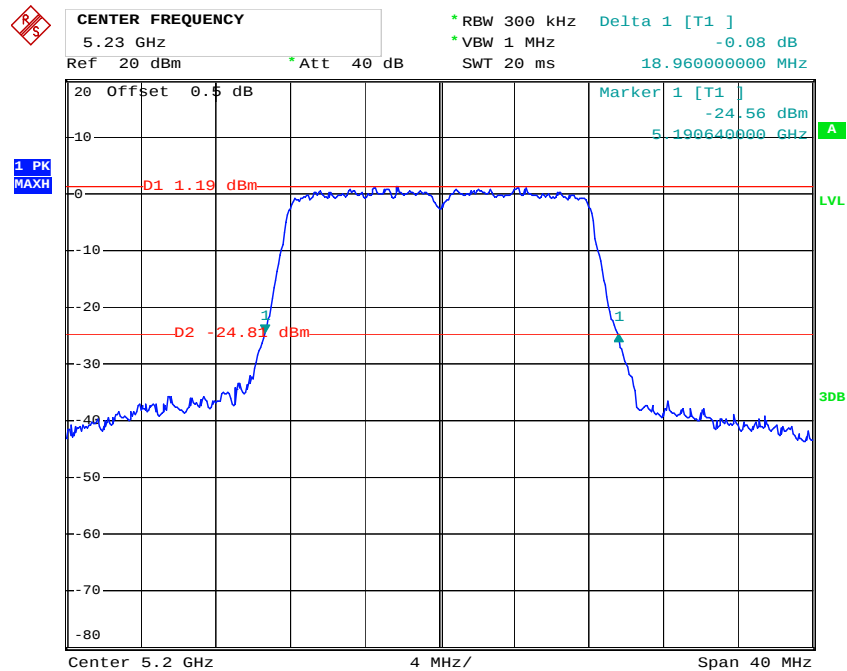


Date: 5.SEP.2020 00:34:36

802.11a High Channel

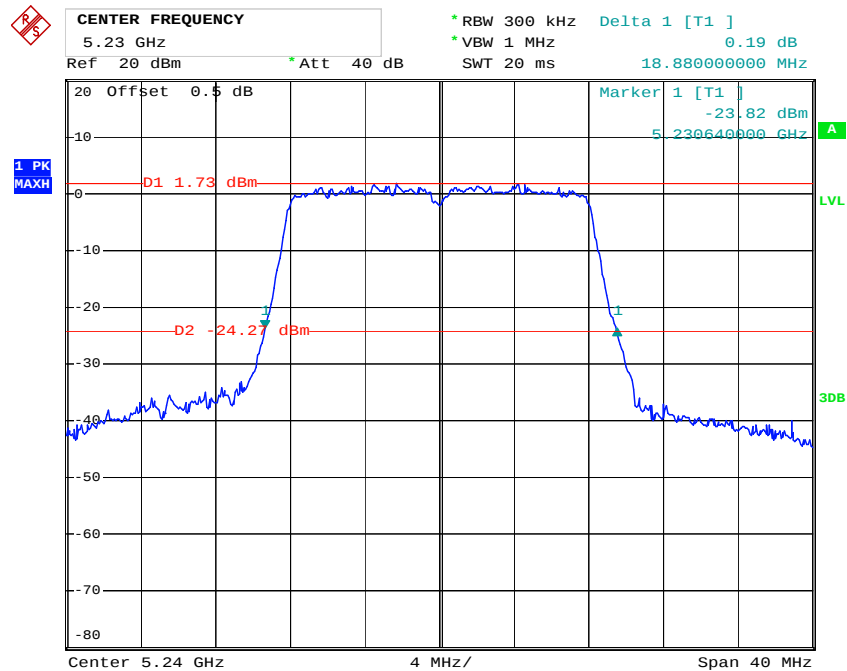


Date: 5.SEP.2020 00:35:18

802.11n ht20 Low Channel

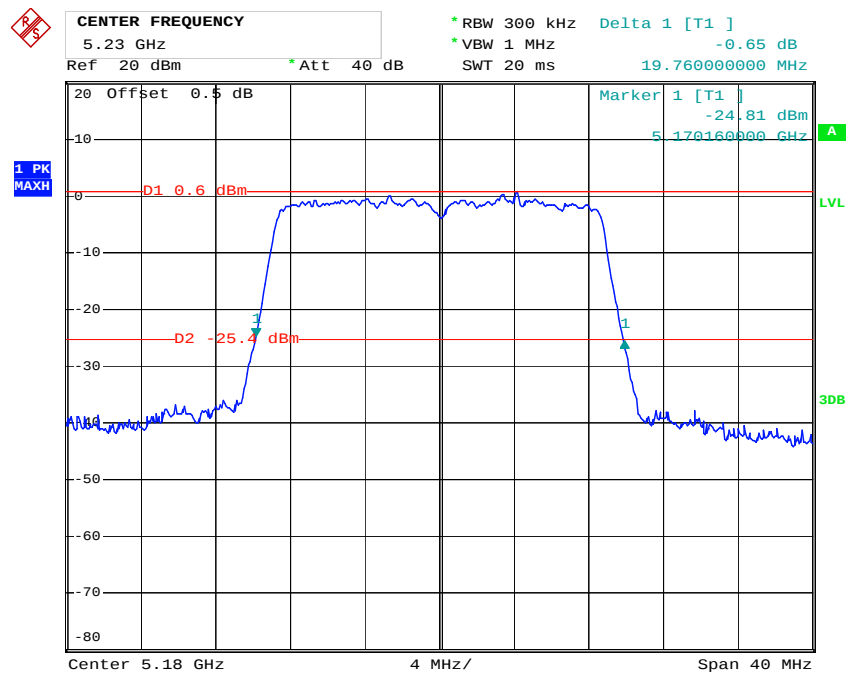


Date: 5.SEP.2020 00:36:13

802.11n ht20 Middle Channel

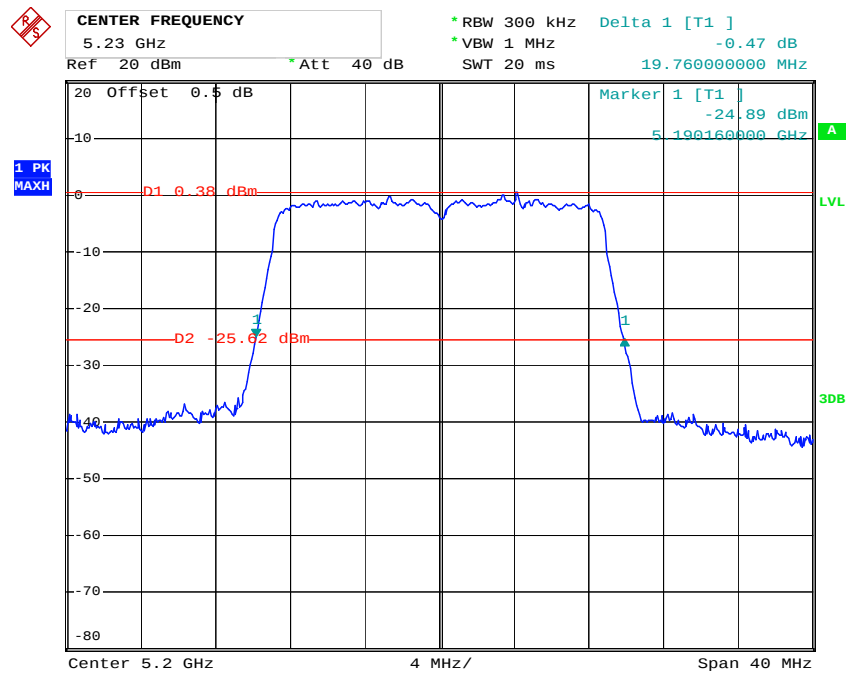


Date: 5.SEP.2020 00:36:51

802.11n ht20 High Channel

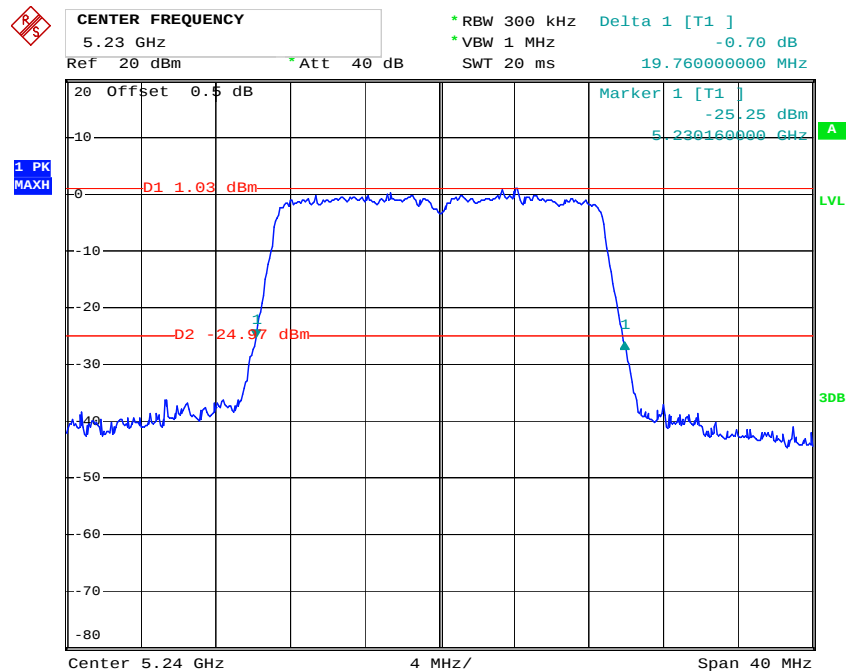


Date: 5.SEP.2020 00:37:32

802.11n ht40 Low Channel

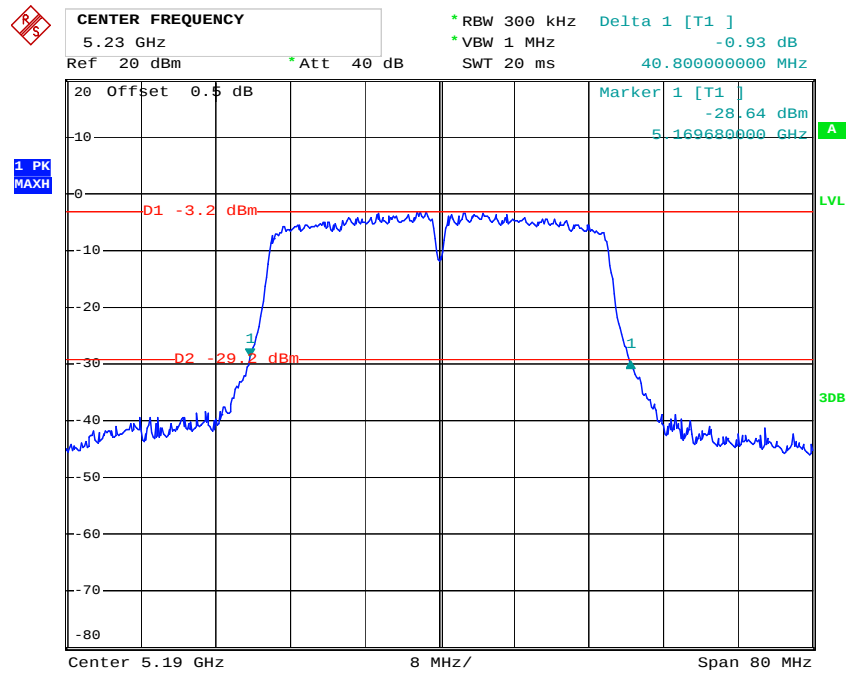

Date: 5.SEP.2020 00:38:22


802.11n ht40 High Channel

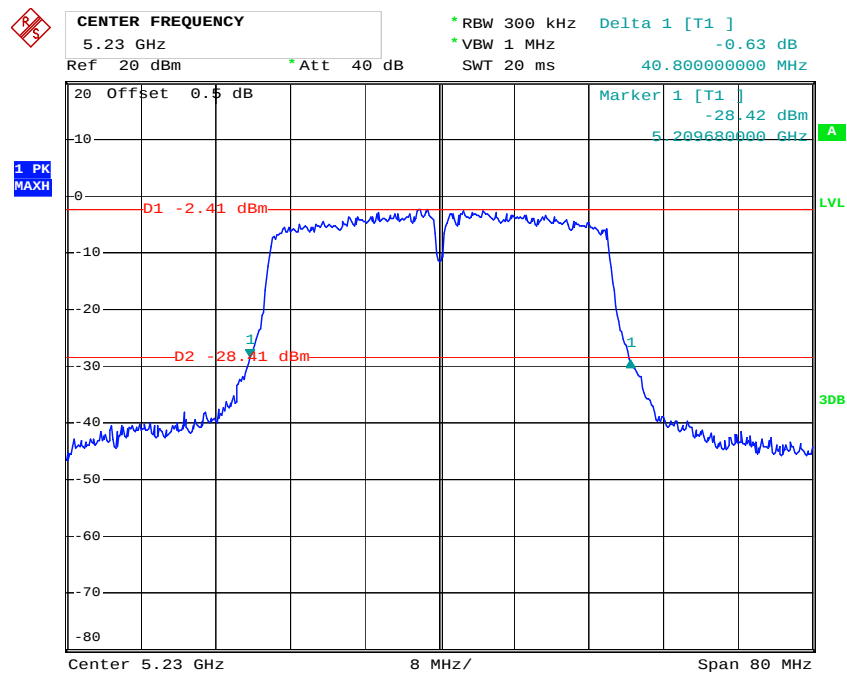

Date: 5.SEP.2020 00:39:01


99% Occupied Bandwidth:

802.11a Low Channel

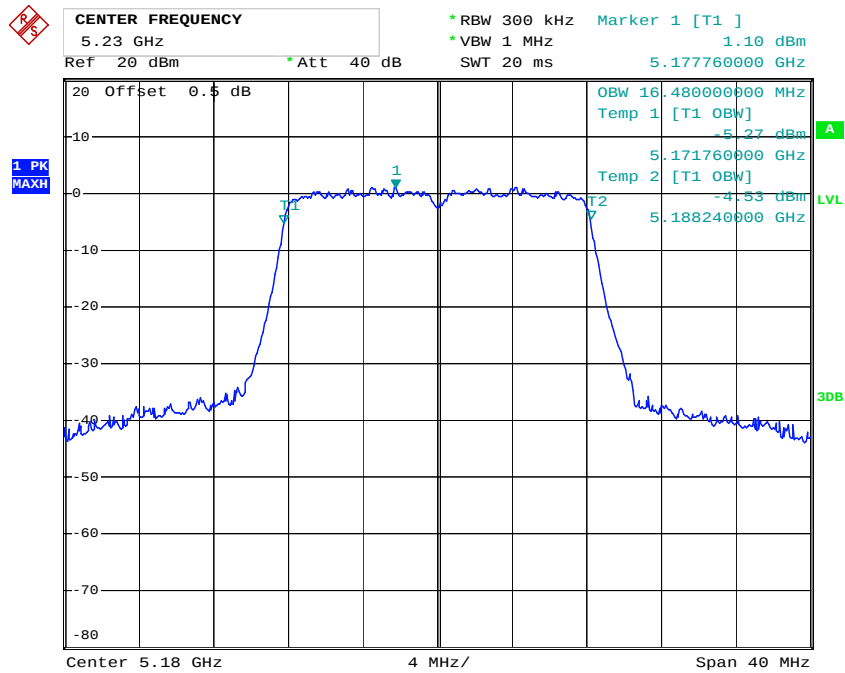


Date: 3.SEP.2020 05:38:56

802.11a Middle Channel

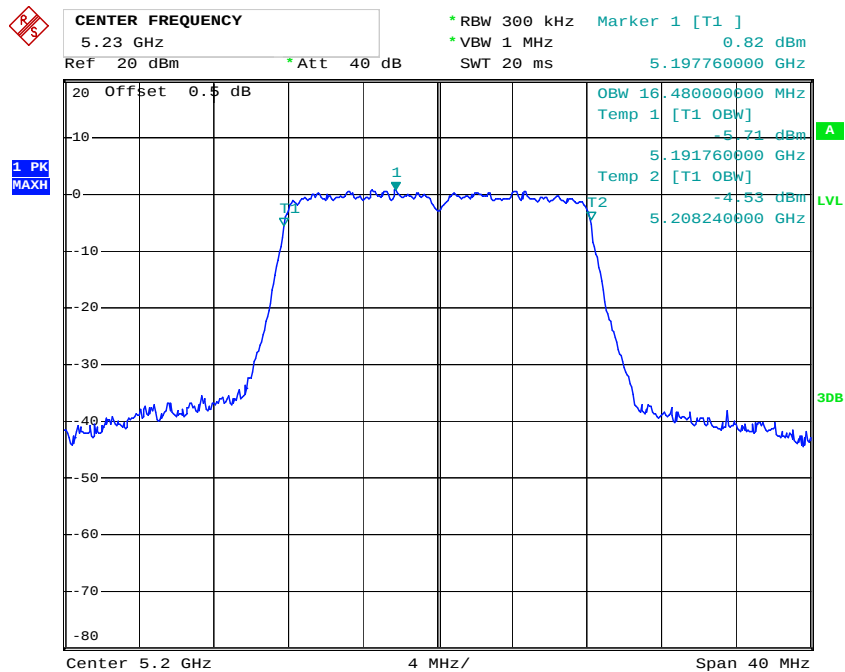


Date: 3.SEP.2020 05:40:29

802.11a High Channel

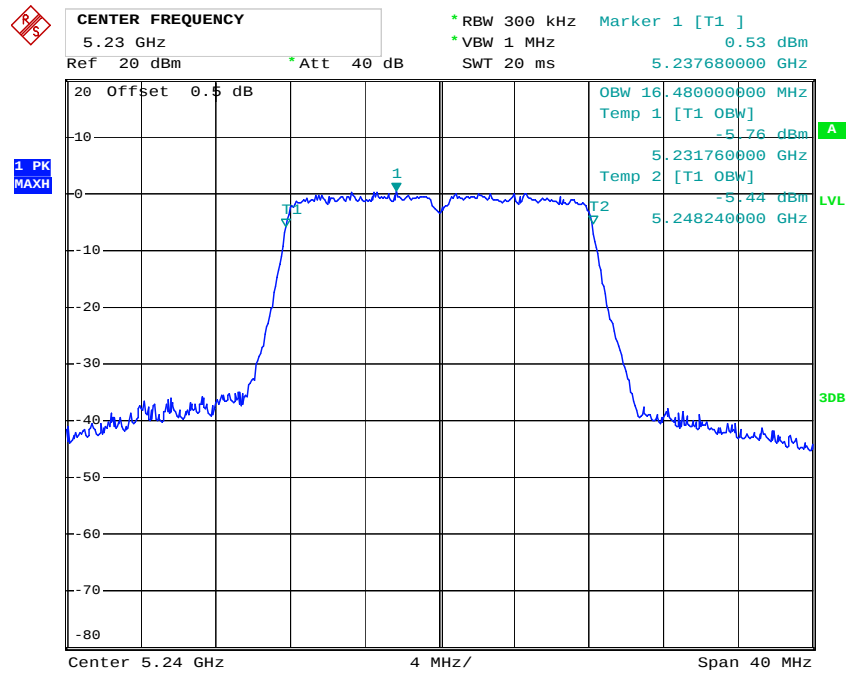


Date: 3.SEP.2020 05:41:17

802.11n ht20 Low Channel

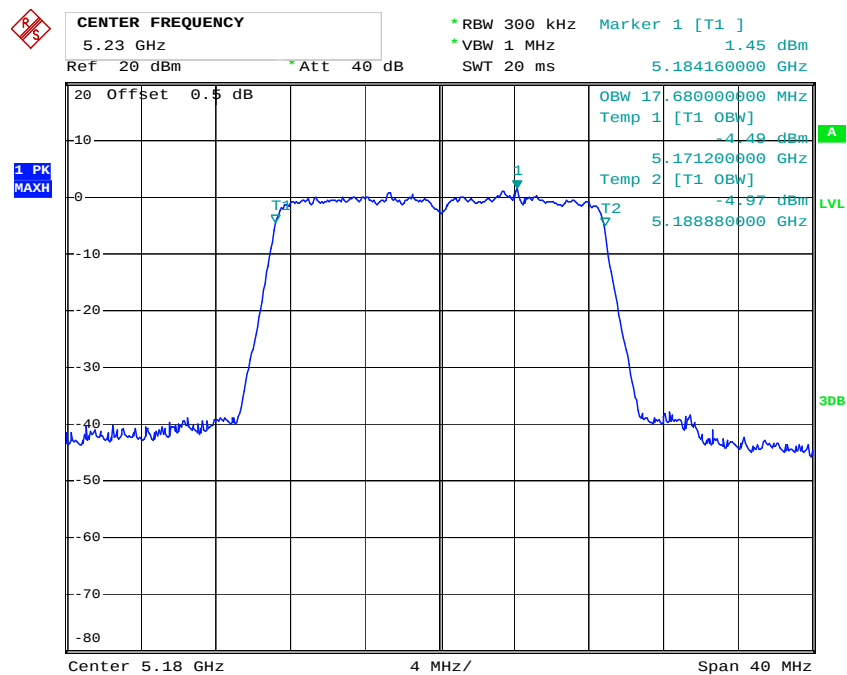


Date: 3.SEP.2020 05:47:45

802.11n ht20 Middle Channel

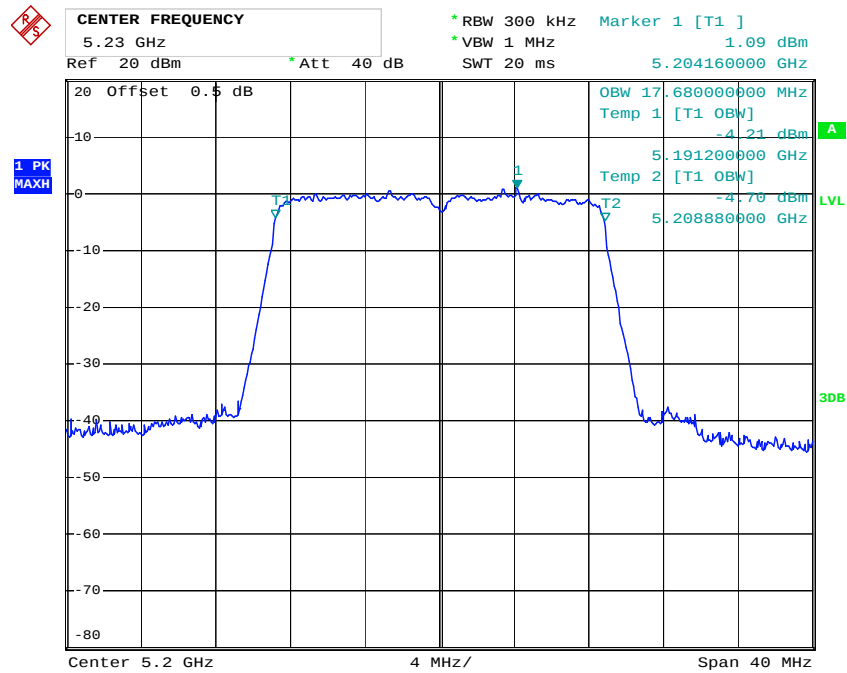


Date: 3.SEP.2020 05:48:32

802.11n ht20 High Channel

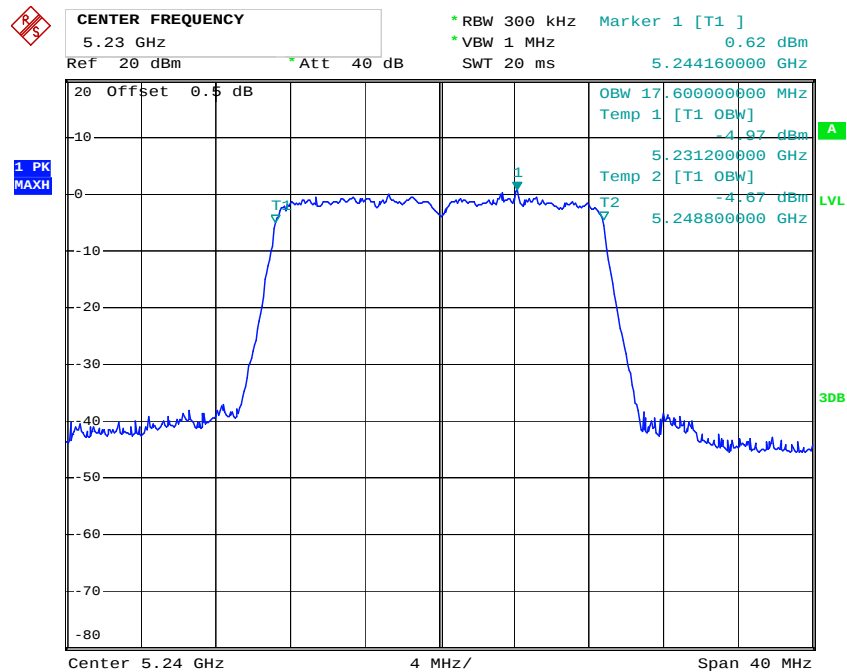


Date: 3.SEP.2020 05:49:15

802.11n ht40 Low Channel

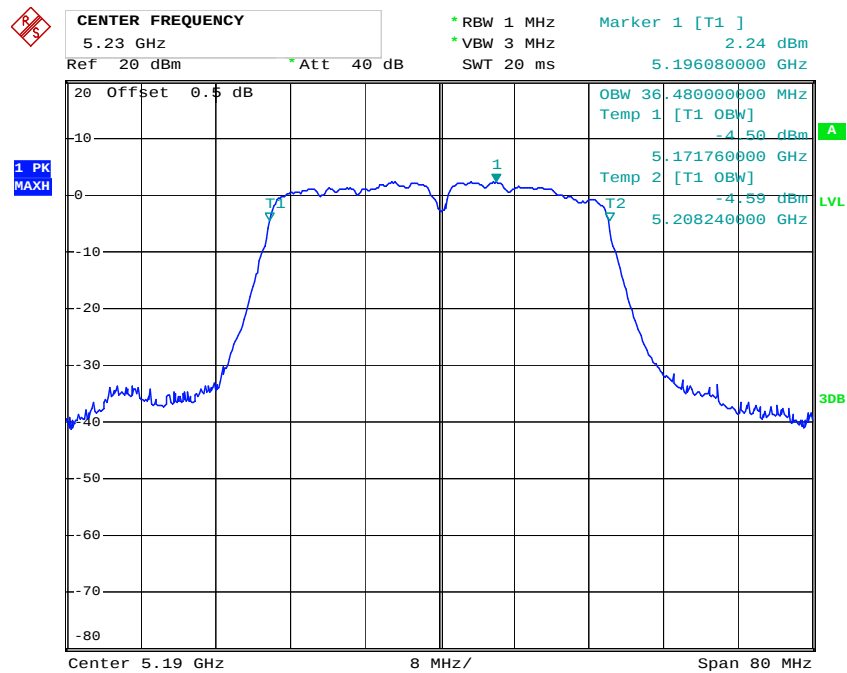

Date: 3.SEP.2020 05:45:59


802.11n ht40 High Channel

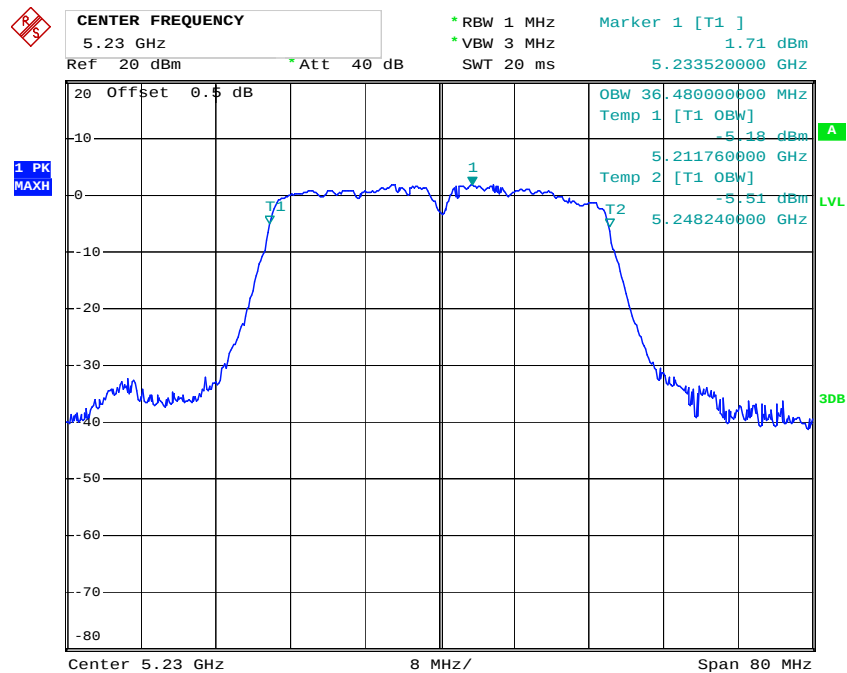

Date: 3.SEP.2020 05:46:49


5725-5850MHz:
6dB Emission Bandwidth:

802.11a Low Channel

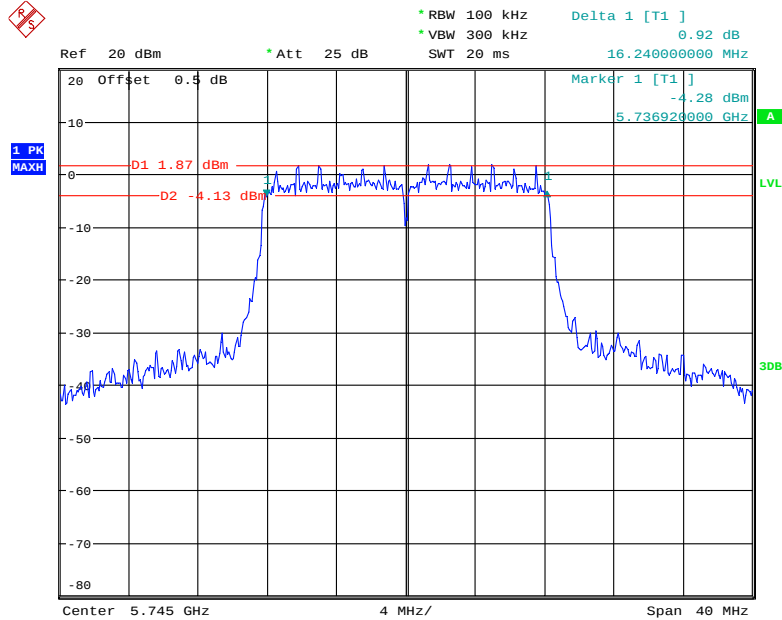


Date: 19.SEP.2020 15:36:01


802.11a Middle Channel

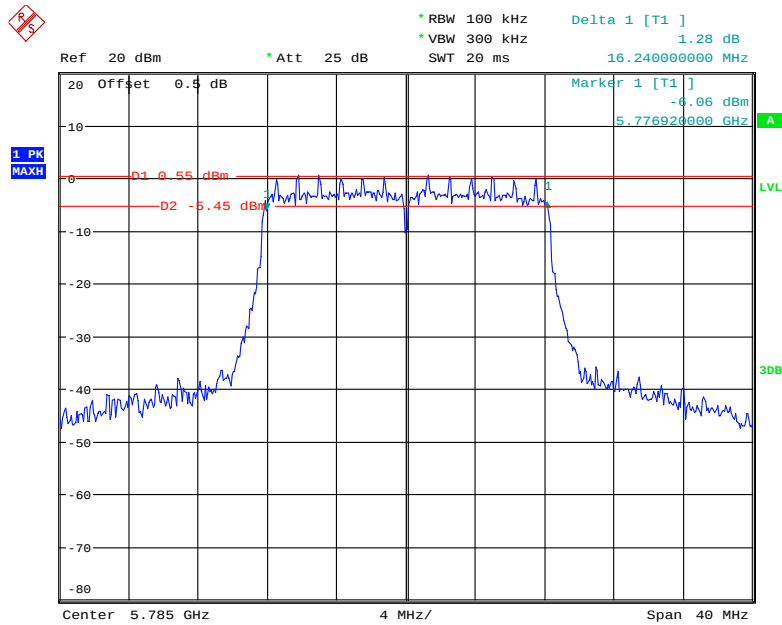

Date: 19.SEP.2020 15:38:26

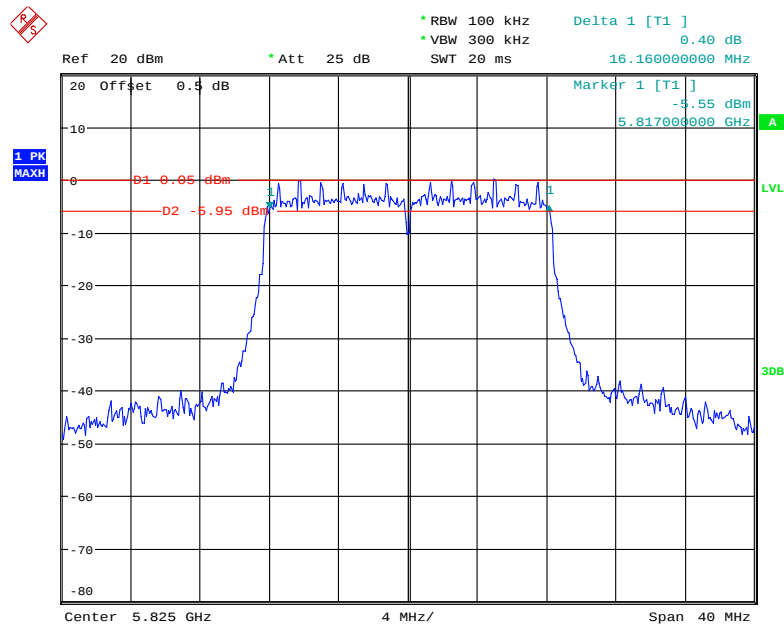
802.11a High Channel

Date: 19.SEP.2020 15:39:30

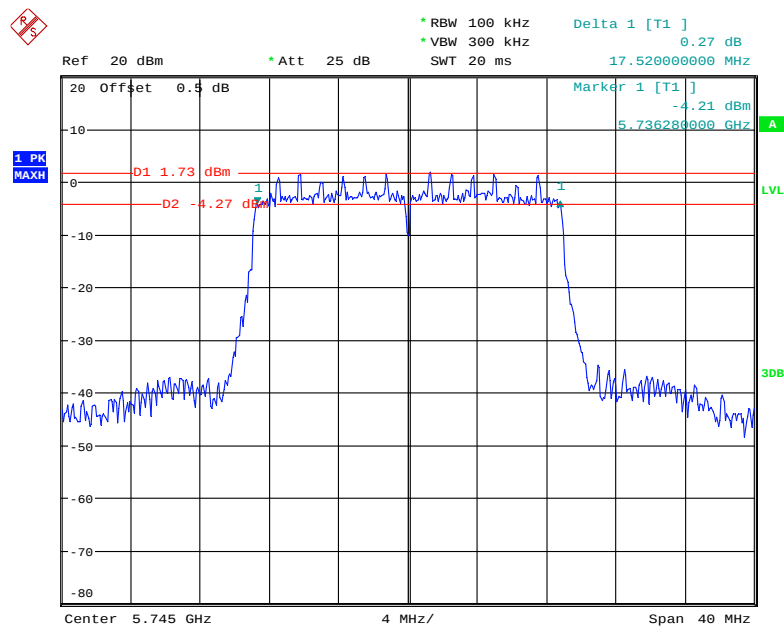802.11n ht20 Low Channel


Date: 19.SEP.2020 15:40:57

802.11n ht20 Middle Channel

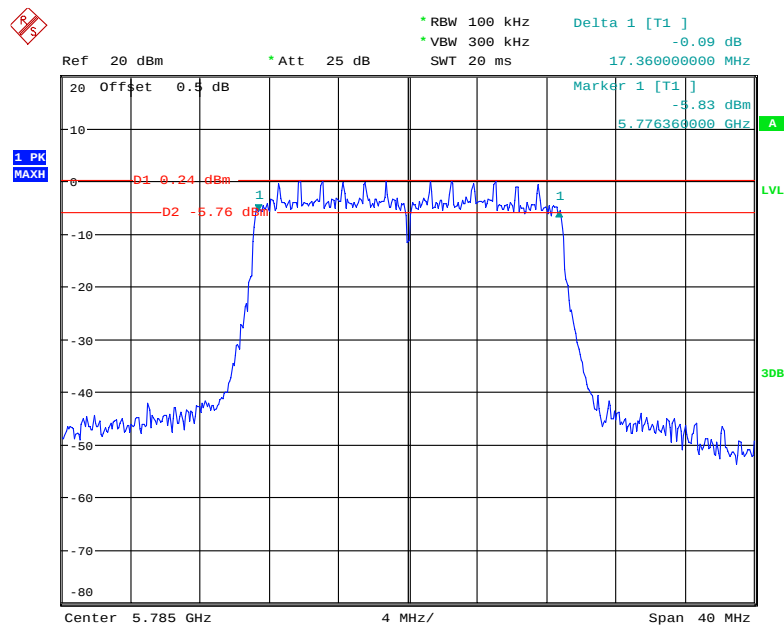


Date: 19.SEP.2020 15:54:53

802.11n ht20 High Channel

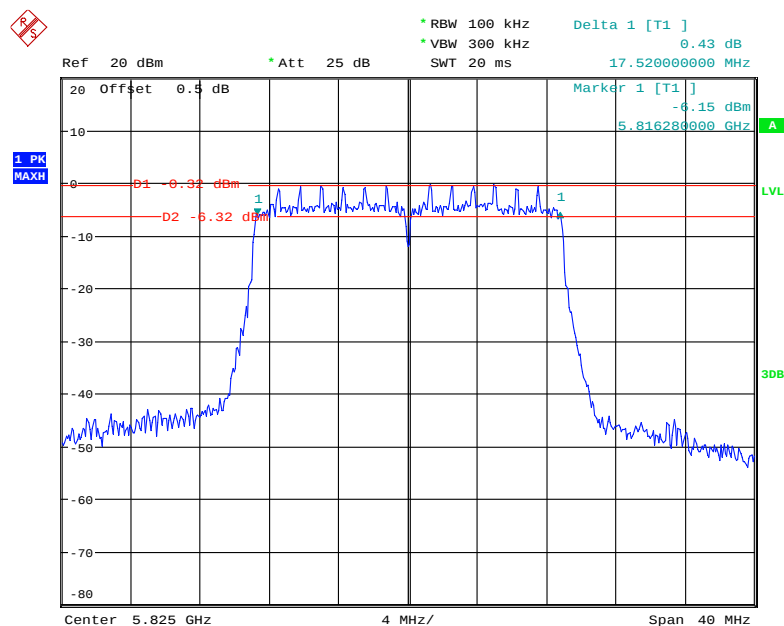


Date: 19.SEP.2020 15:56:33

802.11n ht40 Low Channel

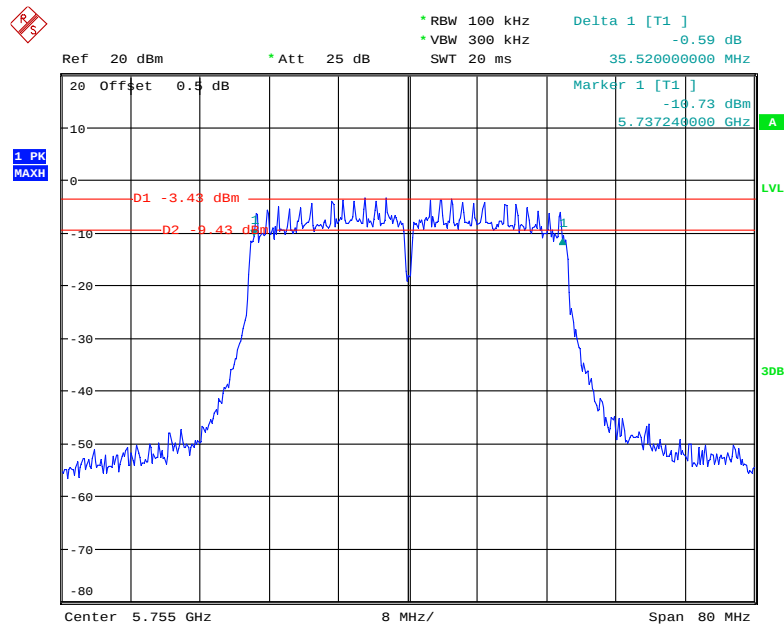


Date: 19.SEP.2020 16:00:21


802.11n ht40 High Channel

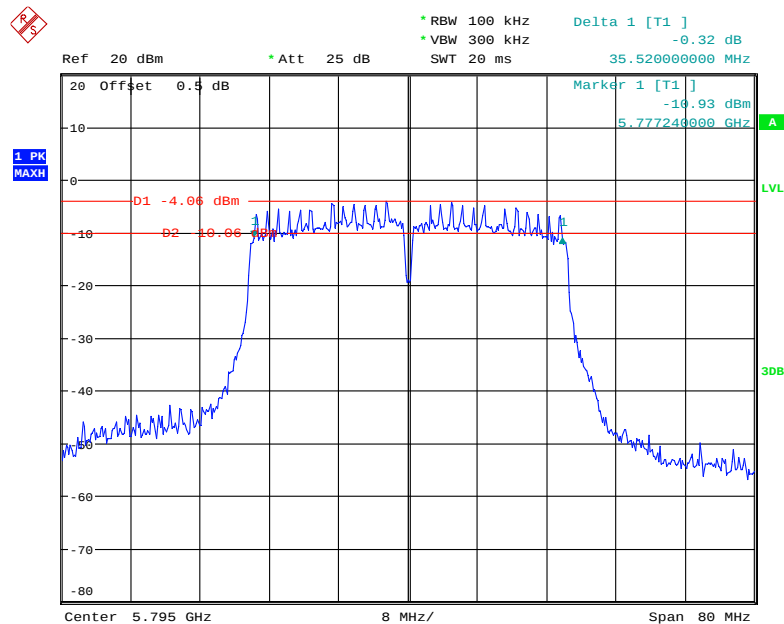

Date: 19.SEP.2020 16:02:27

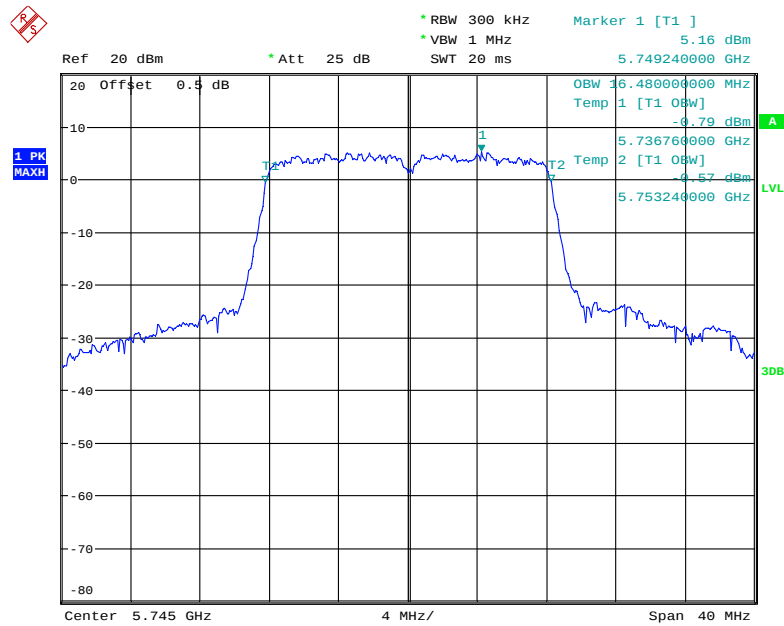
99% Occupied Bandwidth:**802.11a Low Channel**

Date: 19.SEP.2020 15:36:13

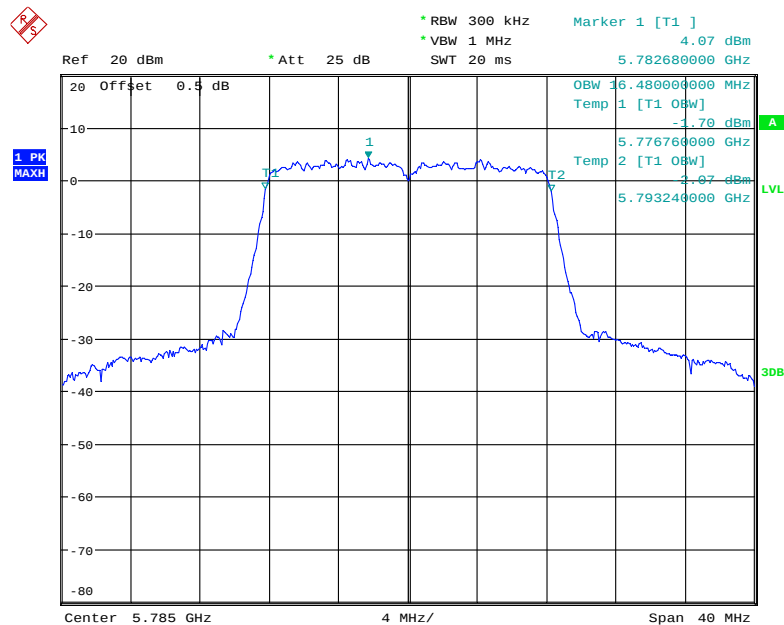802.11a Middle Channel


Date: 19.SEP.2020 15:38:41

802.11a High Channel

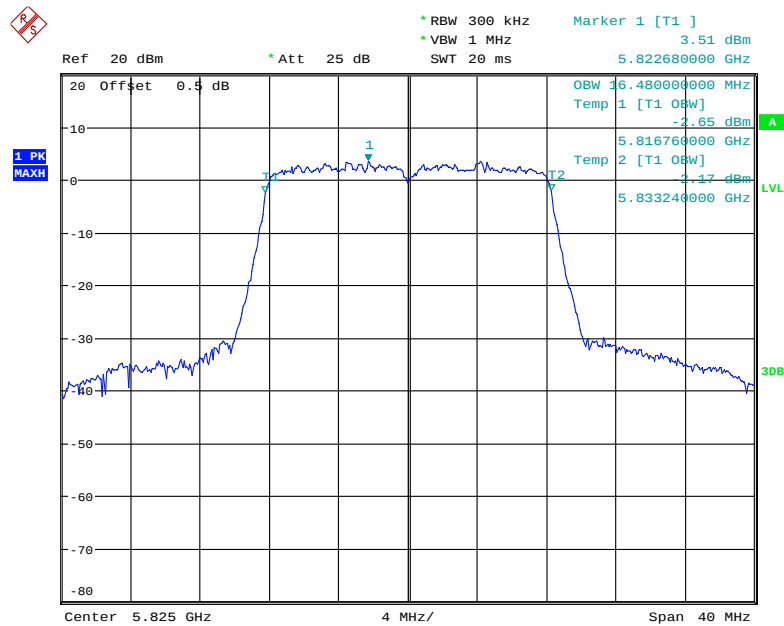


Date: 19.SEP.2020 15:39:42

802.11n ht20 Low Channel

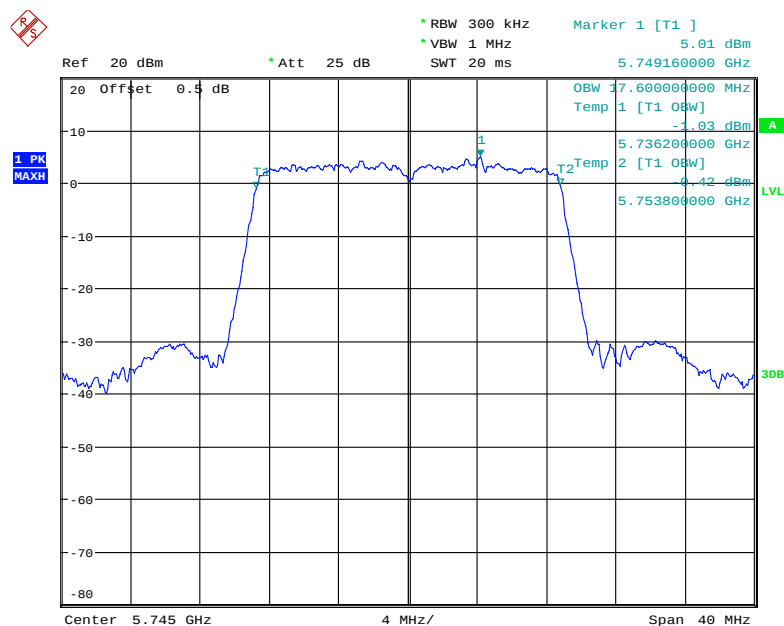


Date: 19.SEP.2020 15:41:12

802.11n ht20 Middle Channel

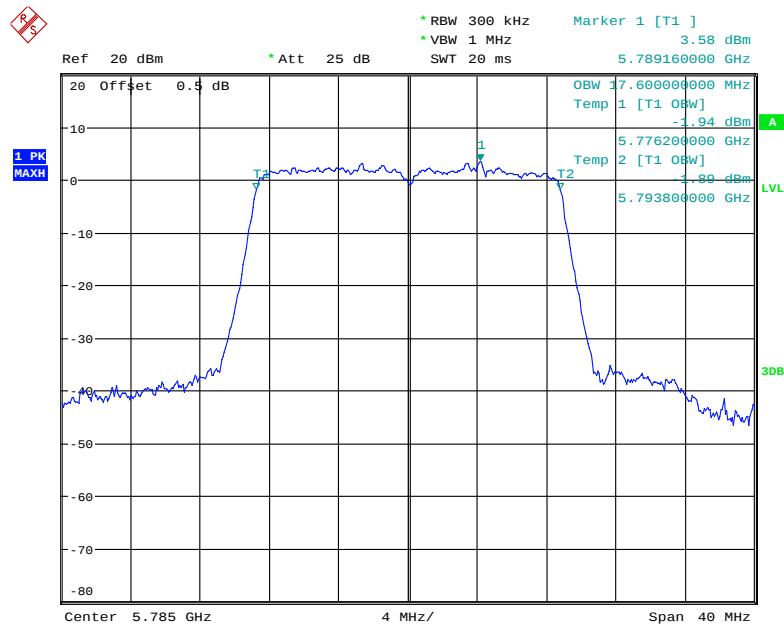


Date: 19.SEP.2020 15:55:08

802.11n ht20 High Channel

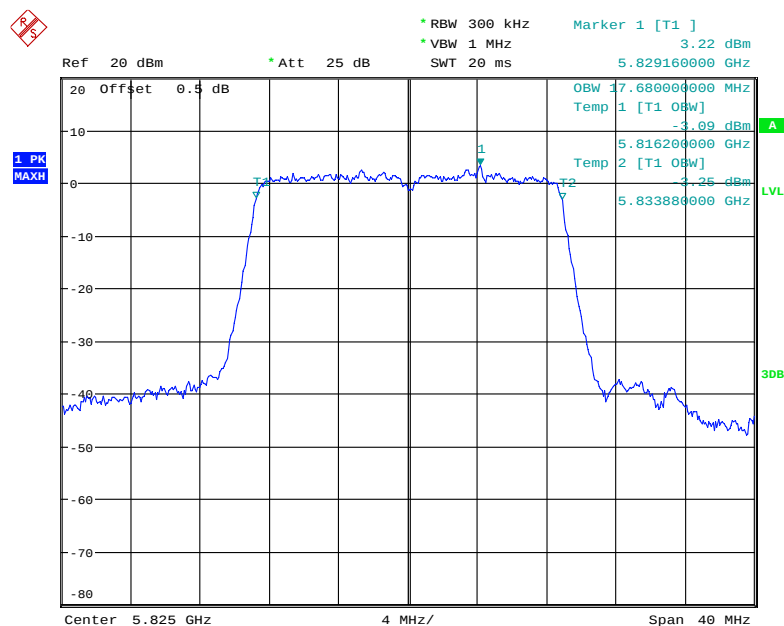


Date: 19.SEP.2020 15:56:45

802.11n ht40 Low Channel

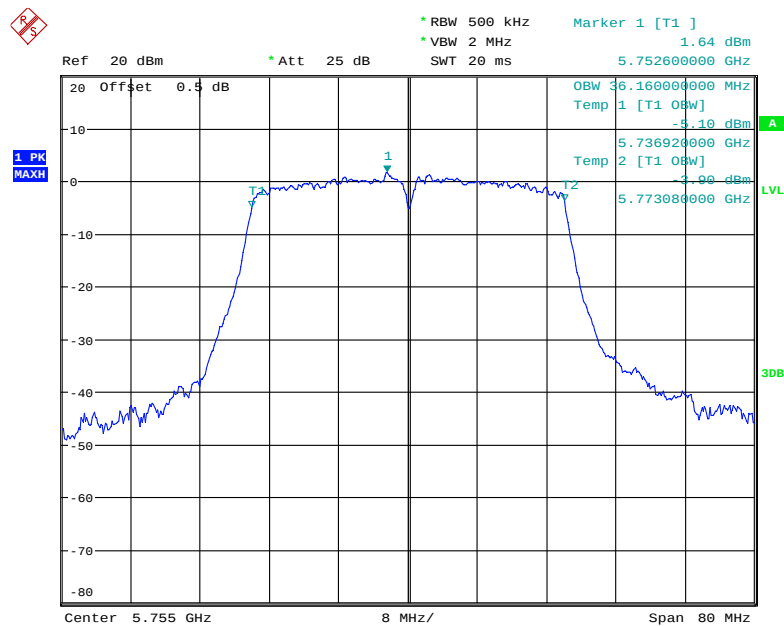

Date: 19.SEP.2020 16:00:33

802.11n ht40 High Channel

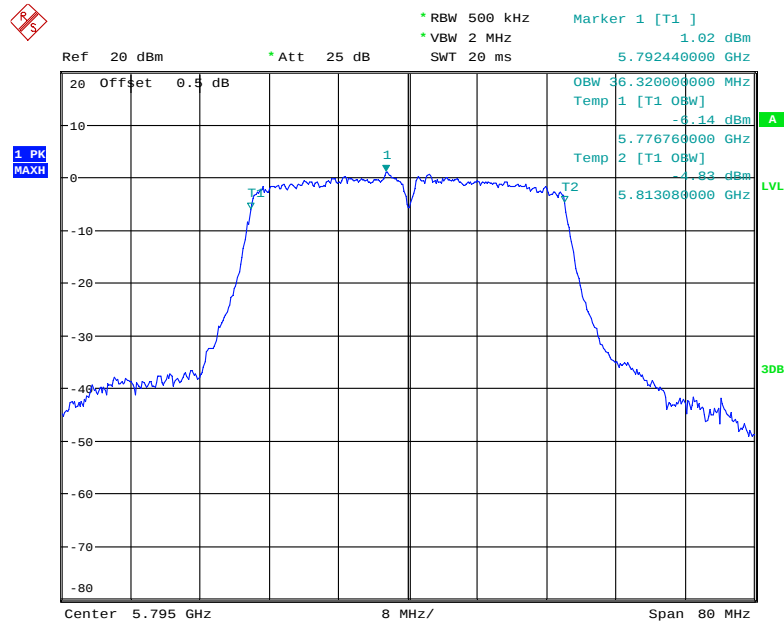

Date: 19.SEP.2020 16:02:39

FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	Each time	N/A
Agilent	USB Wideband Power Sensor	U2021XA	MY5425009	2020-05-09	2021-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	28.2°C
Relative Humidity:	69 %
ATM Pressure:	100.5 kPa
Tester:	Rennes Guo
Test Date:	2020-07-06

Test Mode: Transmitting

Modules	Band	Mode	Frequency (MHz)	Conducted Average Output Power (dBm)			Limit (dBm)
				Chain 0	Chain 1	Total	
Module 1	5150 - 5250 MHz	802.11 a	5180	12.37	12.85	/	24
			5200	12.75	12.86	/	24
			5240	13.42	12.74	/	24
		802.11n ht20	5180	12.14	12.45	15.31	24
			5200	12.65	12.60	15.64	24
			5240	13.25	12.49	15.9	24
		802.11n ht40	5190	10.77	9.85	13.34	24
			5230	10.18	10.64	13.43	24
	5725 - 5850 MHz	802.11 a	5745	13.01	13.14	/	30
			5785	12.58	12.69	/	30
			5825	12.31	12.57	/	30
		802.11n ht20	5745	12.62	13.15	15.9	30
			5785	12.49	12.70	15.61	30
			5825	11.88	12.02	14.96	30
		802.11n ht40	5755	10.64	10.67	13.67	30
			5795	9.98	10.12	13.06	30
Module 2	5150 - 5250 MHz	802.11 a	5180	12.99	12.80	/	24
			5200	12.79	12.92	/	24
			5240	12.96	12.97	/	24
		802.11n ht20	5180	12.84	12.35	15.61	24
			5200	13.06	12.54	15.82	24
			5240	13.33	12.79	16.08	24
		802.11n ht40	5190	10.59	10.18	13.4	24
			5230	10.89	10.24	13.59	24
	5725 - 5850 MHz	802.11 a	5745	13.25	13.40	/	30
			5785	12.48	12.91	/	30
			5825	11.89	12.69	/	30
		802.11n ht20	5745	13.14	13.43	16.3	30
			5785	12.45	13.09	15.79	30
			5825	11.76	12.79	15.32	30
		802.11n ht40	5755	10.75	10.88	13.83	30
			5795	9.70	10.23	12.98	30

Note:

The device is a client device.

The duty cycle factor has been calculated into the test data.

The maximum antenna gain is 4.97dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

$$\text{Array Gain} = 0 \text{ dB (i.e., no array gain) for } N_{\text{ANT}} \leq 4;$$

So:

$$\text{Directional gain} = 4.97\text{dBi}$$

FCC §15.407(a) - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 + 10 \log B$ dBm, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-05-09	2021-05-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/03	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.3~28.9 °C
Relative Humidity:	64~73 %
ATM Pressure:	100.1~100.9 kPa
Tester:	Rennes Guo
Test Date:	2020-09-03~2020-09-19

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plot.

Module 1:

5150-5250MHz:

Mode	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)
		Chain 0	Chain 1	Total	
802.11a	5180	-1.09	-0.89	/	11
	5200	-1.06	-0.59	/	11
	5240	-1.37	-0.64	/	11
802.11n ht20	5180	-1.76	-1.26	1.51	9.03
	5200	-1.76	-1.11	1.59	9.03
	5240	-2.21	-1.18	1.35	9.03
802.11n ht40	5190	-5.84	-5.59	-2.7	9.03
	5230	-4.80	-4.24	-1.5	9.03

5725-5850 MHz:

Mode	Frequency (MHz)	Reading (dBm/300kHz)		Maximum Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)
		Chain 0	Chain 1	Chain 0	Chain 1	Total	
802.11a	5745	-1.91	-1.06	0.31	1.16	/	30
	5785	-2.28	-2.19	-0.06	0.03	/	30
	5825	-3.37	-2.76	-1.15	-0.54	/	30
802.11n ht20	5745	-0.71	-0.31	1.51	1.91	4.72	28.03
	5785	-1.38	-1.49	0.84	0.73	3.80	28.03
	5825	-2.31	-2.81	-0.09	-0.59	2.68	28.03
802.11n ht40	5755	-3.19	-3.04	-0.97	-0.82	2.12	28.03
	5795	-4.04	-4.79	-1.82	-2.57	0.83	28.03

Module 2:

5150-5250MHz:

Mode	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)			Limit (dBm/MHz)
		Chain 0	Chain 1	Total	
802.11a	5180	-1.56	-1.60	/	11
	5200	-1.18	-1.27	/	11
	5240	-2.26	-1.12	/	11
802.11n ht20	5180	-1.71	-1.58	-1.71	9.03
	5200	-1.81	-1.74	-1.81	9.03
	5240	-2.55	-1.44	-2.55	9.03
802.11n ht40	5190	-5.73	-6.00	-5.73	9.03
	5230	-6.23	-6.37	-6.23	9.03

5725-5850 MHz:

Mode	Frequency (MHz)	Reading (dBm/300kHz)		Maximum Power Spectral Density (dBm/500kHz)			Limit (dBm/500kHz)
		Chain 0	Chain 1	Chain 0	Chain 1	Total	
802.11a	5745	-1.30	-1.45	0.92	0.77	/	30
	5785	-2.23	-1.66	-0.01	0.56	/	30
	5825	-2.51	0.54	-0.29	2.76	/	30
802.11n ht20	5745	-1.12	-0.31	1.1	1.91	4.53	28.03
	5785	-2.33	-1.20	-0.11	1.02	3.50	28.03
	5825	-2.72	-1.65	-0.5	0.57	3.08	28.03
802.11n ht40	5755	-5.71	-5.56	-3.49	-3.34	-0.40	28.03
	5795	-6.46	-6.46	-4.24	-4.24	-1.23	28.03

Note:

The maximum antenna gain is 4.97dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:


$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 4.97\text{dBi} + 10 \log(2/1) = 7.97 \text{ dBi for Non-beamforming mode}$$

For 5.8GHz band, If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.


Module 1:
5150-5250MHz
Chain 0

802.11a Low Channel

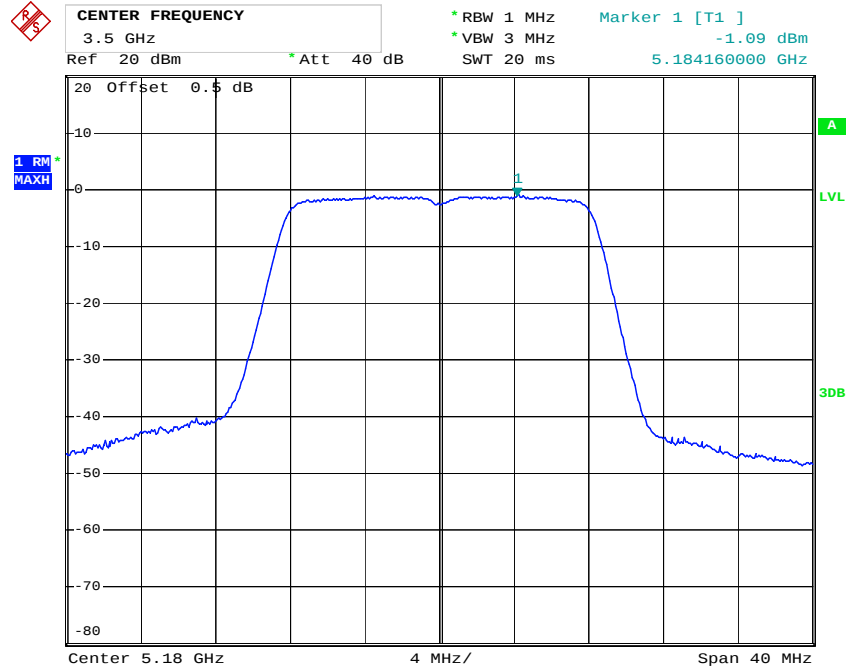


Date: 3.SEP.2020 04:44:50

802.11a Middle Channel

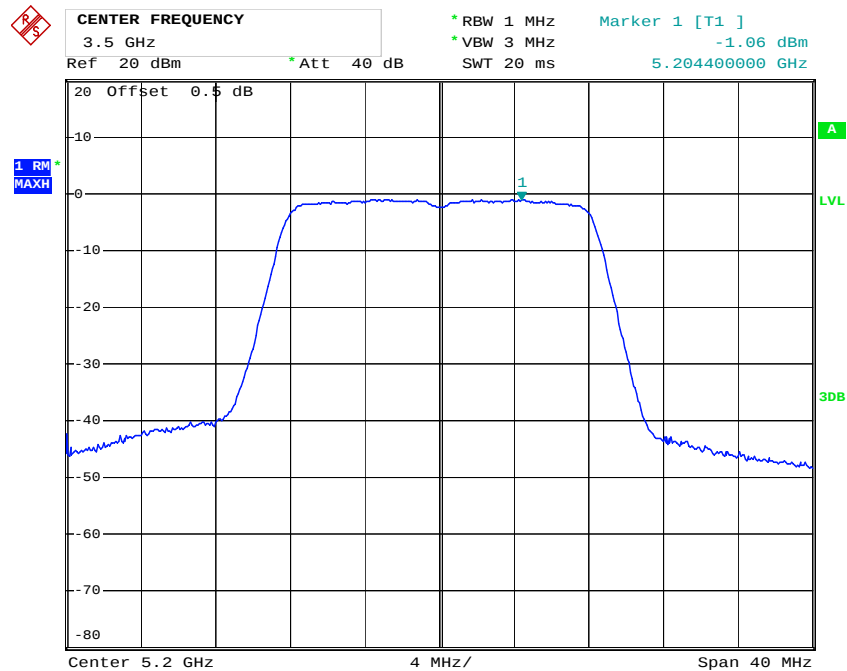


Date: 3.SEP.2020 04:45:33

802.11a High Channel

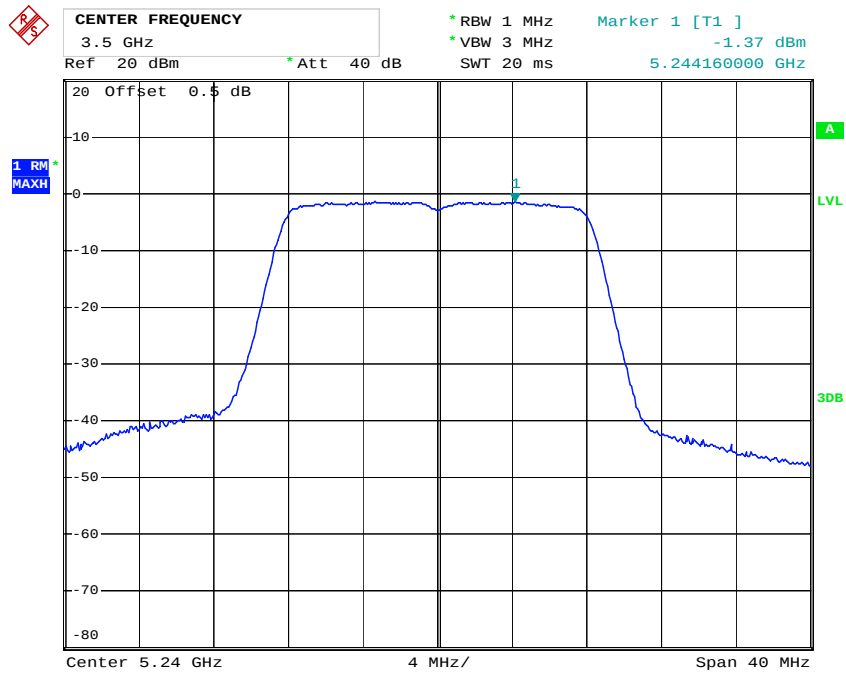


Date: 3.SEP.2020 04:46:32

802.11n ht20 Low Channel

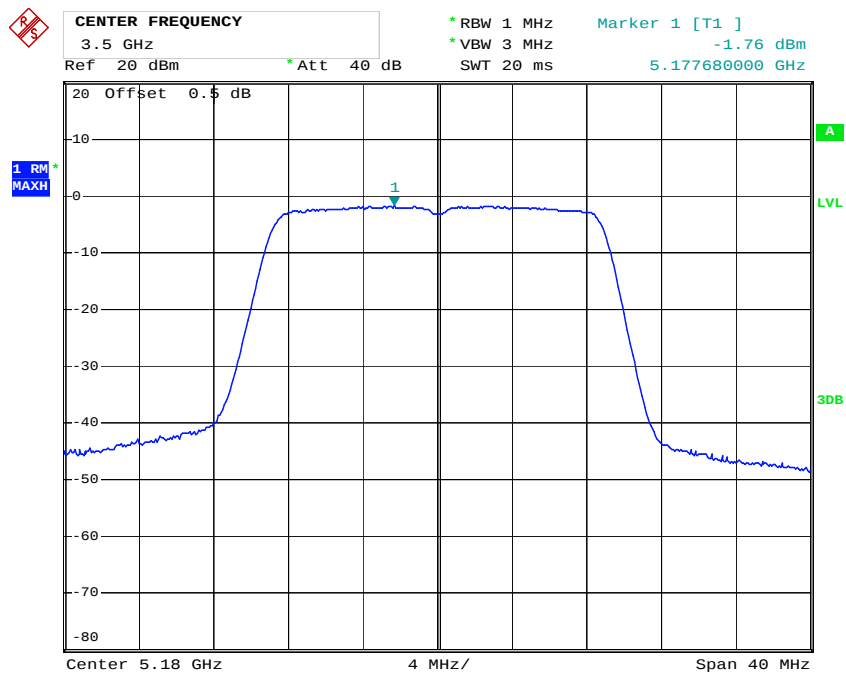


Date: 3.SEP.2020 04:48:16

802.11n ht20 Middle Channel

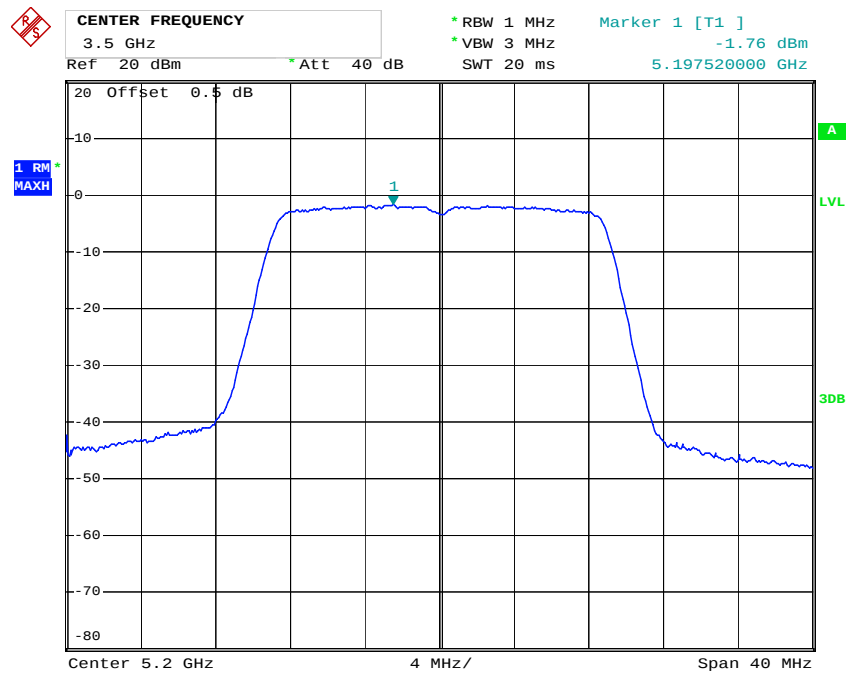


Date: 3.SEP.2020 04:49:32

802.11n ht20 High Channel

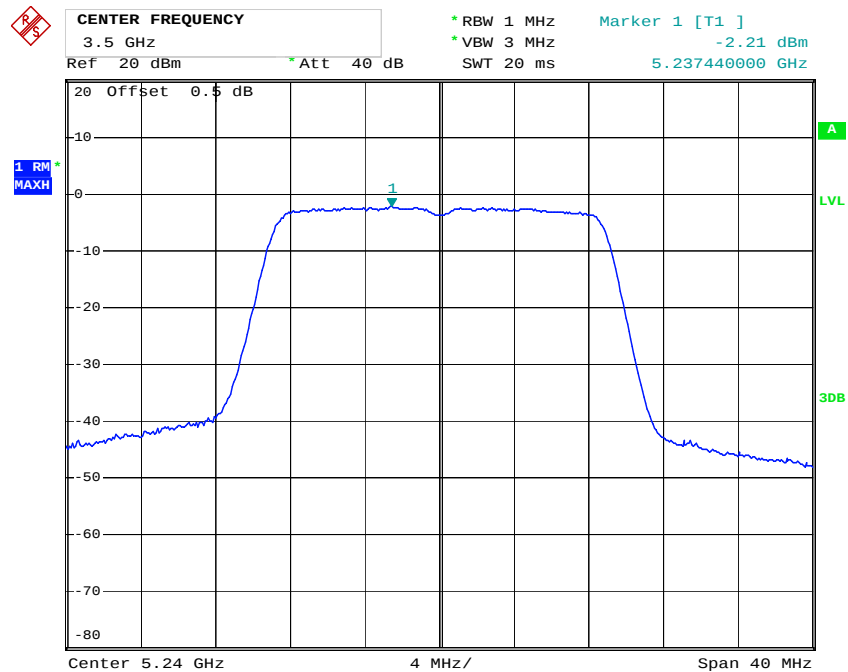


Date: 3.SEP.2020 04:50:21

802.11n ht40 Low Channel

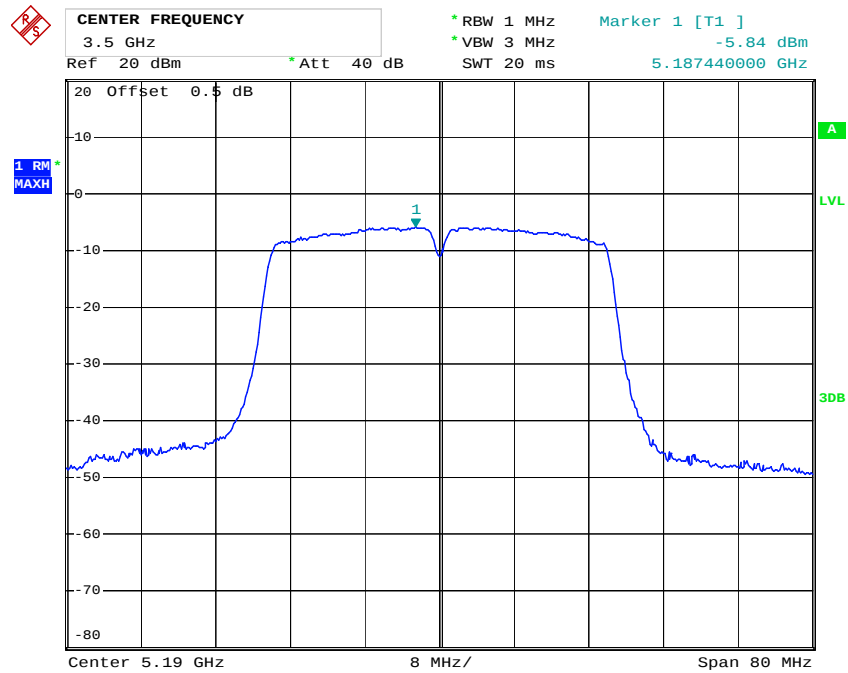

Date: 3.SEP.2020 04:51:47


802.11n ht40 High Channel

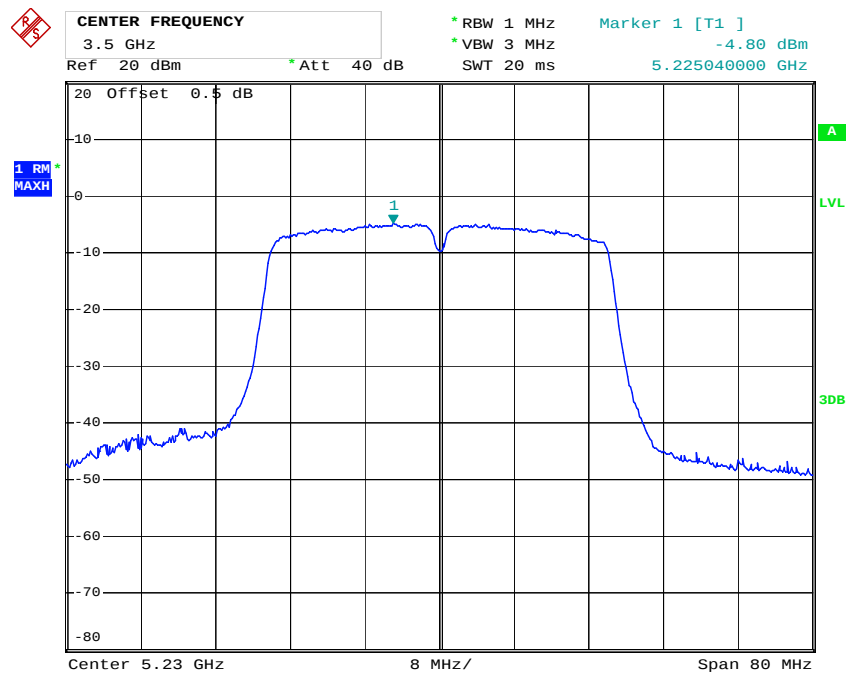

Date: 3.SEP.2020 04:58:08


Chain 1

802.11a Low Channel

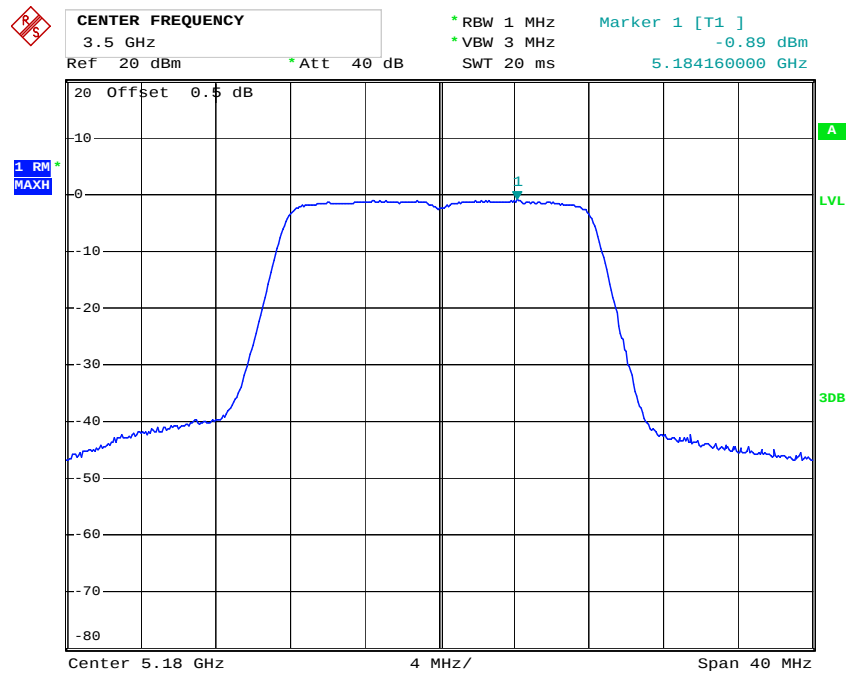


Date: 3.SEP.2020 04:59:26

802.11a Middle Channel

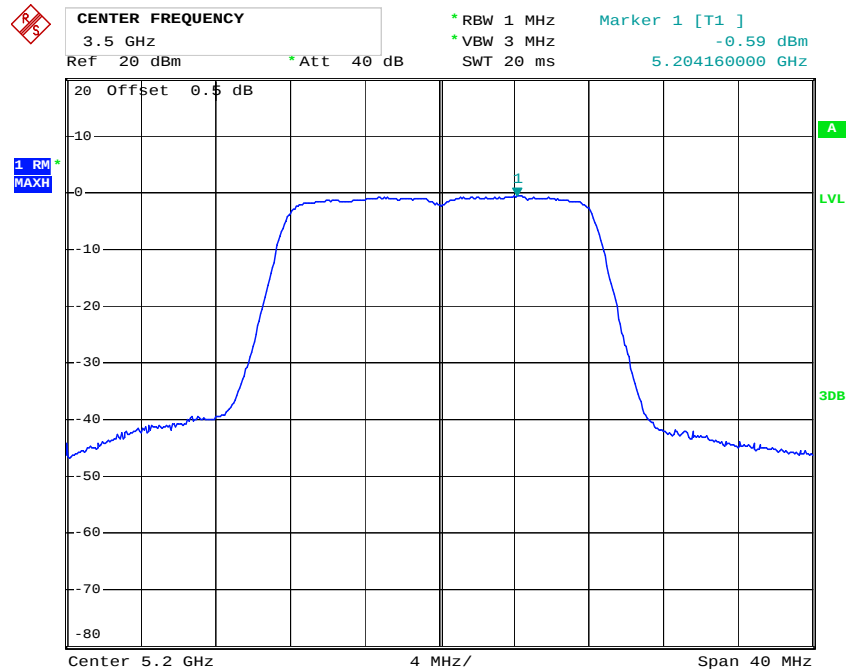


Date: 3.SEP.2020 05:00:24

802.11a High Channel

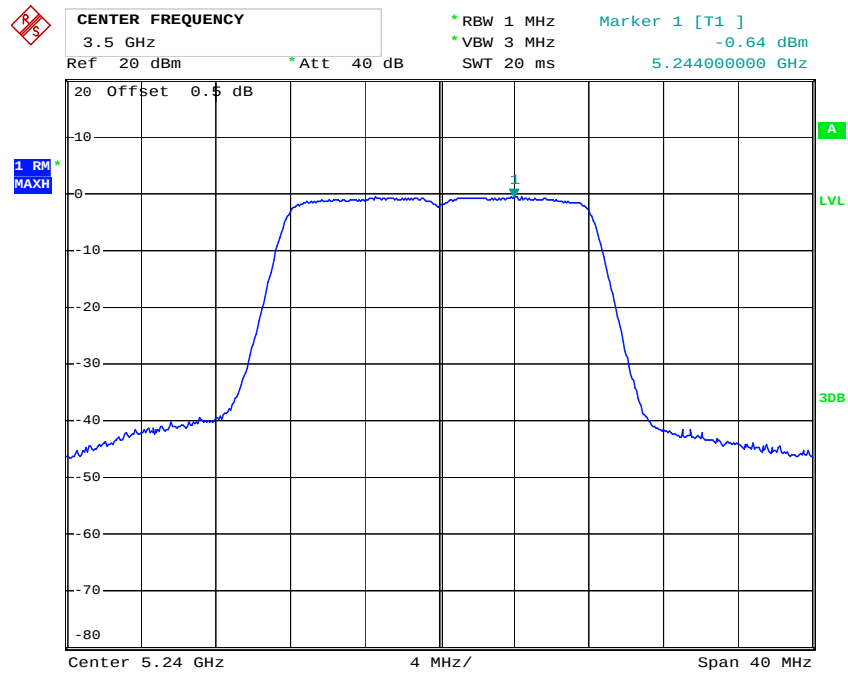


Date: 3.SEP.2020 05:01:46

802.11n ht20 Low Channel

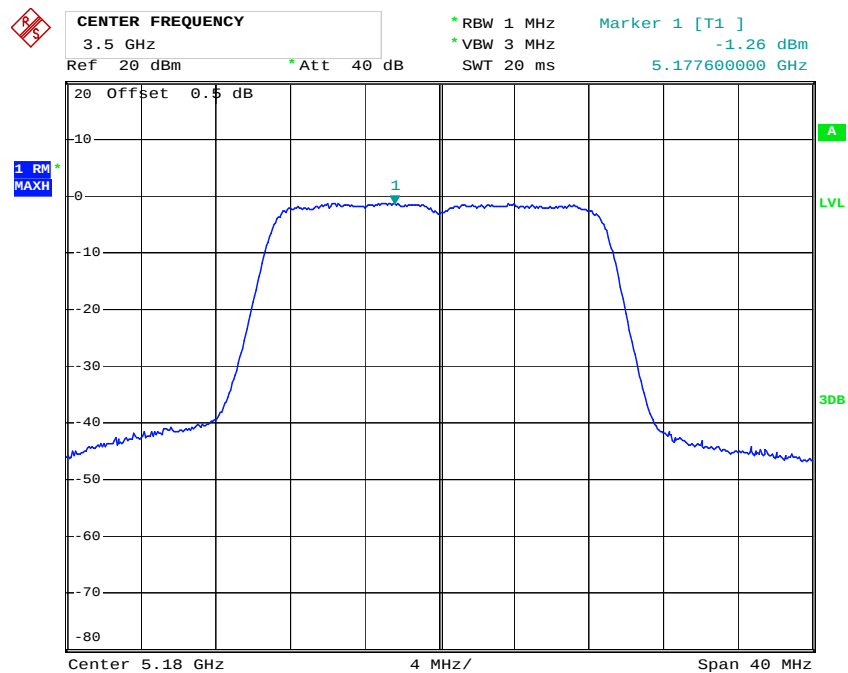


Date: 3.SEP.2020 05:02:23

802.11n ht20 Middle Channel

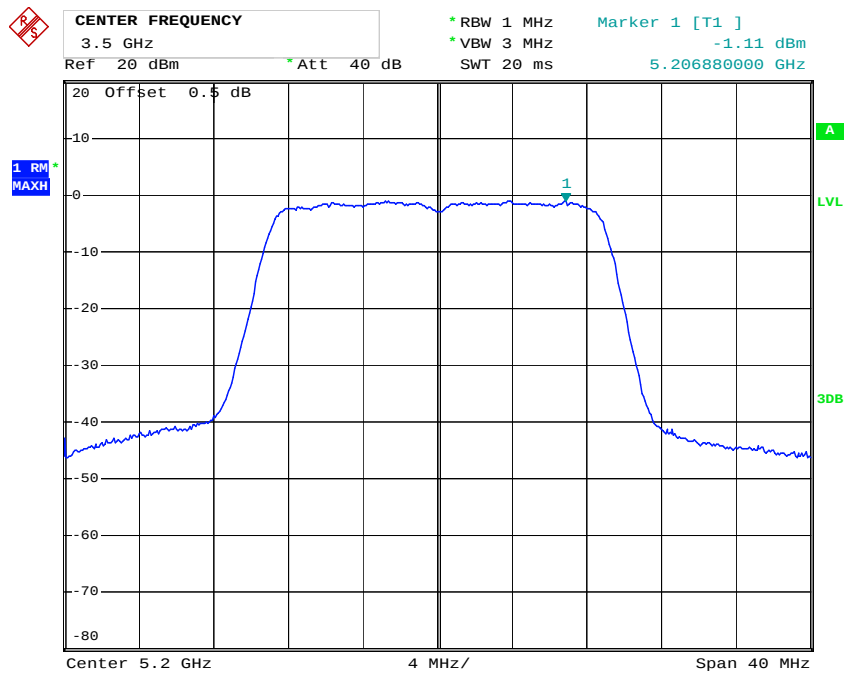


Date: 3.SEP.2020 05:03:21

802.11n ht20 High Channel

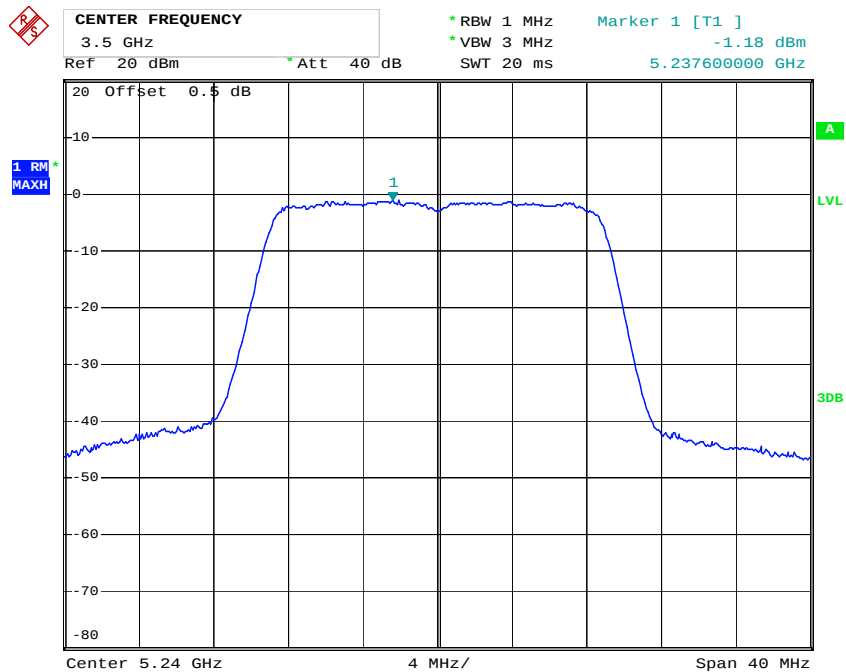


Date: 3.SEP.2020 05:04:28

802.11n ht40 Low Channel

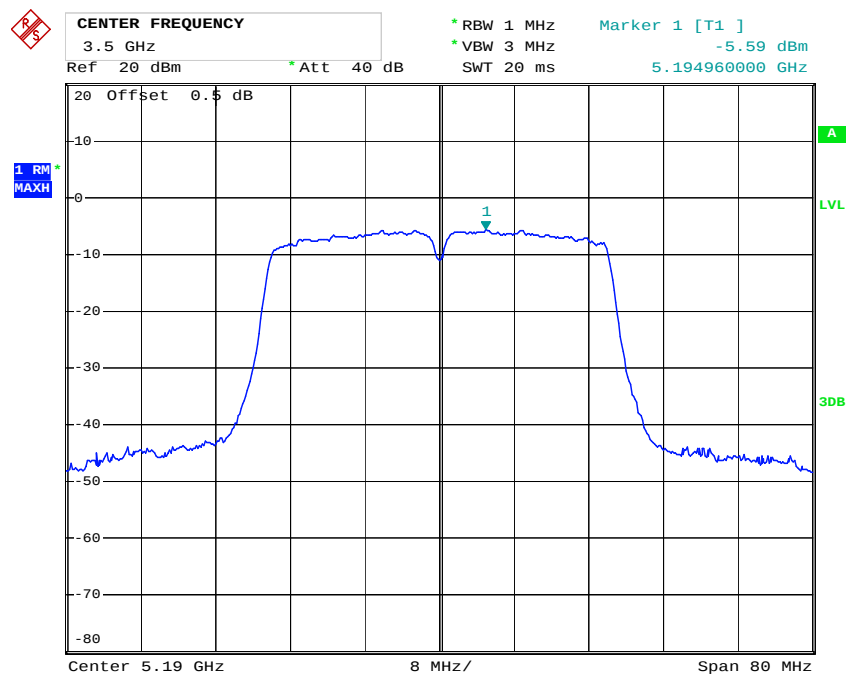

Date: 3.SEP.2020 04:54:56


802.11n ht40 High Channel

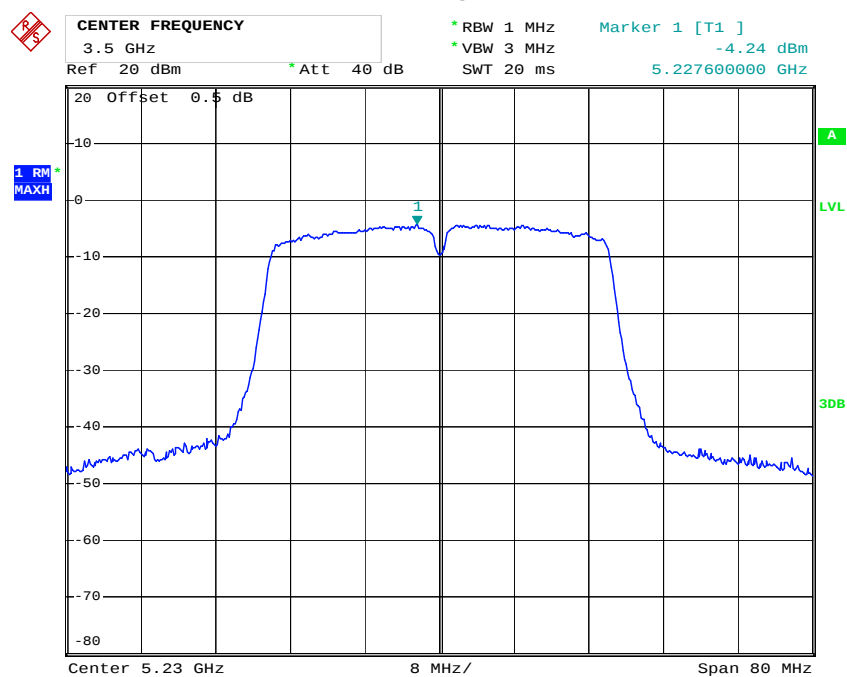

Date: 3.SEP.2020 04:56:02


5725-5850MHz
Chain 0

802.11a Low Channel

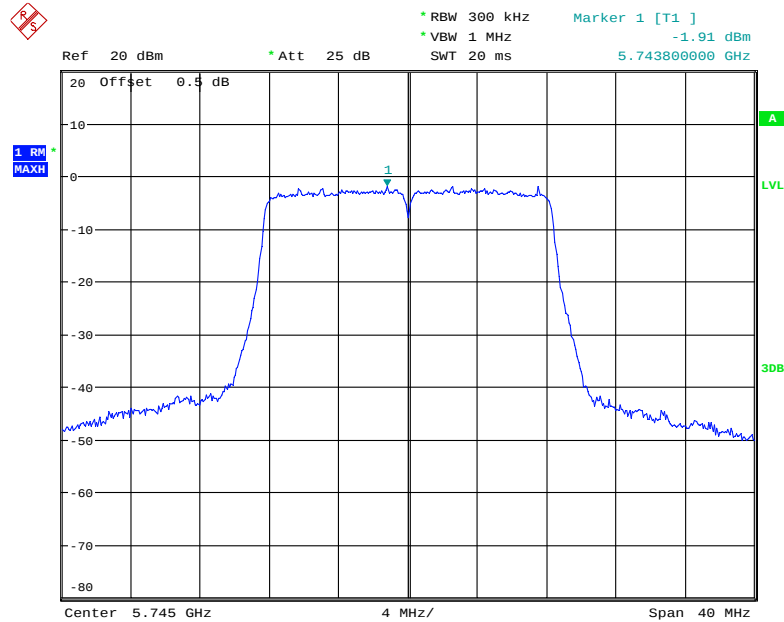


Date: 19.SEP.2020 14:37:34

802.11a Middle Channel

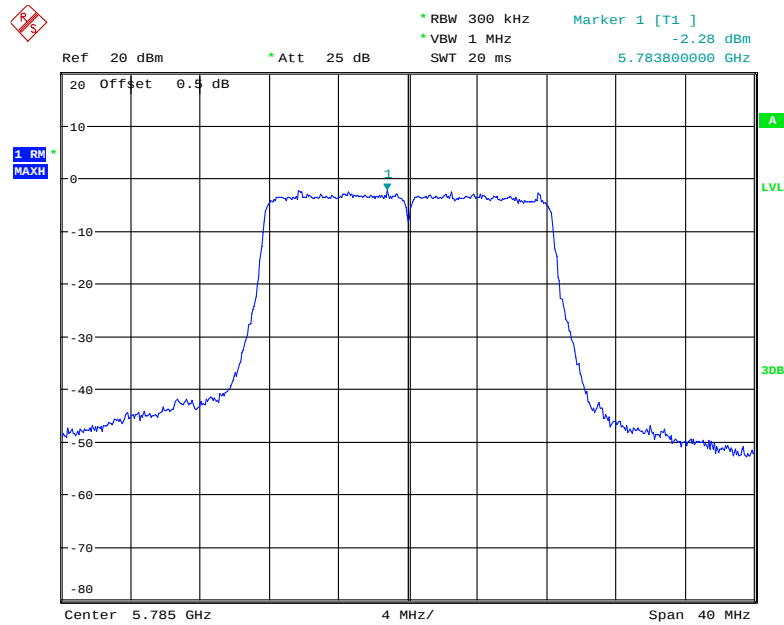


Date: 19.SEP.2020 14:38:42

802.11a High Channel

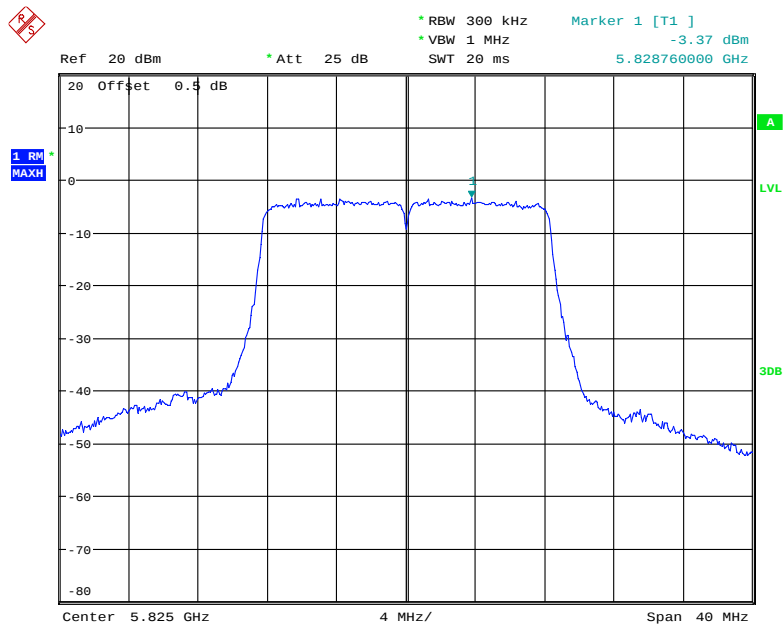


Date: 19.SEP.2020 14:39:36

802.11n ht20 Low Channel

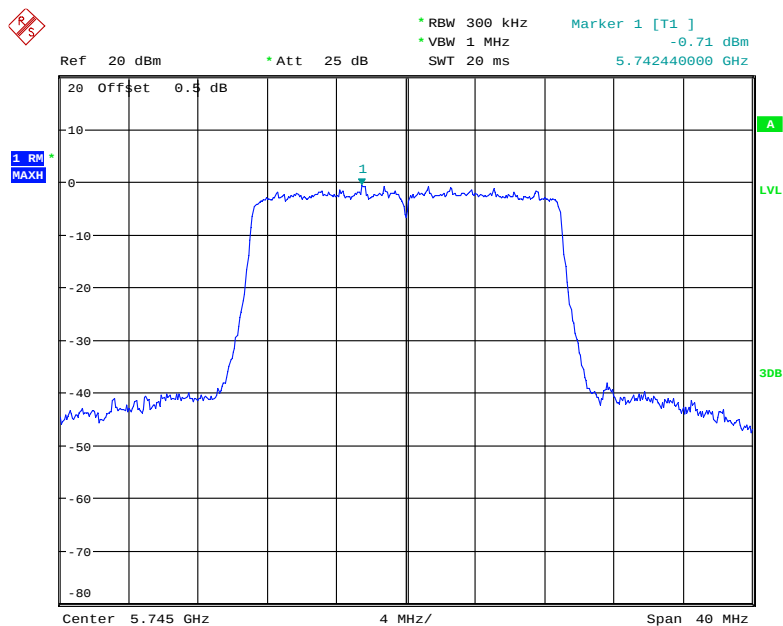


Date: 19.SEP.2020 14:42:25

802.11n ht20 Middle Channel

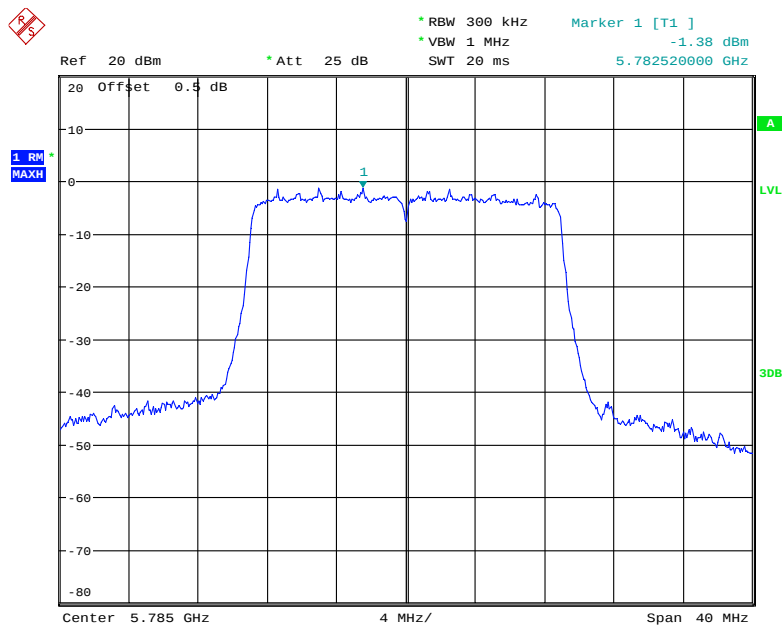


Date: 19.SEP.2020 14:44:39

802.11n ht20 High Channel

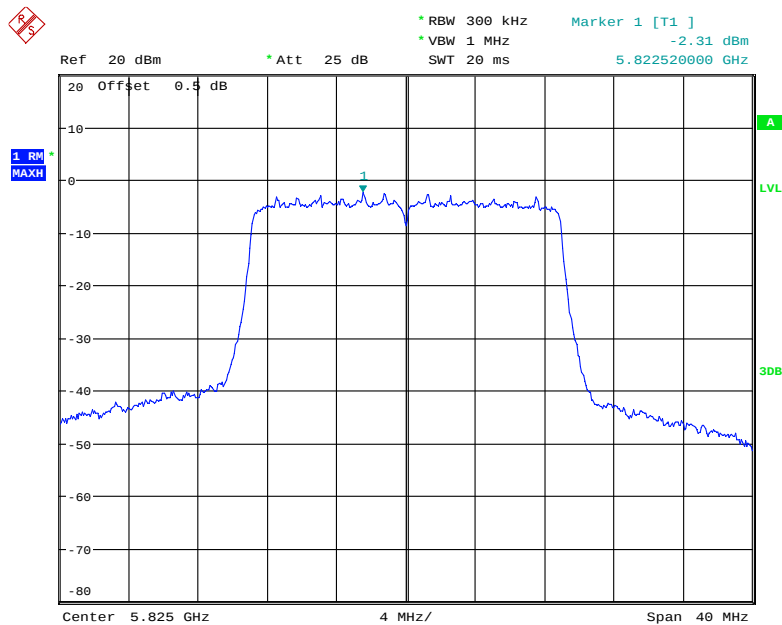


Date: 19.SEP.2020 14:47:17

802.11n ht40 Low Channel

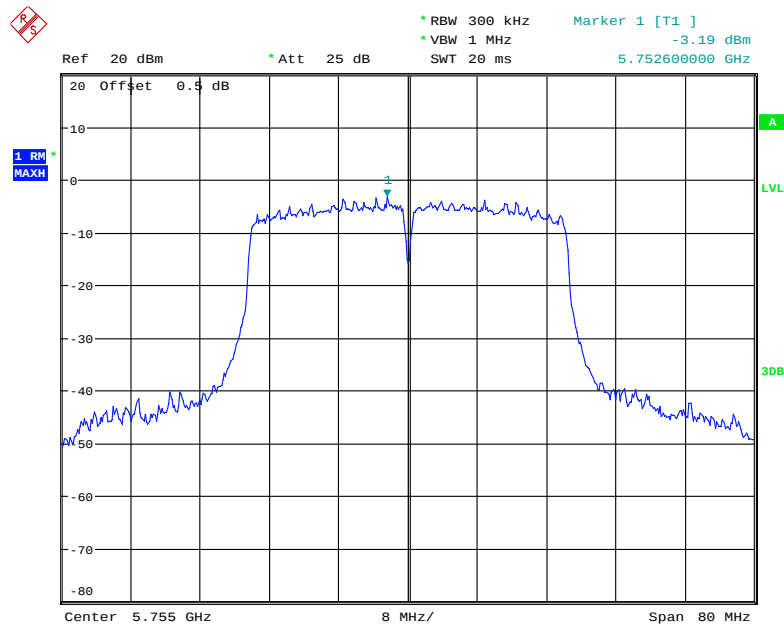

Date: 19.SEP.2020 14:48:30


802.11n ht40 High Channel

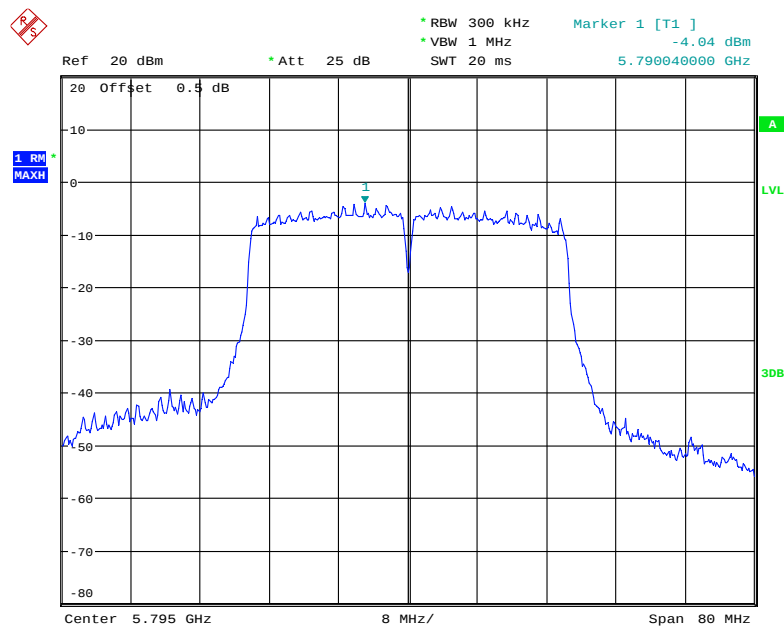

Date: 19.SEP.2020 14:49:22


Chain 1:

802.11a Low Channel

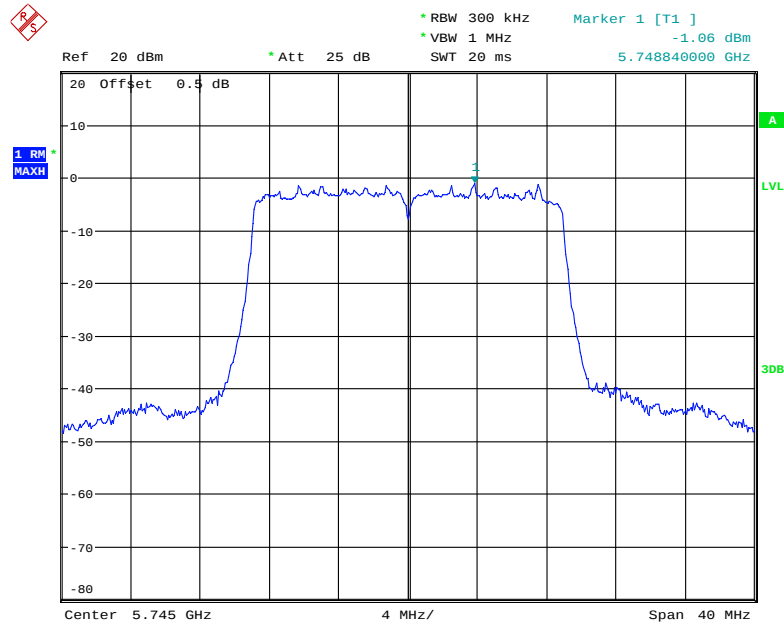


Date: 19.SEP.2020 14:54:09

802.11a Middle Channel

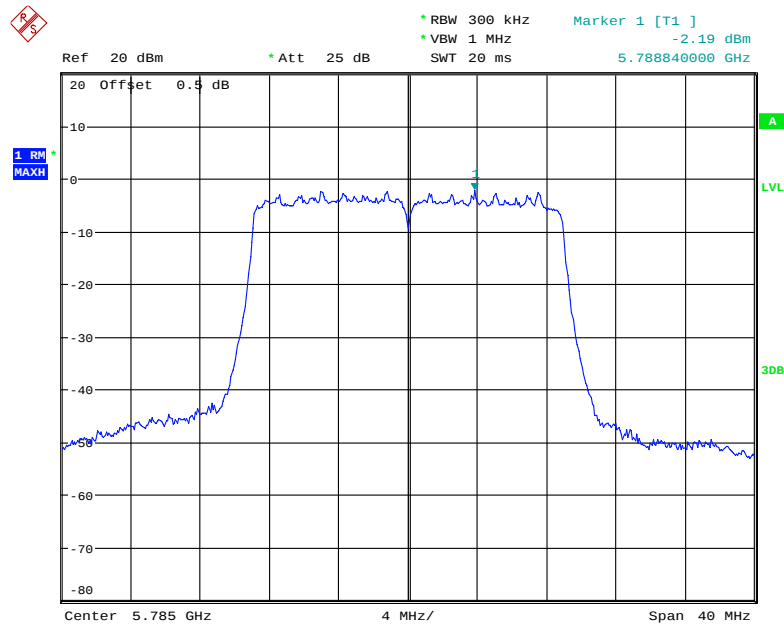


Date: 19.SEP.2020 14:54:41

802.11a High Channel

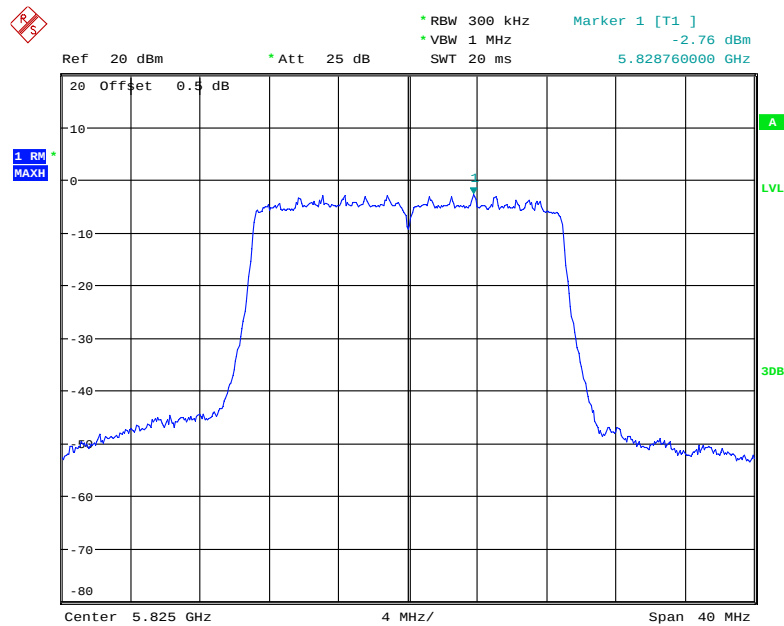


Date: 19.SEP.2020 14:55:11

802.11n ht20 Low Channel

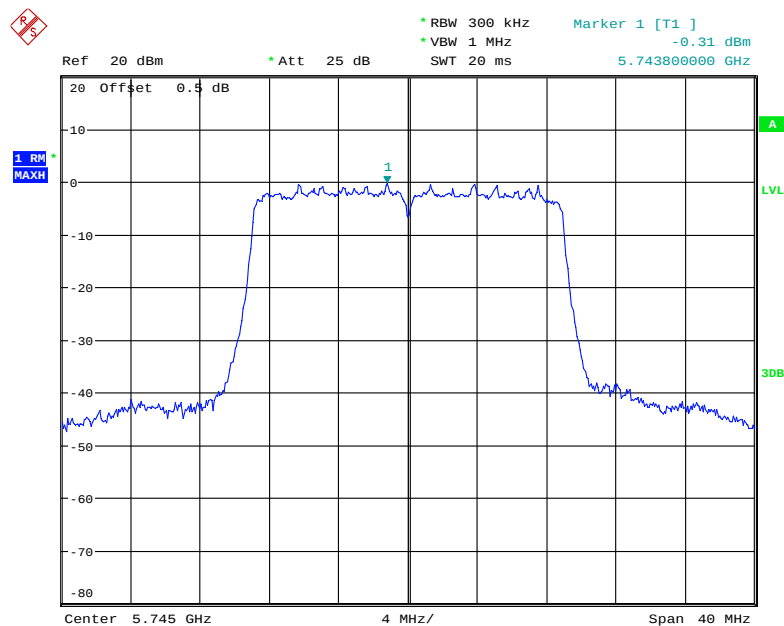


Date: 19.SEP.2020 15:29:35

802.11n ht20 Middle Channel

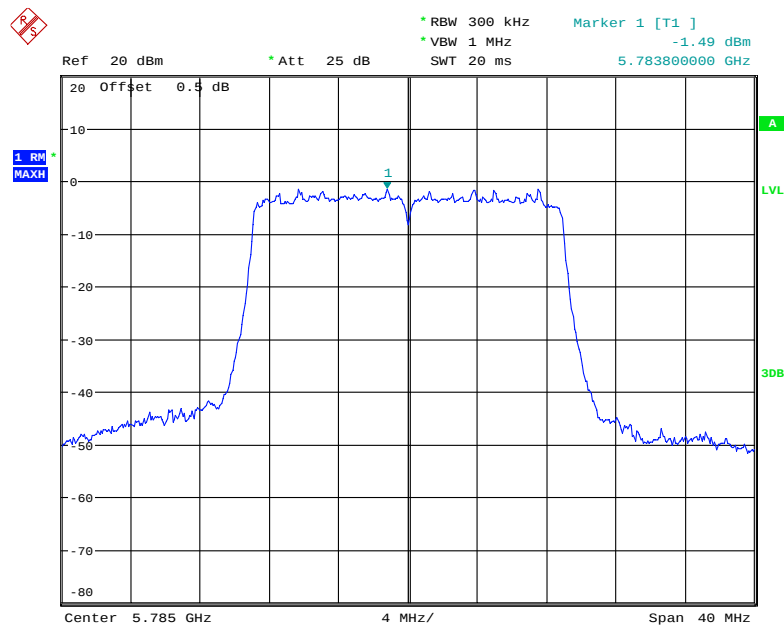


Date: 19.SEP.2020 15:30:09

802.11n ht20 High Channel

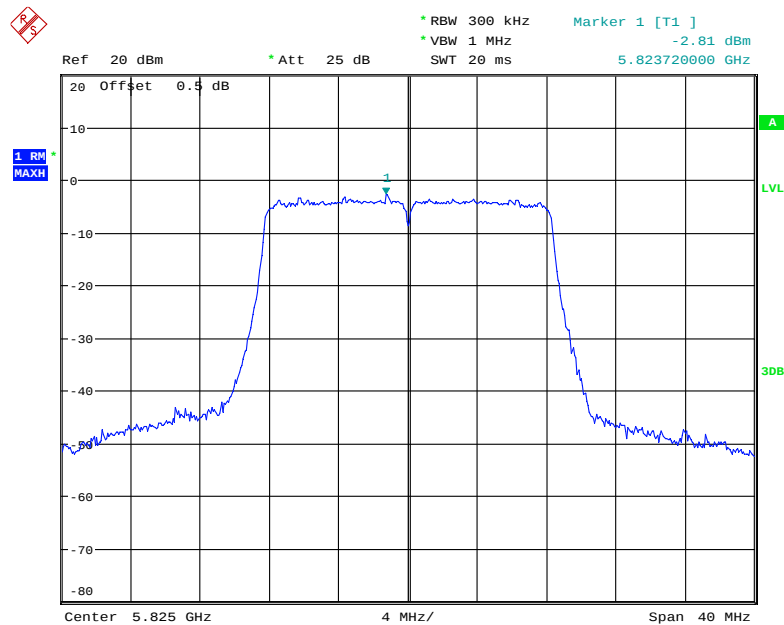


Date: 19.SEP.2020 14:52:58

802.11n ht40 Low Channel

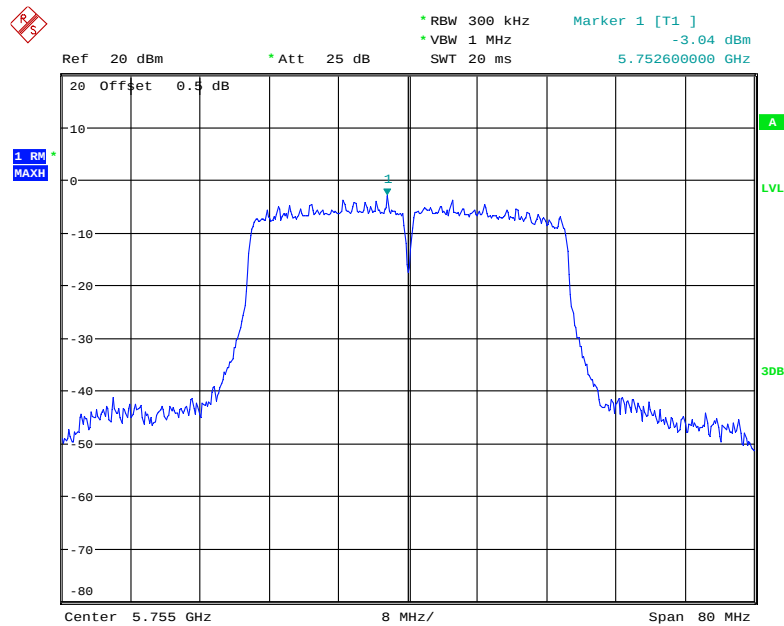

Date: 19.SEP.2020 14:55:52


802.11n ht40 High Channel

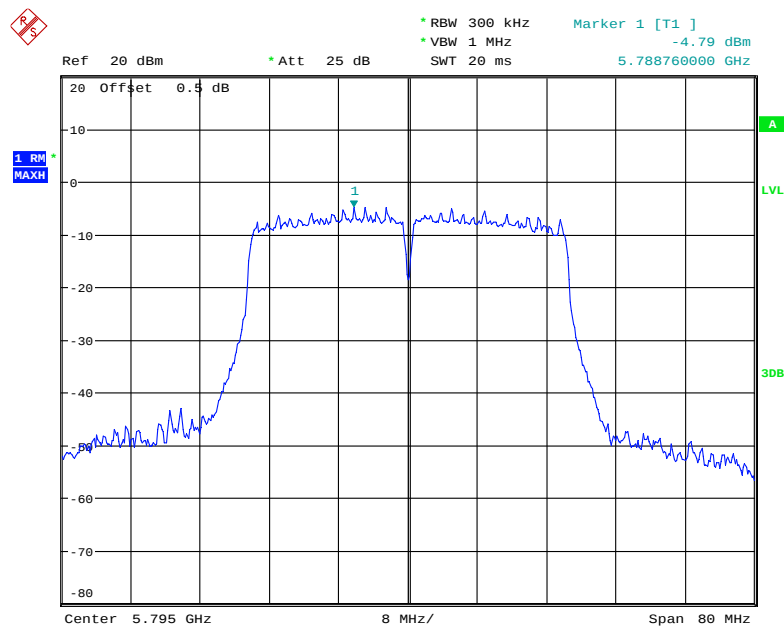

Date: 19.SEP.2020 14:56:25


**Module 2:
5150-5250MHz
Chain 0**

802.11a Low Channel

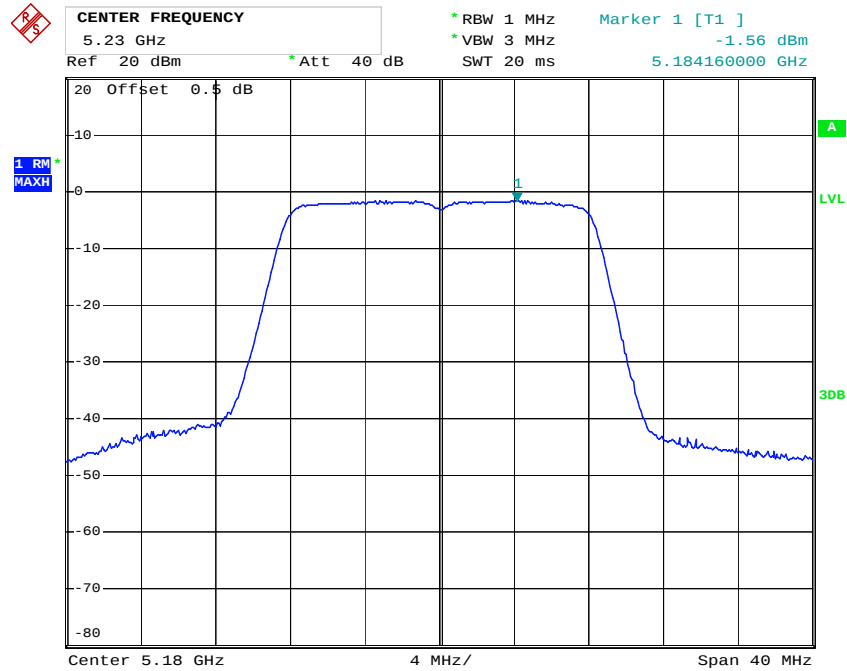


Date: 3.SEP.2020 05:50:48

802.11a Middle Channel

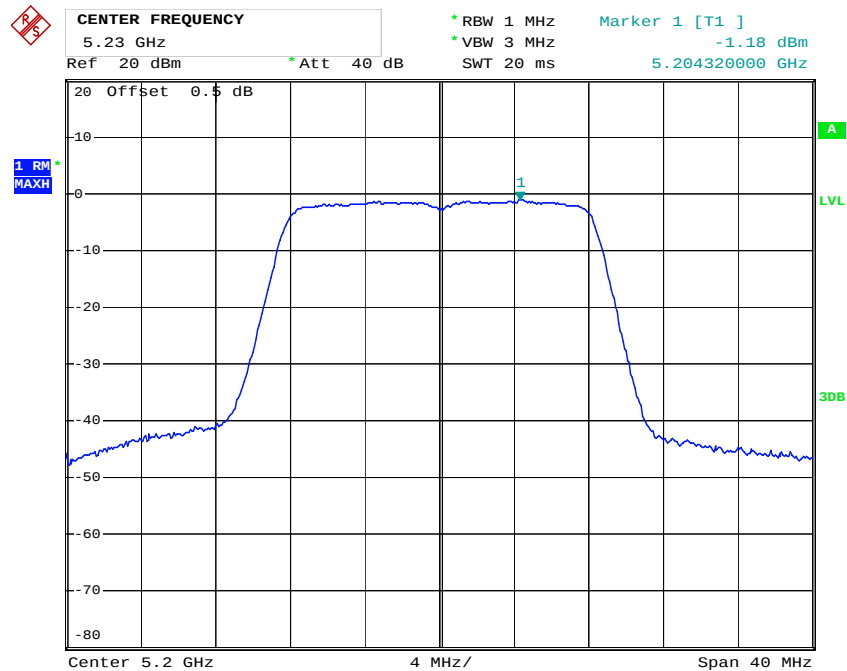


Date: 3.SEP.2020 05:51:12

802.11a High Channel

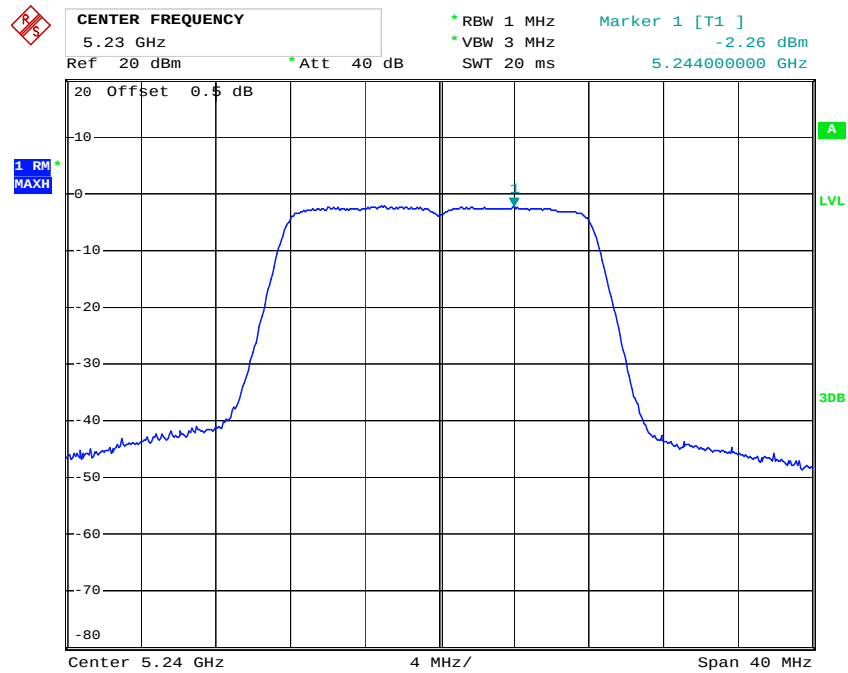


Date: 3.SEP.2020 05:41:27

802.11n ht20 Low Channel

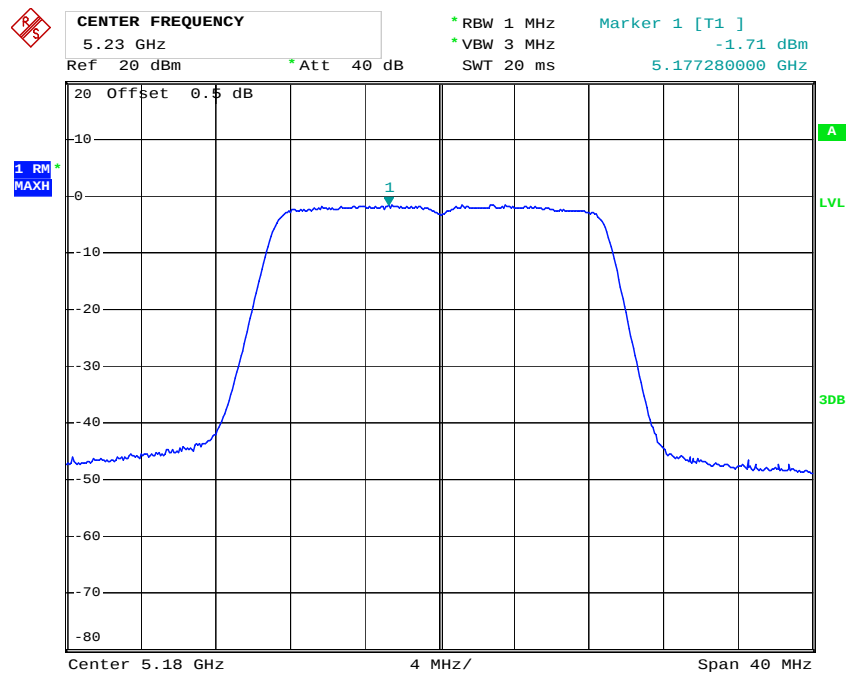


Date: 3.SEP.2020 05:47:55

802.11n ht20 Middle Channel

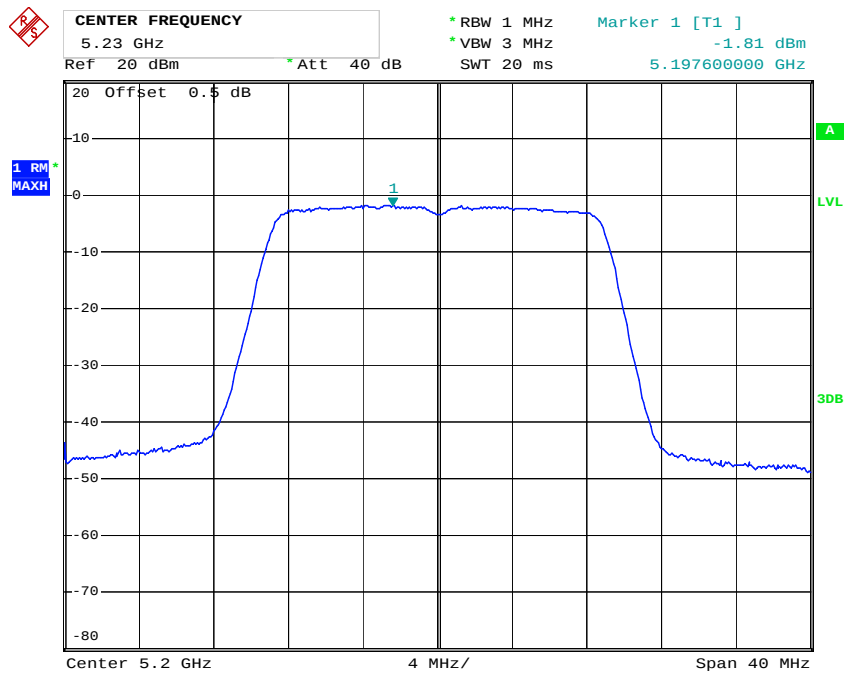


Date: 3.SEP.2020 05:48:43

802.11n ht20 High Channel

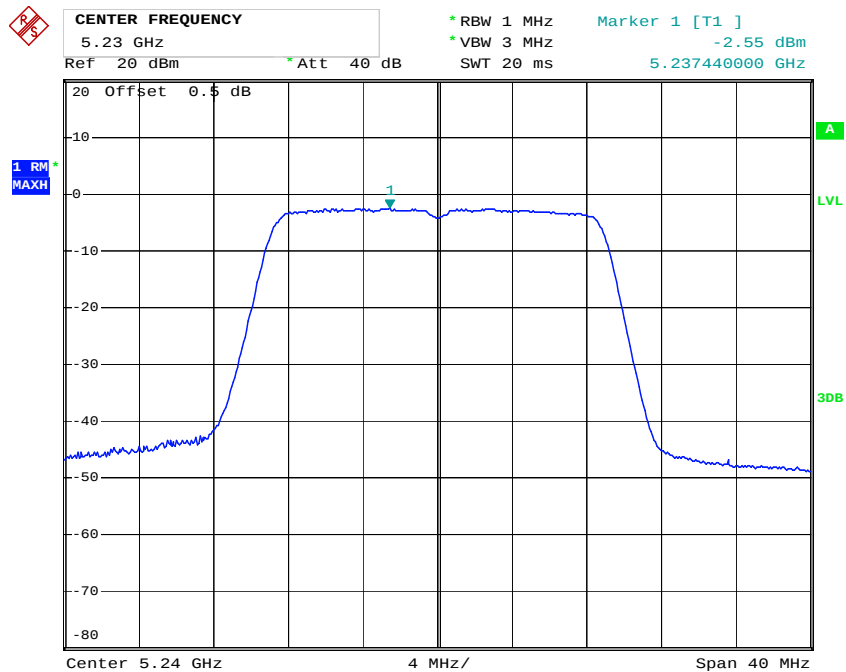


Date: 3.SEP.2020 05:49:25

802.11n ht40 Low Channel

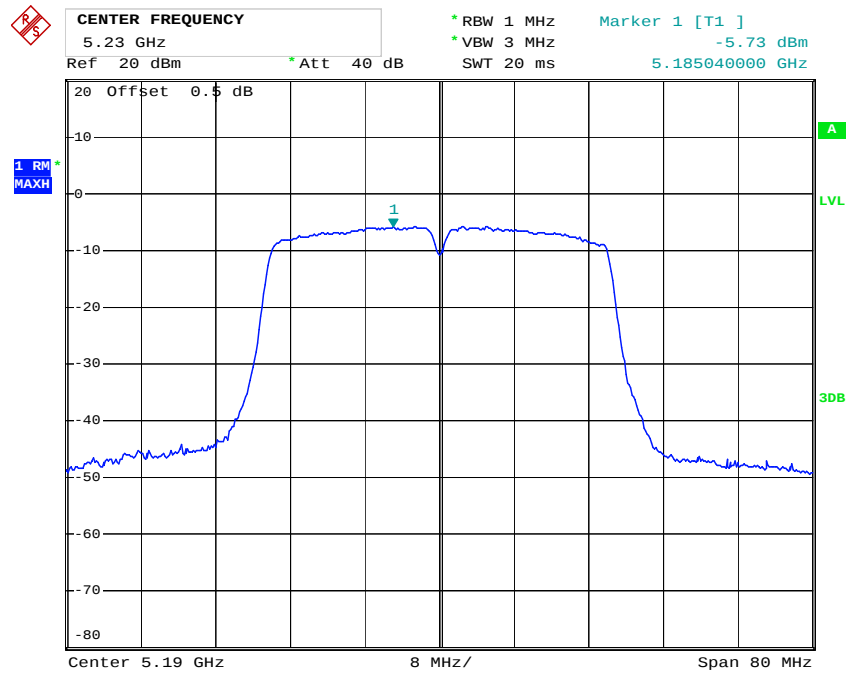

Date: 3.SEP.2020 05:46:13


802.11n ht40 High Channel

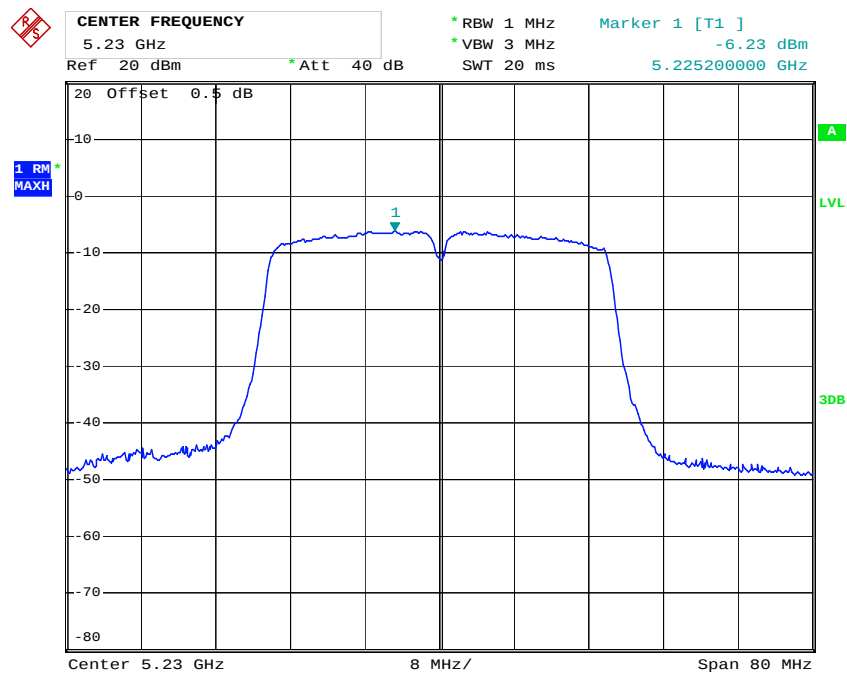

Date: 3.SEP.2020 05:47:03


Chain 1

802.11a Low Channel

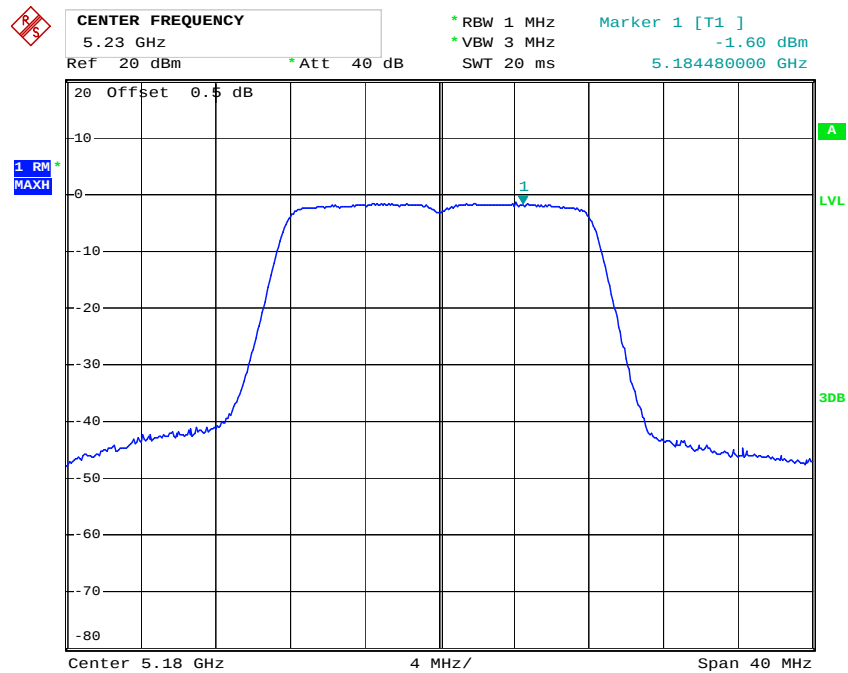


Date: 3.SEP.2020 05:52:24

802.11a Middle Channel

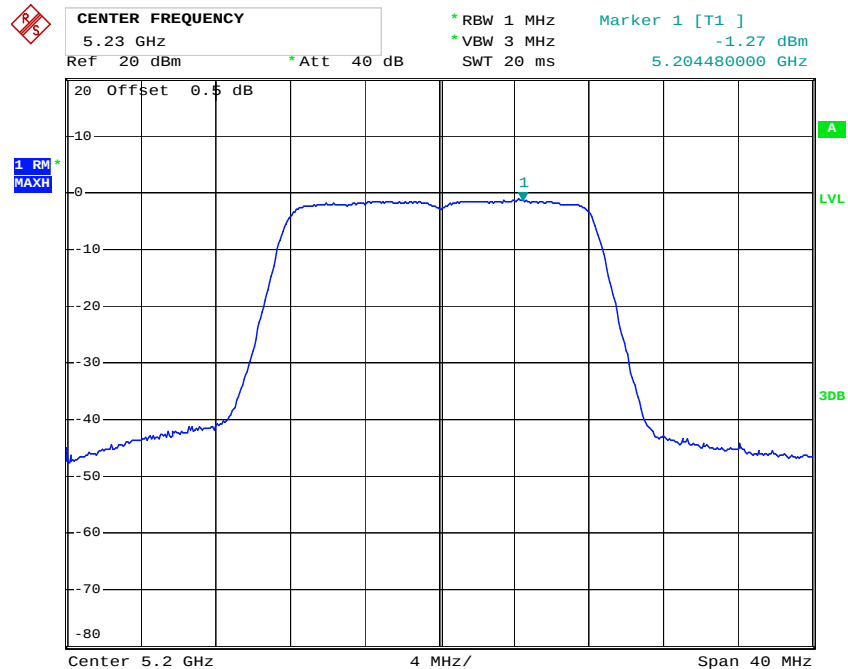


Date: 3.SEP.2020 05:51:39

802.11a High Channel

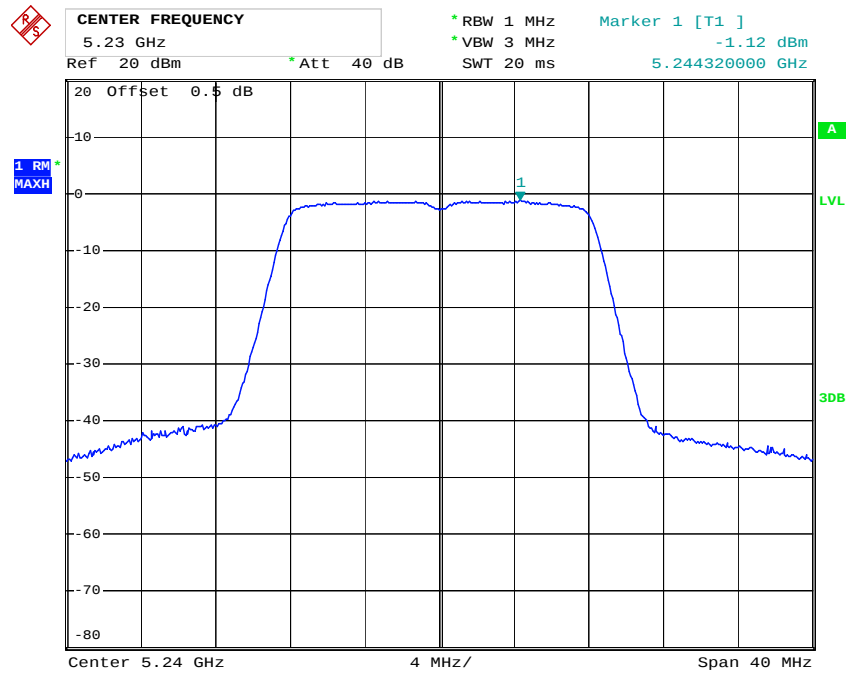


Date: 3.SEP.2020 05:53:39

802.11n ht20 Low Channel

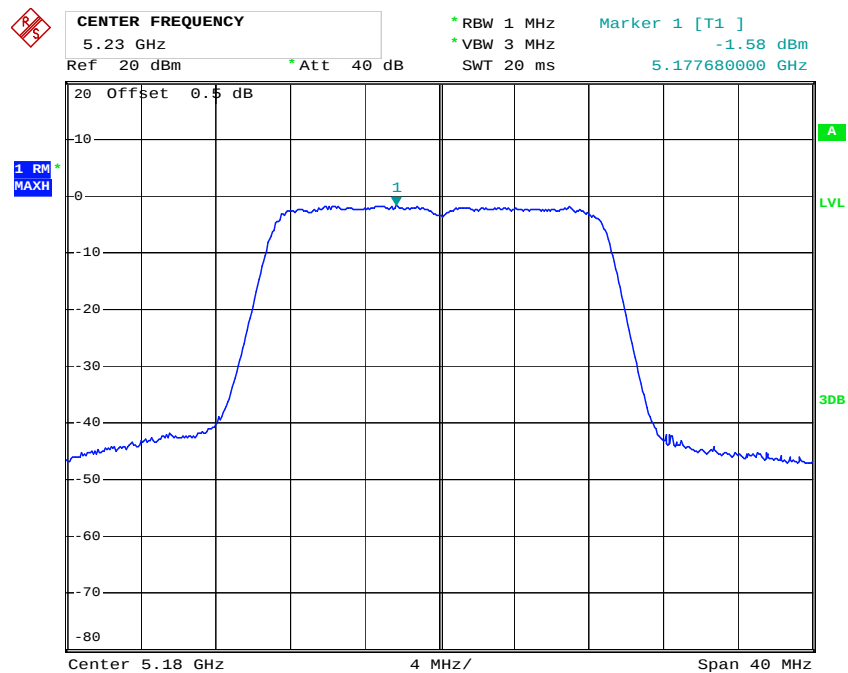


Date: 3.SEP.2020 05:54:17

802.11n ht20 Middle Channel

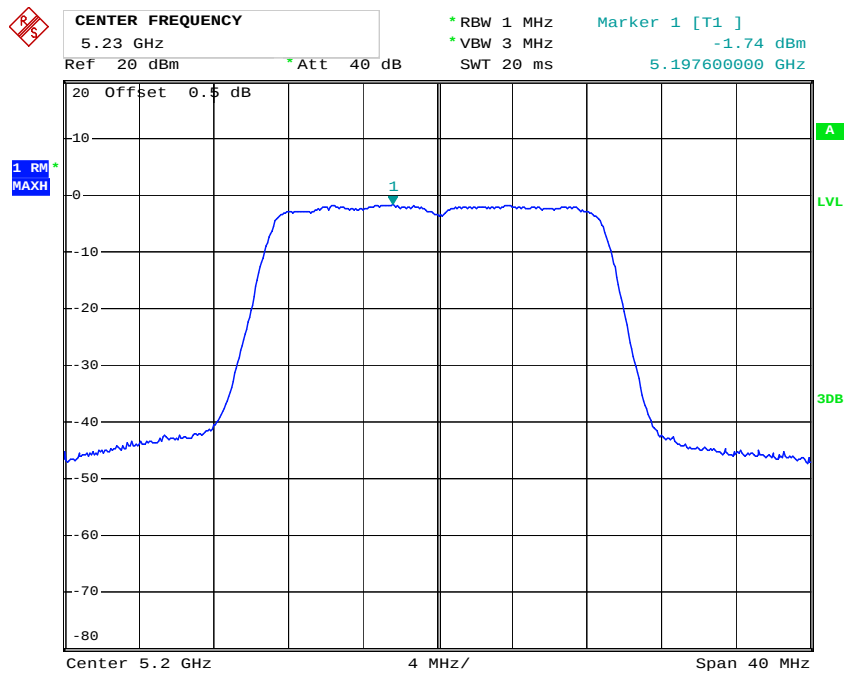


Date: 3.SEP.2020 05:54:59

802.11n ht20 High Channel

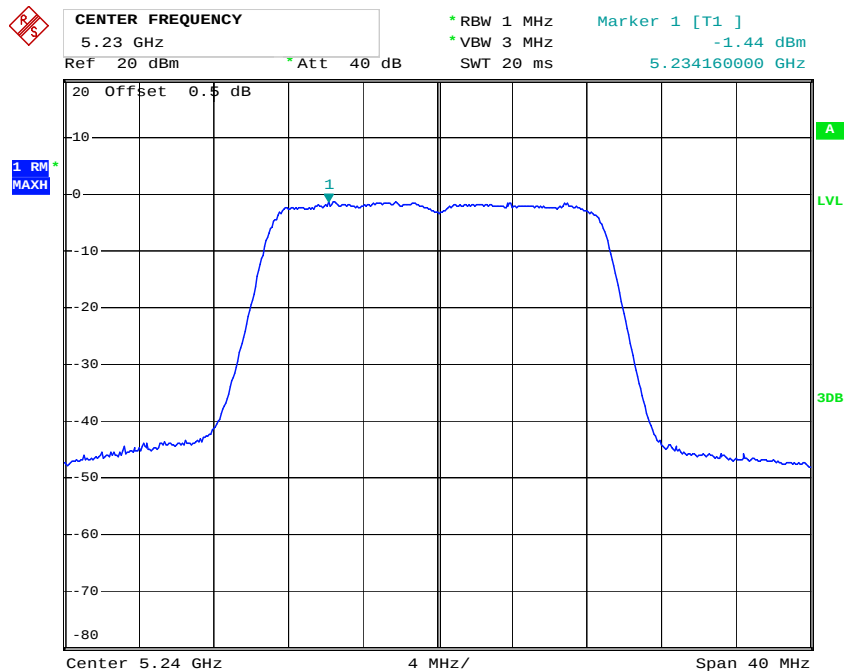


Date: 3.SEP.2020 05:56:18

802.11n ht40 Low Channel

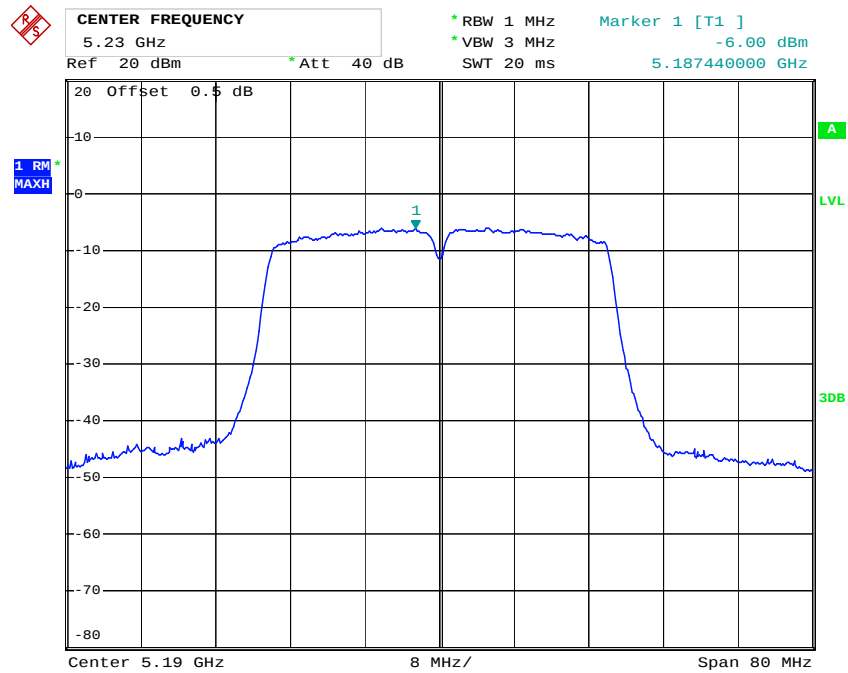

Date: 3.SEP.2020 05:59:17


802.11n ht40 High Channel

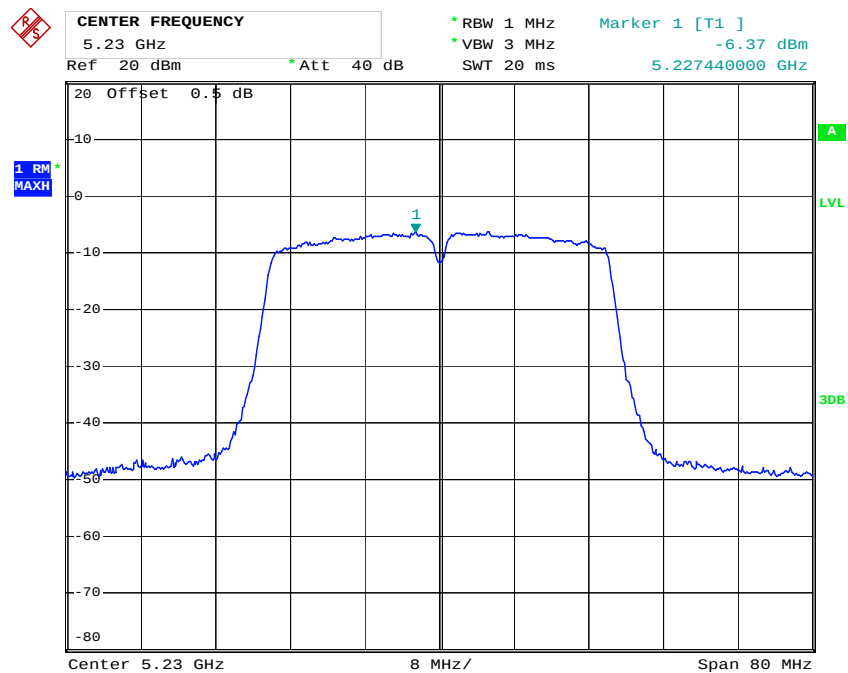

Date: 3.SEP.2020 05:59:43


**5725-5850MHz
Chain 0**

802.11a Low Channel

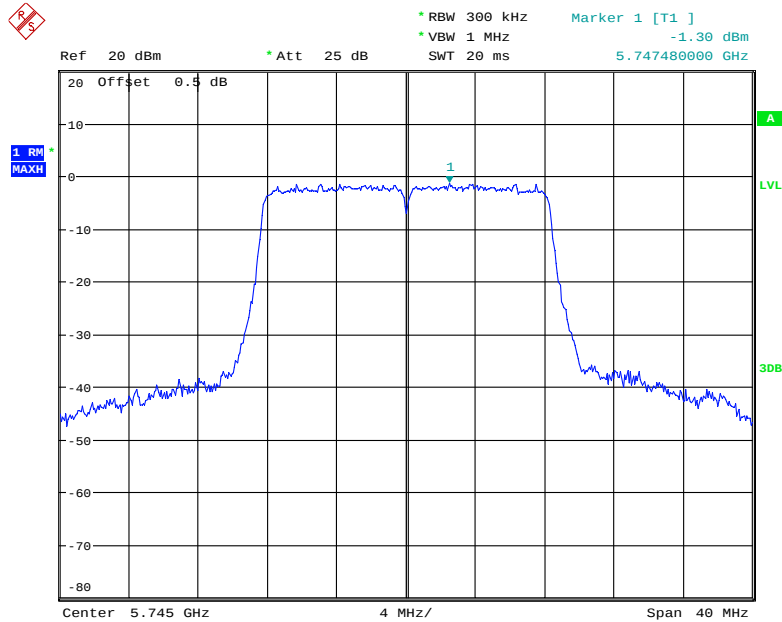


Date: 19.SEP.2020 15:36:24

802.11a Middle Channel

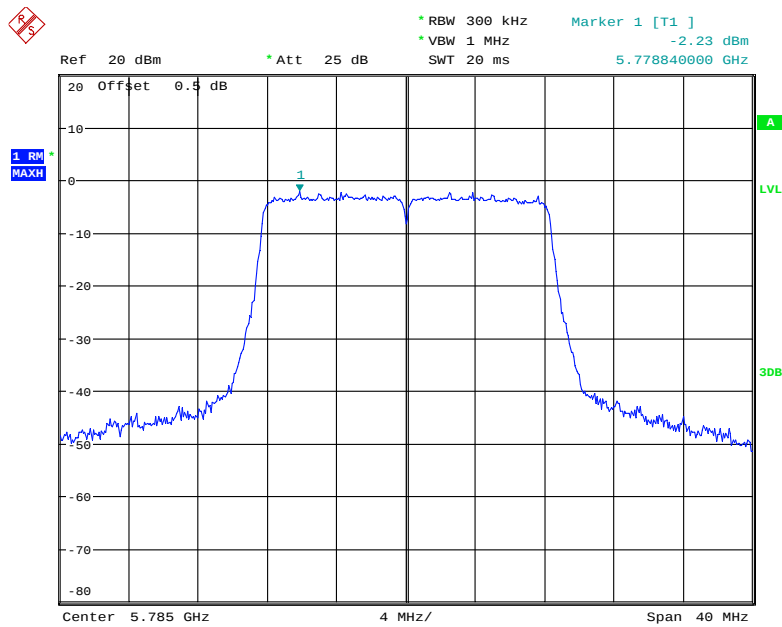


Date: 19.SEP.2020 15:38:52

802.11a High Channel

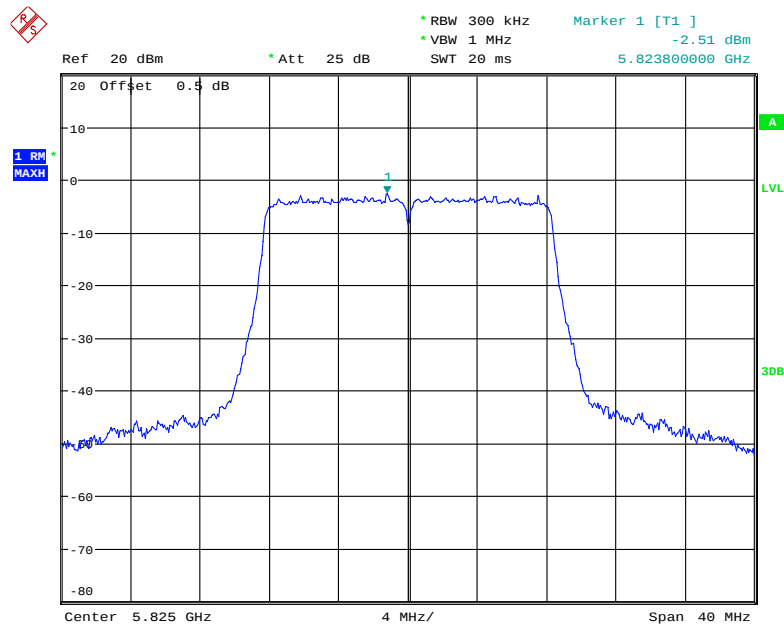


Date: 19.SEP.2020 15:39:53

802.11n ht20 Low Channel

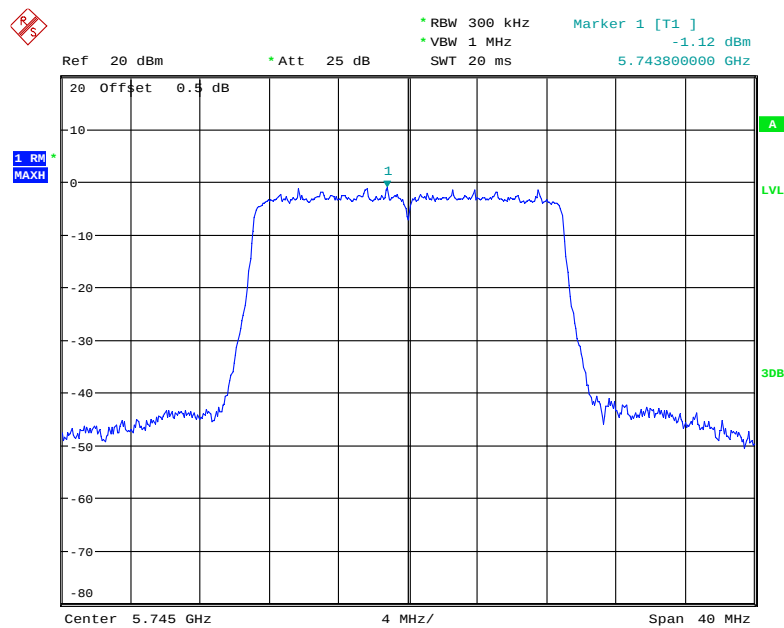


Date: 19.SEP.2020 15:41:23

802.11n ht20 Middle Channel

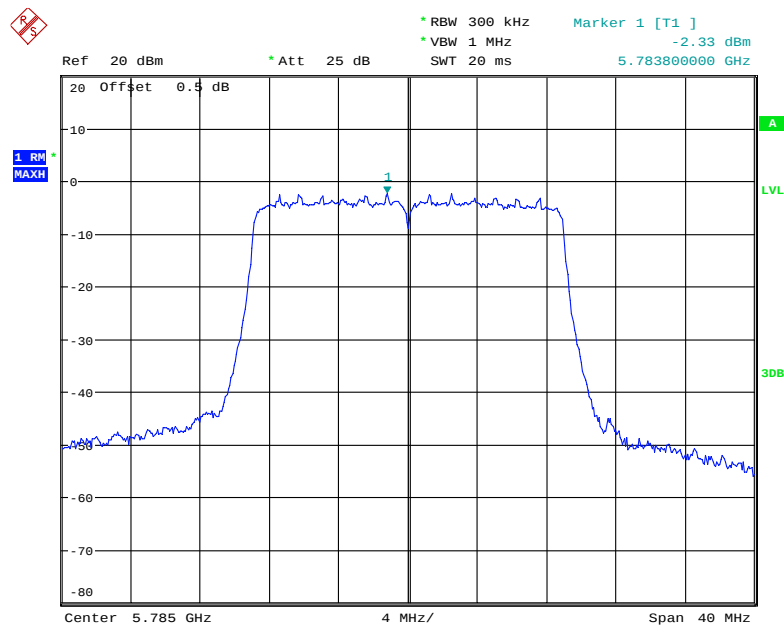


Date: 19.SEP.2020 15:55:19

802.11n ht20 High Channel

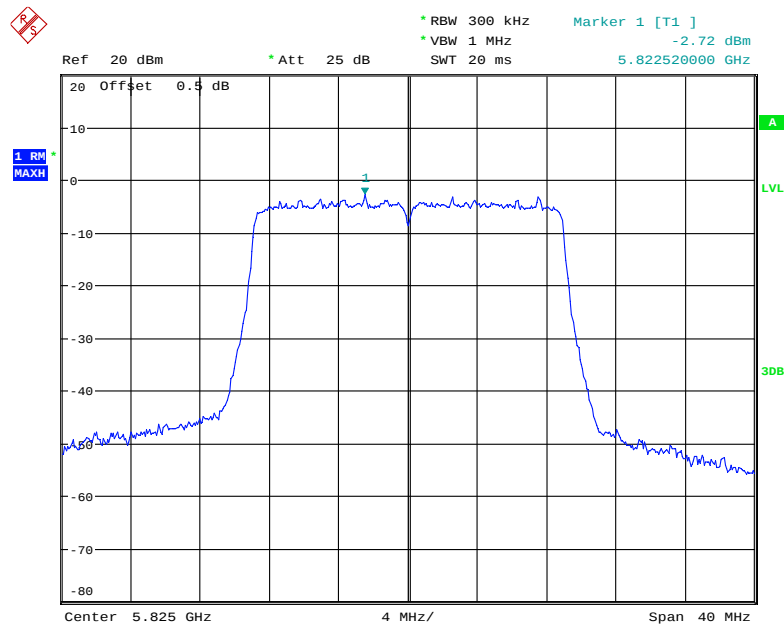


Date: 19.SEP.2020 15:56:53

802.11n ht40 Low Channel

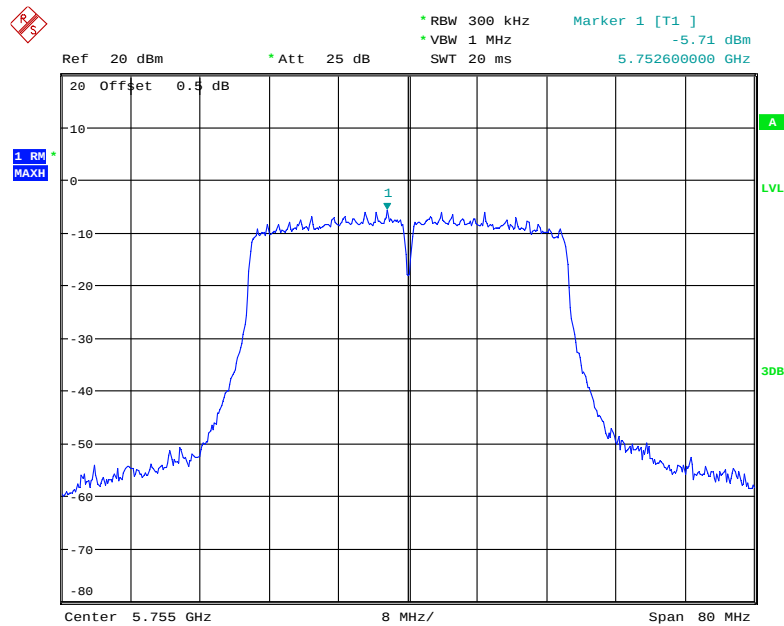

Date: 19.SEP.2020 16:00:43


802.11n ht40 High Channel

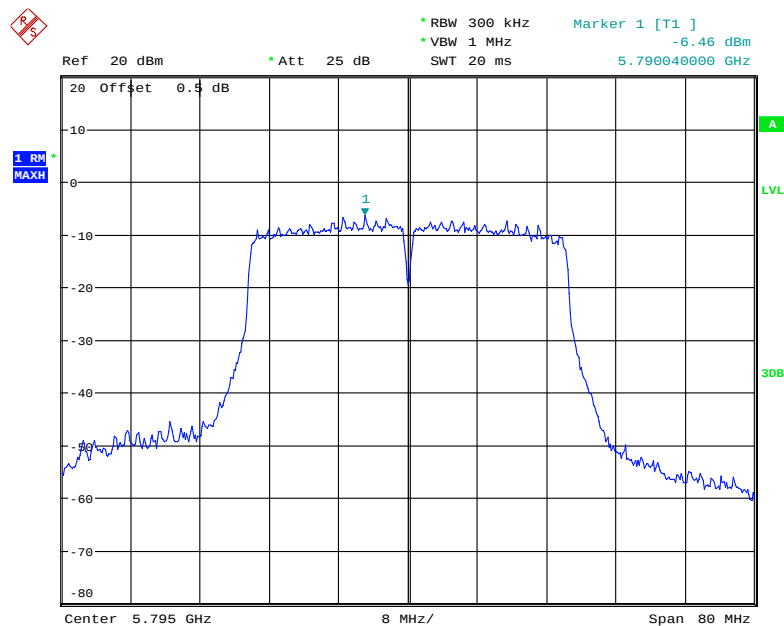

Date: 19.SEP.2020 16:02:50


Chain 1:

802.11a Low Channel

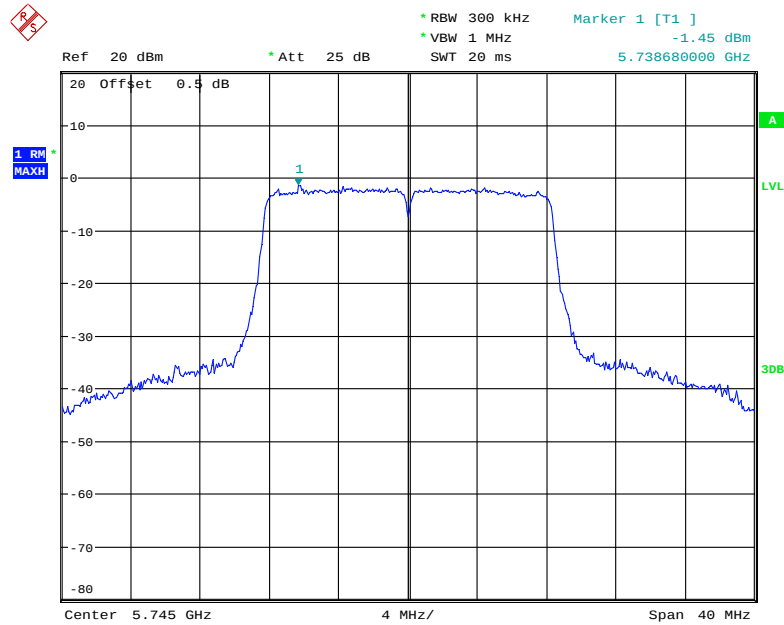


Date: 19.SEP.2020 16:04:13


802.11a Middle Channel

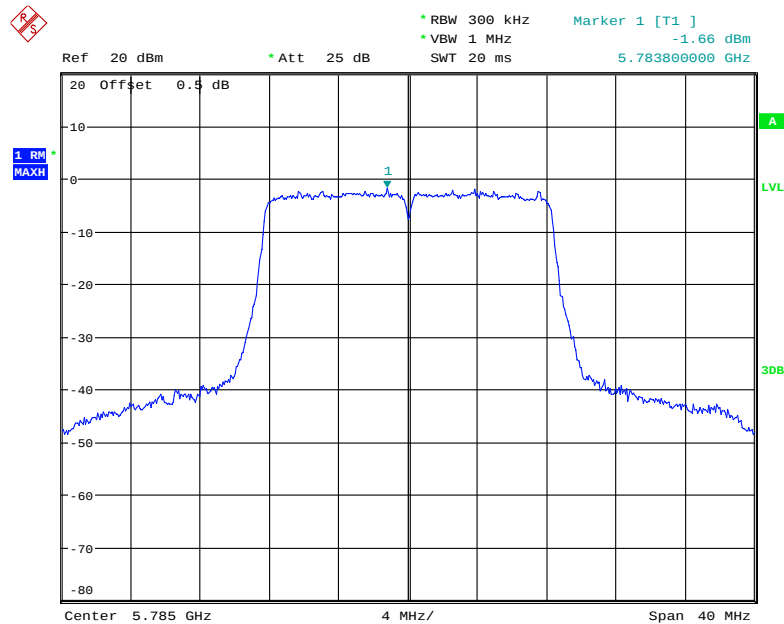

Date: 19.SEP.2020 16:05:02

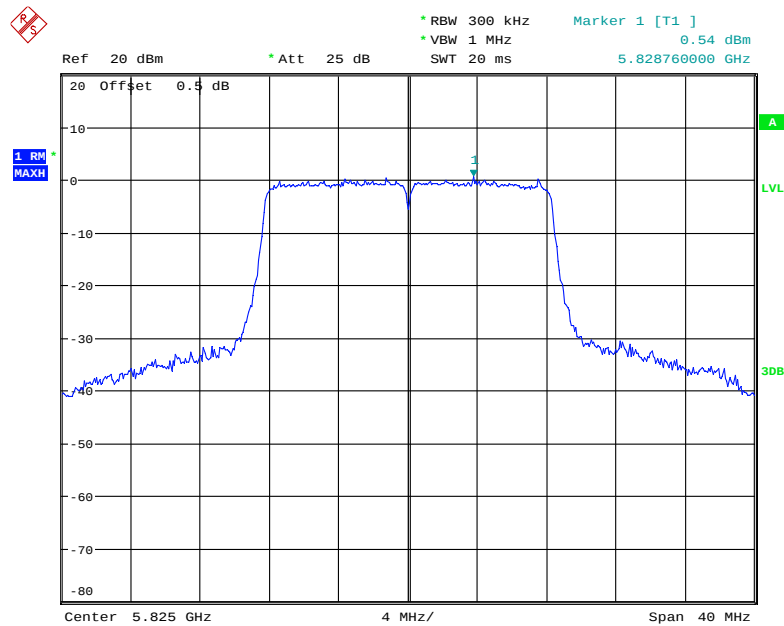
802.11a High Channel

Date: 19.SEP.2020 16:06:17

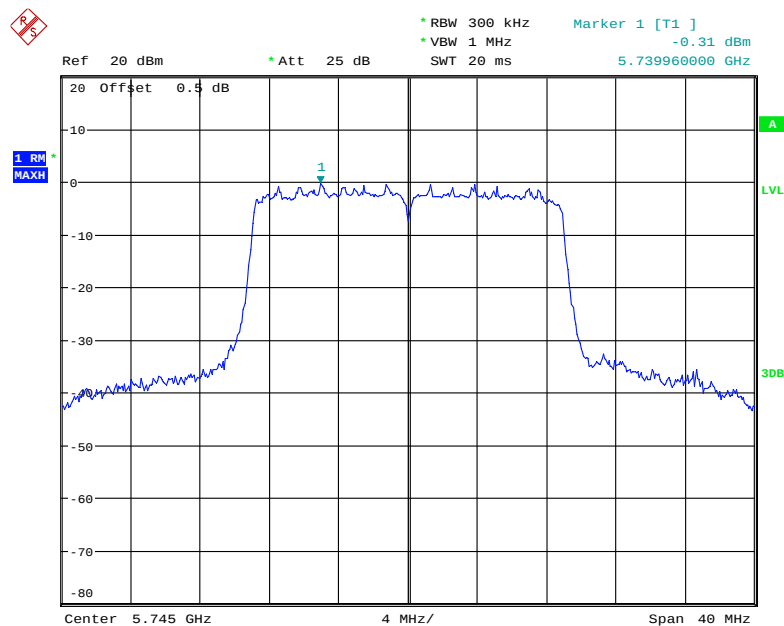802.11n ht20 Low Channel


Date: 19.SEP.2020 16:07:37

802.11n ht20 Middle Channel

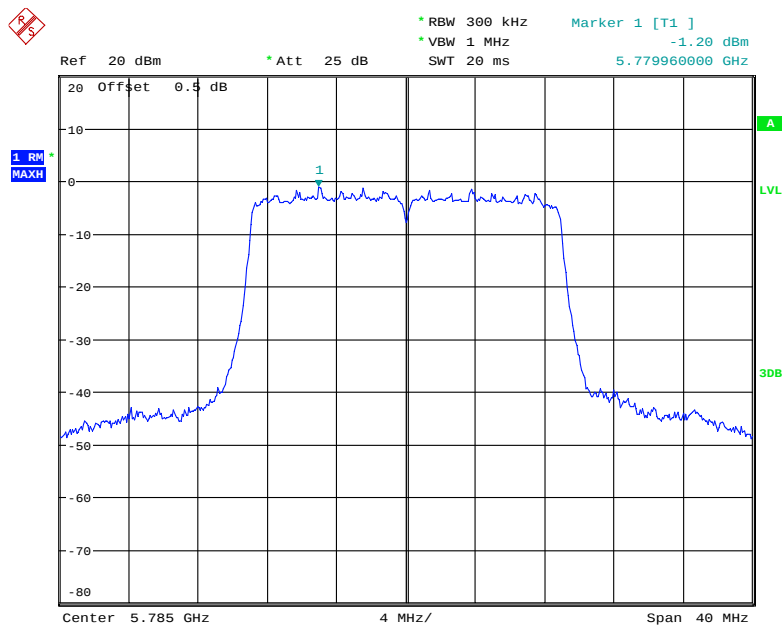


Date: 19.SEP.2020 16:08:17

802.11n ht20 High Channel

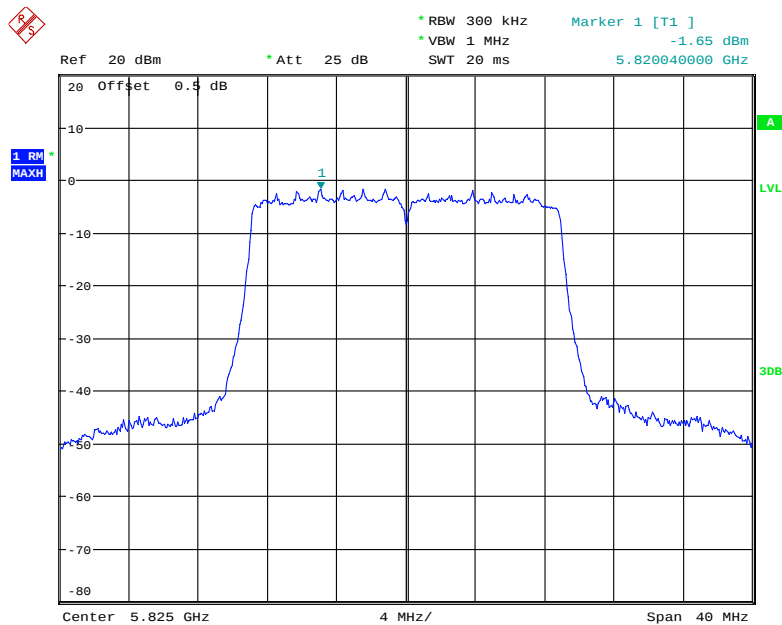


Date: 19.SEP.2020 16:09:02

802.11n ht40 Low Channel

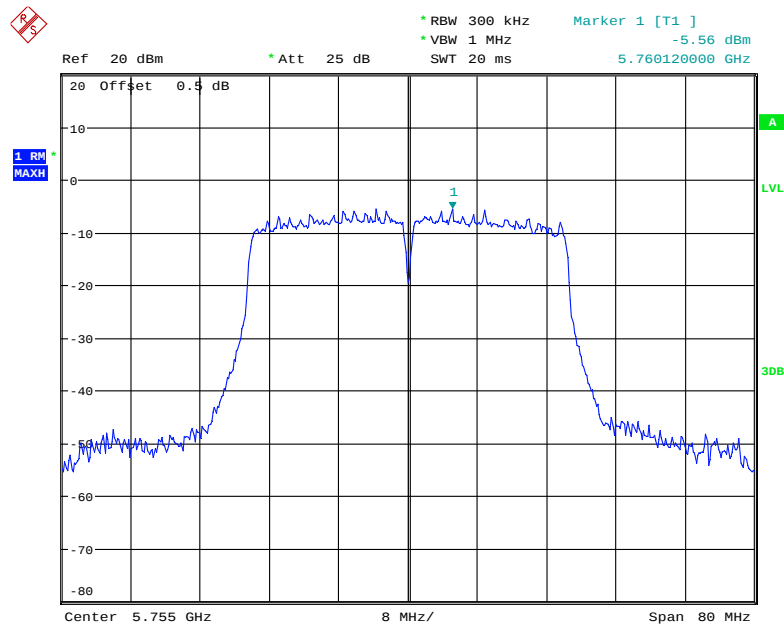

Date: 19.SEP.2020 16:10:06

802.11n ht40 High Channel

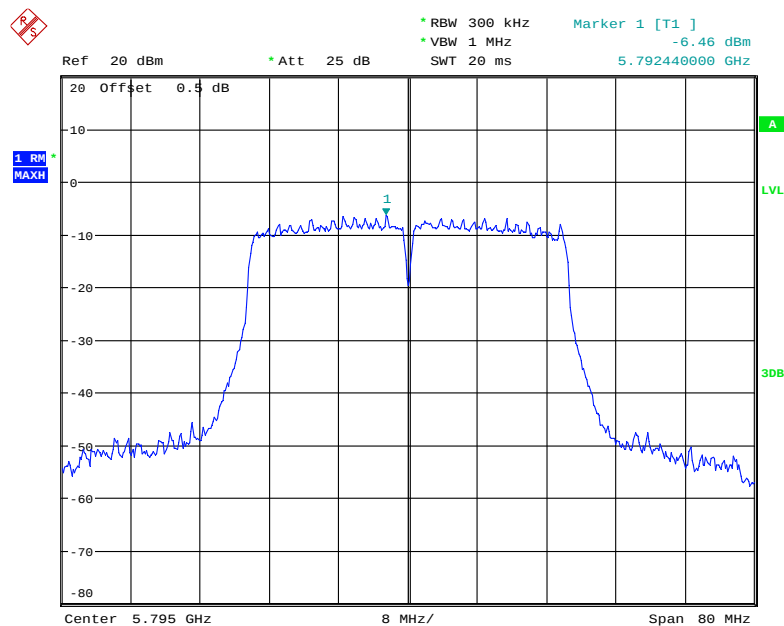

Date: 19.SEP.2020 16:10:35

***** END OF REPORT *****