



# **FCC RADIO TEST REPORT**

FCC ID : ACJFZT1A

**Equipment** : Tablet Computer

Brand Name : Panasonic Model Name : FZ-T1BB Marketing Name : FZ-T1

Applicant : Panasonic Corporation of North America

Two Riverfront Plaza, 9th Floor, Newark, NJ

07102-5490

Manufacturer : Panasonic Mobile Communications Co., Ltd.

600 Saedo-cho, Tsuzuki-ku, Yokohama City

224-8539, Japan

Standard : 47 CFR Part 2, 22(H), 24(E), 27

The product was received on Jul. 04, 2018 and testing was started from Jul. 04, 2018 and completed on Jul. 24, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

TEL: 886-3-327-3456

Ince/sai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Page Number

: 1 of 23

## **Table of Contents**

His	tory o	of this test report	3
Su	mmar	y of Test Result	4
1	Gene	eral Description	5
	1.1	Product Feature of Equipment Under Test	5
	1.2	Modification of EUT	5
	1.3	Testing Location	5
	1.4	Applicable Standards	6
2	Test	Configuration of Equipment Under Test	7
	2.1	Test Mode	7
	2.2	Connection Diagram of Test System	9
	2.3	Support Unit used in test configuration and system	9
	2.4	Measurement Results Explanation Example	9
	2.5	Frequency List of Low/Middle/High Channels	10
3	Cond	ducted Test Items	12
	3.1	Measuring Instruments	12
	3.2	Conducted Output Power and ERP/EIRP	13
	3.3	Peak-to-Average Ratio	14
	3.4	Occupied Bandwidth	15
	3.5	Conducted Band Edge	16
	3.6	Conducted Spurious Emission	18
	3.7	Frequency Stability	19
4	Radia	ated Test Items	20
	4.1	Measuring Instruments	20
	4.2	Radiated Spurious Emission	21
5	List	of Measuring Equipment	22
6	Unce	ertainty of Evaluation	23
Ap	pendi	x A. Test Results of Conducted Test	
Ap	pendi	x B. Test Results of ERP/EIRP and Radiated Test	
Ap	pendi	x C. Test Setup Photographs	

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Report Template No.: BU5-FGLTE Version 2.1

Page Number : 2 of 23 Issued Date : Aug. 27

: Aug. 27, 2018

Report No. : FG870417B

Report Version : 02

# History of this test report

Report No.: FG870417B

Report No.	Version	Description	Issued Date
FG870417B	01	Initial issue of report	Aug. 22, 2018
FG870417B	Update the test data of LTE Band 5 and LTE Band 12 in appendix A1 and appendix B1		Aug. 27, 2018

TEL: 886-3-327-3456 Page Number : 3 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

# **Summary of Test Result**

Report No.: FG870417B

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark	
	§2.1046	Conducted Output Power	Reporting only		
	§22.913 (a)(2)	Effective Radiated Power (Band 5)			
3.2	§27.50 (b)(10) §27.50 (c)(10)	Effective Radiated Power (Band 12) (Band 13)	Pass	-	
	§24.232 (c) §27.50 (h)(2)	Equivalent Isotropic Radiated Power (Band 2)	1 400		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (Band 4)			
3.3	§24.232 (d) §27.50 (d)(5)	Peak-to-Average Ratio	Pass	-	
3.4	§2.1049	Occupied Bandwidth	Reporting only	-	
3.5	\$2.1051 \$22.917 (a) \$24.238 (a) \$27.53 (c)(2)(4) \$27.53 (g) \$27.53 (h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5) (Band 12) (Band 13)	Pass	-	
3.6	\$2.1051 \$22.917 (a) \$24.238 (a) \$27.53 (c)(2) \$27.53 (g) \$27.53 (h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13)	Pass	-	
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-	
4.2	\$2.1053 \$22.917 (a) \$24.238 (a) \$27.53 (c)(2) \$27.53 (f) \$27.53 (g) \$27.53 (h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5) (Band 12) (Band 13)	Pass	Under limit 15.64 dB at 1560.000 MHz	

Reviewed by: Joseph Lin

Report Producer: Maggie Chiang

TEL: 886-3-327-3456 Page Number : 4 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

## 1 General Description

## 1.1 Product Feature of Equipment Under Test

WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, NFC, and GNSS.

Product Specification subjective to this standard						
	WWAN: Fixed Internal Antenna					
	WLAN: Monopole Antenna					
Antenna Type	Bluetooth: Monopole Antenna					
	NFC: Loop Antenna					
	GPS/Glonass: Monopole Antenna					

Report No.: FG870417B

#### 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.3 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.						
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978						
Test Site No.	Sporton Site No.						
rest site NO.	TH03-HY						

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.					
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855					
Test Site No.	Sporton Site No. 03CH13-HY					

Note: The test site complies with ANSI C63.4 2014 requirement.

TEL: 886-3-327-3456 Page Number : 5 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

## 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Report No.: FG870417B

- + ANSI C63.26-2015
- ANSI / TIA-603-E
- 47 CFR Part 2, 22(H), 24(E), 27
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

#### Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

TEL: 886-3-327-3456 Page Number : 6 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

# 2 Test Configuration of Equipment Under Test

#### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Report No.: FG870417B

: 02

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane and Z plane) were recorded in this report.

Test Items			В	andwid	dth (MF	łz)		Modu	lation		RB#		Tes	t Chan	nel
	Band	1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	М	н
	2	٧	٧	v	v	v	V	v	v	v	v	v	v	v	v
Max.	4	٧	٧	v	v	v	V	v	v	v	v	v	v	v	v
Output	5	٧	٧	v	v	•	•	v	v	v	v	v	v	v	v
Power	12	<b>v</b>	٧	v	v	•	•	v	v	v	v	v	v	v	v
	13	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	2						v	٧	v	v		v	v	٧	v
	4						v	v	v	v		v	٧	٧	v
Peak-to-Av erage Ratio	5				v	-	-	v	v	v		v	v	٧	v
orago riano	12				v	-	-	v	v	v		v	v	٧	v
	13	-	-		v	-	-	v	v	v		v	v	v	v
	2	v	v	٧	v	٧	v	V	v			v	v	٧	v
26dB and	4	v	v	٧	v	v	v	v	v			v	v	٧	v
99%	5	v	v	v	v	-	-	v	v			v	v	v	v
Bandwidth	12	v	v	٧	v	-	-	v	v			v	v	٧	v
	13	-	-	v	v	-	-	v	v			v	v	v	v
	2	v	v	v	v	v	v	٧	v	v		v	v		v
	4	v	٧	v	v	v	v	v	v	v		v	v		v
Conducted Band Edge	5	v	٧	v	v	-	-	v	v	٧		v	v		v
Dana Lage	12	v	v	v	v	-	-	٧	v	٧		v	v		v
	13	-	•	v	v	-	•	v	v	٧		v	٧		v


TEL: 886-3-327-3456 Page Number : 7 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018



			В	andwi	dth (M	Hz)		Modu	lation		RB#		Test Channel		
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	М	н
	2	v	v	v	v	v	v	v	v	v			v	v	v
Conducted	4	٧	v	v	٧	v	v	v	v	v			v	v	v
Spurious	5	v	v	٧	v	1	-	V	v	٧			v	٧	٧
Emission	12	v	v	٧	v	-	-	v	v	٧			v	٧	٧
	13	-	-	V	v	-	-	v	v	v			v	V	V
	2				٧			٧				v		٧	
	4				v			v				v		V	
Frequency Stability	5				v	-	-	v				v		V	
,	12				v	-	-	v				v		V	
	13	-	-		v	-	-	v				v		v	
	2	v	V	V	v	v	v	v	v	v	v		V	V	V
	4	v	v	v	v	v	v	v	v	v	v		v	v	v
E.R.P / E.I.R.P	5	v	v	v	v	-	-	v	v	v	v		v	V	v
	12	v	v	v	v	-	-	v	v	v	v		v	V	v
	13	-	-	v	v	-	-	v	v	v			v	V	v
	2						Woı	st Case					v	V	v
Radiated	4		Worst Case								v	v	v		
Spurious	5						Woı	rst Case					v	V	V
Emission	12						Woı	rst Case					v	V	V
	13							rst Case						V	
Remark	1. The mark "v " means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All the radiated test cases were performed with USB Cable 1.														

TEL: 886-3-327-3456 Page Number : 8 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

### 2.2 Connection Diagram of Test System

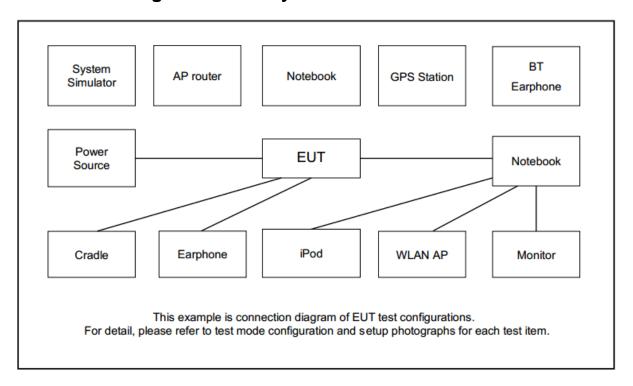

Report No.: FG870417B

#### 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Zyia	N/A	N/A	Unshielded, 1.2m	N/A

## 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

#### Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$ 

= 4.2 + 10 = 14.2 (dB)

TEL: 886-3-327-3456 Page Number : 9 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

# 2.5 Frequency List of Low/Middle/High Channels

	LTE Band 2 Channel and Frequency List											
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest								
20	Channel	18700	18900	19100								
20	Frequency	1860	1880	1900								
15	Channel	18675	18900	19125								
15	Frequency	1857.5	1880	1902.5								
10	Channel	18650	18900	19150								
10	Frequency	1855	1880	1905								
5	Channel	18625	18900	19175								
5	Frequency	1852.5	1880	1907.5								
3	Channel	18615	18900	19185								
3	Frequency	1851.5	1880	1908.5								
1.4	Channel	18607	18900	19193								
1.4	Frequency	1850.7	1880	1909.3								

Report No.: FG870417B

	LTE Band 4 Channel and Frequency List											
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest								
20	Channel	20050	20175	20300								
20	Frequency	1720	1732.5	1745								
15	Channel	20025	20175	20325								
15	Frequency	1717.5	1732.5	1747.5								
10	Channel	20000	20175	20350								
10	Frequency	1715	1732.5	1750								
5	Channel	19975	20175	20375								
5	Frequency	1712.5	1732.5	1752.5								
3	Channel	19965	20175	20385								
3	Frequency	1711.5	1732.5	1753.5								
1.4	Channel	19957	20175	20393								
1.4	Frequency	1710.7	1732.5	1754.3								

TEL: 886-3-327-3456 Page Number : 10 of 23 FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018 : 02 Report Version

Report Template No.: BU5-FGLTE Version 2.1

LTE Band 5 Channel and Frequency List											
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest							
10	Channel	20450	20525	20600							
10	Frequency	829	836.5	844							
5	Channel	20425	20525	20625							
5	Frequency	826.5	836.5	846.5							
2	Channel	20415	20525	20635							
3	Frequency	825.5	836.5	847.5							
1.4	Channel	20407	20525	20643							
1.4	Frequency	824.7	836.5	848.3							

LTE Band 12 Channel and Frequency List								
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest				
10	Channel	23060	23095	23130				
10	Frequency	704	707.5	711				
5	Channel	23035	23095	23155				
5	Frequency	701.5	707.5	713.5				
3	Channel	23025	23095	23165				
3	Frequency	700.5	707.5	714.5				
1.4	Channel	23017	23095	23173				
1.4	Frequency	699.7	707.5	715.3				

LTE Band 13 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz) Lowest Middle High								
10	Channel	-	23230	-					
10	Frequency	-	782	-					
5	Channel	23205	23230	23255					
5	Frequency	779.5	782	784.5					

TEL: 886-3-327-3456 Page Number : 11 of 23 FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018


#### 3 Conducted Test Items

### 3.1 Measuring Instruments

See list of measuring instruments of this test report.


#### 3.1.1 Test Setup

#### 3.1.2 Conducted Output Power




Report No.: FG870417B

# 3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

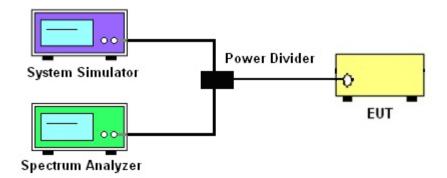

#### 3.1.4 Frequency Stability

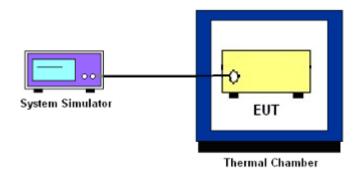

#### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 12 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

#### 3.2 Conducted Output Power and ERP/EIRP

# 3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Report No.: FG870417B

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 12 and Band 13.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4.

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$ , ERP = EIRP - 2.15, where

 $P_T$  = transmitter output power in dBm

 $G_T$  = gain of the transmitting antenna in dBi

 $\mathsf{L}_\mathsf{C}$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.2.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

TEL: 886-3-327-3456 Page Number : 13 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

#### 3.3 Peak-to-Average Ratio

#### 3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Report No.: FG870417B

#### 3.3.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.7.1

- 1. The EUT was connected to spectrum and system simulator via a power divider.
- 2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- 3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 4. Record the deviation as Peak to Average Ratio.

TEL: 886-3-327-3456 Page Number : 14 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

#### 3.4 Occupied Bandwidth

#### 3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

Report No.: FG870417B

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 4.2

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
   The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 4. Set the detection mode to peak, and the trace mode to max hold.
- Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
   (this is the reference value)
- 6. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

TEL: 886-3-327-3456 Page Number : 15 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 - 849 MHz band, the FCC limit is  $43 + 10\log_{10}(P[Watts])$  dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

Report No.: FG870417B

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is 43 + 10log<sub>10</sub>(P[Watts]) dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (c)

For operations in the 776-788 MHz band, the FCC limit is 43 +  $10\log_{10}(P[Watts])$  dB below the transmitter power P(Watts) in a 100 kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least 65 + 10 log10 p(watts), dB, for mobile and portable equipment.

27.53 (g)

For operations in the 600MHz band and 698 -746 MHz band, the FCC limit is 43 + 10log10(P[Watts]) dB below the transmitter power P(Watts) in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h)

For operations in the 1710 - 1755 MHz band, the FCC limit is  $43 + 10\log_{10}(P[Watts])$  dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

TEL: 886-3-327-3456 Page Number : 16 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

#### 3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The band edges of low and high channels for the highest RF powers were measured.
- 3. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.

Report No.: FG870417B

- 4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
- 5. Set spectrum analyzer with RMS detector.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- Checked that all the results comply with the emission limit line.
   The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 17 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

#### 3.6 Conducted Spurious Emission

#### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

Report No.: FG870417B

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
   The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
- 6. Set spectrum analyzer with RMS detector.
- 7. Taking the record of maximum spurious emission.
- 8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 9. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 18 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

#### 3.7 Frequency Stability

#### 3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

Report No.: FG870417B

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was set up in the thermal chamber and connected with the system simulator.
- 2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 Page Number : 19 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018


#### 4 Radiated Test Items

### 4.1 Measuring Instruments

See list of measuring instruments of this test report.


#### 4.1.1 Test Setup

#### For radiated test from 30MHz to 1GHz

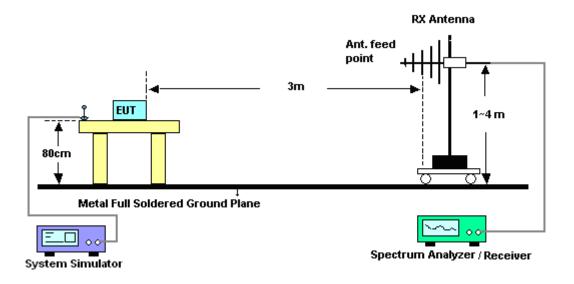

Report No.: FG870417B

#### For radiated test above 1GHz

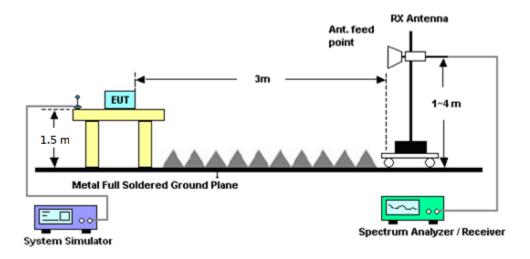

#### 4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

TEL: 886-3-327-3456 Page Number : 20 of 23 FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

#### 4.2 Radiated Spurious Emission

#### 4.2.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

Report No.: FG870417B

For LTE Band 13

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 21 of 23
FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

# 5 List of Measuring Equipment

					Calibration			
Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201432821	GSM/GPRS /WCDMA/LTE	Oct. 13, 2017	Jul.04.2018~ Jul.21.2018	Oct. 12, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 09, 2017	Jul.04.2018~ Jul.21.2018	Nov. 08, 2018	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-30°℃~70°℃	Aug. 28, 2017	Jul.04.2018~ Jul.21.2018	Aug. 27, 2018	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~5A	Oct. 06, 2017	Jul.04.2018~ Jul.21.2018	Oct. 05, 2018	Conducted (TH05-HY)
Coupler	Warison	1-18GHz 20d B 25WSMA D irectional Cou pler	#B	1G~18GHz	Dec.04, 2017	Jul.04.2018~ Jul.21.2018	Dec. 03, 2018	Conducted (DF02-HY)
Amplifier	Sonoma-Instru ment	310 N	187282	9KHz~1GHz	Dec. 21, 2016	Jul. 23, 2018~ Jul. 24, 2018	Dec. 20, 2018	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	40103&07	30MHz to 1GHz	Jan. 10, 2018	Jul. 23, 2018~ Jul. 24, 2018	Jan. 09, 2019	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1241	1GHz ~ 18GHz	Jun. 29, 2018	Jul. 23, 2018~ Jul. 24, 2018	Jun. 28, 2019	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Feb. 02, 2018	Jul. 23, 2018~ Jul. 24, 2018	Feb. 01, 2019	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 15, 2018	Jul. 23, 2018~ Jul. 24, 2018	Mar. 14, 2019	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS- 4500-B	N/A	1m~4m	N/A	Jul. 23, 2018~ Jul. 24, 2018	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jul. 23, 2018~ Jul. 24, 2018	N/A	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1522	1G~18GHz	May 10, 2018	Jul. 23, 2018~ Jul. 24, 2018	May 09, 2019	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 27, 2017	Jul. 23, 2018~ Jul. 24, 2018	Nov. 26, 2018	Radiation (03CH13-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 15, 2018	Jul. 23, 2018~ Jul. 24, 2018	Jan. 14, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30M-18G	Jan. 22, 2018	Jul. 23, 2018~ Jul. 24, 2018	Jan. 21, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	335041/4	30M-18G	Jan. 22, 2018	Jul. 23, 2018~ Jul. 24, 2018	Jan. 21, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30M~18GHz	Jan. 22, 2018	Jul. 23, 2018~ Jul. 24, 2018	Jan. 21, 2019	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Oct. 17, 2017	Jul. 23, 2018~ Jul. 24, 2018	Oct. 16, 2018	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Oct. 17, 2017	Jul. 23, 2018~ Jul. 24, 2018	Oct. 16, 2018	Radiation (03CH13-HY)
Software	AUDIX	E3 6.2009-8-24c	RK-001124	N/A	N/A	Jul. 23, 2018~ Jul. 24, 2018	N/A	Radiation (03CH13-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03K	17100018000 54002	1GHz~18GHz	Apr. 16, 2018	Jul. 23, 2018~ Jul. 24, 2018	Apr. 15, 2019	Radiation (03CH13-HY)
Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Jul. 23, 2018~ Jul. 24, 2018	Jul. 15, 2019	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000- 60SS	SN2	3G High Pass	Sep. 18, 2017	Jul. 23, 2018~ Jul. 24, 2018	Sep. 17, 2018	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-108 0-1200-15000- 60ST	SN2	1.2G High Pass	Sep. 18, 2017	Jul. 23, 2018~ Jul. 24, 2018	Sep. 17, 2018	Radiation (03CH13-HY)

Report No.: FG870417B

TEL: 886-3-327-3456 Page Number : 22 of 23 FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018

# 6 Uncertainty of Evaluation

#### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3.07
Confidence of 95% (U = 2Uc(y))	

Report No.: FG870417B

#### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	2.49
Confidence of 95% (U = 2Uc(y))	3.48

#### **Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)**

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.92
---	------

TEL: 886-3-327-3456 Page Number : 23 of 23 FAX: 886-3-328-4978 Issued Date : Aug. 27, 2018



# **Appendix A. Test Results of Conducted Test**

# Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]							
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	
20	1	0		23.38	23.47	23.27	
20	1	49		23.69	23.53	23.57	
20	1	99		23.53	23.27	23.16	
20	50	0	QPSK	22.41	22.36	22.32	
20	50	24		22.25	22.21	22.44	
20	50	50		22.37	22.14	22.32	
20	100	0		22.32	22.24	22.32	
20	1	0		22.34	22.49	22.50	
20	1	49		22.04	22.05	22.78	
20	1	99		22.11	21.96	22.53	
20	50	0	16-QAM	21.43	21.45	21.27	
20	50	24		21.27	21.13	21.36	
20	50	50		21.11	21.30	21.36	
20	100	0		21.33	21.26	21.34	
15	1	0		23.38	23.33	23.36	
15	1	37		23.47	23.22	23.45	
15	1	74		23.23	23.29	23.45	
15	36	0	QPSK	22.19	22.28	22.55	
15	36	20		22.34	22.22	22.51	
15	36	39		22.42	22.23	22.37	
15	75	0		22.31	22.24	22.34	
15	1	0		22.63	22.09	22.46	
15	1	37		22.65	21.94	22.40	
15	1	74		22.51	22.08	22.41	
15	36	0	16-QAM	21.17	21.17	21.36	
15	36	20		21.27	21.33	21.42	
15	36	39		21.34	21.24	21.31	
15	75	0		21.26	21.18	21.32	



SPORTON LAB.	CC RAD	IO TEST	REPORT		Repo	rt No. : FG870417B
		LTE	Band 2 Max	kimum Average Po	wer [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0		23.30	23.32	23.47
10	1	25		23.42	23.48	23.52
10	1	49		23.37	23.14	23.40
10	25	0	QPSK	22.39	22.26	22.50
10	25	12		22.19	22.27	22.46
10	25	25		22.27	22.15	22.31
10	50	0		22.28	22.23	22.45
10	1	0		22.60	22.60	22.50
10	1	25		22.95	22.71	22.59
10	1	49		22.91	22.28	22.44
10	25	0	16-QAM	21.14	21.18	21.62
10	25	12		21.14	21.28	21.61
10	25	25		21.11	21.18	21.52
10	50	0		21.25	21.15	21.46
5	1	0		23.07	23.36	23.14
5	1	12		23.00	23.49	23.19
5	1	24		22.98	23.30	23.26
5	12	0	QPSK	22.14	22.12	22.25
5	12	7		22.19	22.09	22.22
5	12	13		22.18	22.13	22.31
5	25	0		22.15	22.14	22.26
5	1	0		22.24	22.74	22.58
5	1	12		22.37	22.15	22.56
5	1	24		22.67	22.31	22.79
5	12	0	16-QAM	20.98	21.09	21.15
5	12	7		21.01	21.09	21.01
5	12	13		21.03	21.13	21.20
5	25	0		21.10	21.14	21.25



LTE Band 2 Maximum Average Power [dBm]							
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	
3	1	0		23.28	23.26	23.24	
3	1	8		23.08	23.19	23.14	
3	1	14		23.16	23.14	23.26	
3	8	0	QPSK	22.29	22.16	22.47	
3	8	4		22.23	22.20	22.52	
3	8	7		22.29	22.23	22.39	
3	15	0		22.25	22.21	22.40	
3	1	0		22.54	22.43	22.69	
3	1	8		22.30	22.36	22.62	
3	1	14		22.43	22.33	22.62	
3	8	0	16-QAM	21.01	21.02	21.35	
3	8	4		20.96	20.96	21.26	
3	8	7		21.11	20.99	21.46	
3	15	0		21.04	20.81	21.54	
1.4	1	0		23.29	23.06	23.38	
1.4	1	3		23.21	23.13	23.40	
1.4	1	5		23.21	22.97	23.32	
1.4	3	0	QPSK	23.27	23.19	23.50	
1.4	3	1		23.40	23.24	23.61	
1.4	3	3		23.34	23.24	23.48	
1.4	6	0		22.37	22.23	22.41	
1.4	1	0		21.97	22.08	22.18	
1.4	1	3		22.13	22.42	22.46	
1.4	1	5		21.96	21.99	22.44	
1.4	3	0	16-QAM	22.10	21.96	22.53	
1.4	3	1		22.44	22.24	22.44	
1.4	3	3		22.44	22.00	22.33	
1.4	6	0		21.14	20.92	21.41	



# FCC RADIO TEST REPORT

LTE Band 4 Maximum Average Power [dBm]							
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	
20	1	0	Mod	24.11	23.63	23.67	
20	1	49		24.00	23.77	23.84	
20	1	99		23.84	23.56	23.60	
20	50	0	QPSK	22.93	22.87	22.82	
20	50	24		22.83	22.73	22.79	
20	50	50		22.73	22.69	22.77	
20	100	0		22.79	22.78	22.84	
20	1	0		22.77	22.90	22.87	
20	1	49		22.72	23.00	23.02	
20	1	99		22.73	22.80	22.62	
20	50	0	16-QAM	21.78	21.80	21.92	
20	50	24		21.74	21.70	21.79	
20	50	50		21.90	21.64	21.64	
20	100	0		21.83	21.70	21.83	
15	1	0		24.02	23.87	23.89	
15	1	37		24.01	23.74	24.05	
15	1	74		23.76	23.71	23.76	
15	36	0	QPSK	22.95	22.87	22.78	
15	36	20		22.86	22.75	22.79	
15	36	39		22.90	22.76	22.79	
15	75	0		22.97	22.81	22.73	
15	1	0		23.37	23.22	23.13	
15	1	37		23.00	22.89	23.19	
15	1	74		23.09	22.46	23.12	
15	36	0	16-QAM	21.88	21.90	21.82	
15	36	20		21.74	21.80	21.75	
15	36	39		21.82	21.68	21.71	
15	75	0		22.01	21.86	21.81	



	LTE Band 4 Maximum Average Power [dBm]							
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest		
10	1	0	Mod	23.97	23.91	23.65		
10	1	25		24.10	24.00	23.90		
10	1	49		23.89	23.71	23.57		
10	25	0	QPSK	22.94	22.85	22.89		
10	25	12		22.90	22.88	22.77		
10	25	25		22.93	22.77	22.75		
10	50	0		22.89	22.83	22.77		
10	1	0		23.29	22.85	23.04		
10	1	25		23.36	23.23	23.30		
10	1	49		23.29	22.59	22.78		
10	25	0	16-QAM	21.97	21.99	21.74		
10	25	12		21.94	21.76	21.74		
10	25	25		21.97	21.84	21.71		
10	50	0		21.94	21.88	21.83		
5	1	0		23.60	23.85	23.63		
5	1	12		23.96	24.02	23.98		
5	1	24		23.79	23.84	23.60		
5	12	0	QPSK	22.78	22.75	22.69		
5	12	7		22.79	22.75	22.74		
5	12	13		22.79	22.74	22.67		
5	25	0		22.84	22.69	22.72		
5	1	0		23.12	22.88	23.28		
5	1	12		23.31	22.53	22.97		
5	1	24		23.07	22.86	23.24		
5	12	0	16-QAM	21.78	21.71	21.63		
5	12	7		21.73	21.78	21.60		
5	12	13		21.72	21.88	21.63		
5	25	0		21.83	21.74	21.57		



# FCC RADIO TEST REPORT

		LTE	Band 4 Max	kimum Average Po	wer [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0		24.00	23.75	23.84
3	1	8		23.92	23.69	23.75
3	1	14		24.05	23.69	23.74
3	8	0	QPSK	22.86	22.68	22.76
3	8	4		22.89	22.73	22.72
3	8	7		22.84	22.74	22.69
3	15	0		22.80	22.70	22.64
3	1	0		22.67	22.94	22.46
3	1	8		22.49	22.91	22.57
3	1	14		22.46	22.89	22.62
3	8	0	16-QAM	21.75	21.88	21.63
3	8	4		21.90	21.89	21.74
3	8	7		21.82	21.74	21.61
3	15	0		21.85	21.51	21.61
1.4	1	0		23.86	23.69	23.71
1.4	1	3		23.93	23.75	23.69
1.4	1	5		23.80	23.71	23.63
1.4	3	0	QPSK	23.96	23.70	23.77
1.4	3	1		24.02	23.75	23.82
1.4	3	3		23.99	23.75	23.74
1.4	6	0		22.95	22.77	22.72
1.4	1	0		22.83	22.88	22.57
1.4	1	3		23.06	22.76	22.52
1.4	1	5		22.48	22.73	22.30
1.4	3	0	16-QAM	22.57	22.89	22.69
1.4	3	1		23.07	23.14	22.96
1.4	3	3		23.09	23.05	22.99
1.4	6	0		21.96	21.79	21.44



LTE Band 5 Maximum Average Power [dBm]								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest		
10	1	0		23.77	23.67	23.78		
10	1	25		23.90	23.85	23.96		
10	1	49		23.60	23.39	23.54		
10	25	0	QPSK	22.85	22.71	22.72		
10	25	12		22.81	22.75	22.66		
10	25	25		22.72	22.76	22.71		
10	50	0		22.72	22.71	22.79		
10	1	0		22.90	22.96	22.70		
10	1	25		22.51	22.73	22.88		
10	1	49		22.87	22.76	22.50		
10	25	0	16-QAM	21.69	21.66	21.91		
10	25	12		21.67	21.60	21.93		
10	25	25		21.60	21.50	21.85		
10	50	0		21.84	21.73	21.86		
5	1	0		23.91	23.49	23.66		
5	1	12		23.92	23.62	23.85		
5	1	24		23.87	23.49	23.61		
5	12	0	QPSK	22.74	22.67	22.73		
5	12	7		22.73	22.75	22.59		
5	12	13		22.78	22.62	22.65		
5	25	0		22.74	22.68	22.62		
5	1	0		22.90	22.88	22.70		
5	1	12		22.72	22.88	22.62		
5	1	24		22.60	22.72	22.51		
5	12	0	16-QAM	21.77	21.63	21.54		
5	12	7		21.69	21.61	21.49		
5	12	13		21.73	21.62	21.58		
5	25	0		21.97	21.67	21.82		



LTE Band 5 Maximum Average Power [dBm]								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest		
3	1	0		23.71	23.82	23.75		
3	1	8		23.59	23.69	23.72		
3	1	14		23.71	23.60	23.56		
3	8	0	QPSK	22.82	22.71	22.81		
3	8	4		22.60	22.73	22.63		
3	8	7		22.75	22.78	22.63		
3	15	0		22.77	22.68	22.62		
3	1	0		22.91	22.83	22.69		
3	1	8		22.86	22.86	22.56		
3	1	14		22.81	22.76	22.50		
3	8	0	16-QAM	21.91	21.52	21.57		
3	8	4		21.82	21.47	21.46		
3	8	7		21.89	21.50	21.53		
3	15	0		21.91	21.72	21.57		
1.4	1	0		23.68	23.75	23.51		
1.4	1	3		23.65	23.72	23.55		
1.4	1	5		23.50	23.65	23.50		
1.4	3	0	QPSK	23.72	23.69	23.76		
1.4	3	1		23.65	23.79	23.61		
1.4	3	3		23.78	23.76	23.54		
1.4	6	0		22.81	22.82	22.53		
1.4	1	0		22.84	22.88	22.85		
1.4	1	3		22.69	22.77	22.74		
1.4	1	5		22.98	22.87	22.51		
1.4	3	0	16-QAM	22.77	22.83	22.52		
1.4	3	1		22.75	22.72	22.78		
1.4	3	3		22.64	22.95	22.66		
1.4	6	0		21.83	21.75	21.64		



LTE Band 12 Maximum Average Power [dBm]								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest		
10	1	0		23.51	23.48	23.77		
10	1	25		24.00	23.68	23.91		
10	1	49		23.49	23.23	23.57		
10	25	0	QPSK	22.69	22.61	22.66		
10	25	12		22.64	22.62	22.69		
10	25	25		22.63	22.52	22.68		
10	50	0		22.68	22.63	22.72		
10	1	0		22.24	22.90	22.84		
10	1	25		22.69	22.95	23.23		
10	1	49		22.37	22.35	22.71		
10	25	0	16-QAM	21.71	21.86	21.58		
10	25	12		21.70	21.84	21.58		
10	25	25		21.89	21.68	21.58		
10	50	0		21.61	21.53	21.52		
5	1	0		23.75	23.73	23.76		
5	1	12		23.83	23.63	23.84		
5	1	24		23.84	23.46	23.84		
5	12	0	QPSK	22.60	22.64	22.61		
5	12	7		22.59	22.64	22.77		
5	12	13		22.53	22.62	22.69		
5	25	0		22.64	22.62	22.66		
5	1	0		22.56	23.09	23.13		
5	1	12		22.63	22.92	22.77		
5	1	24		22.90	23.19	23.27		
5	12	0	16-QAM	21.57	21.56	21.34		
5	12	7		21.59	21.41	21.41		
5	12	13		21.54	21.57	21.42		
5	25	0		21.43	21.67	21.66		



LTE Band 12 Maximum Average Power [dBm]								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest		
3	1	0		23.82	23.74	23.71		
3	1	8		23.77	23.51	23.80		
3	1	14		23.74	23.49	23.71		
3	8	0	QPSK	22.55	22.53	22.58		
3	8	4		22.57	22.45	22.64		
3	8	7		22.52	22.49	22.61		
3	15	0		22.62	22.64	22.52		
3	1	0		22.45	23.11	23.04		
3	1	8		22.62	22.94	22.76		
3	1	14		22.93	23.13	23.23		
3	8	0	16-QAM	21.50	21.57	21.29		
3	8	4		21.58	21.46	21.47		
3	8	7		21.43	21.46	21.30		
3	15	0		21.38	21.63	21.49		
1.4	1	0		23.59	23.67	23.57		
1.4	1	3		23.59	23.61	23.60		
1.4	1	5		23.29	23.62	23.65		
1.4	3	0	QPSK	23.66	23.64	23.71		
1.4	3	1		23.73	23.73	23.67		
1.4	3	3		23.67	23.67	23.81		
1.4	6	0		22.60	22.55	22.77		
1.4	1	0		22.63	22.89	23.13		
1.4	1	3		23.19	23.33	23.14		
1.4	1	5	16-QAM	22.79	22.78	23.02		
1.4	3	0		22.75	22.73	22.80		
1.4	3	1		22.68	22.67	22.91		
1.4	3	3		22.58	22.67	22.70		
1.4	6	0		20.96	21.64	21.48		



# FCC RADIO TEST REPORT

LTE Band 13 Maximum Average Power [dBm]								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest		
10	1	0			23.80			
10	1	25			23.89			
10	1	49			23.52			
10	25	0	QPSK		22.76			
10	25	12			22.69			
10	25	25			22.61			
10	50	0			22.66			
10	1	0		-	23.06	-		
10	1	25			23.42			
10	1	49			22.83			
10	25	0	16-QAM		21.58			
10	25	12			21.69			
10	25	25			21.50			
10	50	0			21.56			
5	1	0		23.68	23.67	23.61		
5	1	12		23.72	23.88	23.61		
5	1	24		23.49	23.75	23.46		
5	12	0	QPSK	22.77	22.71	22.71		
5	12	7		22.79	22.75	22.63		
5	12	13		22.66	22.71	22.61		
5	25	0		22.65	22.68	22.67		
5	1	0		23.28	22.54	22.55		
5	1	12		22.97	22.50	22.89		
5	1	24		22.82	22.38	22.72		
5	12	0	16-QAM	21.46	21.57	21.65		
5	12	7		21.52	21.65	21.43		
5	12	13		21.46	21.63	21.49		
5	25	0		21.58	21.68	21.58		


# LTE Band 2

# Peak-to-Average Ratio

Mode					
Mod.	QPSK		16C	Limit: 13dB	
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.94	4.67	4.61	5.71	
Middle CH	4.64	4.93	5.22	5.97	PASS
Highest CH	4.58	4.96	4.99	5.97	


TEL: 886-3-327-3456 Page Number : A2-1 of 41

FAX: 886-3-328-4978

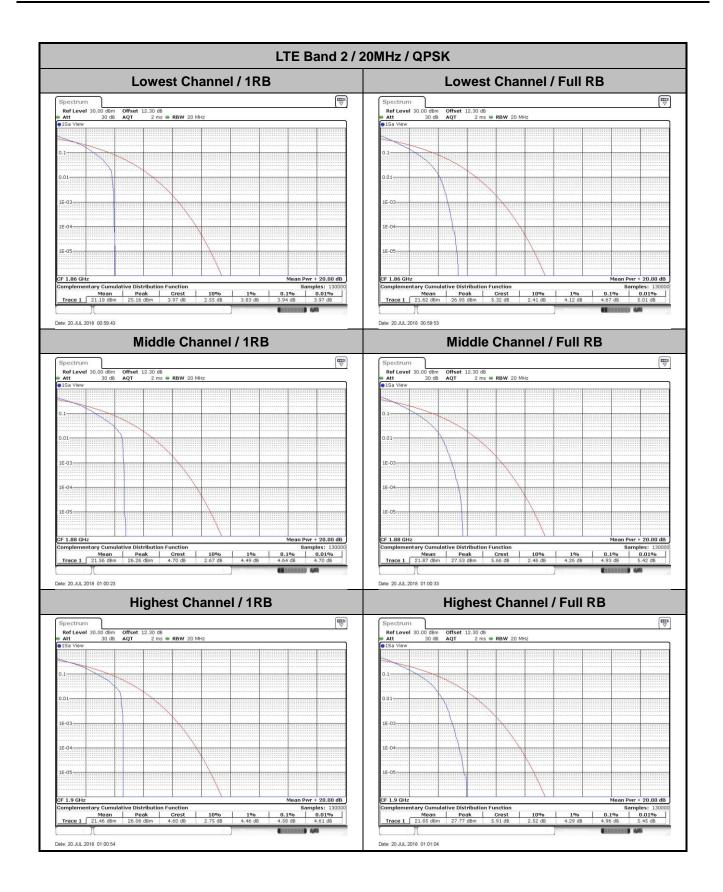

TEL: 886-3-327-3456 Page Number: A2-2 of 41

FAX: 886-3-328-4978

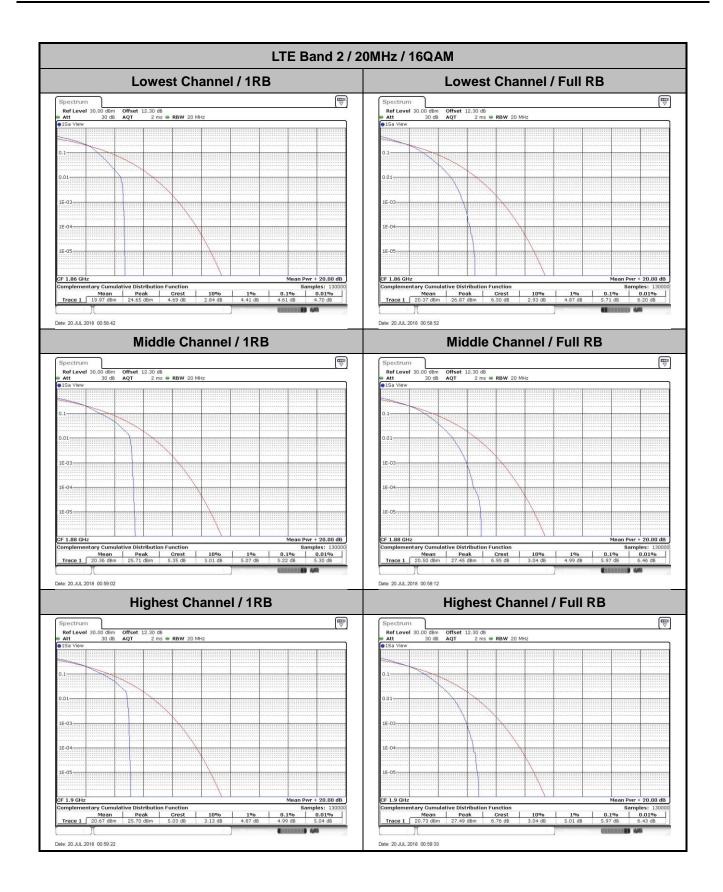


TEL: 886-3-327-3456 Page Number: A2-3 of 41

26dB Bandwidth


Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.29	1.281	3.033	2.961	5.005	4.855	9.91	9.95	14.535	14.505	20.14	20.18
Middle CH	1.262	1.287	3.015	3.021	4.825	4.955	9.65	9.83	14.446	14.715	20.18	20.26
Highest CH	1.27	1.242	3.003	3.027	4.875	4.925	9.77	9.91	14.416	14.685	20.26	20.14

Report No. :FG870417B


TEL: 886-3-327-3456 Page Number : A2-4 of 41

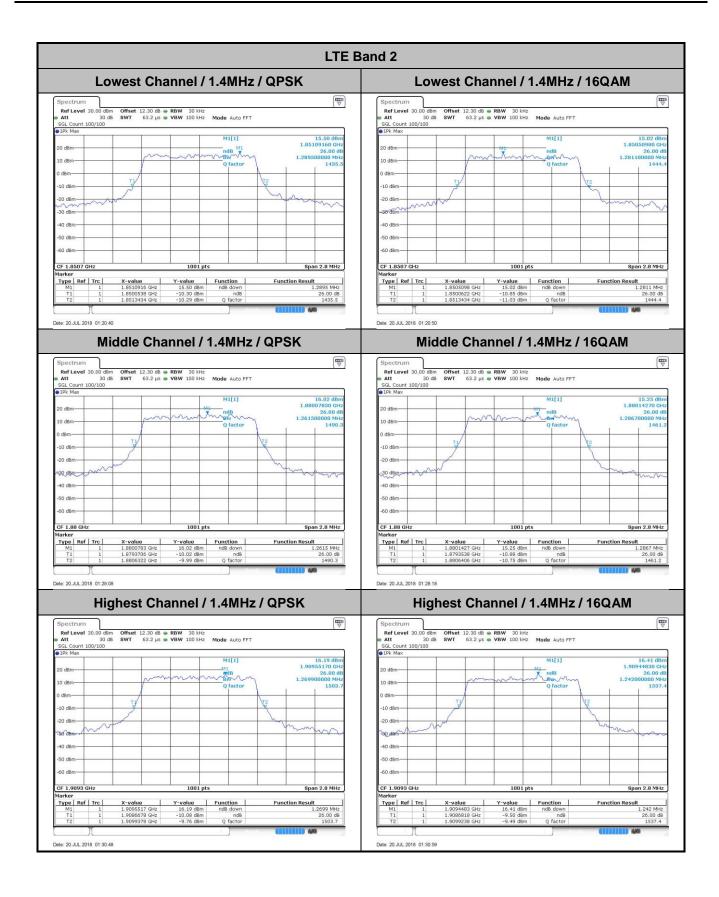


TEL: 886-3-327-3456 Page Number: A2-5 of 41

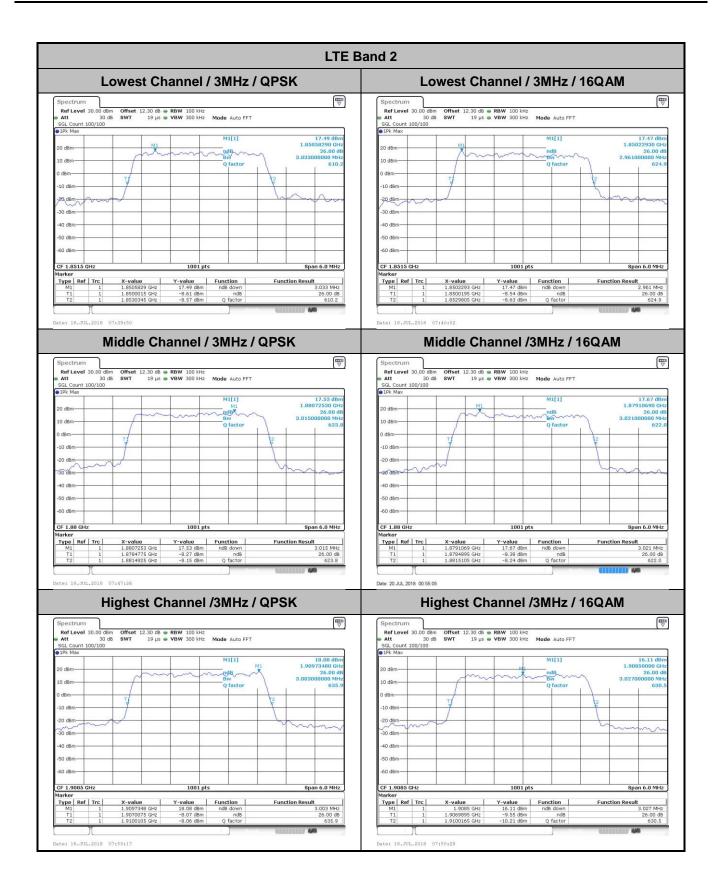

TEL: 886-3-327-3456 Page Number: A2-6 of 41

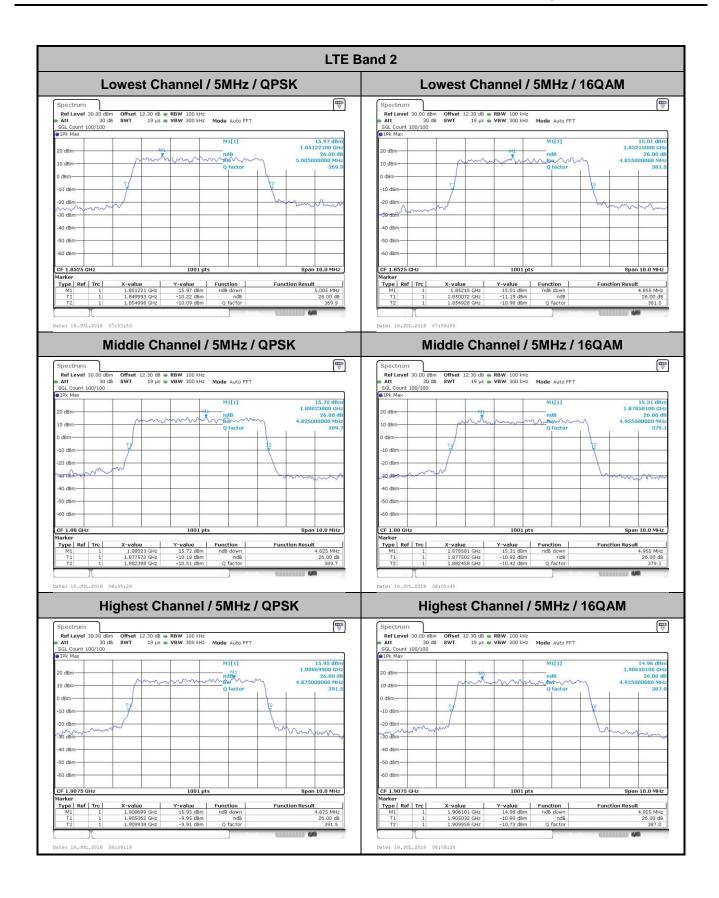


TEL: 886-3-327-3456 Page Number : A2-7 of 41

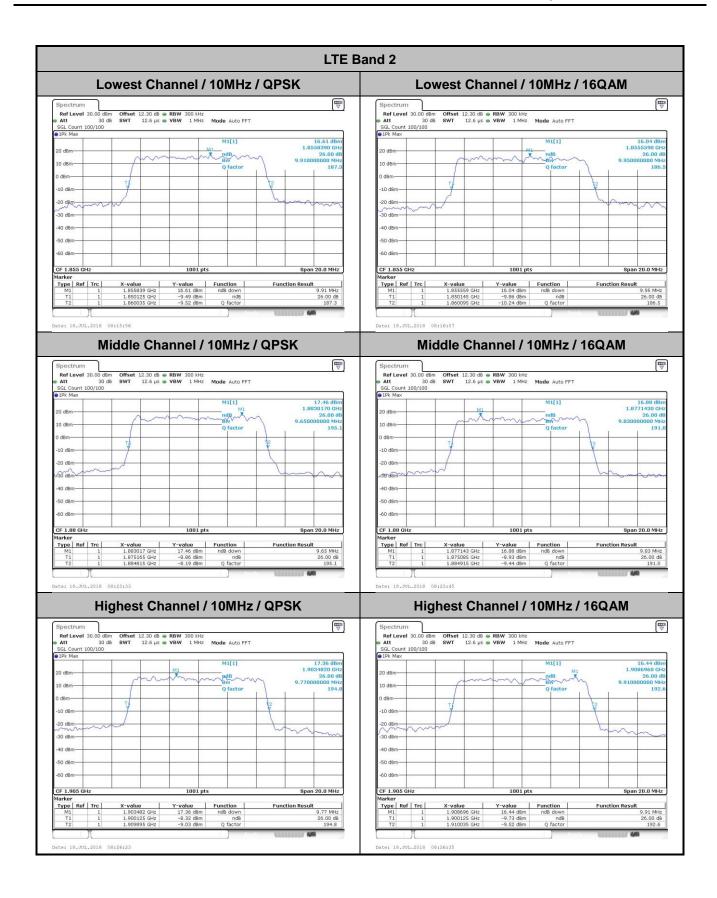


TEL: 886-3-327-3456 Page Number : A2-8 of 41



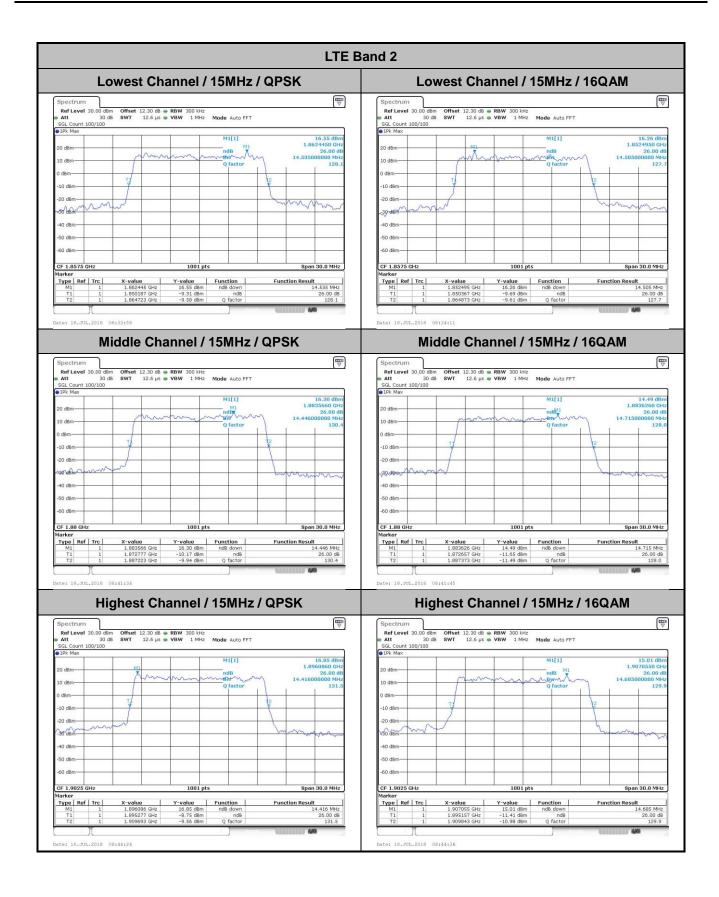

TEL: 886-3-327-3456 Page Number: A2-9 of 41

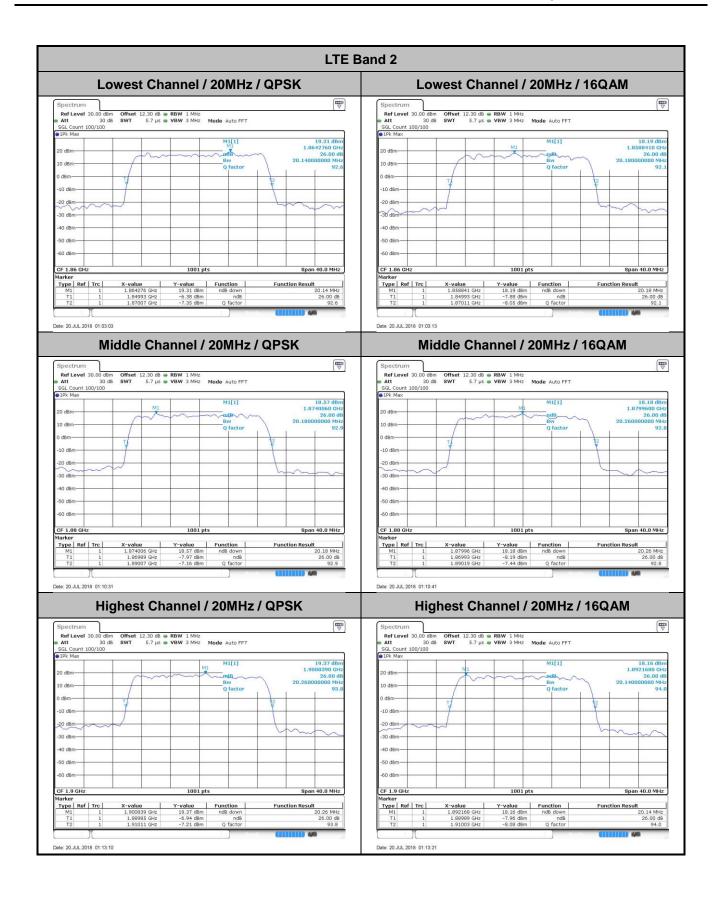


TEL: 886-3-327-3456 Page Number : A2-10 of 41 FAX: 886-3-328-4978

Occupied Bandwidth

Mode	LTE Band 2 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.1	2.72	2.72	4.52	4.48	9.01	9.01	13.52	13.46	18.46	18.26
Middle CH	1.09	1.09	2.75	2.74	4.5	4.48	9.01	9.05	13.46	13.46	18.42	18.22
Highest CH	1.09	1.09	2.72	2.71	4.48	4.49	9.09	9.01	13.49	13.49	18.34	18.58


Report No. :FG870417B

TEL: 886-3-327-3456 Page Number : A2-11 of 41

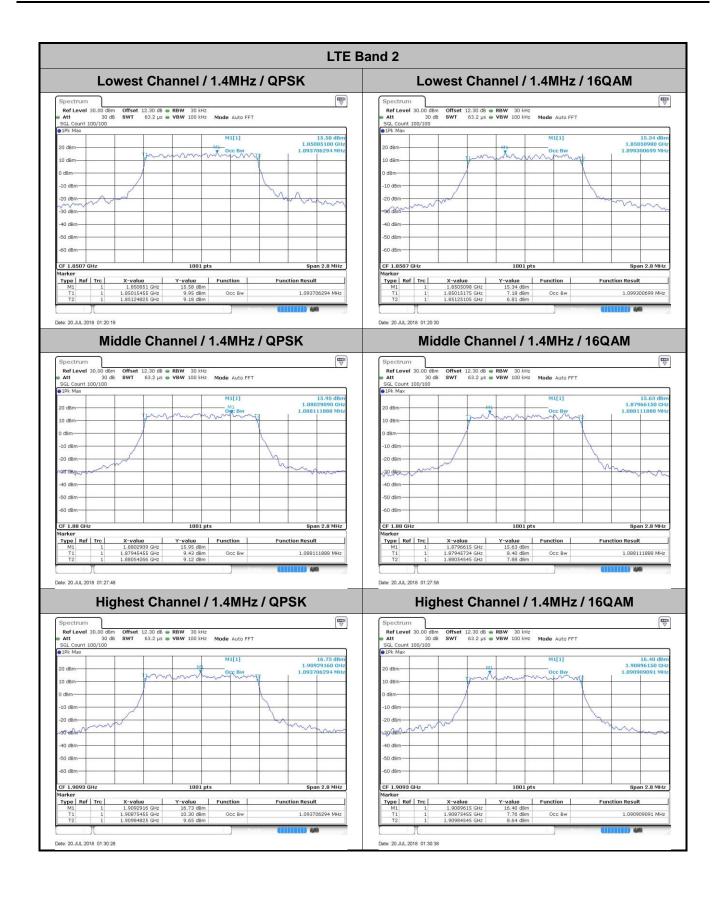


TEL: 886-3-327-3456 Page Number : A2-12 of 41


FAX: 886-3-328-4978

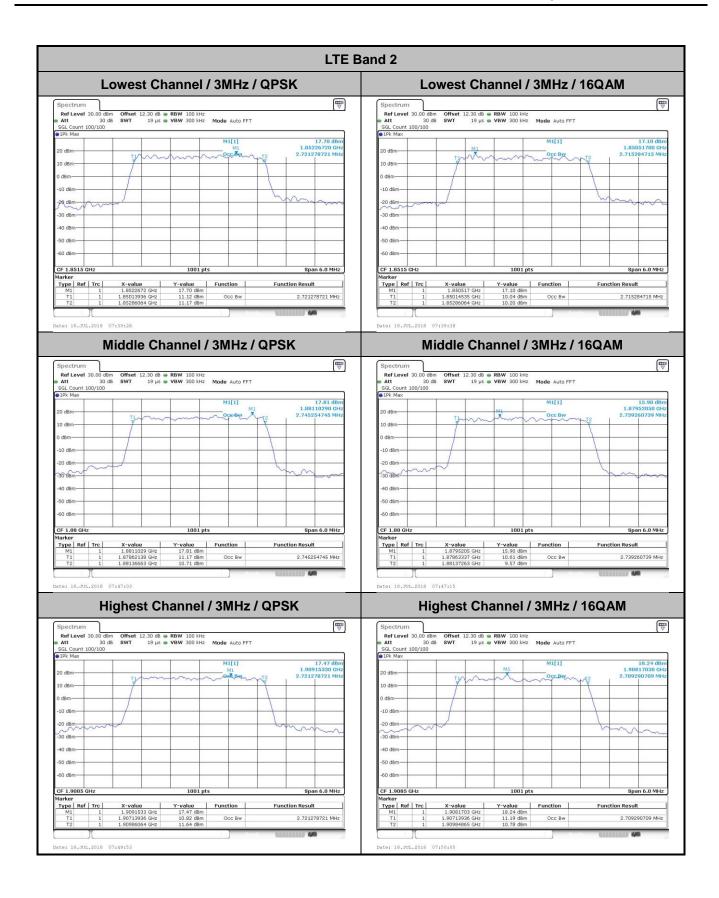


TEL: 886-3-327-3456 Page Number : A2-13 of 41

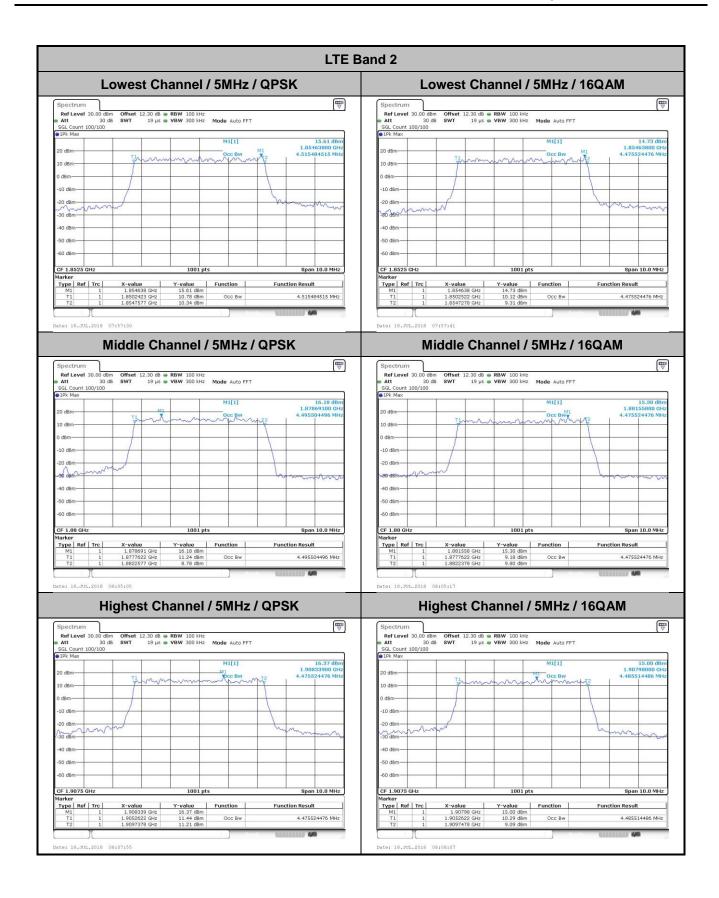


TEL: 886-3-327-3456 Page Number : A2-14 of 41

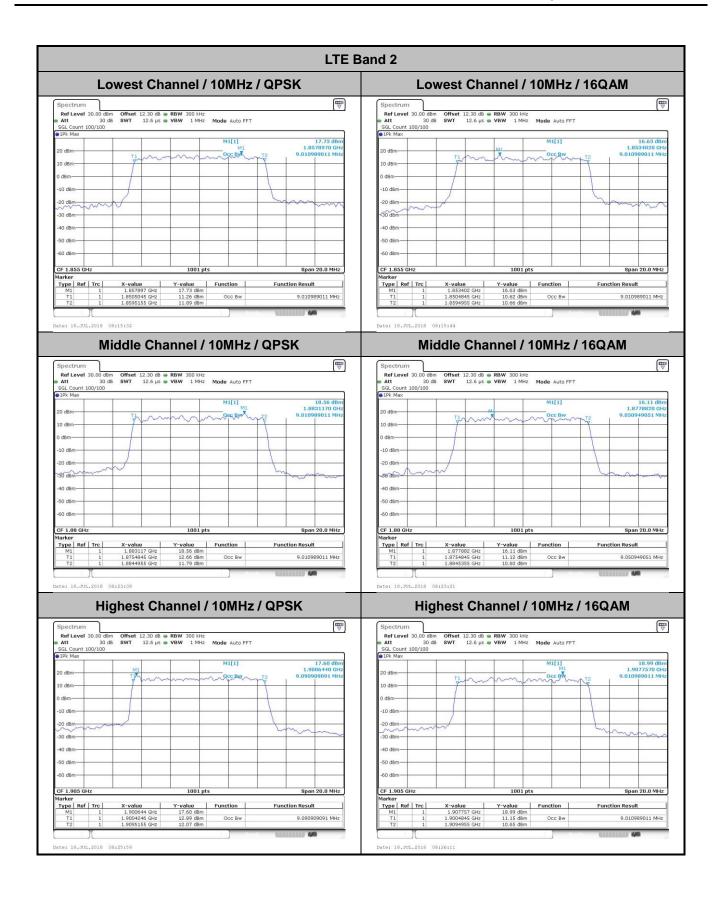

TEL: 886-3-327-3456 Page Number : A2-15 of 41

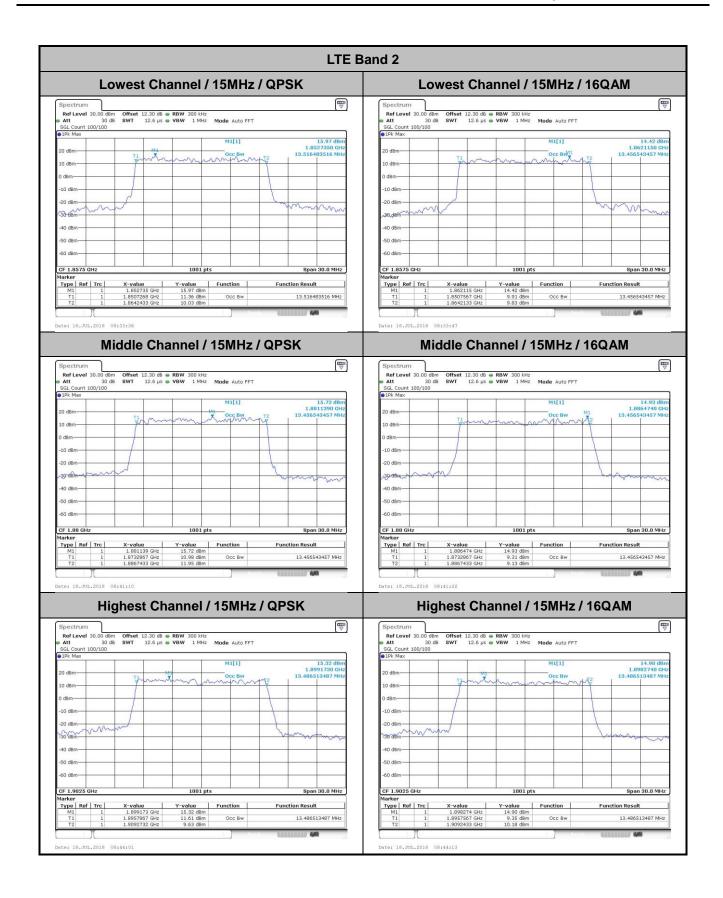

TEL: 886-3-327-3456 Page Number : A2-16 of 41 FAX: 886-3-328-4978

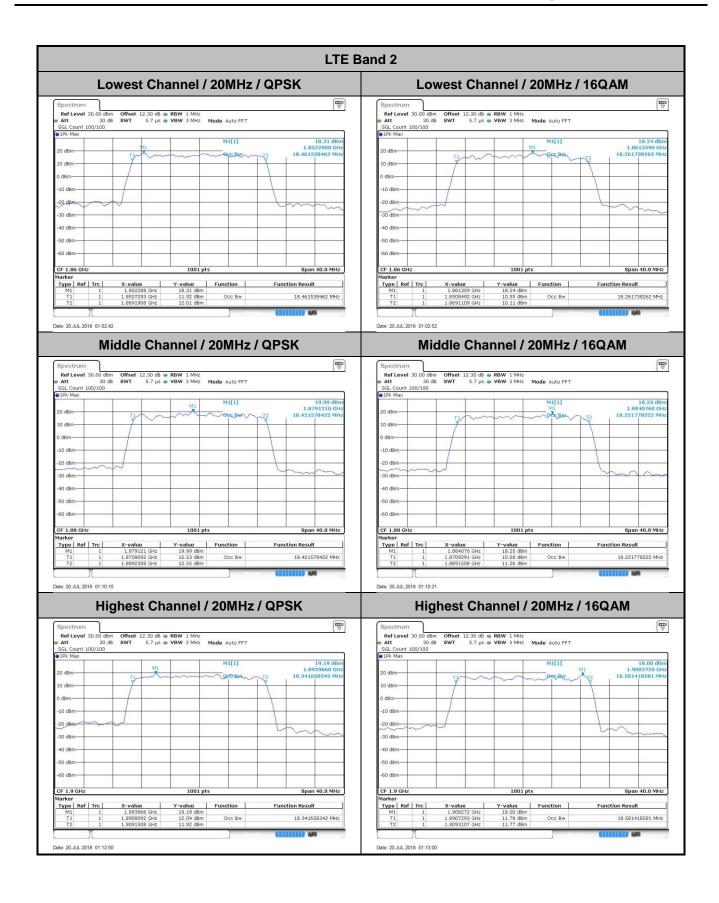


TEL: 886-3-327-3456 Page Number : A2-17 of 41

## **Conducted Band Edge**

Report No. :FG870417B

TEL: 886-3-327-3456 Page Number : A2-18 of 41

RT Report No. :FG870417B

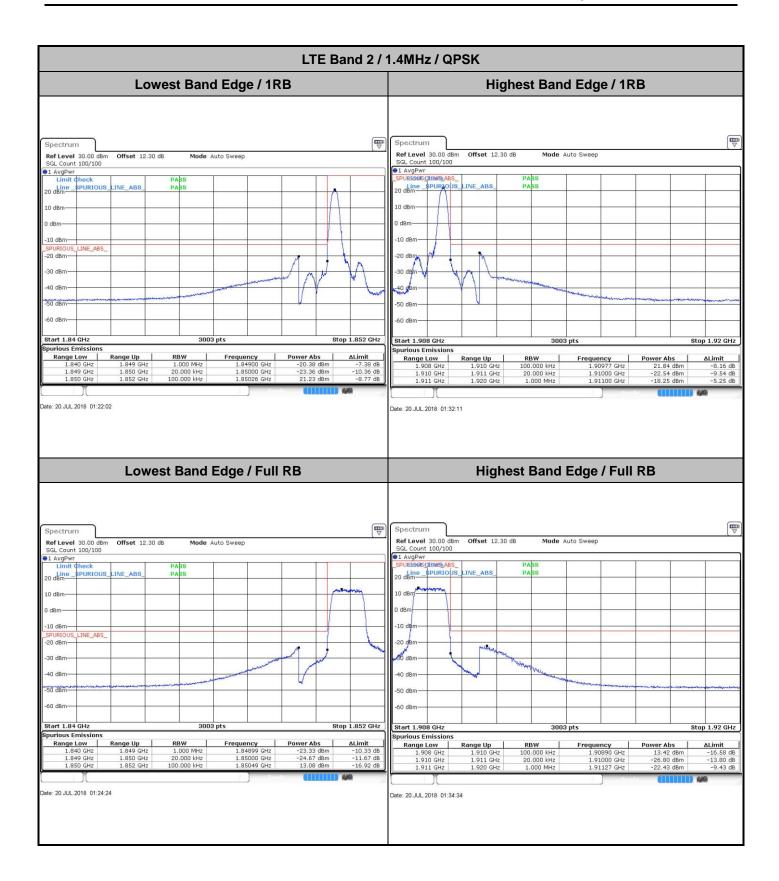

TEL: 886-3-327-3456 Page Number : A2-19 of 41