

FCC SAR TEST REPORT

FCC ID : AK8VTG100
Brand Name : Sony Group Corporation
Applicant : Sony Group Corporation
1-7-1 Konan Minato-ku, Tokyo, 108-0075 Japan
Manufacturer : Sony Network Communications Europe B.V.
Taurusavenue 16, 2132LS Hoofddorp, Netherlands
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Apr. 16, 2021 and testing was started from May 11, 2021 and completed on Jun. 07, 2021. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information	5
3.1 General Information	5
3.2 Device Serial Number	5
3.3 General LTE SAR Test and Reporting Considerations	6
4. RF Exposure Limits.....	7
4.1 Uncontrolled Environment.....	7
4.2 Controlled Environment.....	7
5. Specific Absorption Rate (SAR).....	8
5.1 Introduction	8
5.2 SAR Definition.....	8
6. System Description and Setup	9
6.1 Test Site Location.....	9
6.2 E-Field Probe	10
6.3 Data Acquisition Electronics (DAE)	10
6.4 Phantom.....	11
6.5 Device Holder.....	12
7. Measurement Procedures	13
7.1 Spatial Peak SAR Evaluation.....	13
7.2 Power Reference Measurement.....	14
7.3 Area Scan	14
7.4 Zoom Scan.....	15
7.5 Volume Scan Procedures.....	15
7.6 Power Drift Monitoring.....	15
8. Test Equipment List.....	16
9. System Verification	17
9.1 Tissue Verification	17
9.2 System Performance Check Results.....	17
10. GSM/LTE Output Power (Unit: dBm)	18
11. Bluetooth Output Power (Unit: dBm).....	28
12. SAR Test Results	29
12.1 Body SAR	30
12.2 Repeated SAR Measurement	32
13. Simultaneous Transmission Analysis	32
13.1 Body Exposure Conditions	33
14. Uncertainty Assessment	34
15. References	34
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

History of this test report

Report No.	Version	Description	Issued Date
FA140729-02	01	Initial issue of report	Aug. 14, 2021

1. Statement of Compliance

Applicant Name	Sony Group Corporation	
EUT Description	Visilion Tracker G100	
Brand Name	Sony Group Corporation	
FCC ID	AK8VTG100	
RF Exposure Conditions	Equipment Class	
	Licensed	DTS
Body (1g SAR W/kg)	1.48	0.09
Highest Simultaneous Transmission (1g SAR W/kg)	1.56	
Date Tested	2021/5/11 ~ 2021/6/7	
Test Result	Pass	

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Daisy Peng

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05



3. Equipment Under Test (EUT) Information

3.1 General Information

Wireless Technologies	Frequency	Operating Mode	
GSM	850 1900	· GSM Voice · GPRS (GMSK) · EDGE (8PSK)	Multi-Slot Class: Class 33
	Does device support dual transfer mode? (No)		
LTE (FDD)	Band 2 Band 4 Band 5 Band 12 Band 13 Band 26	· QPSK · 16QAM · Rel. 13 LTE Cat M1 · Duty Cycle: 30% ⁽¹⁾	
Bluetooth	2.4GHz	Version 4.2 with LE	

Remark:

1. For LTE cat. M1, the uplink subframes are scheduled at three subframes every 10ms for all channel bandwidths according to 3GPP 36.521.

3.2 Device Serial Number

Band	SN
WWAN & BT	P1Q20IU06014402

Note: Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device tested gave the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

3.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05												
FCC ID			AK8VTG100									
Operating Frequency Range of each LTE transmission band			LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 26: 814 MHz ~ 849 MHz									
Channel Bandwidth			LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz									
uplink modulations used			QPSK / 16QAM									
LTE Voice / Data requirements			Data only									
LTE MPR permanently built-in by design			Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3									
			Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)		
				1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz			
			QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1		
			16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1		
			16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2		
			64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2		
			64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3		
256 QAM		≥ 1						≤ 5				
LTE A-MPR			In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)									
Spectrum plots for RB configuration			A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.									
Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20475	832	20500	835
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20575	842	20550	840

LTE Band 12										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	23017	699.7	23025	700.5	23035	701.5	23060	704		
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5		
H	23173	715.3	23165	714.5	23155	713.5	23130	711		
LTE Band 13										
	Bandwidth 5 MHz				Bandwidth 10 MHz					
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)			
L	23205		779.5		23230		782			
M	23230		782							
H	23255		784.5							
LTE Band 26										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)


$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.


6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit ⁽²⁾	D750V3	1107	Mar. 08, 2019	Mar. 05, 2022
SPEAG	835MHz System Validation Kit ⁽²⁾	D835V2	4d167	Nov. 25, 2019	Nov. 23, 2021
SPEAG	1750MHz System Validation Kit ⁽²⁾	D1750V2	1112	Mar. 07, 2019	Mar. 04, 2022
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d041	Sep. 11, 2018	Sep. 08, 2021
SPEAG	1900MHz System Validation Kit ⁽²⁾	D1900V2	5d185	Mar. 07, 2019	Mar. 04, 2022
SPEAG	2450MHz System Validation Kit ⁽²⁾	D2450V2	929	Nov. 21, 2019	Nov. 19, 2021
SPEAG	Data Acquisition Electronics	DAE4	376	Nov. 23, 2020	Nov. 22, 2021
SPEAG	Data Acquisition Electronics	DAE4	1647	Jan. 07, 2021	Jan. 06, 2022
SPEAG	Dosimetric E-Field Probe	ES3DV3	3184	Sep. 23, 2020	Sep. 22, 2021
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 23, 2020	Sep. 22, 2021
Testo	Hygro meter	608-H1	45196600	Nov. 10, 2020	Nov. 09, 2021
Testo	Hygro meter	608-H1	45207528	Nov. 10, 2020	Nov. 09, 2021
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Nov. 10, 2020	Nov. 09, 2021
Keysight	Wireless Communication Test Set	E5515C	MY50267236	Mar. 21, 2021	Mar. 20, 2022
R&S	BT Base Station	CBT32	100519	Jun. 04, 2020	Jun. 03, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 11, 2020	Nov. 10, 2021
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 03, 2020	Sep. 02, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 16, 2020	Sep. 15, 2021
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Nov. 06, 2020	Nov. 05, 2021
Anritsu	Power Meter	ML2495A	1419002	Aug. 19, 2020	Aug. 18, 2021
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2020	Aug. 17, 2021
Anritsu	Power Meter	ML2495A	1804003	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Power Sensor	MA2411B	1726150	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 15, 2021	Jan. 14, 2022
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 21, 2020	Oct. 20, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Aug. 26, 2020	Aug. 25, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.5	0.894	43.124	0.89	41.90	0.45	2.92	± 5	2021/5/11
835	22.5	0.899	41.281	0.90	41.50	-0.11	-0.53	± 5	2021/5/11
835	22.2	0.898	42.289	0.90	41.50	-0.22	1.90	± 5	2021/6/7
1750	22.5	1.346	38.973	1.37	40.10	-1.75	-2.81	± 5	2021/5/11
1900	22.5	1.450	40.264	1.40	40.00	3.57	0.66	± 5	2021/5/11
1900	22.2	1.426	40.900	1.40	40.00	1.86	2.25	± 5	2021/6/7
2450	22.5	1.763	39.969	1.80	39.20	-2.06	1.96	± 5	2021/5/25

9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR09-HY	2021/5/11	750	250	D750V3-1107	ES3DV3 - SN3184	DAE4 Sn376	2.20	8.32	8.8	5.77
SAR09-HY	2021/5/11	835	250	D835V2-4d167	ES3DV3 - SN3184	DAE4 Sn376	2.26	9.55	9.04	-5.34
SAR09-HY	2021/6/7	835	250	D835V2-4d167	ES3DV3 - SN3184	DAE4 Sn1647	2.26	9.55	9.04	-5.34
SAR09-HY	2021/5/11	1750	250	D1750V2-1112	ES3DV3 - SN3184	DAE4 Sn376	8.37	36.70	33.48	-8.77
SAR09-HY	2021/5/11	1900	250	D1900V2-5d041	ES3DV3 - SN3184	DAE4 Sn376	10.20	40.20	40.8	1.49
SAR09-HY	2021/6/7	1900	250	D1900V2-5d185	ES3DV3 - SN3184	DAE4 Sn1647	9.70	39.40	38.8	-1.52
SAR11-HY	2021/5/25	2450	250	D2450V2-929	ES3DV3 - SN3270	DAE4 Sn376	12.40	53.10	49.6	-6.59

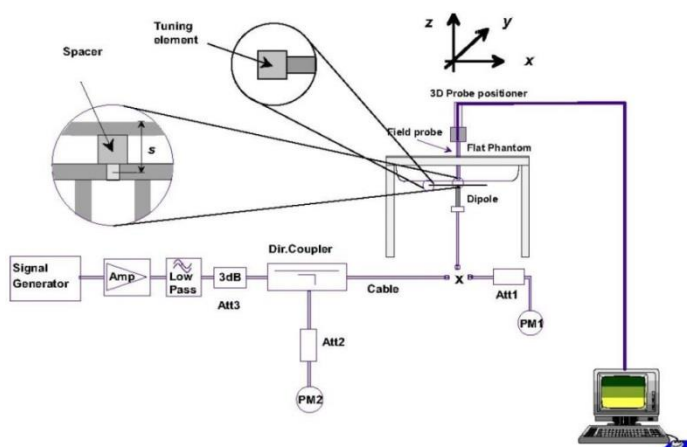


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. GSM/LTE Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (2Tx slots) for GSM850 and GPRS (4Tx slots) for GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot		32.66	32.74	32.26	35.00	23.66	23.74	23.26	26.00
GPRS 1 Tx slot		32.69	32.75	32.27	35.00	23.69	23.75	23.27	26.00
GPRS 2 Tx slots		31.52	32.02	31.41	32.50	25.52	26.02	25.41	26.50
GPRS 3 Tx slots		29.40	29.92	29.38	30.50	25.14	25.66	25.12	26.24
GPRS 4 Tx slots		27.70	28.38	27.66	29.00	24.70	25.38	24.66	26.00
EDGE 1 Tx slot		25.85	26.13	25.74	30.00	16.85	17.13	16.74	21.00
EDGE 2 Tx slots		24.44	24.85	24.38	26.00	18.44	18.85	18.38	20.00
EDGE 3 Tx slots		22.91	22.79	23.01	24.00	18.65	18.53	18.75	19.74
EDGE 4 Tx slots		22.08	22.26	21.70	23.00	19.08	19.26	18.70	20.00

GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot		29.25	29.30	29.51	32.00	20.25	20.30	20.51	23.00
GPRS 1 Tx slot		29.27	29.31	29.58	32.00	20.27	20.31	20.58	23.00
GPRS 2 Tx slots		28.95	28.59	28.90	30.00	22.95	22.59	22.90	24.00
GPRS 3 Tx slots		27.63	27.21	26.91	28.00	23.37	22.95	22.65	23.74
GPRS 4 Tx slots		26.51	25.96	25.46	27.00	23.51	22.96	22.46	24.00
EDGE 1 Tx slot		25.37	24.97	24.86	29.00	16.37	15.97	15.86	20.00
EDGE 2 Tx slots		24.44	24.03	24.11	26.00	18.44	18.03	18.11	20.00
EDGE 3 Tx slots		22.63	22.31	22.03	24.00	18.37	18.05	17.77	19.74
EDGE 4 Tx slots		21.54	21.19	21.00	22.50	18.54	18.19	18.00	19.50

<LTE Conducted Power>**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 5 SAR test was covered by Band 26; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H	18700	18900	19100	
Frequency (MHz)							1860	1880	1900	
20	QPSK	1	0	0	0	15	20.39	20.27	20.41	22.00
20	QPSK	1	5	0	0	15	20.15	20.13	20.16	
20	QPSK	3	0	0	0	15	20.30	20.23	20.40	
20	QPSK	3	3	0	0	15	20.21	20.18	20.41	
20	QPSK	6	0	0	0	15	20.35	20.37	20.37	
20	16QAM	1	0	0	0	15	20.15	20.00	20.22	
20	16QAM	1	5	0	0	15	19.91	19.82	19.86	
20	16QAM	3	0	0	0	15	19.71	19.74	19.76	
20	16QAM	3	3	0	0	15	19.78	19.70	19.72	
20	16QAM	5	0	0	0	15	20.17	20.22	20.20	
Channel				L	M	H	18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)							1857.5	1880	1902.5	
15	QPSK	1	0	0	0	11	20.43	20.30	20.28	22.00
15	QPSK	1	5	0	0	11	20.24	20.11	20.08	
15	QPSK	3	0	0	0	11	20.51	20.35	20.44	
15	QPSK	3	3	0	0	11	20.57	20.30	20.49	
15	QPSK	6	0	0	0	11	20.35	20.32	20.30	
15	16QAM	1	0	0	0	11	20.02	19.86	19.82	
15	16QAM	1	5	0	0	11	19.85	19.97	19.93	
15	16QAM	3	0	0	0	11	19.66	19.77	19.77	
15	16QAM	3	3	0	0	11	19.77	19.75	19.77	
15	16QAM	5	0	0	0	11	20.25	20.20	20.15	
Channel				L	M	H	18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)							1855	1880	1905	
10	QPSK	1	0	0	0	7	20.32	20.29	20.32	22.00
10	QPSK	1	5	0	0	7	20.18	20.03	20.10	
10	QPSK	3	0	0	0	7	19.92	20.02	20.09	
10	QPSK	3	3	0	0	7	19.80	19.89	19.94	
10	QPSK	6	0	0	0	7	19.45	19.35	19.40	21.00
10	16QAM	1	0	0	0	7	20.03	20.03	19.94	22.00
10	16QAM	1	5	0	0	7	19.88	19.73	19.74	
10	16QAM	3	0	0	0	7	19.96	20.05	20.16	
10	16QAM	3	3	0	0	7	19.87	19.99	20.04	
10	16QAM	5	0	0	0	7	20.22	20.14	20.12	21.00
Channel				L	M	H	18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)							1852.5	1880	1907.5	
5	QPSK	1	0	0	0	3	20.34	20.26	20.28	22.00
5	QPSK	1	5	0	0	3	20.19	20.06	20.30	
5	QPSK	3	0	0	0	3	19.98	19.99	20.02	21.00
5	QPSK	3	3	0	0	3	19.80	19.82	19.92	
5	QPSK	6	0	0	0	3	19.44	19.41	19.51	
5	16QAM	1	0	0	0	3	20.21	19.94	20.02	22.00
5	16QAM	1	5	0	0	3	19.96	19.93	19.85	
5	16QAM	3	0	0	0	3	19.99	20.02	19.97	21.00
5	16QAM	3	3	0	0	3	19.89	19.95	20.07	
5	16QAM	5	0	0	0	3	19.39	19.19	19.27	20.00
Channel				L	M	H	18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)							1851.5	1880	1908.5	
3	QPSK	1	0	0	0	1	20.40	20.33	20.49	22.00
3	QPSK	1	5	0	0	1	20.26	20.13	20.26	
3	QPSK	3	0	0	0	1	19.04	19.05	19.12	21.00



FCC SAR TEST REPORT

Report No. : FA140729-02

3	QPSK	3	3	0	0	1	19.02	19.08	19.07	
3	QPSK	6	0	0	0	1	18.48	18.42	18.46	20.00
3	16QAM	1	0	0	0	1	19.60	20.05	20.08	21.00
3	16QAM	1	5	0	0	1	20.01	19.93	19.55	
3	16QAM	3	0	0	0	1	18.62	18.56	18.64	20.00
3	16QAM	3	3	0	0	1	18.50	18.48	18.13	
3	16QAM	5	0	0	0	1	18.62	18.55	18.60	
Channel				L	M	H	18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)							1850.7	1880	1909.3	
1.4	QPSK	1	0	0	0	0	20.44	20.39	20.45	22.00
1.4	QPSK	1	5	0	0	0	20.29	20.15	20.26	
1.4	QPSK	3	0	0	0	0	19.16	19.00	19.31	21.00
1.4	QPSK	3	3	0	0	0	19.15	19.00	19.02	
1.4	QPSK	6	0	0	0	0	18.48	18.41	18.42	20.00
1.4	16QAM	1	0	0	0	0	19.57	19.54	19.72	21.00
1.4	16QAM	1	5	0	0	0	19.42	19.38	19.50	
1.4	16QAM	3	0	0	0	0	18.49	18.59	18.95	20.00
1.4	16QAM	3	3	0	0	0	18.48	18.42	18.44	
1.4	16QAM	5	0	0	0	0	18.60	18.51	18.60	

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H	20050	20175	20300	
Frequency (MHz)							1720	1732.5	1745	
20	QPSK	1	0	0	0	15	20.73	20.93	20.95	22.00
20	QPSK	1	5	0	0	15	20.59	20.90	20.83	
20	QPSK	3	0	0	0	15	20.81	20.99	20.98	
20	QPSK	3	3	0	0	15	20.67	21.02	20.88	
20	QPSK	6	0	0	0	15	20.68	21.01	21.00	
20	16QAM	1	0	0	0	15	20.63	21.02	20.92	
20	16QAM	1	5	0	0	15	20.40	20.84	20.75	
20	16QAM	3	0	0	0	15	20.79	21.00	20.99	
20	16QAM	3	3	0	0	15	20.74	20.95	20.90	
20	16QAM	5	0	0	0	15	20.73	20.82	20.94	
Channel				L	M	H	20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)							1717.5	1732.5	1747.5	
15	QPSK	1	0	0	0	11	20.73	21.04	20.91	22.00
15	QPSK	1	5	0	0	11	20.56	20.84	20.75	
15	QPSK	3	0	0	0	11	20.76	20.91	21.36	
15	QPSK	3	3	0	0	11	20.66	20.82	21.26	
15	QPSK	6	0	0	0	11	20.59	20.84	21.05	
15	16QAM	1	0	0	0	11	20.57	21.00	21.03	
15	16QAM	1	5	0	0	11	20.34	20.67	20.97	
15	16QAM	3	0	0	0	11	20.80	20.97	21.08	
15	16QAM	3	3	0	0	11	20.69	20.91	21.12	
15	16QAM	5	0	0	0	11	20.51	20.81	21.06	
Channel				L	M	H	20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)							1715	1732.5	1750	
10	QPSK	1	0	0	0	7	20.80	20.98	21.14	22.00
10	QPSK	1	5	0	0	7	20.67	20.97	20.91	
10	QPSK	3	0	0	0	7	20.75	20.90	21.35	
10	QPSK	3	3	0	0	7	20.71	20.79	21.26	
10	QPSK	6	0	0	0	7	19.61	19.87	20.02	21.00
10	16QAM	1	0	0	0	7	20.56	20.88	21.00	22.00
10	16QAM	1	5	0	0	7	20.33	21.01	20.83	
10	16QAM	3	0	0	0	7	20.76	21.00	21.09	
10	16QAM	3	3	0	0	7	20.69	20.91	21.01	
10	16QAM	5	0	0	0	7	20.90	21.00	21.00	21.00
Channel				L	M	H	19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)							1712.5	1732.5	1752.5	
5	QPSK	1	0	0	0	3	20.84	21.04	21.19	22.00
5	QPSK	1	5	0	0	3	20.64	20.94	20.97	
5	QPSK	3	0	0	0	3	20.79	20.98	21.35	21.00
5	QPSK	3	3	0	0	3	20.70	20.90	21.27	
5	QPSK	6	0	0	0	3	19.60	20.00	20.08	22.00
5	16QAM	1	0	0	0	3	20.50	21.18	21.03	
5	16QAM	1	5	0	0	3	20.37	20.95	20.84	21.00
5	16QAM	3	0	0	0	3	20.76	20.99	21.21	
5	16QAM	3	3	0	0	3	20.66	20.90	21.12	20.00
5	16QAM	5	0	0	0	3	19.46	19.81	19.93	
Channel				L	M	H	19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)							1711.5	1732.5	1753.5	
3	QPSK	1	0	0	0	1	20.66	21.19	21.07	22.00
3	QPSK	1	5	0	0	1	20.45	21.03	21.03	
3	QPSK	3	0	0	0	1	19.67	19.92	20.21	21.00



FCC SAR TEST REPORT

Report No. : FA140729-02

3	QPSK	3	3	0	0	1	19.55	19.78	20.07	
3	QPSK	6	0	0	0	1	18.57	19.01	19.00	20.00
3	16QAM	1	0	0	0	1	19.97	20.38	20.88	21.00
3	16QAM	1	5	0	0	1	19.86	20.21	20.70	
3	16QAM	3	0	0	0	1	19.66	19.94	20.00	20.00
3	16QAM	3	3	0	0	1	19.46	19.83	19.99	
3	16QAM	5	0	0	0	1	18.80	19.25	19.27	
Channel				L	M	H	19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)							1710.7	1732.5	1754.3	
1.4	QPSK	1	0	0	0	0	20.77	21.02	21.19	22.00
1.4	QPSK	1	5	0	0	0	20.56	20.85	21.00	
1.4	QPSK	3	0	0	0	0	19.76	19.92	20.13	21.00
1.4	QPSK	3	3	0	0	0	19.68	19.80	20.03	
1.4	QPSK	6	0	0	0	0	18.50	18.95	19.10	20.00
1.4	16QAM	1	0	0	0	0	19.93	19.66	20.54	21.00
1.4	16QAM	1	5	0	0	0	19.78	19.44	20.80	
1.4	16QAM	3	0	0	0	0	19.36	19.52	19.72	20.00
1.4	16QAM	3	3	0	0	0	19.45	19.39	19.53	
1.4	16QAM	5	0	0	0	0	18.73	19.08	19.32	

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H	20450	20525	20600	
Frequency (MHz)							829	836.5	844	
10	QPSK	1	0	0	0	7	20.75	20.86	20.73	22.00
10	QPSK	1	5	0	0	7	20.47	20.75	20.55	
10	QPSK	3	0	0	0	7	20.89	21.05	20.78	
10	QPSK	3	3	0	0	7	20.95	20.99	20.75	
10	QPSK	6	0	0	0	7	19.72	19.96	19.81	21.00
10	16QAM	1	0	0	0	7	20.57	20.75	20.70	22.00
10	16QAM	1	5	0	0	7	20.32	20.47	20.44	
10	16QAM	3	0	0	0	7	21.19	21.26	21.06	
10	16QAM	3	3	0	0	7	21.09	21.11	20.96	
10	16QAM	5	0	0	0	7	20.80	21.00	21.00	21.00
Channel				L	M	H	20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)							826.5	836.5	846.5	
5	QPSK	1	0	0	0	3	20.66	21.08	20.85	22.00
5	QPSK	1	5	0	0	3	20.63	20.94	20.66	
5	QPSK	3	0	0	0	3	20.77	20.93	20.89	21.00
5	QPSK	3	3	0	0	3	20.87	20.99	20.78	
5	QPSK	6	0	0	0	3	19.83	20.16	19.88	22.00
5	16QAM	1	0	0	0	3	20.70	20.91	20.83	
5	16QAM	1	5	0	0	3	20.49	20.72	20.58	21.00
5	16QAM	3	0	0	0	3	20.95	20.96	20.97	
5	16QAM	3	3	0	0	3	20.81	20.89	20.91	20.00
5	16QAM	5	0	0	0	3	19.71	19.77	19.85	
Channel				L	M	H	20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)							825.5	836.5	847.5	
3	QPSK	1	0	0	0	1	20.92	21.09	21.18	22.00
3	QPSK	1	5	0	0	1	20.80	20.87	20.98	
3	QPSK	3	0	0	0	1	19.74	19.92	20.05	21.00
3	QPSK	3	3	0	0	1	19.67	19.84	20.05	
3	QPSK	6	0	0	0	1	18.80	18.85	19.00	20.00
3	16QAM	1	0	0	0	1	19.86	20.05	20.00	21.00
3	16QAM	1	5	0	0	1	19.79	19.87	19.71	
3	16QAM	3	0	0	0	1	19.18	19.55	19.58	20.00
3	16QAM	3	3	0	0	1	19.14	19.37	19.42	
3	16QAM	5	0	0	0	1	18.63	18.73	18.80	
Channel				L	M	H	20407	20525	20643	Tune-up limit (dBm)
Frequency (MHz)							824.7	836.5	848.3	
1.4	QPSK	1	0	0	0	0	21.09	21.22	21.13	22.00
1.4	QPSK	1	5	0	0	0	20.91	20.98	20.95	
1.4	QPSK	3	0	0	0	0	20.19	20.04	19.91	21.00
1.4	QPSK	3	3	0	0	0	20.21	19.97	19.80	
1.4	QPSK	6	0	0	0	0	18.97	18.97	19.00	20.00
1.4	16QAM	1	0	0	0	0	20.06	20.09	20.06	21.00
1.4	16QAM	1	5	0	0	0	19.84	19.88	19.85	
1.4	16QAM	3	0	0	0	0	19.71	19.69	19.65	20.00
1.4	16QAM	3	3	0	0	0	19.51	19.50	19.49	
1.4	16QAM	5	0	0	0	0	18.70	18.83	18.89	



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H	23060	23095	23130	
Frequency (MHz)							704	707.5	711	
10	QPSK	1	0	0	0	7	20.75	20.86	20.73	22.00
10	QPSK	1	5	0	0	7	20.47	20.75	20.55	
10	QPSK	3	0	0	0	7	21.27	21.10	20.89	
10	QPSK	3	3	0	0	7	21.17	20.91	20.81	
10	QPSK	6	0	0	0	7	19.72	19.96	19.81	21.00
10	16QAM	1	0	0	0	7	20.57	20.75	20.70	22.00
10	16QAM	1	5	0	0	7	20.32	20.47	20.44	
10	16QAM	3	0	0	0	7	21.51	21.29	21.09	
10	16QAM	3	3	0	0	7	21.42	21.16	21.03	
10	16QAM	5	0	0	0	7	20.89	20.92	20.85	21.00
Channel				L	M	H	23035	23095	23155	Tune-up limit (dBm)
Frequency (MHz)							701.5	707.5	713.5	
5	QPSK	1	0	0	0	3	20.66	21.08	20.85	22.00
5	QPSK	1	5	0	0	3	20.63	20.94	20.66	
5	QPSK	3	0	0	0	3	20.95	21.00	20.96	21.00
5	QPSK	3	3	0	0	3	20.99	20.91	20.97	
5	QPSK	6	0	0	0	3	19.83	20.16	19.88	
5	16QAM	1	0	0	0	3	20.70	20.91	20.83	22.00
5	16QAM	1	5	0	0	3	20.49	20.72	20.58	
5	16QAM	3	0	0	0	3	21.00	20.96	20.99	21.00
5	16QAM	3	3	0	0	3	20.92	20.95	20.93	
5	16QAM	5	0	0	0	3	19.90	19.92	19.96	20.00
Channel				L	M	H	23025	23095	23165	Tune-up limit (dBm)
Frequency (MHz)							700.5	707.5	714.5	
3	QPSK	1	0	0	0	1	20.92	21.09	21.18	22.00
3	QPSK	1	5	0	0	1	20.80	20.87	20.98	
3	QPSK	3	0	0	0	1	20.25	20.00	20.20	21.00
3	QPSK	3	3	0	0	1	20.14	19.94	20.22	
3	QPSK	6	0	0	0	1	18.80	18.85	19.00	20.00
3	16QAM	1	0	0	0	1	19.86	20.05	20.00	21.00
3	16QAM	1	5	0	0	1	19.79	19.87	19.71	
3	16QAM	3	0	0	0	1	19.88	19.47	19.76	20.00
3	16QAM	3	3	0	0	1	19.76	19.29	19.72	
3	16QAM	5	0	0	0	1	19.42	19.00	19.15	
Channel				L	M	H	23017	23095	23173	Tune-up limit (dBm)
Frequency (MHz)							699.7	707.5	715.3	
1.4	QPSK	1	0	0	0	0	21.09	21.22	21.13	22.00
1.4	QPSK	1	5	0	0	0	20.91	20.98	20.95	
1.4	QPSK	3	0	0	0	0	19.82	19.83	19.79	21.00
1.4	QPSK	3	3	0	0	0	19.78	19.72	19.77	
1.4	QPSK	6	0	0	0	0	18.97	18.97	19.00	20.00
1.4	16QAM	1	0	0	0	0	20.06	20.09	20.06	21.00
1.4	16QAM	1	5	0	0	0	19.84	19.88	19.85	
1.4	16QAM	3	0	0	0	0	19.65	19.53	19.65	20.00
1.4	16QAM	3	3	0	0	0	19.60	19.40	19.58	
1.4	16QAM	5	0	0	0	0	19.30	18.92	19.21	

<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H		23230		
Frequency (MHz)								782		
10	QPSK	1	0	0	0	7		20.95		22.00
10	QPSK	1	5	0	0	7		20.69		
10	QPSK	3	0	0	0	7		21.10		
10	QPSK	3	3	0	0	7		21.06		
10	QPSK	6	0	0	0	7		20.00		21.00
10	16QAM	1	0	0	0	7		20.80		22.00
10	16QAM	1	5	0	0	7		20.74		
10	16QAM	3	0	0	0	7		21.27		
10	16QAM	3	3	0	0	7		21.26		
10	16QAM	5	0	0	0	7		21.00		21.00
Channel				L	M	H	23205	23230	23255	Tune-up limit (dBm)
Frequency (MHz)							779.5	782	784.5	
5	QPSK	1	0	0	0	3	20.98	20.92	20.94	22.00
5	QPSK	1	5	0	0	3	20.75	20.74	20.74	
5	QPSK	3	0	0	0	3	20.99	20.98	20.96	21.00
5	QPSK	3	3	0	0	3	20.99	21.00	20.95	
5	QPSK	6	0	0	0	3	20.02	20.03	20.01	
5	16QAM	1	0	0	0	3	20.84	20.92	20.87	22.00
5	16QAM	1	5	0	0	3	20.77	20.79	20.77	
5	16QAM	3	0	0	0	3	21.00	20.99	20.95	21.00
5	16QAM	3	3	0	0	3	20.92	20.90	20.93	
5	16QAM	5	0	0	0	3	19.96	19.92	19.93	20.00

<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Index			Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				L	M	H	26765	26865	26965	
Frequency (MHz)							821.5	831.5	841.5	
15	QPSK	1	0	0	0	11	20.08	20.06	20.10	22.00
15	QPSK	1	5	0	0	11	19.95	19.96	20.06	
15	QPSK	3	0	0	0	11	20.08	20.25	20.51	
15	QPSK	3	3	0	0	11	20.22	20.31	20.49	
15	QPSK	6	0	0	0	11	20.23	20.32	20.37	
15	16QAM	1	0	0	0	11	20.01	20.08	20.15	
15	16QAM	1	5	0	0	11	19.95	19.91	20.00	
15	16QAM	3	0	0	0	11	20.50	20.57	20.69	
15	16QAM	3	3	0	0	11	20.42	20.53	20.63	
15	16QAM	5	0	0	0	11	20.28	20.46	20.43	
Channel				L	M	H	26740	26865	26990	Tune-up limit (dBm)
Frequency (MHz)							819	831.5	844	
10	QPSK	1	0	0	0	7	20.26	20.18	20.27	22.00
10	QPSK	1	5	0	0	7	19.99	19.89	20.07	
10	QPSK	3	0	0	0	7	20.49	20.30	20.48	
10	QPSK	3	3	0	0	7	20.30	20.18	20.38	
10	QPSK	6	0	0	0	7	19.38	19.37	19.60	21.00
10	16QAM	1	0	0	0	7	20.27	20.00	20.16	22.00
10	16QAM	1	5	0	0	7	19.85	19.85	20.00	
10	16QAM	3	0	0	0	7	20.34	20.58	20.65	
10	16QAM	3	3	0	0	7	20.45	20.54	20.60	
10	16QAM	5	0	0	0	7	20.67	20.40	20.52	21.00
Channel				L	M	H	26715	26865	27015	Tune-up limit (dBm)
Frequency (MHz)							816.5	831.5	846.5	
5	QPSK	1	0	0	0	3	20.10	20.14	20.25	22.00
5	QPSK	1	5	0	0	3	20.30	20.00	20.06	
5	QPSK	3	0	0	0	3	20.50	20.63	20.55	21.00
5	QPSK	3	3	0	0	3	20.29	20.38	20.45	
5	QPSK	6	0	0	0	3	19.47	19.45	19.58	
5	16QAM	1	0	0	0	3	20.11	20.15	20.26	22.00
5	16QAM	1	5	0	0	3	20.00	19.89	20.15	
5	16QAM	3	0	0	0	3	20.55	20.63	20.73	21.00
5	16QAM	3	3	0	0	3	20.45	20.64	20.65	
5	16QAM	5	0	0	0	3	19.34	19.40	19.65	20.00
Channel				L	M	H	26705	26865	27025	Tune-up limit (dBm)
Frequency (MHz)							815.5	831.5	847.5	
3	QPSK	1	0	0	0	1	20.47	20.44	20.58	22.00
3	QPSK	1	5	0	0	1	20.36	20.21	20.42	
3	QPSK	3	0	0	0	1	19.54	19.64	19.57	21.00
3	QPSK	3	3	0	0	1	19.49	19.55	19.53	
3	QPSK	6	0	0	0	1	18.37	18.35	18.58	20.00
3	16QAM	1	0	0	0	1	19.58	19.50	19.69	21.00
3	16QAM	1	5	0	0	1	19.44	19.39	19.52	
3	16QAM	3	0	0	0	1	18.80	19.21	18.74	20.00
3	16QAM	3	3	0	0	1	18.78	18.87	18.71	
3	16QAM	5	0	0	0	1	18.34	18.39	18.63	
Channel				L	M	H	26697	26865	27033	Tune-up limit (dBm)
Frequency (MHz)							814.7	831.5	848.3	
1.4	QPSK	1	0	0	0	0	20.43	20.35	20.60	22.00
1.4	QPSK	1	5	0	0	0	20.25	20.19	20.39	
1.4	QPSK	3	0	0	0	0	20.21	20.19	20.28	21.00

1.4	QPSK	3	3	0	0	0	20.25	20.10	20.30	
1.4	QPSK	6	0	0	0	0	18.23	18.32	18.46	20.00
1.4	16QAM	1	0	0	0	0	19.42	19.38	19.60	21.00
1.4	16QAM	1	5	0	0	0	19.32	19.24	19.43	
1.4	16QAM	3	0	0	0	0	19.95	19.51	19.88	20.00
1.4	16QAM	3	3	0	0	0	19.89	19.40	19.78	
1.4	16QAM	5	0	0	0	0	18.17	18.25	18.56	


11. Bluetooth Output Power (Unit: dBm)

<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
BLE	CH 00	2402	7.80	7.80
	CH 19	2440	7.60	7.60
	CH 39	2480	7.40	7.40
Tune-up Limit			9.00	9.00

General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 100% considered in SAR testing.

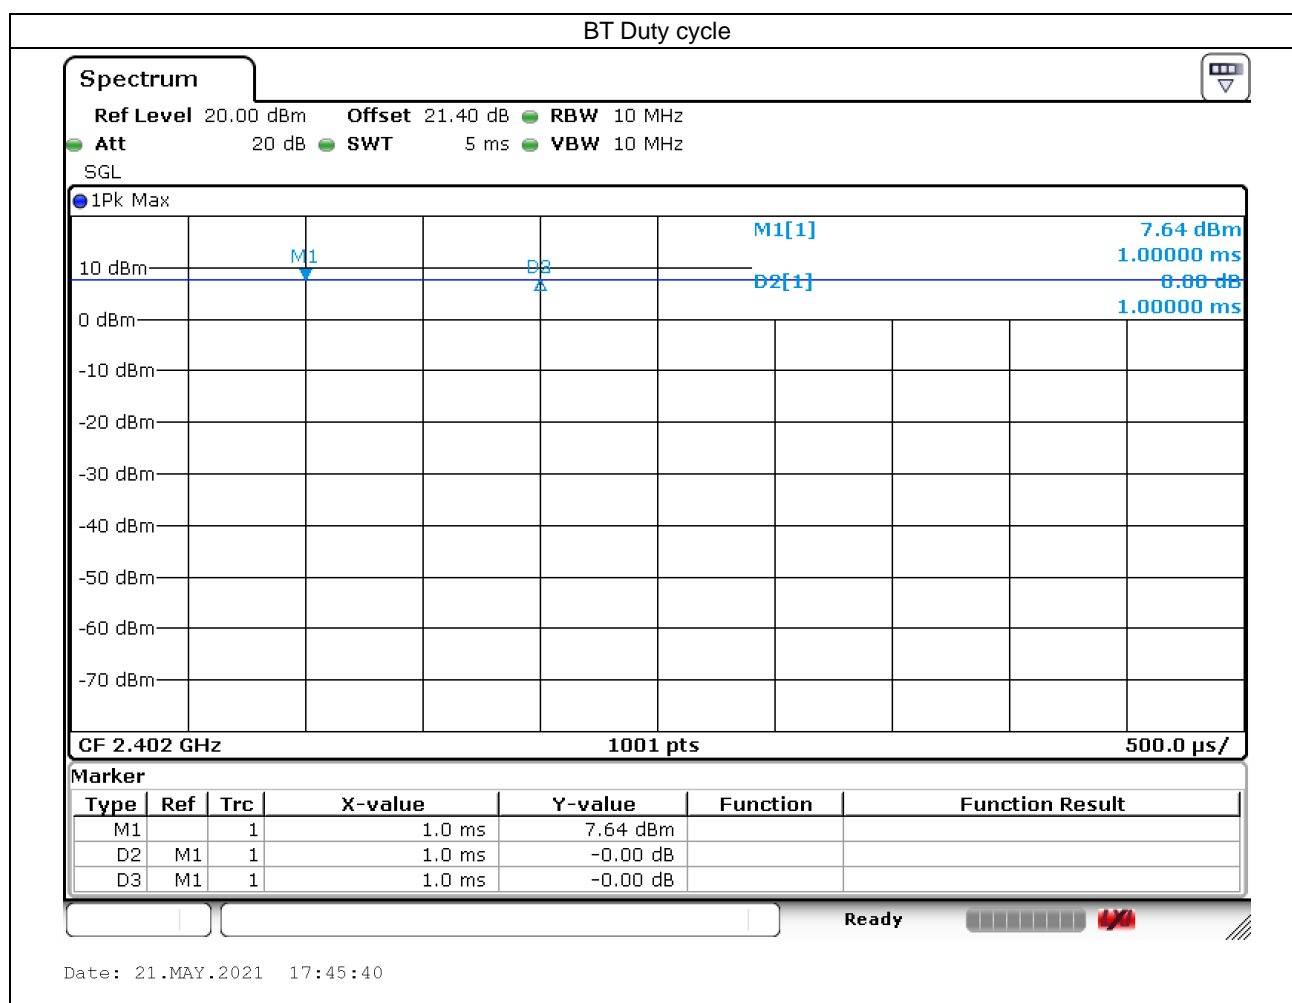

12. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. According to the Appendix D. antenna location, when the antenna distance to the surface edge is larger than 25mm; SAR testing is not necessary.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (2Tx slots) for GSM850 and GPRS (4Tx slots) for GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 5 SAR test was covered by Band 26; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

12.1 Body SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS (2 Tx slots)	Front	5mm	189	836.4	32.02	32.50	1.117	0.17	0.918	1.025
	GSM850	GPRS (2 Tx slots)	Front	5mm	128	824.2	31.52	32.50	1.253	-0.12	1.180	1.479
	GSM850	GPRS (2 Tx slots)	Front	5mm	251	848.8	31.41	32.50	1.285	-0.14	0.752	0.967
	GSM850	GPRS (2 Tx slots)	Back	5mm	189	836.4	32.02	32.50	1.117	-0.1	1.160	1.296
	GSM850	GPRS (2 Tx slots)	Back	5mm	128	824.2	31.52	32.50	1.253	-0.13	1.140	1.429
	GSM850	GPRS (2 Tx slots)	Back	5mm	251	848.8	31.41	32.50	1.285	-0.03	1.050	1.350
	GSM850	GPRS (2 Tx slots)	Right Side	5mm	189	836.4	32.02	32.50	1.117	0.09	0.384	0.429
	GSM850	GPRS (2 Tx slots)	Bottom Side	5mm	189	836.4	32.02	32.50	1.117	-0.09	0.590	0.659
	GSM1900	GPRS (4 Tx slots)	Front	5mm	512	1850.2	26.51	27.00	1.119	0.19	0.786	0.880
02	GSM1900	GPRS (4 Tx slots)	Front	5mm	661	1880	25.96	27.00	1.271	-0.19	0.963	1.224
	GSM1900	GPRS (4 Tx slots)	Front	5mm	810	1909.8	25.46	27.00	1.426	0.06	0.968	1.380
	GSM1900	GPRS (4 Tx slots)	Back	5mm	512	1850.2	26.51	27.00	1.119	0.1	0.961	1.076
	GSM1900	GPRS (4 Tx slots)	Back	5mm	661	1880	25.96	27.00	1.271	-0.13	0.825	1.048
	GSM1900	GPRS (4 Tx slots)	Back	5mm	810	1909.8	25.46	27.00	1.426	0.13	0.849	1.210
	GSM1900	GPRS (4 Tx slots)	Right Side	5mm	512	1850.2	26.51	27.00	1.119	-0.01	0.201	0.225
	GSM1900	GPRS (4 Tx slots)	Bottom Side	5mm	512	1850.2	26.51	27.00	1.119	-0.13	0.882	0.987
	GSM1900	GPRS (4 Tx slots)	Bottom Side	5mm	661	1880	25.96	27.00	1.271	-0.03	0.775	0.985
	GSM1900	GPRS (4 Tx slots)	Bottom Side	5mm	810	1909.8	25.46	27.00	1.426	-0.08	0.718	1.024

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	5mm	19100	1900	20.41	22.00	1.442	0.02	0.171	0.247
	LTE Band 2	20M	QPSK	1	0	Front	5mm	18700	1860	20.39	22.00	1.449	-0.06	0.191	0.277
03	LTE Band 2	20M	QPSK	1	0	Front	5mm	18900	1880	20.27	22.00	1.489	0.16	0.190	0.283
	LTE Band 2	20M	QPSK	3	3	Front	5mm	19100	1900	20.41	22.00	1.442	-0.16	0.168	0.242
	LTE Band 2	20M	QPSK	1	0	Back	5mm	19100	1900	20.41	22.00	1.442	-0.08	0.143	0.206
	LTE Band 2	20M	QPSK	3	3	Back	5mm	19100	1900	20.41	22.00	1.442	-0.13	0.14	0.202
	LTE Band 2	20M	QPSK	1	0	Right Side	5mm	19100	1900	20.41	22.00	1.442	0.16	0.052	0.075
	LTE Band 2	20M	QPSK	3	3	Right Side	5mm	19100	1900	20.41	22.00	1.442	0.01	0.052	0.075
	LTE Band 2	20M	QPSK	1	0	Bottom Side	5mm	19100	1900	20.41	22.00	1.442	0	0.131	0.189
	LTE Band 2	20M	QPSK	3	3	Bottom Side	5mm	19100	1900	20.41	22.00	1.442	-0.11	0.13	0.187
04	LTE Band 4	20M	QPSK	1	0	Front	5mm	20175	1732.5	20.93	22.00	1.279	-0.18	0.184	0.235
	LTE Band 4	20M	QPSK	3	3	Front	5mm	20175	1732.5	21.02	22.00	1.253	-0.18	0.180	0.226
	LTE Band 4	20M	QPSK	1	0	Back	5mm	20175	1732.5	20.93	22.00	1.279	-0.18	0.172	0.220
	LTE Band 4	20M	QPSK	3	3	Back	5mm	20175	1732.5	21.02	22.00	1.253	-0.16	0.170	0.213
	LTE Band 4	20M	QPSK	1	0	Right Side	5mm	20175	1732.5	20.93	22.00	1.279	0.04	0.048	0.061
	LTE Band 4	20M	QPSK	3	3	Right Side	5mm	20175	1732.5	21.02	22.00	1.253	0.06	0.047	0.059
	LTE Band 4	20M	QPSK	1	0	Bottom Side	5mm	20175	1732.5	20.93	22.00	1.279	-0.19	0.128	0.164
	LTE Band 4	20M	QPSK	3	3	Bottom Side	5mm	20175	1732.5	21.02	22.00	1.253	-0.17	0.127	0.159
	LTE Band 12	10M	QPSK	1	0	Front	5mm	23095	707.5	20.86	22.00	1.300	-0.12	0.094	0.122
05	LTE Band 12	10M	QPSK	3	0	Front	5mm	23095	707.5	21.10	22.00	1.230	-0.01	0.107	0.132
	LTE Band 12	10M	QPSK	1	0	Back	5mm	23095	707.5	20.86	22.00	1.300	-0.18	0.054	0.070
	LTE Band 12	10M	QPSK	3	0	Back	5mm	23095	707.5	21.10	22.00	1.230	-0.14	0.056	0.069
	LTE Band 12	10M	QPSK	1	0	Right Side	5mm	23095	707.5	20.86	22.00	1.300	-0.03	0.009	0.012
	LTE Band 12	10M	QPSK	3	0	Right Side	5mm	23095	707.5	21.10	22.00	1.230	-0.03	0.010	0.012
	LTE Band 12	10M	QPSK	1	0	Bottom Side	5mm	23095	707.5	20.86	22.00	1.300	-0.1	0.030	0.039
	LTE Band 12	10M	QPSK	3	0	Bottom Side	5mm	23095	707.5	21.10	22.00	1.230	-0.13	0.031	0.038
	LTE Band 13	10M	QPSK	1	0	Front	5mm	23230	782	20.95	22.00	1.274	-0.14	0.108	0.138
06	LTE Band 13	10M	QPSK	3	0	Front	5mm	23230	782	21.10	22.00	1.230	-0.19	0.113	0.139
	LTE Band 13	10M	QPSK	1	0	Back	5mm	23230	782	20.95	22.00	1.274	-0.14	0.083	0.106
	LTE Band 13	10M	QPSK	3	0	Back	5mm	23230	782	21.10	22.00	1.230	-0.11	0.087	0.107
	LTE Band 13	10M	QPSK	1	0	Right Side	5mm	23230	782	20.95	22.00	1.274	-0.18	0.027	0.034
	LTE Band 13	10M	QPSK	3	0	Right Side	5mm	23230	782	21.10	22.00	1.230	-0.04	0.03	0.037
	LTE Band 13	10M	QPSK	1	0	Bottom Side	5mm	23230	782	20.95	22.00	1.274	0.09	0.041	0.052
	LTE Band 13	10M	QPSK	3	0	Bottom Side	5mm	23230	782	21.10	22.00	1.230	-0.02	0.044	0.054
07	LTE Band 26	15M	QPSK	1	0	Front	5mm	26865	831.5	20.06	22.00	1.563	-0.04	0.116	0.181
	LTE Band 26	15M	QPSK	3	3	Front	5mm	26865	831.5	20.31	22.00	1.476	-0.14	0.113	0.167
	LTE Band 26	15M	QPSK	1	0	Back	5mm	26865	831.5	20.06	22.00	1.563	-0.02	0.11	0.172
	LTE Band 26	15M	QPSK	3	3	Back	5mm	26865	831.5	20.31	22.00	1.476	-0.13	0.111	0.164
	LTE Band 26	15M	QPSK	1	0	Right Side	5mm	26865	831.5	20.06	22.00	1.563	-0.12	0.036	0.056
	LTE Band 26	15M	QPSK	3	3	Right Side	5mm	26865	831.5	20.31	22.00	1.476	-0.07	0.038	0.056
	LTE Band 26	15M	QPSK	1	0	Bottom Side	5mm	26865	831.5	20.06	22.00	1.563	-0.08	0.059	0.092
	LTE Band 26	15M	QPSK	3	3	Bottom Side	5mm	26865	831.5	20.31	22.00	1.476	-0.09	0.058	0.086

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	LE-1Mbps	Front	5mm	0	2402	7.80	9.00	1.318	100	1.000	-0.17	0.062	0.082
	Bluetooth	LE-1Mbps	Back	5mm	0	2402	7.80	9.00	1.318	100	1.000	-0.01	0.064	0.084
	Bluetooth	LE-1Mbps	Back	5mm	19	2440	7.60	9.00	1.380	100	1.000	0.03	0.056	0.077
08	Bluetooth	LE-1Mbps	Back	5mm	39	2480	7.40	9.00	1.445	100	1.000	-0.07	0.059	0.085

12.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850	GPRS (2 Tx slots)	Front	5mm	128	824.2	31.52	32.50	1.253	-0.12	1.180		1.479
2nd	GSM850	GPRS (2 Tx slots)	Front	5mm	128	824.2	31.52	32.50	1.253	0.04	1.090	1.08	1.366
1st	GSM1900	GPRS (4 Tx slots)	Front	5mm	810	1909.8	25.46	27.00	1.426	0.06	0.968		1.380
2nd	GSM1900	GPRS (4 Tx slots)	Front	5mm	810	1909.8	25.46	27.00	1.426	-0.05	0.954	1.01	1.360

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

13. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body
1.	WWAN + Bluetooth	Yes

General Note:

1. The Scaled SAR summation is calculated based on the same configuration and test position.
2. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation $< 1.6\text{W/kg}$.
 - ii) $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$.

13.1 Body Exposure Conditions

WWAN Band	Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
		WWAN	Bluetooth	
		1g SAR (W/kg)	1g SAR (W/kg)	
GSM850	Front	1.479	0.082	1.561
	Back	1.429	0.085	1.514
	Right side	0.429		0.429
	Bottom side	0.659		0.659
GSM1900	Front	1.380	0.082	1.462
	Back	1.210	0.085	1.295
	Right side	0.225		0.225
	Bottom side	1.024		1.024
LTE Band 2	Front	0.283	0.082	0.365
	Back	0.206	0.085	0.291
	Right side	0.075		0.075
	Bottom side	0.189		0.189
LTE Band 4	Front	0.235	0.082	0.317
	Back	0.220	0.085	0.305
	Right side	0.061		0.061
	Bottom side	0.164		0.164
LTE Band 12	Front	0.132	0.082	0.214
	Back	0.070	0.085	0.155
	Right side	0.012		0.012
	Bottom side	0.039		0.039
LTE Band 13	Front	0.139	0.082	0.221
	Back	0.107	0.085	0.192
	Right side	0.037		0.037
	Bottom side	0.054		0.054
LTE Band 26	Front	0.181	0.082	0.263
	Back	0.172	0.085	0.257
	Right side	0.056		0.056
	Bottom side	0.092		0.092

Test Engineer : Jeff Tsao, Charles Shen, Sheng Hsu, Kevin Guo and Jordar Jhuang

14. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

15. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.