



RADIO TEST REPORT

Test Report No. 14630442S-A-R1

Customer	Sony Group Corporation
Description of EUT	Wireless Noise Canceling Stereo Headset
Model Number of EUT	YY2963
FCC ID	AK8YY2963
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied (Refer to SECTION 3)
Issue Date	February 17, 2023
Remarks	Bluetooth (BR / EDR) parts

Representative Test Engineer

T. Suzuki

Takahiro Suzuki
Engineer

Approved By

T. Imamura

Toyokazu Imamura
Leader



CERTIFICATE 1266.03

- ☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.
☒ There is no testing item of "Non-accreditation".

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 21.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the customer for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 14630442S-A

This report is a revised version of 14630442S-A. 14630442S-A is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14630442S-A	January 31, 2023	-
1	14630442S-A-R1	February 17, 2023	Page 5 Corrected the test date from December 26 to January 17, 2022 to December 26, 2022 to January 17, 2023. Page 10 Corrected USB Cable and Connector information in the List of Cables Used from “Unshielded” to “Shielded”.

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test Specification, Procedures & Results	6
SECTION 4: Operation of EUT during testing.....	9
SECTION 5: Radiated Spurious Emission	11
SECTION 6: Antenna Terminal Conducted Tests.....	13
APPENDIX 1: Test data	14
20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation	14
Number of Hopping Frequency	18
Dwell time.....	20
Maximum Peak Output Power/Average Power(Reference data for RF Exposure)	23
Radiated Spurious Emission	25
Conducted Spurious Emission	47
Conducted Emission Band Edge compliance	53
APPENDIX 2: Test Instruments.....	55
APPENDIX 3: Photographs of Test Setup	57
Radiated Spurious Emission	57
Pre-check of Worst Case Position.....	58
Antenna Terminal Conducted Tests.....	59

SECTION 1: Customer Information

Company Name	Sony Group Corporation
Address	1-7-1 Konan Minato-ku, Tokyo, 108-0075 Japan
Contact Person	Kazuhiko Nagano

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	Wireless Noise Canceling Stereo Headset
Model Number	YY2963
Serial Number	Refer to SECTION 4.2
Condition	Engineering prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	December 20, 2022
Test Date	January 16, 2023 *Antenna Terminal Conducted tests only
	December 26, 2022 to January 17, 2023

2.2 Product Description

General Specification

Rating	DC 3.85 V (Battery)
Operating temperature	0 deg. C to +40 deg. C

Radio Specification

Bluetooth (BR / EDR)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK)
Antenna Gain	-3 dBi

Bluetooth (Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	GFSK
Antenna Gain	-3 dBi

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ISED: RSS-Gen 8.8	FCC: Section 15.207 ISED: RSS-Gen 8.8	N/A	N/A	*1)
Carrier Frequency Separation	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1) ISED: RSS-247 5.1 (b)	See data.	Complied a)	Conducted
20dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1) ISED: RSS-247 5.1 (a)		Complied a)	Conducted
Number of Hopping Frequency	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1)(iii) ISED: RSS-247 5.1 (d)		Complied b)	Conducted
Dwell time	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1)(iii) ISED: RSS-247 5.1 (d)		Complied c)	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section15.247(b)(1) ISED: RSS-247 5.4 (b)		Complied d)	Conducted
Spurious Emission & Band Edge Compliance	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section15.247(d) ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	13.2 dB 2483.500 MHz, AV, Hori., Mode: Tx Hopping Off, DH5 2480 MHz, Right	Complied e) / f)	Conducted/ Radiated (above 30 MHz) *2)
Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred. *1) The test was not applicable since the Bluetooth does not operate during charging. *2) Radiated test was selected over 30 MHz based on section 15.247(d). a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation) b) Refer to APPENDIX 1 (data of Number of Hopping Frequency) c) Refer to APPENDIX 1 (data of Dwell time) d) Refer to APPENDIX 1 (data of Maximum Peak Output Power) e) Refer to APPENDIX 1 (data of Conducted Spurious Emission) f) Refer to APPENDIX 1 (data of Radiated Spurious Emission)					

FCC Part 15.31 (e)

This EUT provides the stable voltage constantly to RF Part regardless of input voltage.
Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT.
Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99% Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	Complied a)	Conducted

a) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation)

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.

Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Item	Frequency range	Uncertainty (+/-)
Conducted emission (AC Mains) LISN	150 kHz-30 MHz	3.1 dB
Radiated emission (Measurement distance: 3 m)	9 kHz-30 MHz	3.3 dB
	30 MHz-200 MHz	4.8 dB
	200 MHz-1 GHz	6.1 dB
	1 GHz-6 GHz	4.7 dB
	6 GHz-18 GHz	5.3 dB
	18 GHz-40 GHz	5.5 dB
Radiated emission (Measurement distance: 1 m)	1 GHz-18 GHz	5.6 dB
	18 GHz-40 GHz	5.8 dB

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector)_SPM-06	1.3 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-06	2.1 dB
Power Measurement above 1 GHz (Average Detector)_SPM-07	1.1 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-07	1.2 dB
Power Measurement above 1 GHz (Average Detector)_SPM-13	1.1 dB
Power Measurement above 1 GHz (Peak Detector)_SPM-13	1.4 dB
Spurious emission (Conducted) below 1 GHz	0.8 dB
Conducted emissions Power Density Measurement 1 GHz-3 GHz	0.9 dB
Conducted emissions Power Density Measurement 3 GHz-18 GHz	2.4 dB
Spurious emission (Conducted) 18 GHz-26.5 GHz	2.4 dB
Spurious emission (Conducted) 26.5 GHz-40 GHz	2.2 dB
Bandwidth Measurement	0.012 %
Duty cycle and Time Measurement	0.27 %
Temperature_SCH-01	0.87 deg.C.
Humidity_SCH-01	3.5 %
Temperature_SCH-02	2.0 deg.C.
Humidity_SCH-02	6.7 %
Voltage	0.97 %

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.
1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 Japan
Telephone: +81-463-50-6400
A2LA Certificate Number: 1266.03
(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room	-	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	-	2.55 x 4.1 x 2.5	-	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)


Mode	Remarks*
Bluetooth (BT)	BR / EDR, Payload: PRBS9
*EUT has the power settings by the software as follows; Power Setting: 55 Software: BT Test Tool Version: 0.04 (Date: 2022.10.31, Storage location: Driven by connected PC) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

Details of Operating Mode(s)


Test Item	Mode	Hopping	Tested Frequency
Radiated Spurious Emission (Below 1 GHz)	Tx DH5 *1)	Off	2402 MHz
Radiated Spurious Emission (Above 1 GHz), Conducted Spurious Emission	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx DH5 Tx 3DH5	On	2402 MHz 2441 MHz 2480 MHz
20dB Bandwidth	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx DH5 Tx 3DH5	On	-
Dwell time	Tx DH1, DH3, DH5 Tx 3DH1, 3DH3, 3DH5	On	-
Maximum Peak Output Power	Tx DH5 Tx 2DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2480 MHz
99% Occupied Bandwidth	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2441 MHz 2480 MHz
*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test) *2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative. *It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification. *1) Conducted emissions and Spurious emissions for frequencies below 1 GHz were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.			

4.2 Configuration and Peripherals

[Antenna Terminal Conducted tests]

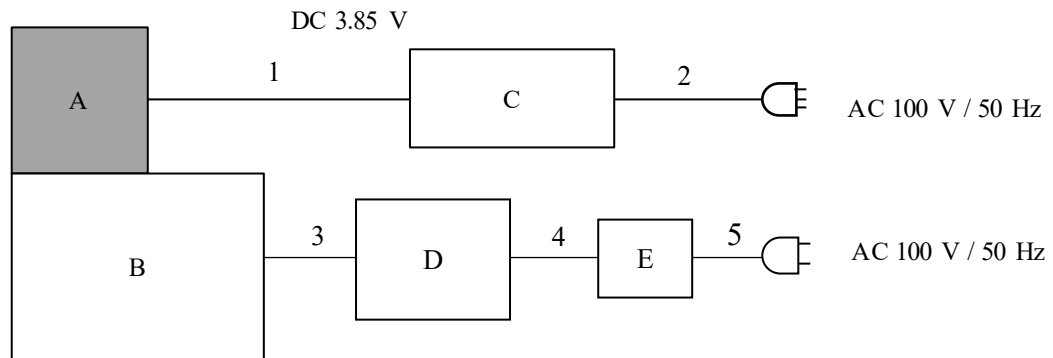

[Radiated Emission test]



Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	Wireless Noise Canceling Stereo Headset	YY2963	1300870 *1)	SONY	EUT (Left)
			1300740 *2)	SONY	EUT (Left)
A'	Wireless Noise Canceling Stereo Headset	YY2963	1300870 *1)	SONY	EUT (Right)
			1300740 *2)	SONY	EUT (Right)
B	Case	YY2963	1300870	SONY	-
C	Power Supply (DC)	PW18-2ATP	19050351	TEXIO	-
D	Laptop Computer	ThinkPad L580	PF-1LTWLZ	LENOVO	-
E	AC Adapter	ADLX45YLC2A	8SSA10E75842L1CZ94J0D3R	LENOVO	-

*1) For the Antenna Terminal Conducted tests

*2) For the Radiated Emission test

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC	0.1	Unshielded	Unshielded	-
2	AC	1.5	Unshielded	Unshielded	-
3	USB	0.2	Shielded	Shielded	-
4	DC	1.8	Unshielded	Unshielded	-
5	AC	0.9	Unshielded	Unshielded	-

SECTION 5: Radiated Spurious Emission

Test Procedure

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane. Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).


Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer *a)		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 1/T (T: burst length, refer to Burst rate confirmation sheet) Detector: Peak	RBW: 100 kHz VBW: 300 kHz

*1) Average Power Measurement was performed based on KDB 558074 D01 15.247 Meas Guidance v05r02.

*a) The Spectrum Analyzer was used in 3 dB resolution bandwidth.


Figure 2: Test Setup

Below 1 GHz

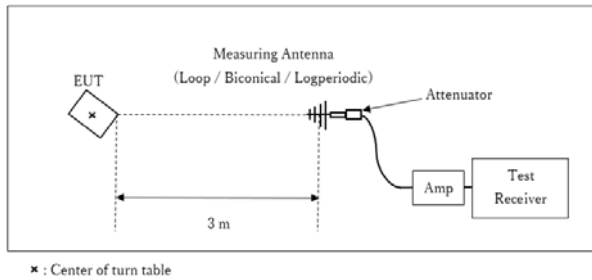

Test Distance: 3 m


1 GHz to 10 GHz

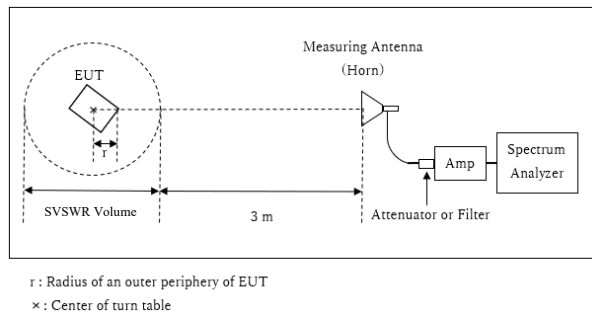

Distance Factor: $20 \times \log (3.99 \text{ m} / 3.0 \text{ m}) = 2.48 \text{ dB}$
* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.99 \text{ m}$

SVSWR Volume : 2.0 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.01 \text{ m}$

10 GHz to 26.5 GHz

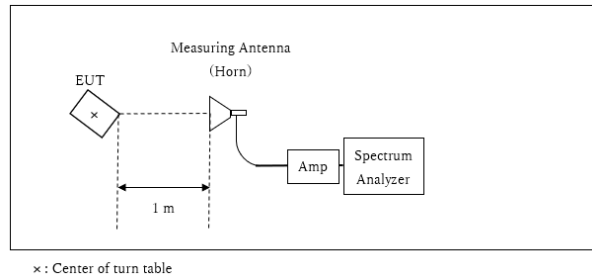

Distance Factor: $20 \times \log (1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$
*Test Distance: 1 m

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

		Below 30 MHz	1-2.8 GHz	2.8-10 GHz	10-18 GHz	18-26.5 GHz
EUT (Left)	Horizontal	X	X	X	X	X
	Vertical	X	Z	X	X	X
EUT (Right)	Horizontal	X	X	X	X	X
	Vertical	X	Y	X	X	X

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement Range : 30 MHz to 26.5 GHz
Test Data : APPENDIX
Test Result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.
The antenna terminal conducted test was performed only for the left side as representative.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
20dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak Average *2)	-	Power Meter (Sensor: 160 MHz BW)
Carrier Frequency Separation	3 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3) *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	10 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

*1) Peak hold was applied as Worst-case measurement.
 *2) Reference data
 *3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.
 Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.
 *4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

Test Data : APPENDIX
Test Result : Pass

APPENDIX 1: Test data

20dB Bandwidth, 99%Occupied Bandwidth and Carrier Frequency Separation


Test place	Shonan EMC Lab. No.5 Shielded Room	
Date	December 29, 2022	January 5, 2023
Temperature / Humidity	23 deg. C / 38 % RH	23 deg. C / 35 % RH
Engineer	Yohsuke Matsuzawa	Yohsuke Matsuzawa
Mode	Tx, Hopping Off, Tx, Hopping On	

Mode	Freq. [MHz]	20 dB Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	0.950	879.7	1.000	≥ 0.633
DH5	2441.0	0.949	879.6	1.000	≥ 0.633
DH5	2480.0	0.949	879.2	1.000	≥ 0.633
DH5	Hopping On	-	78650.2	-	-
3DH5	2402.0	1.258	1166.4	1.000	≥ 0.839
3DH5	2441.0	1.255	1166.0	1.000	≥ 0.837
3DH5	2480.0	1.255	1165.1	1.000	≥ 0.837
3DH5	Hopping On	-	78717.0	-	-


Limit: Two-thirds of 20 dB Bandwidth or 25 kHz (whichever is greater).

No limit applies to 20 dB Bandwidth.


20dB Bandwidth and 99% Occupied Bandwidth

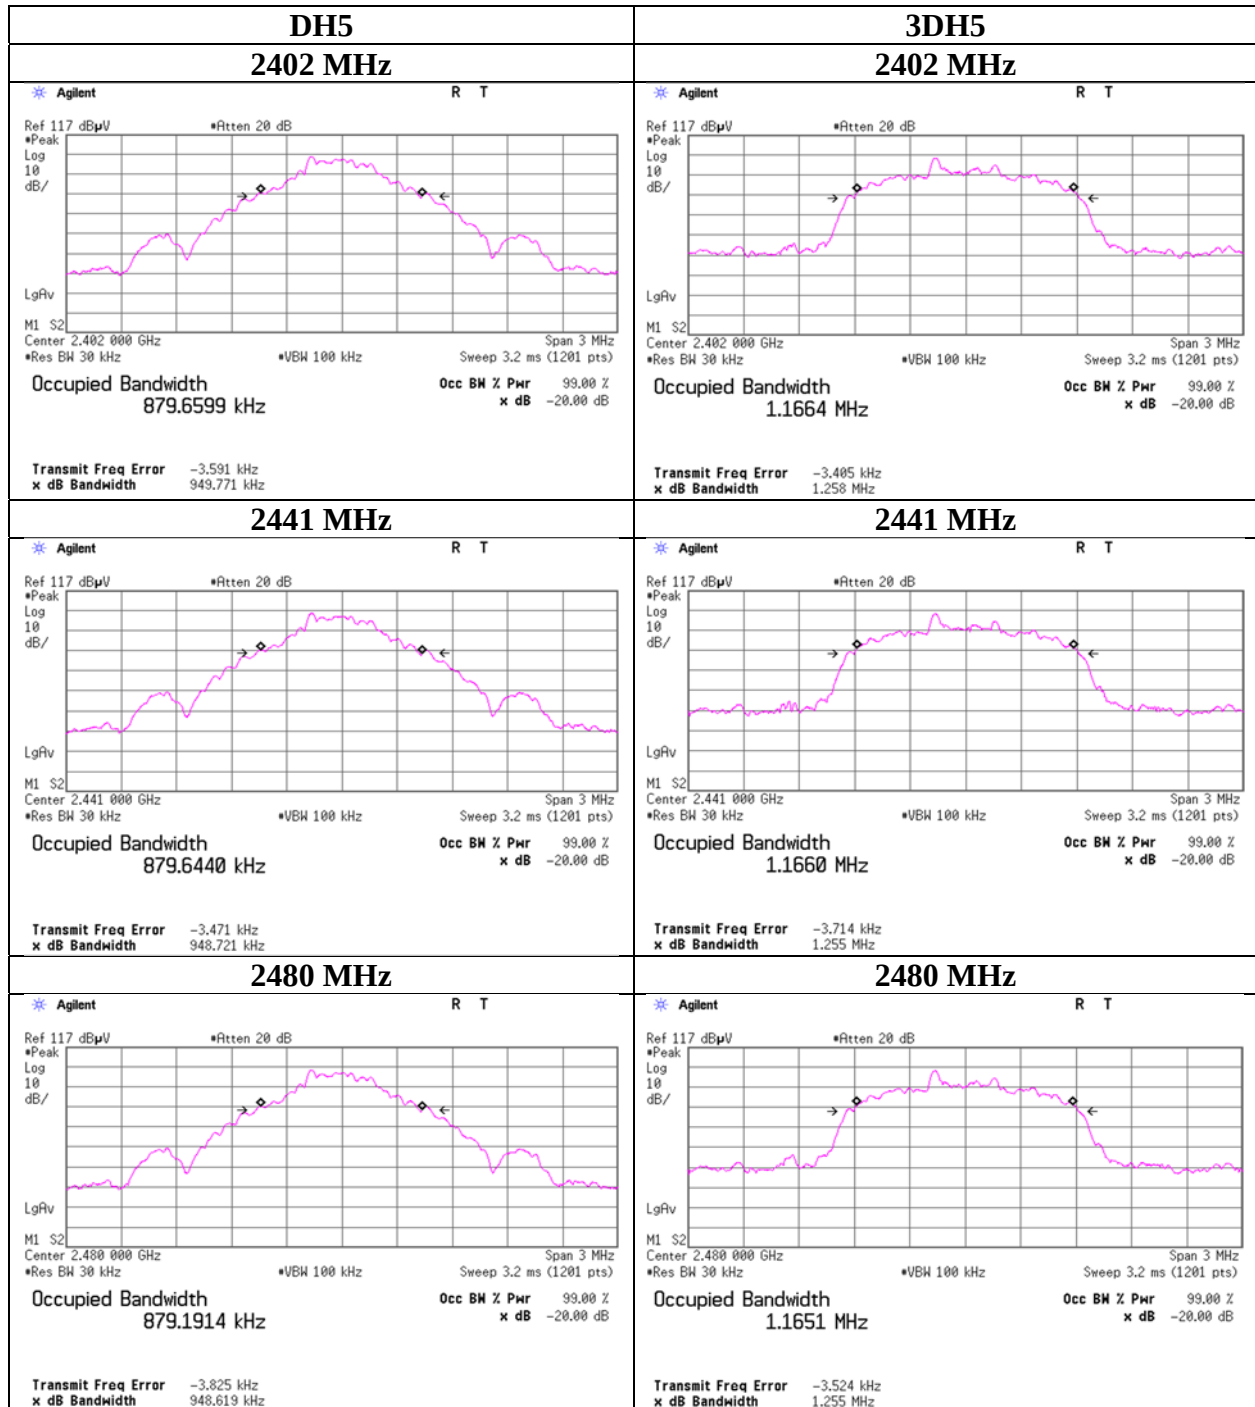

20dB Bandwidth and 99% Occupied Bandwidth

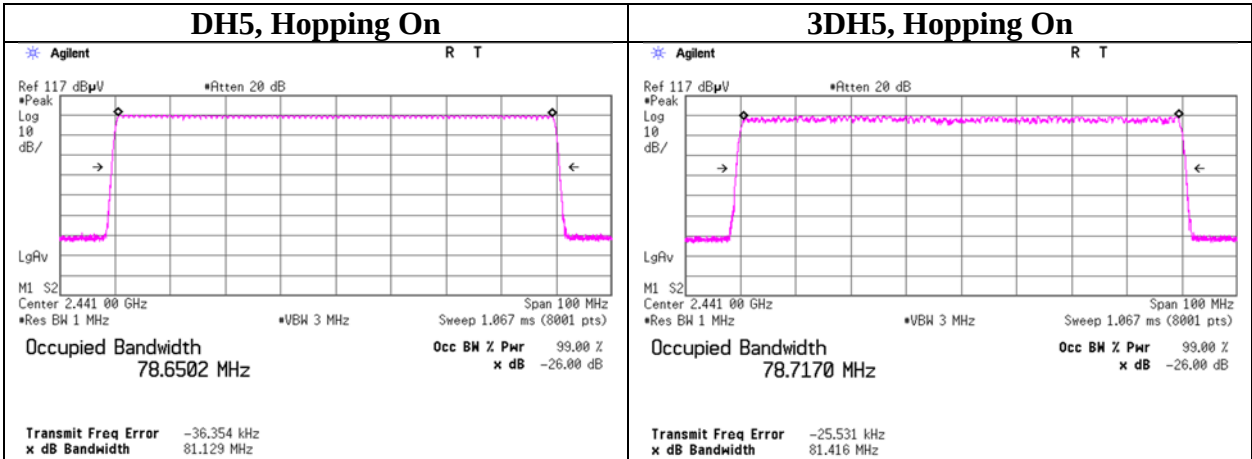

Carrier Frequency Separation

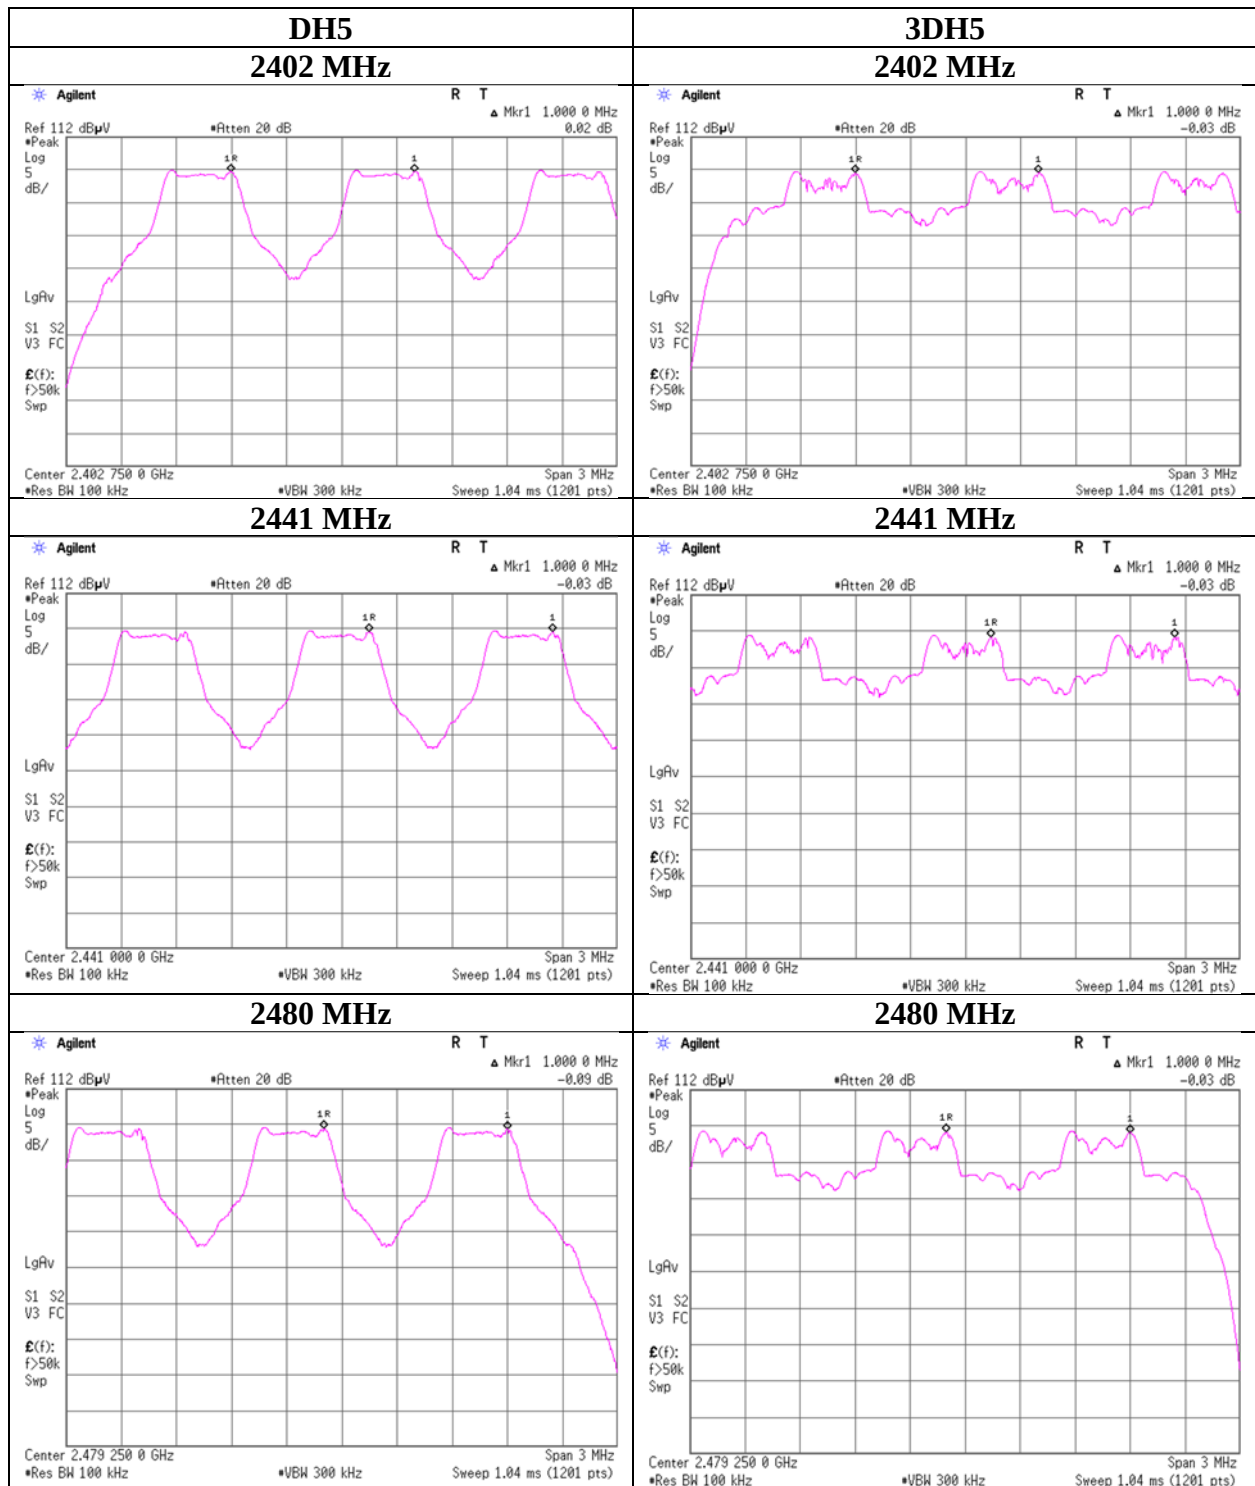


Number of Hopping Frequency

Test place	Shonan EMC Lab. No.5 Semi Anechoic Chamber
Date	January 5, 2023
Temperature / Humidity	23 deg. C / 35 % RH
Engineer	Yohsuke Matsuzawa
Mode	Tx, Hopping Off

Mode	Number of channel [channels]	Limit [channels]
DH5	79	≥ 15
3DH5	79	≥ 15

Test was not performed at AFH mode whose number of hopping channel is
20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

Number of Hopping Frequency

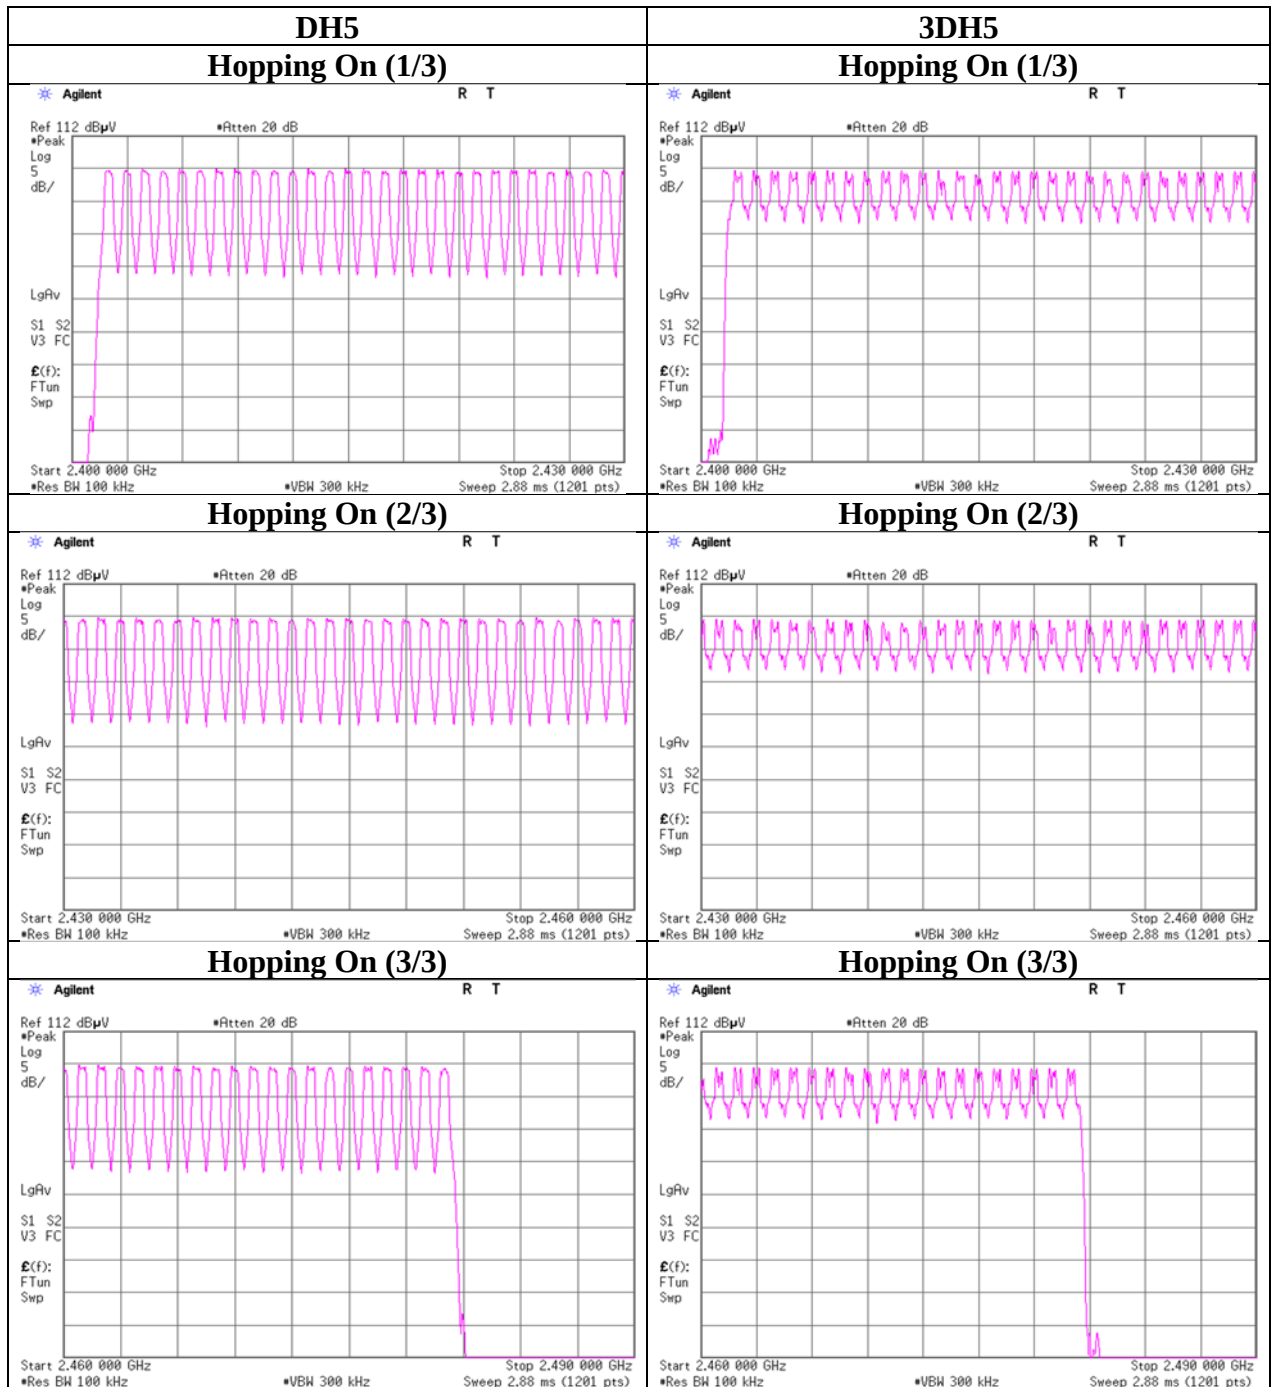

Dwell time

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	January 17, 2023
Temperature / Humidity	25 deg. C / 50 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off

Mode	Number of transmission in a 31.6 (79 Hopping x 0.4)	Length of transmission [ms]	Result [ms]	Limit [ms]
DH1	51.0 times / 5 s x 31.6 s = 323 times	0.389	126	400
DH3	26.0 times / 5 s x 31.6 s = 165 times	1.645	271	400
DH5	17.0 times / 5 s x 31.6 s = 108 times	2.895	313	400
3DH1	51.0 times / 5 s x 31.6 s = 323 times	0.390	126	400
3DH3	25.8 times / 5 s x 31.6 s = 164 times	1.641	269	400
3DH5	17.2 times / 5 s x 31.6 s = 109 times	2.898	316	400

Sample Calculation

Result = Number of transmission x Length of transmission

*Average data of 5 tests.


Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	51	51	51	51	51	51
DH3	26	26	27	26	25	26
DH5	17	17	17	17	17	17
3DH1	51	50	51	52	51	51
3DH3	26	26	25	26	26	25.8
3DH5	17	17	18	17	17	17.2

Sample Calculation


Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in $N \times 0.4$ s, where N is the number of channels being used in the hopping sequence ($20 \leq N \leq 79$), is always less than 0.4 s regardless of packet size. This is confirmed in the test report for $N = 79$.

Dwell time

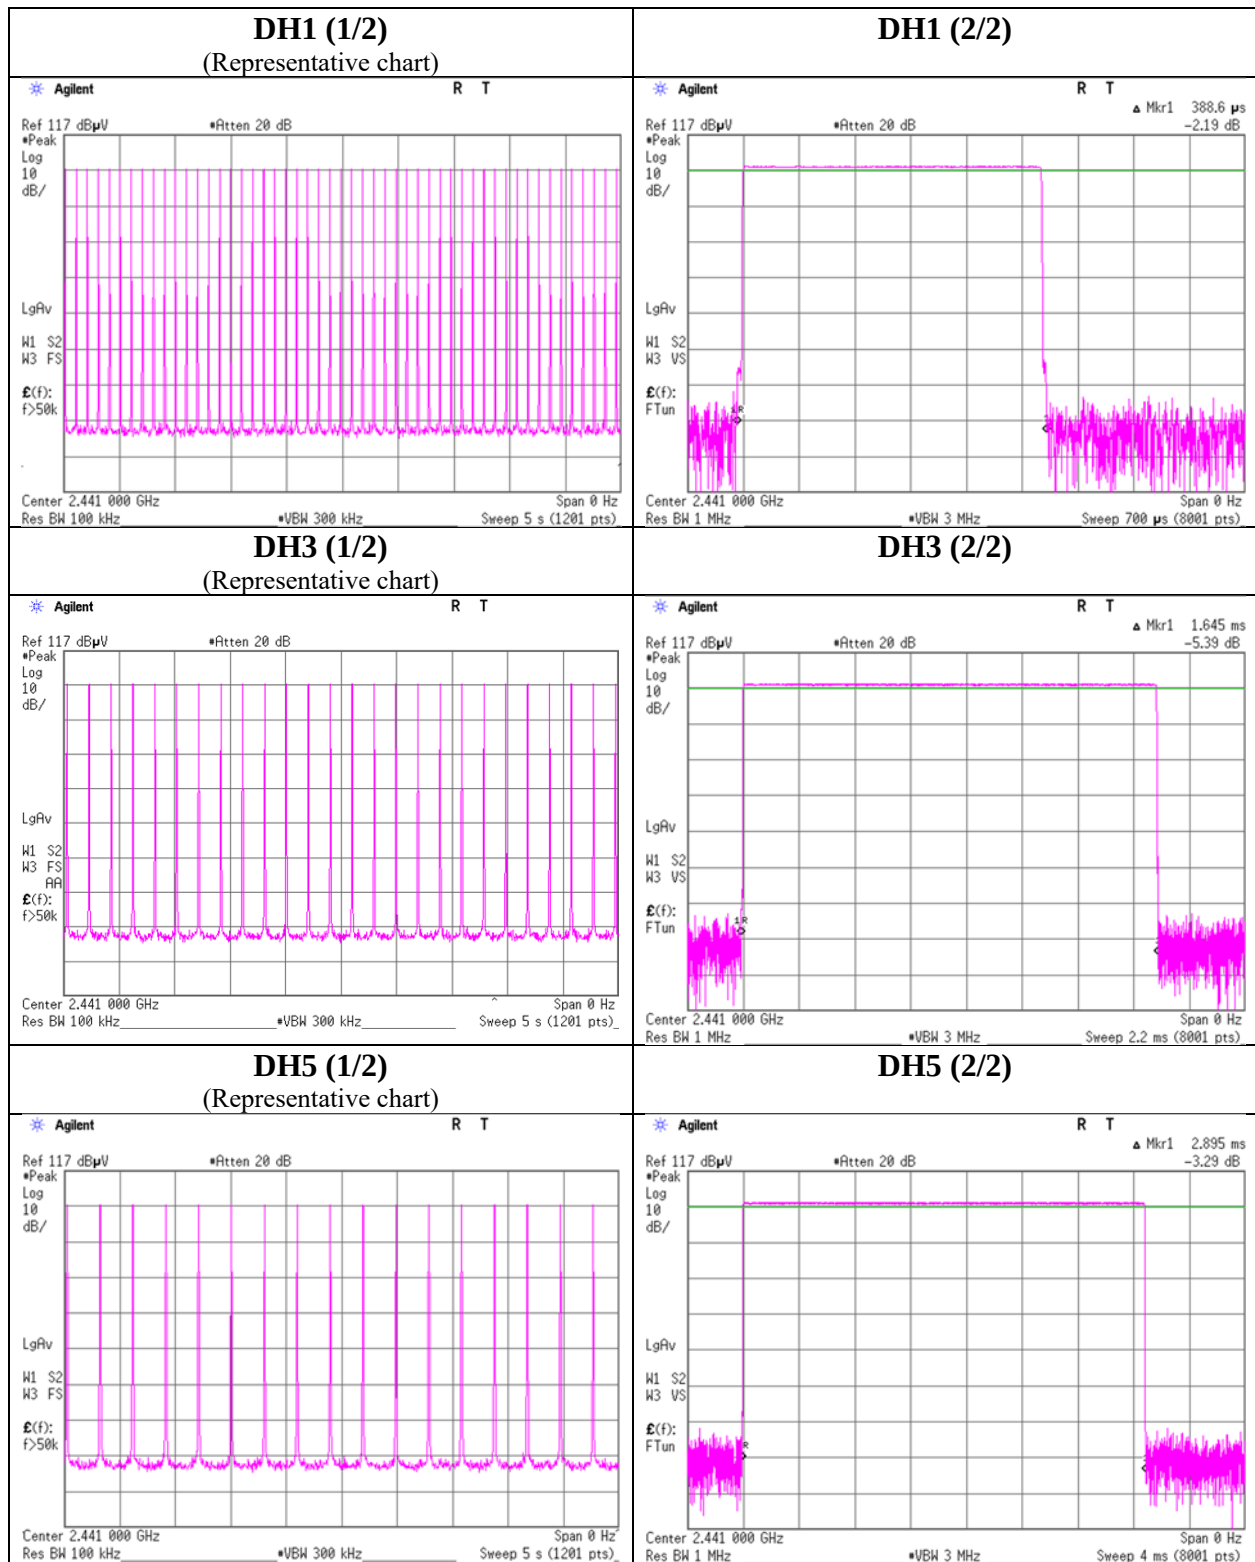

Dwell time

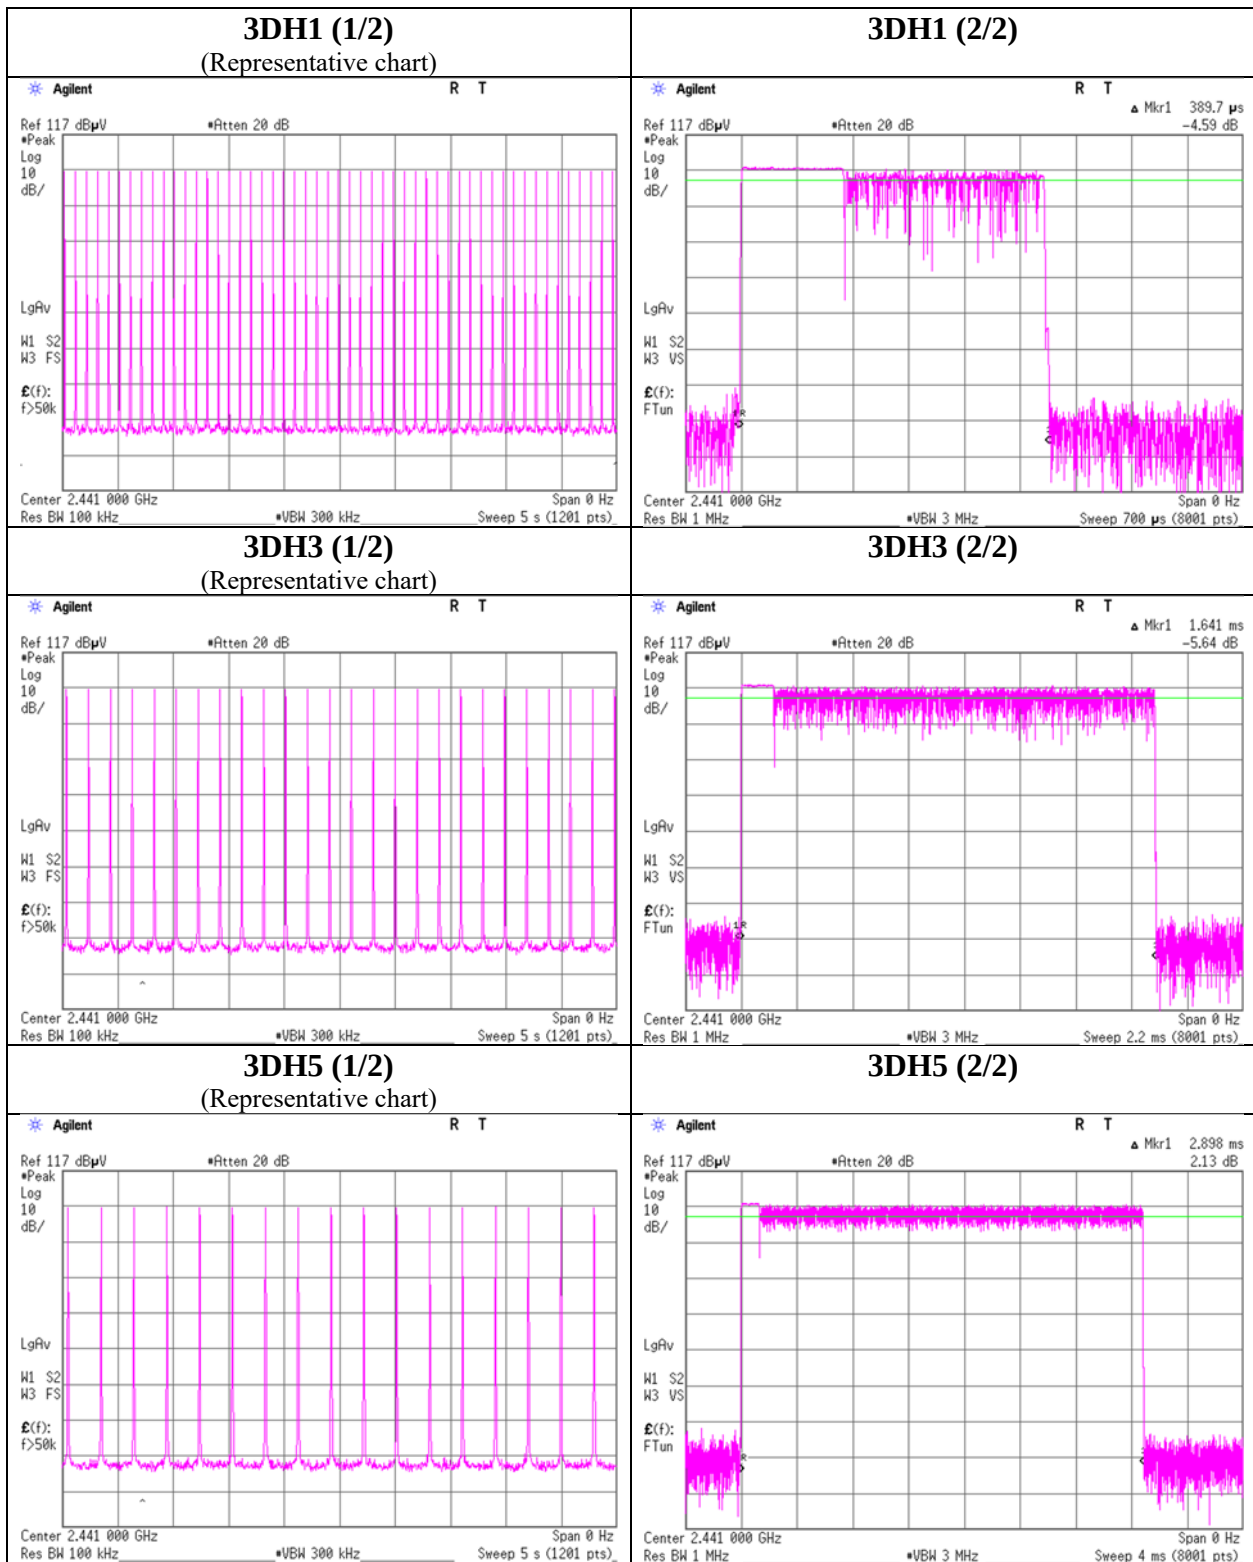

Maximum Peak Output Power/Average Power(Reference data for RF Exposure)

Test place Shonan EMC Lab. No.5 Shielded Room
Date January 16, 2023
Temperature / Humidity 25 deg. C / 50 % RH
Engineer Takahiro Kawakami
Mode Tx, Hopping Off

Maximum peak output power

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
					Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
DH5	2402	1.54	1.25	9.88	12.67	18.49	20.97	125	8.30	-3.00	9.67	9.27	36.02	4000	26.35
DH5	2441	1.44	1.26	9.88	12.58	18.11	20.97	125	8.39	-3.00	9.58	9.08	36.02	4000	26.44
DH5	2480	1.06	1.26	9.89	12.21	16.63	20.97	125	8.76	-3.00	9.21	8.34	36.02	4000	26.81
2DH5	2402	1.07	1.25	9.88	12.20	16.60	20.97	125	8.77	-3.00	9.20	8.32	36.02	4000	26.82
2DH5	2441	0.97	1.26	9.88	12.11	16.26	20.97	125	8.86	-3.00	9.11	8.15	36.02	4000	26.91
2DH5	2480	0.75	1.26	9.89	11.90	15.49	20.97	125	9.07	-3.00	8.90	7.76	36.02	4000	27.12
3DH5	2402	1.28	1.25	9.88	12.41	17.42	20.97	125	8.56	-3.00	9.41	8.73	36.02	4000	26.61
3DH5	2441	1.21	1.26	9.88	12.35	17.18	20.97	125	8.62	-3.00	9.35	8.61	36.02	4000	26.67
3DH5	2480	0.95	1.26	9.89	12.10	16.22	20.97	125	8.87	-3.00	9.10	8.13	36.02	4000	26.92

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Test was not performed at AFH mode, because the decrease of number of channel (min: 20 ch) at AFH mode does not influence on the output power and bandwidth of the EUT.
As this device had AFH mode and frequency separation could not meet the requirement of over 20 dB BW without 2/3 relaxation, 125 mW power limit was applied to it.

Average power (Reference data for RF Exposure)

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
					[dBm]	[mW]		[dBm]	[mW]
					[dBm]	[mW]	[dB]	[dBm]	[mW]
DH5	2402	0.01	1.25	9.88	11.14	13.00	1.12	12.26	16.83
DH5	2441	-0.10	1.26	9.88	11.04	12.71	1.12	12.16	16.45
DH5	2480	-0.31	1.26	9.89	10.84	12.13	1.12	11.96	15.71
2DH5	2402	-2.57	1.25	9.88	8.56	7.18	1.12	9.68	9.28
2DH5	2441	-2.70	1.26	9.88	8.44	6.98	1.12	9.56	9.03
2DH5	2480	-2.98	1.26	9.89	8.17	6.56	1.12	9.29	8.49
3DH5	2402	-2.56	1.25	9.88	8.57	7.19	1.12	9.69	9.31
3DH5	2441	-2.69	1.26	9.88	8.45	7.00	1.12	9.57	9.06
3DH5	2480	-2.96	1.26	9.89	8.19	6.59	1.12	9.31	8.53

Sample Calculation:


Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Result (Burst power average) = Result (Time average) + Duty factor


Burst Rate Confirmation

Test place	Shonan EMC Lab. No.5 Semi Anechoic Chamber
Date	January 5, 2023
Temperature / Humidity	23 deg. C / 35 % RH
Engineer	Yohsuke Matsuzawa
Mode	Tx, Hopping Off


DH5

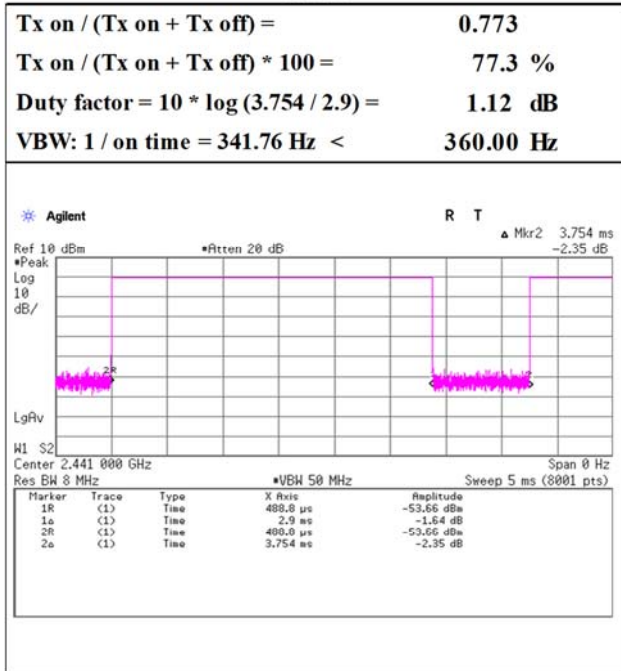

2DH5

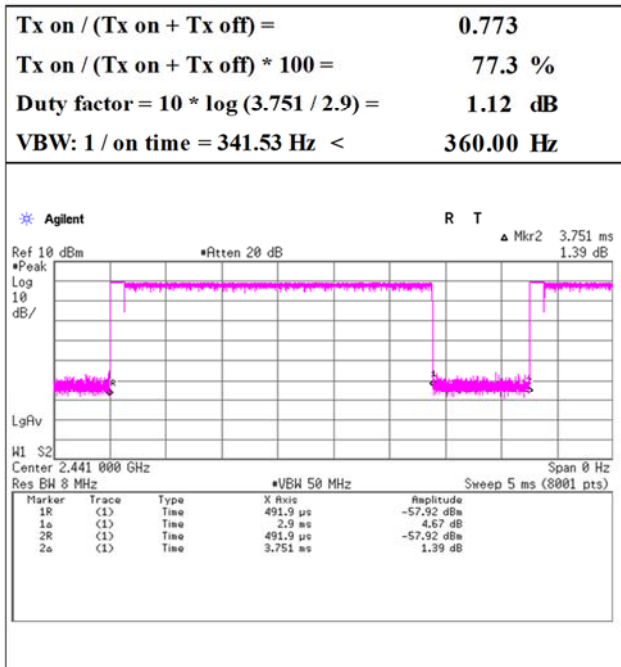

3DH5

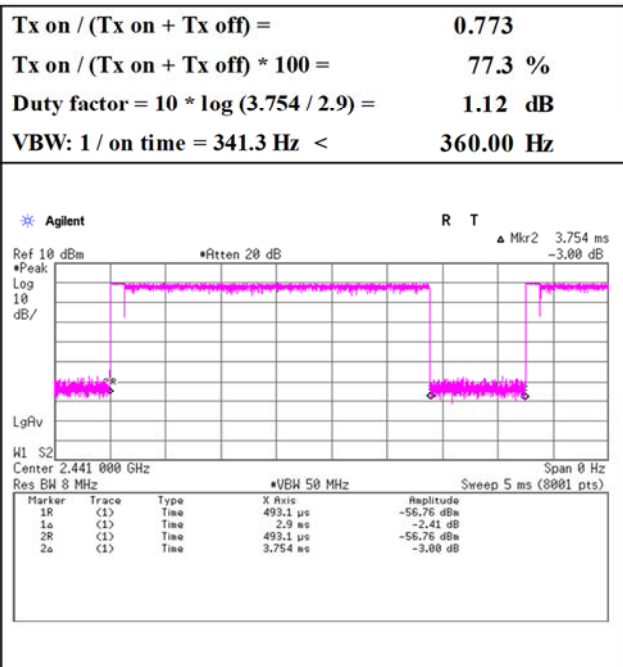

Radiated Spurious Emission

Test place	Shonan EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.2
Date	January 10, 2023	December 26, 2022	January 16, 2023	January 5, 2023
Temperature / Humidity	21 deg.C, 30 %RH	22 deg.C, 23 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Kouki Yamada	Miku Ikudome	Yusuke Tanikawara	Takahiro Kawakami
	(30 MHz -1 GHz)	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz, Left			

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	32.125	QP	21.60	18.01	6.88	31.93	0.00	14.56	40.0	25.4	100	0	-
Hori.	915.597	QP	19.70	22.29	9.79	30.78	0.00	21.00	46.0	25.0	100	0	-
Hori.	2390.000	PK	47.27	28.18	14.48	41.63	2.48	50.78	73.9	23.1	208	49	-
Hori.	4804.000	PK	48.75	31.54	6.95	42.87	2.48	46.85	73.9	27.0	150	0	-
Hori.	7206.000	PK	47.86	37.37	8.41	43.39	2.48	52.73	73.9	21.1	150	0	-
Hori.	9608.000	PK	47.73	38.89	9.68	43.21	2.48	55.57	73.9	18.3	150	0	-
Hori.	2390.000	AV	35.37	28.18	14.48	41.63	2.48	38.88	53.9	15.0	208	49	VBW:360 Hz
Hori.	4804.000	AV	37.47	31.54	6.95	42.87	2.48	35.57	53.9	18.3	150	0	VBW: 360Hz, Floor Noise
Hori.	7206.000	AV	37.46	37.37	8.41	43.39	2.48	42.33	53.9	11.5	150	0	VBW: 360Hz, Floor Noise
Hori.	9608.000	AV	37.02	38.89	9.68	43.21	2.48	44.86	53.9	9.0	150	0	VBW: 360Hz, Floor Noise
Vert.	30.446	QP	20.90	18.68	6.83	31.93	0.00	14.48	40.0	25.5	100	0	-
Vert.	34.846	QP	21.40	16.93	6.95	31.93	0.00	13.35	40.0	26.6	100	0	-
Vert.	179.460	QP	21.00	16.00	8.81	31.81	0.00	14.00	43.5	29.5	100	0	-
Vert.	190.865	QP	21.10	16.43	8.84	31.80	0.00	14.57	43.5	28.9	100	0	-
Vert.	942.406	QP	20.00	22.02	9.92	30.65	0.00	21.29	46.0	24.7	100	0	-
Vert.	2390.000	PK	47.69	28.18	14.48	41.63	2.48	51.20	73.9	22.7	234	100	-
Vert.	4804.000	PK	48.92	31.54	6.95	42.87	2.48	47.02	73.9	26.8	150	0	-
Vert.	7206.000	PK	48.60	37.37	8.41	43.39	2.48	53.47	73.9	20.4	150	0	-
Vert.	9608.000	PK	47.54	38.89	9.68	43.21	2.48	55.38	73.9	18.5	150	0	-
Vert.	2390.000	AV	35.49	28.18	14.48	41.63	2.48	39.00	53.9	14.9	234	100	VBW:360 Hz
Vert.	4804.000	AV	37.49	31.54	6.95	42.87	2.48	35.59	53.9	18.3	150	0	VBW: 360Hz, Floor Noise
Vert.	7206.000	AV	37.56	37.37	8.41	43.39	2.48	42.43	53.9	11.4	150	0	VBW: 360Hz, Floor Noise
Vert.	9608.000	AV	36.97	38.89	9.68	43.21	2.48	44.81	53.9	9.0	150	0	VBW: 360Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$ 10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)



Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	94.26	28.17	14.50	41.64	2.48	97.77	-	-	Carrier
Hori.	2400.000	PK	39.97	28.17	14.50	41.64	2.48	43.48	77.7	34.2	-
Vert.	2402.000	PK	93.37	28.17	14.50	41.64	2.48	96.88	-	-	Carrier
Vert.	2400.000	PK	40.07	28.17	14.50	41.64	2.48	43.58	76.8	33.2	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$ 10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	December 26, 2022
Temperature / Humidity	22 deg.C, 23 %RH
Engineer	Miku Ikudome
	(1 GHz -2.8 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz, Left

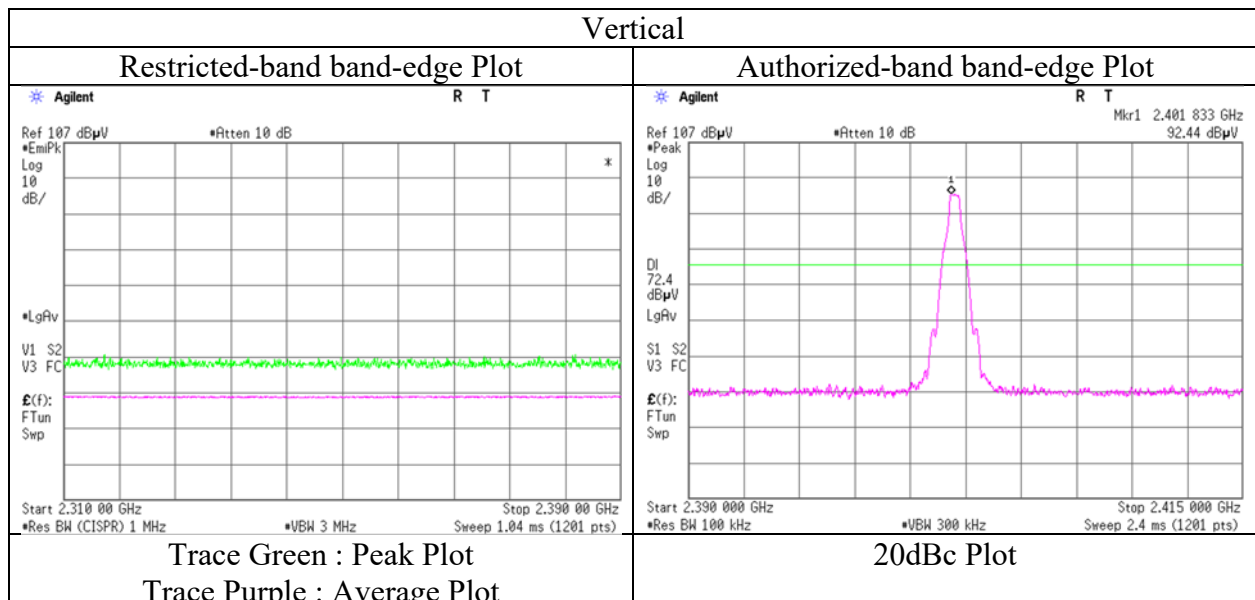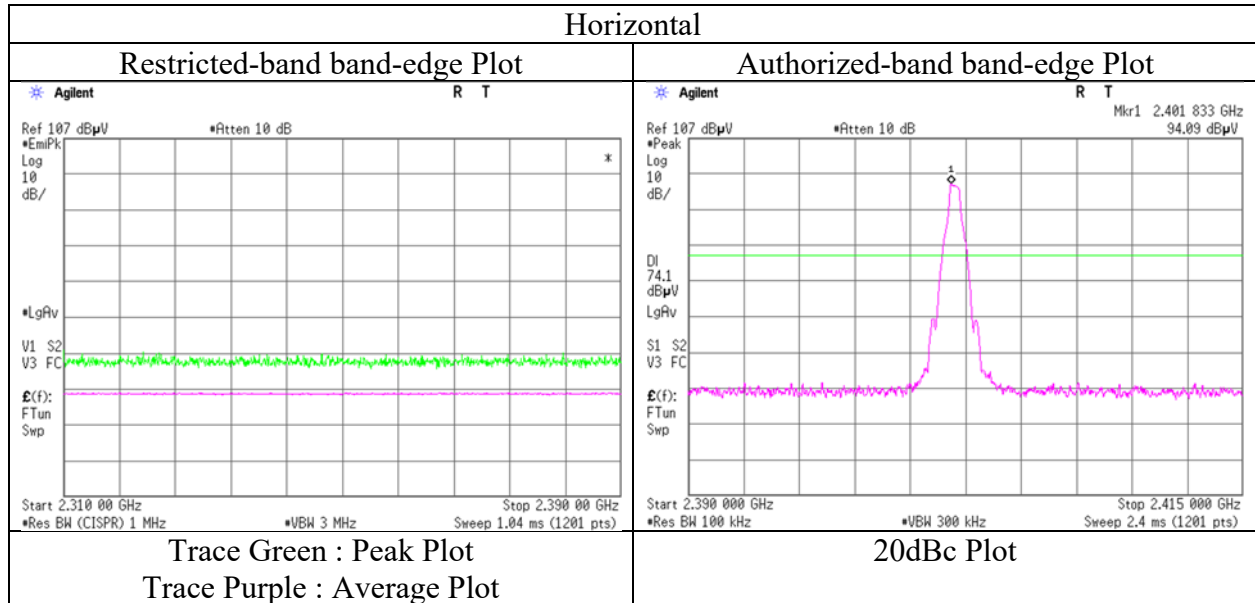

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.2
Date	December 26, 2022	January 16, 2023	January 5, 2023
Temperature / Humidity	22 deg.C, 23 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Miku Ikudome	Yusuke Tanikawara	Takahiro Kawakami
	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz, Left		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4882.000	PK	47.97	31.64	6.99	42.83	2.48	46.25	73.9	27.6	150	0	-
Hori.	7323.000	PK	47.81	37.46	8.46	43.52	2.48	52.69	73.9	21.2	150	0	-
Hori.	9764.000	PK	47.66	39.18	9.76	43.02	2.48	56.06	73.9	17.8	150	0	-
Hori.	4882.000	AV	37.36	31.64	6.99	42.83	2.48	35.64	53.9	18.2	150	0	VBW: 360 Hz, Floor Noise
Hori.	7323.000	AV	37.59	37.46	8.46	43.52	2.48	42.47	53.9	11.4	150	0	VBW: 360 Hz, Floor Noise
Hori.	9764.000	AV	37.23	39.18	9.76	43.02	2.48	45.63	53.9	8.2	150	0	VBW: 360 Hz, Floor Noise
Vert.	4882.000	PK	48.53	31.64	6.99	42.83	2.48	46.81	73.9	27.0	150	0	-
Vert.	7323.000	PK	48.21	37.46	8.46	43.52	2.48	53.09	73.9	20.8	150	0	-
Vert.	9764.000	PK	48.06	39.18	9.76	43.02	2.48	56.46	73.9	17.4	150	0	-
Vert.	4882.000	AV	37.21	31.64	6.99	42.83	2.48	35.49	53.9	18.4	150	0	VBW: 360 Hz, Floor Noise
Vert.	7323.000	AV	37.61	37.46	8.46	43.52	2.48	42.49	53.9	11.4	150	0	VBW: 360 Hz, Floor Noise
Vert.	9764.000	AV	37.27	39.18	9.76	43.02	2.48	45.67	53.9	8.2	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.2
Date	December 26, 2022	January 16, 2023	January 5, 2023
Temperature / Humidity	22 deg.C, 23 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Miku Ikudome	Yusuke Tanikawara	Takahiro Kawakami
	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz, Left		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	49.98	28.08	14.60	41.68	2.48	53.46	73.9	20.4	260	18	-
Hori.	4960.000	PK	48.23	31.81	7.05	42.80	2.48	46.77	73.9	27.1	150	0	-
Hori.	7440.000	PK	47.75	37.61	8.51	43.65	2.48	52.70	73.9	21.2	150	0	-
Hori.	9920.000	PK	48.23	39.03	9.83	42.82	2.48	56.75	73.9	17.1	150	0	-
Hori.	2483.500	AV	35.86	28.08	14.60	41.68	2.48	39.34	53.9	14.5	260	18	VBW:360 Hz
Hori.	4960.000	AV	37.25	31.81	7.05	42.80	2.48	35.79	53.9	18.1	150	0	VBW: 360 Hz, Floor Noise
Hori.	7440.000	AV	37.19	37.61	8.51	43.65	2.48	42.14	53.9	11.7	150	0	VBW: 360 Hz, Floor Noise
Hori.	9920.000	AV	36.97	39.03	9.83	42.82	2.48	45.49	53.9	8.4	150	0	VBW: 360 Hz, Floor Noise
Vert.	2483.500	PK	47.83	28.08	14.60	41.68	2.48	51.31	73.9	22.5	111	307	-
Vert.	4960.000	PK	48.10	31.81	7.05	42.80	2.48	46.64	73.9	27.2	150	0	-
Vert.	7440.000	PK	48.01	37.61	8.51	43.65	2.48	52.96	73.9	20.9	150	0	-
Vert.	9920.000	PK	48.21	39.03	9.83	42.82	2.48	56.73	73.9	17.1	150	0	-
Vert.	2483.500	AV	35.77	28.08	14.60	41.68	2.48	39.25	53.9	14.6	111	307	VBW:360 Hz
Vert.	4960.000	AV	37.19	31.81	7.05	42.80	2.48	35.73	53.9	18.1	150	0	VBW: 360 Hz, Floor Noise
Vert.	7440.000	AV	37.31	37.61	8.51	43.65	2.48	42.26	53.9	11.6	150	0	VBW: 360 Hz, Floor Noise
Vert.	9920.000	AV	36.89	39.03	9.83	42.82	2.48	45.41	53.9	8.4	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	December 26, 2022
Temperature / Humidity	22 deg.C, 23 %RH
Engineer	Miku Ikudome
	(1 GHz -2.8 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz, Left

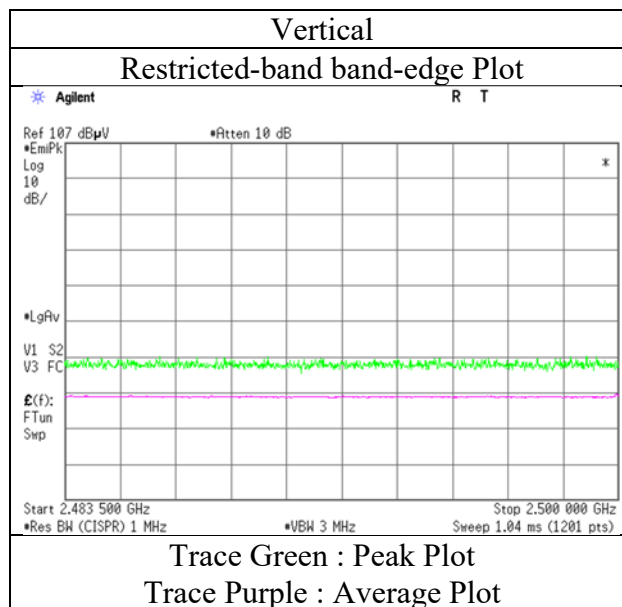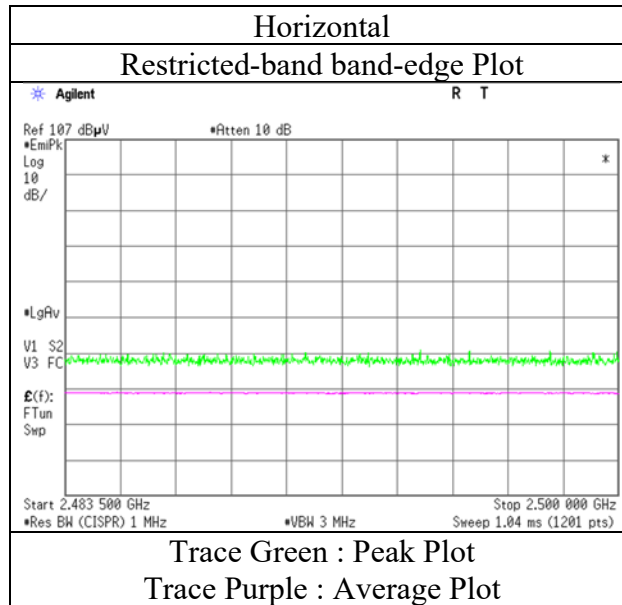

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.2
Date	January 13, 2023	January 16, 2023	January 5, 2023
Temperature / Humidity	23 deg.C, 33 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Takahiro Suzuki	Yusuke Tanikawara	Takahiro Kawakami
	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz,Left		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	49.16	28.18	14.49	41.63	2.48	52.68	73.9	21.2	245	73	-
Hori.	4804.000	PK	48.35	31.54	6.95	42.87	2.48	46.45	73.9	27.4	150	0	-
Hori.	7206.000	PK	48.04	37.37	8.41	43.39	2.48	52.91	73.9	20.9	150	0	-
Hori.	9608.000	PK	47.71	38.89	9.68	43.21	2.48	55.55	73.9	18.3	150	0	-
Hori.	2390.000	AV	35.52	28.18	14.49	41.63	2.48	39.04	53.9	14.8	245	73	VBW:360 Hz
Hori.	4804.000	AV	37.37	31.54	6.95	42.87	2.48	35.47	53.9	18.4	150	0	VBW: 360 Hz, Floor Noise
Hori.	7206.000	AV	37.46	37.37	8.41	43.39	2.48	42.33	53.9	11.5	150	0	VBW: 360 Hz, Floor Noise
Hori.	9608.000	AV	36.91	38.89	9.68	43.21	2.48	44.75	53.9	9.1	150	0	VBW: 360 Hz, Floor Noise
Vert.	2390.000	PK	49.37	28.18	14.49	41.63	2.48	52.89	73.9	21.0	260	268	-
Vert.	4804.000	PK	47.74	31.54	6.95	42.87	2.48	45.84	73.9	28.0	150	0	-
Vert.	7206.000	PK	49.11	37.37	8.41	43.39	2.48	53.98	73.9	19.9	150	0	-
Vert.	9608.000	PK	49.08	38.89	9.68	43.21	2.48	56.92	73.9	16.9	150	0	-
Vert.	2390.000	AV	35.61	28.18	14.49	41.63	2.48	39.13	53.9	14.7	260	268	VBW:360 Hz
Vert.	4804.000	AV	37.29	31.54	6.95	42.87	2.48	35.39	53.9	18.5	150	0	VBW: 360 Hz, Floor Noise
Vert.	7206.000	AV	37.30	37.37	8.41	43.39	2.48	42.17	53.9	11.7	150	0	VBW: 360 Hz, Floor Noise
Vert.	9608.000	AV	36.84	38.89	9.68	43.21	2.48	44.68	53.9	9.2	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	92.07	28.17	14.51	41.64	2.48	95.59	-	-	Carrier
Hori.	2400.000	PK	39.19	28.17	14.51	41.64	2.48	42.71	75.5	32.7	-
Vert.	2402.000	PK	93.03	28.17	14.51	41.64	2.48	96.55	-	-	Carrier
Vert.	2400.000	PK	38.81	28.17	14.51	41.64	2.48	42.33	76.5	34.1	-



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 13, 2023
Temperature / Humidity	23 deg.C, 33 %RH
Engineer	Takahiro Suzuki
	(1 GHz -2.8 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz, Left

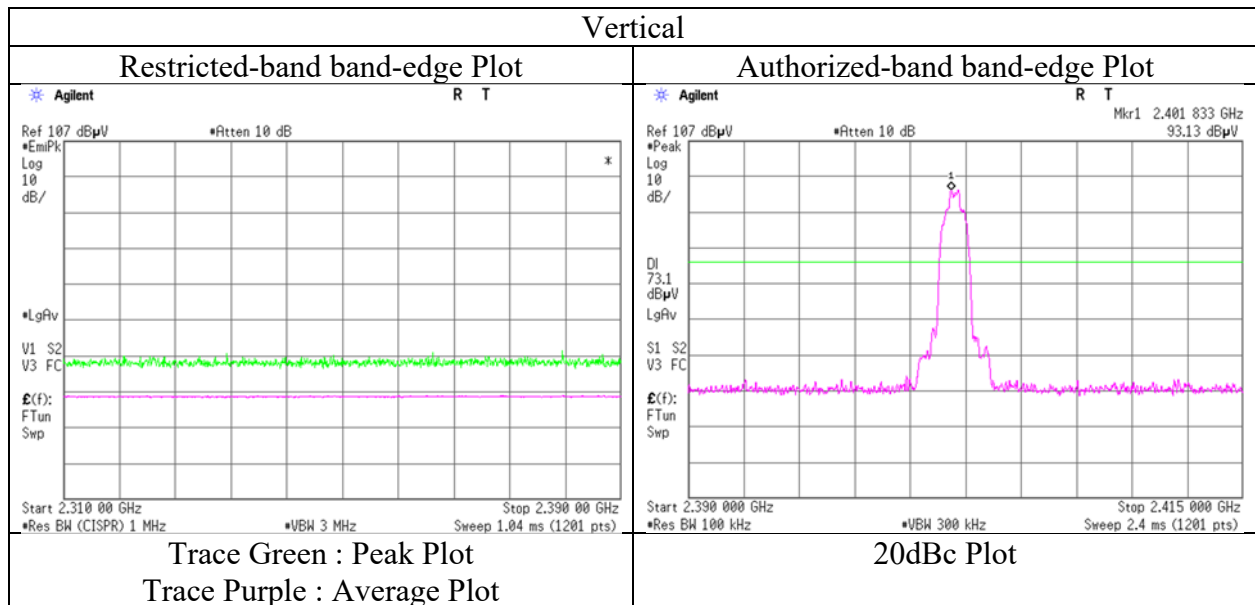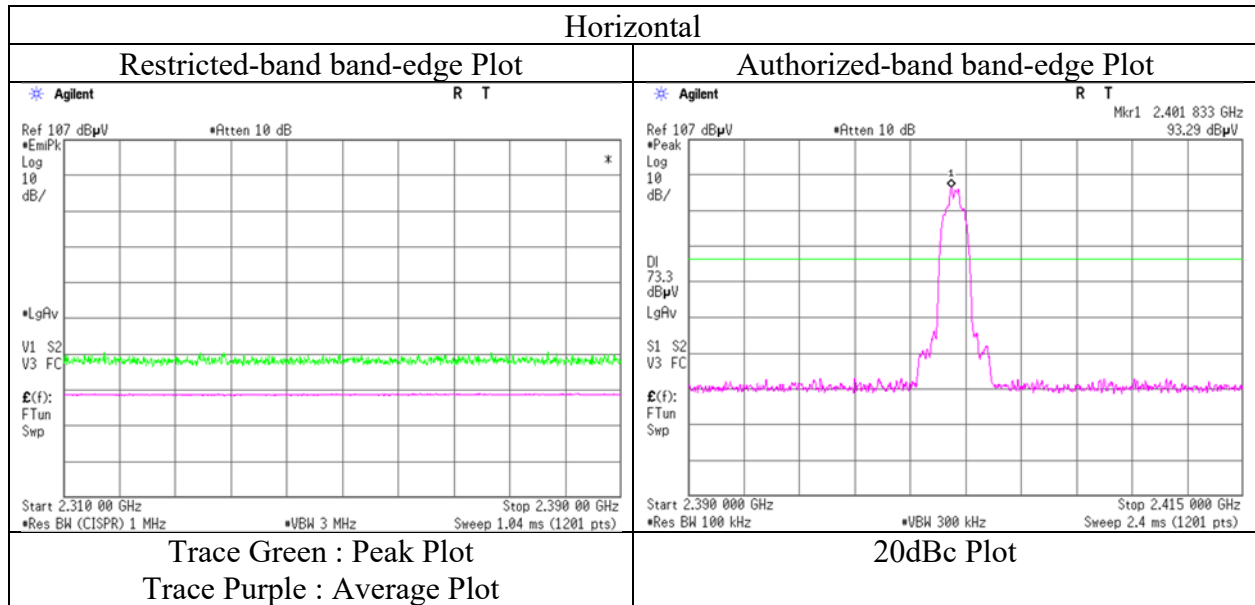

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.2
Date	January 13, 2023	January 16, 2023	January 5, 2023
Temperature / Humidity	23 deg.C, 33 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Takahiro Suzuki	Yusuke Tanikawara	Takahiro Kawakami
	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2441 MHz, Left		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4882.000	PK	47.61	31.64	6.99	42.83	2.48	45.89	73.9	28.0	150	0	-
Hori.	7323.000	PK	48.75	37.46	8.46	43.52	2.48	53.63	73.9	20.2	150	0	-
Hori.	9764.000	PK	48.28	39.18	9.76	43.02	2.48	56.68	73.9	17.2	150	0	-
Hori.	4882.000	AV	37.11	31.64	6.99	42.83	2.48	35.39	53.9	18.5	150	0	VBW: 360 Hz, Floor Noise
Hori.	7323.000	AV	37.51	37.46	8.46	43.52	2.48	42.39	53.9	11.5	150	0	VBW: 360 Hz, Floor Noise
Hori.	9764.000	AV	37.21	39.18	9.76	43.02	2.48	45.61	53.9	8.2	150	0	VBW: 360 Hz, Floor Noise
Vert.	4882.000	PK	47.99	31.64	6.99	42.83	2.48	46.27	73.9	27.6	150	0	-
Vert.	7323.000	PK	48.23	37.46	8.46	43.52	2.48	53.11	73.9	20.7	150	0	-
Vert.	9764.000	PK	48.76	39.18	9.76	43.02	2.48	57.16	73.9	16.7	150	0	-
Vert.	4882.000	AV	37.20	31.64	6.99	42.83	2.48	35.48	53.9	18.4	150	0	VBW: 360 Hz, Floor Noise
Vert.	7323.000	AV	37.38	37.46	8.46	43.52	2.48	42.26	53.9	11.6	150	0	VBW: 360 Hz, Floor Noise
Vert.	9764.000	AV	37.31	39.18	9.76	43.02	2.48	45.71	53.9	8.1	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.2
Date	January 13, 2023	January 16, 2023	January 5, 2023
Temperature / Humidity	23 deg.C, 33 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Takahiro Suzuki	Yusuke Tanikawara	Takahiro Kawakami
	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz, Left		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	49.64	28.08	14.61	41.68	2.48	53.13	73.9	20.7	163	188	-
Hori.	4960.000	PK	47.79	31.81	7.05	42.80	2.48	46.33	73.9	27.5	150	0	-
Hori.	7440.000	PK	47.73	37.61	8.51	43.65	2.48	52.68	73.9	21.2	150	0	-
Hori.	9920.000	PK	47.53	39.03	9.83	42.82	2.48	56.05	73.9	17.8	150	0	-
Hori.	2483.500	AV	35.83	28.08	14.61	41.68	2.48	39.32	53.9	14.5	163	188	VBW:360 Hz
Hori.	4960.000	AV	37.19	31.81	7.05	42.80	2.48	35.73	53.9	18.1	150	0	VBW: 360 Hz, Floor Noise
Hori.	7440.000	AV	37.35	37.61	8.51	43.65	2.48	42.30	53.9	11.6	150	0	VBW: 360 Hz, Floor Noise
Hori.	9920.000	AV	37.14	39.03	9.83	42.82	2.48	45.66	53.9	8.2	150	0	VBW: 360 Hz, Floor Noise
Vert.	2483.500	PK	49.89	28.08	14.61	41.68	2.48	53.38	73.9	20.5	115	260	-
Vert.	4960.000	PK	48.31	31.81	7.05	42.80	2.48	46.85	73.9	27.0	150	0	-
Vert.	7440.000	PK	48.29	37.61	8.51	43.65	2.48	53.24	73.9	20.6	150	0	-
Vert.	9920.000	PK	47.26	39.03	9.83	42.82	2.48	55.78	73.9	18.1	150	0	-
Vert.	2483.500	AV	35.72	28.08	14.61	41.68	2.48	39.21	53.9	14.6	115	260	VBW:360 Hz
Vert.	4960.000	AV	37.13	31.81	7.05	42.80	2.48	35.67	53.9	18.2	150	0	VBW: 360 Hz, Floor Noise
Vert.	7440.000	AV	37.21	37.61	8.51	43.65	2.48	42.16	53.9	11.7	150	0	VBW: 360 Hz, Floor Noise
Vert.	9920.000	AV	36.92	39.03	9.83	42.82	2.48	45.44	53.9	8.4	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 13, 2023
Temperature / Humidity	23 deg.C, 33 %RH
Engineer	Takahiro Suzuki
	(1 GHz -2.8 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz, Left

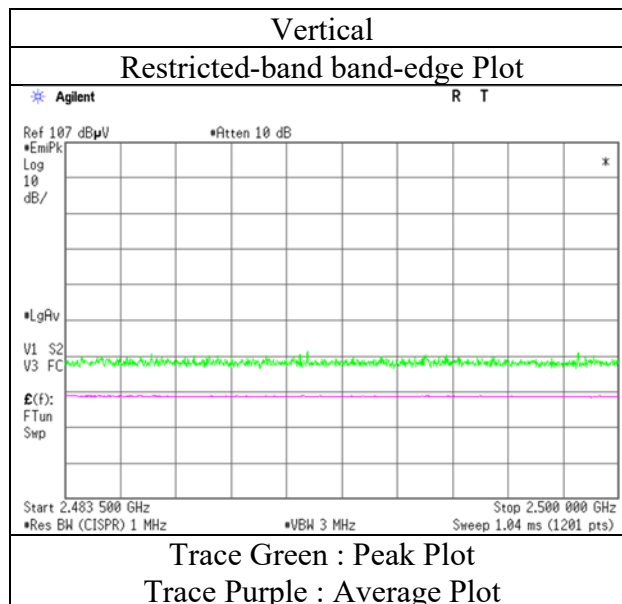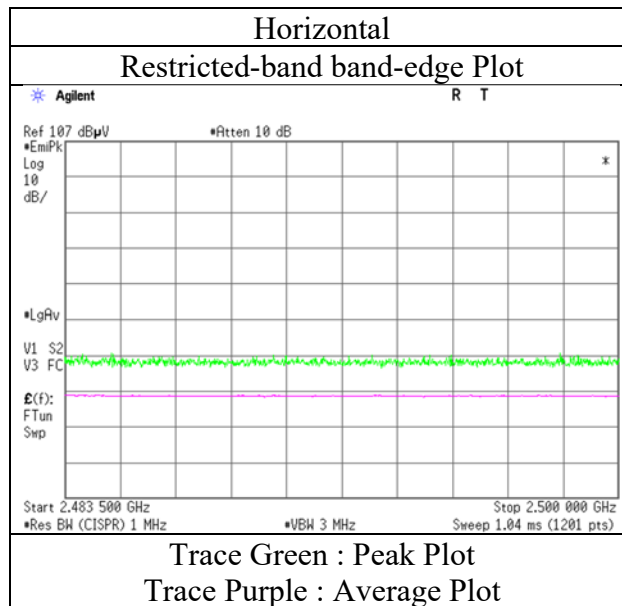

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.2
Date	January 10, 2023	December 26, 2022	January 16, 2023	January 5, 2023
Temperature / Humidity	21 deg.C, 30 %RH	22 deg.C, 23 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Kouki Yamada	Miku Ikudome	Yusuke Tanikawara	Takahiro Kawakami
	(30 MHz -1 GHz)	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz, Right			

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	31.340	QP	22.00	18.32	6.85	31.93	0.00	15.24	40.0	24.7	100	0	-
Hori.	190.080	QP	21.10	16.45	8.83	31.80	0.00	14.58	43.5	28.9	100	0	-
Hori.	921.106	QP	19.50	22.26	9.82	30.75	0.00	20.83	46.0	25.1	100	0	-
Hori.	2390.000	PK	48.13	28.18	14.48	41.63	2.48	51.64	73.9	22.2	208	209	-
Hori.	4804.000	PK	49.51	31.54	6.95	42.87	2.48	47.61	73.9	26.2	150	0	-
Hori.	7206.000	PK	48.61	37.37	8.41	43.39	2.48	53.48	73.9	20.4	150	0	-
Hori.	9608.000	PK	48.07	38.89	9.68	43.21	2.48	55.91	73.9	17.9	150	0	-
Hori.	2390.000	AV	37.04	28.18	14.48	41.63	2.48	40.55	53.9	13.3	208	209	VBW:360 Hz
Hori.	4804.000	AV	36.95	31.54	6.95	42.87	2.48	35.05	53.9	18.8	150	0	VBW: 360 Hz, Floor Noise
Hori.	7206.000	AV	37.06	37.37	8.41	43.39	2.48	41.93	53.9	11.9	150	0	VBW: 360 Hz, Floor Noise
Hori.	9608.000	AV	36.71	38.89	9.68	43.21	2.48	44.55	53.9	9.3	150	0	VBW: 360 Hz, Floor Noise
Vert.	31.340	QP	21.80	18.32	6.85	31.93	0.00	15.04	40.0	24.9	100	0	-
Vert.	34.548	QP	21.50	17.04	6.94	31.93	0.00	13.55	40.0	26.4	100	0	-
Vert.	44.514	QP	21.40	13.28	7.19	31.92	0.00	9.95	40.0	30.0	100	0	-
Vert.	193.647	QP	21.00	16.53	8.86	31.80	0.00	14.59	43.5	28.9	100	0	-
Vert.	946.005	QP	19.50	21.98	9.94	30.63	0.00	20.79	46.0	25.2	100	0	-
Vert.	2390.000	PK	49.27	28.18	14.48	41.63	2.48	52.78	73.9	21.1	206	319	-
Vert.	4804.000	PK	48.17	31.54	6.95	42.87	2.48	46.27	73.9	27.6	150	0	-
Vert.	7206.000	PK	48.65	37.37	8.41	43.39	2.48	53.52	73.9	20.3	150	0	-
Vert.	9608.000	PK	48.63	38.89	9.68	43.21	2.48	56.47	73.9	17.4	150	0	-
Vert.	2390.000	AV	36.97	28.18	14.48	41.63	2.48	40.48	53.9	13.4	206	319	VBW:360 Hz
Vert.	4804.000	AV	36.98	31.54	6.95	42.87	2.48	35.08	53.9	18.8	150	0	VBW: 360 Hz, Floor Noise
Vert.	7206.000	AV	37.05	37.37	8.41	43.39	2.48	41.92	53.9	11.9	150	0	VBW: 360 Hz, Floor Noise
Vert.	9608.000	AV	36.71	38.89	9.68	43.21	2.48	44.55	53.9	9.3	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$ 10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)



Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	92.82	28.17	14.50	41.64	2.48	96.33	-	-	Carrier
Hori.	2400.000	PK	38.28	28.17	14.50	41.64	2.48	41.79	76.3	34.5	-
Vert.	2402.000	PK	93.26	28.17	14.50	41.64	2.48	96.77	-	-	Carrier
Vert.	2400.000	PK	38.31	28.17	14.50	41.64	2.48	41.82	76.7	34.8	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$ 10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	December 26, 2022
Temperature / Humidity	22 deg.C, 23 %RH
Engineer	Miku Ikudome
	(1 GHz -2.8 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz, Right

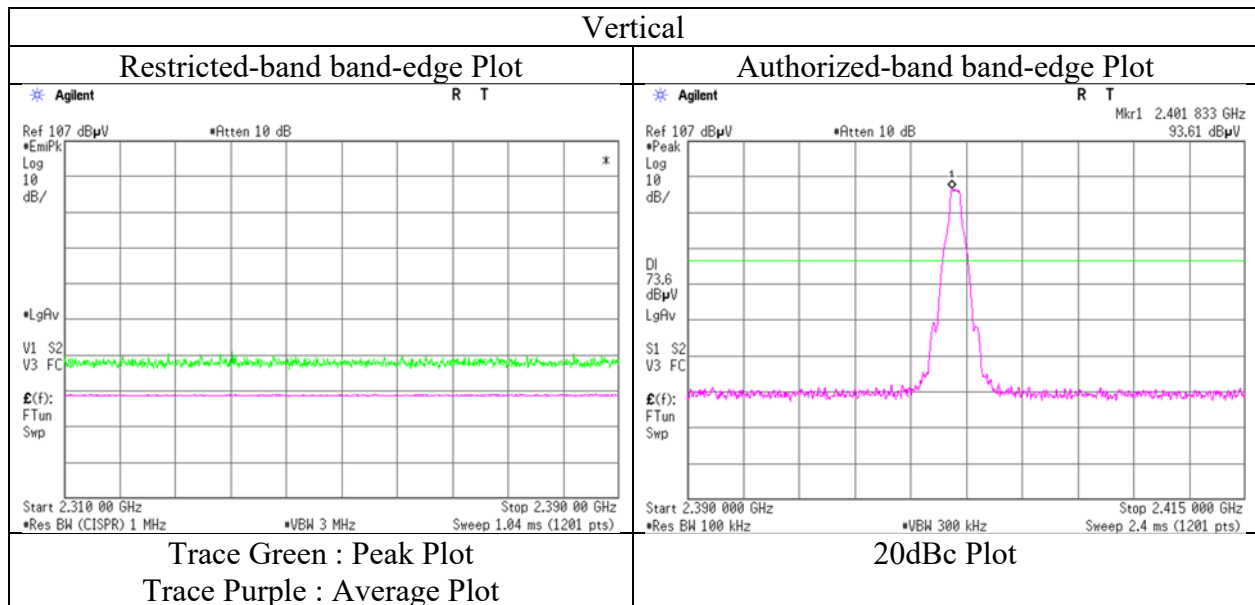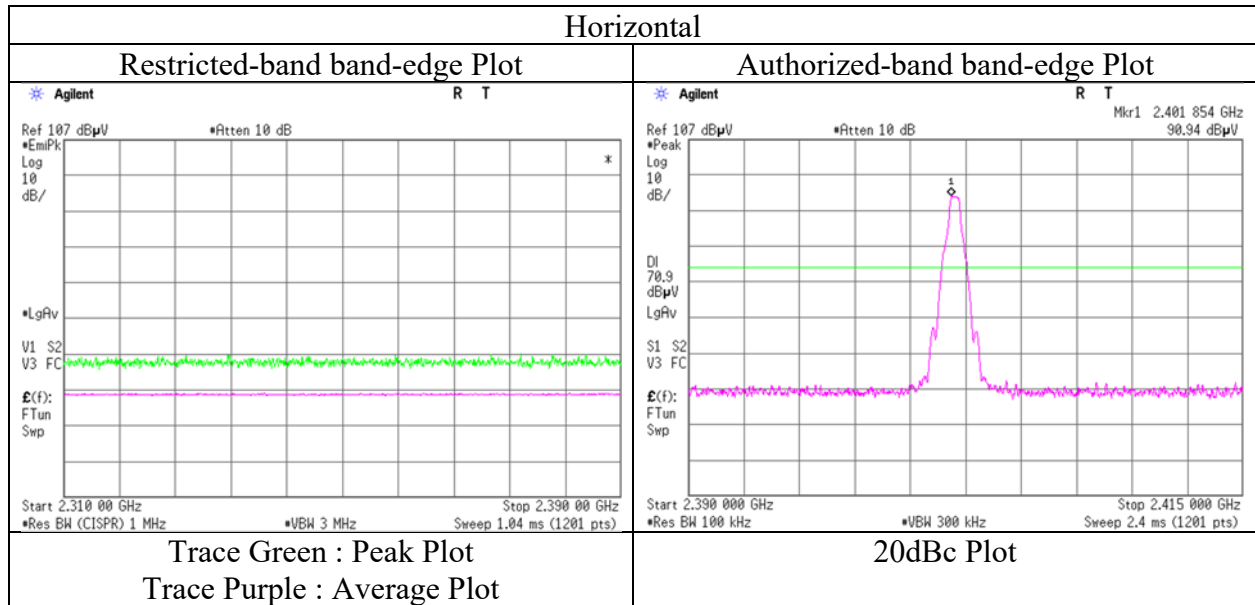

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.2
Date	December 26, 2022	January 16, 2023	January 5, 2023
Temperature / Humidity	22 deg.C, 23 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Miku Ikudome (1 GHz -2.8 GHz)	Yusuke Tanikawara (2.8 GHz -10 GHz)	Takahiro Kawakami (10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz, Right		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4882.000	PK	47.94	31.64	6.99	42.83	2.48	46.22	73.9	27.6	150	0	-
Hori.	7323.000	PK	48.13	37.46	8.46	43.52	2.48	53.01	73.9	20.8	150	0	-
Hori.	9764.000	PK	48.53	39.18	9.76	43.02	2.48	56.93	73.9	16.9	150	0	-
Hori.	4882.000	AV	37.14	31.64	6.99	42.83	2.48	35.42	53.9	18.4	150	0	VBW: 360 Hz, Floor Noise
Hori.	7323.000	AV	37.36	37.46	8.46	43.52	2.48	42.24	53.9	11.6	150	0	VBW: 360 Hz, Floor Noise
Hori.	9764.000	AV	37.38	39.18	9.76	43.02	2.48	45.78	53.9	8.1	150	0	VBW: 360 Hz, Floor Noise
Vert.	4882.000	PK	48.07	31.64	6.99	42.83	2.48	46.35	73.9	27.5	150	0	-
Vert.	7323.000	PK	48.02	37.46	8.46	43.52	2.48	52.90	73.9	21.0	150	0	-
Vert.	9764.000	PK	48.75	39.18	9.76	43.02	2.48	57.15	73.9	16.7	150	0	-
Vert.	4882.000	AV	37.09	31.64	6.99	42.83	2.48	35.37	53.9	18.5	150	0	VBW: 360 Hz, Floor Noise
Vert.	7323.000	AV	37.42	37.46	8.46	43.52	2.48	42.30	53.9	11.6	150	0	VBW: 360 Hz, Floor Noise
Vert.	9764.000	AV	37.47	39.18	9.76	43.02	2.48	45.87	53.9	8.0	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.2
Date	December 26, 2022	January 16, 2023	January 5, 2023
Temperature / Humidity	22 deg.C, 23 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Miku Ikudome	Yusuke Tanikawara	Takahiro Kawakami
	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz, Right		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	49.22	28.08	14.60	41.68	2.48	52.70	73.9	21.2	161	5	-
Hori.	4960.000	PK	48.01	31.81	7.05	42.80	2.48	46.55	73.9	27.3	150	0	-
Hori.	7440.000	PK	48.05	37.61	8.51	43.65	2.48	53.00	73.9	20.9	150	0	-
Hori.	9920.000	PK	48.24	39.03	9.83	42.82	2.48	56.76	73.9	17.1	150	0	-
Hori.	2483.500	AV	37.21	28.08	14.60	41.68	2.48	40.69	53.9	13.2	161	5	VBW:360 Hz
Hori.	4960.000	AV	37.35	31.81	7.05	42.80	2.48	35.89	53.9	18.0	150	0	VBW: 360 Hz, Floor Noise
Hori.	7440.000	AV	37.24	37.61	8.51	43.65	2.48	42.19	53.9	11.7	150	0	VBW: 360 Hz, Floor Noise
Hori.	9920.000	AV	36.93	39.03	9.83	42.82	2.48	45.45	53.9	8.4	150	0	VBW: 360 Hz, Floor Noise
Vert.	2483.500	PK	48.50	28.08	14.60	41.68	2.48	51.98	73.9	21.9	112	83	-
Vert.	4960.000	PK	47.87	31.81	7.05	42.80	2.48	46.41	73.9	27.4	150	0	-
Vert.	7440.000	PK	47.93	37.61	8.51	43.65	2.48	52.88	73.9	21.0	150	0	-
Vert.	9920.000	PK	48.56	39.03	9.83	42.82	2.48	57.08	73.9	16.8	150	0	-
Vert.	2483.500	AV	37.06	28.08	14.60	41.68	2.48	40.54	53.9	13.3	112	83	VBW:360 Hz
Vert.	4960.000	AV	37.10	31.81	7.05	42.80	2.48	35.64	53.9	18.2	150	0	VBW: 360 Hz, Floor Noise
Vert.	7440.000	AV	37.19	37.61	8.51	43.65	2.48	42.14	53.9	11.7	150	0	VBW: 360 Hz, Floor Noise
Vert.	9920.000	AV	37.00	39.03	9.83	42.82	2.48	45.52	53.9	8.3	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	December 26, 2022
Temperature / Humidity	22 deg.C, 23 %RH
Engineer	Miku Ikudome
	(1 GHz -2.8 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz, Right

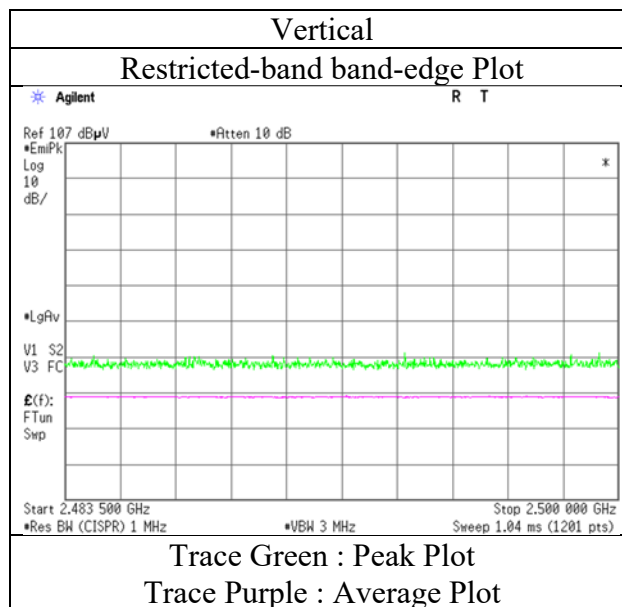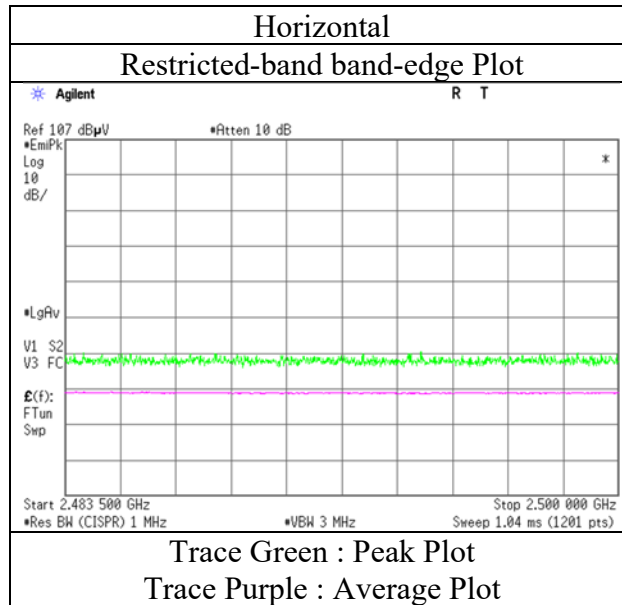

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.2
Date	January 12, 2023	January 16, 2023	January 5, 2023
Temperature / Humidity	22 deg.C, 32 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Takahiro Suzuki	Yusuke Tanikawara	Takahiro Kawakami
	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz, Right		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	49.91	28.18	14.49	41.63	2.48	53.43	73.9	20.4	148	119	-
Hori.	4804.000	PK	49.00	31.54	6.95	42.87	2.48	47.10	73.9	26.8	150	0	-
Hori.	7206.000	PK	48.54	37.37	8.41	43.39	2.48	53.41	73.9	20.4	150	0	-
Hori.	9608.000	PK	48.18	38.89	9.68	43.21	2.48	56.02	73.9	17.8	150	0	-
Hori.	2390.000	AV	35.60	28.18	14.49	41.63	2.48	39.12	53.9	14.7	148	119	VBW:360 Hz
Hori.	4804.000	AV	37.34	31.54	6.95	42.87	2.48	35.44	53.9	18.4	150	0	VBW: 360 Hz, Floor Noise
Hori.	7206.000	AV	37.35	37.37	8.41	43.39	2.48	42.22	53.9	11.6	150	0	VBW: 360 Hz, Floor Noise
Hori.	9608.000	AV	36.98	38.89	9.68	43.21	2.48	44.82	53.9	9.0	150	0	VBW: 360 Hz, Floor Noise
Vert.	2390.000	PK	49.15	28.18	14.49	41.63	2.48	52.67	73.9	21.2	162	14	-
Vert.	4804.000	PK	48.32	31.54	6.95	42.87	2.48	46.42	73.9	27.4	150	0	-
Vert.	7206.000	PK	48.67	37.37	8.41	43.39	2.48	53.54	73.9	20.3	150	0	-
Vert.	9608.000	PK	48.40	38.89	9.68	43.21	2.48	56.24	73.9	17.6	150	0	-
Vert.	2390.000	AV	35.54	28.18	14.49	41.63	2.48	39.06	53.9	14.8	162	14	VBW:360 Hz
Vert.	4804.000	AV	37.34	31.54	6.95	42.87	2.48	35.44	53.9	18.4	150	0	VBW: 360 Hz, Floor Noise
Vert.	7206.000	AV	37.28	37.37	8.41	43.39	2.48	42.15	53.9	11.7	150	0	VBW: 360 Hz, Floor Noise
Vert.	9608.000	AV	37.48	38.89	9.68	43.21	2.48	45.32	53.9	8.5	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	91.25	28.17	14.51	41.64	2.48	94.77	-	-	Carrier
Hori.	2400.000	PK	39.75	28.17	14.51	41.64	2.48	43.27	74.7	31.4	-
Vert.	2402.000	PK	90.84	28.17	14.51	41.64	2.48	94.36	-	-	Carrier
Vert.	2400.000	PK	39.31	28.17	14.51	41.64	2.48	42.83	74.3	31.4	-



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 12, 2023
Temperature / Humidity	22 deg.C, 32 %RH
Engineer	Takahiro Suzuki
	(1 GHz -2.8 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz, Right

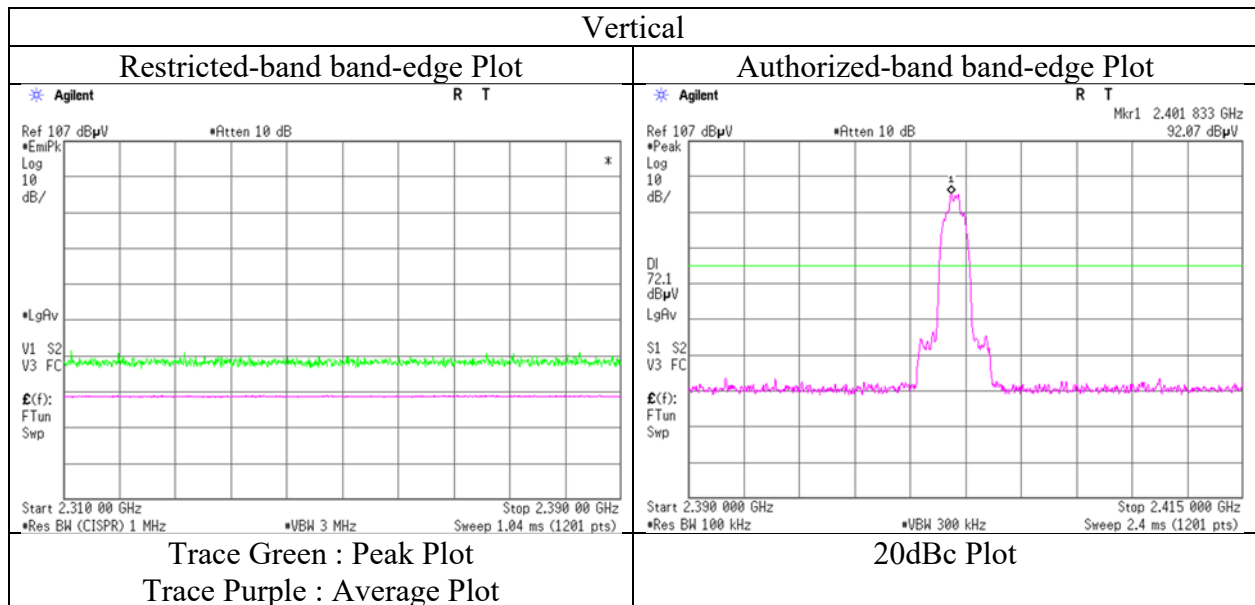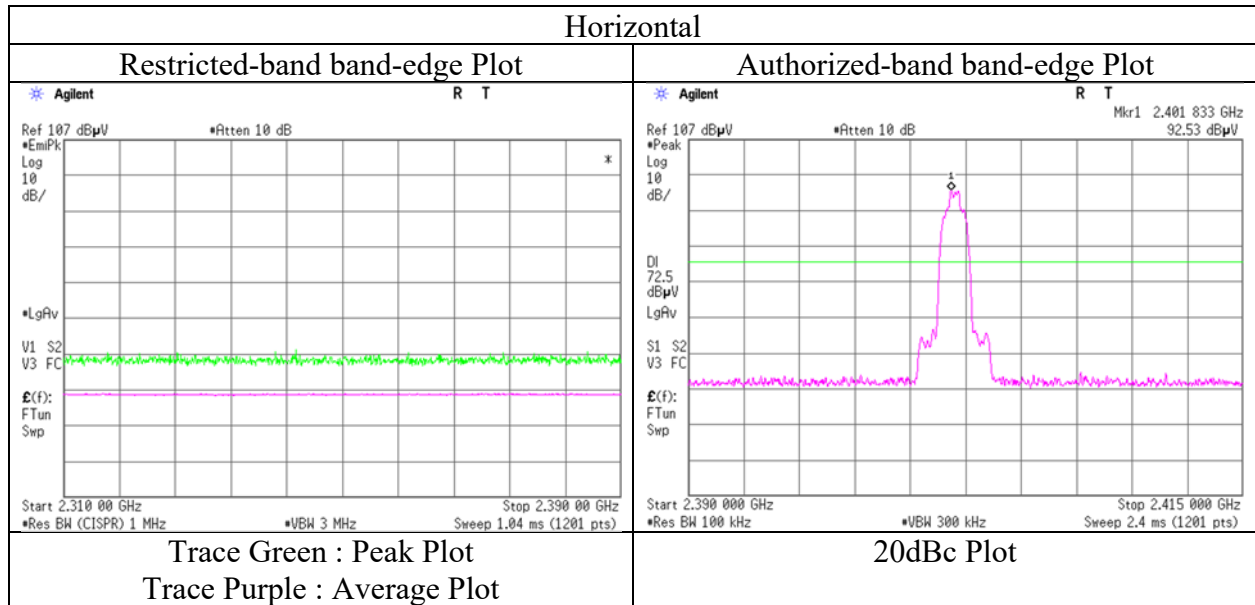

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.2
Date	January 12, 2023	January 16, 2023	January 5, 2023
Temperature / Humidity	22 deg.C, 32 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Takahiro Suzuki	Yusuke Tanikawara	Takahiro Kawakami
	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2441 MHz, Right		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	4882.000	PK	48.05	31.64	6.99	42.83	2.48	46.33	73.9	27.5	150	0	-
Hori.	7323.000	PK	48.84	37.46	8.46	43.52	2.48	53.72	73.9	20.1	150	0	-
Hori.	9764.000	PK	48.53	39.18	9.76	43.02	2.48	56.93	73.9	16.9	150	0	-
Hori.	4882.000	AV	36.47	31.64	6.99	42.83	2.48	34.75	53.9	19.1	150	0	VBW: 360 Hz, Floor Noise
Hori.	7323.000	AV	36.86	37.46	8.46	43.52	2.48	41.74	53.9	12.1	150	0	VBW: 360 Hz, Floor Noise
Hori.	9764.000	AV	36.83	39.18	9.76	43.02	2.48	45.23	53.9	8.6	150	0	VBW: 360 Hz, Floor Noise
Vert.	4882.000	PK	48.55	31.64	6.99	42.83	2.48	46.83	73.9	27.0	150	0	-
Vert.	7323.000	PK	49.01	37.46	8.46	43.52	2.48	53.89	73.9	20.0	150	0	-
Vert.	9764.000	PK	48.58	39.18	9.76	43.02	2.48	56.98	73.9	16.9	150	0	-
Vert.	4882.000	AV	36.38	31.64	6.99	42.83	2.48	34.66	53.9	19.2	150	0	VBW: 360 Hz, Floor Noise
Vert.	7323.000	AV	36.78	37.46	8.46	43.52	2.48	41.66	53.9	12.2	150	0	VBW: 360 Hz, Floor Noise
Vert.	9764.000	AV	37.06	39.18	9.76	43.02	2.48	45.46	53.9	8.4	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	No.3	No.3	No.2
Date	January 12, 2023	January 16, 2023	January 5, 2023
Temperature / Humidity	22 deg.C, 32 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Takahiro Suzuki	Yusuke Tanikawara	Takahiro Kawakami
	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz, Right		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	48.86	28.08	14.61	41.68	2.48	52.35	73.9	21.5	205	2	-
Hori.	4960.000	PK	48.10	31.81	7.05	42.80	2.48	46.64	73.9	27.2	150	0	-
Hori.	7440.000	PK	48.01	37.61	8.51	43.65	2.48	52.96	73.9	20.9	150	0	-
Hori.	9920.000	PK	49.03	39.03	9.83	42.82	2.48	57.55	73.9	16.3	150	0	-
Hori.	2483.500	AV	35.65	28.08	14.61	41.68	2.48	39.14	53.9	14.7	205	2	VBW:360 Hz
Hori.	4960.000	AV	36.97	31.81	7.05	42.80	2.48	35.51	53.9	18.3	150	0	VBW: 360 Hz, Floor Noise
Hori.	7440.000	AV	37.22	37.61	8.51	43.65	2.48	42.17	53.9	11.7	150	0	VBW: 360 Hz, Floor Noise
Hori.	9920.000	AV	36.98	39.03	9.83	42.82	2.48	45.50	53.9	8.4	150	0	VBW: 360 Hz, Floor Noise
Vert.	2483.500	PK	49.21	28.08	14.61	41.68	2.48	52.70	73.9	21.2	143	118	-
Vert.	4960.000	PK	47.81	31.81	7.05	42.80	2.48	46.35	73.9	27.5	150	0	-
Vert.	7440.000	PK	48.53	37.61	8.51	43.65	2.48	53.48	73.9	20.4	150	0	-
Vert.	9920.000	PK	48.21	39.03	9.83	42.82	2.48	56.73	73.9	17.1	150	0	-
Vert.	2483.500	AV	35.61	28.08	14.61	41.68	2.48	39.10	53.9	14.8	143	118	VBW:360 Hz
Vert.	4960.000	AV	37.03	31.81	7.05	42.80	2.48	35.57	53.9	18.3	150	0	VBW: 360 Hz, Floor Noise
Vert.	7440.000	AV	37.13	37.61	8.51	43.65	2.48	42.08	53.9	11.8	150	0	VBW: 360 Hz, Floor Noise
Vert.	9920.000	AV	36.92	39.03	9.83	42.82	2.48	45.44	53.9	8.4	150	0	VBW: 360 Hz, Floor Noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



Distance factor : 1 GHz - 10 GHz : $20\log(3.99\text{ m} / 3.0\text{ m}) = 2.48\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission (Reference Plot for band-edge)


Test place	Shonan EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 12, 2023
Temperature / Humidity	22 deg.C, 32 %RH
Engineer	Takahiro Suzuki
	(1 GHz -2.8 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz, Right

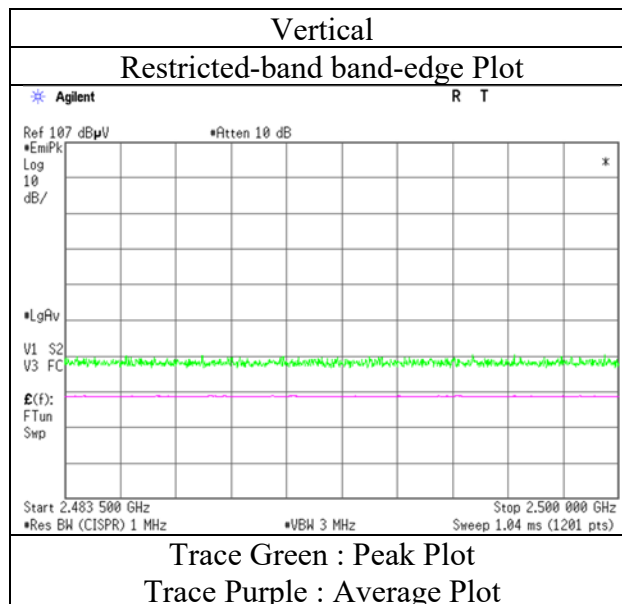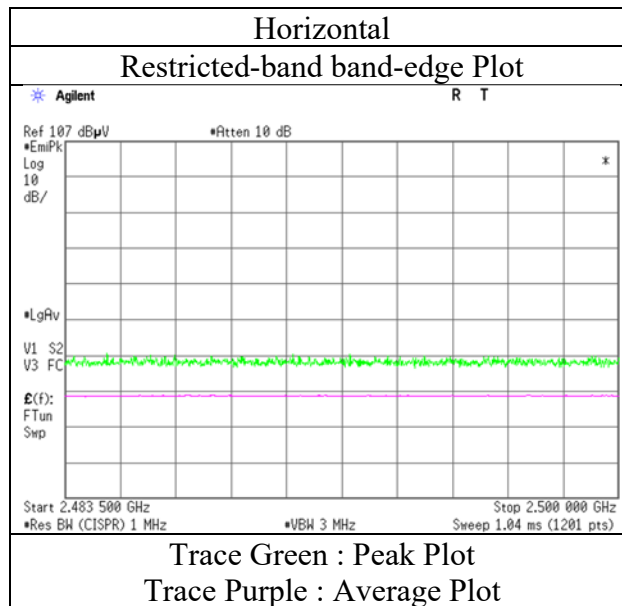

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Peak Output Power)


Test place	Shonan EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.2
Date	January 10, 2023	December 26, 2022	January 16, 2023	January 5, 2023
Temperature / Humidity	21 deg.C, 30 %RH	22 deg.C, 23 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Kouki Yamada	Miku Ikudome	Yusuke Tanikawara	Takahiro Kawakami
	(30 MHz -1 GHz)	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz, Left			

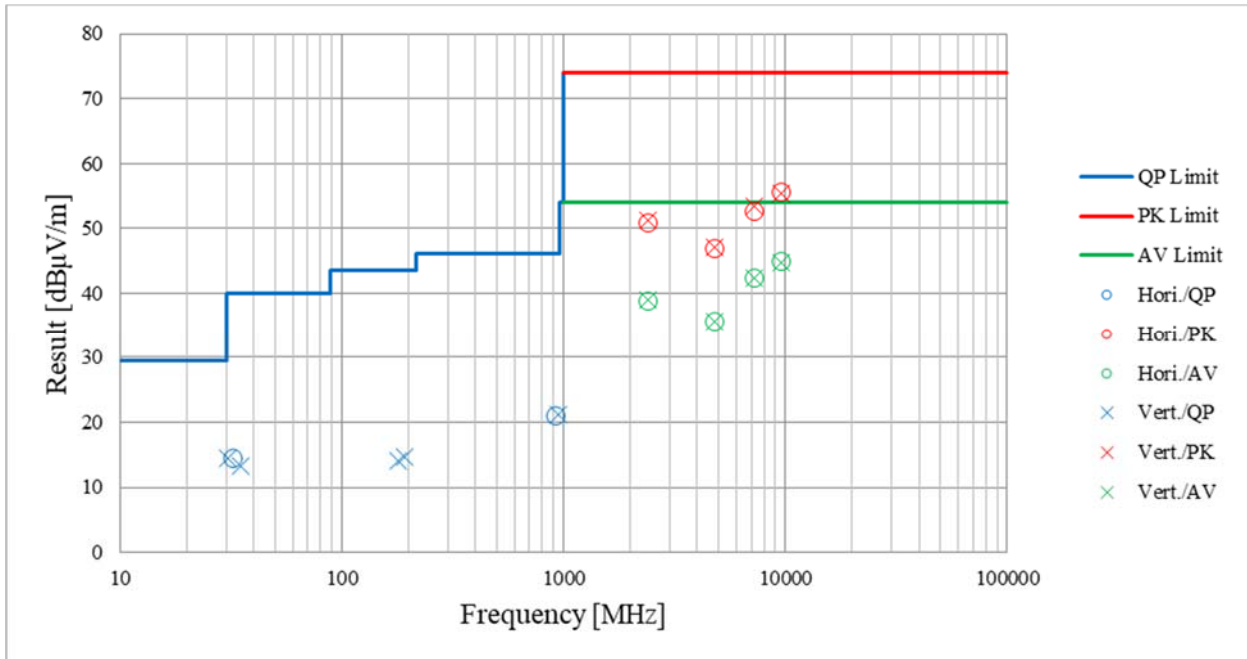

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Radiated Spurious Emission
(Plot data, Worst case mode for Maximum Peak Output Power)

Test place	Shonan EMC Lab.			
Semi Anechoic Chamber	No.2	No.3	No.3	No.2
Date	January 10, 2023	December 26, 2022	January 16, 2023	January 5, 2023
Temperature / Humidity	21 deg.C, 30 %RH	22 deg.C, 23 %RH	24 deg.C, 36 %RH	20 deg.C, 27 %RH
Engineer	Kouki Yamada	Miku Ikudome	Yusuke Tanikawara	Takahiro Kawakami
	(30 MHz -1 GHz)	(1 GHz -2.8 GHz)	(2.8 GHz -10 GHz)	(10 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz, Right			


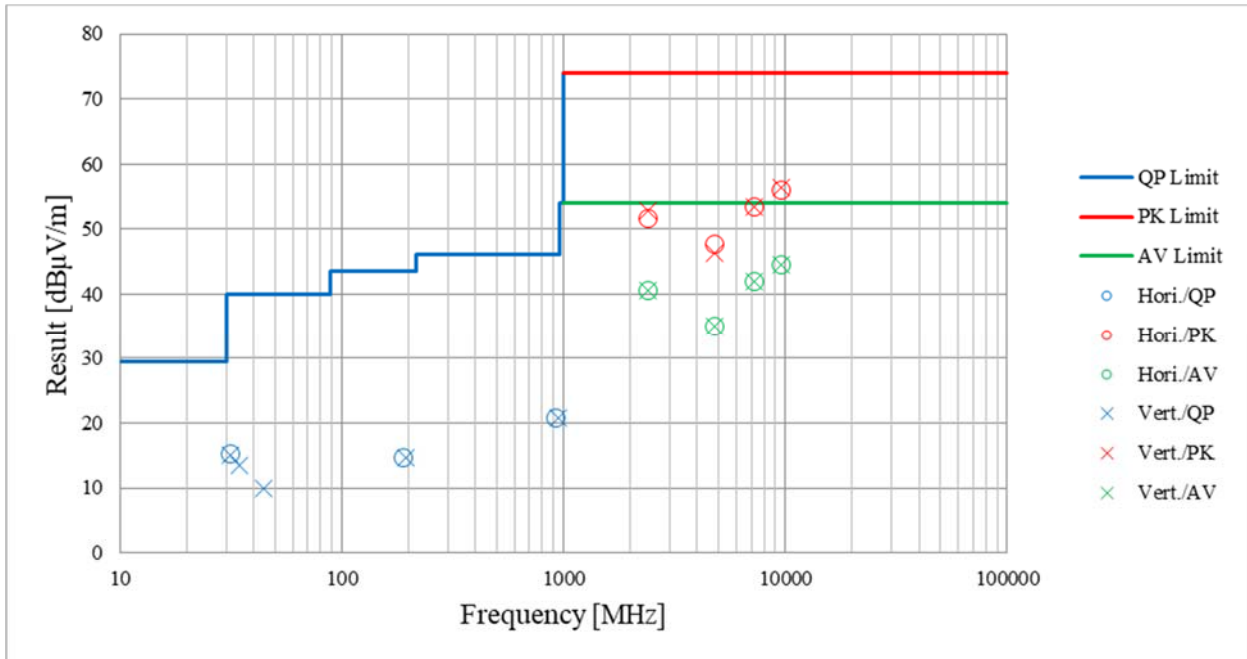


*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Test place	Shonan EMC Lab. No.5 Semi Anechoic Chamber
Date	January 17, 2023
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off, DH5



2402 MHz

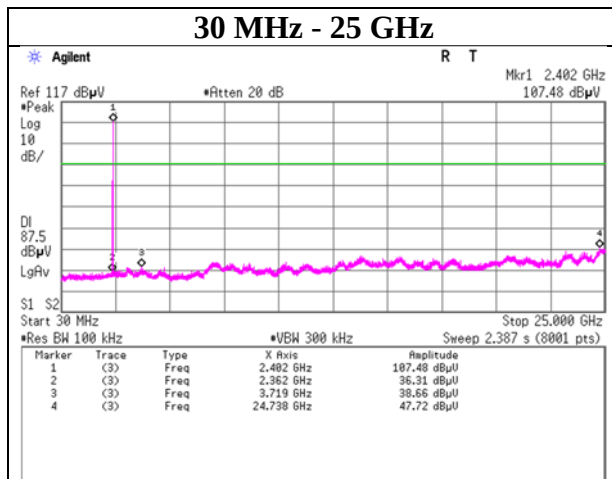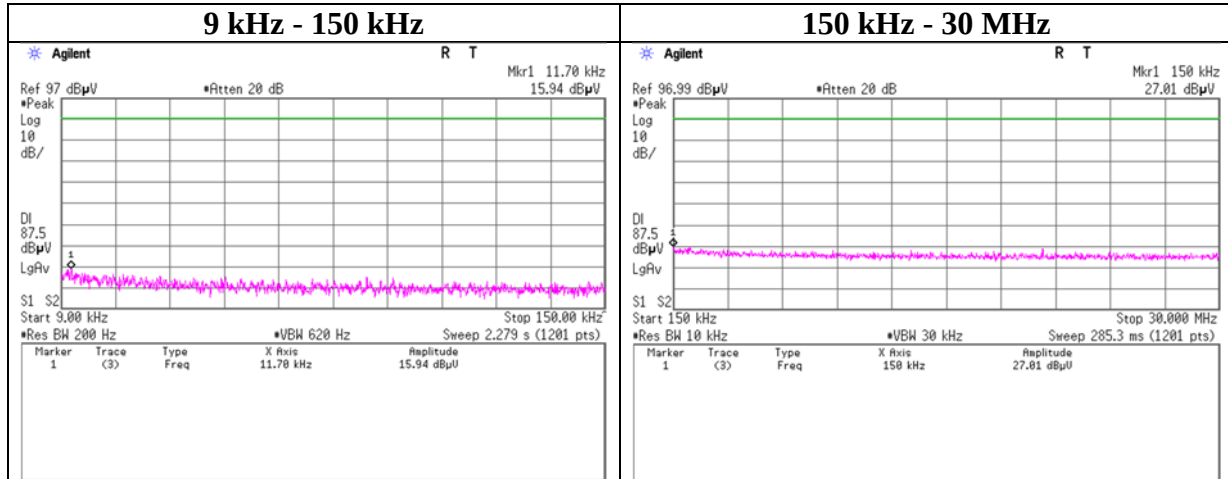

Conducted Spurious Emission

Test place	Shonan EMC Lab. No.5 Semi Anechoic Chamber
Date	January 17, 2023
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off, DH5



2441 MHz

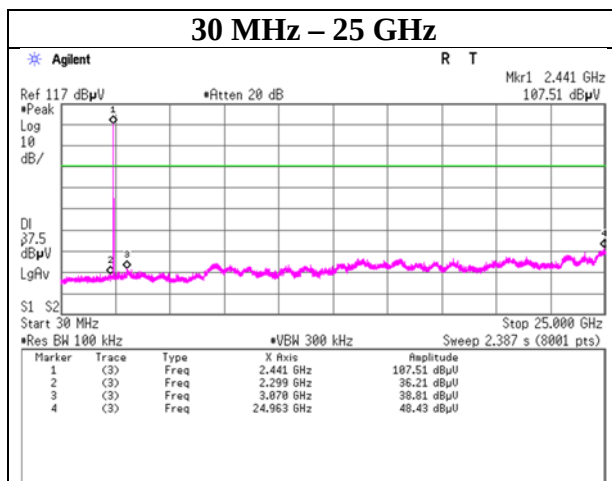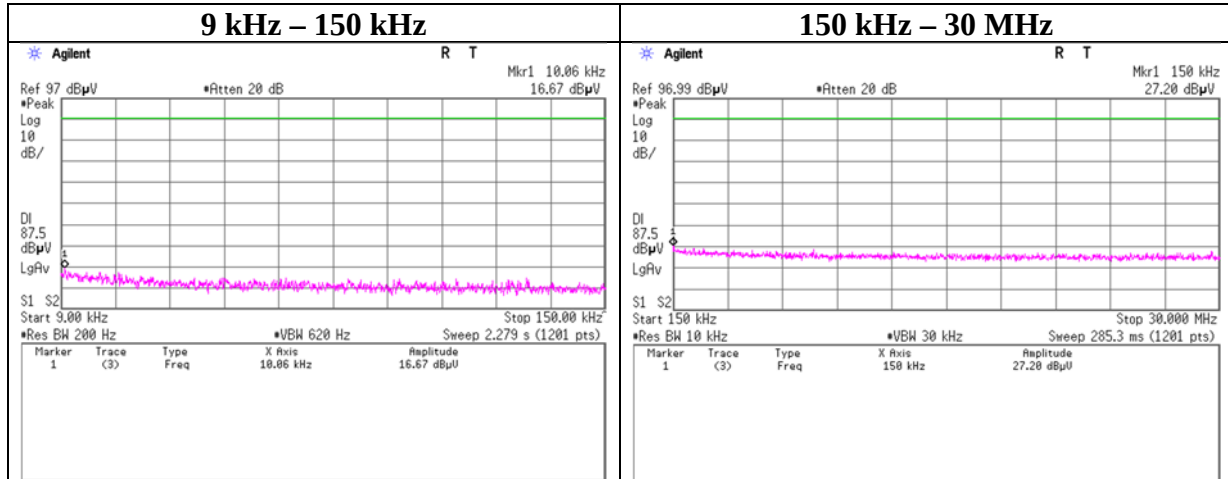

Conducted Spurious Emission

Test place	Shonan EMC Lab. No.5 Semi Anechoic Chamber
Date	January 17, 2023
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off, DH5



2480 MHz

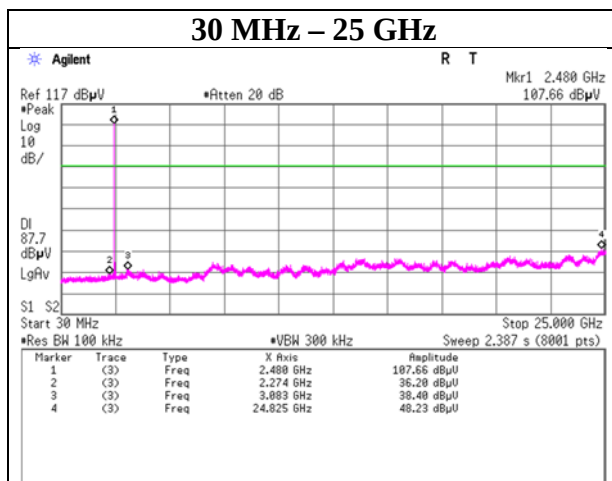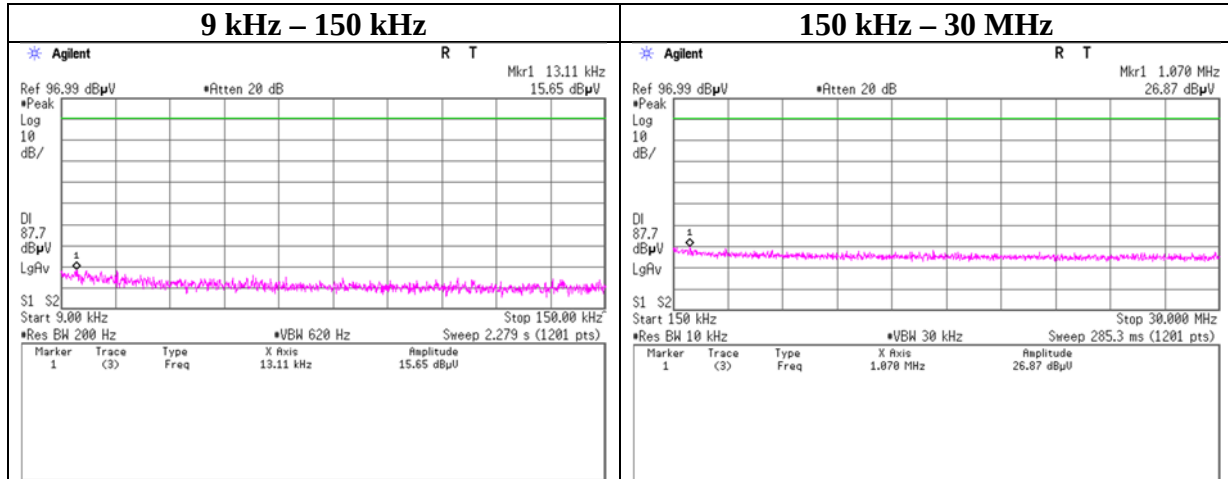

Conducted Spurious Emission

Test place	Shonan EMC Lab. No.5 Semi Anechoic Chamber
Date	January 17, 2023
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off, 3DH5



2402 MHz

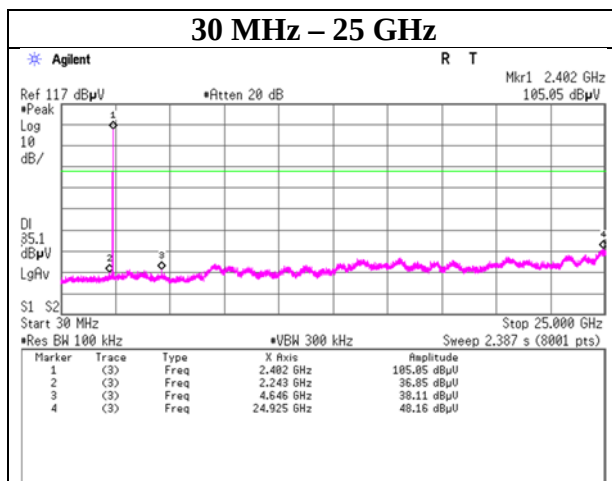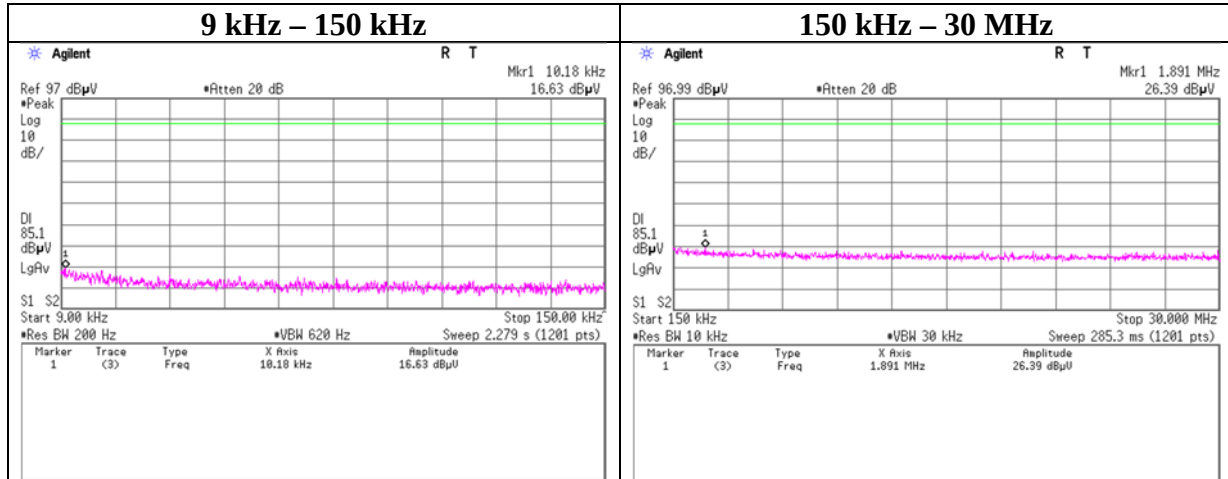

Conducted Spurious Emission

Test place	Shonan EMC Lab. No.5 Semi Anechoic Chamber
Date	January 17, 2023
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off, 3DH5



2441 MHz

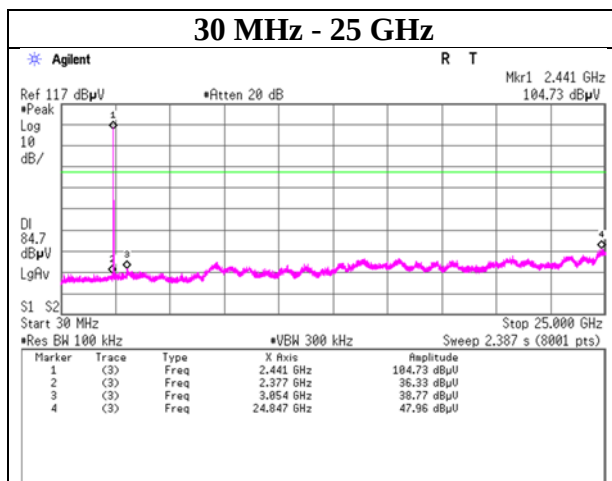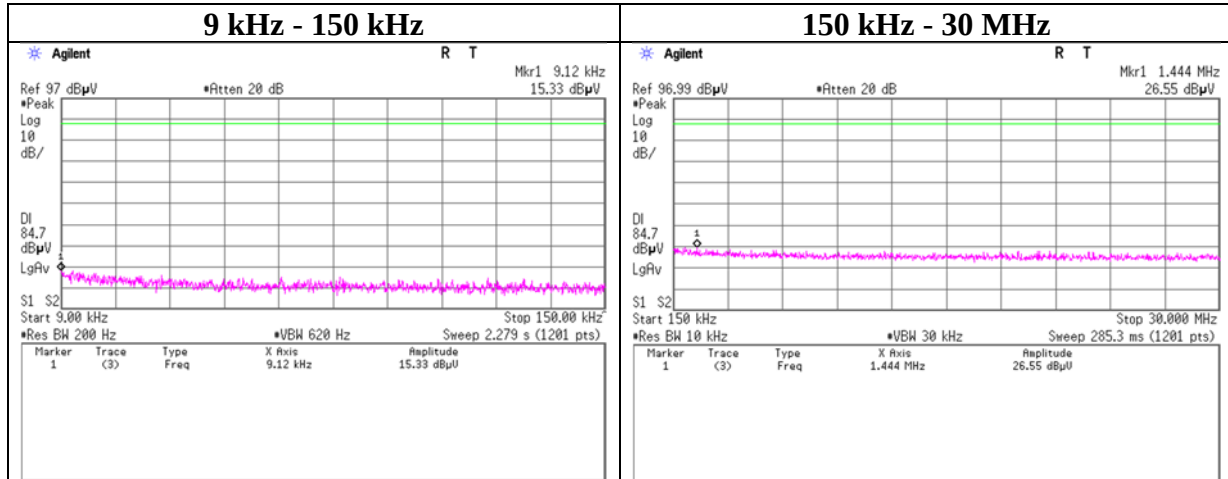

Conducted Spurious Emission

Test place	Shonan EMC Lab. No.5 Semi Anechoic Chamber
Date	January 17, 2023
Temperature / Humidity	24 deg. C / 49 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off, 3DH5


2480 MHz

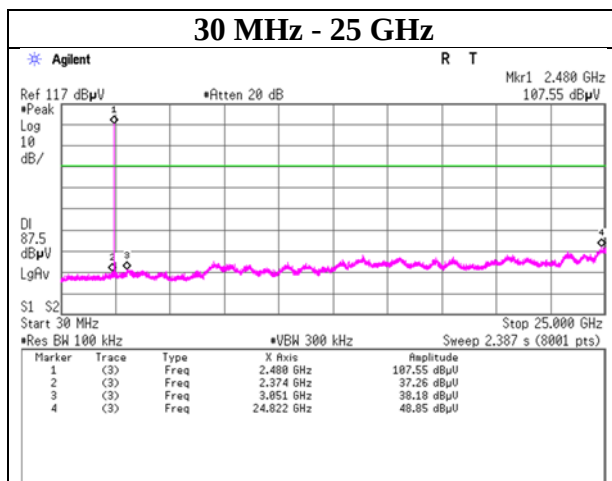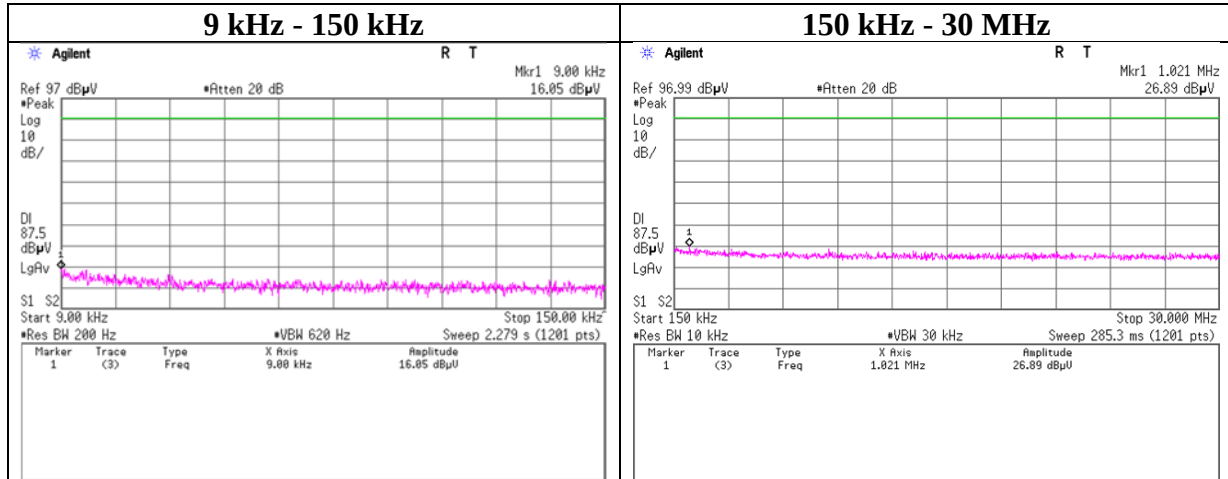


Conducted Emission Band Edge compliance

Test place Shonan EMC Lab. No.5 Semi Anechoic Chamber
Date January 17, 2023
Temperature / Humidity 24 deg. C / 49 % RH
Engineer Takahiro Kawakami
Mode Tx DH5

Hopping On

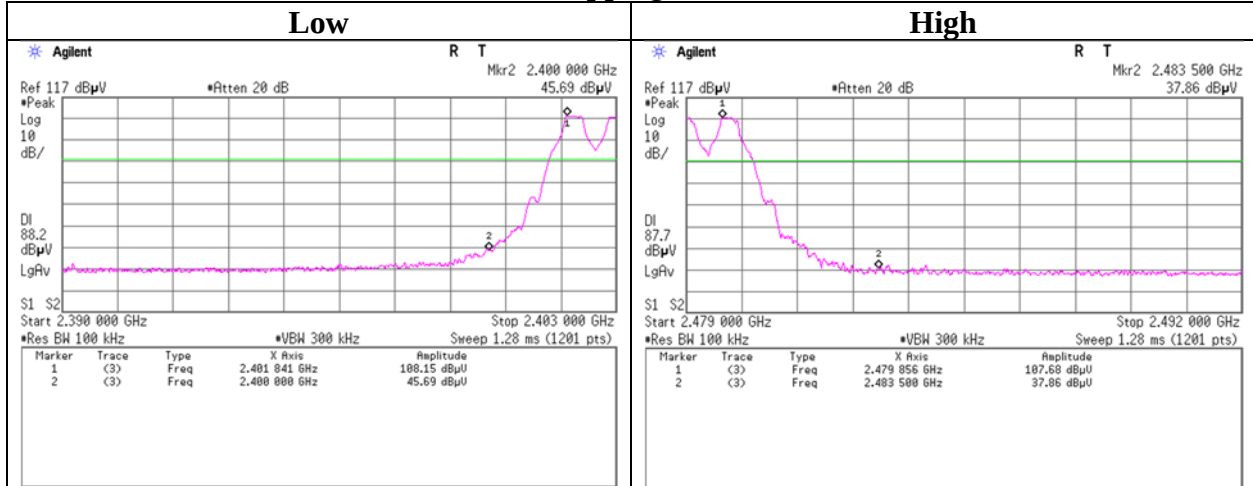


Hopping Off

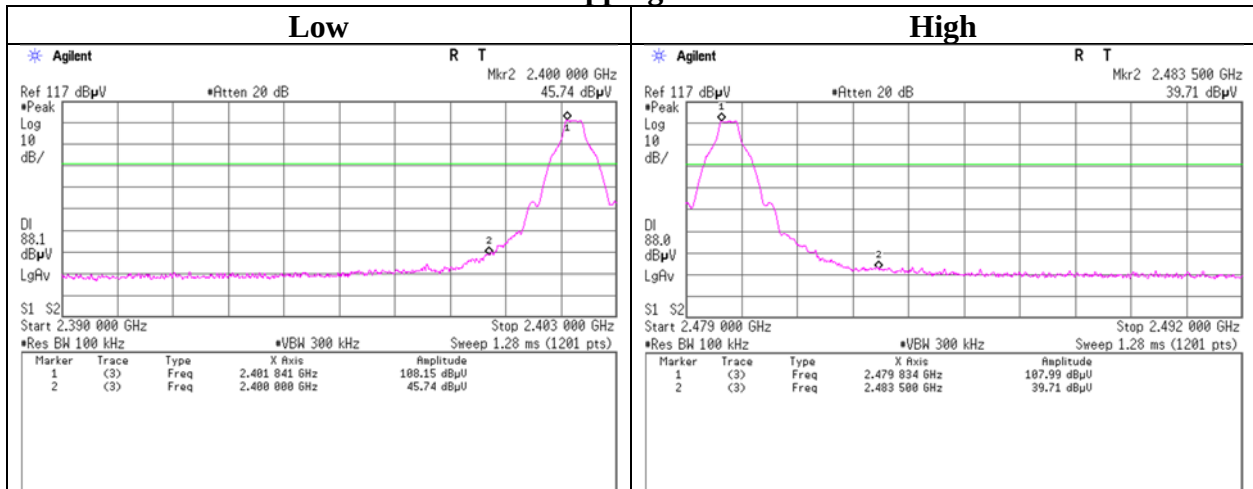


Conducted Emission Band Edge compliance

Test place Shonan EMC Lab. No.5 Semi Anechoic Chamber
Date January 17, 2023
Temperature / Humidity 24 deg. C / 49 % RH
Engineer Takahiro Kawakami
Mode Tx 3DH5

Hopping On

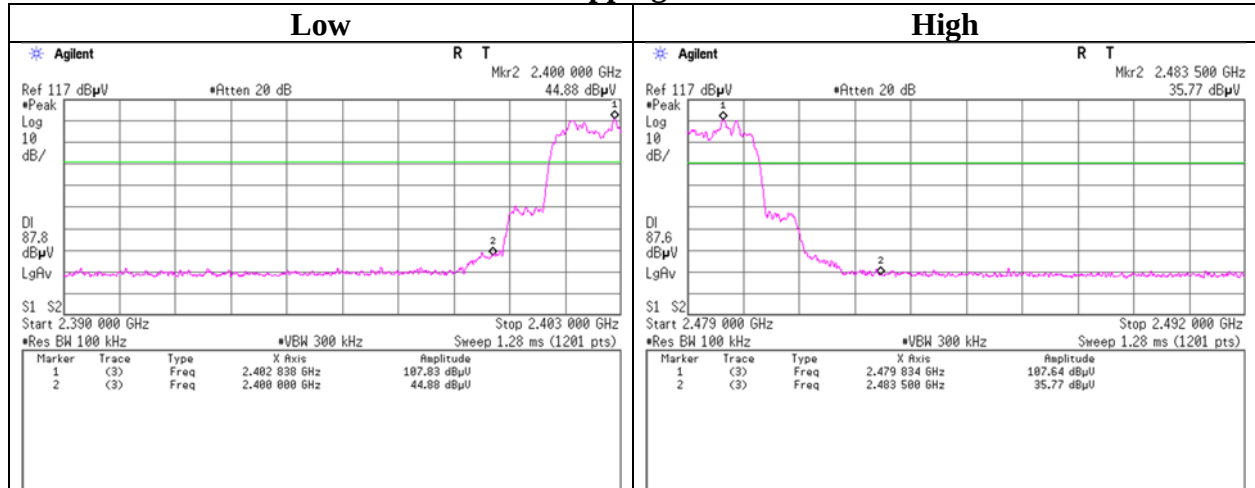

Hopping Off

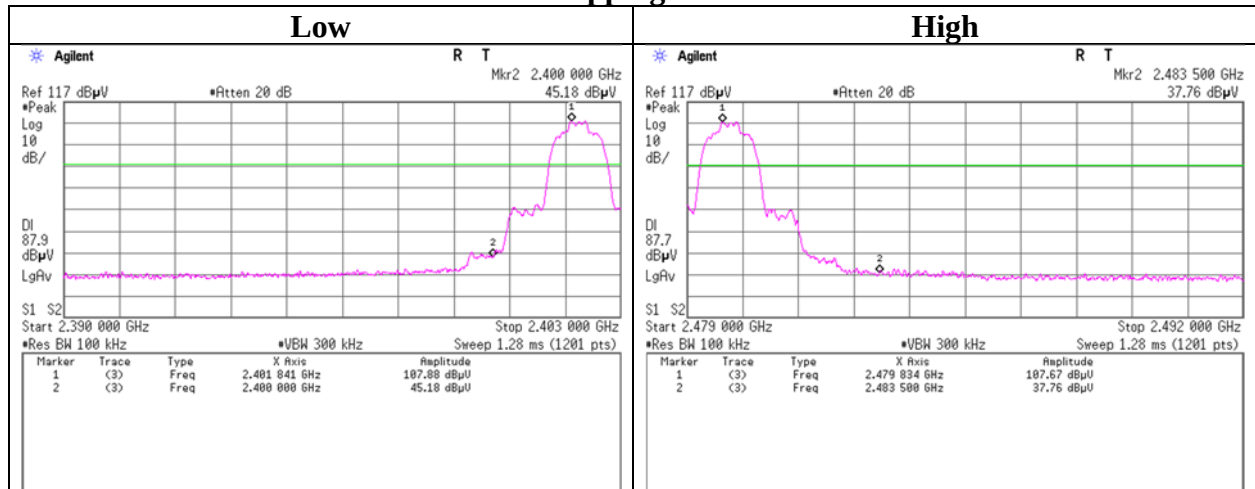

APPENDIX 2: Test Instruments

Test Equipment (1/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	SAT10-22	204926	Attenuator	Weinschel Corp.	54A-10	109971	2022/02/21	12
AT	SCC-G64	196945	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803414/2	2022/03/01	12
AT	SOS-27	191845	Thermo-Hygro meter	CUSTOM. Inc	CTH-201	-	2022/08/08	12
AT	SPM-13	169910	Power Meter	Keysight Technologies Inc	8990B	MY51000448	2022/11/08	12
AT	SPSS-06	169911	Power sensor	Keysight Technologies Inc	N1923A	MY57270004	2022/11/08	12
AT	SRENT-09	150461	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY46186392	2022/03/14	12
AT	STS-05	146212	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997828	2022/09/20	12
RE	COTS-SEMI-5	170932	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,ME,PE)	-	-	-
RE	KJM-02	146432	Measure	TAJIMA	GL19-55	-	-	-
RE	KSA-08	145089	Spectrum Analyzer	Keysight Technologies Inc	E4446A	MY46180525	2022/11/01	12
RE	SAEC-02(NSA)	145563	Semi-Anechoic Chamber	TDK	SAEC-02(NSA)	2	2022/03/20	12
RE	SAEC-03(SVSWR)	145566	Semi-Anechoic Chamber	TDK	SAEC-03(SVSWR)	3	2022/05/18	12
RE	SAF-02	145004	Pre Amplifier	SONOMA	310N	290212	2022/02/24	12
RE	SAF-05	145128	Pre Amplifier	Toyo Corporation	TPA0118-36	1440490	2022/05/12	12
RE	SAF-06	145005	Pre Amplifier	Toyo Corporation	TPA0118-36	1440491	2022/02/04	12
RE	SAF-08	145007	Pre Amplifier	Toyo Corporation	HAP18-26W	19	2022/03/03	12
RE	SAT10-05	145136	Attenuator	Keysight Technologies Inc	8493C-010	74864	2022/10/20	12
RE	SAT10-06	145137	Attenuator	Keysight Technologies Inc	8493C-010	74865	2022/10/20	12
RE	SAT3-11	150921	Attenuator	JFW	50HF-003N	-	2022/02/21	12
RE	SAT6-14	167095	Attenuator	JFW	50HF-006N	-	2022/02/21	12
RE	SBA-02	145022	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	BBA9106	91032665	2022/04/16	12
RE	SCC-B1/B3/B5/B7/B8/B13/SRSE-02	144975	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/NS4906	-/0901-270(RF Selector)	2022/04/20	12
RE	SCC-B2/B4/B6/B7/B8/B13/SRSE-02	144976	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/NS4906	-/0901-270(RF Selector)	2022/04/20	12

Test Equipment (2/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	SCC-G15	145176	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	2022/03/03	12
RE	SCC-G40	166491	Coaxial Cable	Junkosha	MWX221-01000NFSNMS/B	1612S005	2022/01/06	12
RE	SCC-G43	156380	Coaxial Cable	Huber+Suhner	SUCOFLEX_104_E	SN MY 13406/4E	2022/05/20	12
RE	SCC-G44	168300	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	800375/4A	2022/11/10	12
RE	SCC-G50	178573	Coaxial Cable	Huber+Suhner	SUCOFLEX_104_E	MY13407/4E	2022/03/03	12
RE	SCC-G51	178572	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	800288 /4A	2022/03/03	12
RE	SCC-G57	179540	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	802815/2	2022/05/12	12
RE	SCC-G69	200009	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	575617/4	2022/07/21	12
RE	SFL-02	145301	Highpass Filter	MICRO-TRONICS	HPM50111	51	2022/10/20	12
RE	SFL-18	145305	Highpass Filter	MICRO-TRONICS	HPM50111	119	2022/03/02	12
RE	SHA-03	145501	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	9120D-739	2022/03/16	12
RE	SHA-04	145512	Horn Antenna	ETS-Lindgren	3160-09	00094868	2022/06/06	12
RE	SHA-09	194684	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	695	2022/03/10	12
RE	SJM-20	207277	Measuring	ASKUL	-	-	-	-
RE	SLA-06	145528	Logperiodic Antenna	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	195	2022/04/16	12
RE	SOS-21	191838	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2022/08/08	12
RE	SOS-23	191840	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2022/08/08	12
RE	SSA-03	145801	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY48250152	2022/08/04	12
RE	STR-07	146209	Test Receiver	Rohde & Schwarz	ESU26	100484	2022/09/14	12
RE	STR-08	150463	Test Receiver	Rohde & Schwarz	ESW44	101581	2022/03/02	12
RE	STS-02	145793	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997819	2022/04/07	12
RE	STS-03	146210	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997823	2022/09/20	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: RE: Radiated Emission
AT: Antenna Terminal Conducted