

Emission Test Report

Standard: FCC Part 15 Subpart C / IC RSS-210

Document Number : FCC 19-0208-0

Product: IBM High Rate Wireless LAN Mini PCI Adapter III

measured with **IBM ThinkPad R40 Series**

FCC ID: ANO20020200BRX

IC: 349E-802MIP

January 7, 2003

**Prepared :
EMC Engineer**

Takeshi Asano

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

**1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-4779
Fax: +81-46-273-7420
E-Mail: asano@jp.ibm.com**

**Reviewed and Checked :
EMC Staff Engineer**

Toshiya Murota

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

**1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-6574
Fax: +81-46-273-7420
E-Mail: murota@jp.ibm.com**

**Approved :
Manager, EMC Engineering**

Akihisa Sakurai

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

**1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-2613
Fax: +81-46-273-7420
E-Mail: akihisa@jp.ibm.com**

MEASUREMENT / TECHNICAL REPORT – Part 15 Subpart C (Intentional Radiator)

IBM High Rate Wireless LAN Mini PCI Adapter III (with ThinkPad R40 Series)

FCC ID : ANO20020200BRX

January 7, 2003

This report concerns: (check one)

Original Grant ☒

Class I change ☐

Class II change ☐

Equipment type: Wireless LAN device

This report shall not be reproduced except in full, without the written permission of this test lab.

The measurement results contained in this report relate only to the item which was tested.

Measurement procedure used is ANSI C63.4-2000 unless otherwise specified.

Other test procedure: _____

The FCC has issued provisional acceptance of this test laboratory for Declaration of Conformity testing per letter dated 1997.

APPLICANT ANTI-DRUG ABUSE CERTIFICATION:

By checking yes, the applicant certifies that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a), or, in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section. For the definition of a “party” for these purposes, see 47 CFR 1.2002(b).

☒ Yes or No

“Report shall not be reproduced except in full, without the written approval of the laboratory” “the report must not be used by the client to claim product endorsement by NVLAP or any agency of the US government”

Prepared by: Takeshi Asano

IBM Japan Corporation, Yamato EMC Engineering

LAB-S59, 1623-14, Shimotsuruma, Yamato-shi Kanagawa-ken 242-8502, Japan

Tel: +81-46-215-4779 Fax: +81-46-273-7420

- Index -

A. GENERAL INFORMATION	5
A.1 TEST METHODOLOGY	5
A.2 TEST FACILITY / NVLAP ACCREDITATION	5
A.3 EUT DETAILS	5
B. SUMMARY OF TEST RESULTS	6
C. OPERATION MODE OF EUT	7
D. TEST INSTRUMENTS	8
E. MEASUREMENT UNCERTAINTY	9
F. TEMPERATURE AND HUMIDITY	9
G. RELATED SUBMITTAL(S)/GRANT(S)/NOTES	9
1. BANDWIDTH AT 6 DB BELOW	10
1.1 TEST PROCEDURE	10
1.2 TEST INSTRUMENTS AND MEASUREMENT SETUP	10
1.3 MEASUREMENT RESULTS	10
1.4 TRACE DATA	11
2. OCCUPIED BANDWIDTH / BAND-EDGE (AT 20 DB BELOW), AND OUT OF BAND EMISSIONS	14
2.1 TEST PROCEDURE	14
2.2 TEST INSTRUMENTS AND MEASUREMENT SETUP	14
2.3 MEASUREMENT RESULTS OF OCCUPIED BANDWIDTH / BAND-EDGE	14
2.4 MEASUREMENT RESULTS OF OUT OF BAND EMISSIONS	14
2.5 TRACE DATA OF BAND-EDGE	15
2.6 TRACE DATA OF OUT OF BAND EMISSIONS	18
3. TRANSMITTER OUTPUT POWER	21
3.1 TEST PROCEDURE	21
3.2 MEASUREMENT RESULTS	21
4. TRANSMITTER POWER SPECTRAL DENSITY	22
4.1 TEST PROCEDURE	22
4.2 TEST INSTRUMENTS AND MEASUREMENT SETUP	22
4.3 MEASUREMENT RESULTS	22
4.4 TRACE DATA	23
5. AC WIRELINE CONDUCTED EMISSIONS (150KHZ – 30MHZ)	26
5.1 TEST PROCEDURE	26
5.2 TEST INSTRUMENTS AND MEASUREMENT SETUP	26
5.3 MEASUREMENT RESULTS	27
6. RESTRICTED BANDS RADIATIONS (30MHZ – 1GHZ)	29
6.1 TEST PROCEDURE	29
6.2 TEST INSTRUMENTS AND MEASUREMENT SETUP	29
6.3 FIELD STRENGTH CALCULATION	31
6.4 MEASUREMENT RESULTS	32
7. RESTRICTED BANDS RADIATIONS (1GHZ – 25GHZ)	34

7.1 **TEST PROCEDURE.....** 34

7.2 **TEST INSTRUMENTS AND MEASUREMENT SETUP.....** 34

7.3 **FIELD STRENGTH CALCULATION.....** 35

7.4 **MEASUREMENT RESULTS.....** 36

A. General Information

APPLICANT : IBM Japan, Ltd.
 TEST SITE : IBM Japan, Ltd., Yamato Semi-anechoic chamber #2
 TEST SITE ADDRESS : 1623 – 14 Shimotsuruma, Yamato-shi, Kanagawa 242-8502 Japan
 Tel: +81-46-215-4779, Fax: +81-46-273-7420
 REGULATION : FCC Part 15 Subpart C
 Industry Canada RSS-210 (Issue No.5)
 MODEL NAME : IBM High Rate Wireless LAN Mini PCI Adapter III
 FCC ID : ANO20020200BRX
 IC Certification Number : 349E-802MIP
 SERIAL NUMBER : 145023400006
 PHYSICAL CONDITION : Preproduction
 KIND OF EQUIPMENT : DTS: IEEE802.11b Wireless LAN Mini-PCI card
 TESTED DATE : September 18, 19, October 4, 2002 and January 6, 2003

A.1 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-2000. Radiated testing was performed at an antenna to EUT distance of 3 meters.

A.2 Test Facility / NVLAP Accreditation

The semi-anechoic chamber #2 used to correct the data are located in Yamato Laboratory, IBM Japan.

- This facility has been fully described in a report dated September 1998, submitted to the FCC office, and accepted in a letter, dated Nov. 2, 1998(31040/SIT).
- IBM Yamato EMC Engineering is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance with Criteria established in Title 15, Part 285 Code of Federal Regulations.(NVLAP Lab code: 200198-0)
- This facility is accepted by **Industry Canada** in a letter dated March 19, 2001 as number **IC 349E** for chamber #2, and January 25, 2002 as number **IC 4221** for chamber #1.

A.3 EUT details

Table A EUT details

Model and S/N	FCC ID IC Certification Number	Description
IBM High Rate Wireless LAN Mini PCI Adapter III (s/n 145023400006)	FCC ID: ANO20020200BRX IC:349E-802MIP	Applying modular transmitter Built_in type IEEE802.11b Wireless LAN Mini-PCI card without antenna
ThinkPad R40 Series M/T 2682-N6U (s/n FX-00336)	N/A	Host equipment IBM Notebook PC with built_in antenna CPU: Intel® Mobile Pentium® 4 Processor, 1.9GHz
P/N 02K6746	N/A	Universal AC adapter 72W, Unshielded power cord

B. Summary of Test Results

Table-B presents the list of the measurement items for Spread Spectrum, Direct Sequence devices under FCC Part 15 Subpart C and Industry Canada RSS-210.

The section numbers of upper portion are showing FCC number, and the other (lower) ones are for IC.

Table-B List of the measurements

Section(s)	Test Items		Condition	Result
	Transmit mode (TX):			
15.247(a)(2) 5.9.1	Bandwidth at 6 dB below		Conducted	Pass
15.247(c) 5.9.1 6.2.2 (o) (e1)	Occupied BW (or Band-edge) Out of Band Emissions (Bandwidth at 20 dB below)	The radiated emission in any 100kHz of outband shall be at least 20dB below the highest inband spectral density.	Conducted	Pass
15.247(b) 6.2.2 (o) (b)	Transmitter output power	Shall not exceed 1.0 W.	Conducted	Pass
15.247(d) 6.2.2 (o) (b)	Transmitter power spectral Density	Shall not be greater than 8 dBm in any 3kHz band.	Conducted	Pass
15.207 6.6	AC Wireline Conducted Emissions 150kHz - 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50	Conducted	Pass
15.205 / 209 6.2.1 / 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3.	Radiated (30MHz - 1GHz)	Pass
			Radiated (1- 25GHz)	Pass

	Receive mode (RX):			
15.207 7.4	AC Wireline Conducted Emissions 150kHz - 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50	Conducted	Pass
15.209 7.3	General Field Strength Limits (Radiated Emission Limits)	Shall not exceed the limits specified in RSS-210.	Radiated (30MHz - 1GHz)	Pass
			Radiated (1- 25GHz)	Pass

C. Operation Mode of EUT

All tests were performed using the “PRISM Test Utility Program”, Version 3.0.24. Three kinds of modulation are used for transmission with appropriate bit rates:

Table C-1 Transmit mode (TX)

Operation Frequency [GHz]	Rated output power (conducted) [dBm]			Test performed*
	Bit rate 2Mbps	Bit rate 5.5Mbps	Bit rate 11Mbps	
2.412 (Ch. 1)	+15	+15	+15	X
2.417 (Ch. 2)	+15	+15	+15	
2.422 (Ch. 3)	+15	+15	+15	
2.427 (Ch. 4)	+15	+15	+15	
2.432 (Ch. 5)	+15	+15	+15	
2.437 (Ch. 6)	+15	+15	+15	X
2.442 (Ch. 7)	+15	+15	+15	
2.447 (Ch. 8)	+15	+15	+15	
2.452 (Ch. 9)	+15	+15	+15	
2.457 (Ch. 10)	+15	+15	+15	
2.462 (Ch. 11)	+15	+15	+15	X

* Full testing with bit rate 11Mbps only

Table C-2 Receive mode (RX)

Operation Frequency [GHz]	Test performed
2.412 (Ch. 1)	
2.417 (Ch. 2)	
2.422 (Ch. 3)	
2.427 (Ch. 4)	
2.432 (Ch. 5)	
2.437 (Ch. 6)	X
2.442 (Ch. 7)	
2.447 (Ch. 8)	
2.452 (Ch. 9)	
2.457 (Ch. 10)	
2.462 (Ch. 11)	

D. Test Instruments

Table-D List of Measuring Instruments

Description	Model	Serial Number	Calibration Date	Calibration Interval
Computer	IBM 5551-L	#4	N/A	N/A
Computer	IBM 6589-13J	97-15613	N/A	N/A
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634	08/28/02	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2732A03651	02/19/02	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	3019A05156	04/04/02	1 year
Spectrum Analyzer Display	HP 85662A	2542A12308	08/28/02	1 year
Spectrum Analyzer Display	HP 85662A	2648A15255	02/19/02	1 year
Spectrum Analyzer Display	HP 85662A	3026A19366	04/04/02	1 year
Quasi-Peak Adapter	HP 85650A	2043A00062	08/28/02	1 year
Quasi-Peak Adapter	HP 85650A	2521A00968	02/15/02	1 year
Quasi-Peak Adapter	HP 85650A	2811A01433	04/08/02	1 year
Amplifier (100KHz - 1.3GHz)				
- for 30-200MHz	HP 8447D	2805A02919	04/15/02	1 year
- for 200-1000MHz	HP 8447D	2944A03506	04/15/02	1 year
Amplifier (1GHz - 26.5GHz)	HP 8449B	3008A00582	06/13/02	1 year
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003	07/18/02	1 year
Receiver (9kHz-30MHz)	R&S ESH3	891806/012	10/07/02	1 year
Receiver (20MHz-1.3GHz)	R&S ESVP	892111/026	09/28/01	1 year
Biconical Antenna (30-200MHz)	EMCO 3108	2400	05/06/02	1 year
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	2150	05/06/02	1 year
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774	07/18/02	1 year
Horn Antenna (3.95- 5.85GHz)	EMCO 3160-5	1099	04/17/02	1 year
Horn Antenna (5.85- 8.20GHz)	EMCO 3160-6	9712-1044	04/17/02	1 year
Horn Antenna (8.20- 12.40GHz)	EMCO 3160-7	1156	04/17/02	1 year
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202	04/17/02	1 year
LISN	EMCO 3825/2	1426	09/01/02	1 year
Power Meter	HP 437B	3043U03437	10/23/01	1 year
Power Sensor	HP 8481A	US41030582	10/26/01	1 year
Switch/control unit	HP 3488A	2719A17226	N/A	N/A
		2719A17228	N/A	N/A
Plotter	HP 7550A	2631A33619	N/A	N/A
SF106 cables:	Length:			
- Horn Ant <=> RF Amp.	6 m	- EM206SCO	09/05/02	1 year
- RF Amp.<=>Spectrum Analyzer	15m	- EM215SCO	09/05/02	1 year
N-Coax cables:				
- Bi-coni Ant <=> 10m Cable	9 m	- EM203L01	04/15/02	1 year
- 10m Cable <=> Shield Panel	10 m	- EM203L02	04/15/02	1 year
- Shield Panel <=> RF Amp	7 m	- EM203L03	04/15/02	1 year
- RF Amp <=> Power Splitter	0.5m	- EM203L04	04/15/02	1 year

- Log-peri Ant <=> 10m Cable	9 m	- EM203H01	04/15/02	1 year
- 10m Cable <=> Shield Panel	10 m	- EM203H02	04/15/02	1 year
- Shield Panel <=> RF Amp	7 m	- EM203H03	04/15/02	1 year
- RF Amp <=> Power Splitter	0.5m	- EM203H04	04/15/02	1 year
Coax cables:				
- Lisn-L <=> SW/Con.unit (SW100)	4 m	- EMIC-L	04/15/02	1 year
- Lisn-N <=> SW/Con.unit (SW101)	4 m	- EMIC-N	04/15/02	1 year
- SW/Con.unit <=> RCVR (Input)	1 m	- EMIC-R	04/15/02	1 year
- SW/Con.unit<=> Spe Ana.(Signal In)	1 m	- EMIC-S	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM203L05	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM203L06	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM203H05	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM203H06	04/15/02	1 year
- SW/Con.unit <=> Receiver (Input)	2 m	- EM2RCV	04/15/02	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM2SPL	04/15/02	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM2SPH	04/15/02	1 year

Notes.

- The above equipment calibration is traceable to National standards.
- HP: Hewlett Packard, R&S: Rohde & Schwarz

E. Measurement Uncertainty

Uncertainties of the both, the Yamato EMI radiated test facilities (EMI chambers, #1 and #2) and the Yamato EMI conducted test facility are derived with the NIS 81 " Treatment of uncertainty in EMC measurements" 1994.

Estimated site uncertainty values are as follows.

EMI chamber #1 : 4.39dB

EMI chamber #2 : 4.40dB

EMI conducted measurement system : 2.4dB

Detail should be referred to "Treatment of Uncertainty, Calculations and Policy" report, document number TCR 10-0015.

F. Temperature and Humidity

The temperature is controlled within range of 17° to 28°.

The relative humidity is controlled within range of 40% to 70%.

G. Related Submittal(s)/Grant(s)/Notes

The host unit with full peripheral devices including the applying modular as an unintentional radiator is classified as a Digital Device under the FCC Part 15 Subpart B or the Industry Canada Class B Emission Compliance (ICES-003), and subject to SDoC.

1. Bandwidth at 6 dB below

1.1 Test Procedure

The bandwidth at 6 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

RBW=100kHz, VBW=100kHz*1, Span=30MHz, Sweep=suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

1.2 Test Instruments and Measurement Setup

Table 1-1 : 6 dB Bandwidth Test Instruments

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 110 cm Loss: 1.3 dB	

Notes: - R&S: Rohde & Schwarz




Figure 1: Measurement setup for 6dB bandwidth test


1.3 Measurement Results


Test Date: October 4, 2002

Table 1-2. EUT: M/T 2682-N6U, s/n FX-00336 , TX mode 11Mbps


Center Frequency (MHz)	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)
2412 (ch. 1)	2407.58	2416.84	9.26
2437 (ch. 6)	2432.16	2444.18	12.02
2462 (ch. 11)	2457.16	2467.98	10.82

1.4 Trace Data

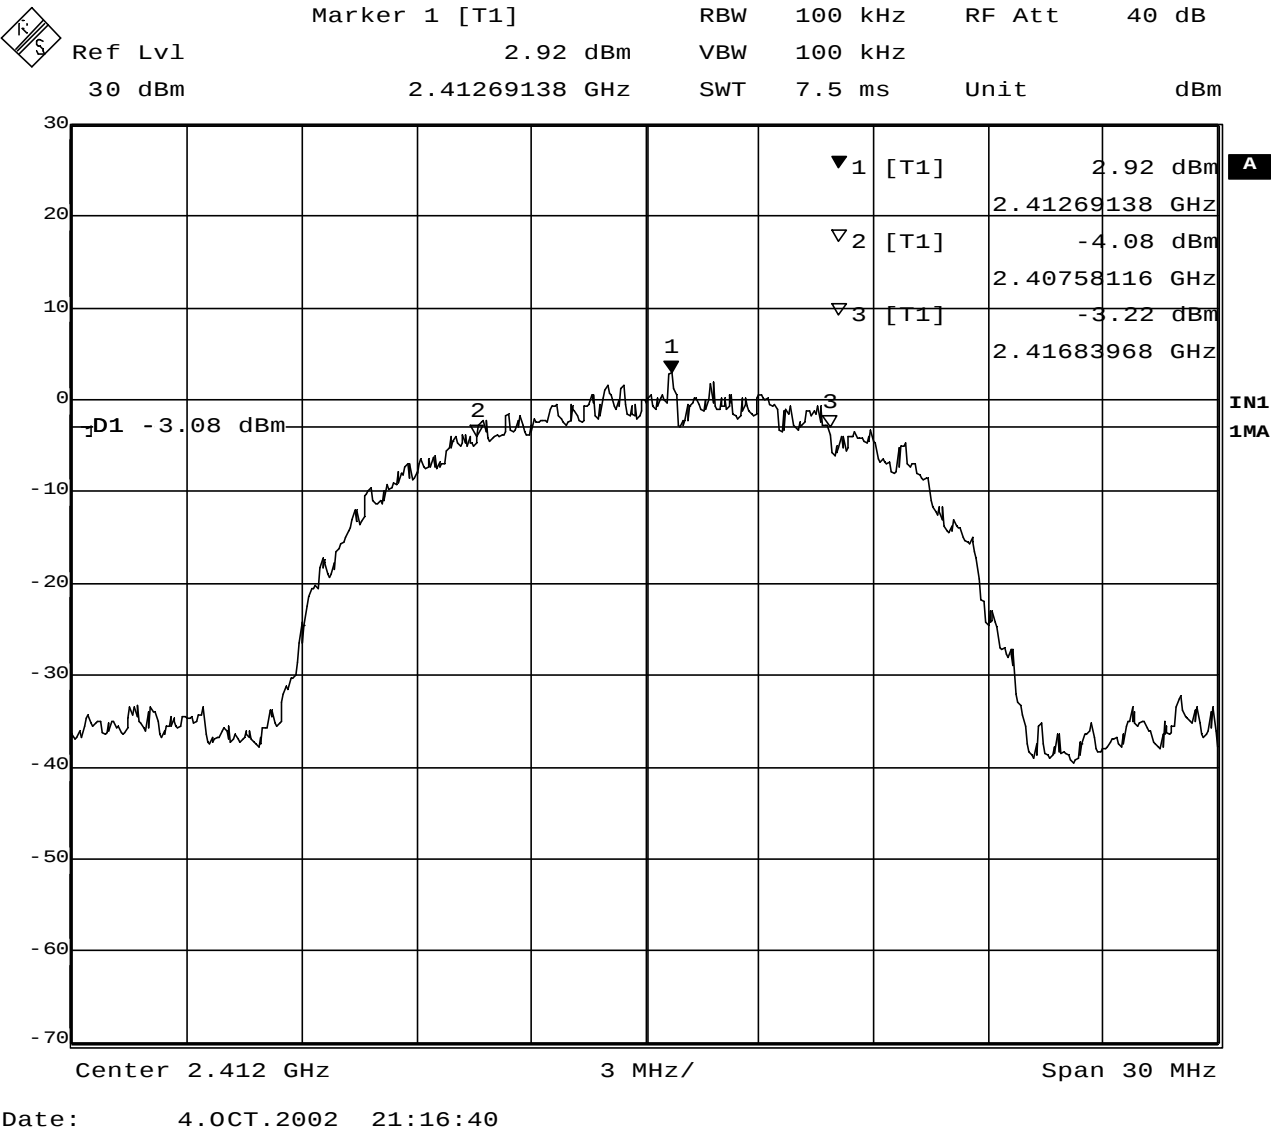

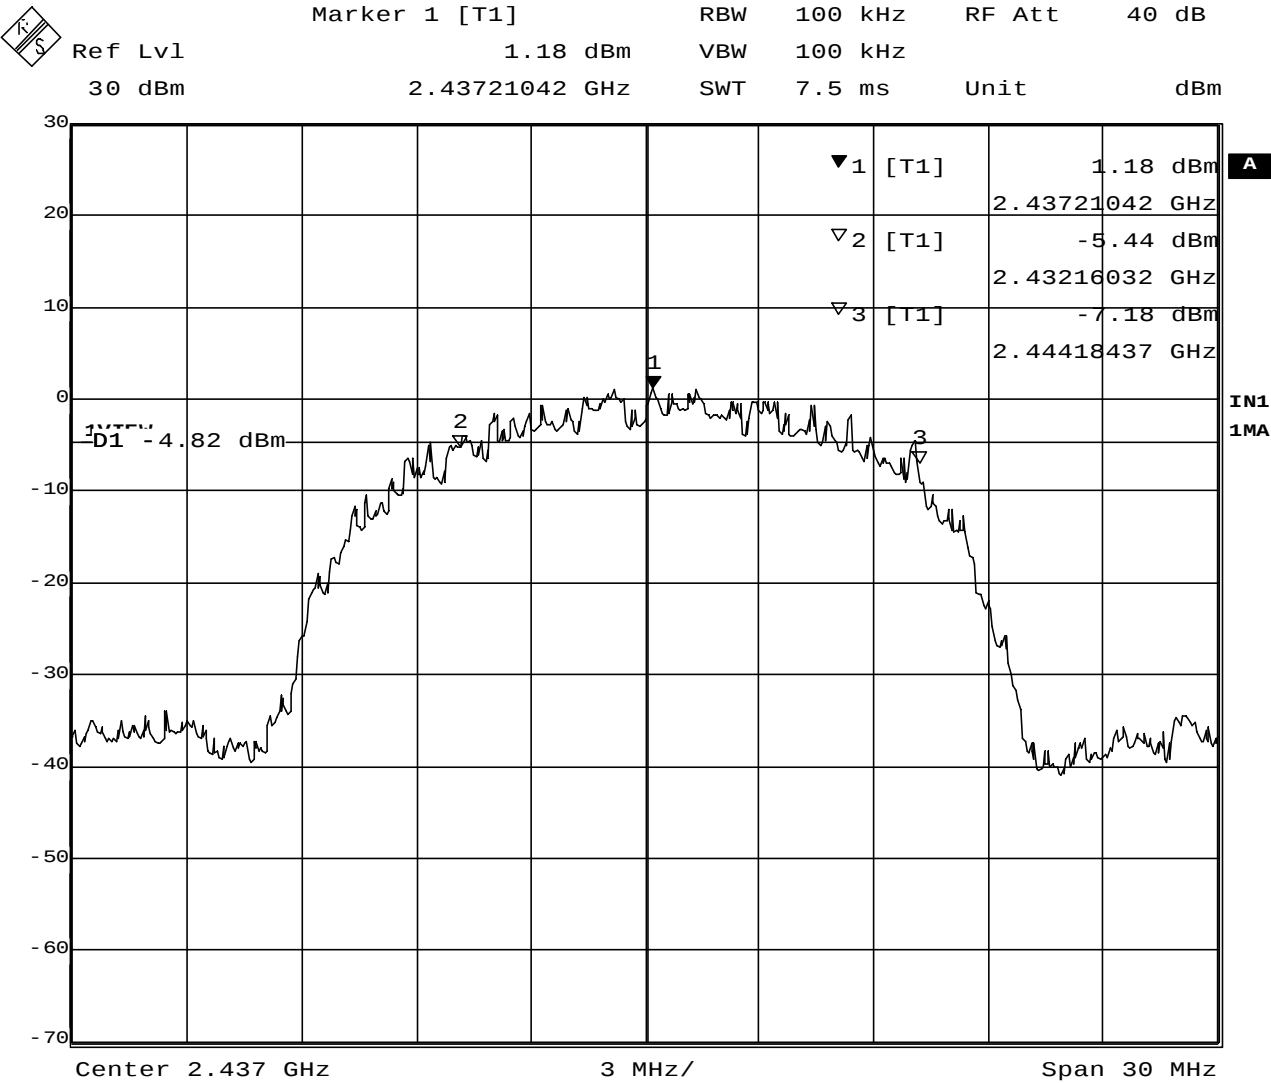

Date: 4.OCT.2002 21:19:35

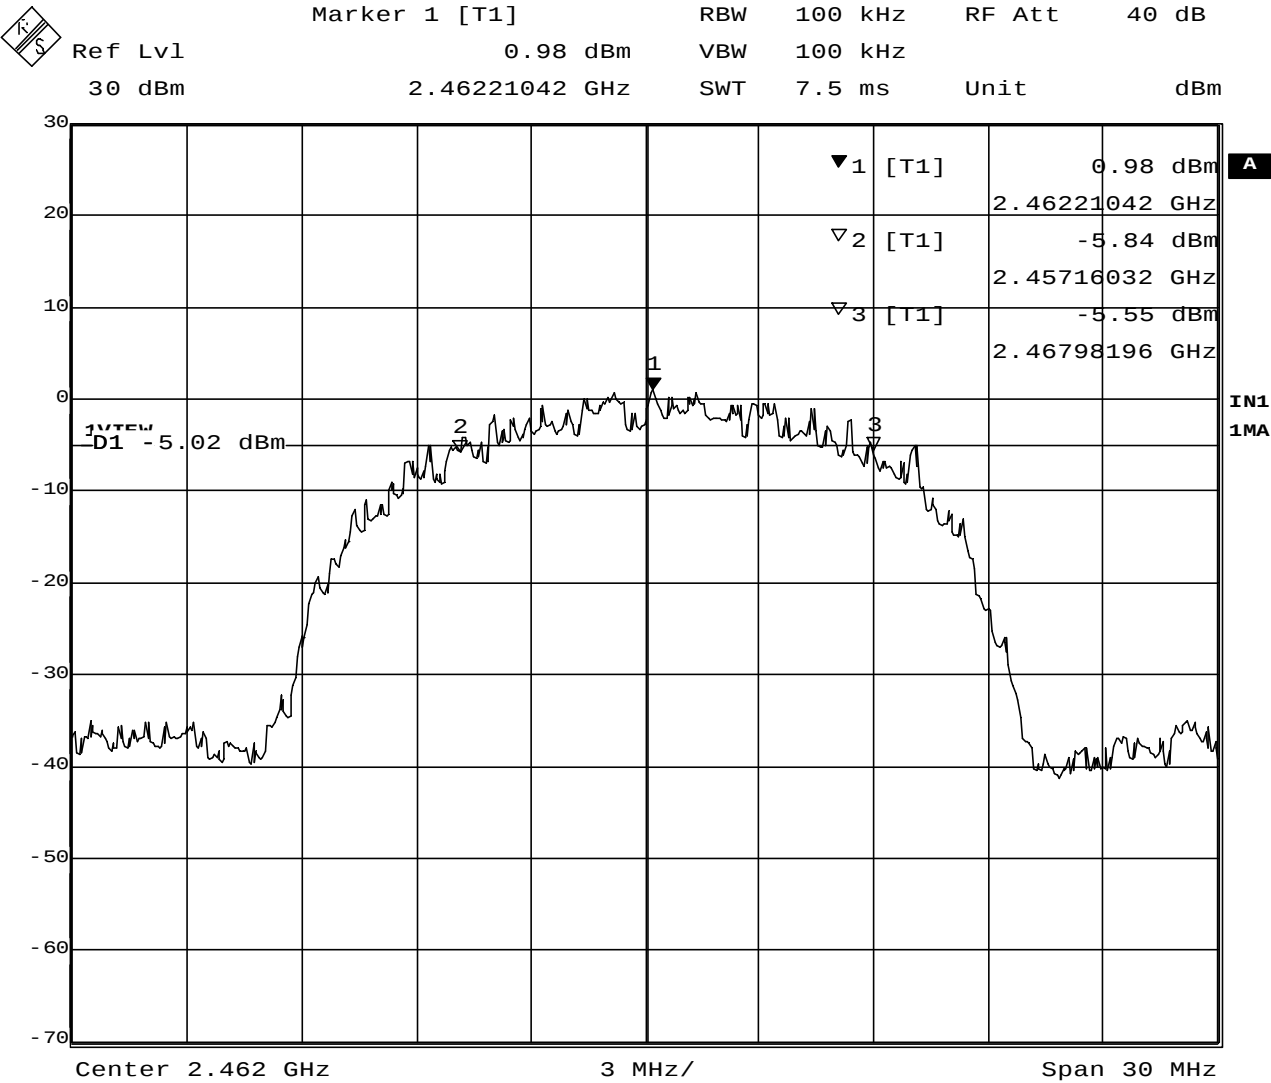

Date: 4.OCT.2002 21:20:58

2. Occupied Bandwidth / Band-edge (at 20 dB below), and Out of Band Emissions

2.1 Test Procedure

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

RBW=100kHz, VBW=100kHz*1, Span=50MHz, Sweep=suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

2.2 Test Instruments and Measurement Setup

Same as the Chapter 1(Table 1-1 & Figure 1).

2.3 Measurement Results of Occupied Bandwidth / Band-edge

Test Date: October 4, 2002

Table 2-1. EUT: M/T 2682-N6U, s/n FX-00336 , TX mode 11Mbps


Center Frequency (MHz)	Lower Frequency (MHz)	Upper Frequency (MHz)	Bandwidth at 20 dB below (MHz)	Margin to Lower limit (MHz)	Margin to Upper limit (MHz)
2412 (ch. 1)	2403.65	2420.79	17.14	3.65	
2437 (ch. 6)	2428.63	2445.74	17.11		
2462 (ch. 11)	2453.63	2470.79	17.16		12.71


2.4 Measurement Results of Out of Band Emissions

All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density.


Test Date: October 4, 2002

2.5 Trace Data of Band-edge

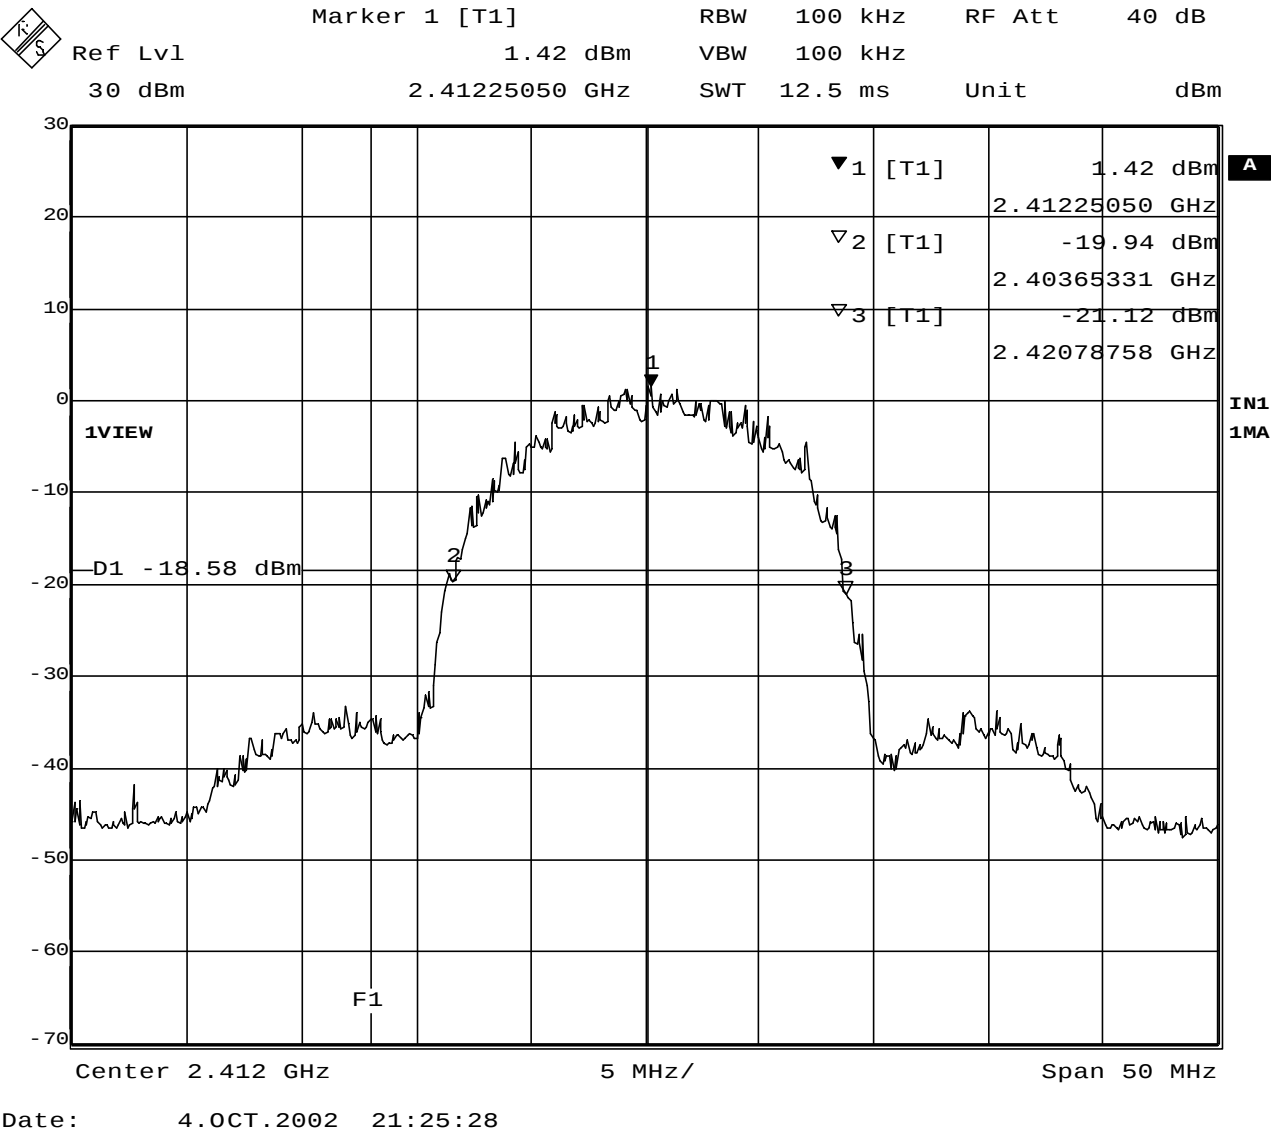

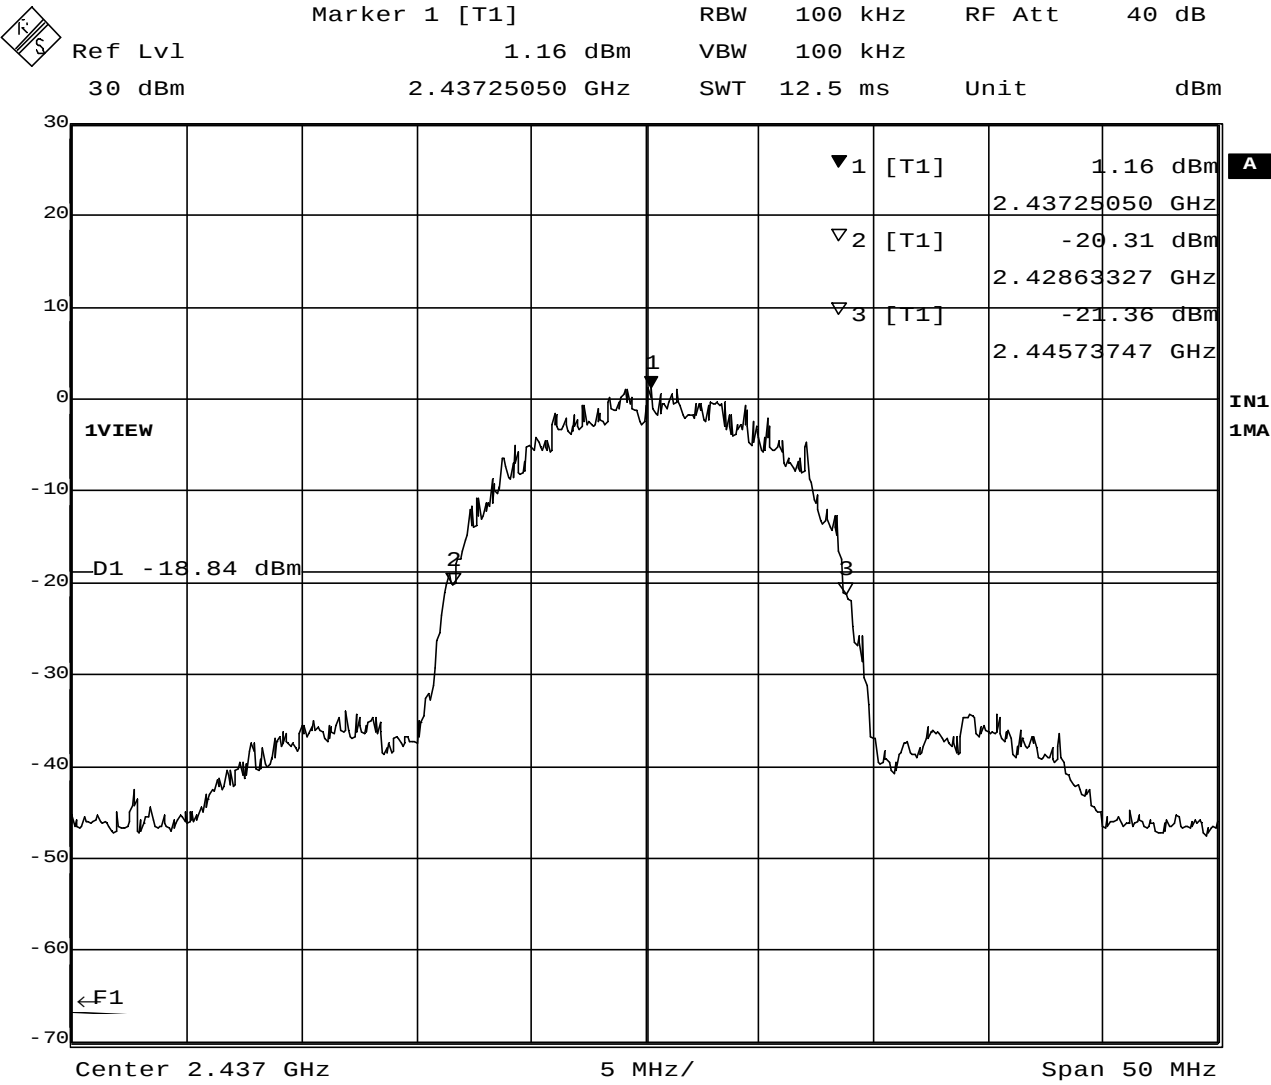



Date: 4.OCT.2002 21:29:27

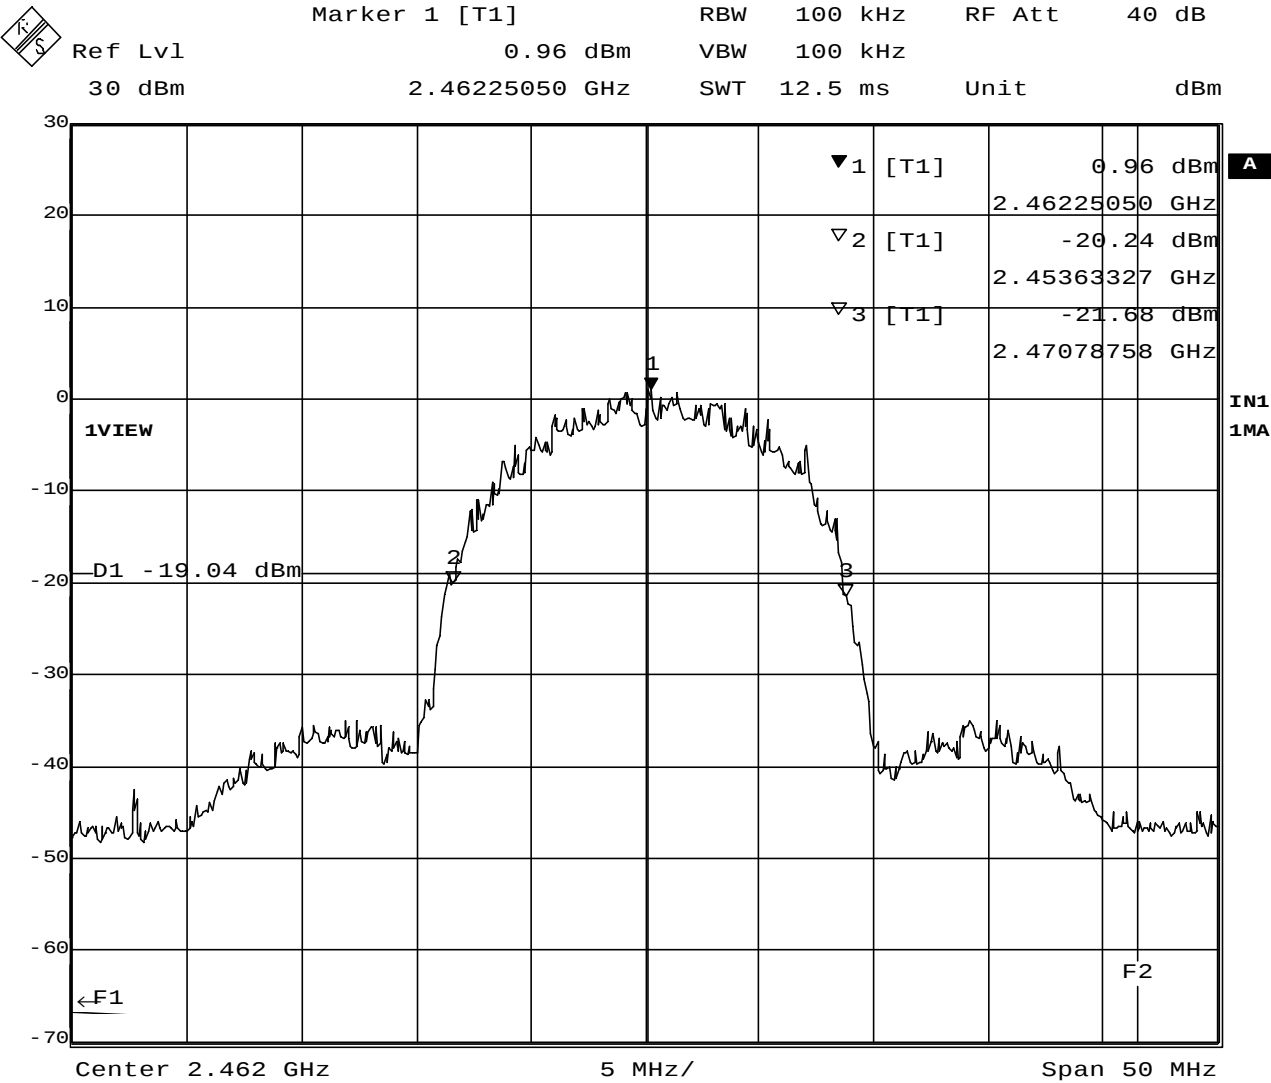


Date: 4.OCT.2002 21:32:24

2.6 Trace Data of Out of Band Emissions

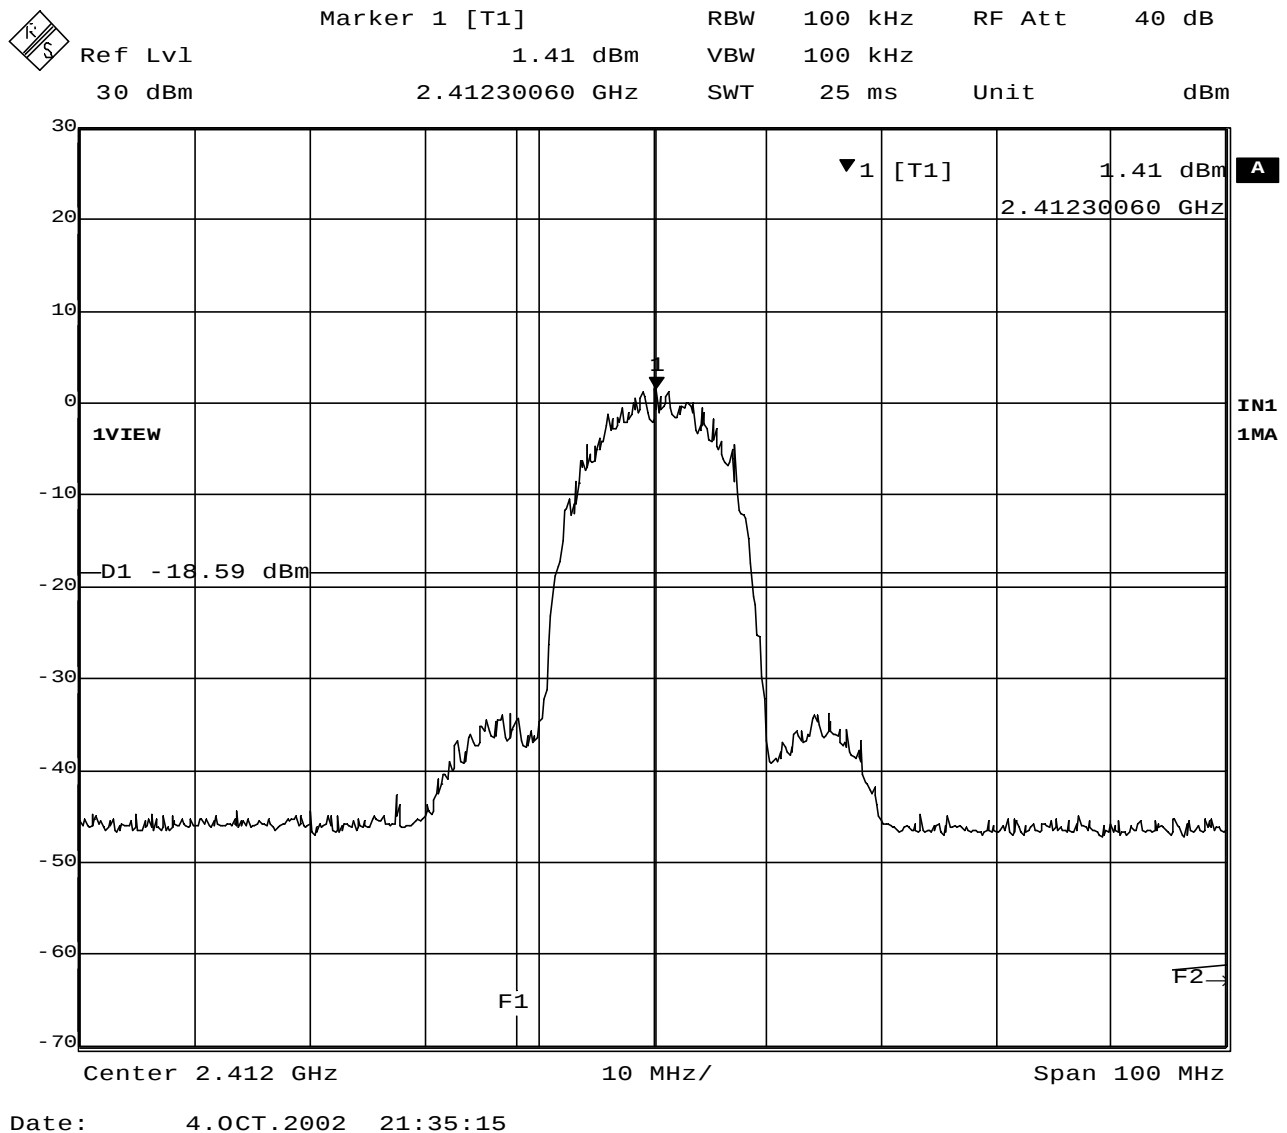

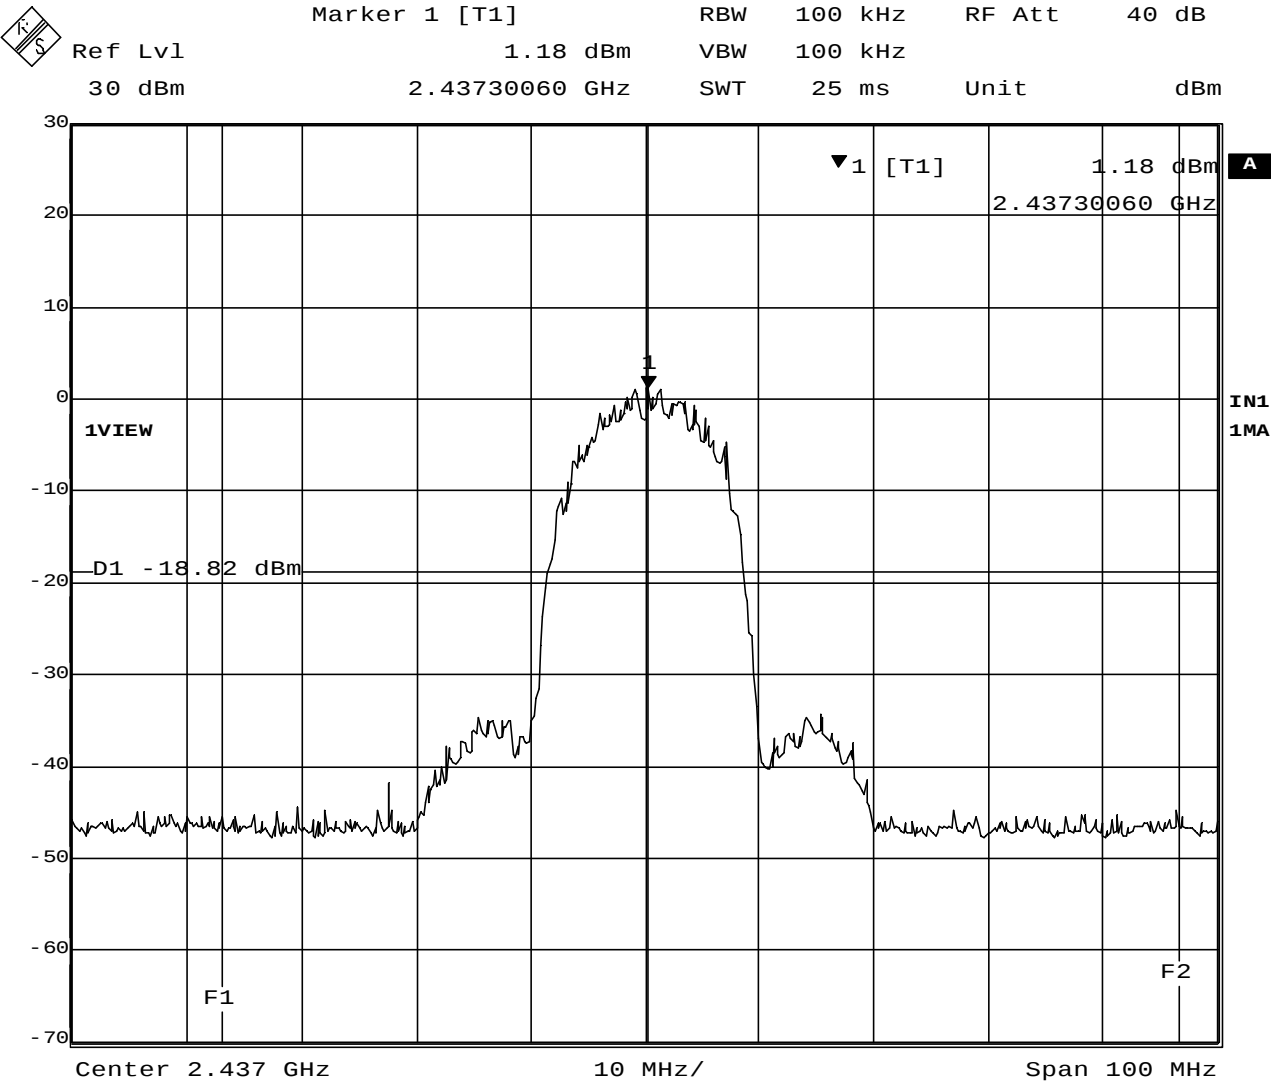

Date: 4.OCT.2002 21:36:16

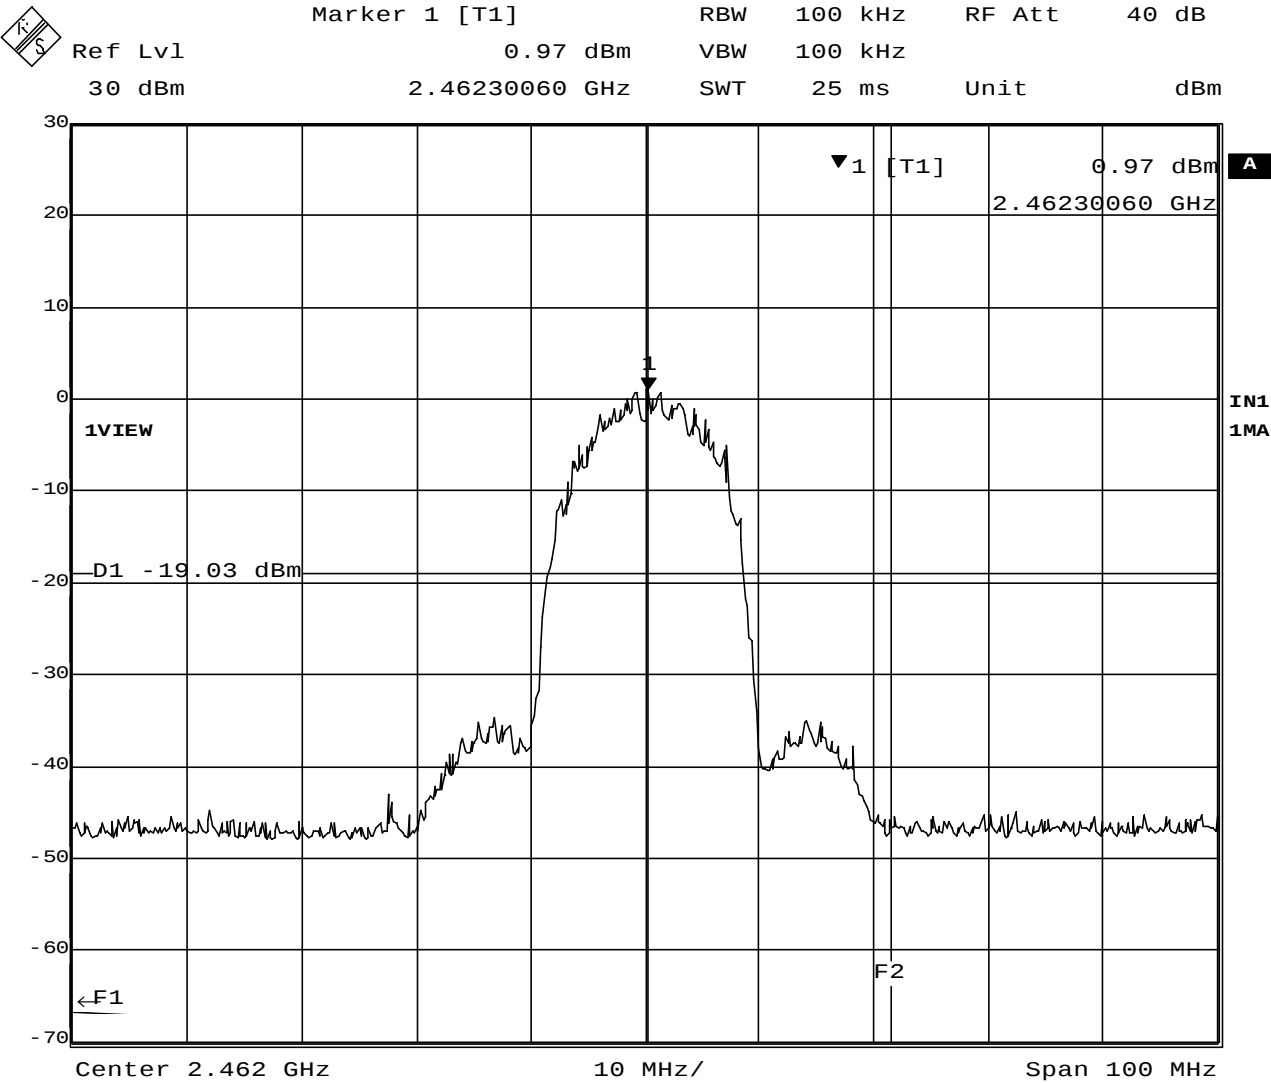

Date: 4.OCT.2002 21:37:00

3. Transmitter Output Power

3.1 Test Procedure

- A transmitter antenna terminal of EUT is connected to the input of a RF power sensor.
- Measurement is made while EUT is operating in transmission mode at the appropriate center frequency.

Table 3-1 : 6 dB Bandwidth Test Instruments

Description	Model	Serial Number
Power Meter	HP 437B	3043U03437
Power Sensor	HP 8481A	US41030582
Coax cables: - Power Sensor <=> EUT	Length: 20 cm Loss: 0.7dB	

Notes: - HP: Hewlett Packard

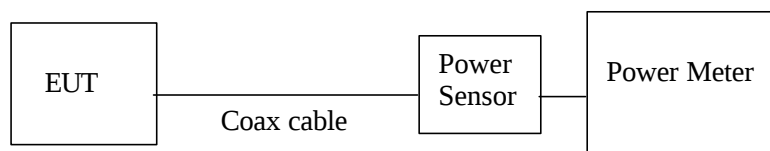


Figure 3: Measurement setup for RF output power

3.2 Measurement Results

Test Date: September 18, 2002

Table 3-2. EUT: M/T 2682-N6U, s/n FX-00336, TX mode 11Mbps

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results		Limit [1W] (dBm)	Margin (dB)
			(dBm)	(W)		
2412 (ch. 1)	15.07	0.7	15.8	0.03800	30.0	14.2
2437 (ch. 6)	14.88	0.7	15.6	0.03633	30.0	14.4
2462 (ch. 11)	14.66	0.7	15.4	0.03477	30.0	14.6

Table 3-3. EUT: M/T 2682-N6U, s/n FX-00336, TX mode 2Mbps

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results		Limit [1W] (dBm)	Margin (dB)
			(dBm)	(W)		
2412 (ch. 1)	14.98	0.7	15.7	0.03722	30.0	14.3
2437 (ch. 6)	14.79	0.7	15.5	0.03555	30.0	14.5
2462 (ch. 11)	14.42	0.7	15.1	0.03241	30.0	14.9

4. Transmitter Power Spectral Density

4.1 Test Procedure

The peak power density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

RBW= 3kHz, VBW=100kHz, Span=10MHz, Sweep = 2.8 seconds

4.2 Test Instruments and Measurement Setup

Same as the Chapter 1(Table 1-1 & Figure 1).


4.3 Measurement Results


Test Date: October 4, 2002

Table 4-1. EUT: M/T 2682-N6U, s/n FX-00336 , TX mode 11Mbps

Ch No.	Frequency (MHz)	Spectrum Analyzer Reading (dBm)	Cable loss (dB)	Result (dBm)	Limit (dBm)	Margin (dB)
1	2411.15	-11.1	1.3	-9.8	8.0	17.8
6	2436.15	-11.4	1.3	-10.1	8.0	18.1
11	2461.15	-11.5	1.3	-10.2	8.0	18.2

4.4 Trace Data

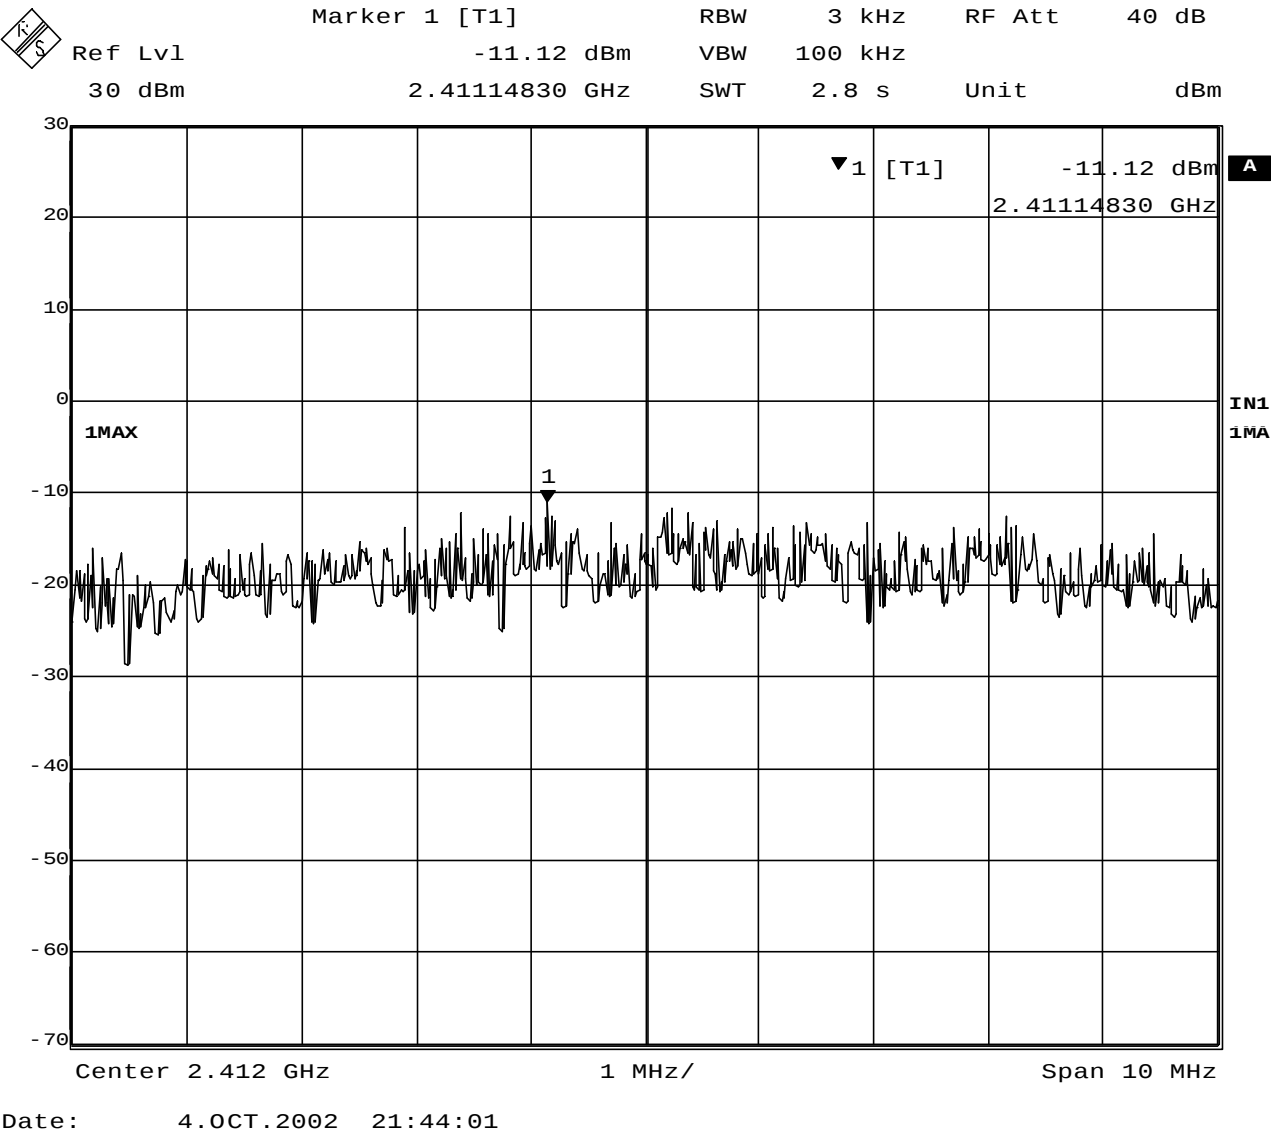


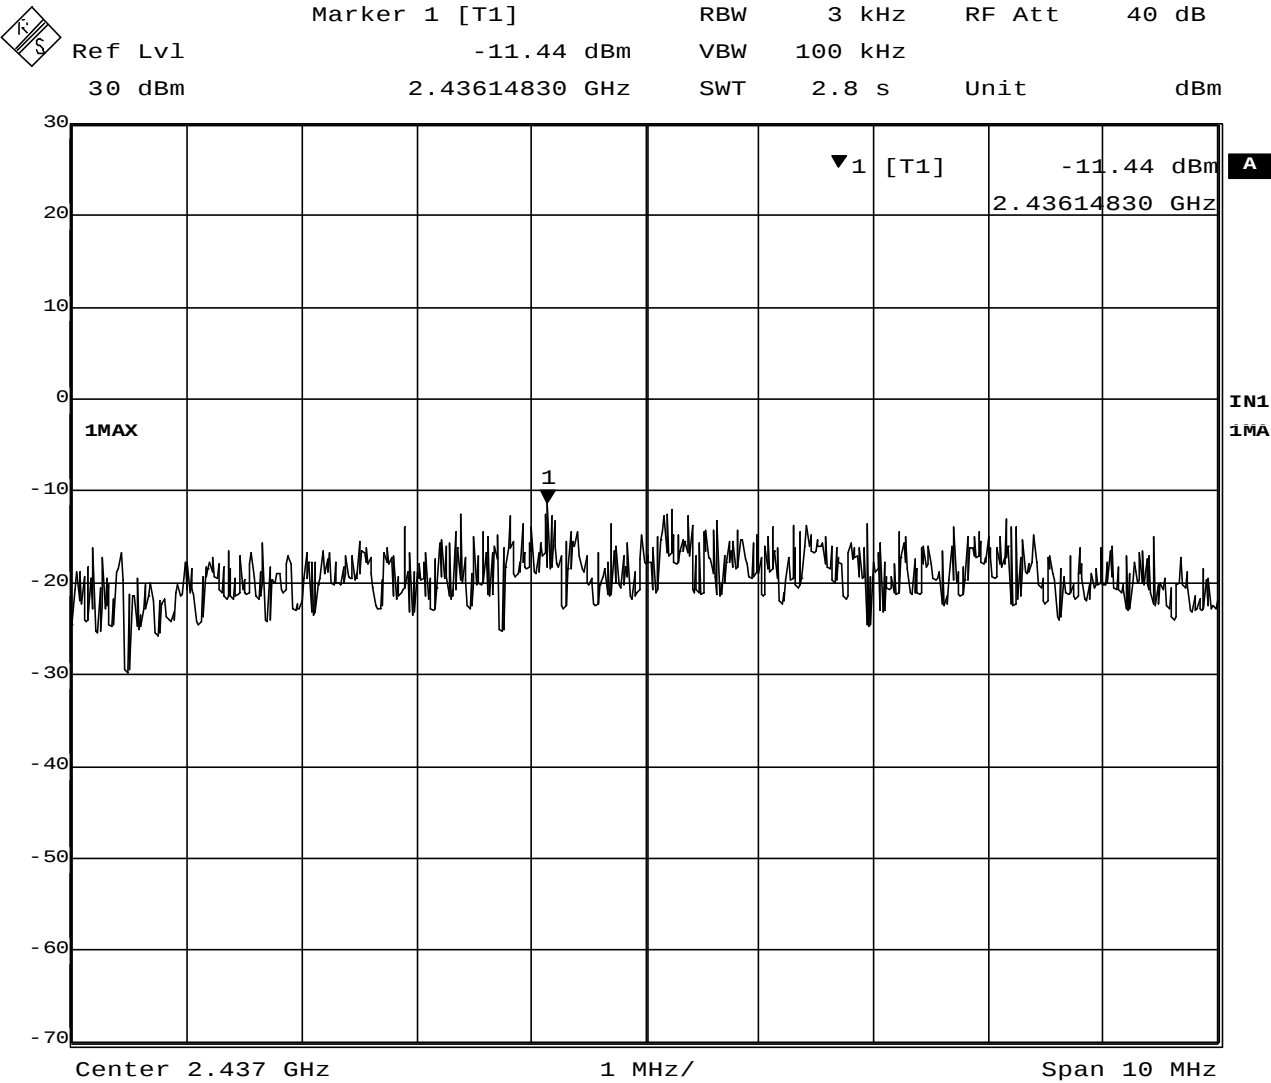

Date: 4.OCT.2002 21:45:40



Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	40 dB
30 dBm	-11.45 dBm	VBW	100 kHz		
	2.46114830 GHz	SWT	2.8 s	Unit	dBm

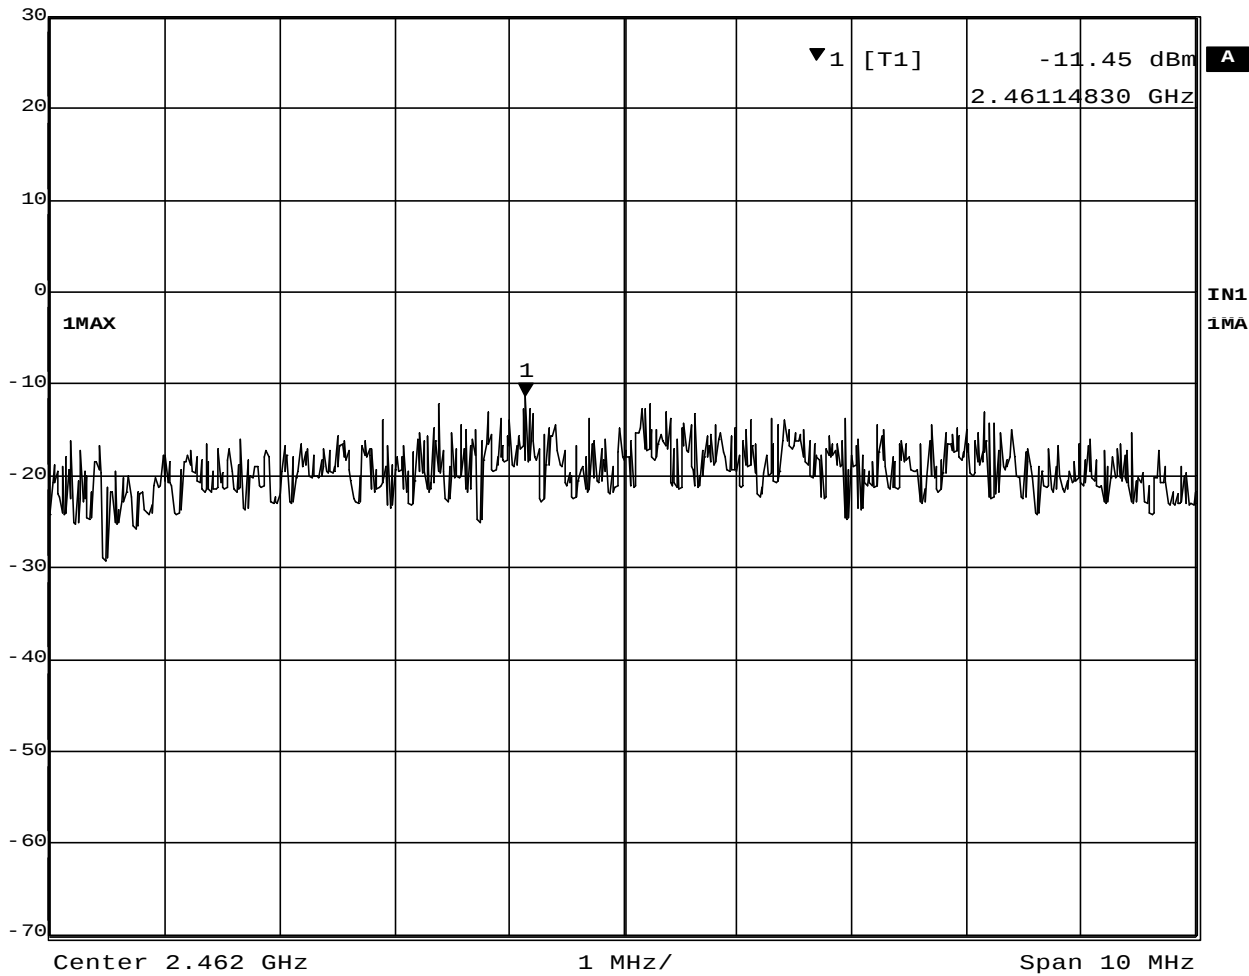

Date: 4.OCT.2002 21:46:24

5. AC WIRELINE CONDUCTED EMISSIONS (150KHz – 30MHz)

5.1 Test Procedure

The conducted emissions are measured in the IBM shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

5.2 Test Instruments and Measurement Setup

Table 5-1. Conducted Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6589-13J	97-15613
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634
Spectrum Analyzer Display	HP 85662A	2542A12308
Quasi-Peak Adapter	HP 85650A	2043A00062
Receiver (9kHz-30MHz)	R&S ESH3	891806/012
LISN	EMCO 3825/2	1426
Switch/control unit	HP 3488A	2719A17228
Plotter	HP 7550A	2631A33619
Coax cables: - Lisen-L <=> SW/Con.unit (SW100) - Lisen-N <=> SW/Con.unit (SW101) - SW/Con.unit <=> RCVR (Input) - SW/Con.unit<=> Spe Ana.(Signal In)	Length: 4 m 4 m 1 m 1 m	- EMIC-L - EMIC-N - EMIC-R - EMIC-S

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

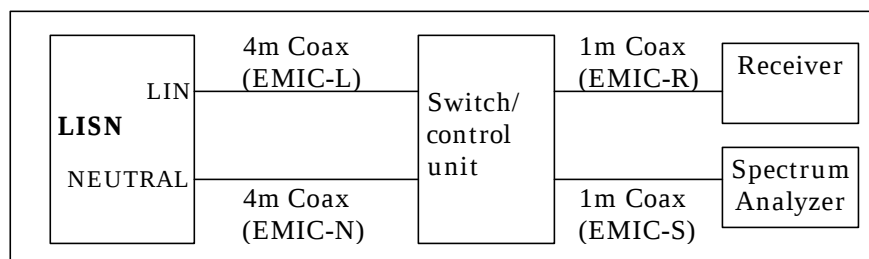


Figure 5. Cables for Conducted Emission Test

5.3 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 11.2dB. The 6 highest emissions relative to the limits are reported.

Test Date: January 6, 2003

1) EUT in transmission mode

Table 5-2-1. EUT: M/T 2682-N6U, s/n FX-00336, Ch.1(2412MHz) TX mode 11Mbps

Frequency (MHz)	Phase	QP Voltage (dBμV)	CISPR22 QP Limit (dBμV)	AV Voltage (dBμV)	CISPR22 AV Limit (dBμV)
0.1949	LINE	51.6	63.8	42.2	53.8
0.3075	LINE	38.5	60.0	31.2	50.0
0.4077	LINE	33.5	57.7	25.8	47.7
0.5144	NEUTRAL	30.2	56.0	24.1	46.0
0.6398	LINE	27.6	56.0	21.6	46.0
0.9332	LINE	26.5	56.0	21.1	46.0

Table 5-2-2. EUT: M/T 2682-N6U, s/n FX-00336 , Ch.6(2437MHz) TX mode 11Mbps

Frequency (MHz)	Phase	QP Voltage (dBμV)	CISPR22 QP Limit (dBμV)	AV Voltage (dBμV)	CISPR22 AV Limit (dBμV)
0.2021	LINE	51.8	63.5	42.3	53.5
0.3086	NEUTRAL	39.4	60.0	31.4	50.0
0.4013	LINE	33.8	57.8	27.3	47.8
0.4757	NEUTRAL	30.7	56.4	23.7	46.4
0.8292	LINE	28.5	56.0	23.8	46.0
0.9111	LINE	27.1	56.0	22.0	46.0

Table 5-2-3. EUT: M/T 2682-N6U, s/n FX-00336, Ch.11(2462MHz) TX mode 11Mbps

Frequency (MHz)	Phase	QP Voltage (dBμV)	CISPR22 QP Limit (dBμV)	AV Voltage (dBμV)	CISPR22 AV Limit (dBμV)
0.1953	NEUTRAL	49.4	63.8	38.2	53.8
0.2891	LINE	38.7	60.6	30.4	50.6
0.3829	LINE	32.5	58.2	24.7	48.2
0.5007	LINE	29.0	56.0	25.3	46.0
0.8286	NEUTRAL	25.0	56.0	20.5	46.0
1.1908	LINE	25.1	56.0	20.4	46.0

2) EUT in receiving mode

Table 5-2-4. EUT: M/T 2682-N6U, s/n FX-00336, Ch.6(2437MHz) RX mode

Frequency (MHz)	Phase	QP Voltage (dB μ V)	CISPR22 QP Limit (dB μ V)	AV Voltage (dB μ V)	CISPR22 AV Limit (dB μ V)
0.1957	LINE	49.9	63.8	38.7	53.8
0.2866	NEUTRAL	38.6	60.6	31.1	50.6
0.4007	LINE	30.9	57.8	25.1	47.8
0.4974	NEUTRAL	27.6	56.0	23.3	46.0
0.8303	NEUTRAL	26.4	56.0	21.5	46.0
1.1898	LINE	23.4	56.0	19.1	46.0

6. RESTRICTED BANDS RADIATIONS (30MHz – 1GHz)

6.1 Test Procedure

Preliminary radiated emissions are measured in the semi-anechoic chamber at a 3 meter distance on every azimuth in both horizontal and vertical polarity. The antennas are also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized by a cable manipulation. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120kHz. The highest emissions relative to the limit are listed.

6.2 Test Instruments and Measurement Setup

Table 6-1 Radiated Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 5551-L	#4
Spectrum Analyzer (100Hz-1.5GHz) for 30-200MHz	HP 85680B	3019A05156
Spectrum Analyzer Display for 30-200MHz	HP 85662A	3026A19366
Quasi-Peak Adapter for 30-200MHz	HP 85650A	2811A01433
Spectrum Analyzer (100Hz-1.5GHz) for 200-1000MHz	HP 85680B	2732A03651
Spectrum Analyzer Display for 200-1000MHz	HP 85662A	2648A15255
Quasi-Peak Adapter for 200-1000MHz	HP 85650A	2521A00968
Amplifier (100KHz-1.3GHz)		
- for 30-200MHz	HP 8447D	2805A02919
- for 200-1000MHz	HP 8447D	2944A03506
Biconical Antenna (30-200MHz)	EMCO 3108	2400
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	2150
Receiver (20MHz-1.3GHz)	R&S ESVP	892111/026
Switch/control unit	HP 3488A	2719A17226
N-Coax cables:	Length:	
- Bi-coni Ant <=> 10m Cable	9 m	- EM203L01
- 10m Cable <=> Shield Panel	10 m	- EM203L02
- Shield Panel <=> RF Amp	7 m	- EM203L03
- RF Amp <=> Power Splitter	0.5m	- EM203L04
- Log-peri Ant <=> 10m Cable	9 m	- EM203H01
- 10m Cable <=> Shield Panel	10 m	- EM203H02
- Shield Panel <=> RF Amp	7 m	- EM203H03
- RF Amp <=> Power Splitter	0.5m	- EM203H04
Coax cables:		
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM203L05
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM203L06
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM203H05
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM203H06
- SW/Con.unit <=> Receiver (Input)	2 m	- EM2RCV
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM2SPL

- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM2SPH
---	-----	----------

Notes:
- HP: Hewlett Packard, R&S: Rohde & Schwarz

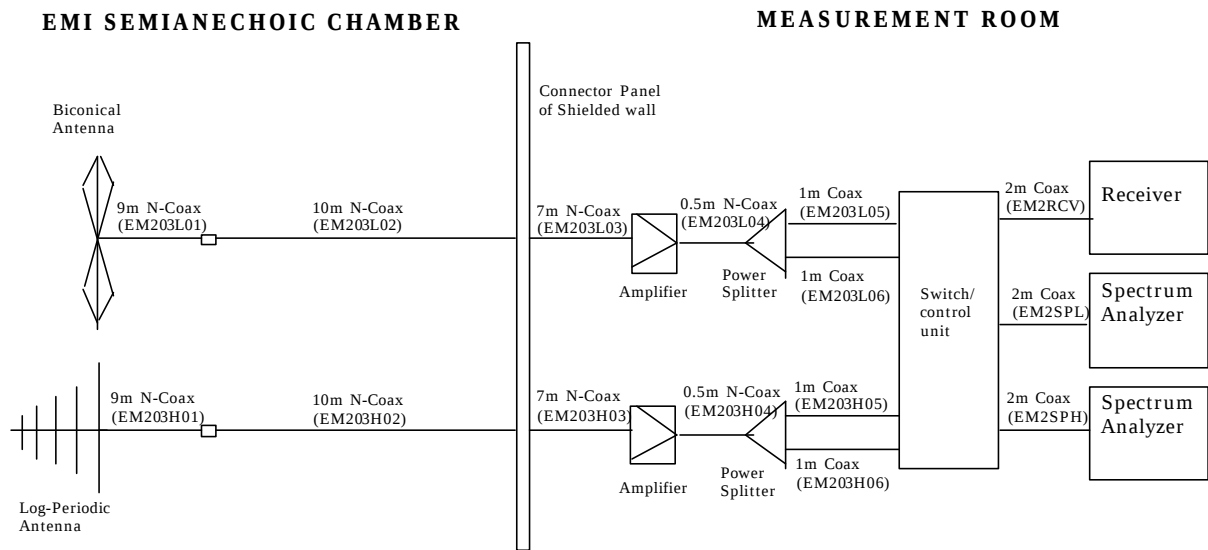


Figure 6 Cables for Radiated Emission Test

6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver. All factors are included in the reported data.

$$FS = R + AF + CORR$$

where:

FS	=	Field Strength
R	=	Measured Receiver Input Amplitude
AF	=	Antenna Factor
CORR	=	Correction Factor = CL - AG
CL	=	Cable Loss
AG	=	Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB/m; Cable Loss of 1.3dB; and an Amplifier Gain of 26dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 = 35.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level(dB}\mu\text{V/m)} = 20 \times \text{Log(Level(}\mu\text{V/m))}$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m}$$

6.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 8.8 dB at 30MHz - 1000MHz band.

The 6 highest emissions relative to the limits are reported.

Test Date: September 19, 2002

1) EUT in transmission mode

Table 6-2-1. EUT: M/T 2682-N6U, s/n FX-00336, Ch.1(2412MHz) TX mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
200.462	H	37.2	11.2	-16.9	31.5	43.5	37.6	150
439.995	V	31.8	16.0	-15.3	32.5	46.0	42.2	200
515.473	V	28.7	18.2	-15.3	31.6	46.0	38.0	200
589.913	V	34.0	18.6	-15.4	37.2	46.0	72.4	200
901.989	H	23.5	22.4	-12.7	33.2	46.0	45.7	200
931.964	V	25.1	22.5	-12.5	35.1	46.0	56.9	200

Table 6-2-2. EUT: M/T 2682-N6U, s/n FX-00336, Ch.6(2437MHz) TX mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
200.461	H	33.9	11.2	-16.9	28.2	43.5	25.7	150
214.781	H	34.7	10.7	-16.5	28.9	43.5	27.9	150
298.089	H	31.3	14.1	-15.6	29.8	46.0	30.9	200
515.472	V	28.0	18.2	-15.3	30.9	46.0	35.1	200
589.913	V	33.3	18.6	-15.4	36.5	46.0	66.8	200
931.992	V	25.3	22.5	-12.5	35.3	46.0	58.2	200

Table 6-2-3. EUT: M/T 2682-N6U, s/n FX-00336, Ch.11(2462MHz) TX mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
200.461	H	34.9	11.2	-16.9	29.2	43.5	28.8	150
214.781	H	35.1	10.7	-16.5	29.3	43.5	29.2	150
298.925	H	33.2	14.1	-15.6	31.7	46.0	38.5	200
589.913	V	33.1	18.6	-15.4	36.3	46.0	65.3	200
631.353	H	27.7	19.0	-14.6	32.1	46.0	40.3	200
931.997	V	25.6	22.5	-12.5	35.6	46.0	60.3	200

2) EUT in receiving mode

Table 6-2-4. EUT: M/T 2682-N6U, s/n FX-00336, RX mode

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
157.506	H	37.3	12.3	-24.2	25.4	43.5	18.6	150
298.765	H	31.6	14.1	-15.6	30.1	46.0	32.0	200
432.087	V	31.8	15.8	-15.3	32.3	46.0	41.2	200
516.993	V	32.7	18.1	-15.3	35.5	46.0	59.6	200
589.913	V	32.4	18.6	-15.4	35.6	46.0	60.3	200
931.999	V	26.1	22.5	-12.5	36.1	46.0	63.8	200

7. RESTRICTED BANDS RADIATIONS (1GHz – 25GHz)

7.1 Test Procedure

Radiated emissions were measured in the frequency range with 1 GHz to 25GHz in transmitting mode and 1 GHz to 12.5 GHz in receiving mode. All tests were performed in the semi-anechoic chamber at a 3-meter distance (except for the frequency range with 18 GHz to 25 GHz where test distance was reduced to 1 meter) on both horizontal and vertical polarities. The antenna was also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized as a function of cable manipulation, azimuth, and antenna height. The emissions closest to the limits are measured in the peak mode with the tuned spectrum analyzer using a bandwidth of 1MHz and the average setting mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 1kHz or 100Hz. The highest emissions relative to the limit are listed.

7.2 Test Instruments and Measurement Setup

Table 7 Radiated Emission Test Instrumentation (1GHz – 25GHz)

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Amplifier (1-26.5GHz)	HP 8449B	3008A00582
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774
Horn Antenna (3.95 – 5.85GHz)	EMCO 3160-5	1099
Horn Antenna (5.85 – 8.20GHz)	EMCO 3160-6	9712-1044
Horn Antenna (8.20 – 12.40GHz)	EMCO 3160-7	1156
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202
SF106 cables: - Horn Ant <=> RF Amp. - RF Amp.<=>Spectrum Analyzer	Length: 6 m 15 m	- EM206SCO - EM215SCO

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

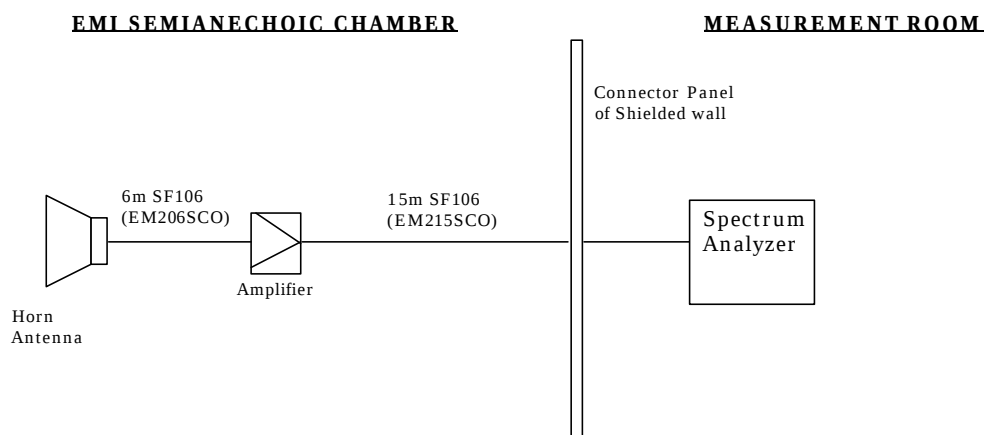


Figure 7 Cables for Radiated Emission Test

7.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL-AG

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

For example:

Given a Spectrum Analyzer input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB/m; Cable Loss of 1.3 dB; Falloff Factor of 0 dB; and an Amplifier Gain of 26 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26 - 0.0 = 35.6 \text{ dB}\mu\text{V/m}$$

Conversions between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as :

$$\text{Level(dB}\mu\text{V/m)} = 20 \times \text{Log (Level}(\mu\text{V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

7.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 6.9 dB. The measurement was done for the frequency range of 1 GHz to 25 GHz in TX mode and 1 GHz to 12.5GHz in RX mode.

Test Date: September 18 and 19, 2002

1) EUT in transmission mode

Table 7-2-1. EUT: M/T 2682-N6U, s/n FX-00336, Ch.1(2412MHz) TX mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (peak)	FCC Limit (dBμV/m) (peak)	Field Strength (dBμV/m) (average)	FCC Limit (dBμV/m) (average)
1.008	V	48.4	-	24.1	-32.9	0.0	39.6	74.0	-	54.0
1.031	V	48.5	-	24.6	-32.7	0.0	40.4	74.0	-	54.0
1.345	V	48.5	-	25.2	-31.9	0.0	41.8	74.0	-	54.0
1.498	V	48.0	-	25.5	-31.5	0.0	42.0	74.0	-	54.0
2.259	H	49.1	-	27.7	-30.5	0.0	46.3	74.0	-	54.0
2.347	H	50.4	-	28.1	-30.3	0.0	48.2	74.0	-	54.0
2.390	H	57.5	49.3	28.2	-30.4	0.0	55.3	74.0	47.1	54.0
2.413	H	109.5	101.5	28.3	-30.4	0.0	107.4	OB*	99.4	OB*
4.074	V	50.5	-	27.2	-28.4	0.0	49.3	74.0	-	54.0
8.151	V	39.8	-	30.0	-25.7	0.0	44.1	74.0	-	54.0

*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter).

Table 7-2-2. EUT: M/T 2682-N6U, s/n FX-00336, Ch.6(2437MHz) TX mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (peak)	FCC Limit (dBμV/m) (peak)	Field Strength (dBμV/m) (average)	FCC Limit (dBμV/m) (average)
1.008	V	48.5	-	24.1	-32.9	0.0	39.7	74.0	-	54.0
1.031	V	48.4	-	24.6	-32.7	0.0	40.3	74.0	-	54.0
1.345	V	48.6	-	25.2	-31.9	0.0	41.9	74.0	-	54.0
1.498	V	49.4	-	25.5	-31.5	0.0	43.4	74.0	-	54.0
2.284	H	50.1	-	27.8	-30.5	0.0	47.4	74.0	-	54.0
2.328	H	50.3	-	28	-30.3	0.0	48.0	74.0	-	54.0
2.371	H	52.3	-	28.2	-30.4	0.0	50.1	74.0	-	54.0
2.438	H	109.9	101.7	28.4	-30.3	0.0	108.0	OB*	99.8	OB*
2.484	H	50.6	-	28.4	-30.2	0.0	48.8	74.0	-	54.0
4.126	V	45.8	-	27.2	-27.9	0.0	45.1	74.0	-	54.0
7.316	V	37.3	-	29.8	-25.7	0.0	41.4	74.0	-	54.0
8.251	V	40.2	-	33.4	-24.7	0.0	48.9	74.0	-	54.0

*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter).

Table 7-2-3. EUT: M/T 2682-N6U, s/n ZZ-00163, Ch.11(2462MHz) TX mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
1.008	V	48.8	-	24.1	-32.9	0.0	40.0	74.0	-	54.0
1.031	V	48.5	-	24.6	-32.7	0.0	40.4	74.0	-	54.0
1.345	V	48.6	-	25.2	-31.9	0.0	41.9	74.0	-	54.0
1.498	V	47.9	-	25.5	-31.5	0.0	41.9	74.0	-	54.0
2.286	H	49.1	-	27.8	-30.5	0.0	46.4	74.0	-	54.0
2.352	H	51.3	-	28.2	-30.4	0.0	49.1	74.0	-	54.0
2.464	H	110.5	102.5	28.4	-30.2	0.0	108.7	OB*	100.7	OB*
2.484	H	56.8	45.9	28.4	-30.2	0.0	55.0	74.0	44.1	54.0
4.174	V	46.6	-	27.2	-27.9	0.0	45.9	74.0	-	54.0
7.388	V	38.8	-	29.8	-26.2	0.0	42.4	74.0	-	54.0
8.351	V	38.2	-	33.4	-24.9	0.0	46.7	74.0	-	54.0


*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter).

2) EUT in receiving mode

Table 7-2-4. EUT: M/T 2682-N6U, s/n FX-00336, Ch.6(2437MHz) RX mode


Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
1.008	V	48.3	-	24.1	-32.9	0.0	39.5	74.0	-	54.0
1.031	V	51.3	-	24.6	-32.7	0.0	43.2	74.0	-	54.0
1.345	V	47.6	-	25.2	-31.9	0.0	40.9	74.0	-	54.0
1.498	V	48.9	-	25.5	-31.5	0.0	42.9	74.0	-	54.0
4.126	V	45.8	-	27.2	-27.9	0.0	45.1	74.0	-	54.0
8.251	V	39.3	-	33.4	-24.7	0.0	48.0	74.0	-	54.0

Measurement plots for adjacent restricted band

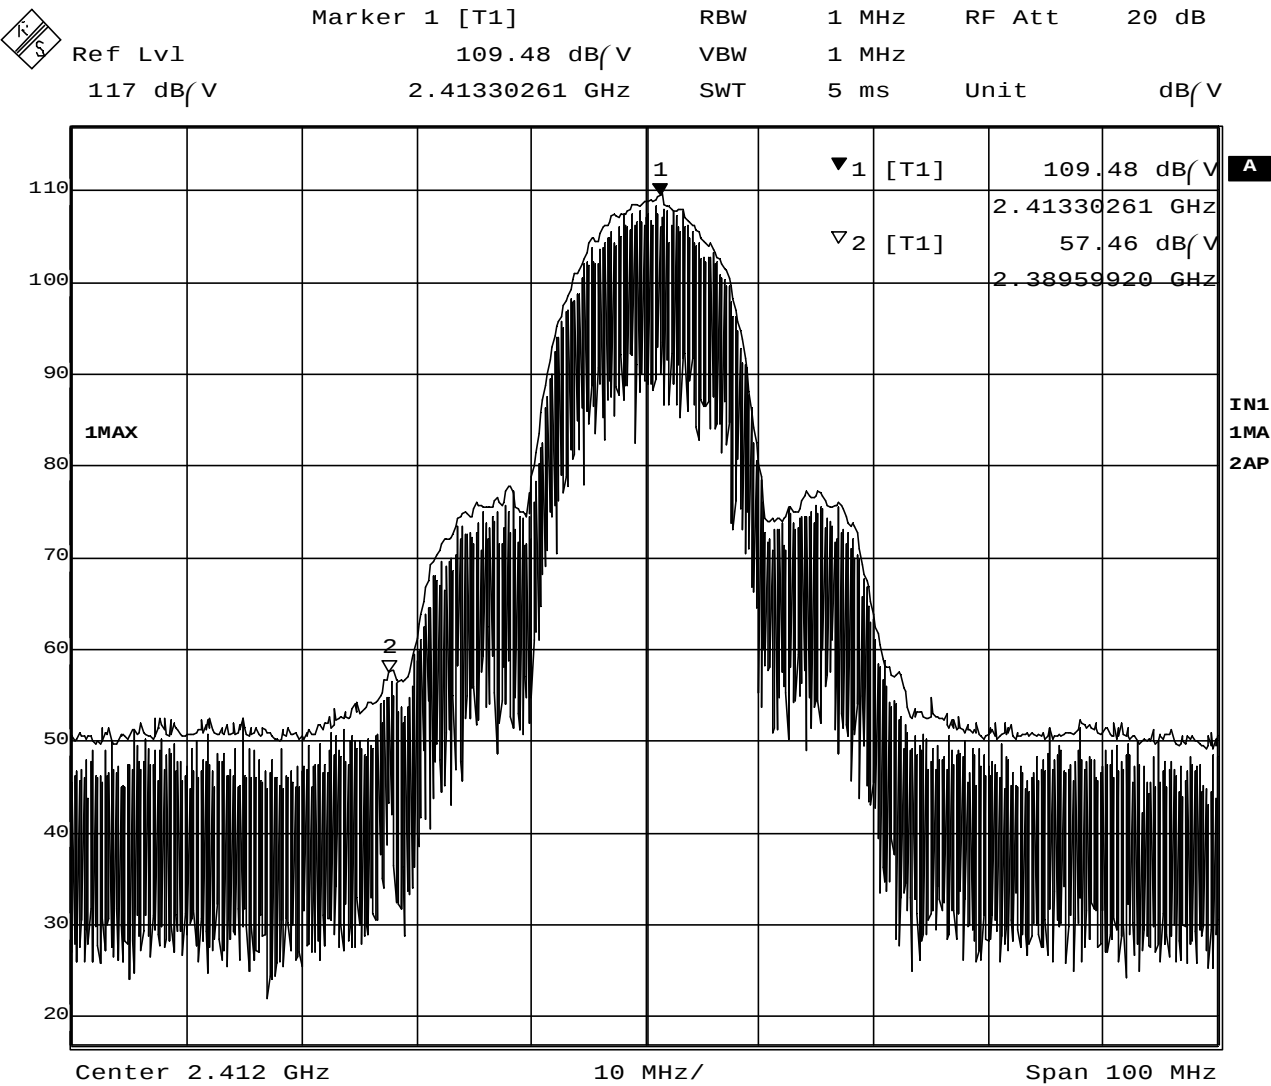


Date: 18.SEP.2002 22:07:58

Plot 7-2-1 Ch.1 2412MHz TX 11Mb/s (Peak)

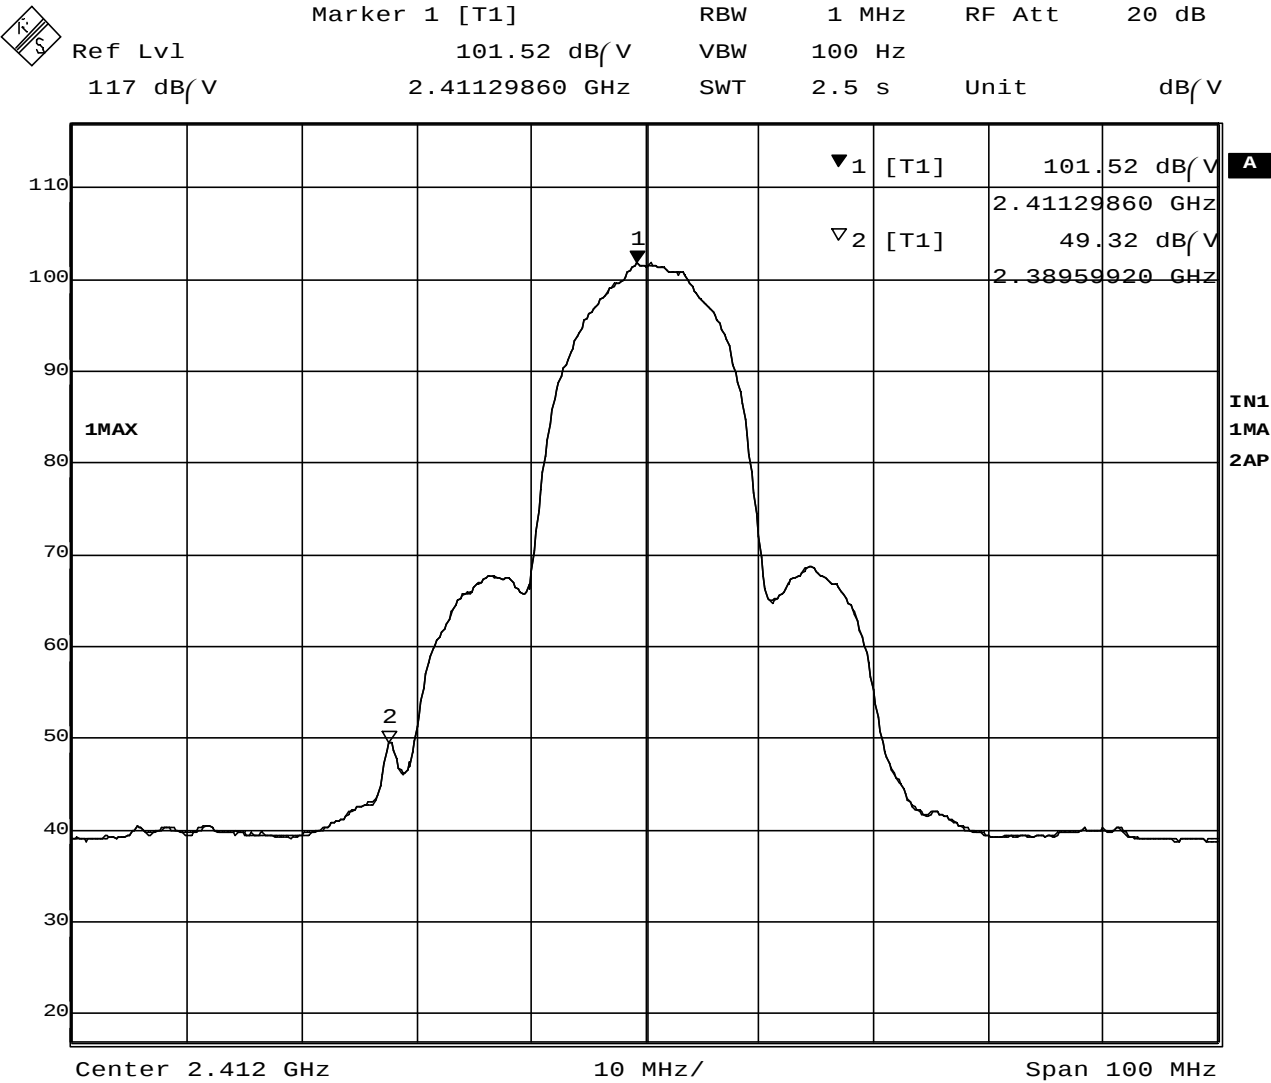


Date: 18.SEP.2002 22:07:22

Plot 7-2-2 Ch.1 2412MHz TX11Mb/s (Average)

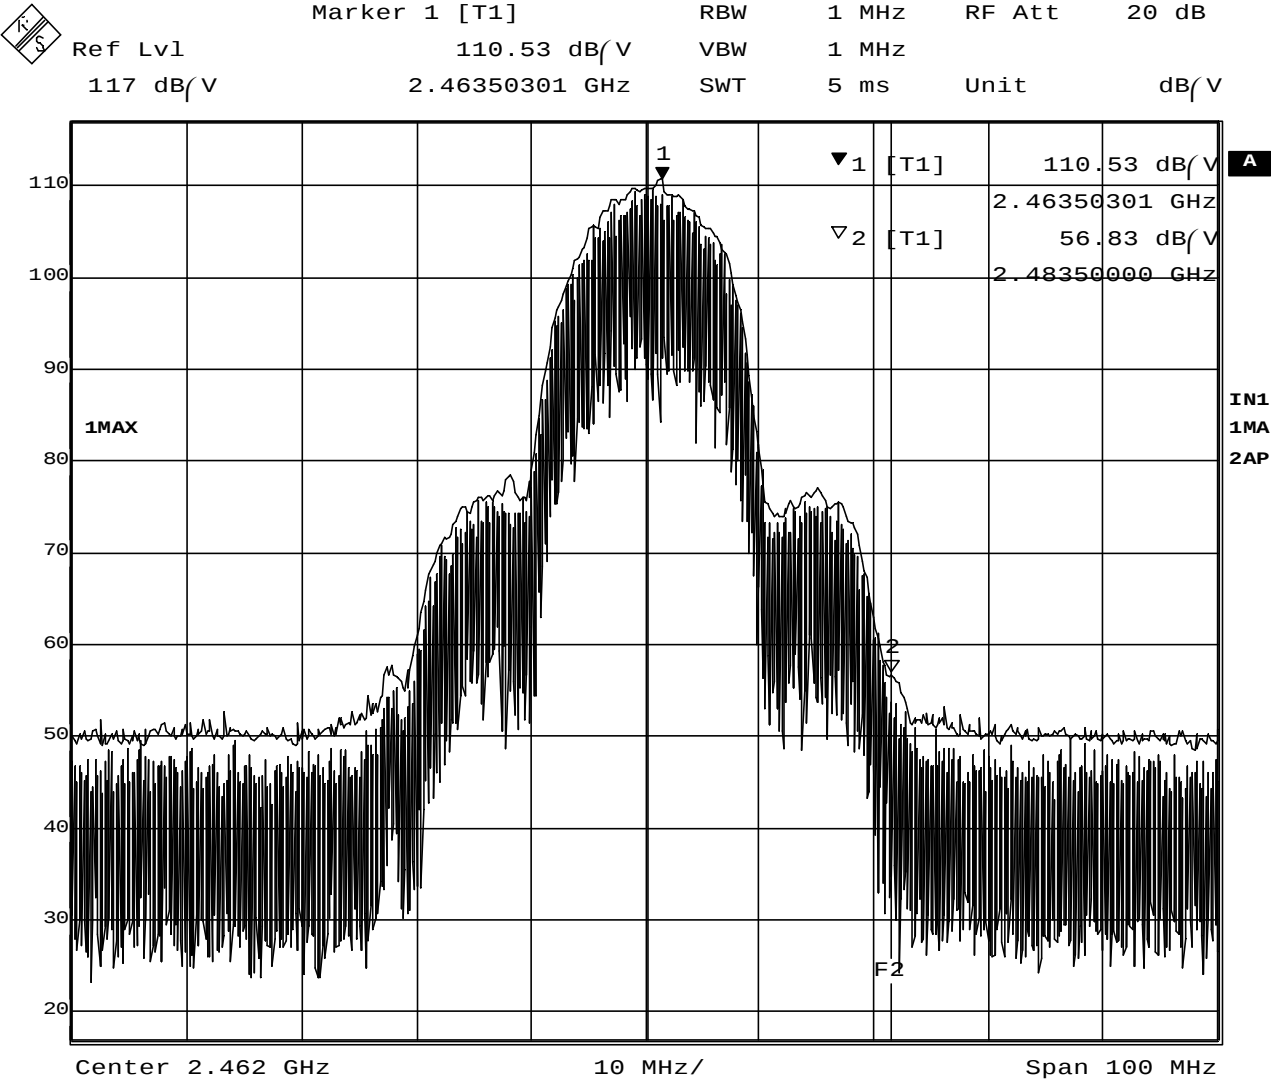

Date: 18.SEP.2002 22:19:21

Plot 7-2-3 Ch.11 2462MHz TX 11Mb/s (Peak)

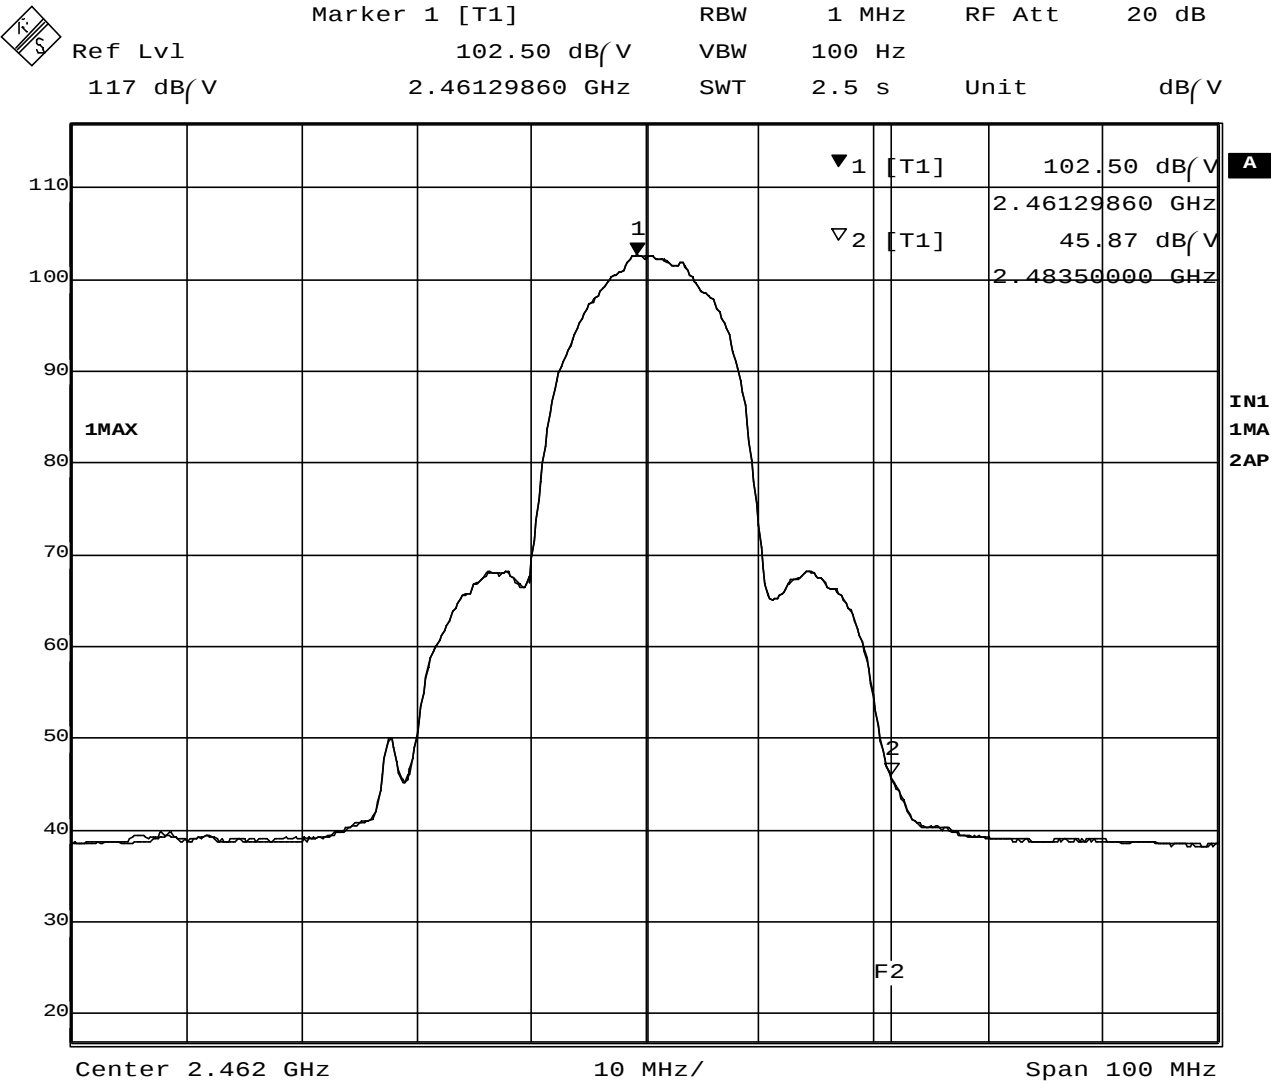

Date: 18.SEP.2002 22:18:46

Plot 7-2-4 Ch.11 2462MHz TX 11Mb/s (Average)