

Page: 1 of 22

FCC Test Report

Application No.: HKES130300041701

Applicant: **BIGBEN INTERACTIVE HK LTD** Address: 1505, 15/F, 148 Electric Road

> North Point Hong Kong

Product Information:

Product Description: Cyberbike (Handle bar unit)

Model: BB5008

Product Class: Low Power Communication Device – Transmitter (2.4 GHz)

FCC ID: AVJ-5008B

Requirement: CFR 47 FCC PART 15 SUBPART C, 2012

Intentional Radiators.

Date of Receipt: MAR 19, 2013 Date of Test: APR 26, 2013 Date of Issue: MAY 03, 2013

Test Result: PASS*

In the configuration tested, the EUT complied with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

Authorized Signature:

LOKE Sai Kit, Wilson **Senior Manager**

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS IECC Limited or testing done by SGS IECC Limited in connection with, distribution or use of the product described in this report must be approved by SGS IECC Limited in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 2 of 22

2 Test Summary

Test	Test Requirement	Test Method	Result
Conducted Emission (150KHz to 30MHz)	FCC PART 15, SUBPART C: 2012	ANSI C63.4:2009	N/A ¹⁾
Radiated Emission (9kMHz to 1GHz)	FCC PART 15, SUBPART C: 2012	ANSI C63.4:2009	PASS
Radiated Emission above 1 GHz	FCC PART 15, SUBPART C: 2012	ANSI C63.4:2009	PASS
Band edge / 20 dB Bandwidth	FCC PART 15, SUBPART C: 2012	ANSI C63.4:2009 Marker-Detla measurement	PASS

Remark:

¹⁾ Please refer to section 6.1 of this report for explanation



3 of 22 Page:

Contents

		Page
1	COVER PAGE	1
2	TEST SUMMARY	2
3	CONTENTS	3
4		
4		
	4.1 GENERAL DESCRIPTION OF EUT	
	4.2 DETAILS OF EUT	
	4.3 CONDITIONS OF EUT	
	4.5 STANDARDS APPLICABLE FOR TESTING	
	4.6 TEST LOCATION	
	4.7 TEST FACILITY	
	4.8 DEVIATION FROM STANDARDS	5
	4.9 ABNORMALITIES FROM STANDARD CONDITIONS	
	4.10 DECLARATION OF FAMILY GROUPING	
	4.11 ABBREVIATIONS	5
5	EQUIPMENTS USED DURING TEST	6
6	TEST RESULTS	7
	6.1 CONDUCTED EMISSIONS MAINS TERMINALS, 150KHZ TO 30MHZ	7
	6.2 RADIATED EMISSIONS, 9KHZ TO1GHZ	
	6.2.1 EUT Operation	
	6.2.2 Test Setup and Procedure	
	6.2.3 Measurement Data	
	6.3 RADIATED EMISSIONS ABOVE 1 GHz	
	6.3.2 Test Setup and Procedure	
	6.3.3 Measurement Data	
	6.4 BAND EDGE / 20 DB BANDWIDTH	
7	PHOTOGRAPHS	17
	7.1 RADIATD EMISSION TEST SETUP	
	7.1 RADIATO EMISSION TEST SETUP	
0	I ADEL	



Page: 4 of 22

4 General Information

4.1 General Description of EUT

EUT Name: Cyberbike (Handle bar unit)

Model: BB5008

Serial No.: --

4.2 Details of EUT

Power Supply: DC 3V (AA battery x2)

Power Cord: --

Operating Frequency 2402-2480MHz

Antenna Type: Integral antenna (3mm x 12mm on print circuit board)

Modulation Type: GFSK

4.3 Conditions of EUT

The received sample was under good condition.

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

CFR 47, FCC Part 15, Oct 2012 ANSI C63.4:2009

4.6 Test Location

All tests were performed at:

SGS IECC Limited (Member of the SGS Group (SGS SA))

Units 303-305, 3/F., 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong

Tel: +852 2305 2570 Fax: +852 2756 4480

4.7 Test Facility

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules (FCC Registration No.: 97774).

The test facility is recognized, certified, or accredited by the following organizations:

FCC - CAB Registration No.: 446297

Measurement facility located at Fanling (Hong Kong), accredited as a Conformity Assessment Body (CAB) and was designated by FCC to perform compliance testing on equipment subject to Declaration Of Conformity (DOC) and Certification under Part 15 and 18 of the Commission's Rules.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



5 of 22 Page:

4.8 Deviation from Standards

None.

4.9 Abnormalities from Standard Conditions

None.

4.10 Declaration of Family Grouping

None.

4.11 Abbreviations

N/A: Not Applicable

EUT: Equipment Under Test



6 of 22 Page:

Equipments Used during Test

Radiated Emission								
Equipment	Manufacturer	Model / Serial No.	Cal. Date	Cal. Due Date				
3m Semi-Anechoic Chamber (pre-test)								
3m / 10m Open Aera Test Site			2012-02-24	2015-02-23				
Test Receiver	Rohde & Schwarz	ESCS 30 / 100388	2012-11-19	2013-11-18				
Spectrum Analyzer	Rohde & Schwarz	FSP 30 / 101474	2012-08-16	2013-08-15				
Loop antenna	Rohde & Schwarz	HFH2-Z2	2012-10-11	2014-10-10				
Antenna 30-1000MHz	Schaffner	CBL6111C / 2791	2012-10-11	2014-10-10				
Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D / 9120D-1070	2012-11-13	2014-11-12				
Horn Antenna 15-26.5GHz	Schwarzbeck	BBHA9170 / 9170-492	2012-11-12	2014-11-11				
Preamplifier 10MHz – 6GHz	Schwarzbeck	BBV9743 / 9743-052	2012-11-13	2014-11-12				
Preamplifier 1-18GHz	Schwarzbeck	BBV9718 / 9718-223	2012-11-13	2014-11-12				
Preamplifier 18- 26.5GHz	Schwarzbeck	BBV9719 / 9719-019	2012-11-13	2014-11-12				
Coaxial Cable		E167	2012-08-01	2013-07-31				
RF Cable	HUBER+SUHNER	E207	2012-11-14	2013-11-13				
Antenna Mast System	Schwarzbeck	AM9104 / -						
Turntable with Controller	Drehtisch	DT312 / -						

General Use Equipment							
Equipment	Manufacturer	Model / Serial No.	Cal. Date	Cal. Due Date			
Digital Multimeter	Fluke	189 / 83640020	2013-04-10	2014-04-09			
Temperature / Humidity meter	-	E158	2012-10-15	2013-10-14			



Page: 7 of 22

6 Test Results

6.1 Conducted Emissions Mains Terminals, 150kHz to 30MHz

Test Requirement: FCC Part15 C Section 15.207

Test Method: ANSI C63.4:2009
Test Date: Not Applicable

Remark:

The product is battery operated and this test is not applicable.

6.2 Radiated Emissions, 9kHz to1GHz

Test Requirement: FCC Part15 Subpart C Section 15.209 and 15.249(d)

Test Method: ANSI C63.4:2009
Test Date: 26 Apr 2013

Measurement Distance: 3m

Detector: Peak for pre-scan (120kHz resolution bandwidth)

Quasi-Peak if maximised peak within 6dB of limit

Limit:

Frequency range MHz	Quasi-peak limits dB (μV/m)
0.009 - 0.490	-72.4 – 20logF(MHz)
0.490 - 1.705	-12.4 – 20logF(MHz)
1.705 – 30.0	-10.5
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

Note: 1) At transitional frequencies the lower limit applies.

- 2) F is the frequency of the spurious emission measured in MHz.
- 3) Limit from 0.009 30 MHz is converted from measuring distance 300m or 30m to 3m

with the formulat provided in FCC Part 15, section 15.31(f)(2)

6.2.1 EUT Operation

Operating Environment:

Temperature: 22 °C Humidity: 58%

EUT Operation: Pre-test with Peak detector with the following mode(s):

1. Transmission for difference code for controlling different directions.


Final test with Quasi-Peak detector with the following mode(s):

1. Transimission for controlling forward direction.



8 of 22 Page:

6.2.2 Test Setup and Procedure

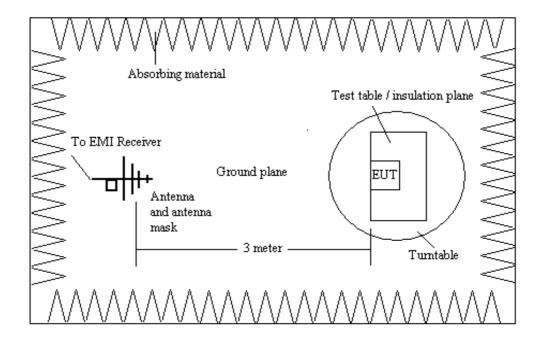

- The pre-test of the radiated emissions test was conducted in a semi-anechoic chamber and the final measurement was conducted in the open area test site.
- 2. The EUT was operated with new batteries. The EUT was placed upon a non-metallic table 0.8m above the ground reference plane.
- 3. Loop antennat and Bilog antenna was used for the frequency range from the lowest generated frequency to 30MHz and 30MHz to 1GHz respectively
- 4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT with located frequencies.
- 5. The actual frequencies of maximum emission were confirmed in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters for Bilog antenna (Loop antenna is still maintain in 1m hight) in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/te Inis occument is issued by the Company subject to its General Conditions or Service printed overlear, available on request or accessible at www.sgs.com/terms and Conditions.ntm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and Conditions for Electronic Documents at www.sgs.com/terms and Conditions and Conditions and Jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9 of 22 Page:

6.2.3 Measurement Data

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. The EUT was measured by Bilog antenna with 2 orthogonal polarities and frequencies of peak emissions from the EUT were detected within 6dB of the limit line. Final measurement was conducted in the open area test site with data as follows:

Test results on operation with control for transmittion mode:

(1) Operation Frequency: 2402.0 MHz

Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)
30.000	V	19.4	2.2	21.6	40.0	-18.4
100.000	V	9.9	4.8	14.7	43.5	-28.8
220.250	V	10.1	11.3	21.4	46.0	-24.6
300.000	Н	14.1	6.5	20.6	46.0	-25.4
500.000	V	18.2	4.6	22.8	46.0	-23.2
800.000	V	21.7	2.9	24.6	46.0	-21.4

(2) Operation Frequency: 2441.0 MHz

` ' '	•					
Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)
30.000	Н	19.4	2.4	21.8	40.0	-18.2
100.000	V	9.9	4.9	14.8	43.5	-28.7
216.100	Н	10.0	14.1	24.1	46.0	-21.9
300.000	V	14.1	6.2	20.3	46.0	-25.7
500.000	V	18.2	4.9	23.1	46.0	-22.9
800.000	Н	21.7	3.1	24.8	46.0	-21.2



10 of 22 Page:

(3) Operation Frequency: 2480.0 MHz

Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)
30.000	V	19.4	2.2	21.6	40.0	-18.4
100.000	V	9.9	4.9	14.8	43.5	-28.7
226.625	V	10.6	11.6	22.2	46.0	-23.8
300.000	V	14.1	6.6	20.7	46.0	-25.3
500.000	Н	18.2	4.7	22.9	46.0	-23.1
800.000	Н	21.7	3.0	24.7	46.0	-21.3

Note:

- 1) All readings are Quasi-Peak values.
- 2) **Correction Factor = Antenna Factor + Cable Loss.**
- The above results were the worst case results with the EUT positioned in all 3 axis during the test. The EUT was positioned vertically and horizontally on the table for vertical and horizontal measurement respectively.
- 4) Other emissions more than 20dB below the limit are not shown on the above table and only worst six emissions below 1GHz are listed.



Page: 11 of 22

6.3 Radiated Emissions above 1 GHz

Test Requirement: FCC Part15 Subpart C Section 15.209 & 15.249(a) & (d)

Test Method: ANSI C63.4:2009
Test Date: 26 Apr 2013
Frequency Range: 1GHz – 26GHz

Measurement Distance: 3m

Detector: Peak for pre-scan (1MHz resolution bandwidth)

Average and Peak detector for final test

Limit:

Fundamental Frequency:

Frequency range	Limits (Peak)	Limits (Average)
MHz	dB (μV/m)	dB (μV/m)
2400 to 2483.5	114	94

Spurious Emission:

Frequency range MHz	Limits (Peak) dB (µV/m)	Limits (Average) dB (μV/m)
Over 1000	74	54

6.3.1 EUT Operation

Operating Environment:

Temperature: 22 °C Humidity: 58 %

EUT Operation: Pre-test with Peak detector with the following mode(s):

1. Transmission for difference code for controlling different directions and speed


Final test with Average and Peak detector with the following mode(s):

1. Transimission for controlling forward direction with maximum speed.



Page: 12 of 22

6.3.2 Test Setup and Procedure

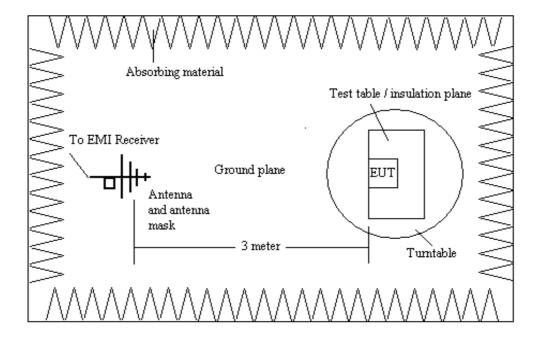

- 1. The pre-test of the radiated emissions test was conducted in a semi-anechoic chamber and the final measurement was conducted in the open area test site.
- 2. The EUT was operated with new batteries. The EUT was placed upon a non-metallic table 0.8m above the ground reference plane.
- 3. Horn antenna was used for the frequency over 1GHz
- 4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT with located frequencies.
- 5. The actual frequencies of maximum emission were confirmed in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.



13 of 22 Page:

6.3.3 Measurement Data

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. The EUT was measured with 2 orthogonal polarities and frequencies of average emissions from the EUT were measured as follows:

Test results on operation with control for transmittion mode:

(1) Fundmental Frequency

(1) I amamonian i oquonoy						
Frequency Antenna	Antenna	Emission Level (dBµV/m)		Limit (dBµV/m)		Domosti
(MHz)	Polarization	Peak	Average	Peak	Average	Remark
2402.0	Н	90.3	88.9	114	94	Pass
2402.0	V	88.5	88.1	114	94	Pass
2441.0	Н	92.2	91.8	114	94	Pass
2441.0	V	89.4	89.0	114	94	Pass
2480.0	Н	91.1	91.0	114	94	Pass
2480.0	V	89.3	88.9	114	94	Pass

(2) Spurious Emission

Operation Frequency: 2402.0 MHz

Frequency	Antenna	Emission Le	vel (dBµV/m)	Limit (d	BμV/m)	Remark
(MHz)	Polarization	Peak	Average	Peak	Average	Remark
4803.20	Н	54.2	50.6	74	54	Pass
6000.00	Н	43.0	34.0	74	54	Pass
7000.00	Н	46.0	38.0	74	54	Pass
8000.00	Н	47.0	36.0	74	54	Pass
9000.00	Н	48.0	37.0	74	54	Pass
12000.00	Н	51.0	42.0	74	54	Pass



Page: 14 of 22

Operation Frequency: 2441.0 MHz

Frequency (MHz)	Antenna Polarization	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
		Peak	Average	Peak	Average	Nemark
4882.10	Н	54.6	50.9	74	54	Pass
6000.00	Н	43.0	34.0	74	54	Pass
7000.00	Н	46.0	38.0	74	54	Pass
8000.00	Н	47.0	36.0	74	54	Pass
9000.00	Н	48.0	37.0	74	54	Pass
12000.00	Н	55.0	43.0	74	54	Pass

Operation Frequency: 2480.0 MHz

Frequency (MHz)	Antenna Polarization	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
		Peak	Average	Peak	Average	Nemark
4959.20	Н	55.4	51.2	74	54	Pass
6000.00	Н	43.0	36.0	74	54	Pass
7000.00	Н	46.5	39.0	74	54	Pass
8000.00	Н	47.0	40.0	74	54	Pass
9000.00	Н	47.0	40.2	74	54	Pass
12000.00	Н	51.6	44.0	74	54	Pass

Note:

- 1) The above results were the worst case results with the EUT positioned in all 3 axis during the test. The EUT was positioned vertically and horizontally on the table for vertical and horizontal measurement respectively.
- 2) Other emissions more than 20dB below the limit are not shown on the above table and only worst six emissions below 1GHz are listed.



Page: 15 of 22

6.4 Band Edge / 20 dB Bandwidth


Test Requirement: FCC Part15 Subpart C Section 15.215, 15.249(d)
Test Method: ANSI C63.4:2009 and Marker-Delta Method

Test Date: 26 Apr 2013

Result: Pass

Test Plot:

Operation frequency: 2402.0 MHz

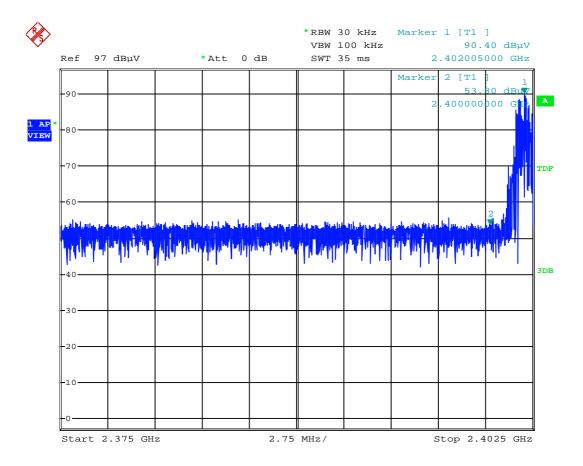

According to the page 14 of this report, the emission of the fundamental frequency 2402.0MHz is 90.3dBuV/m and 88.9dBuV/m for peak and average level respectively. Based on the delta method, the emission at the bandedge, 2400MHz, is more than 30dB below the fundamental and 20dB bandwidth falls in assigned band. It is deemed to comply with section 15.215. Besides, it is below the limit of 74dBuV/m and 54dBuV/m for peak and average level under 15.209. It is deemed to comply with section 15.249(d).


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 16 of 22

Test Plot:

Operation frequency: 2480.0 MHz

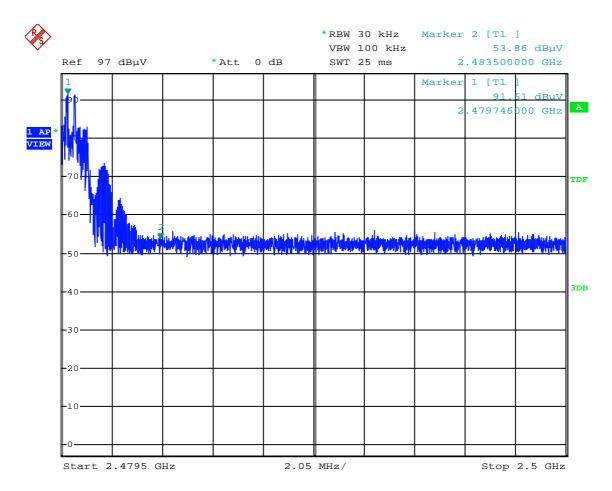

According to the page 14 of this report, the emission of the fundamental frequency 2480.00MHz is 91.1dBuV/m and 91.0dBuV/m for peak and average level respectively. Based on the delta method, the emission at the bandedge, 2483.5MHz, is more than 30dB below the fundamental and 20dB bandwidth falls in the assigned band. It is deemed to comply with section 15.215. Besides, it is below the limit of 74dBuV/m and 54dBuV/m for peak and average level under 15.209. It is deemed to comply with section 15.249(d).



Page: 17 of 22

Photographs

7.1 Radiatd Emission Test Setup





18 of 22 Page:

7. 2 EUT Constructional Details







Page: 19 of 22







Page: 20 of 22





This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



21 of 22 Page:





This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 22 of 22



8 Label



- END -