

FCC Test Report

Report No.: RF171127C13-5

FCC ID: AZ489FT7104

Test Model: LEX L11n

Received Date: Nov. 27, 2017

Test Date: Dec. 13, 2017 ~ Feb. 01, 2018

Issued Date: Mar. 02, 2018

Applicant: Motorola Solutions, Inc.

Address: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

**FCC Registration/
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	7
3.2.1 Test Mode Applicability and Tested Channel Data	8
3.3 Description of Support Units	9
3.3.1 Configuration of System under Test	9
3.4 General Description of Applied Standards	9
4 Test Types and Results	10
4.1 Radiated Emission Measurement	10
4.1.1 Limits of Radiated Emission Measurement	10
4.1.2 Test Instruments	11
4.1.3 Test Procedures	12
4.1.4 Deviation from Test Standard	12
4.1.5 Test Set Up	13
4.1.6 EUT Operating Conditions	13
4.1.7 Test Results	14
4.2 Conducted Emission Measurement	24
4.2.1 Limits of Conducted Emission Measurement	24
4.2.2 Test Instruments	24
4.2.3 Test Procedures	25
4.2.4 Deviation from Test Standard	25
4.2.5 Test Setup	25
4.2.6 EUT Operating Conditions	25
4.2.7 Test Results	26
4.3 Frequency Stability	30
4.3.1 Limits of Frequency Stability Measurement	30
4.3.2 Test Setup	30
4.3.3 Test Instruments	30
4.3.4 Test Procedure	30
4.3.5 Deviation from Test Standard	30
4.3.6 EUT Operating Conditions	30
4.3.7 Test Result	31
4.4 20dB Bandwidth	32
4.4.1 Limits of 20dB Bandwidth Measurement	32
4.4.2 Test Setup	32
4.4.3 Test Instruments	32
4.4.4 Test Procedures	32
4.4.5 Deviation from Test Standard	32
4.4.6 EUT Operating Conditions	32
4.4.7 Test Results	33
5 Pictures of Test Arrangements	34
Appendix – Information on the Testing Laboratories	35

Release Control Record

Issue No.	Description	Date Issued
RF171127C13-5	Original release	Mar. 02, 2018

1 Certificate of Conformity

Product: LEX L11 Mission Critical LTE Device

Brand: Motorola Solutions

Test Model: LEX L11n

Sample Status: Engineering sample


Applicant: Motorola Solutions, Inc.

Test Date: Dec. 13, 2017 ~ Feb. 01, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.225)
47 CFR FCC Part 15, Subpart C (Section 15.215)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Mar. 02, 2018
Pettie Chen / Senior Specialist

Approved by :  , **Date:** Mar. 02, 2018
Bruce Chen / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.225, 15.215)			
FCC Clause	Test Item	Result	Remarks
15.207	Conducted emission test	Pass	Meet the requirement of limit. Minimum passing margin is -3.13dB at 13.56130MHz
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	Pass	Meet the requirement of limit. Minimum passing margin is -64.7dB at 13.56MHz.
15.225 (b)	The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz	Pass	Meet the requirement of limit.
15.225 (c)	The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz	Pass	Meet the requirement of limit.
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	Pass	Meet the requirement of limit. Minimum passing margin is -1.20dB at 34.49MHz.
15.225 (e)	The frequency tolerance	Pass	Meet the requirement of limit.
15.215 (c)	20dB Bandwidth	Pass	Meet the requirement of limit.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.63 dB
	200MHz ~1000MHz	3.64 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	LEX L11 Mission Critical LTE Device
Brand	Motorola Solutions
Test Model	LEX L11n
Sample Status	Engineering sample
Power Supply Rating	3.7Vdc (Battery) 5Vdc or 9Vdc or 12Vdc (adapter) 5Vdc or 9Vdc (Car Charger)
Modulation Type	ASK
Operating Frequency	13.56MHz
Antenna Type	Loop antenna
Accessory Device	Refer to Note as below
Data Cable Supplied	Refer to Note as below

Note:

1. The EUT uses following devices and cables.

Item	Brand	Model	Specification	Remark
Charger 1	Motorola Solutions	MU27-4090300-A1 Part No: PS000278A01	Quick USB Wall Charger Input: 100-240Vac, 50/60Hz, 0.7A Output: 5V / 3A 9V / 3A 12V / 2.25A	Accessory
Charger 2	Motorola Solutions	MU08-L050150-A1 Part No: PS000150A31	Micro USB Wall Charger Input: 100-240Vac, 50/60Hz, 16-22VA, 0.25A Output: 5V / 1.5A	Accessory
Charger 3 (Car charger)	Motorola Solutions	CB18-2090200-C Part No: PMLN7779A	Vehicle Charger Input: 12/24V / 2.0A Output: 5V / 3A; 9V / 2A 0.35m DC cable without core attached	Accessory
Battery 1 (Hi-Cap)	Motorola Solutions	PMNN4546A	3.7V RECHARGEABLE LITHIUM ION BATTERY Rating: 3.7Vdc 5000mAh	Accessory
Battery 2 (Standard)	Motorola Solutions	PMNN4545A	3.7V RECHARGEABLE LITHIUM ION BATTERY Rating: 3.7Vdc 2500mAh	Accessory
Cable 1	Motorola Solutions	CB0000756A01	Type C to Type C 0.95m shielded USB cable without core	Accessory (for Charger PS000278A01 used)
Cable 2	Motorola Solutions	CB0000754A01	Type A to Type C 0.95m shielded USB cable without core	Accessory (for Charger PS000150A31 used)

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

1 channel is provided to this EUT

Channel	Freq. (MHz)
1	13.56

3.2.1 Test Mode Applicability and Tested Channel Data

EUT Configure Mode	Applicable to				Description
	RE	PLC	FS	EB	
A	√	√	-	-	Power from Charger 1
B	√	√	√	√	Power from Charger 2
C	√	-	-	-	Power from Charger 3 (12Vdc)
D	√	-	-	-	Power from Charger 3 (24Vdc)

Where RE: Radiated Emission
FS: Frequency Stability

PLC: Power Line Conducted Emission
EB: 20dB Bandwidth measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Y-plane.
2. "-" means no effect.

Radiated Emission Test (Frequency range 9kHz~30MHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A	1	1	ASK

*After pre-testing, test mode A was the worst mode for the final test.

Radiated Emission Test (Frequency range above 30MHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A, B, C, D	1	1	ASK

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
A, B	1	1	ASK

Frequency Stability:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
B	1	1	ASK

20dB Bandwidth:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
B	1	1	ASK

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE	25deg. C, 66%RH	120Vac, 60Hz	Greg Lin
PLC	25deg. C, 65%RH	120Vac, 60Hz	Greg Lin
FS	25deg. C, 75%RH	120Vac, 60Hz	Greg Lin
BW	25deg. C, 60%RH	120Vac, 60Hz	Ted Chang

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Power Supply	acpower	ADC-48-20A	802001	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Power cable	1	1.8	N	0	-


Note: The core(s) is(are) originally attached to the cable(s).

3.3.1 Configuration of System under Test

Test Mode A, B



Test Mode C, D



3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.225)

FCC Part 15, Subpart C (15.215)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission Measurement

4.1.1 Limits of Radiated Emission Measurement

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	Mar. 27, 2017	Mar. 26, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	May 11, 2017	May 10, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-148	Dec. 11, 2017	Dec. 10, 2018
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Dec. 12, 2017	Dec. 11, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 01, 2017	Nov. 30, 2018
Loop Antenna EMCI	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	Aug. 08, 2017	Aug. 07, 2018
Preamplifier Agilent (Above 1GHz)	8449B	3008A01922	Sep. 15, 2017	Sep. 14, 2018
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM8000	CABLE-CH9-02 (248780+171006)	Jan. 15, 2018	Jan. 14, 2019
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(250795/4)	Aug. 08, 2017	Aug. 07, 2018
RF signal cable Woken	8D-FB	Cable-CH9-01	Aug. 01, 2017	Jul. 31, 2018
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
DC Power Supply Topward	6306A	727263	NA	NA
Digital Power Meter yokogawa	WT310	C2PK22022V	Dec. 16, 2016 Dec. 15, 2017	Dec. 15, 2017 Dec. 14, 2018
Temperature & Humidity Chamber TERCHY	HRM-120RF	931022	Nov. 20, 2017	Nov. 19, 2018

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.
3. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
4. The IC Site Registration No. is IC 7450F-9.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

For Radiated emission below 30MHz

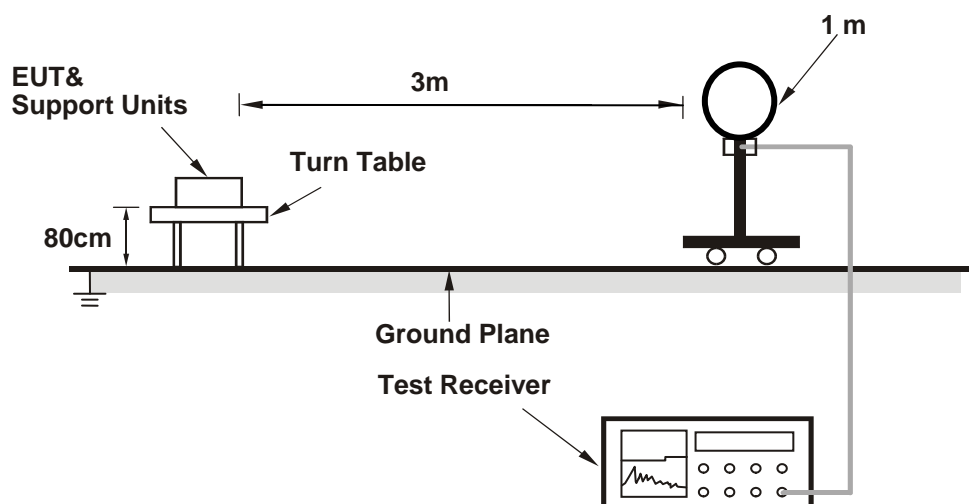

For Radiated emission 30MHz to 1GHz

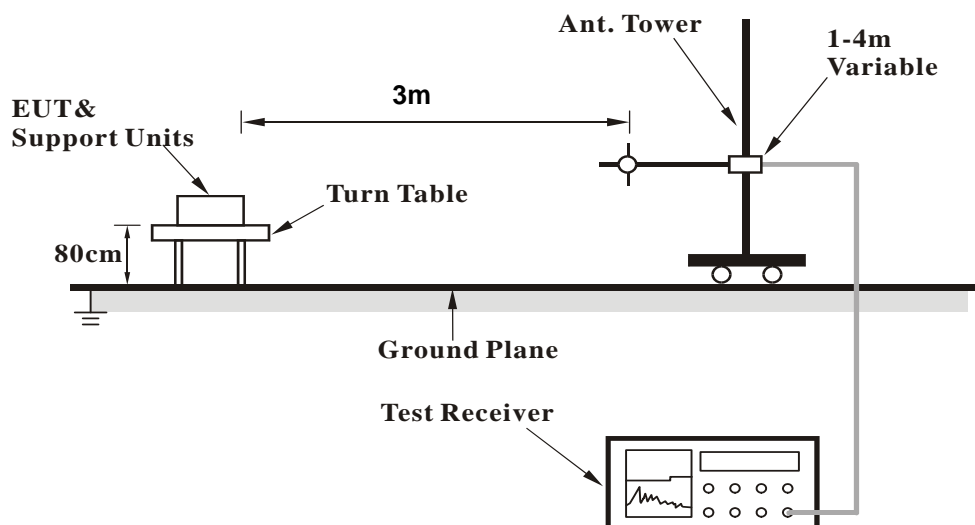

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Luis Lee

Antenna Polarity & Test Distance: Loop Antenna Open At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	59.3 QP	124.00 QP	-64.7	1.00	26	63.5	-4.2


Remarks:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

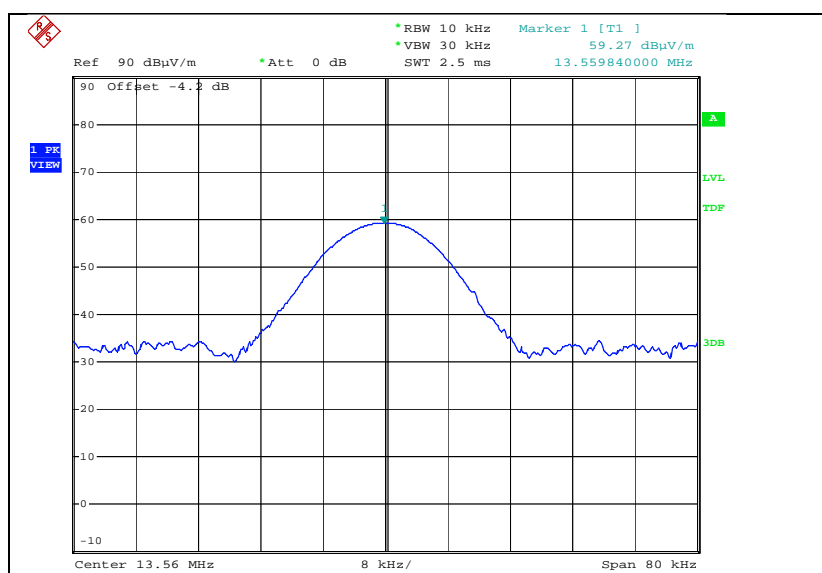

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Luis Lee

Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	54.5 QP	124.00 QP	-69.5	1.00	189	58.7	-4.2


Remarks:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

13.56MHz = 15848uV/m 30m
 = 84dBuV/m 30m
 = $84+20\log(30/3)^2$ 3m
 = 124dBuV/m

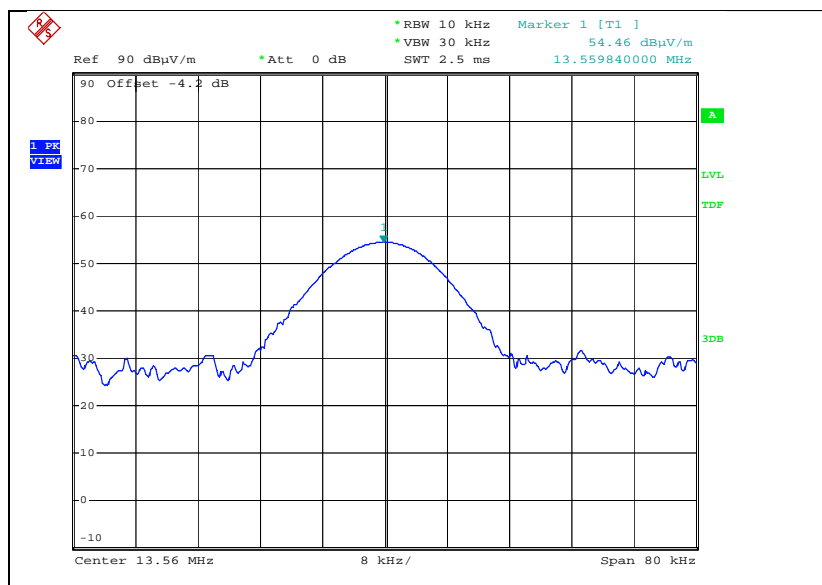

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	13.553 ~ 13.567MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	22 deg. C, 67% RH	Tested By	Adair Peng


Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*13.56	49.8 QP	124.00 QP	-72.2	1.00	205	29.3	20.50

- Remarks:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. Above limits have been translated by the formula

The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

Example:

$$\begin{aligned}
 13.56\text{MHz} &= 15848\text{uV/m} & 30\text{m} \\
 &= 84\text{dBuV/m} & 30\text{m} \\
 &= 84+20\log(30/3)^2 & 3\text{m} \\
 &= 124\text{dBuV/m}
 \end{aligned}$$

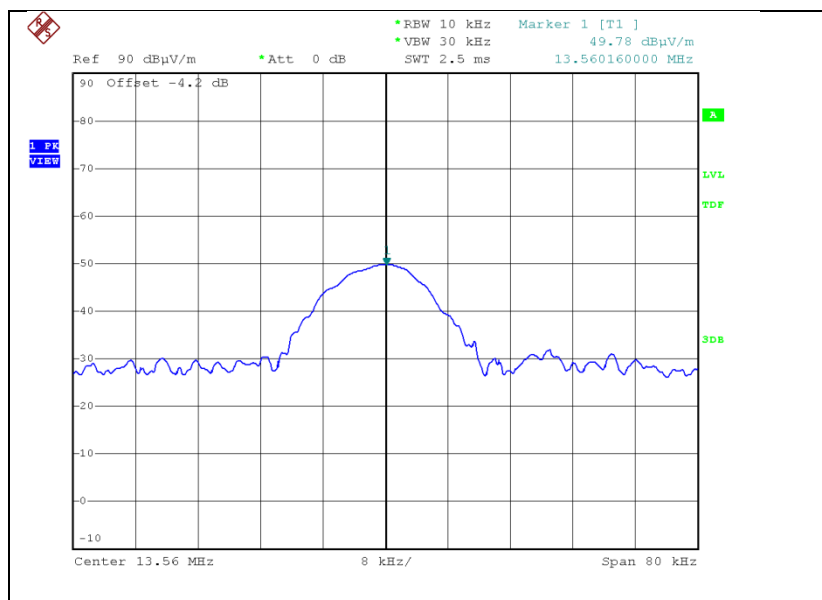


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Luis Lee

Antenna Polarity & Test Distance: Loop Antenna Open At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.69	42.9 QP	63.1	-20.2	1.00	45	43.6	-0.7
2	2.59	34.7 QP	69.5	-34.8	1.00	219	36.7	-2.0
3	8.29	36.3 QP	69.5	-33.2	1.00	9	39.6	-3.3
4	12.91	34.3 QP	69.5	-35.2	1.00	211	38.4	-4.1
5	16.02	41.4 QP	69.5	-28.1	1.00	65	46.2	-4.8
6	27.66	34.6 QP	69.5	-34.9	1.00	17	38.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

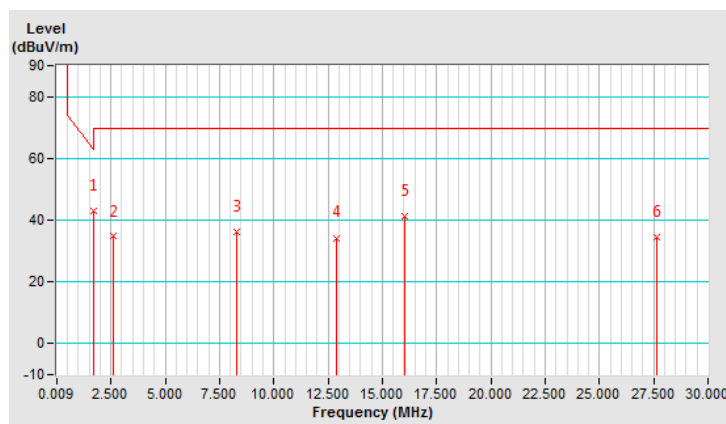


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 70% RH	Tested By	Luis Lee

Antenna Polarity & Test Distance: Loop Antenna Close At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.69	43.5 QP	63.1	-19.6	1.00	10	44.2	-0.7
2	2.71	32.6 QP	69.5	-36.9	1.00	218	34.8	-2.2
3	7.09	36.1 QP	69.5	-33.4	1.00	127	39.3	-3.2
4	11.11	36.4 QP	69.5	-33.1	1.00	28	40.1	-3.7
5	20.22	35.0 QP	69.5	-34.5	1.00	296	40.5	-5.5
6	24.60	34.3 QP	69.5	-35.2	1.00	10	38.6	-4.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

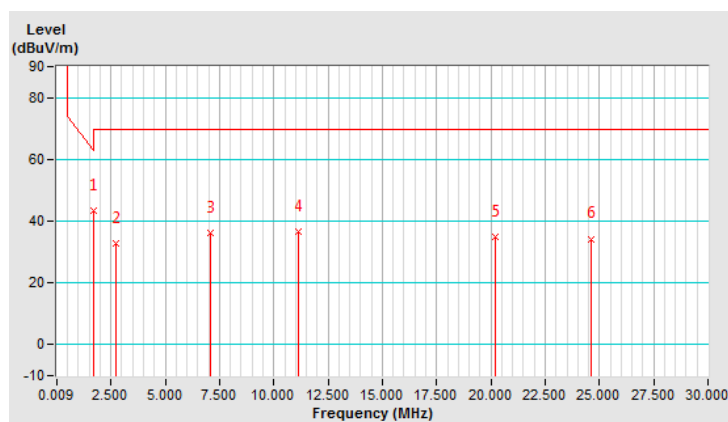


EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 30MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	22 deg. C, 67% RH	Tested By	Adair Peng

Antenna Polarity & Test Distance: Loop Antenna Ground-Parallel At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1.21	40.8 QP	66.0	-25.2	1.00	342	20.5	20.3
2	3.73	37.5 QP	69.5	-32.0	1.00	233	17.1	20.4
3	10.81	33.6 QP	69.5	-35.9	1.00	271	13.1	20.5
4	16.14	34.8 QP	69.5	-34.7	1.00	354	14.2	20.6
5	19.08	34.5 QP	69.5	-35.0	1.00	62	14.0	20.5
6	23.46	38.7 QP	69.5	-30.8	1.00	354	18.2	20.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

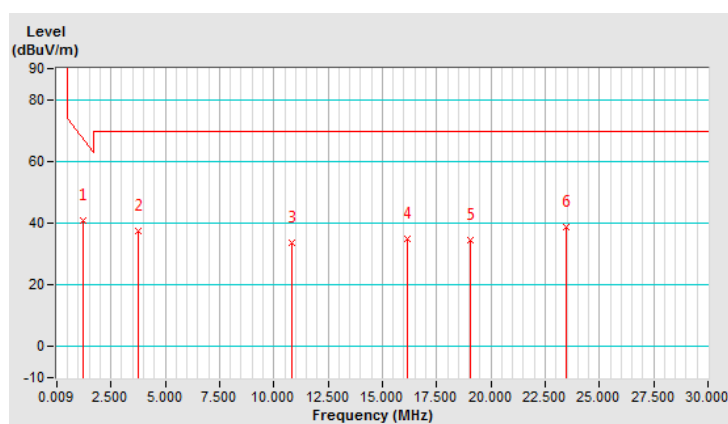

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 66% RH	Tested By	James Yang
Test Mode	A		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	33.3 QP	40.0	-6.7	1.49 H	350	48.4	-15.1
2	95.96	18.4 QP	43.5	-25.1	1.00 H	79	36.8	-18.4
3	211.39	24.0 QP	43.5	-19.5	1.00 H	102	40.2	-16.2
4	441.28	20.1 QP	46.0	-25.9	1.49 H	292	30.1	-10.0
5	628.49	23.7 QP	46.0	-22.3	1.49 H	161	30.5	-6.8
6	903.97	27.0 QP	46.0	-19.0	1.00 H	155	29.6	-2.6
Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.49	38.8 QP	40.0	-1.2	1.00 V	249	53.5	-14.7
2	59.10	29.4 QP	40.0	-10.6	1.00 V	110	43.0	-13.6
3	95.96	21.5 QP	43.5	-22.0	1.50 V	299	39.9	-18.4
4	127.00	21.4 QP	43.5	-22.1	1.00 V	15	36.6	-15.2
5	555.74	21.6 QP	46.0	-24.4	1.50 V	87	30.2	-8.6
6	845.77	27.4 QP	46.0	-18.6	1.00 V	213	30.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 66% RH	Tested By	James Yang
Test Mode	B		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	95.96	25.3 QP	43.5	-18.2	2.00 H	188	43.7	-18.4
2	207.51	24.6 QP	43.5	-18.9	1.25 H	157	40.8	-16.2
3	503.36	21.4 QP	46.0	-24.6	1.50 H	261	30.5	-9.1
4	666.32	23.3 QP	46.0	-22.7	1.00 H	299	29.7	-6.4
5	802.12	26.2 QP	46.0	-19.8	1.00 H	273	30.3	-4.1
6	995.15	28.3 QP	54.0	-25.7	2.00 H	252	29.2	-0.9
Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.76	31.3 QP	40.0	-8.7	1.00 V	91	45.7	-14.4
2	90.14	28.9 QP	43.5	-14.6	1.00 V	203	47.7	-18.8
3	198.78	21.1 QP	43.5	-22.4	1.50 V	208	37.3	-16.2
4	521.79	21.1 QP	46.0	-24.9	1.50 V	351	30.0	-8.9
5	746.83	24.9 QP	46.0	-21.1	1.50 V	38	29.6	-4.7
6	979.63	28.1 QP	54.0	-25.9	1.25 V	113	29.3	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 66% RH	Tested By	James Yang
Test Mode	C		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	29.0 QP	40.0	-11.0	1.50 H	356	43.8	-14.8
2	95.96	26.2 QP	43.5	-17.3	1.50 H	9	44.6	-18.4
3	133.79	22.2 QP	43.5	-21.3	1.50 H	228	36.7	-14.5
4	224.97	17.3 QP	46.0	-28.7	1.01 H	13	33.4	-16.1
5	326.82	18.9 QP	46.0	-27.1	1.01 H	221	30.6	-11.7
6	853.53	26.4 QP	46.0	-19.6	1.01 H	13	29.6	-3.2
Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.38	37.4 QP	40.0	-2.6	1.00 V	300	52.1	-14.7
2	48.43	35.1 QP	40.0	-4.9	1.00 V	216	48.6	-13.5
3	67.83	24.5 QP	40.0	-15.5	1.49 V	112	39.0	-14.5
4	172.59	16.7 QP	43.5	-26.8	1.00 V	144	30.7	-14.0
5	479.11	20.6 QP	46.0	-25.4	1.49 V	73	30.1	-9.5
6	885.54	26.7 QP	46.0	-19.3	1.00 V	107	29.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	Below 1000MHz
Input Power	120Vac, 60Hz	Detector Function	Quasi-Peak
Environmental Conditions	25 deg. C, 66% RH	Tested By	James Yang
Test Mode	D		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	30.1 QP	40.0	-9.9	1.50 H	9	44.9	-14.8
2	95.96	26.4 QP	43.5	-17.1	1.50 H	276	44.8	-18.4
3	128.94	40.0 QP	43.5	-3.5	1.50 H	184	54.9	-14.9
4	211.39	38.5 QP	43.5	-5.0	1.50 H	2	54.7	-16.2
5	526.64	21.1 QP	46.0	-24.9	1.00 H	15	30.0	-8.9
6	846.74	26.3 QP	46.0	-19.7	1.00 H	248	29.5	-3.2
Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.45	30.8 QP	40.0	-9.2	1.00 V	249	45.8	-15.0
2	50.37	36.1 QP	40.0	-3.9	1.00 V	186	49.6	-13.5
3	69.77	29.5 QP	40.0	-10.5	1.49 V	329	44.5	-15.0
4	134.76	25.2 QP	43.5	-18.3	1.00 V	307	39.6	-14.4
5	211.39	19.0 QP	43.5	-24.5	1.00 V	139	35.2	-16.2
6	612.97	23.4 QP	46.0	-22.6	1.49 V	181	30.4	-7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 23, 2017	Nov. 22, 2018
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Sep. 05, 2017	Sep. 04, 2018
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 10, 2017	Mar. 09, 2018
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 15, 2017	Aug. 14, 2018
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA
Extension Cord	Extension Cord	1-1	Dec. 22, 2016	Dec. 21, 2017
			Dec. 22, 2017	Dec. 21, 2018

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

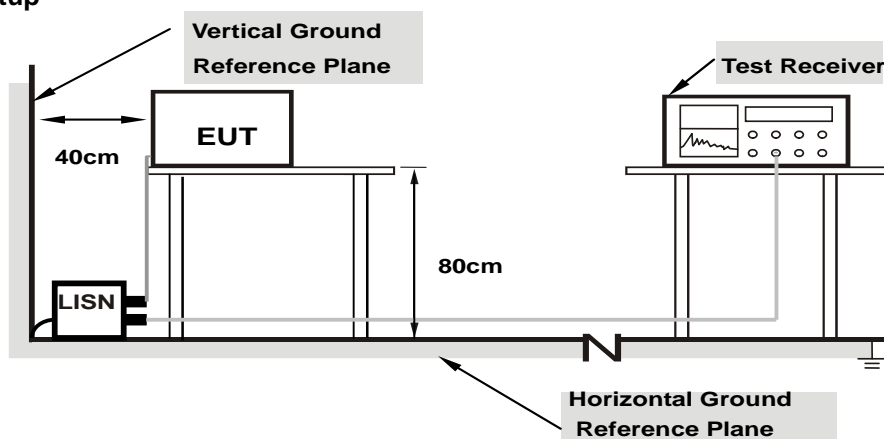

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.45	33.66	18.65	44.11	29.10	65.79	55.79	-21.68	-26.69
2	0.21226	10.46	27.58	15.41	38.04	25.87	63.12	53.12	-25.08	-27.25
3	0.25796	10.47	30.12	18.90	40.59	29.37	61.50	51.50	-20.91	-22.13
4	2.72669	10.57	24.64	10.94	35.21	21.51	56.00	46.00	-20.79	-24.49
5	13.56130	11.11	40.87	35.76	51.98	46.87	60.00	50.00	-8.02	-3.13
6	23.70775	11.58	23.36	11.59	34.94	23.17	60.00	50.00	-25.06	-26.83
7	27.12118	11.71	26.50	17.97	38.21	29.68	60.00	50.00	-21.79	-20.32

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

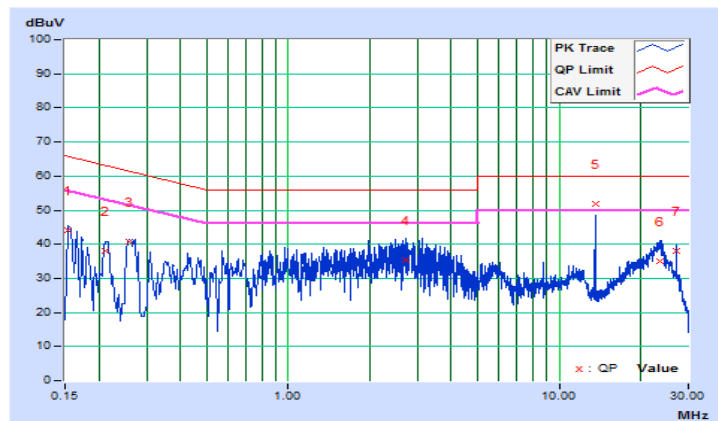


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16564	10.21	31.43	16.91	41.64	27.12	65.18	55.18	-23.54	-28.06
2	0.21647	10.22	26.07	15.03	36.29	25.25	62.95	52.95	-26.66	-27.70
3	0.25932	10.23	28.15	20.85	38.38	31.08	61.45	51.45	-23.07	-20.37
4	2.09327	10.32	21.08	10.44	31.40	20.76	56.00	46.00	-24.60	-25.24
5	13.56130	10.81	30.41	28.88	41.22	39.69	60.00	50.00	-18.78	-10.31
6	22.25323	11.12	19.26	10.58	30.38	21.70	60.00	50.00	-29.62	-28.30

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

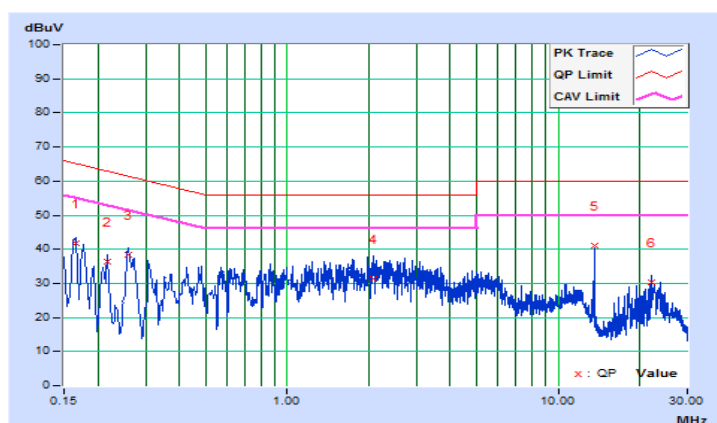


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.45	32.12	16.76	42.57	27.21	66.00	56.00	-23.43	-28.79
2	0.19367	10.45	26.92	13.22	37.37	23.67	63.88	53.88	-26.51	-30.21
3	0.32200	10.49	18.76	12.24	29.25	22.73	59.66	49.66	-30.41	-26.93
4	2.94200	10.58	10.04	2.08	20.62	12.66	56.00	46.00	-35.38	-33.34
5	13.55800	11.11	22.52	21.64	33.63	32.75	60.00	50.00	-26.37	-17.25
6	22.97000	11.54	4.21	1.56	15.75	13.10	60.00	50.00	-44.25	-36.90

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

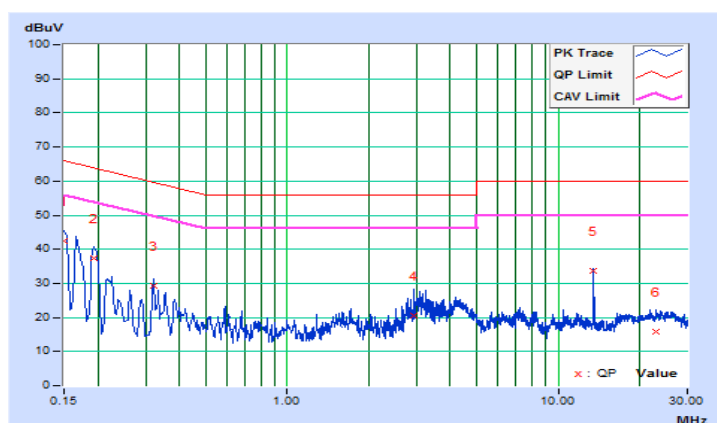


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16200	10.21	32.44	16.54	42.65	26.75	65.36	55.36	-22.71	-28.61
2	0.23785	10.23	23.00	12.74	33.23	22.97	62.17	52.17	-28.94	-29.20
3	0.32600	10.23	18.22	12.75	28.45	22.98	59.55	49.55	-31.10	-26.57
4	3.19000	10.37	14.46	3.29	24.83	13.66	56.00	46.00	-31.17	-32.34
5	13.56200	10.81	21.65	21.56	32.46	32.37	60.00	50.00	-27.54	-17.63
6	27.08200	11.25	4.15	1.70	15.40	12.95	60.00	50.00	-44.60	-37.05

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

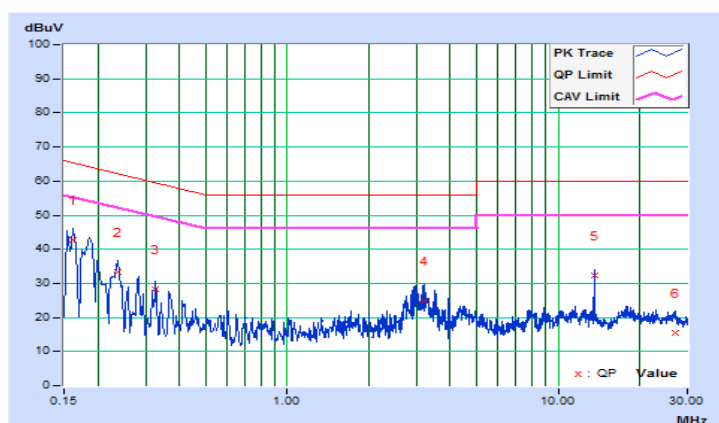


4.3 Frequency Stability

4.3.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.3.2 Test Setup

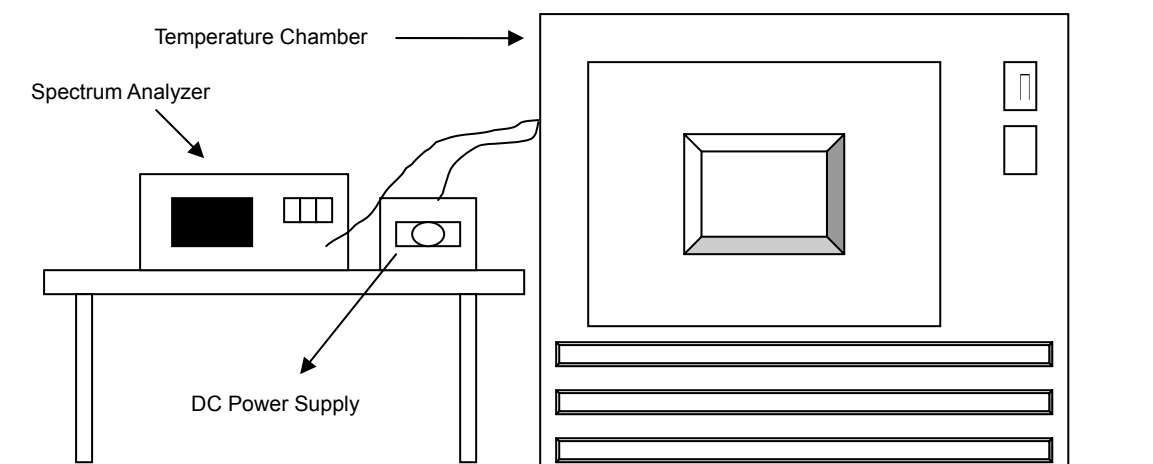

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turned the EUT on and coupled its output to a spectrum analyzer.
- Turned the EUT off and set the chamber to the highest temperature specified.
- Allowed sufficient time (approximately 30 min) for the temperature of the chamber to stabilize then turned the EUT on and measured the operating frequency after 2, 5, and 10 minutes.
- Repeated step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

Same as Item 4.1.6.

4.3.7 Test Result

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	3.7	13.56004	0.00029	13.56003	0.00022	13.56003	0.00022	13.56004	0.00029
40	3.7	13.55993	-0.00052	13.55994	-0.00044	13.55993	-0.00052	13.55993	-0.00052
30	3.7	13.55999	-0.00007	13.55999	-0.00007	13.55998	-0.00015	13.55999	-0.00007
20	3.7	13.55998	-0.00015	13.55997	-0.00022	13.55998	-0.00015	13.55998	-0.00015
10	3.7	13.56002	0.00015	13.56003	0.00022	13.56002	0.00015	13.56002	0.00015
0	3.7	13.55994	-0.00044	13.55995	-0.00037	13.55993	-0.00052	13.55994	-0.00044
-10	3.7	13.55997	-0.00022	13.55997	-0.00022	13.55998	-0.00015	13.55998	-0.00015
-20	3.7	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007	13.56001	0.00007


Frequency Stability Versus Voltage									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	4.255	13.55998	-0.00015	13.55997	-0.00022	13.55998	-0.00015	13.55998	-0.00015
	3.7	13.55998	-0.00015	13.55997	-0.00022	13.55998	-0.00015	13.55998	-0.00015
	3.145	13.55998	-0.00015	13.55997	-0.00022	13.55998	-0.00015	13.55998	-0.00015

4.4 20dB Bandwidth

4.4.1 Limits of 20dB Bandwidth Measurement

The 20dB bandwidth shall be specified in operating frequency band.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.4.5 Deviation from Test Standard


No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.1.6.

4.4.7 Test Results

20dBc point (Low)	20dBc point (High)	Operating frequency band (MHz)	Pass / Fail
13.55820	13.56116	13.553~13.567	Pass

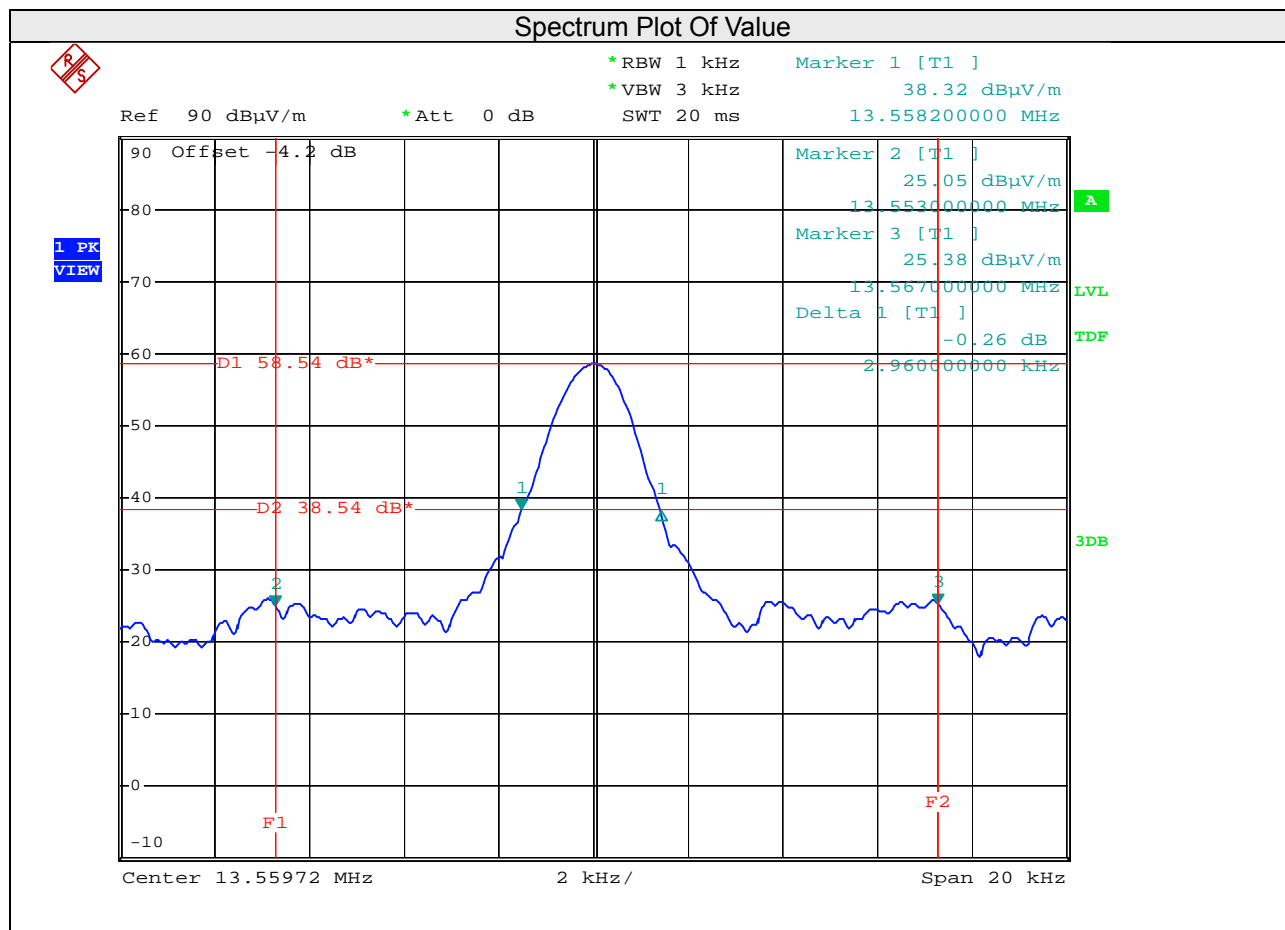

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---