

	    CERTIFICATE 2518.08 MS ISO/IEC 17025 TESTING SAMM NO. 0825																																
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia SDN BHD, Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.	TEST REPORT Report Revision : Rev.A																																
<table><tr><td>Date/s Tested</td><td>: 2-OCT-2020 - 20-OCT-2020</td></tr><tr><td>Report Issue Date</td><td>: 26-NOV-2020</td></tr><tr><td>Manufacturer</td><td>: Motorola Solutions Malaysia SDN BHD</td></tr><tr><td>Manufacturer Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>Requestor</td><td>: SZE KEAT NG</td></tr><tr><td>Product Type</td><td>: Portable</td></tr><tr><td>Product Version (PMN)</td><td>: APX 8000HXE</td></tr><tr><td>Model Number (HVIN)</td><td>: H91TGD9PW9AN</td></tr><tr><td>Frequency Band</td><td>: 760-806MHz</td></tr><tr><td>Max RF Output Power</td><td>: 2.99 Watts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>Applicant Address</td><td>: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322</td></tr><tr><td>ISED Registrations</td><td>: MY0001</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>Firmware Version (FVIN)</td><td>: R21.41.00</td></tr></table>  The equipment was tested accordance to the requirement listed below: <table><tr><td>(LMR) FCC 47 CFR Part 22 / 24 / 74 / 80 / 90 ISED RSS- Gen Issue 5 / 119 Issue</td><td>PASS</td></tr></table>		Date/s Tested	: 2-OCT-2020 - 20-OCT-2020	Report Issue Date	: 26-NOV-2020	Manufacturer	: Motorola Solutions Malaysia SDN BHD	Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	Requestor	: SZE KEAT NG	Product Type	: Portable	Product Version (PMN)	: APX 8000HXE	Model Number (HVIN)	: H91TGD9PW9AN	Frequency Band	: 760-806MHz	Max RF Output Power	: 2.99 Watts	Applicant Name	: Motorola Solutions Inc	Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322	ISED Registrations	: MY0001	FCC Registrations	: 461337	Firmware Version (FVIN)	: R21.41.00	(LMR) FCC 47 CFR Part 22 / 24 / 74 / 80 / 90 ISED RSS- Gen Issue 5 / 119 Issue	PASS
Date/s Tested	: 2-OCT-2020 - 20-OCT-2020																																
Report Issue Date	: 26-NOV-2020																																
Manufacturer	: Motorola Solutions Malaysia SDN BHD																																
Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																																
Requestor	: SZE KEAT NG																																
Product Type	: Portable																																
Product Version (PMN)	: APX 8000HXE																																
Model Number (HVIN)	: H91TGD9PW9AN																																
Frequency Band	: 760-806MHz																																
Max RF Output Power	: 2.99 Watts																																
Applicant Name	: Motorola Solutions Inc																																
Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322																																
ISED Registrations	: MY0001																																
FCC Registrations	: 461337																																
Firmware Version (FVIN)	: R21.41.00																																
(LMR) FCC 47 CFR Part 22 / 24 / 74 / 80 / 90 ISED RSS- Gen Issue 5 / 119 Issue	PASS																																
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																																	
Prepared By:  Gan Boon Teong Test Personnel	Approved Signatory:  Vincent Foong Chuen Kit Responsible Engineer																																

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results	5
3.0 Measurement Uncertainty	6
4.0 Equipment List.....	7
5.0 Test Condition.....	10
5.1. Transmitter Test Conditions	10
6.0 Transmitter Test Parameters	11
6.1. RF Output Power	11
6.1.1. Test Setup.....	11
6.1.2. Test Result	11
6.2. Frequency Stability	12
6.2.1. Test Setup.....	12
6.2.2. Test Result	13
6.2.3. Test Limit.....	14
6.3. Audio Frequency Response	15
6.3.1. Test Setup.....	15
6.3.2. Test Result	16
6.3.3. Test Limit.....	16
6.4. Audio Low Pass Filter Response	17
6.4.1. Test Setup.....	17
6.4.2. Test Result	18
6.4.3. Test Limit.....	19
6.5. Modulation Limiting	20
6.5.1. Test Setup.....	20
6.5.2. Test Result	21
6.5.3. Test Limit.....	21
6.6. Occupied Bandwidth.....	22
6.6.1. Test Setup (Analog)	22
6.6.2. Test Result (Analog).....	22
6.6.3. Test Setup (Digital).....	22
6.6.4. Test Result (Digital).....	23
6.6.5. Test Limit.....	23
6.7. Band Edge Conducted Spurious Emission (Part 22)	24
6.7.1. Test Setup (Analog)	24
6.7.2. Test Result (Analog).....	24
6.7.3. Test Setup (Digital).....	25
6.7.4. Test Result (Digital).....	25
6.7.5. Test Limit.....	25
6.8. Transient Frequency Behavior	26
6.8.1. Test Setup.....	26
6.8.2. Test Result	26
6.8.3. Test Limit.....	27

6.9.	Adjacent Channel Power.....	28
6.9.1.	Test Setup (Analog)	28
6.9.2.	Test Result	29
6.9.3.	Test Setup (Digital).....	31
6.9.4.	Test Result	32
6.9.5.	Test Limit.....	40
6.10.	Conducted Spurious Emission	42
6.10.1.	Test Setup.....	42
6.10.2.	Test Result (Analog)	43
6.10.3.	Test Result (Digital).....	49
6.10.4.	Test Limit.....	68
6.11.	Radiated Spurious Emission	71
6.11.1.	Test Setup.....	71
6.11.2.	Test Result (Analog)	72
6.11.3.	Test Result (Digital).....	74
6.11.4.	Test Limit.....	74
6.12.	Effective Radiated Power (ERP)	75
6.12.1.	Test Setup.....	75
6.12.2.	Test Result	75
6.12.3.	Test Limit.....	75
6.13.	GNSS (EIRP for 1559 - 1610MHz).....	76
6.13.1.	Test Setup.....	76
6.13.1.	Test Result	76
6.13.2.	Test Limit.....	76

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	20-OCT-2020	Gan Boon Teong

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, C4FM, Phase II

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
BATT IMPRES 2 LIION R IP68 4850T	MOTOROLA	PMNN4487A

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.4-2014

ANSI C63.26-2015

No modifications were done to the UUT to facilitate the tests in this report.

Deviation from standard

Not applicable as no deviation from standard test method

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remarks	Serial number tested
2.1046, 90.541, 22.565, 74.461, 74.534, 80.215	RSS-119	RF Power Output	Pass		581TWT0053
2.1047, 74.463, 80.213	RSS-119	Frequency Stability	Pass		581TWT0053
2.1047, 74.463, 80.213	RSS-119	Audio Frequency Response	Pass		581TWT0053
2.1047, 74.463, 80.213	RSS-119	Audio Low Pass Filter Response	Pass		581TWT0053
2.1047, 74.463, 80.213	RSS-119	Modulation limiting	Pass		581TWT0053
-	-	Occupied Bandwidth	NA		
-	-	Band Edge Conducted Spurious Emission	NA		
-	-	Transient Frequency Behavior	NA		
90.543	-	Adjacent Channel Power	Pass		581TWT0053
Low end of 700 Band in other regions, Itinerant (90.531(b)(4), Low end of FCC Part 90, High end of FCC Part 90	RSS-119	Conducted Spurious Emissions	Pass	No spur detected (noise floor)	581TWT0053
Low end of 700 Band in other regions, Itinerant (90.531(b)(4), Low end of FCC Part 90, High end of FCC Part 90	RSS-119	Radiated Spurious Emission	Pass	No spur detected (noise floor)	581TWT0057
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA		
-	-	Effective Radiated Power (ERP)	NA		

NA → Not Applicable

3.0 Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	4.03 dB
	200MHz ~ 1000MHz	4.03 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.03 dB
	18GHz ~ 25GHz	4.03 dB
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82 dB
Frequency Stability	9kHz ~ 12.75GHz	0.0085 ppm
Audio Frequency / Low Pass Filter Response	300Hz ~ 20kHz	4.09%
Modulation Limiting	300Hz ~ 3kHz	1.15%
Occupied Bandwidth	9kHz ~ 12.75GHz	2.82 dB
Band Edge Conducted Spurious Emission	9kHz ~ 12.75GHz	2.82 dB
Transient Frequency Behavior	9kHz ~ 12.75GHz	5.4 ms
Adjacent Channel Power	9kHz ~ 12.75GHz	2.82 dB

4.0 Equipment List

FCC Analog ATE#1: (SW version: 2.4.6 & FCC_Frequency Stability 1.0.3 rev.)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92009188	06-Mar-20	06-Mar-21
DSA Dynamic Signal Analyzer	35670A	MY42507095	19-Jun-20	19-Jun-21
ANALYZER AUDIO	8903B	3729A17612	15-Nov-19	15-Nov-20
POWER METER	E4416A	GB41293747	19-Nov-18	19-Nov-20
POWER SENSOR	E9301B	MY41498918	12-Aug-20	12-Aug-21
POWER SUPPLY	6031A	3325A02771	13-Mar-20	13-Mar-21
SIGNAL GENERATOR	2042	119718/063	24-Jun-20	24-Jun-21
ANALYZER MODULATION	8901B	3122A03662	08-Jul-20	08-Jul-21
N to N RF Cable # 1	M17/128-RG400	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to BNC RF Cable # 7	RG 58	NA	NA	NA
N to SMA RF Cable # 1	RG 58	NA	NA	NA
N to SMA RF Cable # 2	RG 58	NA	NA	NA
N to SMA RF Cable # 3	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-34-LIM	NA	NA	NA

FCC Transient ATE #1: (SW version: FCC Transient ATE_R1.1.3)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A36210	CNR	CNR
ATTENUATOR / SWITCH DRIVER	11713A	2508A10141	CNR	CNR
POWER METER	E4416A	GB41293866	26-Feb-19	26-Feb-21
POWER SUPPLY	6033A	3004A05137	2-Aug-20	2-Aug-21
SIGNAL GENERATOR	8657A	3250A05137	19-Jun-20	19-Jun-21
STEP ATTENUATOR	8494G	MY42143006	12-Jun-20	12-Jun-21
STEP ATTENUATOR	8496G	MY42143012	13-Jun-20	13-Jun-21
OSCILLOSCOPE	MSO8104A	MY45002372	26-Jun-20	26-Jun-21
ANALYZER MODULATION	8901B	3438A05093	23-Jun-20	23-Jun-21
ANALYZER AUDIO	8903B	3011A12671	11-Mar-20	11-Mar-21
ANALYZER AUDIO	8903B	3011A08952	29-Jul-20	29-Jul-21
SPECTRUM ANALYZER	E4440A	MY46181974	2-Aug-20	2-Aug-21
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	M17/128-RG400	NA	NA	NA
N to N RF Cable # 3	M17/128-RG400	NA	NA	NA
N to N RF Cable # 4	M17/128-RG400	NA	NA	NA
N to N RF Cable # 5	M17/128-RG400	NA	NA	NA
N to N RF Cable # 6	M17/128-RG400	NA	NA	NA
N to N RF Cable # 7	M17/128-RG400	NA	NA	NA
N to N RF Cable # 8	M17/128-RG400	NA	NA	NA
N to N RF Cable # 9	M17/128-RG400	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 10dB	49-10-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE_rev 1.23.03)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
ANALYZER SPECTRUM	E4440A	MY46185415	10-Jan-20	10-Jan-22
POWER SUPPLY	6031A	3543A03489	05-Jun-20	05-Jun-21
HIGH PASS FILTER SWITCH BOX	-	CS001	2-Jul-20	2-Jul-21
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	SF126/11N/11N	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

EMC Chamber 1

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	720	21-Mar-19	21-Mar-21
DRG HORN FREQ.	SAS-571	1143	14-Feb-19	14-Feb-21
POWER SUPPLY (0-60V / 0-50A, 1000W)	6032A	2615A01178	21-May-20	21-May-21
SIGNAL GENERATOR	SMB 100A	181117	8-Nov-18	8-Nov-21
EMI TEST RECEIVER	ESW44	101750	24-Jul-19	24-Nov-20
EMI TEST RECEIVER	ESIB26	100017	19-Jul-19	19-Nov-20
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	No Cal. Req'd	No Cal. Req'd
BILOG ANTENNA	CBL6112B	2964	23-Apr-19	23-Apr-21
BILOG ANTENNA	CBL6112B	2950	8-Jul-19	8-Jul-21
DATA LOGGER	SDL500	A.016776	4-Jun-20	4-Jun-21
SYSTEM CONTROLLER	SC104V	050806-1	No Cal. Req'd	No Cal. Req'd
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	No Cal. Req'd	No Cal. Req'd
ANTENNA POSITIONING TOWER	TLT2	NA	No Cal. Req'd	No Cal. Req'd
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	27-Jan-20	27-Jan-21
18 - 40GHz PREAMPLIFIER	MITEQ Hi GAIN SUCOFLEX	001	No Cal. Req'd	No Cal. Req'd
PREAMPLIFIER	PAM-0118	269	24-May-19	24-May-22
LOOP ANTENNA	6502	00203479	21-Jan-20	21-Jan-21
TEST SOFTWARE	EMC_FCC_IC_BLUETOOTH_RE_TEST			
VERSION	EMC_FCC_RE_v1.6.2			

5.0 Test Condition

5.1. Transmitter Test Conditions


Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By	Environmental conditions
RF Output Power	Low & Max	Analog	762.0125, 764.0125, 768.0125, 769.0125, 769.0875, 774.8875, 775.9875, 792.0125, 794.0125, 798.0125, 799.0875, 804.9125, 805.9875	Gan Boon Teong	23.4°C, 50%RH
Frequency Stability	Max	Analog	769.0875	Gan Boon Teong	25.1°C, 54.3%RH, 60.3°C, 50%RH, -30.1°C, 51.2%RH
Audio Frequency Response (12.5kHz / 25kHz)	Max	Analog	769.0875	Gan Boon Teong	23.4°C, 50%RH
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	Analog	769.0875	Gan Boon Teong	23.4°C, 50%RH
Modulation limiting (12.5kHz / 25kHz)	Max	Analog	769.0875	Gan Boon Teong	23.4°C, 50%RH
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	Max	NA	NA		
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Low / Max	NA	NA		
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	Max	NA	NA		
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	Max	Analog, C4FM, Phase II	769.0875, 774.8875, 799.0875, 804.9125	Gan Boon Teong	23.4°C, 50%RH
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Max	Analog, C4FM, Phase II	762.0125, 764.0125, 769.0125, 769.0875, 774.8875, 792.0125, 794.0125, 799.0875, 804.9125	Gan Boon Teong	23.4°C, 50%RH
Radiated Spurious Emission (12.5kHz / 25kHz)	Low / Max	Analog	769.0125	Qawiman&Fendi	23.7 Hum(%RH)
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	NA	NA		
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	NA	NA		

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

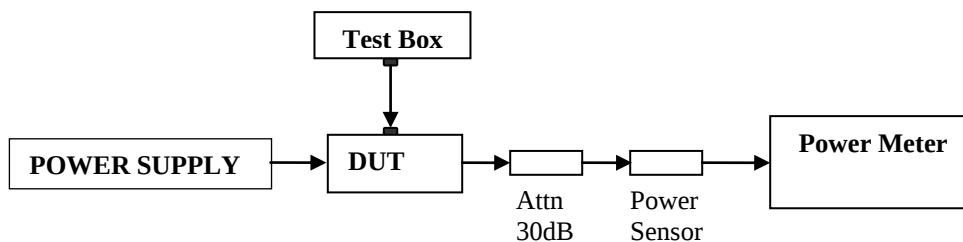


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C			
Voltage (V)	7.5V			
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)
762.01250	1.01	1.25	2.94	1.80
764.01250	1.01	1.26	2.94	1.77
768.01250	1.01	1.23	2.94	1.83
769.01250	1.00	1.23	2.93	1.83
769.08750	1.00	1.23	2.92	1.92
774.88750	1.00	1.26	2.92	1.83
775.98750	1.00	1.23	2.92	1.86
792.01250	1.00	1.21	2.91	1.87
794.01250	1.00	1.20	2.91	1.83
798.01250	0.99	1.20	2.90	1.83
799.08750	0.99	1.20	2.90	1.83
804.9125	0.99	1.20	2.89	1.83
805.9875	0.99	1.2	2.89	1.8

6.2. Frequency Stability

6.2.1. Test Setup

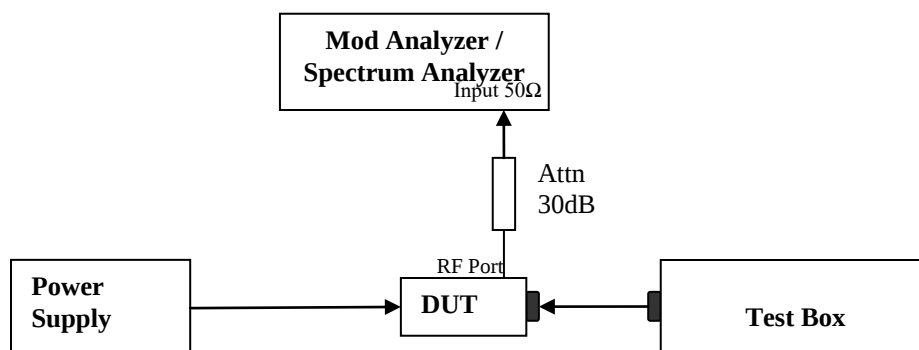


- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions:
 - Temperature: The frequency of the transmitter was measured from -30°C to 50°C.
 - Supply Voltage:
 - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
 - Portable: The frequency of the transmitter was measured from nominal $\pm x\%$ as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:

$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$


Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result

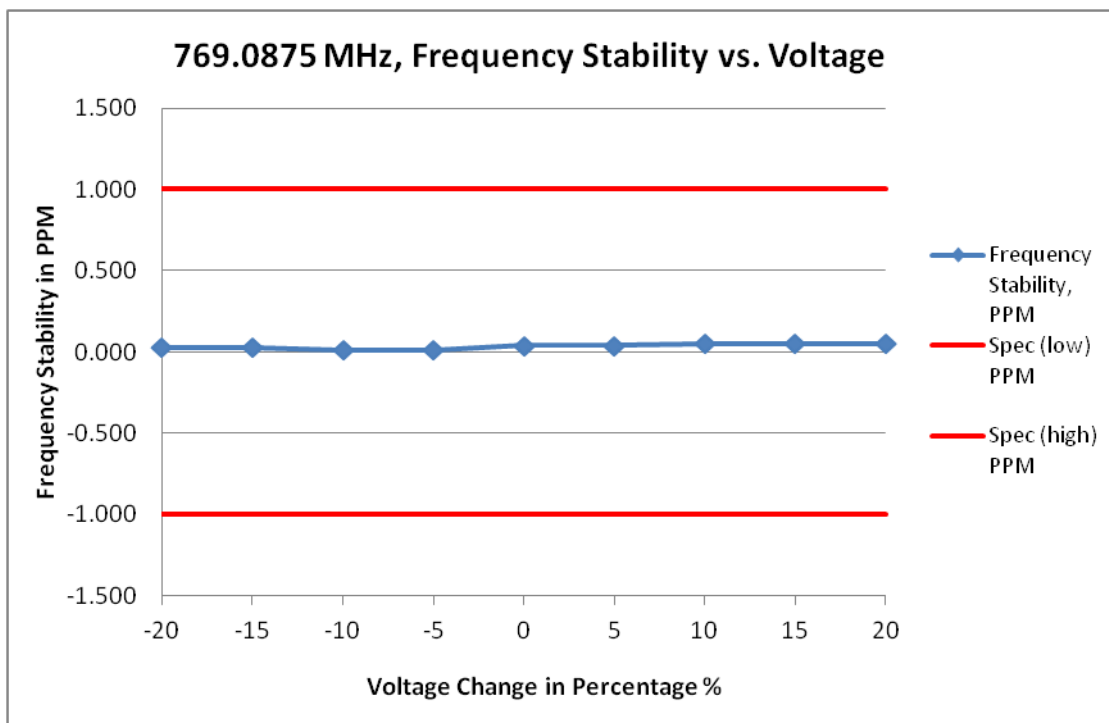

(i) Frequency Stability VS Voltage

Frequency / Channel Spacing	769.0875 MHz / 12.5 kHz				
Temperature, °C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	6.000	769.087520	0.026	-1.000	1.000
-15	6.370	769.087520	0.026	-1.000	1.000
-10	6.750	769.087510	0.013	-1.000	1.000
-5	7.120	769.087510	0.013	-1.000	1.000
0	7.500	769.087530	0.039	-1.000	1.000
5	7.870	769.087530	0.039	-1.000	1.000
10	8.250	769.087540	0.052	-1.000	1.000
15	8.620	769.087540	0.052	-1.000	1.000
20	9.000	769.087540	0.052	-1.000	1.000

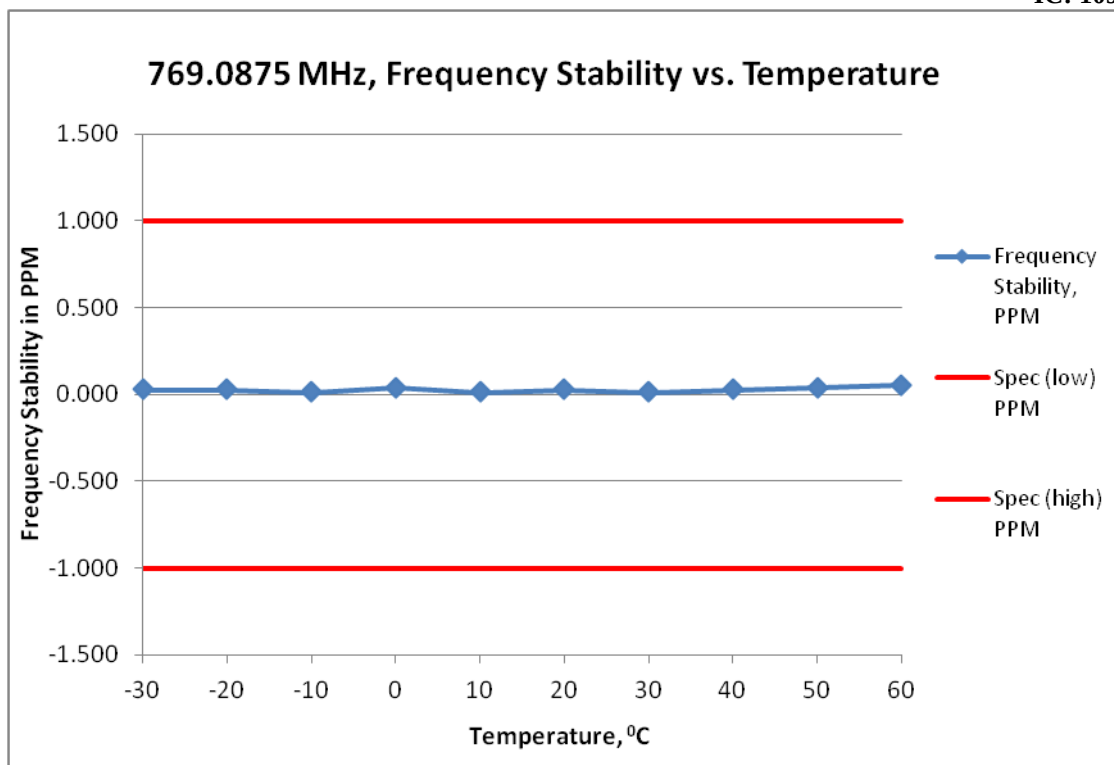

(ii) Frequency Stability VS temperature


Frequency / Channel Spacing	769.0875 MHz / 12.5 kHz			
Voltage, V	7.5			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	769.087520	0.026	-1.000	1.000
-20	769.087520	0.026	-1.000	1.000
-10	769.087510	0.013	-1.000	1.000
0	769.087530	0.039	-1.000	1.000
10	769.087510	0.013	-1.000	1.000
20	769.087520	0.026	-1.000	1.000
30	769.087510	0.013	-1.000	1.000
40	769.087520	0.026	-1.000	1.000
50	769.087530	0.039	-1.000	1.000
60	769.087540	0.052	-1.000	1.000

6.2.3. Test Limit

As per manufacturer declared spec +/- 1.0ppm


6.3. Audio Frequency Response

6.3.1. Test Setup

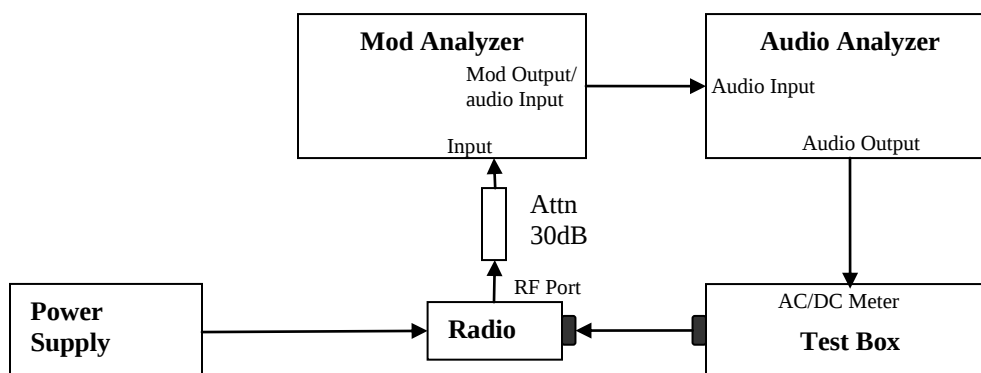


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
- 5) On audio analyzer, set the rated level as reference to zero.
- 6) Vary the audio frequency from 300 Hz to 3 kHz. Record the change in dB on the audio analyzer.

6.3.2. Test Result

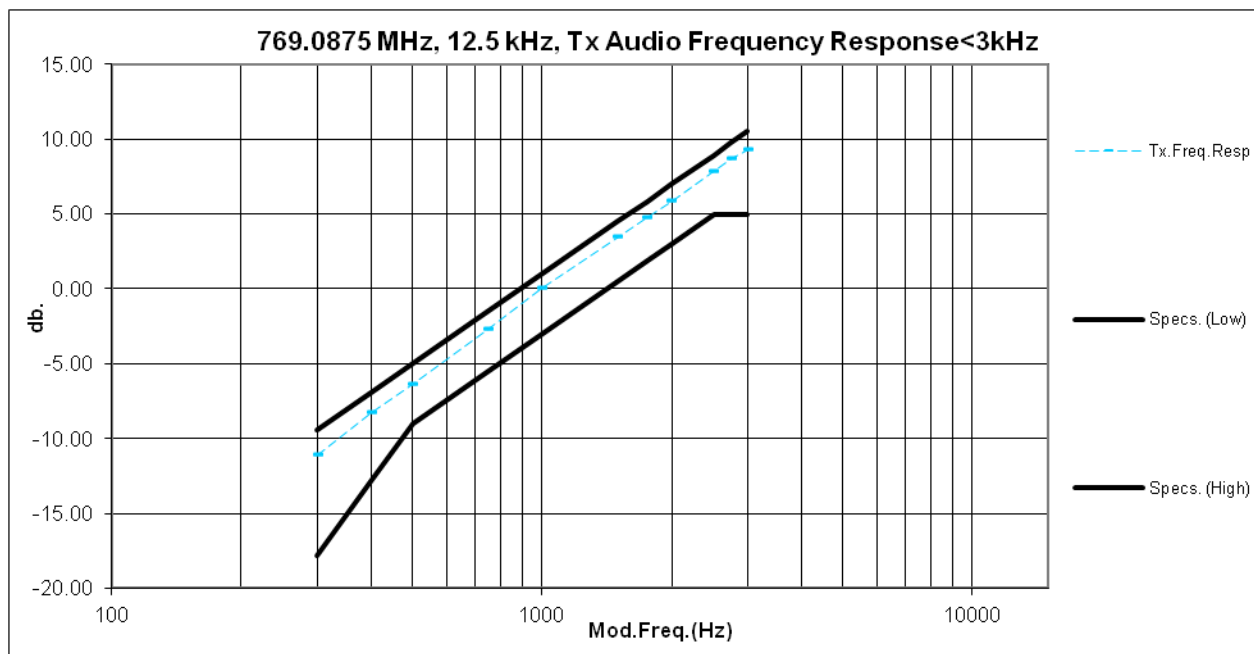

6.3.3. Test Limit

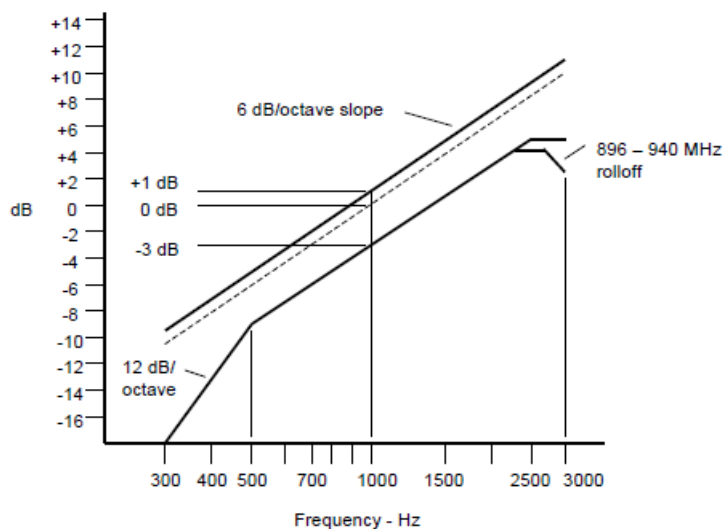


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.


6.4. Audio Low Pass Filter Response

6.4.1. Test Setup

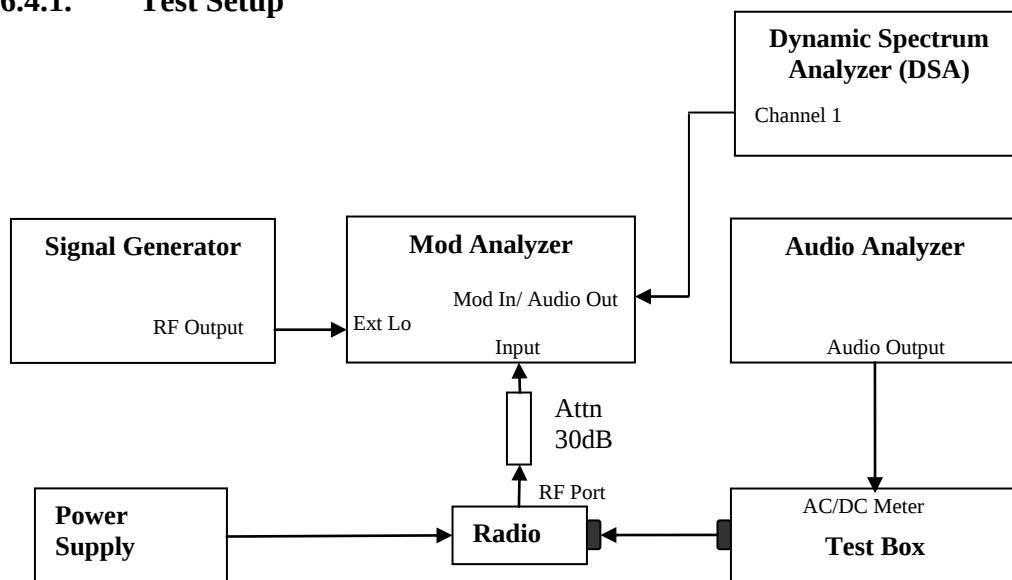


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4) Set the Sigen frequency to $F_c + 1.5$ MHz, RF output level to 0dBm without modulation.
- 5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 6) Up the amplitude by 20dB.
- 7) On DSA, get the reference point to 0dB.
- 8) Vary the frequency on audio analyzer from 3 kHz to 20 kHz, record the audio tone from DSA.

6.4.2. Test Result

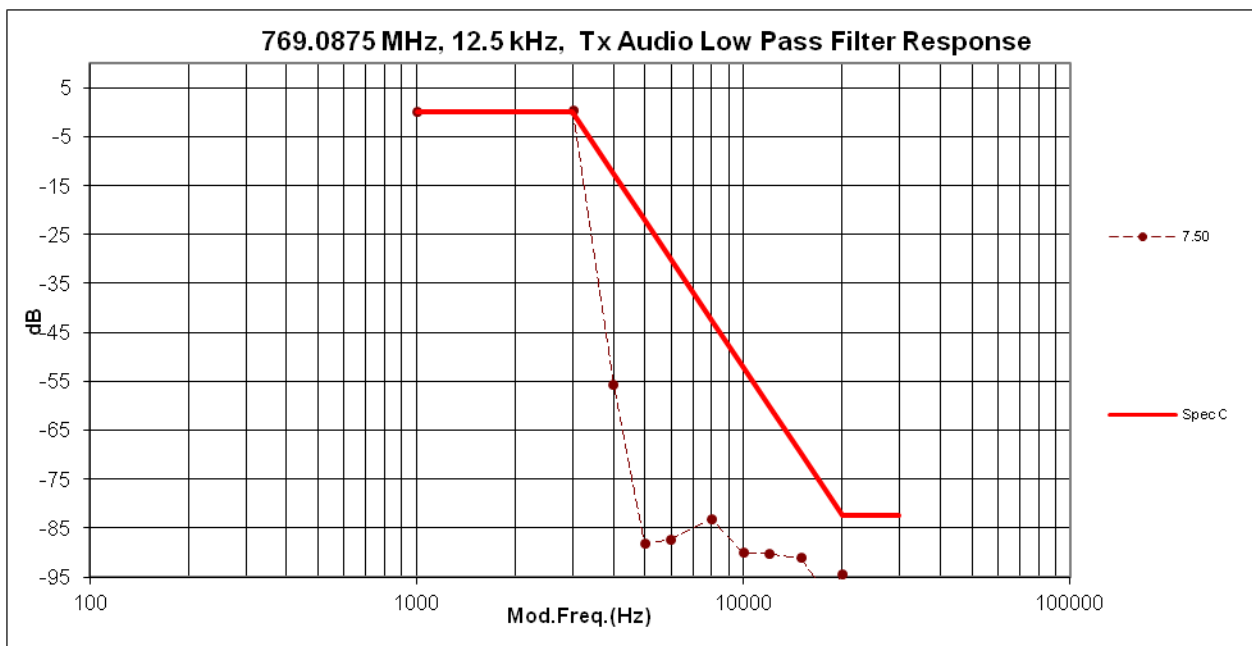

6.4.3. Test Limit

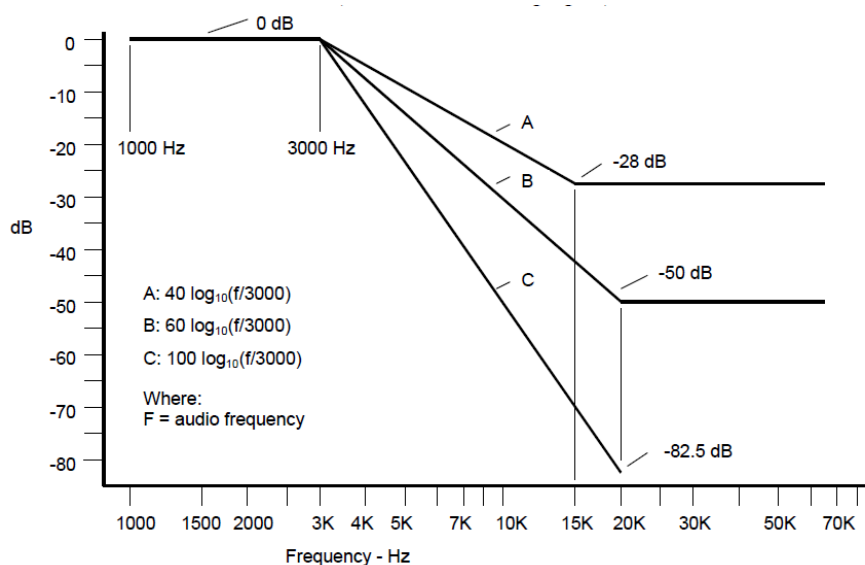

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $40 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

- b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least: $60 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.


- c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $100 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.


6.5. Modulation Limiting

6.5.1. Test Setup

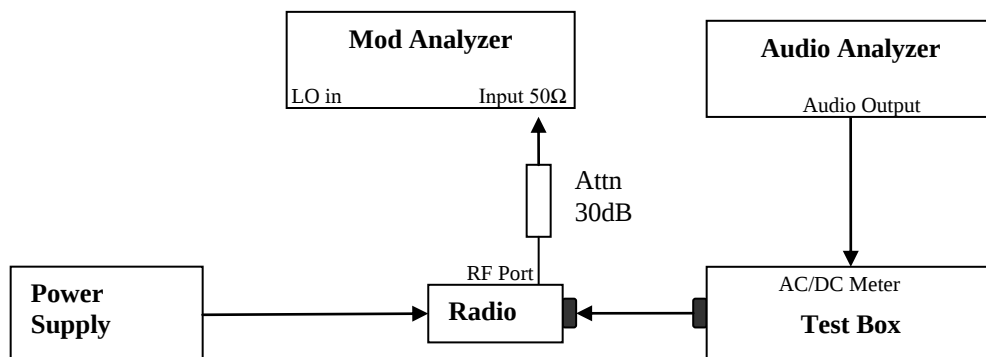

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

6.5.2. Test Result

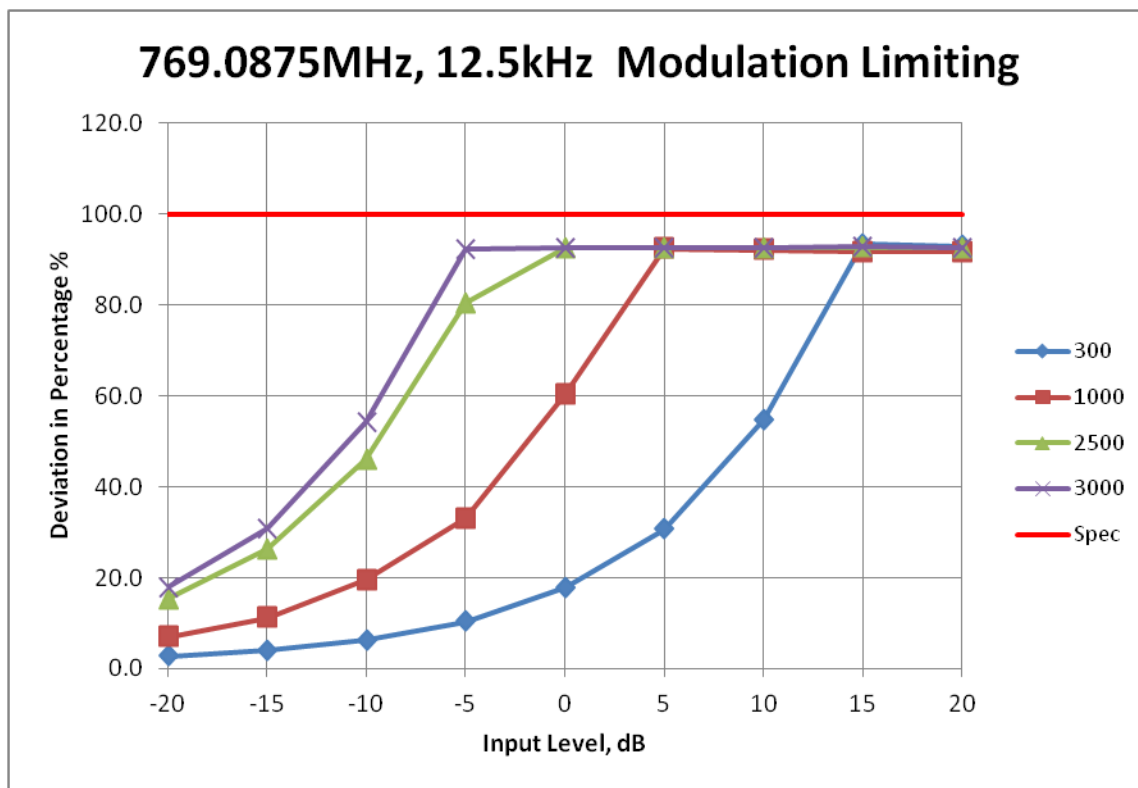


6.5.3. Test Limit

Modulation Limiting shall not exceed 100 percent.


6.6. Occupied Bandwidth

6.6.1. Test Setup (Analog)

A. Get Fc for reference

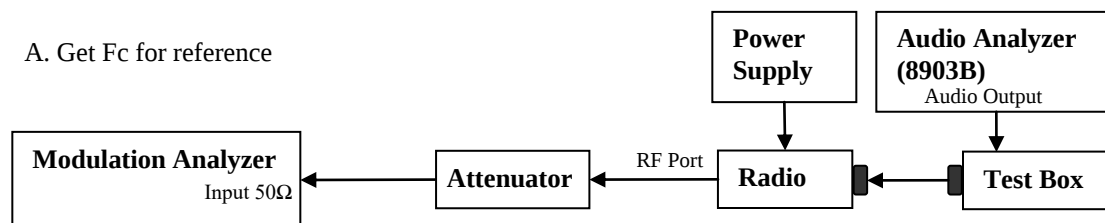

B. Testing

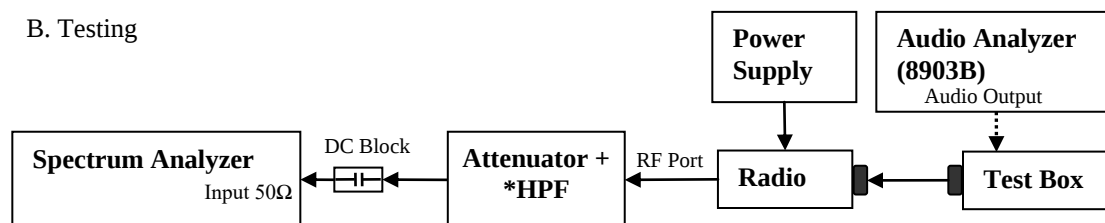


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.

* Only HPF added for Mask 80.211 measurement with attenuator.

6.6.2. Test Result (Analog)

Not Applicable.

6.6.4. Test Setup (Digital)

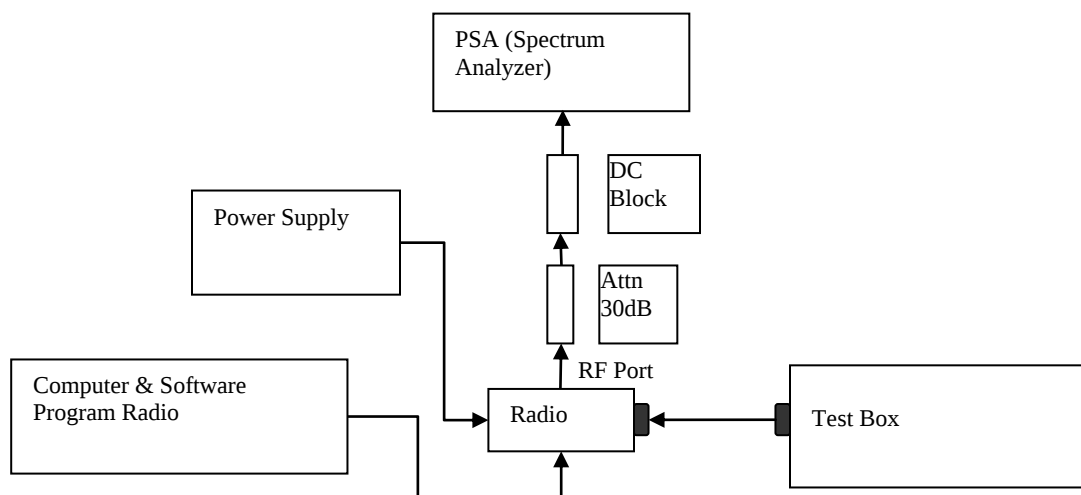

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.

***Note:**

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.6.5. Test Result (Digital)


Not Applicable.

6.6.6. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

6.7. Band Edge Conducted Spurious Emission (Part 22)

6.7.1. Test Setup (Analog)

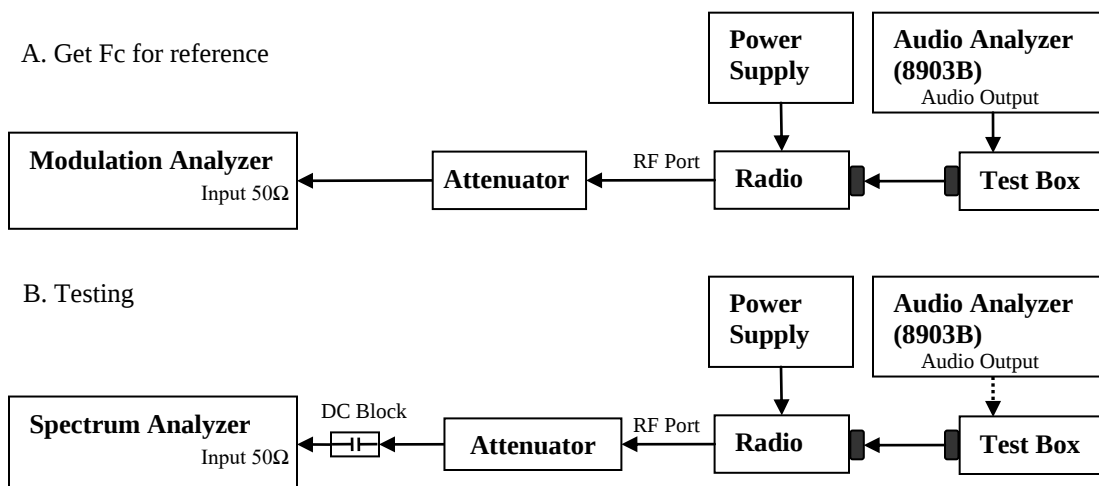

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth.
- 7) Transmit the DUT and record the occupied Bandwidth frequencies.
- 8) Preset the spectrum analyzer for band edge measurement.
- 9) The band edges of lowest and highest channels were measured.
- 10) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 11) Save the screen shot as modulated signal.
- 12) Remove the audio tone from audio analyzer to capture unmodulated signal.


*Note:

- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

6.7.2. Test Result (Analog)

Not Applicable.

6.7.3. Test Setup (Digital)

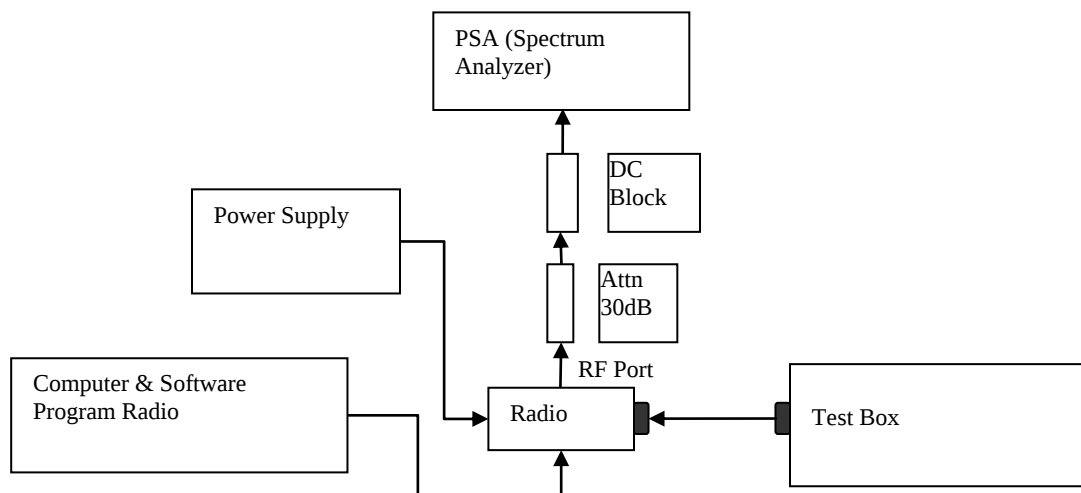

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 8) Save the screen shot.

*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.7.4. Test Result (Digital)


Not Applicable.

6.7.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.8. Transient Frequency Behavior

6.8.1. Test Setup

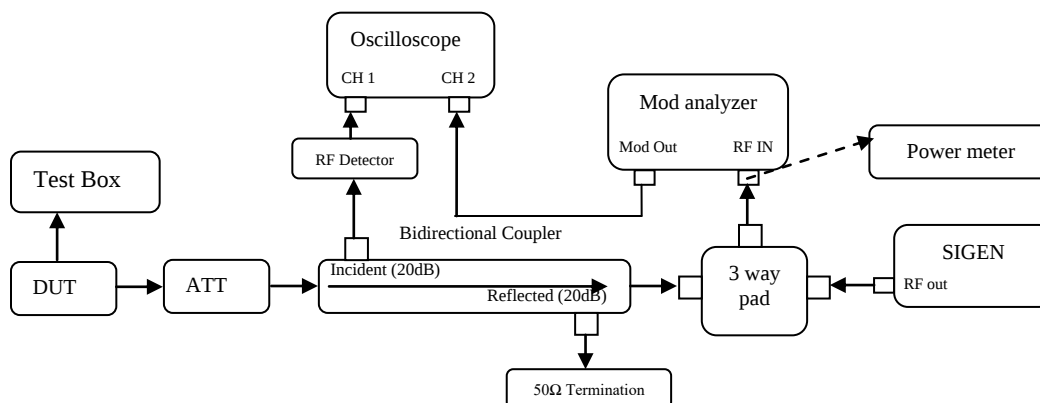

- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Siggen with the assigned center frequency, internal 1 kHz FM tone.
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
Analog 12.5 kHz Channel Spacing = 12.5 kHz
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when DUT is keying up.
- 6) Note the power level on power meter and dekey the DUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 10) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.8.2. Test Result

Not Applicable.

6.8.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t₁ is the time period immediately following t_{on}.

t₂ is the time period immediately following t₁.

t₃ is the time period from the instant when the transmitter is turned off until t_{off}.

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.9. Adjacent Channel Power

6.9.1. Test Setup (Analog)

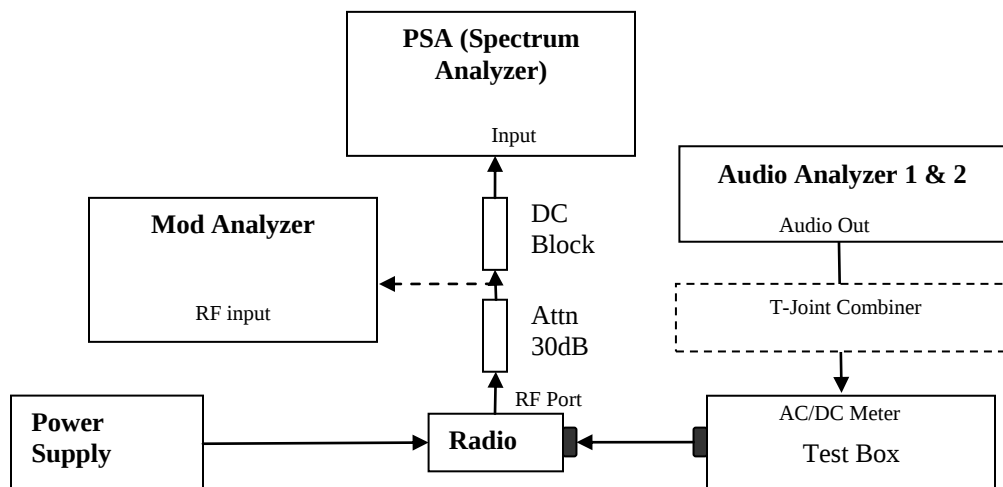

- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 4) Turn both audio analyzers ON and up 10dB amplitude level.
- 5) Connect the output to PSA and set to assigned center frequency.
- 6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
- 7) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.2. Test Result


Mode	Analog			
Frequency, MHz	769.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.319	-48.403	-40
15.625	6.25	-75.802	-76.457	-60
21.875	6.25	-77.673	-77.483	-60
37.500	25	-73.072	-73.007	-65
62.500	25	-74.907	-74.724	-65
87.500	25	-78.086	-77.947	-65
150.000	100	-76.428	-76.275	-65
250.000	100	-81.668	-81.683	-65
350.000	100	-83.859	-83.821	-65
400k	30	-89.453	-89.826	-75
12M	30	-89.493	-90.081	-75

Mode	Analog			
Frequency, MHz	774.8875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-48.866	-48.299	-40
15.625	6.25	-76.226	-75.603	-60
21.875	6.25	-77.781	-77.681	-60
37.500	25	-73.120	-72.912	-65
62.500	25	-74.833	-74.934	-65
87.500	25	-78.088	-77.862	-65
150.000	100	-76.355	-76.034	-65
250.000	100	-81.754	-81.602	-65
350.000	100	-83.800	-83.710	-65
400k	30	-89.210	-88.753	-75
12M	30	-89.846	-90.142	-75

Mode	Analog			
Frequency, MHz	799.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-49.910	-48.141	-40
15.625	6.25	-75.051	-75.143	-60
21.875	6.25	-76.611	-76.664	-60
37.500	25	-72.931	-72.686	-65
62.500	25	-75.362	-74.862	-65
87.500	25	-78.247	-77.951	-65
150.000	100	-76.433	-76.260	-65
250.000	100	-81.583	-81.818	-65
350.000	100	-83.872	-83.707	-65
400k	30	-89.385	-89.636	-75
12M	30	-89.931	-89.416	-75

Mode	Analog			
Frequency, MHz	804.9125			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-50.561	-48.016	-40
15.625	6.25	-75.376	-74.830	-60
21.875	6.25	-76.803	-76.799	-60
37.500	25	-72.673	-72.611	-65
62.500	25	-75.041	-74.868	-65
87.500	25	-78.106	-77.744	-65
150.000	100	-76.608	-75.915	-65
250.000	100	-81.463	-81.369	-65
350.000	100	-83.595	-83.697	-65
400k	30	-89.207	-89.624	-75
12M	30	-89.593	-88.943	-75

6.9.3. Test Setup (Digital)

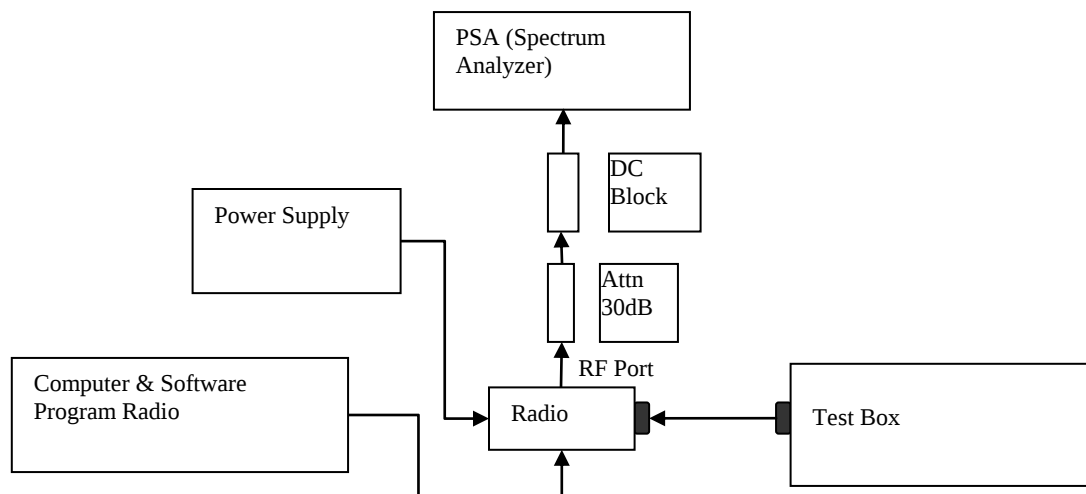

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
- 2) Prepare setup as per picture.
- 3) Turn on the ACP Measurement – Press Measure, ACP.
- 4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
- 5) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.4. Test Result

Mode	Digital Data			
Frequency, MHz	769.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-41.303	-41.009	-40
15.625	6.25	-76.507	-76.299	-60
21.875	6.25	-76.978	-77.204	-60
37.500	25	-73.059	-73.195	-65
62.500	25	-75.115	-75.279	-65
87.500	25	-77.928	-77.950	-65
150.000	100	-76.394	-75.996	-65
250.000	100	-81.508	-81.500	-65
350.000	100	-83.715	-83.766	-65
400k	30	-88.972	-89.233	-75
12M	30	-89.641	-89.717	-75

Mode	Digital Data			
Frequency, MHz	774.8875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-41.936	-42.157	-40
15.625	6.25	-76.349	-75.705	-60
21.875	6.25	-76.746	-77.400	-60
37.500	25	-73.152	-72.931	-65
62.500	25	-75.264	-74.950	-65
87.500	25	-78.008	-78.052	-65
150.000	100	-76.400	-76.050	-65
250.000	100	-81.471	-81.584	-65
350.000	100	-83.711	-83.522	-65
400k	30	-89.259	-89.328	-75
12M	30	-89.324	-89.347	-75

Mode	Digital Data			
Frequency, MHz	799.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-42.835	-41.563	-40
15.625	6.25	-75.044	-75.321	-60
21.875	6.25	-77.198	-76.877	-60
37.500	25	-72.542	-72.726	-65
62.500	25	-75.169	-74.938	-65
87.500	25	-78.216	-77.928	-65
150.000	100	-76.530	-76.376	-65
250.000	100	-81.717	-81.487	-65
350.000	100	-83.762	-83.772	-65
400k	30	-89.553	-89.081	-75
12M	30	-89.771	-88.869	-75

Mode	Digital Data			
Frequency, MHz	804.9125			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-41.742	-40.673	-40
15.625	6.25	-75.405	-75.218	-60
21.875	6.25	-77.033	-76.287	-60
37.500	25	-72.595	-72.739	-65
62.500	25	-75.071	-74.809	-65
87.500	25	-78.158	-77.671	-65
150.000	100	-76.537	-75.665	-65
250.000	100	-81.397	-81.388	-65
350.000	100	-83.765	-83.705	-65
400k	30	-88.937	-88.885	-75
12M	30	-89.671	-89.207	-75

Mode	Digital Voice			
Frequency, MHz	769.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-54.423	-50.093	-40
15.625	6.25	-76.299	-76.529	-60
21.875	6.25	-77.153	-76.792	-60
37.500	25	-72.974	-73.131	-65
62.500	25	-75.024	-74.810	-65
87.500	25	-78.174	-77.989	-65
150.000	100	-76.334	-75.908	-65
250.000	100	-81.427	-81.476	-65
350.000	100	-83.878	-83.687	-65
400k	30	-89.359	-89.062	-75
12M	30	-89.623	-89.980	-75

Mode	Digital Voice			
Frequency, MHz	774.8875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-55.845	-45.792	-40
15.625	6.25	-75.653	-76.132	-60
21.875	6.25	-76.591	-76.485	-60
37.500	25	-73.133	-73.030	-65
62.500	25	-74.897	-74.762	-65
87.500	25	-78.157	-77.911	-65
150.000	100	-76.086	-76.084	-65
250.000	100	-81.164	-81.356	-65
350.000	100	-83.512	-83.650	-65
400k	30	-89.016	-89.249	-75
12M	30	-89.288	-89.887	-75

Mode	Digital Voice			
Frequency, MHz	799.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-53.927	-46.289	-40
15.625	6.25	-74.881	-75.206	-60
21.875	6.25	-76.407	-76.201	-60
37.500	25	-72.677	-72.718	-65
62.500	25	-75.280	-74.856	-65
87.500	25	-78.451	-78.195	-65
150.000	100	-76.339	-76.231	-65
250.000	100	-81.589	-81.494	-65
350.000	100	-83.724	-83.671	-65
400k	30	-89.294	-89.667	-75
12M	30	-89.566	-89.347	-75

Mode	Digital Voice			
Frequency, MHz	804.9125			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-43.801	-41.029	-40
15.625	6.25	-74.413	-74.427	-60
21.875	6.25	-76.472	-75.446	-60
37.500	25	-72.653	-72.751	-65
62.500	25	-74.811	-74.771	-65
87.500	25	-77.973	-78.107	-65
150.000	100	-76.374	-76.057	-65
250.000	100	-81.406	-81.425	-65
350.000	100	-83.489	-83.575	-65
400k	30	-88.967	-89.351	-75
12M	30	-89.488	-88.719	-75

Mode	Digital Voice Encyption			
Frequency, MHz	769.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-40.878	-40.463	-40
15.625	6.25	-76.674	-76.251	-60
21.875	6.25	-78.108	-78.258	-60
37.500	25	-73.928	-73.653	-65
62.500	25	-75.715	-75.209	-65
87.500	25	-78.685	-78.364	-65
150.000	100	-77.082	-76.922	-65
250.000	100	-82.309	-82.051	-65
350.000	100	-84.526	-84.451	-65
400k	30	-90.269	-89.836	-75
12M	30	-89.959	-90.419	-75

Mode	Digital Voice Encyption			
Frequency, MHz	774.8875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-40.126	-40.877	-40
15.625	6.25	-75.899	-75.831	-60
21.875	6.25	-77.059	-77.474	-60
37.500	25	-72.832	-72.834	-65
62.500	25	-75.153	-75.110	-65
87.500	25	-78.080	-78.151	-65
150.000	100	-76.503	-76.421	-65
250.000	100	-81.585	-81.528	-65
350.000	100	-83.926	-83.593	-65
400k	30	-89.182	-88.593	-75
12M	30	-89.171	-89.747	-75

Mode	Digital Voice Encyption			
Frequency, MHz	799.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-40.536	-41.018	-40
15.625	6.25	-75.802	-75.440	-60
21.875	6.25	-76.814	-77.077	-60
37.500	25	-72.423	-72.420	-65
62.500	25	-75.007	-74.636	-65
87.500	25	-78.050	-78.271	-65
150.000	100	-76.672	-76.278	-65
250.000	100	-81.561	-81.707	-65
350.000	100	-83.949	-83.889	-65
400k	30	-89.053	-89.400	-75
12M	30	-89.478	-89.588	-75

Mode	Digital Voice Encyption			
Frequency, MHz	804.9125			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-41.697	-41.579	-40
15.625	6.25	-75.452	-75.539	-60
21.875	6.25	-76.980	-76.523	-60
37.500	25	-72.949	-73.084	-65
62.500	25	-75.111	-75.033	-65
87.500	25	-78.271	-78.310	-65
150.000	100	-76.916	-76.243	-65
250.000	100	-81.633	-81.562	-65
350.000	100	-83.591	-83.656	-65
400k	30	-89.452	-88.903	-75
12M	30	-89.246	-89.343	-75

Mode	Phase II			
Frequency, MHz	769.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-43.683	-40.563	-40
15.625	6.25	-80.703	-77.578	-60
21.875	6.25	-83.264	-84.032	-60
37.500	25	-75.721	-75.904	-65
62.500	25	-78.275	-77.898	-65
87.500	25	-80.465	-80.673	-65
150.000	100	-79.375	-78.929	-65
250.000	100	-83.270	-83.222	-65
350.000	100	-84.868	-84.874	-65
400k	30	-90.037	-89.973	-75
12M	30	-89.300	-89.968	-75

Mode	Phase II			
Frequency, MHz	774.8875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-41.484	-42.352	-40
15.625	6.25	-79.592	-79.404	-60
21.875	6.25	-80.218	-82.744	-60
37.500	25	-75.926	-76.156	-65
62.500	25	-77.867	-77.772	-65
87.500	25	-81.153	-80.608	-65
150.000	100	-79.210	-78.870	-65
250.000	100	-83.171	-83.231	-65
350.000	100	-84.867	-84.819	-65
400k	30	-90.796	-89.916	-75
12M	30	-89.808	-89.723	-75

Mode	Phase II			
Frequency, MHz	799.0875			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-41.921	-41.822	-40
15.625	6.25	-78.167	-78.298	-60
21.875	6.25	-84.389	-89.521	-60
37.500	25	-75.740	-75.610	-65
62.500	25	-77.681	-77.823	-65
87.500	25	-81.246	-80.862	-65
150.000	100	-79.010	-78.779	-65
250.000	100	-83.264	-83.199	-65
350.000	100	-84.811	-84.770	-65
400k	30	-90.103	-90.085	-75
12M	30	-89.617	-89.344	-75

Mode	Phase II			
Frequency, MHz	804.9125			
Channel Spacing, kHz	12.5			
Offset (kHz)	Meas BW (kHz)	Lower	Upper	Spec (dB)
9.375	6.25	-42.804	-41.873	-40
15.625	6.25	-75.903	-79.384	-60
21.875	6.25	-81.780	-76.865	-60
37.500	25	-75.571	-75.320	-65
62.500	25	-77.701	-77.991	-65
87.500	25	-80.917	-80.493	-65
150.000	100	-78.972	-78.583	-65
250.000	100	-83.285	-83.226	-65
350.000	100	-84.724	-84.565	-65
400k	30	-89.942	-90.575	-75
12M	30	-89.931	-89.366	-75

6.9.5. Test Limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	¹ -85

6.10. Conducted Spurious Emission


6.10.1. Test Setup

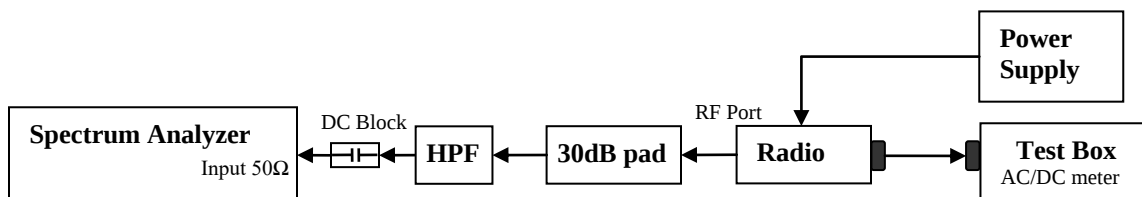

- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Path loss for the measurement included.
- 4) Set the PSA Resolution Bandwidth as per rules part.
- 5) Set the Ref offset from the pathloss offset calibration file.
- 6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - a. 9 KHz to F_c – Test Bandwidth
 - b. F_c + Test Bandwidth to $2F_c$ – 5MHz.
- 7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
- 8) Dekey the DUT.
- 9) Turn On High Pass Filter path and Key up the DUT.
- 10) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$
- 11) Key up the DUT and record the highest spur levels of spurious emissions.


6.10.2. Test Result (Analog)

Analog: 762.0125. MHz, 25.0 kHz Channel Spacing, Max Power
Not for FCC review

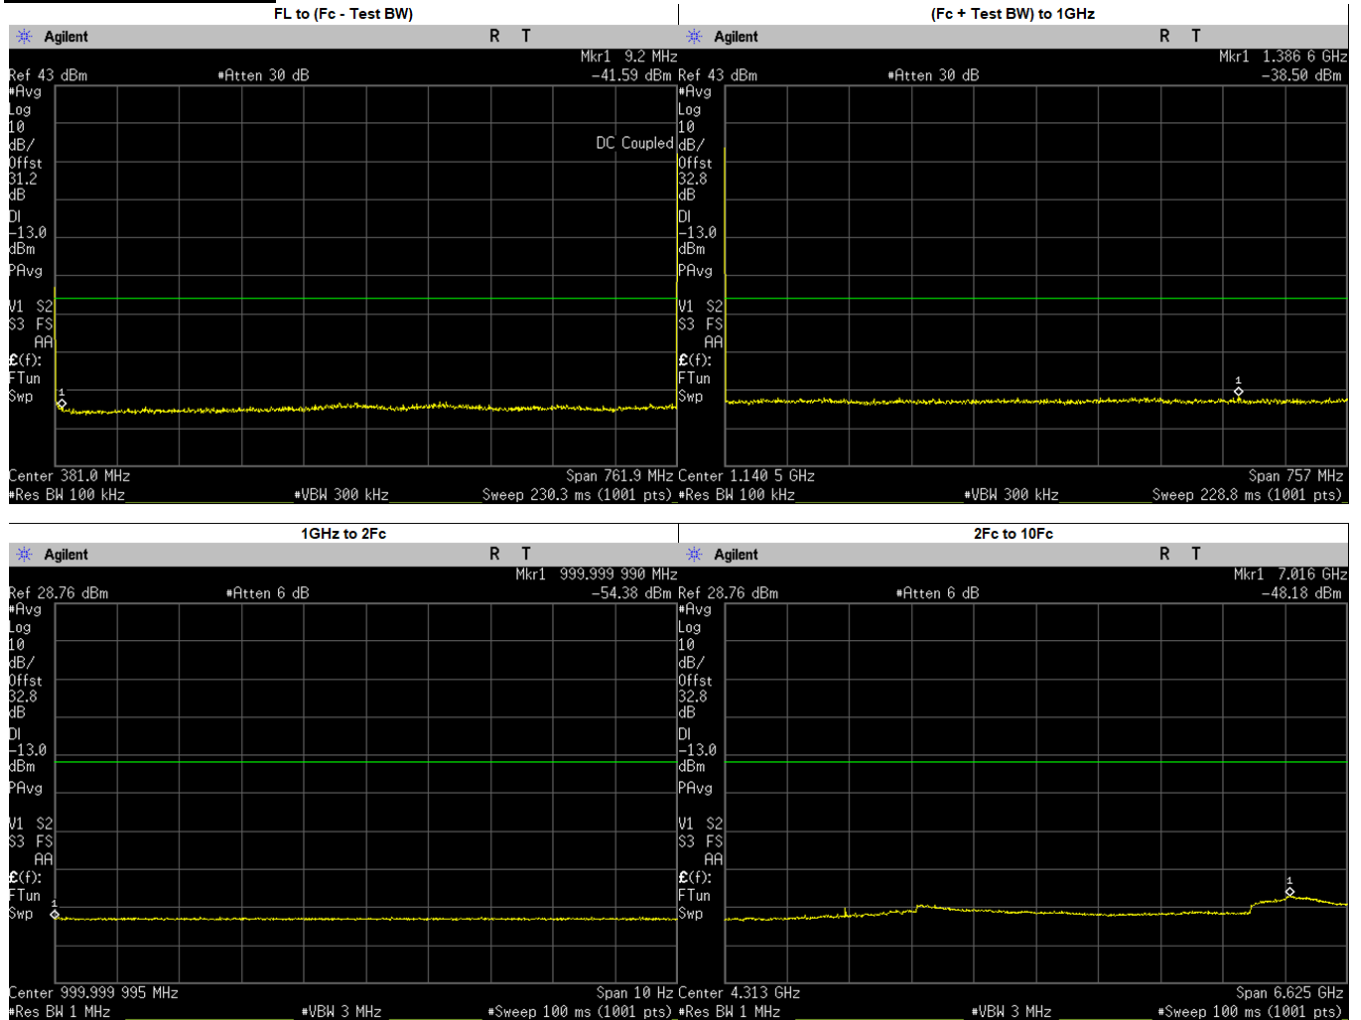



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	9.2000	-41.5870	-13.00	PASS
(Fc + Test BW) to 1GHz	1386.5570	-38.5000	-13.00	PASS
1GHz to 2Fc	1000.0000	-54.3800	-13.00	PASS
2Fc to 10Fc	7015.6140	-48.1800	-13.00	PASS
	1524.0250	-53.9427	-13.00	PASS
	2286.0370	-51.7308	-13.00	PASS
	3048.0500	-50.5425	-13.00	PASS
	3810.0620	-51.8983	-13.00	PASS
	4572.0750	-52.6370	-13.00	PASS
	5334.0870	-53.0760	-13.00	PASS
	6096.1000	-52.5938	-13.00	PASS
	6858.1130	-49.2599	-13.00	PASS
	7620.1250	-50.3664	-13.00	PASS

Analog: 764.0125. MHz, 25.0 kHz Channel Spacing, Max Power
Not for FCC review

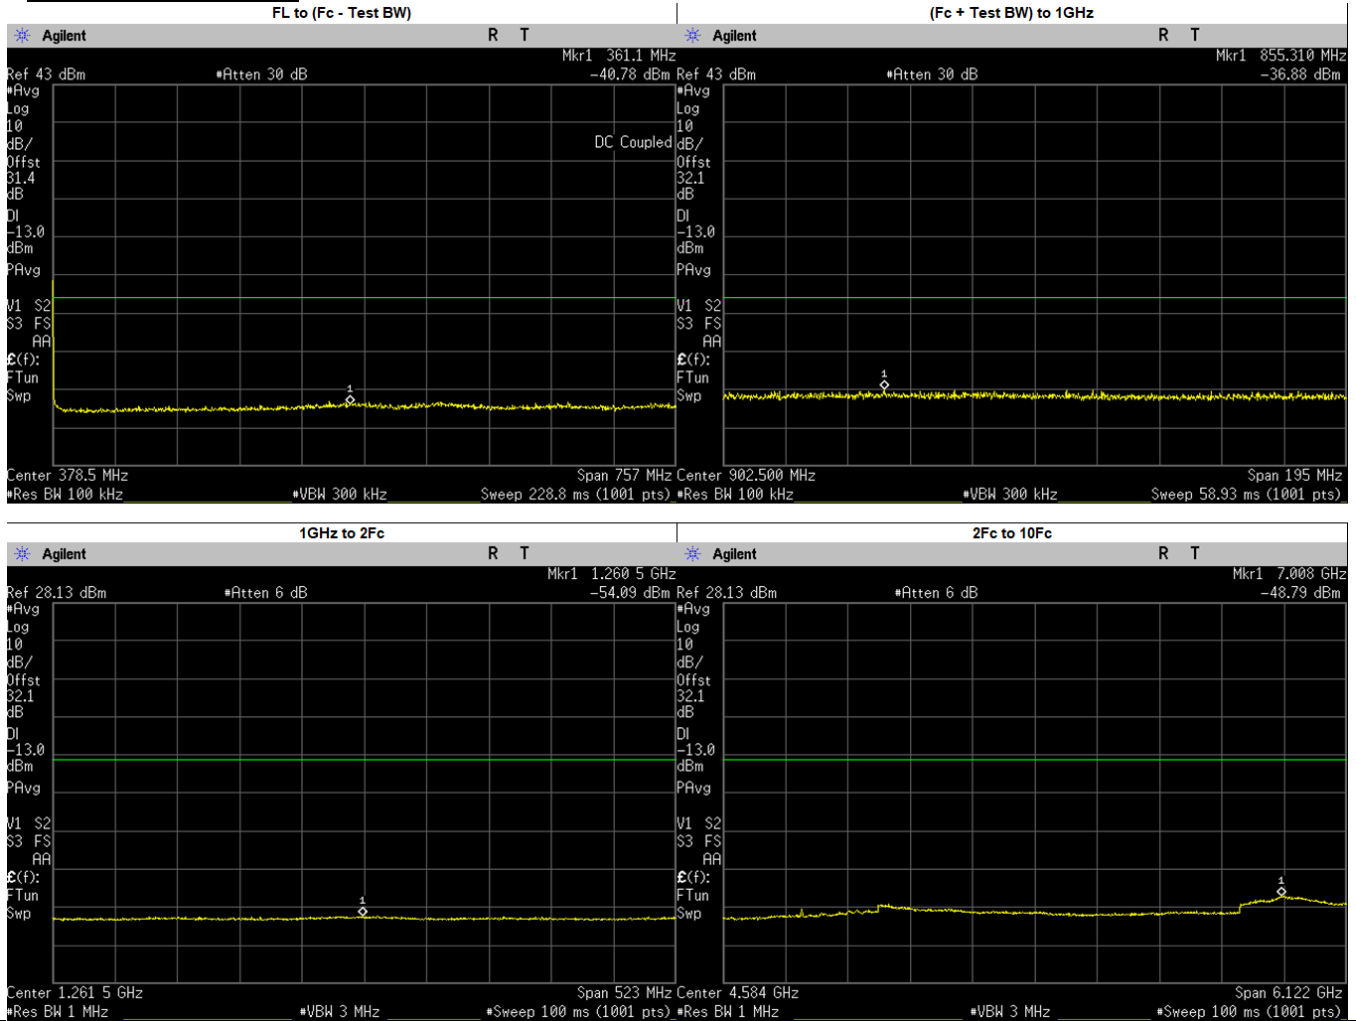



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	361.1000	-40.7780	-13.00	PASS
(Fc + Test BW) to 1GHz	855.3100	-36.8800	-13.00	PASS
1GHz to 2Fc	1260.4660	-54.0900	-13.00	PASS
2Fc to 10Fc	7008.4270	-48.7900	-13.00	PASS
	1528.0250	-54.6434	-13.00	PASS
	2292.0370	-52.9686	-13.00	PASS
	3056.0500	-51.3937	-13.00	PASS
	3820.0620	-52.8766	-13.00	PASS
	4584.0750	-53.3370	-13.00	PASS
	5348.0870	-53.8373	-13.00	PASS
	6112.1000	-53.2259	-13.00	PASS
	6876.1130	-50.2160	-13.00	PASS
	7640.1250	-50.7055	-13.00	PASS

Analog: 769.0125. MHz, 25.0 kHz Channel Spacing, Max Power

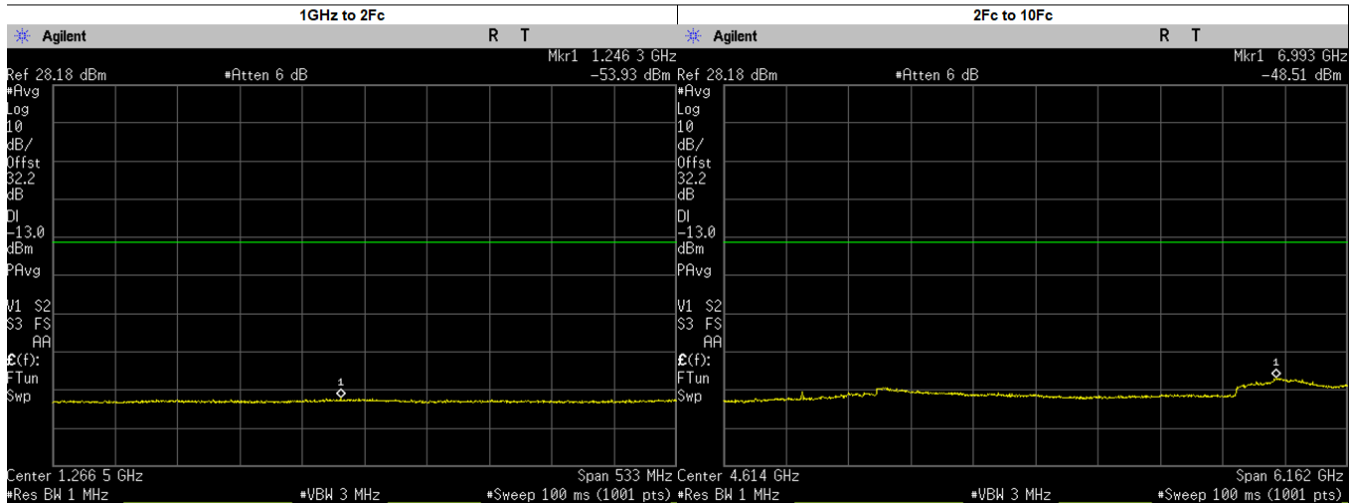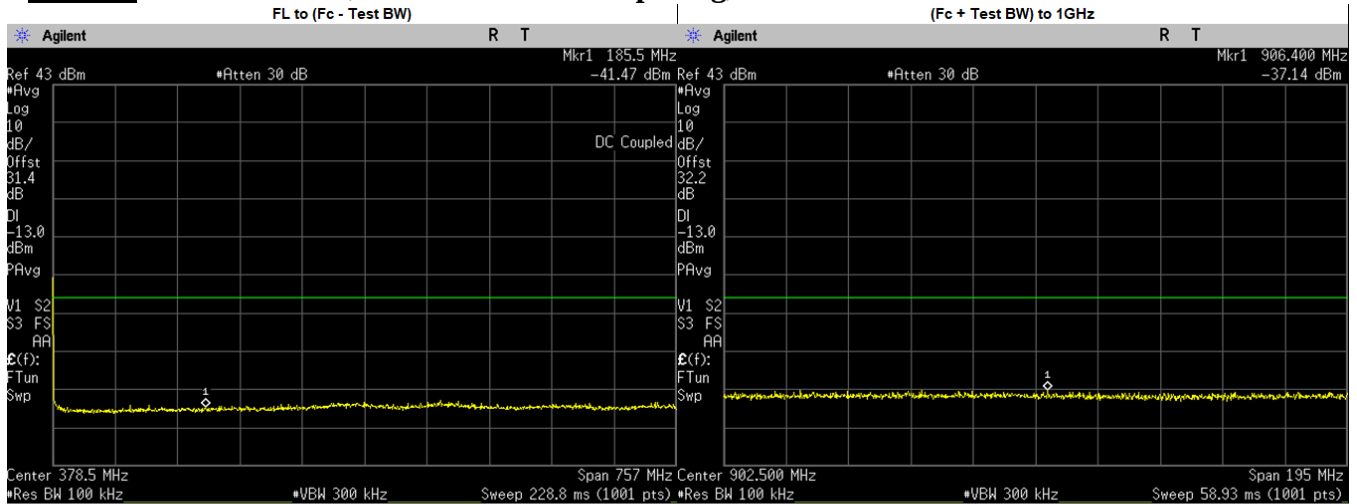



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	185.5000	-41.4690	-13.00	PASS
(Fc + Test BW) to 1GHz	906.4000	-37.1400	-13.00	PASS
1GHz to 2Fc	1246.2580	-53.9300	-13.00	PASS
2Fc to 10Fc	6992.6460	-48.5100	-13.00	PASS
	1538.0250	-54.7706	-13.00	PASS
	2307.0370	-52.9668	-13.00	PASS
	3076.0500	-51.3981	-13.00	PASS
	3845.0620	-52.5701	-13.00	PASS
	4614.0750	-52.9800	-13.00	PASS
	5383.0870	-53.7546	-13.00	PASS
	6152.1000	-53.1439	-13.00	PASS
	6921.1130	-49.9213	-13.00	PASS
	7690.1250	-50.5200	-13.00	PASS

Analog: 769.0875. MHz, 25.0 kHz Channel Spacing, Max Power

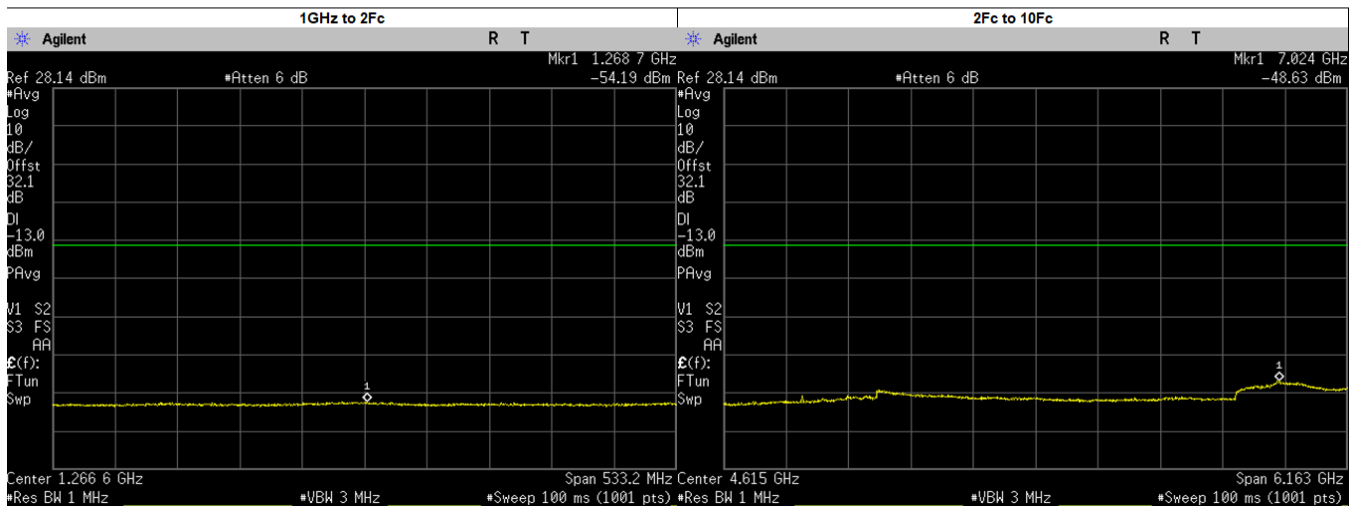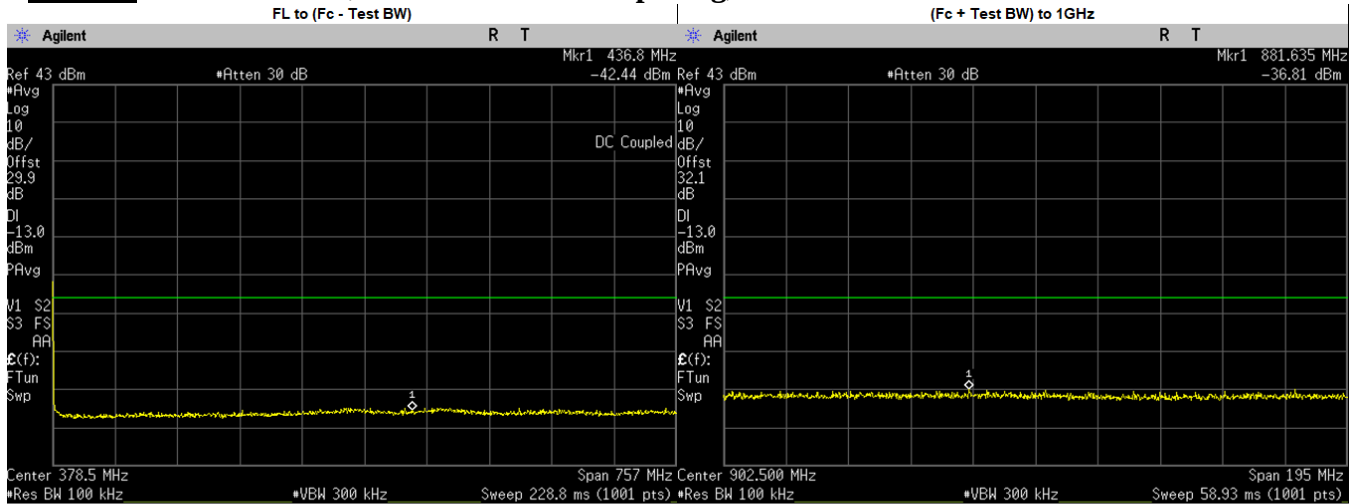


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	436.8000	-42.4380	-13.00	PASS
(Fc + Test BW) to 1GHz	881.6350	-36.8100	-13.00	PASS
1GHz to 2Fc	1268.7200	-54.1900	-13.00	PASS
2Fc to 10Fc	7024.1410	-48.6300	-13.00	PASS
	1538.1750	-54.6479	-13.00	PASS
	2307.2620	-53.2079	-13.00	PASS
	3076.3500	-51.5415	-13.00	PASS
	3845.4370	-52.8993	-13.00	PASS
	4614.5250	-53.2460	-13.00	PASS
	5383.6130	-53.6618	-13.00	PASS
	6152.7000	-53.2750	-13.00	PASS
	6921.7880	-50.0206	-13.00	PASS
	7690.8750	-50.5528	-13.00	PASS

Analog: 774.8875. MHz, 25.0 kHz Channel Spacing, Max Power

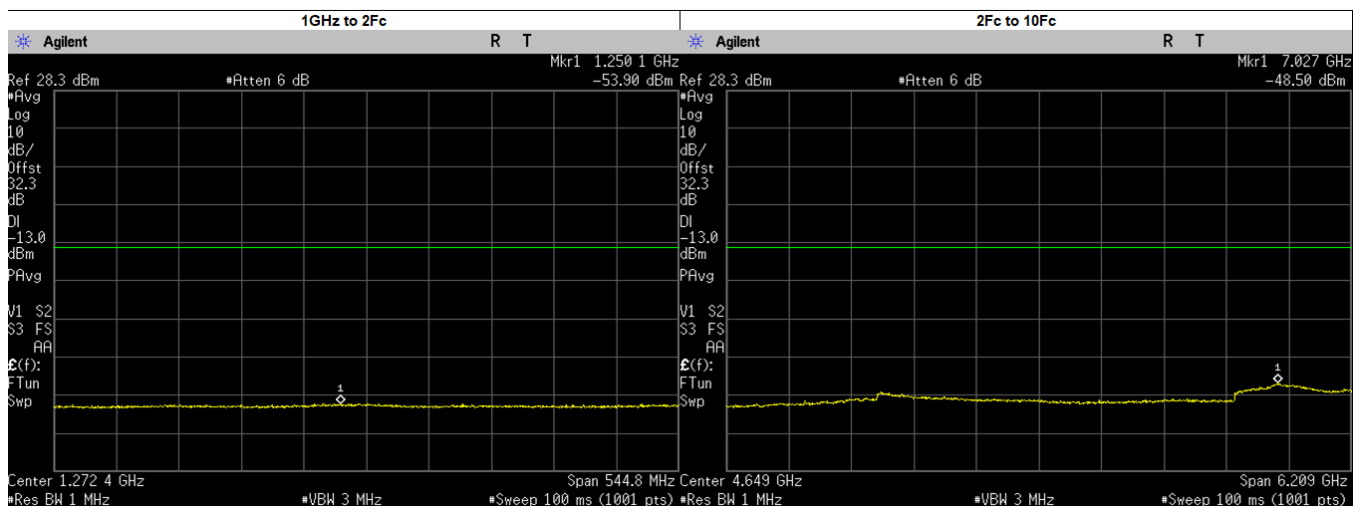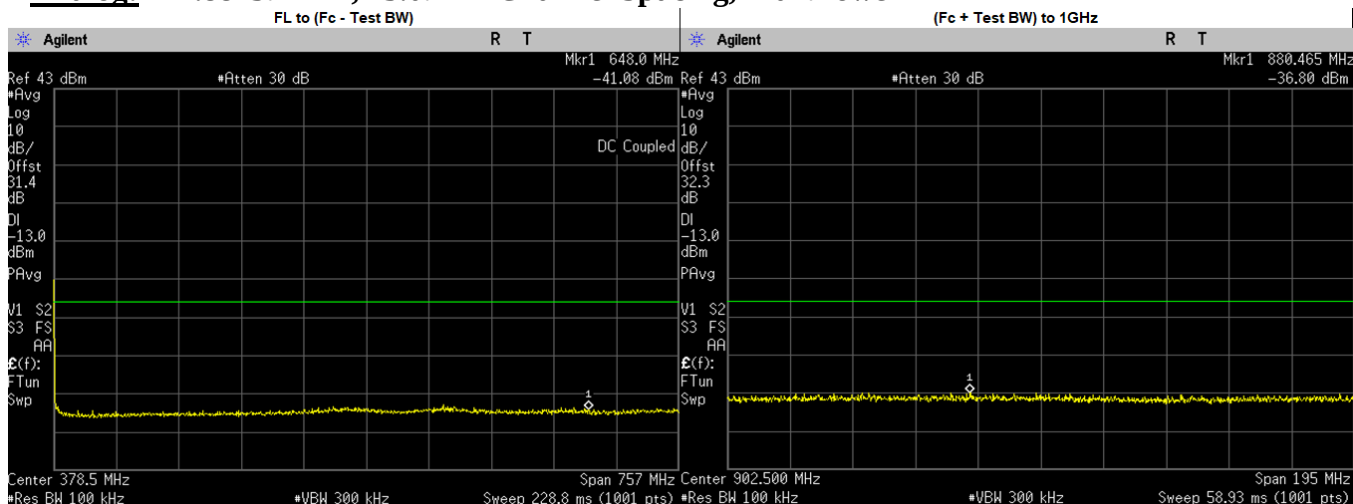


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	648.0000	-41.0800	-13.00	PASS
(Fc + Test BW) to 1GHz	880.4650	-36.8000	-13.00	PASS
1GHz to 2Fc	1250.0520	-53.9000	-13.00	PASS
2Fc to 10Fc	7027.4100	-48.5000	-13.00	PASS
	1549.7750	-54.5826	-13.00	PASS
	2324.6620	-53.5351	-13.00	PASS
	3099.5500	-51.2838	-13.00	PASS
	3874.4370	-52.6925	-13.00	PASS
	4649.3250	-53.1460	-13.00	PASS
	5424.2120	-53.5429	-13.00	PASS
	6199.1000	-53.2492	-13.00	PASS
	6973.9880	-49.2049	-13.00	PASS
	7748.8750	-50.3895	-13.00	PASS

Analog: 792.0125. MHz, 25.0 kHz Channel Spacing, Max Power
Not for FCC review

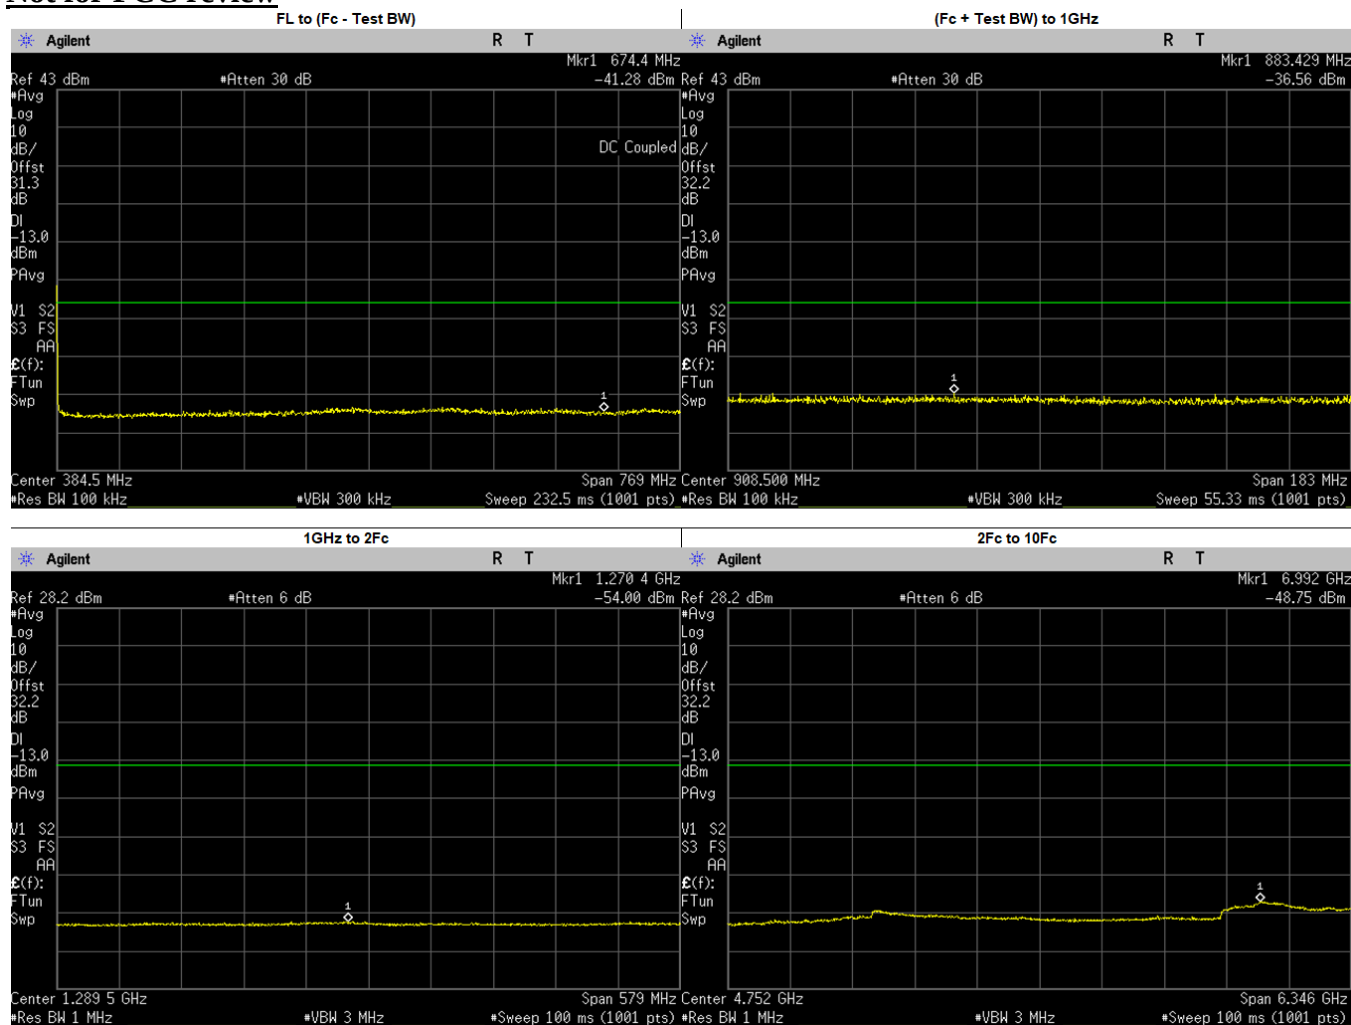



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	674.4000	-41.2780	-13.00	PASS
(Fc + Test BW) to 1GHz	883.4290	-36.5600	-13.00	PASS
1GHz to 2Fc	1270.4050	-54.0000	-13.00	PASS
2Fc to 10Fc	6992.2480	-48.7500	-13.00	PASS
	1584.0250	-54.7940	-13.00	PASS
	2376.0370	-53.7816	-13.00	PASS
	3168.0500	-51.6705	-13.00	PASS
	3960.0620	-53.1061	-13.00	PASS
	4752.0750	-53.2570	-13.00	PASS
	5544.0870	-53.5978	-13.00	PASS
	6336.1000	-53.4632	-13.00	PASS
	7128.1130	-49.3401	-13.00	PASS
	7920.1250	-50.5775	-13.00	PASS

Analog: 794.0125. MHz, 25.0 kHz Channel Spacing, Max Power
Not for FCC review

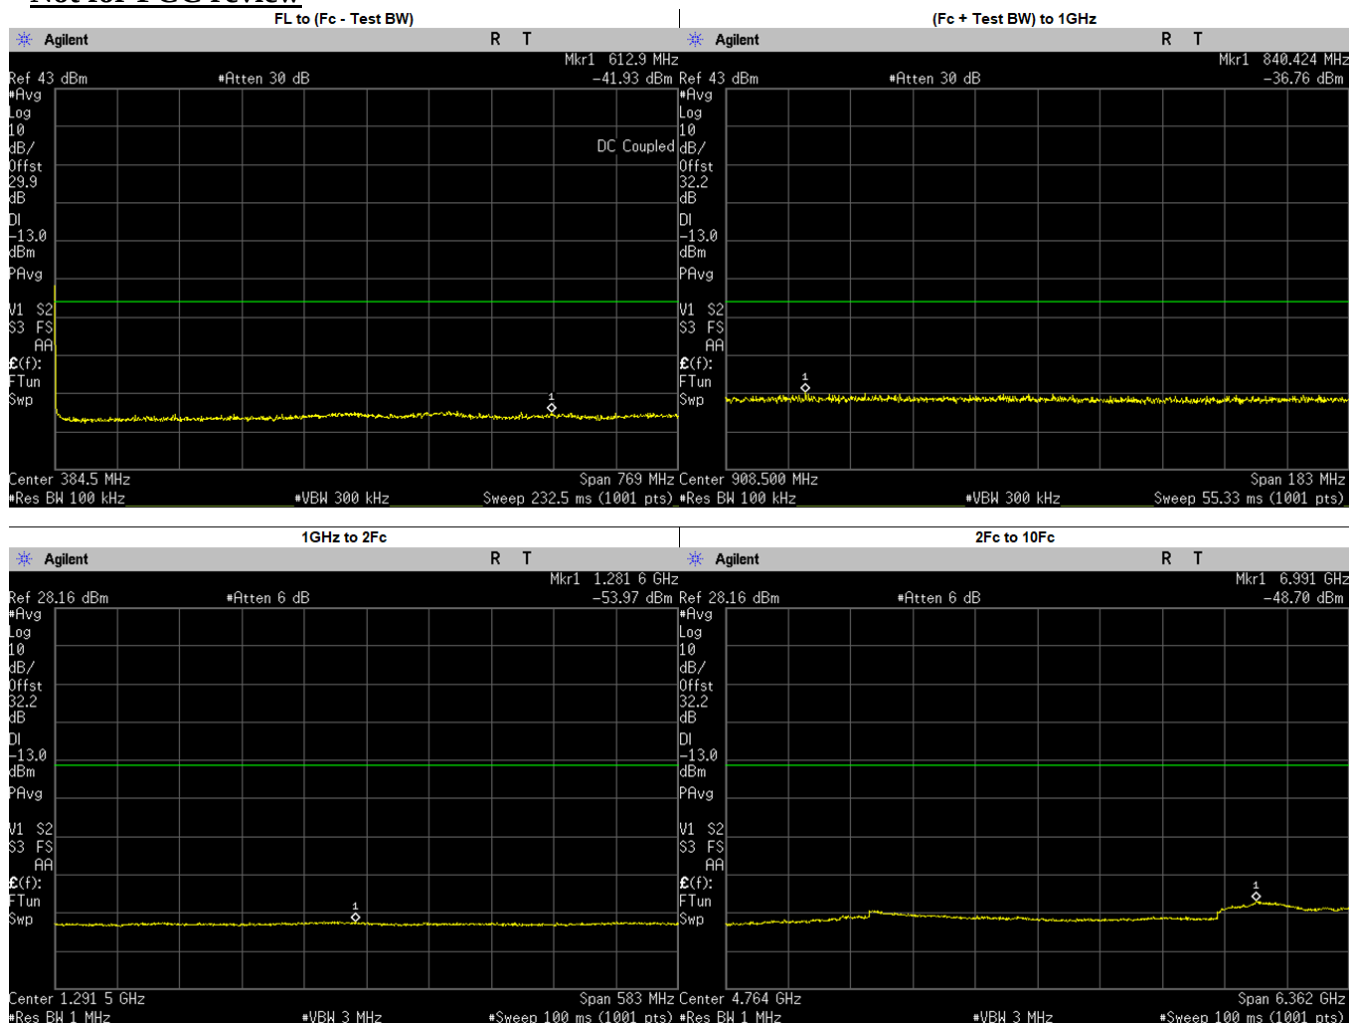



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	612.9000	-41.9290	-13.00	PASS
(Fc + Test BW) to 1GHz	840.4240	-36.7600	-13.00	PASS
1GHz to 2Fc	1281.6010	-53.9700	-13.00	PASS
2Fc to 10Fc	6990.8100	-48.7000	-13.00	PASS
	1588.0250	-54.9318	-13.00	PASS
	2382.0370	-53.9103	-13.00	PASS
	3176.0500	-51.6349	-13.00	PASS
	3970.0620	-53.0235	-13.00	PASS
	4764.0750	-53.3800	-13.00	PASS
	5558.0870	-53.6718	-13.00	PASS
	6352.1000	-53.4554	-13.00	PASS
	7146.1130	-49.5715	-13.00	PASS
	7940.1250	-50.6007	-13.00	PASS

Analog: 799.0875. MHz, 25.0 kHz Channel Spacing, Max Power

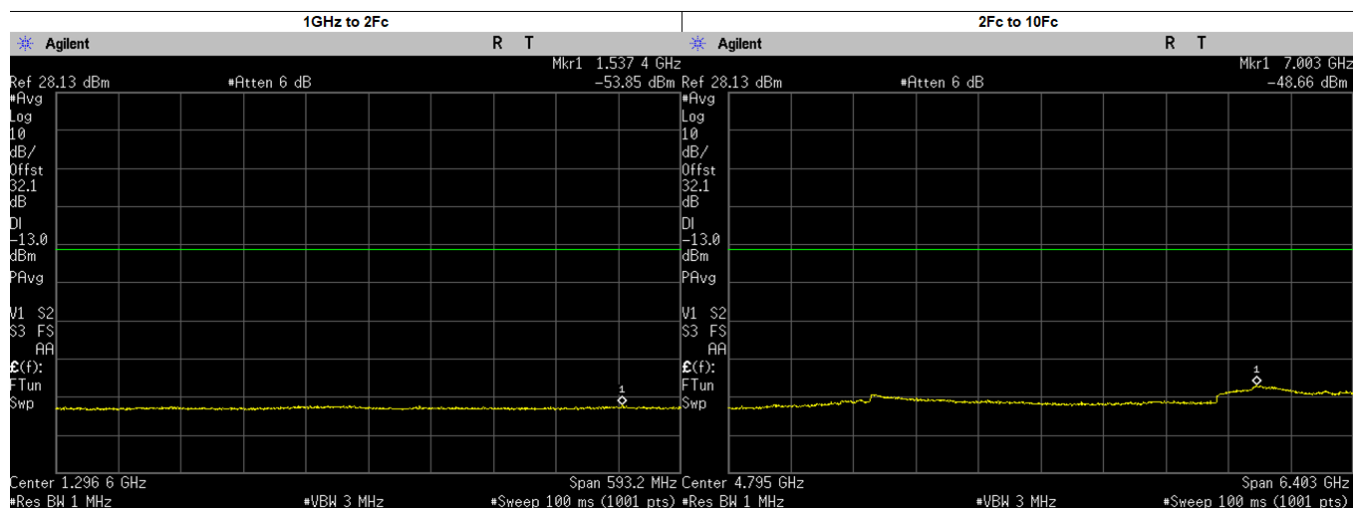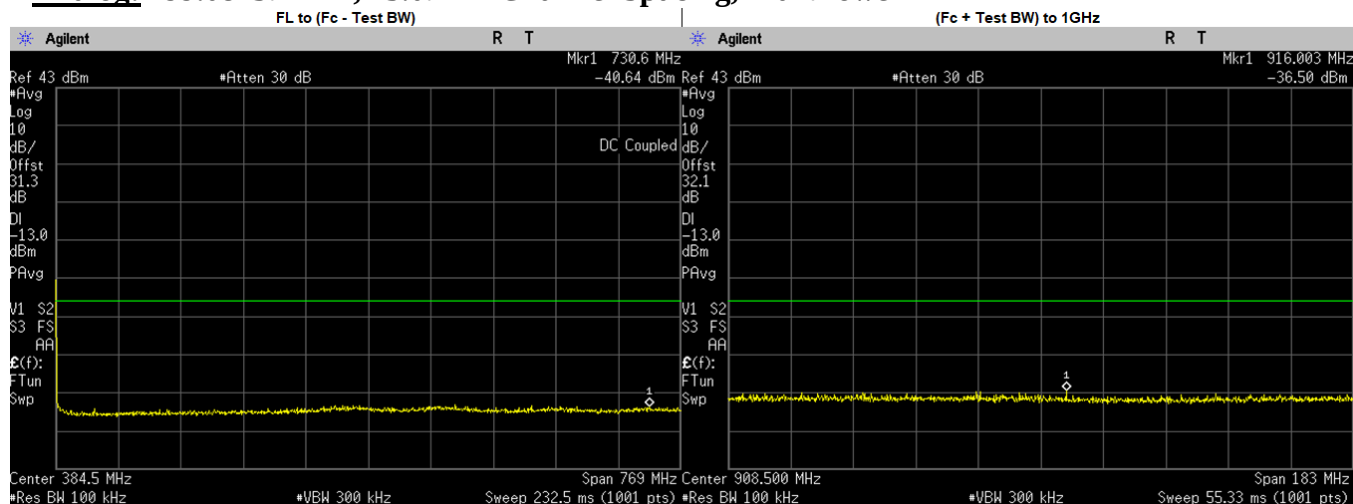

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	730.6000	-40.6370	-13.00	PASS
(Fc + Test BW) to 1GHz	916.0030	-36.5000	-13.00	PASS
1GHz to 2Fc	1537.4170	-53.8500	-13.00	PASS
2Fc to 10Fc	7003.4570	-48.6600	-13.00	PASS
	1598.1750	-54.5786	-13.00	PASS
	2397.2620	-54.1365	-13.00	PASS
	3196.3500	-51.8181	-13.00	PASS
	3995.4370	-53.2734	-13.00	PASS
	4794.5250	-53.5990	-13.00	PASS
	5593.6130	-53.4671	-13.00	PASS
	6392.7000	-53.4401	-13.00	PASS
	7191.7880	-49.3131	-13.00	PASS
	7990.8750	-50.8979	-13.00	PASS


Analog: 804.9125. MHz, 25.0 kHz Channel Spacing, Max Power

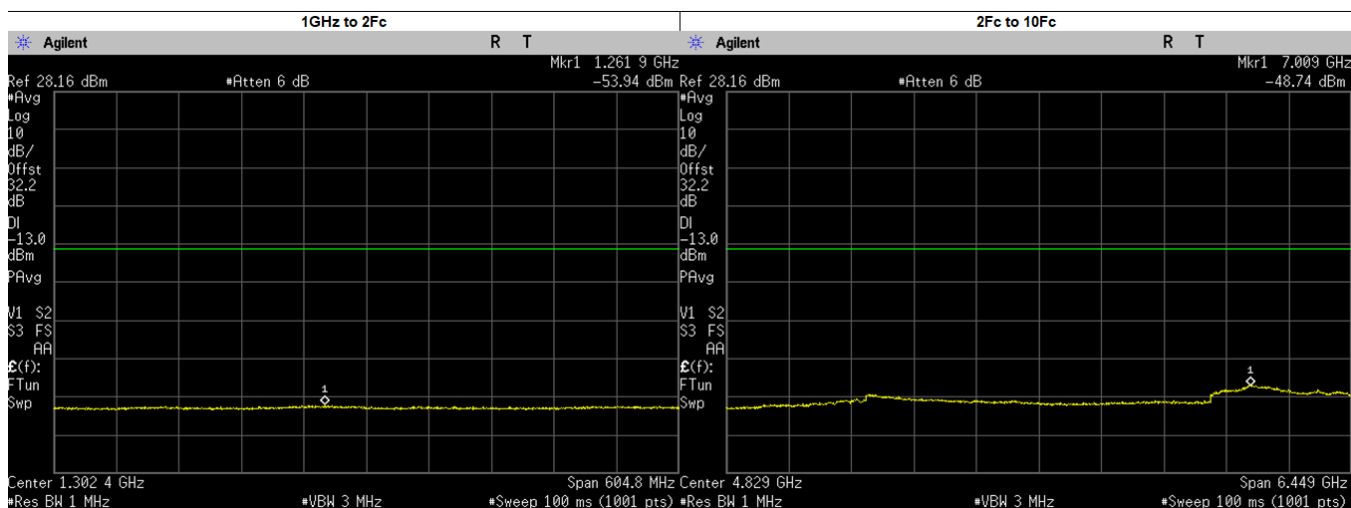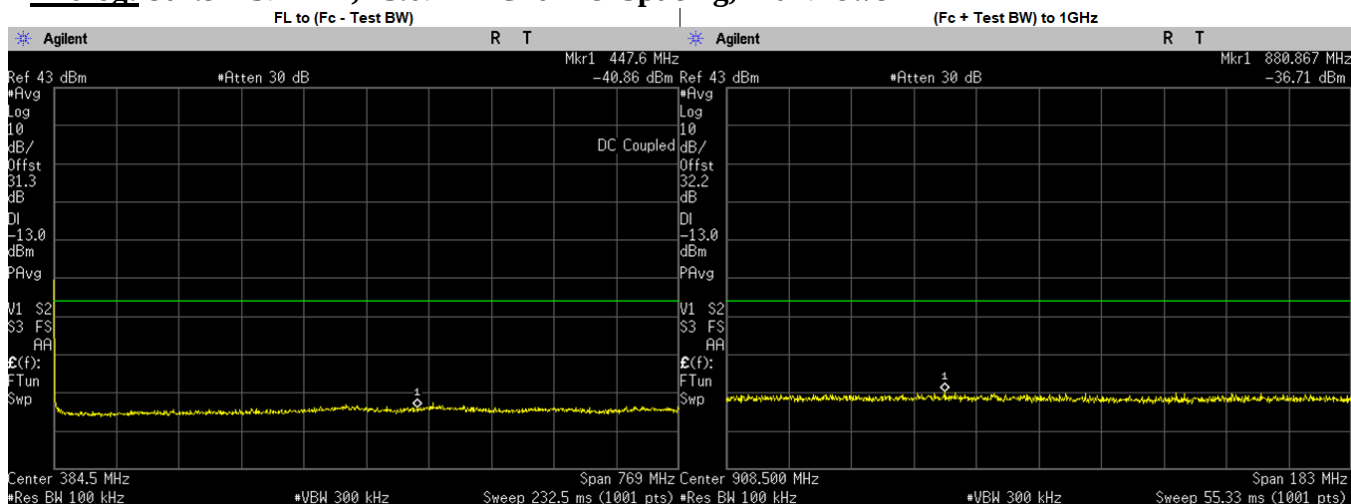

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	447.6000	-40.8580	-13.00	PASS
(Fc + Test BW) to 1GHz	880.8670	-36.7100	-13.00	PASS
1GHz to 2Fc	1261.8890	-53.9400	-13.00	PASS
2Fc to 10Fc	7009.3380	-48.7400	-13.00	PASS
	1609.8250	-54.5214	-13.00	PASS
	2414.7380	-54.1315	-13.00	PASS
	3219.6500	-51.9106	-13.00	PASS
	4024.5620	-53.3062	-13.00	PASS
	4829.4750	-53.5050	-13.00	PASS
	5634.3870	-53.3836	-13.00	PASS
	6439.3000	-53.3758	-13.00	PASS
	7244.2120	-49.7285	-13.00	PASS
	8049.1250	-51.4247	-13.00	PASS


6.10.3. Test Result (Digital)

Digital : 762.0125. MHz, 12.5 kHz Channel Spacing, Max.Power
Not for FCC review

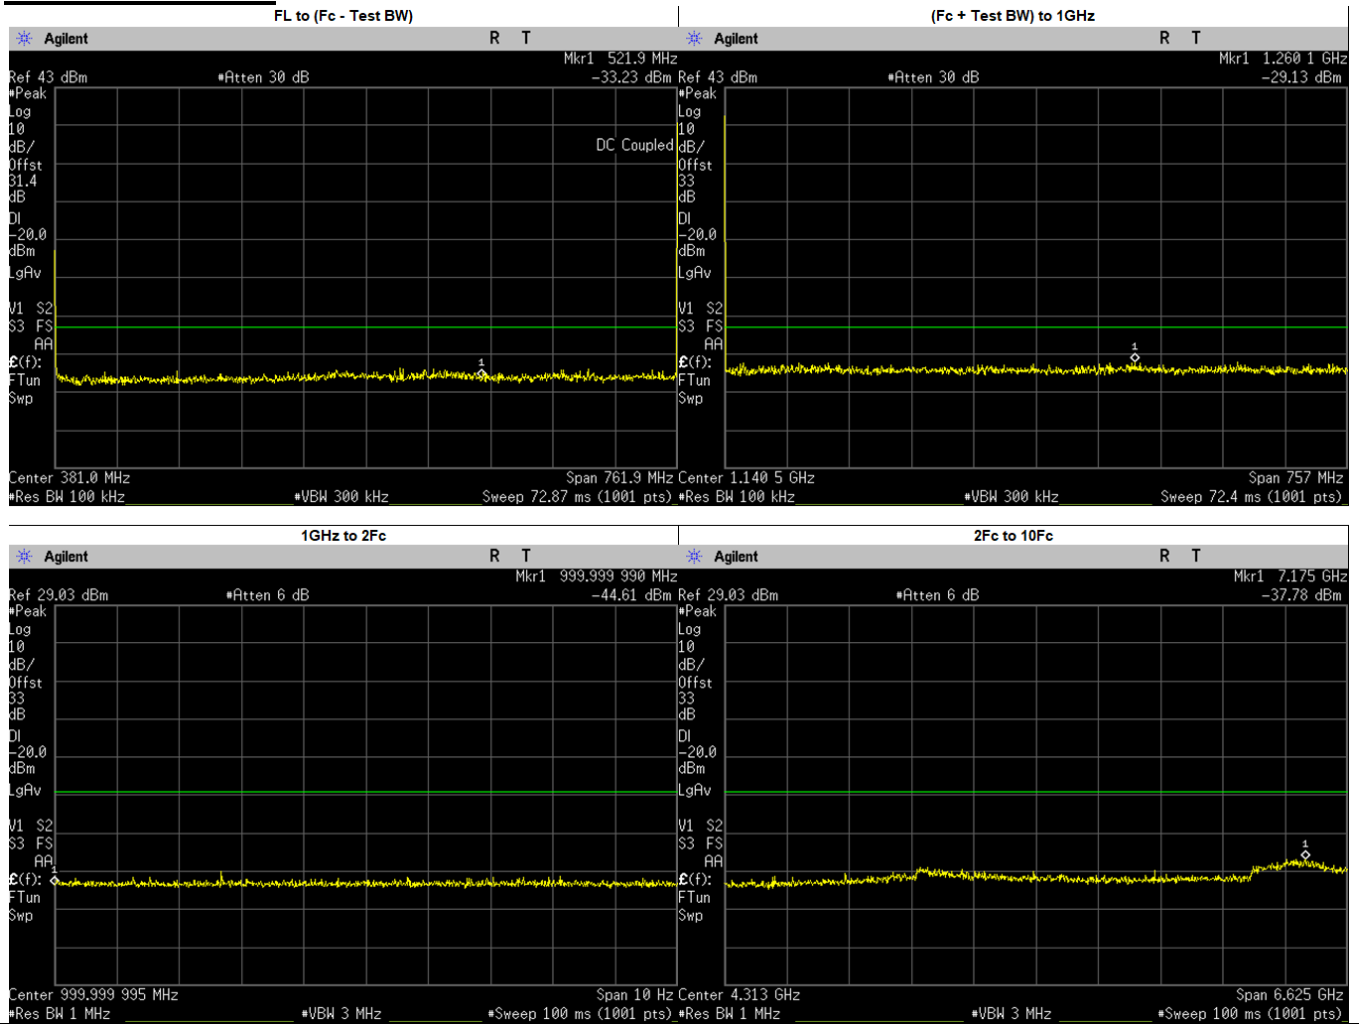



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	521.9000	-33.2330	-20.00	PASS
(Fc + Test BW) to 1GHz	1260.1460	-29.1300	-20.00	PASS
1GHz to 2Fc	1000.0000	-44.6100	-20.00	PASS
2Fc to 10Fc	7175.0000	-37.7800	-20.00	PASS
	2286.0370	-41.6431	-20.00	PASS
	3048.0500	-40.4986	-20.00	PASS
	3810.0620	-42.5120	-20.00	PASS
	4572.0750	-42.6934	-20.00	PASS
	5334.0870	-43.3989	-20.00	PASS
	6096.1000	-42.8217	-20.00	PASS
	7620.1250	-40.5174	-20.00	PASS
	7174.6170	-37.7800	-20.00	PASS
	6858.1130	-39.7373	-20.00	PASS

Digital : 764.0125. MHz, 12.5 kHz Channel Spacing, Max.Power
Not for FCC review

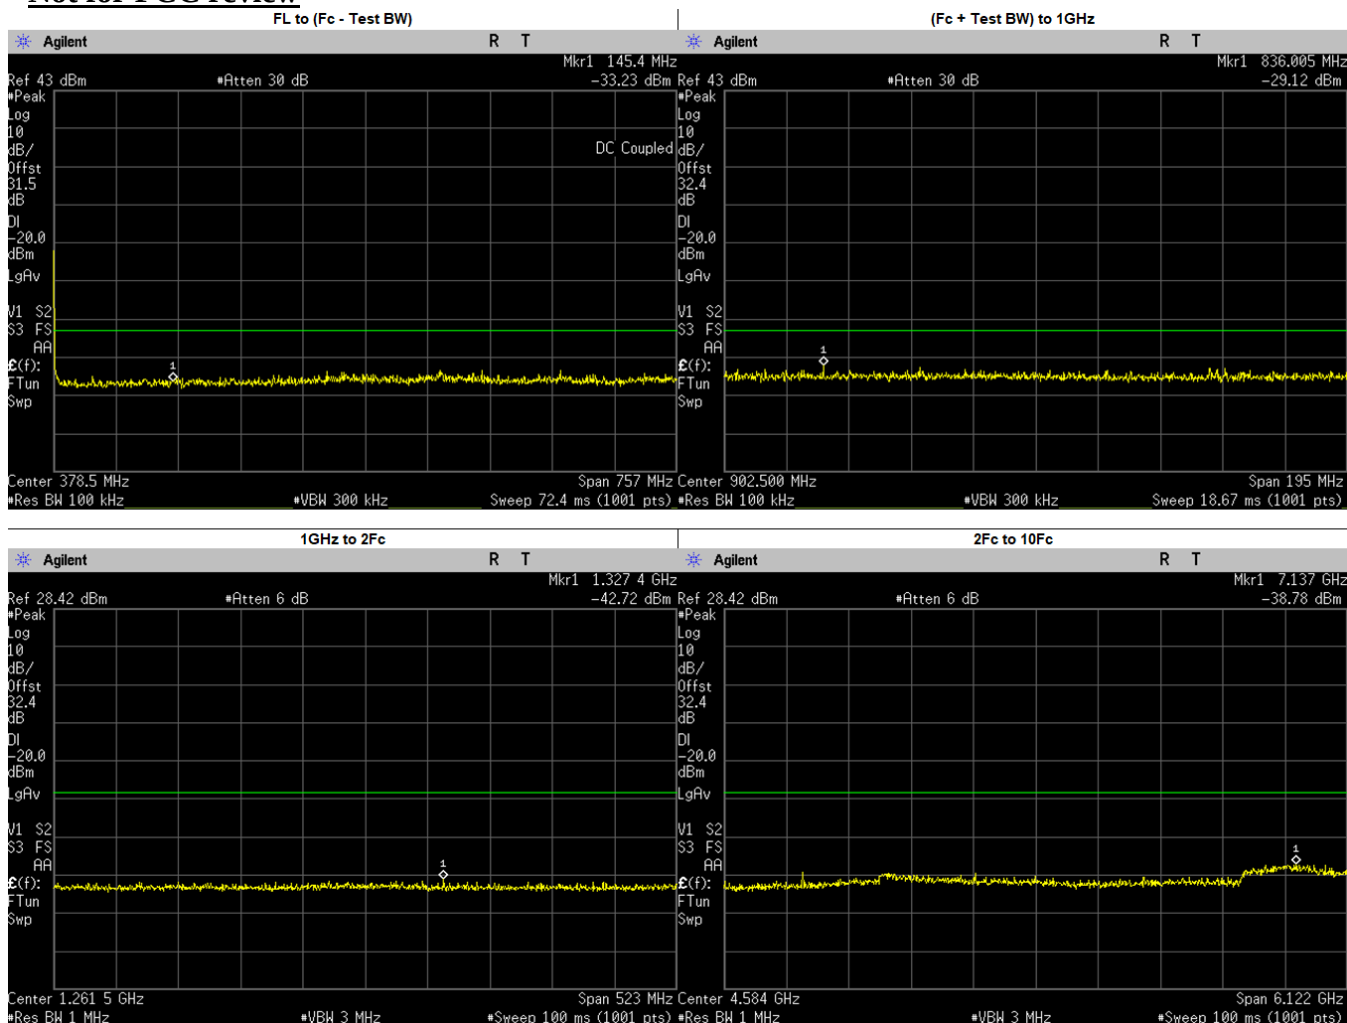



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	145.4000	-33.2320	-20.00	PASS
(Fc + Test BW) to 1GHz	836.0050	-29.1200	-20.00	PASS
1GHz to 2Fc	1327.4140	-42.7200	-20.00	PASS
2Fc to 10Fc	7137.0000	-38.7800	-20.00	PASS
	2292.0370	-42.2787	-20.00	PASS
	3056.0500	-41.8452	-20.00	PASS
	3820.0620	-42.3853	-20.00	PASS
	4584.0750	-43.3850	-20.00	PASS
	5348.0870	-44.4526	-20.00	PASS
	6112.1000	-43.8633	-20.00	PASS
	6876.1130	-40.5101	-20.00	PASS
	7640.1250	-41.3919	-20.00	PASS
	7136.9910	-38.7800	-20.00	PASS

Digital: 769.0125 MHz, 12.5 kHz Channel Spacing, Max Power

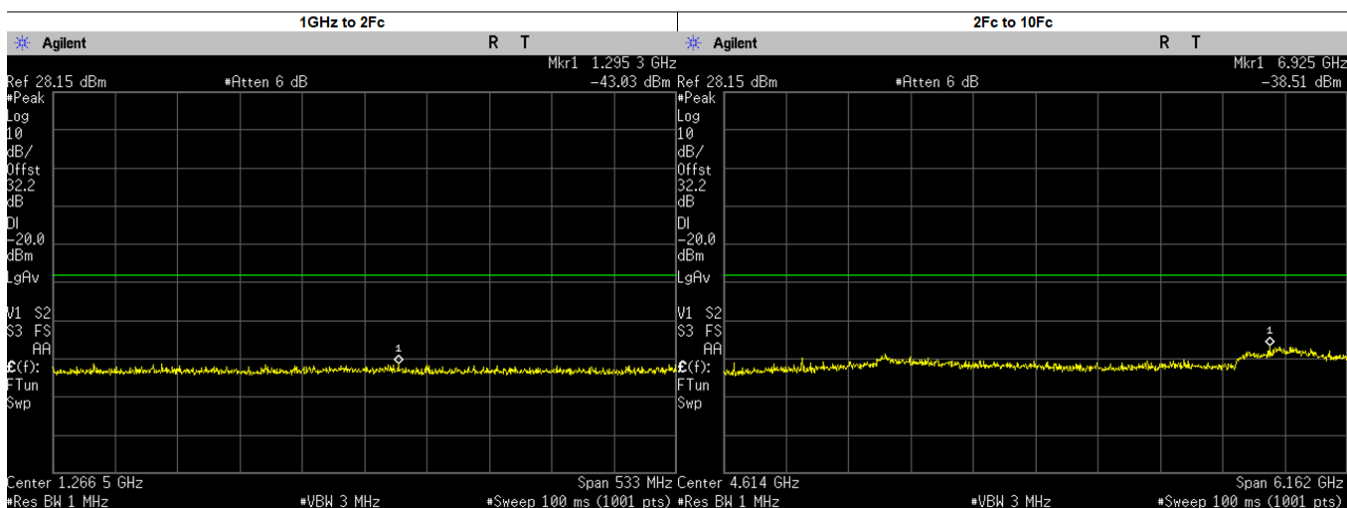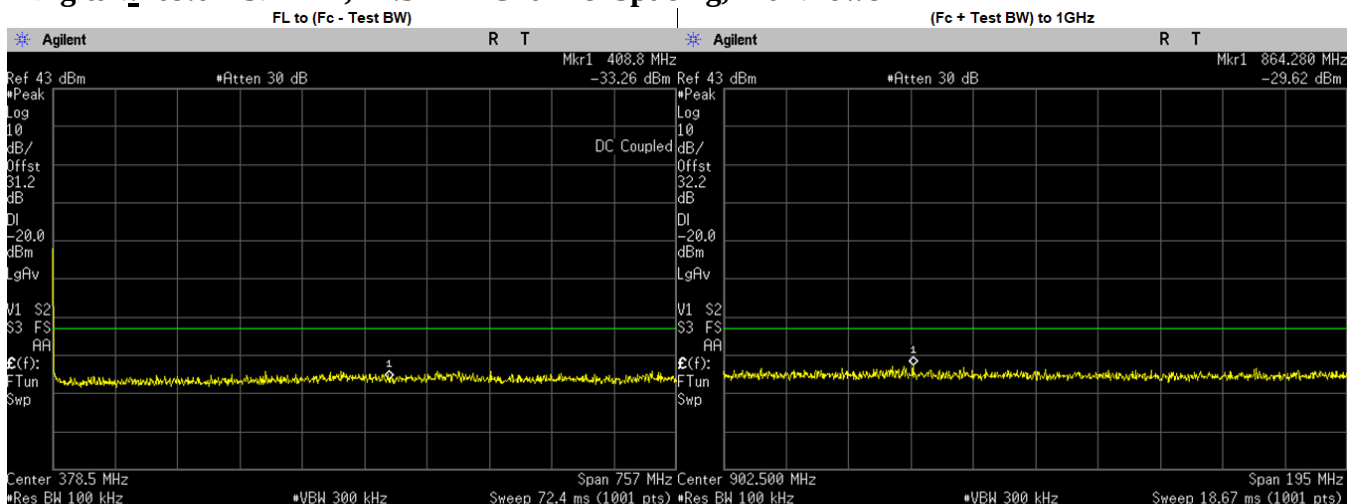



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	408.8000	-33.2580	-20.00	PASS
(Fc + Test BW) to 1GHz	864.2800	-29.6200	-20.00	PASS
1GHz to 2Fc	1295.2960	-43.0300	-20.00	PASS
2Fc to 10Fc	6925.0000	-38.5100	-20.00	PASS
	2307.0370	-42.4314	-20.00	PASS
	3076.0500	-42.1585	-20.00	PASS
	3845.0620	-42.9959	-20.00	PASS
	4614.0750	-43.7770	-20.00	PASS
	5383.0870	-44.5093	-20.00	PASS
	6152.1000	-44.1165	-20.00	PASS
	7690.1250	-41.9720	-20.00	PASS
	6924.8630	-38.5100	-20.00	PASS
	6921.1130	-39.8197	-20.00	PASS

Digital : 769.0875. MHz, 12.5 kHz Channel Spacing, Max Power

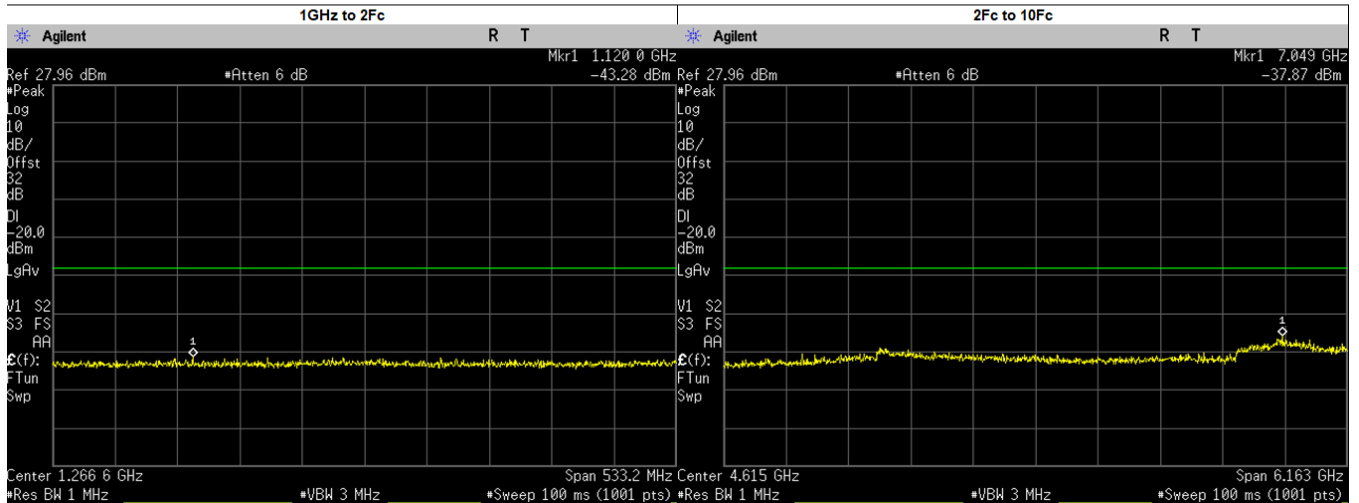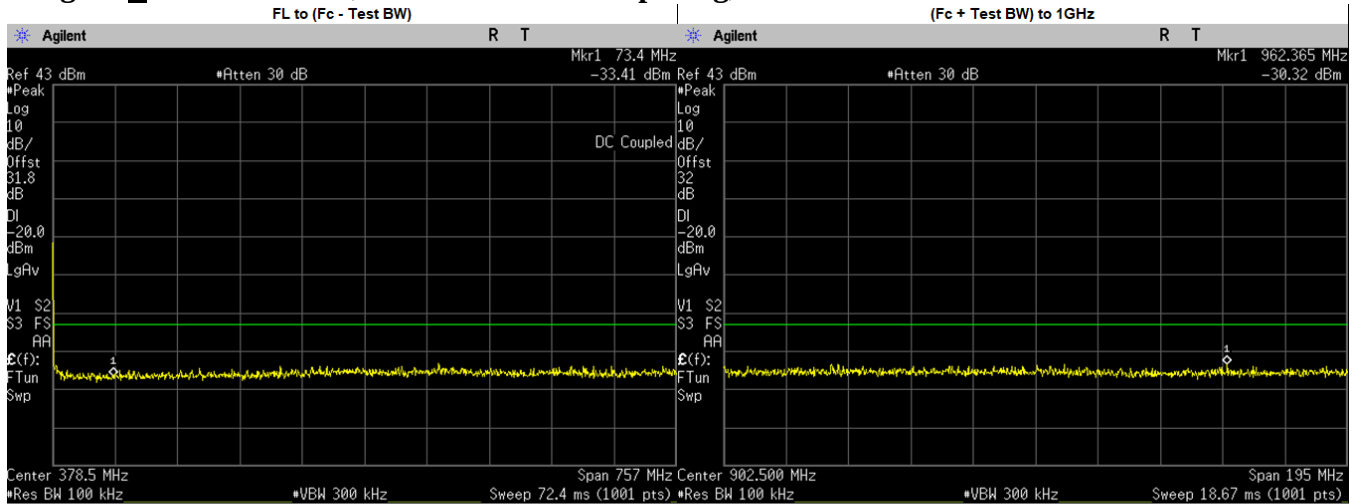


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	73.4000	-33.4130	-20.00	PASS
(Fc + Test BW) to 1GHz	962.3650	-30.3200	-20.00	PASS
1GHz to 2Fc	1119.9640	-43.2800	-20.00	PASS
2Fc to 10Fc	7049.0000	-37.8700	-20.00	PASS
	2307.2620	-43.4839	-20.00	PASS
	3076.3500	-41.5563	-20.00	PASS
	3845.4370	-43.4100	-20.00	PASS
	4614.5250	-44.3000	-20.00	PASS
	5383.6130	-44.3987	-20.00	PASS
	6152.7000	-43.9559	-20.00	PASS
	6921.7880	-41.2400	-20.00	PASS
	7690.8750	-41.6055	-20.00	PASS
	7048.7920	-37.8700	-20.00	PASS

Digital : 774.8875. MHz, 12.5 kHz Channel Spacing, Max.Power

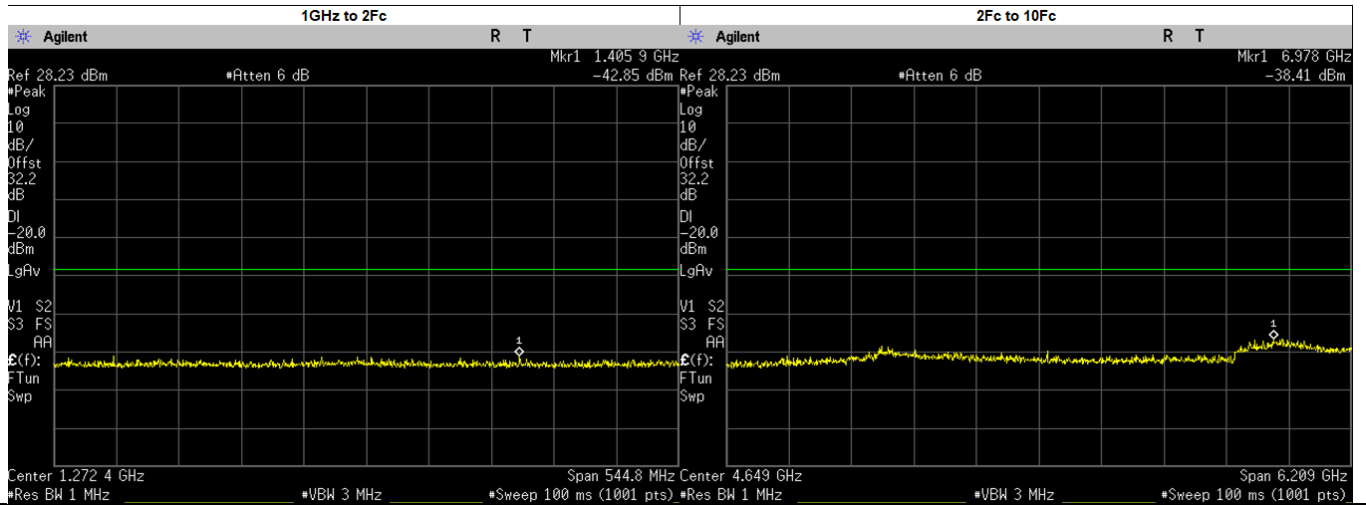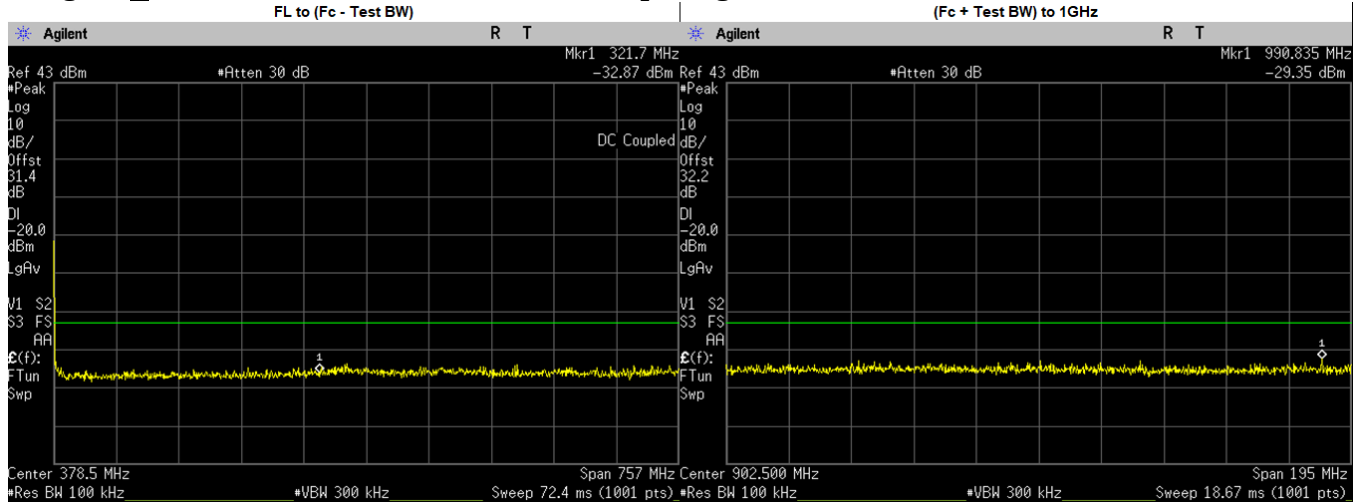


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	321.7000	-32.8740	-20.00	PASS
(Fc + Test BW) to 1GHz	990.8350	-29.3500	-20.00	PASS
1GHz to 2Fc	1405.8570	-42.8500	-20.00	PASS
2Fc to 10Fc	6978.0000	-38.4100	-20.00	PASS
	2324.6620	-44.0678	-20.00	PASS
	3099.5500	-42.0160	-20.00	PASS
	3874.4370	-42.0827	-20.00	PASS
	4649.3250	-43.8030	-20.00	PASS
	5424.2120	-44.1888	-20.00	PASS
	6199.1000	-43.8872	-20.00	PASS
	7748.8750	-41.2189	-20.00	PASS
	6977.7380	-38.4100	-20.00	PASS
	6973.9880	-38.9703	-20.00	PASS

Digital : 792.0125. MHz, 12.5 kHz Channel Spacing, Max.Power
Not for FCC review

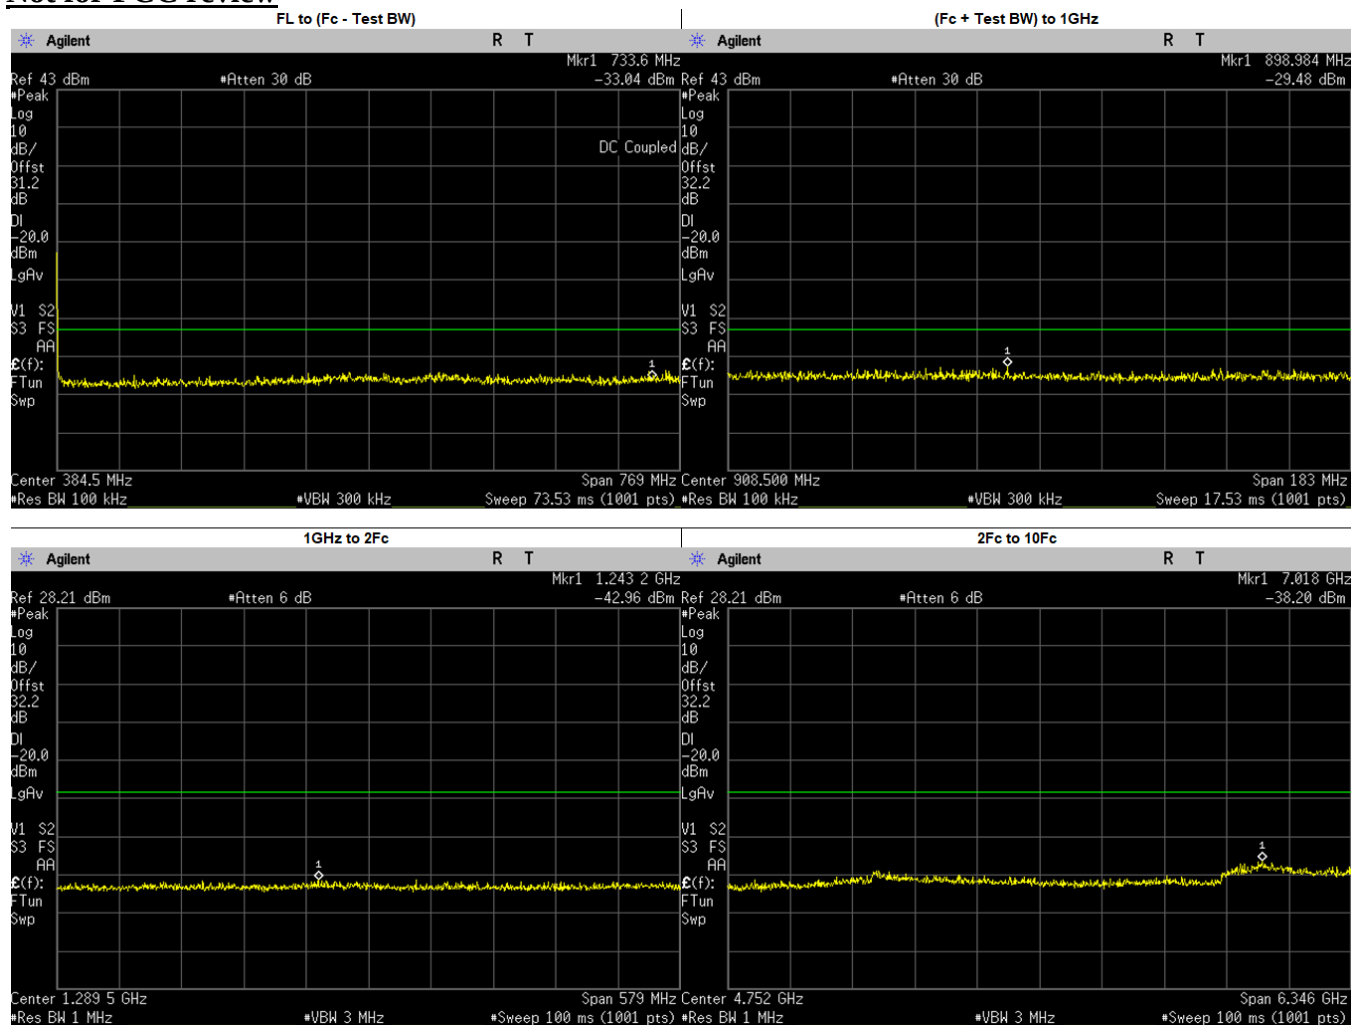



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	733.6000	-33.0430	-20.00	PASS
(Fc + Test BW) to 1GHz	898.9840	-29.4800	-20.00	PASS
1GHz to 2Fc	1243.1900	-42.9600	-20.00	PASS
2Fc to 10Fc	7018.0000	-38.2000	-20.00	PASS
	2376.0370	-44.8173	-20.00	PASS
	3168.0500	-41.7559	-20.00	PASS
	3960.0620	-43.8239	-20.00	PASS
	4752.0750	-44.2970	-20.00	PASS
	5544.0870	-43.4280	-20.00	PASS
	6336.1000	-43.5079	-20.00	PASS
	7128.1130	-40.0089	-20.00	PASS
	7920.1250	-41.5691	-20.00	PASS
	7017.6330	-38.2000	-20.00	PASS

Digital : 794.0125. MHz, 12.5 kHz Channel Spacing, Max.Power
Not for FCC review

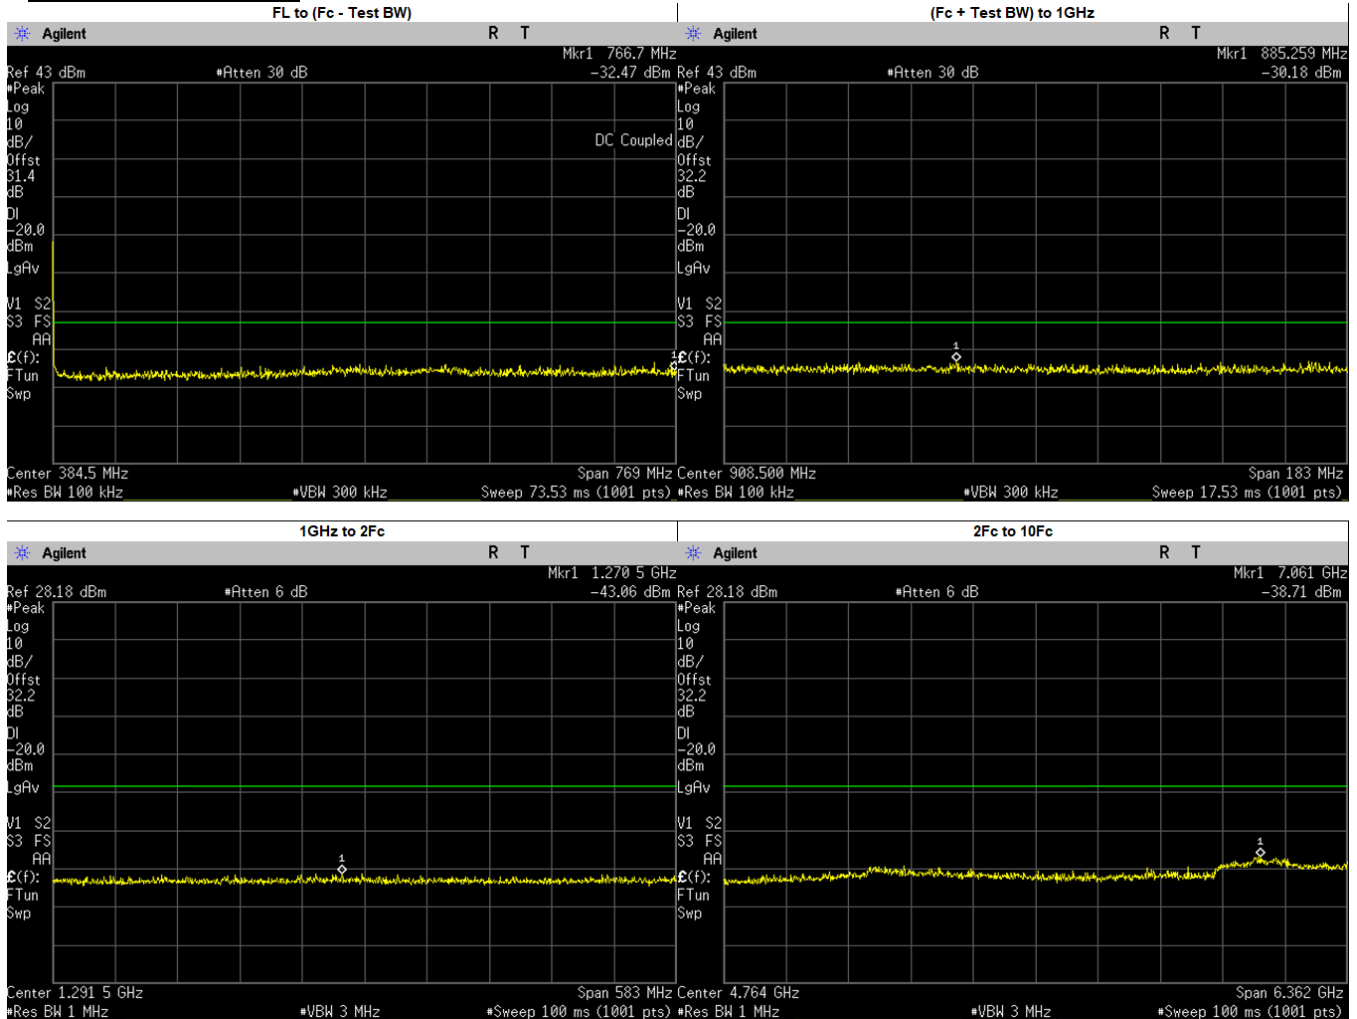



Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	766.7000	-32.4650	-20.00	PASS
(Fc + Test BW) to 1GHz	885.2590	-30.1800	-20.00	PASS
1GHz to 2Fc	1270.5240	-43.0600	-20.00	PASS
2Fc to 10Fc	7061.0000	-38.7100	-20.00	PASS
	2382.0370	-44.0650	-20.00	PASS
	3176.0500	-42.4801	-20.00	PASS
	3970.0620	-43.1650	-20.00	PASS
	4764.0750	-43.5500	-20.00	PASS
	5558.0870	-44.1005	-20.00	PASS
	6352.1000	-43.2495	-20.00	PASS
	7940.1250	-40.8821	-20.00	PASS
	7060.7930	-38.7100	-20.00	PASS
	7146.1130	-39.9422	-20.00	PASS

Digital, 799.0875. MHz, 12.5 kHz Channel Spacing, Max.Power

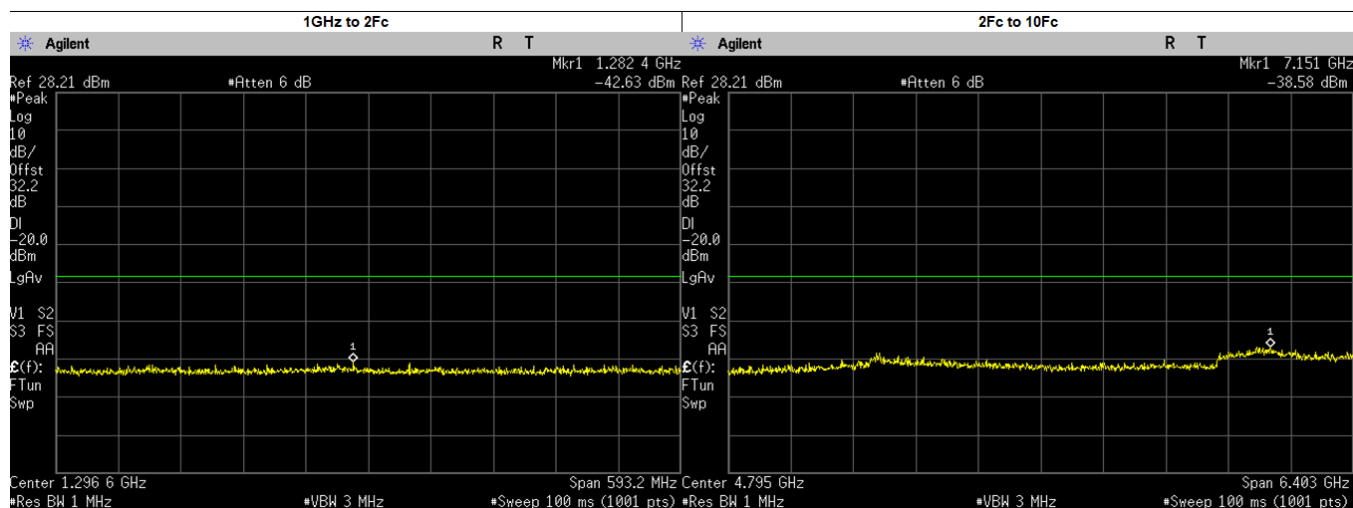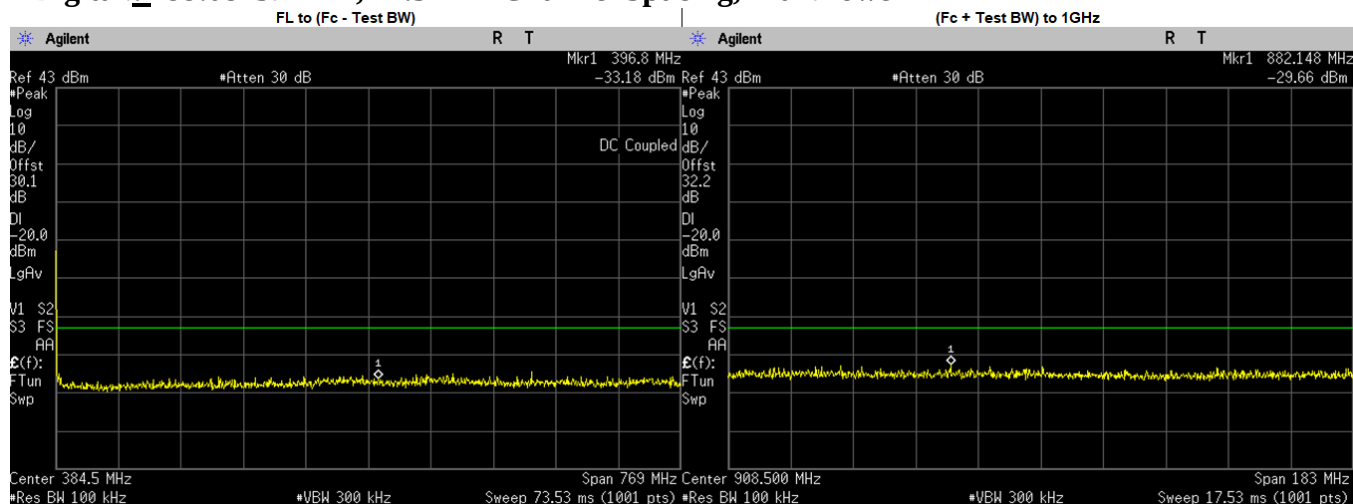

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	396.8000	-33.1760	-20.00	PASS
(Fc + Test BW) to 1GHz	882.1480	-29.6600	-20.00	PASS
1GHz to 2Fc	1282.3510	-42.6300	-20.00	PASS
2Fc to 10Fc	7151.0000	-38.5800	-20.00	PASS
	2397.2620	-44.6269	-20.00	PASS
	3196.3500	-42.4286	-20.00	PASS
	3995.4370	-43.6506	-20.00	PASS
	4794.5250	-43.8850	-20.00	PASS
	5593.6130	-43.7467	-20.00	PASS
	6392.7000	-43.1783	-20.00	PASS
	7990.8750	-41.4682	-20.00	PASS
	7150.7190	-38.5900	-20.00	PASS
	7191.7880	-39.8526	-20.00	PASS

Digital : 804.9125. MHz, 12.5 kHz Channel Spacing, Max.Power

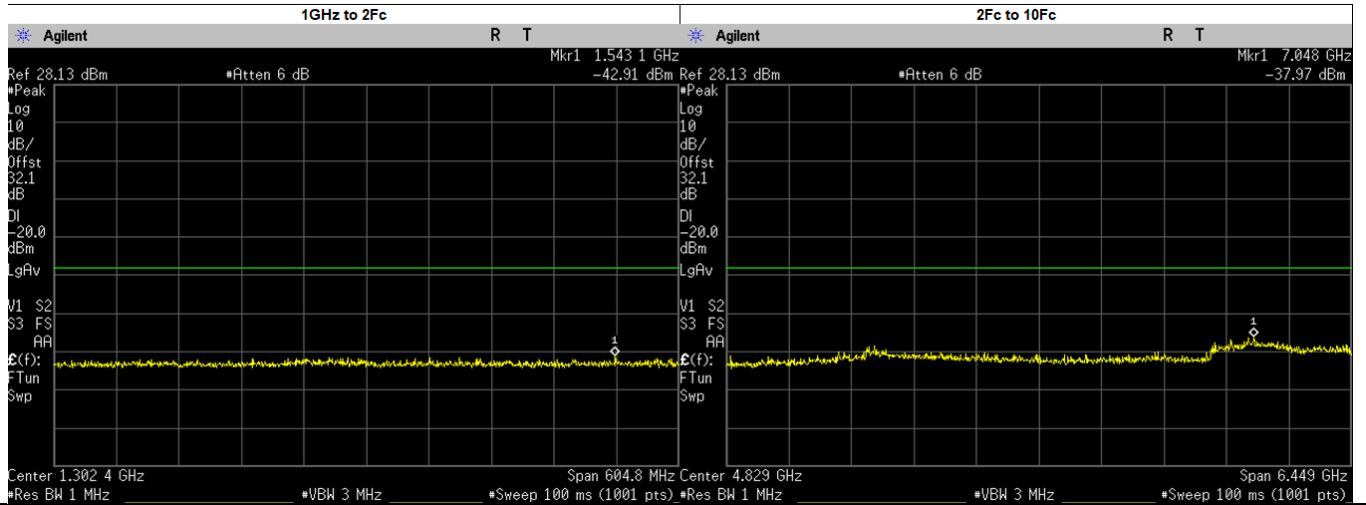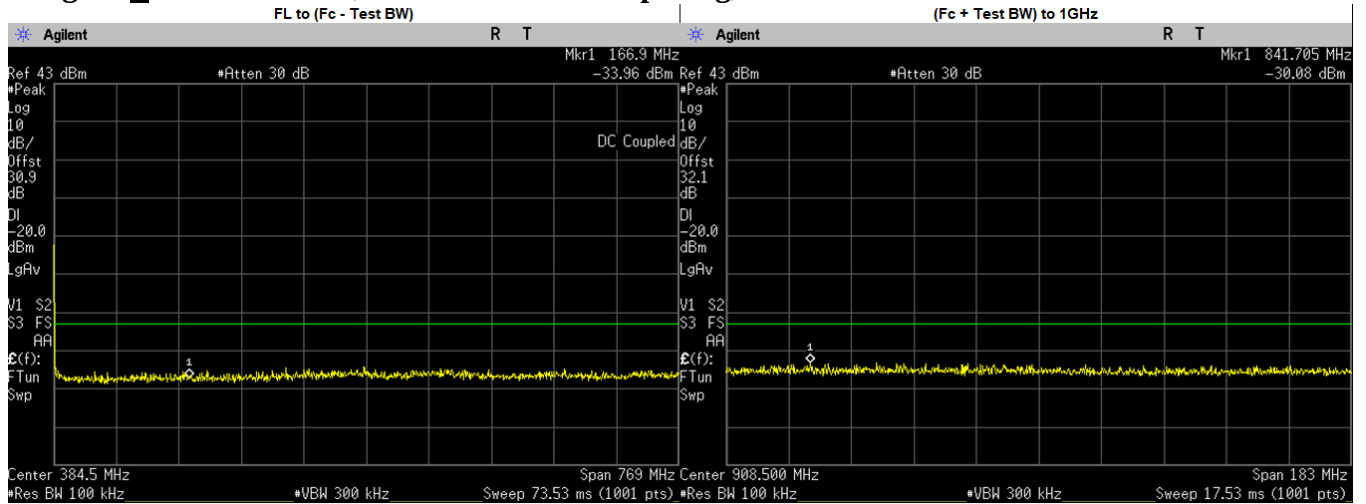

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	166.9000	-33.9610	-20.00	PASS
(Fc + Test BW) to 1GHz	841.7050	-30.0800	-20.00	PASS
1GHz to 2Fc	1543.1330	-42.9100	-20.00	PASS
2Fc to 10Fc	7048.0000	-37.9700	-20.00	PASS
	2414.7380	-44.3965	-20.00	PASS
	3219.6500	-41.9512	-20.00	PASS
	4024.5620	-43.7426	-20.00	PASS
	4829.4750	-44.7560	-20.00	PASS
	5634.3870	-44.4828	-20.00	PASS
	6439.3000	-43.9758	-20.00	PASS
	8049.1250	-42.0568	-20.00	PASS
	7048.0340	-37.9700	-20.00	PASS
	7244.2120	-39.8113	-20.00	PASS