



Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

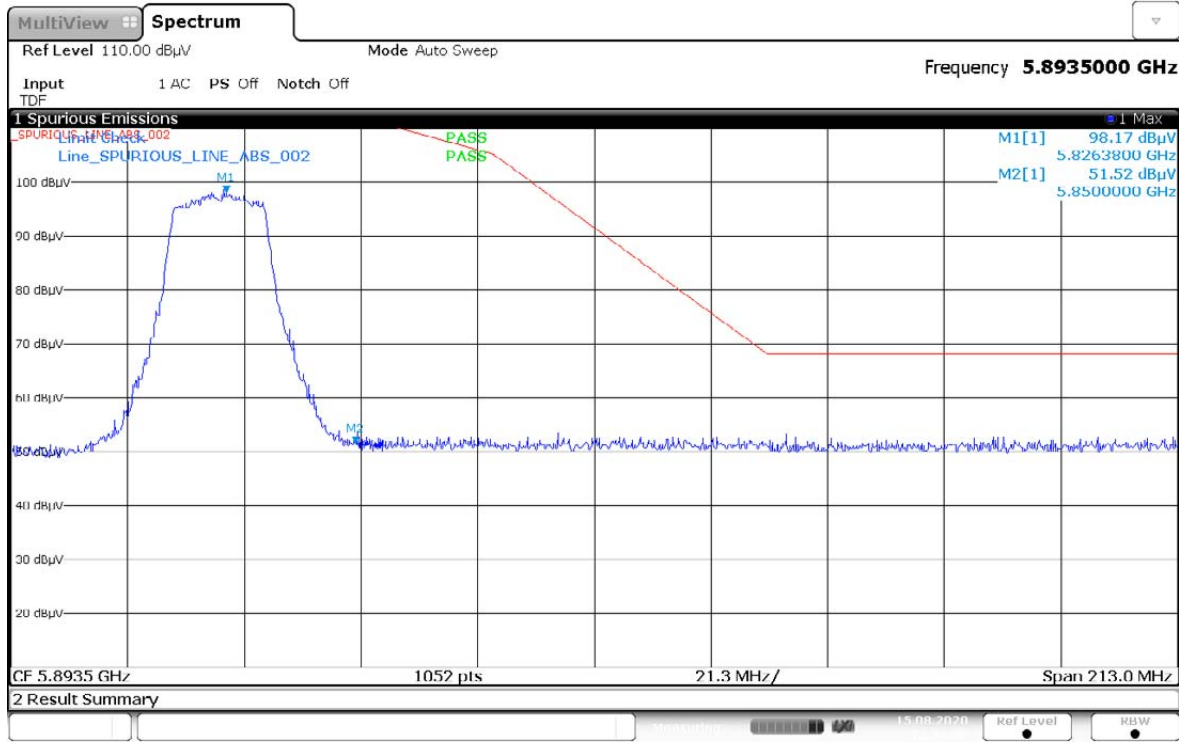


22:34:10 15.08.2020

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

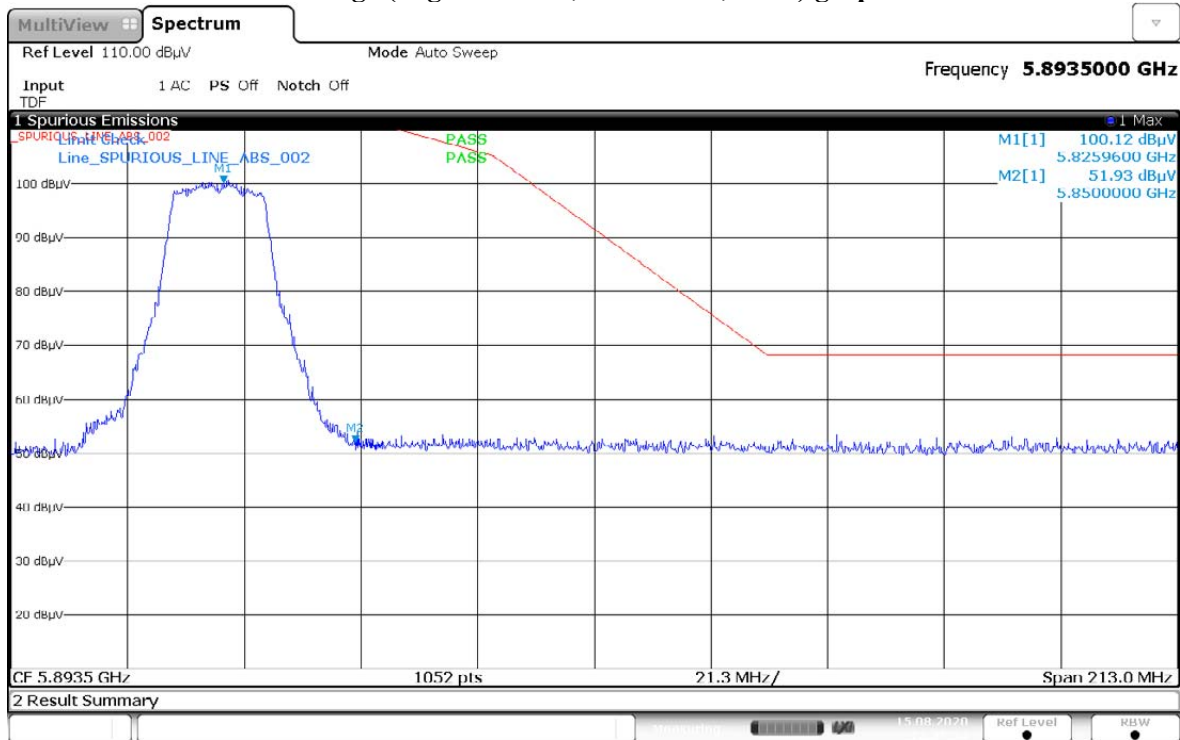


22:37:54 15.08.2020

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

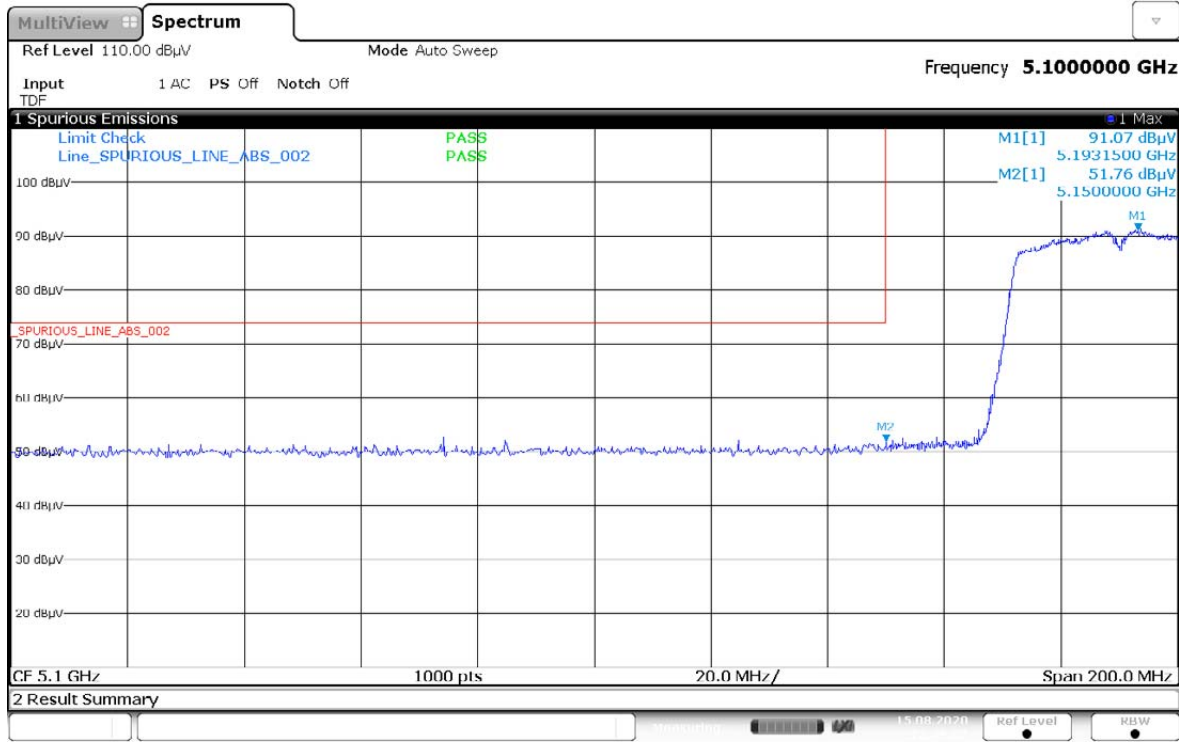


22:49:07 15.08.2020

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

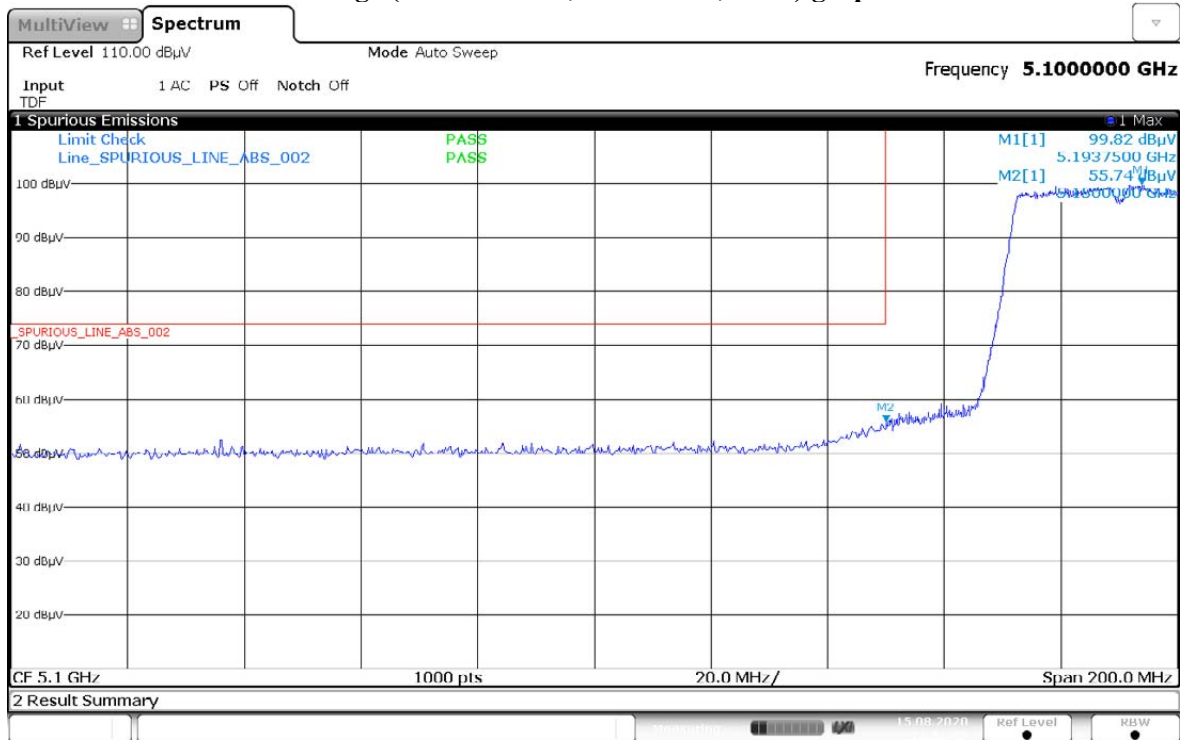


22:52:45 15.08.2020

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

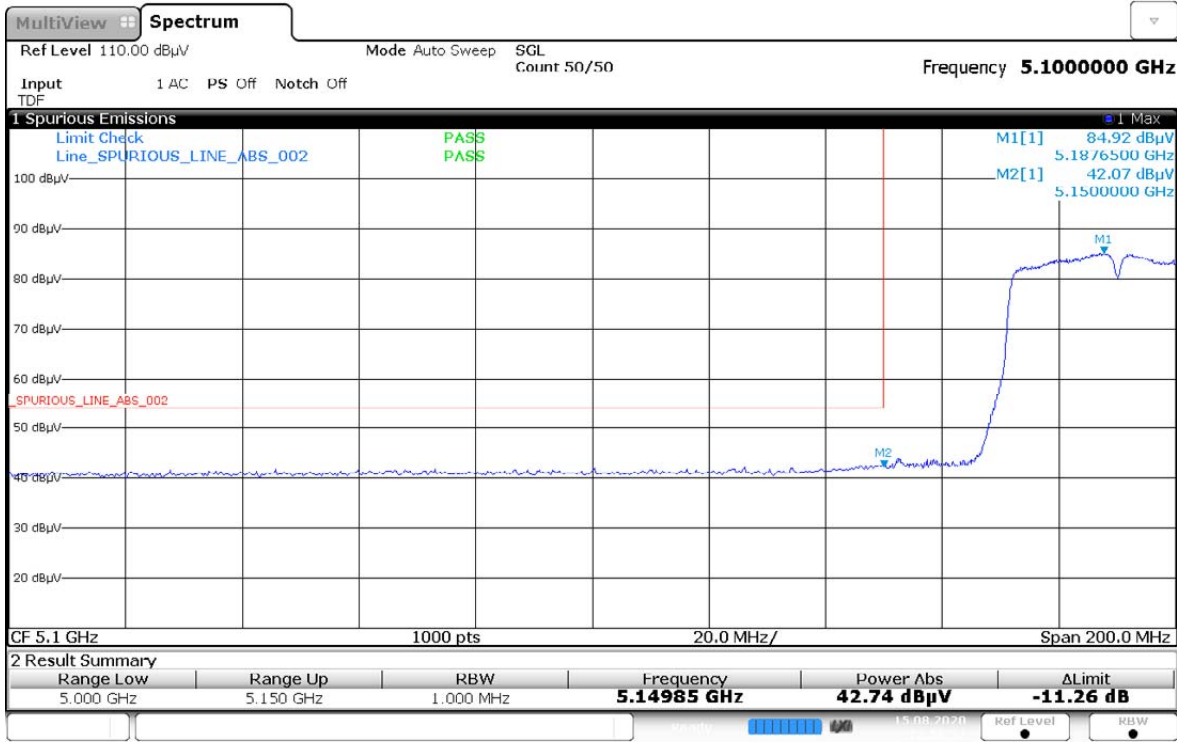


22:58:52 15.08.2020

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

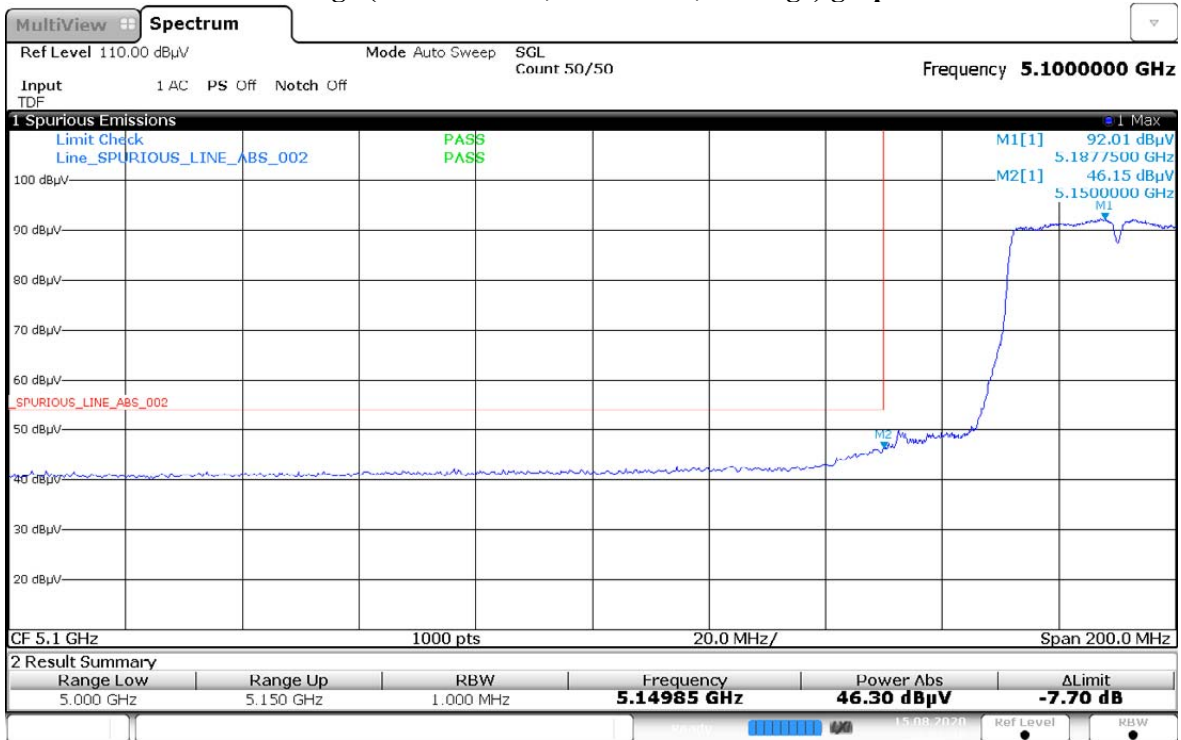


23:02:41 15.08.2020


Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

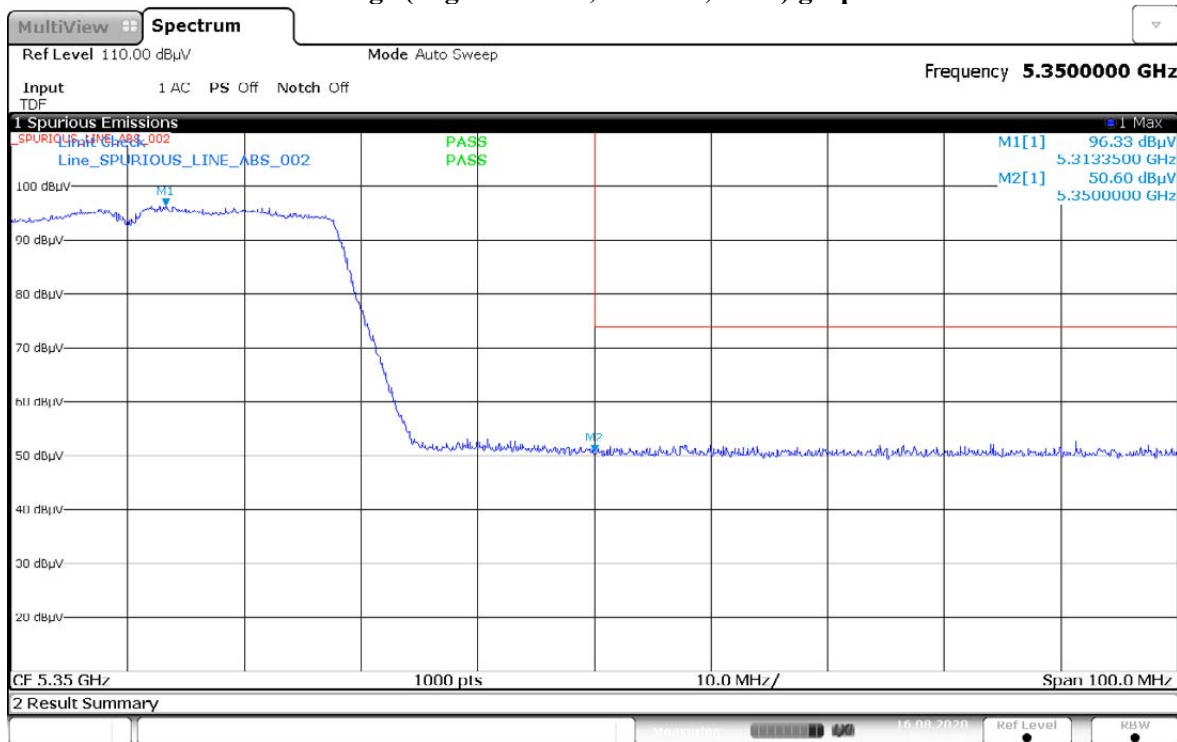

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

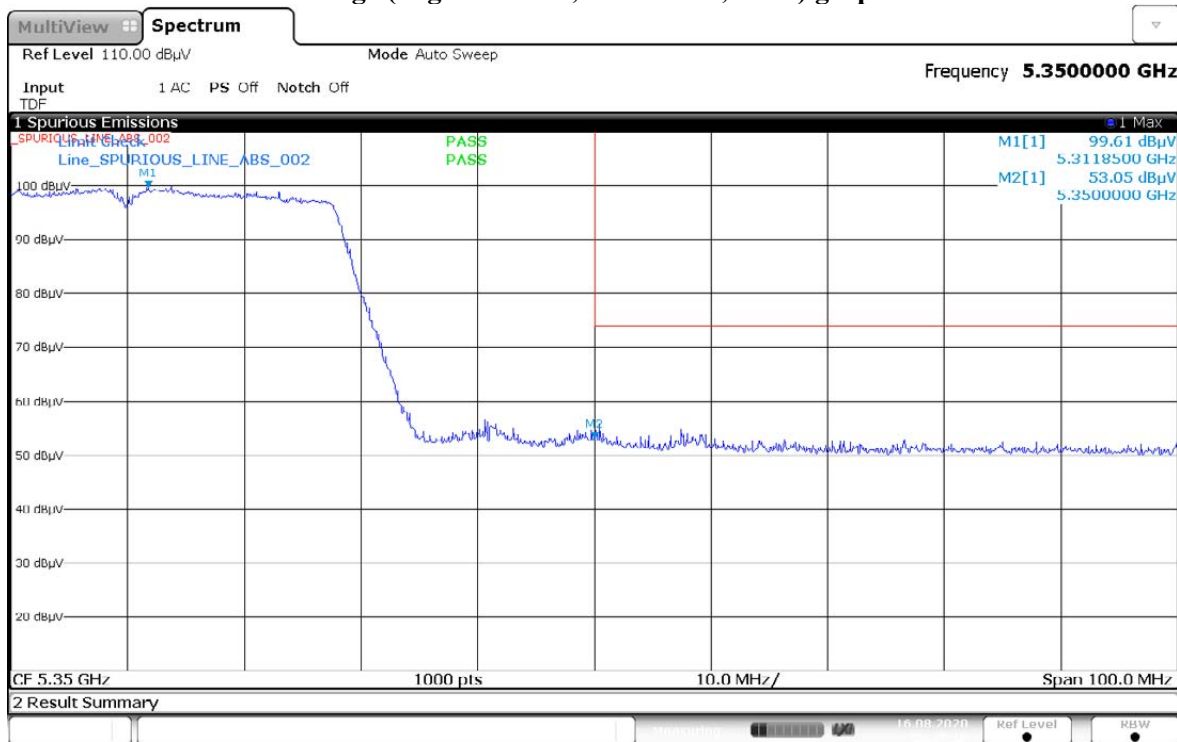


Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

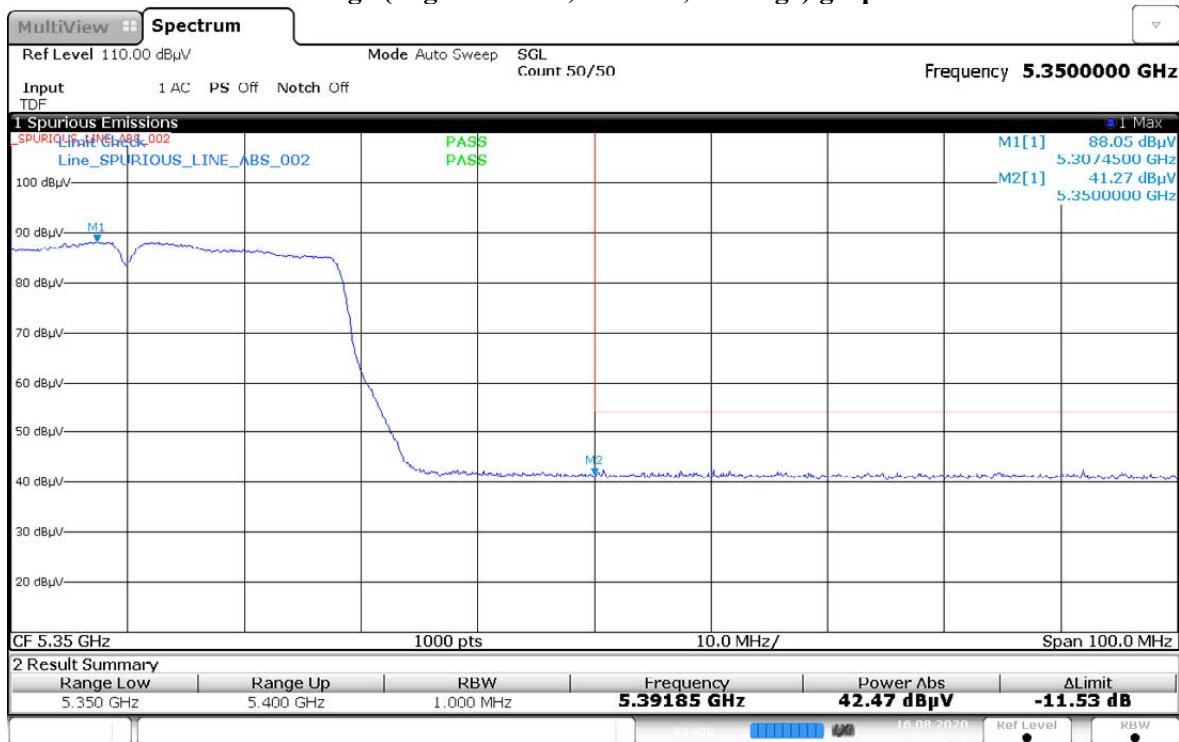


00:36:17 16.08.2020

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

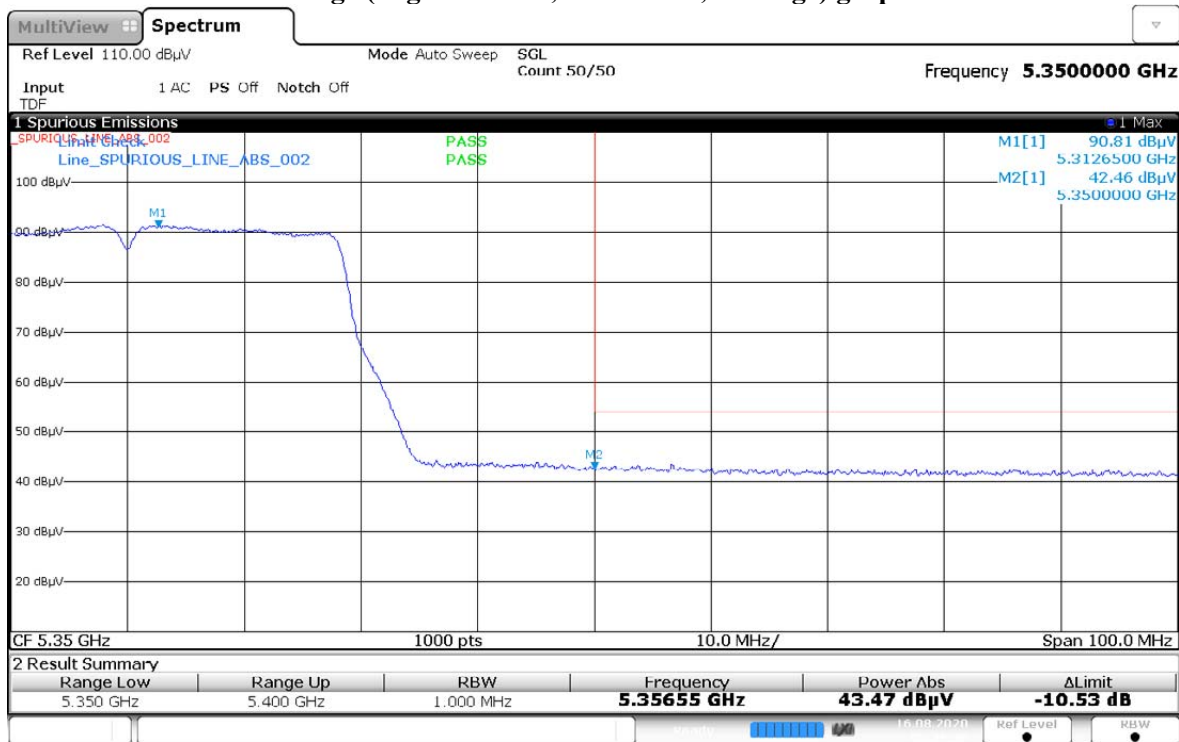


00:39:36 16.08.2020

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

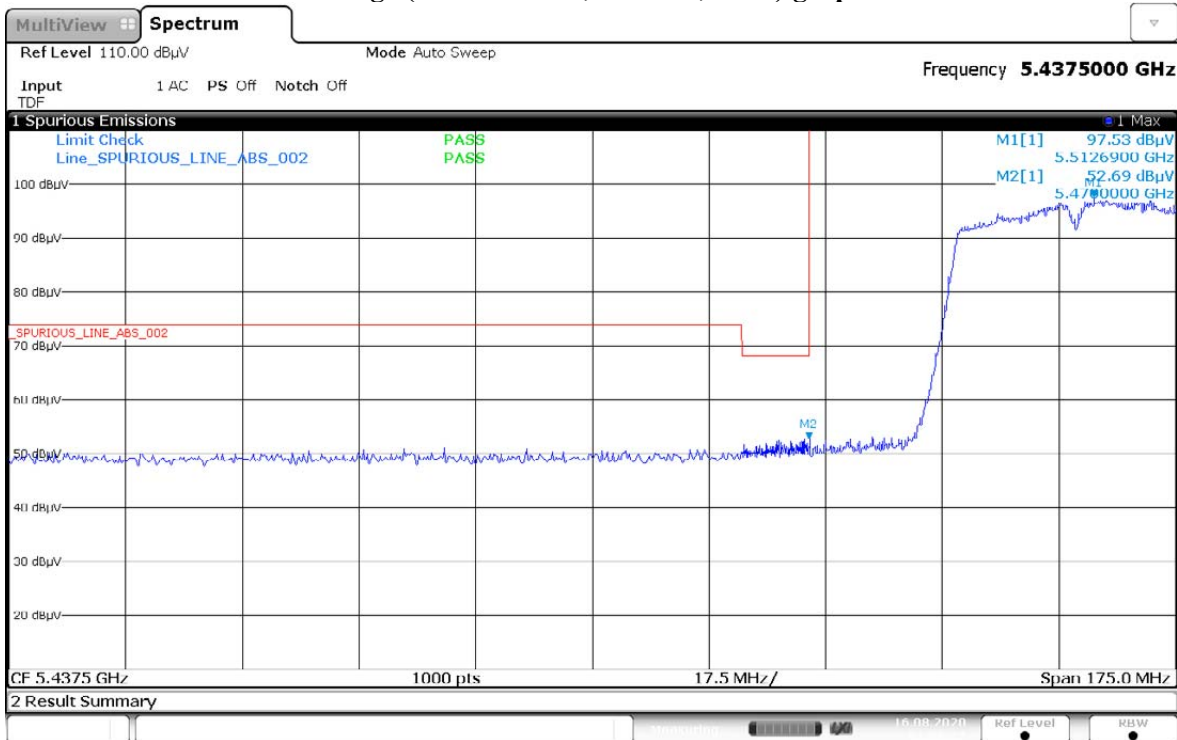


01:08:28 16.08.2020

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

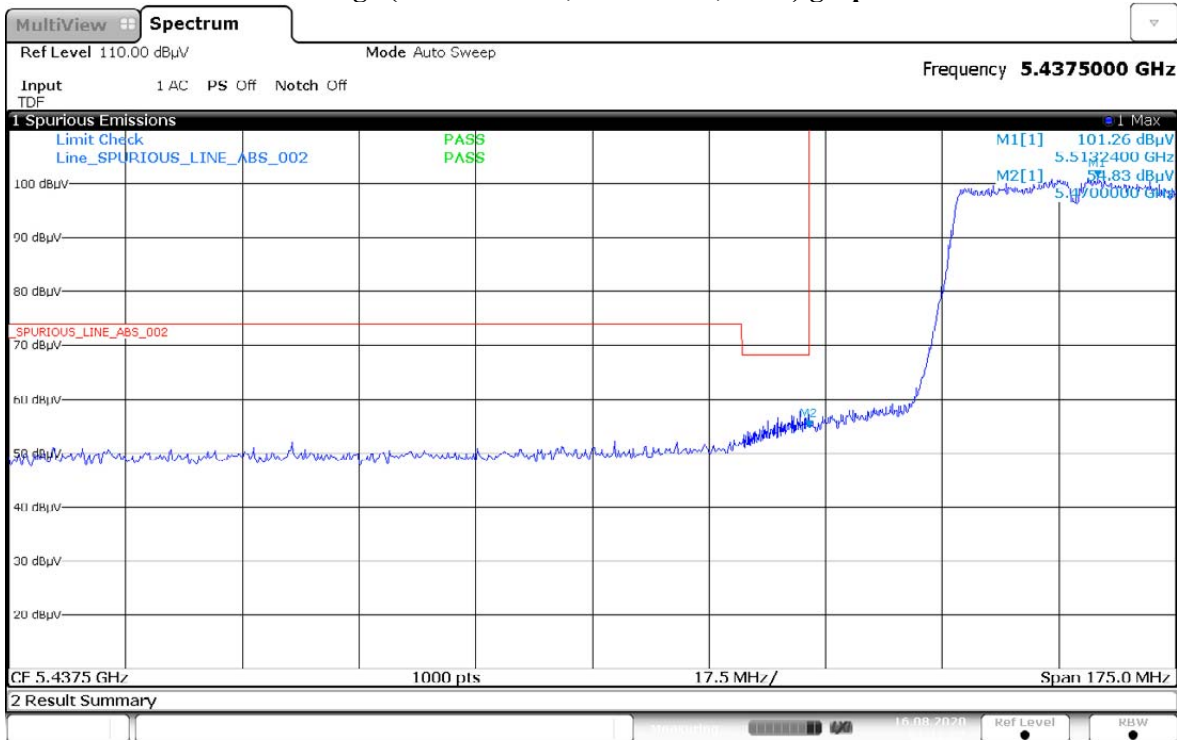


01:12:07 16.08.2020


Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

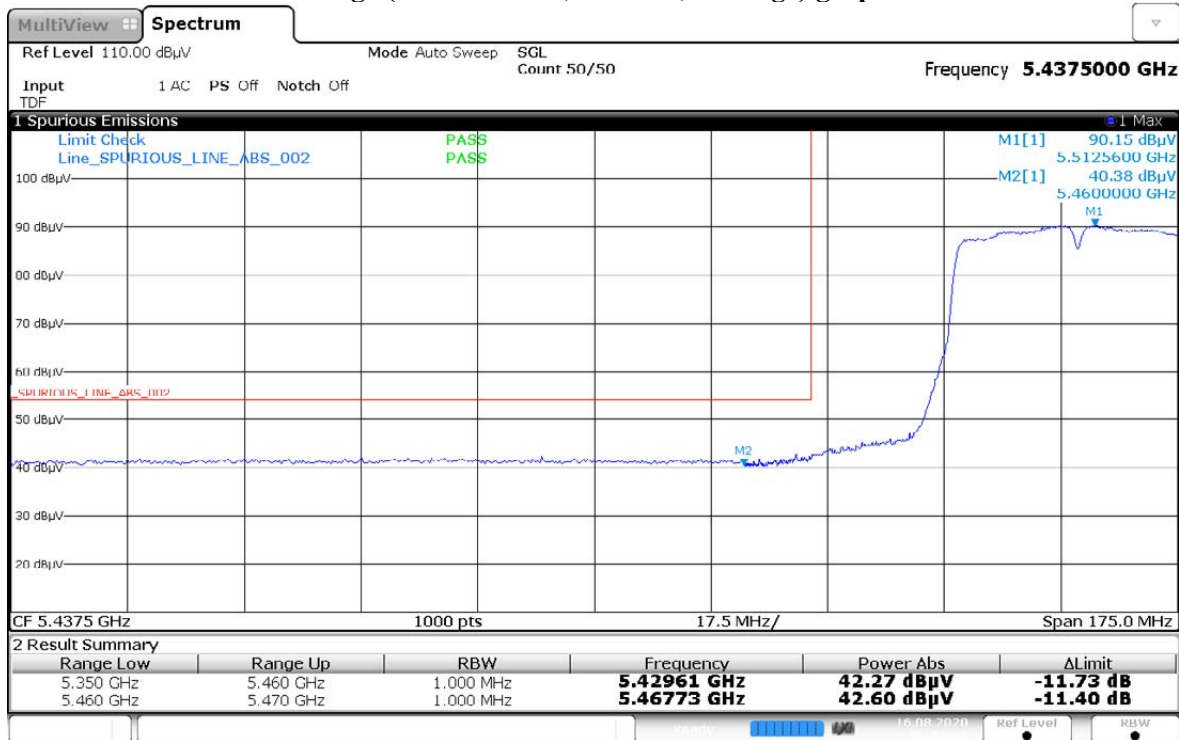


Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

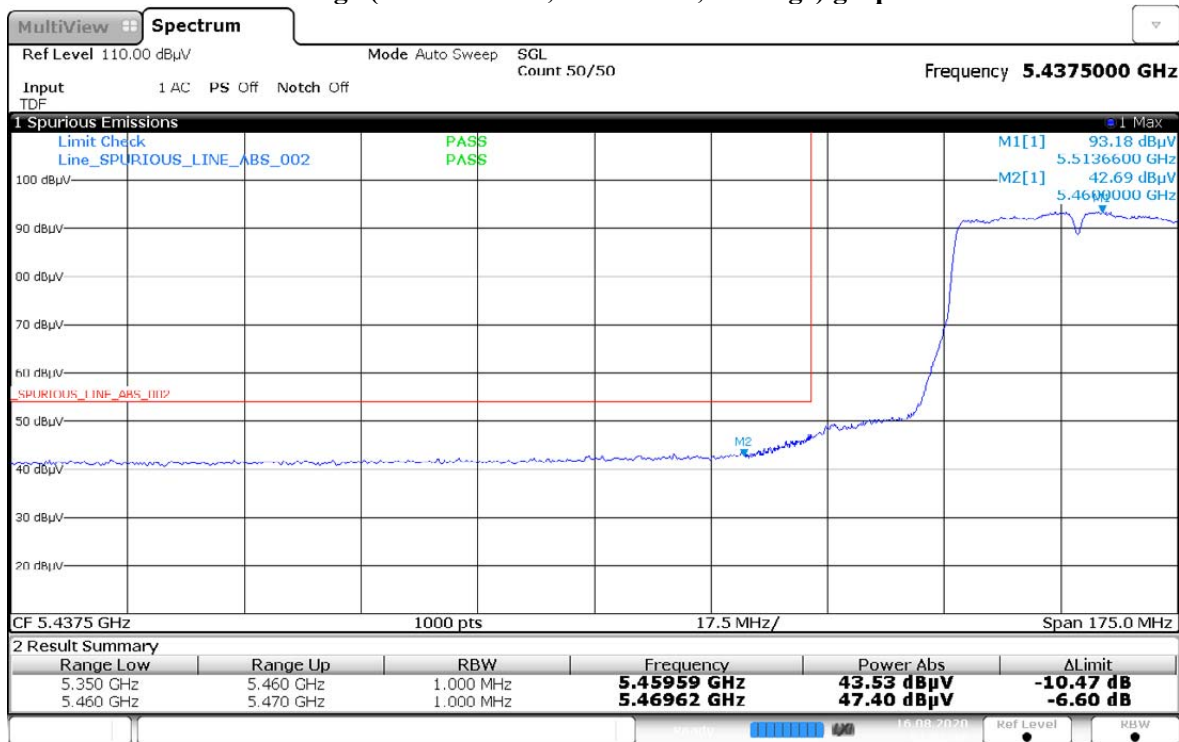


Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

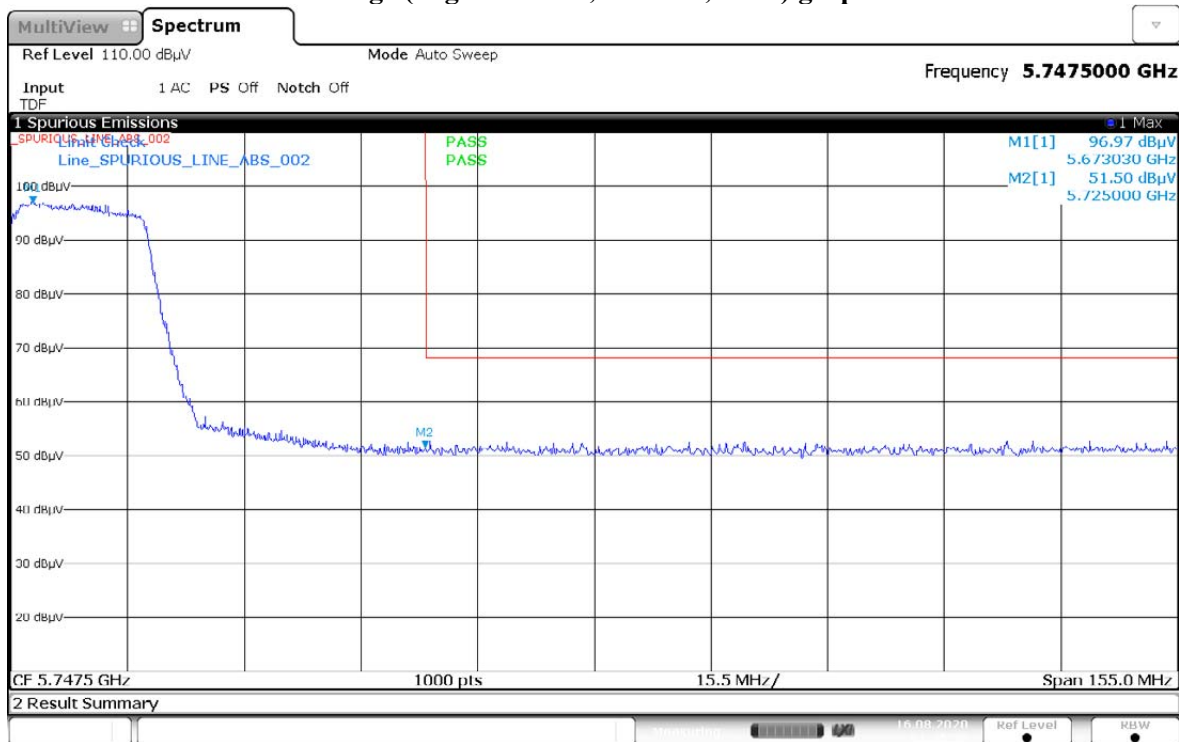


Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

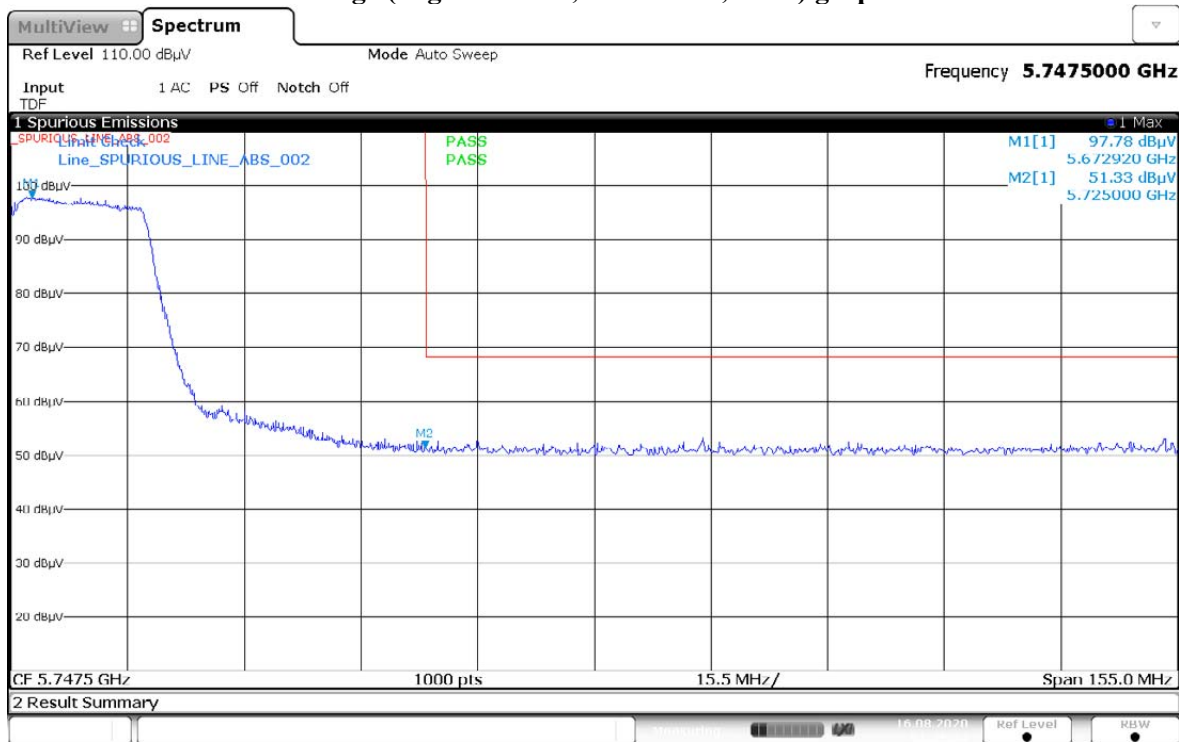

Restricted Band Edge (Straddle Channel, Vertical, Peak) graphical screen shot

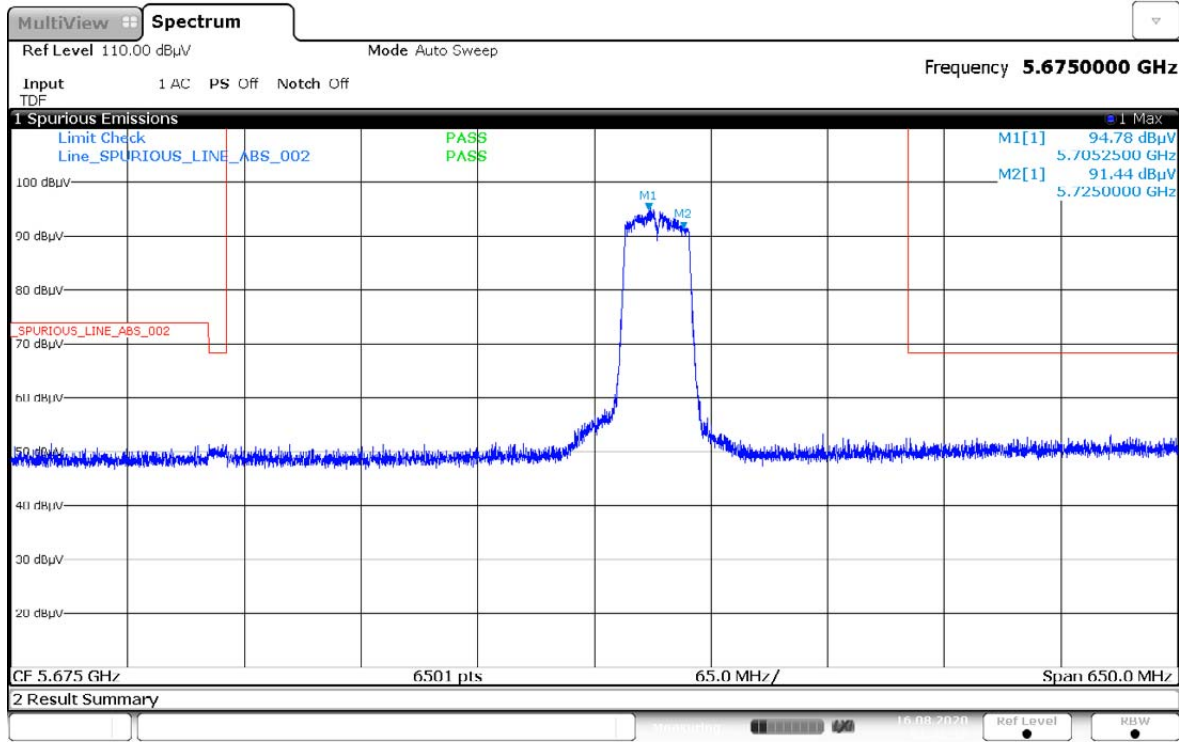

Restricted Band Edge (Straddle Channel, Horizontal, Peak) graphical screen shot

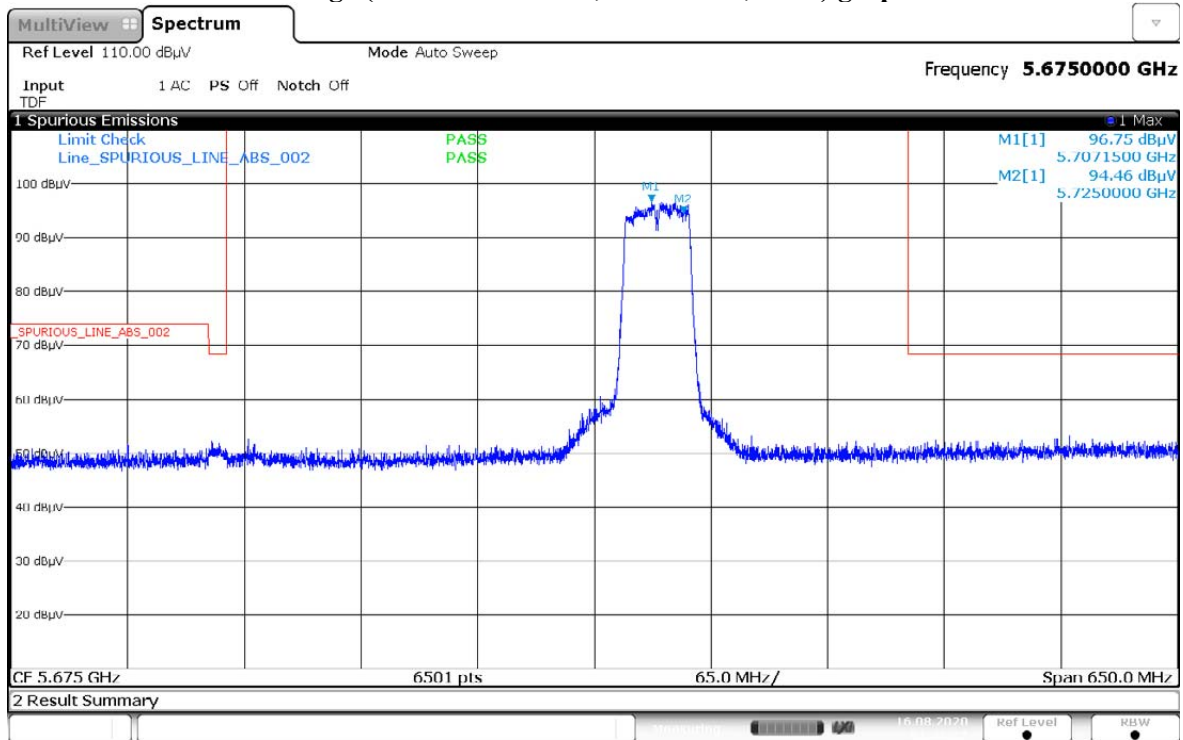

Test: WIFI SAC Restricted Band Edge

Model Number: AAH90ZDU9RH1AN S/N: 734TWP0311 EMC SR ID#: 18058-EMC-00040

Battery: PMNN4804A

Accessory: AN000348A01

Test Channel: Low**Test Frequency: 5755.0000 MHz**

Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (802.11n 40MHz)

Restricted Band Edge (Low Channel) tabular data


[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 24.5
Test Performed by: Nazrin&Fendi
System MU: 4.03dB


Humidity (%): 70.3
Test Date: Sun, Aug 16, 2020

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

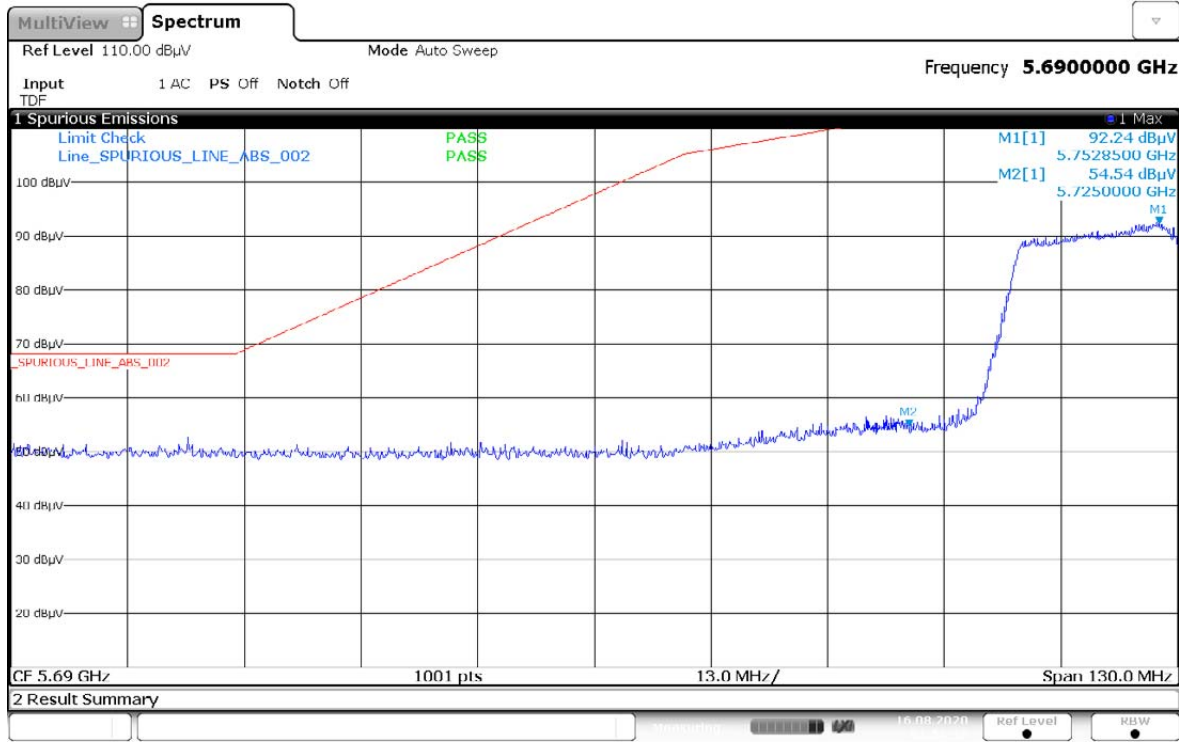


01:54:20 16.08.2020

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

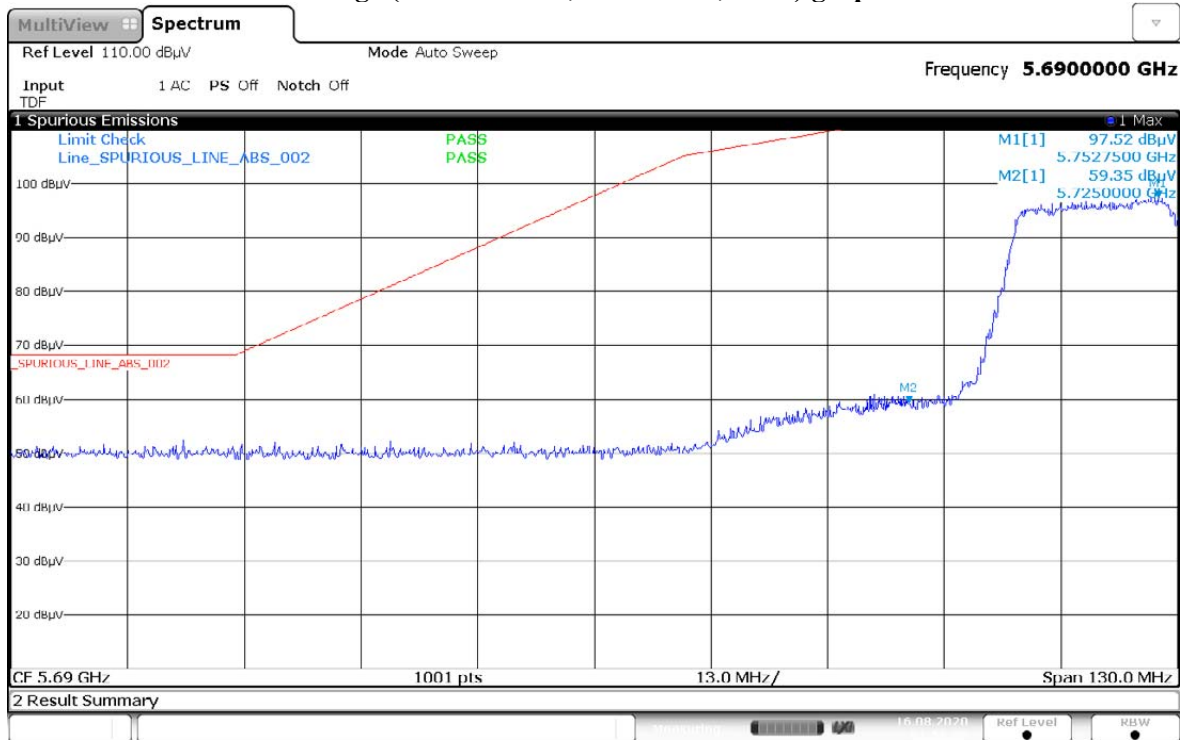


01:58:01 16.08.2020


Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

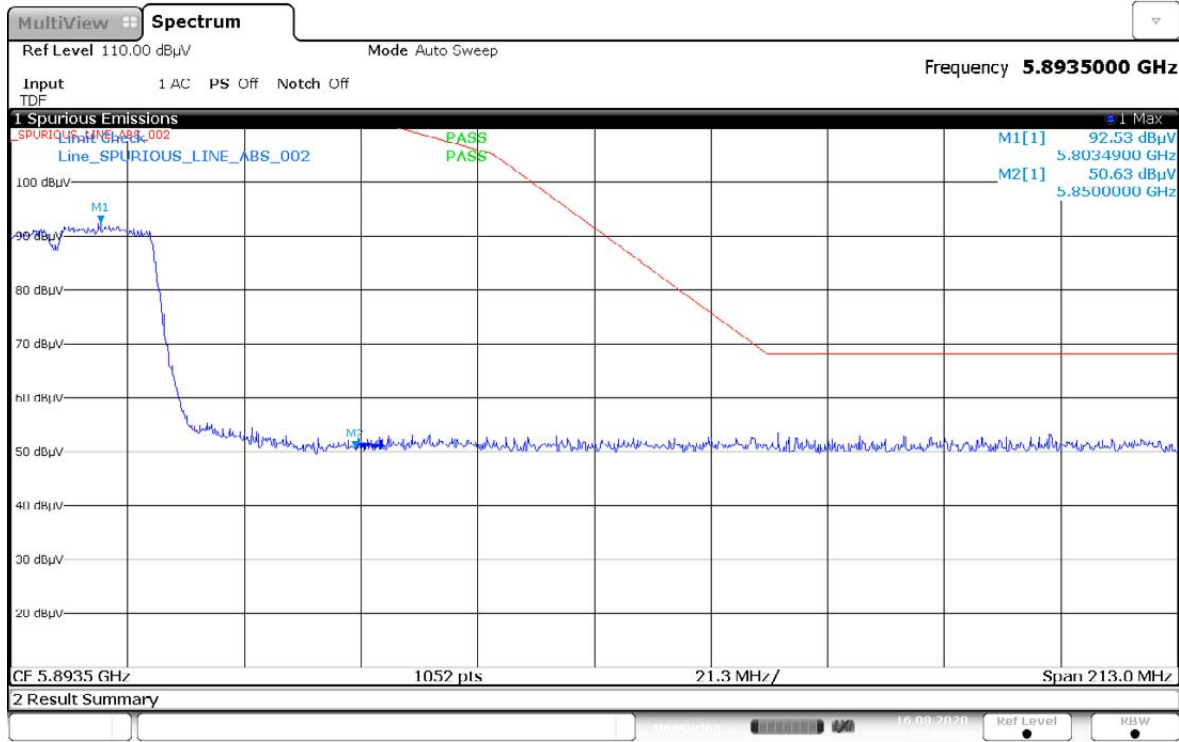


Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

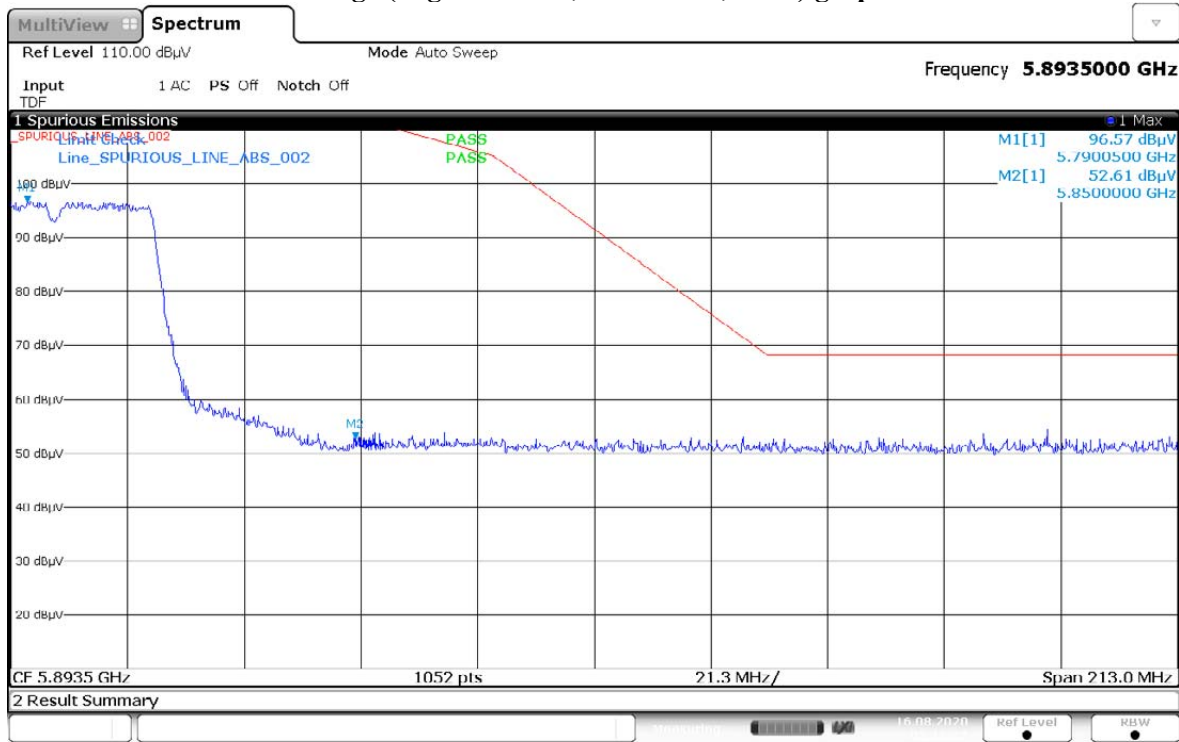


Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

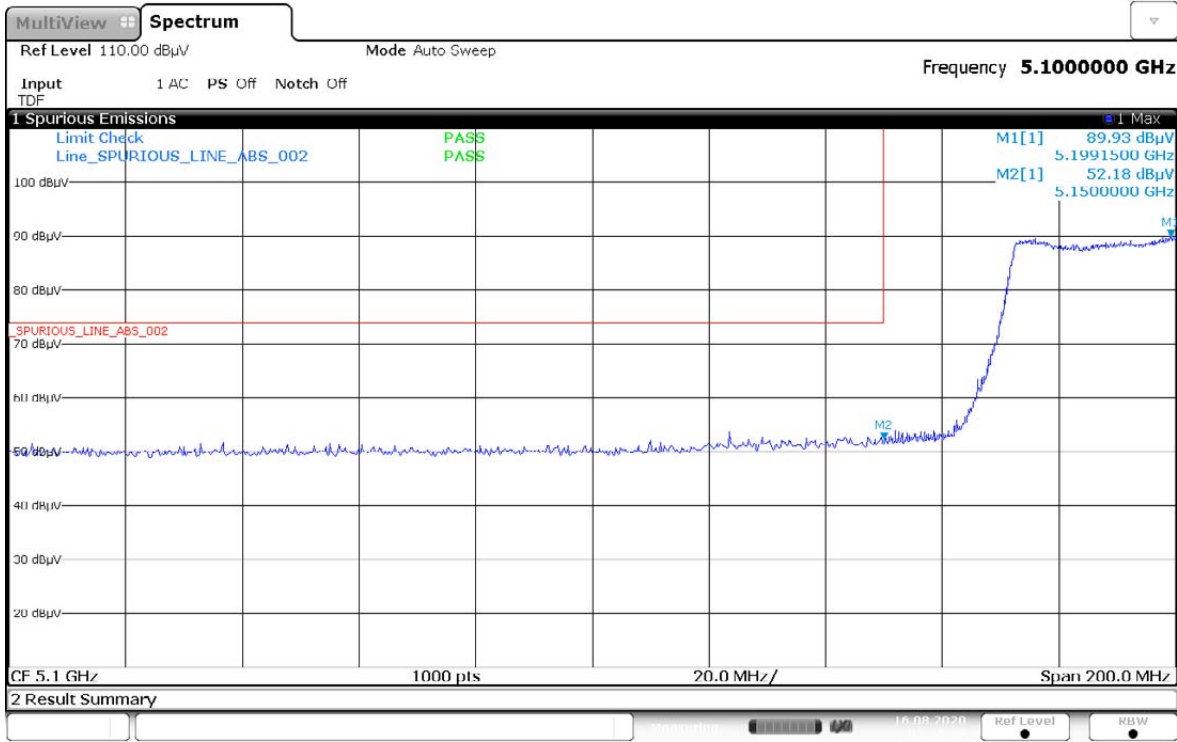


Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

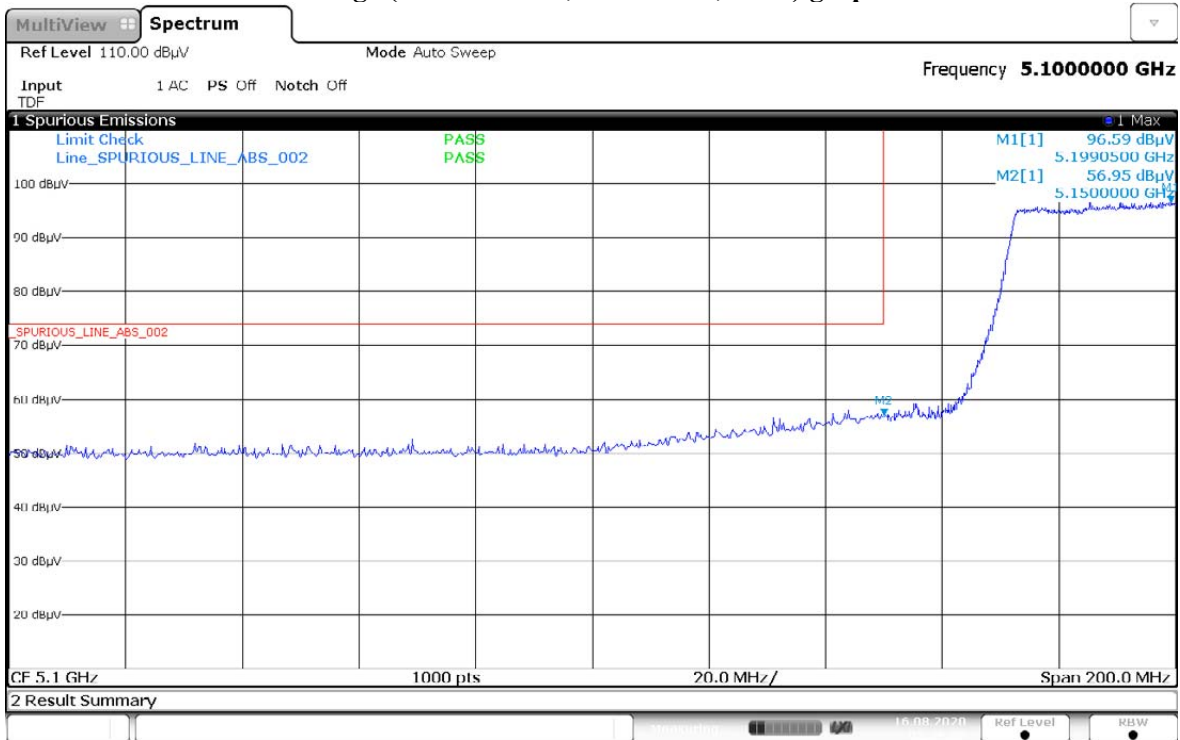


Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

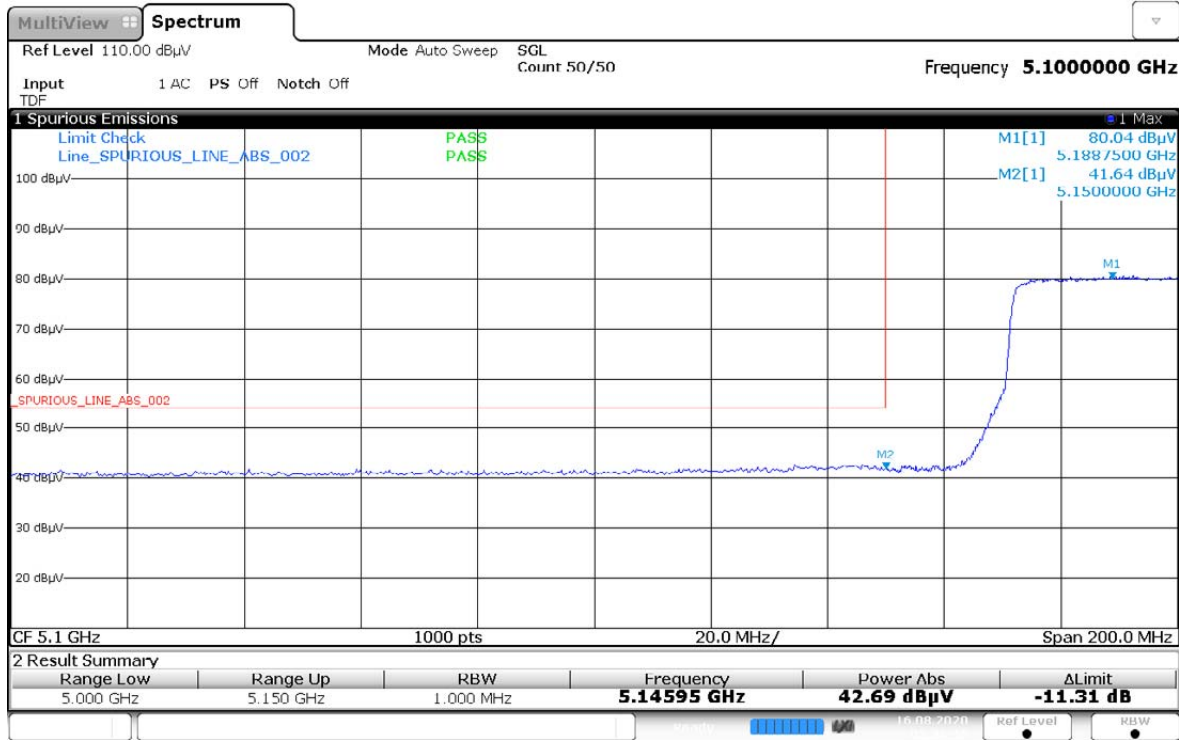


Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

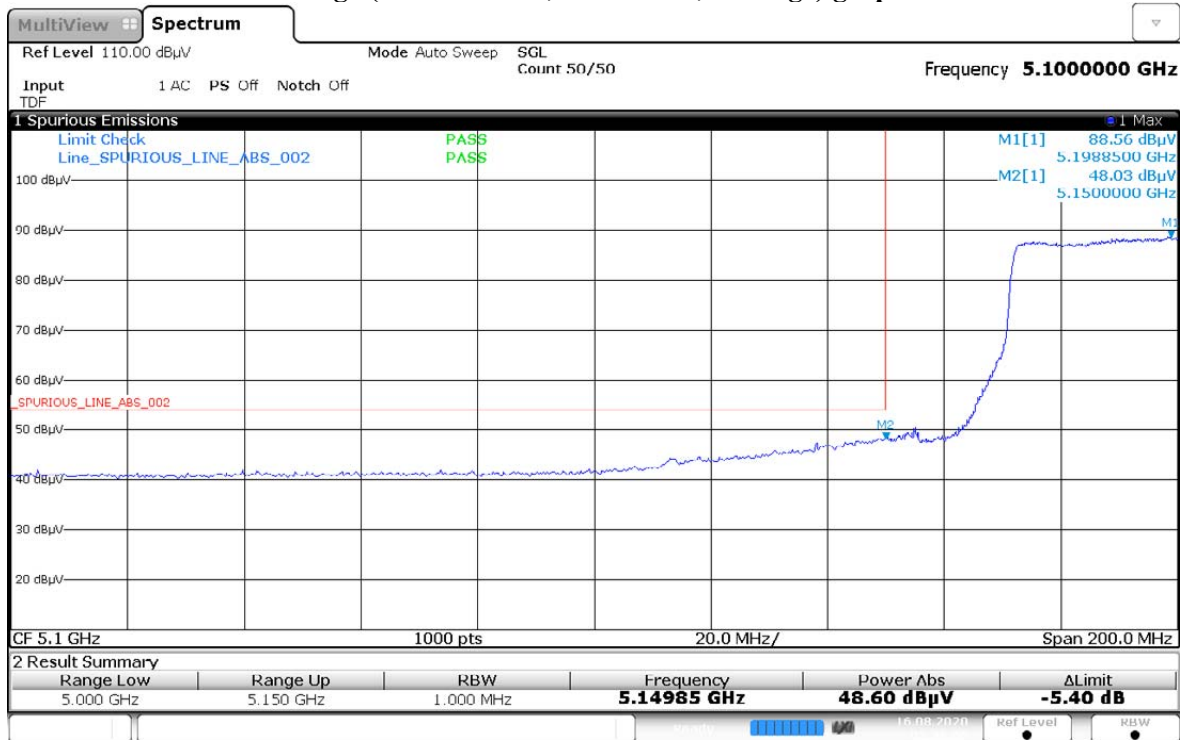


Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

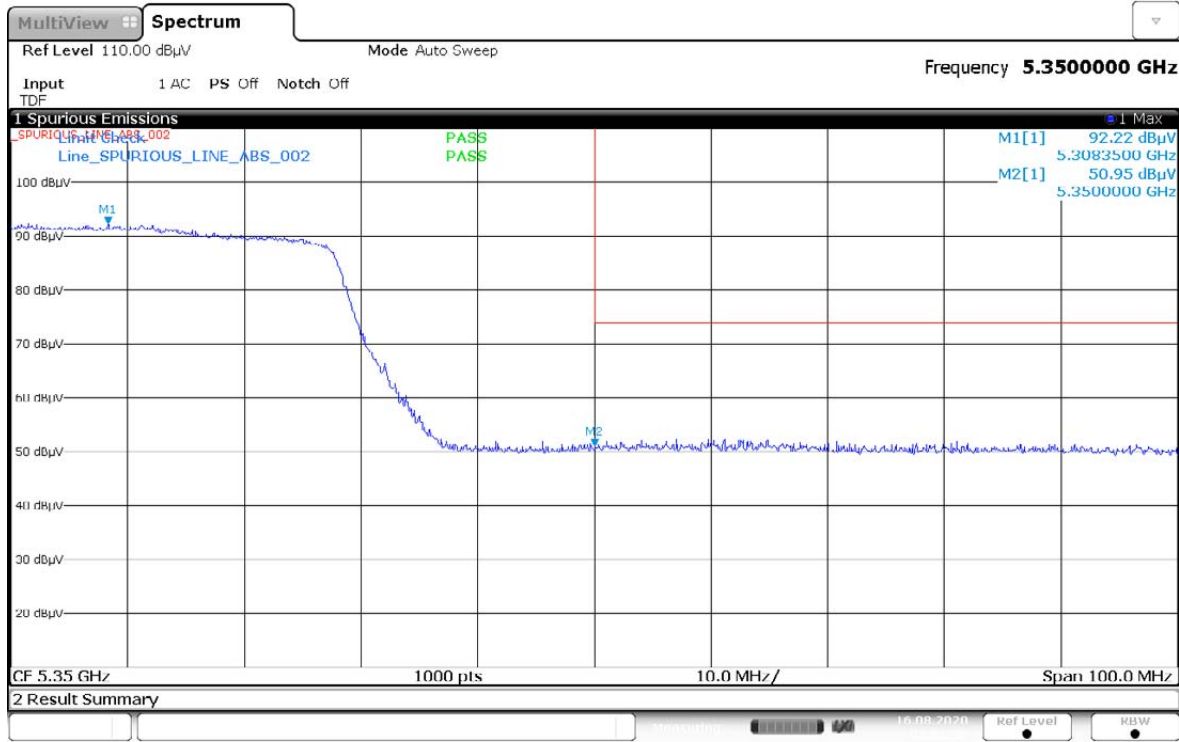


Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

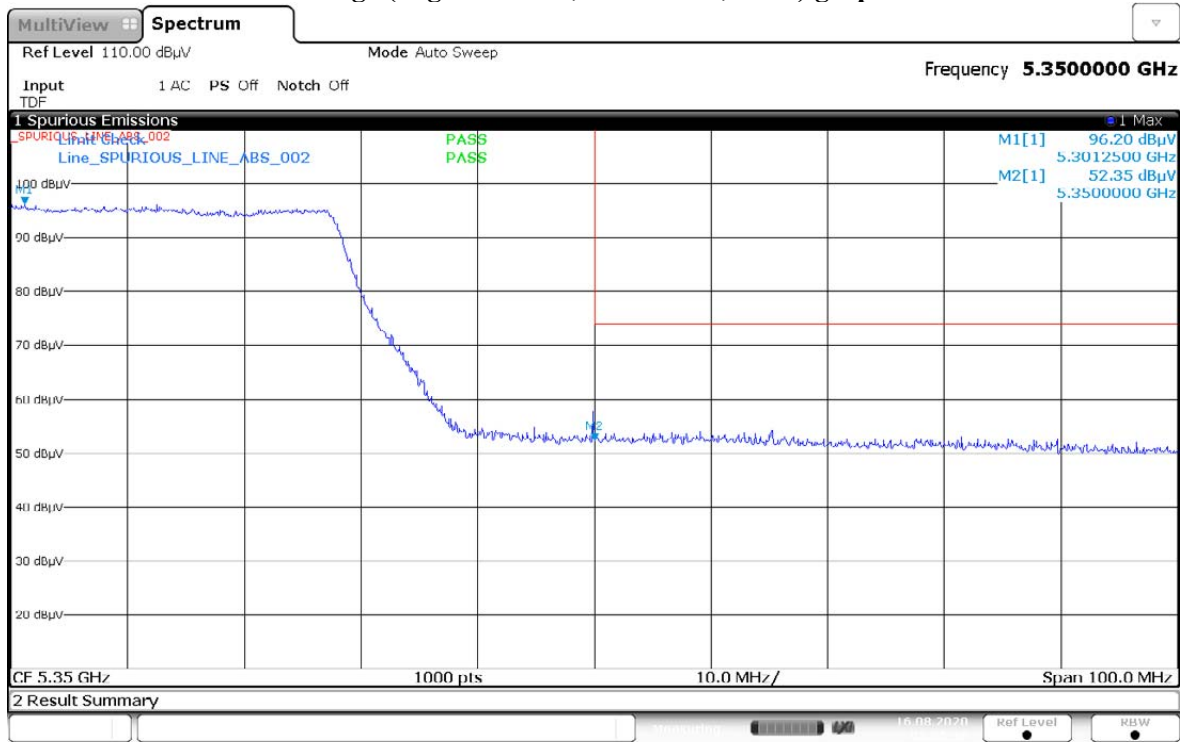


Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

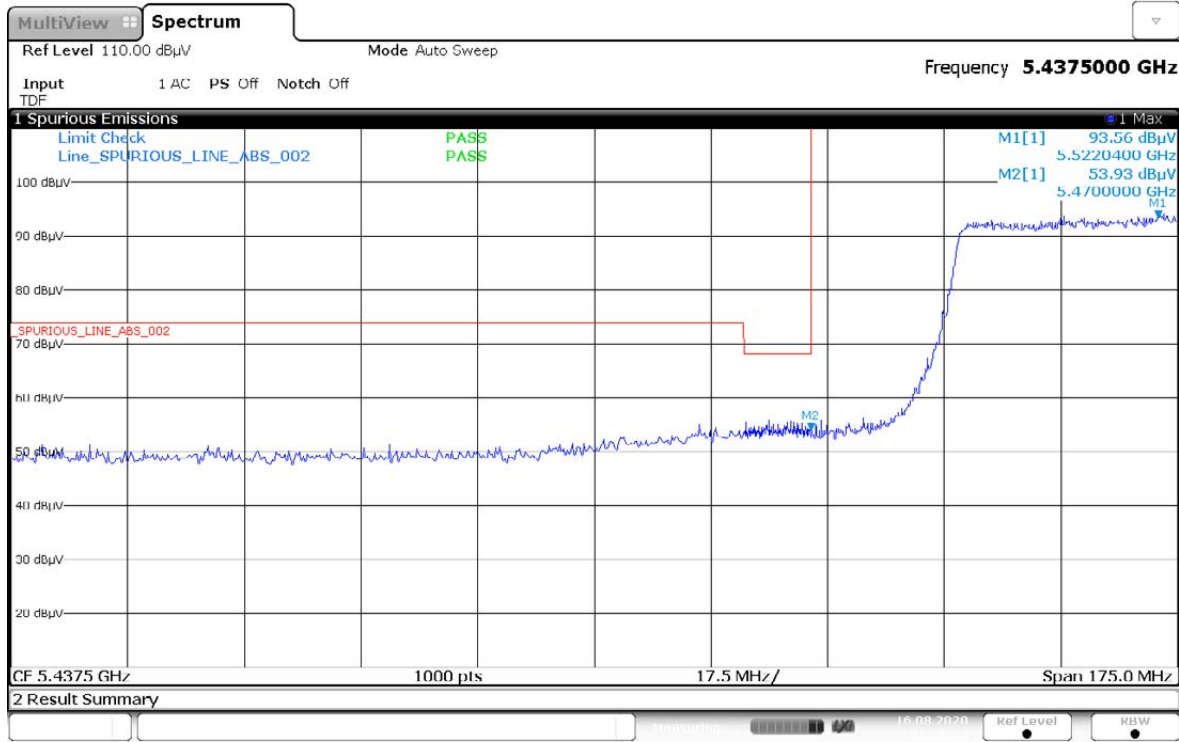


Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

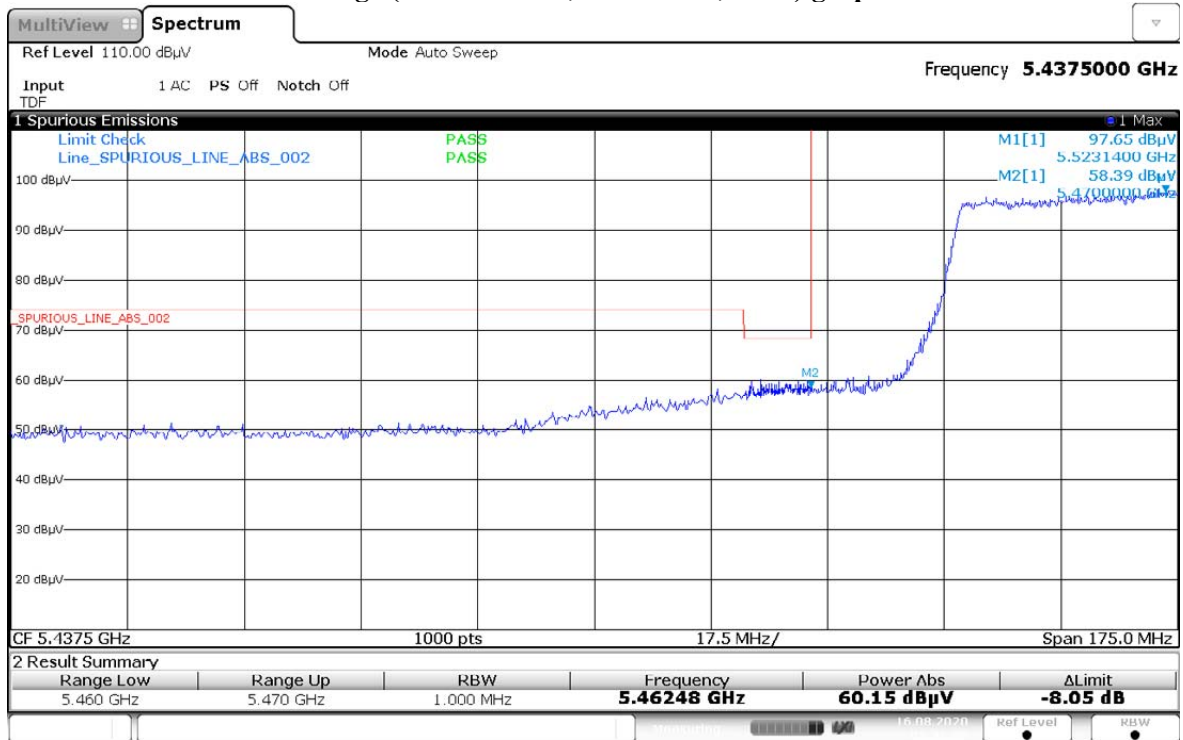

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

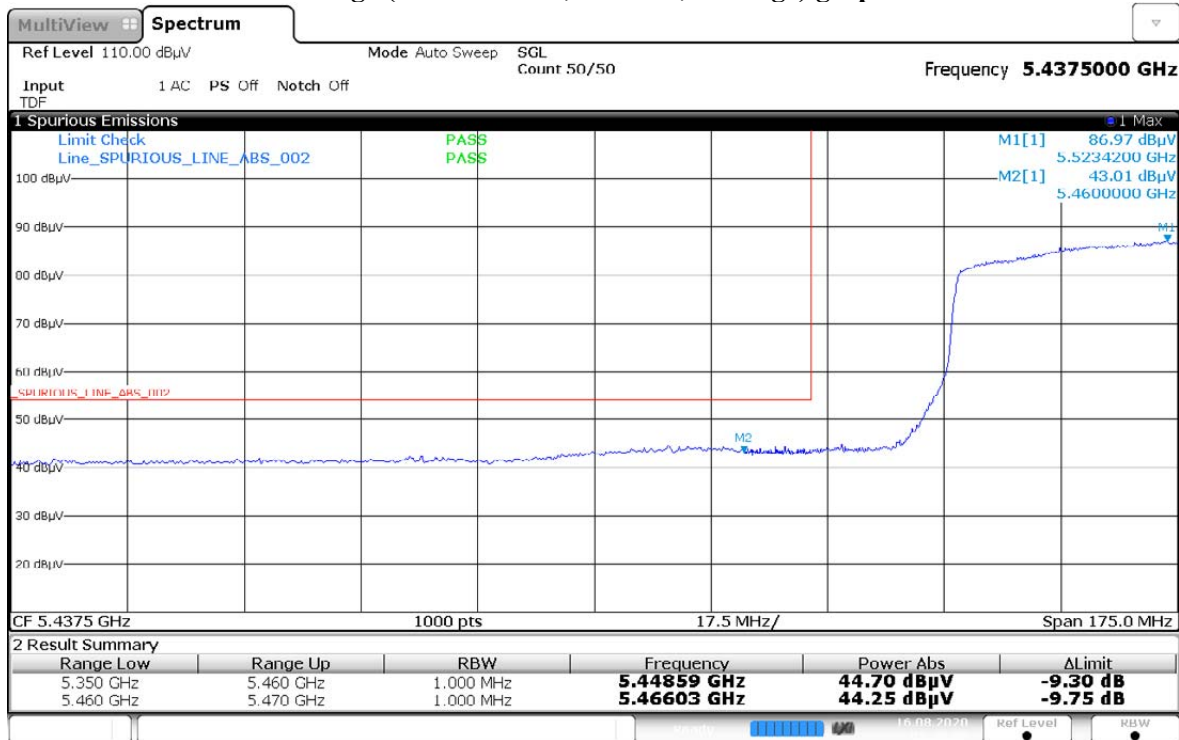

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

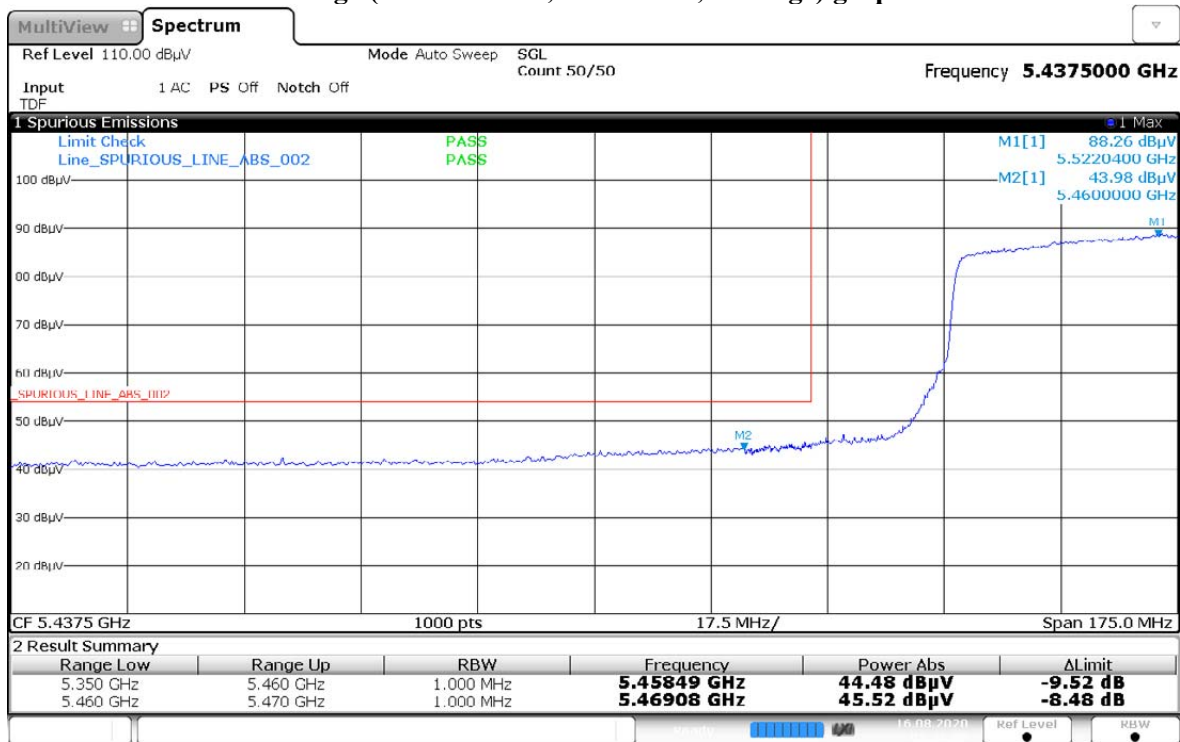

Test: WIFI SAC Restricted Band Edge

Model Number: AAH90ZDU9RH1AN S/N: 734TWP0311 EMC SR ID#: 18058-EMC-00040

Battery: PMNN4804A

Accessory: AN000348A01

Test Channel: Mid

Test Frequency: 5610.0000 MHz

Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (802.11ac 80MHz)

Restricted Band Edge (Mid Channel) tabular data


[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 24.5
Test Performed by: Nazrin&Fendi
System MU: 4.03dB


Humidity (%): 70.3
Test Date: Sun, Aug 16, 2020

Restricted Band Edge (Mid Channel, Vertical, Peak) graphical screen shot

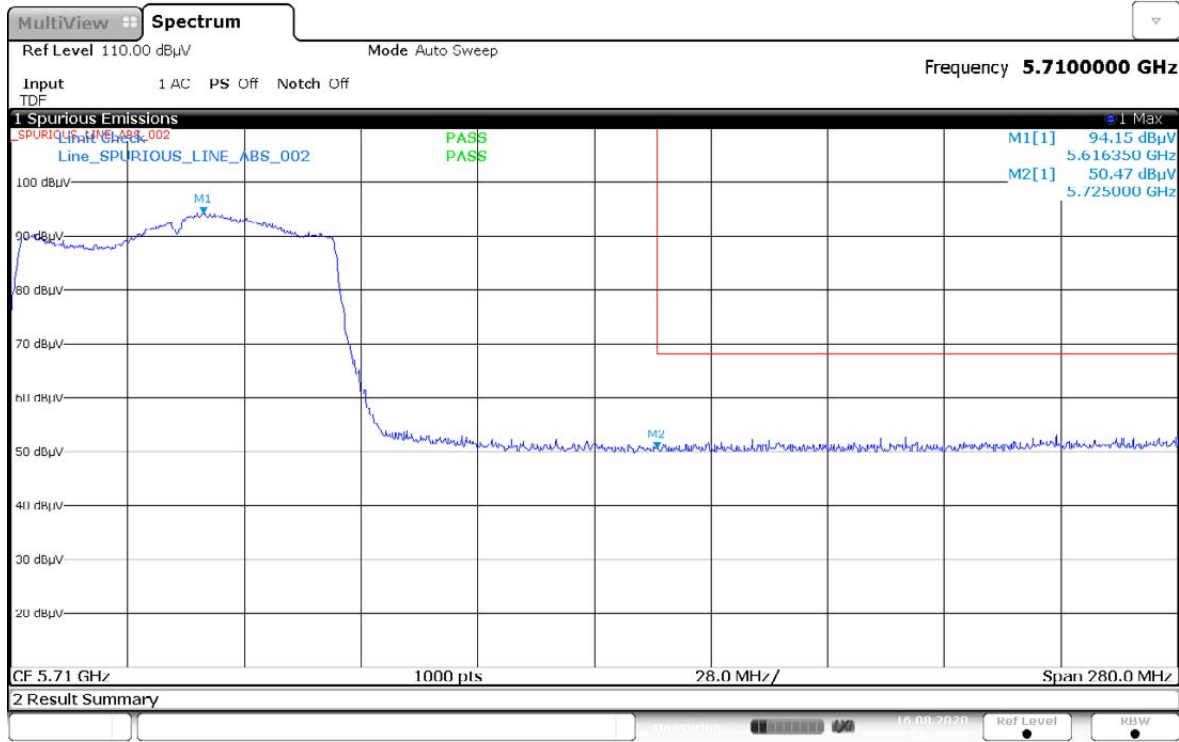


03:44:55 16.08.2020

Restricted Band Edge (Mid Channel, Horizontal, Peak) graphical screen shot

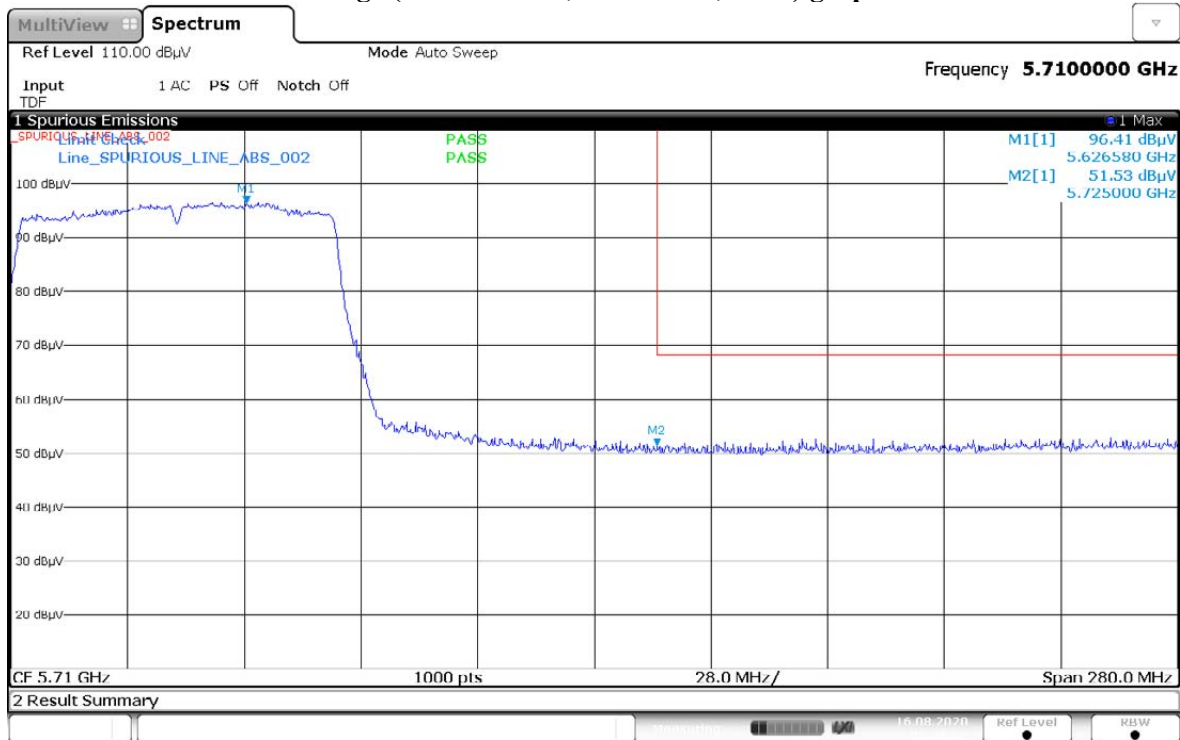


03:48:02 16.08.2020

Restricted Band Edge (Straddle Channel, Vertical, Peak) graphical screen shot

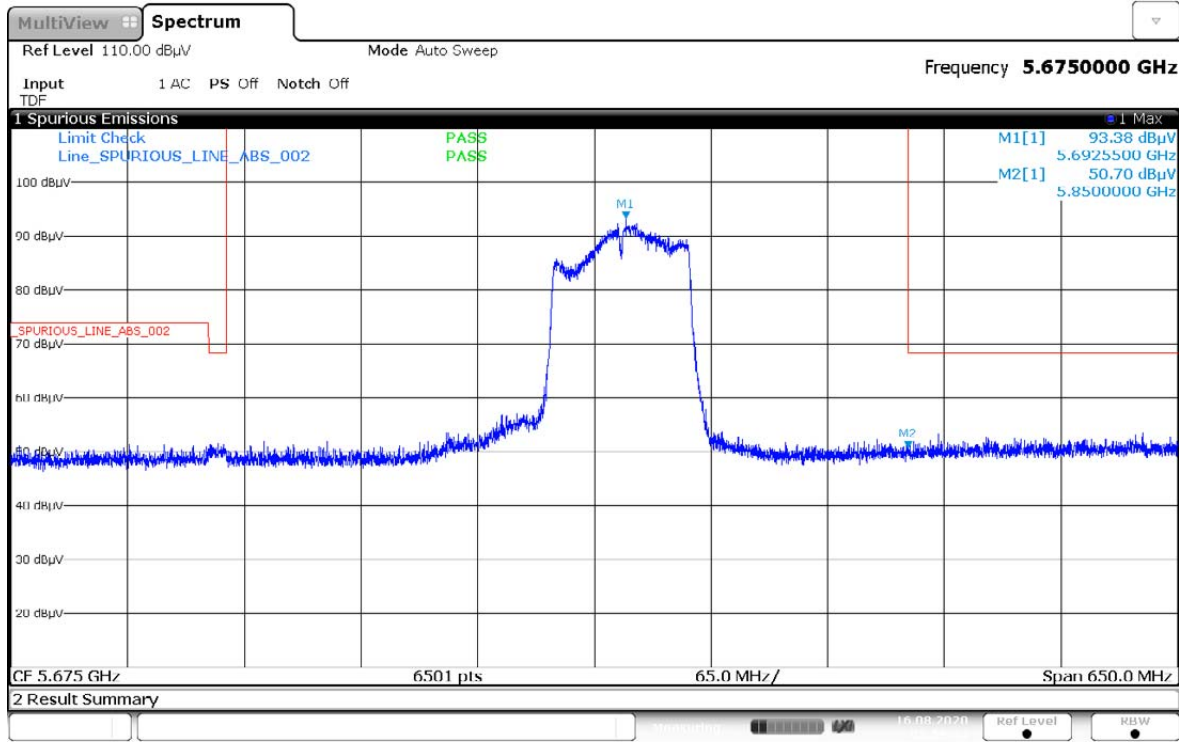

03:59:44 16.08.2020

Restricted Band Edge (Straddle Channel, Horizontal, Peak) graphical screen shot

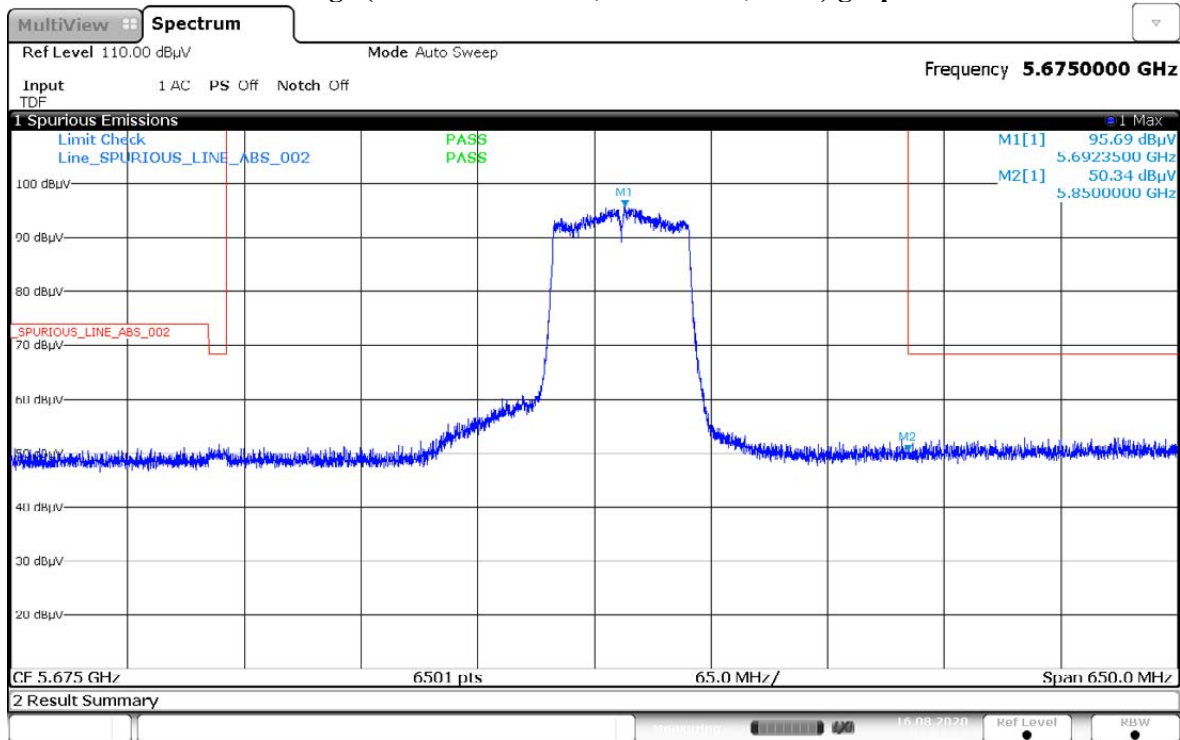

04:03:22 16.08.2020

Test: WIFI SAC Restricted Band Edge

Model Number: AAH90ZDU9RH1AN S/N: 734TWP0311 EMC SR ID#: 18058-EMC-00040

Battery: PMNN4804A **Accessory: AN000348A01**

Test Channel: Low Test Frequency: 5775.0000 MHz Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (802.11ac 80MHz)

Restricted Band Edge (Low Channel) tabular data


[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Temperature (degC): 24.5
Test Performed by: Nazrin&Fendi
System MU: 4.03dB

Humidity (%): 70.3
Test Date: Sun, Aug 16, 2020


Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

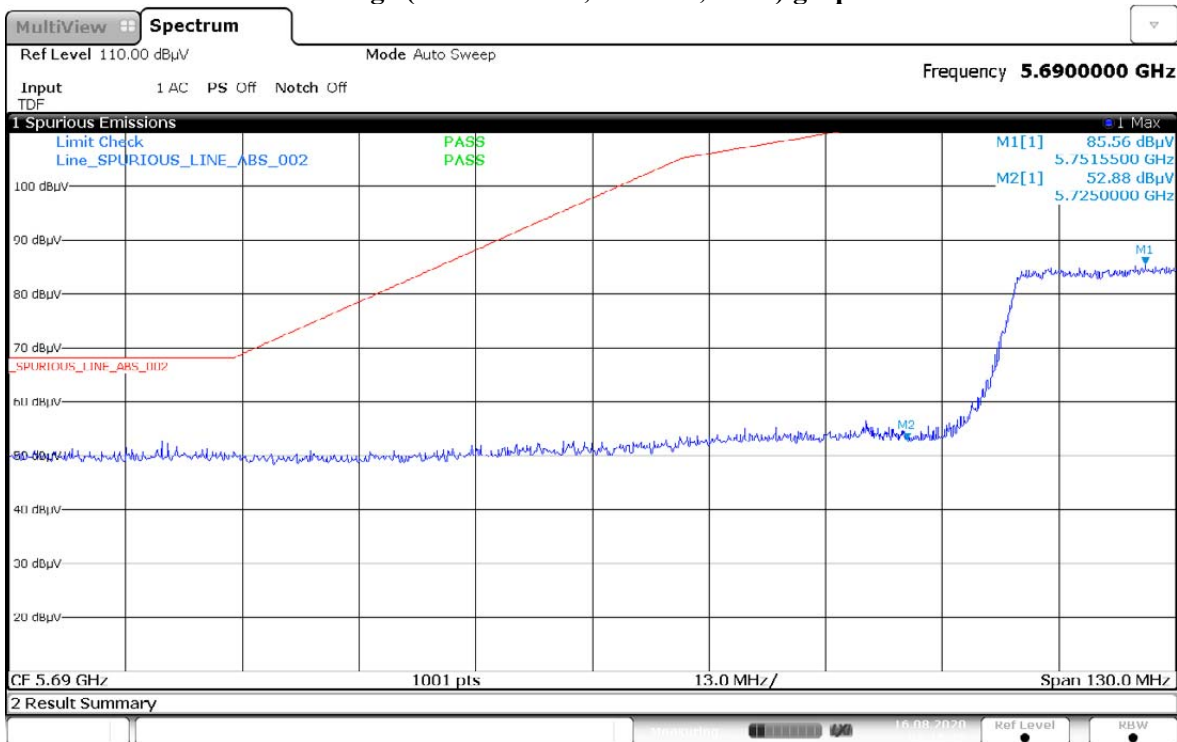

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

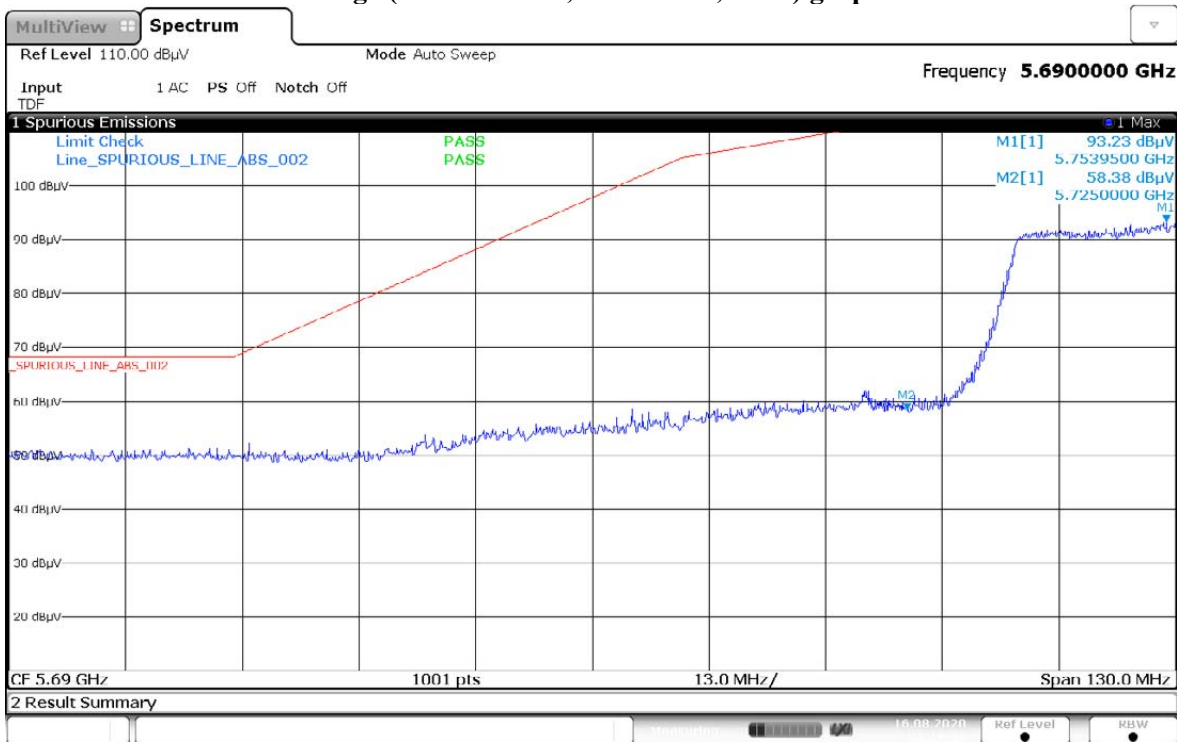


Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

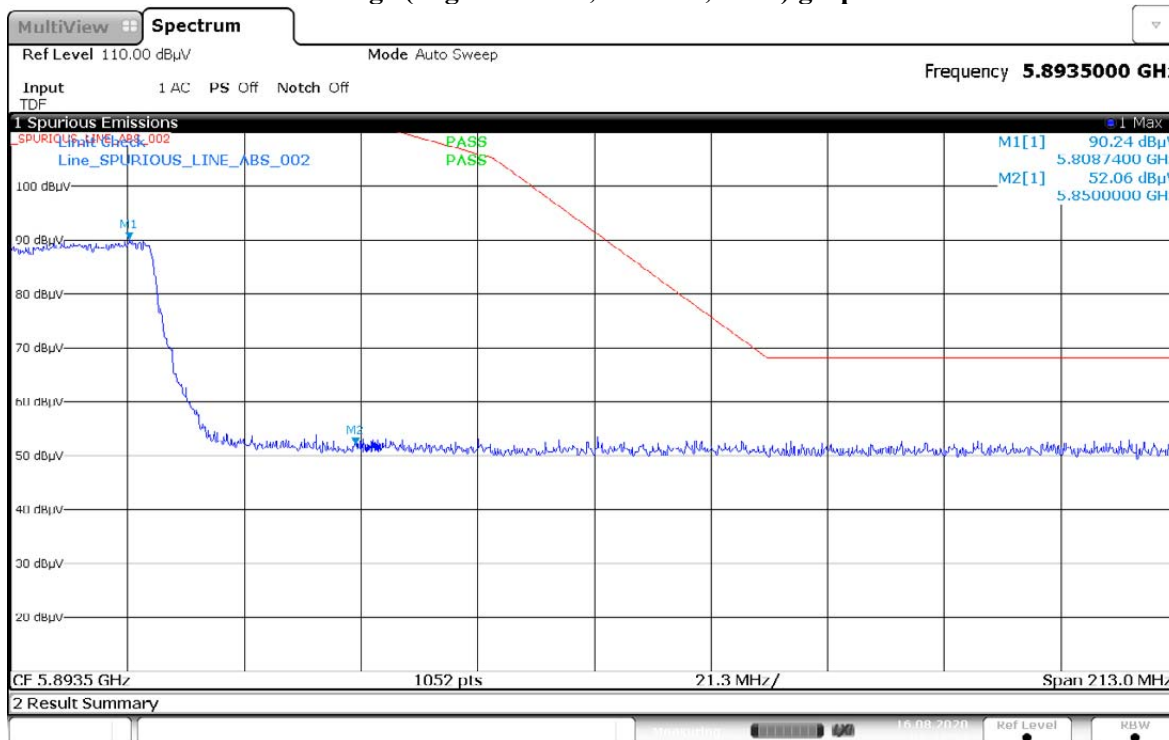

04:23:55 16.08.2020

Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

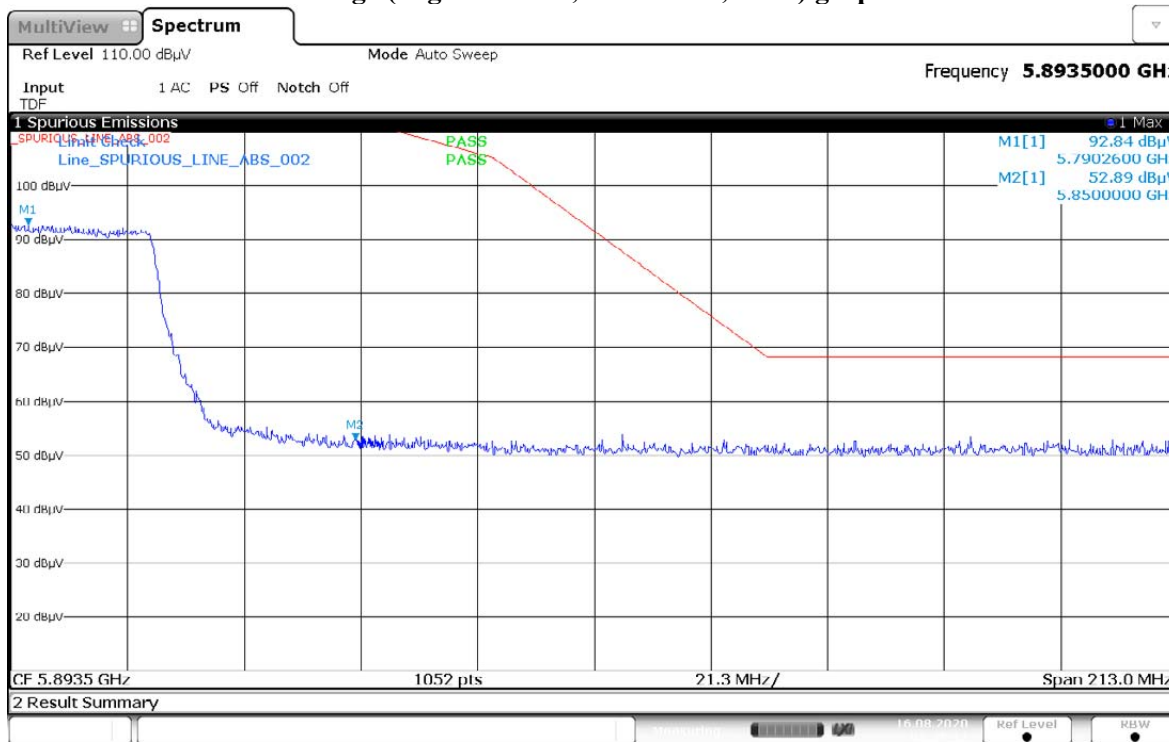


04:27:11 16.08.2020


7.7. Radiated Spurious Emission Measurement

7.7.1. Test Setup


<Radiated emission below 30MHz>

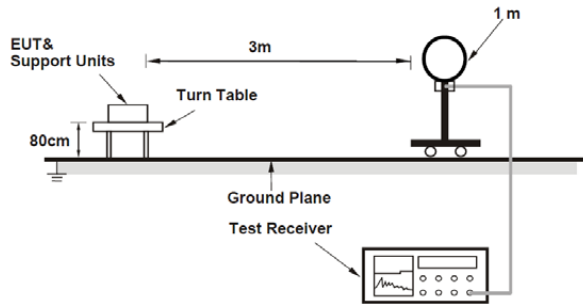

<Frequency Range below 1GHz>

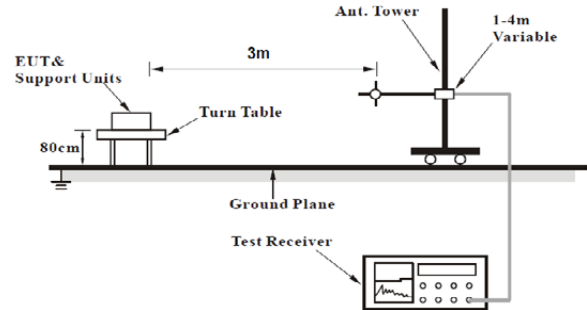

<Frequency Range above 1GHz>

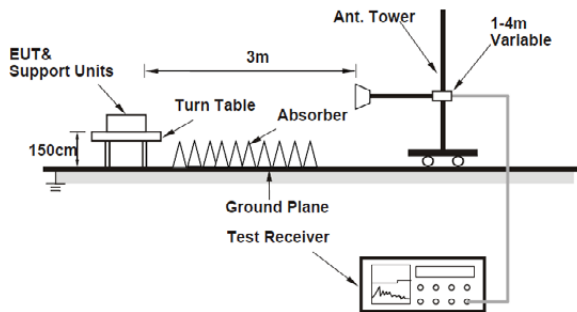

1. The EUT is placed on the top of a rotating table 0.8m/1.5m above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
2. The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
3. The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection using reduced video bandwidth (Duty cycle $\geq 98\%$) at frequency above 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $1/\tau$ Hz, where τ is minimum transmitter on time (Duty cycle $< 98\%$) for Average detection using reduced video bandwidth at frequency above 1GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7.7.2. Test Limits

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

For Radiated emissions which fall out of the restricted bands must comply with the radiated emission limits specified as below table.


Applicable To		Limit	
789033 D02 General UNII Test Procedures New Rules v01r03		Field Strength at 3 m	
		PK: 74 (dBµV/m)	AV: 54 (dBµV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
5150–5250 MHz	15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBµV/m)
5250–5350 MHz	15.407(b)(2)		
5470–5725 MHz	15.407(b)(3)		
5725–5850 MHz	15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2 (dBµV/m) ^{*1} PK: 105.2 (dBµV/m) ^{*2} PK: 110.8 (dBµV/m) ^{*3} PK: 122.2 (dBµV/m) ^{*4}
	15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.			
^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.			
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.			
^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			

NOTE:


The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = ((1000000 \sqrt{(30P)}) / 3) \mu\text{V/m, where } P \text{ is the eirp (Watts)}$$


VERTICAL, QPK

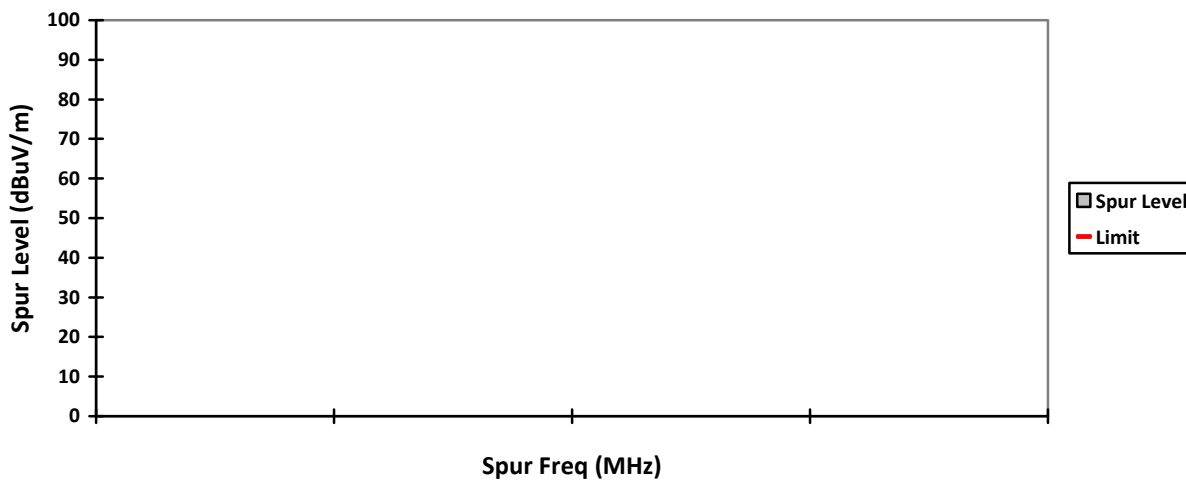


HORIZONTAL, QPK

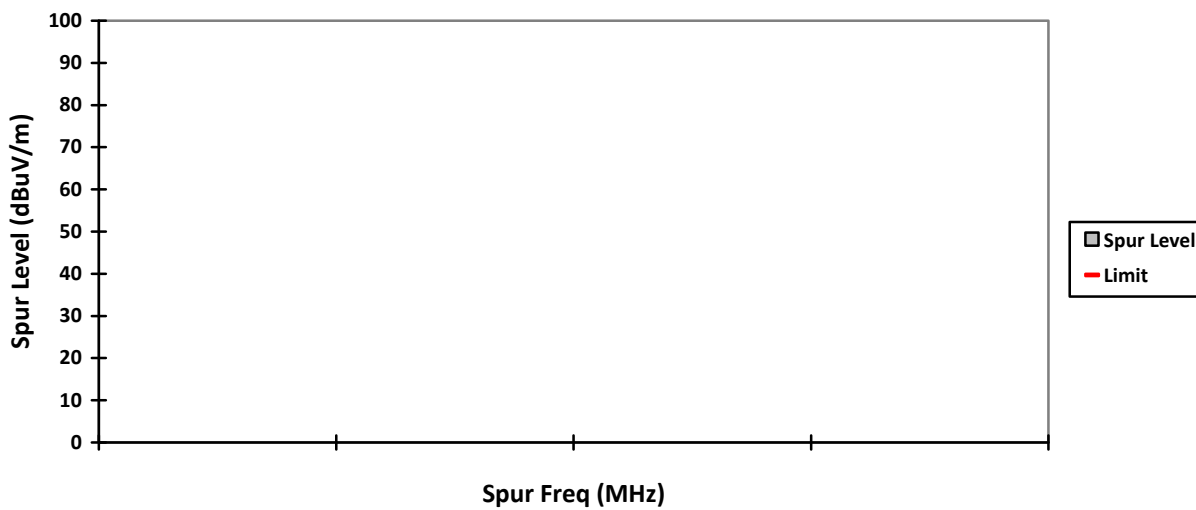


VERTICAL, PK

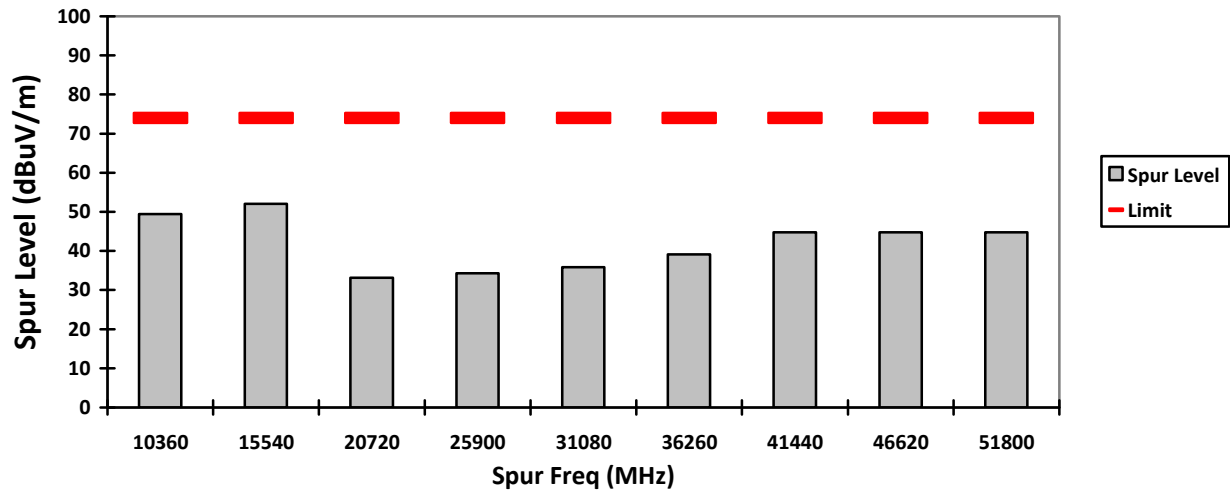


HORIZONTAL, PK

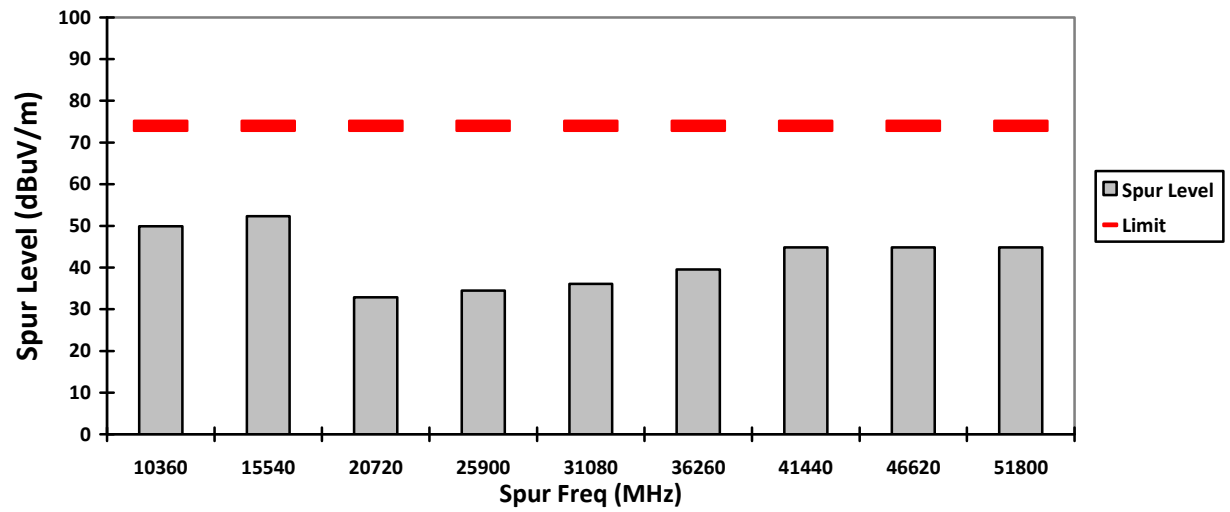

VERTICAL, AV

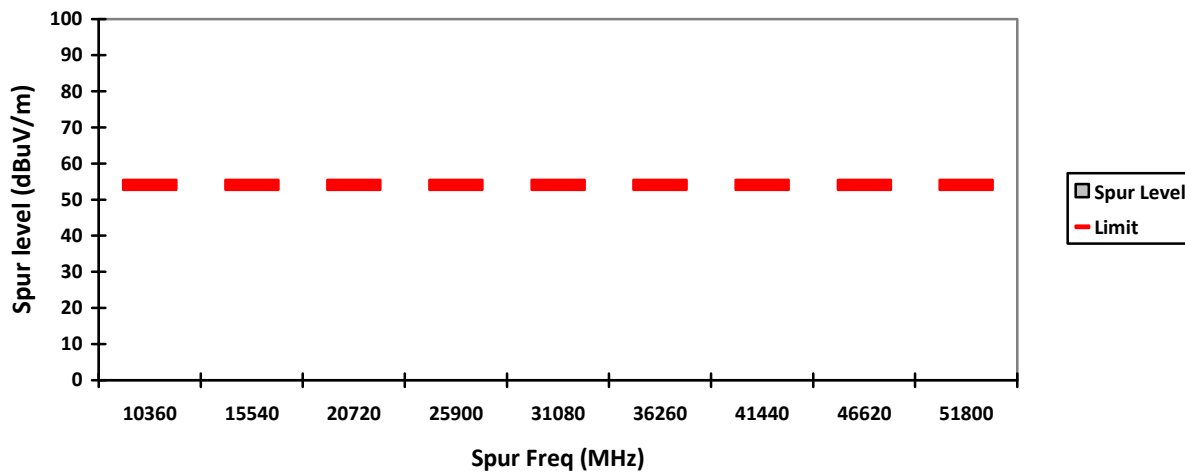

HORIZONTAL, AV

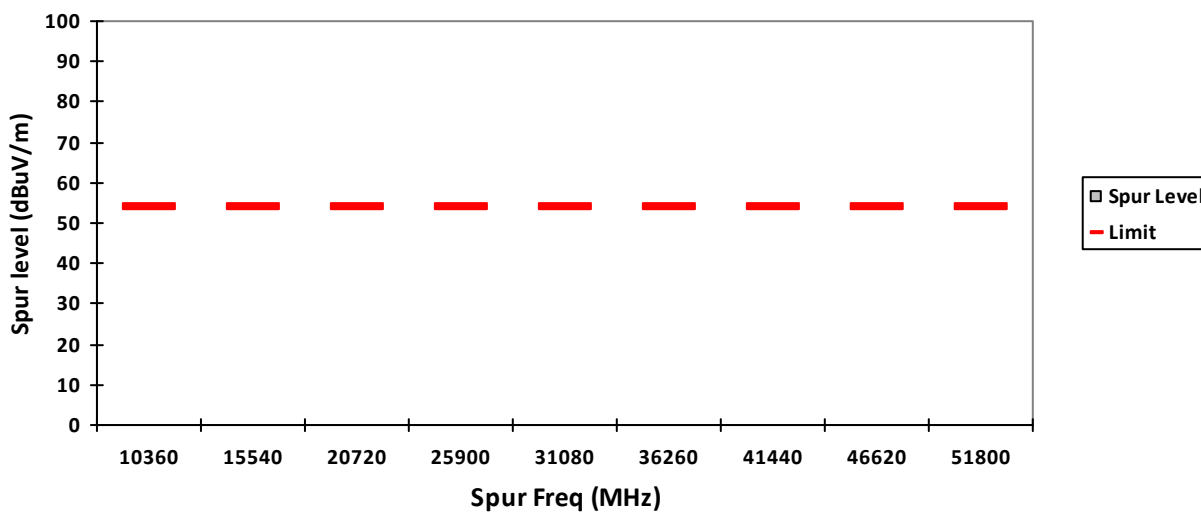


Radiated Emission (Mid Channel) tabular data

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Humidity (%): 70.3
Test Date: Wed, Aug 19, 2020

165


VERTICAL, QPK

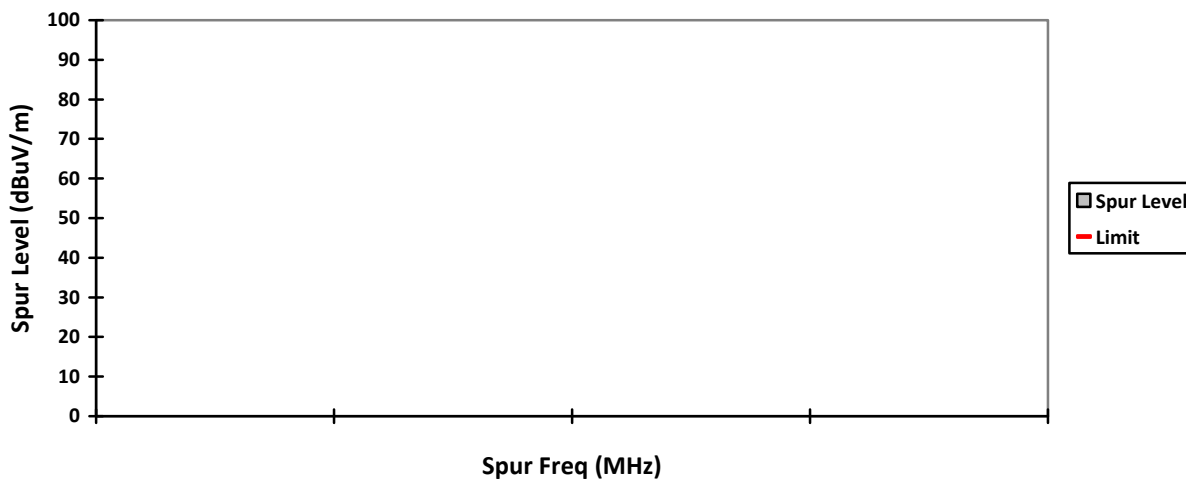


HORIZONTAL, QPK

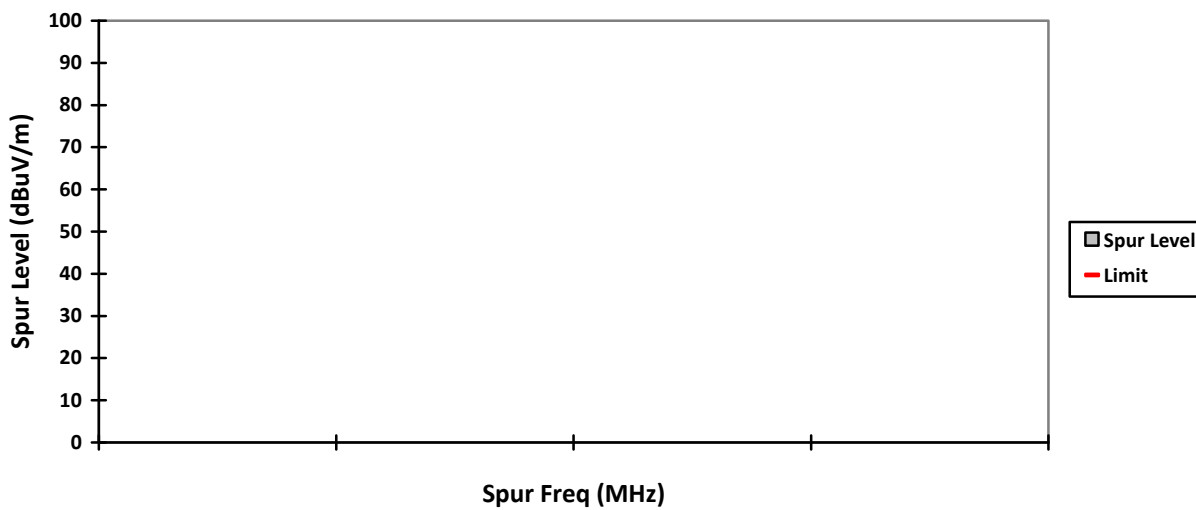


VERTICAL, PK

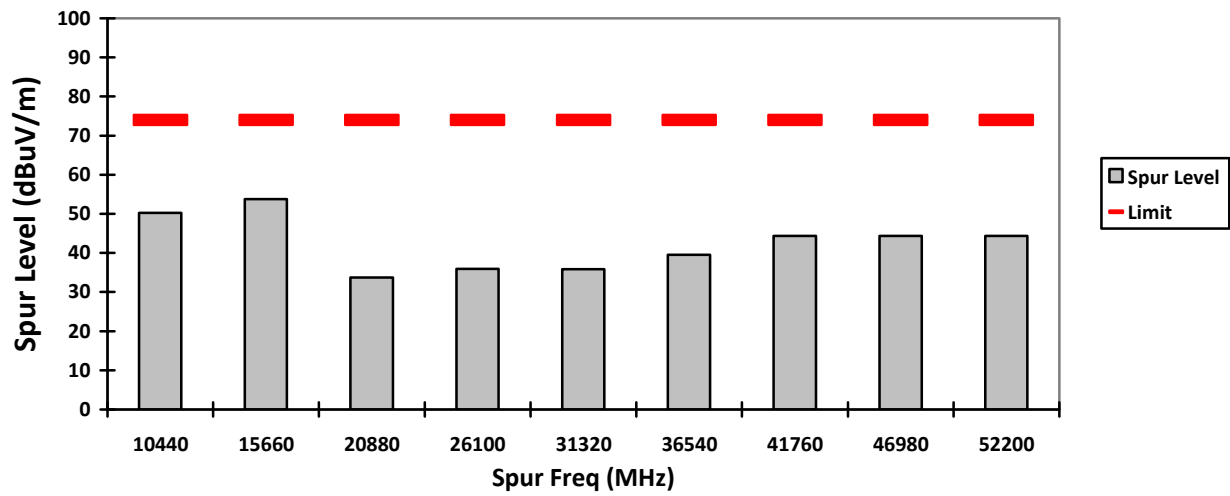


HORIZONTAL, PK

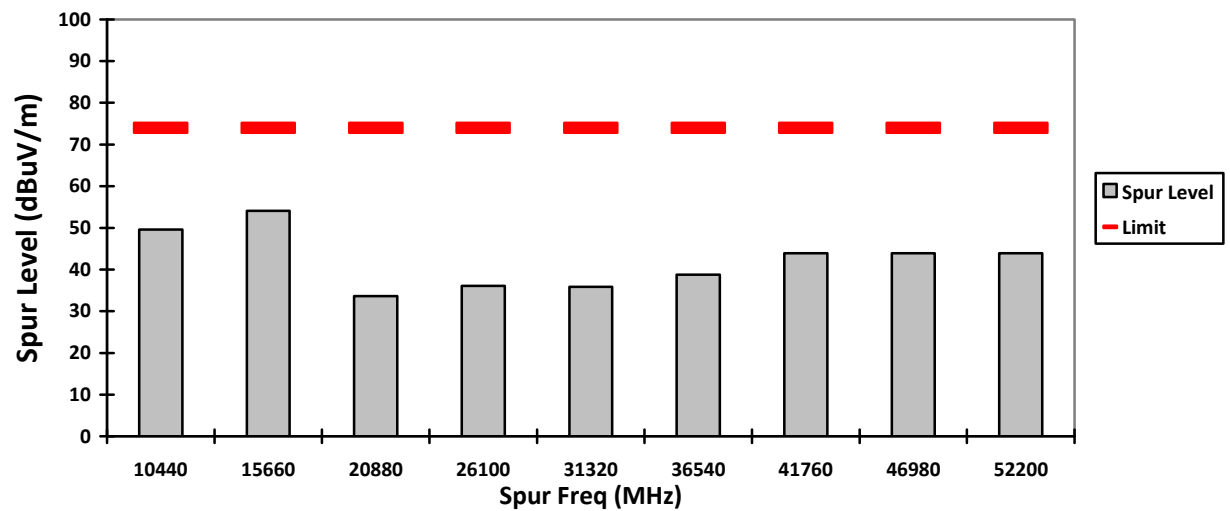


VERTICAL, AV

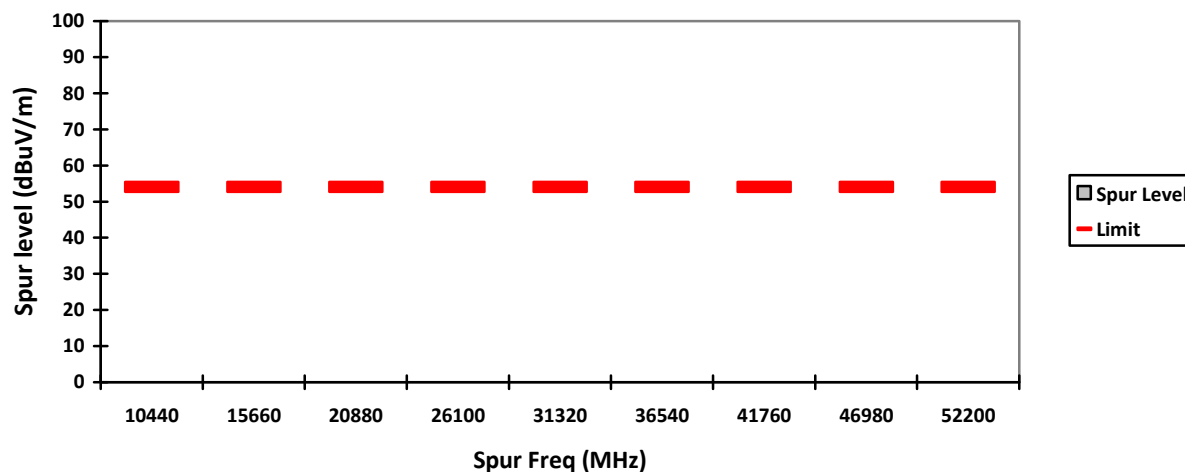


HORIZONTAL, AV

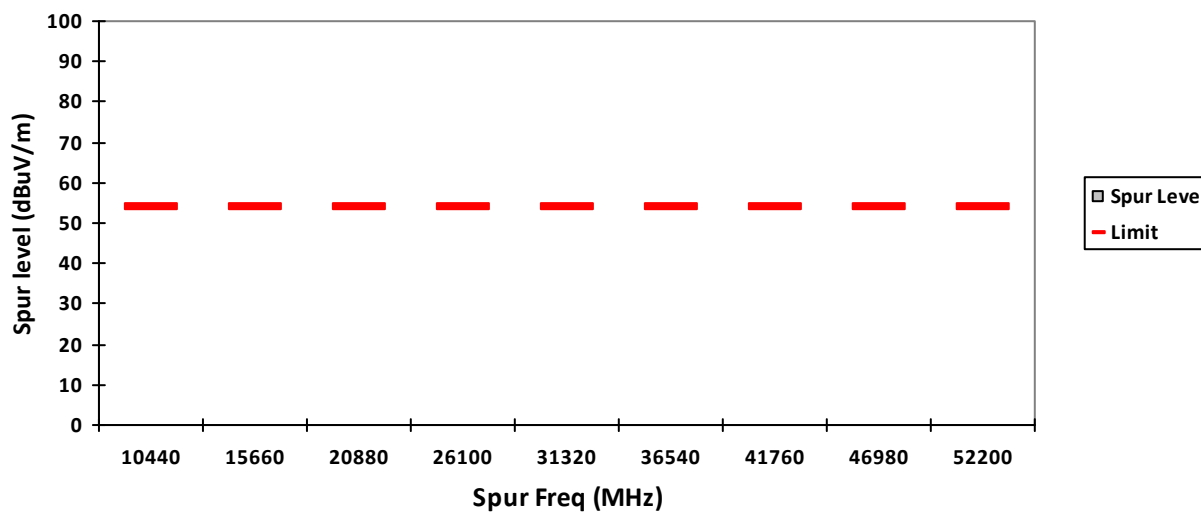


VERTICAL, QPK

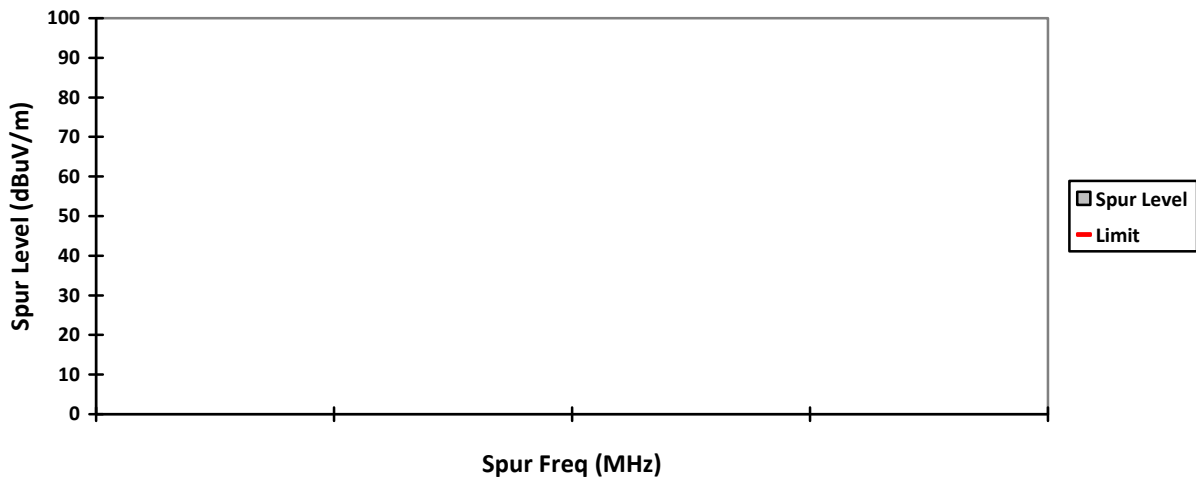


HORIZONTAL, QPK

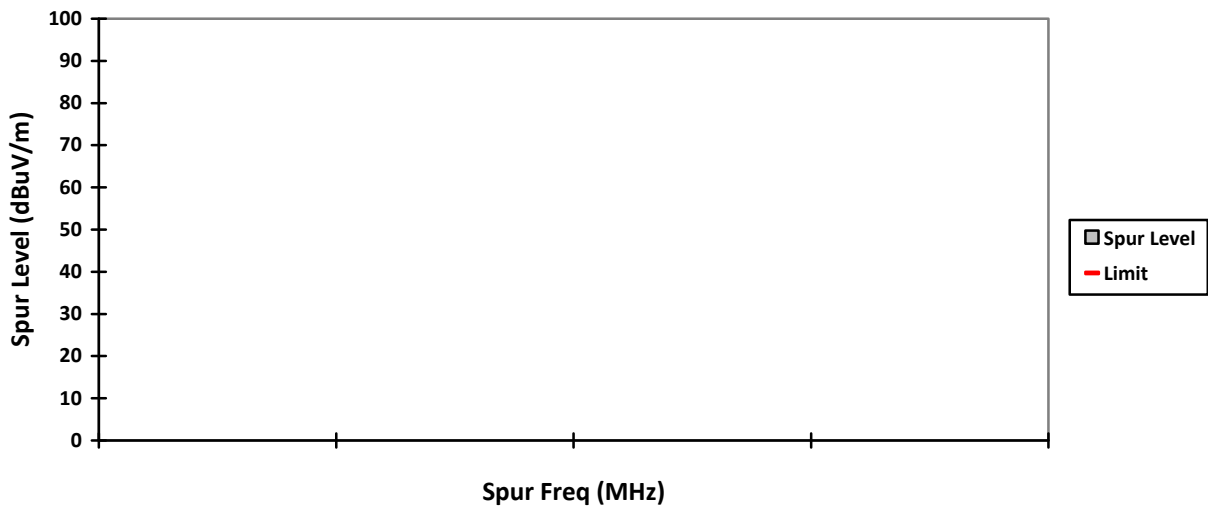


VERTICAL, PK

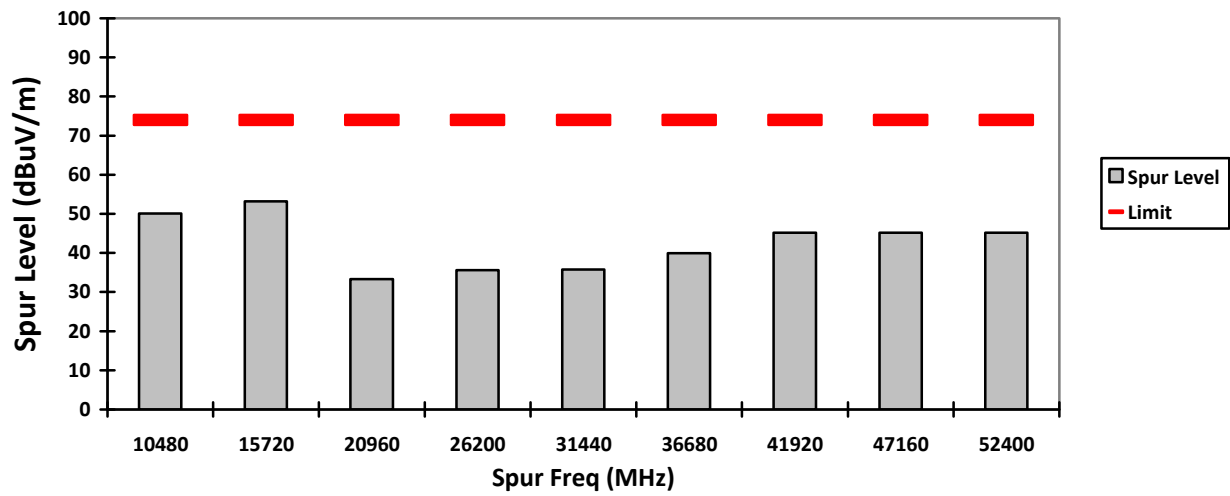


HORIZONTAL, PK

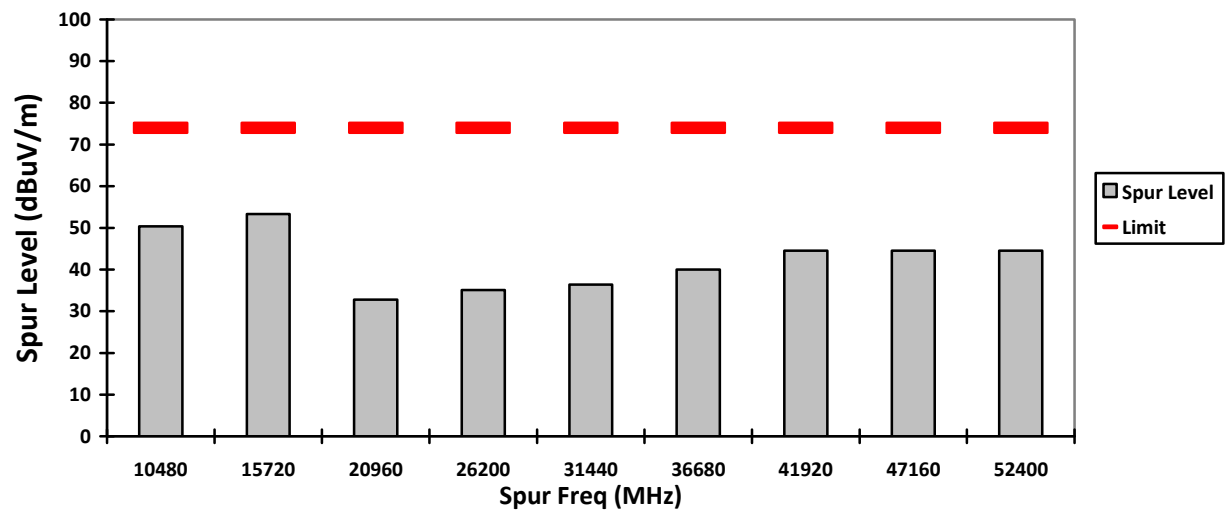

VERTICAL, AV

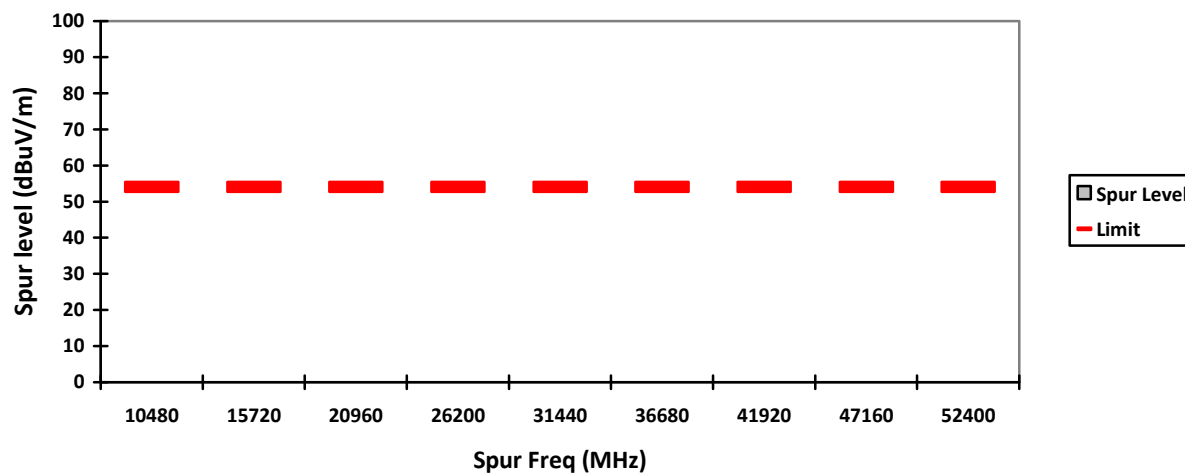

HORIZONTAL, AV

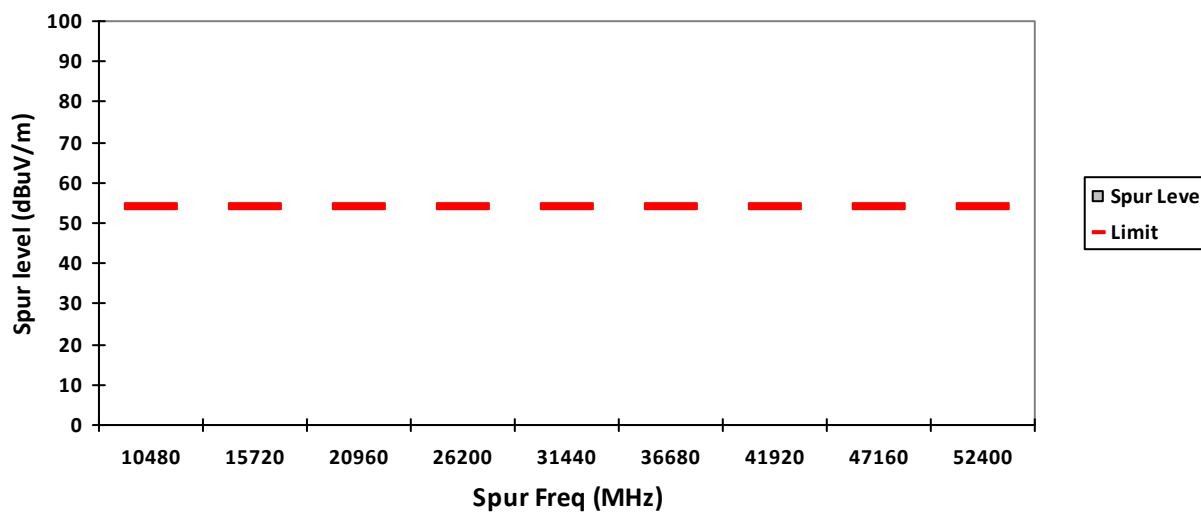

Test: WIFI SAC Transmitter Radiated Emission

Model#: AAH90ZDU9RH1AN

S/N: 734TWP0311

EMC SR ID#: 18058-EMC-00040

Battery: PMNN4804A

Accessory: AN000348A01

Test Channel: Low

Test Frequency: 5260.0000 MHz

Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (802.11a 20MHz)

Radiated Emission (Low Channel) tabular data

[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 24.5

Test Performed by: Qawiman&Fendi

System MU: 4.03dB


Humidity (%): 70.3

Test Date: Wed, Aug 19, 2020


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, QPK

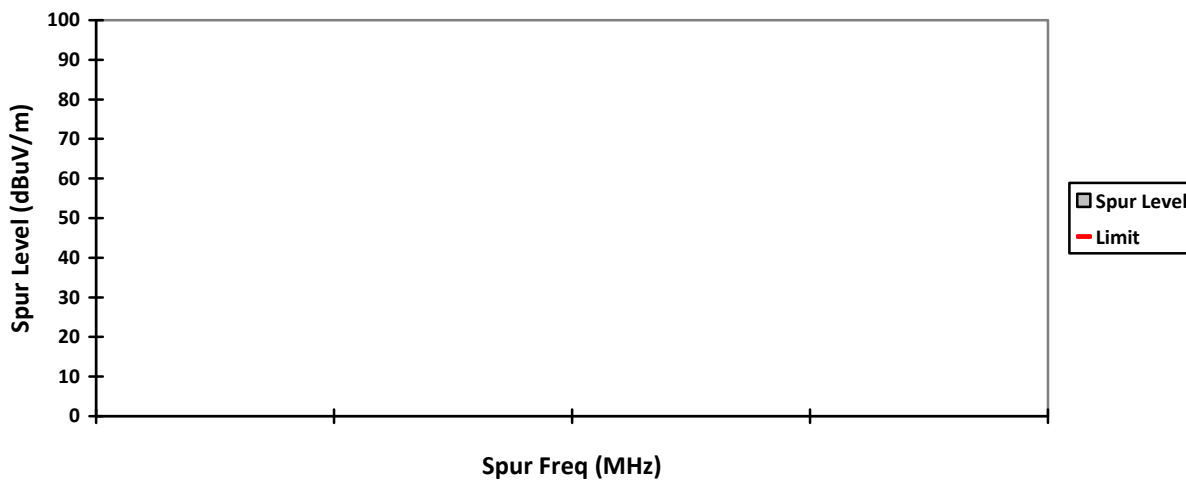


HORIZONTAL, QPK

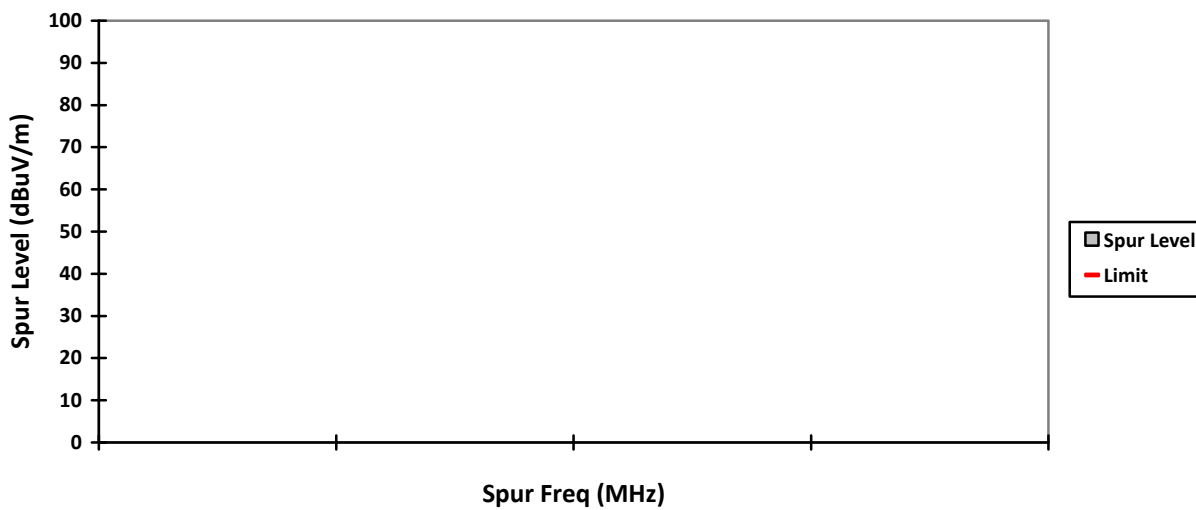


VERTICAL, PK

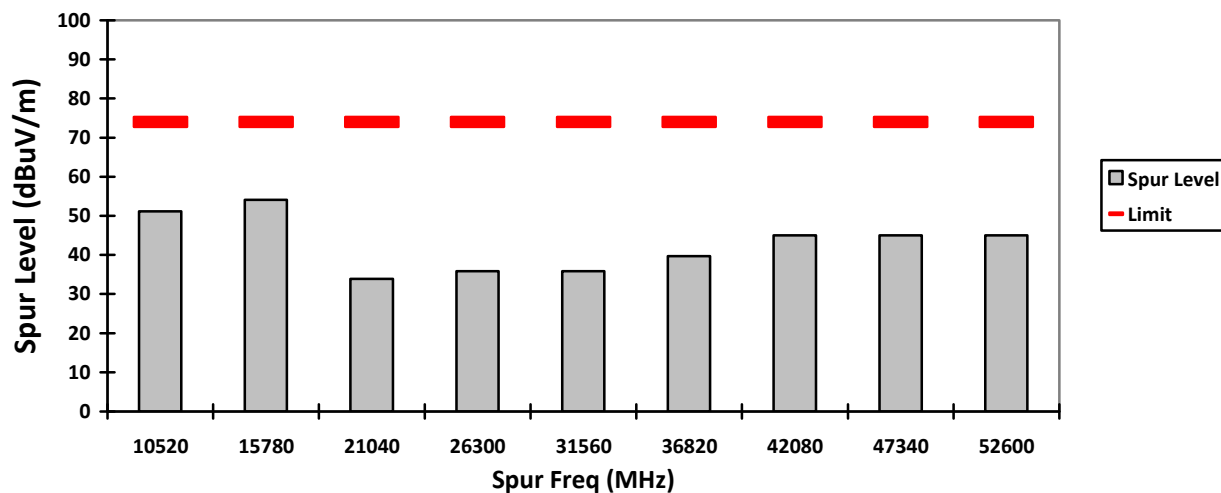


HORIZONTAL, PK

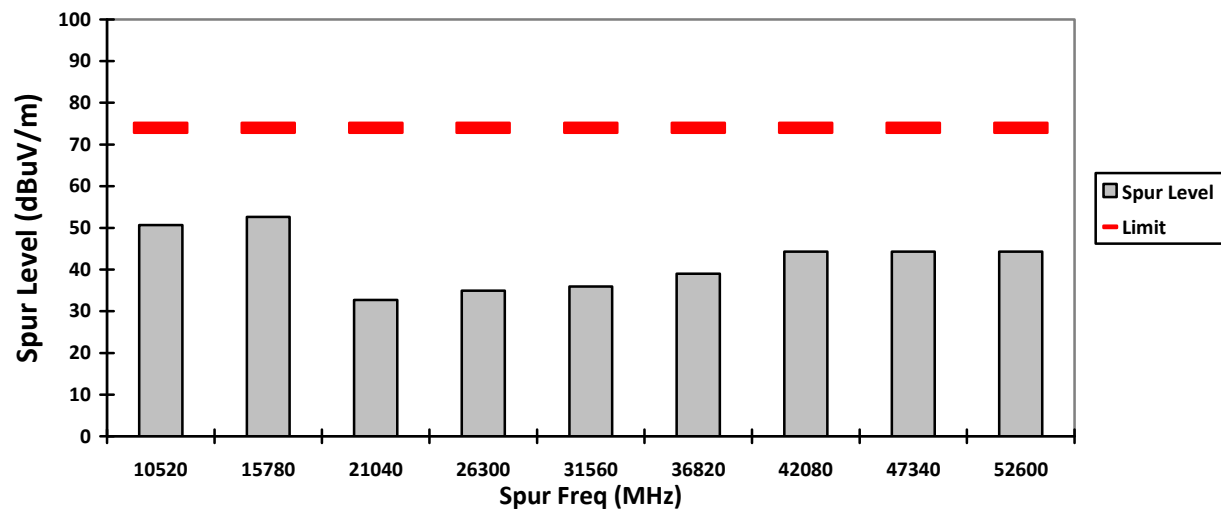


VERTICAL, AV

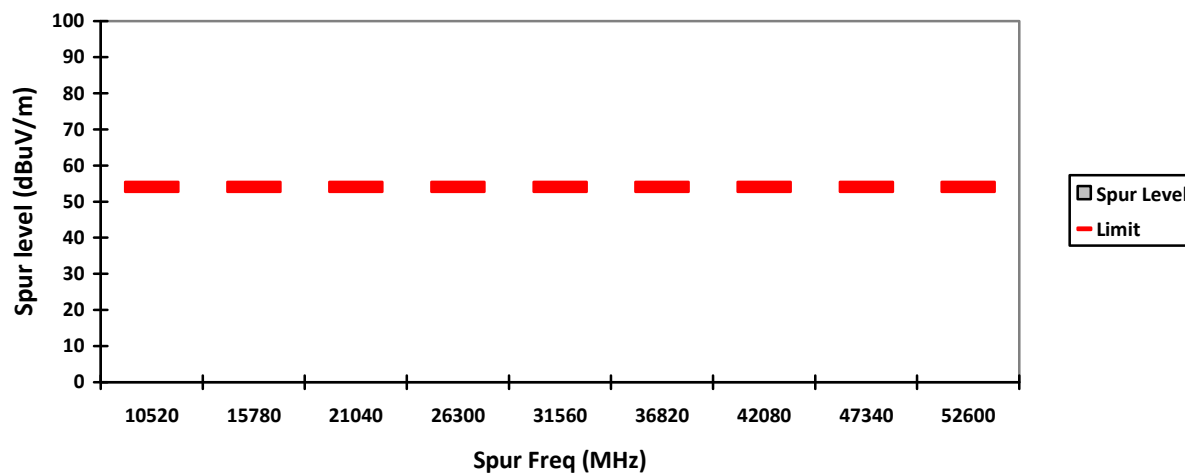


HORIZONTAL, AV

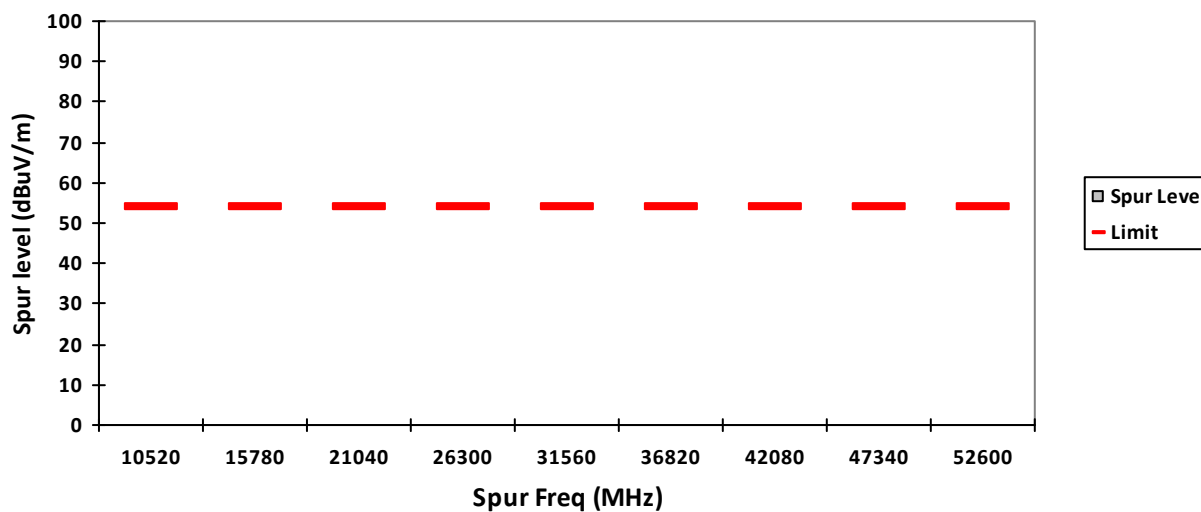


VERTICAL, QPK

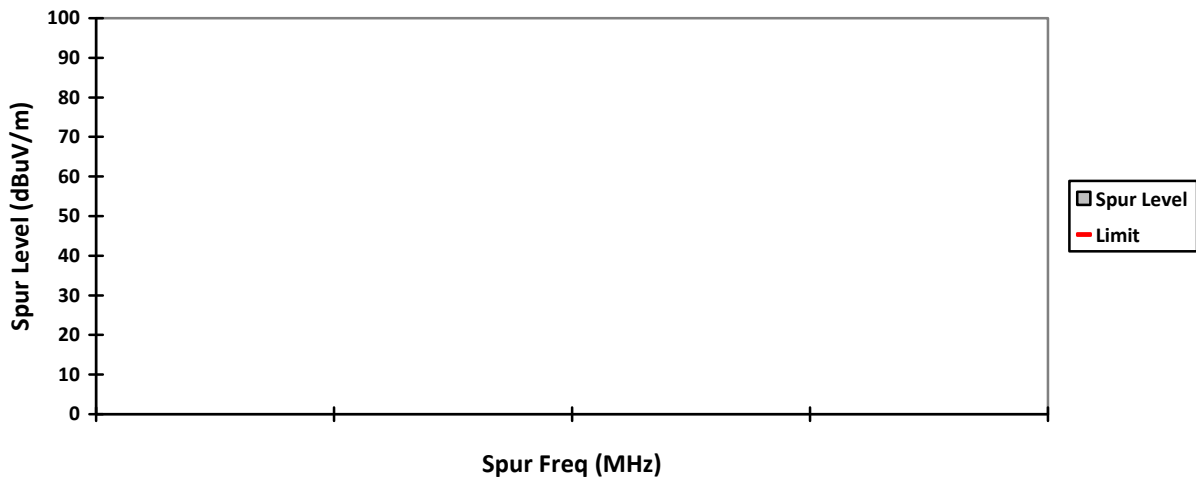


HORIZONTAL, QPK

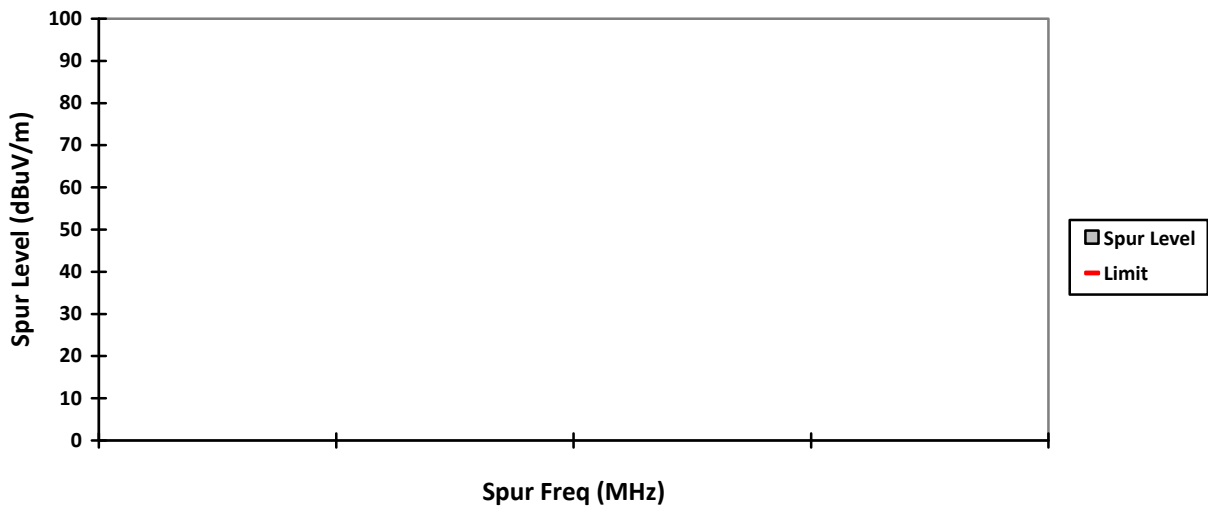


VERTICAL, PK

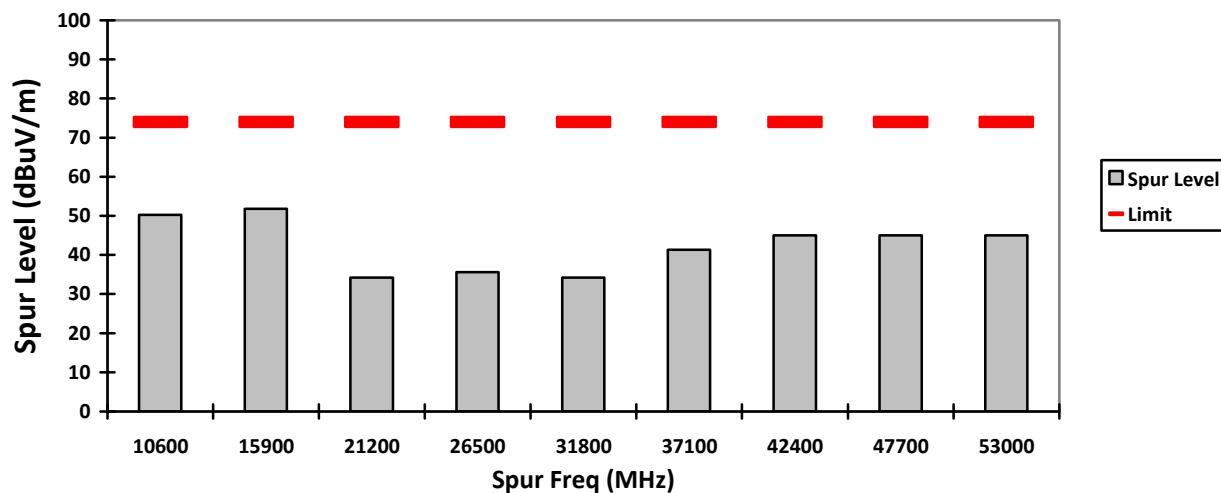


HORIZONTAL, PK

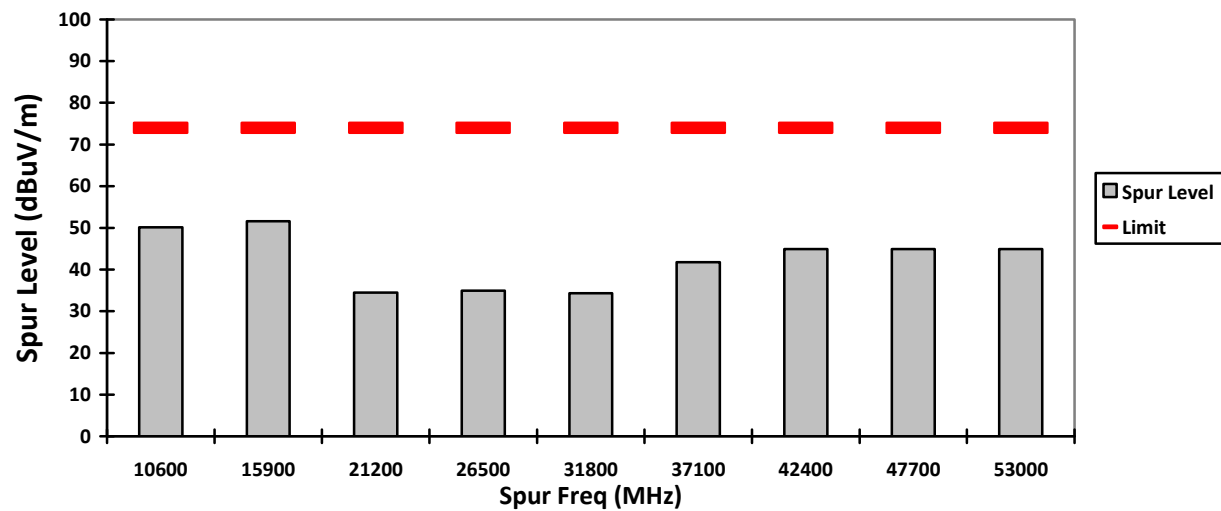


VERTICAL, AV

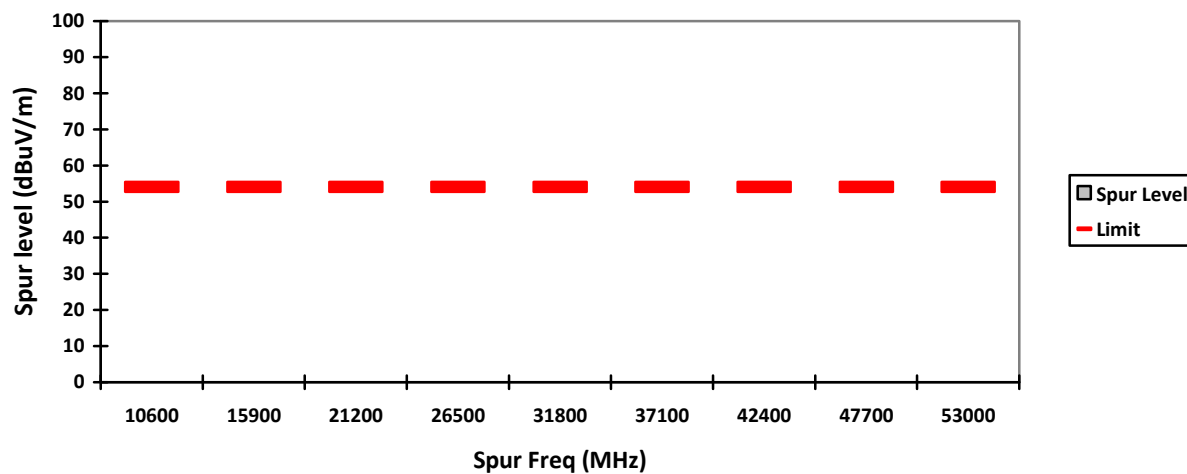


HORIZONTAL, AV

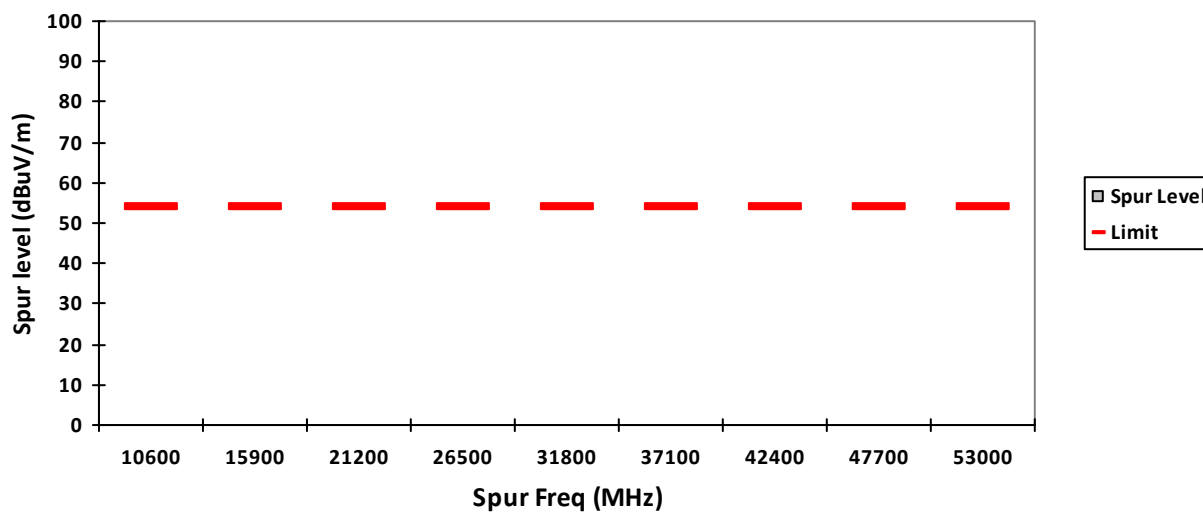


VERTICAL, QPK

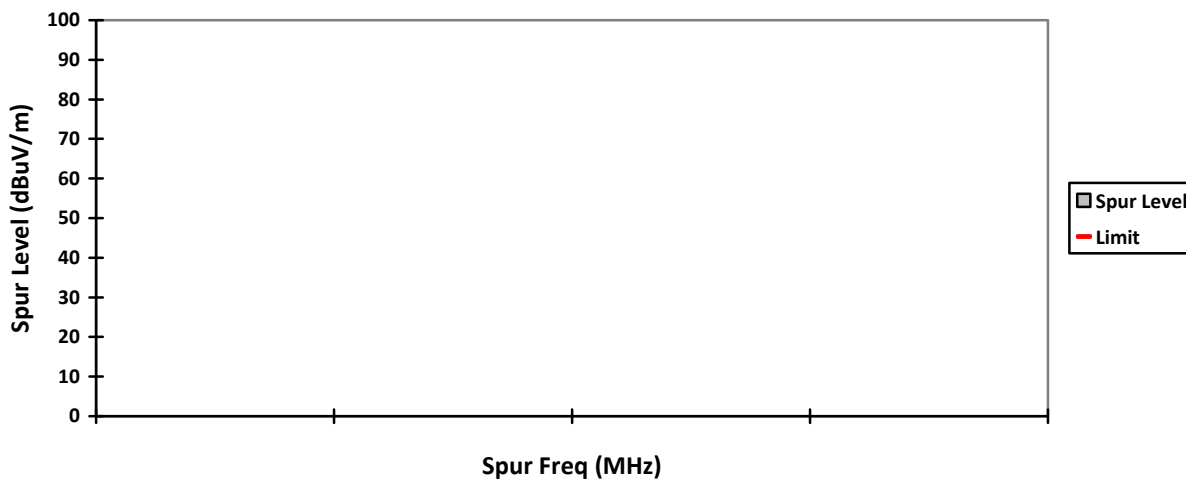


HORIZONTAL, QPK

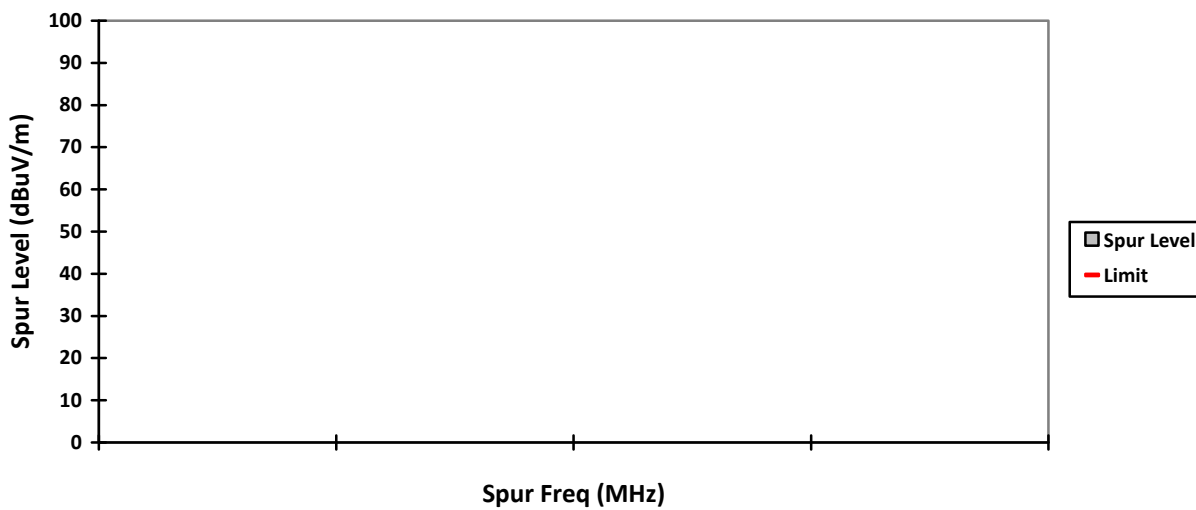


VERTICAL, PK

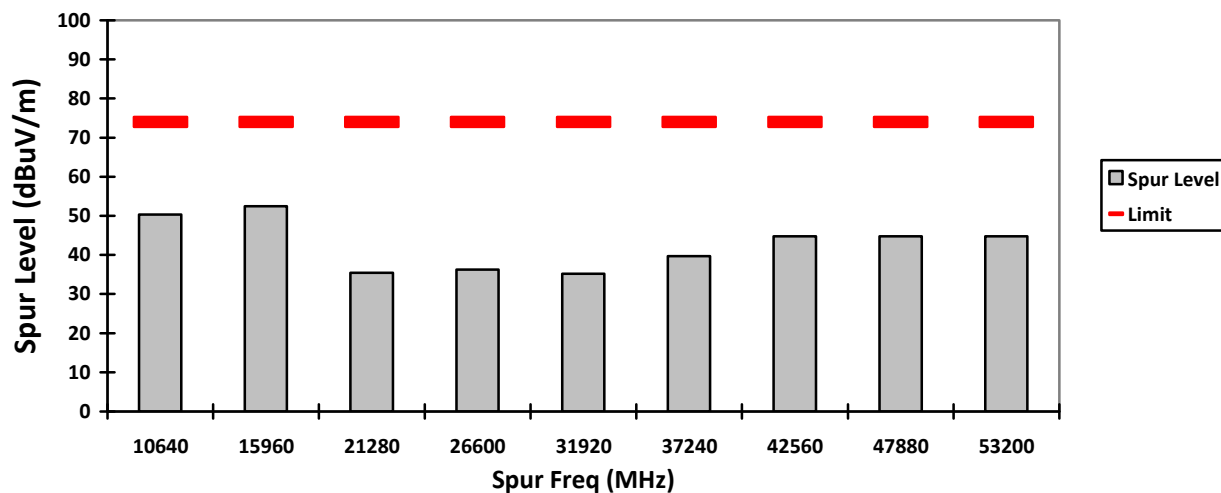


HORIZONTAL, PK

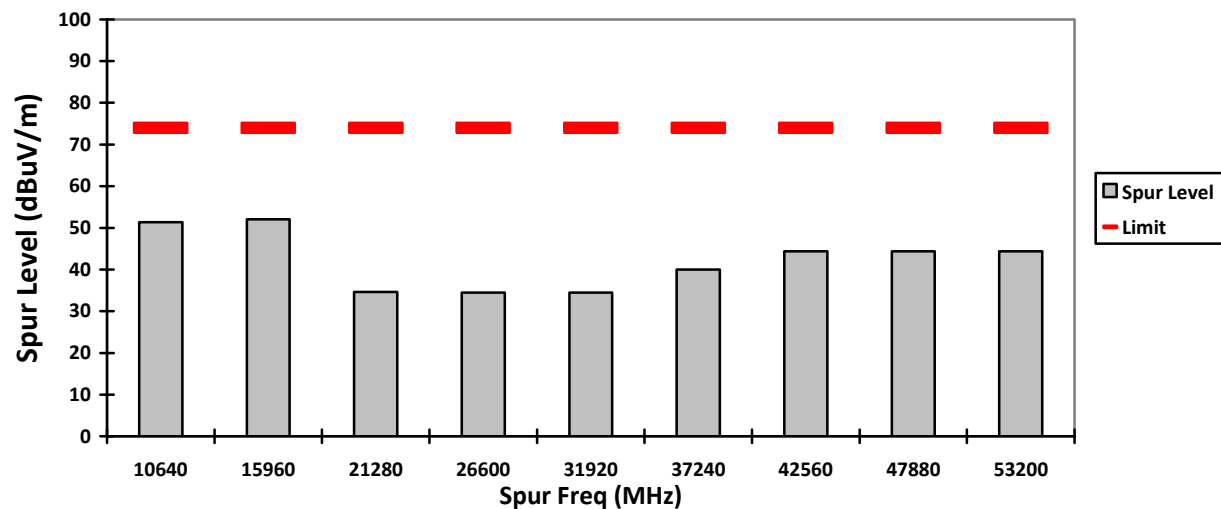


VERTICAL, AV

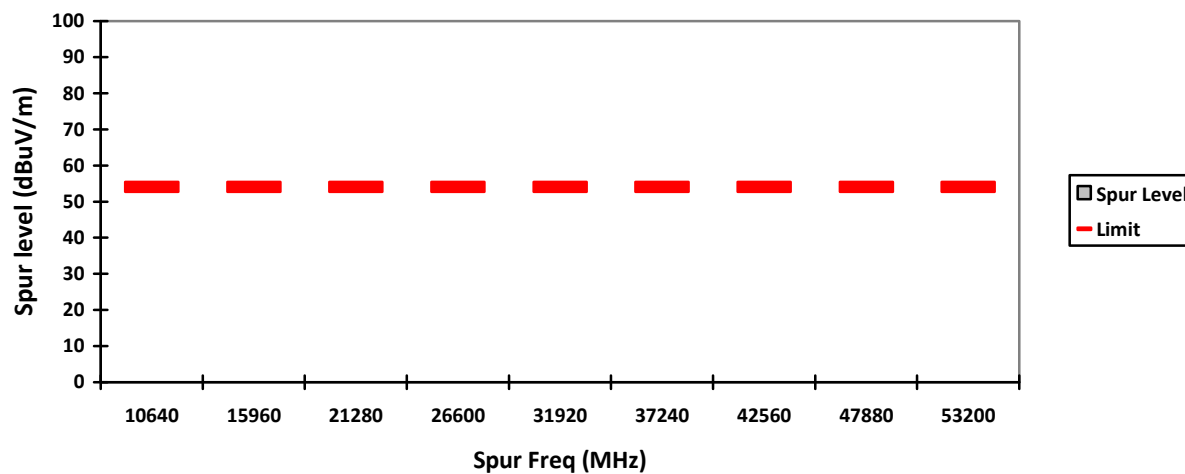


HORIZONTAL, AV

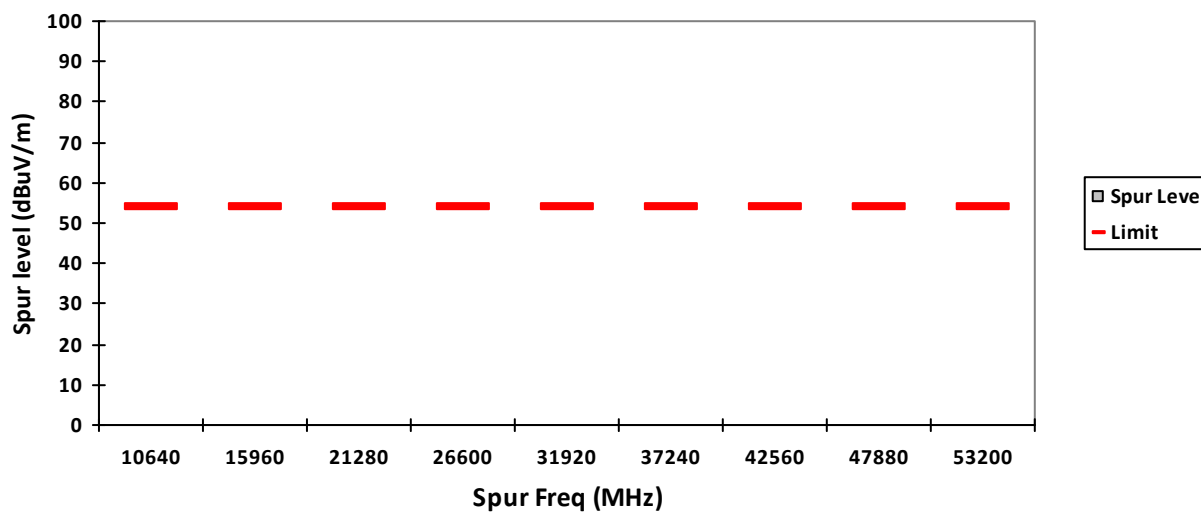


VERTICAL, QPK

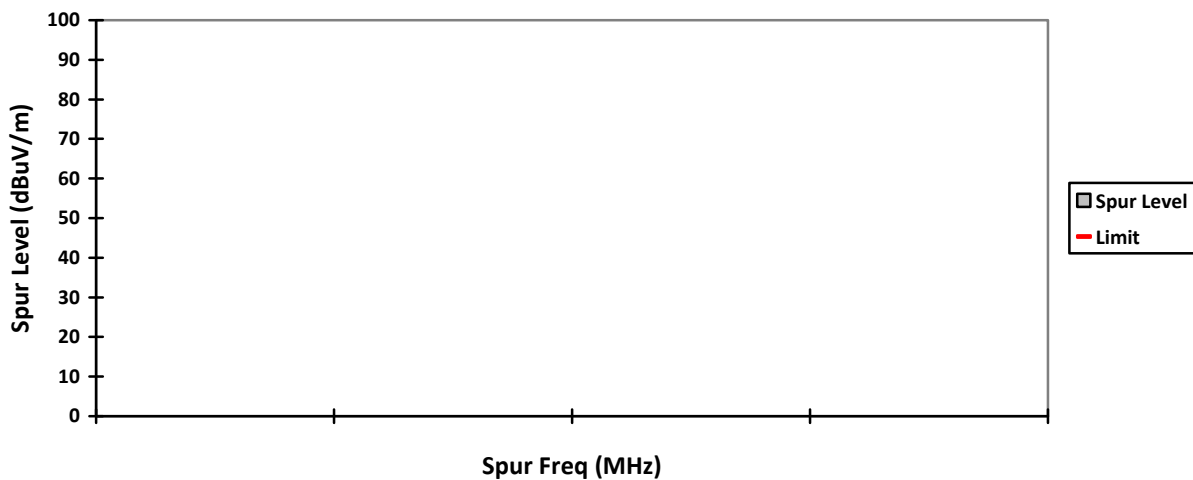


HORIZONTAL, QPK

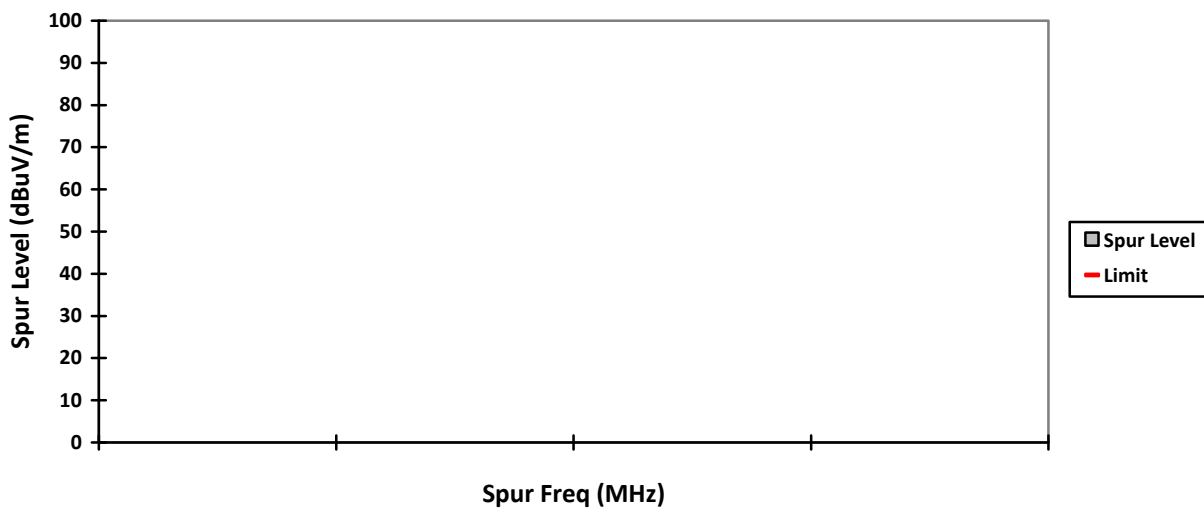


VERTICAL, PK

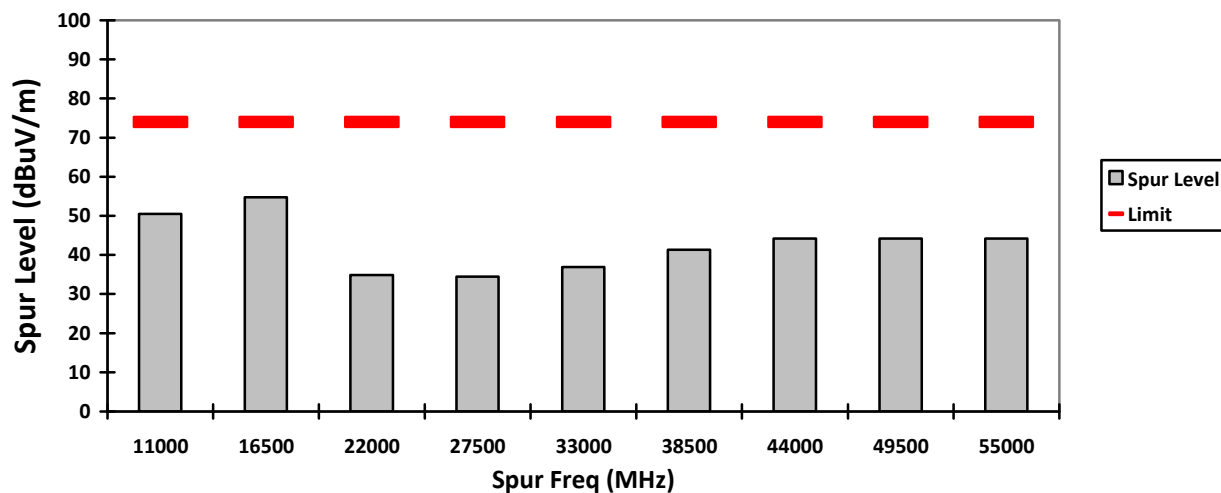


HORIZONTAL, PK

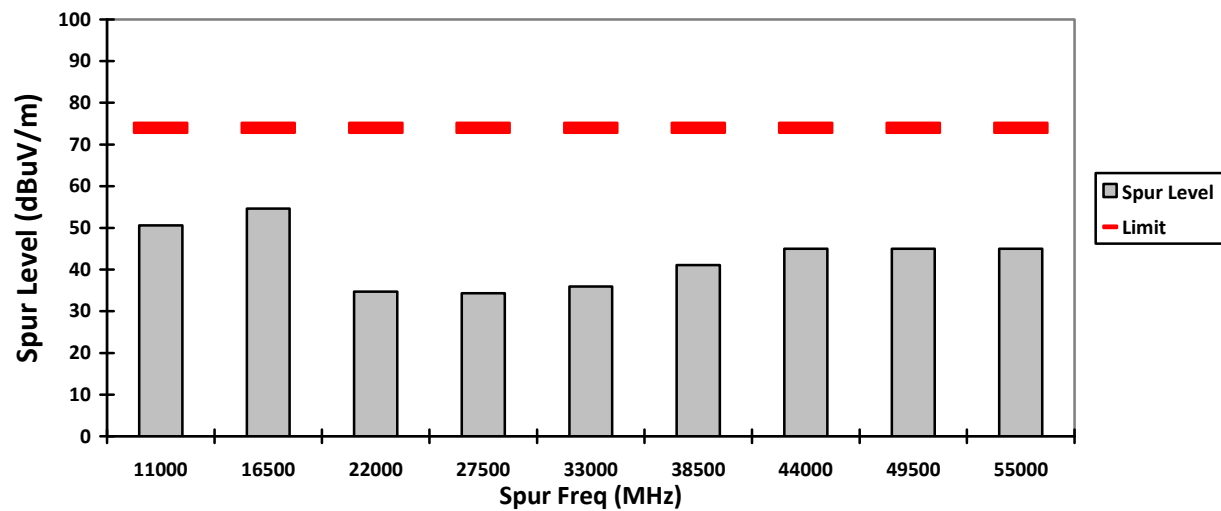


VERTICAL, AV

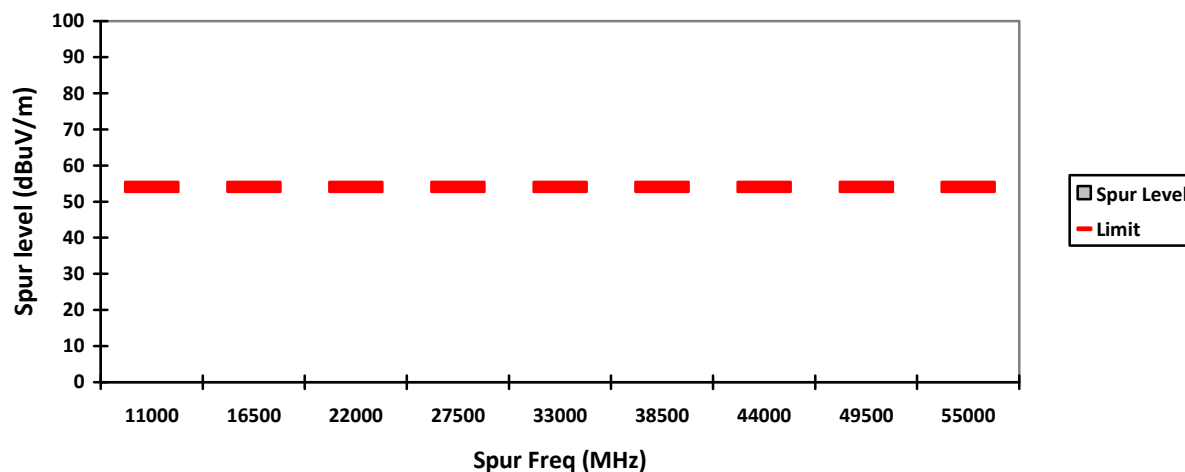


HORIZONTAL, AV

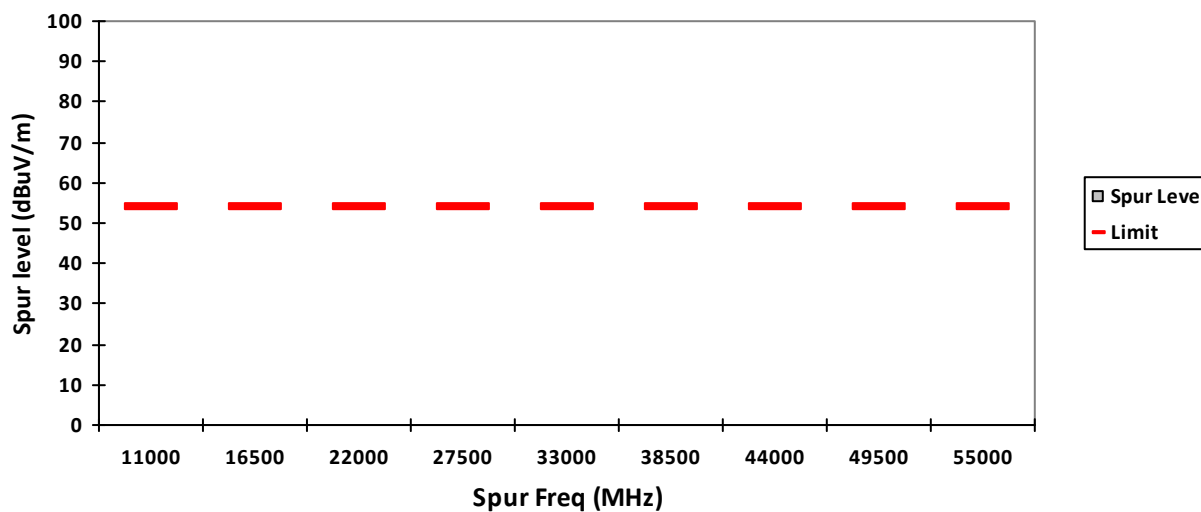


VERTICAL, QPK

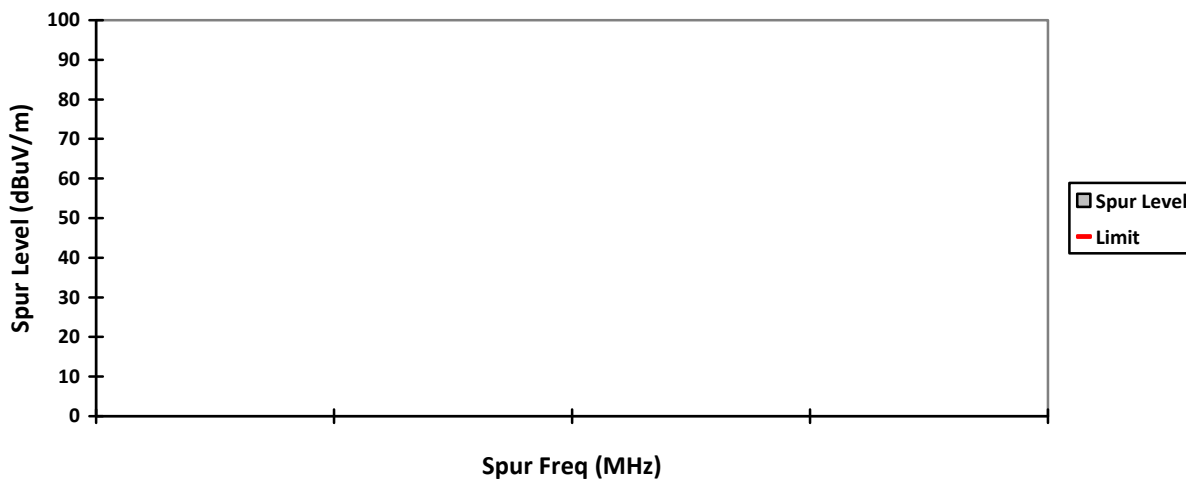


HORIZONTAL, QPK

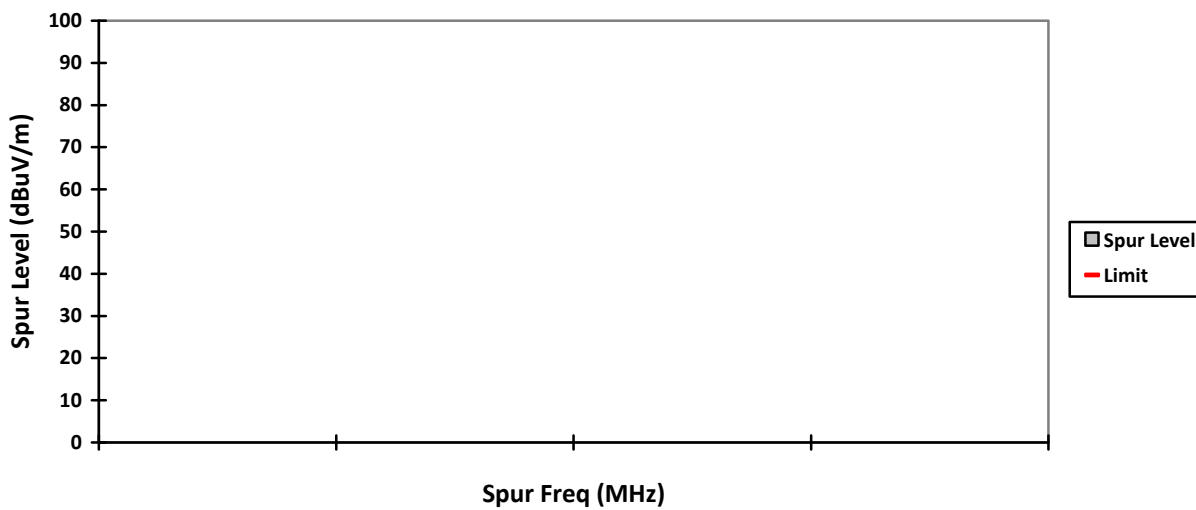


VERTICAL, PK

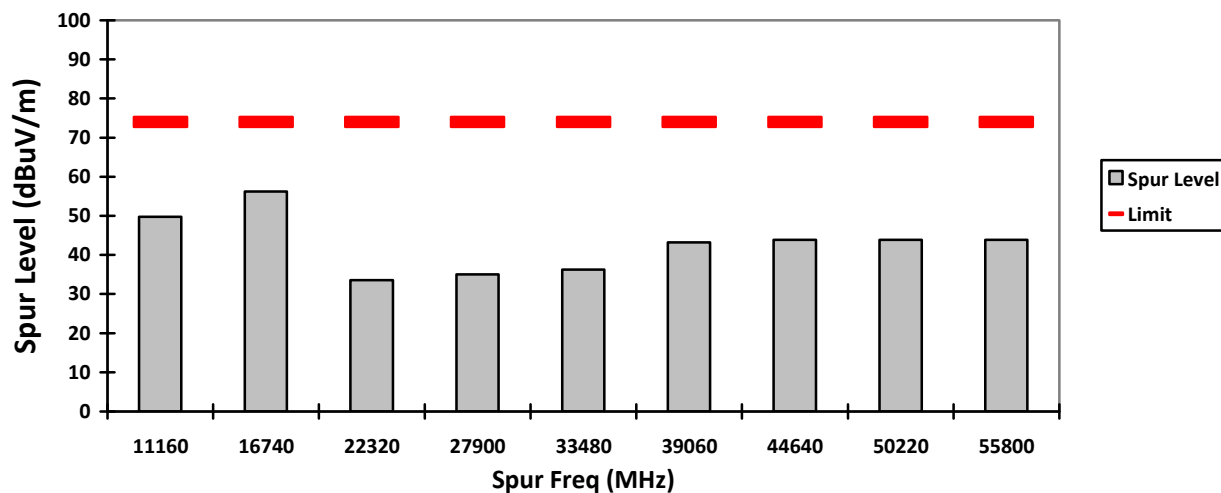


HORIZONTAL, PK

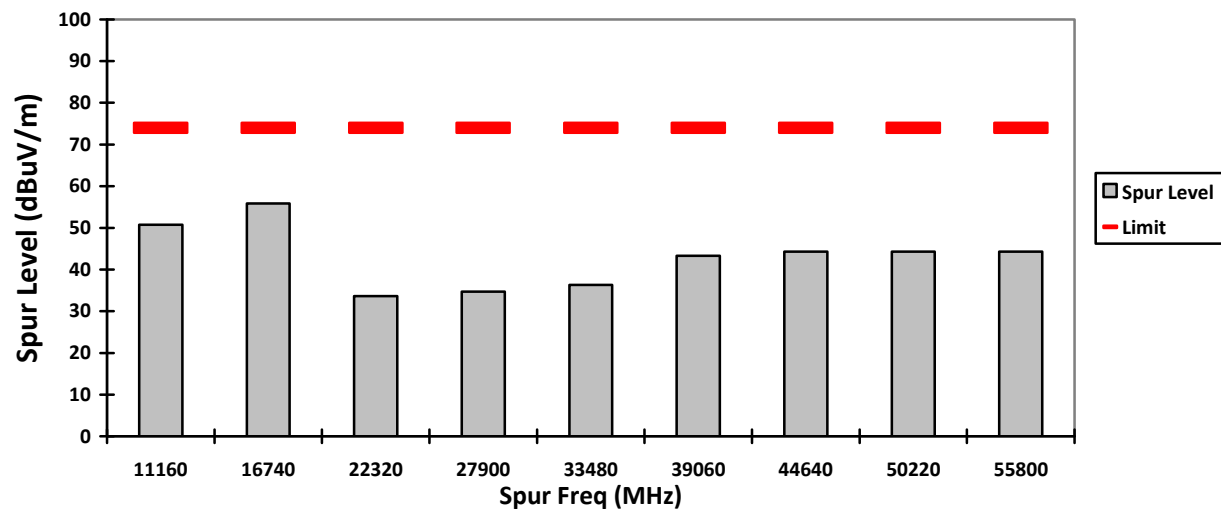

VERTICAL, AV

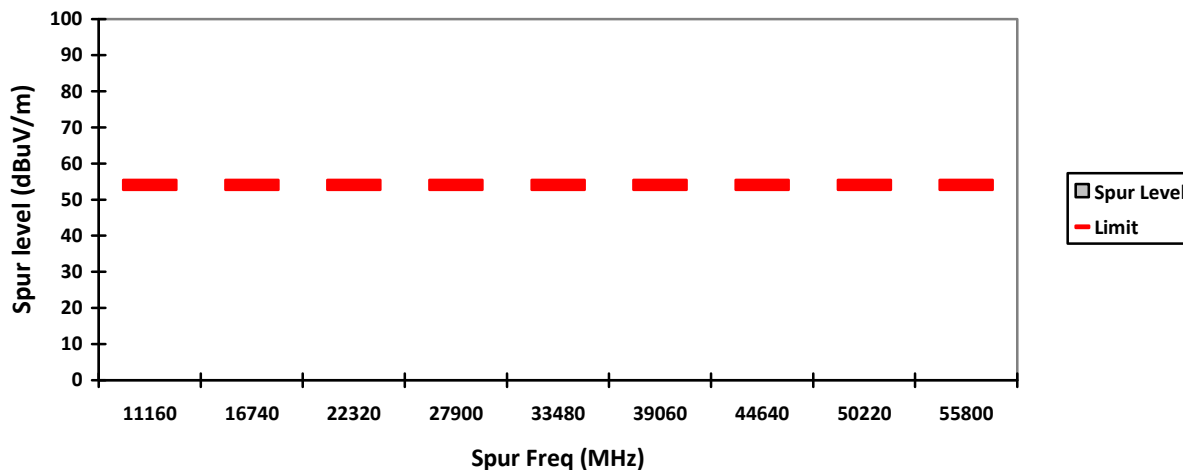

HORIZONTAL, AV

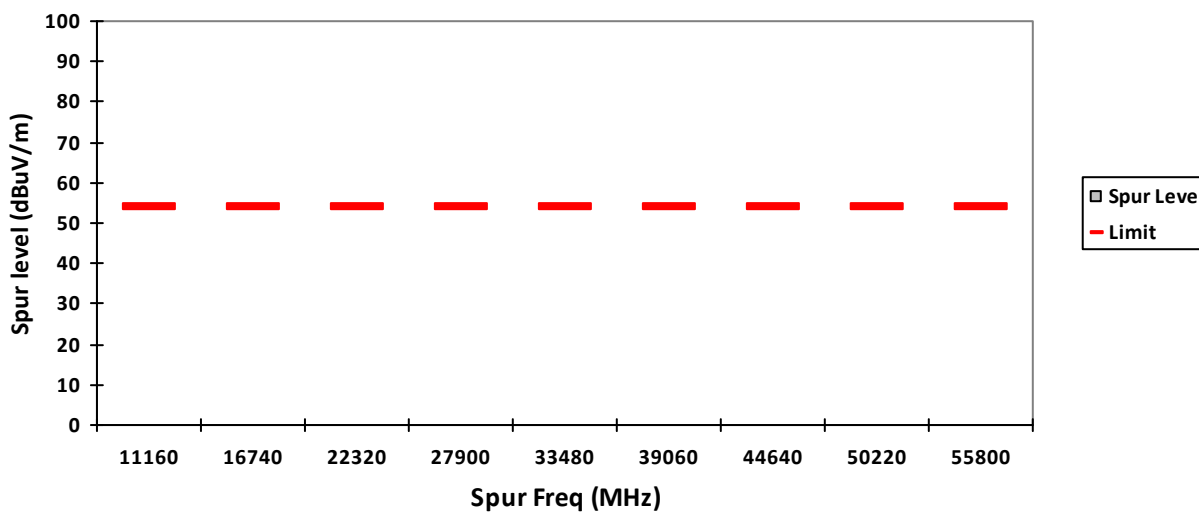


Radiated Emission (Straddle Channel) tabular data

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Humidity (%): 70.3
Test Date: Wed, Aug 19, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
***Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.**


VERTICAL, QPK

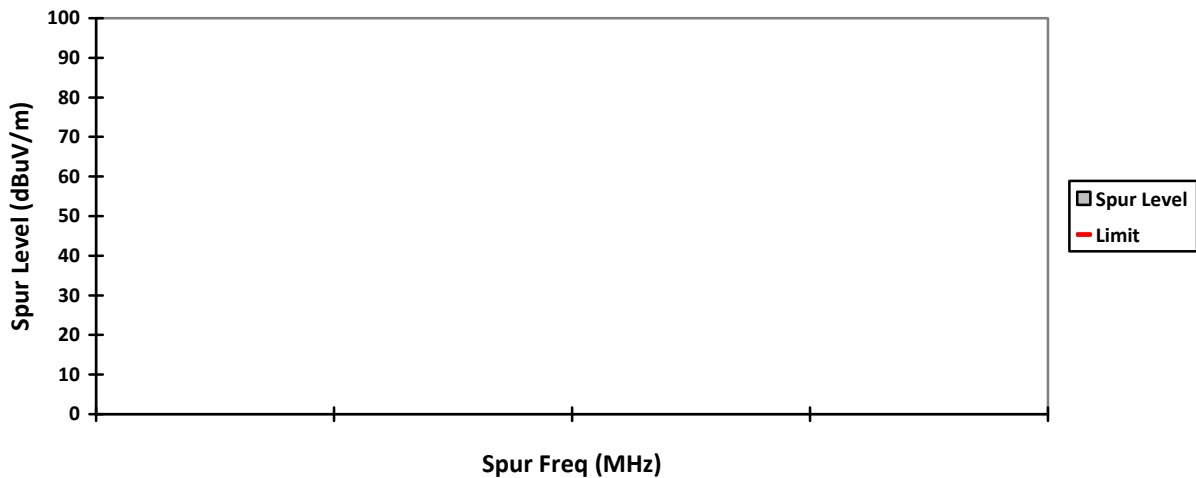


HORIZONTAL, QPK

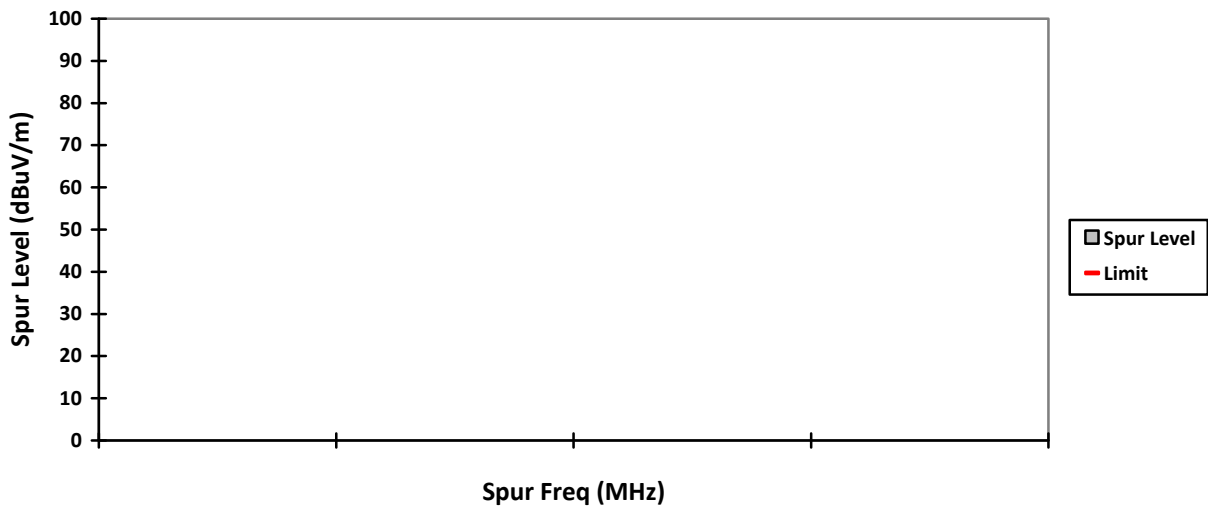


VERTICAL, PK

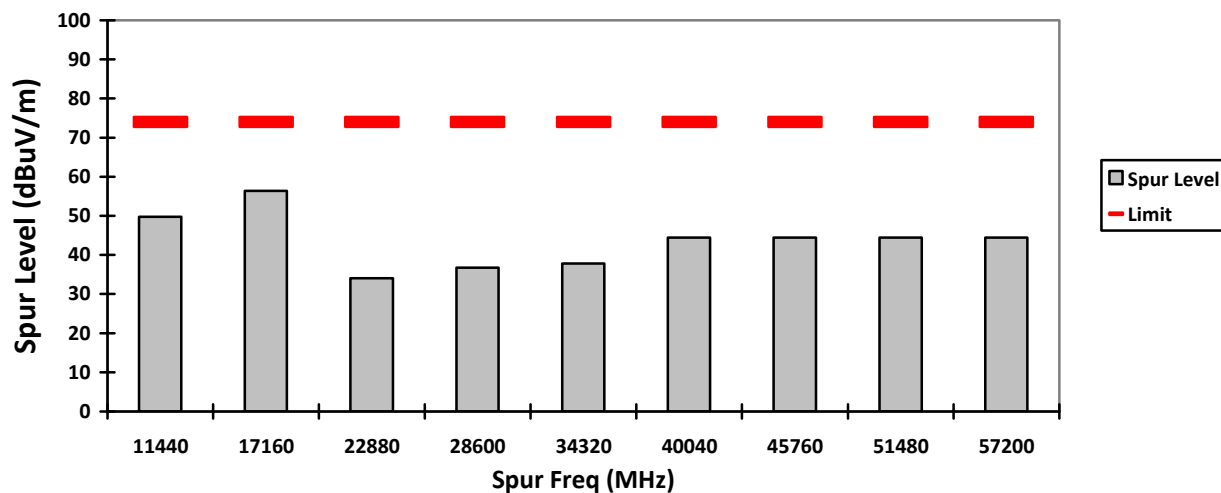


HORIZONTAL, PK

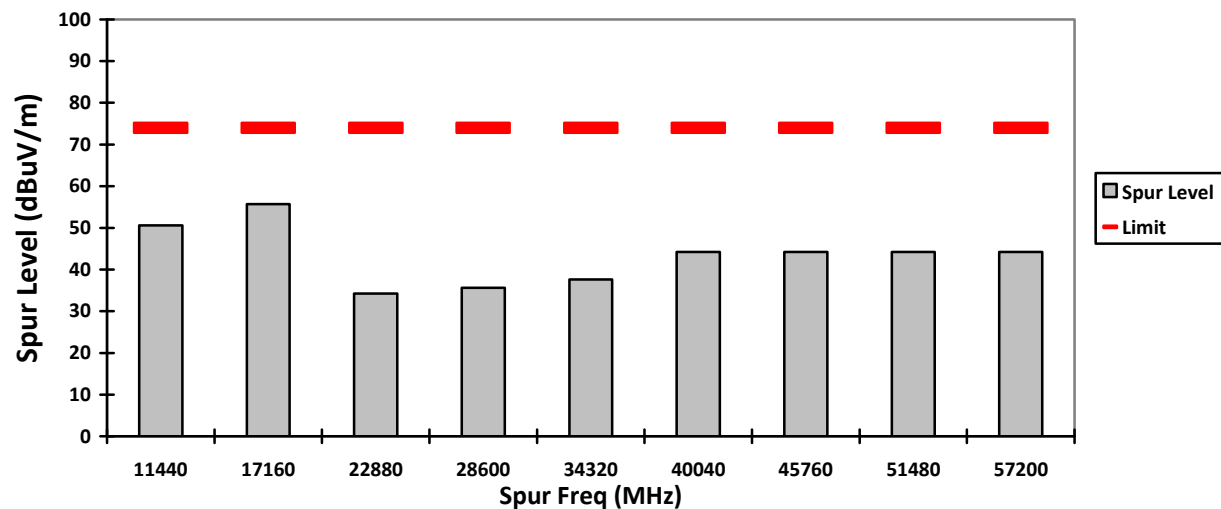

VERTICAL, AV

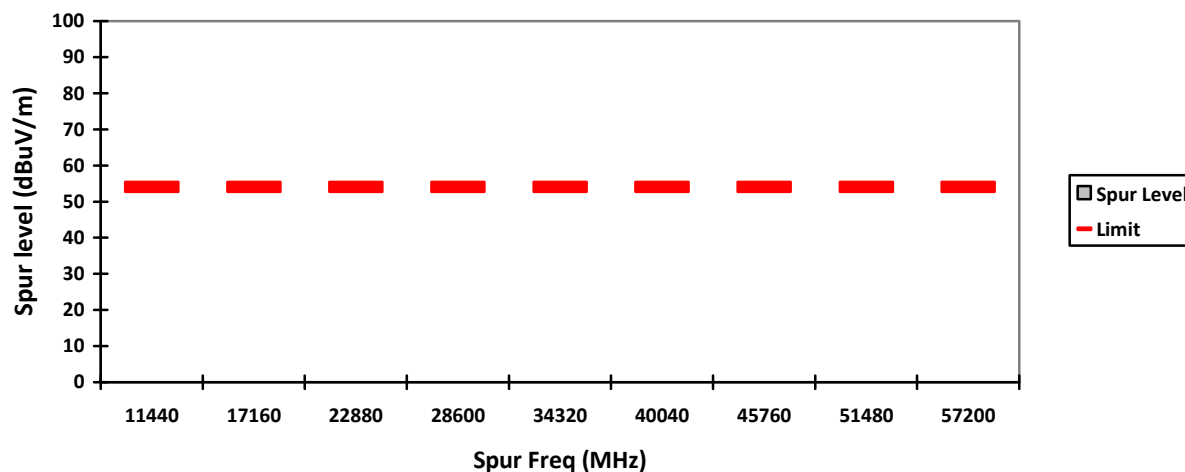

HORIZONTAL, AV

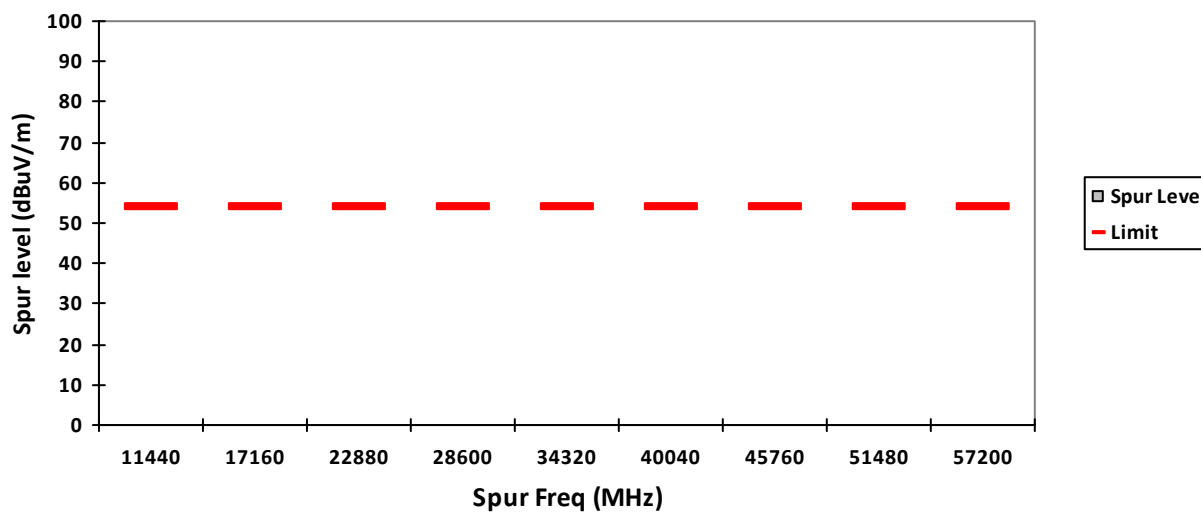


Radiated Emission (Low Channel) tabular data

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Humidity (%): 70.3
Test Date: Wed, Aug 19, 2020

197


VERTICAL, QPK

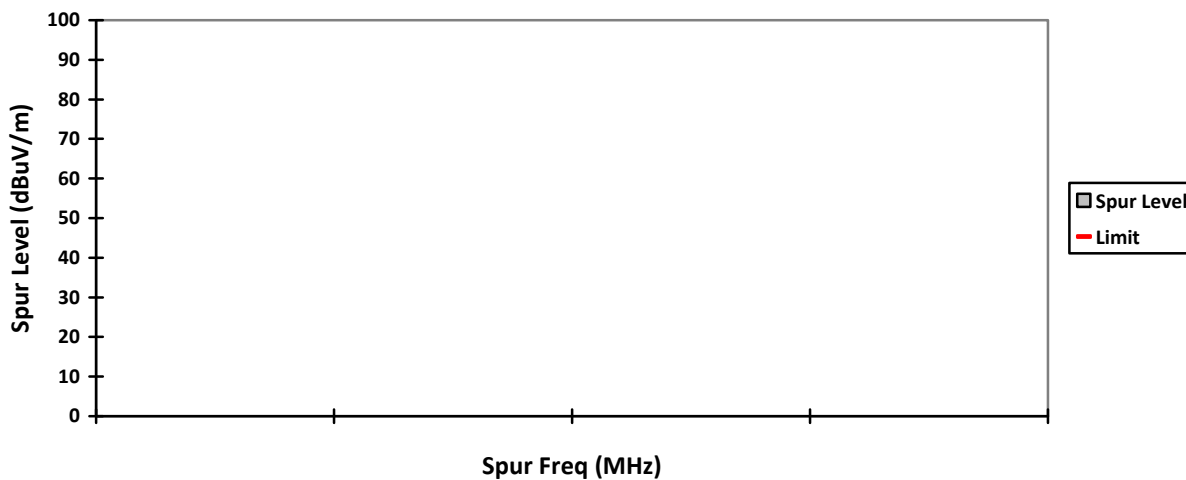


HORIZONTAL, QPK

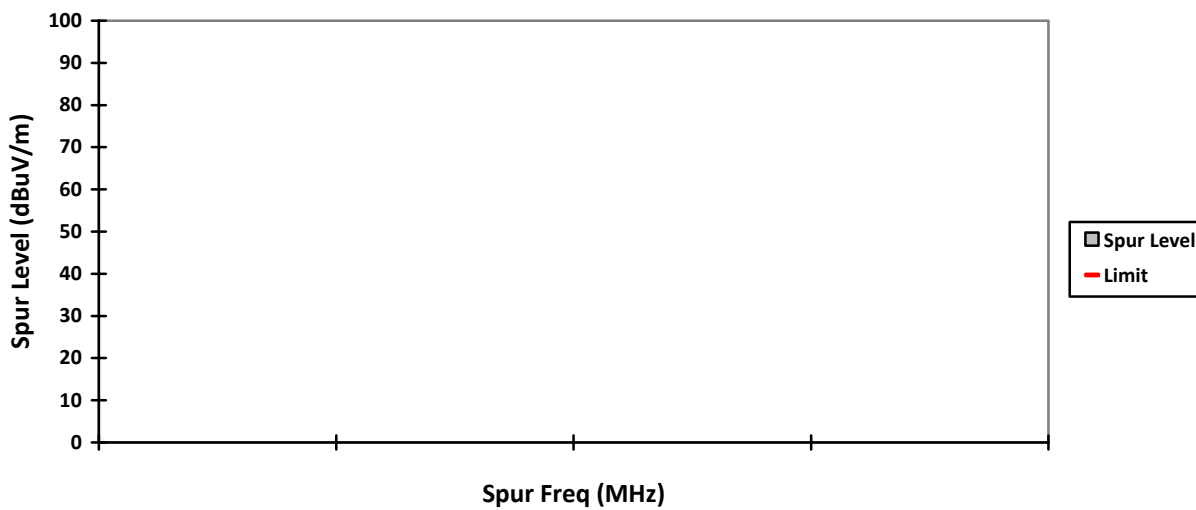


VERTICAL, PK

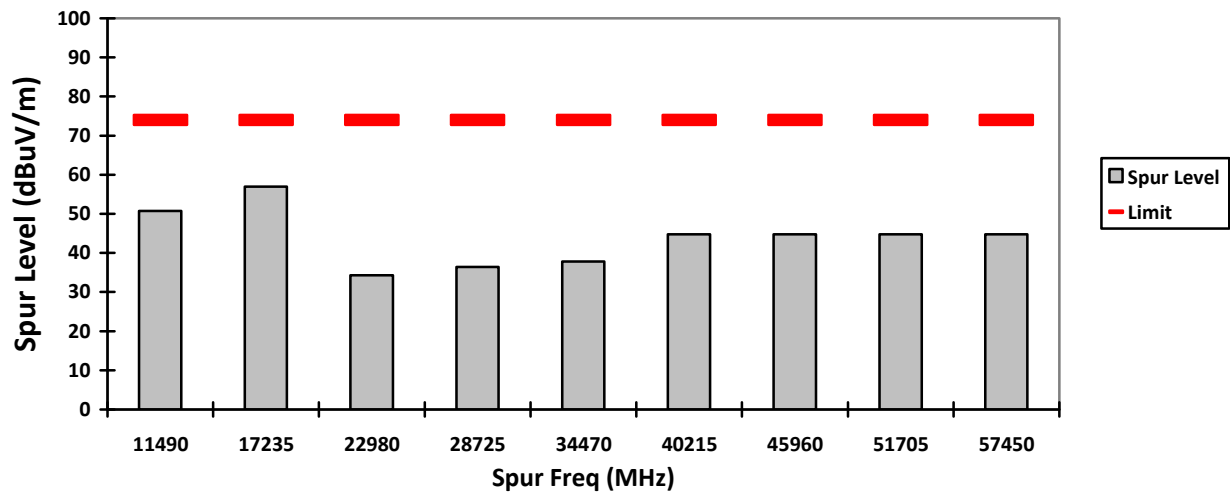


HORIZONTAL, PK

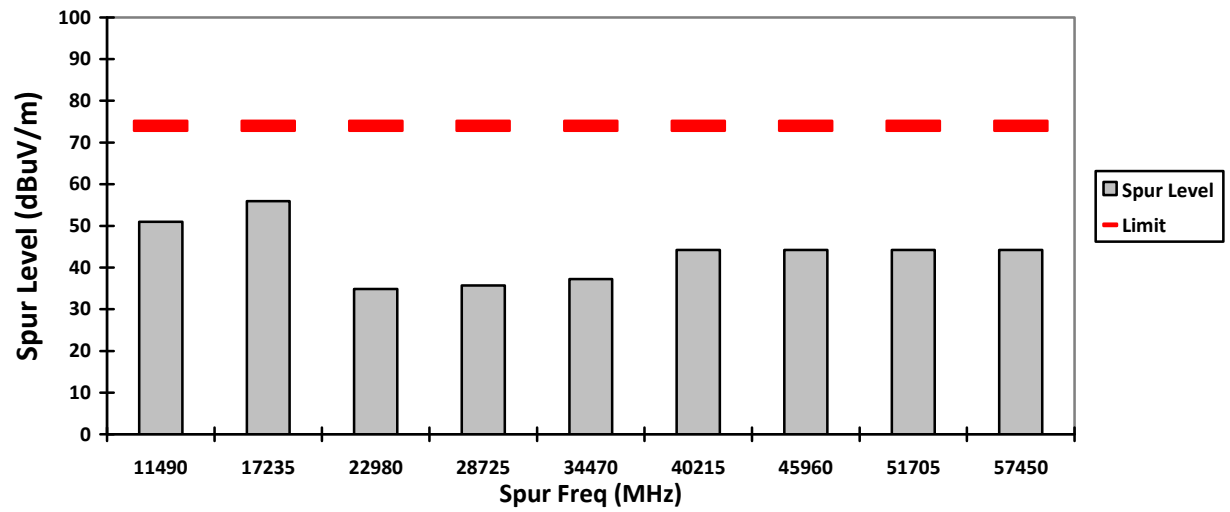


VERTICAL, AV

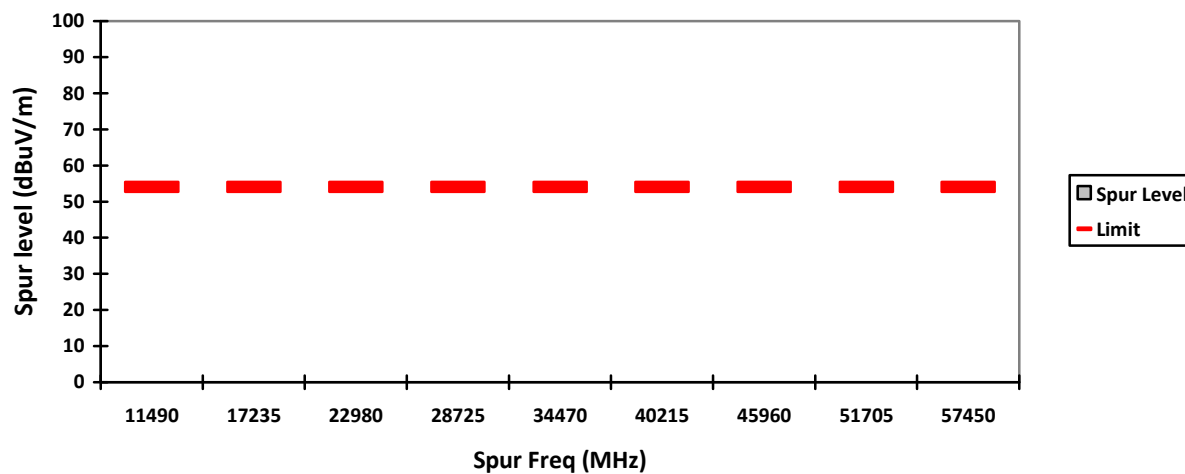


HORIZONTAL, AV

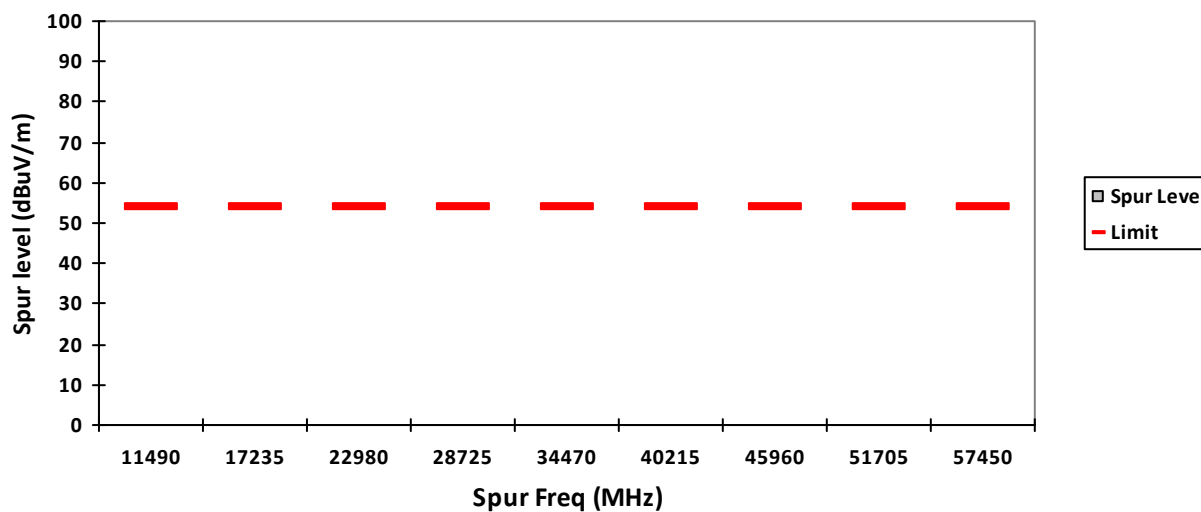


VERTICAL, QPK

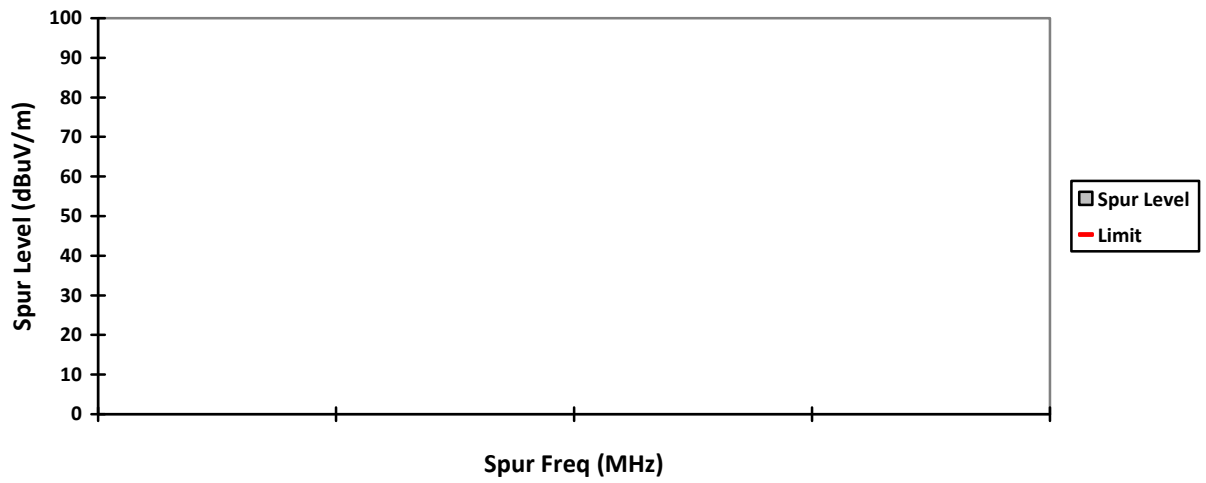


HORIZONTAL, QPK

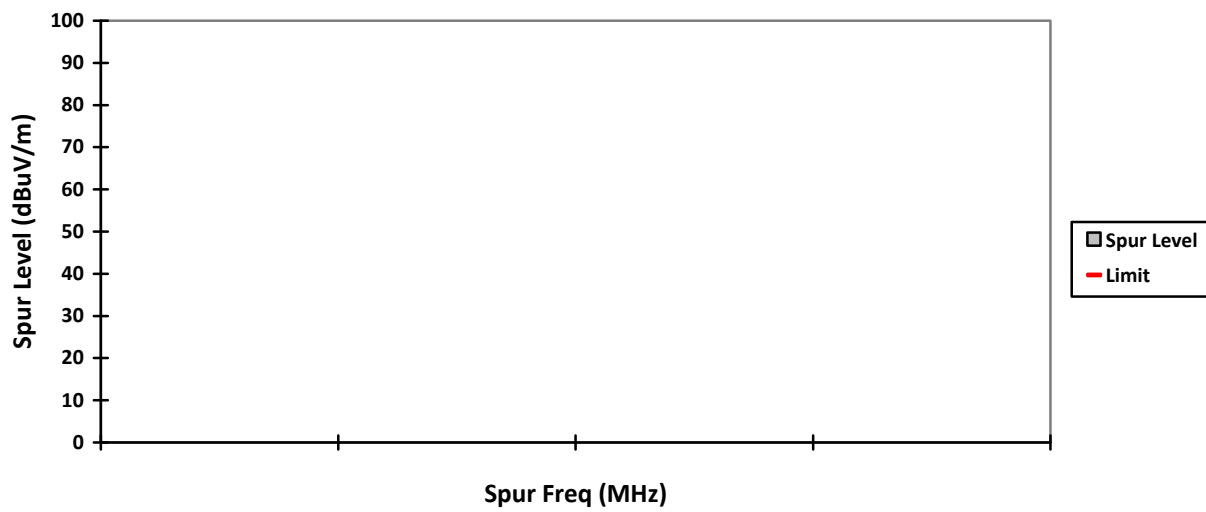


VERTICAL, PK

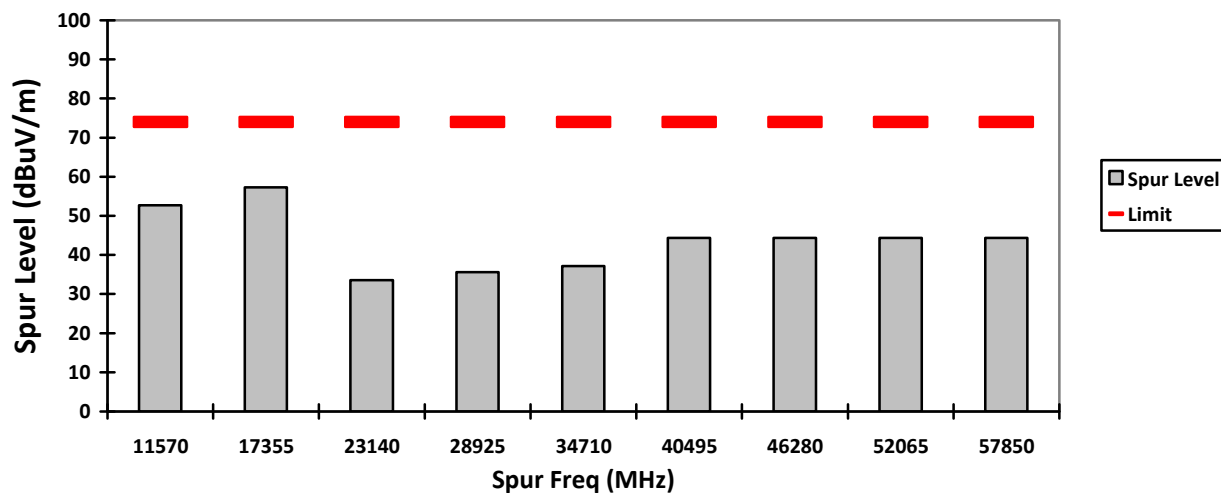


HORIZONTAL, PK

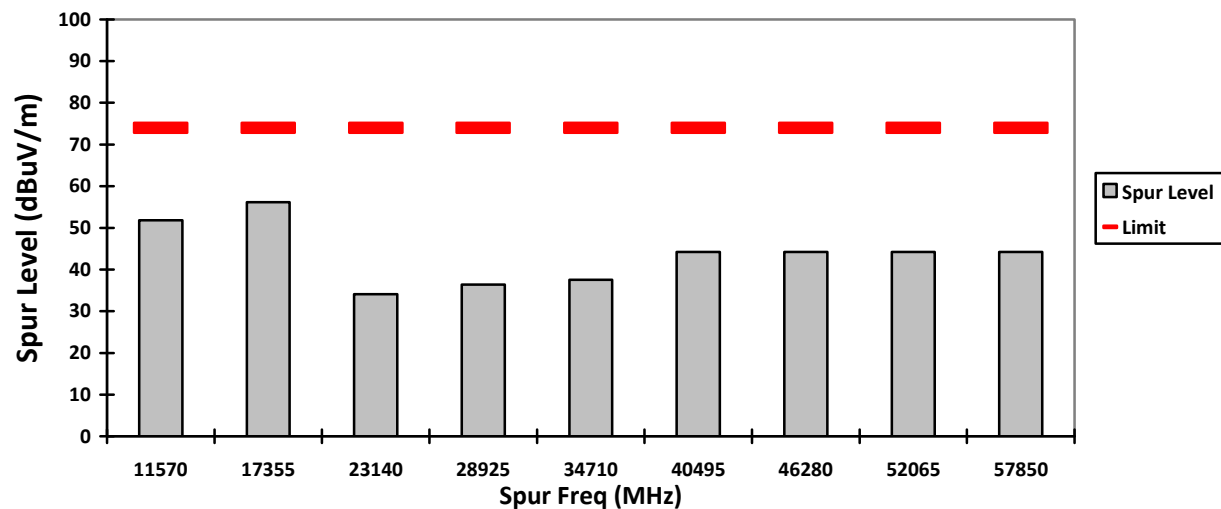


VERTICAL, AV

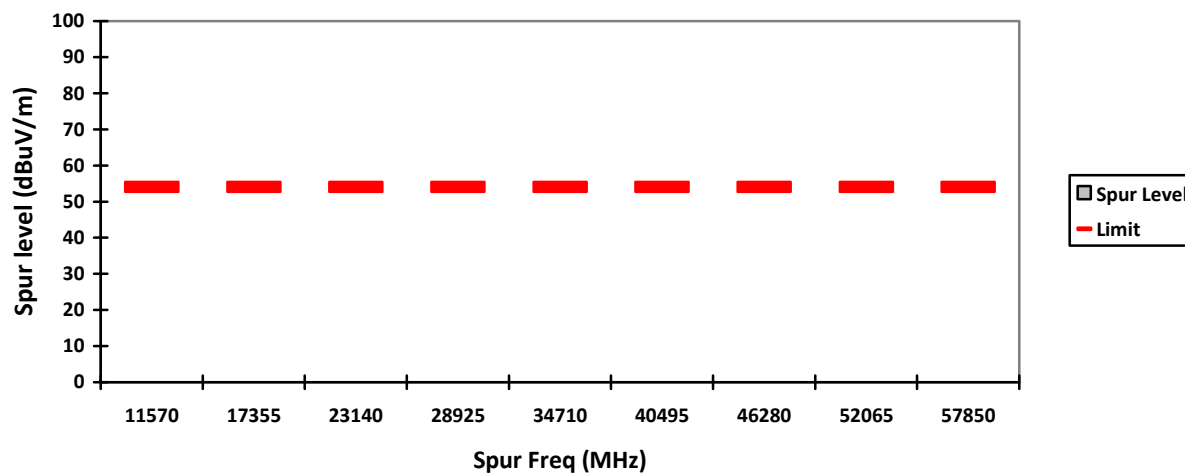


HORIZONTAL, AV

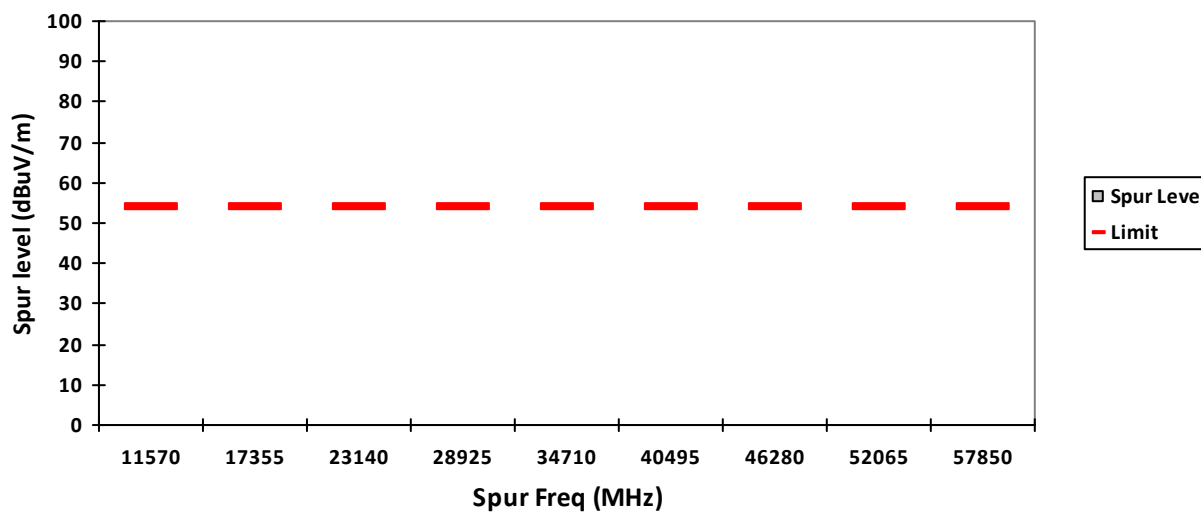


VERTICAL, QPK

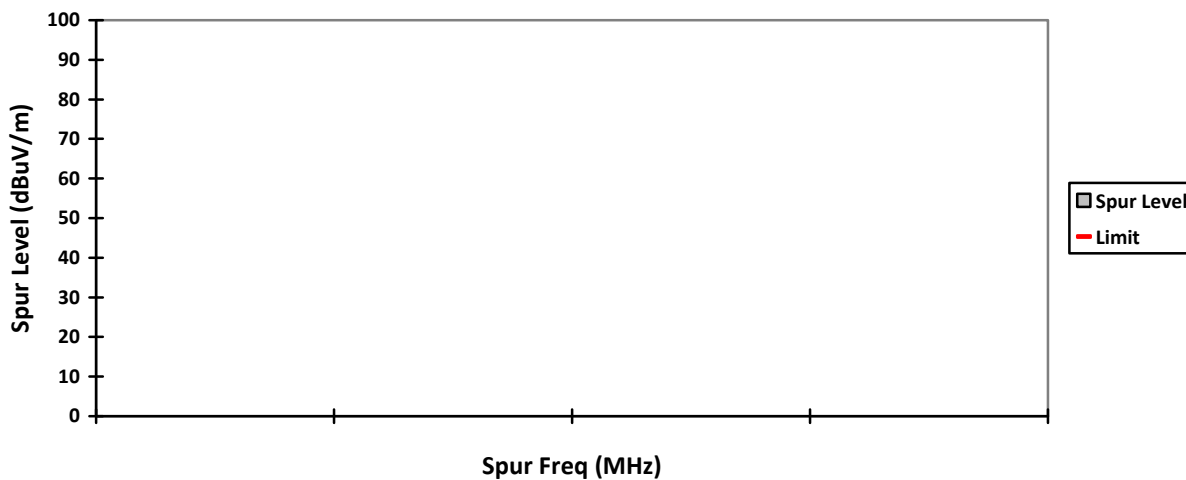


HORIZONTAL, QPK

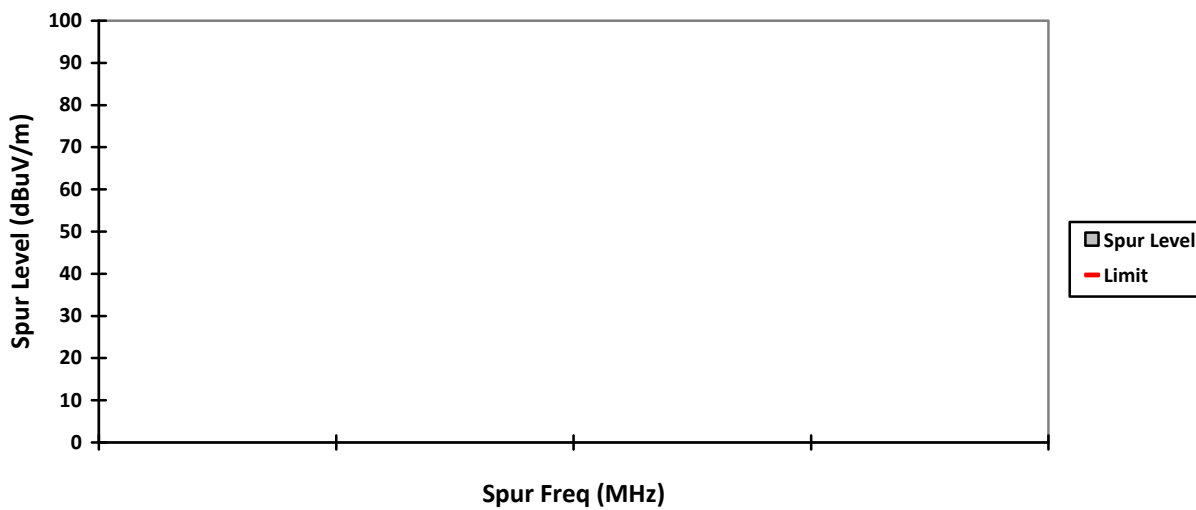


VERTICAL, PK

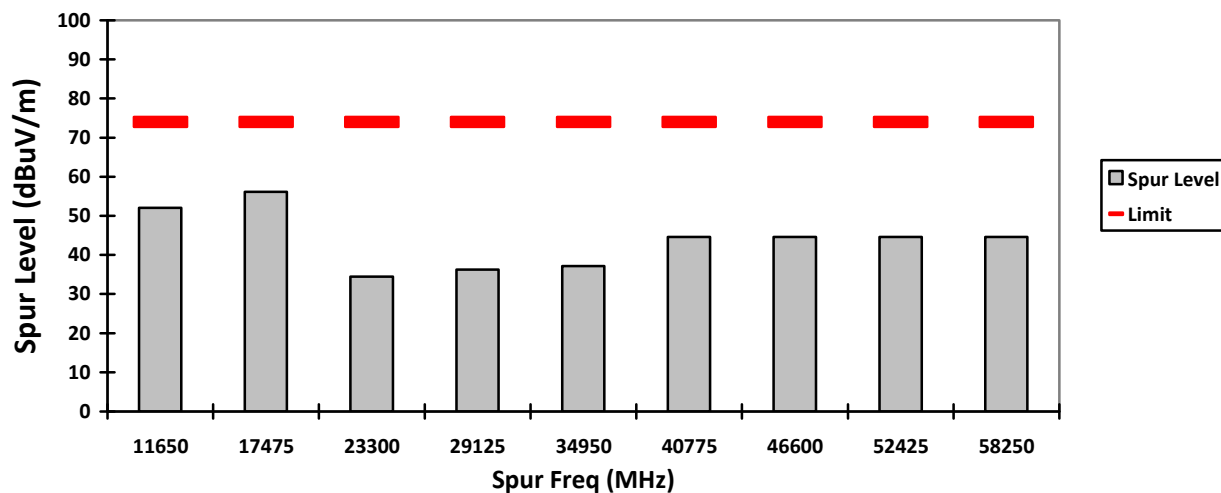


HORIZONTAL, PK

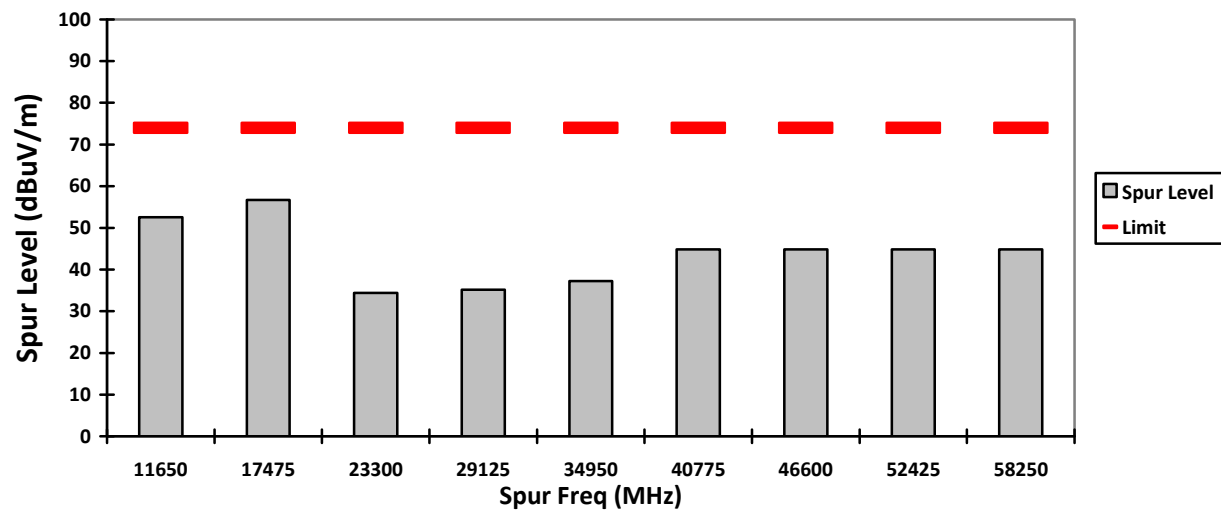


VERTICAL, AV

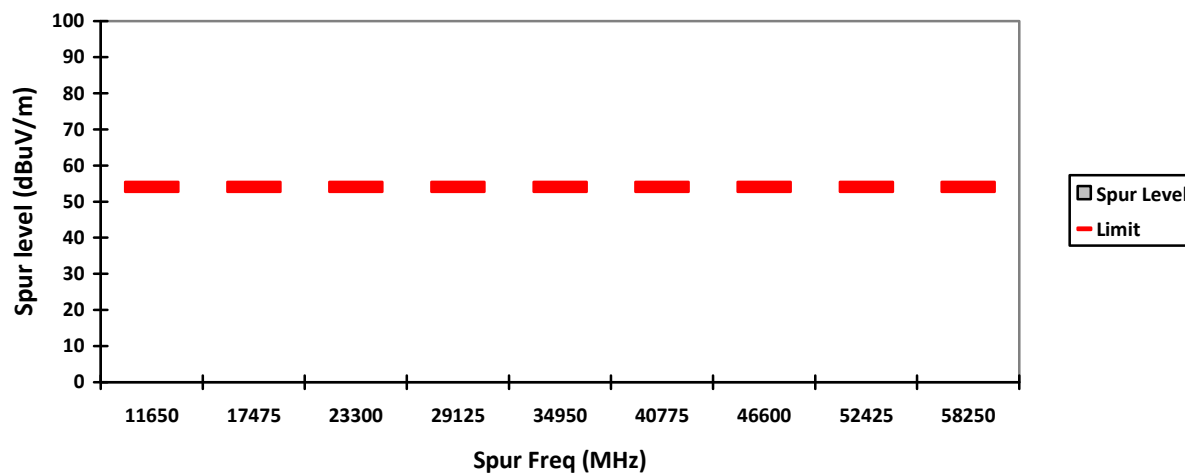


HORIZONTAL, AV

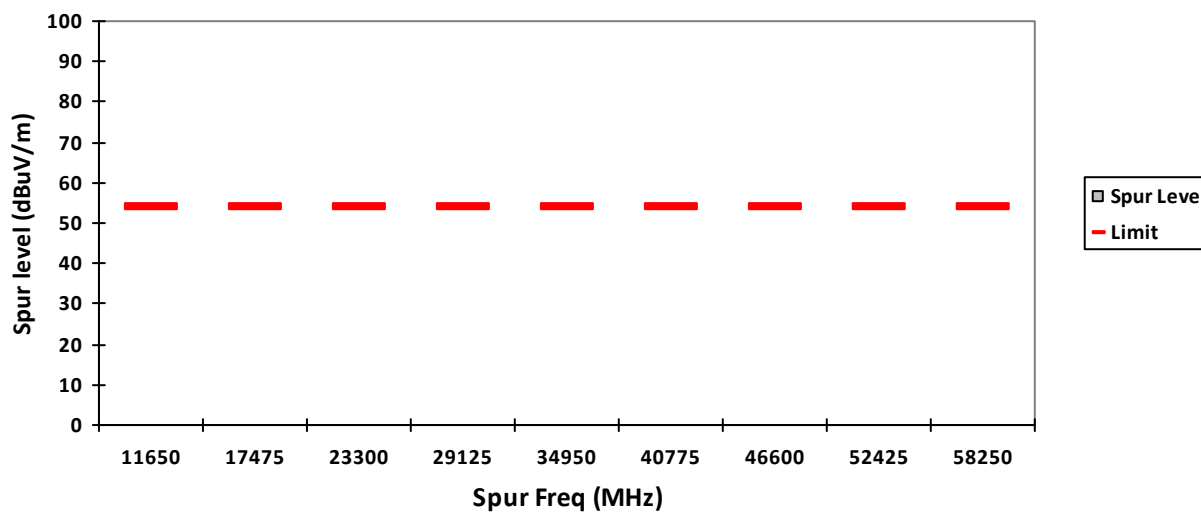


VERTICAL, QPK

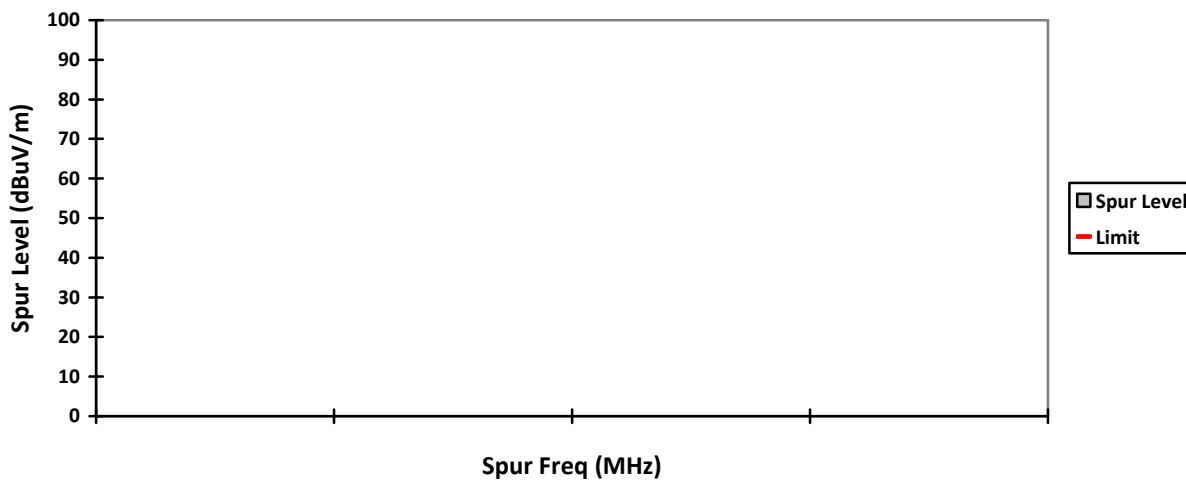


HORIZONTAL, QPK

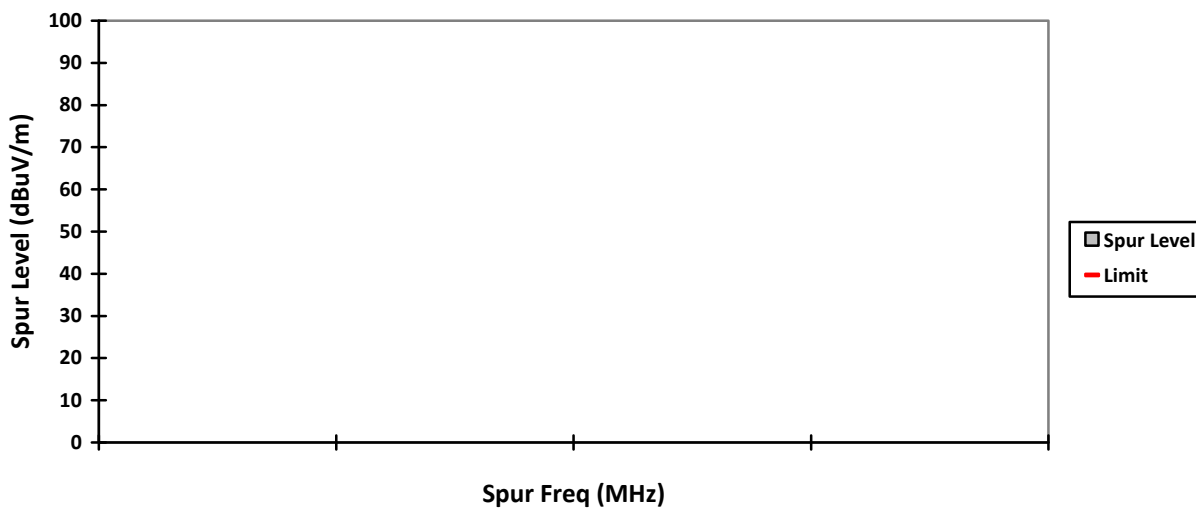


VERTICAL, PK

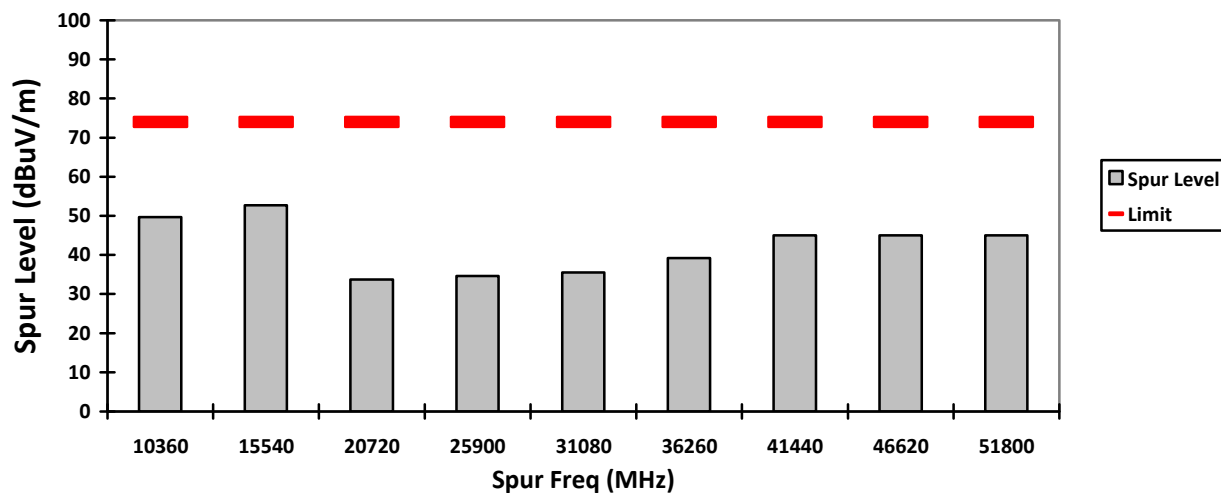


HORIZONTAL, PK

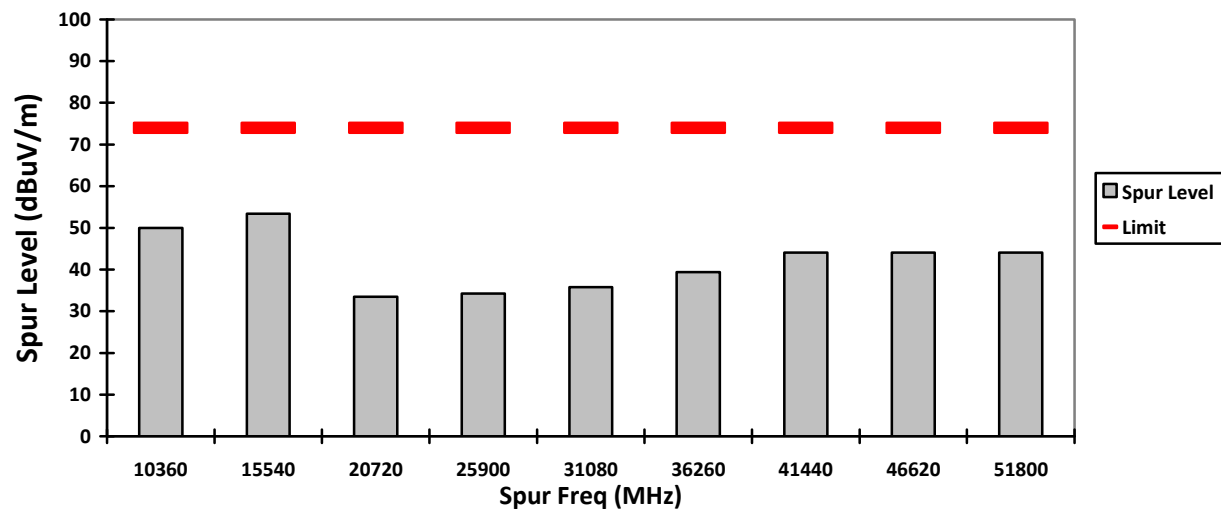


VERTICAL, AV

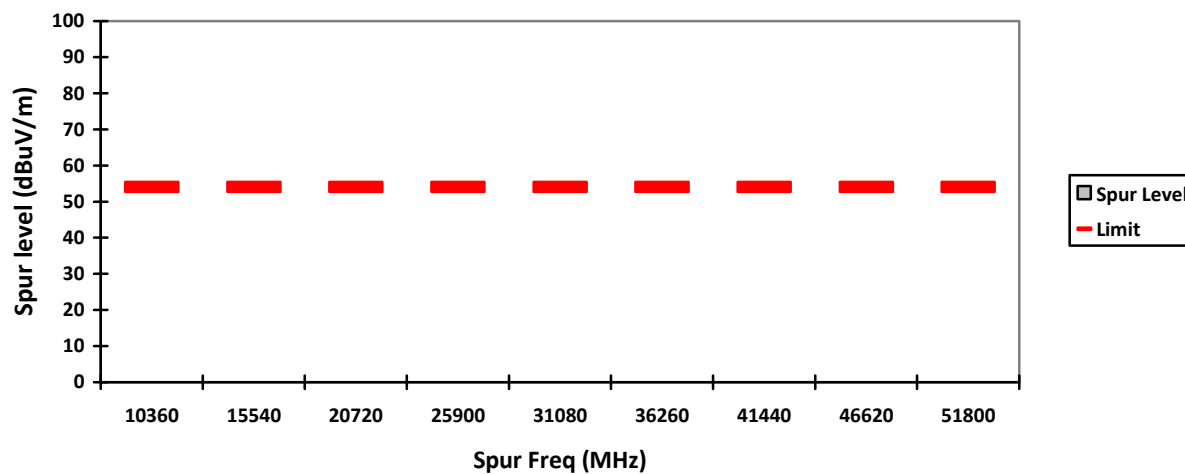


HORIZONTAL, AV

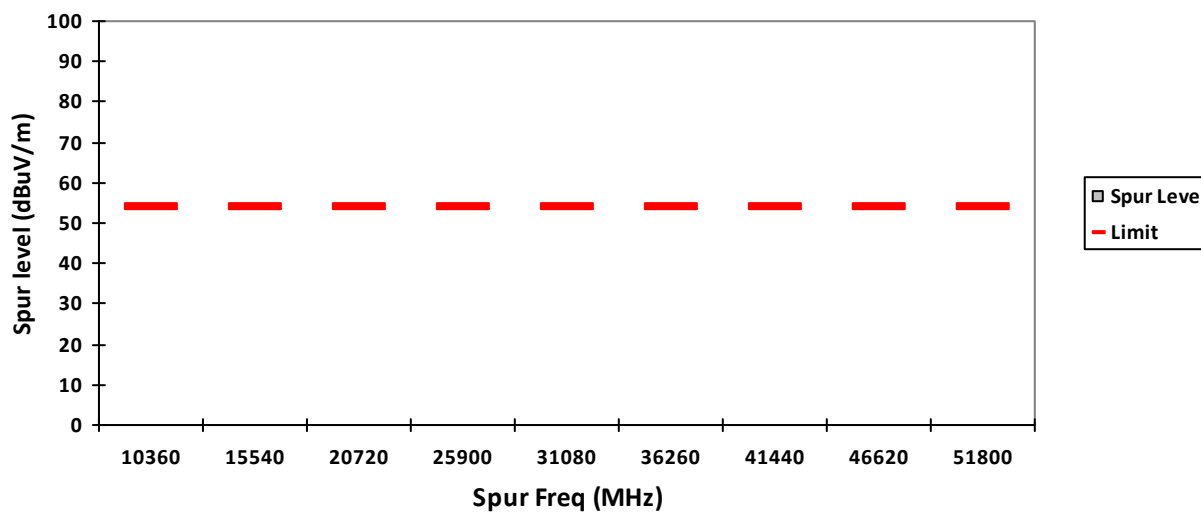


VERTICAL, QPK

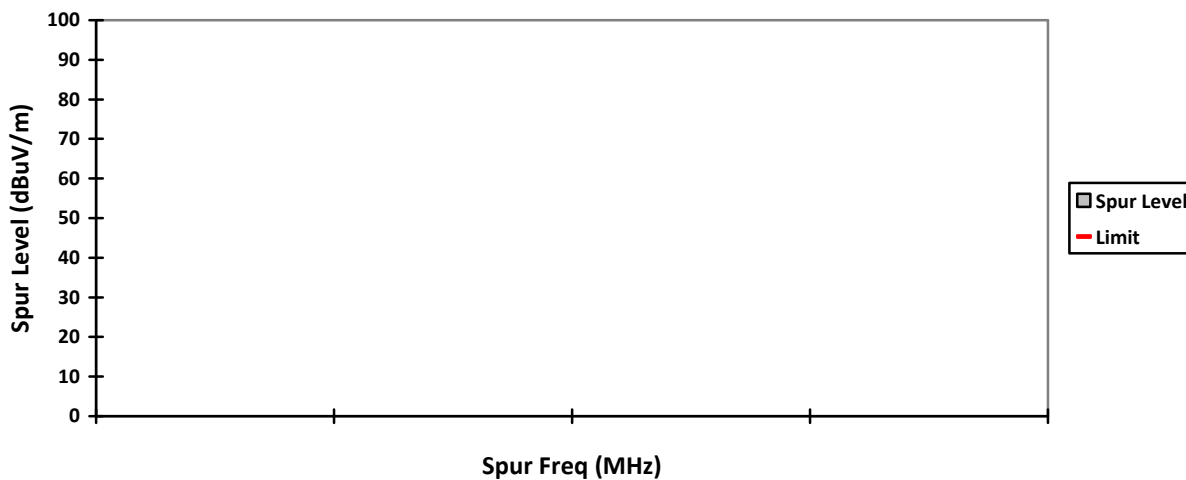


HORIZONTAL, QPK

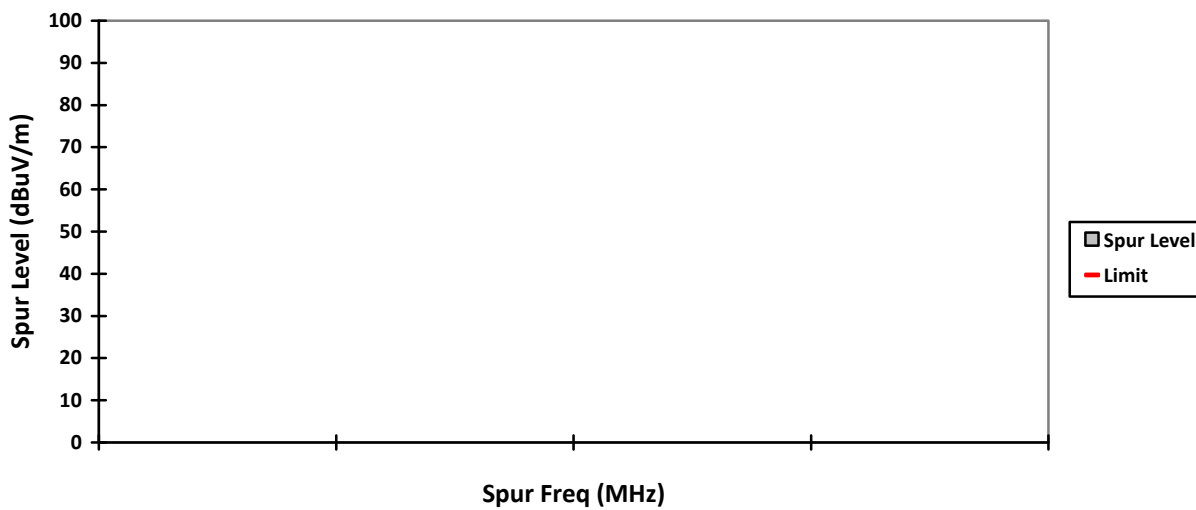


VERTICAL, PK

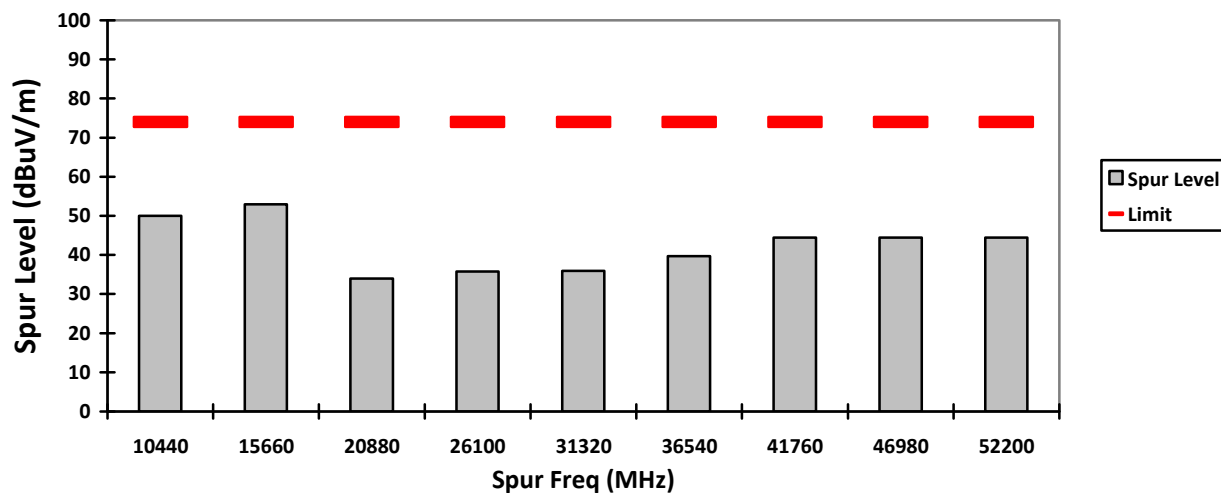


HORIZONTAL, PK

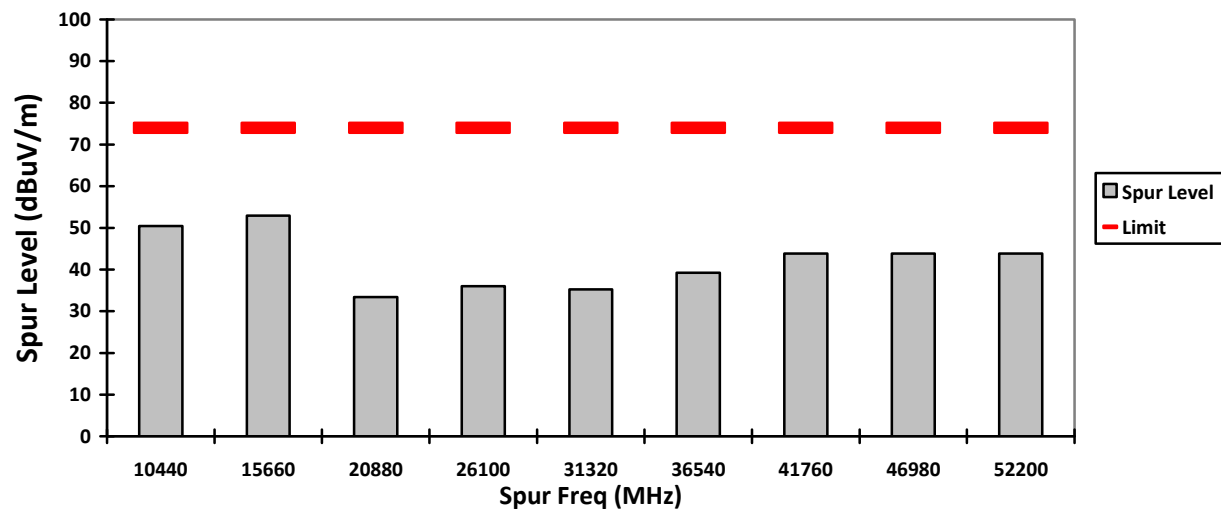


VERTICAL, AV

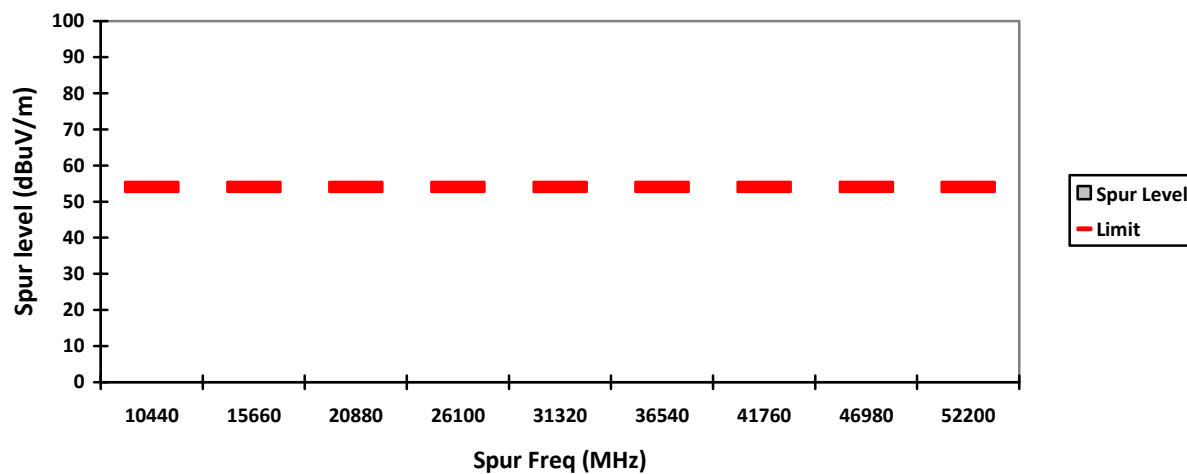


HORIZONTAL, AV

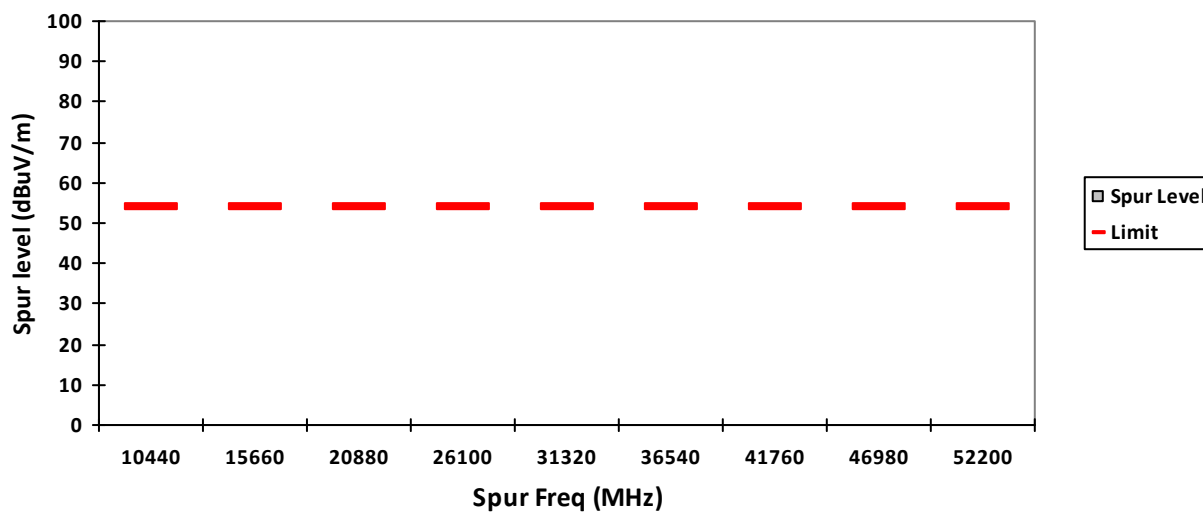


VERTICAL, QPK

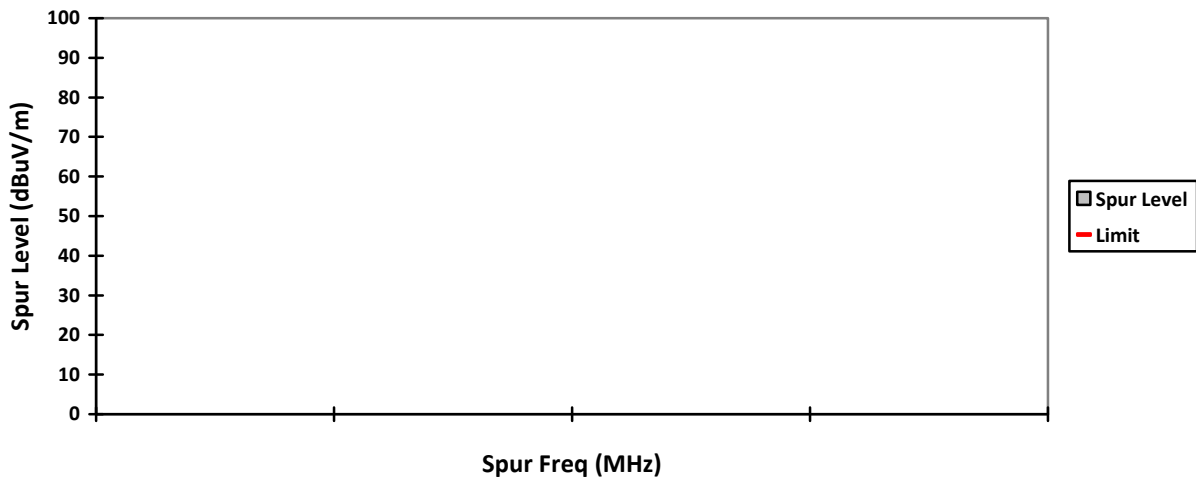


HORIZONTAL, QPK

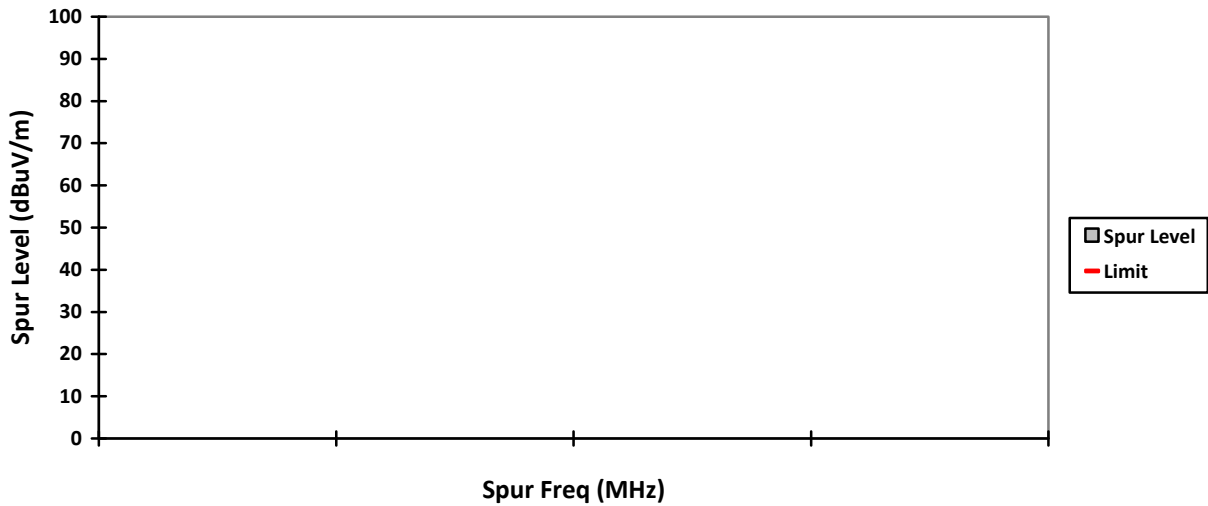


VERTICAL, PK

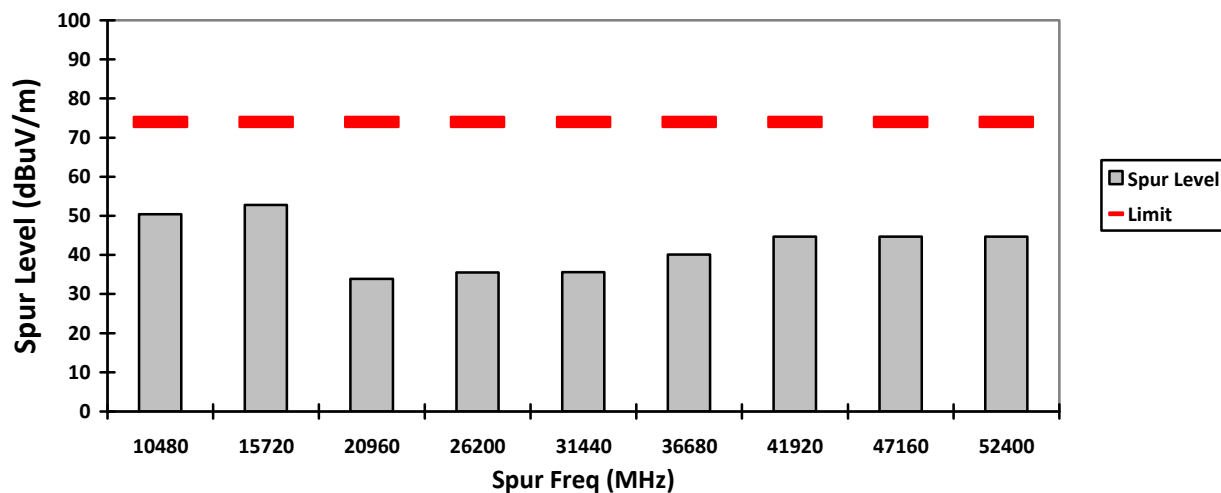


HORIZONTAL, PK

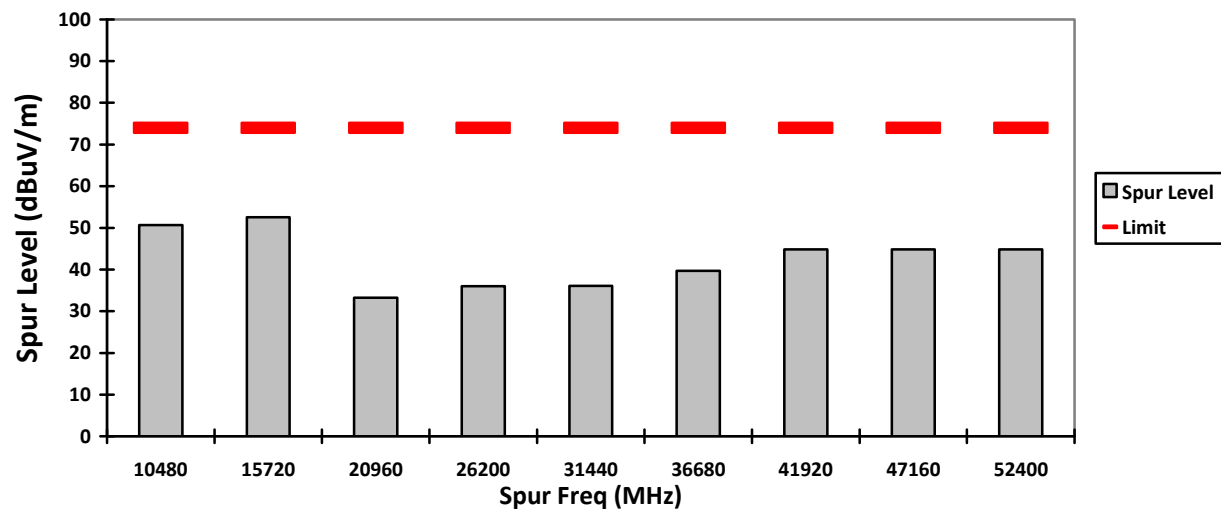


VERTICAL, AV

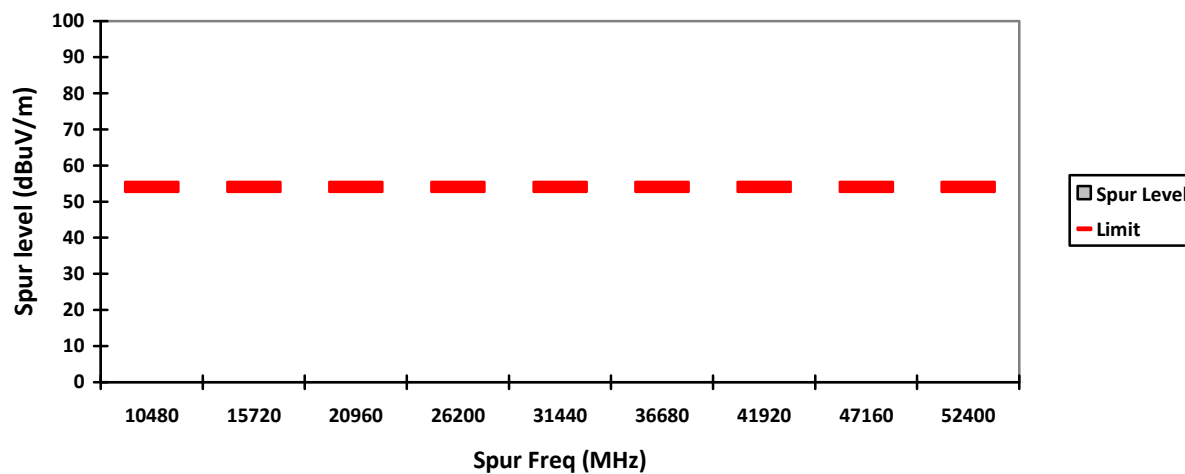


HORIZONTAL, AV

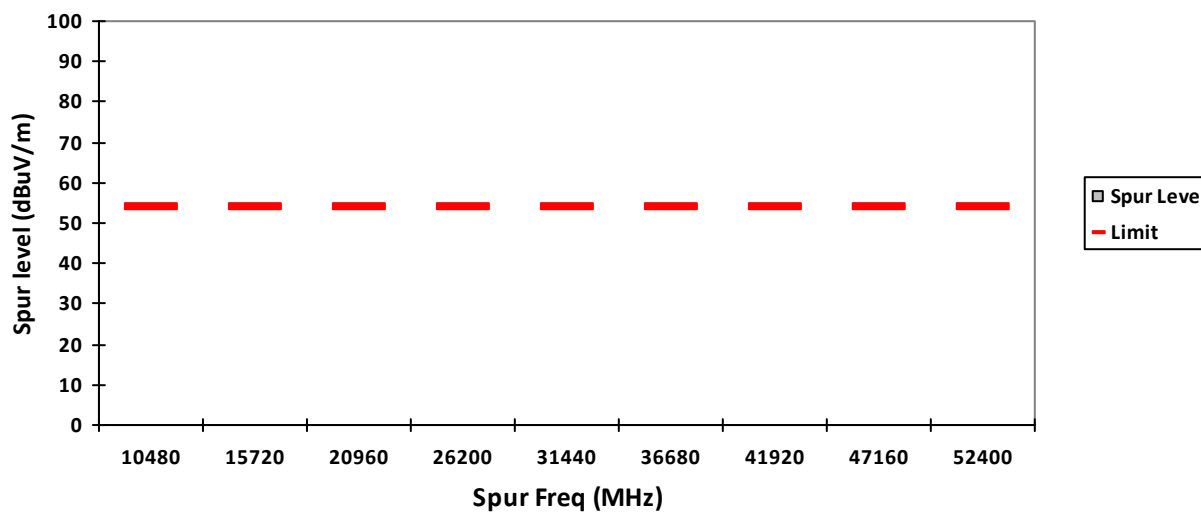


VERTICAL, QPK

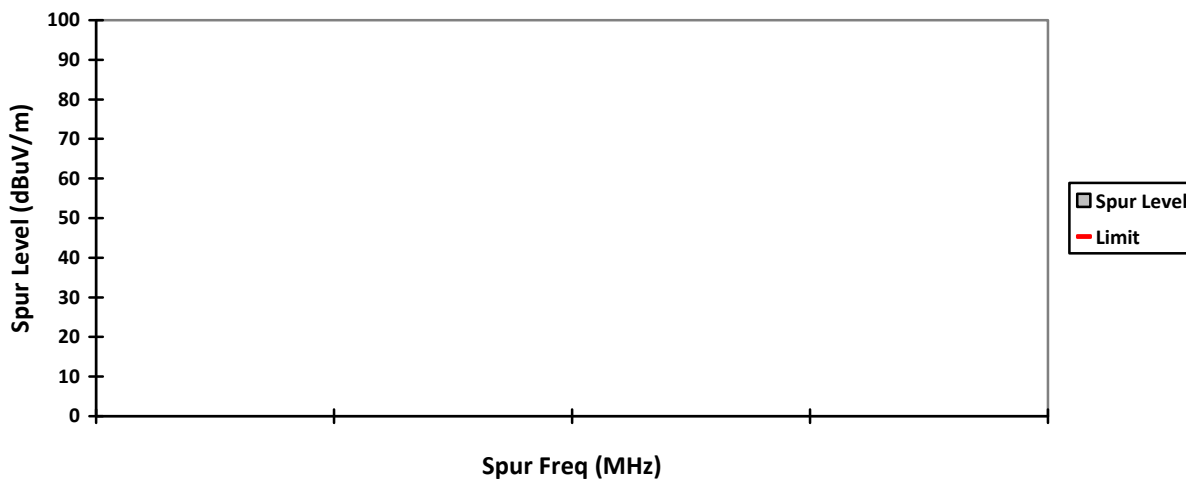


HORIZONTAL, QPK

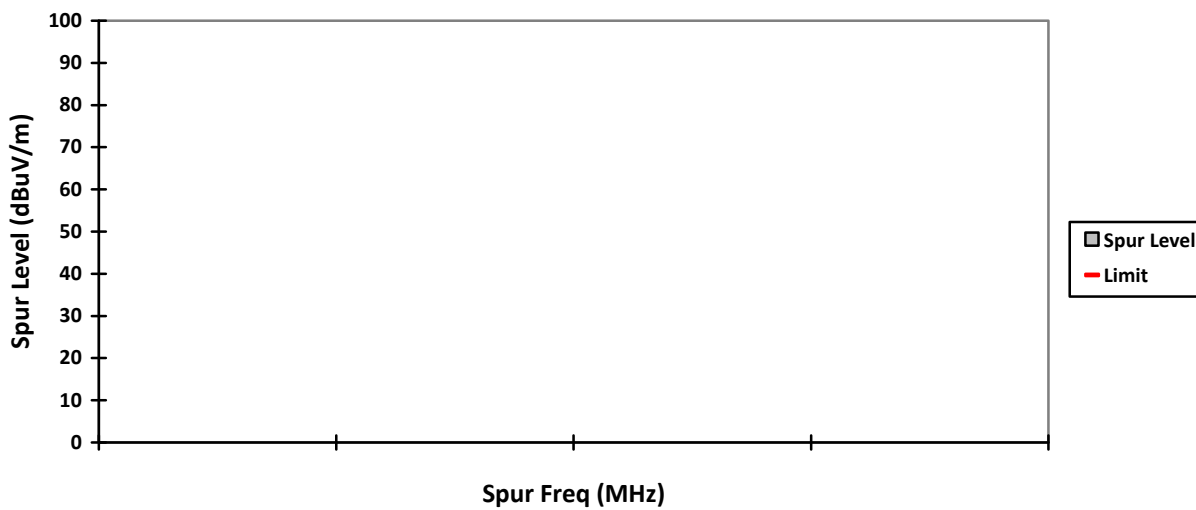


VERTICAL, PK

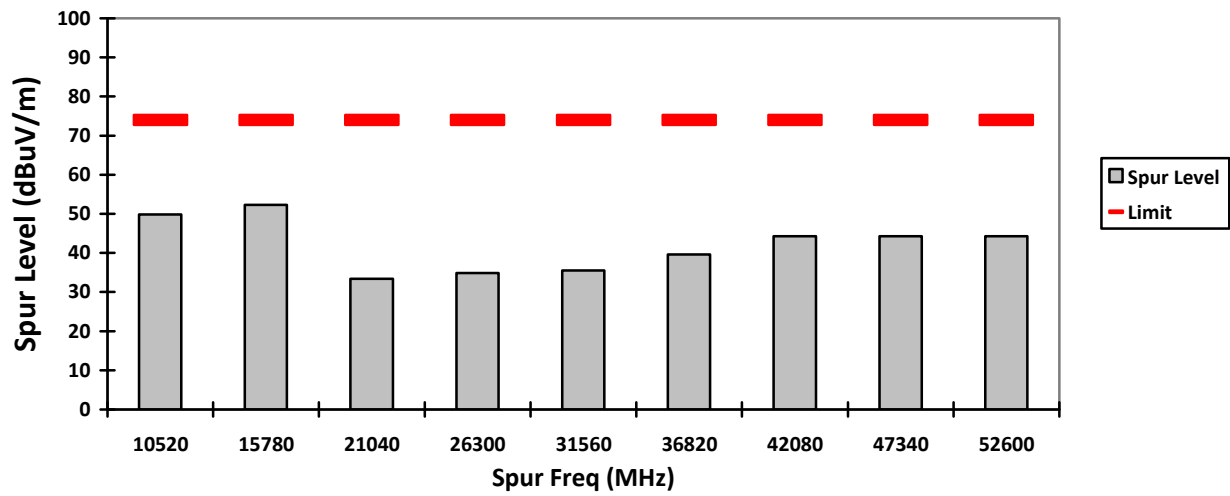


HORIZONTAL, PK

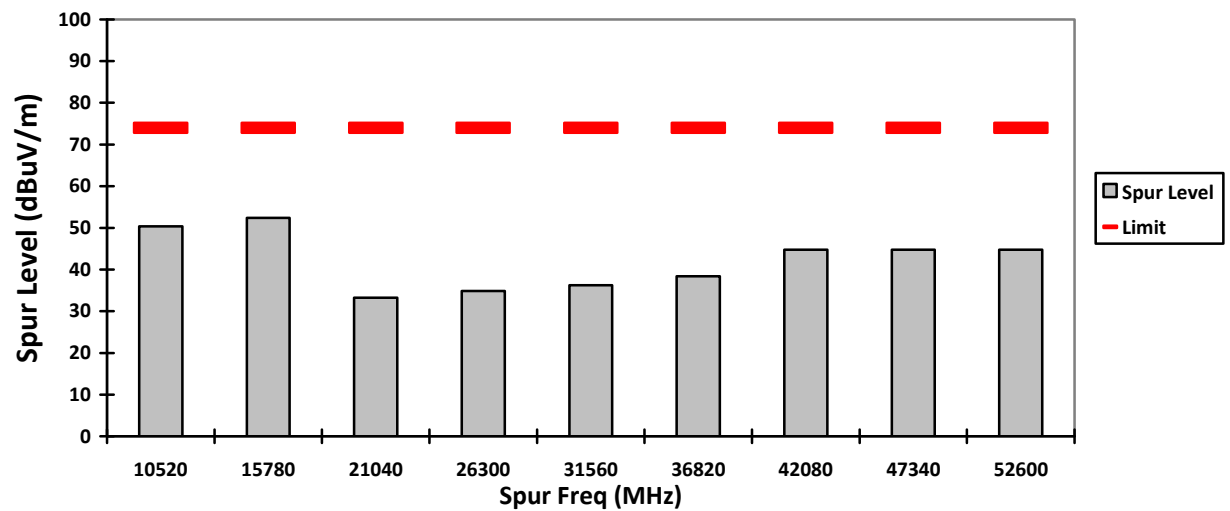

VERTICAL, AV

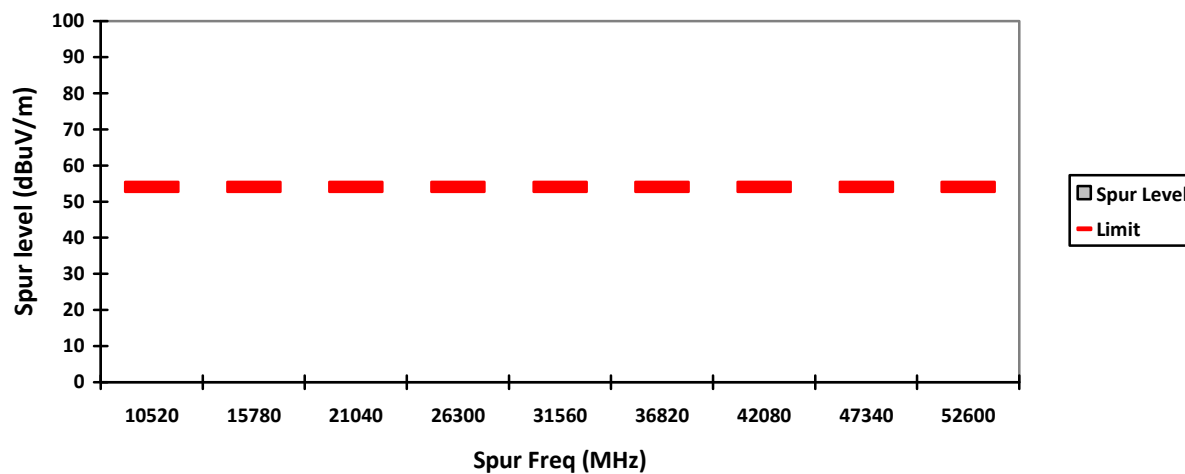

HORIZONTAL, AV

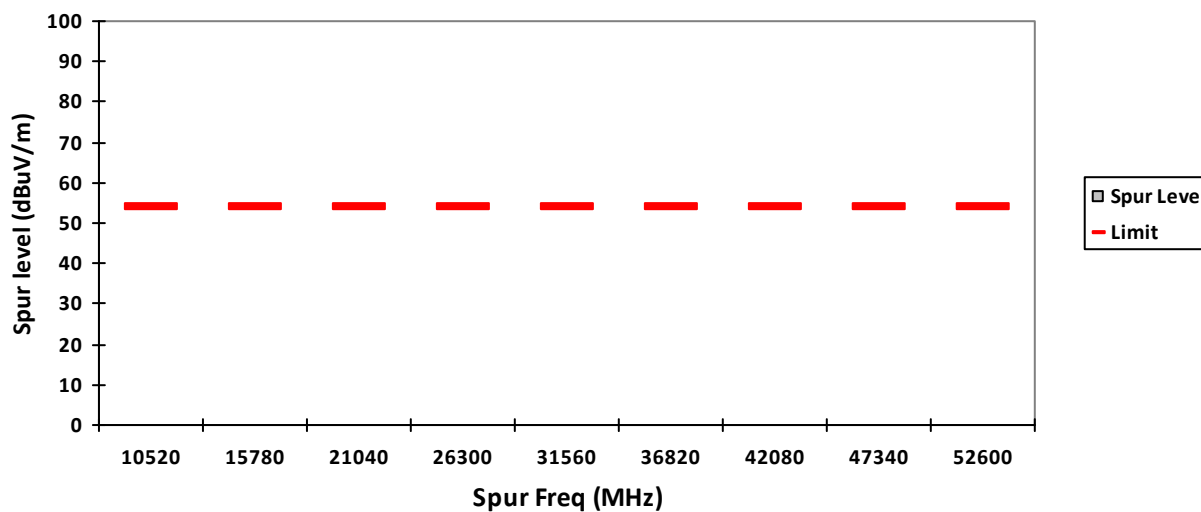


Radiated Emission (Mid Channel) tabular data

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Humidity (%): 70.3
Test Date: Thu, Aug 20, 2020

225


VERTICAL, QPK

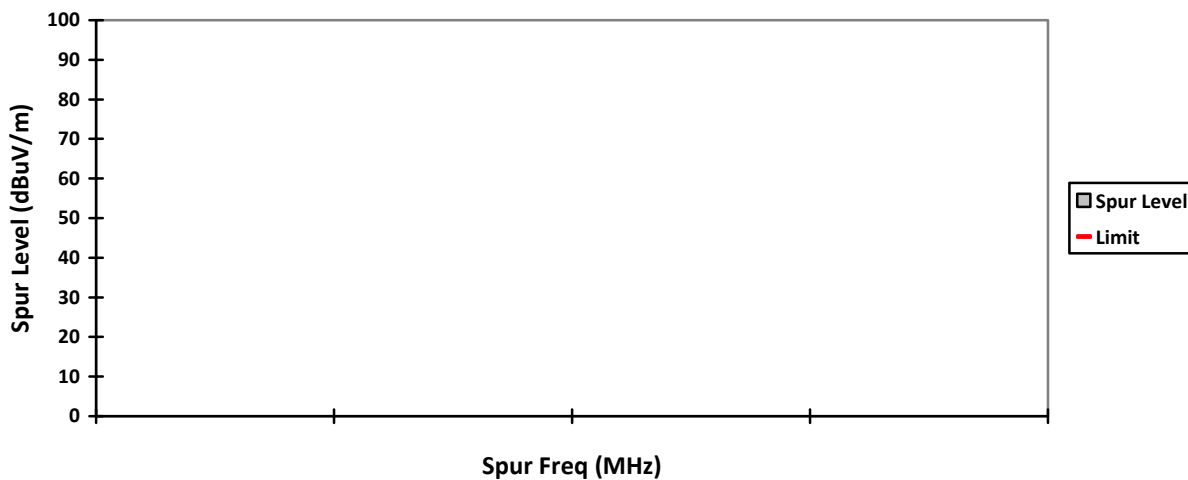


HORIZONTAL, QPK

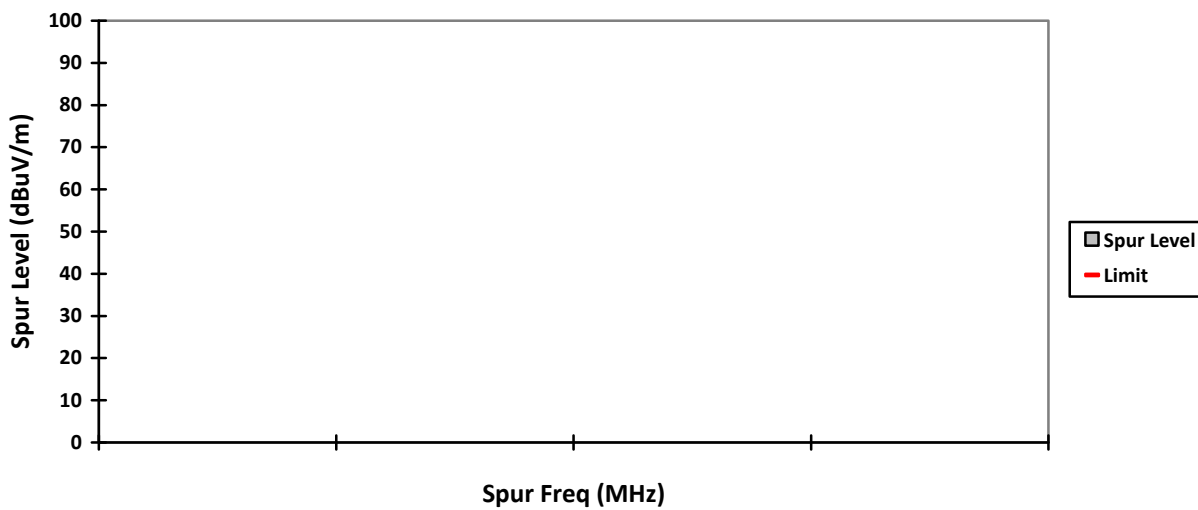


VERTICAL, PK

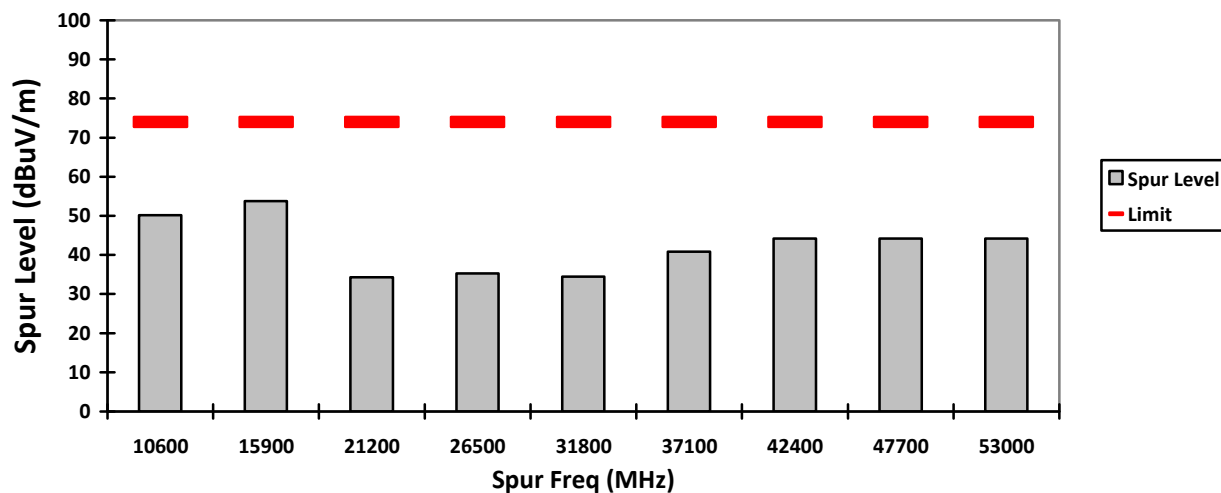


HORIZONTAL, PK

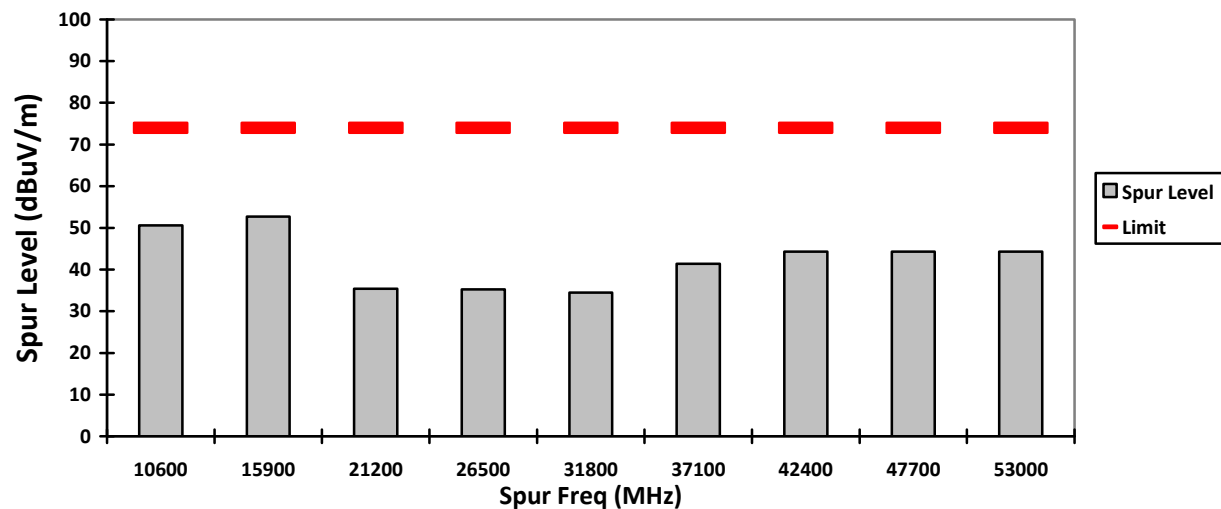


VERTICAL, AV

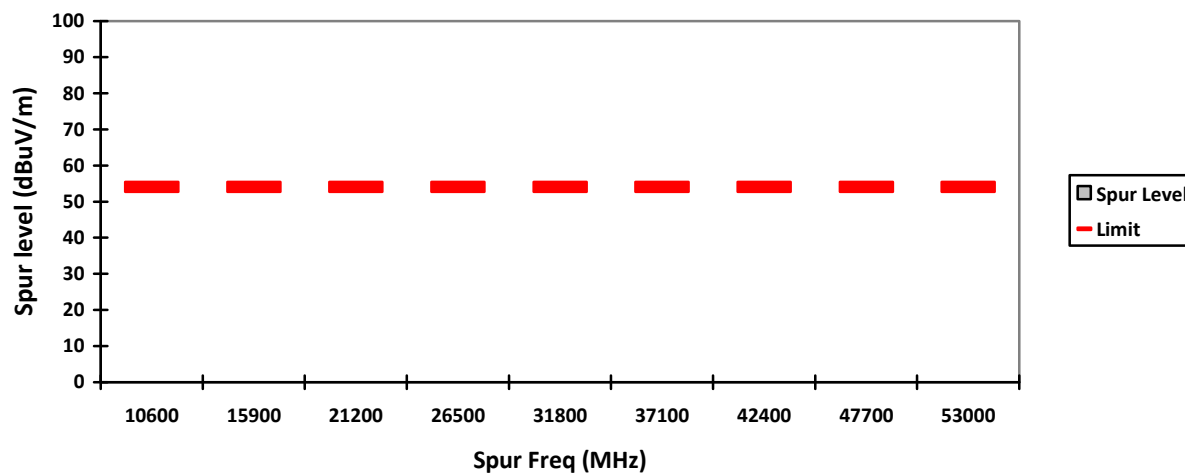


HORIZONTAL, AV

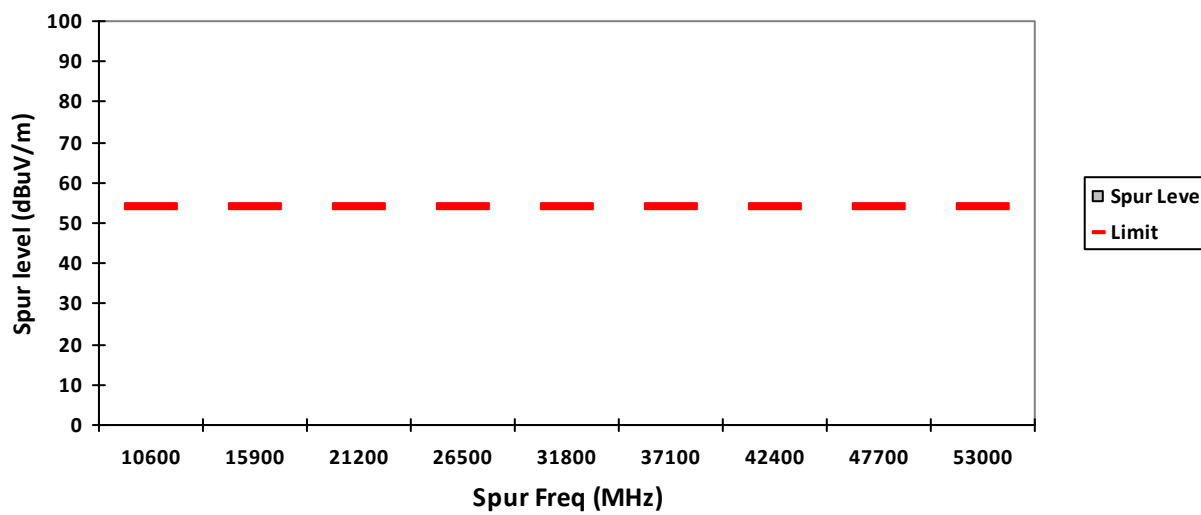


VERTICAL, QPK

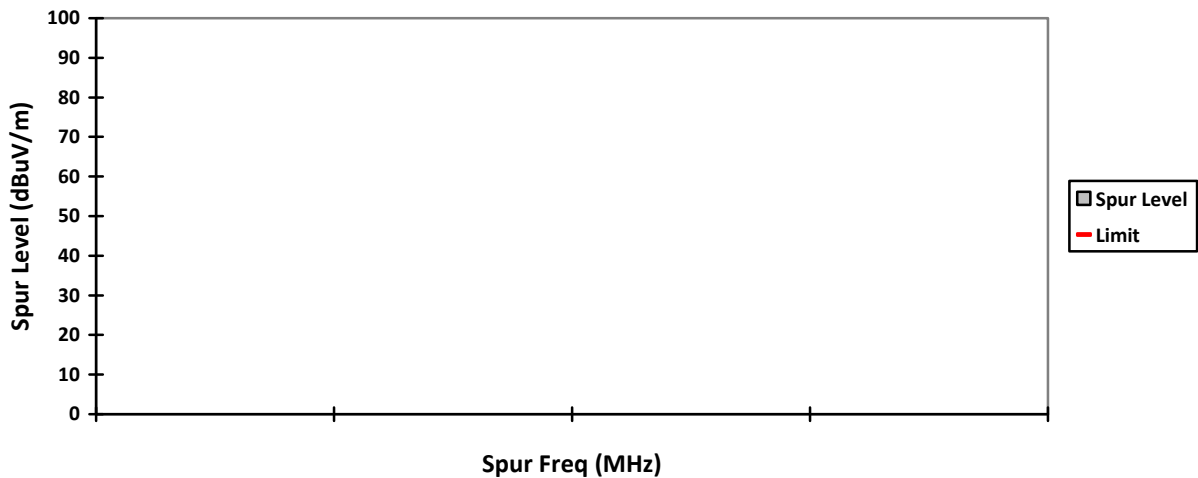


HORIZONTAL, QPK

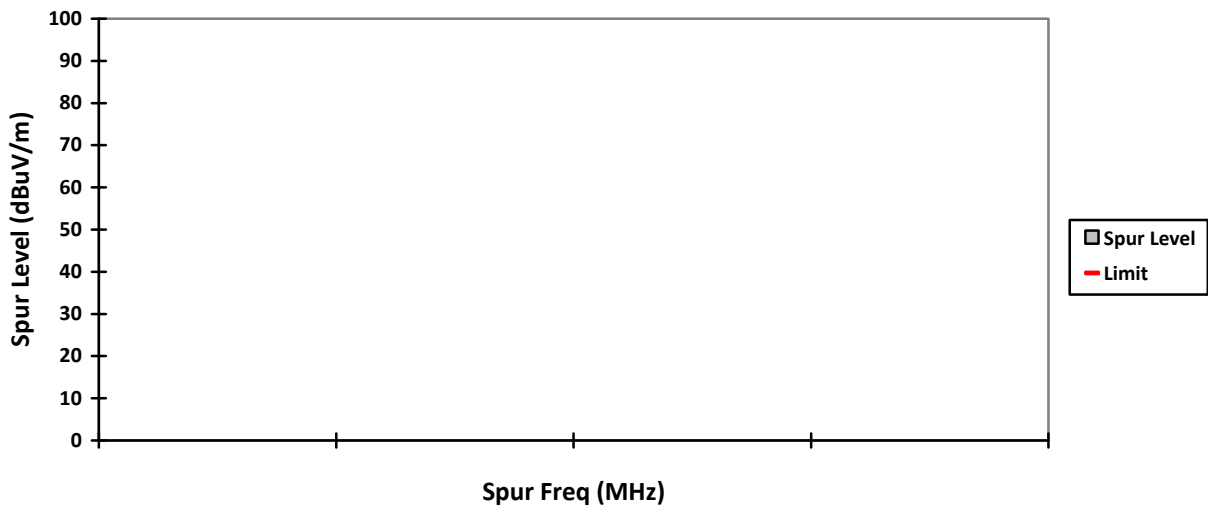


VERTICAL, PK

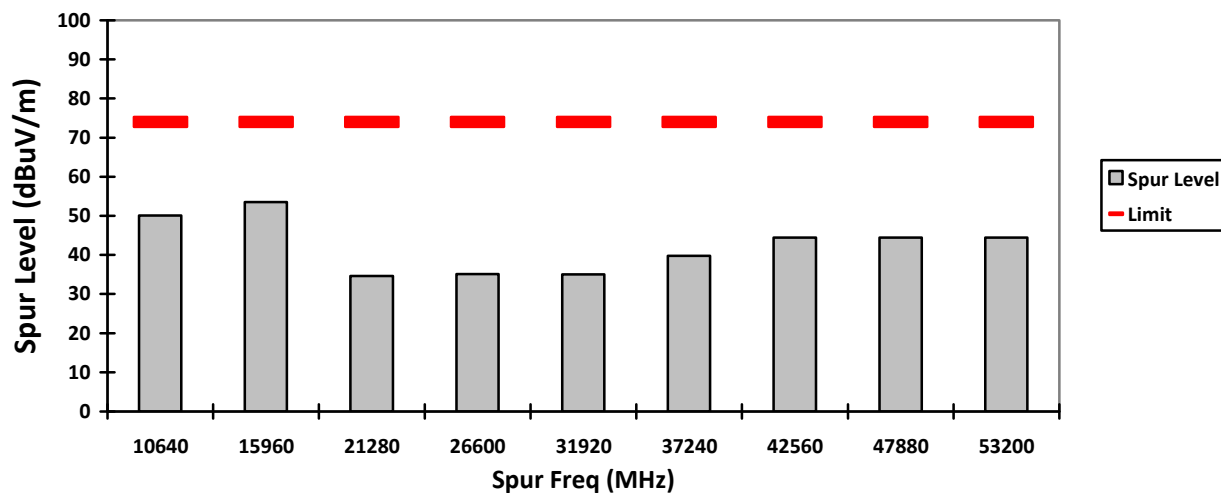


HORIZONTAL, PK

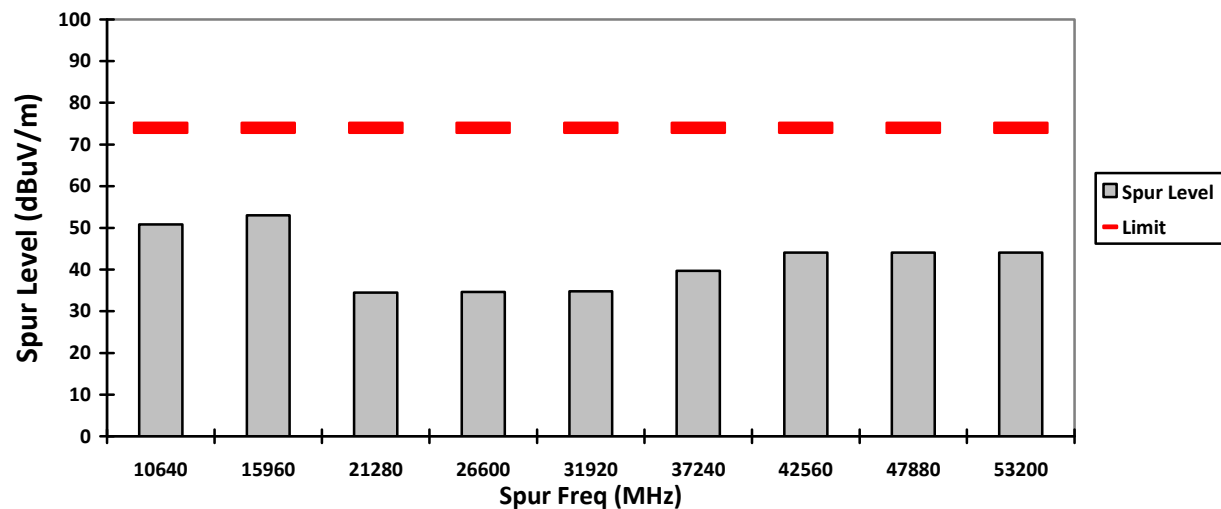

VERTICAL, AV

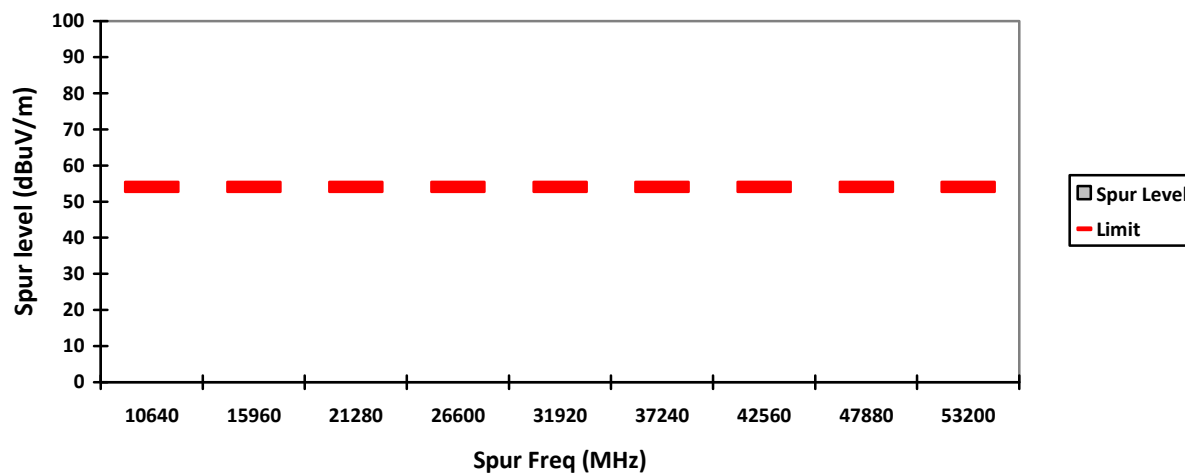

HORIZONTAL, AV

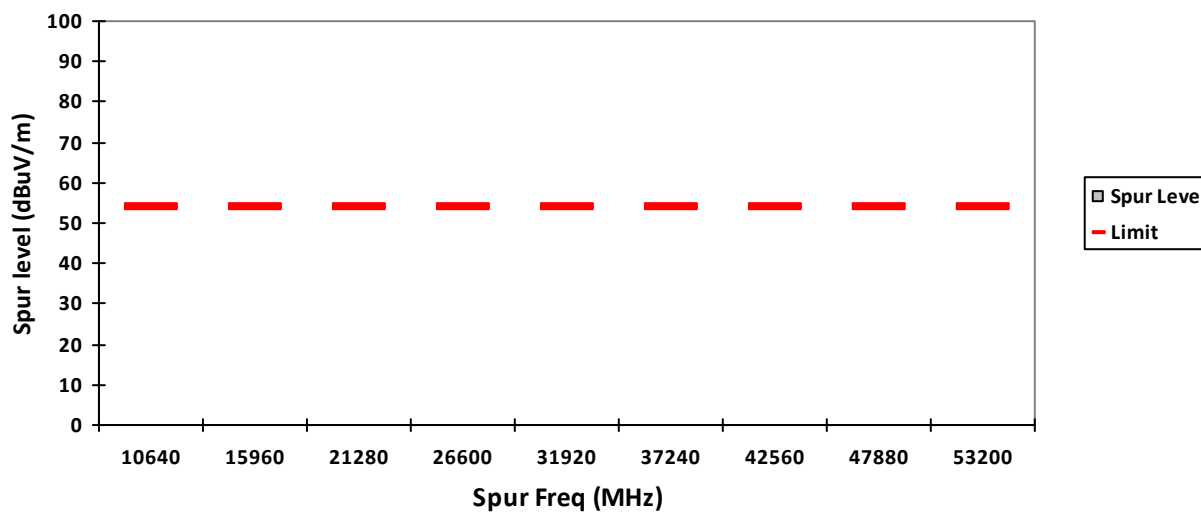

Test: WIFI SAC Transmitter Radiated Emission

Model#: AAH90ZDU9RH1AN

S/N: 734TWP0311

EMC SR ID#: 18058-EMC-00040

Battery: PMNN4804A

Accessory: AN000348A01

Test Channel: Low

Test Frequency: 5500.0000 MHz

Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (802.11n 20MHz)

Radiated Emission (Low Channel) tabular data

[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 24.5

Test Performed by: Qawiman&Fendi

System MU: 4.03dB


Humidity (%): 70.3

Test Date: Thu, Aug 20, 2020


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, QPK

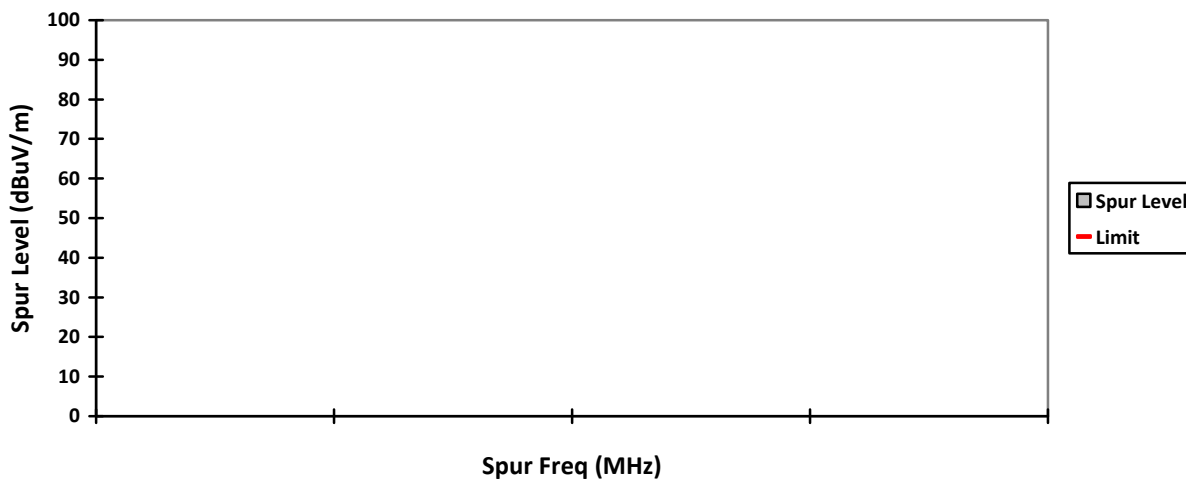


HORIZONTAL, QPK

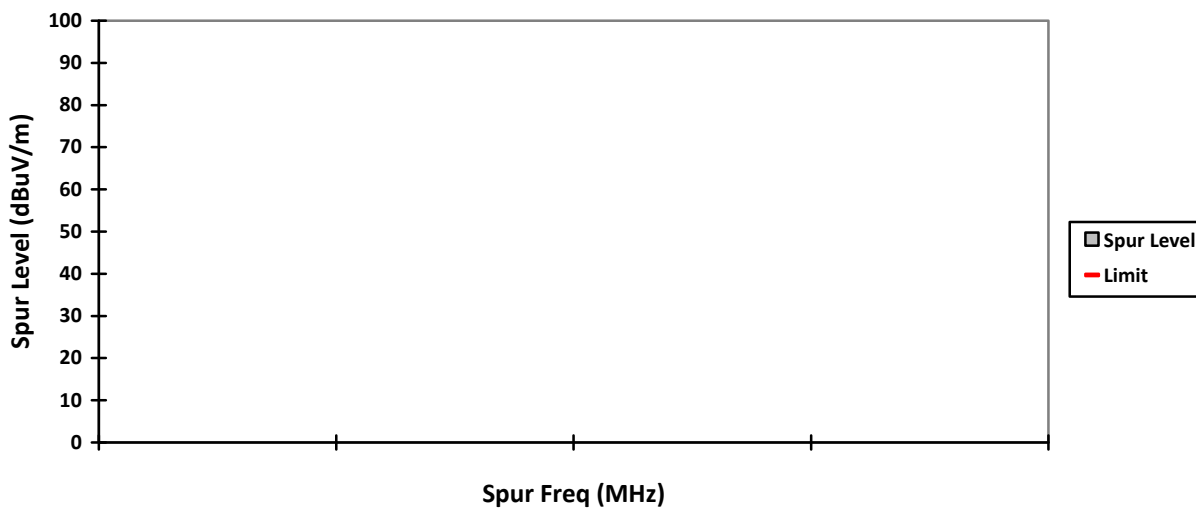


VERTICAL, PK

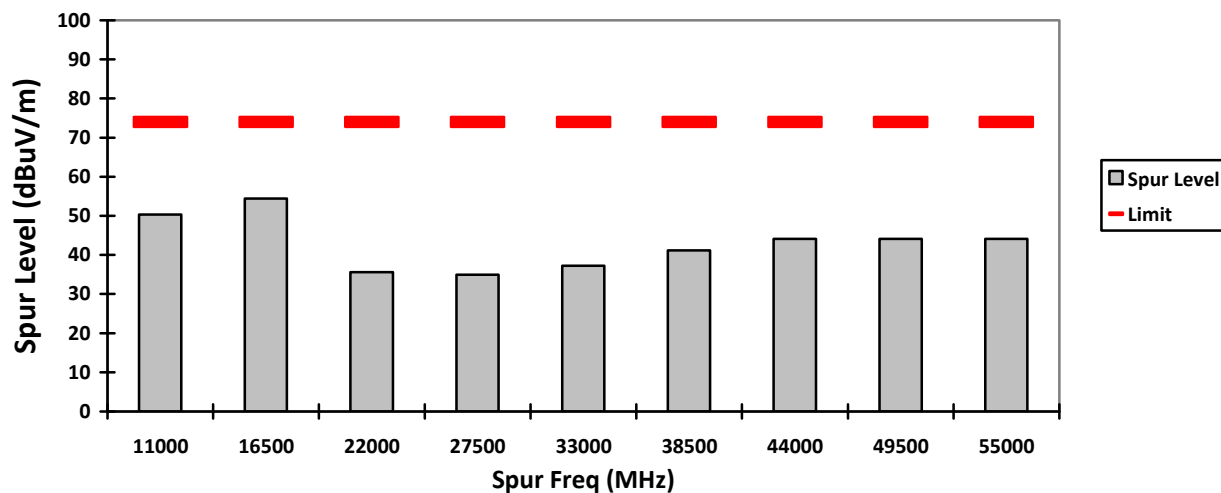


HORIZONTAL, PK

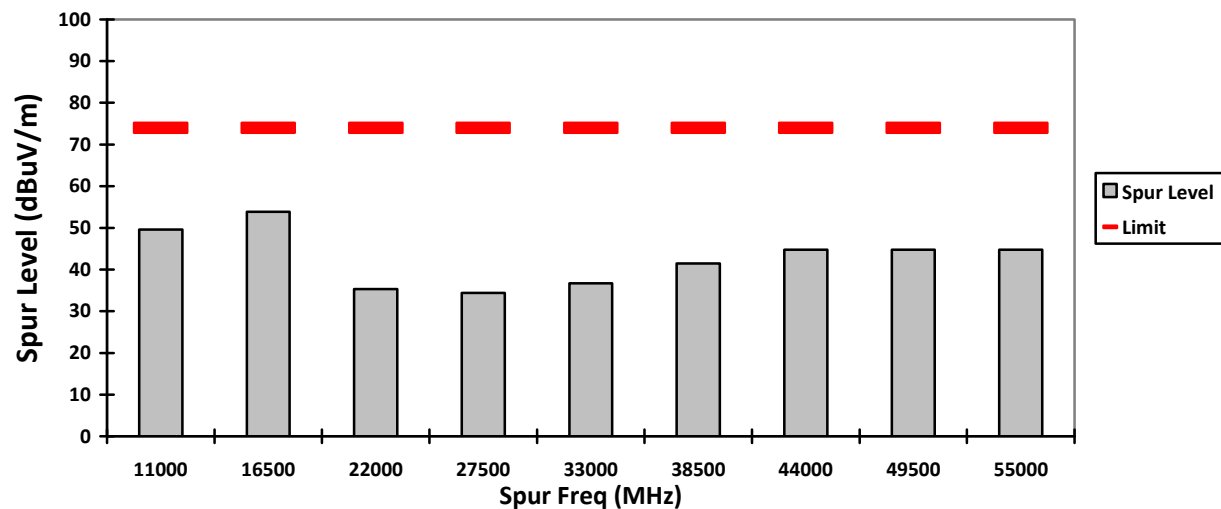

VERTICAL, AV

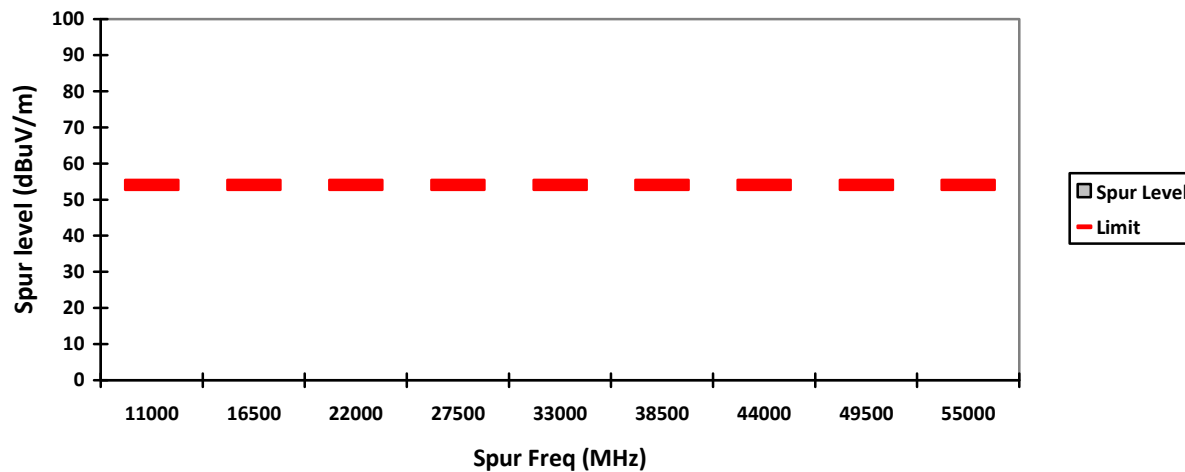

HORIZONTAL, AV

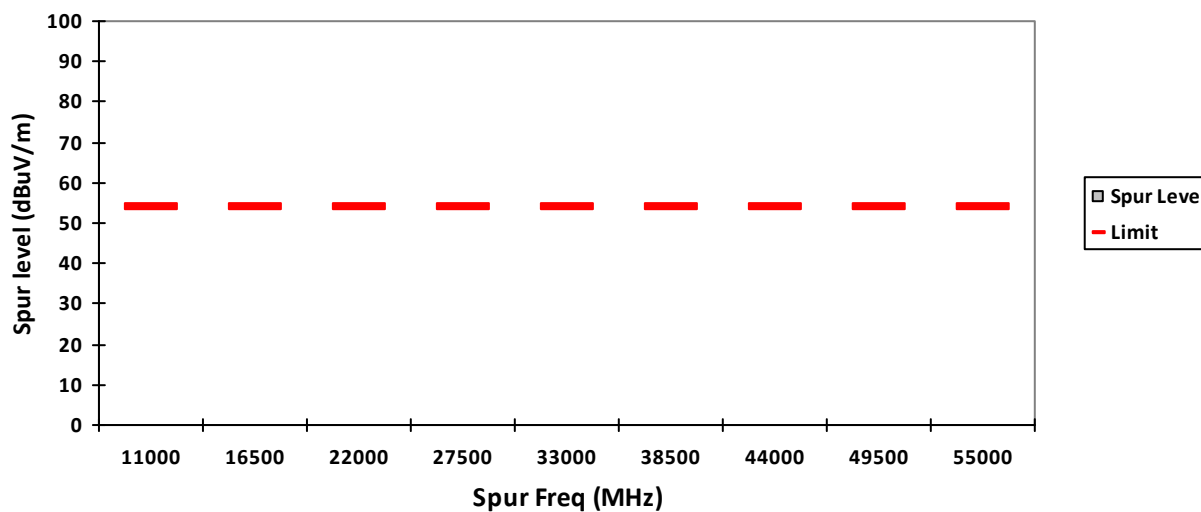

Test: WIFI SAC Transmitter Radiated Emission

Model#: AAH90ZDU9RH1AN

S/N: 734TWP0311

EMC SR ID#: 18058-EMC-00040

Battery: PMNN4804A

Accessory: AN000348A01

Test Channel: Mid

Test Frequency: 5580.0000 MHz

Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (802.11n 20MHz)

Radiated Emission (Mid Channel) tabular data

[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 24.5

Test Performed by: Qawiman&Fendi

System MU: 4.03dB


Humidity (%): 70.3

Test Date: Thu, Aug 20, 2020


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, QPK

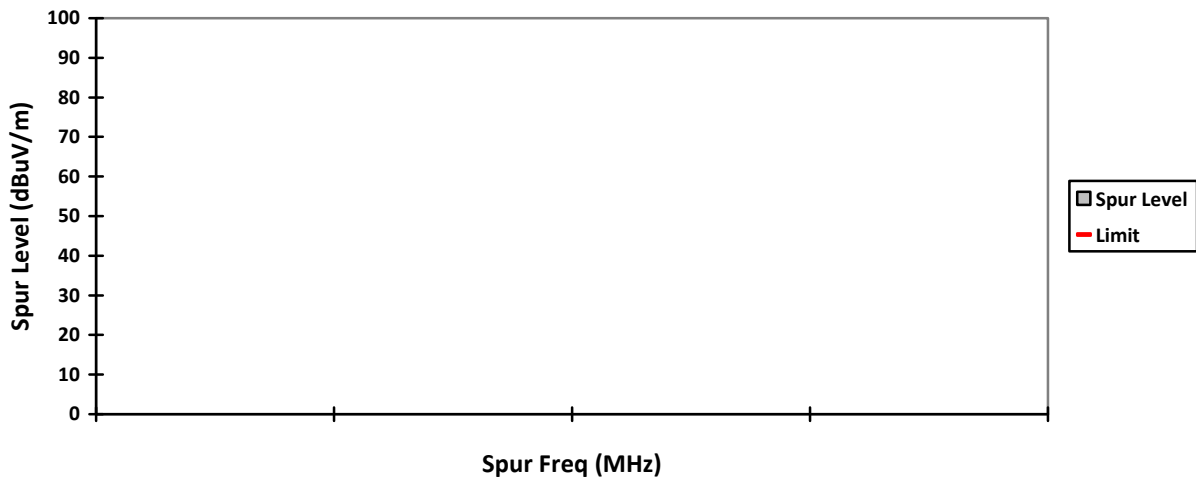


HORIZONTAL, QPK

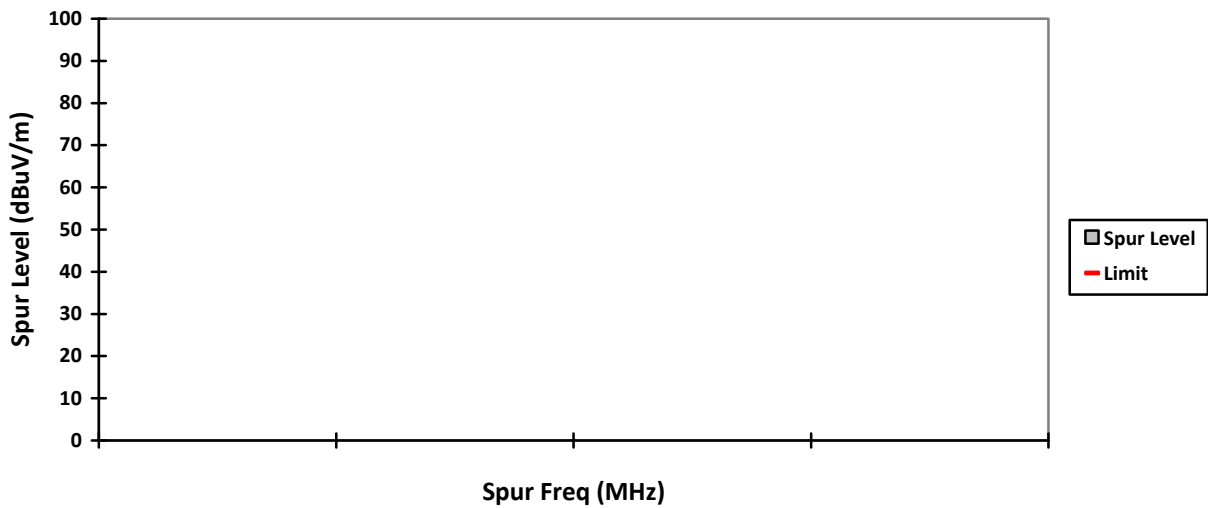


VERTICAL, PK

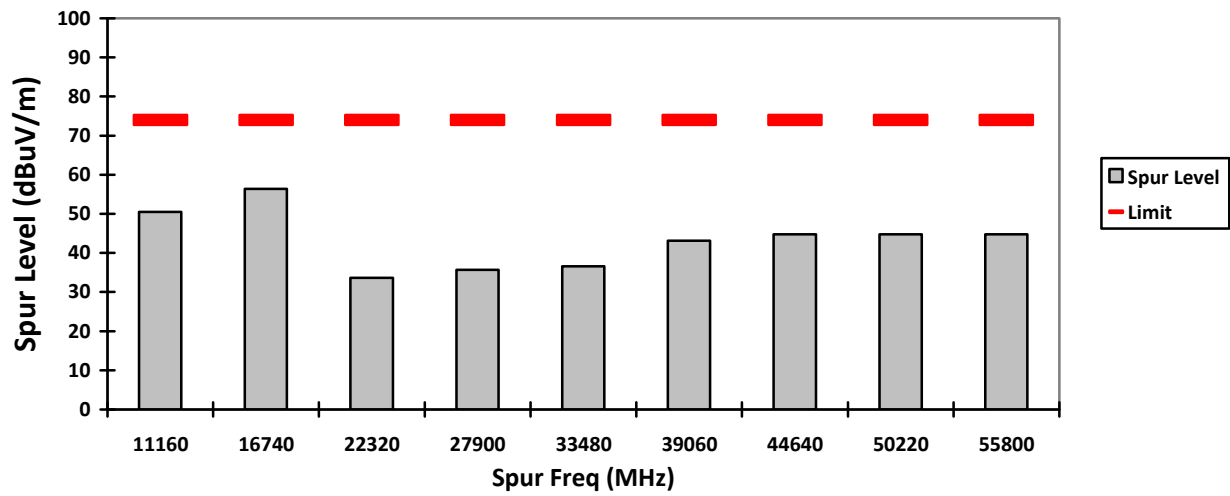


HORIZONTAL, PK

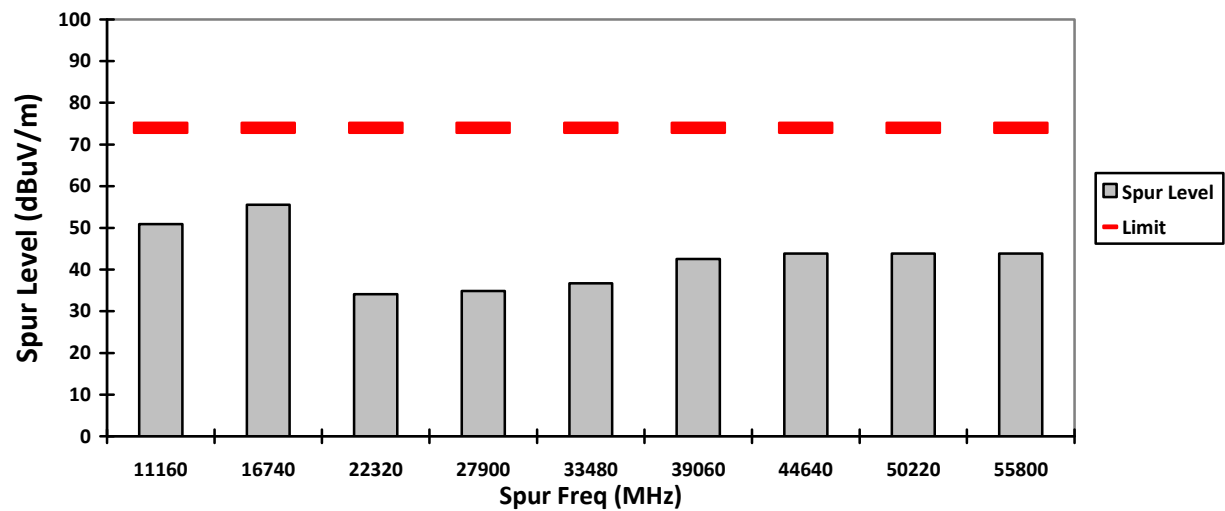

VERTICAL, AV

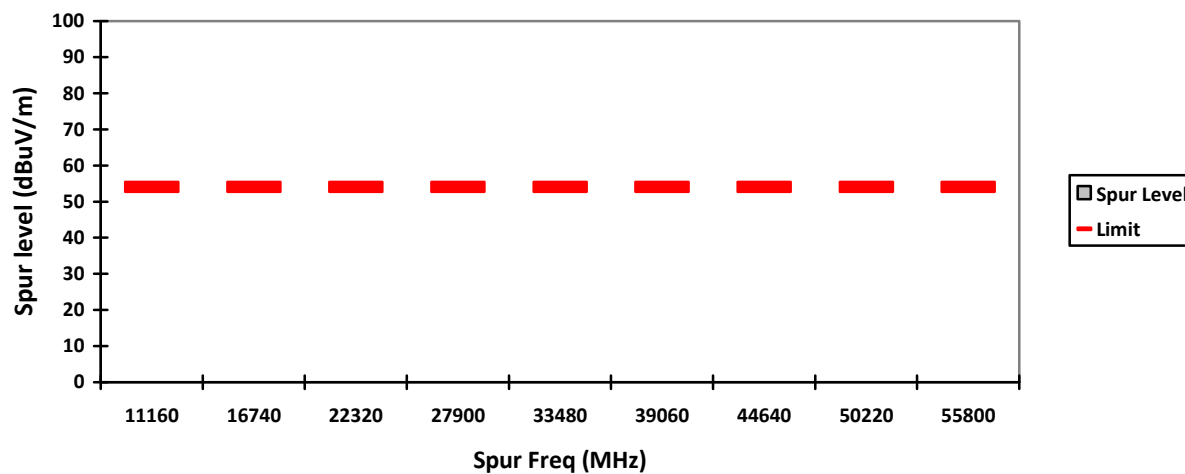

HORIZONTAL, AV

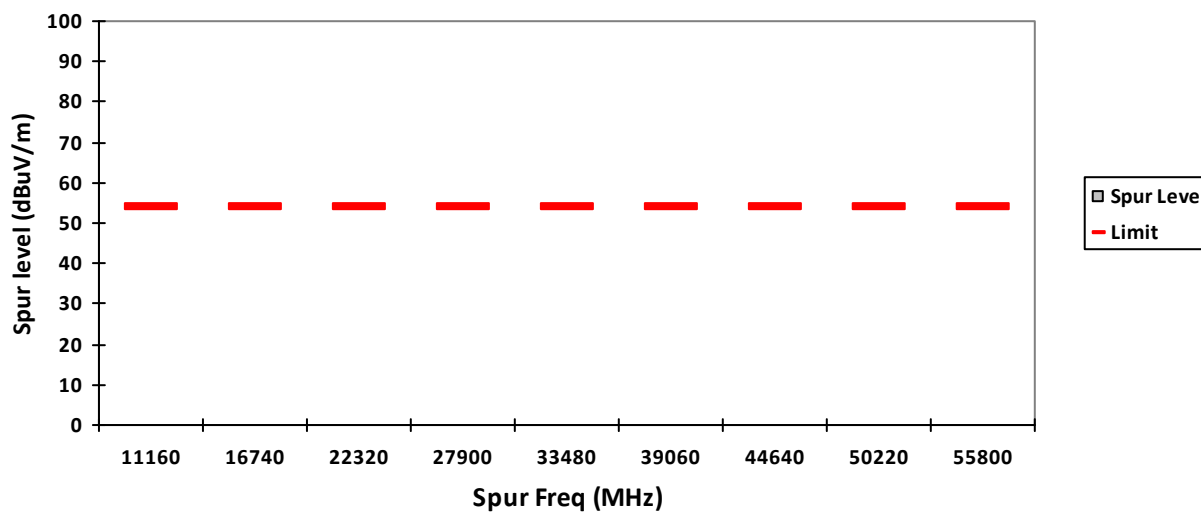


Radiated Emission (Straddle Channel) tabular data

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


Humidity (%): 70.3
Test Date: Thu, Aug 20, 2020

241


VERTICAL, QPK

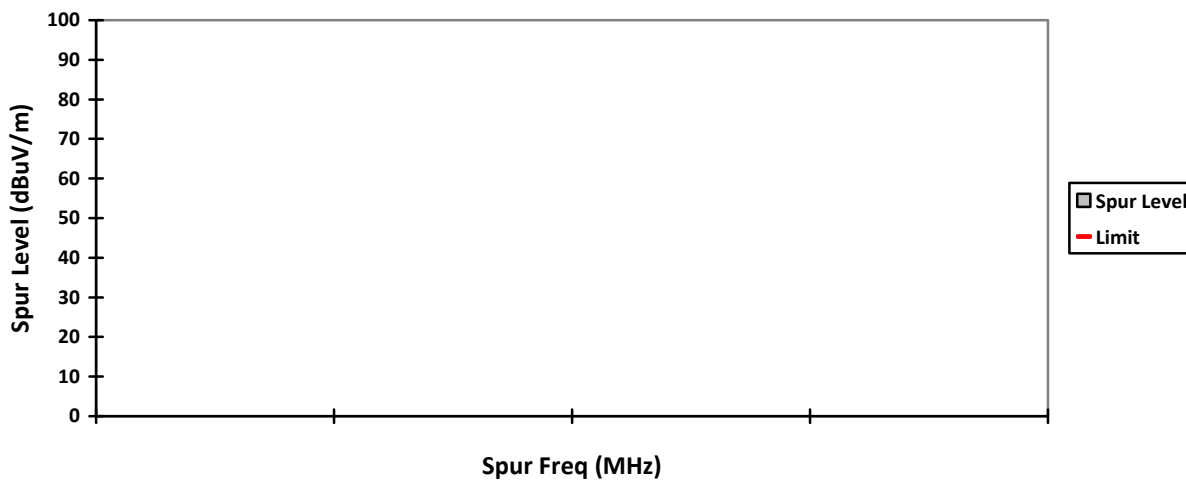


HORIZONTAL, QPK

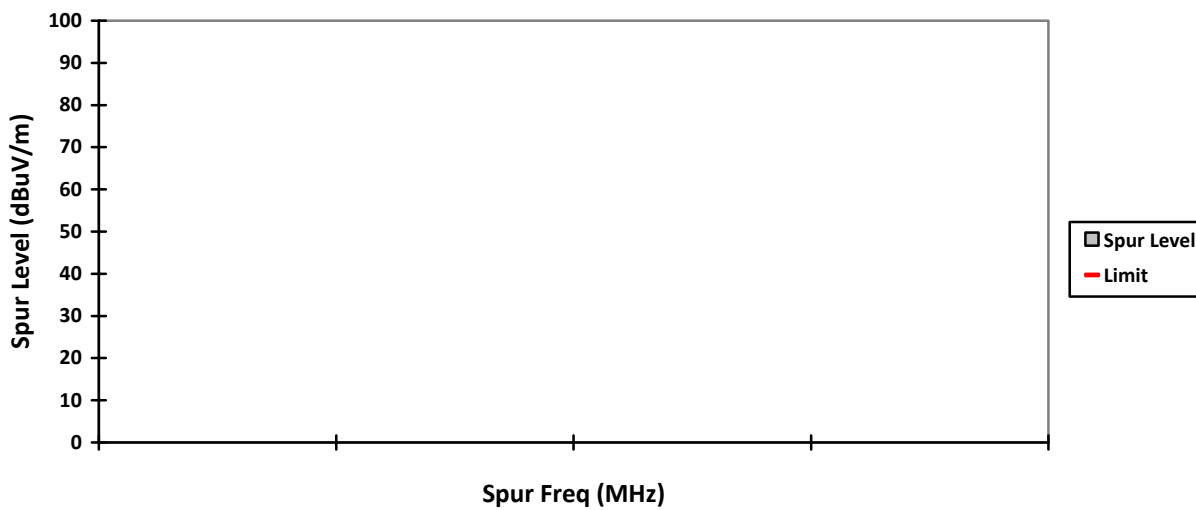


VERTICAL, PK

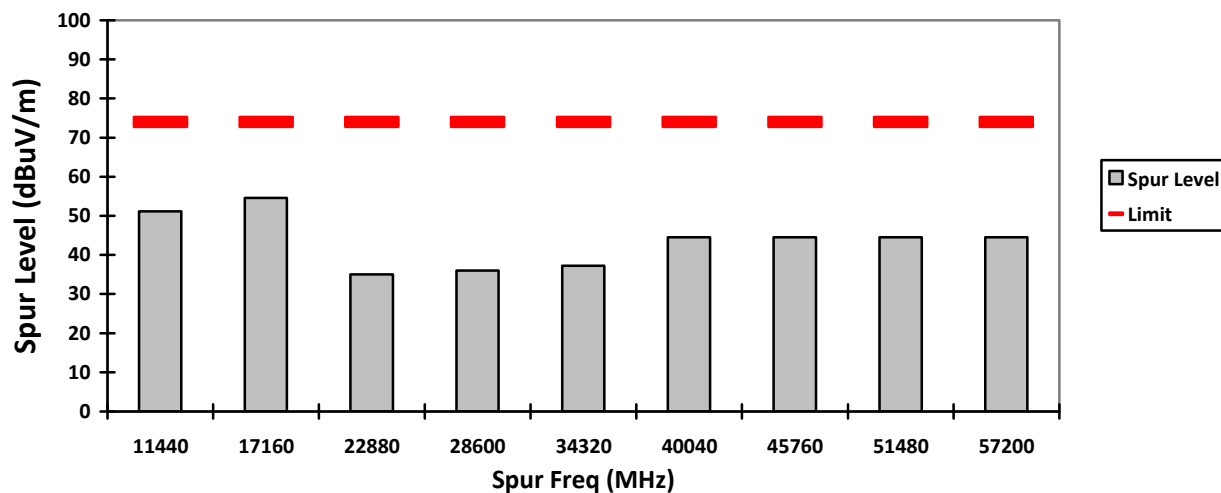


HORIZONTAL, PK

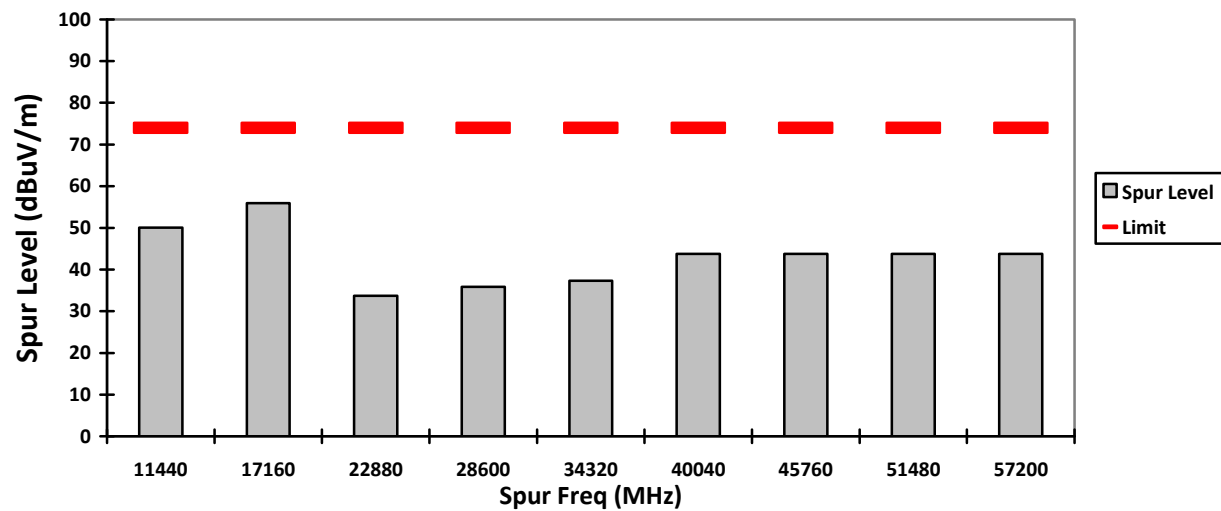


VERTICAL, AV

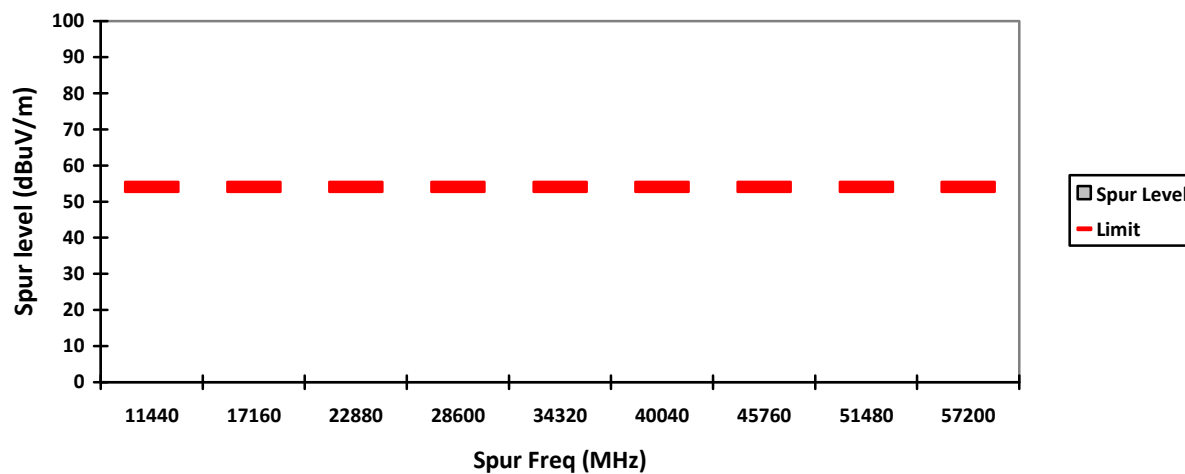


HORIZONTAL, AV

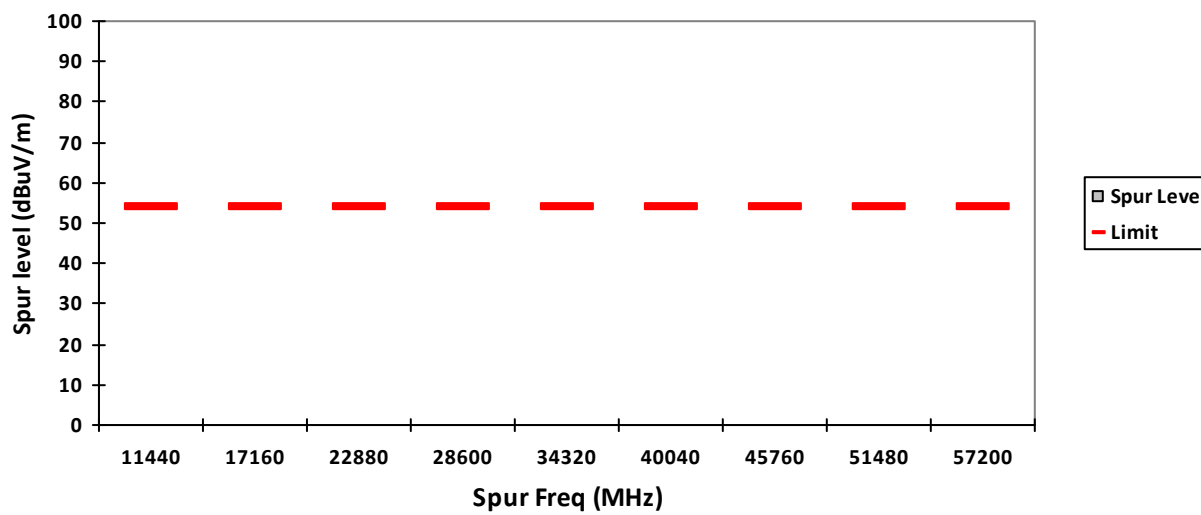


VERTICAL, QPK

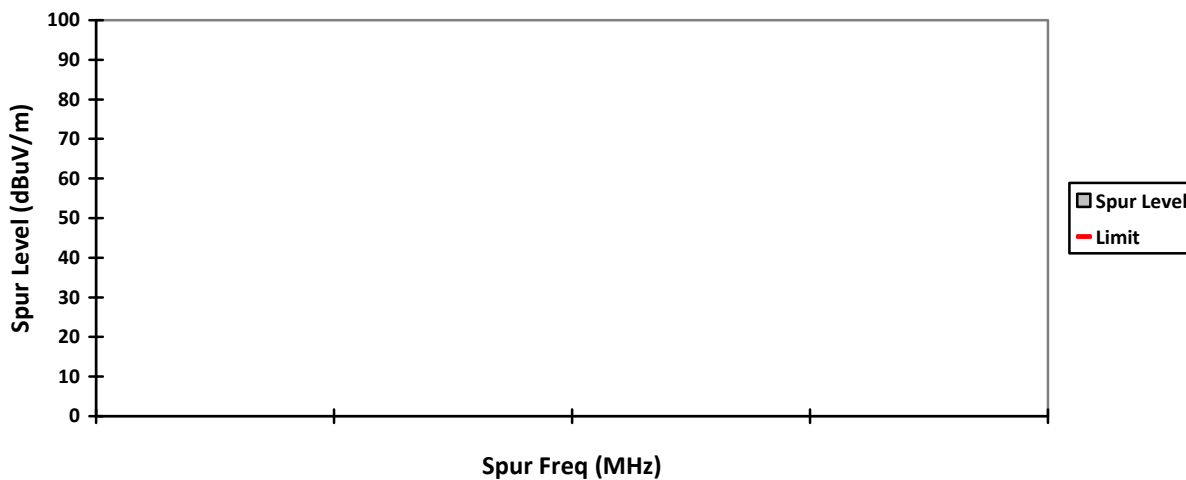


HORIZONTAL, QPK

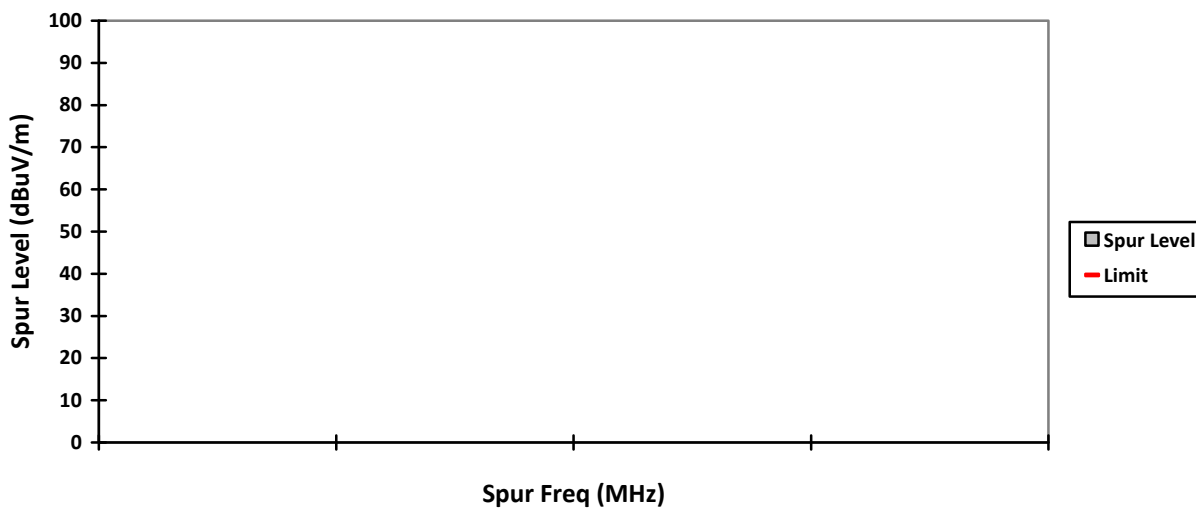


VERTICAL, PK

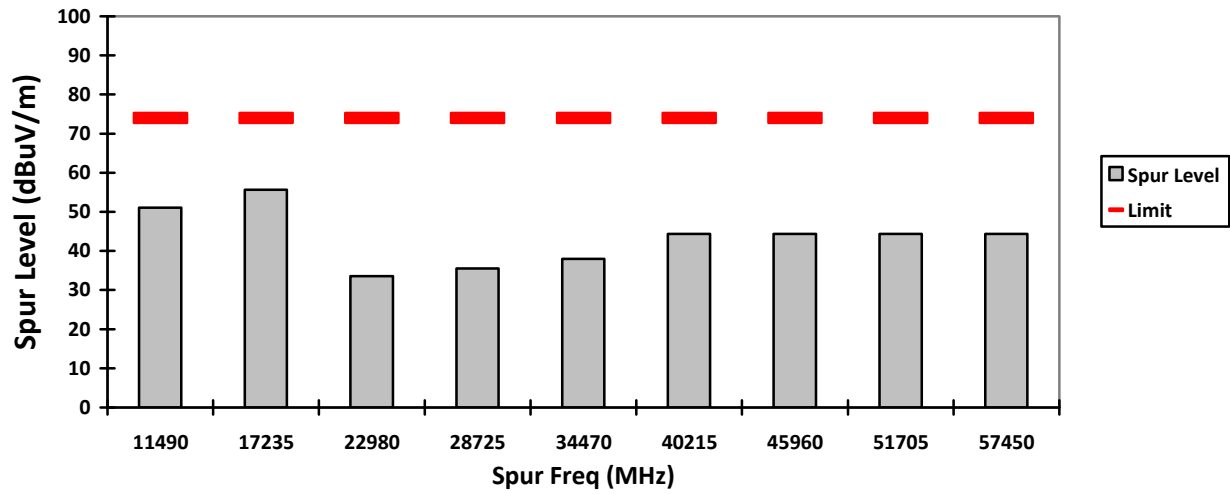


HORIZONTAL, PK

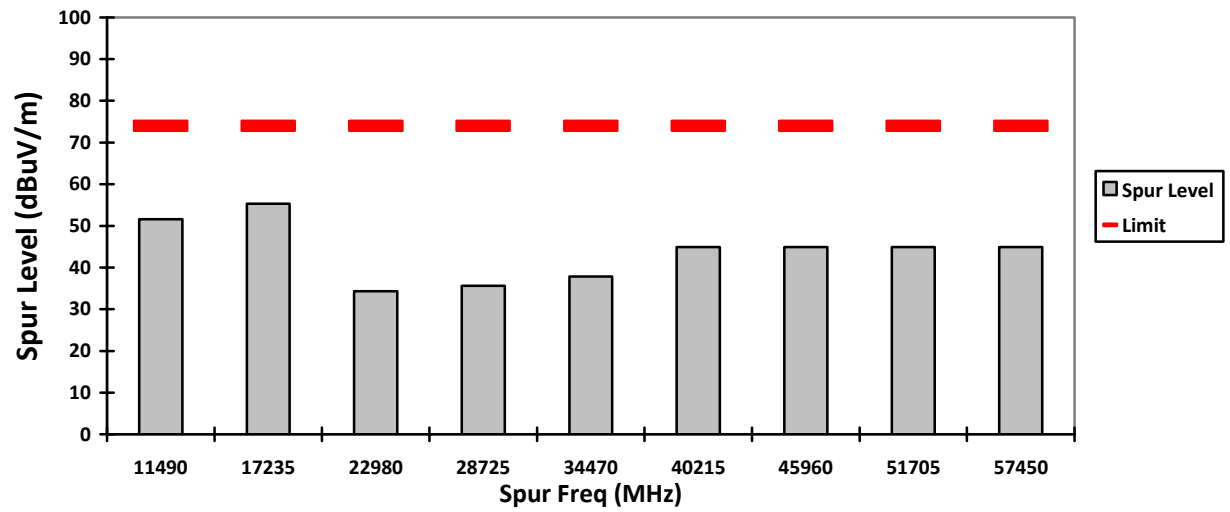


VERTICAL, AV

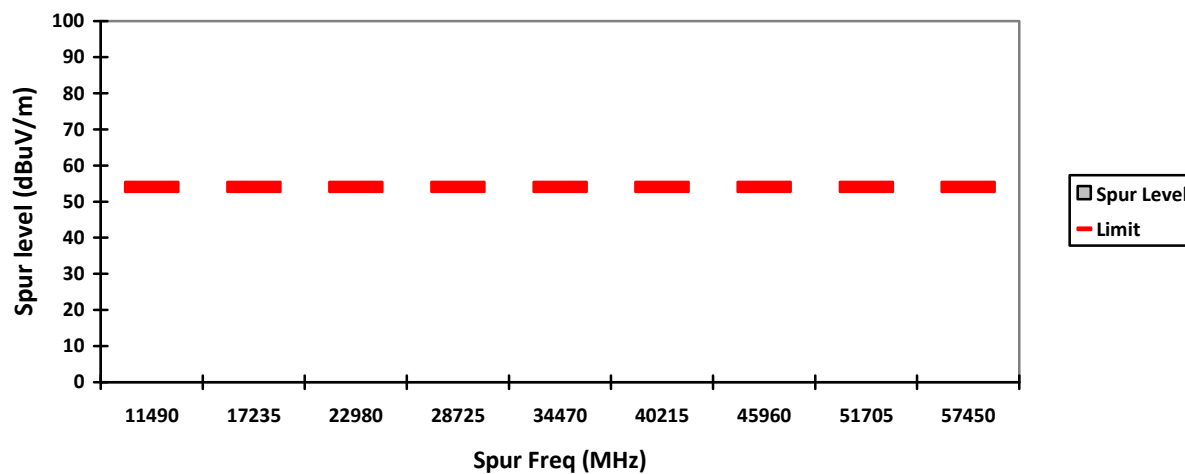


HORIZONTAL, AV

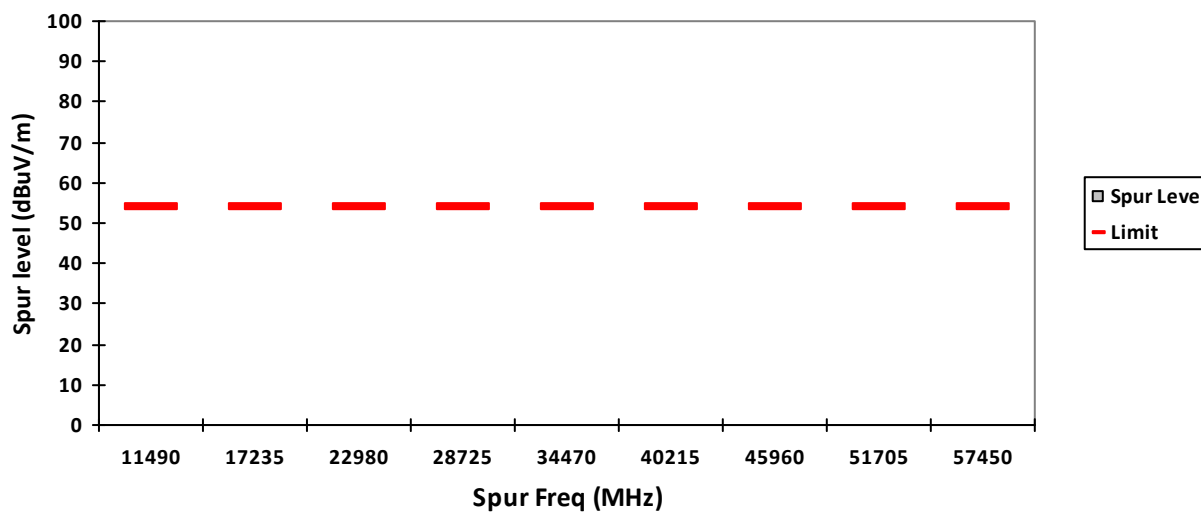


VERTICAL, QPK

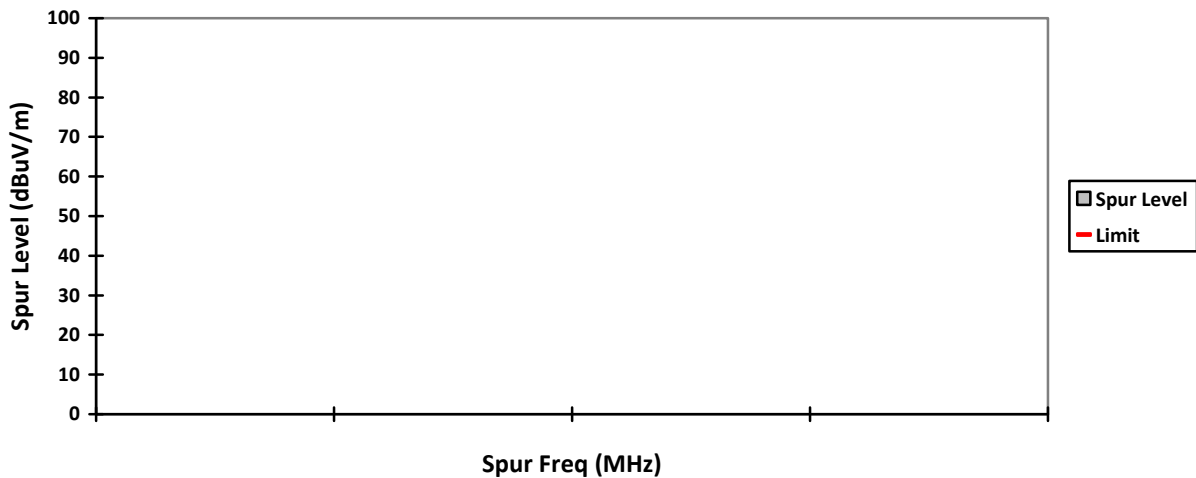


HORIZONTAL, QPK

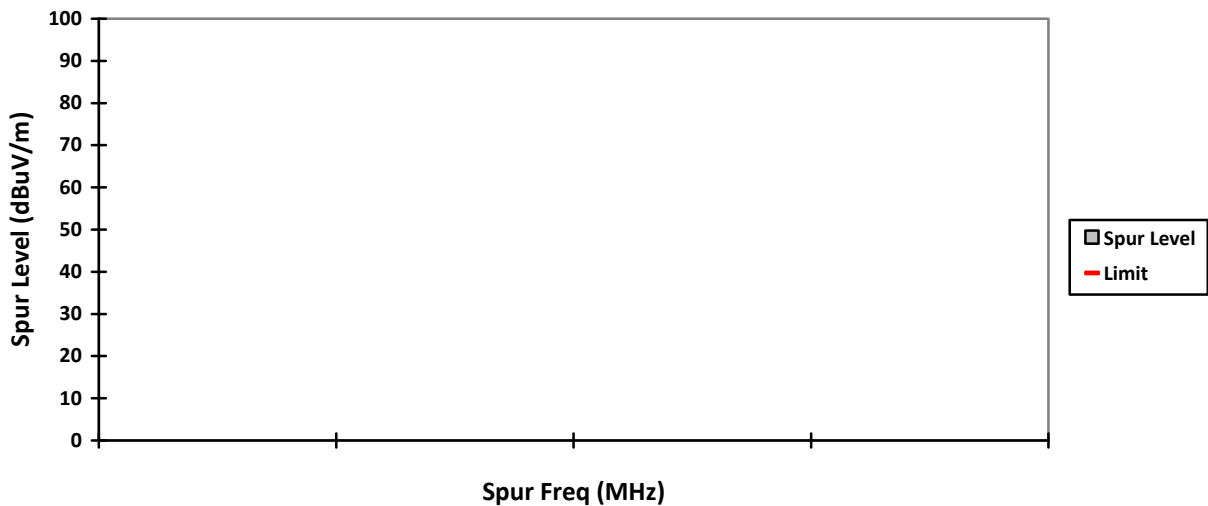


VERTICAL, PK

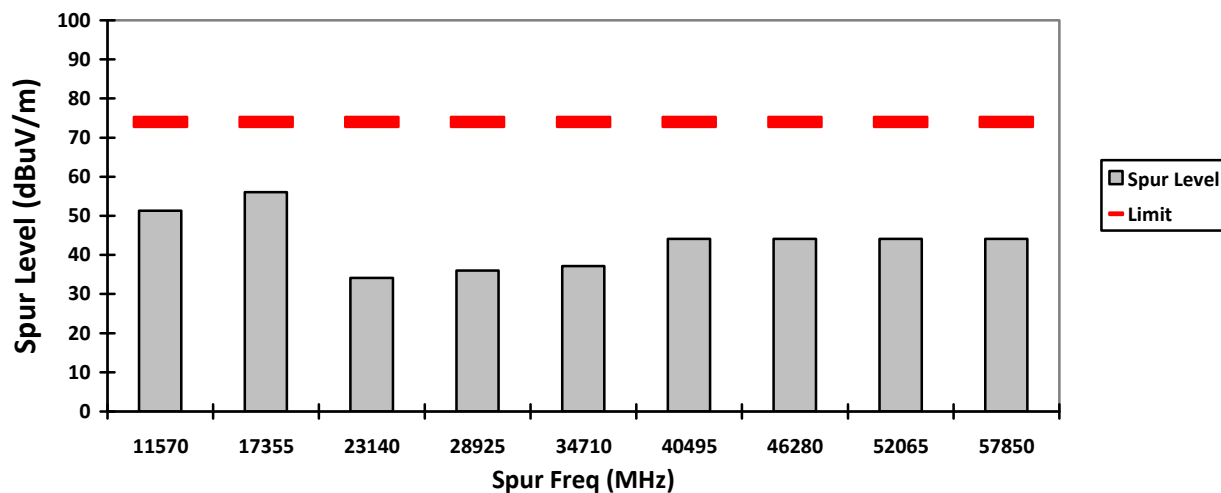


HORIZONTAL, PK

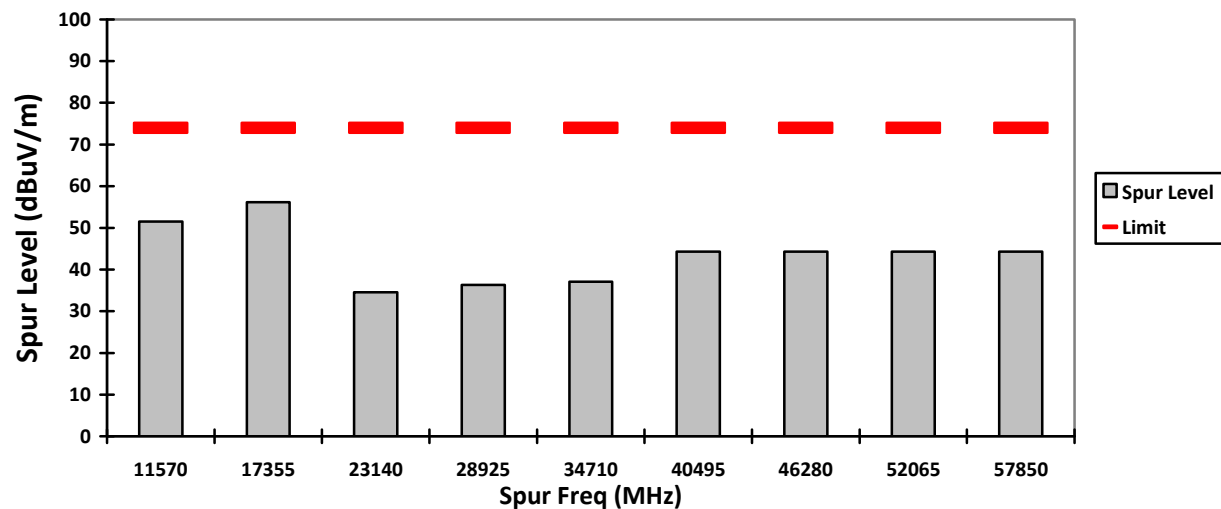


VERTICAL, AV

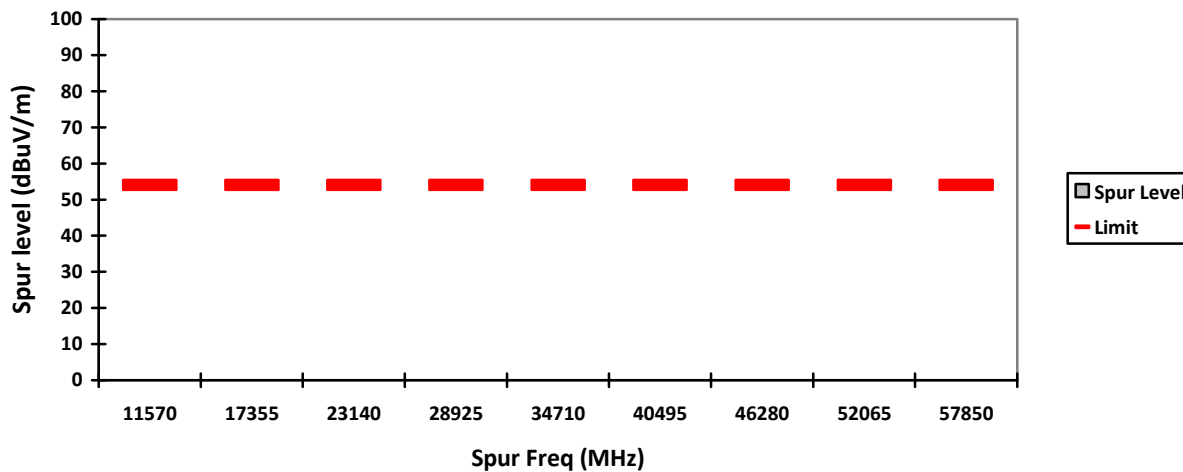


HORIZONTAL, AV

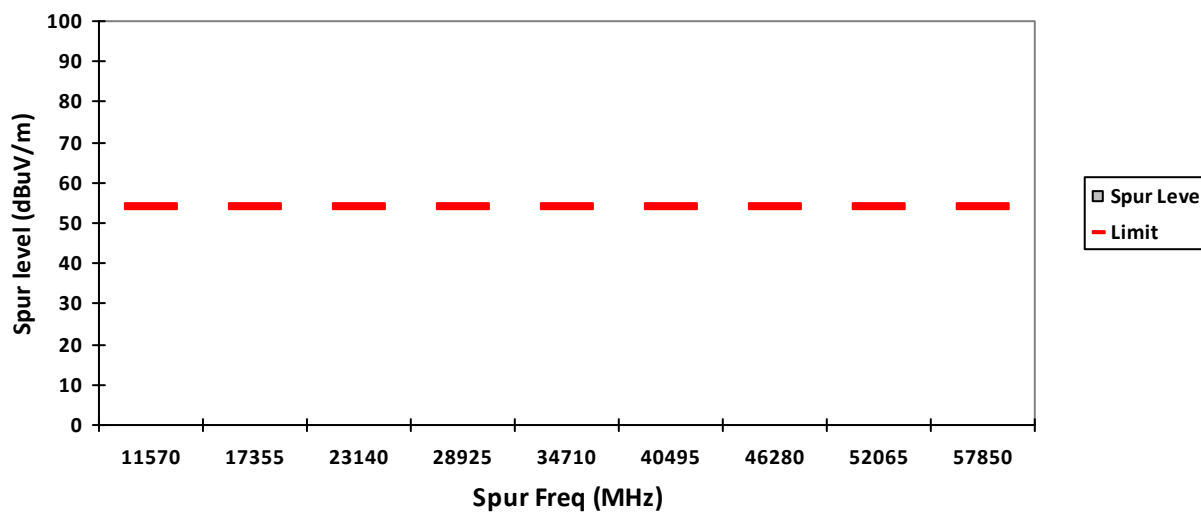


VERTICAL, QPK

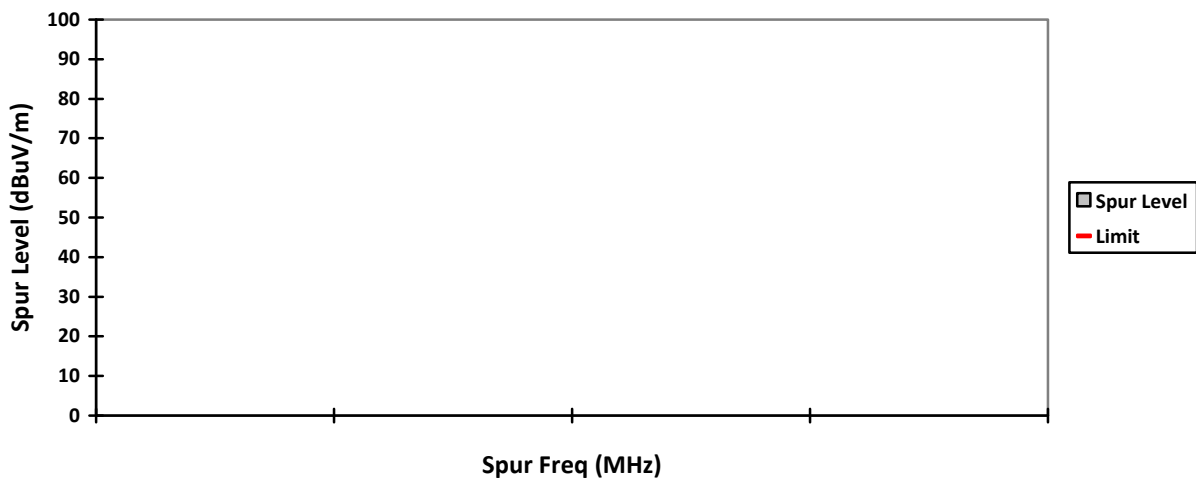


HORIZONTAL, QPK

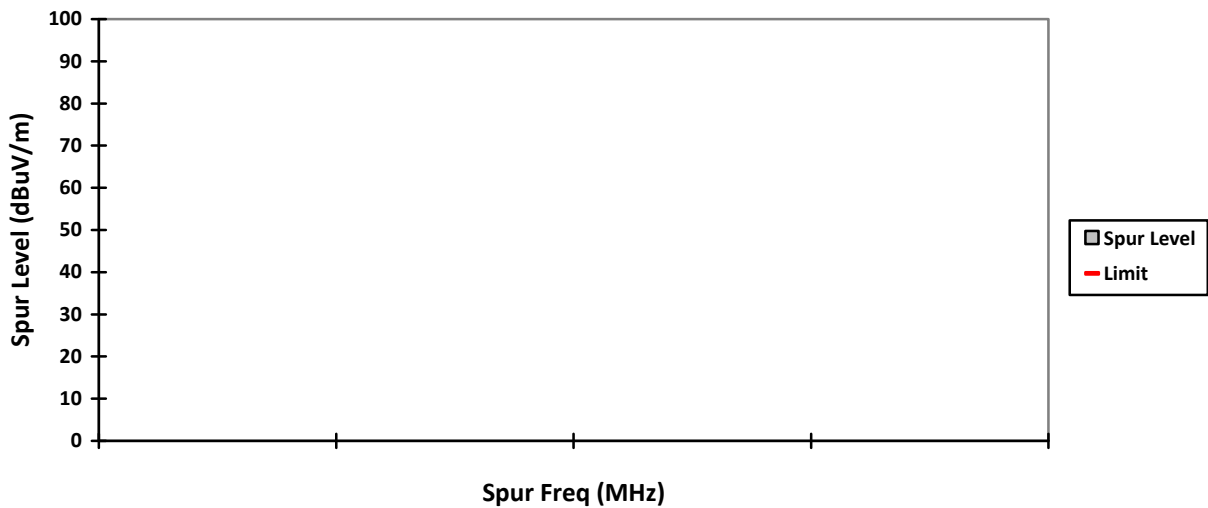


VERTICAL, PK

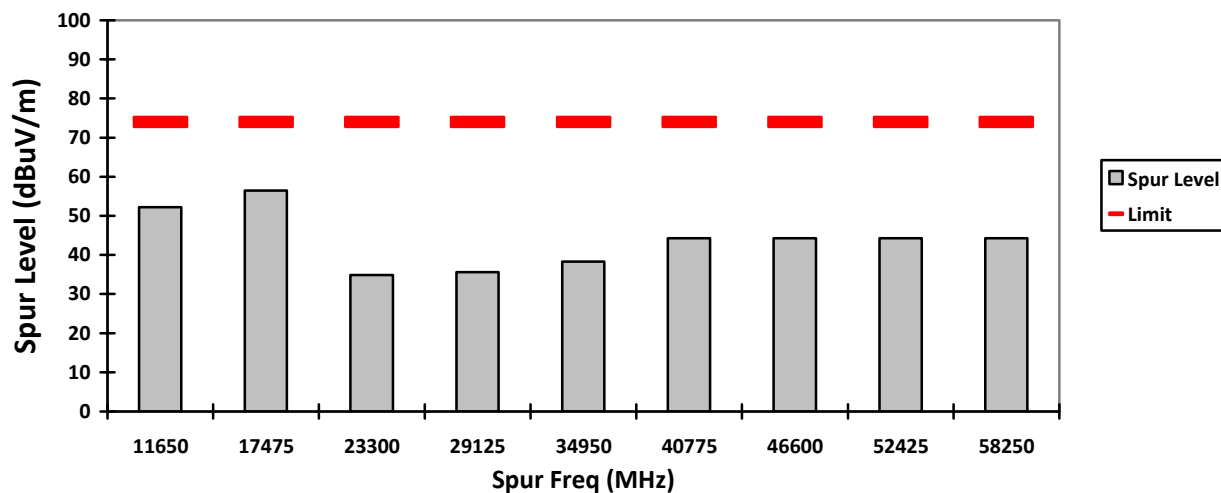


HORIZONTAL, PK

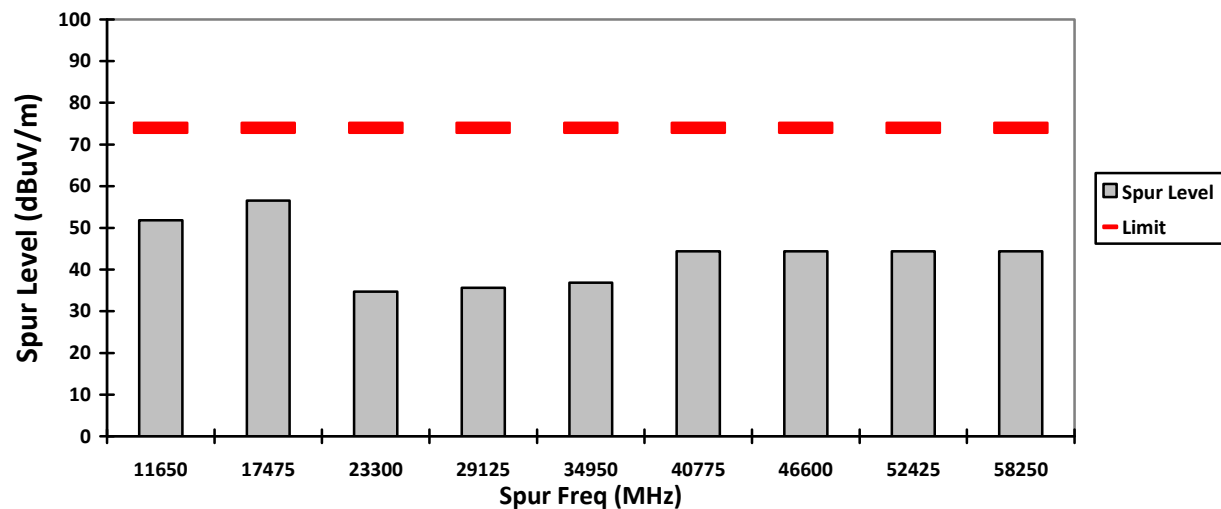


VERTICAL, AV

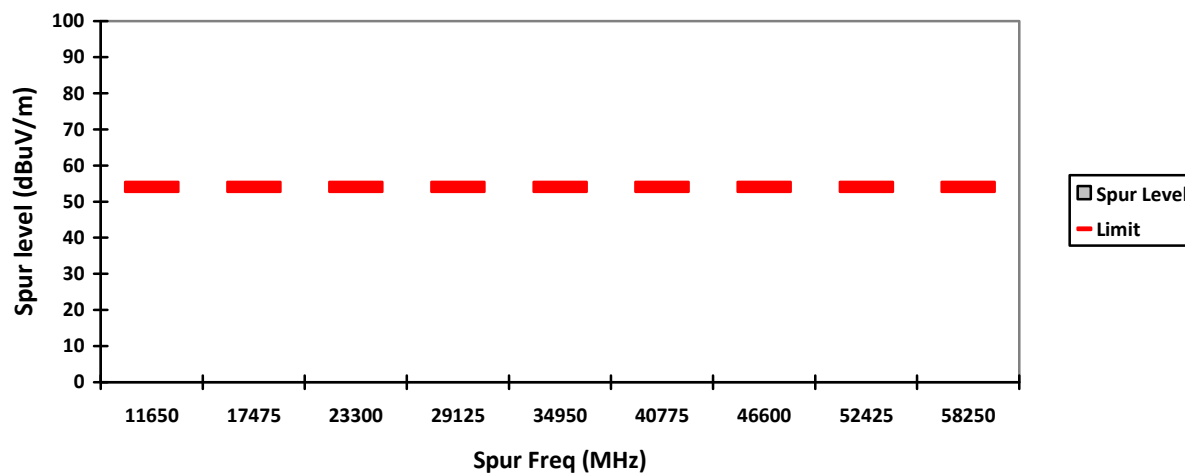


HORIZONTAL, AV

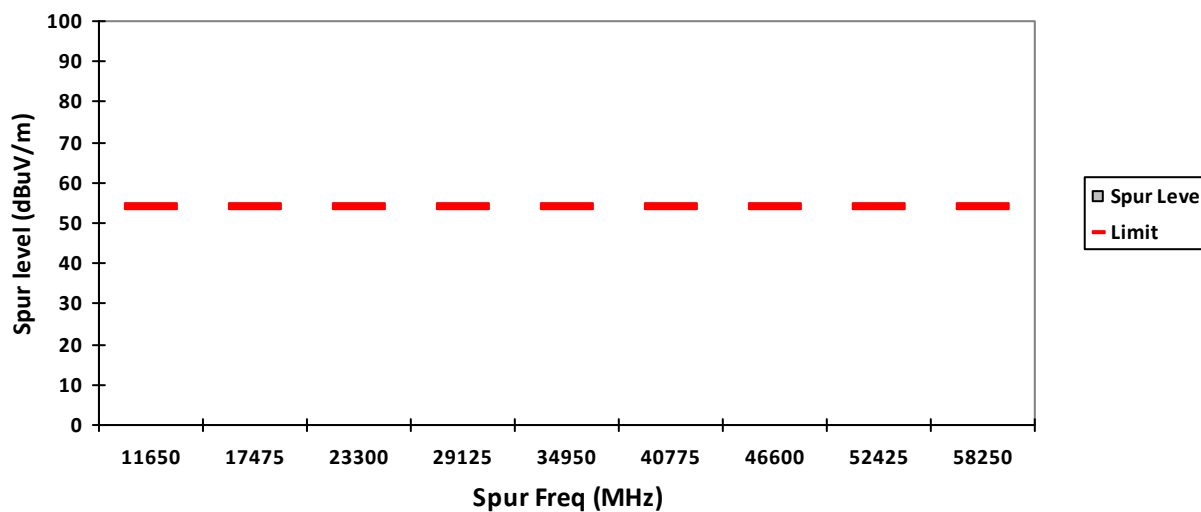


VERTICAL, QPK

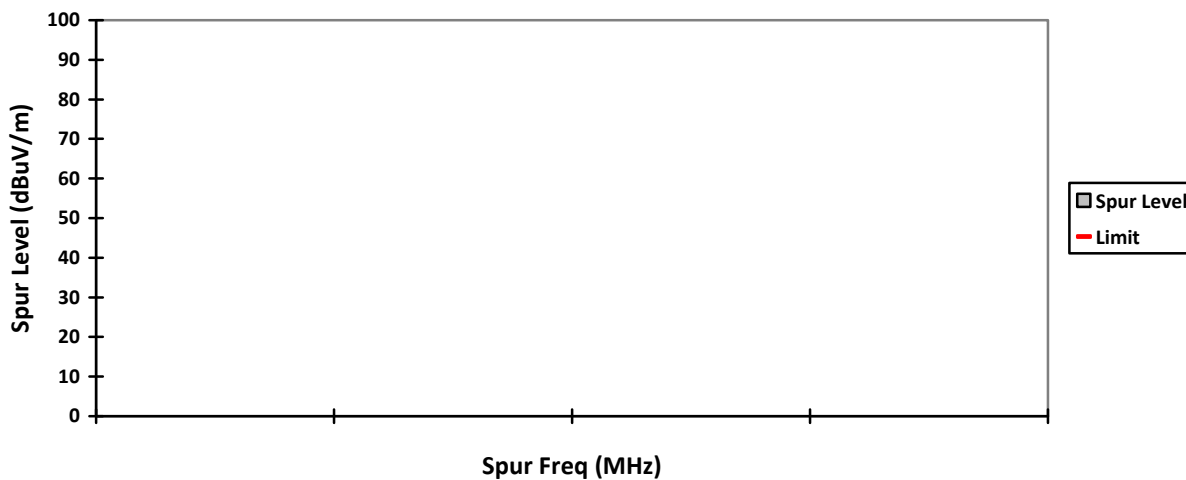


HORIZONTAL, QPK

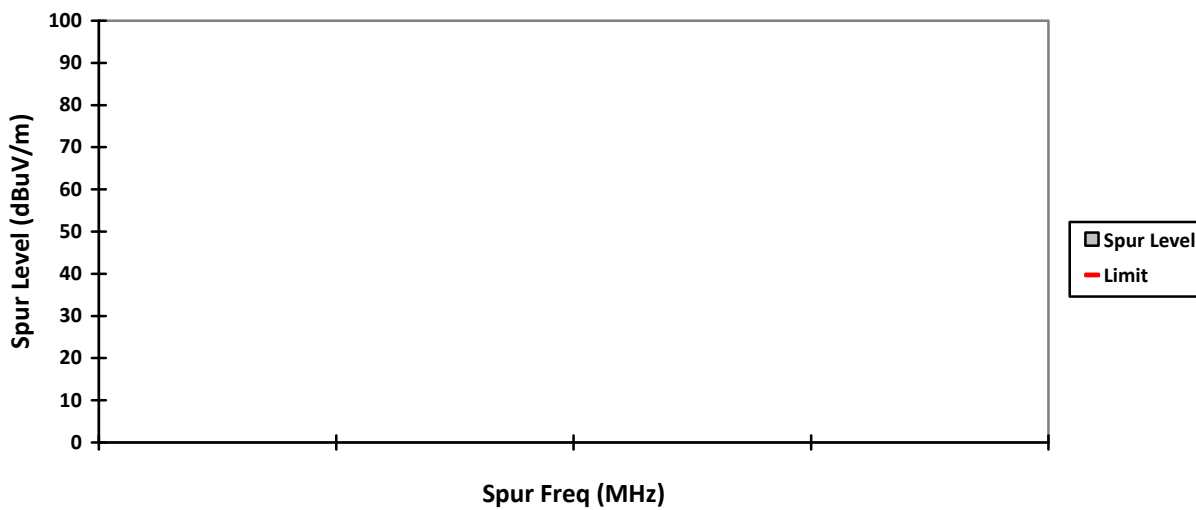


VERTICAL, PK

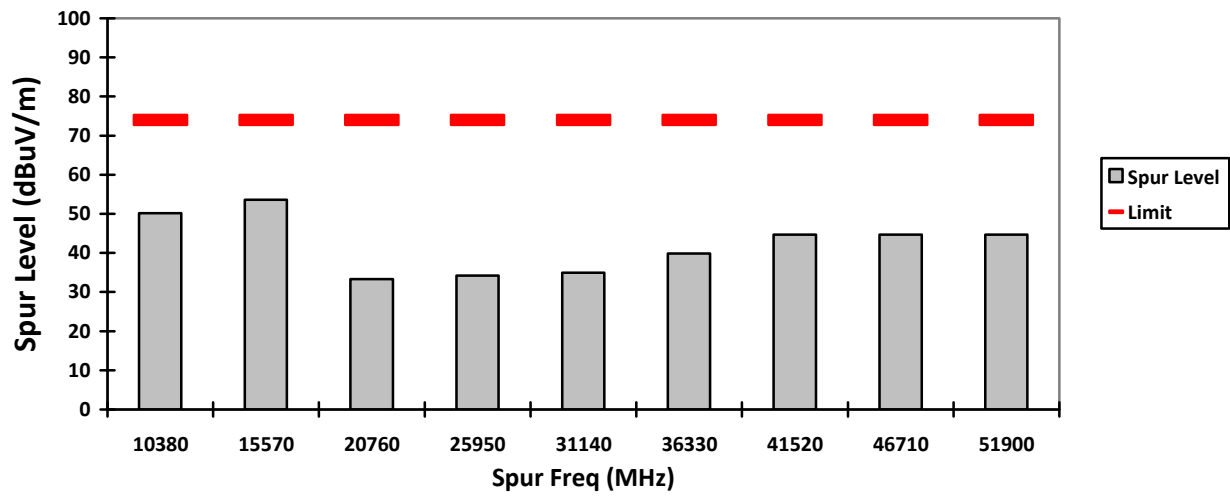


HORIZONTAL, PK

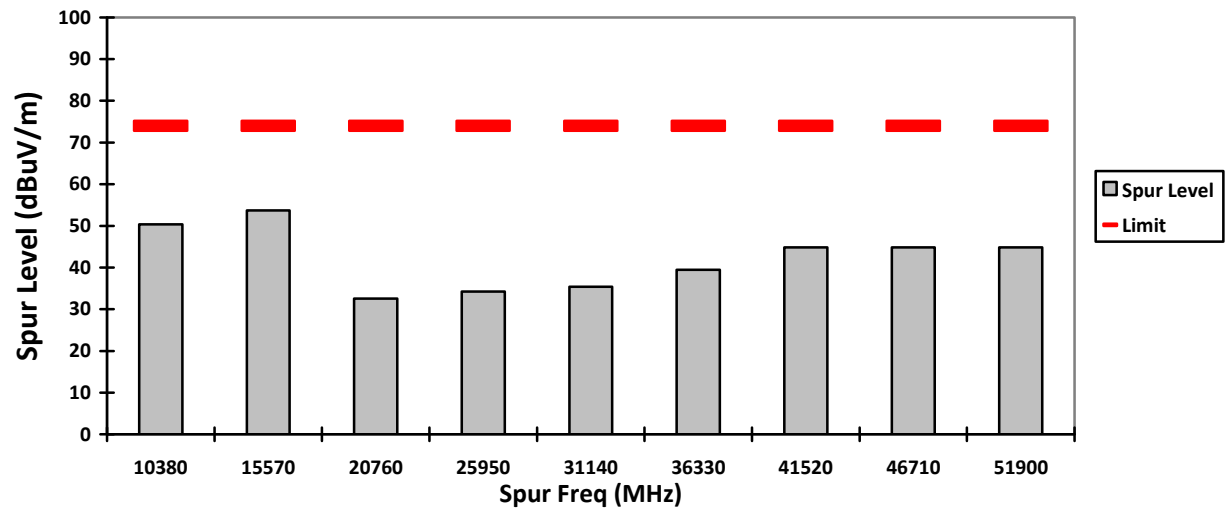


VERTICAL, AV

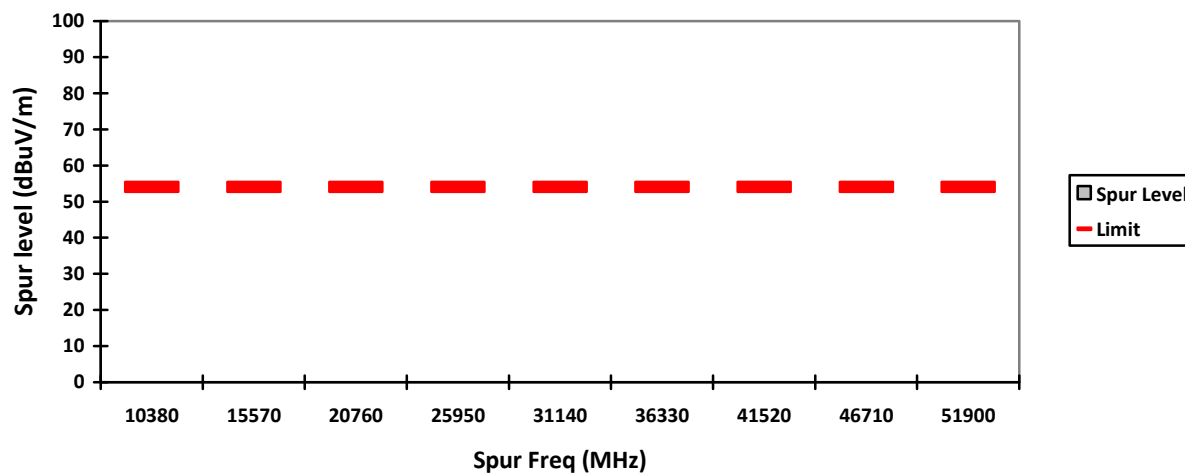


HORIZONTAL, AV

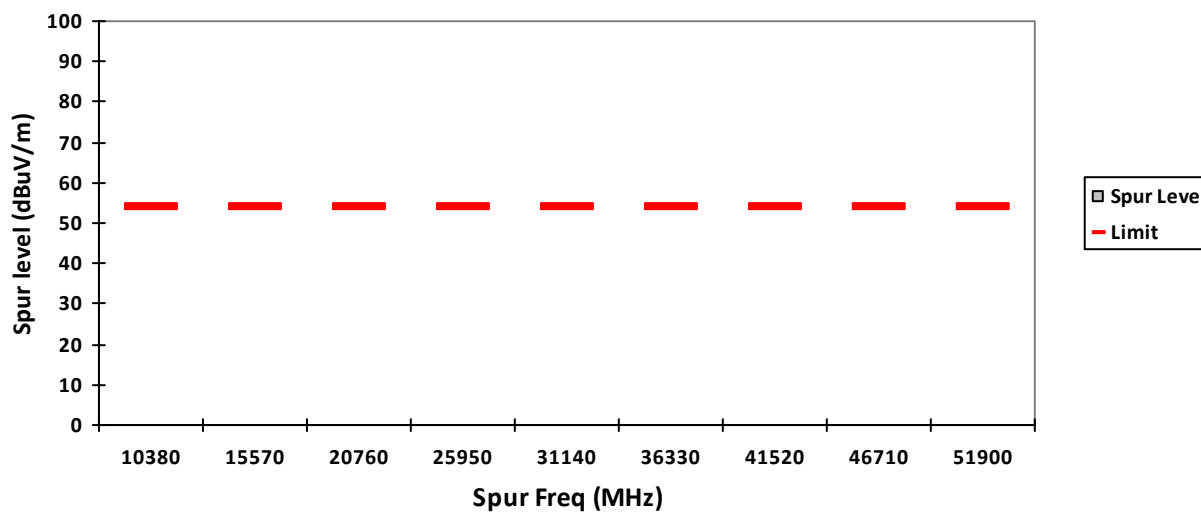


VERTICAL, QPK

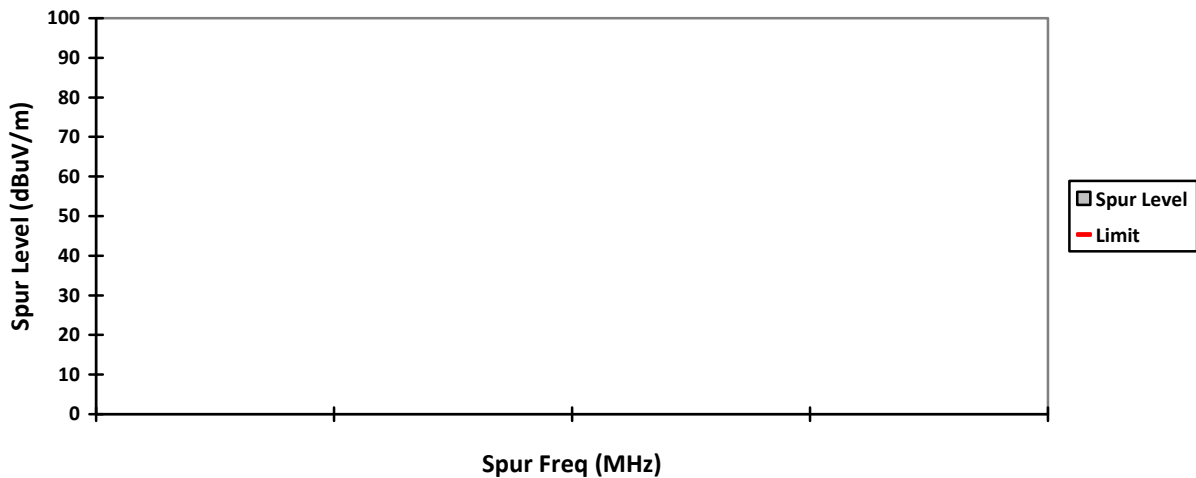


HORIZONTAL, QPK

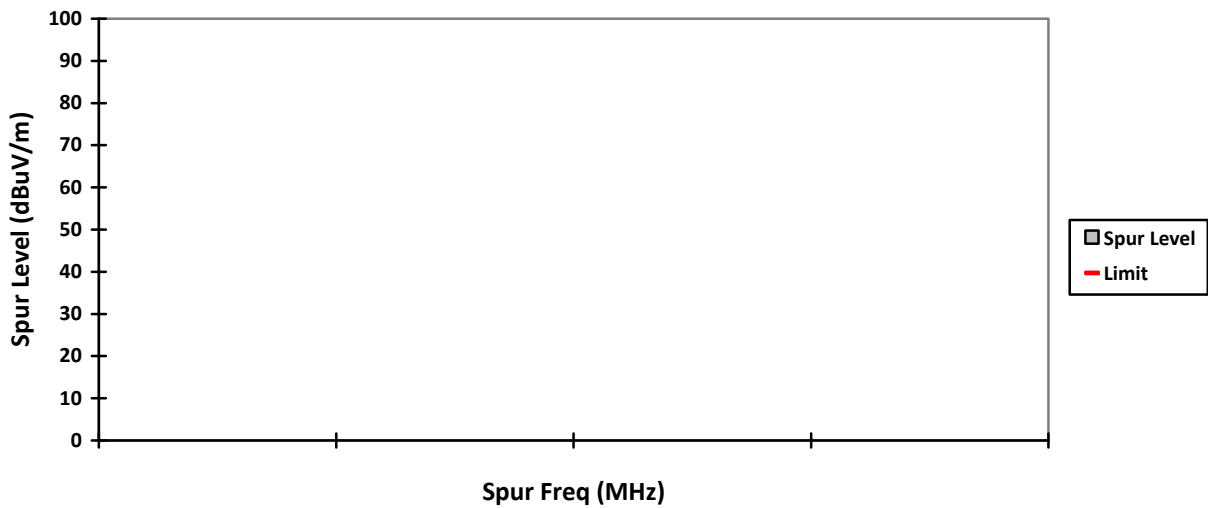


VERTICAL, PK

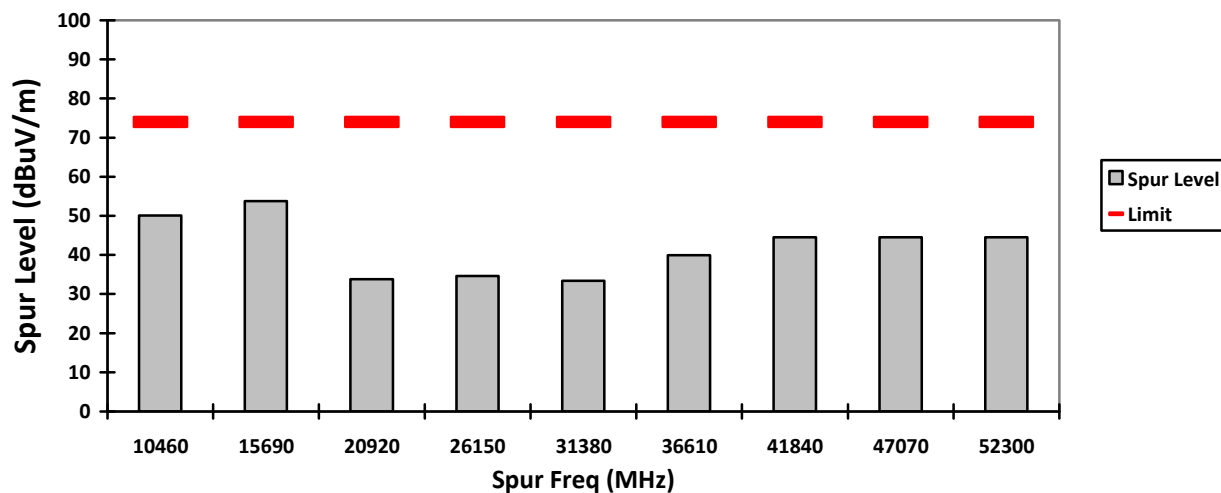


HORIZONTAL, PK

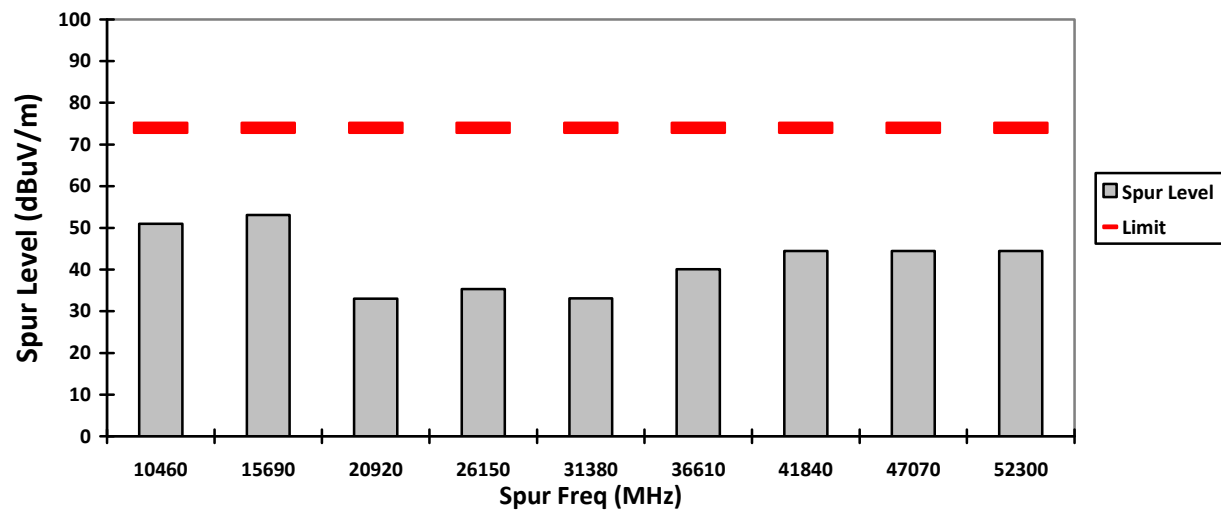


VERTICAL, AV

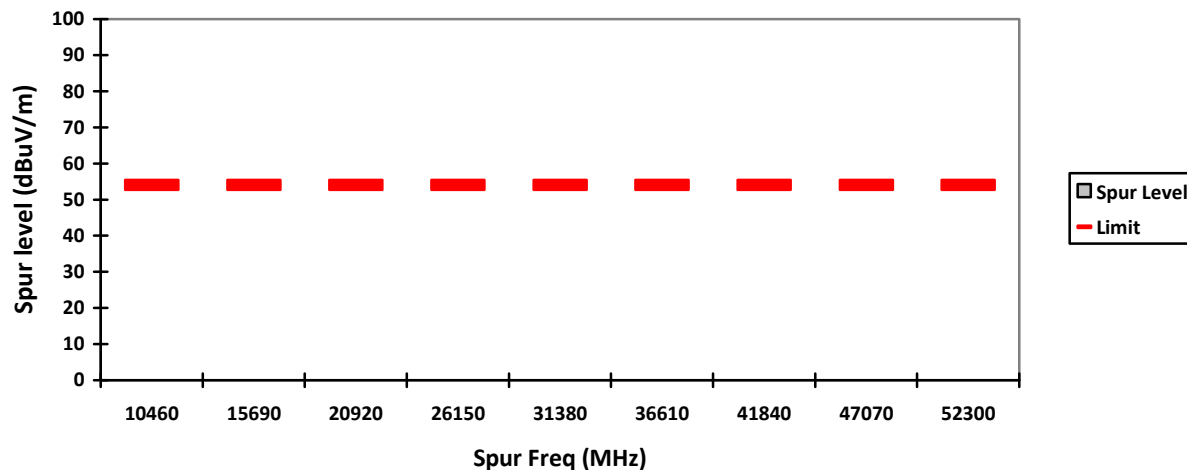


HORIZONTAL, AV

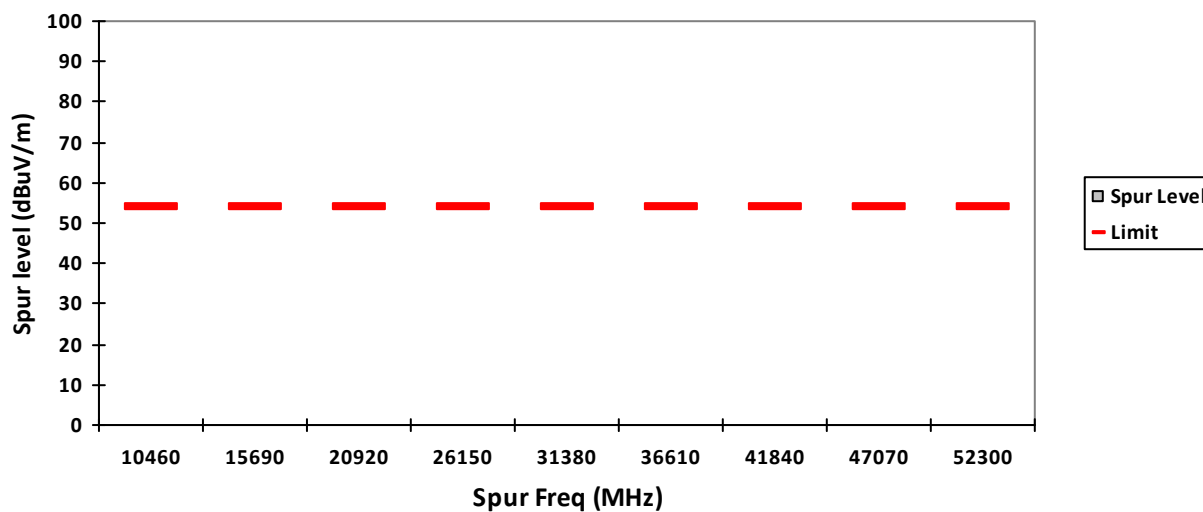


VERTICAL, QPK

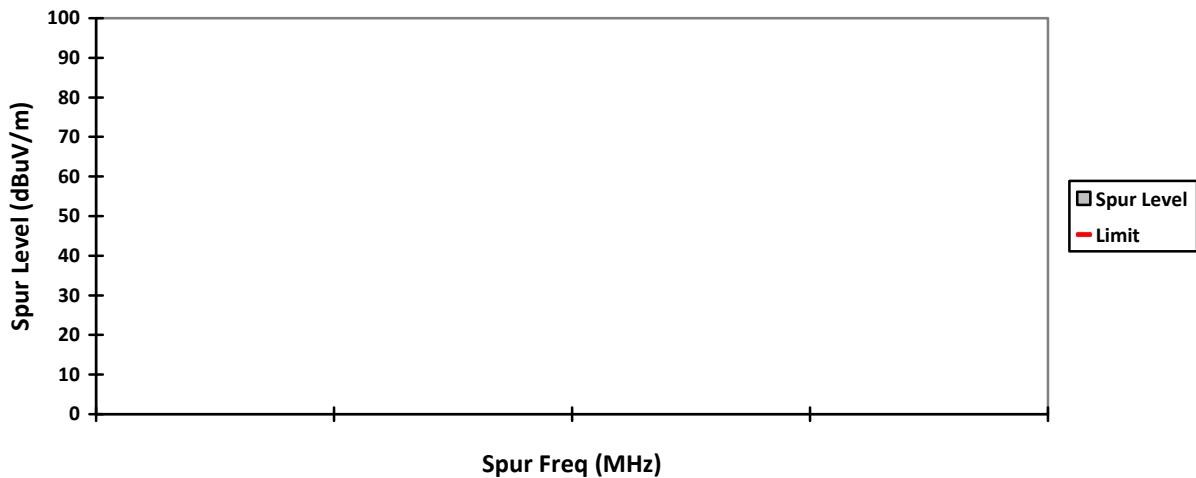


HORIZONTAL, QPK

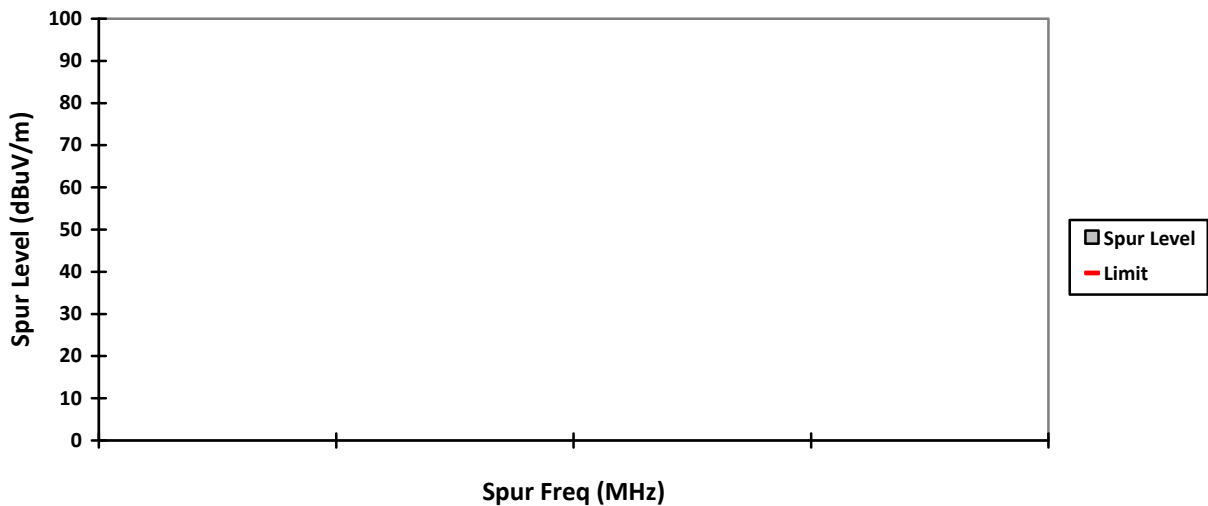


VERTICAL, PK

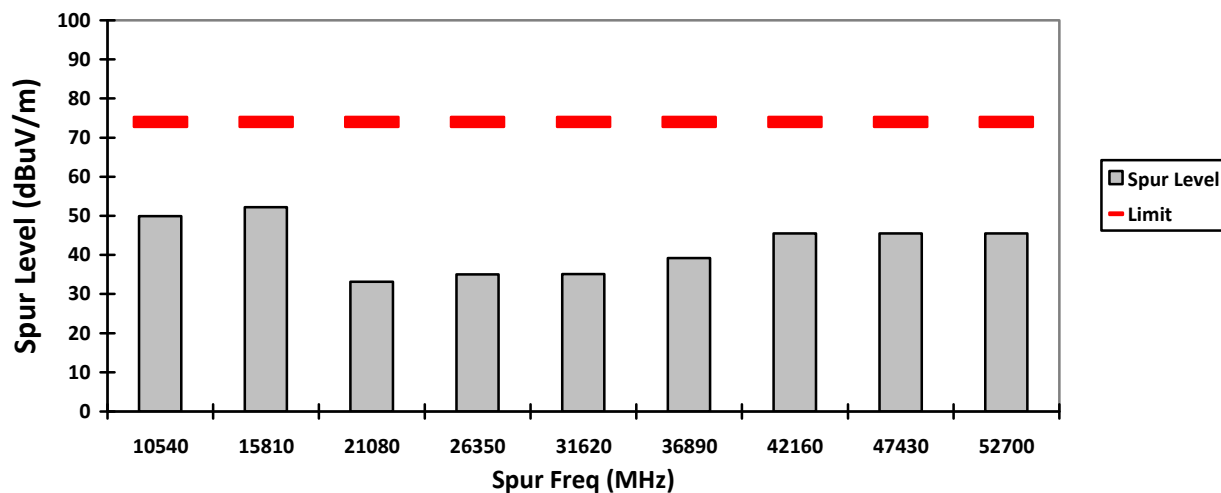


HORIZONTAL, PK

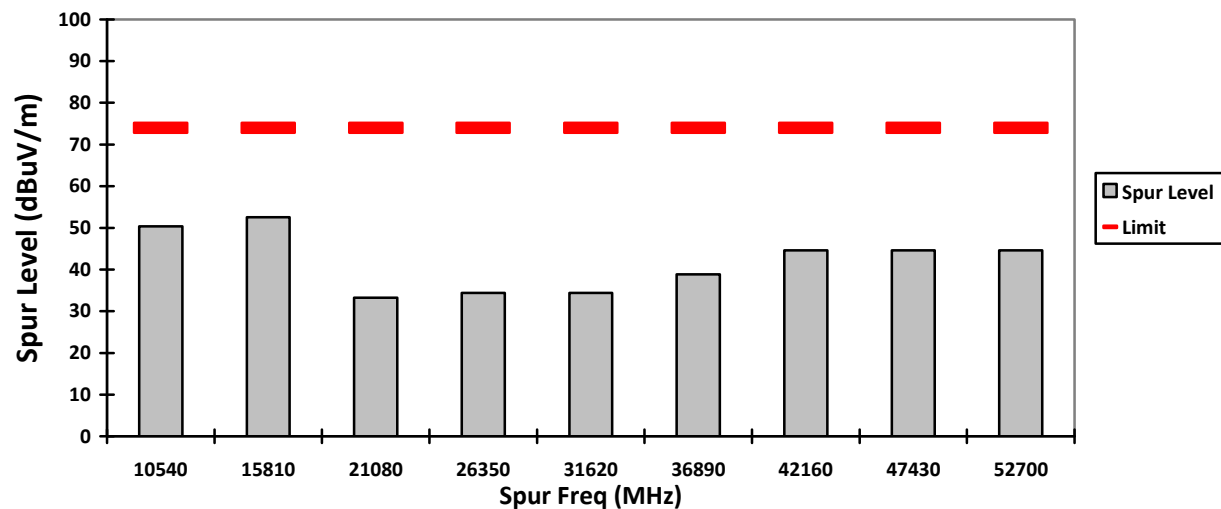


VERTICAL, AV

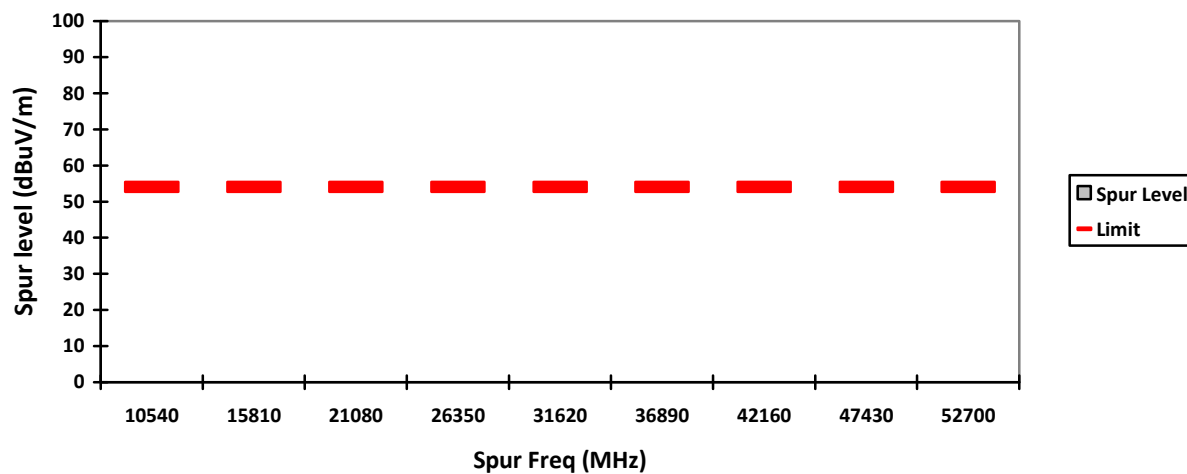


HORIZONTAL, AV

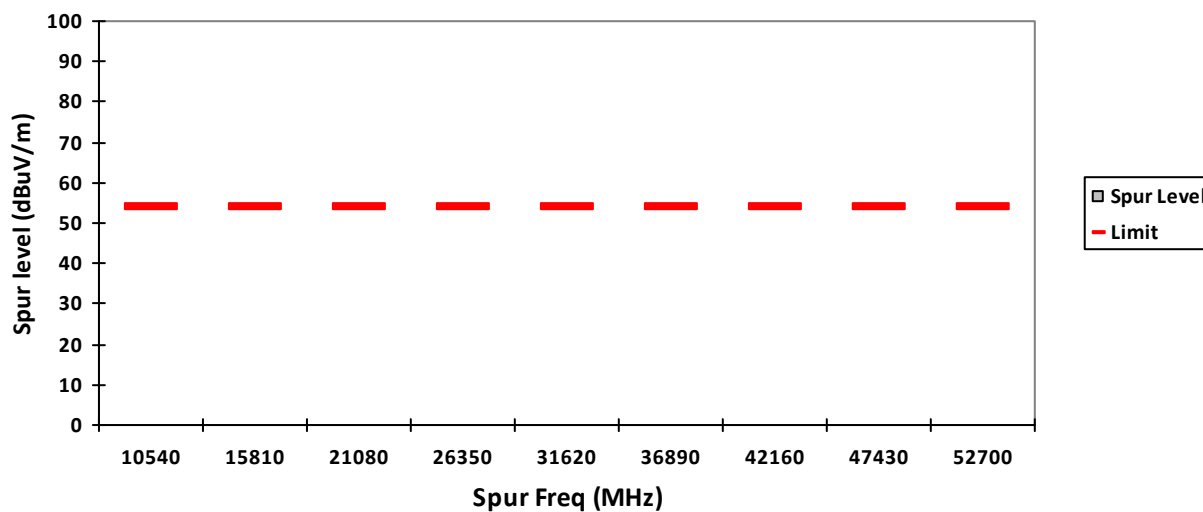


VERTICAL, QPK

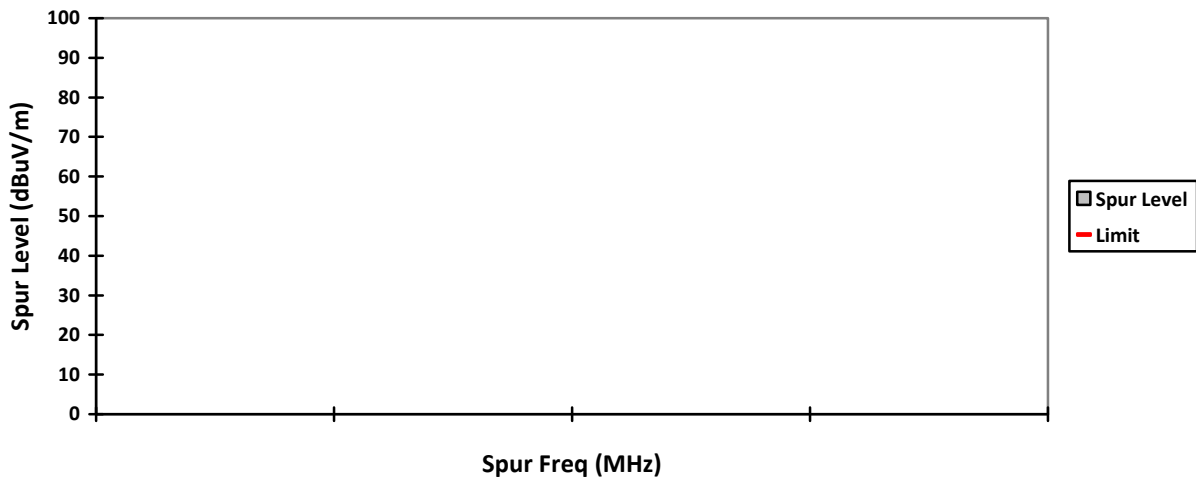


HORIZONTAL, QPK

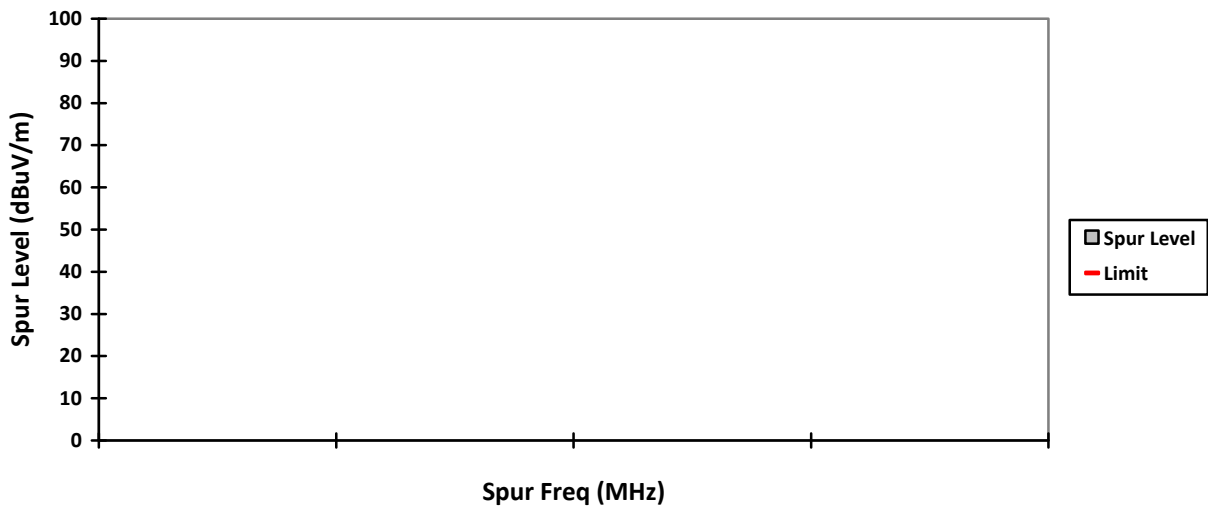


VERTICAL, PK

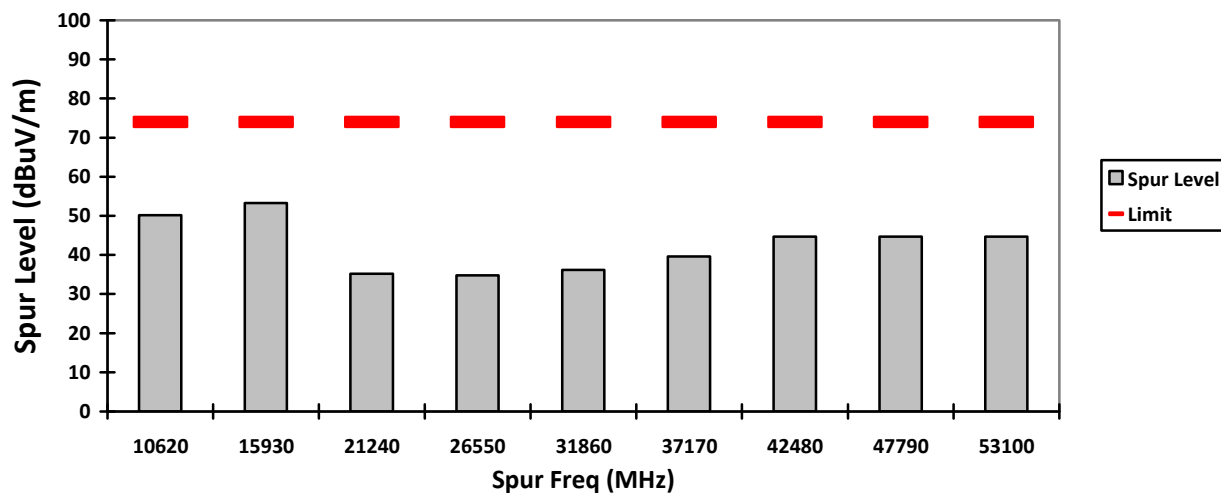


HORIZONTAL, PK

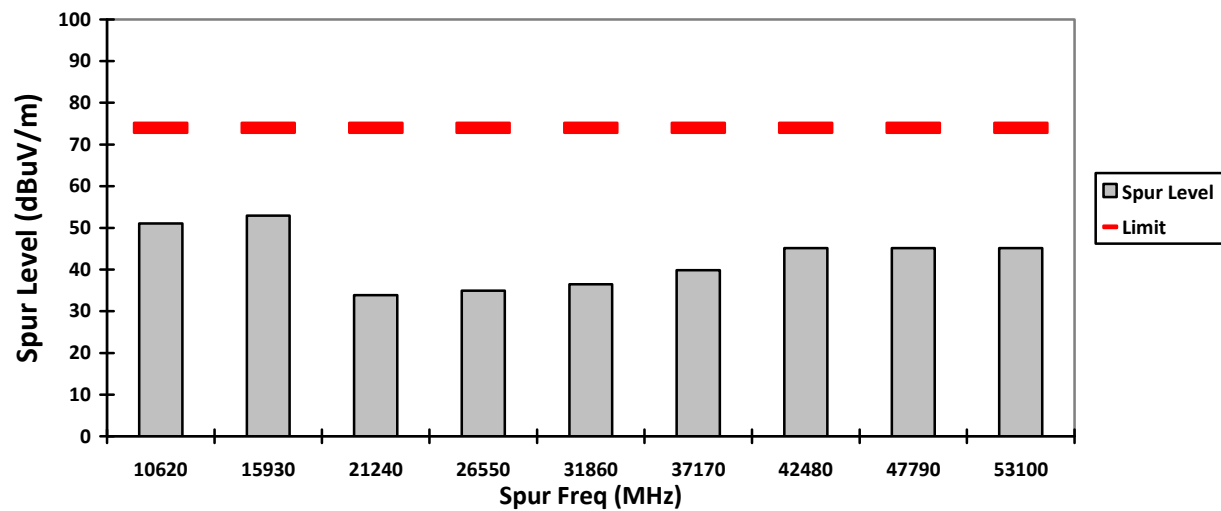


VERTICAL, AV

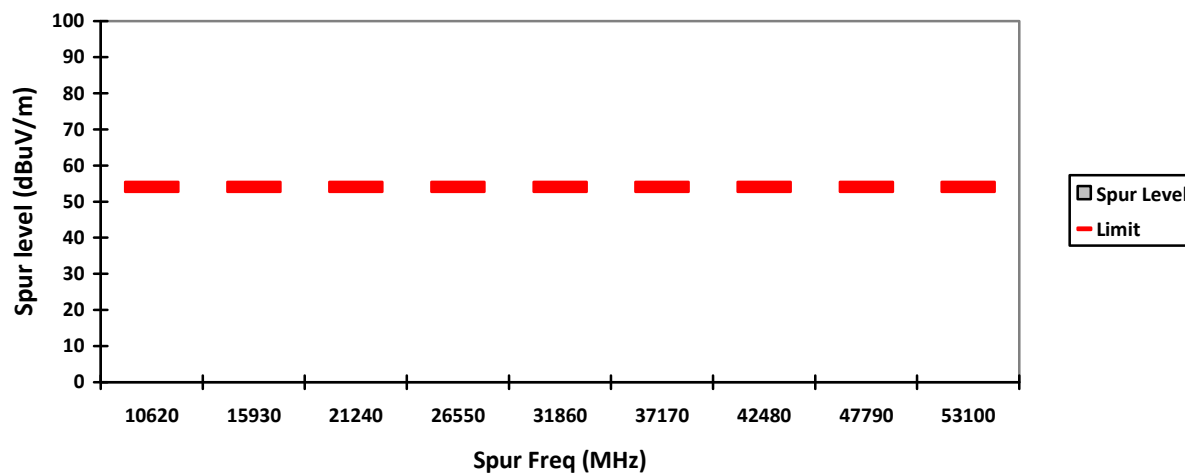


HORIZONTAL, AV

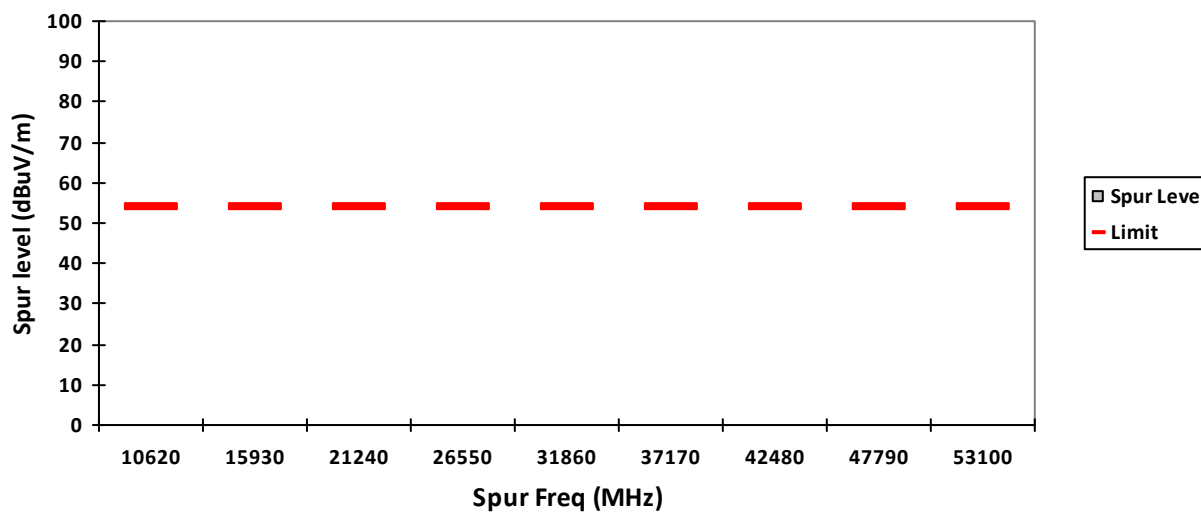


VERTICAL, QPK

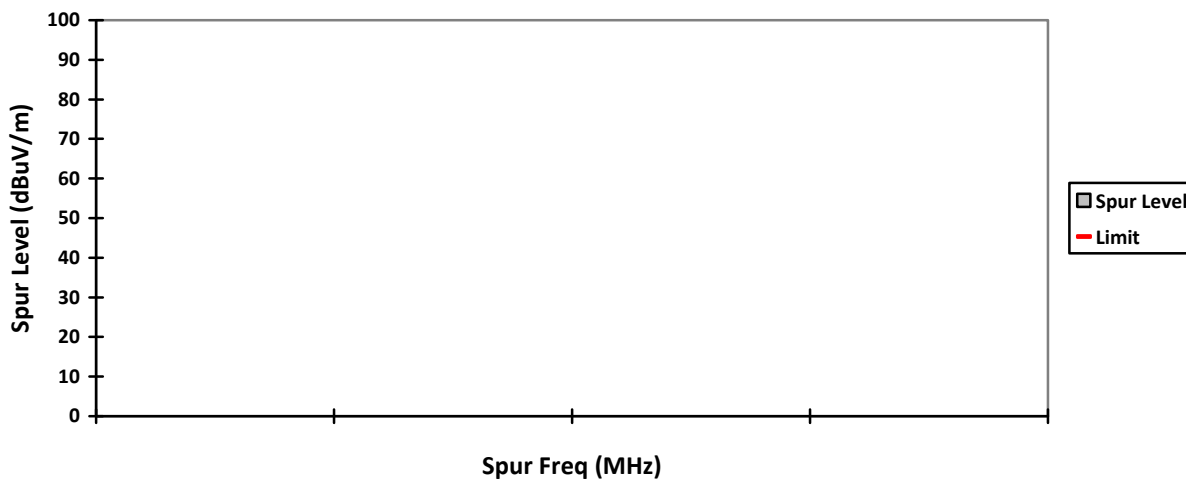


HORIZONTAL, QPK

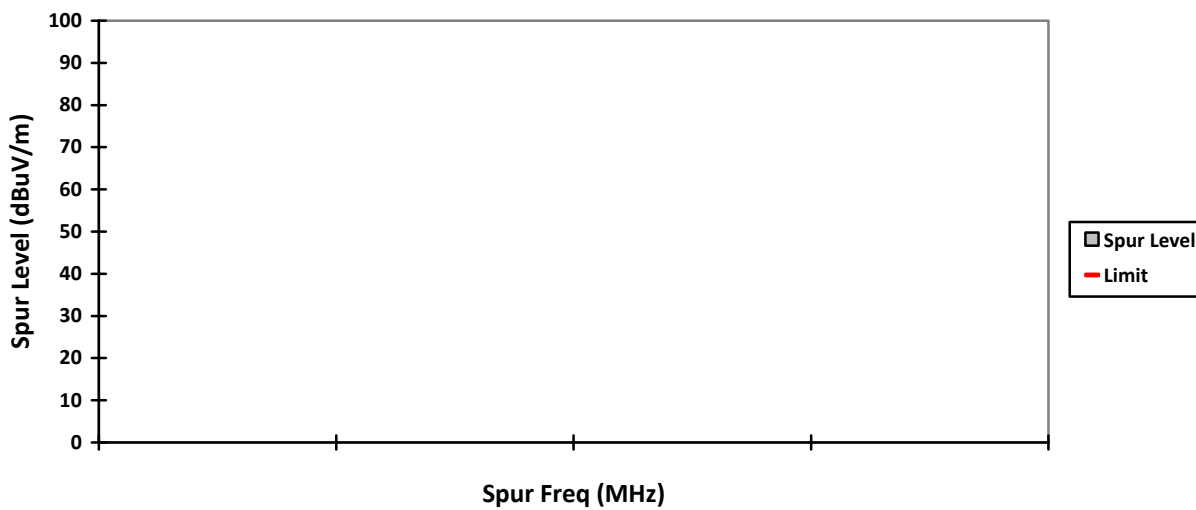


VERTICAL, PK

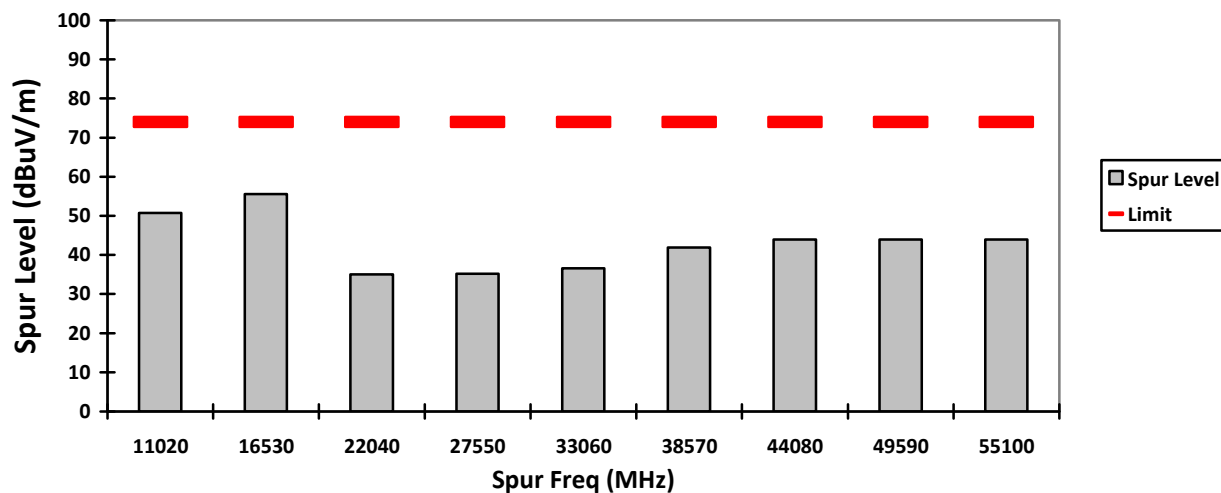


HORIZONTAL, PK

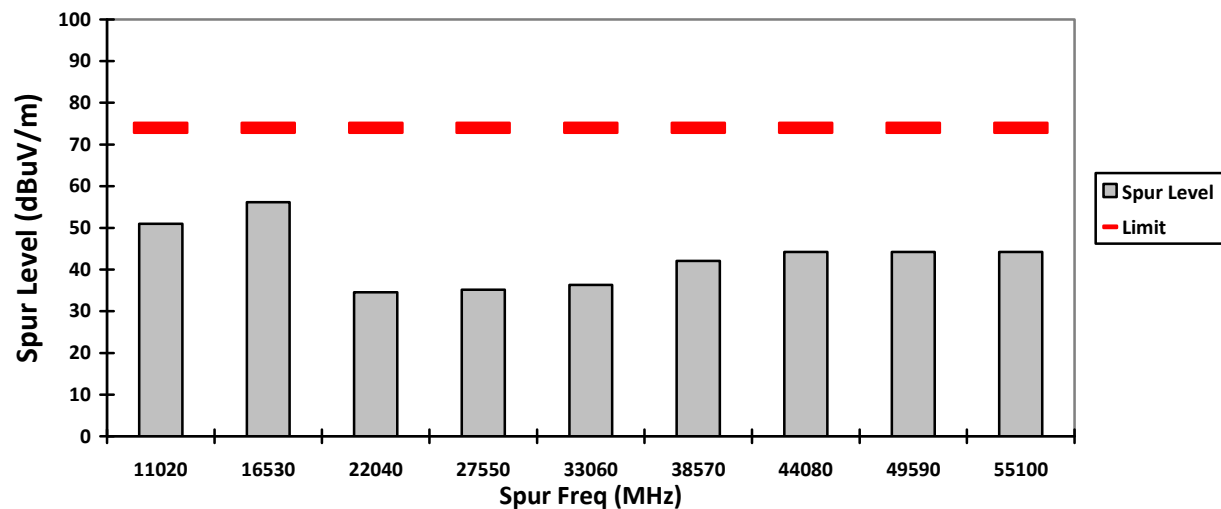


VERTICAL, AV

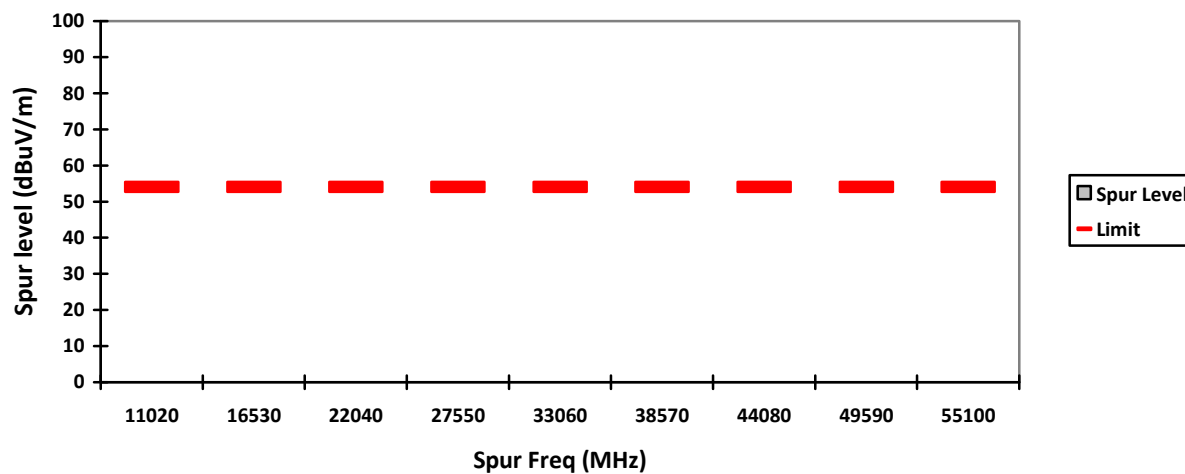


HORIZONTAL, AV

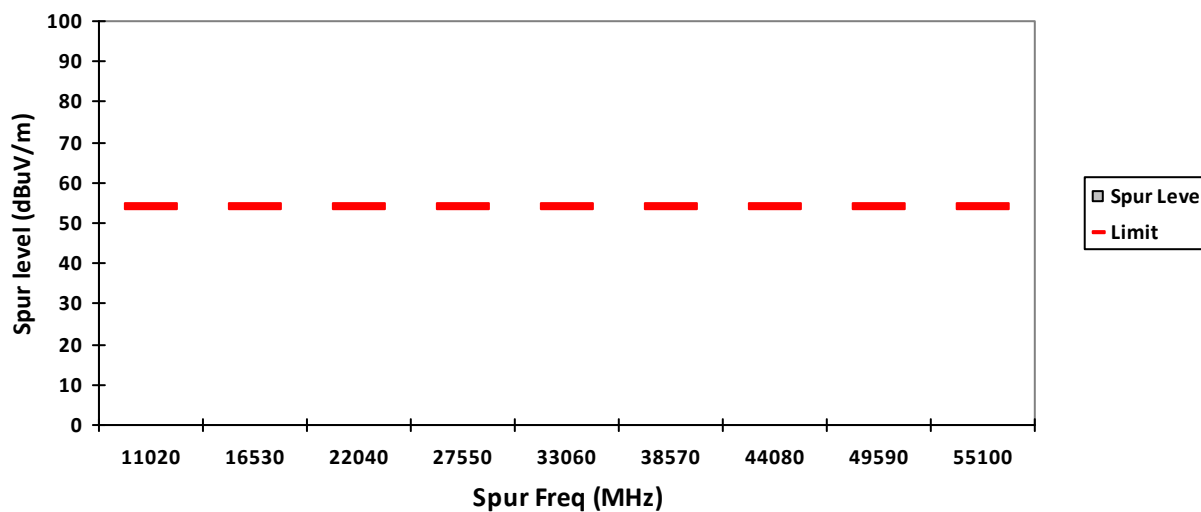


VERTICAL, QPK

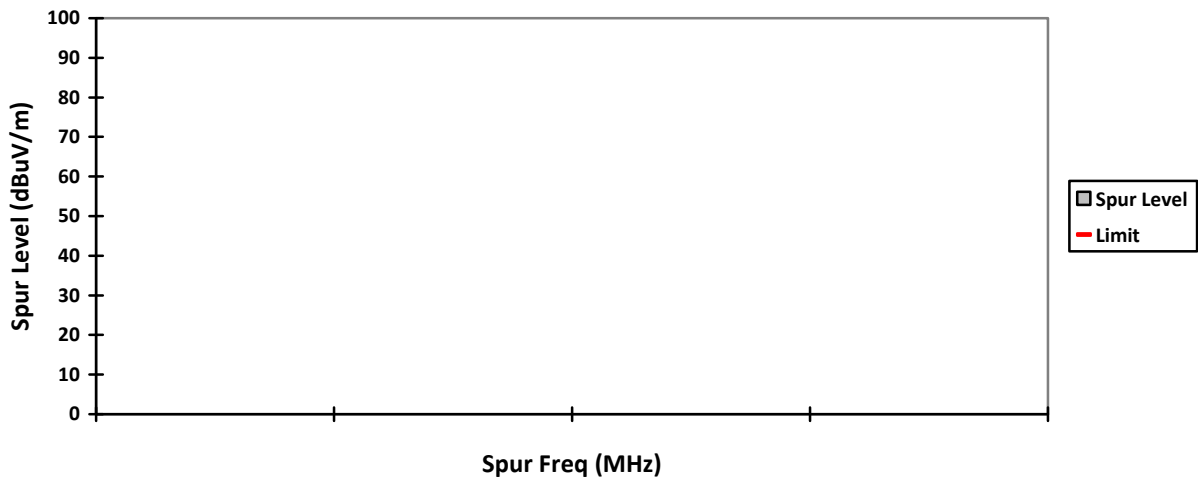


HORIZONTAL, QPK

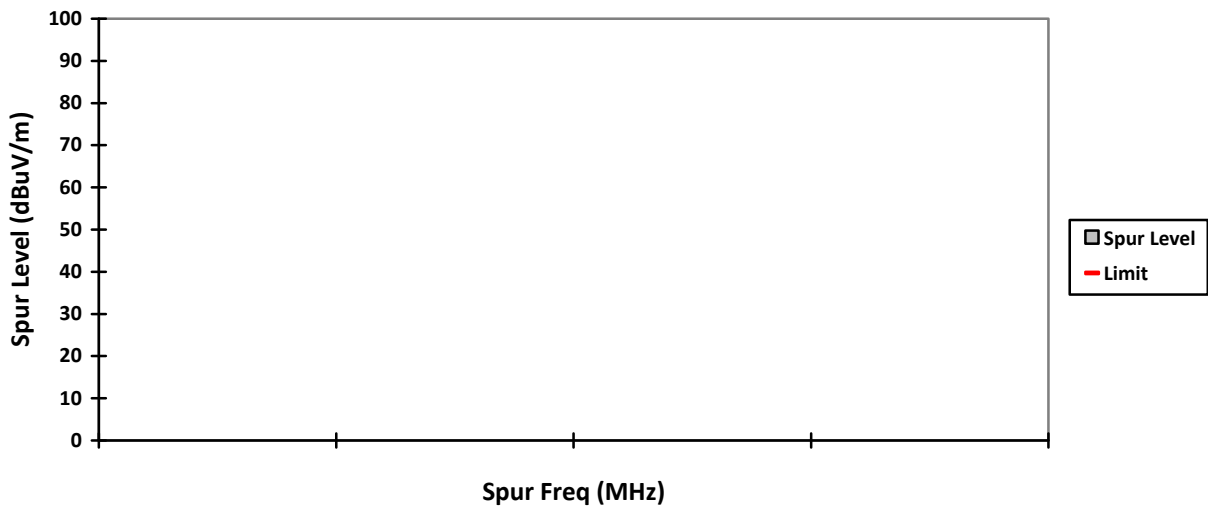


VERTICAL, PK

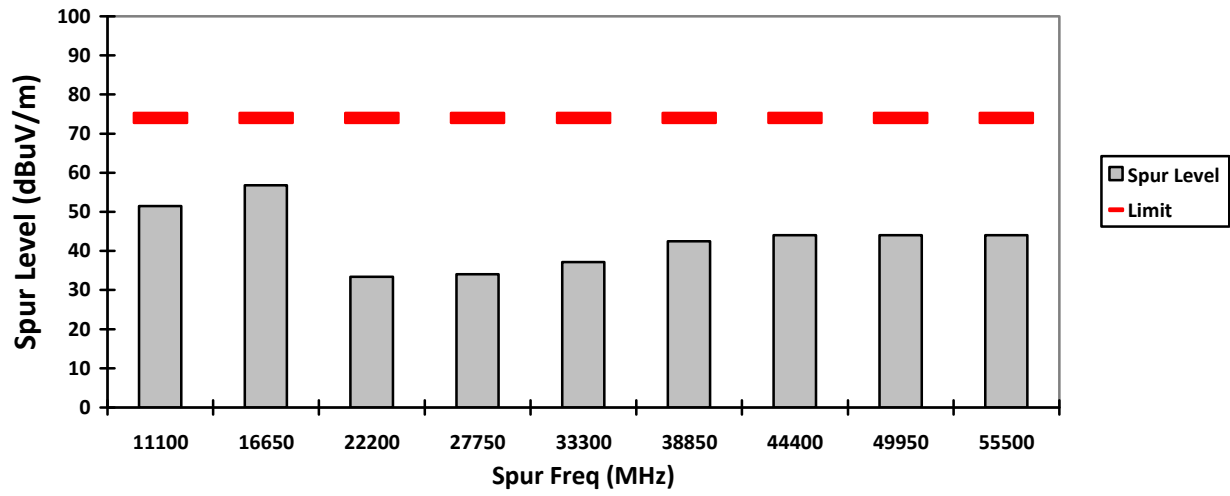


HORIZONTAL, PK

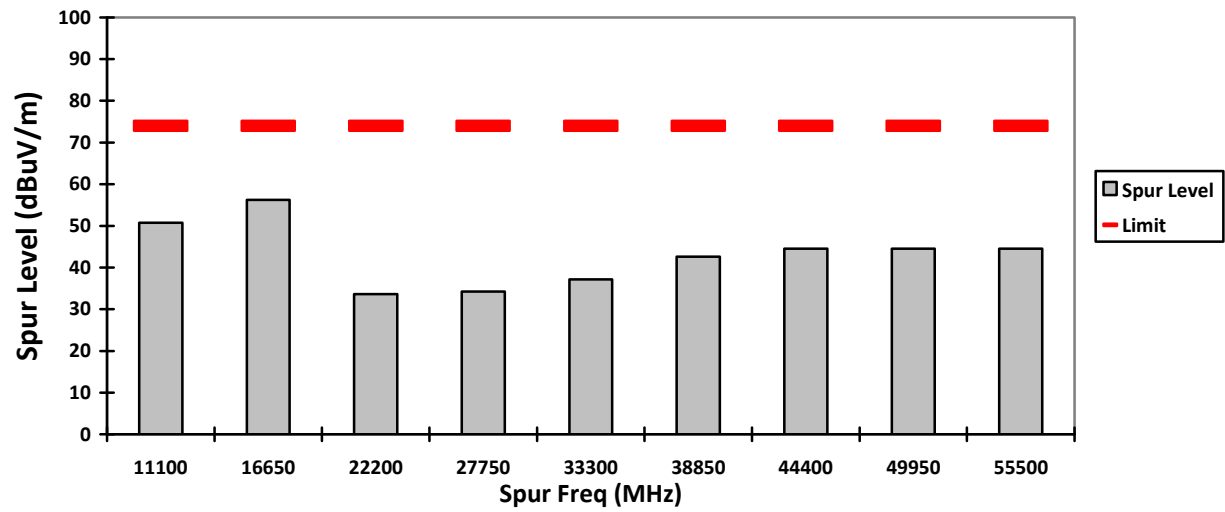


VERTICAL, AV

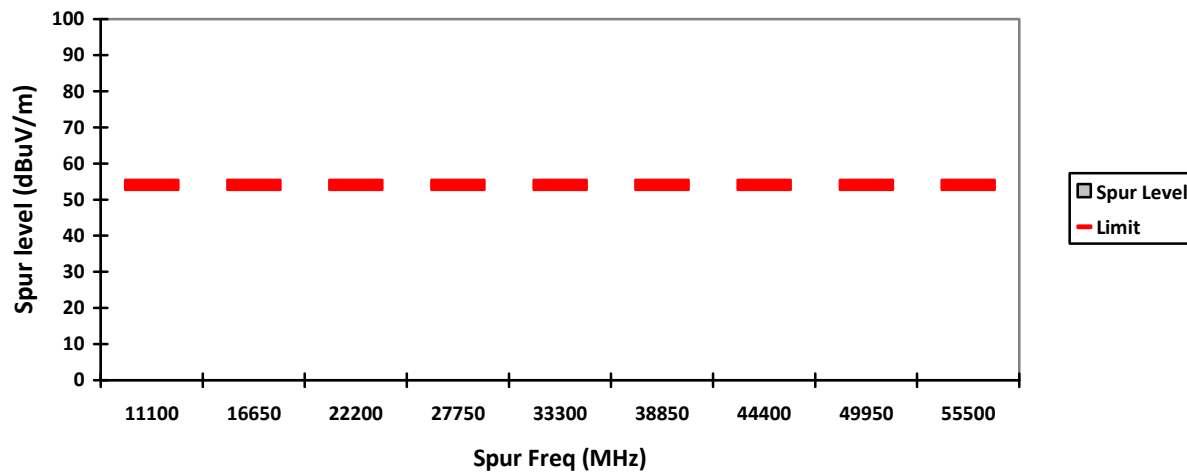


HORIZONTAL, AV

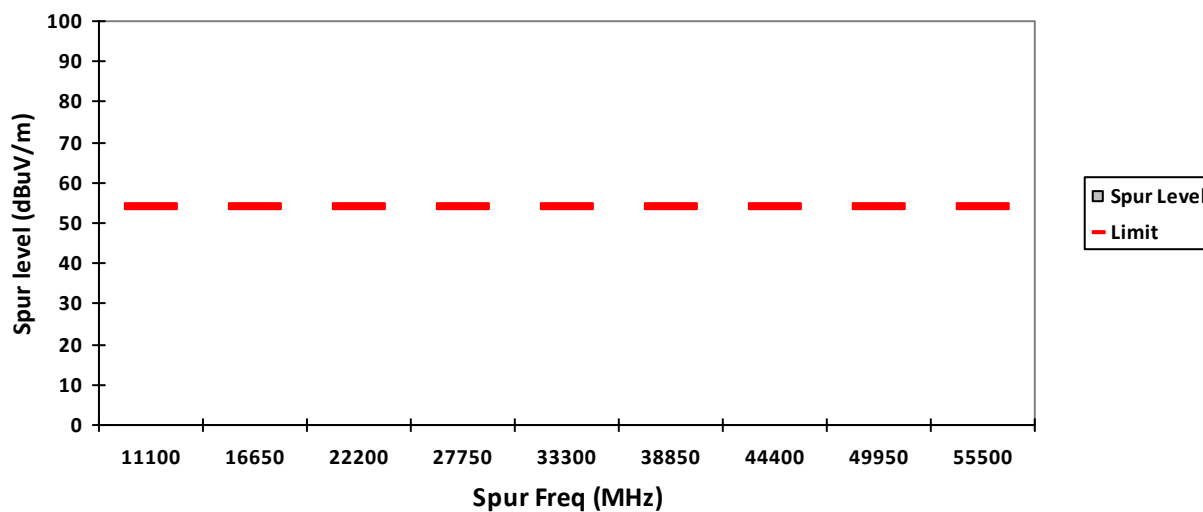


VERTICAL, QPK

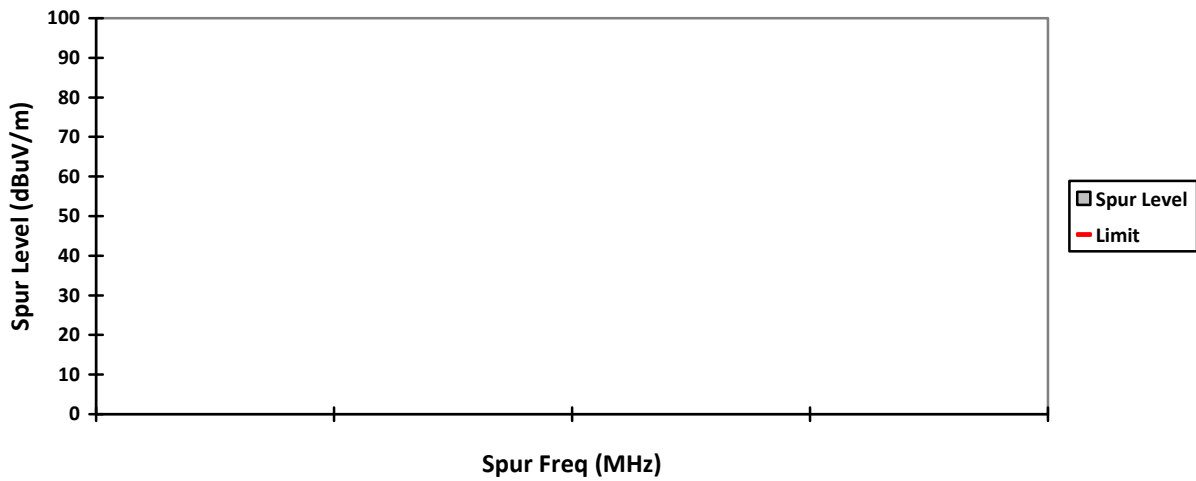


HORIZONTAL, QPK

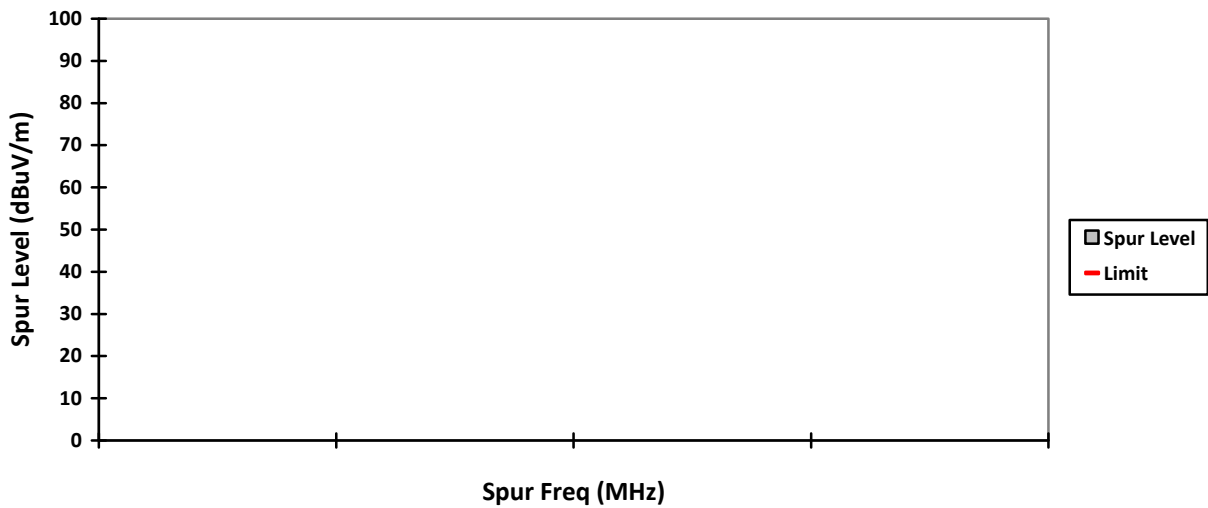


VERTICAL, PK

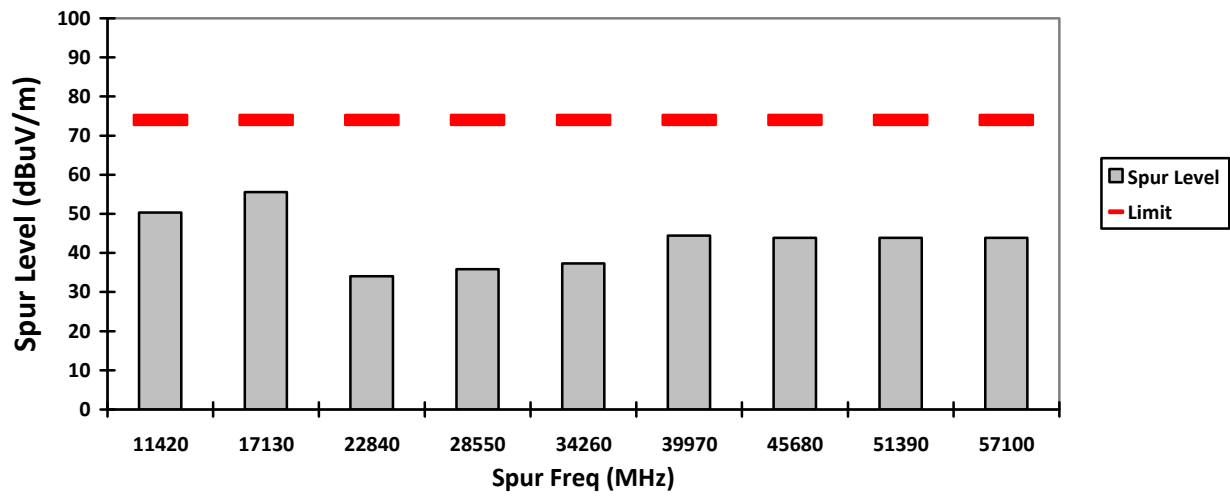


HORIZONTAL, PK

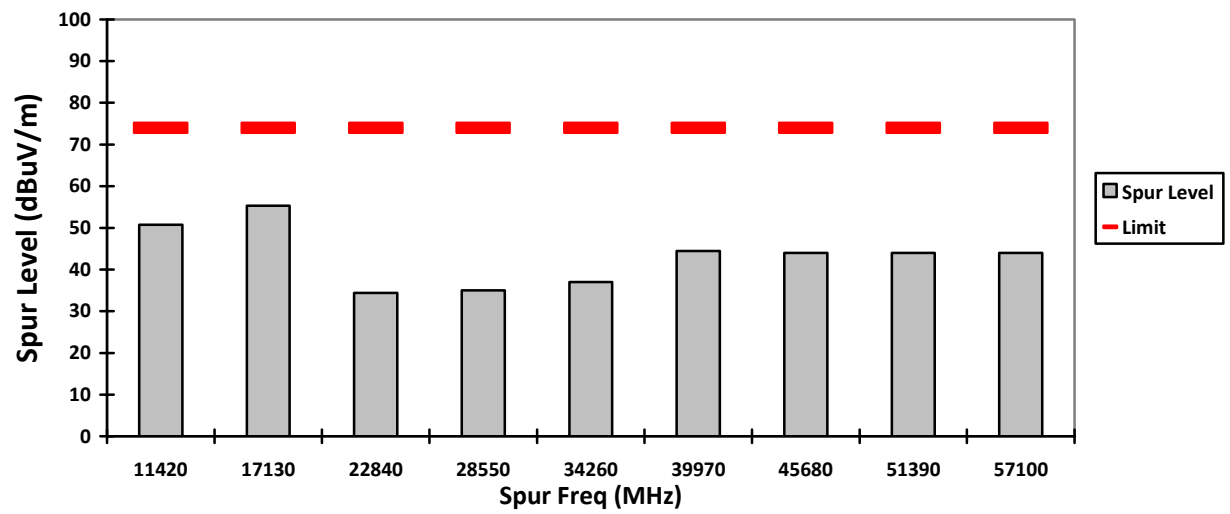


VERTICAL, AV

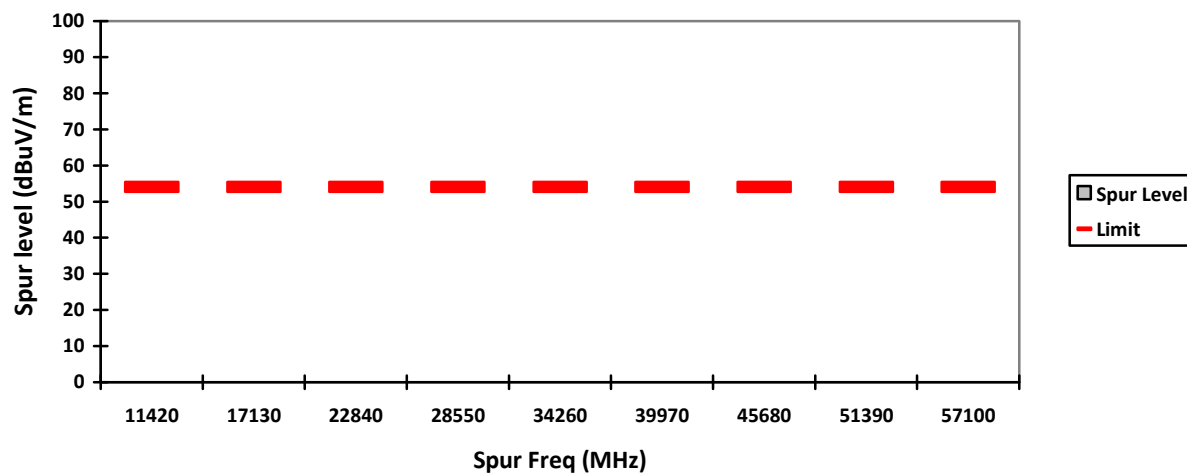


HORIZONTAL, AV

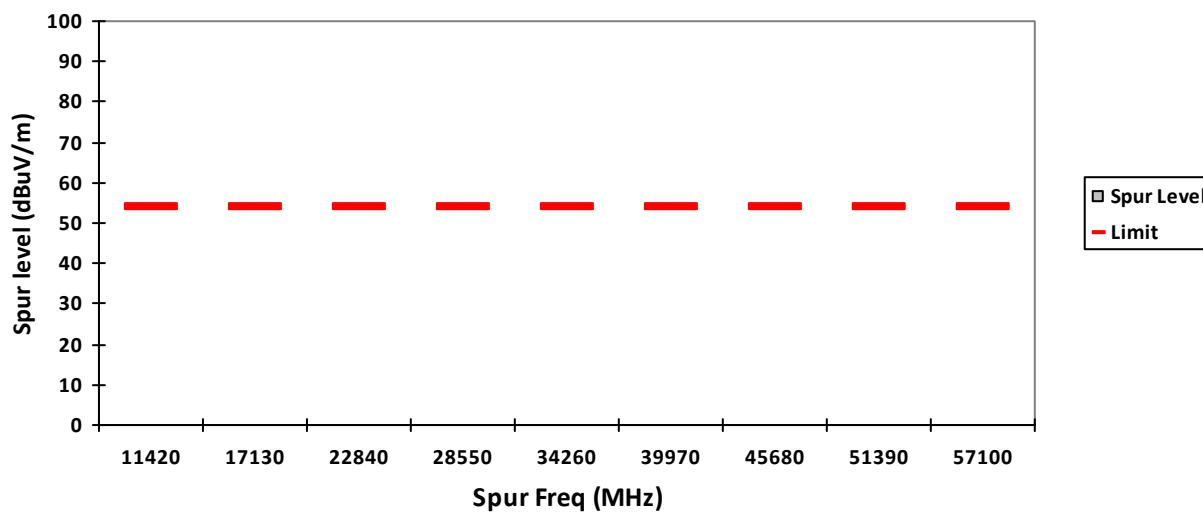


VERTICAL, QPK

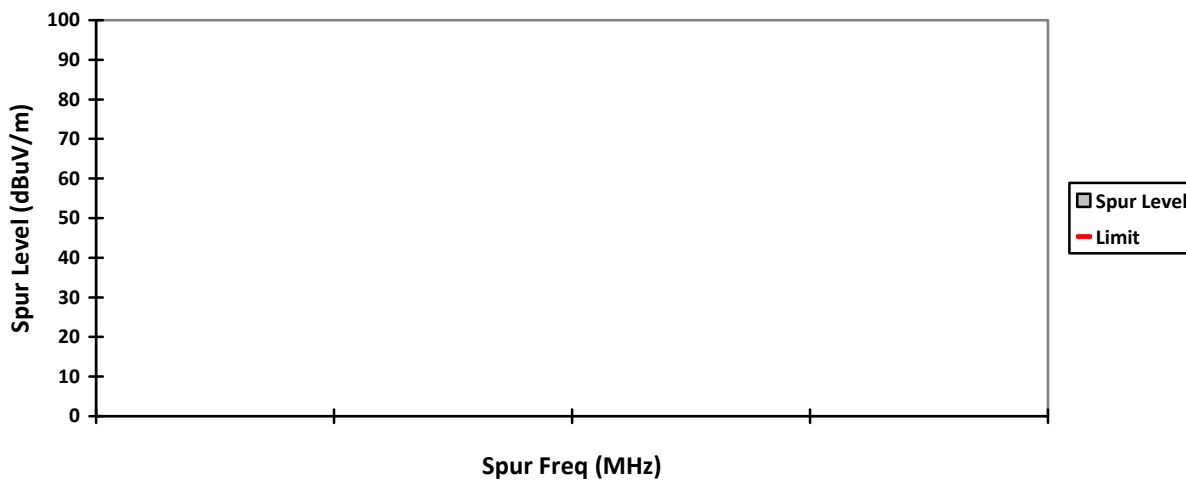


HORIZONTAL, QPK

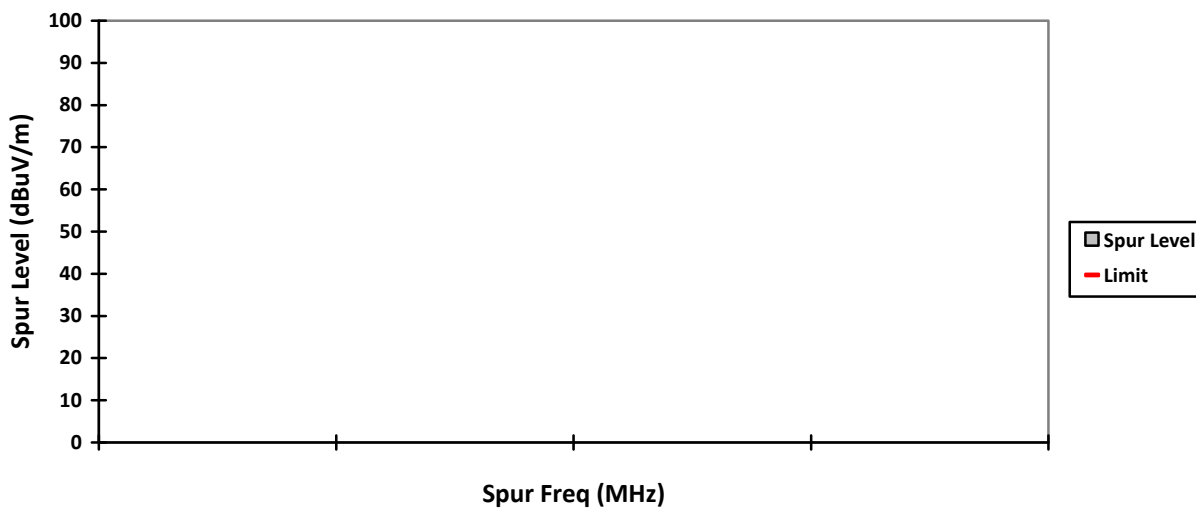


VERTICAL, PK

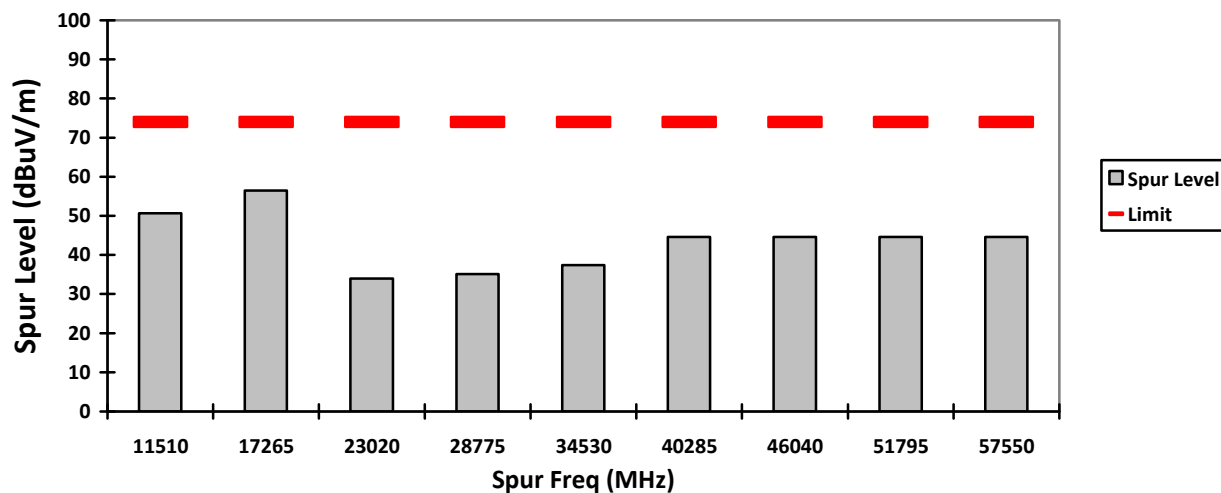


HORIZONTAL, PK

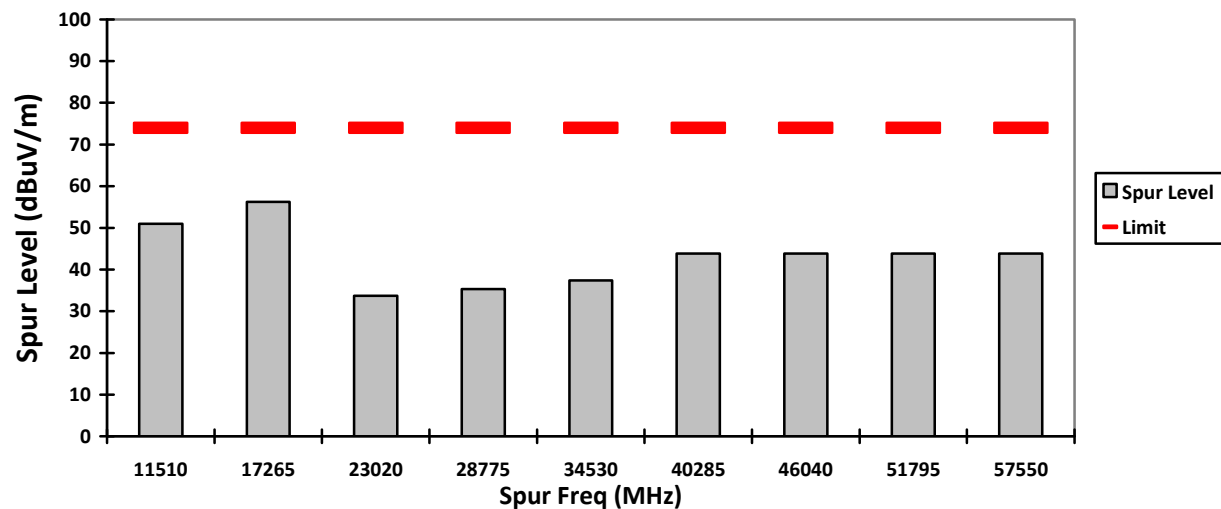

VERTICAL, AV

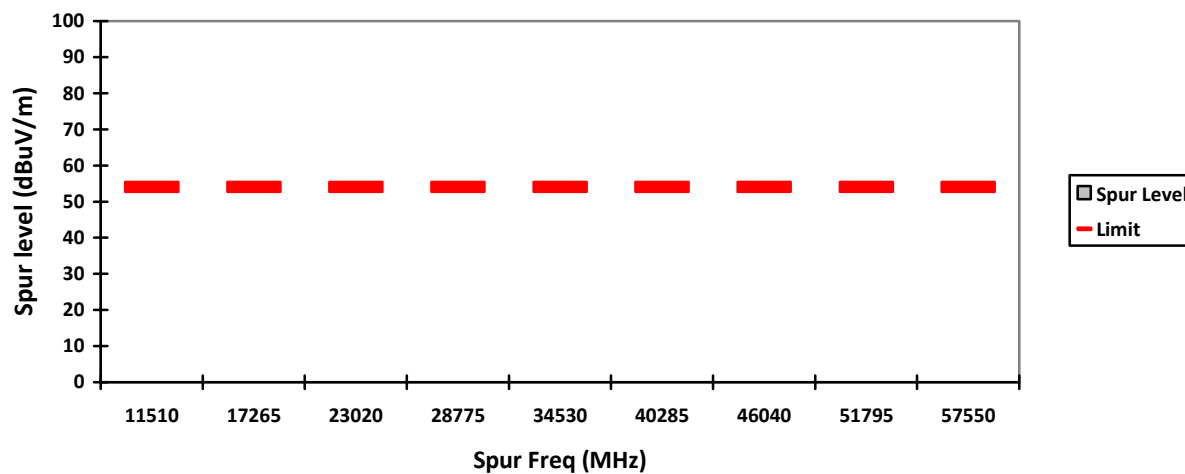

HORIZONTAL, AV

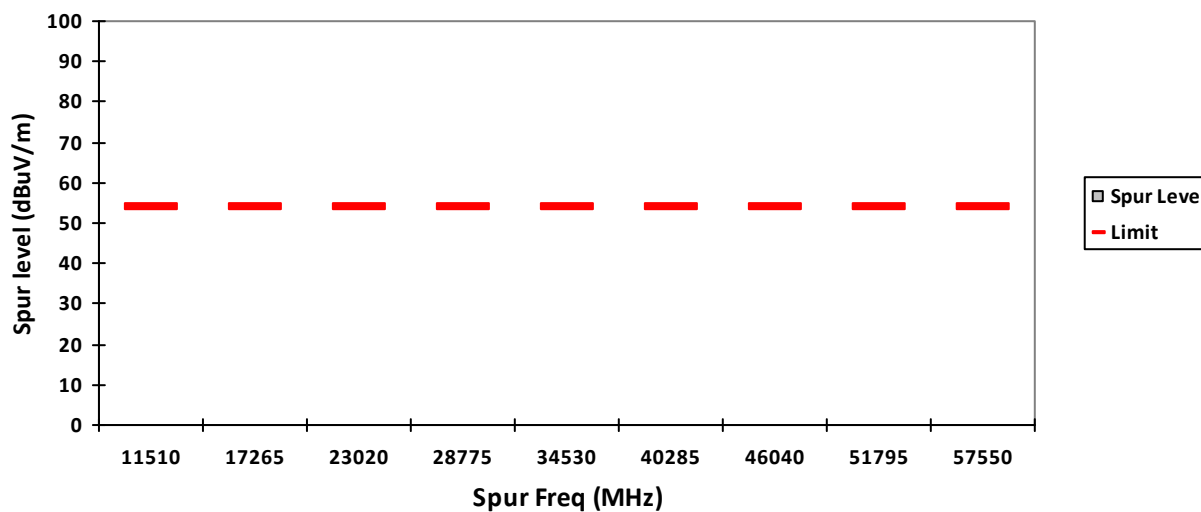

Test: WIFI SAC Transmitter Radiated Emission

Model#: AAH90ZDU9RH1AN

S/N: 734TWP0311

EMC SR ID#: 18058-EMC-00040

Battery: PMNN4804A

Accessory: AN000348A01

Test Channel: High

Test Frequency: 5795.0000 MHz

Test Standard: ANSI C63.10-2013

Worst Case Plane: Z-Plane (802.11n 40MHz)

Radiated Emission (High Channel) tabular data

[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Temperature (degC): 24.5

Test Performed by: Qawiman&Fendi

System MU: 4.03dB


Humidity (%): 70.3

Test Date: Thu, Aug 20, 2020


Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, QPK

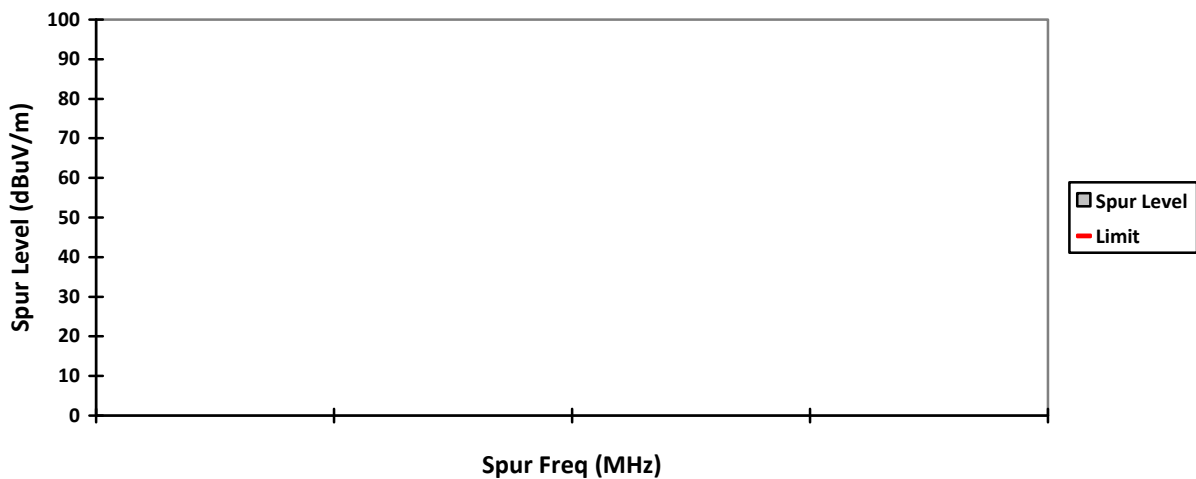


HORIZONTAL, QPK

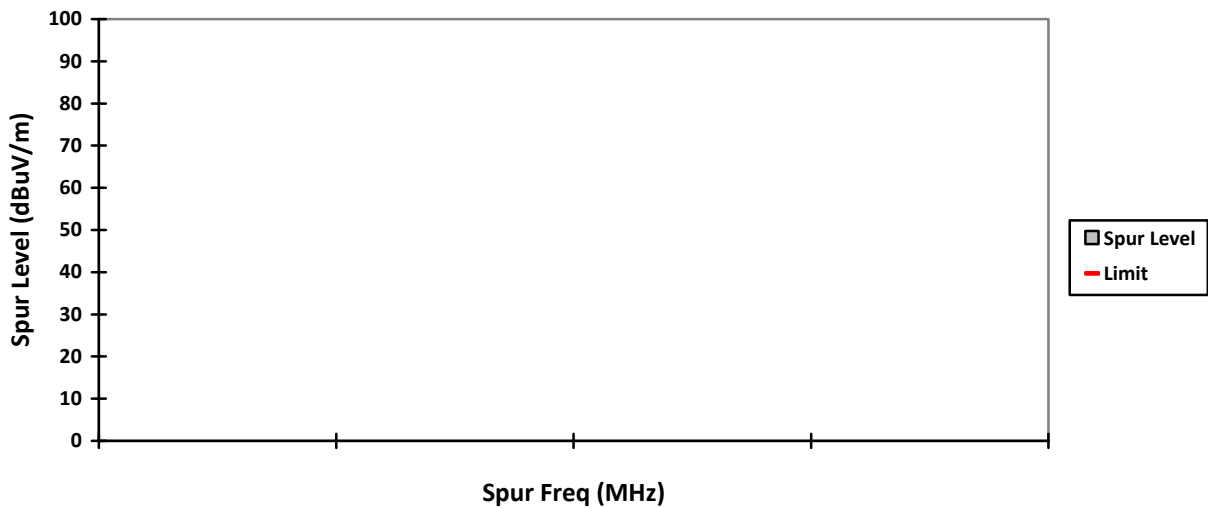


VERTICAL, PK

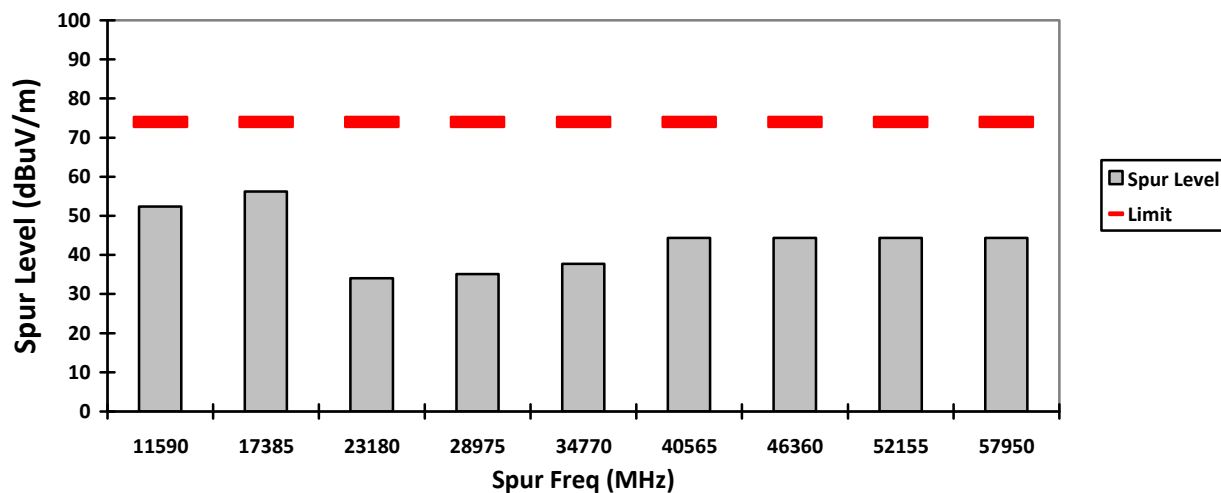


HORIZONTAL, PK

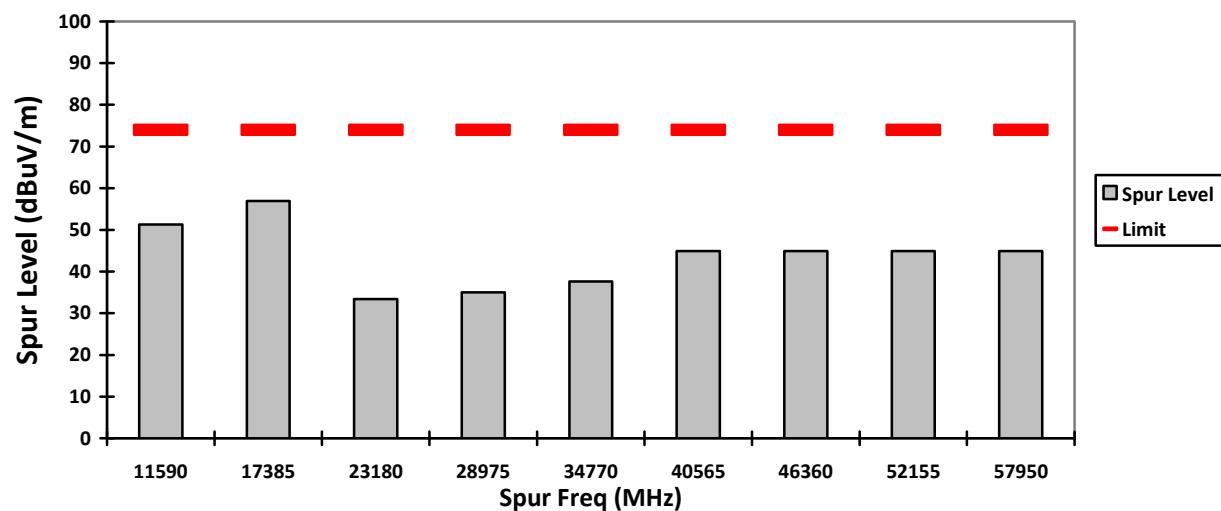


VERTICAL, AV

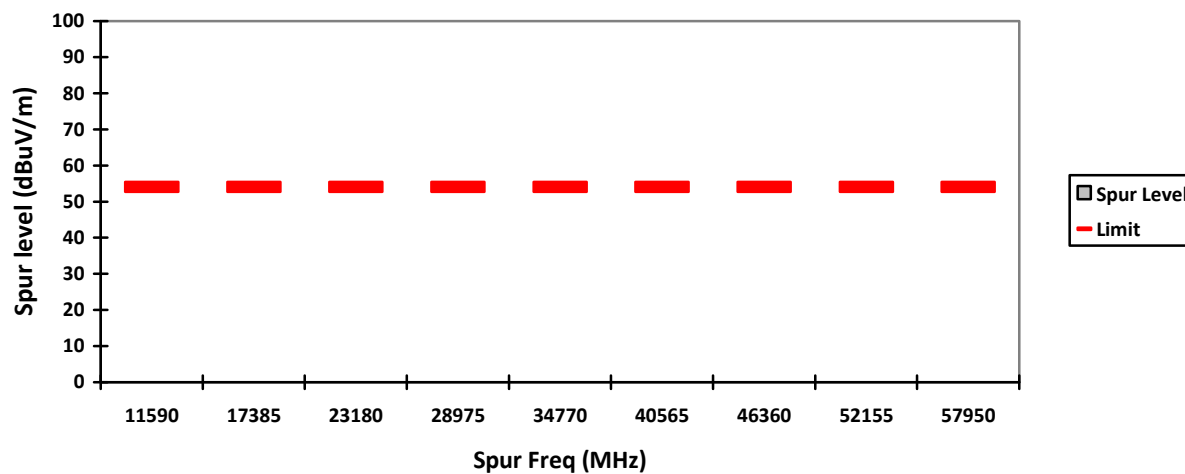


HORIZONTAL, AV

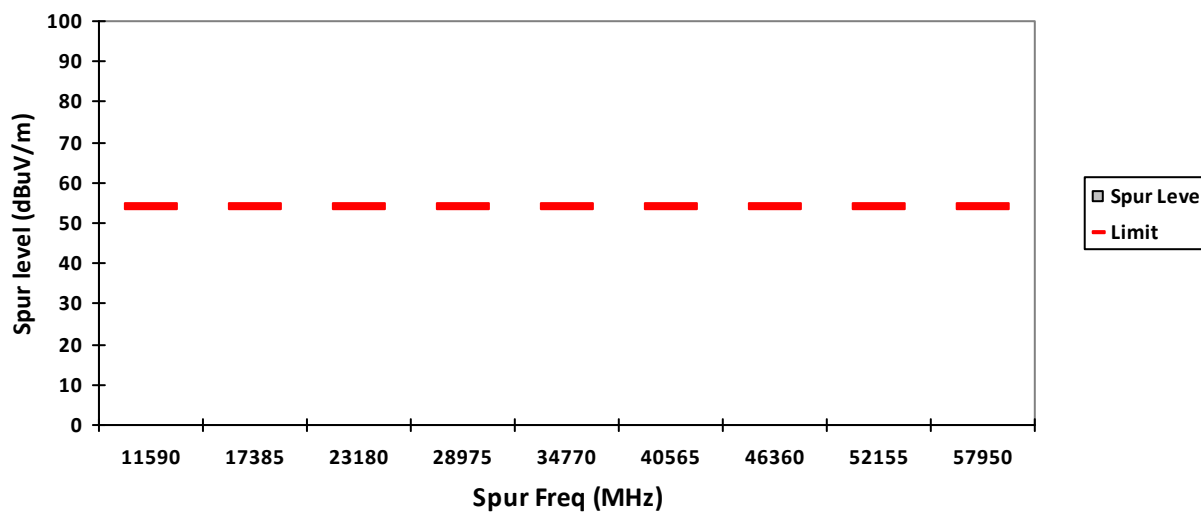


VERTICAL, QPK

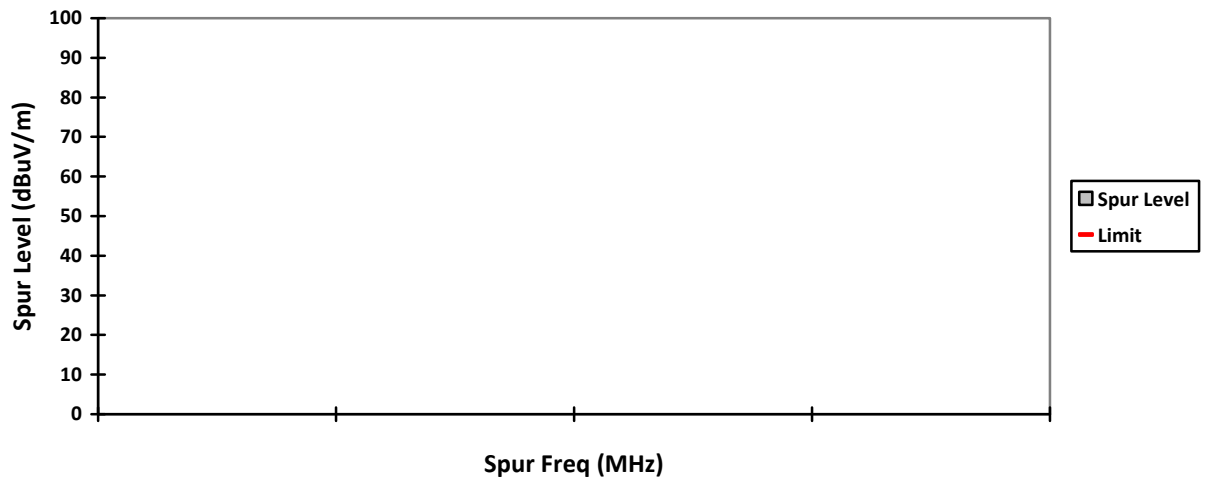


HORIZONTAL, QPK

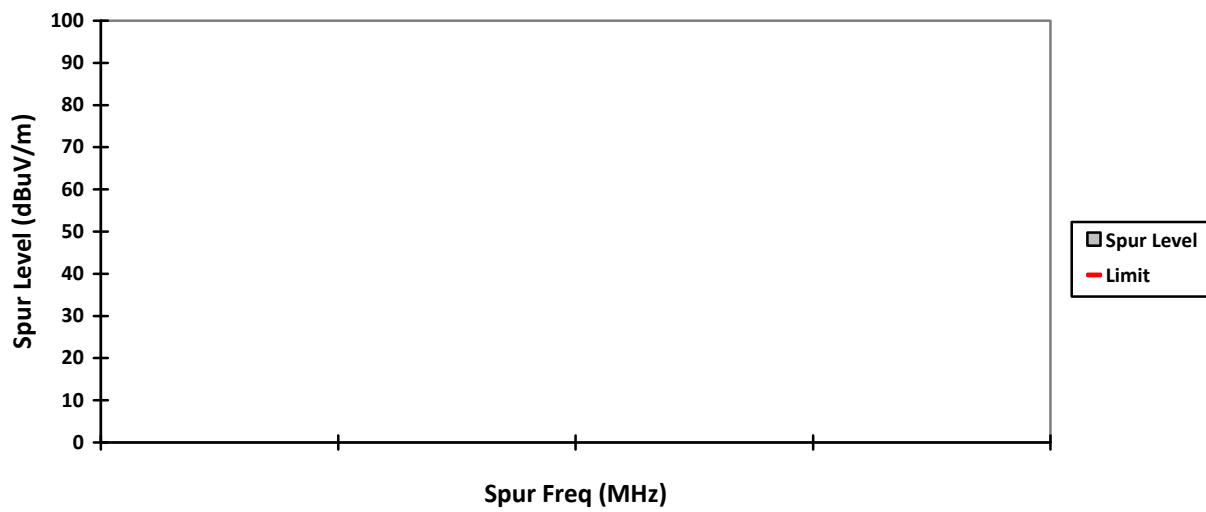


VERTICAL, PK

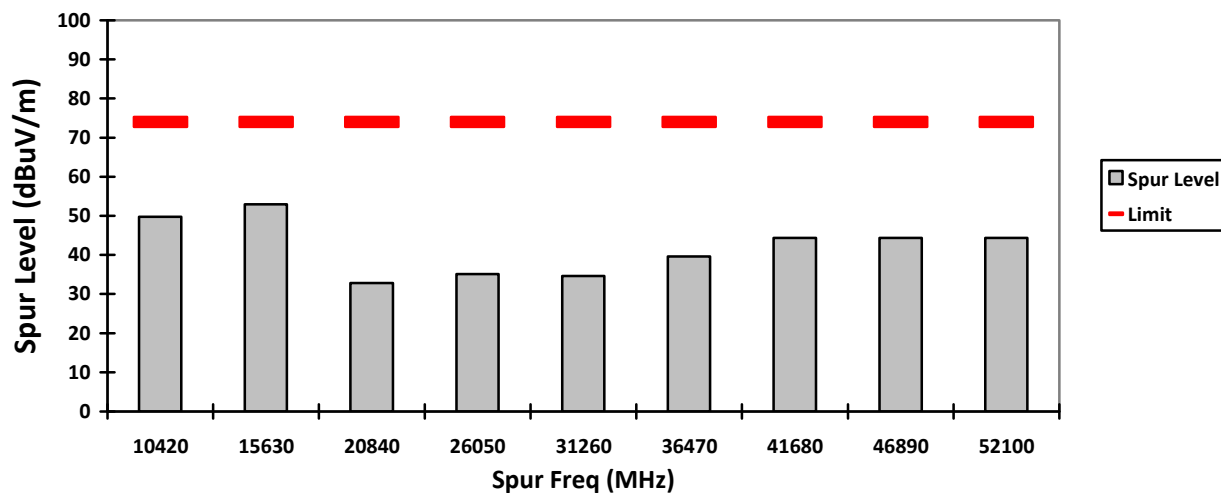


HORIZONTAL, PK

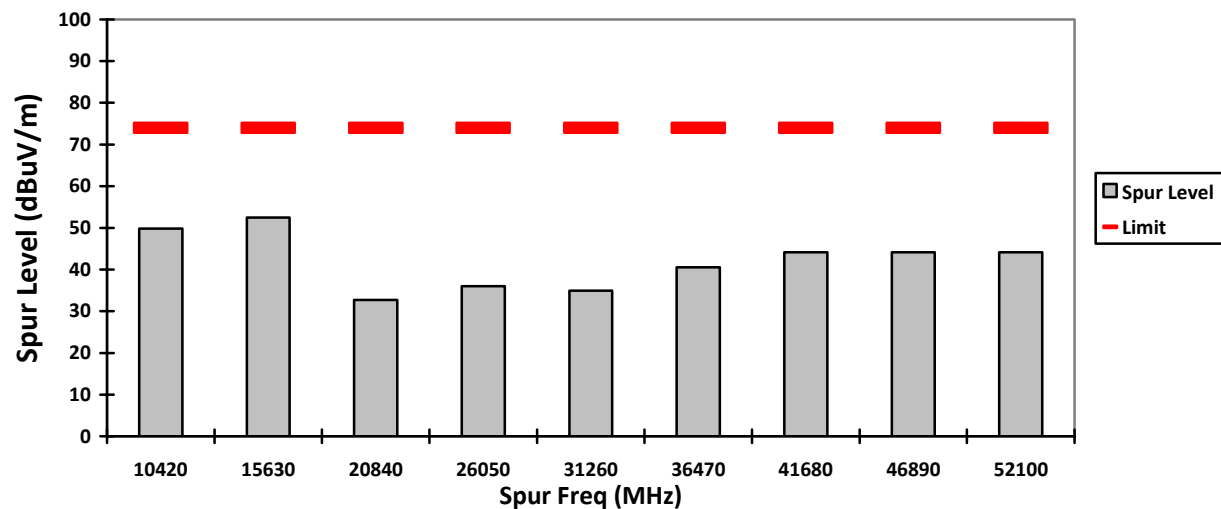


VERTICAL, AV

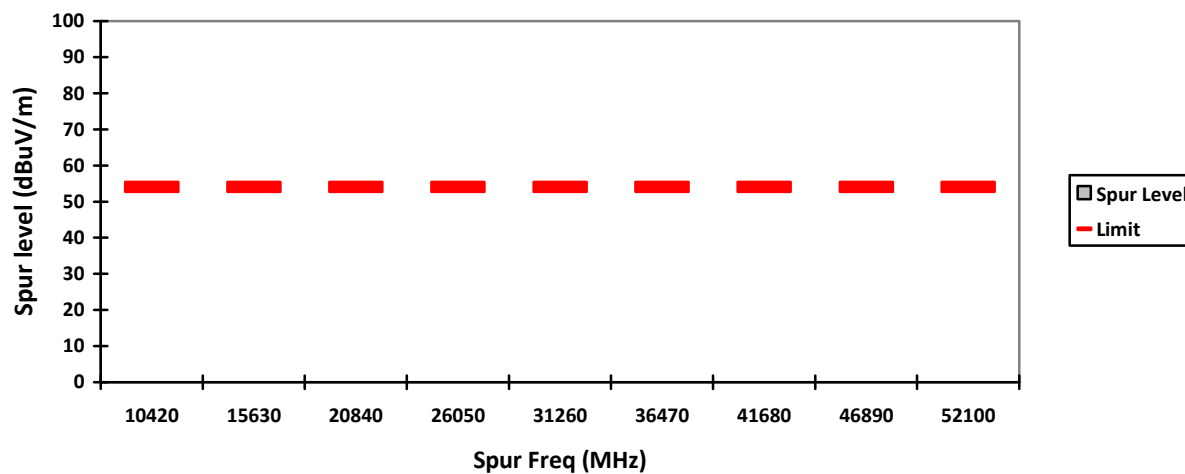


HORIZONTAL, AV

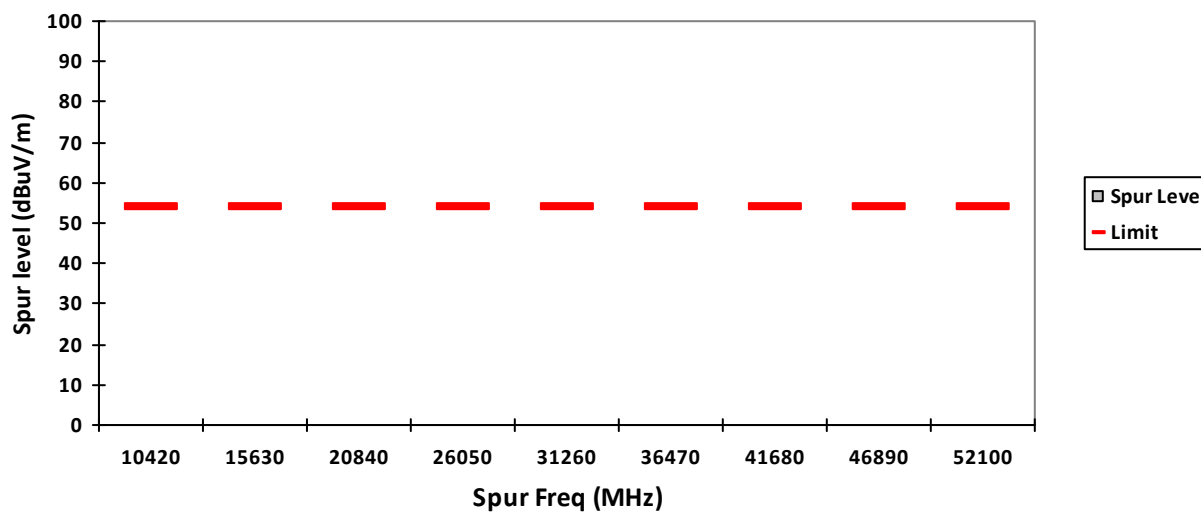


VERTICAL, QPK

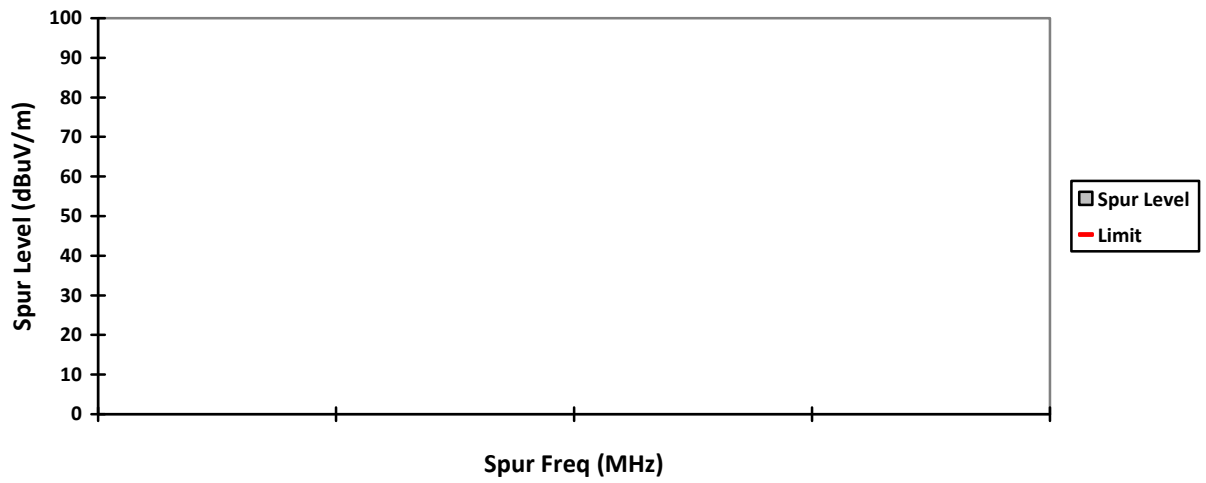


HORIZONTAL, QPK

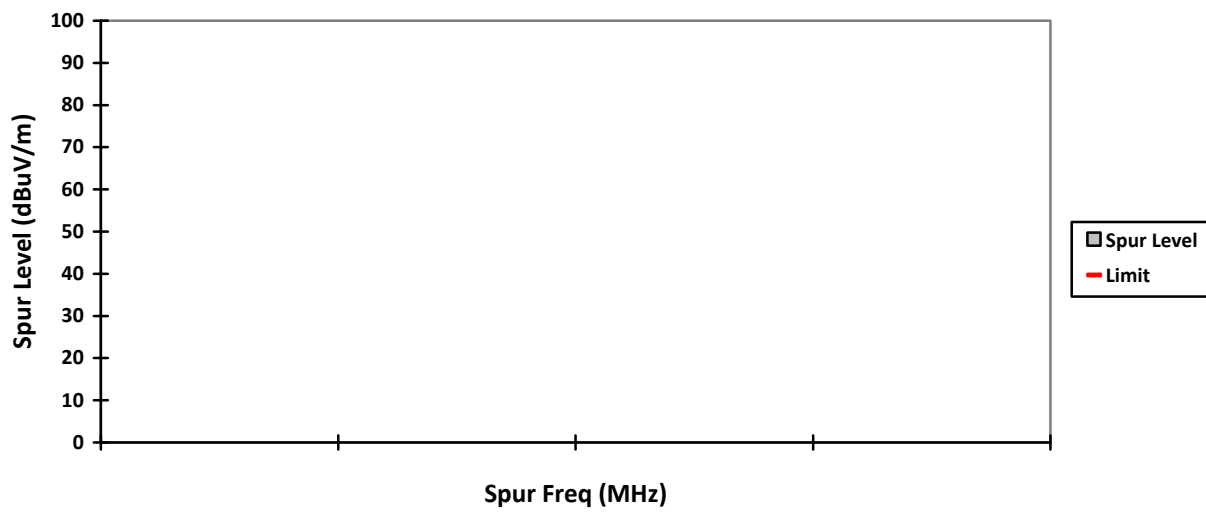


VERTICAL, PK

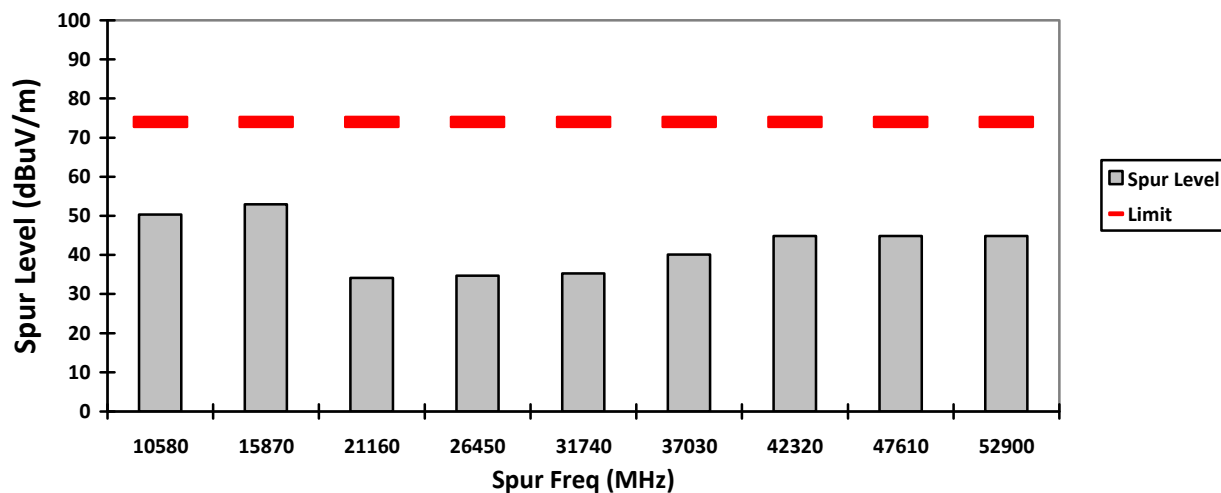


HORIZONTAL, PK

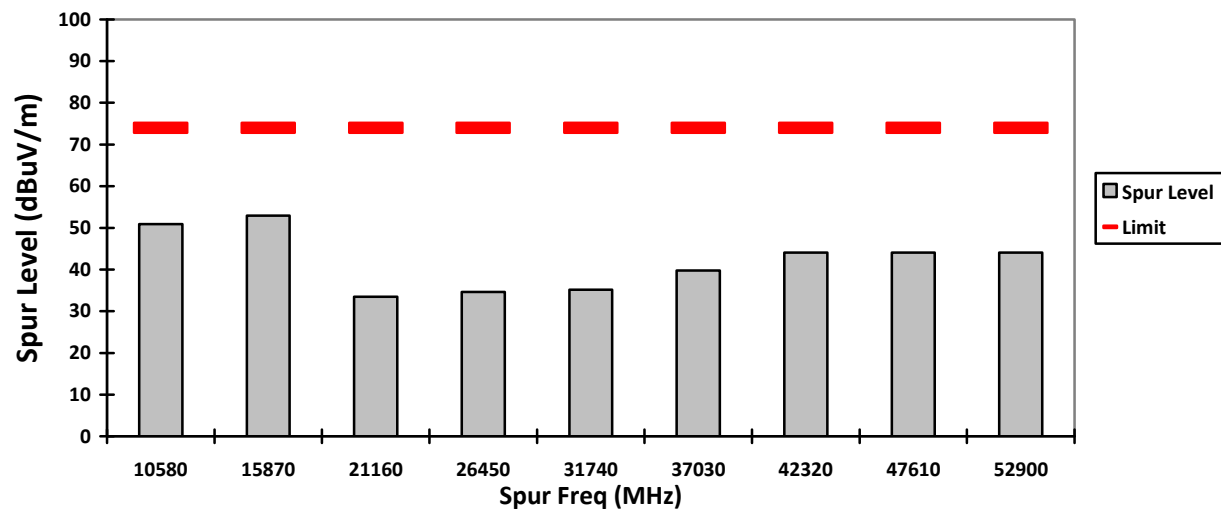


VERTICAL, AV

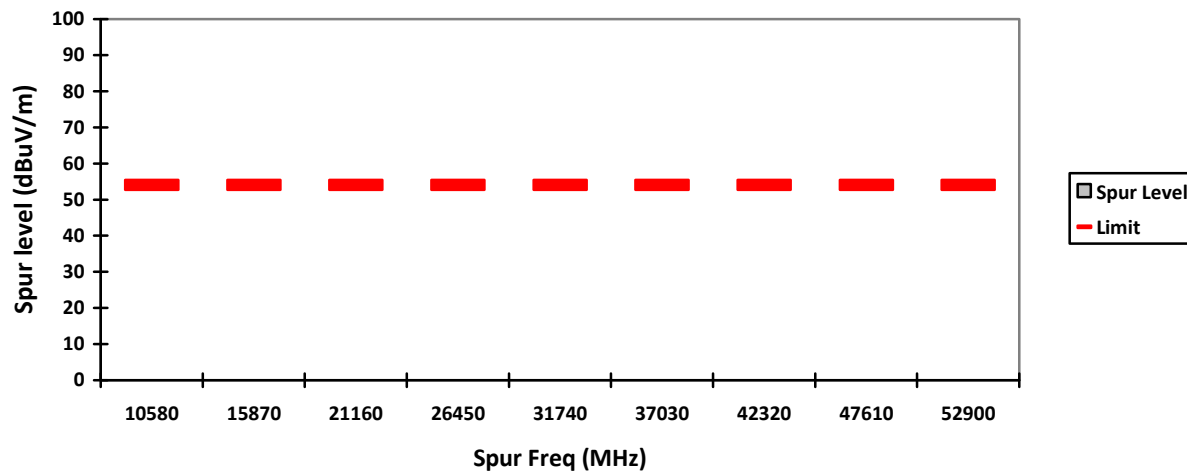


HORIZONTAL, AV

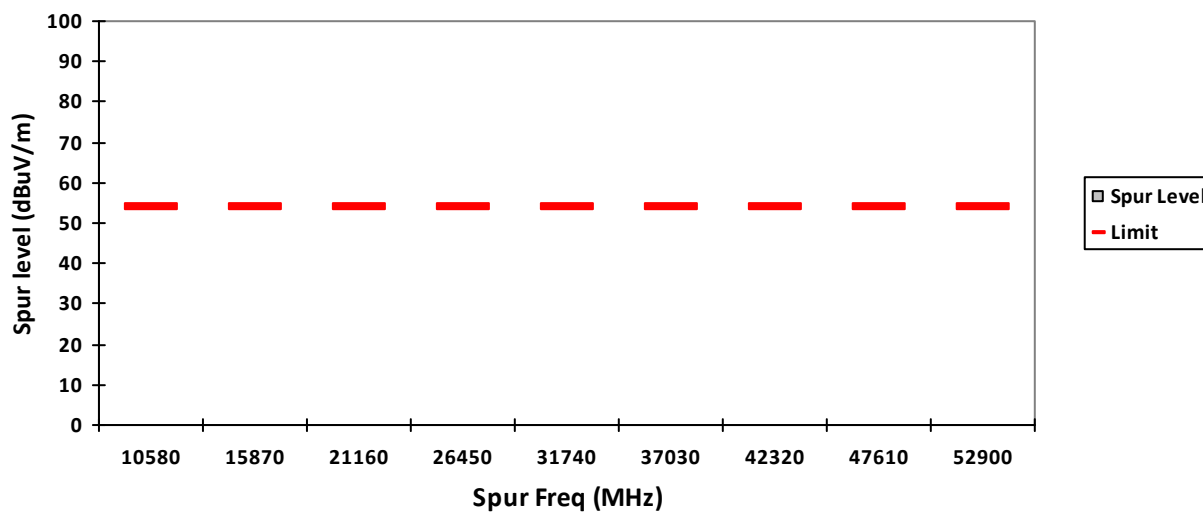


VERTICAL, QPK

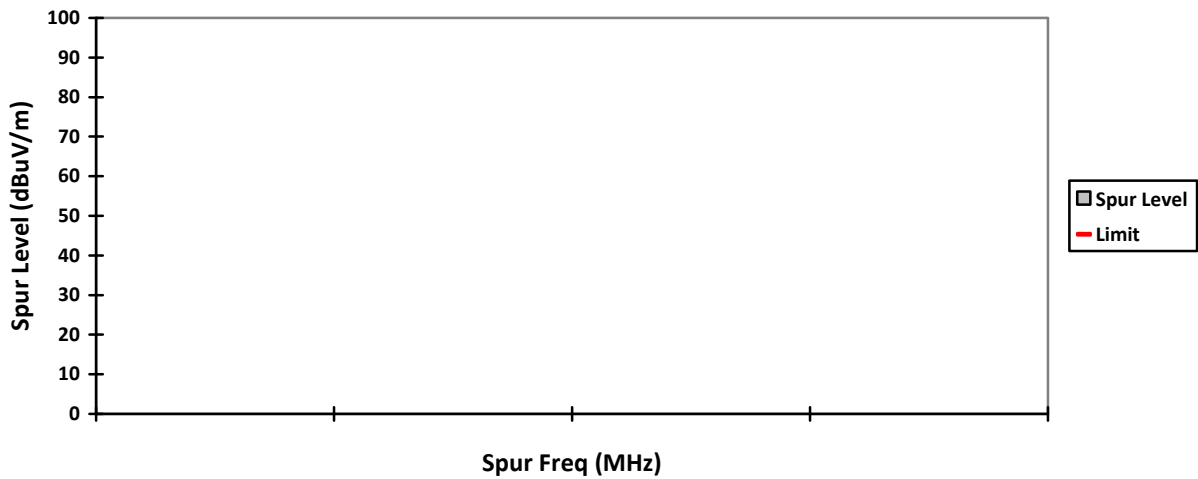


HORIZONTAL, QPK

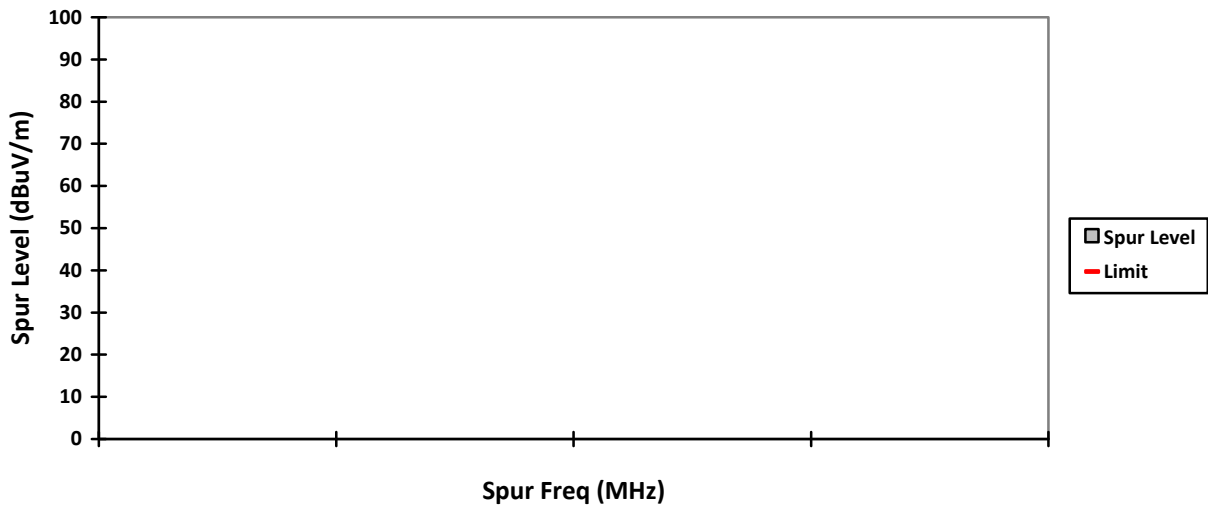


VERTICAL, PK

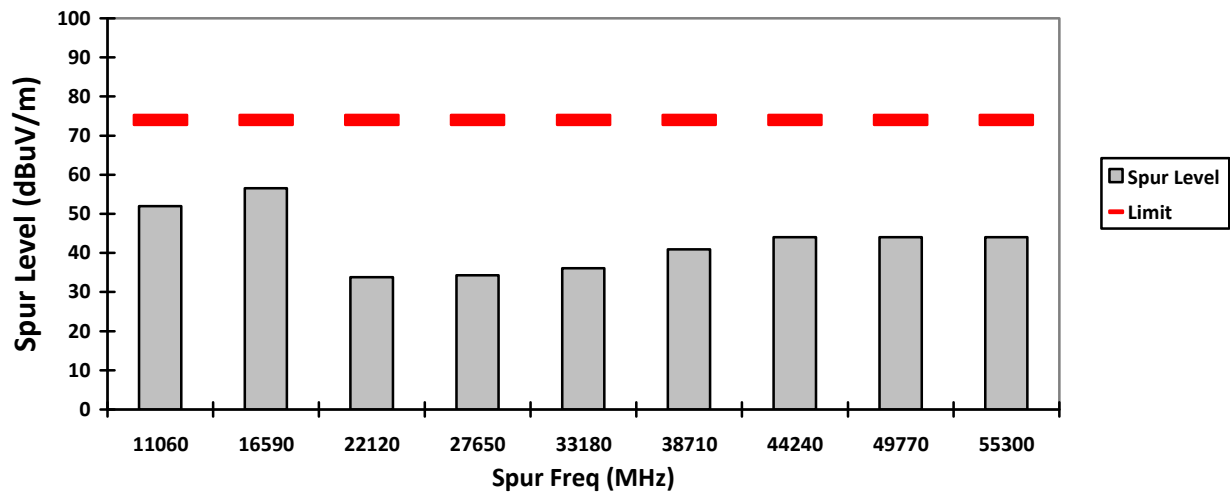


HORIZONTAL, PK

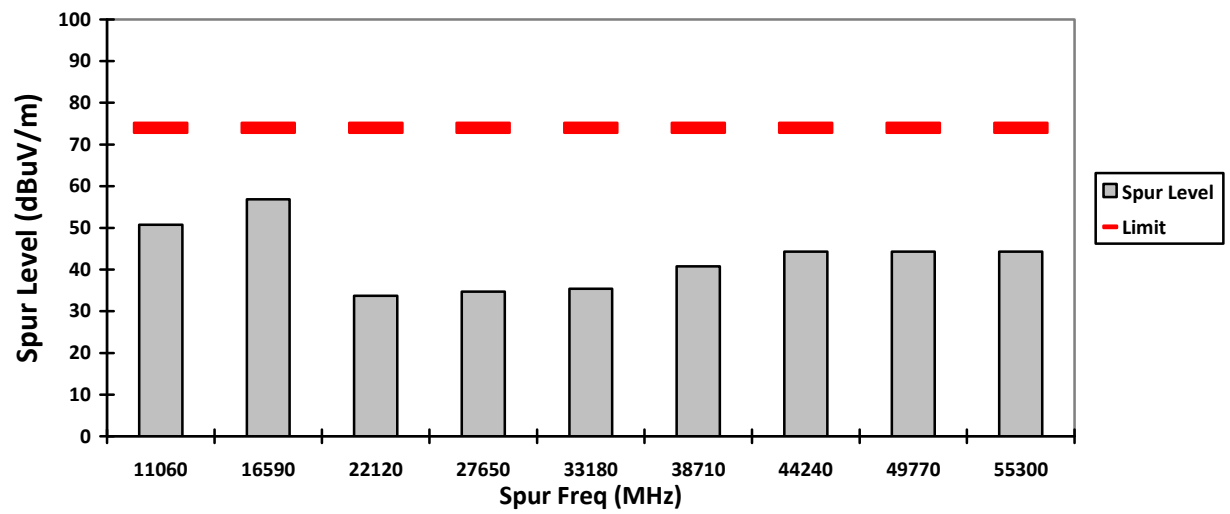


VERTICAL, AV

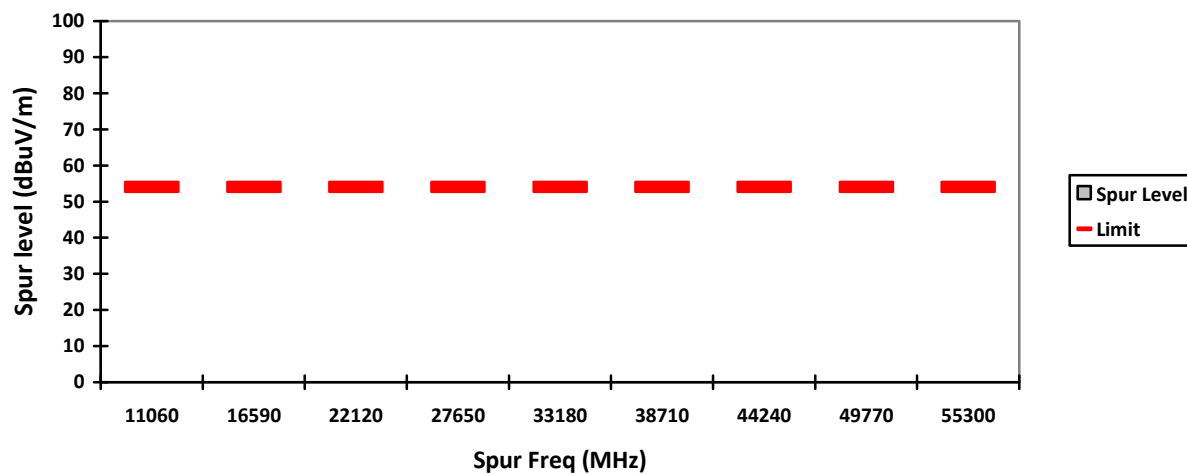


HORIZONTAL, AV

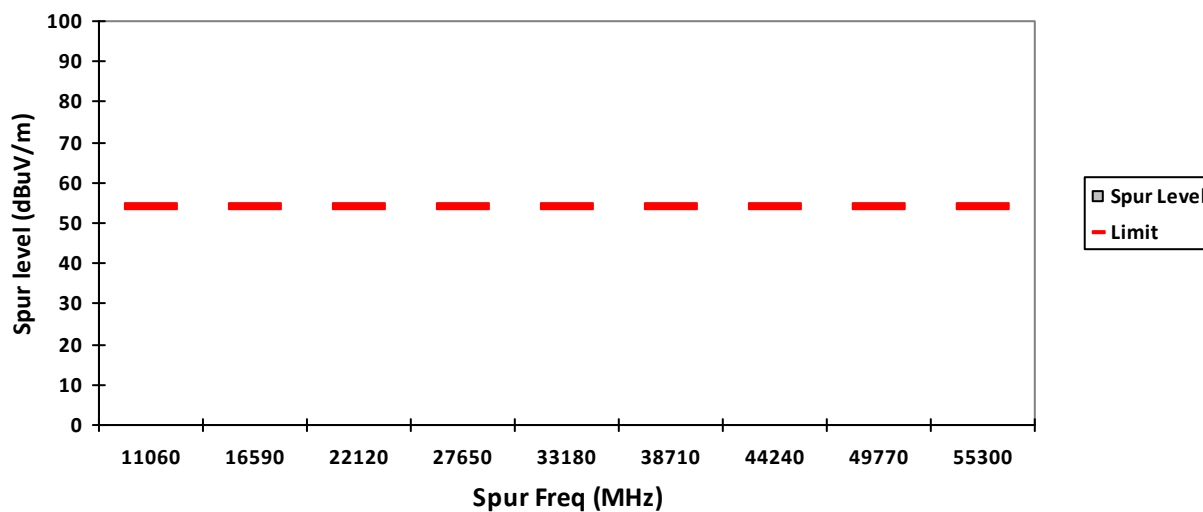


VERTICAL, QPK

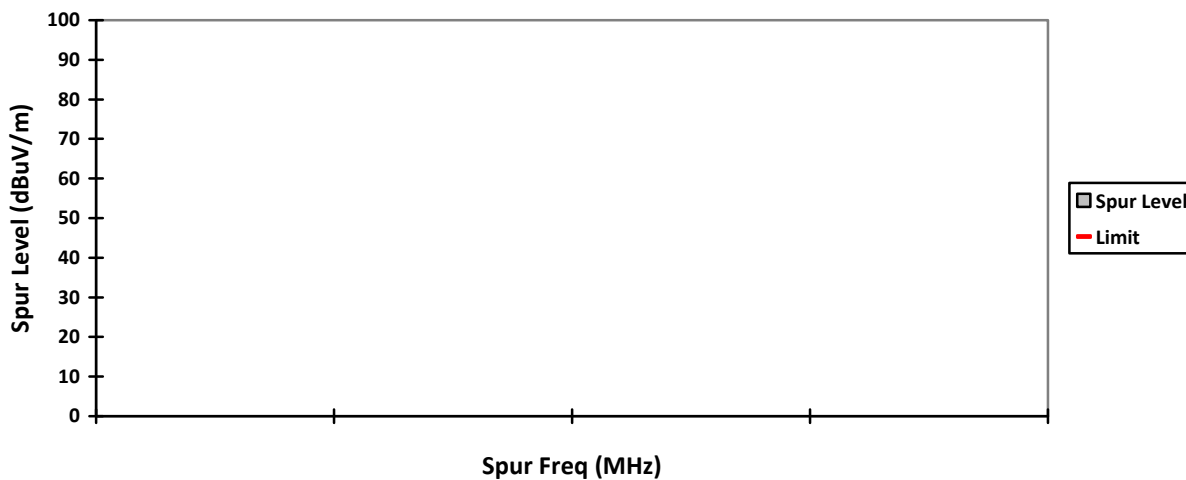


HORIZONTAL, QPK

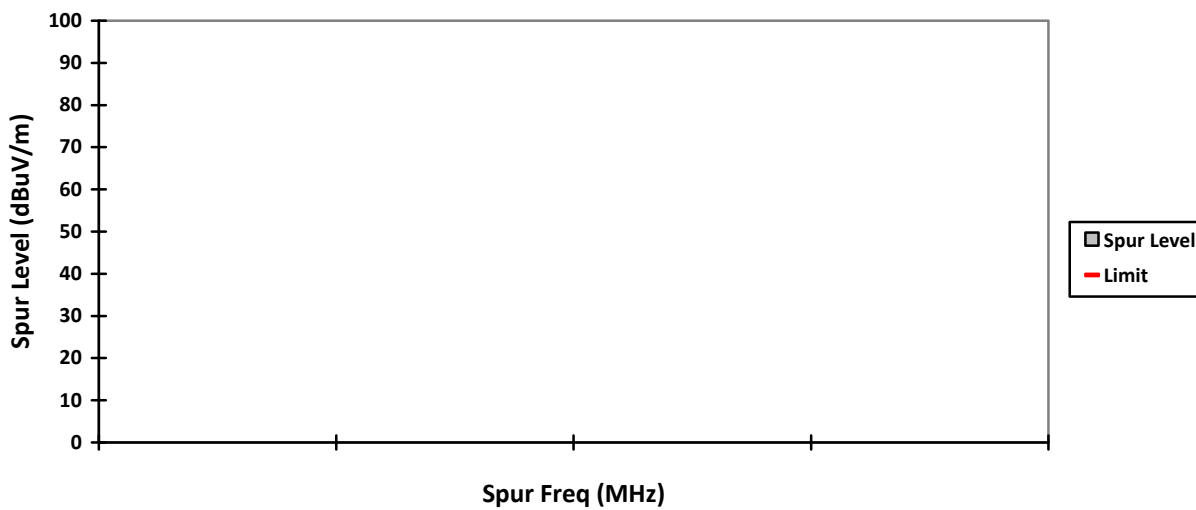


VERTICAL, PK

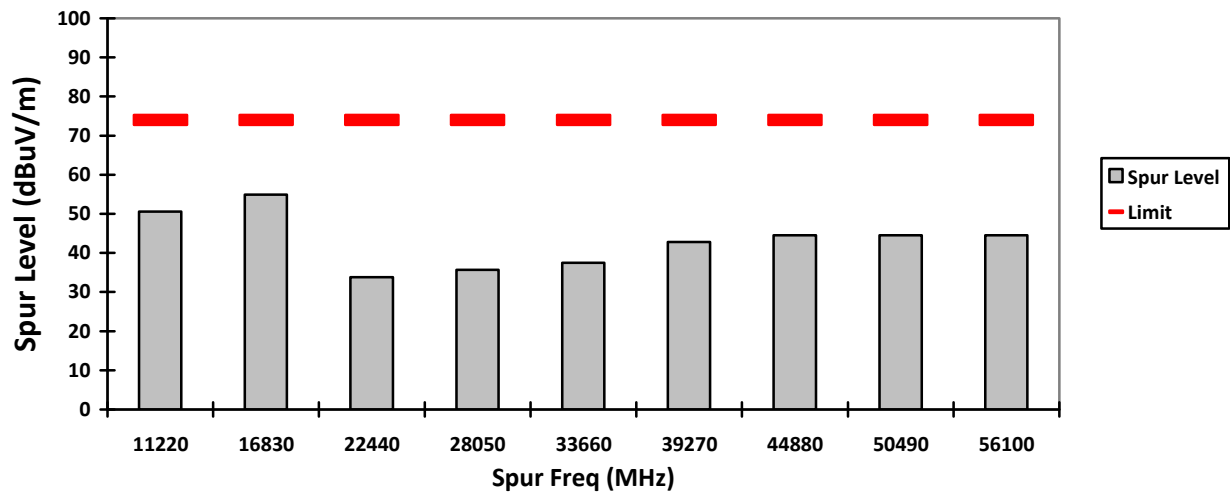


HORIZONTAL, PK

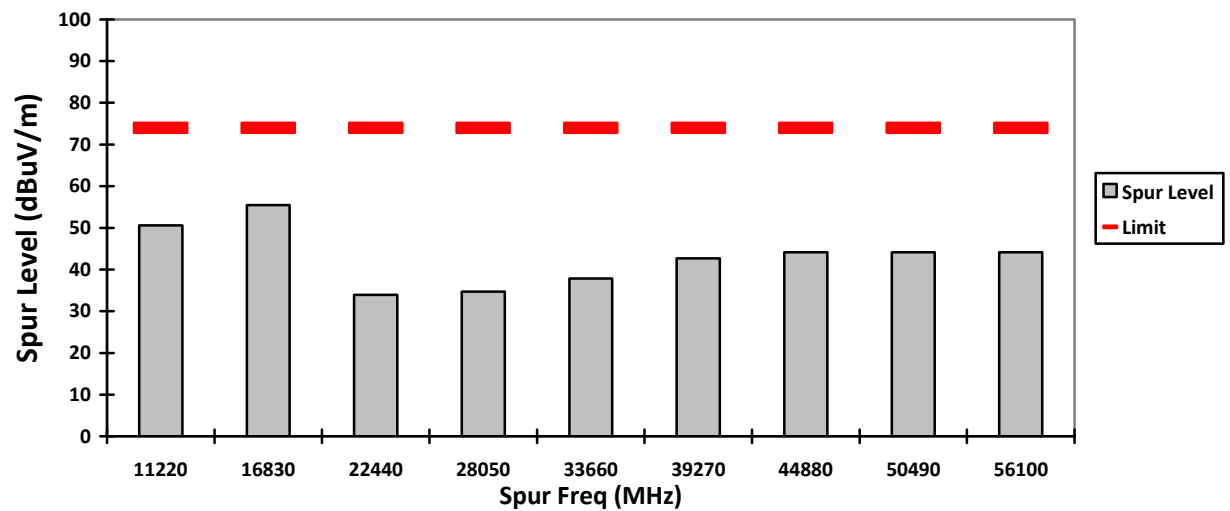


VERTICAL, AV

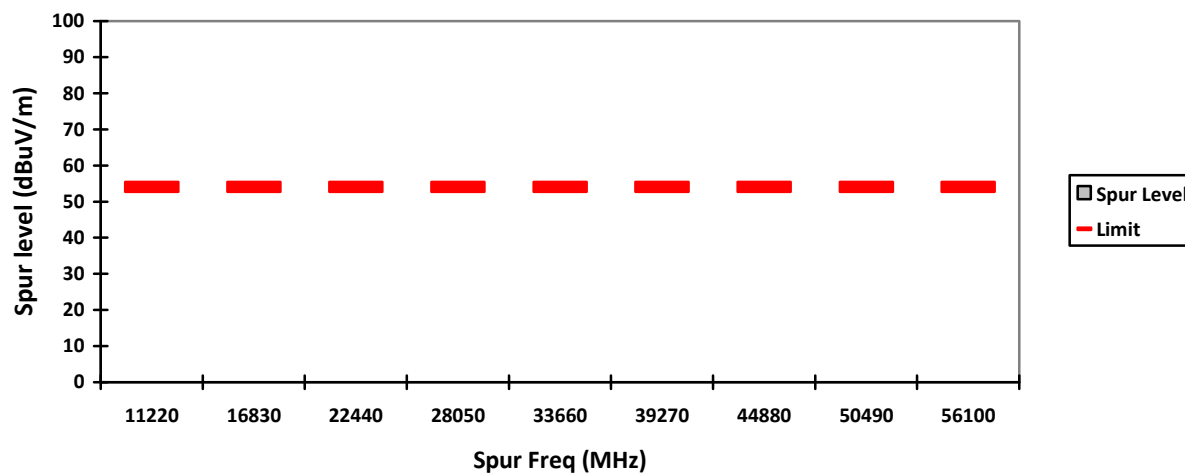


HORIZONTAL, AV

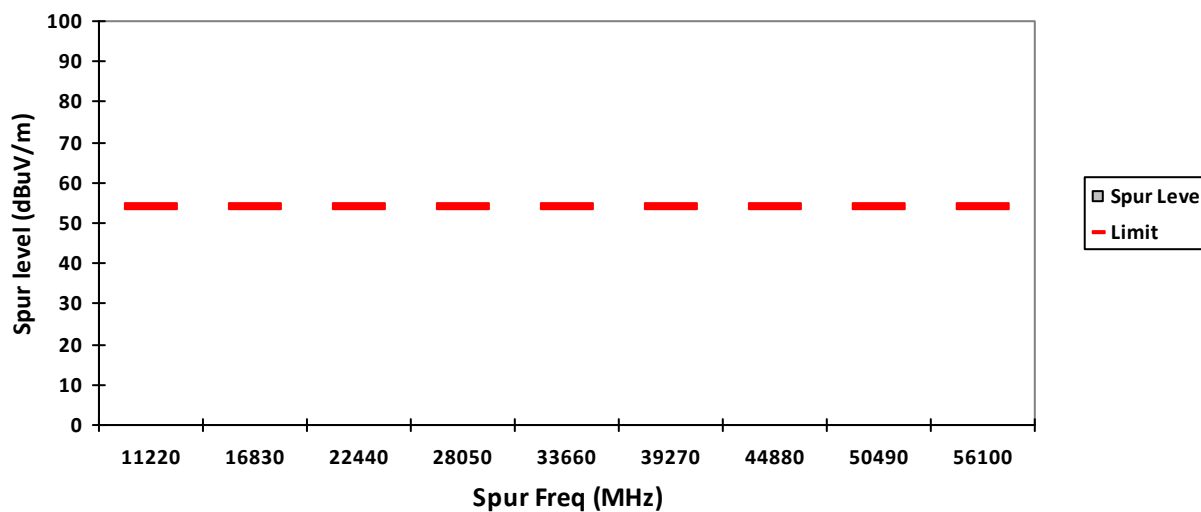


VERTICAL, QPK

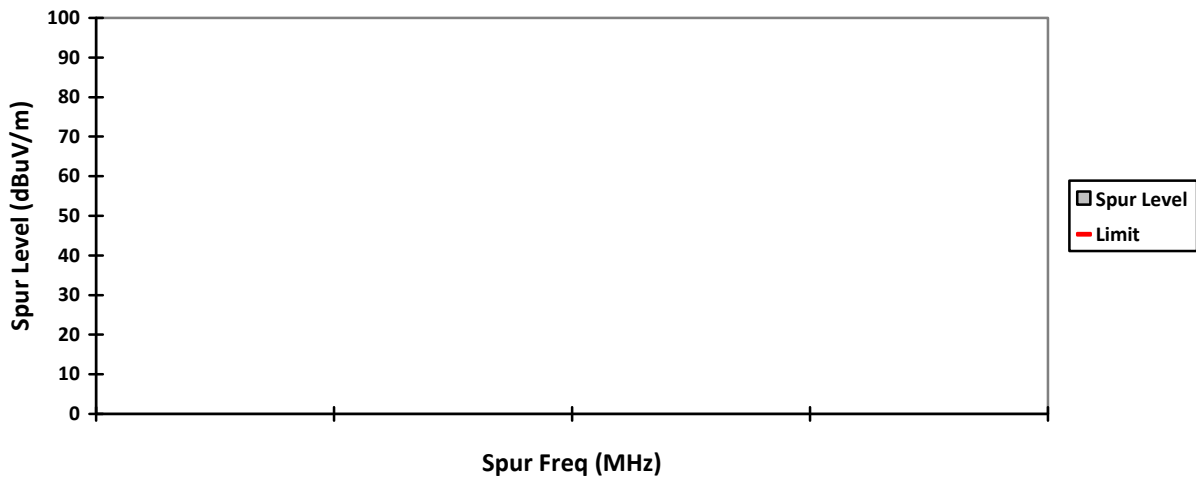


HORIZONTAL, QPK

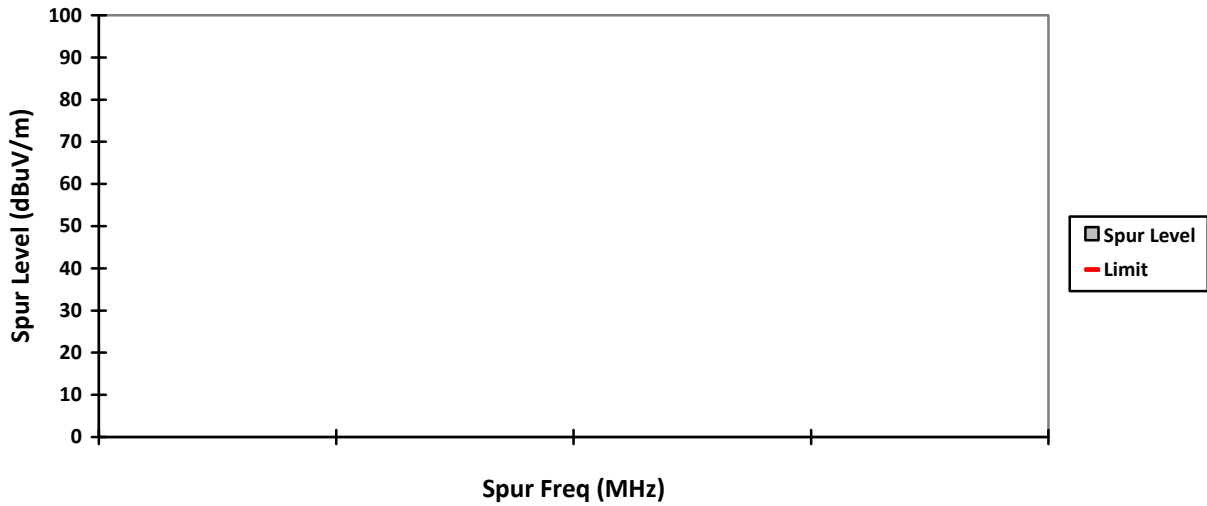


VERTICAL, PK

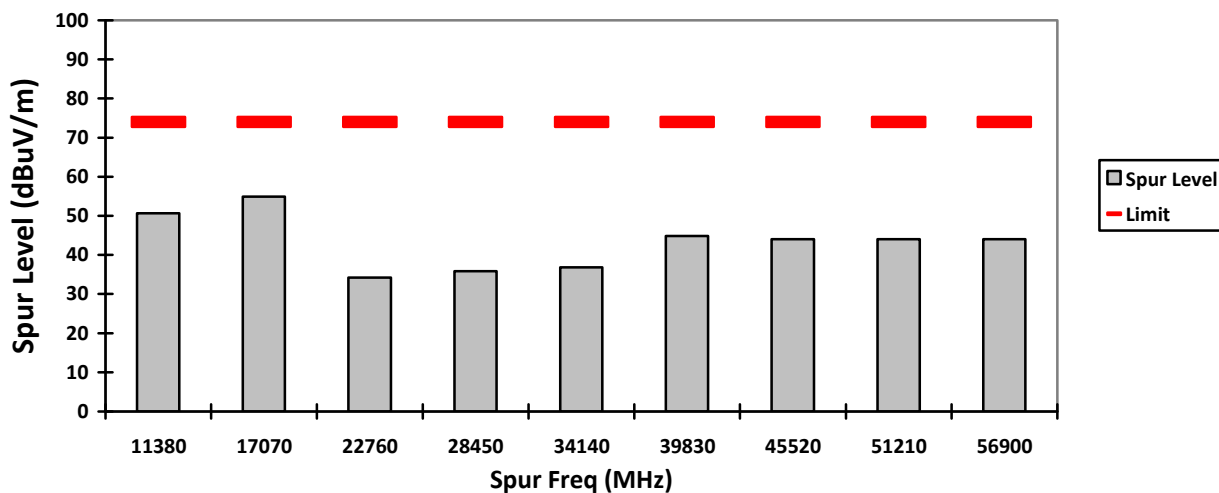


HORIZONTAL, PK

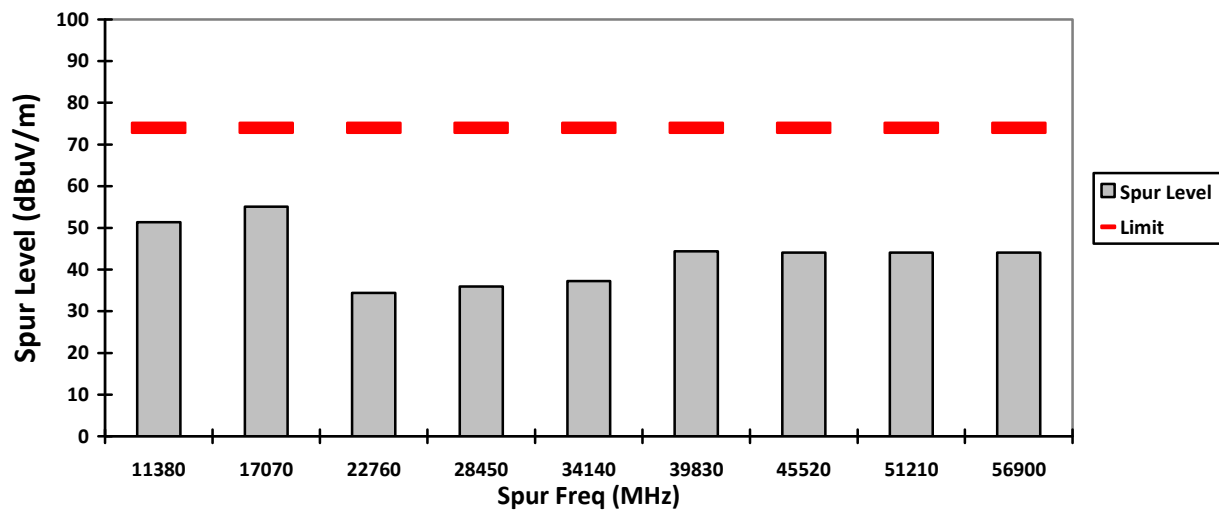


VERTICAL, AV

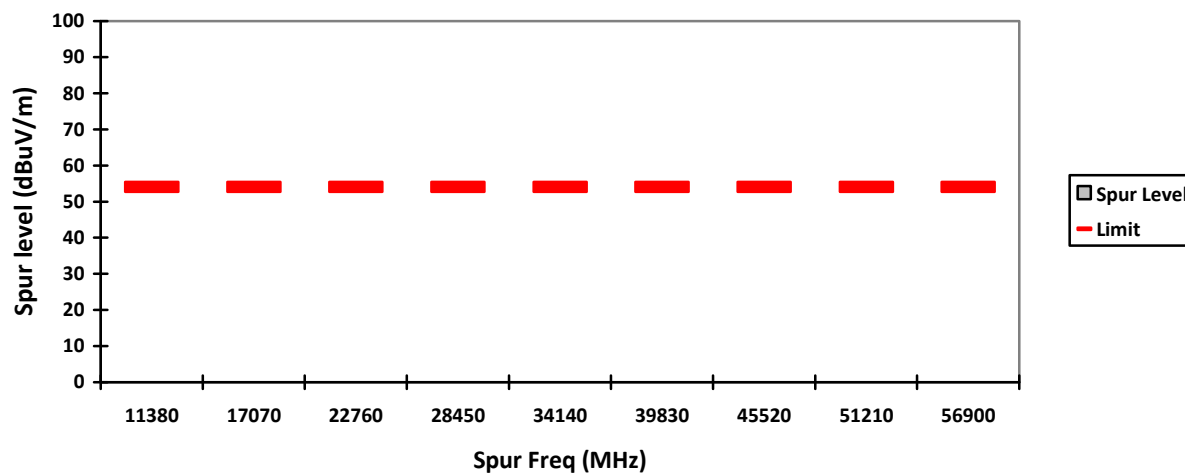


HORIZONTAL, AV

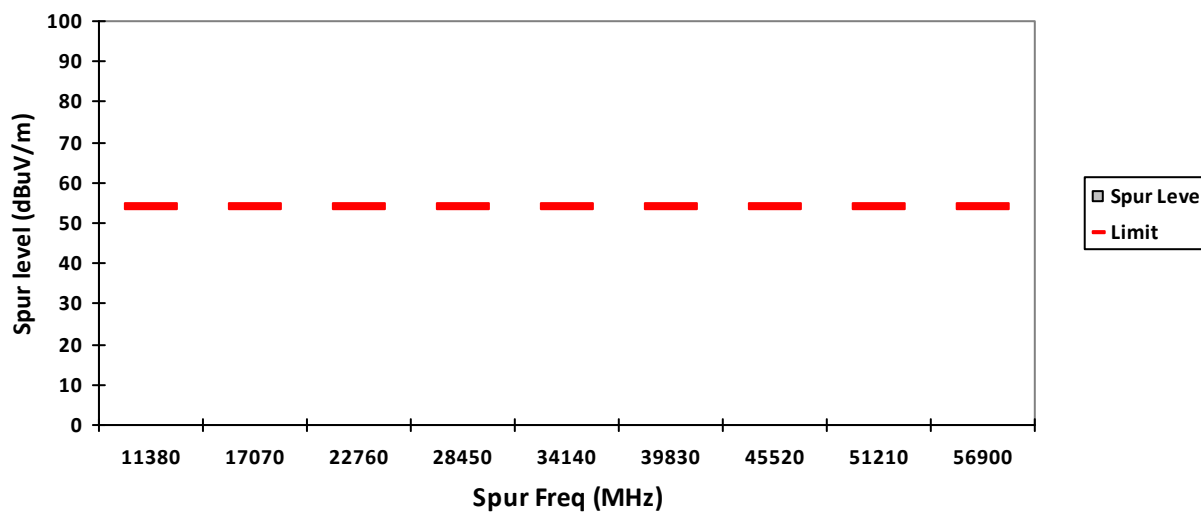


VERTICAL, QPK

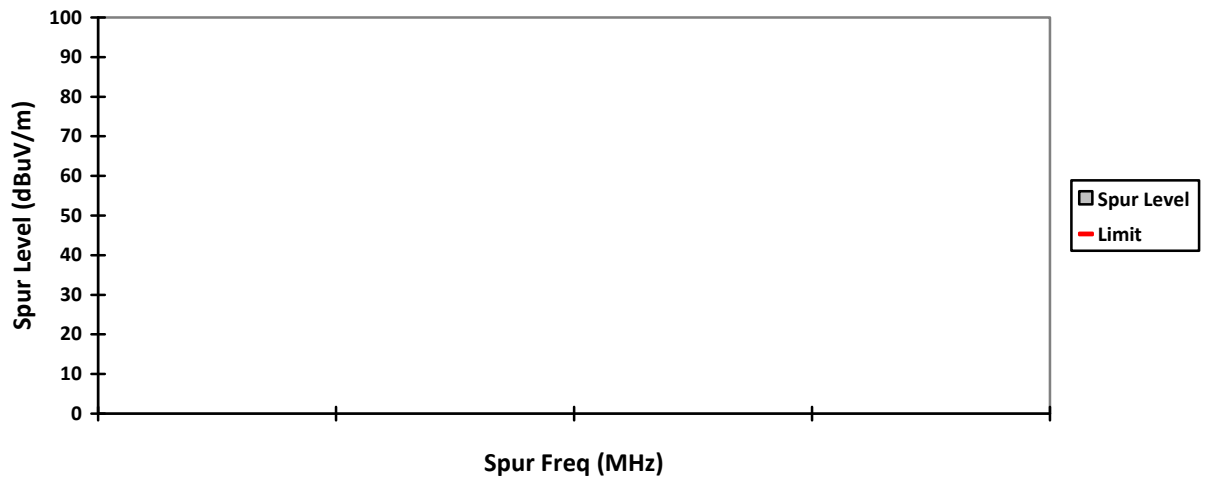


HORIZONTAL, QPK

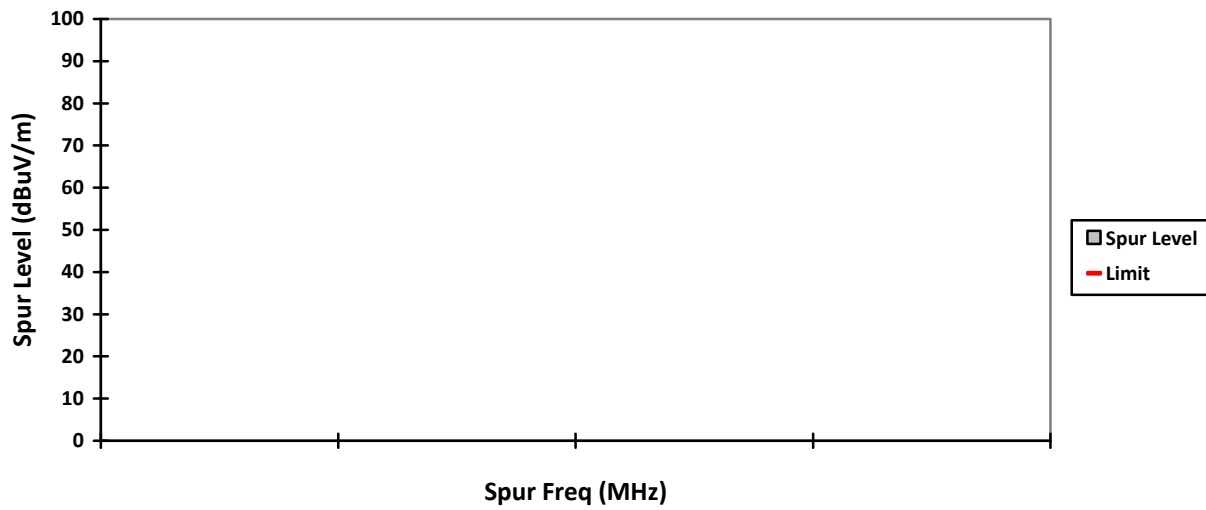


VERTICAL, PK

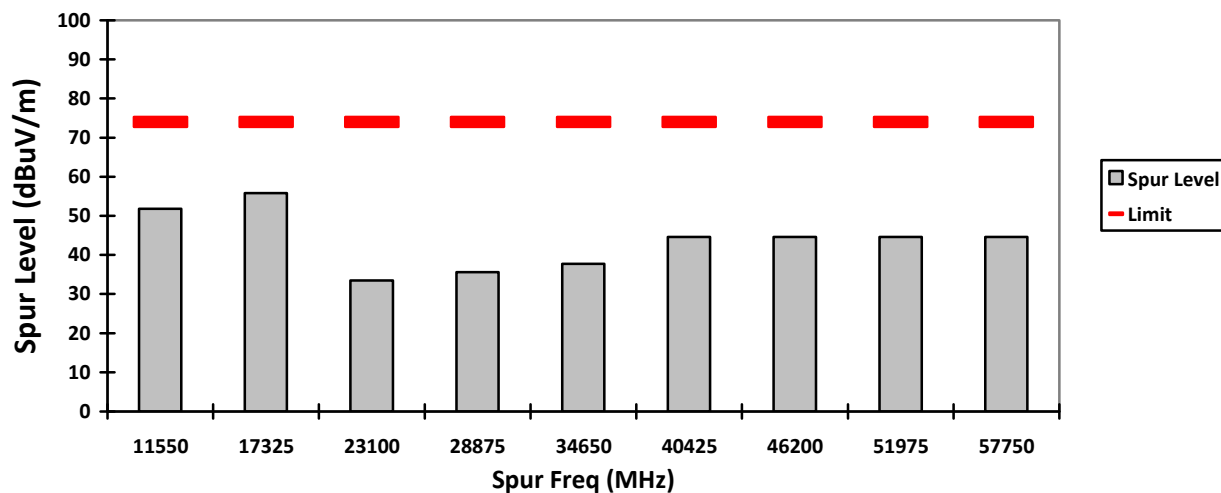


HORIZONTAL, PK

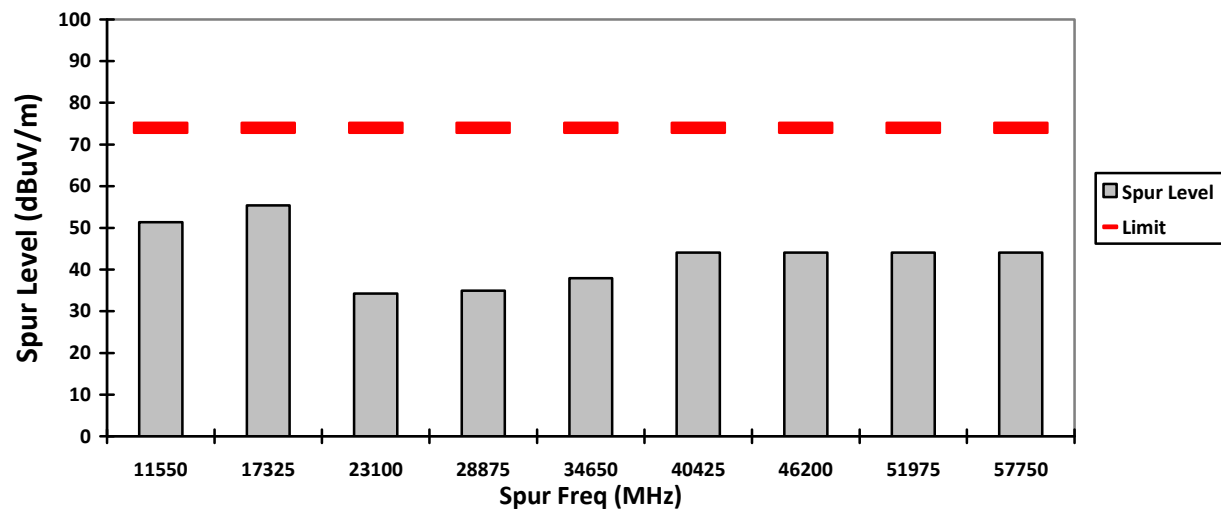

VERTICAL, AV

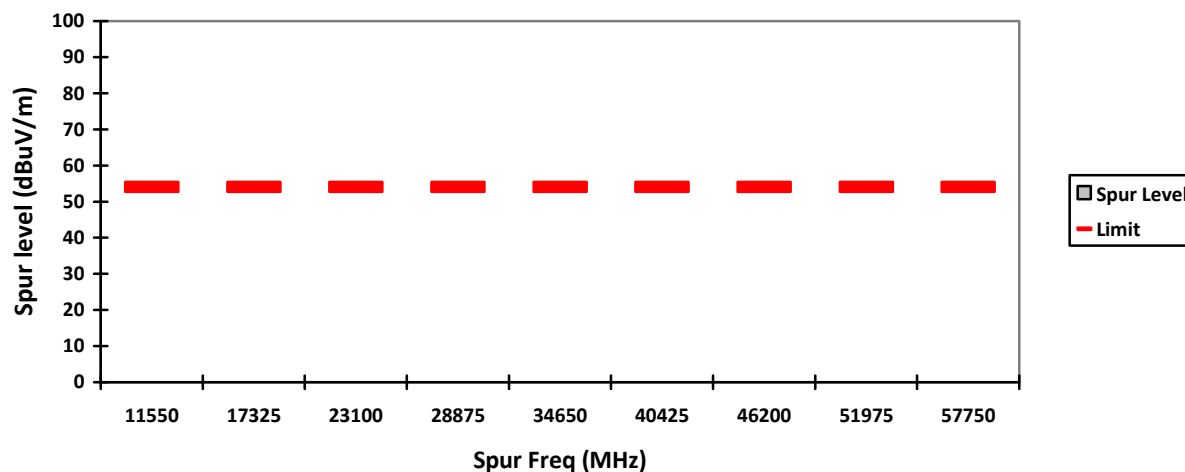


HORIZONTAL, AV

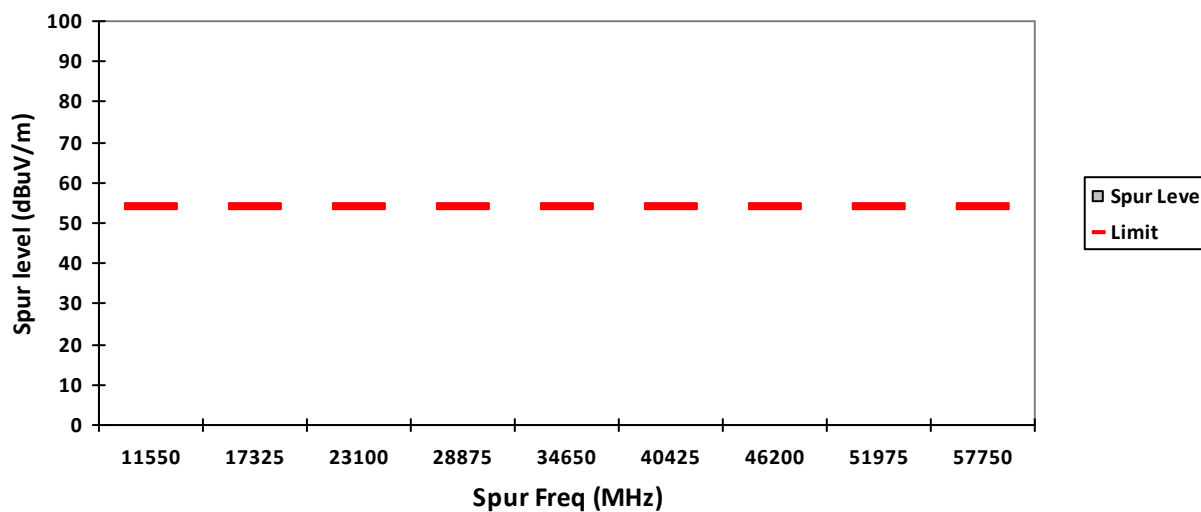

7.8. AC Powerline Conducted Emission

7.8.1. Test Setup

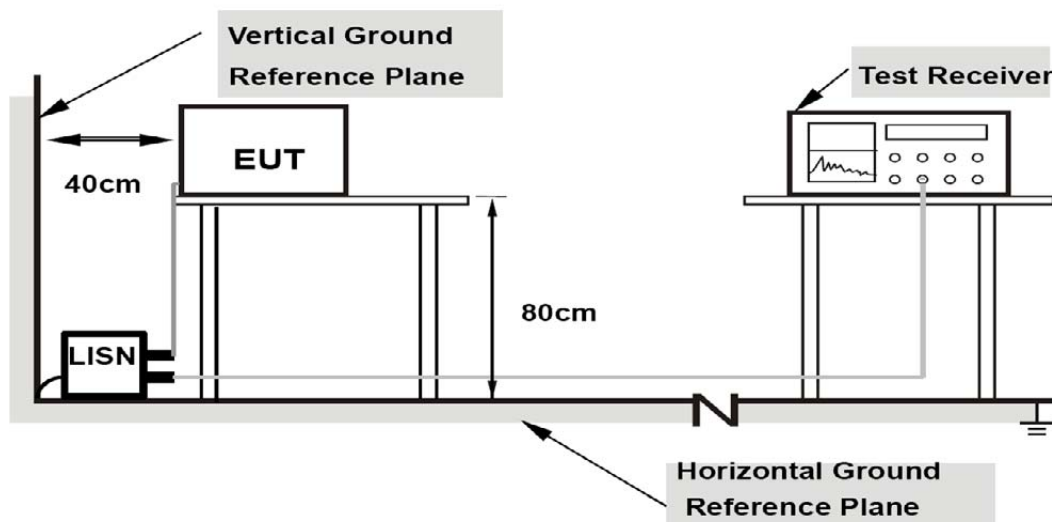

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

7.8.2. Test Limits

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

**Limits for conducted disturbance at the mains ports
of class A ITE**

Frequency range MHz	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**


Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies.		
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

7.8.3. Test Data

1) Charging with Radio in WIFI 5GHz Transmit Mode

Full Spectrum

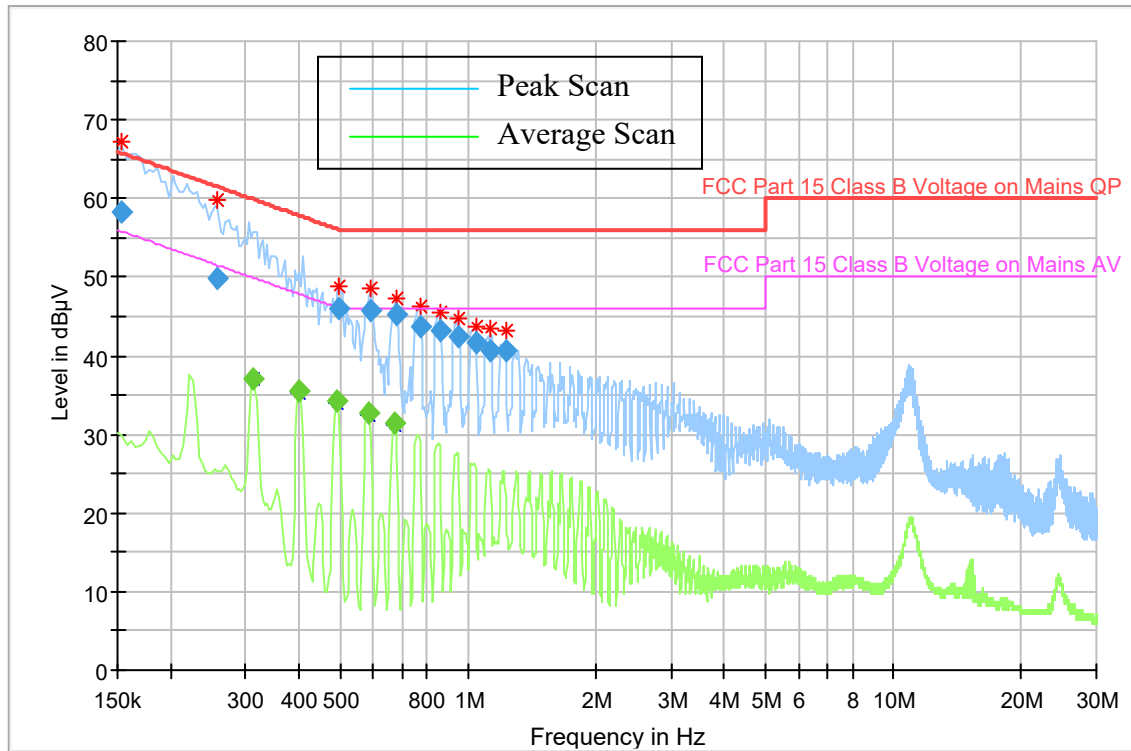

Quasipeak and Average Measurement

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)	Comment
0.154000	58.26	---	65.78	7.52	1000.0	9.000	N	ON	9.7	PASS
0.258000	49.85	---	61.50	11.64	1000.0	9.000	N	ON	9.6	PASS
0.314000	---	37.04	49.86	12.82	1000.0	9.000	L1	ON	9.6	PASS
0.402000	---	35.49	47.81	12.32	1000.0	9.000	L1	ON	9.6	PASS
0.494000	---	34.14	46.10	11.96	1000.0	9.000	L1	ON	9.6	PASS
0.498000	46.10	---	56.03	9.94	1000.0	9.000	L1	ON	9.6	PASS
0.582000	---	32.73	46.00	13.27	1000.0	9.000	L1	ON	9.6	PASS
0.590000	45.70	---	56.00	10.30	1000.0	9.000	L1	ON	9.6	PASS
0.674000	---	31.42	46.00	14.58	1000.0	9.000	L1	ON	9.6	PASS
0.682000	45.19	---	56.00	10.81	1000.0	9.000	L1	ON	9.6	PASS
0.770000	43.73	---	56.00	12.27	1000.0	9.000	L1	ON	9.6	PASS
0.862000	43.10	---	56.00	12.90	1000.0	9.000	L1	ON	9.6	PASS
0.954000	42.49	---	56.00	13.51	1000.0	9.000	L1	ON	9.6	PASS
1.046000	41.69	---	56.00	14.31	1000.0	9.000	L1	ON	9.6	PASS
1.134000	40.73	---	56.00	15.27	1000.0	9.000	N	ON	9.6	PASS
1.226000	40.75	---	56.00	15.25	1000.0	9.000	N	ON	9.6	PASS

* Expanded Uncertainty (U) = +/- 3.43dB

2) Charging with Radio in Wifi 5GHZ Transmit mode

Full Spectrum

