

 MOTOROLA SOLUTIONS	    CERTIFICATE 2518.08 MS ISO/IEC 17025 TESTING SAMM NO. 0825																																
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.	FCC / ISED TEST REPORT Report Revision : Rev.B																																
<table><tr><td>Date/s Tested</td><td>: 17-Sep-2022 - 18-Sep-2022</td></tr><tr><td>Report Issue Date</td><td>: 19-Sep-2022</td></tr><tr><td>Manufacturer/Location</td><td>: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900, Bayan Lepas, Penang, Malaysia</td></tr><tr><td>Requestor</td><td>: TAN SHIOW SHYAN</td></tr><tr><td>Product Type</td><td>: Hand-held</td></tr><tr><td>Product Version (PMN)</td><td>: Curve</td></tr><tr><td>Model Number (HVIN) (Tested model)</td><td>: DLR110NBHLAA (HVIN:DLR110NB1)</td></tr><tr><td>Model Number (HVIN) (By similarity model)</td><td>: DLR110NBHLAB (HVIN:DLR110NB2)</td></tr><tr><td>Frequency Band</td><td>: 2.412-2.462 GHz</td></tr><tr><td>Max RF Output Power</td><td>: 802.11b - 25.12 mWatts 802.11g - 31.62 mWatts 802.11n20 - 25.12 mWatts 802.11n40 - 17.78 mWatts</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>Applicant Address</td><td>: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>ISED Registrations</td><td>: MY0001</td></tr><tr><td>Firmware Version (FVIN)</td><td>: R01.01.00</td></tr></table> The equipment was tested accordance to the requirement listed below: <table><tr><td>(2.4GHz Wifi) 47CFR Part 15C ISED RSS 247 Issue 2</td><td>PASS</td></tr></table>		Date/s Tested	: 17-Sep-2022 - 18-Sep-2022	Report Issue Date	: 19-Sep-2022	Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900, Bayan Lepas, Penang, Malaysia	Requestor	: TAN SHIOW SHYAN	Product Type	: Hand-held	Product Version (PMN)	: Curve	Model Number (HVIN) (Tested model)	: DLR110NBHLAA (HVIN:DLR110NB1)	Model Number (HVIN) (By similarity model)	: DLR110NBHLAB (HVIN:DLR110NB2)	Frequency Band	: 2.412-2.462 GHz	Max RF Output Power	: 802.11b - 25.12 mWatts 802.11g - 31.62 mWatts 802.11n20 - 25.12 mWatts 802.11n40 - 17.78 mWatts	Applicant Name	: Motorola Solutions Inc	Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322	FCC Registrations	: 461337	ISED Registrations	: MY0001	Firmware Version (FVIN)	: R01.01.00	(2.4GHz Wifi) 47CFR Part 15C ISED RSS 247 Issue 2	PASS
Date/s Tested	: 17-Sep-2022 - 18-Sep-2022																																
Report Issue Date	: 19-Sep-2022																																
Manufacturer/Location	: Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900, Bayan Lepas, Penang, Malaysia																																
Requestor	: TAN SHIOW SHYAN																																
Product Type	: Hand-held																																
Product Version (PMN)	: Curve																																
Model Number (HVIN) (Tested model)	: DLR110NBHLAA (HVIN:DLR110NB1)																																
Model Number (HVIN) (By similarity model)	: DLR110NBHLAB (HVIN:DLR110NB2)																																
Frequency Band	: 2.412-2.462 GHz																																
Max RF Output Power	: 802.11b - 25.12 mWatts 802.11g - 31.62 mWatts 802.11n20 - 25.12 mWatts 802.11n40 - 17.78 mWatts																																
Applicant Name	: Motorola Solutions Inc																																
Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322																																
FCC Registrations	: 461337																																
ISED Registrations	: MY0001																																
Firmware Version (FVIN)	: R01.01.00																																
(2.4GHz Wifi) 47CFR Part 15C ISED RSS 247 Issue 2	PASS																																
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																																	
Prepared By:  GAN BOON TEONG Test Personnel	Approved Signatory: VINCENT FOONG CHUEN KIT Responsible Engineer																																

Table of Contents

1.0. General Information.....	3
1.1. Channel number and frequency information:	3
2.0. Summary of Test Results	4
3.0. Measurement Uncertainty	4
4.0. Equipment List.....	5
5.0. Test Mode Applicability and Test Channel Detail	6
6.0. Transmitter Test Parameters.....	9
6.1. 6dB Channel Bandwidth.....	9
6.1.1. Test Setup	9
6.1.2. Test Limits:	9
6.1.3. Test Data:	10
6.2. Conducted RF Output Power	18
6.2.1. Test Setup	18
6.2.2. Test Limits:	18
6.2.3. Test Data:	19
6.3. Duty Cycle of the test signal.....	23
6.3.1. Test Setup	23
6.3.2. Test Data	24
6.4. Maximum Peak Power Spectral Density	28
6.4.1. Test Setup	28
6.4.2. Test Limits	28
6.4.3. Test Result	29
6.5. Conducted Spurious Emission	33
6.5.1. Test Setup	33
6.5.2. Test Limits:	33
6.5.3. Test Result	33
6.6. Band edge Conducted Spurious Emission	53
6.6.1. Test Setup	53
6.6.2. Test Limits:	53
6.6.3. Test Result	53
6.7. Radiated Emission within restricted Bands	58
6.7.1. Test Setup	58
6.7.2. Test Limits:	59
6.7.3. Test Data:	59
6.8. AC Powerline Conducted Emission.....	60
6.8.1. Test Setup	60
6.8.2. Test Limits:	60
6.8.3. Test Result	61

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	19-Sep-2022	Gan Boon Teong
Rev. B	Added by sim model	26-Oct-2022	Vincent Foong

1.0. General Information

EUT Description:

Technologies	2.4GHz Wi-Fi
TX Frequency range	2412MHz – 2462MHz
Modulation Type	DSSS, OFDM
Connector type	PROGRAMMING, TEST & ALIGNMENT CABLE
Antenna type	IFA BLUETOOTH/WIFI ANTENNA

1.1. Channel number and frequency information:

There are two bandwidth systems.

For 20MHz Bandwidth systems (802.11b, 802.11g, 802.11n), use channel 1 ~ channel 11

For 40MHz Bandwidth systems (802.11n), use channel 3 ~ channel 9

Channel	Frequency	Channel	Frequency
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
Curve SUC TRAY	MOTOROLA	PMPN4586A
BATTERY PACK,BATTERY PACK, BATT LIION 2500T	MOTOROLA	PMNN4578A

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

FCC 47 CFR Part 15 Subpart C
KDB 558074 D01 15.247 Meas Guidance v05
ANSI C63.10-2013

Deviation from standard

Not applicable as no deviation from standard test method

Modifications to EUT

For RF conducted measurements a pigtail was soldered out of the board while for radiated measurements there were no modifications to the device

2.0. Summary of Test Results

FCC Clause	IC Clause	Test Item	Result	Remark	Serial number tested	Tested by
15.247 (a)(2)	RSS-247 5.2(a)	DTS & 99% Channel Bandwidth	Pass	Highest 99% OCB: 802.11b: 14.744 MHz(14M7G1D) 802.11g: 16.733 MHz(16M7D1D) 802.11n20: 17.806 MHz(17M8D1D) 802.11n40: 35.820 MHz(35M8D1D)	5507YL0121	Gan
15.247 (b)(3)	RSS-247 5.4(d)	Conducted RF Output Power (Peak)	Pass	Highest output power: 802.11b: 13.486 dBm (22.32 mW) 802.11g: 14.545 dBm (28.48mW) 802.11n20: 13.396 dBm (21.86mW) 802.11n40: 12.007 dBm (15.87mW)	5507YL0121	Gan
15.247(e)	RSS-247 5.2(b)	Maximum Power Spectral Density	Pass	Meet the limit requirement.	55017XJ0046	Gan
15.247(d)	RSS-247 5.5	Conducted Spurious Emissions	Pass	Worst case emission: -39.58 dBm	5507YL0121	Gan
15.247 (d)	RSS-247 5.5	Band edge Conducted Spurious Emission	Pass	Worst case emission: -35.44 dBm	5507YL0121	Gan
15.205, 15.209, 15.247 (d)	RSS-247 5.5	Radiated Emission within Restricted Bands	NA	NA	NA	NA
15.207	RSS-Gen 8.8	AC Power Line Conducted Emission	NA	Testing is not required, radio shall turn off during charging mode	NA	NA
15.203		Antenna requirement	NA	Internal antenna is not accessible to the enduser	NA	NA

NA → Not Available

3.0. Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48
Radiated Emissions up to 1 GHz	30MHz ~ 1000MHz	5.88
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.84
	18GHz ~ 40GHz	6.02
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82

4.0. Equipment List

Bluetooth ATE # 1 (SW Version: Ate Main_3.1.11)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92003820	8-Jul-22	8-Jul-23
POWER SUPPLY	6652A	MY40001436	22-Nov-21	22-Nov-22
ANALYZER SPECTRUM	E4440A	US45303111	22-Jul-22	22-Jul-23
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
CHAMBER	SH-641	92002639	8-Dec-20	8-Dec-21
POWER SUPPLY	6652A	3640A02941	22-Jan-21	22-Jan-22
SPECTRUM ANALYZER	E4445A	MY45301089	7-Sep-19	7-Sep-21

Radiated Emission Station (SW Version: EMC FCC RE v1.6.2)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	719	20-Aug-19	20-Aug-21
DRG HORN FREQ.	SAS-571	566	22-Oct-19	22-Oct-21
POWER SUPPLY	6031A	MY41000626	23-Jul-20	23-Jul-21
SIGNAL GENERATOR	SMB 100A	181117	8-Nov-18	8-Nov-21
EMI TEST RECEIVER	ESW44	101750	15-Jan-21	15-Jan-22
EMI TEST RECEIVER	ESIB26	827769/009	11-Mar-21	11-Mar-22
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	Not Required	Not Required
BILOG ANTENNA	CBL6112B	30991	20-Aug-20	20-Aug-21
BILOG ANTENNA	CBL6112B	2950	8-Jul-19	8-Jul-21
HYGRO-THERMOMETER	SDL500	A.016800	18-May-21	18-May-22
SYSTEM CONTROLLER	SC104V	050806-1	Not Required	Not Required
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	Not Required	Not Required
ANTENNA POSITIONING TOWER	TLT2	NA	Not Required	Not Required
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	15-Jul-20	15-Jul-21
18 - 40GHz PREAMPLIFIER	MITEQ Hi GAIN SUCOFLEX	2006313	Not Required	Not Required
PREAMPLIFIER	PAM-0118	269	24-May-19	24-May-22
LOOP ANTENNA	6502	00208416	15-Sep-20	15-Sep-21

5.0. Test Mode Applicability and Test Channel Detail

The device employs MIMO technology. Below are the possible configurations.

WLAN Configurations		Mode					
		SISO		Spatial Diversity Multiplexing (MIMO)		Cyclic Delay Diversity (MIMO)	
2.4GHz	Antenna	Primary	Secondary	Primary	Secondary	Primary	Secondary
	802.11b	√	√	x	x	x	x
	802.11g	√	√	x	x	x	x
	802.11n (HT20)	√	√	x	x	x	x
	802.11n (HT40)	x	x	x	x	x	x

√ = Support;
 x = NOT Support

Note: This Device supports simultaneous transmission operation, which allows for two SISO or two MIMO channels to operate independent of one another in the 2.4GHz band on each antenna. 802.11n mode is capable of transmitting simultaneously on two antennas using Cyclic Delay Diversity and Spatial Diversity Multiplexing (2x2 MIMO).

The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report.

Radiated Emission Test (Above 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Modulation	Available Channel	Tested Channel	Modulation Technology	Data Modulation Type	Date Rate (Mbps)	Mode	Environmental Conditions
Test Mode	802.11b	1 to 11	1,6,11	DSSS	DBPSK	1	SISO	23.4°C, 68.6%RH
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6	SISO	23.4°C, 68.6%RH
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5	SISO CDD	23.4°C, 68.6%RH
Test Mode	802.11n (HT40)	3 to 9	3,6,9	OFDM	BPSK	13.5	SISO CDD	23.4°C, 68.6%RH

Radiated Emission Test (Below 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Modulation	Available Channel	Tested Channel	Modulation Technology	Data Modulation Type	Date Rate (Mbps)	Mode	Environmental Conditions
Test Mode	802.11b	1 to 11	1,6,11	DSSS	DBPSK	1	SISO	23.4°C, 68.6%RH
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6	SISO	23.4°C, 68.6%RH
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5	SISO CDD	23.4°C, 68.6%RH
Test Mode	802.11n (HT40)	3 to 9	3,6,9	OFDM	BPSK	13.5	SISO CDD	23.4°C, 68.6%RH

Power Line Conducted Emission Test

☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☐ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Modulation	Available Channel	Tested Channel	Modulation Technology	Data Modulation Type	Data Rate (Mbps)	Environmental Conditions
Application Mode	802.11bgn mixed	1 to 11	AUTO	DSSS, OFDM	AUTO	AUTO	NA

Antenna Port Conducted Measurement:

☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Modulation	Available Channel	Tested Channel	Modulation Technology	Data Modulation Type	Data Rate (Mbps)	Mode	Environmental Conditions
Test Mode	802.11b	1 to 11	1,6,11	DSSS	DBPSK	1	SISO	25°C, 54.8%RH
Test Mode	802.11g	1 to 11	1,6,11	OFDM	BPSK	6	SISO	25°C, 54.8%RH
Test Mode	802.11n (HT20)	1 to 11	1,6,11	OFDM	BPSK	6.5	SISO	25°C, 54.8%RH
Test Mode	802.11n (HT40)	1 to 11	3,6,9	OFDM	BPSK	13.5	SISO	NA


Duty Cycle of Test Signal

802.11b, 802.11g and 802.11n : Duty cycle of test signal is $\geq 98\%$. (Refer to Clause 6.3 for duty cycle test signal)

6.0. Transmitter Test Parameters

6.1. 6dB Channel Bandwidth

6.1.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max hold
 - e. Sweep = auto
- e) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.
- f) Measure every antenna port by repeat the step above for MIMO measurement.


6.1.2. Test Limits:


Normal Condition (25 ° C)
≥ 500 kHz

6.1.3. Test Data:

802.11 b


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11b	DSSS	DBPSK	1	2412	10.057	14.732	Pass
802.11b	DSSS	DBPSK	1	2437	10.054	14.726	Pass
802.11b	DSSS	DBPSK	1	2462	10.053	14.744	Pass

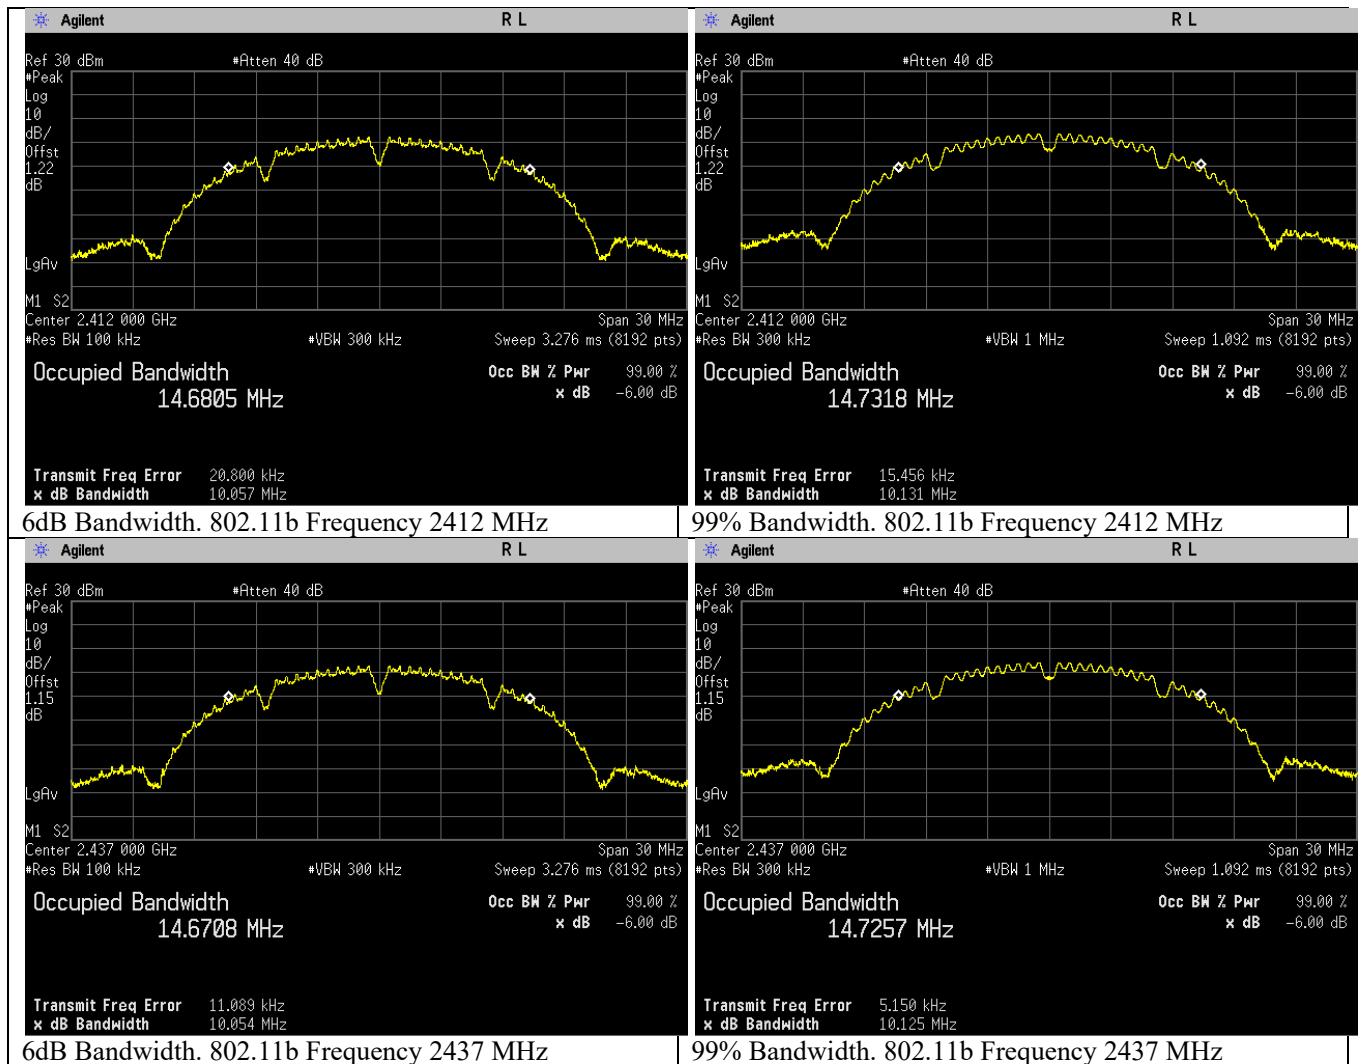


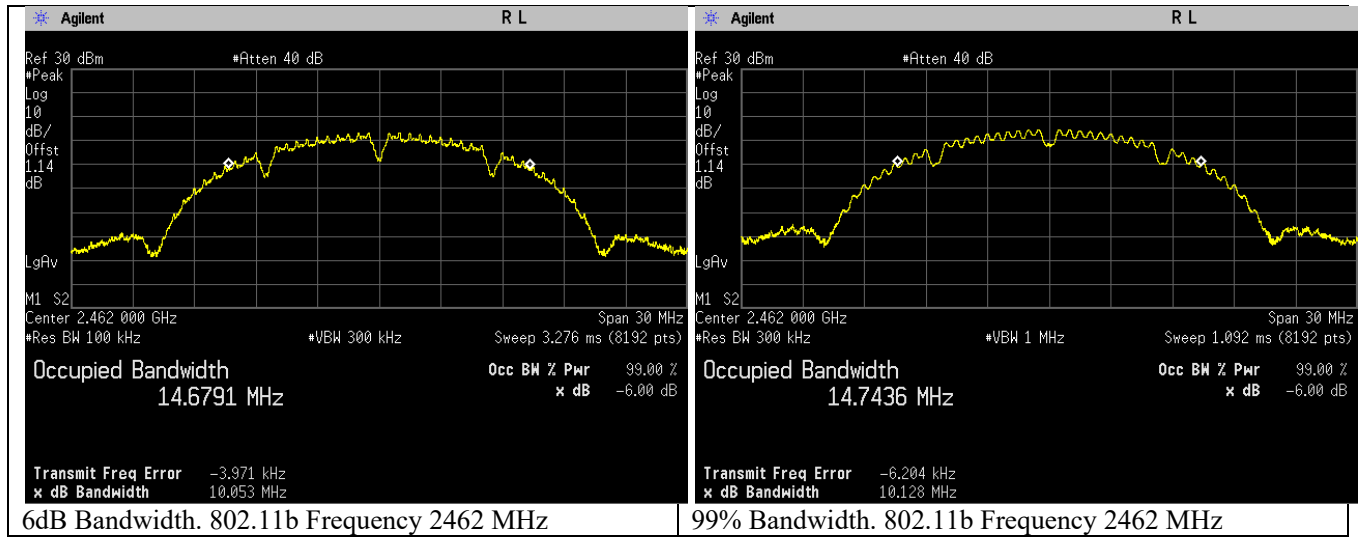

802.11g


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11g	OFDM	BPSK	6	2412	16.525	16.688	Pass
802.11g	OFDM	BPSK	6	2437	16.538	16.693	Pass
802.11g	OFDM	BPSK	6	2462	16.527	16.733	Pass

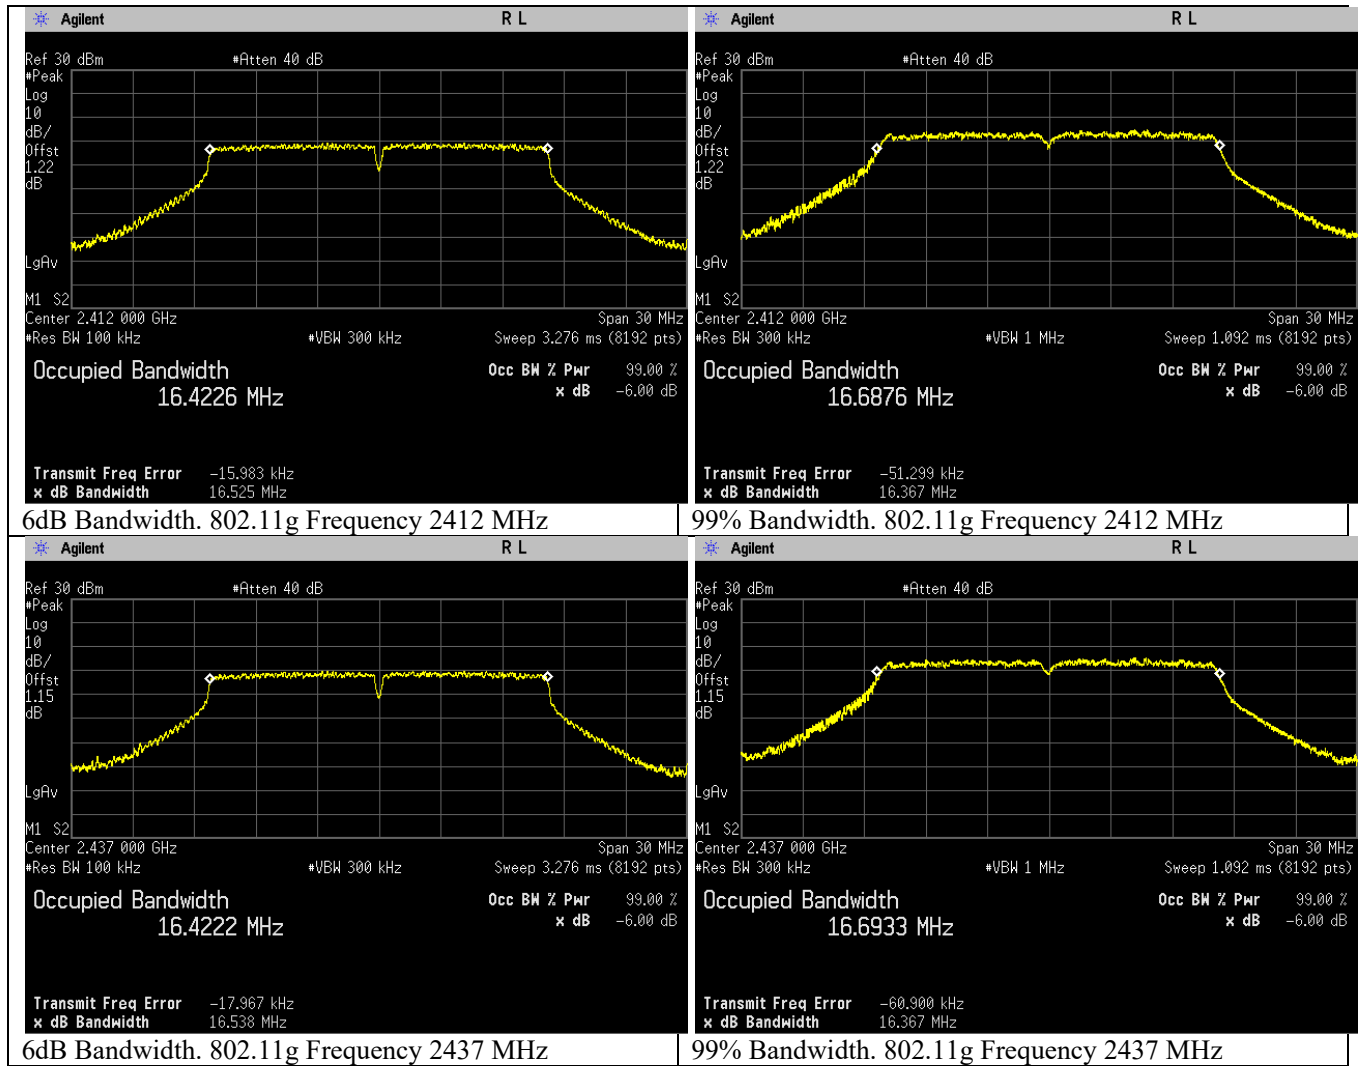

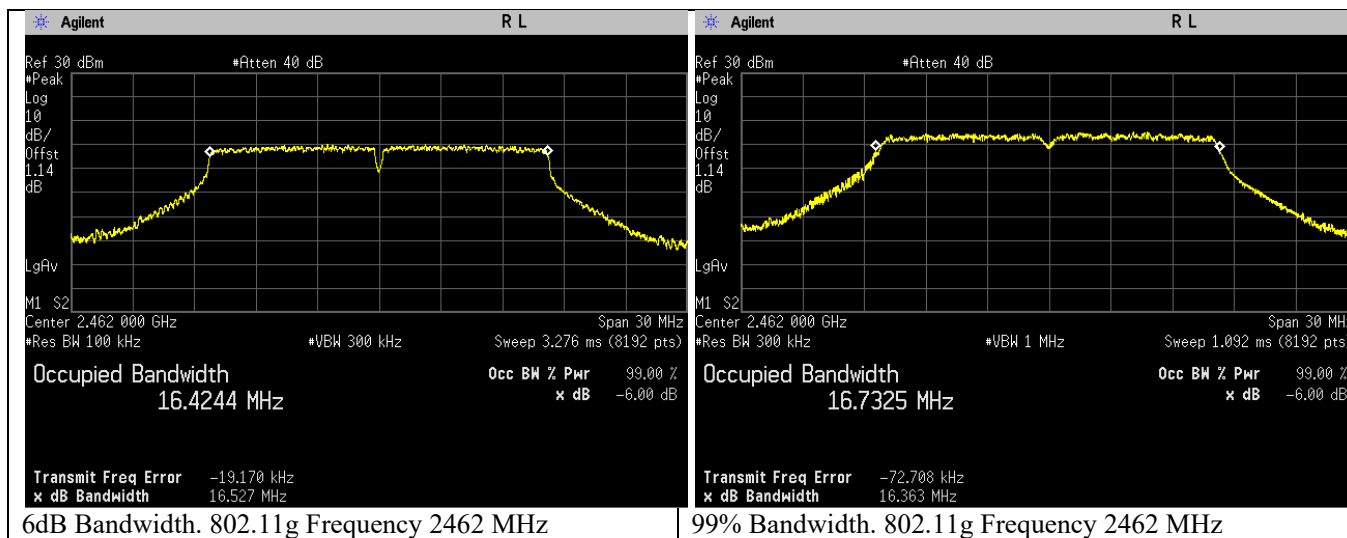


802.11n (HT20)


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11n	OFDM	BPSK	6.5	2412	17.694	17.806	Pass
802.11n	OFDM	BPSK	6.5	2437	17.668	17.795	Pass
802.11n	OFDM	BPSK	6.5	2462	17.662	17.799	Pass

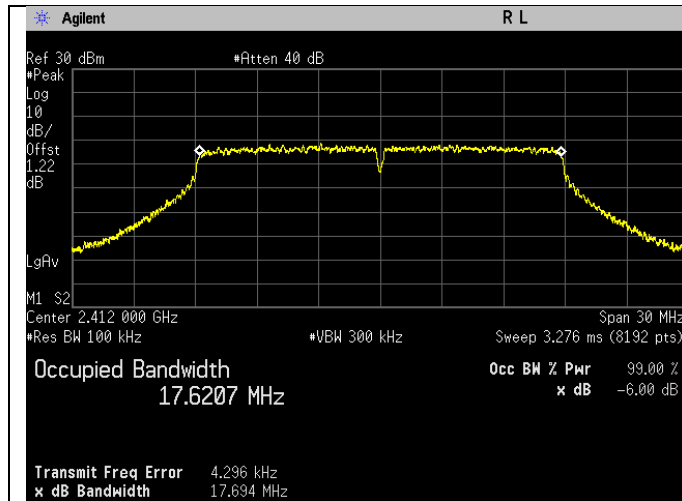


6dB Bandwidth. 802.11n Frequency 2412 MHz

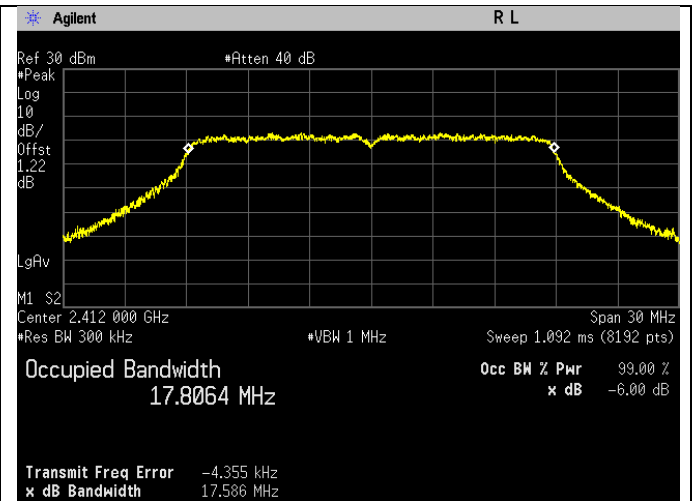


99% Bandwidth. 802.11n Frequency 2412 MHz

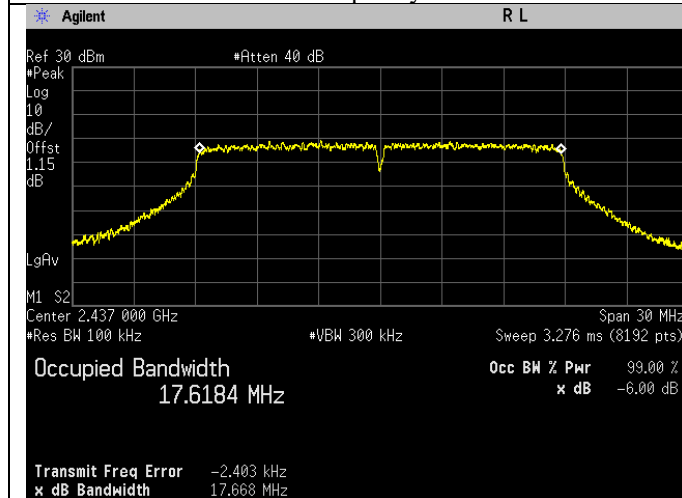


6dB Bandwidth. 802.11n Frequency 2437 MHz

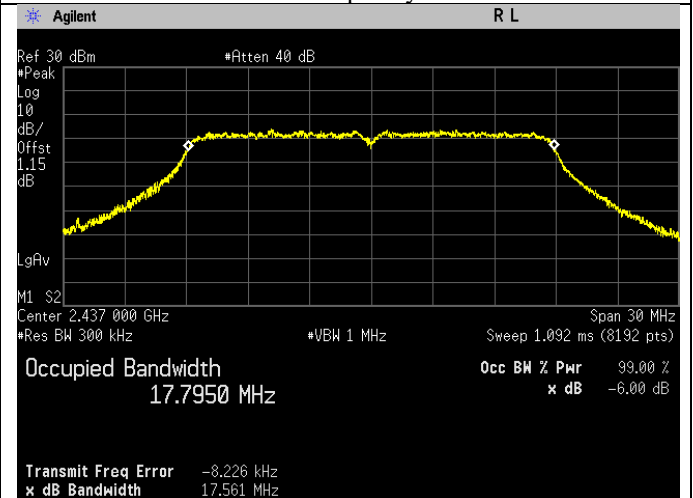

99% Bandwidth. 802.11n Frequency 2437 MHz

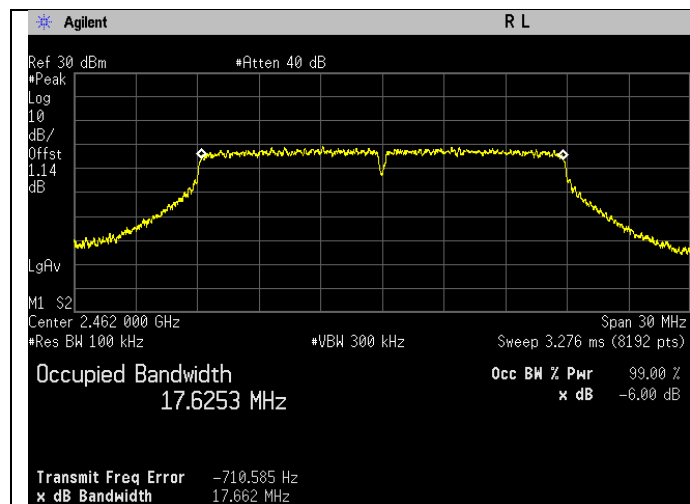


6dB Bandwidth. 802.11n Frequency 2462 MHz

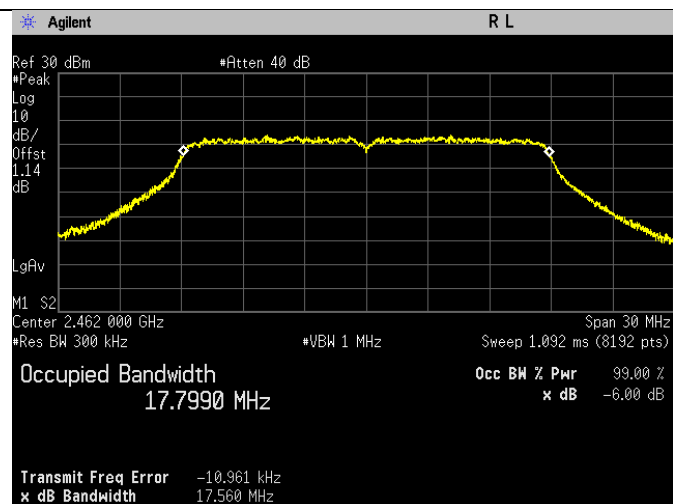


99% Bandwidth. 802.11n Frequency 2462 MHz

802.11n (HT40)


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
802.11n	OFDM	BPSK	13.5	2422	36.360	35.820	Pass
802.11n	OFDM	BPSK	13.5	2437	36.352	35.811	Pass
802.11n	OFDM	BPSK	13.5	2452	36.351	35.807	Pass

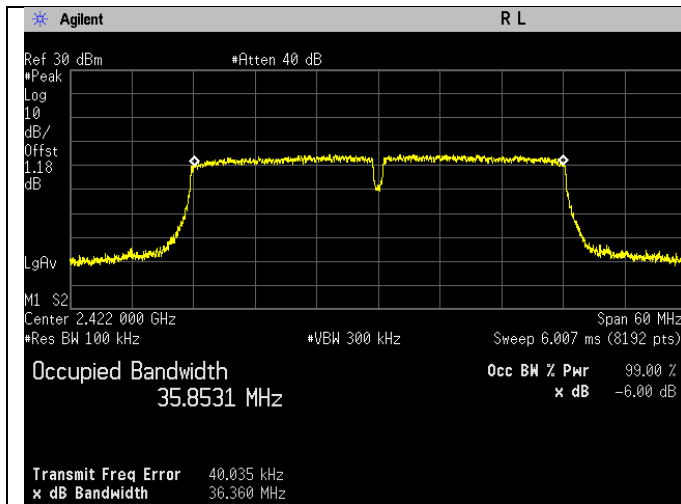


6dB Bandwidth. 802.11n Frequency 2422 MHz

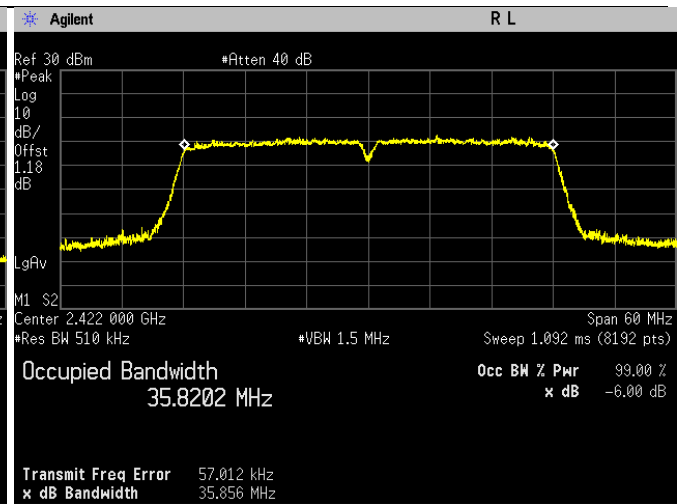


99% Bandwidth. 802.11n Frequency 2422 MHz

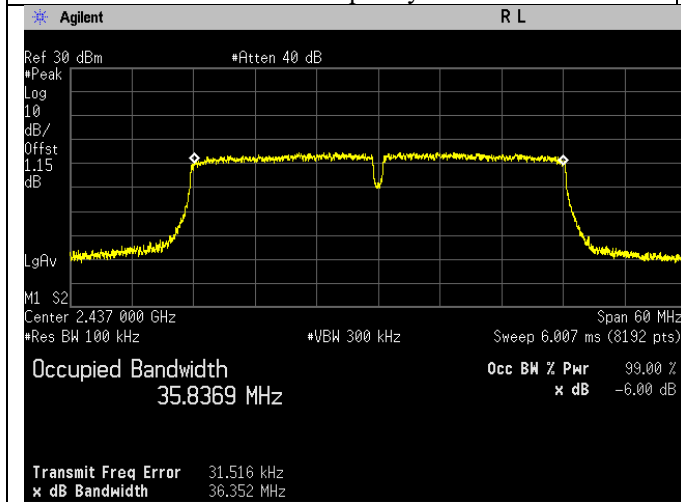

6dB Bandwidth. 802.11n Frequency 2437 MHz

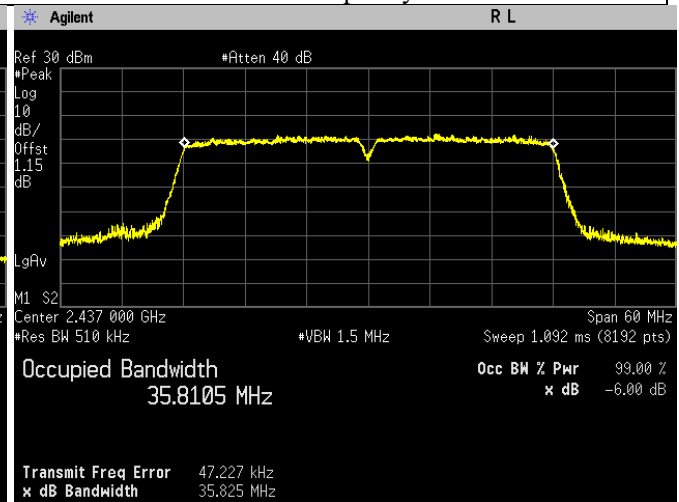


99% Bandwidth. 802.11n Frequency 2437 MHz

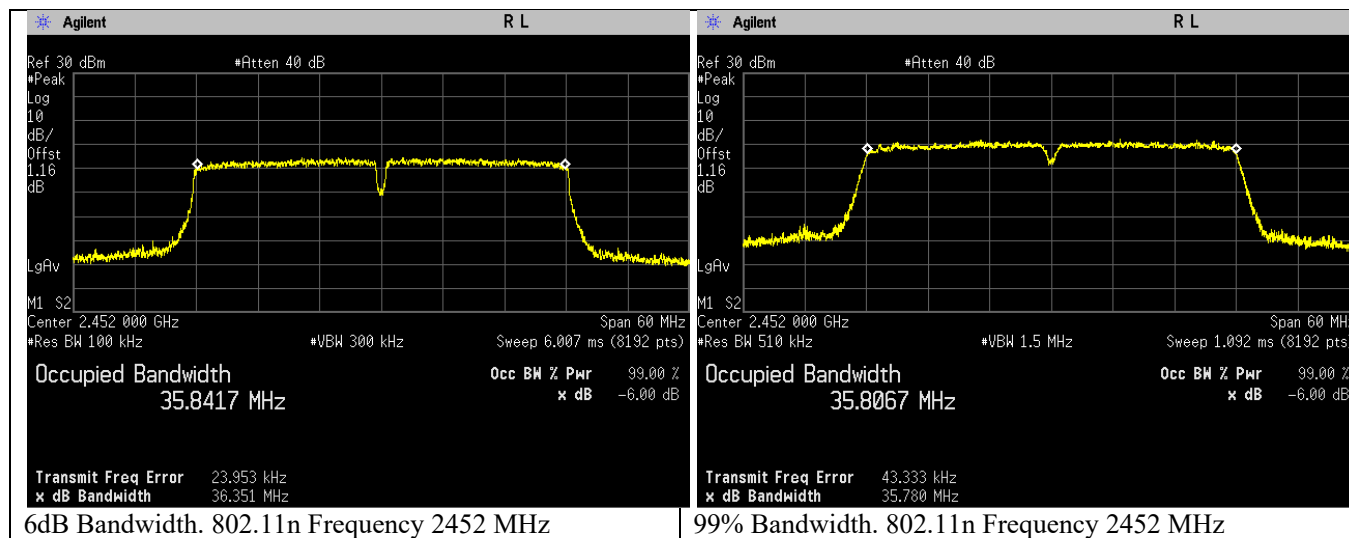

6.2. Conducted RF Output Power

6.2.1. Test Setup



Peal

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Measure the duty cycle of transmitter output signal.
- d) Setting of Spectrum analyzer :
 - a. Set the RBW = 1MHz.
 - b. Set the VBW $\geq [3 \times \text{RBW}]$.
 - c. Set the span $\geq [1.5 \times \text{OBW bandwidth}]$.
 - d. Detector = peak.
 - e. Sweep time = auto couple.
 - f. Trace mode = max hold.
 - g. Allow trace to fully stabilize.
- e) Add in duty cycle correction into final test result.
- f) Duty cycle correction is calculated as below:
 $10 \log (1/x)$
- g) Measure every antenna port by repeat the step above for MIMO measurement.


6.2.2. Test Limits:

Normal Condition (25 ° C)
$\leq 1 \text{ Watt}(30 \text{ dBm})$

6.2.3. Test Data:


802.11b

Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11b	DSSS	DBPSK	1	2412	12.412	Pass
802.11b	DSSS	DBPSK	1	2437	12.995	Pass
802.11b	DSSS	DBPSK	1	2462	13.486	Pass

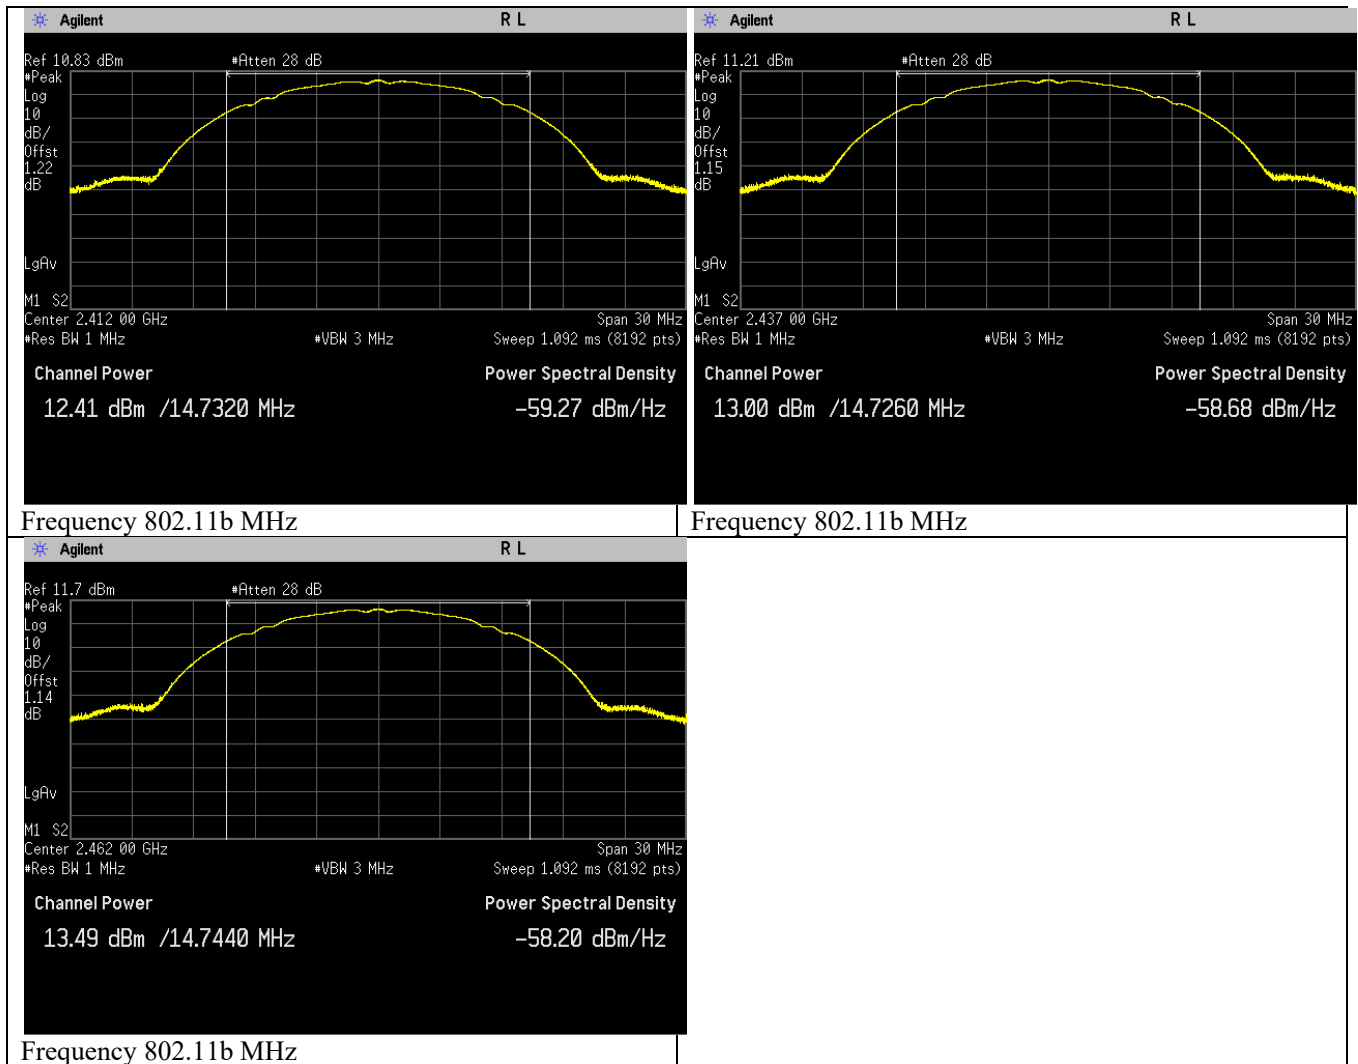


802.11g

Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11g	OFDM	BPSK	6	2412	13.873	Pass
802.11g	OFDM	BPSK	6	2437	14.387	Pass
802.11g	OFDM	BPSK	6	2462	14.545	Pass

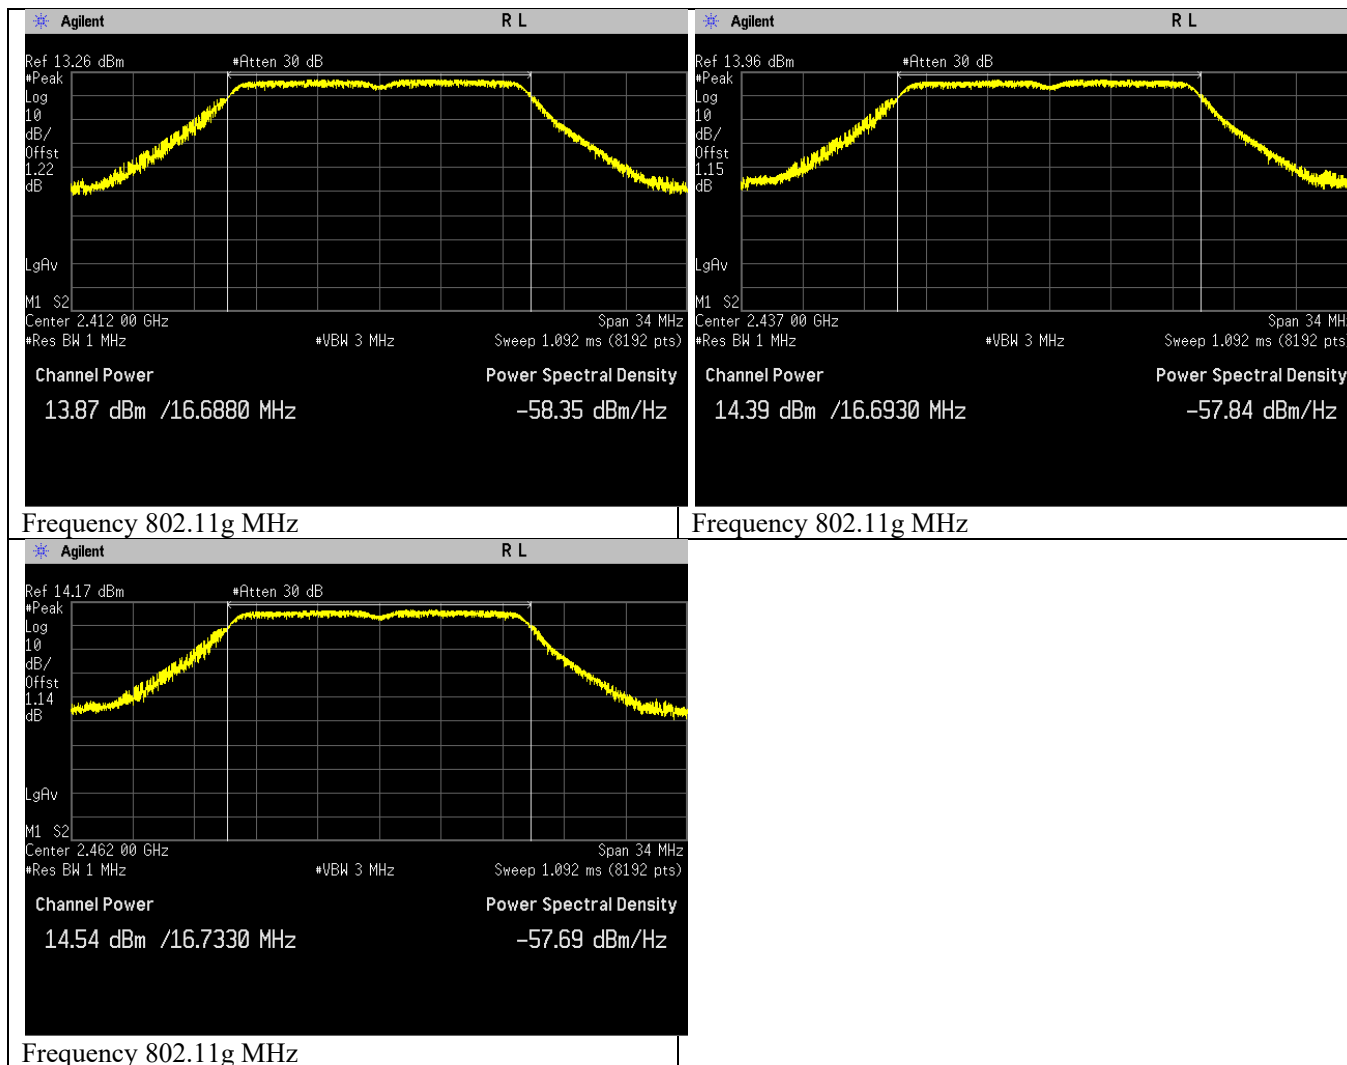


802.11n (HT20)


Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11n	OFDM	BPSK	6.5	2412	12.682	Pass
802.11n	OFDM	BPSK	6.5	2437	13.211	Pass
802.11n	OFDM	BPSK	6.5	2462	13.396	Pass

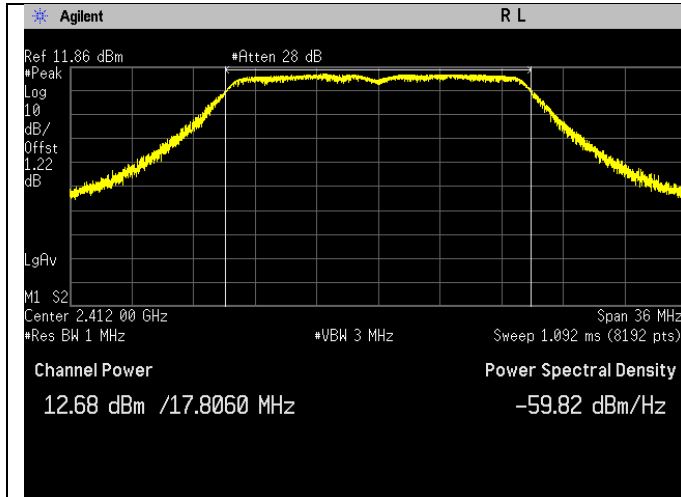

Frequency 802.11n MHz

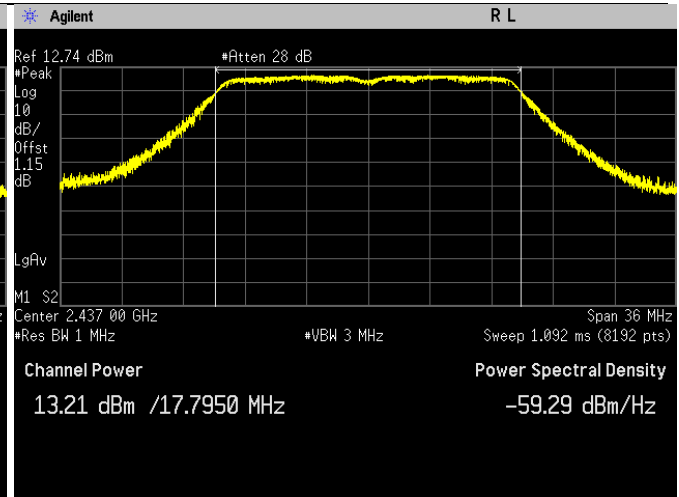


Frequency 802.11n MHz

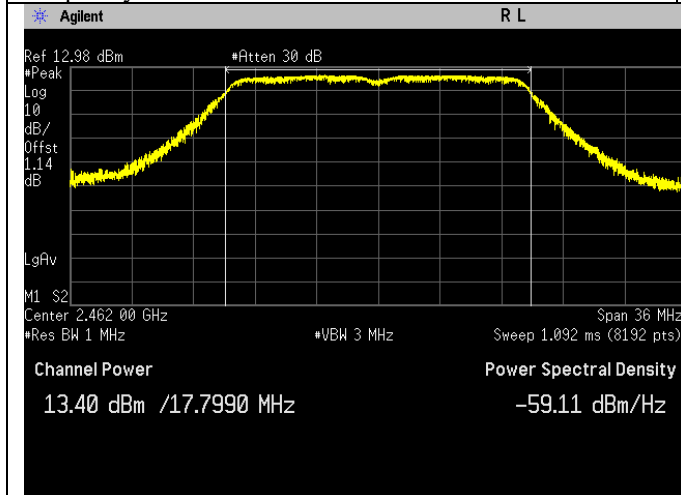


Frequency 802.11n MHz

802.11n (HT40)


Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Output Power (dBm)	Status
802.11n	OFDM	BPSK	13.5	2422	11.909	Pass
802.11n	OFDM	BPSK	13.5	2437	12.007	Pass
802.11n	OFDM	BPSK	13.5	2452	11.834	Pass

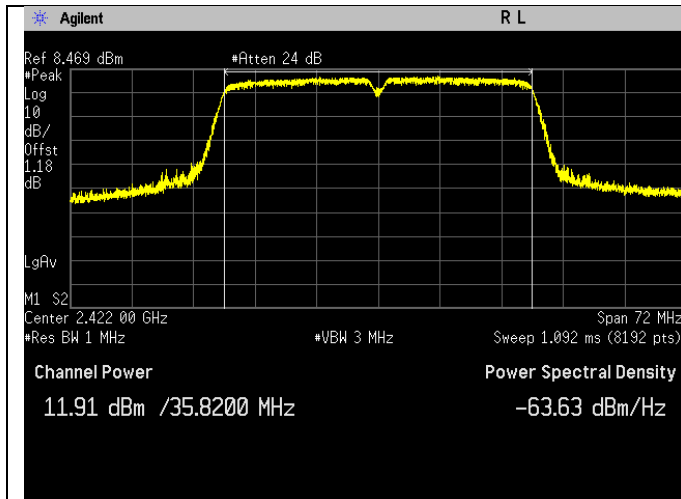

Frequency 802.11n MHz

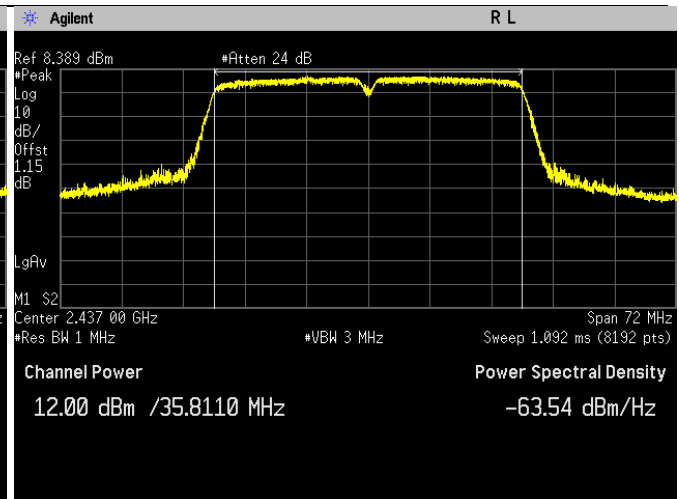


Frequency 802.11n MHz

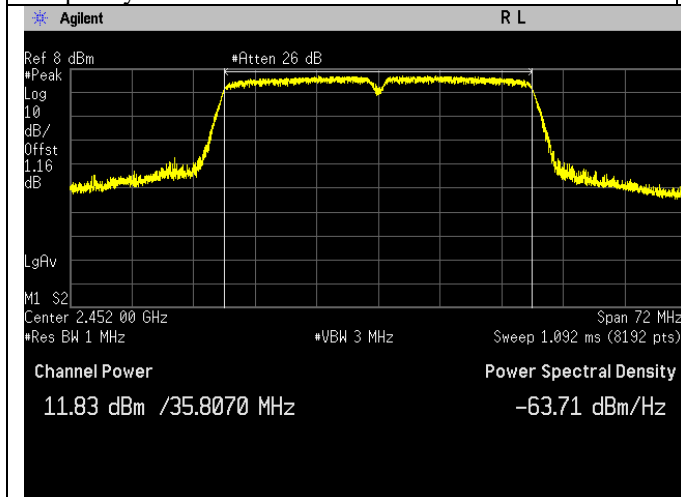

Frequency 802.11n MHz

6.3.Duty Cycle of the test signal


6.3.1. Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. Set the RBW = 10 MHz or the highest RBW available on spectrum analyzer.
 - b. Set the VBW $\geq$ RBW.
 - c. Set the span $\geq$ [1.5 $\times$ DTS bandwidth].
 - d. Detector = Peak.
 - e. Sweep time = 10ms or others that allow to measure accurate duty cycle.
 - f. Trace mode = max hold.
 - g. Allow trace to fully stabilize.
- 5) Record the duty cycle as X and save the plot.
- 6) Measure every antenna port by repeat the step above for MIMO measurement.

6.3.2. Test Data

802.11b

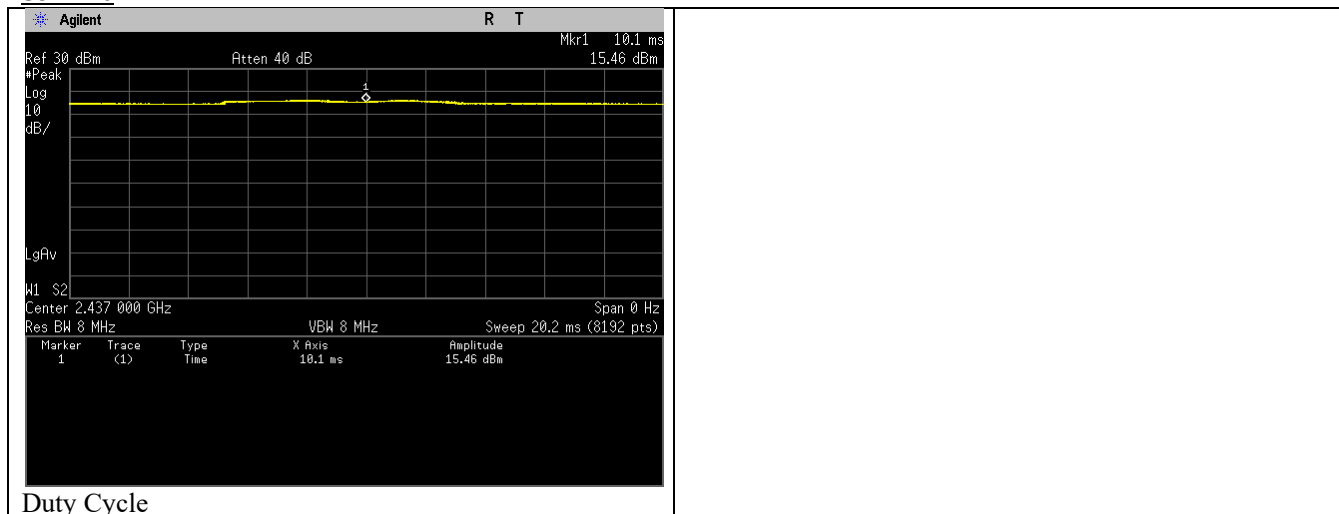


On time (ms)	1
On + Off Time (ms)	1
Duty cycle	1
Duty Cycle factor	0

*Duty cycle = On time/ On +off time

*Duty Cycle factor = $10 \cdot \log(1/\text{Duty Cycle})$

802.11g

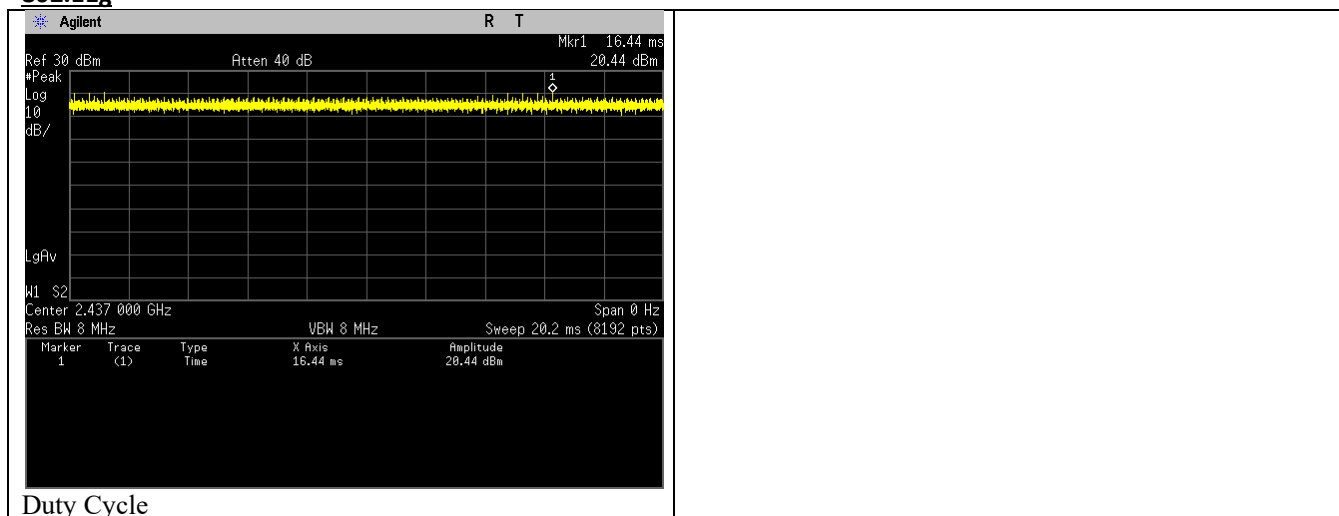


On time (ms)	1
On + Off Time (ms)	1
Duty cycle	1
Duty Cycle factor	0

*Duty cycle = On time/ On +off time

*Duty Cycle factor = $10 \cdot \log(1/\text{Duty Cycle})$

802.11n (HT20)

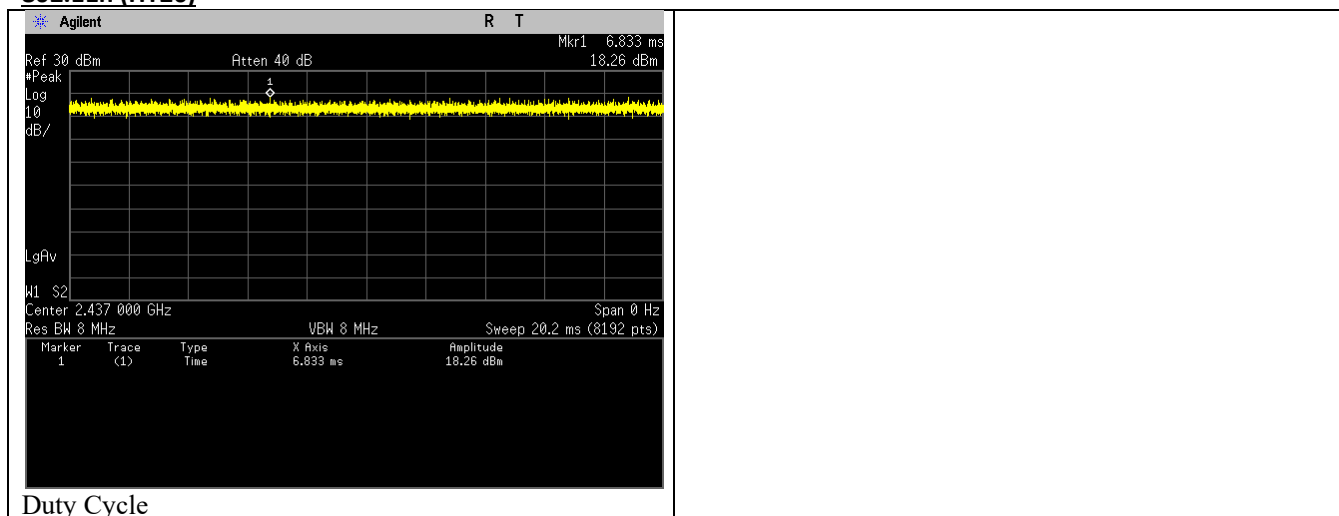


On time (ms)	1
On + Off Time (ms)	1
Duty cycle	1
Duty Cycle factor	0

*Duty cycle = On time/ On +off time

*Duty Cycle factor = $10 \cdot \log(1/\text{Duty Cycle})$

802.11n (HT40)

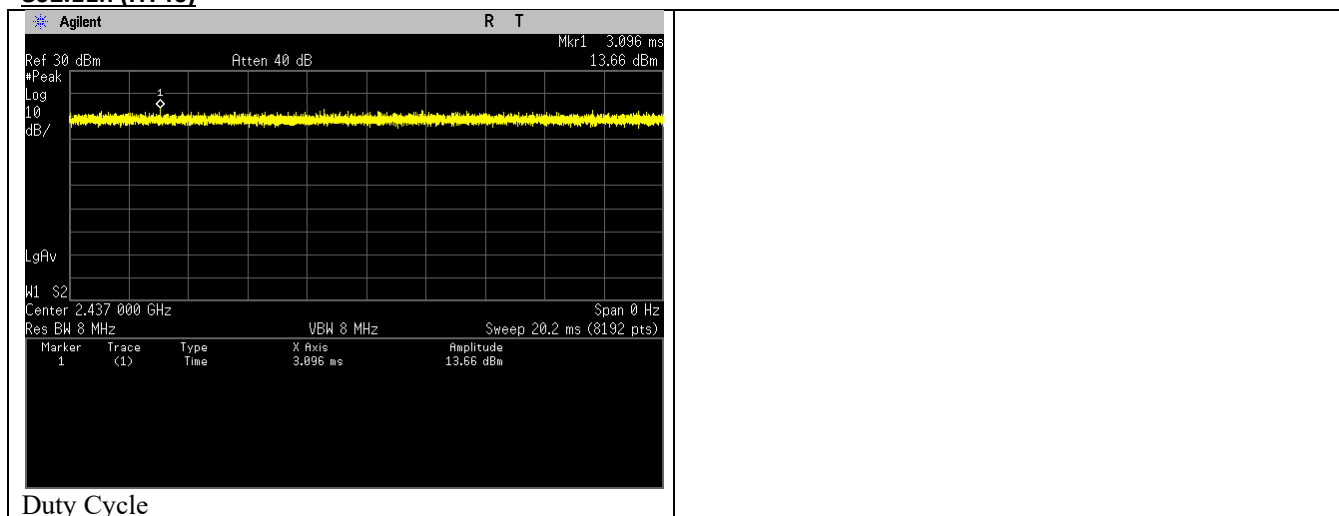


On time (ms)	1
On + Off Time (ms)	1
Duty cycle	1
Duty Cycle factor	0

*Duty cycle = On time/ On +off time

*Duty Cycle factor = $10 \cdot \log(1/\text{Duty Cycle})$

6.4. Maximum Peak Power Spectral Density

6.4.1. Test Setup



Maximum Peak

- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. Set analyzer center frequency to DTS channel center frequency.
 - b. Set the span to 1.5 times the DTS bandwidth.
 - c. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - d. Set the VBW $\geq [3 \times \text{RBW}]$.
 - e. Detector = peak.
 - f. Sweep time = auto couple.
 - g. Trace mode = max hold.
 - h. Allow trace to fully stabilize.
 - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
- e) Measure every antenna port by repeat the step above for MIMO measurement.


6.4.2. Test Limits

Normal Condition (25 ° C)
$\leq 8 \text{ dBm/3kHz}$

6.4.3. Test Result


802.11b

Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Power (dBm/3kHz)	Status
802.11b	DSSS	DBPSK	1	2412	-12.02	Pass
802.11b	DSSS	DBPSK	1	2437	-12.61	Pass
802.11b	DSSS	DBPSK	1	2462	-12.28	Pass

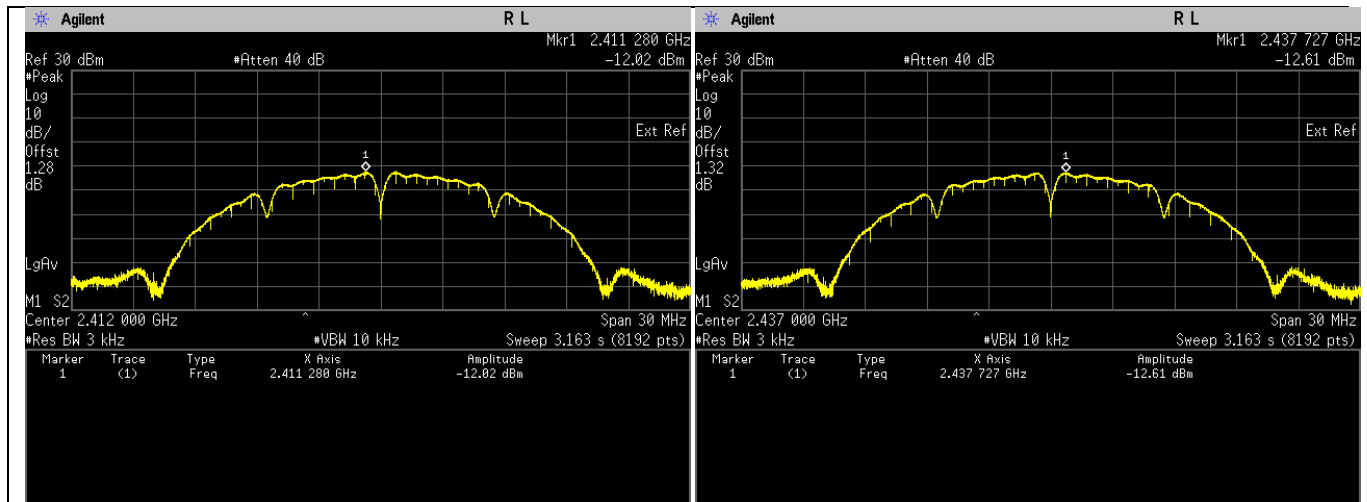

Maximum Power Spectral Density. 802.11b Frequency
 2412 MHz


Maximum Power Spectral Density. 802.11b Frequency
 2437 MHz

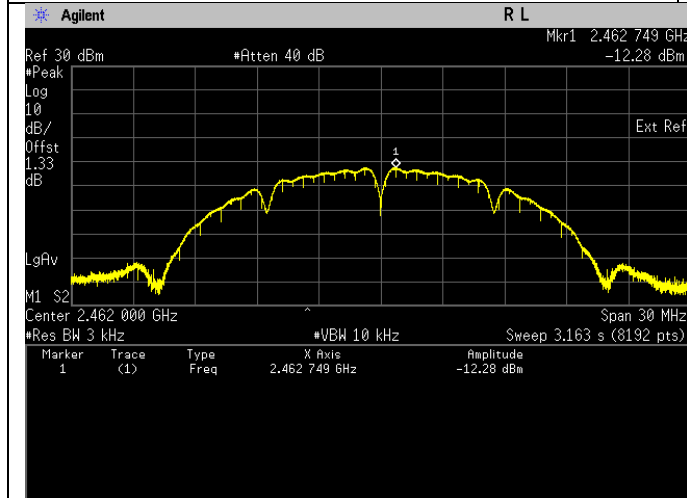

Maximum Power Spectral Density. 802.11b Frequency
 2462 MHz


802.11g

Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Power (dBm/3kHz)	Status
802.11g	OFDM	BPSK	6	2412	-13.73	Pass
802.11g	OFDM	BPSK	6	2437	-13.78	Pass
802.11g	OFDM	BPSK	6	2462	-14.29	Pass

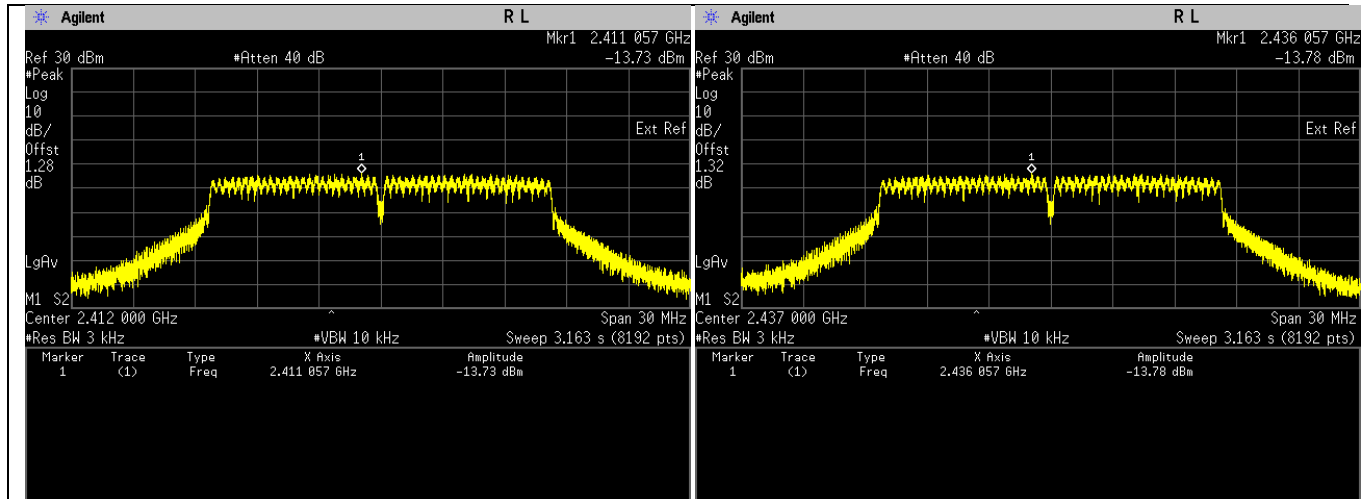

Maximum Power Spectral Density. 802.11g Frequency 2412 MHz


Maximum Power Spectral Density. 802.11g Frequency 2437 MHz

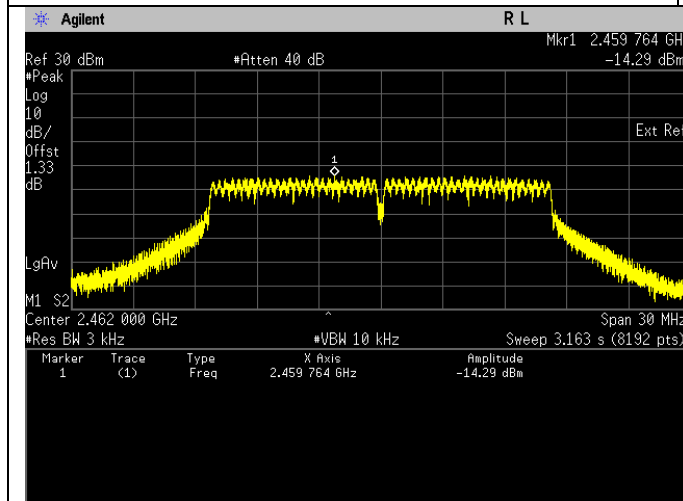

Maximum Power Spectral Density. 802.11g Frequency 2462 MHz


802.11n (HT20)

Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Power (dBm/3kHz)	Status
802.11n	OFDM	BPSK	6.5	2412	-14.28	Pass
802.11n	OFDM	BPSK	6.5	2437	-14.23	Pass
802.11n	OFDM	BPSK	6.5	2462	-14.51	Pass

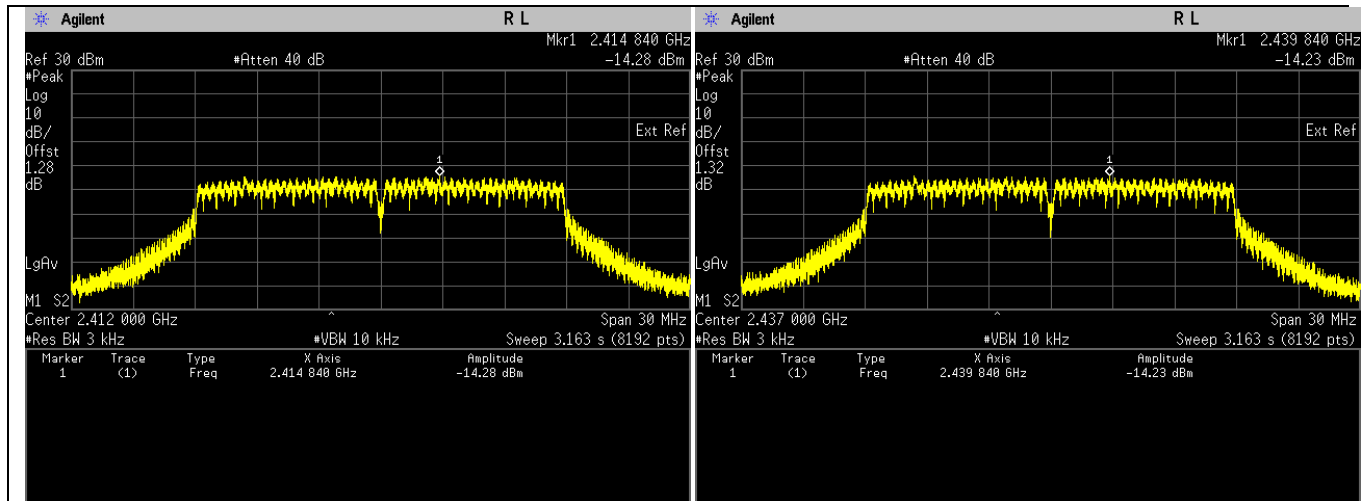

Maximum Power Spectral Density. 802.11n Frequency 2412 MHz


Maximum Power Spectral Density. 802.11n Frequency 2437 MHz

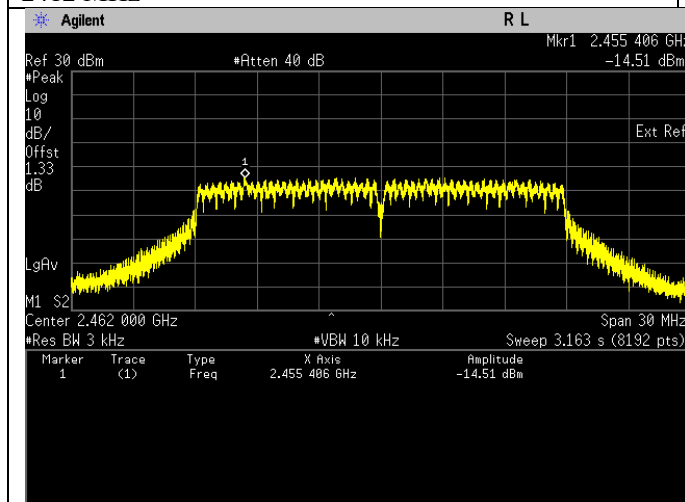

Maximum Power Spectral Density. 802.11n Frequency 2462 MHz


802.11n (HT40)

Test Conditions				Test Frequency	Results	
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Power (dBm/3kHz)	Status
802.11n	OFDM	BPSK	13.5	2422	-16.89	Pass
802.11n	OFDM	BPSK	13.5	2437	-17.89	Pass
802.11n	OFDM	BPSK	13.5	2452	-15.72	Pass

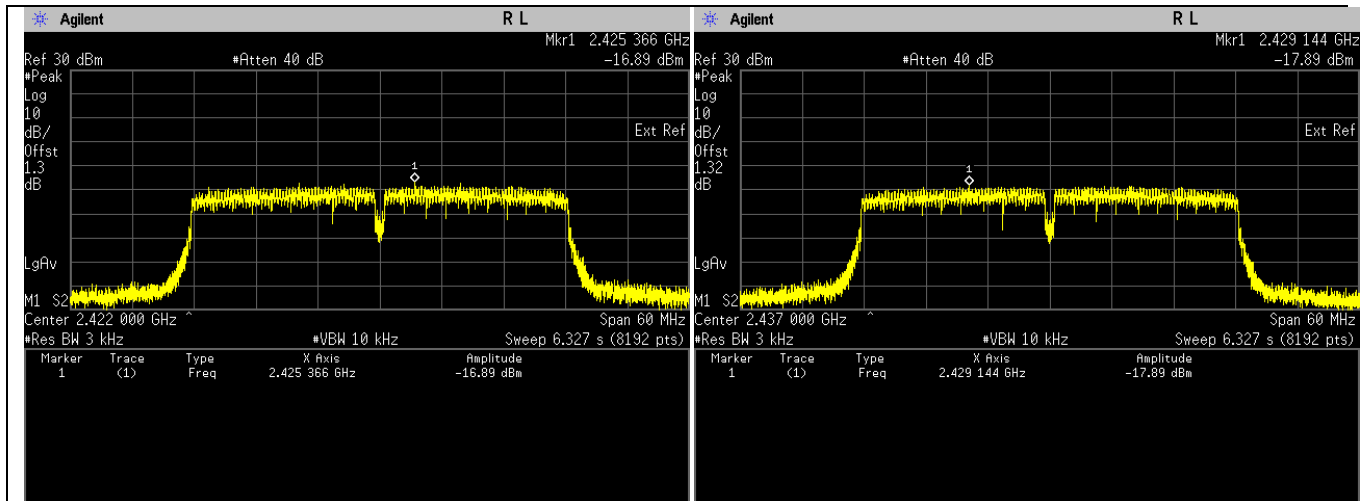

Maximum Power Spectral Density. 802.11n Frequency
 2422 MHz


Maximum Power Spectral Density. 802.11n Frequency
 2437 MHz

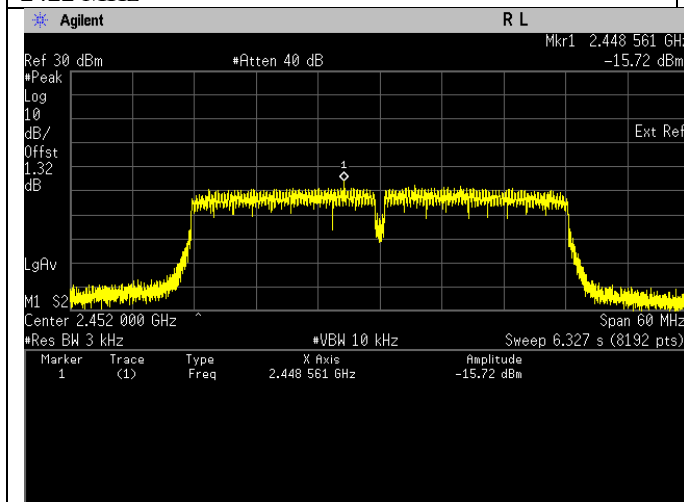

Maximum Power Spectral Density. 802.11n Frequency
 2452 MHz

6.5. Conducted Spurious Emission

6.5.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission and scan up to 10th harmonic.
- f) Measure every antenna port by repeat the step above for MIMO measurement.


6.5.2. Test Limits:

Normal Condition (25 ° C)
Shall be at least 20 dB below peak (max) power.


6.5.3. Test Result

802.11b


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11b	DSSS	DBPSK	1	2412	24900.00	-40.28	Pass
					24575.00	-41.18	Pass
					24600.00	-41.29	Pass
802.11b	DSSS	DBPSK	1	2437	24933.00	-40.09	Pass
					24217.00	-40.96	Pass
					24783.00	-41.37	Pass
802.11b	DSSS	DBPSK	1	2462	24900.00	-40.56	Pass
					24200.00	-40.99	Pass
					24217.00	-41.09	Pass

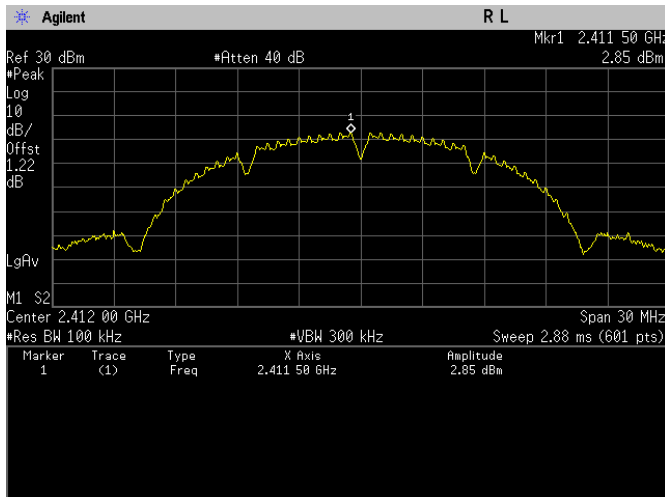


Conducted Emissions(Peak). 802.11b, Frequency 2412 MHz Reference Level

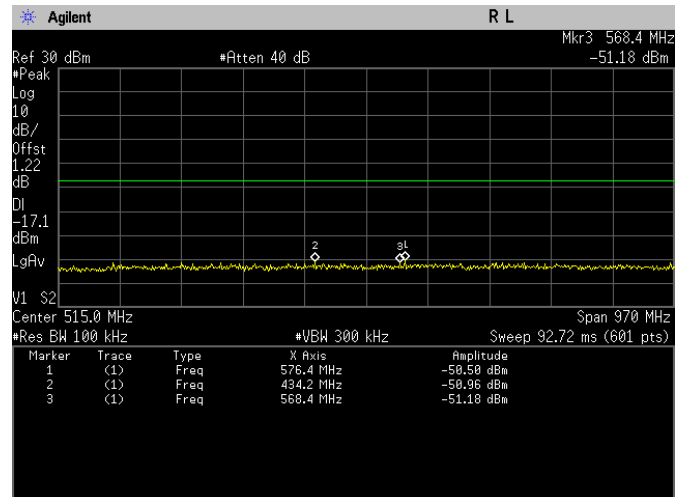


Conducted Emissions(Peak). 802.11b, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz

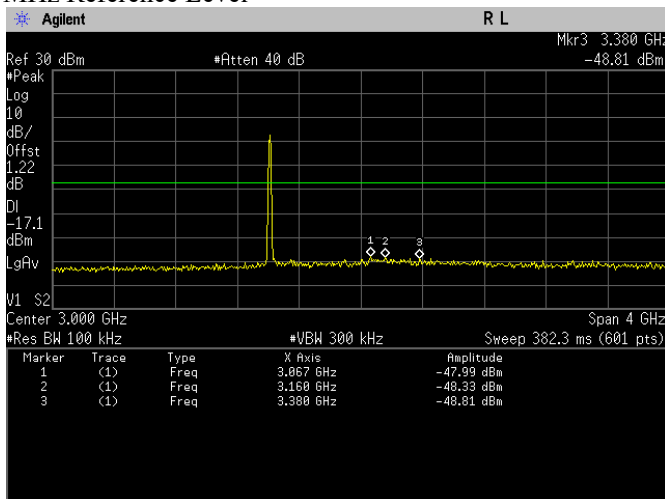


Conducted Emissions(Peak). 802.11b, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz

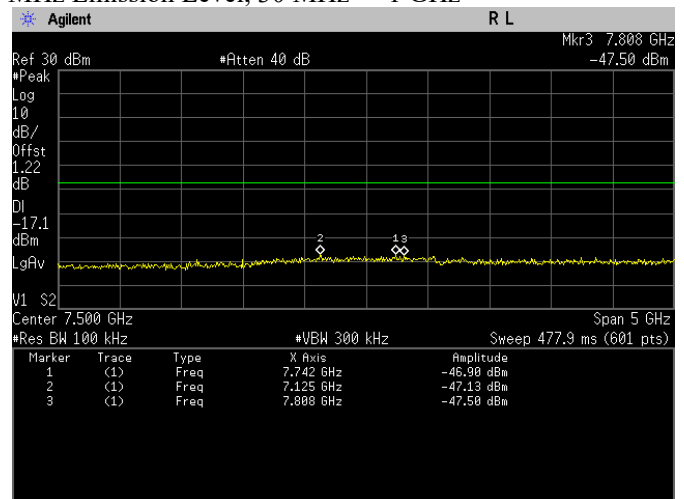


Conducted Emissions(Peak). 802.11b, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz

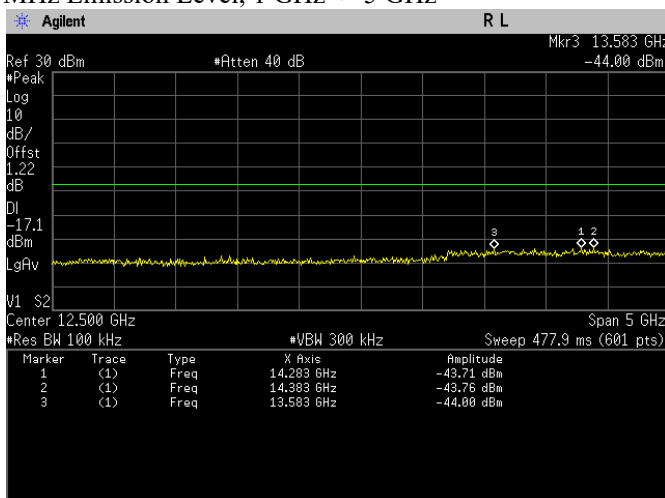


Conducted Emissions(Peak). 802.11b, Frequency 2412 MHz Emission Level, 10 GHz -> 15 GHz

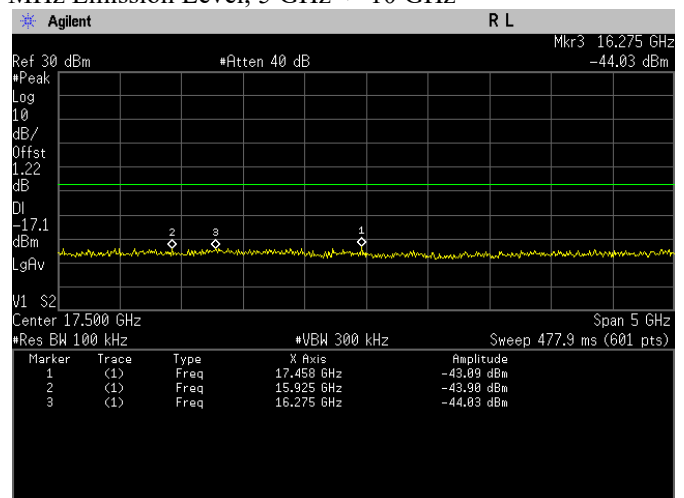


Conducted Emissions(Peak). 802.11b, Frequency 2412 MHz Emission Level, 15 GHz -> 20 GHz

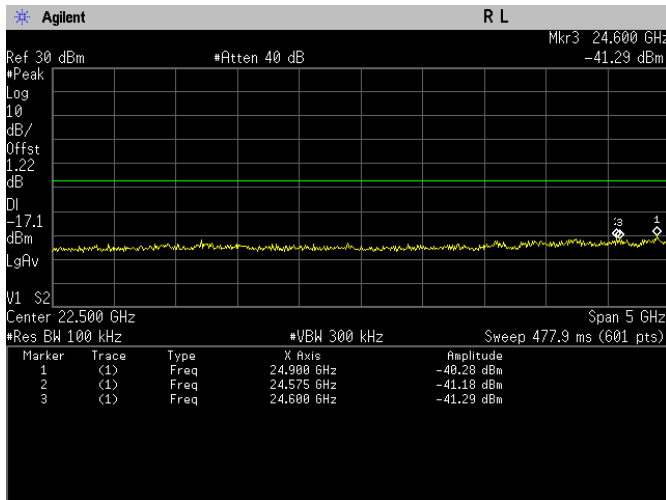


Conducted Emissions(Peak). 802.11b, Frequency 2412 MHz Emission Level, 20 GHz -> 25 GHz

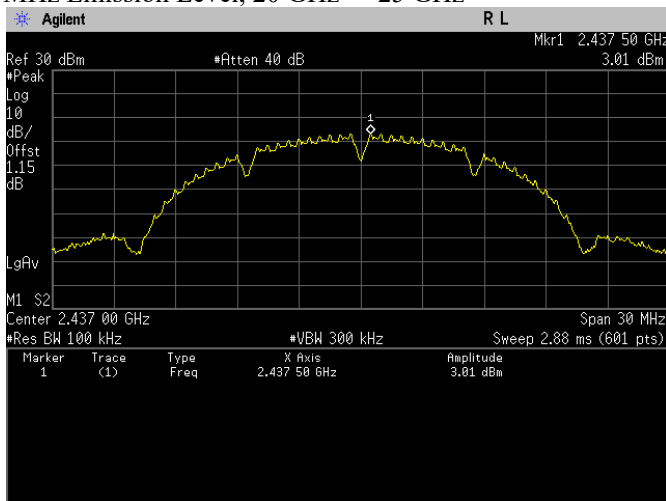


Conducted Emissions(Peak). 802.11b, Frequency 2437 MHz Reference Level

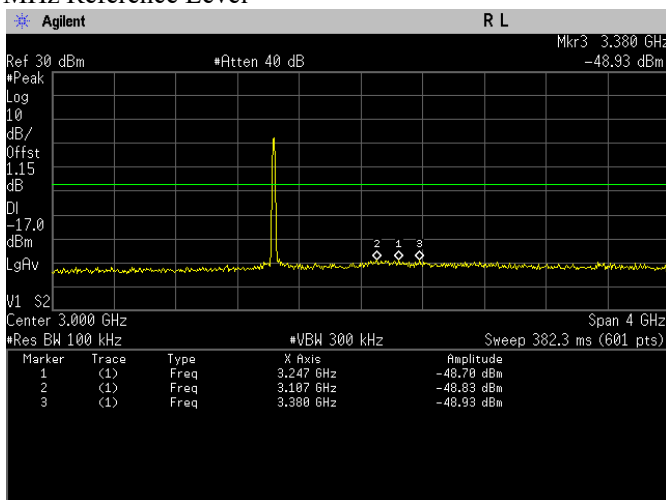


Conducted Emissions(Peak). 802.11b, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz

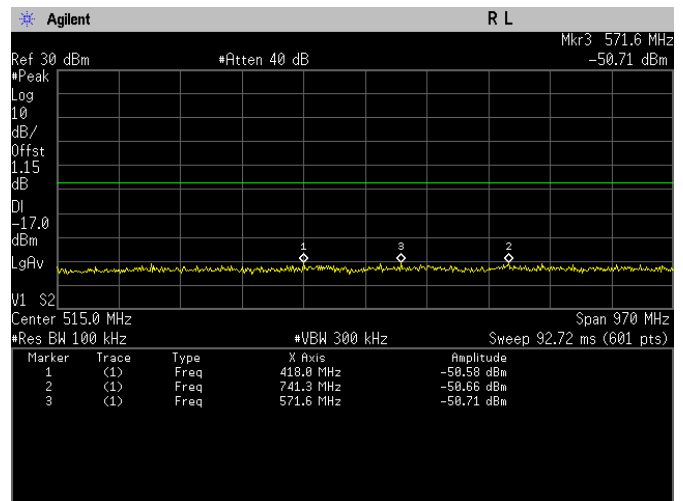


Conducted Emissions(Peak). 802.11b, Frequency 2437 MHz Emission Level, 30 MHz -> 1 GHz

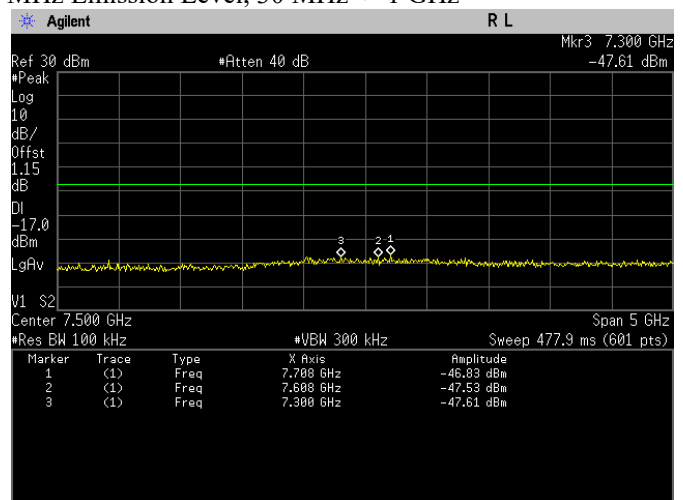


Conducted Emissions(Peak). 802.11b, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz

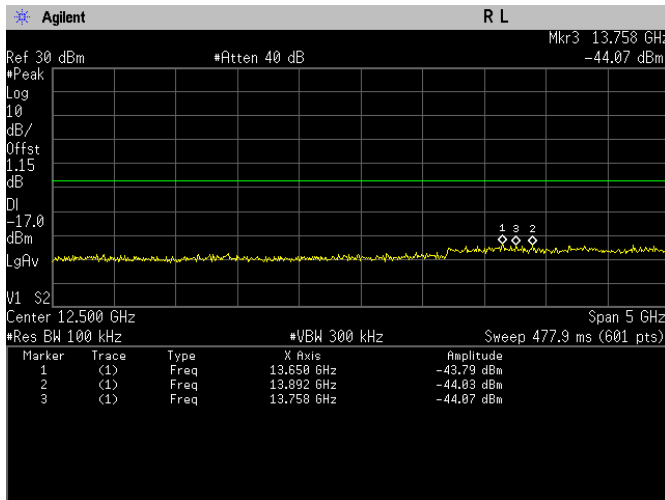


Conducted Emissions(Peak). 802.11b, Frequency 2437
Emission Level, 10 GHz -> 15 GHz

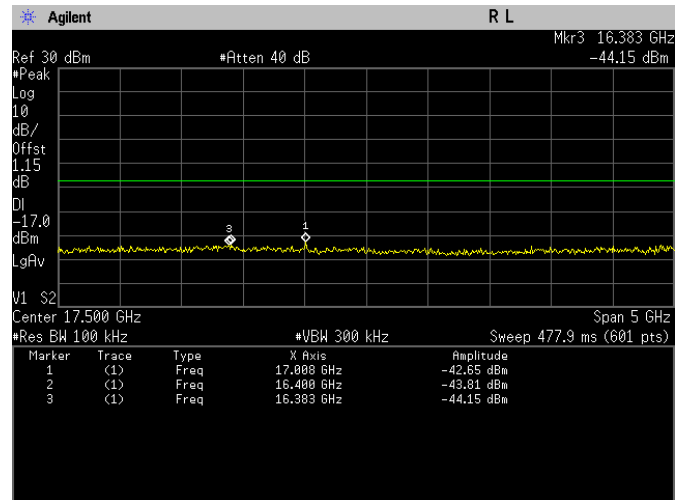


Conducted Emissions(Peak). 802.11b, Frequency 2437
MHz Emission Level, 15 GHz -> 20 GHz

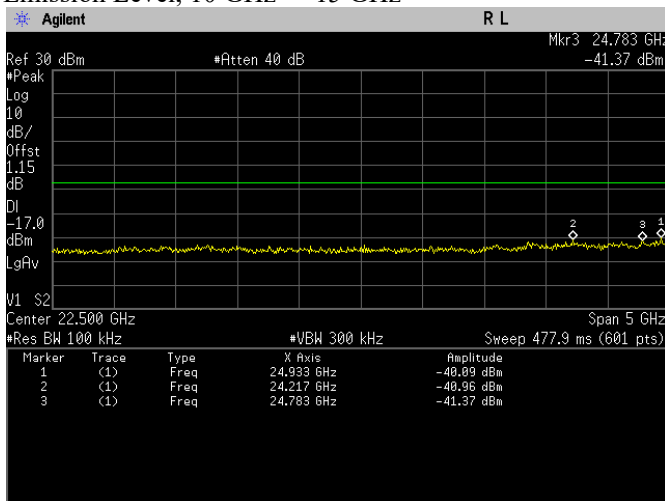


Conducted Emissions(Peak). 802.11b, Frequency 2437
MHz Emission Level, 20 GHz -> 25 GHz

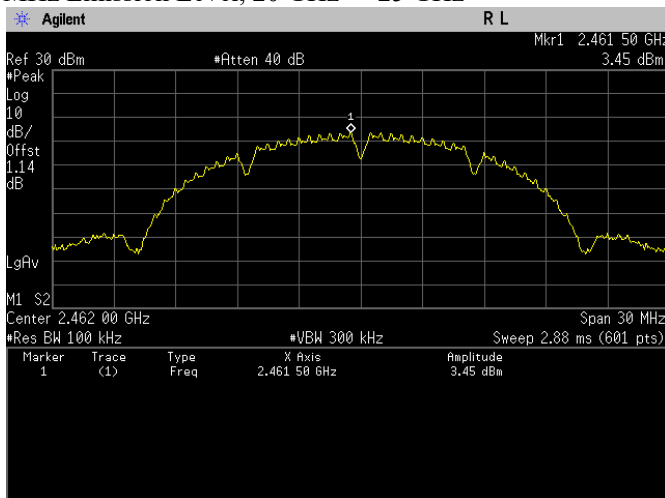


Conducted Emissions(Peak). 802.11b, Frequency 2462
MHz Reference Level

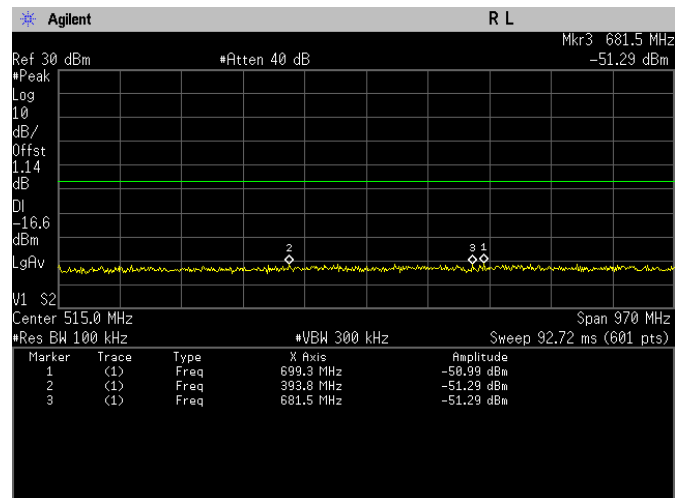


Conducted Emissions(Peak). 802.11b, Frequency 2462
MHz Emission Level, 30 MHz -> 1 GHz

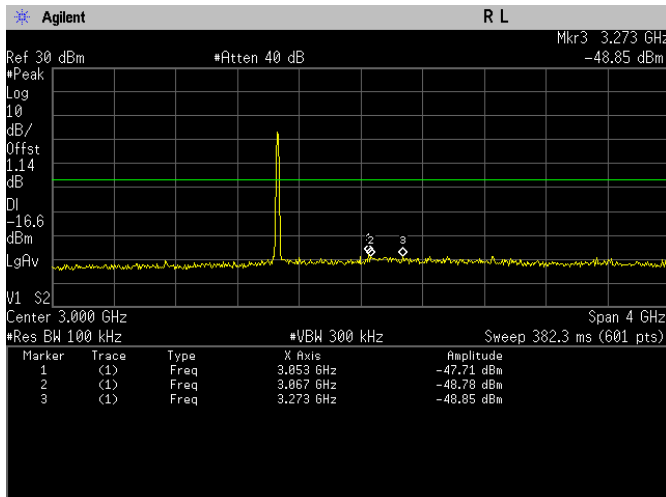


Conducted Emissions(Peak). 802.11b, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz

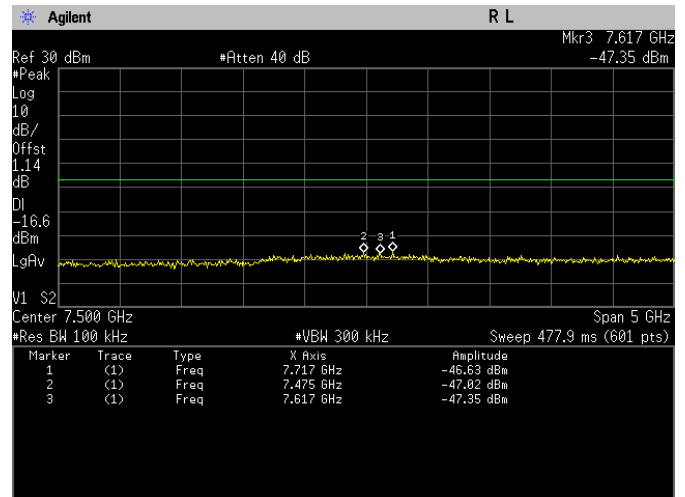


Conducted Emissions(Peak). 802.11b, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz

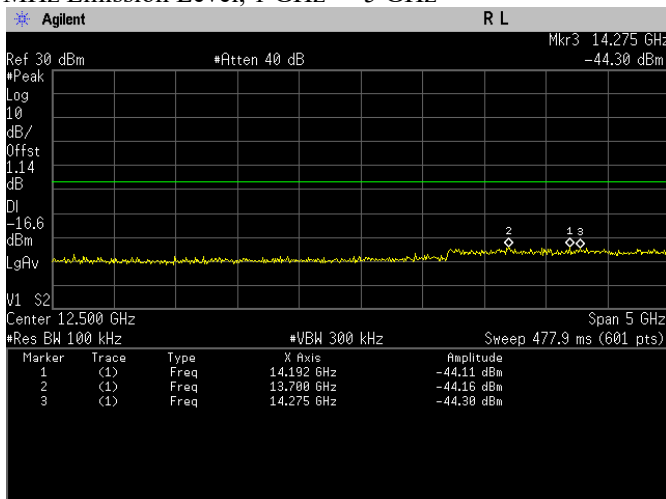

Conducted Emissions(Peak). 802.11b, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz

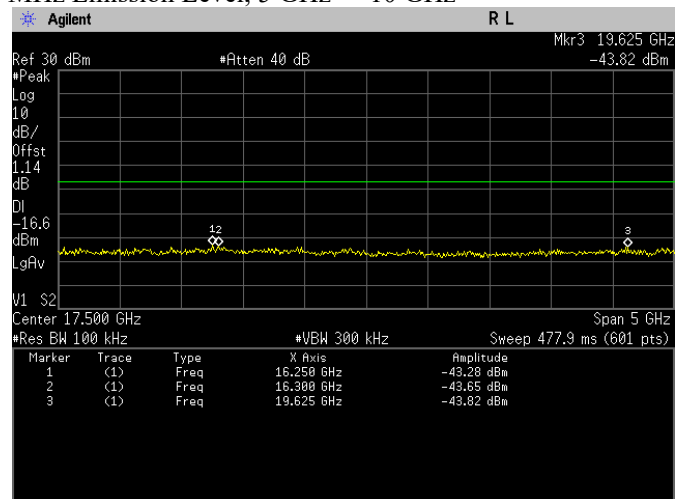


Conducted Emissions(Peak). 802.11b, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz

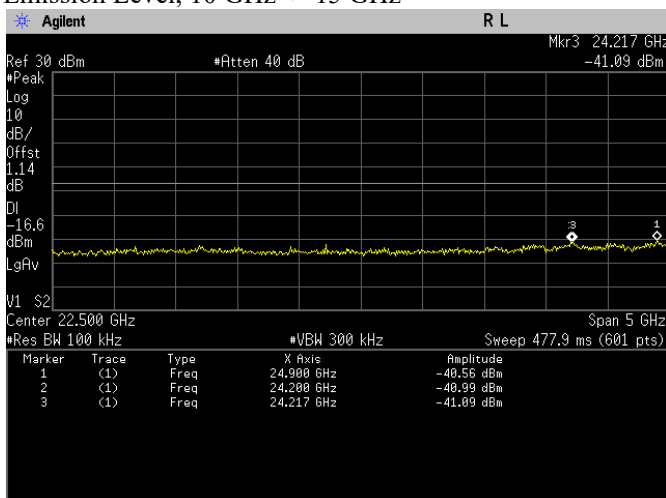


Conducted Emissions(Peak). 802.11b, Frequency 2462 MHz Emission Level, 20 GHz -> 25 GHz

802.11g


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11g	OFDM	BPSK	6	2412	24883.00	-40.51	Pass
					24950.00	-40.73	Pass
					24608.00	-41.12	Pass
802.11g	OFDM	BPSK	6	2437	24917.00	-40.42	Pass
					24842.00	-41.14	Pass
					23900.00	-41.35	Pass
802.11g	OFDM	BPSK	6	2462	24933.00	-39.70	Pass
					24217.00	-39.76	Pass
					24858.00	-40.76	Pass

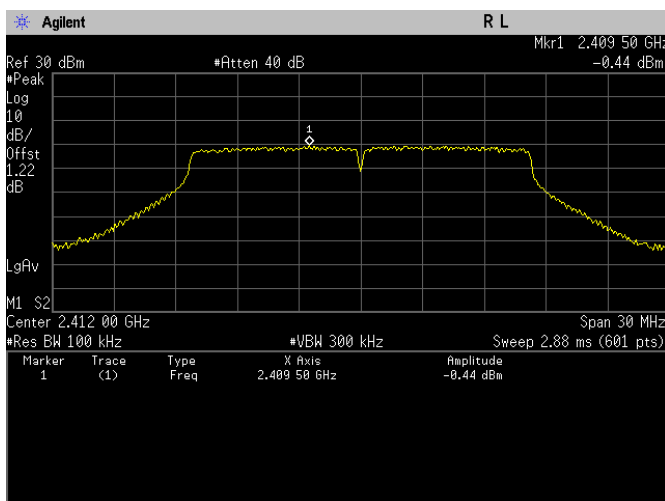


Conducted Emissions(Peak). 802.11g, Frequency 2412 MHz Reference Level

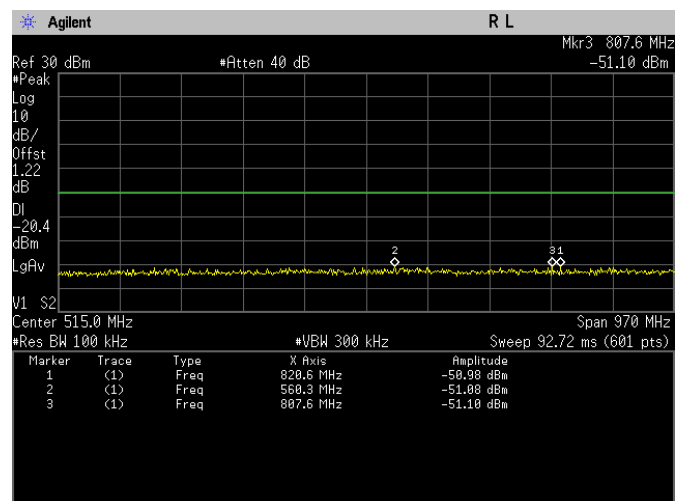


Conducted Emissions(Peak). 802.11g, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz

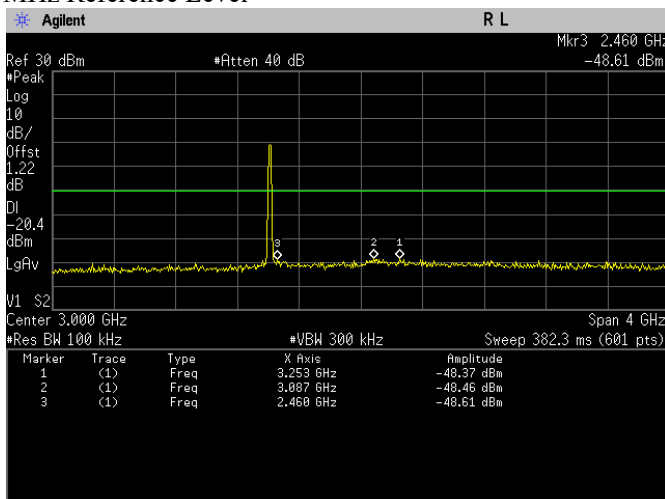


Conducted Emissions(Peak). 802.11g, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz

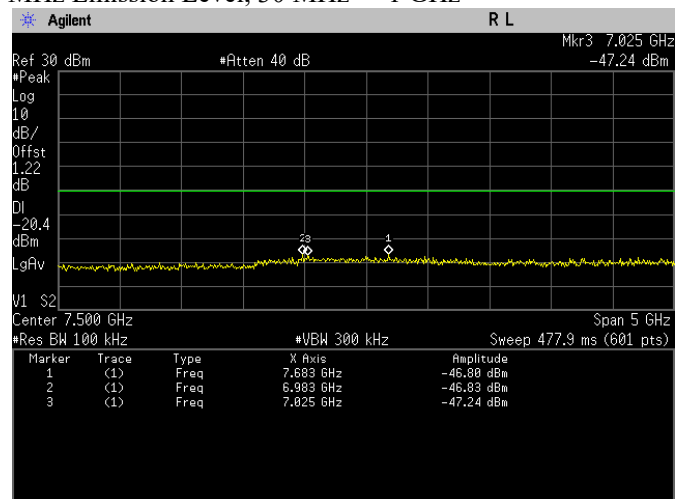


Conducted Emissions(Peak). 802.11g, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz

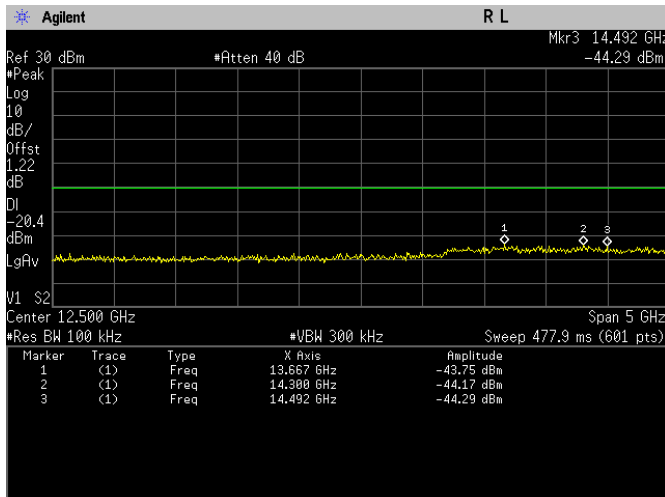


Conducted Emissions(Peak). 802.11g, Frequency 2412
 Emission Level, 10 GHz -> 15 GHz

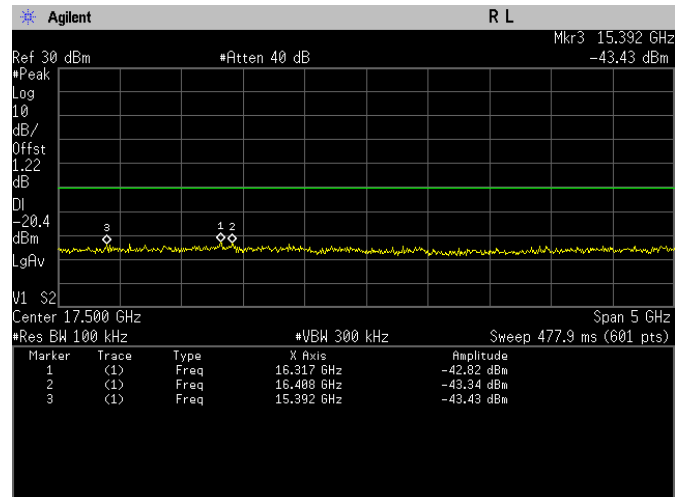


Conducted Emissions(Peak). 802.11g, Frequency 2412
 MHz Emission Level, 15 GHz -> 20 GHz

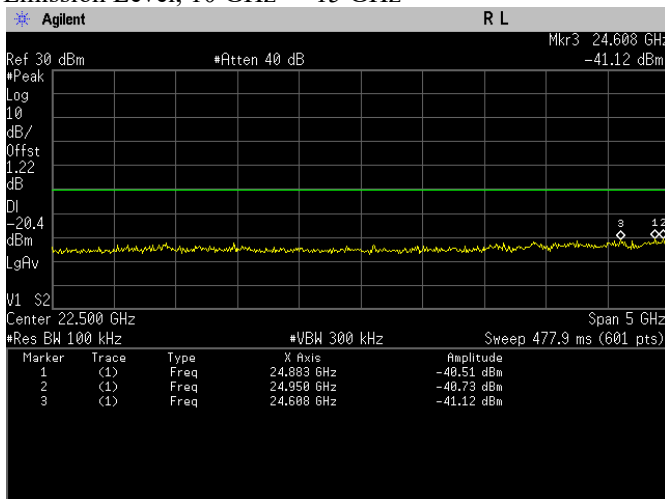


Conducted Emissions(Peak). 802.11g, Frequency 2412
 MHz Emission Level, 20 GHz -> 25 GHz

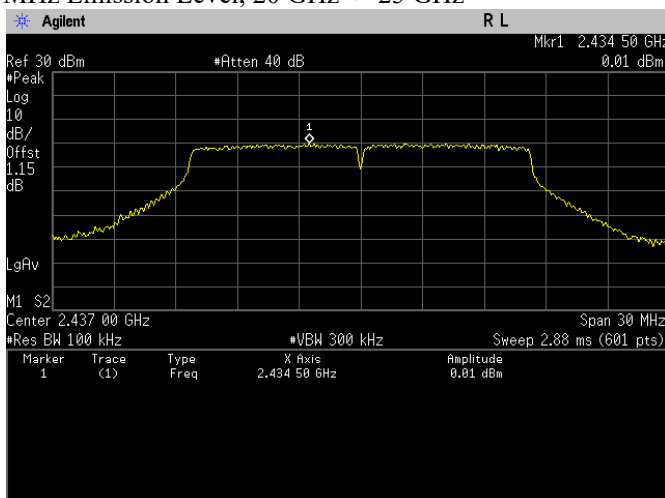


Conducted Emissions(Peak). 802.11g, Frequency 2437
 MHz Reference Level

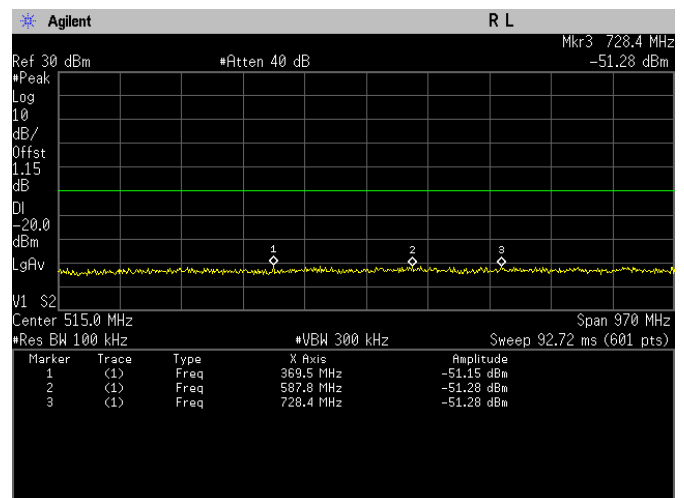


Conducted Emissions(Peak). 802.11g, Frequency 2437
 MHz Emission Level, 30 MHz -> 1 GHz

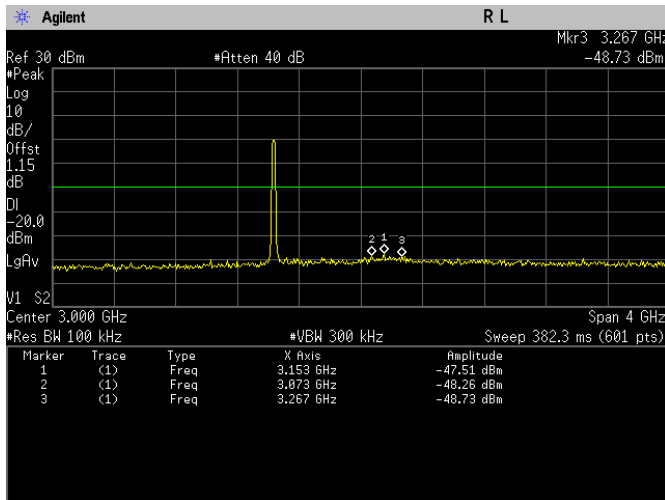


Conducted Emissions(Peak). 802.11g, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz

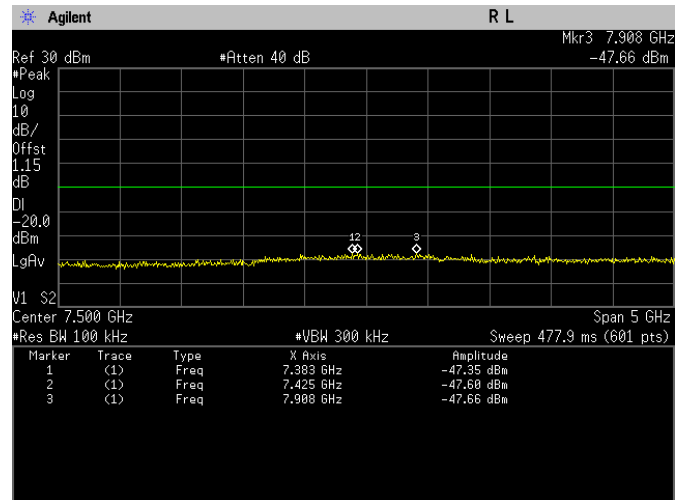


Conducted Emissions(Peak). 802.11g, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz

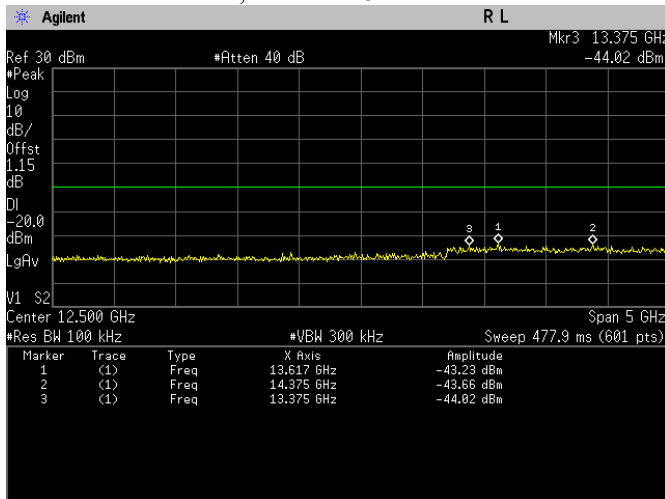


Conducted Emissions(Peak). 802.11g, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz

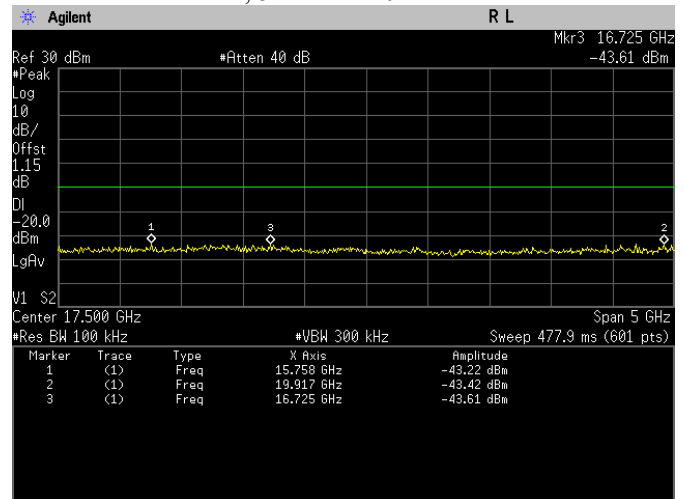


Conducted Emissions(Peak). 802.11g, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz

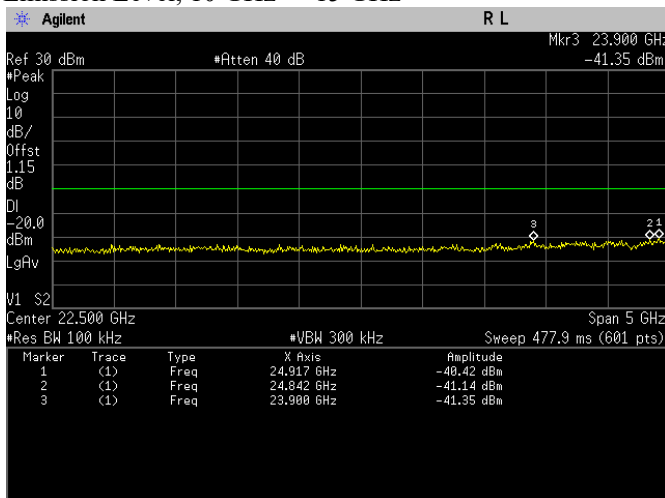


Conducted Emissions(Peak). 802.11g, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz

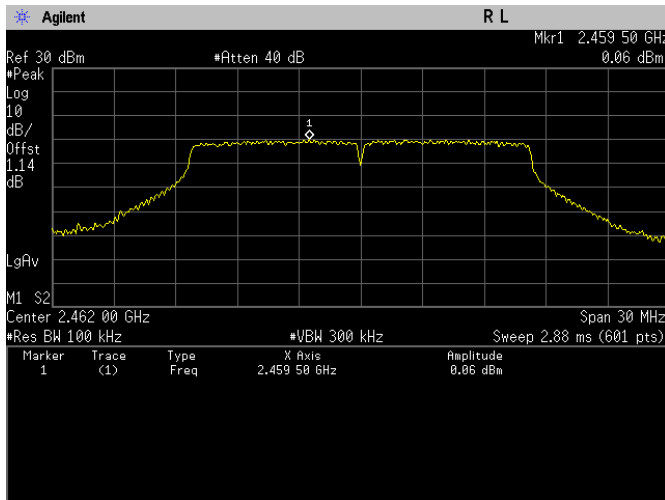


Conducted Emissions(Peak). 802.11g, Frequency 2462 MHz Reference Level

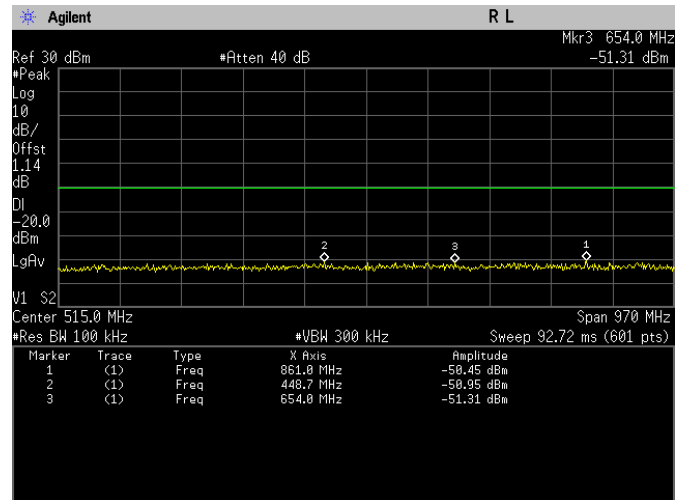


Conducted Emissions(Peak). 802.11g, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz

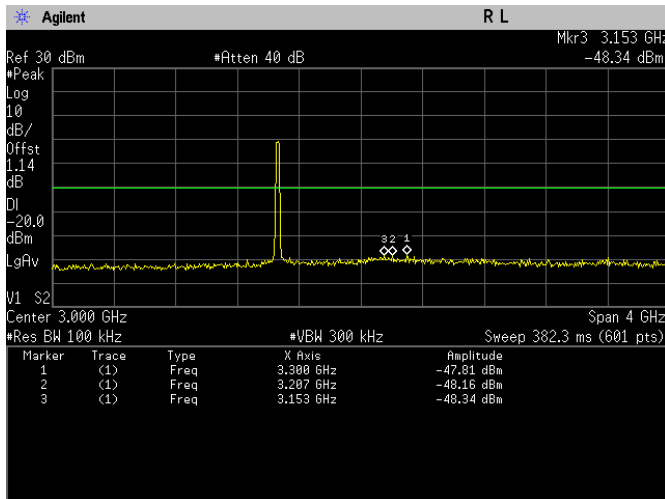


Conducted Emissions(Peak). 802.11g, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz

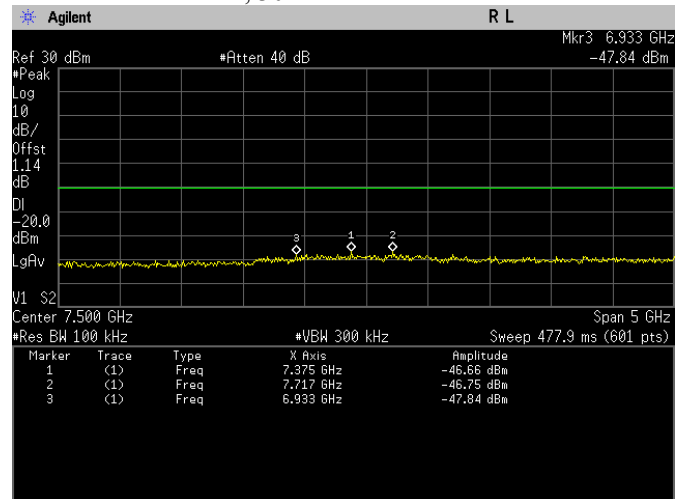


Conducted Emissions(Peak). 802.11g, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz

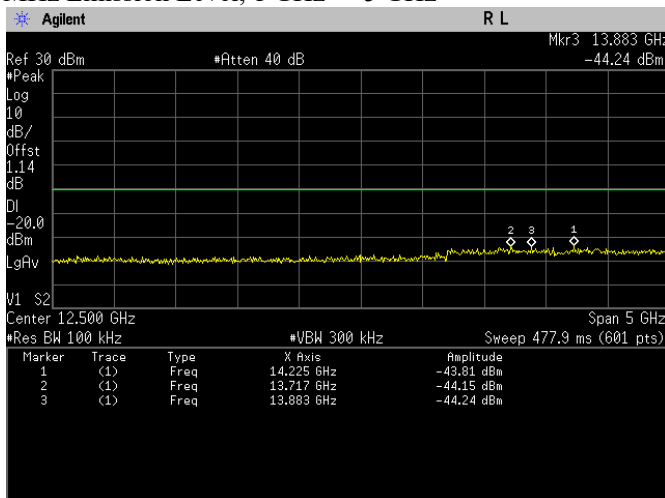

Conducted Emissions(Peak). 802.11g, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz

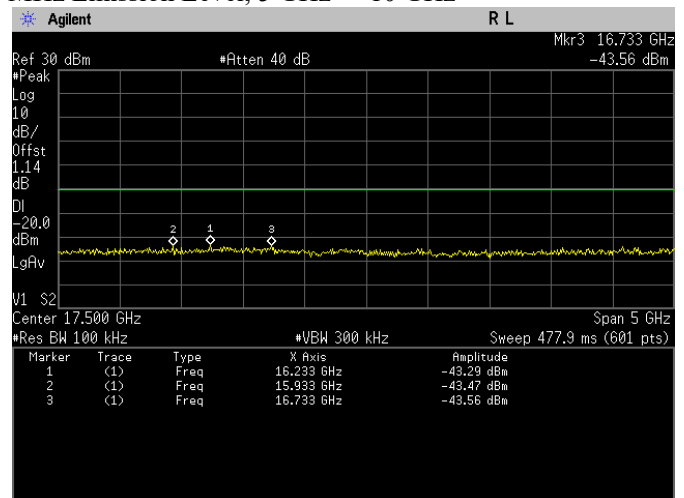


Conducted Emissions(Peak). 802.11g, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz

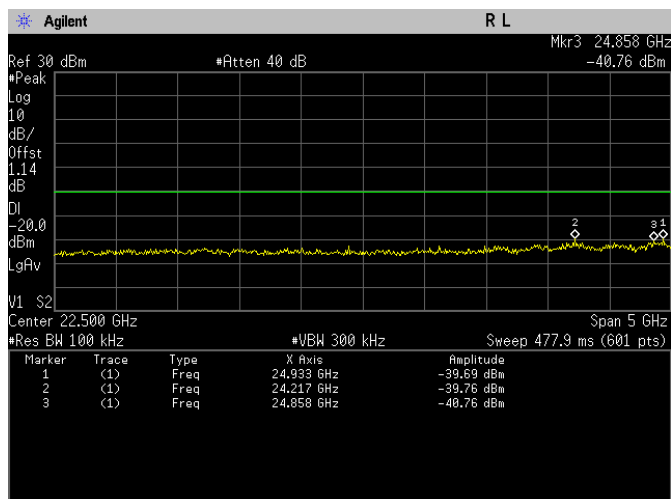


Conducted Emissions(Peak). 802.11g, Frequency 2462
 MHz Emission Level, 20 GHz -> 25 GHz

802.11n (HT20)


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11n	OFDM	BPSK	6.5	2412	24783.00	-39.58	Pass
					24858.00	-40.72	Pass
					24892.00	-40.97	Pass
802.11n	OFDM	BPSK	6.5	2437	24517.00	-40.92	Pass
					24900.00	-40.96	Pass
					24250.00	-41.40	Pass
802.11n	OFDM	BPSK	6.5	2462	24475.00	-40.98	Pass
					24942.00	-41.41	Pass
					24850.00	-41.49	Pass

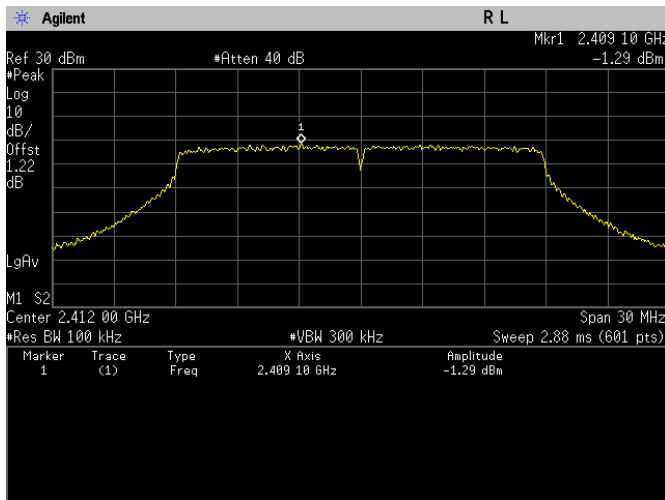


Conducted Emissions(Peak). 802.11n, Frequency 2412 MHz Reference Level

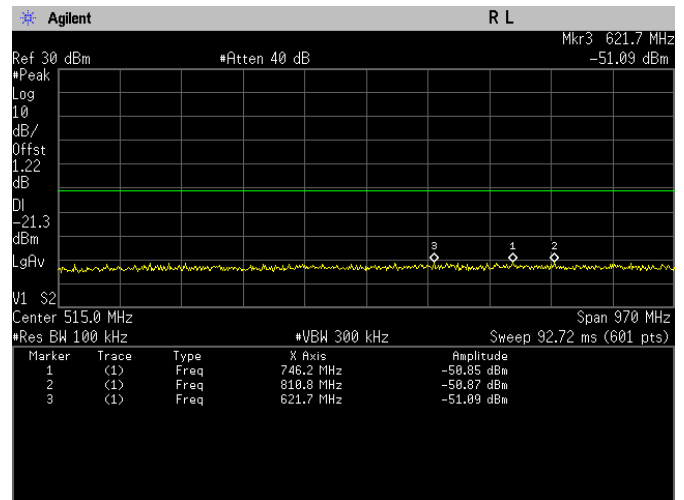


Conducted Emissions(Peak). 802.11n, Frequency 2412 MHz Emission Level, 30 MHz -> 1 GHz

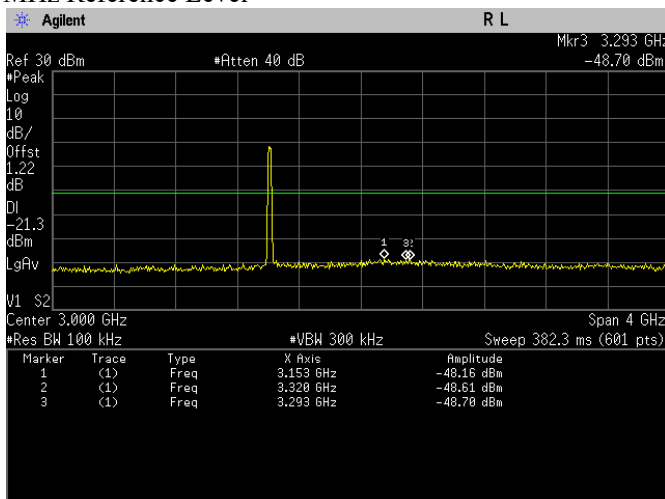


Conducted Emissions(Peak). 802.11n, Frequency 2412 MHz Emission Level, 1 GHz -> 5 GHz

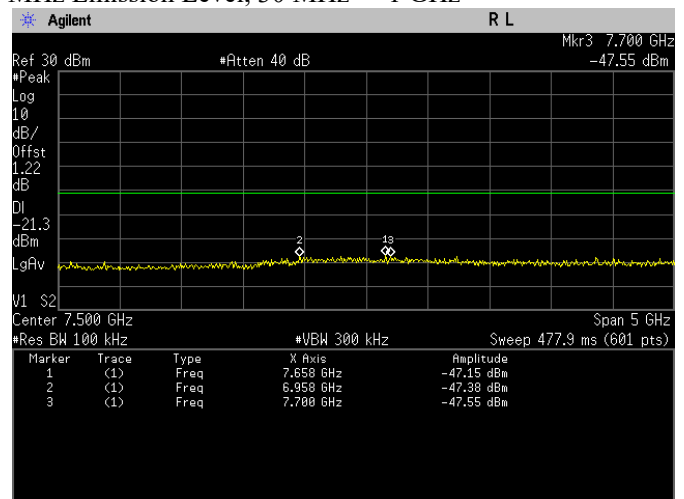


Conducted Emissions(Peak). 802.11n, Frequency 2412 MHz Emission Level, 5 GHz -> 10 GHz

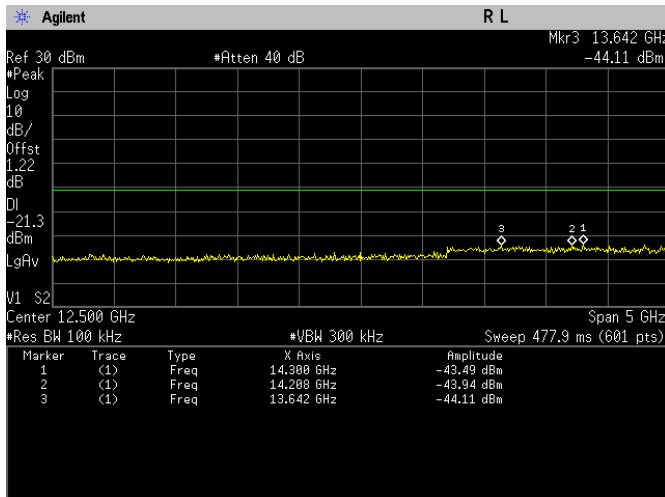


Conducted Emissions(Peak). 802.11n, Frequency 2412
Emission Level, 10 GHz -> 15 GHz

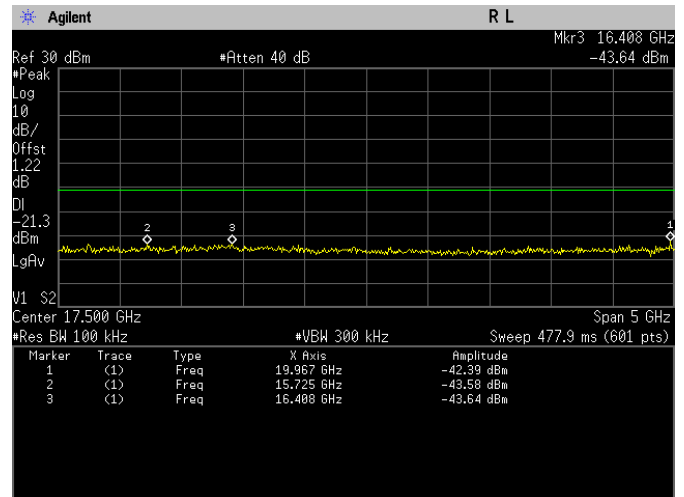


Conducted Emissions(Peak). 802.11n, Frequency 2412
MHz Emission Level, 15 GHz -> 20 GHz

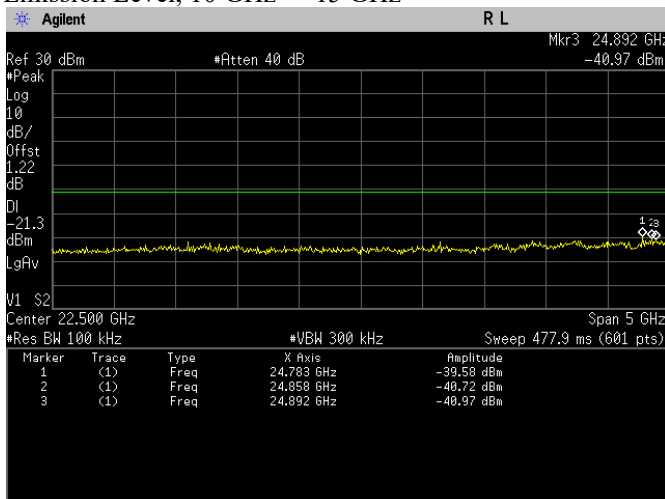


Conducted Emissions(Peak). 802.11n, Frequency 2412
MHz Emission Level, 20 GHz -> 25 GHz

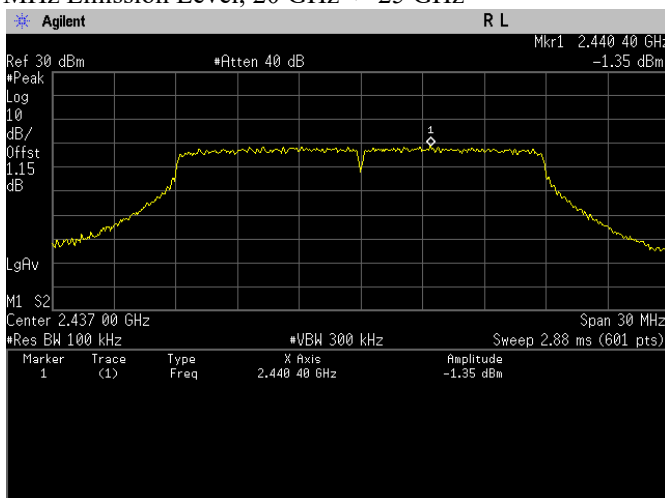


Conducted Emissions(Peak). 802.11n, Frequency 2437
MHz Reference Level

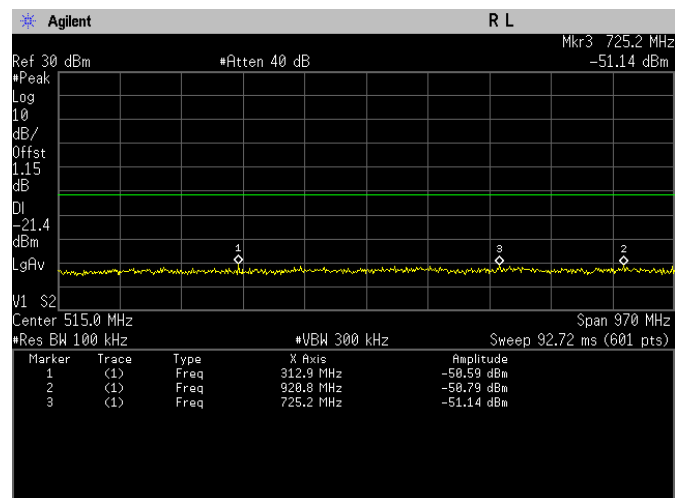


Conducted Emissions(Peak). 802.11n, Frequency 2437
MHz Emission Level, 30 MHz -> 1 GHz

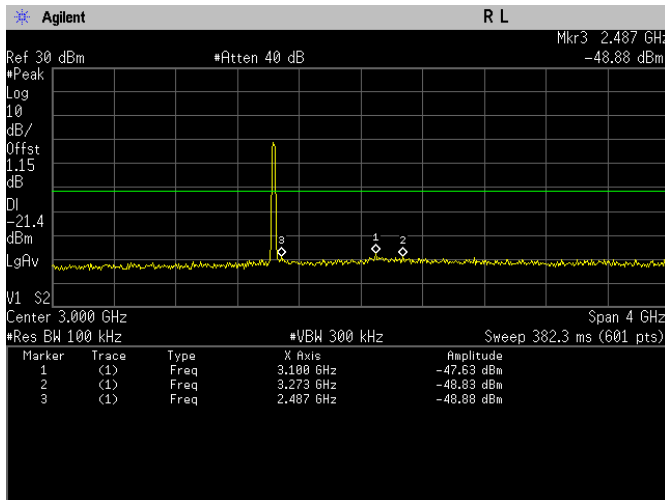


Conducted Emissions(Peak). 802.11n, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz

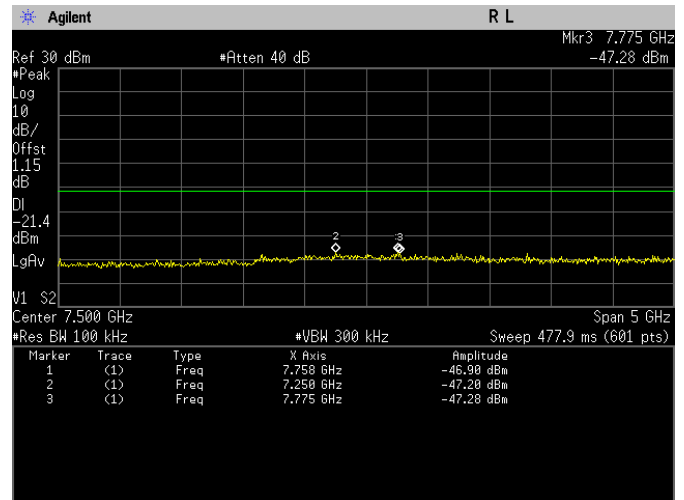


Conducted Emissions(Peak). 802.11n, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz

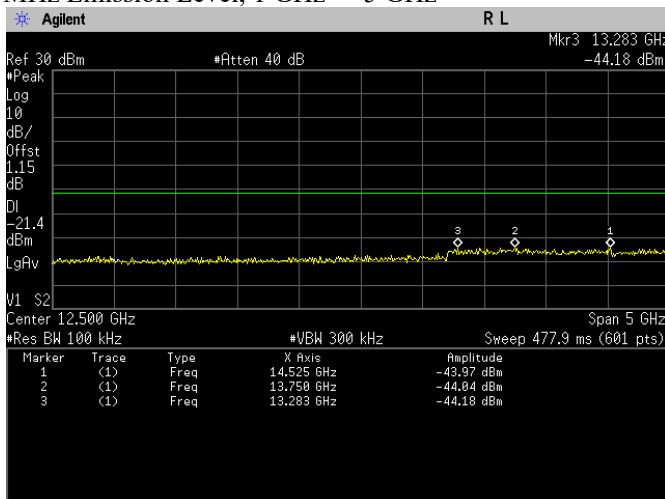


Conducted Emissions(Peak). 802.11n, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz

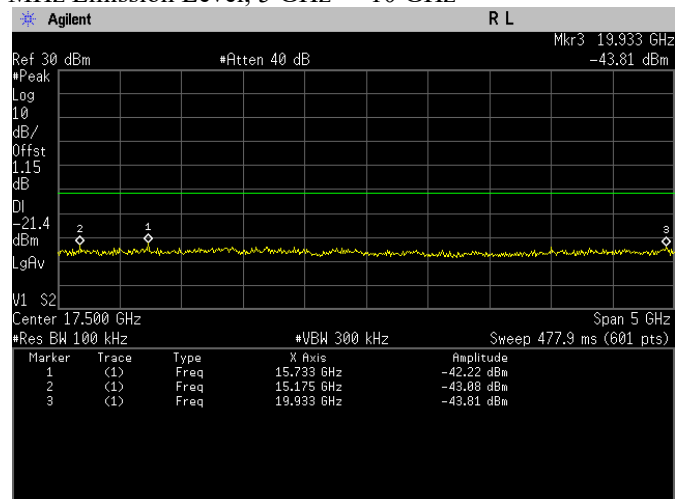


Conducted Emissions(Peak). 802.11n, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz

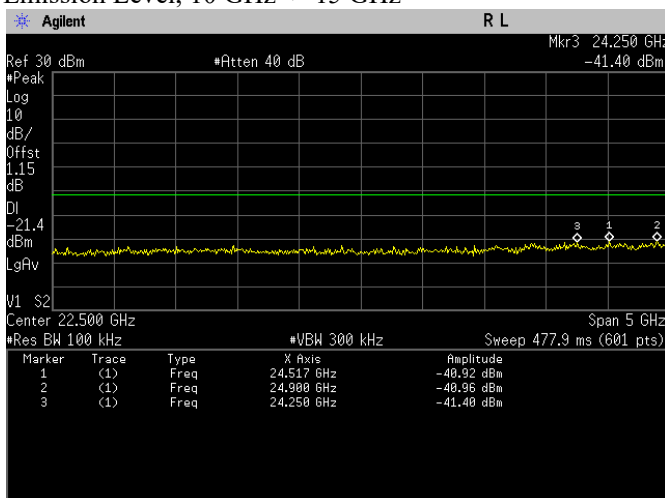


Conducted Emissions(Peak). 802.11n, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz

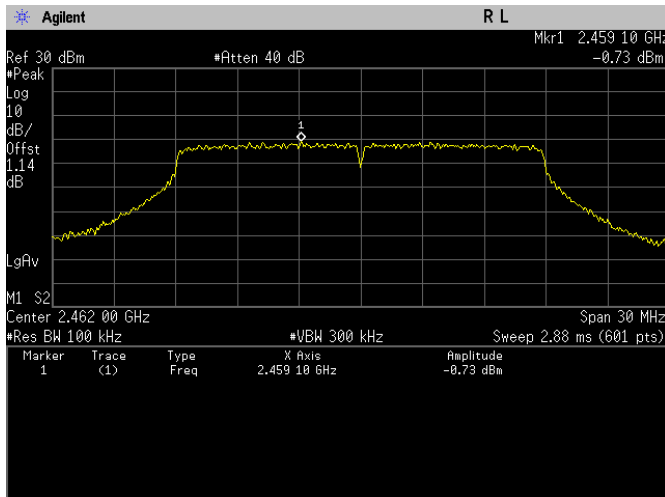


Conducted Emissions(Peak). 802.11n, Frequency 2462 MHz Reference Level

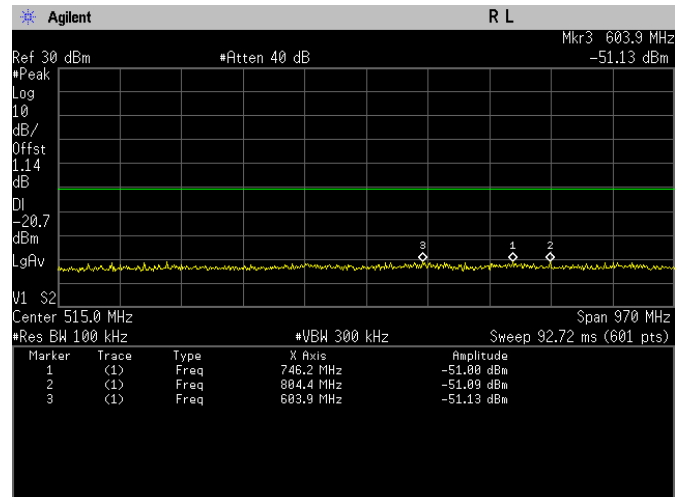


Conducted Emissions(Peak). 802.11n, Frequency 2462 MHz Emission Level, 30 MHz -> 1 GHz

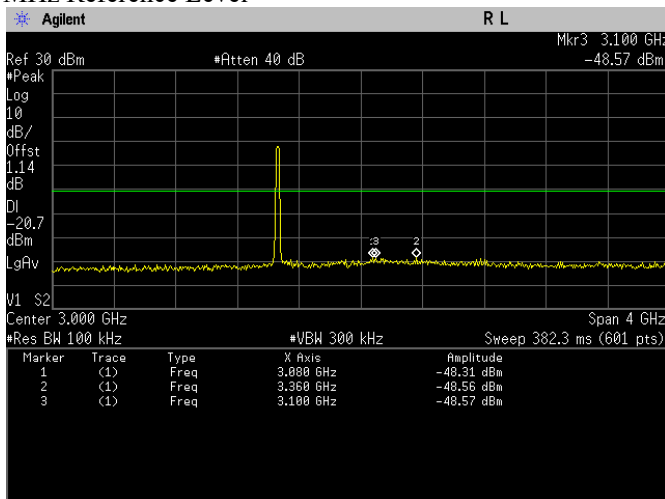


Conducted Emissions(Peak). 802.11n, Frequency 2462 MHz Emission Level, 1 GHz -> 5 GHz

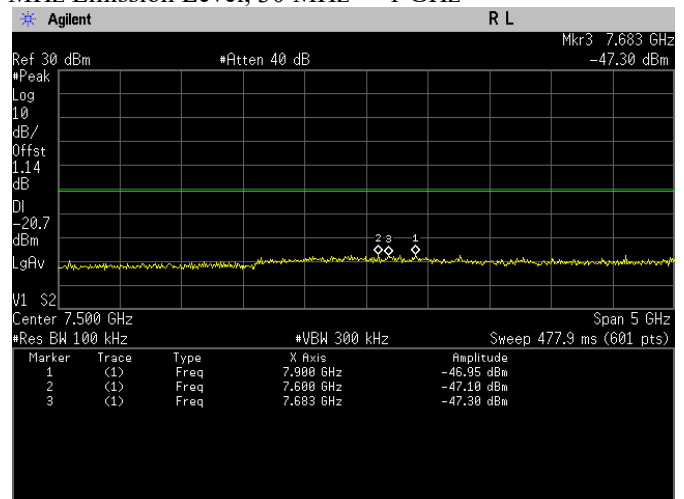


Conducted Emissions(Peak). 802.11n, Frequency 2462 MHz Emission Level, 5 GHz -> 10 GHz

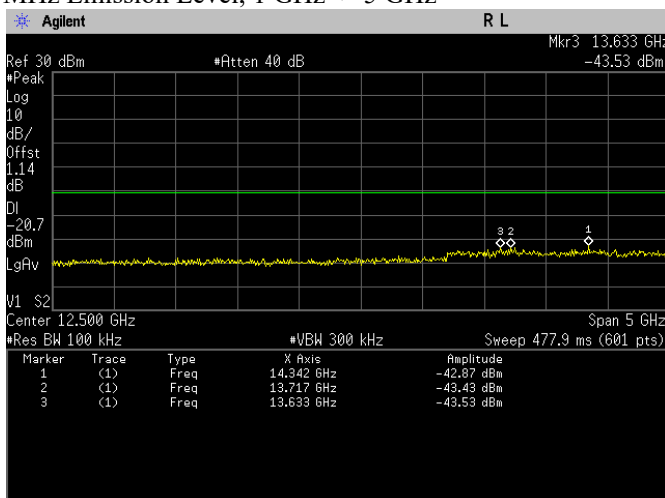

Conducted Emissions(Peak). 802.11n, Frequency 2462 MHz Emission Level, 10 GHz -> 15 GHz

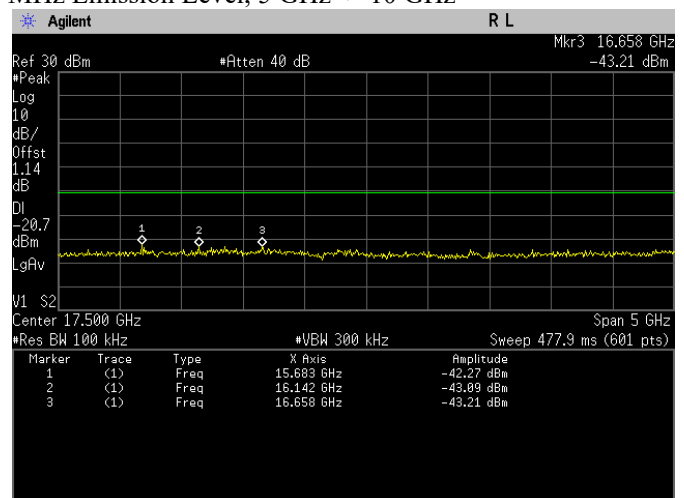


Conducted Emissions(Peak). 802.11n, Frequency 2462 MHz Emission Level, 15 GHz -> 20 GHz

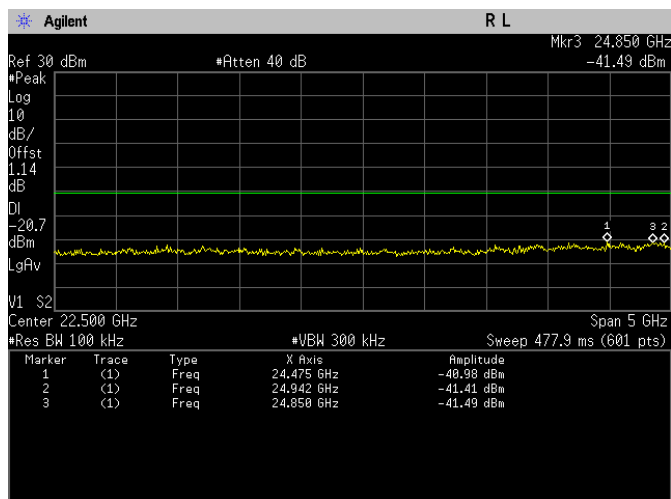


Conducted Emissions(Peak). 802.11n, Frequency 2462
 MHz Emission Level, 20 GHz -> 25 GHz

802.11n (HT40)


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
802.11n	OFDM	BPSK	13.5	2422	24892.00	-40.08	Pass
					23925.00	-41.17	Pass
					24575.00	-41.30	Pass
802.11n	OFDM	BPSK	13.5	2437	24958.00	-40.24	Pass
					24917.00	-40.87	Pass
					24267.00	-41.06	Pass
802.11n	OFDM	BPSK	13.5	2452	24900.00	-40.62	Pass
					23908.00	-41.54	Pass
					24167.00	-41.72	Pass

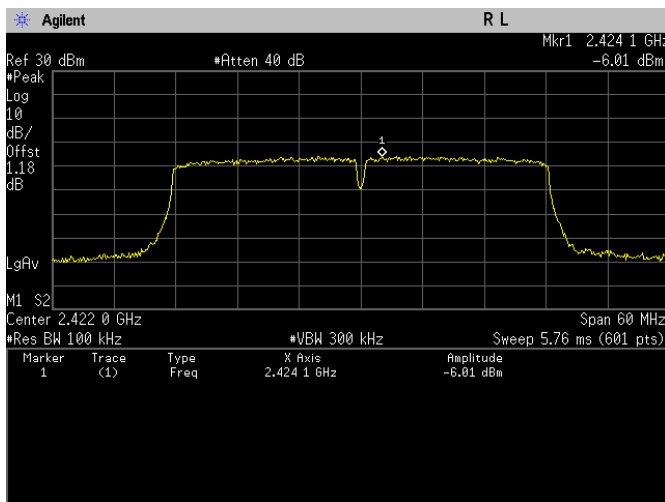


Conducted Emissions(Peak). 802.11n, Frequency 2422 MHz Reference Level

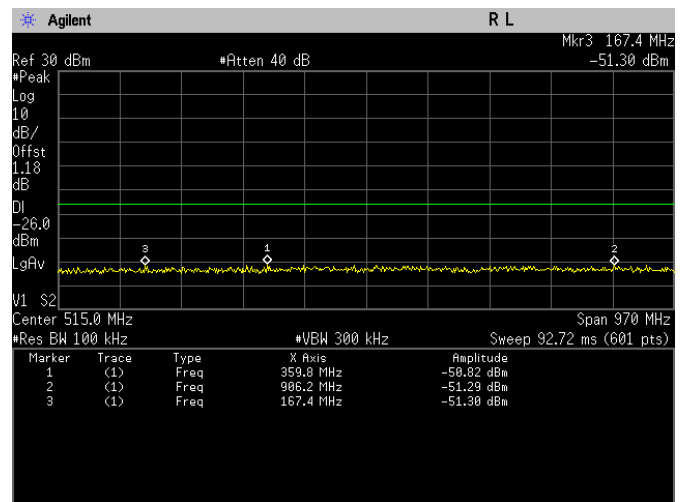


Conducted Emissions(Peak). 802.11n, Frequency 2422 MHz Emission Level, 30 MHz -> 1 GHz

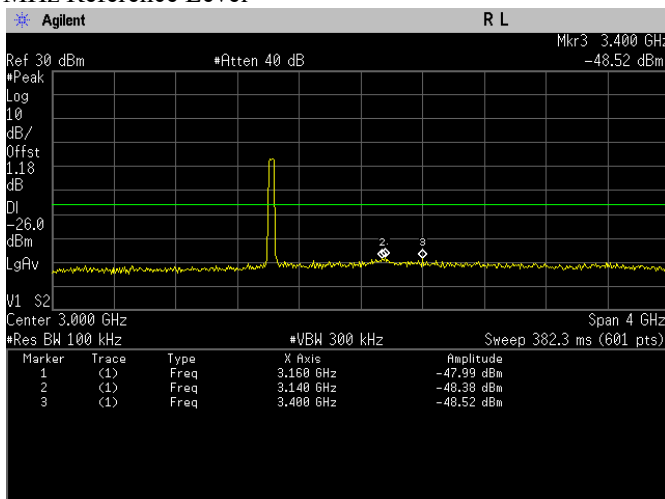


Conducted Emissions(Peak). 802.11n, Frequency 2422 MHz Emission Level, 1 GHz -> 5 GHz

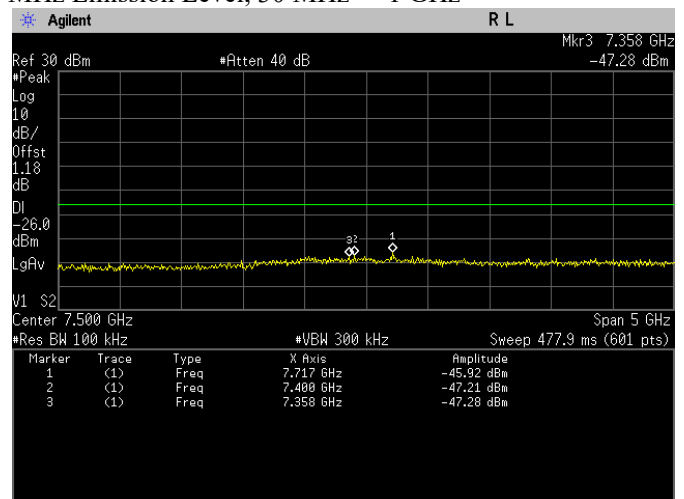


Conducted Emissions(Peak). 802.11n, Frequency 2422 MHz Emission Level, 5 GHz -> 10 GHz

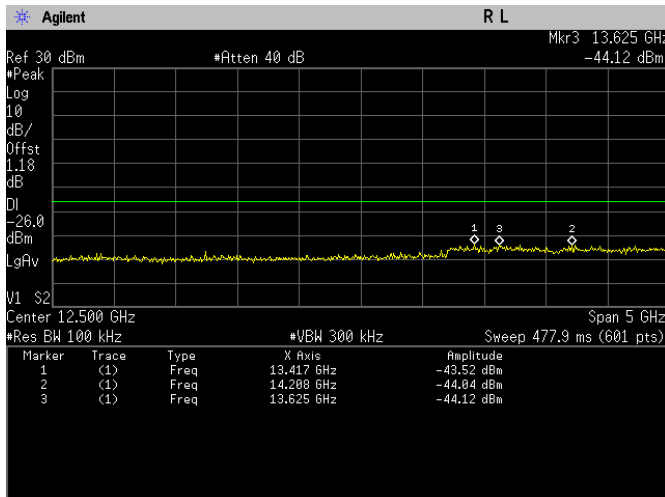


Conducted Emissions(Peak). 802.11n, Frequency 2422 MHz Emission Level, 10 GHz -> 15 GHz

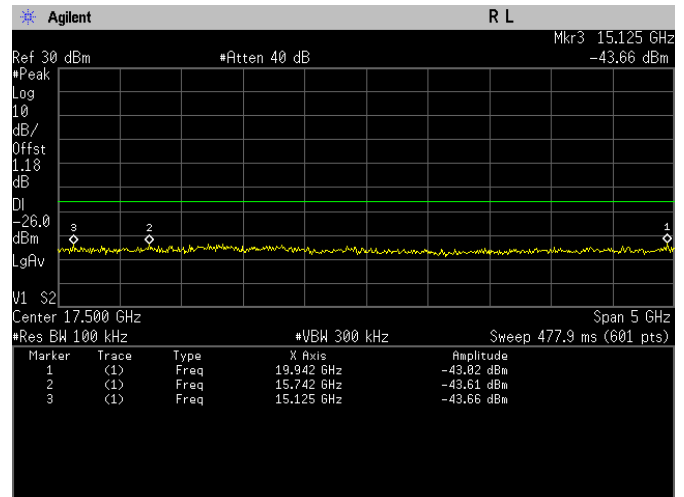


Conducted Emissions(Peak). 802.11n, Frequency 2422 MHz Emission Level, 15 GHz -> 20 GHz

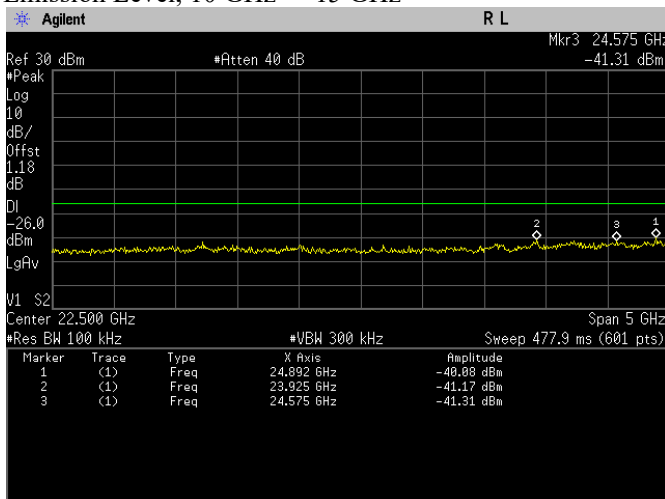


Conducted Emissions(Peak). 802.11n, Frequency 2422 MHz Emission Level, 20 GHz -> 25 GHz

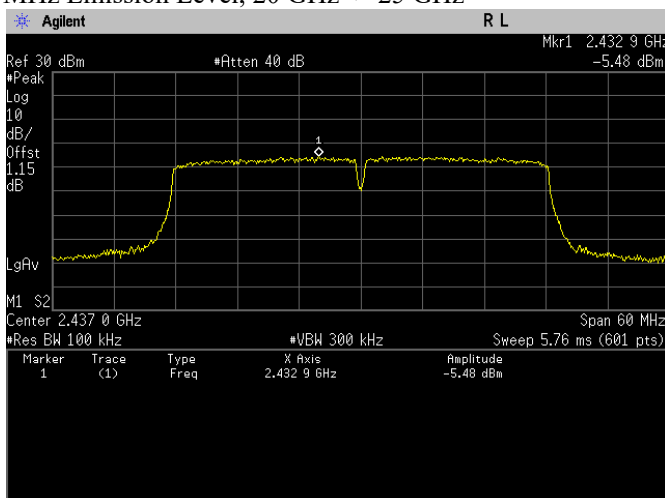


Conducted Emissions(Peak). 802.11n, Frequency 2437 MHz Reference Level

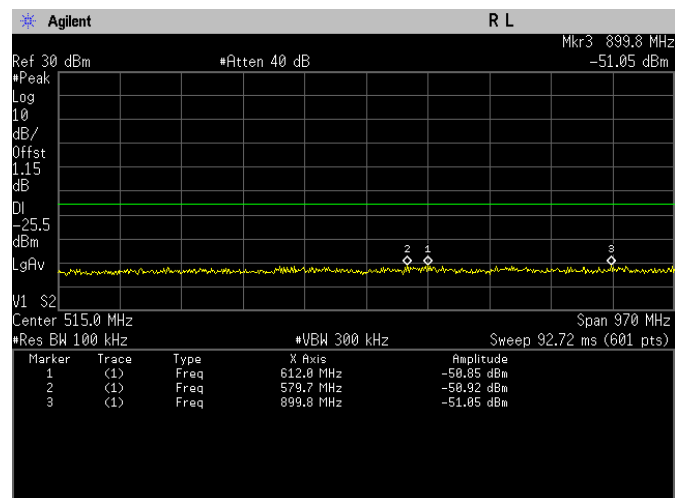


Conducted Emissions(Peak). 802.11n, Frequency 2437 MHz Emission Level, 30 MHz -> 1 GHz

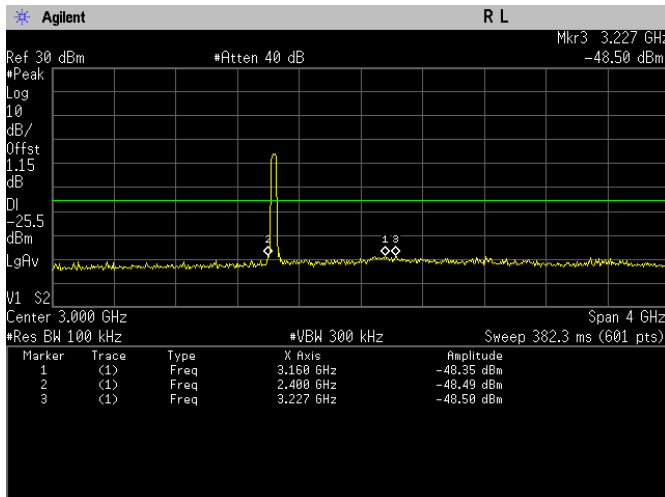


Conducted Emissions(Peak). 802.11n, Frequency 2437 MHz Emission Level, 1 GHz -> 5 GHz

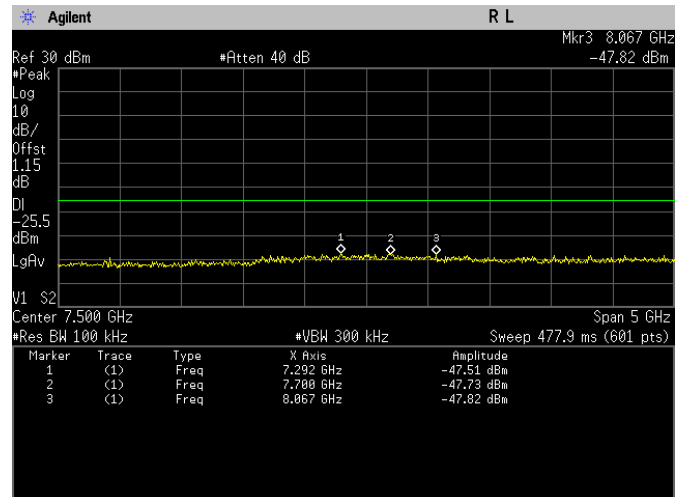


Conducted Emissions(Peak). 802.11n, Frequency 2437 MHz Emission Level, 5 GHz -> 10 GHz

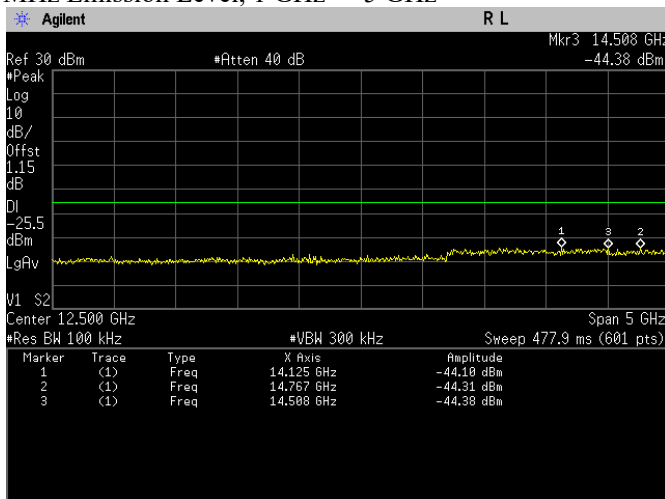


Conducted Emissions(Peak). 802.11n, Frequency 2437 MHz Emission Level, 10 GHz -> 15 GHz

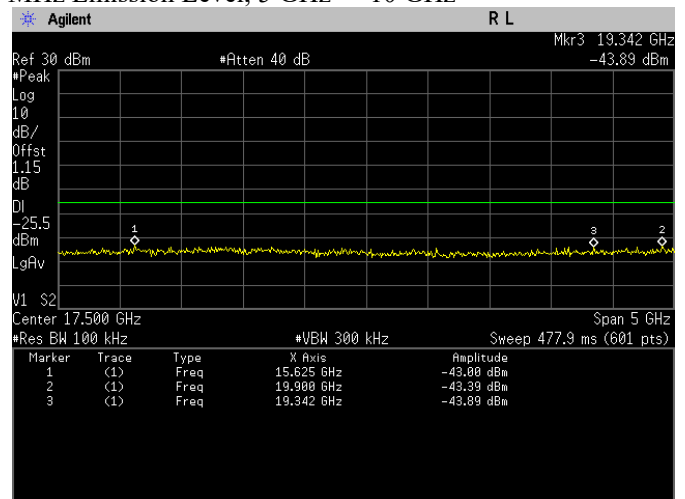


Conducted Emissions(Peak). 802.11n, Frequency 2437 MHz Emission Level, 15 GHz -> 20 GHz

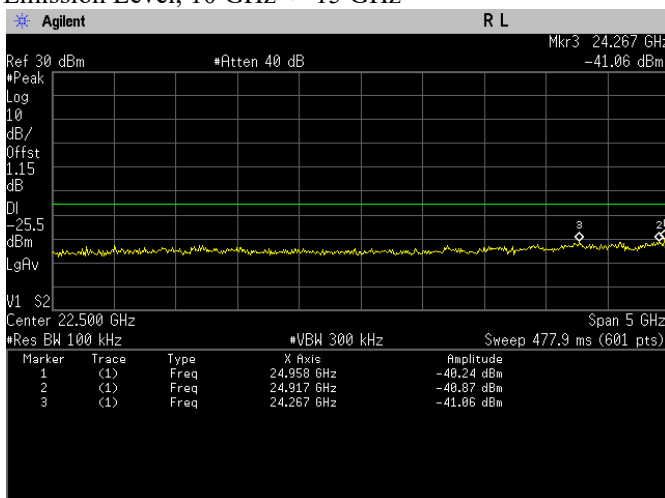


Conducted Emissions(Peak). 802.11n, Frequency 2437 MHz Emission Level, 20 GHz -> 25 GHz

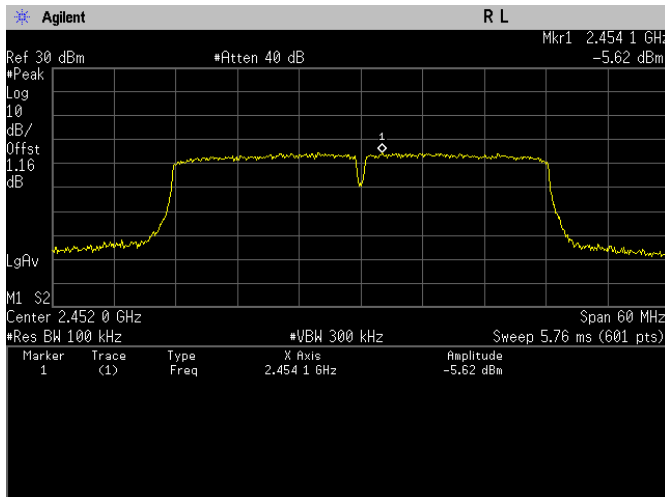


Conducted Emissions(Peak). 802.11n, Frequency 2452 MHz Reference Level

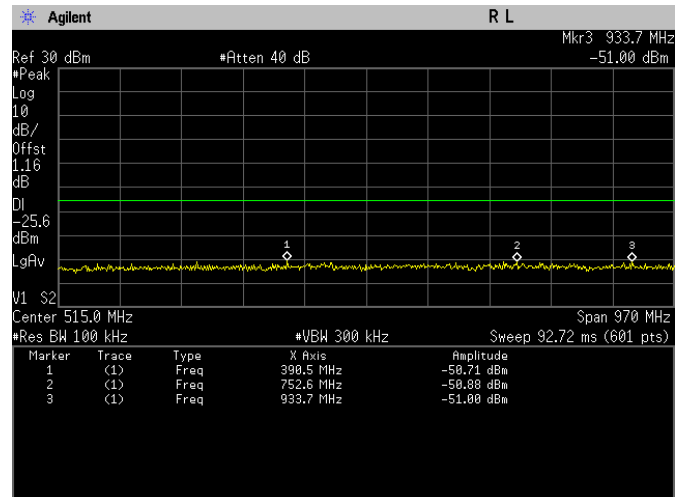


Conducted Emissions(Peak). 802.11n, Frequency 2452 MHz Emission Level, 30 MHz -> 1 GHz

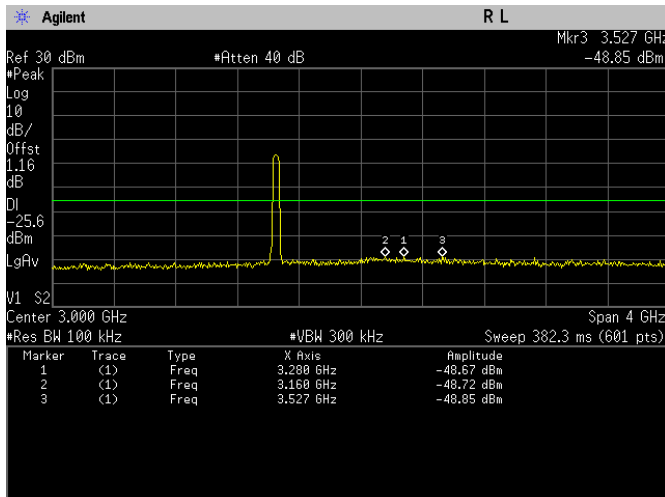


Conducted Emissions(Peak). 802.11n, Frequency 2452 MHz Emission Level, 1 GHz -> 5 GHz

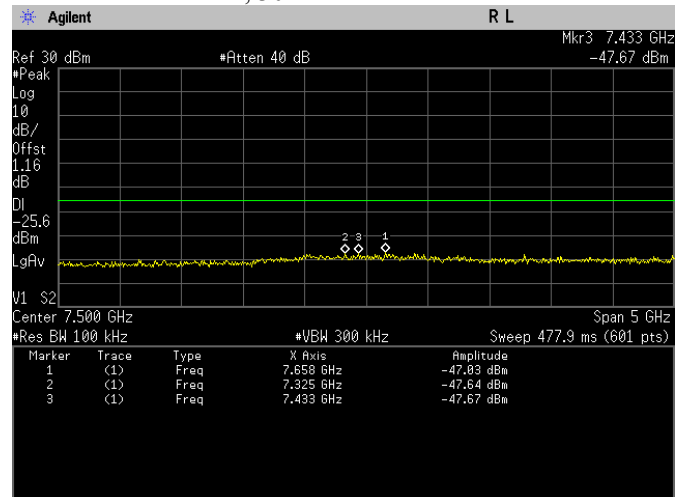


Conducted Emissions(Peak). 802.11n, Frequency 2452 MHz Emission Level, 5 GHz -> 10 GHz

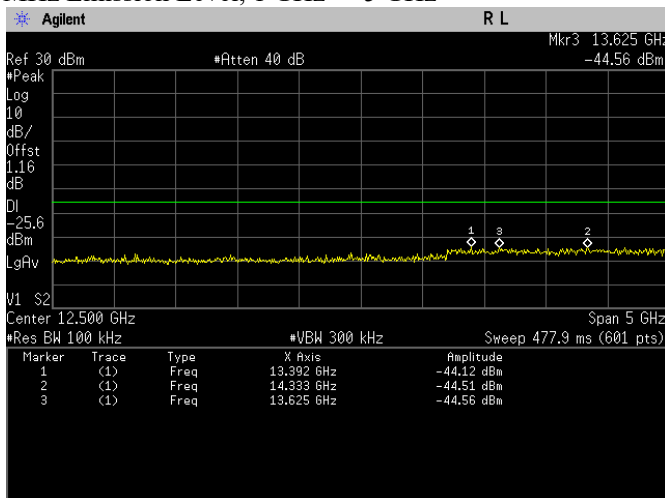

Conducted Emissions(Peak). 802.11n, Frequency 2452 MHz Emission Level, 10 GHz -> 15 GHz

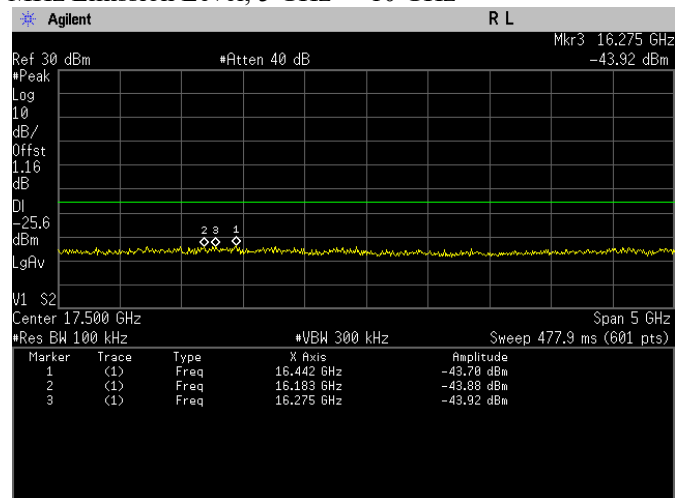


Conducted Emissions(Peak). 802.11n, Frequency 2452 MHz Emission Level, 15 GHz -> 20 GHz

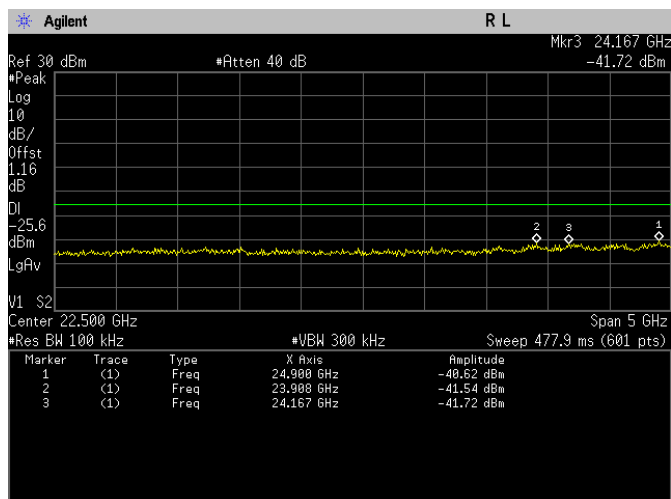

Conducted Emissions(Peak). 802.11n, Frequency 2452
 MHz Emission Level, 20 GHz -> 25 GHz

6.6. Band edge Conducted Spurious Emission

6.6.1. Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.
- f) Measure every antenna port by repeat the step above for MIMO measurement.


6.6.2. Test Limits:

Normal Condition (25 ° C)
Shall be at least 30 dB below peak (max) power.


6.6.3. Test Result

802.11b


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11b	DSSS	DBPSK	1	2412	2400.00	-37.85	Pass
802.11b	DSSS	DBPSK	1	2462	2483.50	-46.97	Pass

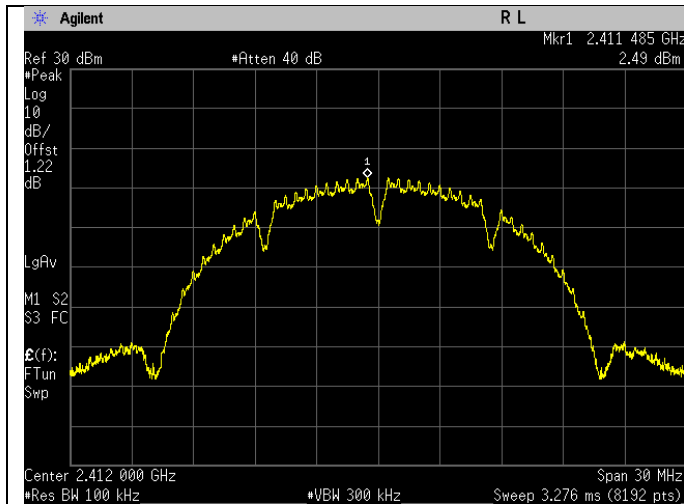


Band Edge(Peak). 802.11b Frequency 2412 MHz
Reference Level

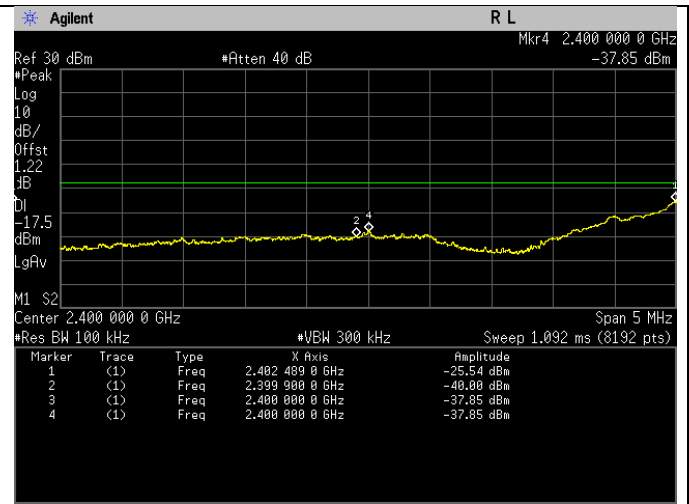

Band Edge(Peak). 802.11b Frequency 2412 MHz Band
Edge

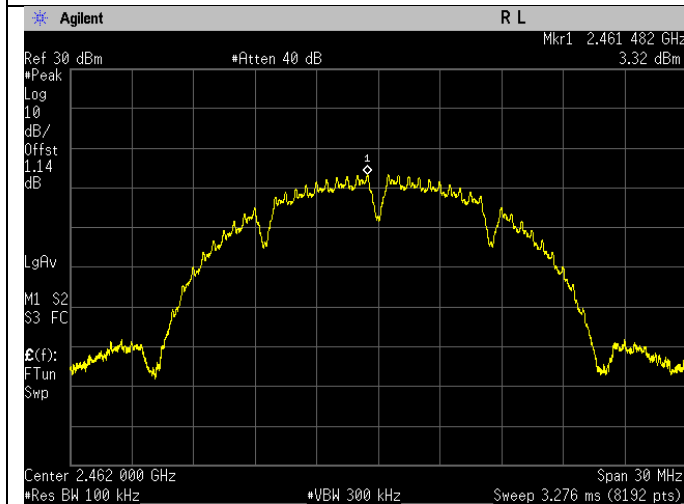


Band Edge(Peak). 802.11b Frequency 2462 MHz
Reference Level

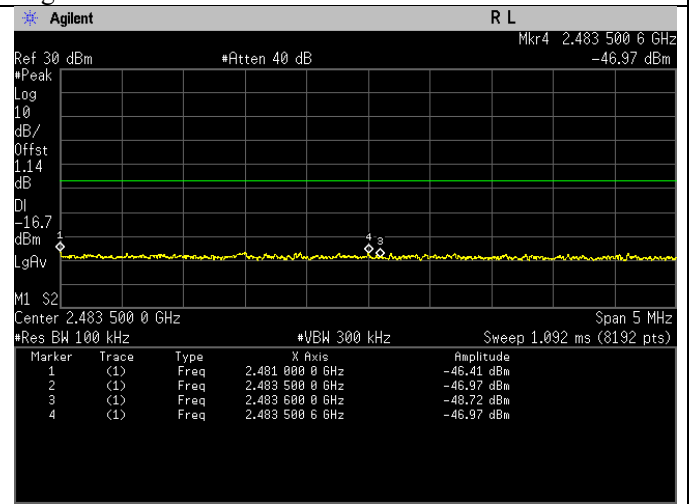


Band Edge(Peak). 802.11b Frequency 2462 MHz Band
Edge

802.11g


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11g	OFDM	BPSK	6	2412	2399.91	-35.44	Pass
802.11g	OFDM	BPSK	6	2462	2483.55	-45.98	Pass

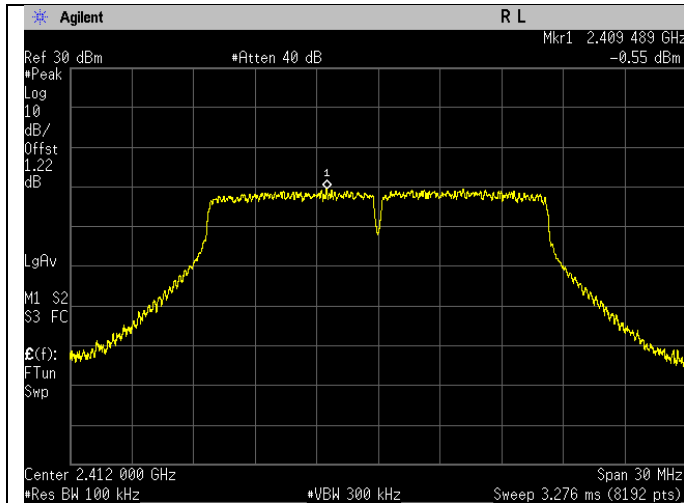


Band Edge(Peak). 802.11g Frequency 2412 MHz
Reference Level

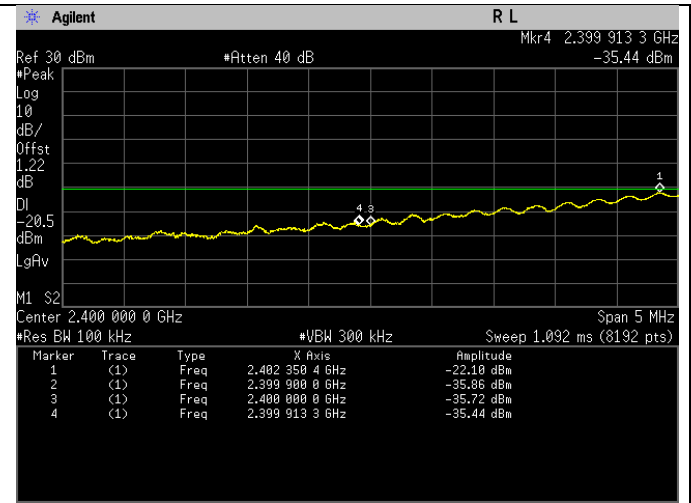

Band Edge(Peak). 802.11g Frequency 2412 MHz Band
Edge

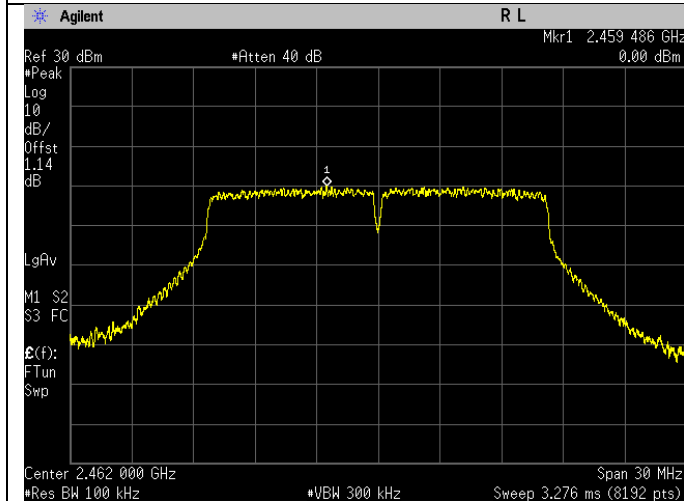


Band Edge(Peak). 802.11g Frequency 2462 MHz
Reference Level

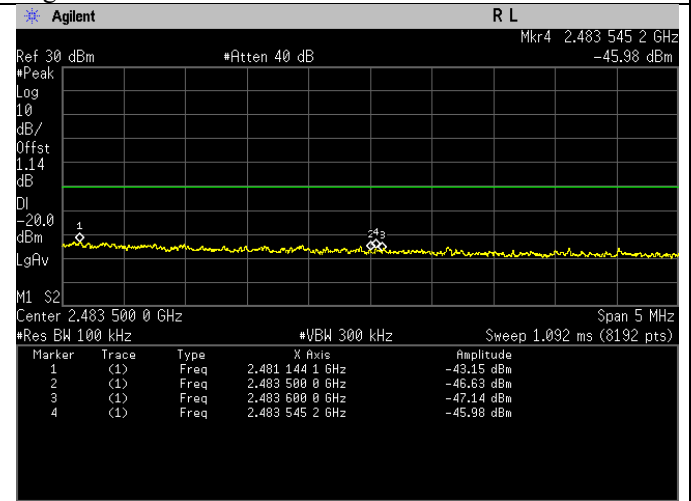


Band Edge(Peak). 802.11g Frequency 2462 MHz Band
Edge

802.11n (HT20)


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11n	OFDM	BPSK	6.5	2412	2399.93	-35.61	Pass
802.11n	OFDM	BPSK	6.5	2462	2483.52	-46.69	Pass

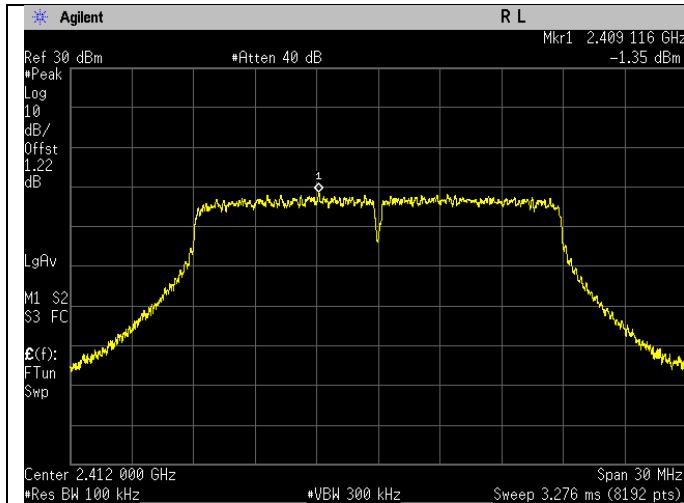


Band Edge(Peak). 802.11n Frequency 2412 MHz
Reference Level

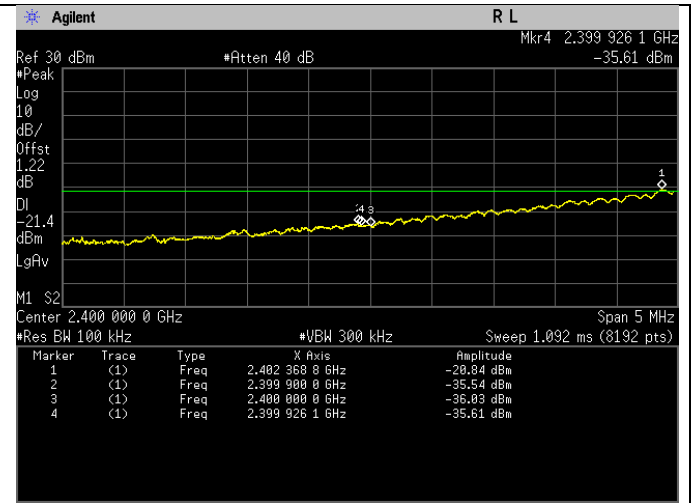

Band Edge(Peak). 802.11n Frequency 2412 MHz Band
Edge

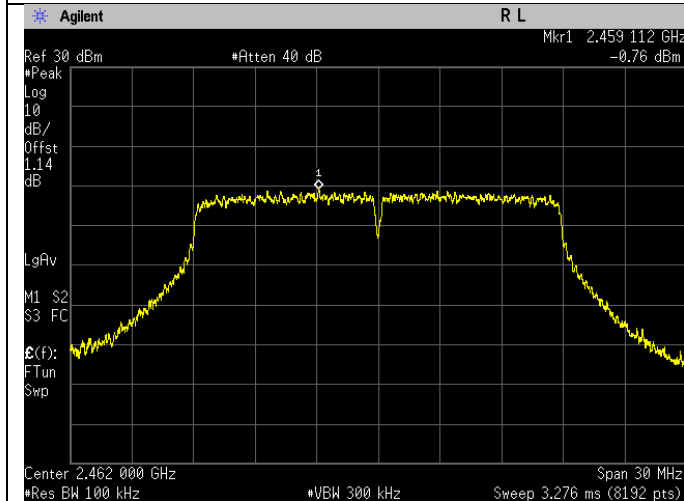


Band Edge(Peak). 802.11n Frequency 2462 MHz
Reference Level

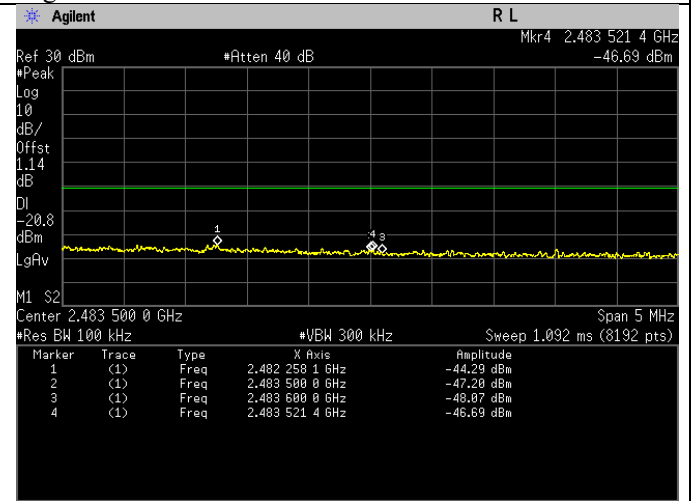


Band Edge(Peak). 802.11n Frequency 2462 MHz Band
Edge

802.11n (HT40)


Test Conditions				Test Frequency	Results		
Standard	Modulation Type	Modulation Technology	Data Rate (mbps)	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
802.11n	OFDM	BPSK	13.5	2422	2399.93	-45.86	Pass
802.11n	OFDM	BPSK	13.5	2452	2483.52	-47.15	Pass

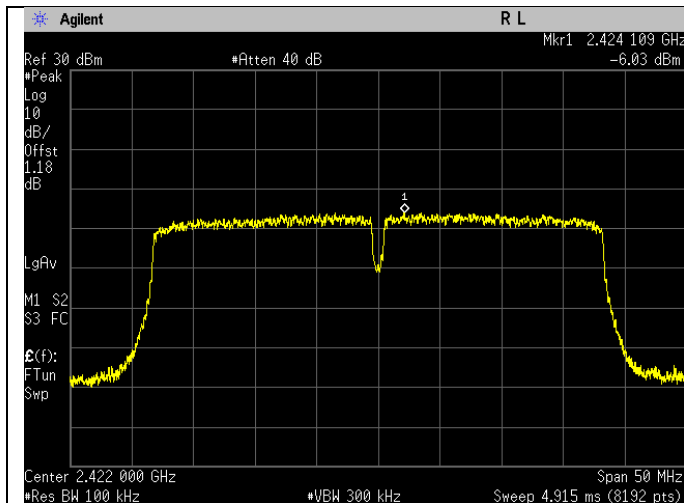


Band Edge(Peak). 802.11n Frequency 2422 MHz
Reference Level

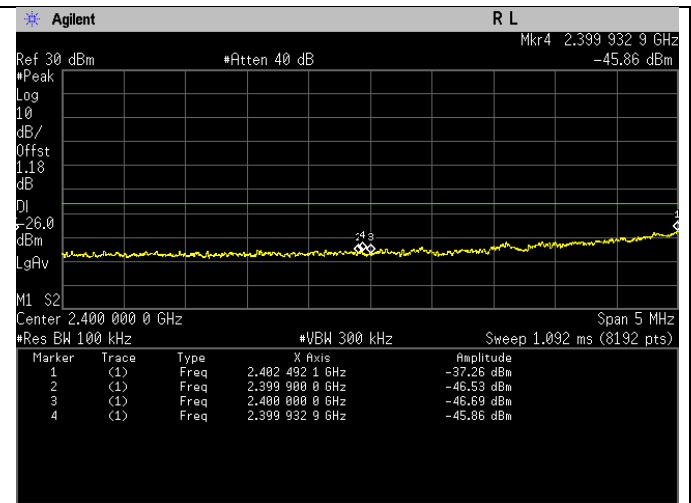

Band Edge(Peak). 802.11n Frequency 2422 MHz
Band Edge

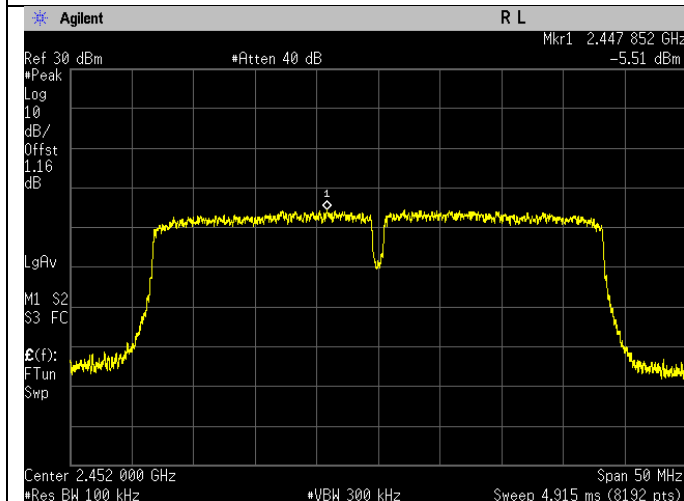


Band Edge(Peak). 802.11n Frequency 2452 MHz
Reference Level

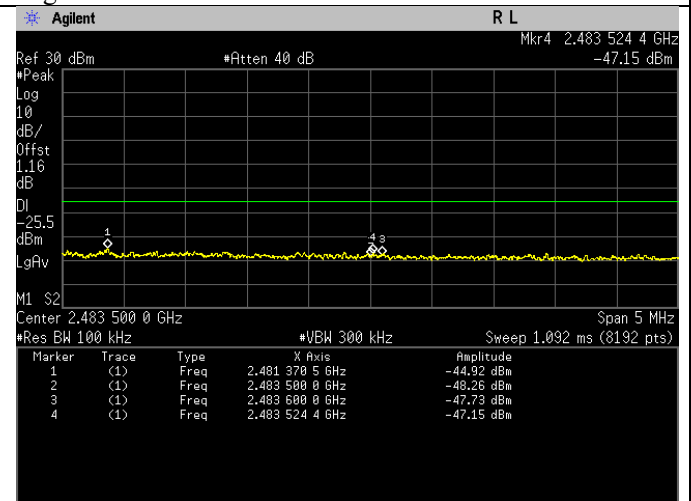

Band Edge(Peak). 802.11n Frequency 2452 MHz
Band Edge

6.7. Radiated Emission within restricted Bands

6.7.1. Test Setup

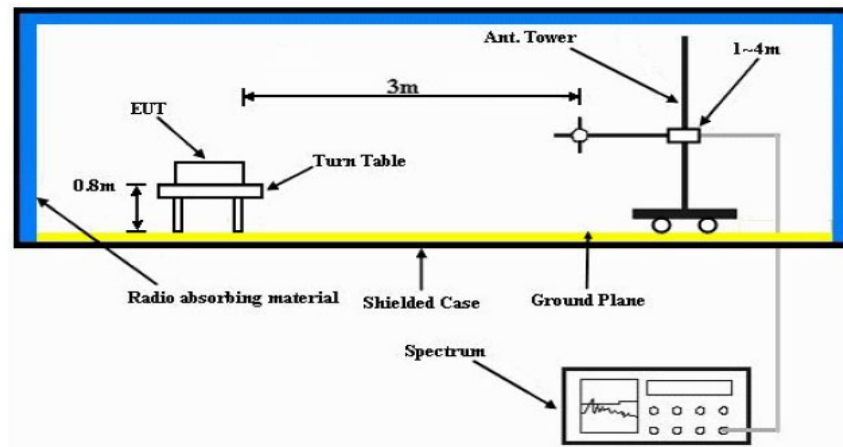

- The EUT is placed on the top of a rotating table 0.8m above the ground (<1GHz) and 1.5m above the ground (>1GHz) at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.7.2. Test Limits:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

NOTE:


- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

6.7.3. Test Data:

Not applicable

6.8. AC Powerline Conducted Emission

6.8.1. Test Setup

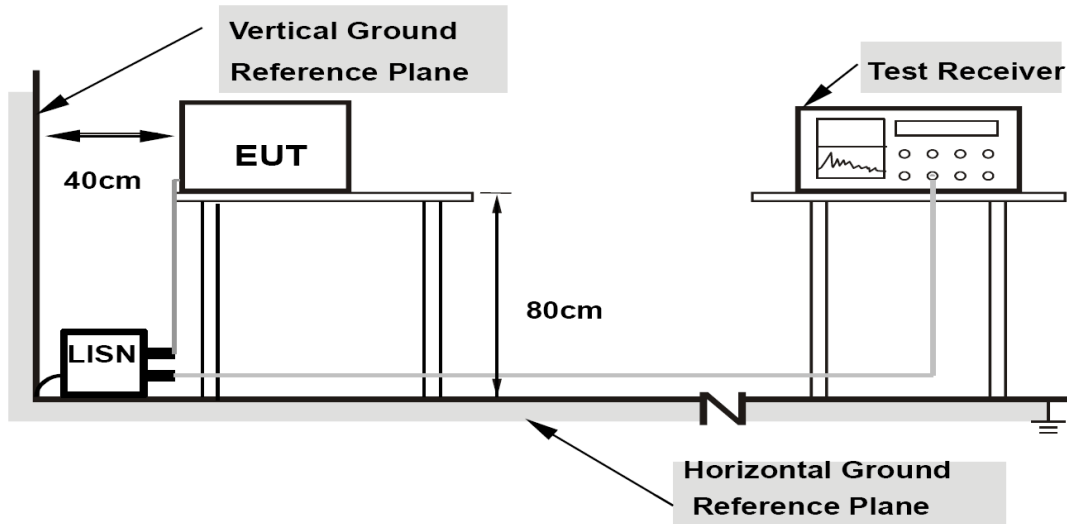

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.8.2. Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports
of class A ITE

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies.		
NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.8.3. Test Result

Not Applicable. Testing is not required, radio shall turn off during charging mode.

END OF TEST REPORT