

	    CERTIFICATE 2518.08 MS ISO/IEC 17025 TESTING SAMMNO. 0825																														
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Plot 2A, Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.	FCC / IC TEST REPORT Report Revision : Rev.D																														
<table><tr><td>Date/s Tested</td><td>: 31-Dec-2019 - 07-Jan-2020</td></tr><tr><td>Report Issue Date</td><td>: 24-Feb-2020</td></tr><tr><td>Manufacturer/Location</td><td>: Motorola Solutions Malaysia SDN BHD</td></tr><tr><td>Manufacturer Address</td><td>: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia</td></tr><tr><td>Requestor</td><td>: TANG, GARY</td></tr><tr><td>Product Type</td><td>: Mobile</td></tr><tr><td>Product Version (PMN)</td><td>: APX6500</td></tr><tr><td>Model Number (HVIN)</td><td>: M25QSS9PW1BN</td></tr><tr><td>Frequency Band</td><td>: 5180-5825 MHz</td></tr><tr><td>Firmware Version (FVIN)</td><td>: R02.10.08.0000</td></tr><tr><td>Applicant Name</td><td>: Motorola Solutions Inc</td></tr><tr><td>Applicant Address</td><td>: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322</td></tr><tr><td>FCC Registrations</td><td>: 461337</td></tr><tr><td>ISED Registrations</td><td>: MY0001</td></tr></table> The equipment was tested accordance to the requirement listed below: <table><tr><td>(5GHz Wi-Fi) FCC 47 CFR Part 15 Subpart E IC RSS 247 Issue 2</td><td>PASS</td></tr></table> 		Date/s Tested	: 31-Dec-2019 - 07-Jan-2020	Report Issue Date	: 24-Feb-2020	Manufacturer/Location	: Motorola Solutions Malaysia SDN BHD	Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia	Requestor	: TANG, GARY	Product Type	: Mobile	Product Version (PMN)	: APX6500	Model Number (HVIN)	: M25QSS9PW1BN	Frequency Band	: 5180-5825 MHz	Firmware Version (FVIN)	: R02.10.08.0000	Applicant Name	: Motorola Solutions Inc	Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322	FCC Registrations	: 461337	ISED Registrations	: MY0001	(5GHz Wi-Fi) FCC 47 CFR Part 15 Subpart E IC RSS 247 Issue 2	PASS
Date/s Tested	: 31-Dec-2019 - 07-Jan-2020																														
Report Issue Date	: 24-Feb-2020																														
Manufacturer/Location	: Motorola Solutions Malaysia SDN BHD																														
Manufacturer Address	: Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia																														
Requestor	: TANG, GARY																														
Product Type	: Mobile																														
Product Version (PMN)	: APX6500																														
Model Number (HVIN)	: M25QSS9PW1BN																														
Frequency Band	: 5180-5825 MHz																														
Firmware Version (FVIN)	: R02.10.08.0000																														
Applicant Name	: Motorola Solutions Inc																														
Applicant Address	: 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322																														
FCC Registrations	: 461337																														
ISED Registrations	: MY0001																														
(5GHz Wi-Fi) FCC 47 CFR Part 15 Subpart E IC RSS 247 Issue 2	PASS																														
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.																															
Prepared By:  GAN BOON TEONG Technician	Approved Signatory: VINCENT FOONG CHUEN KIT Deputy Technical Manager																														

Table of Contents

1.0. Summary of Test Results	3
2.0. Measurement Uncertainty	4
3.0. Equipment List.....	5
4.0. General Information.....	6
5.0. Test Mode Applicability and Test Channel Detail	9
6.0. Duty Cycle of Test Signal.....	12
6.0.1. Test Setup.....	12
6.0.2. Test Data	12
7.0. Transmitter Test Parameters	14
7.1. Bandwidth measurements	14
7.1.1. Test Setup.....	14
7.1.2. Test Limits.....	14
7.1.3. Test Data	14
7.2. Maximum Conducted Output Power	15
7.2.1. Test Setup.....	15
7.2.2. Test Limits.....	15
7.2.3. Additional Info	16
7.2.4. Test Data	16
7.3. Maximum Power Spectral Density	30
7.3.1. Test Setup.....	30
7.3.2. Test Limits.....	30
7.3.3. Additional Info	31
7.3.4. Test Data	31
7.4. 6dB Bandwidth	32
7.4.1. Test Setup.....	32
7.4.2. Test Limits.....	32
7.4.3. Test Data	32
7.5. Frequency Stability	33
7.5.1. Test Setup.....	33
7.5.2. Test Limits.....	33
7.5.3. Test Data	33
7.6. Band Edge Radiated Spurious Emission Measurement.....	34
7.6.1. Test Setup.....	34
7.6.2. Test Limits.....	35
7.6.3. Test Result.....	36
7.7. Radiated Spurious Emission Measurement	38
7.7.1. Test Setup.....	38
7.7.2. Test Limits.....	39
7.7.3. Test Data	40
7.8. AC Powerline Conducted Emission.....	44
7.8.1. Test Setup.....	44
7.8.2. Test Limits.....	44
7.8.3. Test Data	45

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	23-Feb-2020	Gan Boon Teong
Rev. B	Updated radiated worst case data	13-Apr-2020	Vincent Foong
Rev. C	Updated radiated data	21-Apr-2020	Vincent Foong
Rev. D	Updated Summary Table and Reference to other FCC ID	14-May-2020	Vincent Foong

1.0. Summary of Test Results

FCC Clause	IC Clause	Test Item	Result	Remarks	Serial Number tested
15.407 (a)(1/2/3)	RSS 247 6.2	Maximum Conducted Output Power (Average)	Pass	Highest output power: 802.11a: 11.666 dBm 802.11n20: 11.533 dBm	471TVZ0887
15.407(a) (1/2/3)	RSS 247 6.2	Maximum Power Spectral Density	NA	References data from FCC ID AZ492FT7124 / ISED 109U-92FT7124	NA
15.407 (e)	RSS 247 6.2.4	6dB Bandwidth	NA	References data from FCC ID AZ492FT7124 / ISED 109U-92FT7124	NA
15.407 (g)	RSS Gen 6.11	Frequency Stability	NA	References data from FCC ID AZ492FT7124 / ISED 109U-92FT7124	NA
15.407 (b) (1/2/3/4/6)	RSS 247 6.2	Band Edge Radiated Spurious Emission Measurement	Pass	Worst case emission: 63.35 dBμV/m	471TVZ0920
15.407 (b) (1/2/3/4/6)	RSS 247 6.2	Radiated Spurious Emission Measurement	Pass	Worst case emission: 35.8875 dBμV/m	471TVZ0920
15.207 15.407 (b)(6)	RSS Gen 8.8	AC Powerline Conducted Emission	NA	Device does not operate on AC	NA
15.203	-	Antenna requirement	Pass	Internal antenna is not accessible to the end-user	NA

***NOTE: The WiFi chipset is identical to FCC ID AZ492FT7124 / ISED 109U-92FT7124. The rest of conducted measurements are by similarity. Only worst case configuration of radiated emission based on FCC ID AZ492FT7124 / ISED 109U-92FT7124 is tested. As per KDB 484596 D01v01, the applicant takes full responsibility that data referenced represents compliance to the relevant rules for this current FCC ID.**

2.0. Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

3.0. Equipment List

Bluetooth ATE # 1 (SW Version: Ate Main_3.1.10_R2)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SPECTRUM ANALYZER	FSEK30	838495/014	19-Jul-19	19-Jul-20
SPECTRUM ANALYZER	E4443A	MY46181974	9-Aug-18	9-Aug-20
POWER SUPPLY	6033A	3004A05137	24-Jul-18	24-Jul-20
CHAMBER	SH-641	92003821	26-Sep-19	26-Sep-20
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA

EMC Chamber 1

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	720	21-Mar-19	21-Mar-21
DRG HORN FREQ.	SAS-571	1143	14-Feb-19	14-Feb-21
POWER SUPPLY (0-60V / 0-50A, 1000W)	6032A	MY41001736	25-May-19	25-May-20
SIGNAL GENERATOR	SMB 100A	181117	8-Nov-18	8-Nov-21
EMI TEST RECEIVER	ESW44	101750	24-Jul-19	24-Jul-20
EMI TEST RECEIVER	ESIB26	100017	19-Jul-19	19-Jul-20
5m Semi-anechoic Chamber	S800-HX	J2308	No Cal. Req'd	No Cal. Req'd
BILOG ANTENNA	CBL6112D	30991	5-Aug-19	5-Aug-20
BILOG ANTENNA	CBL6112B	2950	8-Jul-19	8-Jul-21
DATA LOGGER	DSB	16372019	31-Oct-19	31-Oct-20
SYSTEM CONTROLLER	SC104V	050806-1	No Cal. Req'd	No Cal. Req'd
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	No Cal. Req'd	No Cal. Req'd
ANTENNA POSITIONING TOWER	TLT2	NA	No Cal. Req'd	No Cal. Req'd
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	23-Jun-19	23-Jun-20
18 - 40GHz PREAMPLIFIER	Miteq Hi Gain Sucoflex	002	12-Jun-19	12-Jun-22
PREAMPLIFIER	PAM-0118	269	24-May-19	24-May-22
LOOP ANTENNA	6502	00208416	5-Sep-19	5-Sep-20
Test Software	EMC_FCC_IC_Bluetooth_RE_Test			
Version	EMC_FCC_RE_v1.6.1			

4.0. General Information

General Description of EUT:

Product	Mobile
Brand	Motorola Solutions
Test Model	APX6500
Power Supply Rating	13.6V
Mode of operation	WLAN 5GHz
Modulation Type	QPSK, BPSK, 16QAM, 64QAM, 256QAM
Modulation Technology	OFDM
Transfer Rate	802.11a: 6.0/9.0/12.0/18.0/24.0/36.0/48.0/54.0 Mbps 802.11n: up to MCS15
Operating Frequency	5.180 ~ 5.240 GHz, 5.260 ~ 5.320 GHz, 5.50 ~ 5.720 GHz, 5.745 ~ 5.825 GHz
Output Power (26 EBW or 99% OBW)	15.84 mW for 5.180 ~ 5.240 GHz 15.84 mW for 5.260 ~ 5.320 GHz 15.84 mW for 5.50 ~ 5.720 GHz 15.84 mW for 5.745 ~ 5.825 GHz
Antenna Type	Motorcycle (AN000163A02)
SW Version	R02.10.08.0000

Note:

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
ASSY,CBL,PWR	MOTOROLA	HKN4191B-2
CABLE, DATA, USB, 1-1/2M, XTL5000	MOTOROLA	HKN6163C-2
15 Watt Speaker (Water Resistant)	MOTOROLA	HSN4040A
Keypad Microphone	MOTOROLA	HMN4079G-4
ANTENNA, STUBBY,WIFI/GNSS LOW LOSS LMR240 (2.4/5 GHZ WI-FI/BT AND GNSS BT/WiFi/GPS Antenna)	MOTOROLA	AN000163A01
ANTENNA, WHIP,3DB MCYCLE 764-870 MHZ 762-870 MHZ	MOTOROLA	AN000197A10
O7 Control Head (English)	MOTOROLA	PMHN4194C
O2 Control Head (Grey)	MOTOROLA	PMHN4193F
ANTENNA, STUBBY,WIFI/GNSS, M-CYCLE, QMA, 6FT, LMR195, FLEXIBLE, PVC FREE GPS WIFI	MOTOROLA	AN000163A02
ANT 5.0DB 380-420 MHZ MAXRAD 380 Mhz - 433 MHz	MOTOROLA	HAE6011A
Water Resistant Microphone	MOTOROLA	HMN1089C
13 Watt Speaker (Motorcycle) - Non EPP Compliant	MOTOROLA	HSN6003C

Description of Test Modes:

For 5180 to 5240 MHz:

Channels for 802.11a, 802.11n, 802.11ac (HT20, VHT20)

Channel	Frequency (MHz)
36	5180
40	5200
44	5220
48	5240

Channels for 802.11n, 802.11ac (HT40, VHT40)

Channel	Frequency (MHz)
38	5190
46	5230

Channels for 802.11ac (VHT80)

Channel	Frequency (MHz)
42	5210

For 5260 to 5320 MHz:

Channels for 802.11a, 802.11n, 802.11ac (HT20, VHT20)

Channel	Frequency (MHz)
52	5260
56	5280
60	5300
64	5320

Channels for 802.11n, 802.11ac (HT40, VHT40)

Channel	Frequency (MHz)
54	5270
62	5310

Channels for 802.11ac (VHT80)

Channel	Frequency (MHz)
58	5290

For 5500 to 5720 MHz:

Channels for 802.11a, 802.11n, 802.11ac (HT20, VHT20)

Channel	Frequency (MHz)
100	5500
104	5520
108	5540
112	5560
116	5580
120	5600
124	5620
128	5640
132	5660
136	5680
140	5700
144	5720

Channels for 802.11n, 802.11ac (HT40, VHT40)

Channel	Frequency (MHz)
102	5510
110	5550
118	5590
126	5630
134	5670
142	5710

Channels for 802.11ac (VHT80)

Channel	Frequency (MHz)
106	5530
122	5610
138	5690

For 5745 to 5825 MHz:

Channels for 802.11a, 802.11n, 802.11ac (HT20, VHT40)

Channel	Frequency(MHz)
149	5745
153	5765
157	5785
161	5805
165	5825

Channels for 802.11n, 802.11ac (HT40, VHT40)

Channel	Frequency(MHz)
151	5755
159	5795

Channels for 802.11ac (VHT80)

Channel	Frequency (MHz)
155	5775

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

FCC Part15, Subpart E (15.407)

789033 D02 General UNII Test Procedures New Rules v01r04

644545 D03 Guidance for IEEE 802 11ac New Rules v01

ANSI C63.10-2013

RSS 247 Issue 2, RSS Gen

All test have been performed and recorded as per above standards.

Deviation from standard

Not applicable as no deviation from standard test method

5.0. Test Mode Applicability and Test Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power from adapter
B	x	√	x	x	Power from carcharger (12Vdc)
C	x	√	x	x	Power from carcharger (24Vdc)

Where:

RE $\geq$ 1G: Radiated Emission above 1GHz & Band edge Measurement

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-scanned on the position of each 3 axis planes. The worst case was found when positioned on Y-plane.

Radiated Emission Test (Above 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Frequency Band	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	5180-5240	802.11a	36-48	36,44,48	OFDM	BPSK	6.0
-	5180-5240	802.11n/ac (HT20, VHT20)	36-48	36,44,48	OFDM	BPSK	6.5
-	5180-5240	802.11n/ac (HT40,VHT40)	38-46	38,46	OFDM	BPSK	13.5
-	5180-5240	802.11ac (VHT80)	42	42	OFDM	BPSK	29.3
-	5260-5320	802.11a	52-64	52,60,64	OFDM	BPSK	6.0
-	5260-5320	802.11n/ac (HT20, VHT20)	52-46	52,60,64	OFDM	BPSK	6.5
-	5260-5320	802.11n/ac (HT40,VHT40)	54-62	54,62	OFDM	BPSK	13.5
-	5260-5320	802.11ac (VHT80)	58	58	OFDM	BPSK	29.3
-	5500-5700	802.11a	100-140	100,116,140	OFDM	BPSK	6.0
-	5500-5720	802.11n/ac (HT20, VHT20)	100-144	100,116,144	OFDM	BPSK	6.5
-	5500-5720	802.11n/ac (HT40,VHT40)	102-142	102,110,142	OFDM	BPSK	13.5
-	5500-5720	802.11ac (VHT80)	106-138	106,122,138	OFDM	BPSK	29.3
-	5745-5825	802.11a	149-165	149,157,165	OFDM	BPSK	6.0
-	5745-5825	802.11n/ac (HT20, VHT20)	149-165	149,157,165	OFDM	BPSK	6.5
-	5745-5825	802.11n/ac (HT40,VHT40)	151-159	151,159	OFDM	BPSK	13.5
-	5745-5825	802.11ac (VHT80)	155	155	OFDM	BPSK	29.3

Radiated Emission Test (Below 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Frequency band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36	OFDM	BPSK	6.0
-	802.11a	5260-5320	52 to 64		OFDM	BPSK	6.0
-	802.11a	5500-5700	100 to 140		OFDM	BPSK	6.0
-	802.11a	5745-5825	149 to 165		OFDM	BPSK	6.0

Power Line Conducted Emission Test

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	MODE	Frequency band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36	OFDM	BPSK	6.0
-	802.11a	5260-5320	52 to 64		OFDM	BPSK	6.0
-	802.11a	5500-5700	100 to 140		OFDM	BPSK	6.0
-	802.11a	5745-5825	149 to 165		OFDM	BPSK	6.0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Frequency Band	MODE	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	5180-5240	802.11a	36-48	36,44,48	OFDM	BPSK	6.0
-	5180-5240	802.11n/ac (HT20, VHT20)	36-48	36,44,48	OFDM	BPSK	6.5
-	5180-5240	802.11n/ac (HT40,VHT40)	38-46	38,46	OFDM	BPSK	13.5
-	5180-5240	802.11ac (VHT80)	42	42	OFDM	BPSK	29.3
-	5260-5320	802.11a	52-64	52,60,64	OFDM	BPSK	6.0
-	5260-5320	802.11n/ac (HT20, VHT20)	52-64	52,60,64	OFDM	BPSK	6.5
-	5260-5320	802.11n/ac (HT40,VHT40)	54-62	54,62	OFDM	BPSK	13.5
-	5260-5320	802.11ac (VHT80)	58	58	OFDM	BPSK	29.3
-	5500-5700	802.11a	100-140	100,116,140	OFDM	BPSK	6.0
-	5500-5720	802.11n/ac (HT20, VHT20)	100-144	100,116,144	OFDM	BPSK	6.5
-	5500-5720	802.11n/ac (HT40,VHT40)	102-142	102,110,142	OFDM	BPSK	13.5
-	5500-5720	802.11ac (VHT80)	106-138	106,122,138	OFDM	BPSK	29.3
-	5745-5825	802.11a	149-165	149,157,165	OFDM	BPSK	6.0
-	5745-5825	802.11n/ac (HT20, VHT20)	149-165	149,157,165	OFDM	BPSK	6.5
-	5745-5825	802.11n/ac (HT40,VHT40)	151-159	151,159	OFDM	BPSK	13.5
-	5745-5825	802.11ac (VHT80)	155	155	OFDM	BPSK	29.3

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE≥1G	25°C, 50% RH	3.7V DC	Nazrin/Qawiman
RE<1G	25°C, 50% RH	3.7V DC	Nazrin/Qawiman
PLC	22.4°C, 68.6% RH	120V AC,240V AC	Madi/Rudy
APCM	25°C, 50% RH	3.7V DC	Jino Lim


Duty Cycle of Test Signal

802.11a, 802.11n and 802.11ac (HT20, VHT20): Duty cycle of test signal is >99%.

If Duty cycle of test signal is <98%, duty cycle factor shall be considered. (Refer to section 6.0 for duty cycle measurement)

6.0. Duty Cycle of Test Signal


6.0.1. Test Setup



- 1) Set DUT to desire transmit frequency and transmit with maximum power.
- 2) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 3) Setting of Spectrum analyzer :
 - a. Set the RBW = 10 MHz or the highest RBW available on spectrum analyzer.
 - b. Set the VBW $\geq$ RBW.
 - c. Set to Zero Span.
 - d. Detector = Peak.
 - e. Sweep time = 10ms or others that allow to measure accurate duty cycle.
 - f. Trace mode = Max hold.
- 4) Record the duty cycle as X and save the plot.

6.0.2. Test Data

802.11a

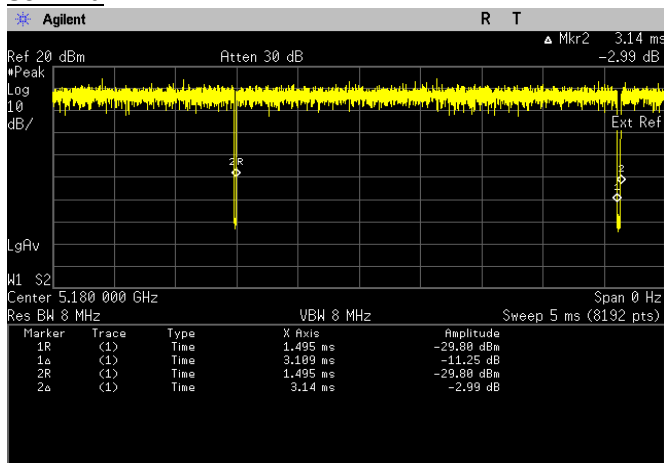


On time	3.109	ms
On + off time	3.14	ms
Duty Cycle	0.9901	
Duty Cycle Factor	0.043	

*Duty cycle = On time/ On +off time

*Duty Cycle factor = $10 \cdot \log(1/\text{Duty Cycle})$

802.11n (HT20)

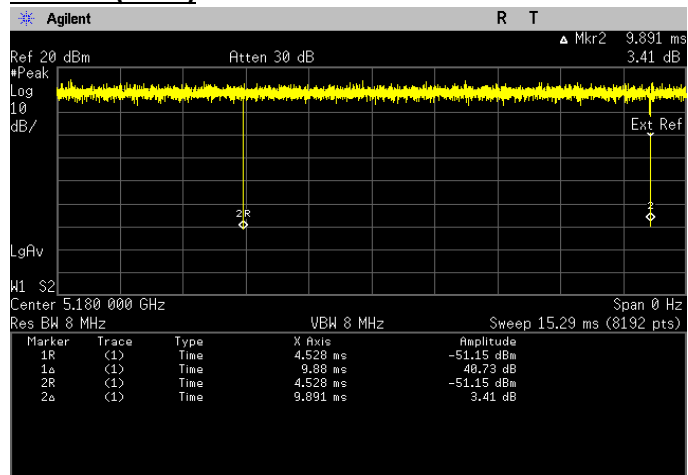

On time	9.88	ms
On + off time	9.891	ms
Duty Cycle	0.9989	
Duty Cycle Factor	0.005	


*Duty cycle = On time/ On +off time

*Duty Cycle factor = 10*log (1/Duty Cycle)

7.0. Transmitter Test Parameters

7.1. Bandwidth measurements

7.1.1. Test Setup



- a) Test Setup as per illustrated above.
- b) Set DUT to transmit at desire transmit frequency.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer for 26dB EBW:
 - RBW = approximate 1% of emission bandwidth
 - VBW > RBW
 - Detector = Peak
 - Trace =Max hold
 - Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
 - Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- e) Setting of Spectrum analyzer for 99% Occupied bandwidth:
 - Span = 1.5 times to 5.0 times the OBW
 - RBW = 1% to 5 % of the OBW
 - VBW $\geq 3 \cdot$ RBW
 - Detector = Peak
 - Trace = Max Hold
 - Use the 99% power bandwidth function of the instrument
- f) The measurement method follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04 under clause C.1) & D).

7.1.2. Test Limits


Not applicable.

7.1.3. Test Data

N/A

7.2. Maximum Conducted Output Power

7.2.1. Test Setup



- a) Test setup as per illustrated above.
- b) Set DUT to transmit at desire transmit frequency.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - Span to encompass the entire 26dB EBW or 99% Occupied Bandwidth.
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = power averaging (RMS)
 - Trace = Max hold
 - Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$
 - Sweep time = auto
 - Trace average at least 100 traces in power averaging (rms) mode
 - Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges.
 - Add $10 \log (1/x)$, where x is the duty cycle, to the measured power to compute the average power during the actual transmission times
- e) The measurement method follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04 under clause E.2.d) Method SA-2.
- f) The Maximum output power results are included duty cycle correction factor.

7.2.2. Test Limits

FCC 15.407(a)

Range(GHz)	Condition	Output Power Limit
5.15-5.25 (UNII-1)	Outdoor AP	$\leq 1\text{ W}$
	Indoor AP	$\leq 1\text{ W}$
	Fixed Point to Point AP	$\leq 1\text{ W}$
	√ Mobile and Portable client devices	$\leq 250\text{mW}$
5.25-5.35 (UNII-2A)	√	$\leq 250\text{mW}$ or $11\text{dBm} + 10\log_{10} B^*$ *B is 26dB emission bandwidth in MHz
5.47-5.525 (UNII-2C)	√	
5.725-5.85 (UNII-3)	√	$\leq 1\text{ W}$

RSS-247 6.2

Range(GHz)	Condition	Output Power Limit
5.15-5.25	indoor only (e.i.r.p.)	$\leq 200\text{mW}$ or $10+10\log_{10}B^*$ *B is 99% emission bandwidth in 1MHz
5.25-5.35	(Conducted & e.i.r.p.)	Conducted: $\leq 250\text{mW}$ or $11+10\log_{10}B^*$ EIRP: $< 1.0\text{W}$ or $17+10\log_{10}B^*$ *B is 99% emission bandwidth in 1MHz
5.47-5.6 5.65-5.725	(Conducted & e.i.r.p.)	Conducted: $\leq 250\text{mW}$ or $11+10\log_{10}B^*$ EIRP: $< 1.0\text{W}$ or $17+10\log_{10}B^*$ *B is 99% emission bandwidth in 1MHz
5.725-5.85	(Conducted)	$\leq 1\text{W}$

7.2.3. Additional Info

Antenna	Gain (dBi)
Antenna 1	5.25
Duty Cycle Correction Factor	
802.11a	0.043
802.11n (HT20)	0.005


7.2.4. Test Data

Summary table


WLAN	Frequency Range (MHz)	Bandwidth (MHz)	RF Power Output		EIRP	
			Max measured (W)	Max declared (W)	Max measured (W)	Max declared (W)
802.11a	5180-5240	20	0.013065	0.01585	0.04377	0.053088
	5260-5320	20	0.014415	0.01585	0.04829	0.053088
	5500-5720	20	0.010352	0.01585	0.03468	0.053088
	5745-5825	20	0.008648	0.01585	0.02897	0.053088
802.11n	5180-5240	20	0.012852	0.01585	0.04305	0.053088
	5260-5320	20	0.013915	0.01585	0.04661	0.053088
	5500-5720	20	0.010656	0.01585	0.03569	0.053088
	5745-5825	20	0.008334	0.01585	0.02792	0.053088

802.11a (26dB EBW)



Freq. (MHz)	Test Conditions	Results		
		Power (mW)	Power (dBm)	Status
5180	Mod Type: BPSK, Data Rate: 6	12.509	10.972	Pass
5220	Mod Type: BPSK, Data Rate: 6	11.432	10.581	Pass
5240	Mod Type: BPSK, Data Rate: 6	13.244	11.220	Pass
5260	Mod Type: BPSK, Data Rate: 6	13.565	11.324	Pass
5300	Mod Type: BPSK, Data Rate: 6	14.676	11.666	Pass
5320	Mod Type: BPSK, Data Rate: 6	11.924	10.764	Pass
5500	Mod Type: BPSK, Data Rate: 6	4.502	6.534	Pass
5580	Mod Type: BPSK, Data Rate: 6	10.544	10.230	Pass
5700	Mod Type: BPSK, Data Rate: 6	9.367	9.716	Pass
5745	Mod Type: BPSK, Data Rate: 6	7.800	8.921	Pass
5785	Mod Type: BPSK, Data Rate: 6	8.738	9.414	Pass
5825	Mod Type: BPSK, Data Rate: 6	6.946	8.417	Pass



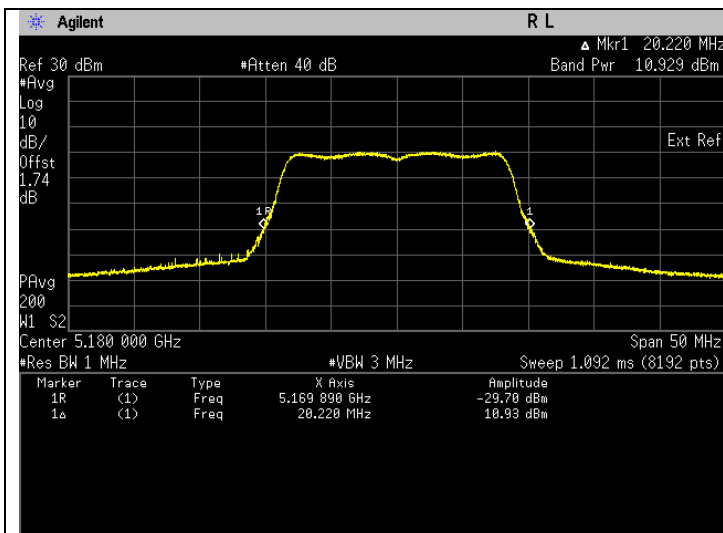



Frequency 5180 MHz, FCC.

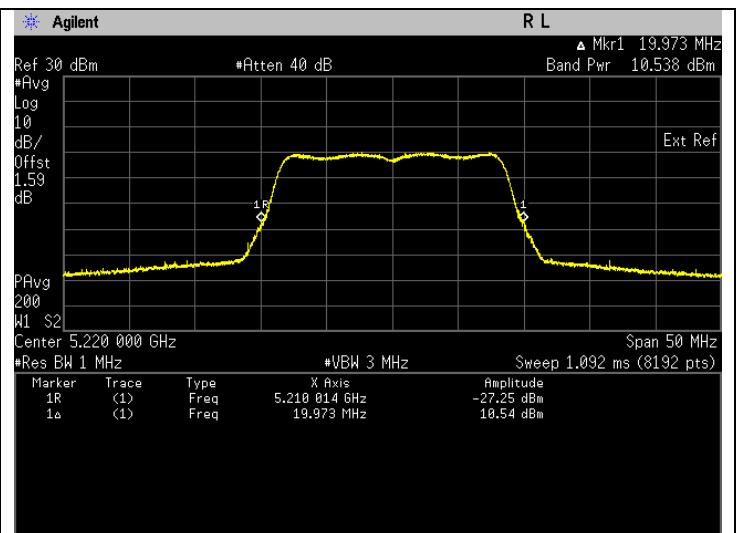


Frequency 5220 MHz, FCC.

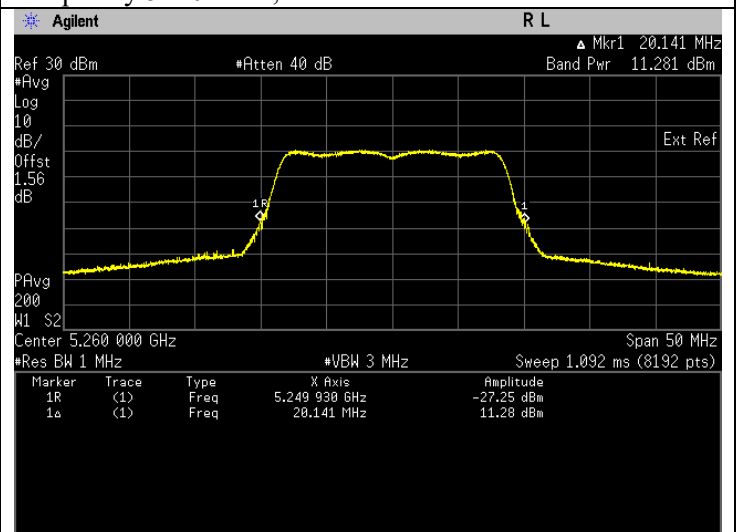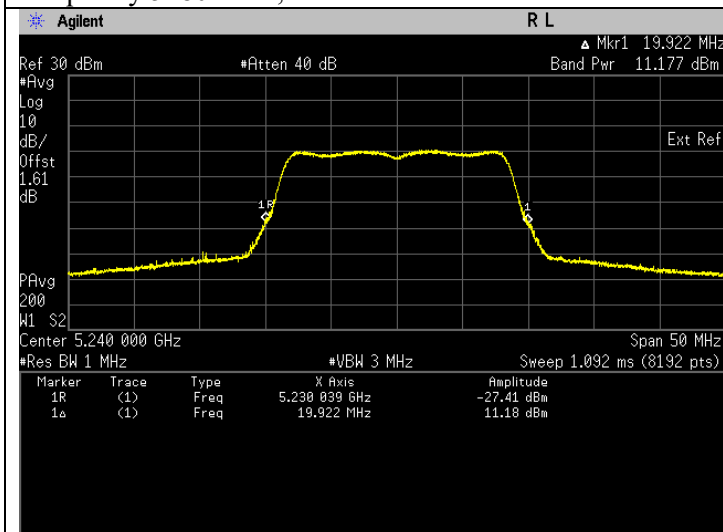

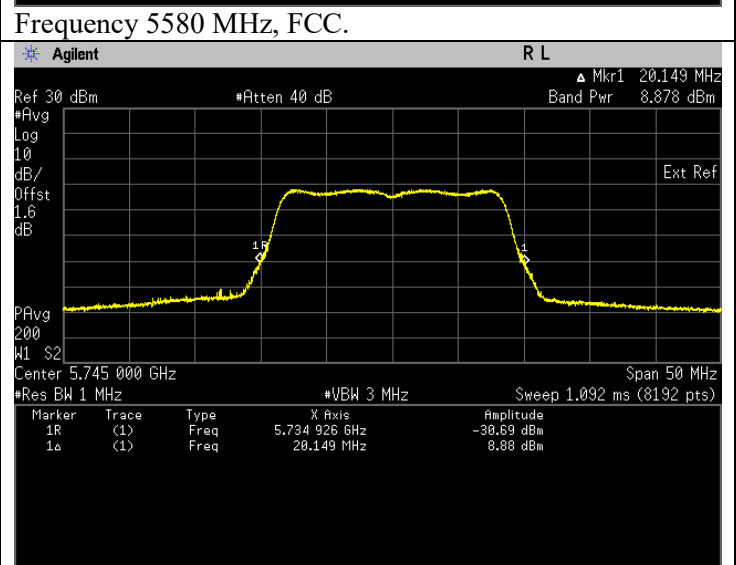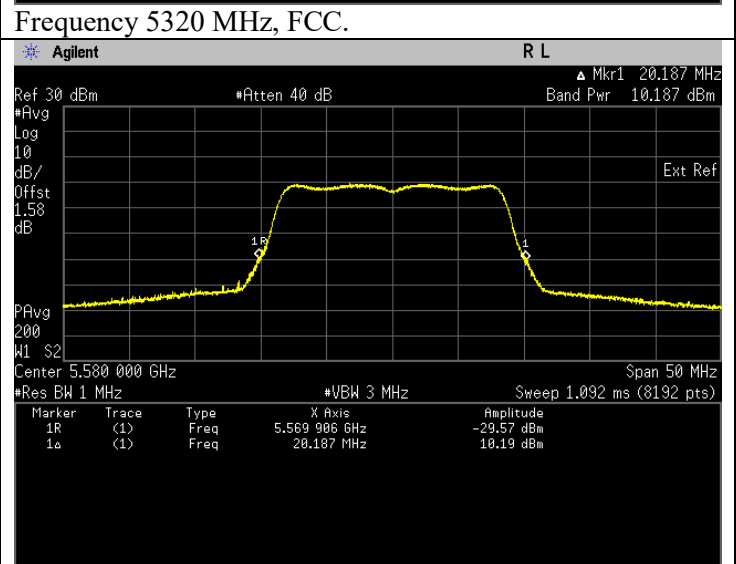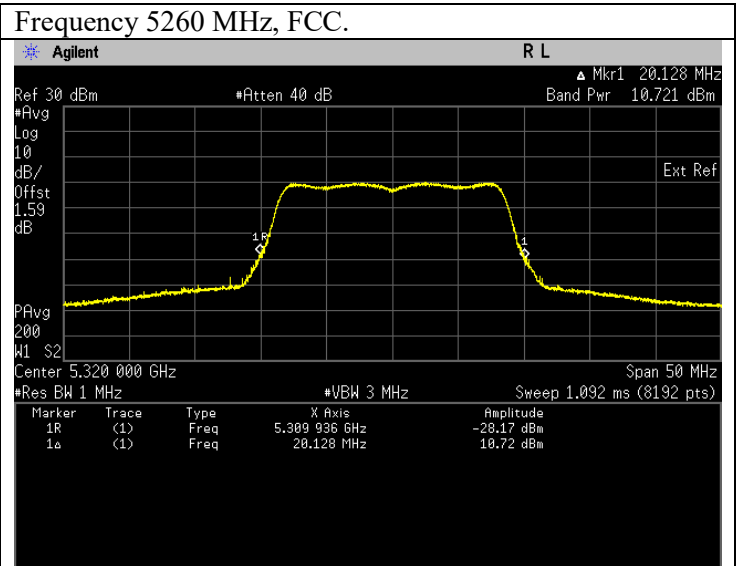

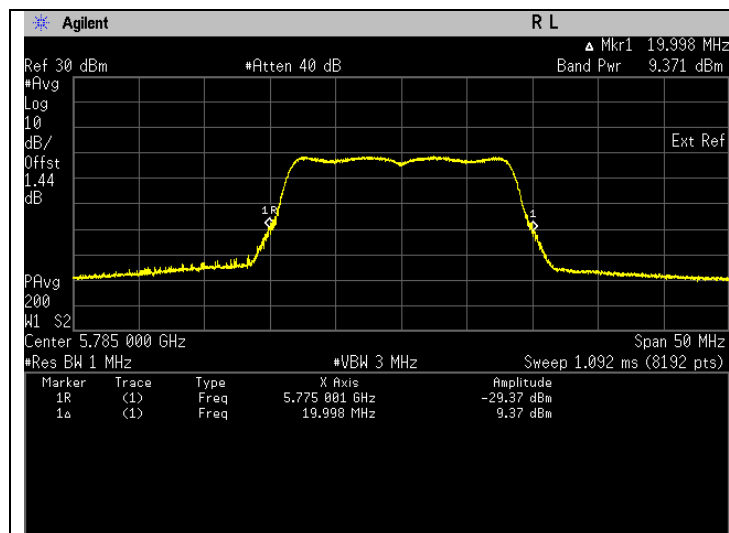


Frequency 5785 MHz, FCC.

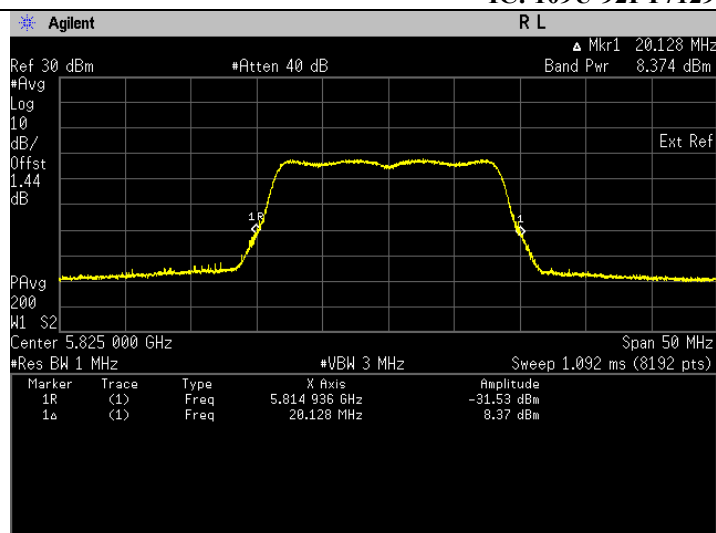


Frequency 5825 MHz, FCC.

Straddle Frequency

Freq. (MHz)	Test Conditions	Results		
		U-NII- 2C		
		Power (mW)	Power (dBm)	Status
5720	Mod Type: BPSK, Data Rate: 6	5.651	7.521	Pass
		U-NII-3		
5720	Mod Type: BPSK, Data Rate: 6	1.375	1.384	Pass

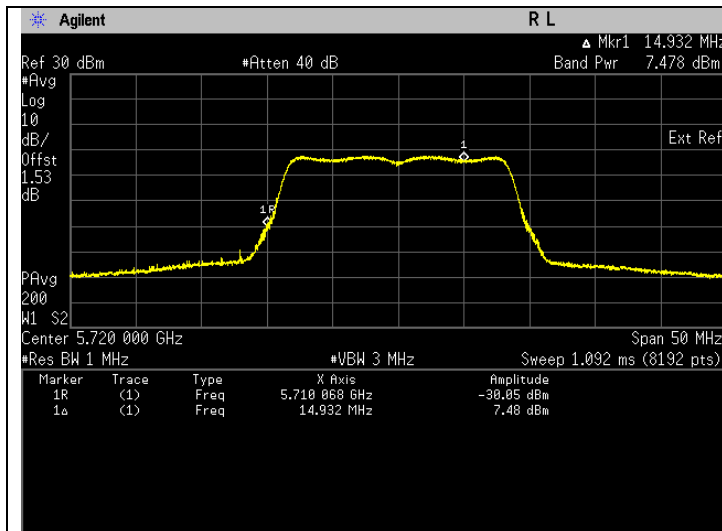


Frequency 5720 MHz, FCC, U-NII-2C. *Note: The band power is captured before the 5725 MHz.

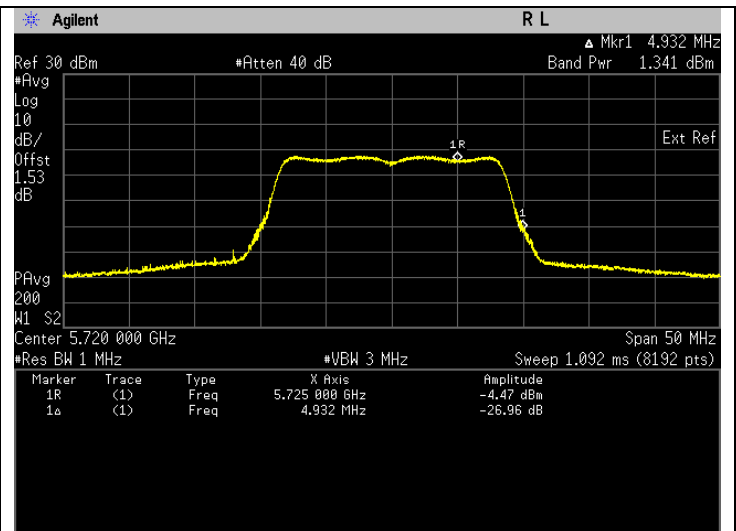


Frequency 5720 MHz, FCC, U-NII-3. *Note: The band power is captured after the 5725 MHz.

802.11a (99% EBW)


Freq. (MHz)	Test Conditions	Results				
		Power (mW)	Power (dBm)	Status	EIRP (dBm)	Status
5180	Mod Type: BPSK, Data Rate: 6	12.281	10.892	Pass	16.142	Pass
5220	Mod Type: BPSK, Data Rate: 6	11.231	10.504	Pass	15.754	Pass
5240	Mod Type: BPSK, Data Rate: 6	13.065	11.161	Pass	16.411	Pass
5260	Mod Type: BPSK, Data Rate: 6	13.367	11.260	Pass	16.510	Pass
5300	Mod Type: BPSK, Data Rate: 6	14.415	11.588	Pass	16.838	Pass
5320	Mod Type: BPSK, Data Rate: 6	11.714	10.687	Pass	15.937	Pass
5500	Mod Type: BPSK, Data Rate: 6	4.418	6.452	Pass	11.702	Pass
5580	Mod Type: BPSK, Data Rate: 6	10.352	10.150	Pass	15.400	Pass
5700	Mod Type: BPSK, Data Rate: 6	9.194	9.635	Pass	14.885	Pass
5745	Mod Type: BPSK, Data Rate: 6	7.683	8.855	Pass	14.105	Pass
5785	Mod Type: BPSK, Data Rate: 6	8.648	9.369	Pass	14.619	Pass
5825	Mod Type: BPSK, Data Rate: 6	6.822	8.339	Pass	13.589	Pass

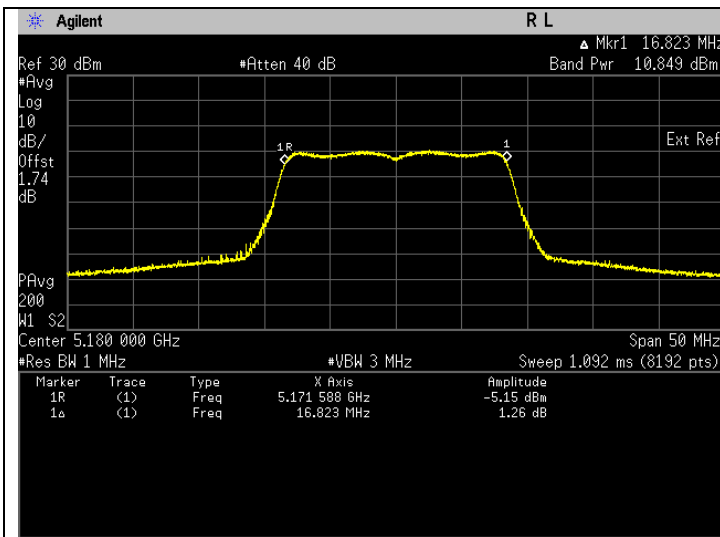


Frequency 5180 MHz, ISED

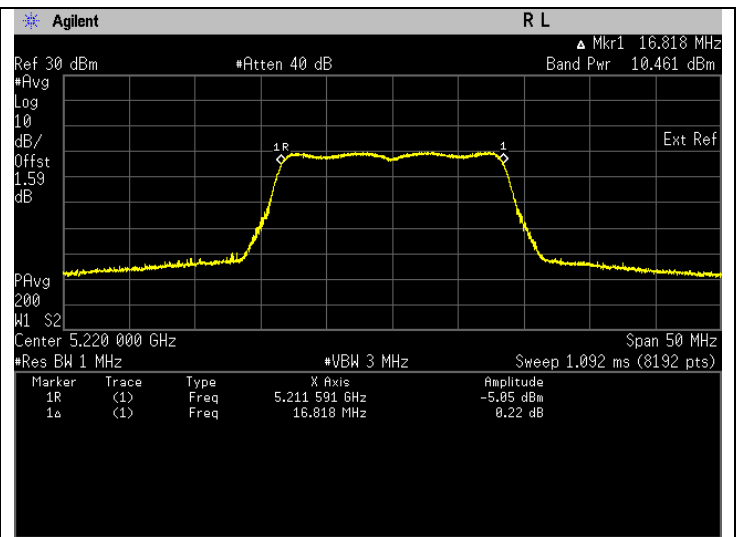


Frequency 5220 MHz, ISED

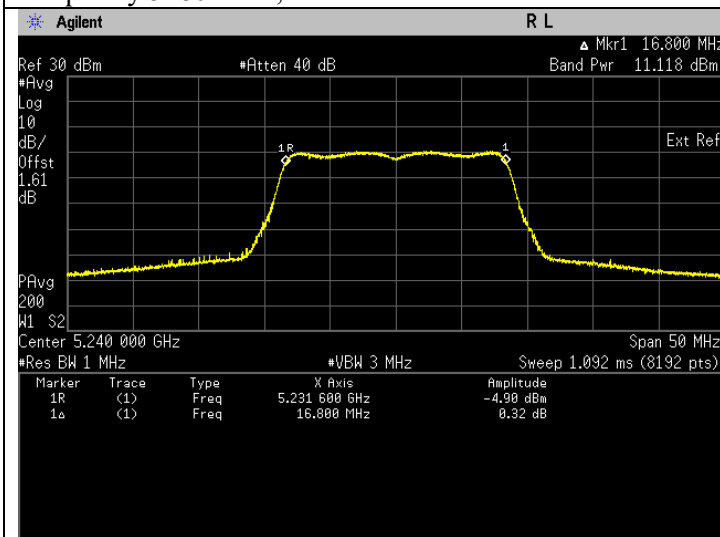


Frequency 5240 MHz, ISED

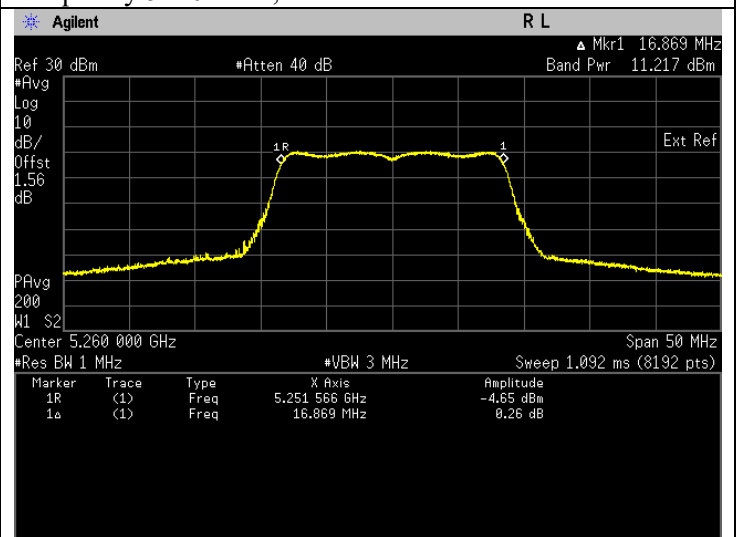


Frequency 5260 MHz, ISED

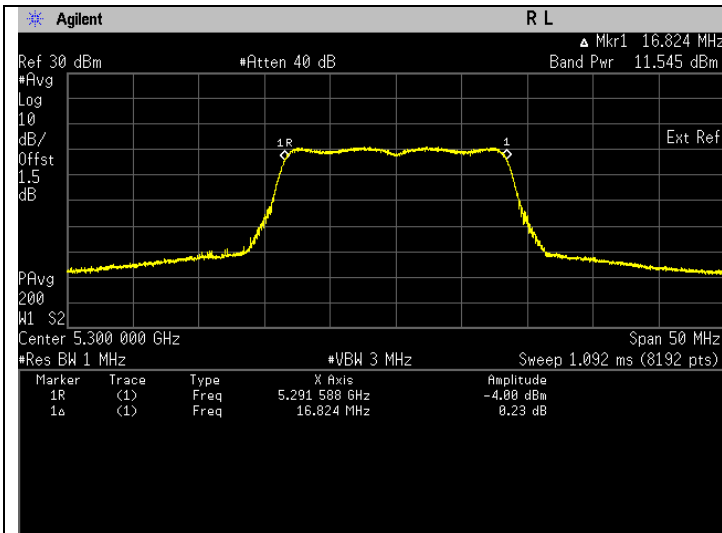


Frequency 5300 MHz, ISED

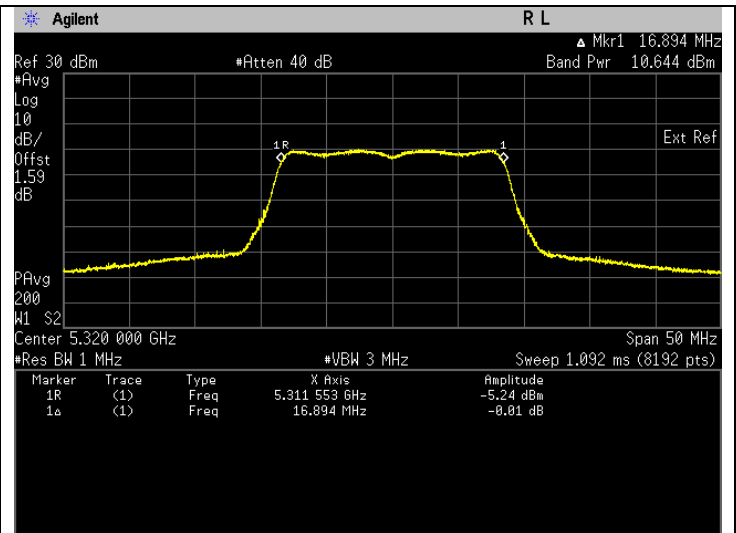


Frequency 5320 MHz, ISED

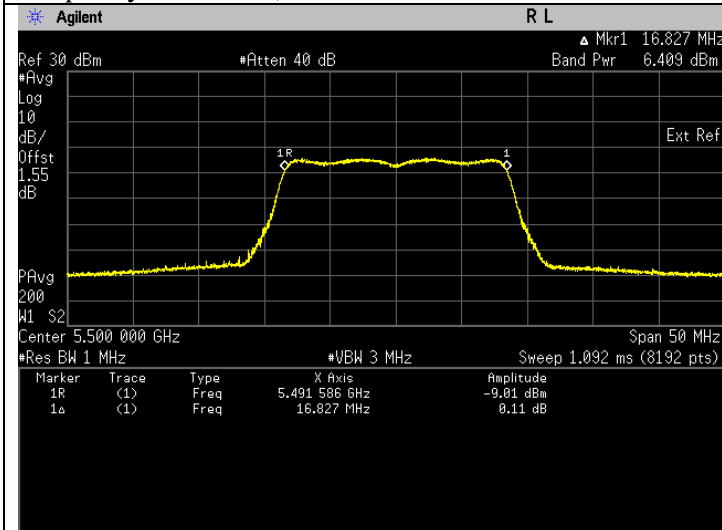


Frequency 5500 MHz, ISED

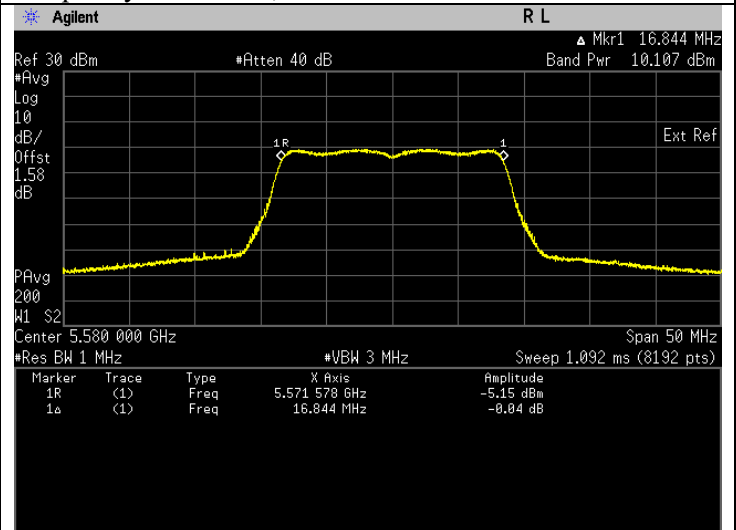


Frequency 5580 MHz, ISED

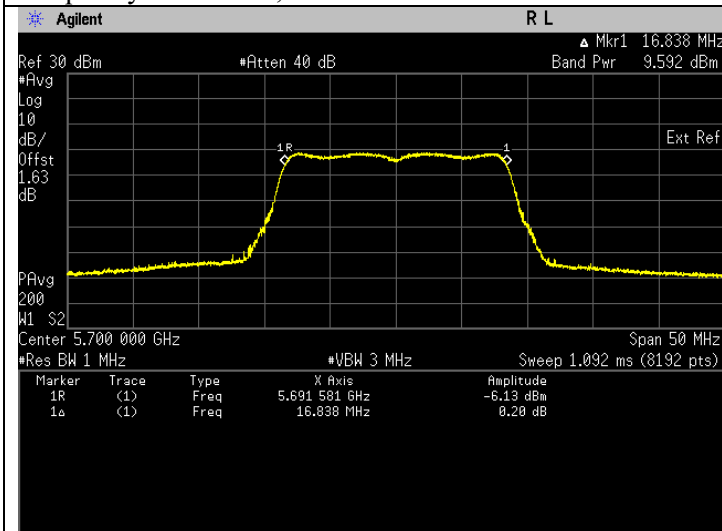


Frequency 5700 MHz, ISED

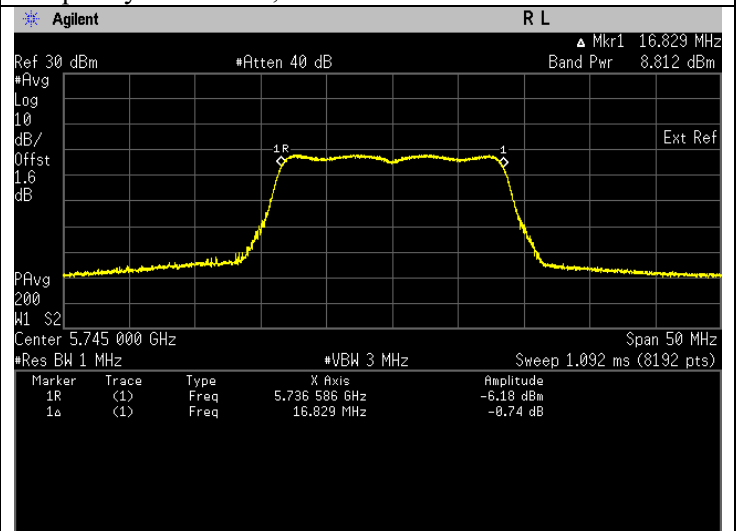

Frequency 5745 MHz, ISED

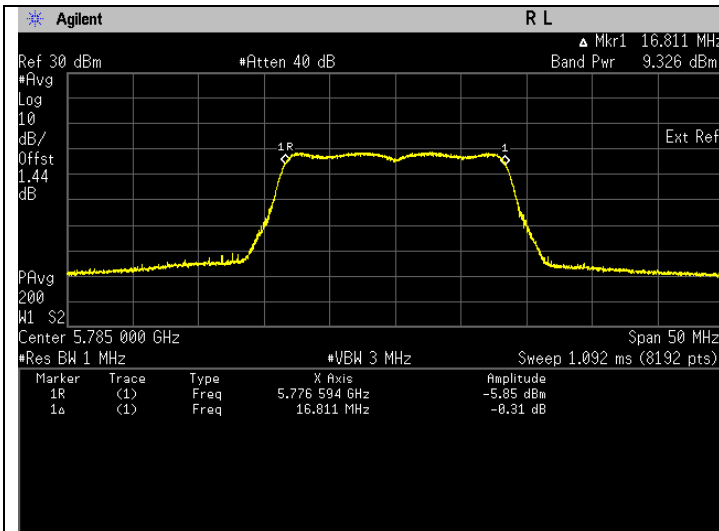


Frequency 5785 MHz, ISED

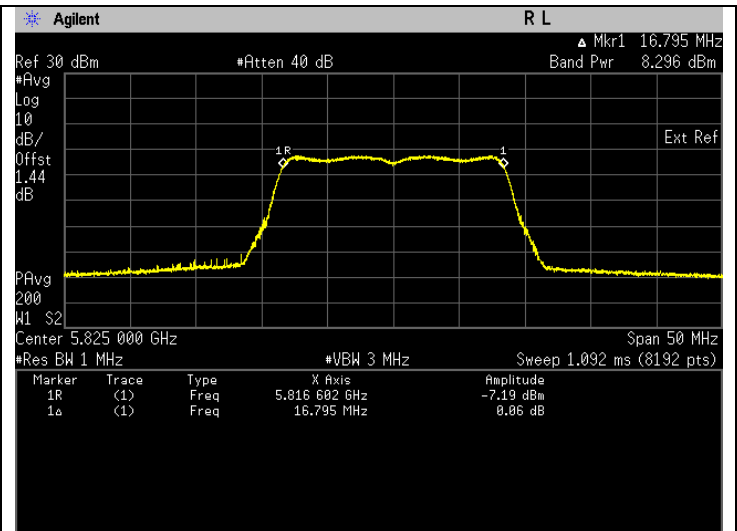


Frequency 5825 MHz, ISED

Straddle Frequency

Freq. (MHz)	Test Conditions	Results				
		U-NII- 2C				
		Power (mW)	Power (dBm)	Status	EIRP (dBm)	Status
5720	Mod Type: BPSK, Data Rate: 6	5.611	7.490	Pass	12.740	Pass
5720	Mod Type: BPSK, Data Rate: 6	U-NII-3				
		Power (mW)	Power (dBm)	Status	EIRP (dBm)	Status
5720	Mod Type: BPSK, Data Rate: 6	1.312	1.178	Pass	6.428	Pass

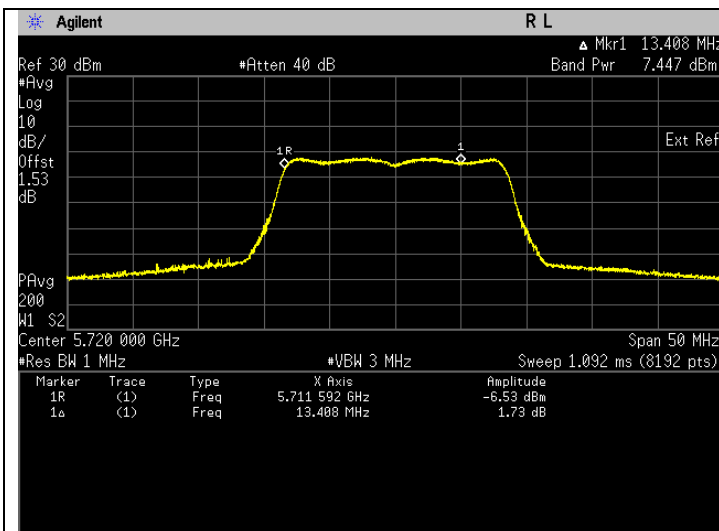


Frequency 5720 MHz, ISED, U-NII-2C. *Note: The band power is captured before the 5725 MHz.

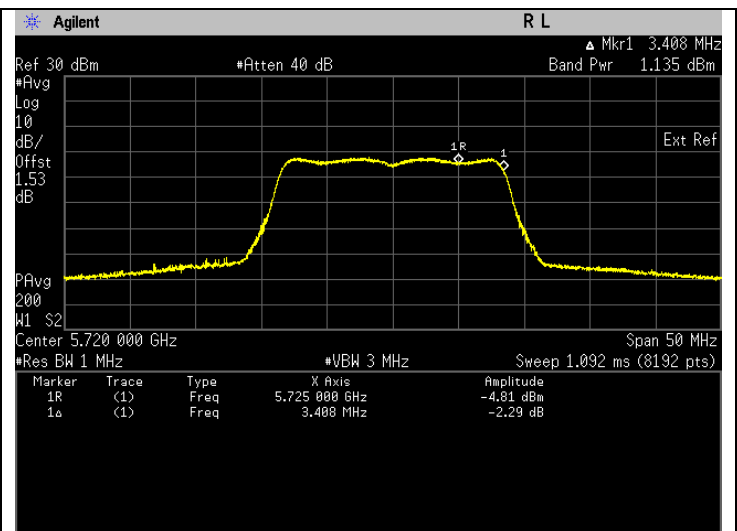


Frequency 5720 MHz, ISED, U-NII-3. *Note: The band power is captured after the 5725 MHz.

802.11n (HT20)(26dB EBW)


Freq. (MHz)	Test Conditions	Results		
		Power (mW)	Power (dBm)	Status
5180	Mod Type: BPSK, Data Rate: MCS0 (6.5)	12.505	10.971	Pass
5220	Mod Type: BPSK, Data Rate: MCS0 (6.5)	11.399	10.569	Pass
5240	Mod Type: BPSK, Data Rate: MCS0 (6.5)	13.146	11.188	Pass
5260	Mod Type: BPSK, Data Rate: MCS0 (6.5)	13.390	11.268	Pass
5300	Mod Type: BPSK, Data Rate: MCS0 (6.5)	14.232	11.533	Pass
5320	Mod Type: BPSK, Data Rate: MCS0 (6.5)	11.838	10.733	Pass
5500	Mod Type: BPSK, Data Rate: MCS0 (6.5)	4.329	6.364	Pass
5580	Mod Type: BPSK, Data Rate: MCS0 (6.5)	10.844	10.352	Pass
5700	Mod Type: BPSK, Data Rate: MCS0 (6.5)	9.330	9.699	Pass
5745	Mod Type: BPSK, Data Rate: MCS0 (6.5)	7.912	8.983	Pass
5785	Mod Type: BPSK, Data Rate: MCS0 (6.5)	8.525	9.307	Pass
5825	Mod Type: BPSK, Data Rate: MCS0 (6.5)	7.021	8.464	Pass

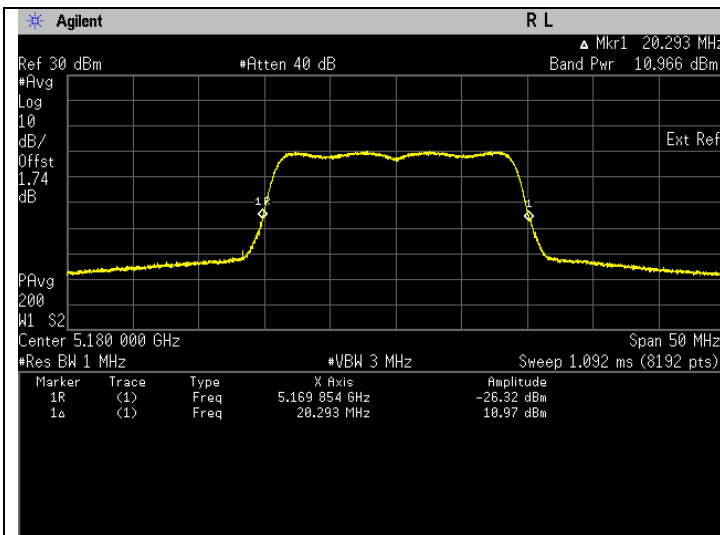


Frequency 5180 MHz, FCC.

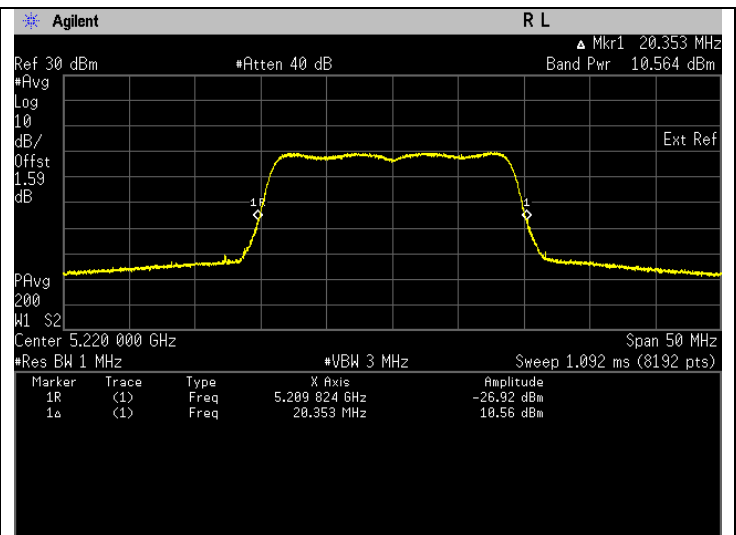


Frequency 5220 MHz, FCC.

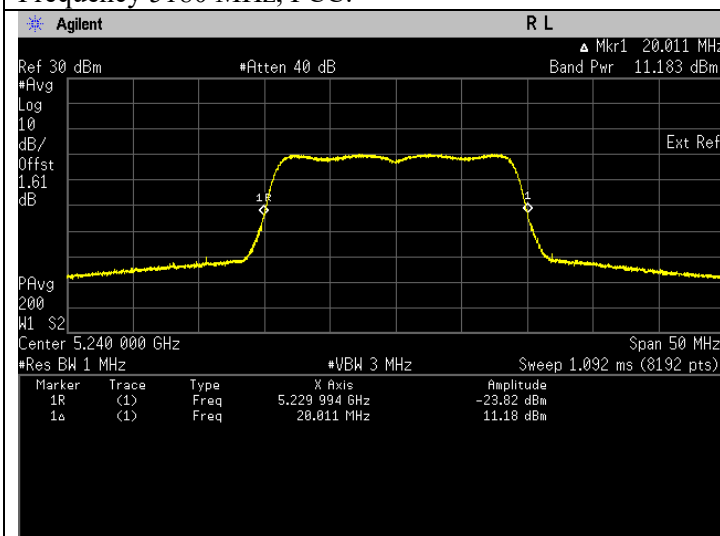


Frequency 5240 MHz, FCC.

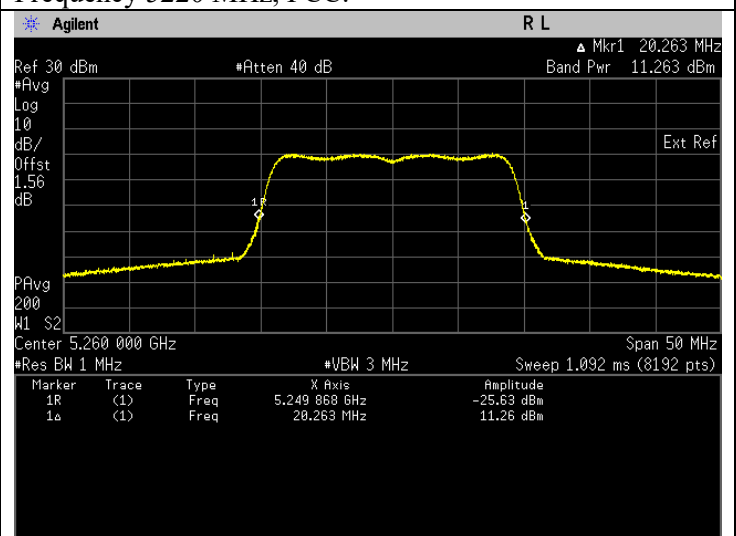


Frequency 5260 MHz, FCC.

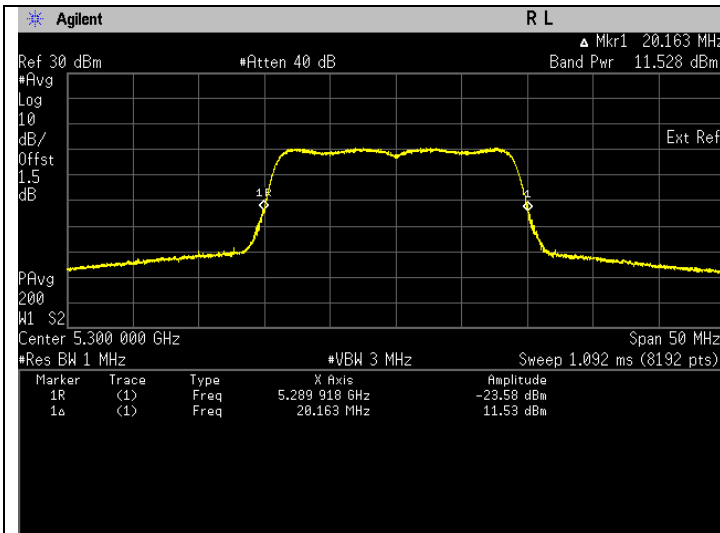


Frequency 5300 MHz, FCC.

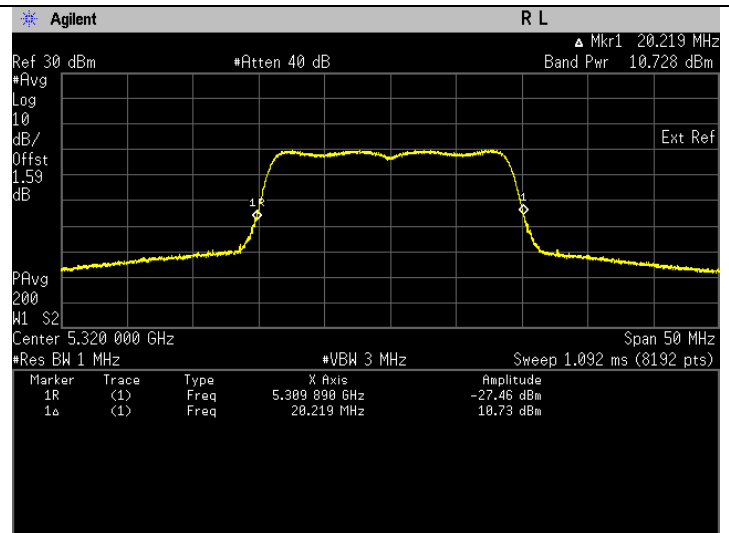


Frequency 5320 MHz, FCC.

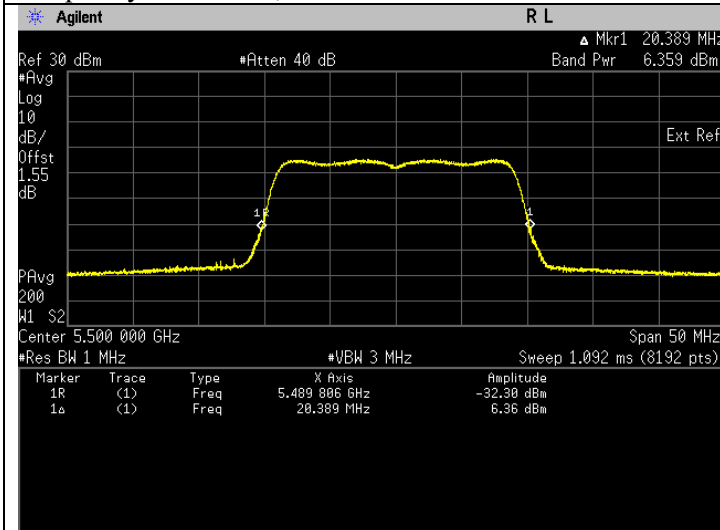


Frequency 5500 MHz, FCC.

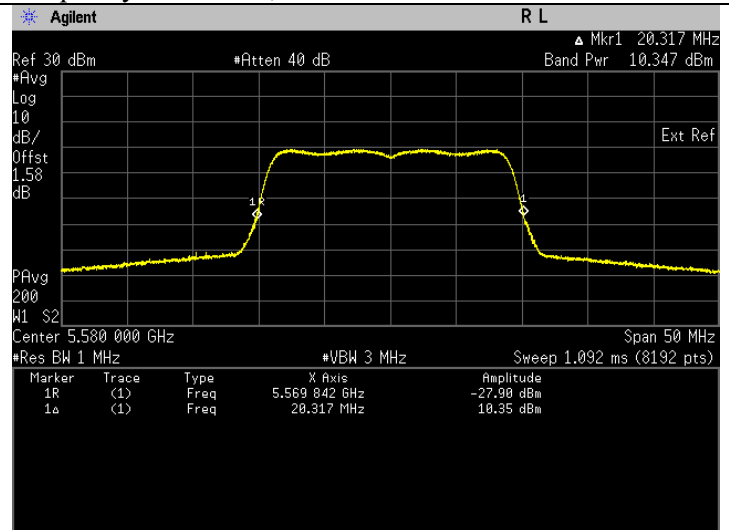


Frequency 5580 MHz, FCC.

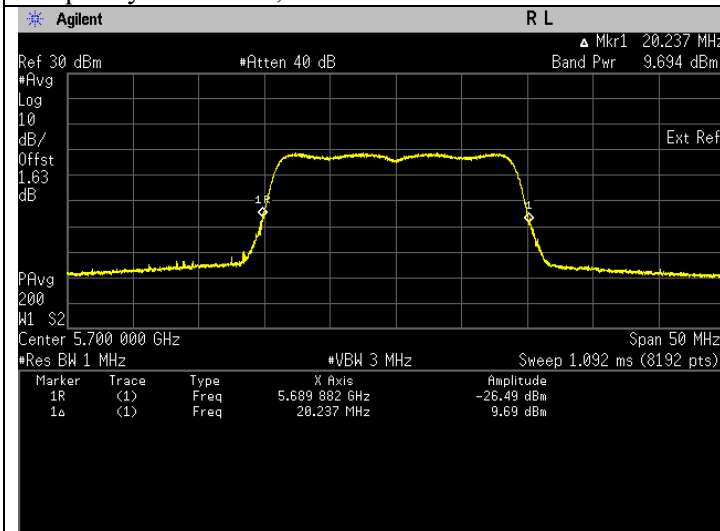


Frequency 5700 MHz, FCC.

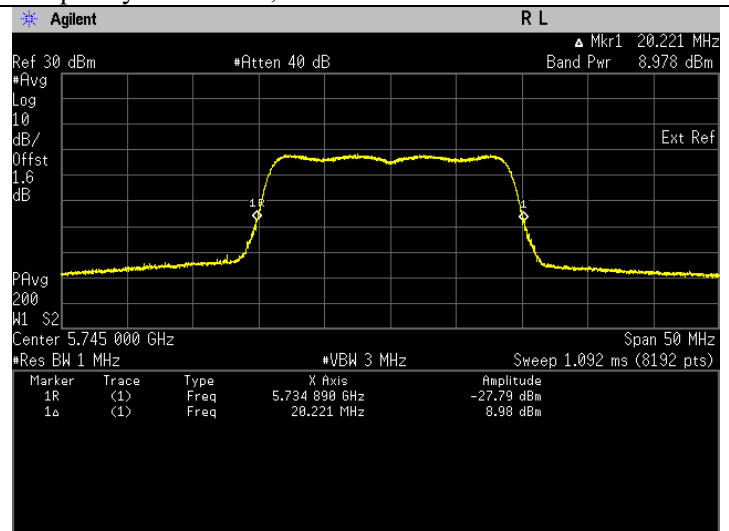

Frequency 5745 MHz, FCC.

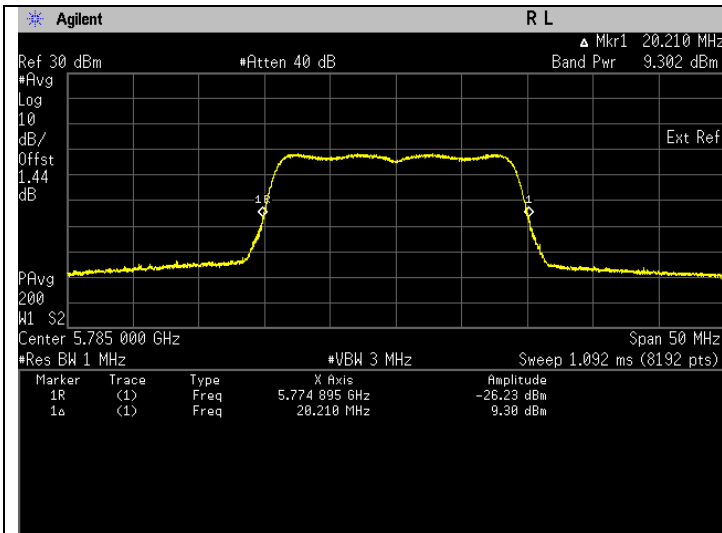


Frequency 5785 MHz, FCC.

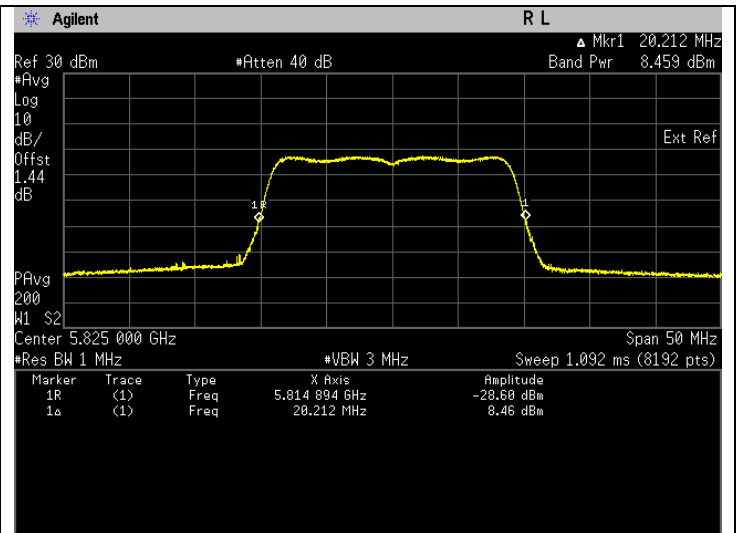


Frequency 5825 MHz, FCC.

Straddle Frequency

Freq. (MHz)	Test Conditions	Results		
		U-NII- 2C		
		Power (mW)	Power (dBm)	Status
5720	Mod Type: BPSK, Data Rate: MCS0 (6.5)	6.864	8.366	Pass
		U-NII-3		
5720	Mod Type: BPSK, Data Rate: MCS0 (6.5)	1.859	2.692	Pass

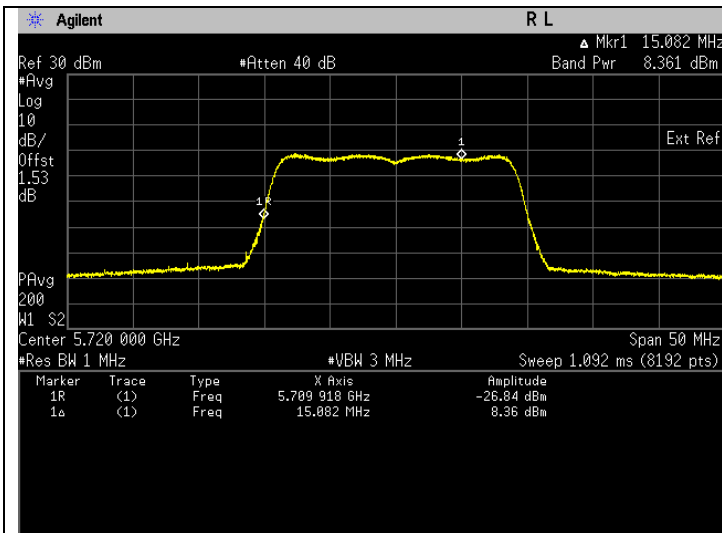


Frequency 5720 MHz, FCC, U-NII-2C. *Note: The band power is captured before the 5725 MHz.

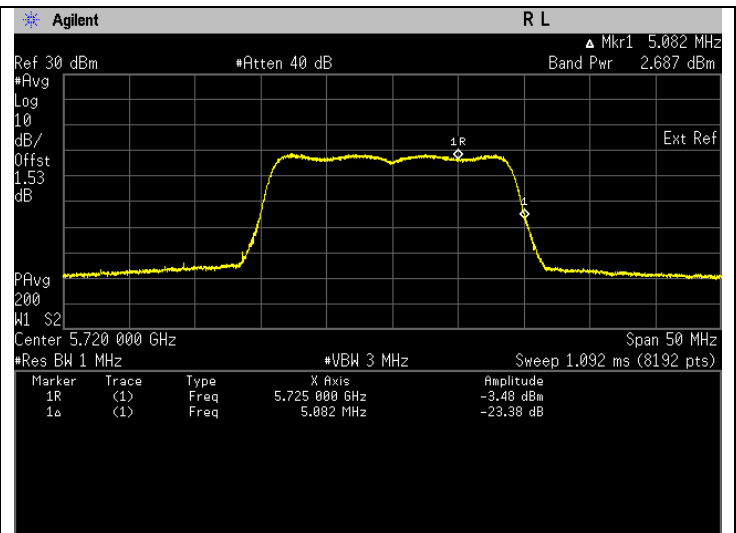


Frequency 5720 MHz, FCC, U-NII-3. *Note: The band power is captured after the 5725 MHz.

802.11n (HT20)(99% EBW)


Freq. (MHz)	Test Conditions	Results				
		Power (mW)	Power (dBm)	Status	EIRP (dBm)	Status
5180	Mod Type: BPSK, Data Rate: MCS0 (6.5)	12.198	10.863	Pass	16.113	Pass
5220	Mod Type: BPSK, Data Rate: MCS0 (6.5)	11.165	10.479	Pass	15.729	Pass
5240	Mod Type: BPSK, Data Rate: MCS0 (6.5)	12.852	11.090	Pass	16.340	Pass
5260	Mod Type: BPSK, Data Rate: MCS0 (6.5)	13.115	11.178	Pass	16.428	Pass
5300	Mod Type: BPSK, Data Rate: MCS0 (6.5)	13.915	11.435	Pass	16.685	Pass
5320	Mod Type: BPSK, Data Rate: MCS0 (6.5)	11.566	10.632	Pass	15.882	Pass
5500	Mod Type: BPSK, Data Rate: MCS0 (6.5)	4.226	6.260	Pass	11.510	Pass
5580	Mod Type: BPSK, Data Rate: MCS0 (6.5)	10.656	10.276	Pass	15.526	Pass
5700	Mod Type: BPSK, Data Rate: MCS0 (6.5)	9.122	9.601	Pass	14.851	Pass
5745	Mod Type: BPSK, Data Rate: MCS0 (6.5)	7.728	8.881	Pass	14.131	Pass
5785	Mod Type: BPSK, Data Rate: MCS0 (6.5)	8.334	9.209	Pass	14.459	Pass
5825	Mod Type: BPSK, Data Rate: MCS0 (6.5)	6.872	8.371	Pass	13.621	Pass

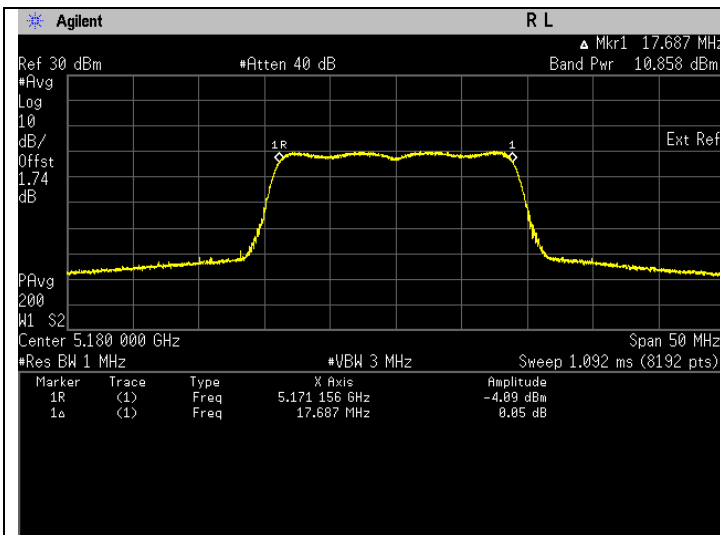


Frequency 5180 MHz, ISED

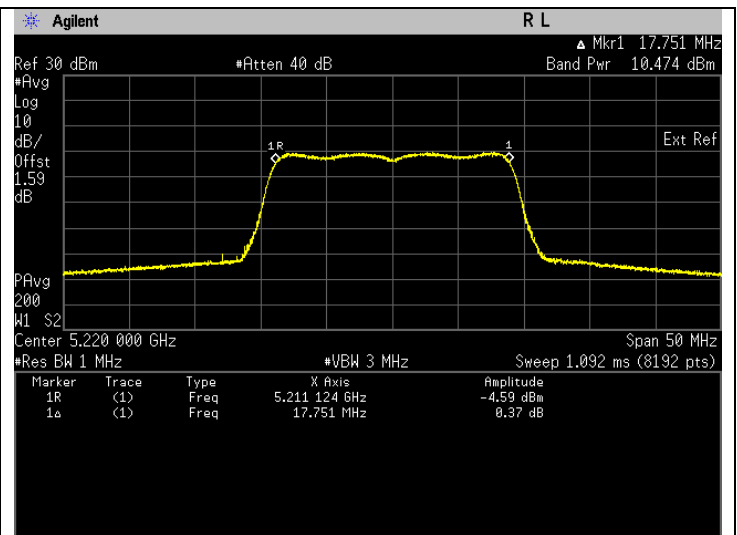


Frequency 5220 MHz, ISED

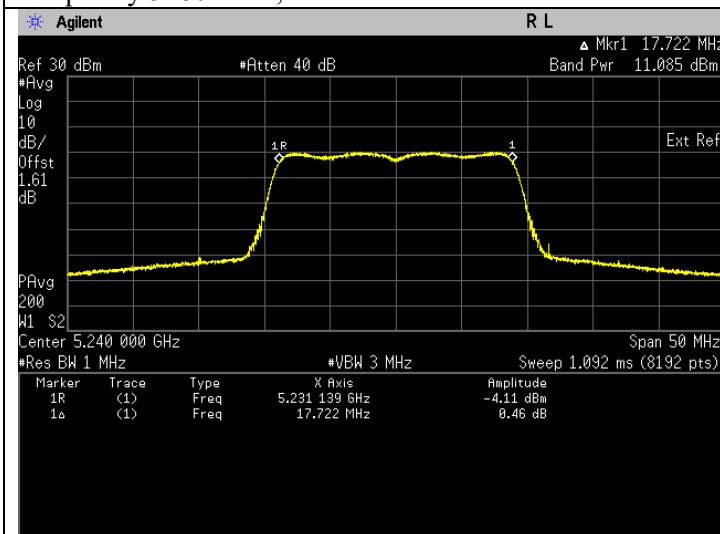


Frequency 5240 MHz, ISED

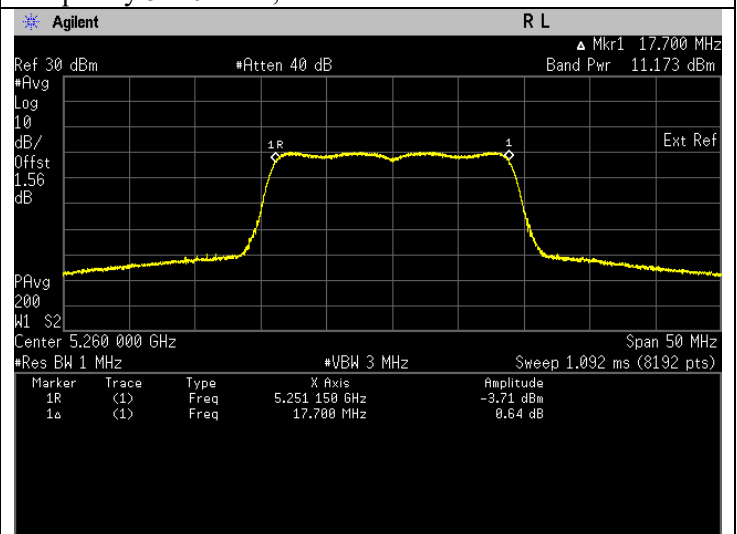


Frequency 5260 MHz, ISED

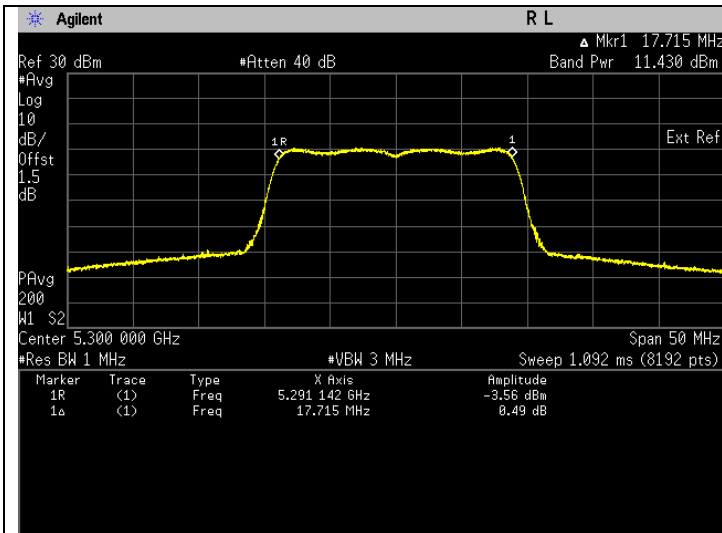


Frequency 5300 MHz, ISED

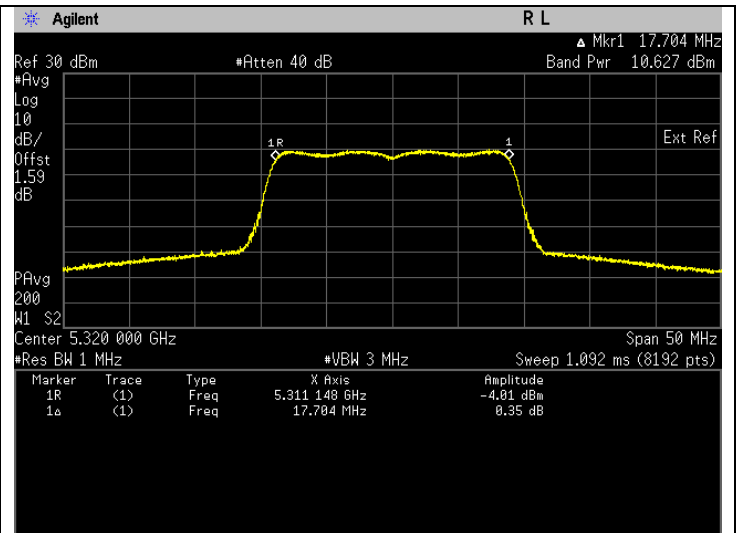


Frequency 5320 MHz, ISED

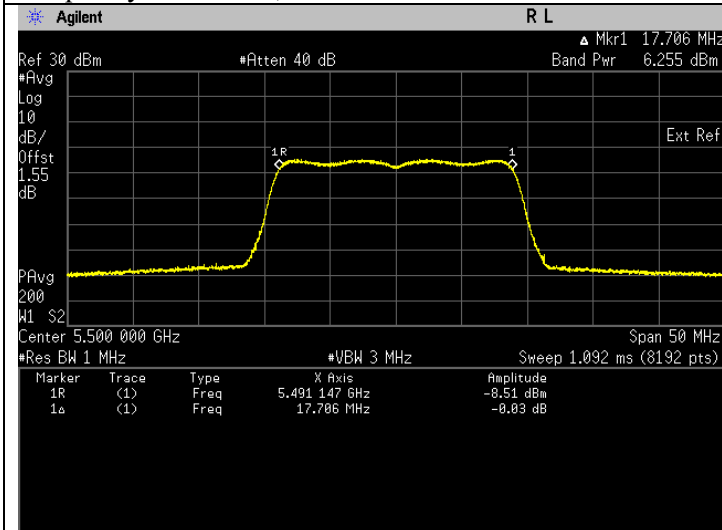


Frequency 5500 MHz, ISED

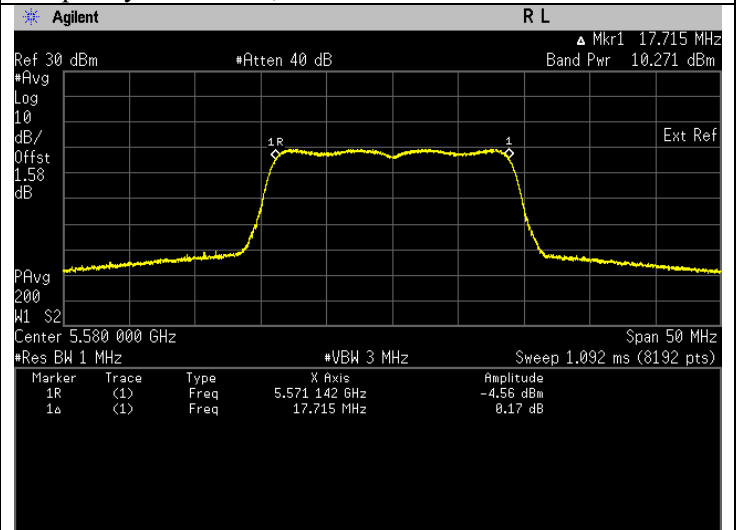



Frequency 5580 MHz, ISED

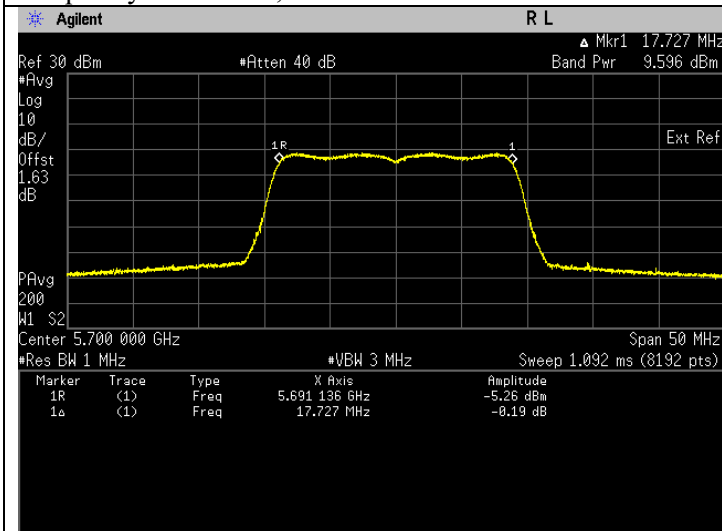

Frequency 5700 MHz, ISED


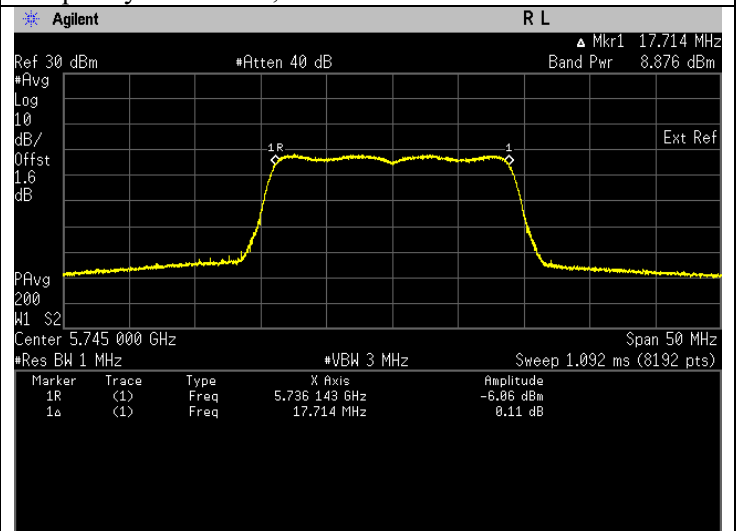


Frequency 5745 MHz, ISED

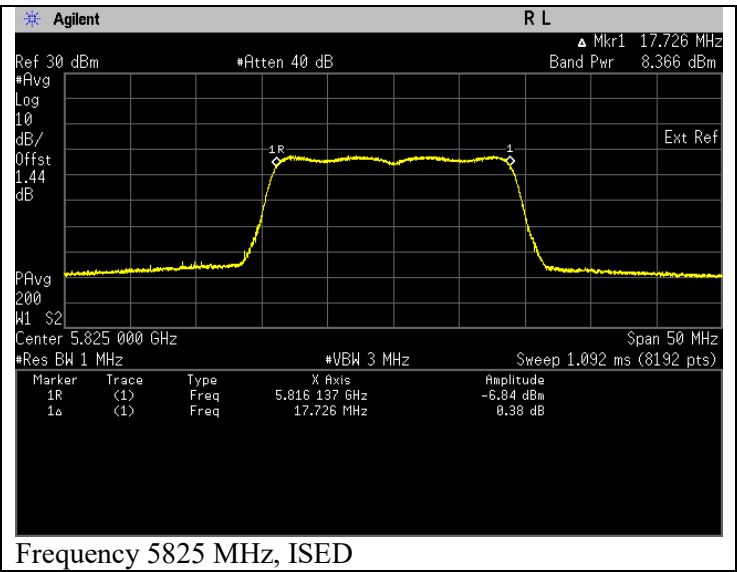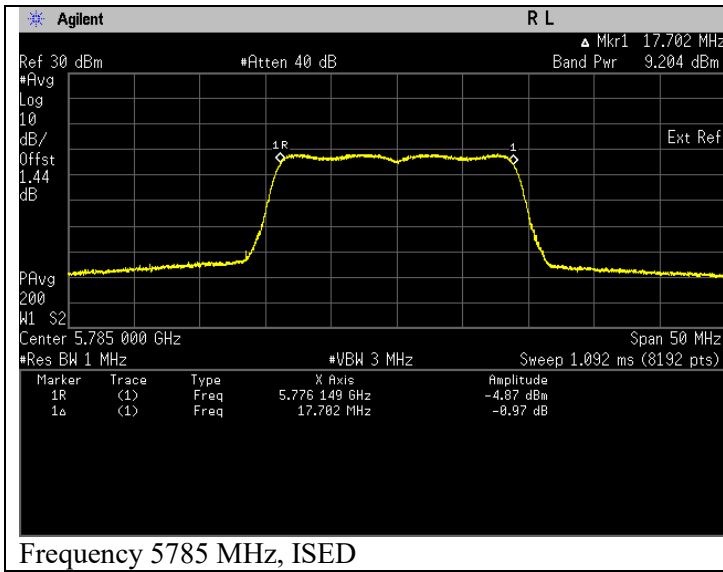


Straddle Frequency

Freq. (MHz)	Test Conditions	Results				
		U-NII- 2C				
		Power (mW)	Power (dBm)	Status	EIRP (dBm)	Status
5720	Mod Type: BPSK, Data Rate: MCS0 (6.5)	6.754	8.296	Pass	13.546	Pass
U-NII-3						
5720	Mod Type: BPSK, Data Rate: MCS0 (6.5)	1.772	2.485	Pass	7.735	Pass

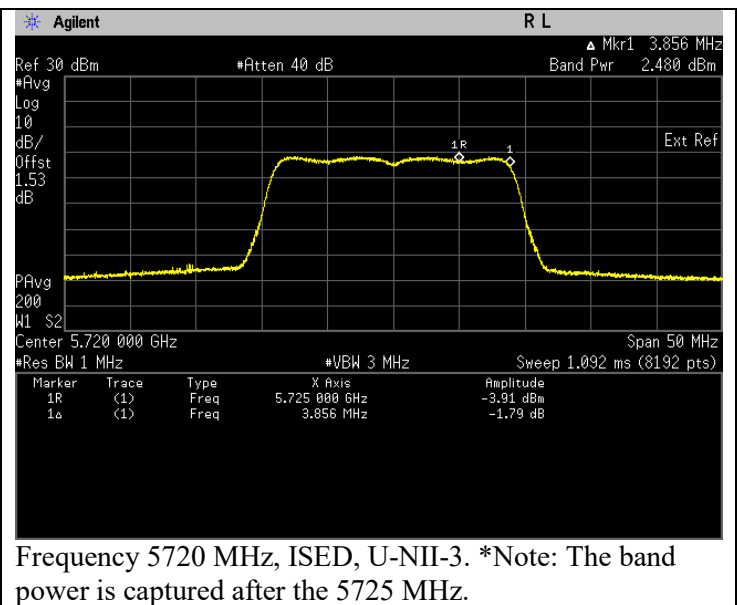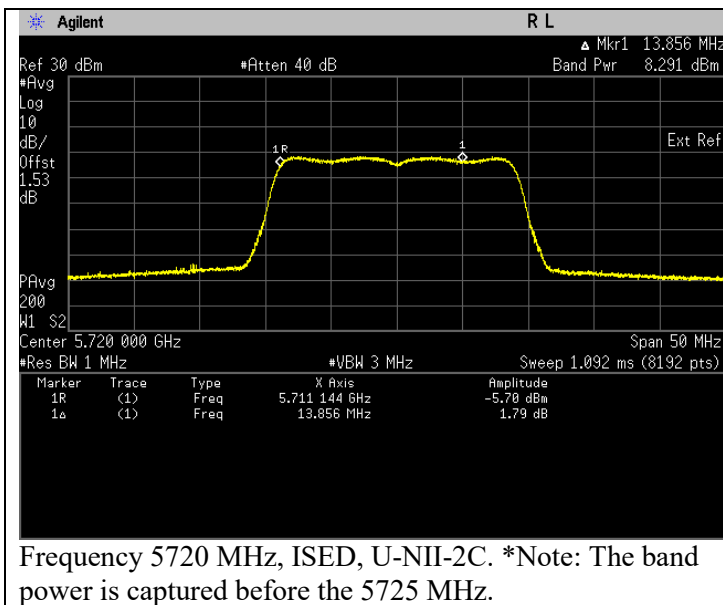

7.3. Maximum Power Spectral Density

7.3.1. Test Setup



- a) Test setup as per illustrated above.
- b) Set DUT to transmit at desire transmit frequency.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - Span to encompass the entire 26dB EBW or 99% occupied bandwidth.
 - RBW = 1 MHz (5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz) / 500 kHz (5.725-5.85 GHz)
 - VBW $\geq 3 \cdot$ RBW
 - Detector = power averaging (RMS)
 - Trace = Max hold
 - Number of points in sweep $\geq 2 \times$ span / RBW
 - Sweep time = auto
 - Trace average at least 100 traces in power averaging (rms) mode
- e) Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- f) Add $10 \log (1/x)$, where x is the duty cycle, to the peak of the spectrum.
- g) The measurement method follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04 under clause F) Method SA-2.
- h) The Maximum power spectral density results are included duty cycle correction factor.

7.3.2. Test Limits

FCC 15.407(a)

Range (GHz)	Condition	Limit
5.15-5.25	Outdoor AP	17dBm/ 1MHz
	Indoor AP	17dBm/ 1MHz
	Fixed Point to Point AP	17dBm/ 1MHz
	√ Mobile and Portable Client Devices	11dBm/ 1MHz
5.25-5.35	√	11dBm/ 1MHz
5.47-5.525	√	11dBm/ 1MHz
5.725-5.85	√	30dBm/ 500kHz

RSS-247 6.2

Range(GHz)	Condition	Limit
5.15-5.25	Indoor Operation Only	EIRP: 10dBm/ 1MHz
5.25-5.35		11dBm/ 1MHz
5.47-5.6 5.6-5.525		11dBm/ 1MHz
5.725-5.85		30dBm/ 500kHz

7.3.3. Additional Info


Antenna	Gain (dBi)
Antenna 1	5.25
Duty Cycle Correction Factor	
802.11a	0.043
802.11n (HT20)	0.005

7.3.4. Test Data

N/A

7.4. 6dB Bandwidth

7.4.1. Test Setup



- a) Test setup as per illustrated above.
- b) Set DUT to transmit at desire transmit frequency.
- c) 6dB bandwidth is applicable for the band 5.725-5.85GHz only.
- d) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- e) Setting of Spectrum analyzer :
 - RBW = 100 kHz
 - VBW $\geq 3 \cdot$ RBW
 - Detector = Peak
 - Trace = Max Hold
 - Sweep = Auto couple
- f) Allow trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- h) The measurement method follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04 under clause C.2).

7.4.2. Test Limits

FCC 15.407(e)

Within the 5.725-5.85GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

RSS 247 6.2.4


For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

7.4.3. Test Data

N/A

7.5. Frequency Stability

7.5.1. Test Setup

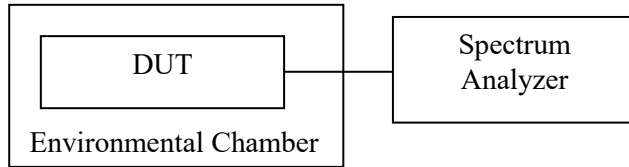

- a) Test setup as per illustrated above.
- b) Set DUT to transmit un-modulated signal at desire transmit frequency.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) The DUT was operated at the maximum output power, and spectrum which is set to maximum hold function and peak detector.
- e) The peak value of the power envelope was measured and noted.
- f) Test was conducted from temperature range from -30°C to 50°C with step size of 10°C on manufacturer's rated supply voltage.
- g) At temperature of 20°C , $\pm 15\%$ of manufacturer's rated voltage are to be applied.
- h) The frequency stability is measured and recorded of frequency deviation due to temperature and supply voltage variations as mentioned at condition f) & g) above.

7.5.2. Test Limits

FCC 15.407(g)

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.


RSS-GEN 6.11

7.5.3. Test Data

N/A

7.6. Band Edge Radiated Spurious Emission Measurement

7.6.1. Test Setup

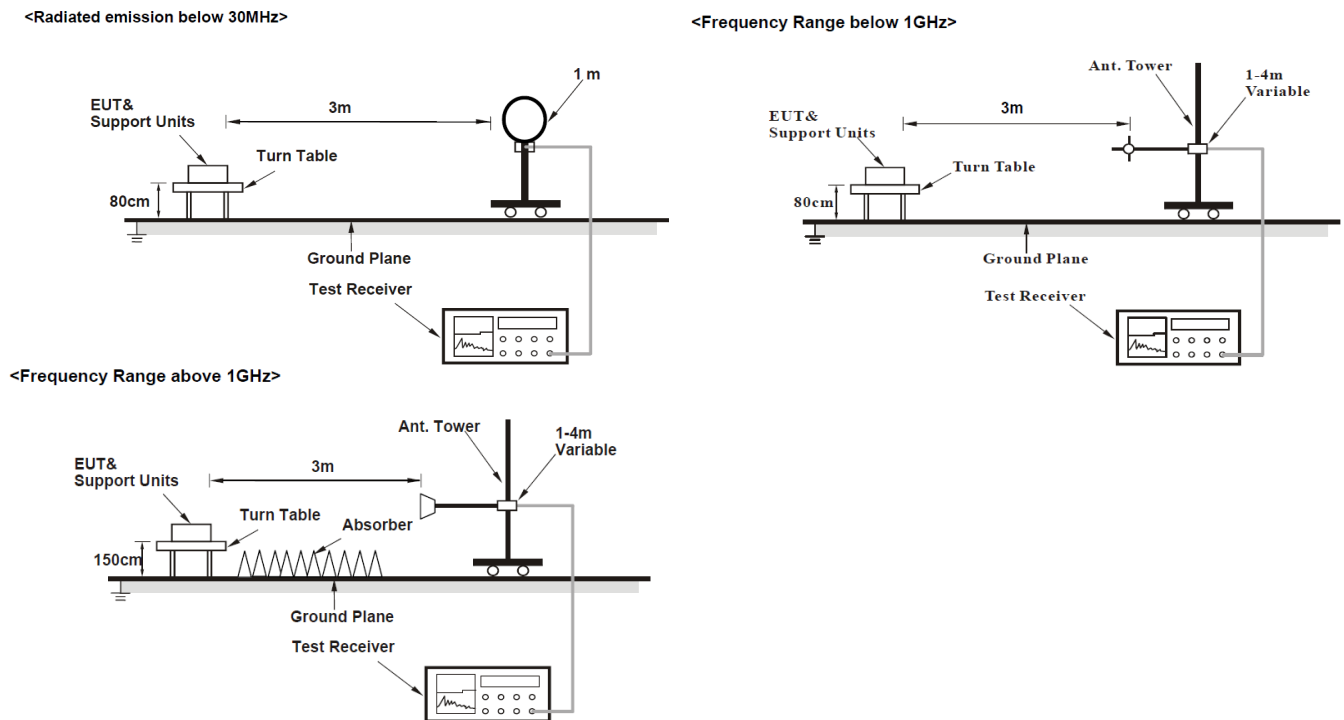

1. The EUT is placed on the top of a rotating table 0.8m/1.5m above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
2. The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
3. The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection using reduced video bandwidth (Duty cycle $\geq 98\%$) at frequency above 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $1/\tau$ Hz, where τ is minimum transmitter on time (Duty cycle $< 98\%$) for Average detection using reduced video bandwidth at frequency above 1GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7.6.2. Test Limits

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

For Radiated emissions which fall out of the restricted bands must comply with the radiated emission limits specified as below table.

Applicable To		Limit	
789033 D02 General UNII Test Procedures New Rules v01r03		Field Strength at 3 m	
		PK: 74 (dBμV/m)	AV: 54 (dBμV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
5150–5250 MHz	15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)
5250–5350 MHz	15.407(b)(2)		
5470–5725 MHz	15.407(b)(3)		
5725–5850 MHz	15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2 (dBμV/m) ^{*1} PK:105.2 (dBμV/m) ^{*2} PK: 110.8 (dBμV/m) ^{*3} PK:122.2 (dBμV/m) ^{*4}
	15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.			
^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.			
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.			
^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge			

NOTE:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = ((1000000 \sqrt{(30P)}) / 3) \mu\text{V/m, where } P \text{ is the eirp (Watts)}$$

802.11a

Model Number: M25QSS9PW1BN S/N: 471TVZ0920 EMC SR ID#: 18807-EMC-00036
Battery: NA Accessory: HAE6011A-C1, AN000163A02-C4, HMN1089C-C2,
HSN6003C-CF2, HKN6032A-CF1, 3466-HKN6163C-1, 3075217A02-C1, PHCN4000E-CF3,
PHLN1002A-CF2, PMUN1083A-C5
Test Channel: High Test Frequency: 5700.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Y-Plane (802.11a)


[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


System MU:

36

Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

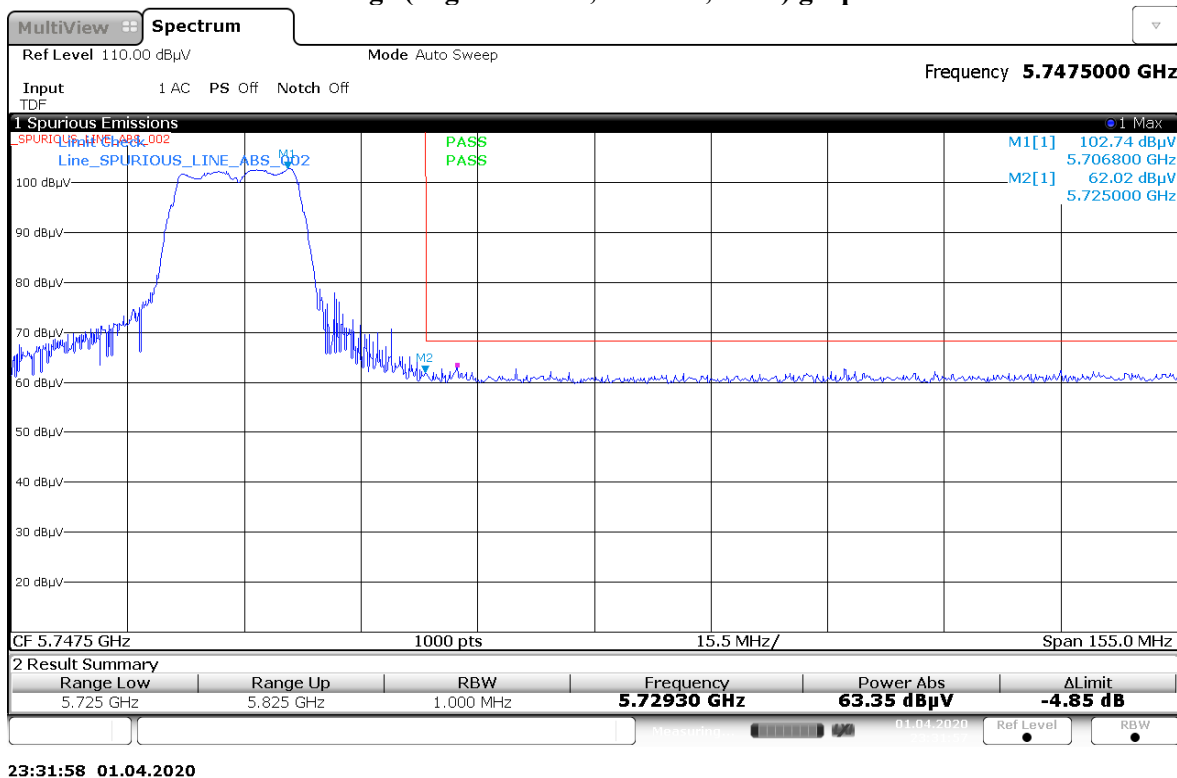


Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

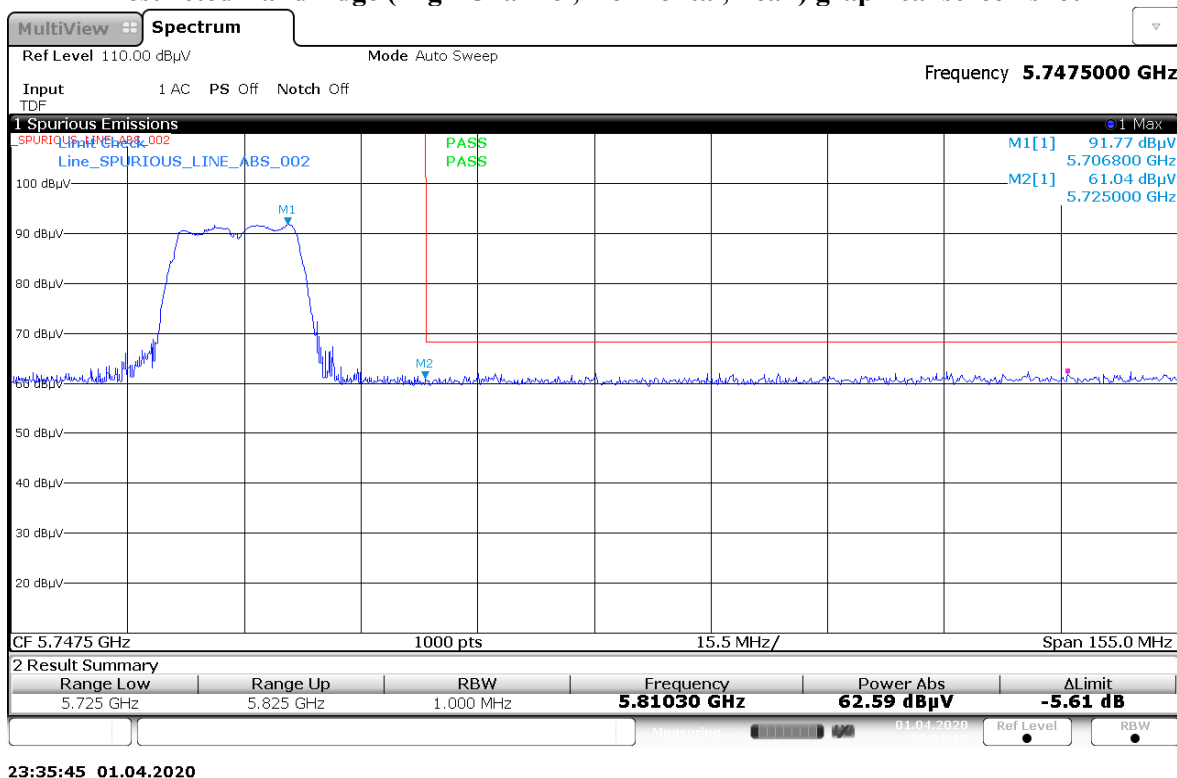


7.7. Radiated Spurious Emission Measurement

7.7.1. Test Setup


<Radiated emission below 30MHz>

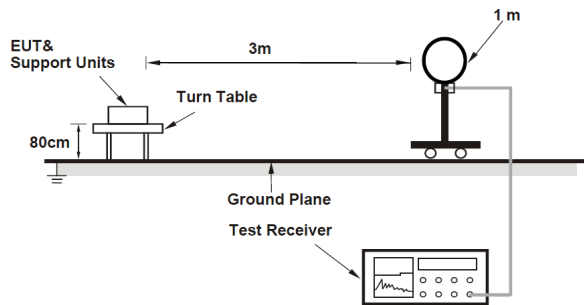

<Frequency Range below 1GHz>

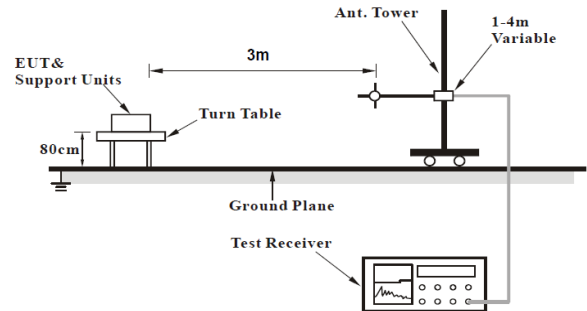

<Frequency Range above 1GHz>

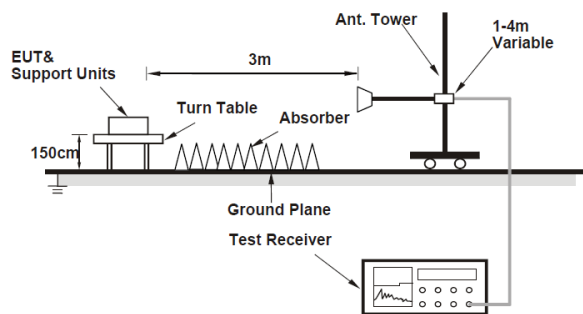

1. The EUT is placed on the top of a rotating table 0.8m/1.5m above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
2. The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
3. The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection using reduced video bandwidth (Duty cycle $\geq 98\%$) at frequency above 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $1/\tau$ Hz, where τ is minimum transmitter on time (Duty cycle $< 98\%$) for Average detection using reduced video bandwidth at frequency above 1GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7.7.2. Test Limits

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

For Radiated emissions which fall out of the restricted bands must comply with the radiated emission limits specified as below table.

Applicable To		Limit	
789033 D02 General UNII Test Procedures New Rules v01r03		Field Strength at 3 m	
		PK: 74 (dBµV/m)	AV: 54 (dBµV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
5150–5250 MHz	15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBµV/m)
5250–5350 MHz	15.407(b)(2)		
5470–5725 MHz	15.407(b)(3)		
5725–5850 MHz	15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2 (dBµV/m) ^{*1} PK: 105.2 (dBµV/m) ^{*2} PK: 110.8 (dBµV/m) ^{*3} PK: 122.2 (dBµV/m) ^{*4}
	15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.			
^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.			
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.			
^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge			

NOTE:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = ((1000000 \sqrt{(30P)}) / 3) \mu\text{V/m, where } P \text{ is the eirp (Watts)}$$

802.11n

Model#: M25QSS9PW1BN S/N: 471TVZ0920 EMC SR ID#: 18807-EMC-00036
Battery: NA Accessory: HAE6011A-C1, AN000163A02-C4, HMN1089C-C2,
HSN6003C-CF2, HKN6032A-CF1, 3466-HKN6163C-1, 3075217A02-C1, PHCN4000E-CF3,
PHLN1002A-CF2, PMUN1083A-C5

Test Channel: High Test Frequency: 5240.0000 MHz Test Standard: ANSI C63.10-2013
Worst Case Plane: Y-Plane (802.11n)


[illegible]

Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------


System MU:

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, QPK

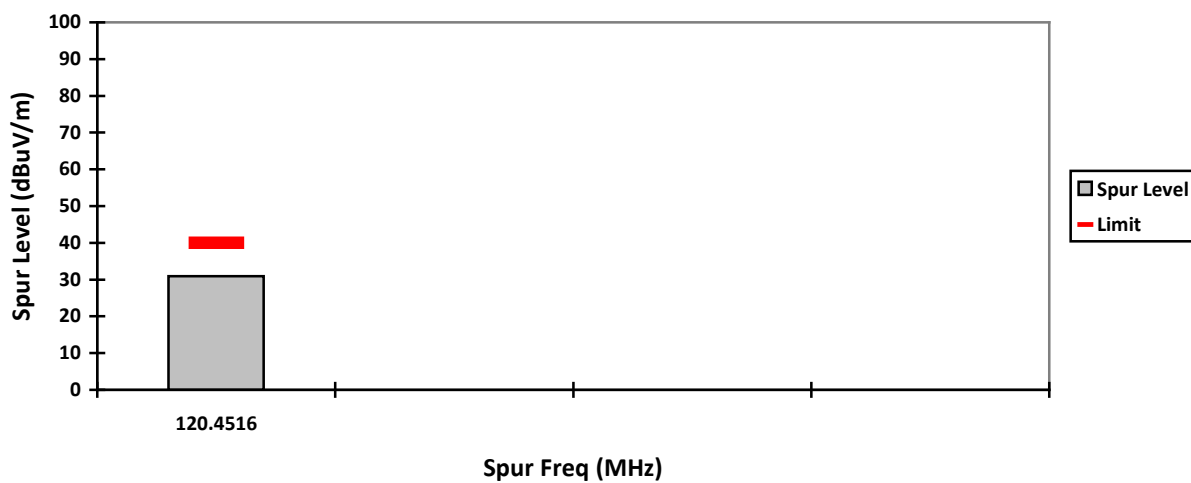


HORIZONTAL, QPK

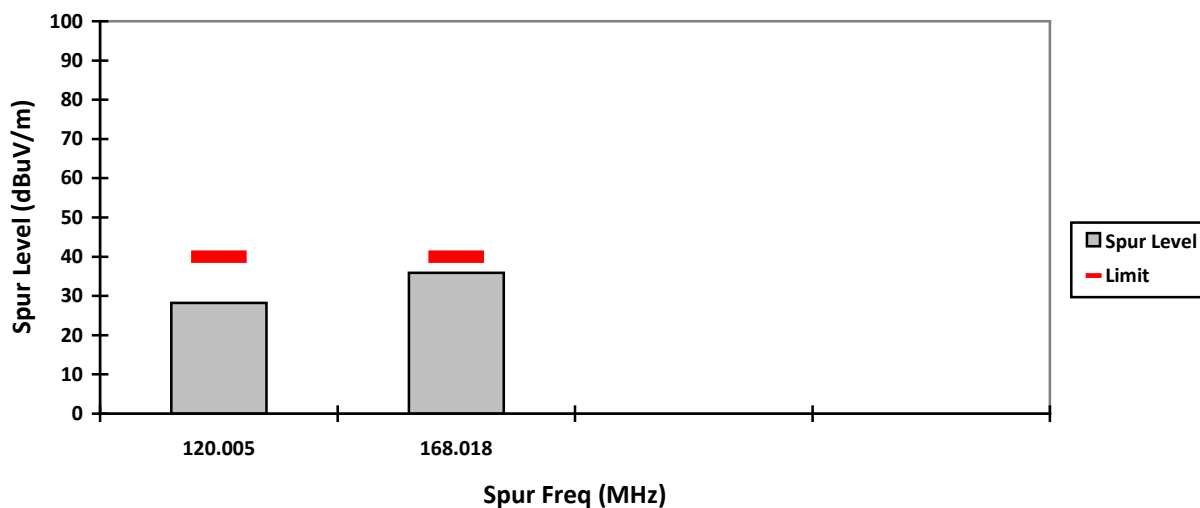


VERTICAL, PK

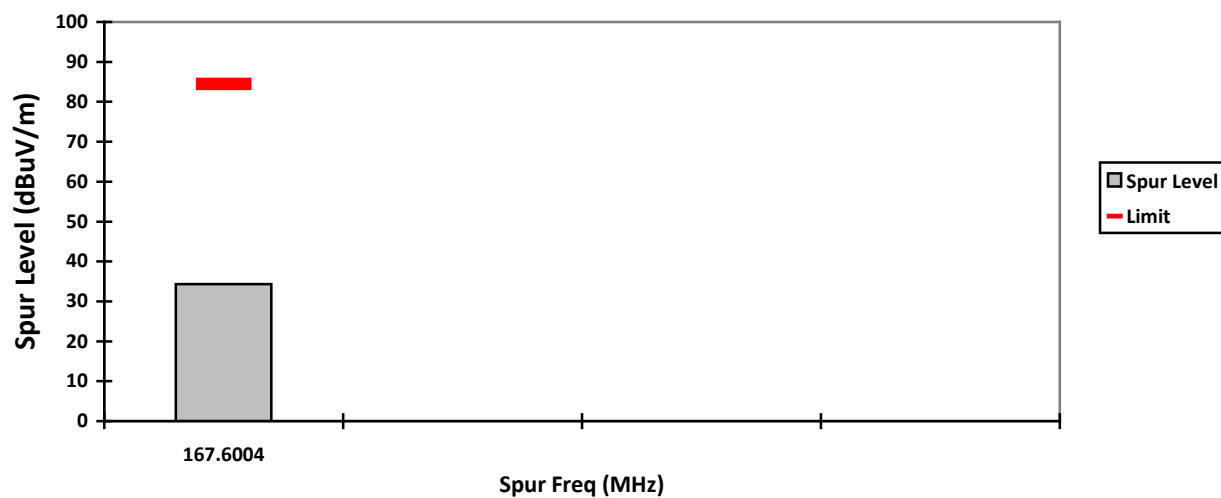


HORIZONTAL, PK

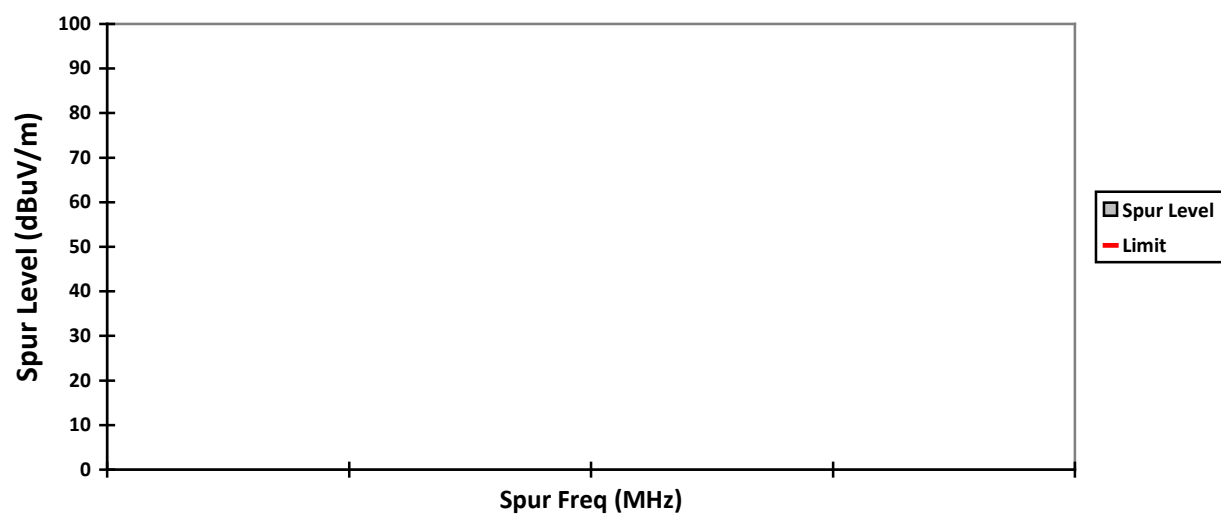

VERTICAL, AV

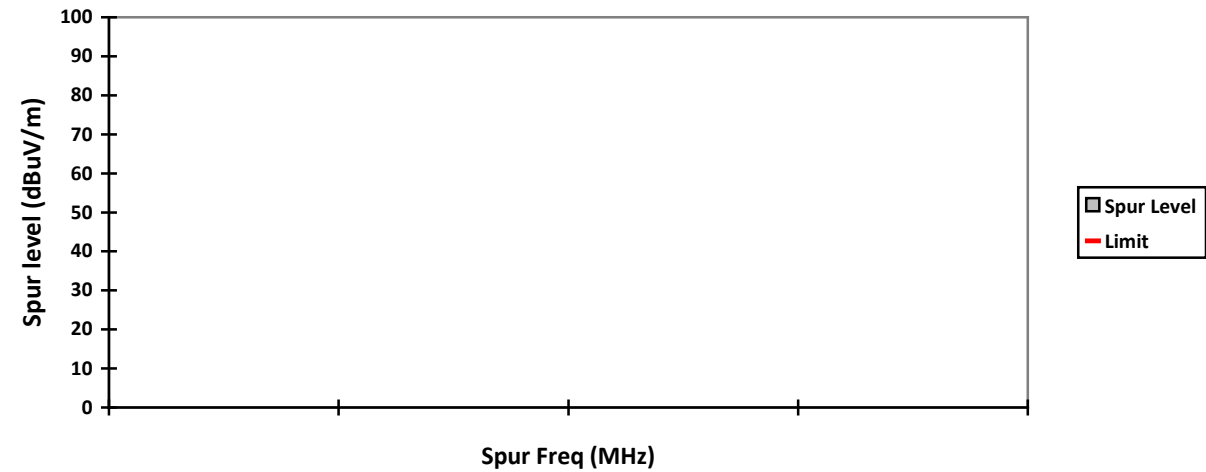


HORIZONTAL, AV

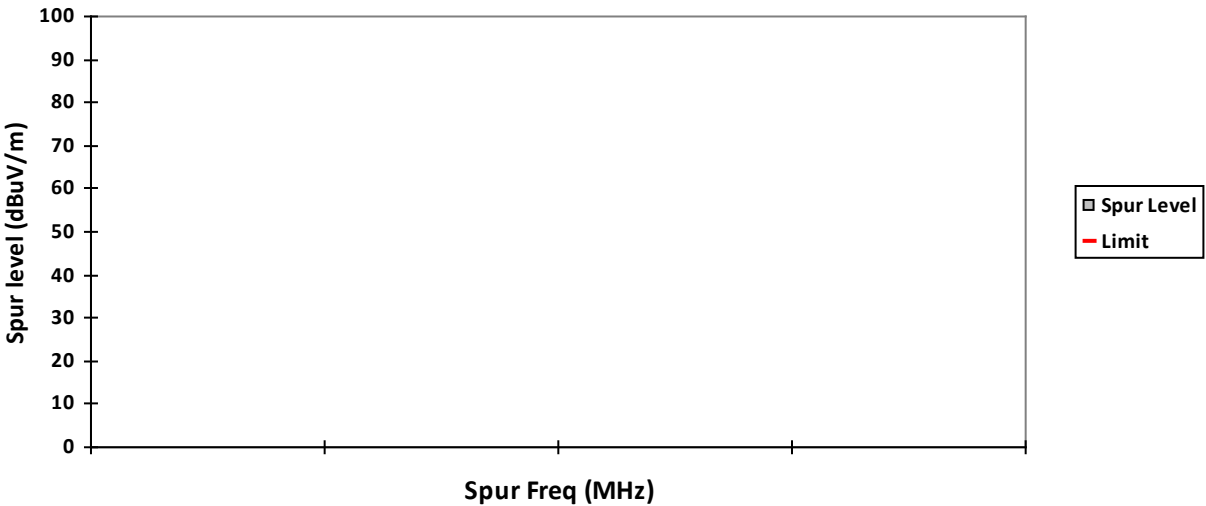

7.8. AC Powerline Conducted Emission

7.8.1. Test Setup

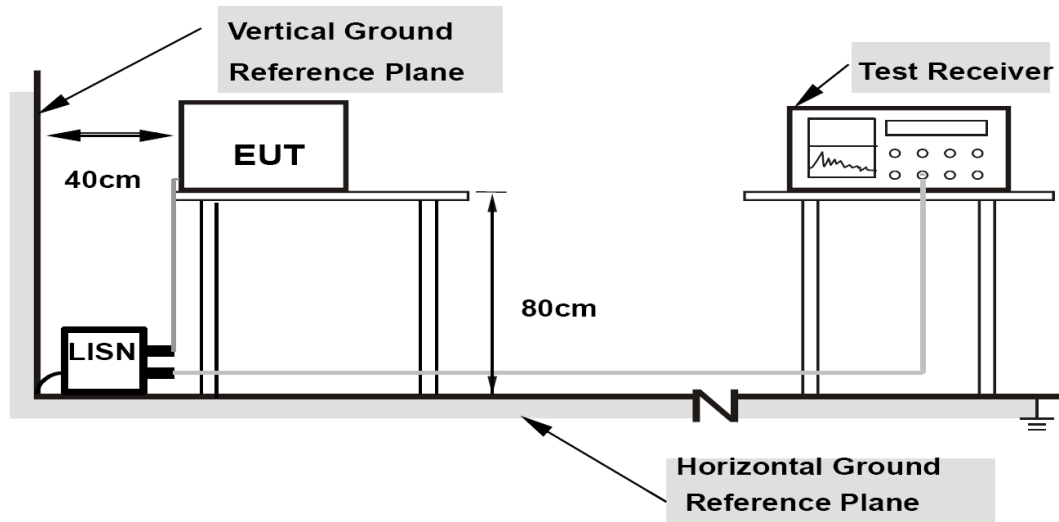

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

7.8.2. Test Limits

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports
of class A ITE

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60
NOTE The lower limit shall apply at the transition frequency.		

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies. NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

7.8.3. Test Data

Not Applicable. Testing is not required, radio shall turn off during charging mode.

END OF TEST REPORT