

FCC TEST REPORT

REPORT NO.: RF130502D13
MODEL NO.: 1558
FCC ID: C3K1558
RECEIVED: Apr. 25, 2013
TESTED: Apr. 25 ~ May 17, 2013
ISSUED: May 23, 2013

APPLICANT: MICROSOFT CORPORATION

ADDRESS: ONE MICROSOFT WAY REDMOND, WA
98052-6399, U.S.A.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB LOCATION: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan (R.O.C.)

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

RELEASE CONTROL RECORD.....	3
1. CERTIFICATION	4
2. SUMMARY OF TEST RESULTS.....	5
2.1 MEASUREMENT UNCERTAINTY	5
3. GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES.....	7
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3 DESCRIPTION OF SUPPORT UNITS.....	10
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	10
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
4. TEST TYPES AND RESULTS.....	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.2 RADIATED EMISSION AND BAND EDGE MEASUREMENT	12
4.2.1 LIMITS OF RADIATED EMISSION AND BAND EDGE MEASUREMENT ...	12
4.2.2 TEST INSTRUMENTS	13
4.2.3 TEST PROCEDURES.....	14
4.2.4 DEVIATION FROM TEST STANDARD	14
4.2.5 TEST SETUP	15
4.2.6 EUT OPERATING CONDITIONS.....	15
4.2.7 TEST RESULTS.....	16
4.3 FREQUENCY TOLERANCE MEASUREMENT	32
4.3.1 LIMITS OF FREQUENCY TOLERANCE MEASUREMENT	32
4.3.2 TEST INSTRUMENTS	32
4.3.3 TEST PROCEDURE	32
4.3.4 DEVIATION FROM TEST STANDARD	32
4.3.5 EUT OPERATING CONDITION	32
4.3.6 TEST RESULTS.....	33
5. PHOTOGRAPHS OF THE TEST CONFIGURATION.....	34
6. INFORMATION ON THE TESTING LABORATORIES	35
7. APPENDIX A – MODIFICATION RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	36



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130502D13	Original release	May 23, 2013

1. CERTIFICATION

PRODUCT: Wireless Number Pad

BRAND NAME: Microsoft

MODEL NO.: 1558

APPLICANT: MICROSOFT CORPORATION

TESTED: Apr. 25 ~ May 17, 2013

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.249)

ANSI C63.10-2009

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Jessica Cheng , **DATE:** May 23, 2013
(Jessica Cheng / Specialist)

APPROVED BY : Ken Liu , **DATE:** May 23, 2013
(Ken Liu / Senior Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.249)			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	N/A	Power supply is 3.0Vdc from batteries
15.209 15.249 15.249 (d)	Radiated Emission Test Band Edge Measurement Limit: 50dB less than the peak value of fundamental frequency or meet radiated emission limit in section 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -8.5dB at 2390.00MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Radiated emissions	30MHz ~ 1GHz	4.00 dB
	Above 1GHz	3.36 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Wireless Number Pad
MODEL NO.	1558
POWER SUPPLY	3.0Vdc
MODULATION TYPE	GFSK
OPERATING FREQUENCY	2403MHz ~ 2480MHz
NUMBER OF CHANNEL	24
ANTENNA TYPE	Printed antenna with -1.09dBi gain
DATA CABLE	N/A
I/O PORT	N/A
ACCESSORY DEVICES	N/A

NOTE:

1. The EUT is a Wireless Number Pad.
2. The EUT has serial samples, which are defined as their serial numbers as follows:

Model No.	Serial no.
1558	EV2-004, EV2-049, EV2-220

3. The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

24 channels are provided to this EUT:

Channel Group	Channel	Frequency (MHz)	Channel Group	Channel	Frequency (MHz)
Subset A	0	2403	Subset D	12	2405
	1	2419		13	2425
	2	2478		14	2444
	3	2468		15	2452
Subset B	4	2429	Subset E	16	2423
	5	2450		17	2446
	6	2470		18	2456
	7	2480		19	2474
Subset C	8	2421	Subset F	20	2417
	9	2431		21	2427
	10	2472		22	2448
	11	2454		23	2476

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE ³ 1G	RE<1G	BM	FT	
-	Note	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE³1G**: Radiated Emission above 1GHz
RE<1G: Radiated Emission below 1GHz **BM**: Bandedge Measurement
FT: Frequency Tolerance

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	SERIAL NO.	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	EV2-220, EV2-004, EV2-049	0 to 23	0, 14, 7	GFSK

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	SERIAL NO.	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	EV2-220, EV2-004, EV2-049	0 to 23	0	GFSK

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	SERIAL NO.	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	EV2-220	0 to 23	0, 7	GFSK



A D T

FREQUENCY TOLERANCE:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	SERIAL NO.	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	EV2-220	0 to 23	0, 14, 7	GFSK


TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE ³ 1G	21deg. C, 75% RH	3Vdc	Saxon Lee
RE<1G	21deg. C, 75% RH	3Vdc	Saxon Lee
BM	21deg. C, 75% RH	3Vdc	Saxon Lee
FT	20deg. C, 72% RH	3Vdc	Chad Lee

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together without any necessary accessory or support unit.

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

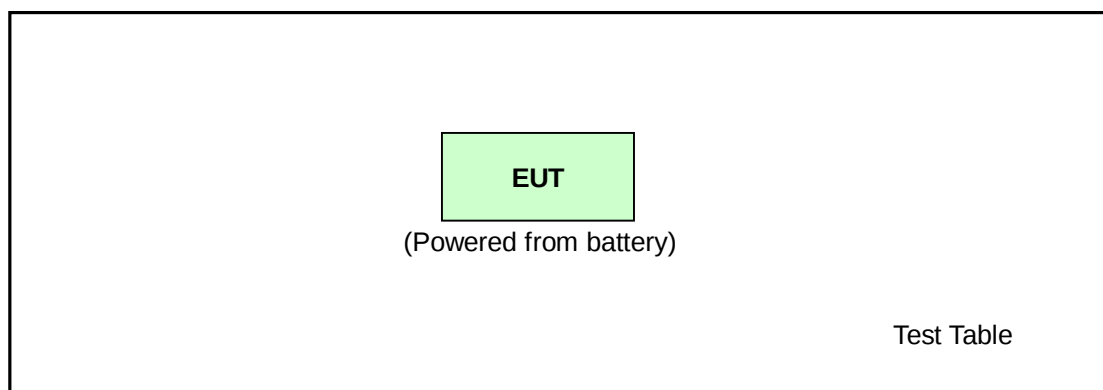

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (Section 15.249)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

N/A

4.2 RADIATED EMISSION AND BAND EDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BAND EDGE MEASUREMENT

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 ~ 928 MHz	50	500
2400 ~ 2483.5 MHz	50	500
5725 ~ 5875 MHz	50	500
24 ~ 24.25 GHz	250	2500

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits as below table, whichever is the lesser attenuation

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 26, 2013	Feb. 25, 2014
HP Preamplifier	8449B	3008A01201	Feb. 26, 2013	Feb. 25, 2014
Agilent Spectrum Analyzer	E4446A	MY46180403	Jun. 13, 2012	Jun. 12, 2013
ROHDE & SCHWARZ Test Receiver	ESCS 30	838251/021	Oct. 11, 2012	Oct. 10, 2013
Schwarzbeck Antenna	VULB 9168	137	Mar. 20, 2013	Mar. 19, 2014
Schwarzbeck Antenna	VHBA 9123	480	May 22, 2012	May 21, 2013
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	ADT_Radiated_V 7.6.15.9.2	NA	NA	NA
SUHNER RF cable	SF102	CABLE-CH6	Aug. 19, 2012	Aug. 18, 2013
Schwarzbeck Horn Antenna	BBHA 9120-D1	D130	May 13, 2013	May 12, 2014
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100036	May. 17, 2013	May. 16, 2014
Anritsu Power Sensor	MA2411B	0738404	Apr. 24, 2013	Apr. 23, 2014
Anritsu Power Meter	ML2495A	0842014	Apr. 25, 2013	Apr. 24, 2014

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.
4. The Industry Canada Reference No. IC 7450E-6.
5. The FCC Site Registration No. is 447212.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

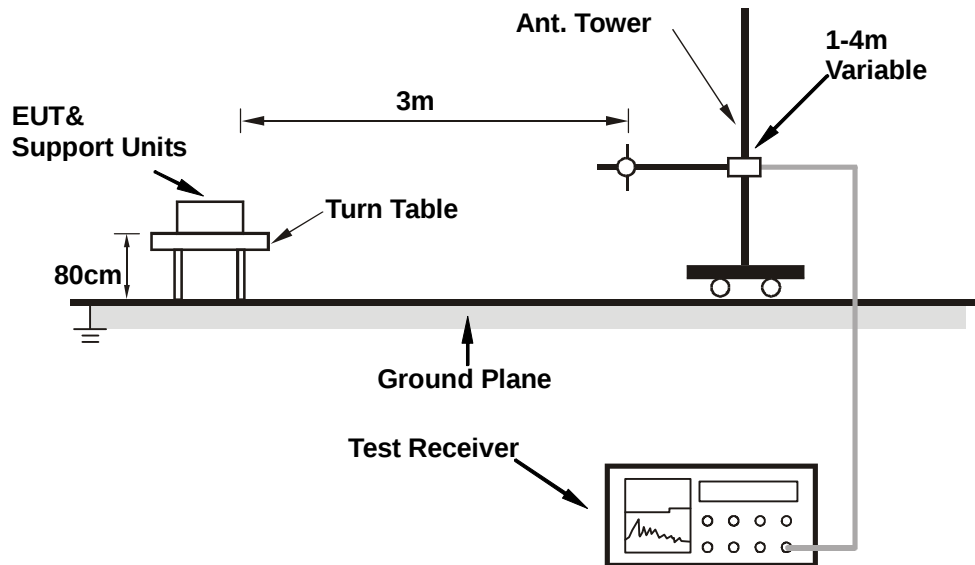

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.

4.2.7 TEST RESULTS

ABOVE 1GHz DATA (For Fundamental, Harmonics)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EV2-220		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2403.00	100.8 PK	114.0	-13.2	1.00 H	201	63.49	37.28
2	*2403.00	65.7 AV	94.0	-28.3	1.00 H	201	28.39	37.28
3	4806.00	46.0 PK	74.0	-28.1	1.19 H	263	3.18	42.77
4	4806.00	10.9 AV	54.0	-43.2	1.19 H	263	-31.92	42.77
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2403.00	90.5 PK	114.0	-23.5	1.09 V	205	58.16	32.30
2	*2403.00	55.4 AV	94.0	-38.6	1.09 V	205	23.06	32.30
3	4806.00	52.9 PK	74.0	-21.1	1.01 V	268	13.53	39.39
4	4806.00	17.8 AV	54.0	-36.2	1.01 V	268	-21.57	39.39

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

$$20 \log (\text{Duty cycle}) = 20 \log (0.14 \text{ ms} / 7.96 \text{ ms}) = -35.1 \text{ dB}$$
Please see page 19 for plotted duty.



A D T

CHANNEL	TX Channel 14	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EV2-220		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2444.00	98.9 PK	114.0	-15.1	1.20 H	184	66.38	32.49
2	*2444.00	63.8 AV	94.0	-30.2	1.20 H	184	31.28	32.49
3	4888.00	45.7 PK	74.0	-28.3	1.13 H	108	6.15	39.59
4	4888.00	10.6 AV	54.0	-43.4	1.13 H	108	-28.95	39.59
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2444.00	90.2 PK	114.0	-23.8	1.03 V	237	57.75	32.49
2	*2444.00	55.1 AV	94.0	-38.9	1.03 V	237	22.65	32.49
3	4888.00	53.1 PK	74.0	-20.9	1.00 V	289	13.53	39.59
4	4888.00	18.0 AV	54.0	-36.0	1.00 V	289	-21.57	39.59

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:
$$20 \log (\text{Duty cycle}) = 20 \log (0.14 \text{ ms} / 7.96 \text{ ms}) = -35.1 \text{ dB}$$

Please see page 19 for plotted duty.



A D T

CHANNEL	TX Channel 7	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EV2-220		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.2 PK	114.0	-13.9	1.00 H	208	67.49	32.66
2	*2480.00	65.1 AV	94.0	-29.0	1.00 H	208	32.39	32.66
3	4960.00	47.0 PK	74.0	-27.0	1.20 H	266	7.30	39.66
4	4960.00	11.9 AV	54.0	-42.1	1.20 H	266	-27.80	39.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	90.0 PK	114.0	-24.0	1.04 V	247	57.31	32.66
2	*2480.00	54.9 AV	94.0	-39.1	1.04 V	247	22.21	32.66
3	4960.00	52.9 PK	74.0	-21.1	1.00 V	345	13.27	39.66
4	4960.00	17.8 AV	54.0	-36.2	1.00 V	345	-21.83	39.66


REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “ : Fundamental frequency
6. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

$$20 \log (\text{Duty cycle}) = 20 \log (0.14 \text{ ms} / 7.96 \text{ ms}) = -35.1 \text{ dB}$$
Please see page 19 for plotted duty.



A D T

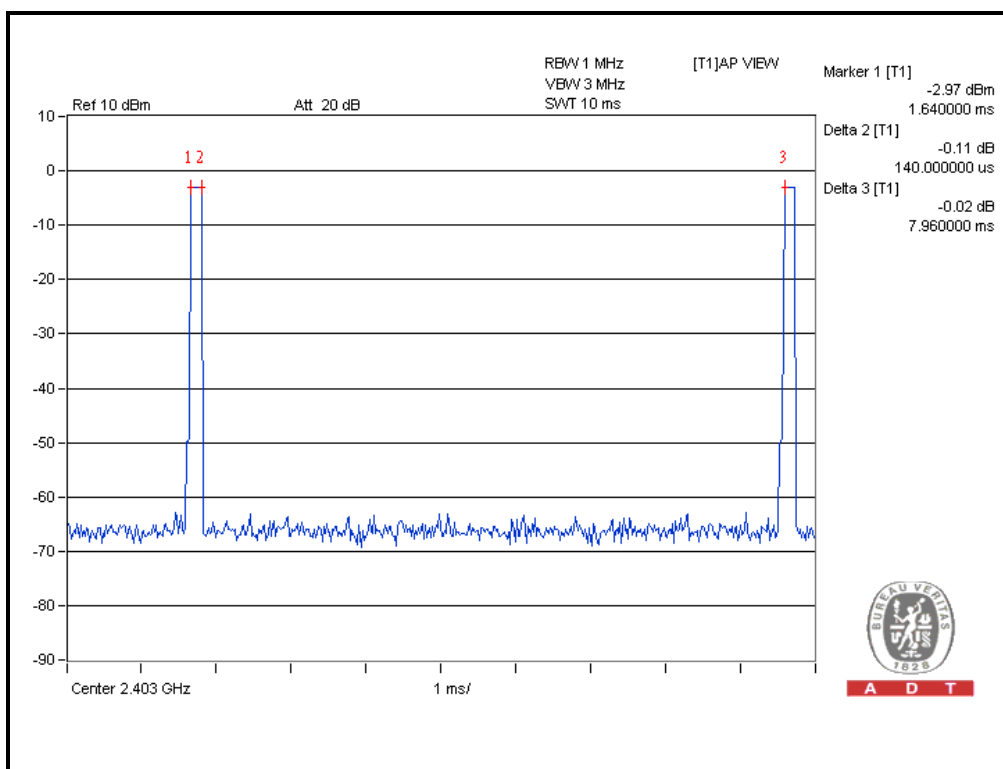

A D T

$$20 \log (\text{Duty cycle}) = 20 \log (0.14 \text{ ms} / 7.96 \text{ ms}) = -35.1 \text{ dB}$$

ABOVE 1GHz DATA (For Spurious Emission)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EV2-220		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.00 H	201	28.08	37.25
2	2390.00	45.5 AV	54.0	-8.5	1.00 H	201	8.21	37.25
3	2400.00	57.8 PK	74.0	-16.2	1.00 H	201	20.50	37.27
4	2400.00	22.7 AV	54.0	-31.3	1.00 H	201	-14.60	37.27
5	2748.00	43.3 PK	74.0	-30.7	1.03 H	224	9.64	33.67
6	2748.00	29.4 AV	54.0	-24.6	1.03 H	224	-4.25	33.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.0 PK	74.0	-15.0	1.09 V	205	26.75	32.25
2	2390.00	45.2 AV	54.0	-8.8	1.09 V	205	12.96	32.25
3	2400.00	46.7 PK	74.0	-27.3	1.09 V	205	14.37	32.29
4	2400.00	11.6 AV	54.0	-42.4	1.09 V	205	-20.73	32.29
5	2748.00	41.2 PK	74.0	-32.8	1.18 V	184	7.56	33.67
6	2748.00	27.0 AV	54.0	-27.0	1.18 V	184	-6.70	33.67

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

**A D T**

CHANNEL	TX Channel 14	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EV2-220		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2795.00	43.1 PK	74.0	-30.9	1.01 H	223	9.22	33.84
2	2795.00	29.3 AV	54.0	-24.7	1.01 H	223	-4.51	33.84
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2795.00	41.0 PK	74.0	-33.0	1.18 V	211	7.17	33.84
2	2795.00	26.1 AV	54.0	-27.9	1.18 V	211	-7.78	33.84

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

CHANNEL	TX Channel 7	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EV2-220		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2483.50	57.6 PK	74.0	-16.5	1.00 H	208	24.88	32.67
2	2483.50	22.5 AV	54.0	-31.6	1.00 H	208	-10.22	32.67
3	2836.00	43.9 PK	74.0	-30.1	1.05 H	214	9.88	34.00
4	2836.00	30.1 AV	54.0	-23.9	1.05 H	214	-3.87	34.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2483.50	47.2 PK	74.0	-26.8	1.04 V	247	14.50	32.67
2	2483.50	12.1 AV	54.0	-41.9	1.04 V	247	-20.60	32.67
3	2836.00	41.0 PK	74.0	-33.0	1.18 V	189	6.99	34.00
4	2836.00	27.1 AV	54.0	-27.0	1.18 V	189	-6.95	34.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EV2-004		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2748.00	43.6 PK	74.0	-30.4	1.03 H	217	9.95	33.67
2	2748.00	29.7 AV	54.0	-24.3	1.03 H	217	-3.95	33.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2748.00	42.4 PK	74.0	-31.6	1.15 V	193	8.69	33.67
2	2748.00	27.1 AV	54.0	-26.9	1.15 V	193	-6.56	33.67

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel 14	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EV2-004		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2795.00	43.8 PK	74.0	-30.2	1.00 H	219	9.93	33.84
2	2795.00	29.7 AV	54.0	-24.3	1.00 H	219	-4.15	33.84
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2795.00	41.7 PK	74.0	-32.3	1.20 V	209	7.84	33.84
2	2795.00	26.6 AV	54.0	-27.4	1.20 V	209	-7.27	33.84

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

CHANNEL	TX Channel 7	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EV2-004		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2836.00	44.4 PK	74.0	-29.7	1.09 H	211	10.35	34.00
2	2836.00	31.3 AV	54.0	-22.7	1.09 H	211	-2.72	34.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2836.00	41.2 PK	74.0	-32.8	1.21 V	192	7.21	34.00
2	2836.00	28.0 AV	54.0	-26.0	1.21 V	192	-6.02	34.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EV2-049		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2748.00	42.5 PK	74.0	-31.5	1.02 H	199	8.87	33.67
2	2748.00	29.9 AV	54.0	-24.1	1.02 H	199	-3.79	33.67
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2748.00	41.2 PK	74.0	-32.8	1.07 V	196	7.56	33.67
2	2748.00	27.1 AV	54.0	-26.9	1.07 V	196	-6.56	33.67

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel 14	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EV2-049		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2795.00	44.0 PK	74.0	-30.0	1.00 H	218	10.19	33.84
2	2795.00	31.6 AV	54.0	-22.4	1.00 H	218	-2.25	33.84
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2795.00	41.4 PK	74.0	-32.7	1.09 V	190	7.51	33.84
2	2795.00	27.0 AV	54.0	-27.0	1.09 V	190	-6.87	33.84

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

CHANNEL	TX Channel 7	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)
SERIAL NO.	EV2-049		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2836.00	44.5 PK	74.0	-29.5	1.00 H	199	10.52	34.00
2	2836.00	31.7 AV	54.0	-22.3	1.00 H	199	-2.31	34.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2836.00	44.5 PK	74.0	-29.5	1.07 V	196	10.52	34.00
2	2836.00	31.2 AV	54.0	-22.8	1.07 V	196	-2.79	34.00

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

BELOW 1GHz WORST-CASE DATA

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
SERIAL NO.	EV2-220		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.43	17.8 QP	40.0	-22.3	1.03 H	271	3.75	14.00
2	161.92	13.2 QP	43.5	-30.3	1.06 H	357	-1.48	14.64
3	304.51	15.4 QP	46.0	-30.6	1.41 H	21	-0.71	16.13
4	548.95	21.7 QP	46.0	-24.3	1.39 H	182	-0.54	22.20
5	741.01	25.7 QP	46.0	-20.3	1.02 H	357	-0.26	25.92
6	845.77	27.7 QP	46.0	-18.3	1.00 H	211	0.09	27.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.46	18.0 QP	40.0	-22.0	1.02 V	343	3.86	14.18
2	164.83	13.5 QP	43.5	-30.0	1.01 V	72	-0.70	14.19
3	326.82	17.2 QP	46.0	-28.8	1.48 V	9	0.35	16.89
4	491.72	21.5 QP	46.0	-24.5	1.06 V	17	0.33	21.18
5	703.18	25.7 QP	46.0	-20.3	1.48 V	168	0.58	25.11
6	847.71	27.3 QP	46.0	-18.7	1.44 V	26	-0.34	27.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
SERIAL NO.	EV2-004		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.46	17.8 QP	40.0	-22.2	1.02 H	303	3.60	14.18
2	172.59	13.3 QP	43.5	-30.2	1.00 H	351	-0.54	13.83
3	350.10	17.2 QP	46.0	-28.8	1.06 H	126	0.00	17.24
4	462.62	21.1 QP	46.0	-24.9	1.00 H	147	0.47	20.64
5	644.98	24.0 QP	46.0	-22.0	1.47 H	75	-0.53	24.49
6	855.47	28.0 QP	46.0	-18.0	1.45 H	66	0.22	27.74
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.43	18.1 QP	40.0	-21.9	1.03 V	162	4.09	14.00
2	165.80	13.6 QP	43.5	-29.9	1.10 V	259	-0.41	14.05
3	362.71	17.2 QP	46.0	-28.9	1.06 V	267	-0.56	17.71
4	588.72	23.5 QP	46.0	-22.5	1.04 V	327	0.16	23.38
5	818.61	27.0 QP	46.0	-19.0	1.47 V	31	-0.32	27.33
6	889.42	28.4 QP	46.0	-17.6	1.52 V	20	0.45	27.95

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		
SERIAL NO.	EV2-049		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.43	17.9 QP	40.0	-22.1	1.06 H	180	3.94	14.00
2	172.59	13.9 QP	43.5	-29.6	1.00 H	29	0.08	13.83
3	368.53	17.0 QP	46.0	-29.0	1.11 H	345	-0.89	17.92
4	487.84	21.7 QP	46.0	-24.3	1.00 H	183	0.55	21.14
5	609.09	23.6 QP	46.0	-22.4	1.49 H	10	-0.14	23.72
6	773.99	28.2 QP	46.0	-17.8	1.00 H	247	1.44	26.77
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	48.43	18.1 QP	40.0	-21.9	1.04 V	183	4.13	14.00
2	159.98	14.4 QP	43.5	-29.1	1.21 V	69	-0.08	14.51
3	316.15	16.4 QP	46.0	-29.7	1.47 V	123	-0.16	16.51
4	454.86	21.5 QP	46.0	-24.5	1.00 V	96	1.07	20.44
5	689.60	24.7 QP	46.0	-21.3	1.51 V	189	-0.27	24.95
6	858.38	27.4 QP	46.0	-18.6	1.39 V	243	-0.39	27.75

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB) if use.
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.3 FREQUENCY TOLERANCE MEASUREMENT

4.3.1 LIMITS OF FREQUENCY TOLERANCE MEASUREMENT

Limit : $\pm 0.001\%$

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100036	May 17, 2013	May 16, 2014

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.001\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 EUT OPERATING CONDITION

Same as Item 4.2.6

4.3.6 TEST RESULTS

SERIAL NO.	EV2-220		
INPUT POWER	3Vdc	CHANNEL	0, 14, 7

CH 0

TEST CONDITION			Carrier Frequency (MHz)	Frequency Drift (kHz)	Frequency error (%)
Tnom(℃)	20	Vnom(V)	2403.0202	0.00	0.00000%
Tmin(℃)	-20	Vmin(V)	2403.0232	3.00	0.00012%
		Vmax(V)	2403.0234	3.20	0.00013%
Tmax(℃)	55	Vmin(V)	2403.0115	-8.70	-0.00036%
		Vmax(V)	2403.0114	-8.80	-0.00037%
Limit : ±0.001%					

CH 14

TEST CONDITION			Carrier Frequency (MHz)	Frequency Drift (kHz)	Frequency error (%)
Tnom(°C)	20	Vnom(V)	2444.0208	0.00	0.00000%
Tmin(°C)	-20	Vmin(V)	2444.0236	2.80	0.00011%
		Vmax(V)	2444.0238	3.00	0.00012%
Tmax(°C)	55	Vmin(V)	2444.0119	-8.90	-0.00036%
		Vmax(V)	2444.0120	-8.80	-0.00036%
Limit : ±0.001%					

CH 7

TEST CONDITION			Carrier Frequency (MHz)	Frequency Drift (kHz)	Frequency error (%)
Tnom(℃)	20	Vnom(V)	2480.0210	0.00	0.00000%
Tmin(℃)	-20	Vmin(V)	2480.0237	2.70	0.00011%
		Vmax(V)	2480.0238	2.80	0.00011%
Tmax(℃)	55	Vmin(V)	2480.0118	-9.20	-0.00037%
		Vmax(V)	2480.0119	-9.10	-0.00037%
Limit : ±0.001%					



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A – MODIFICATION RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---