


VERTICAL RESULT

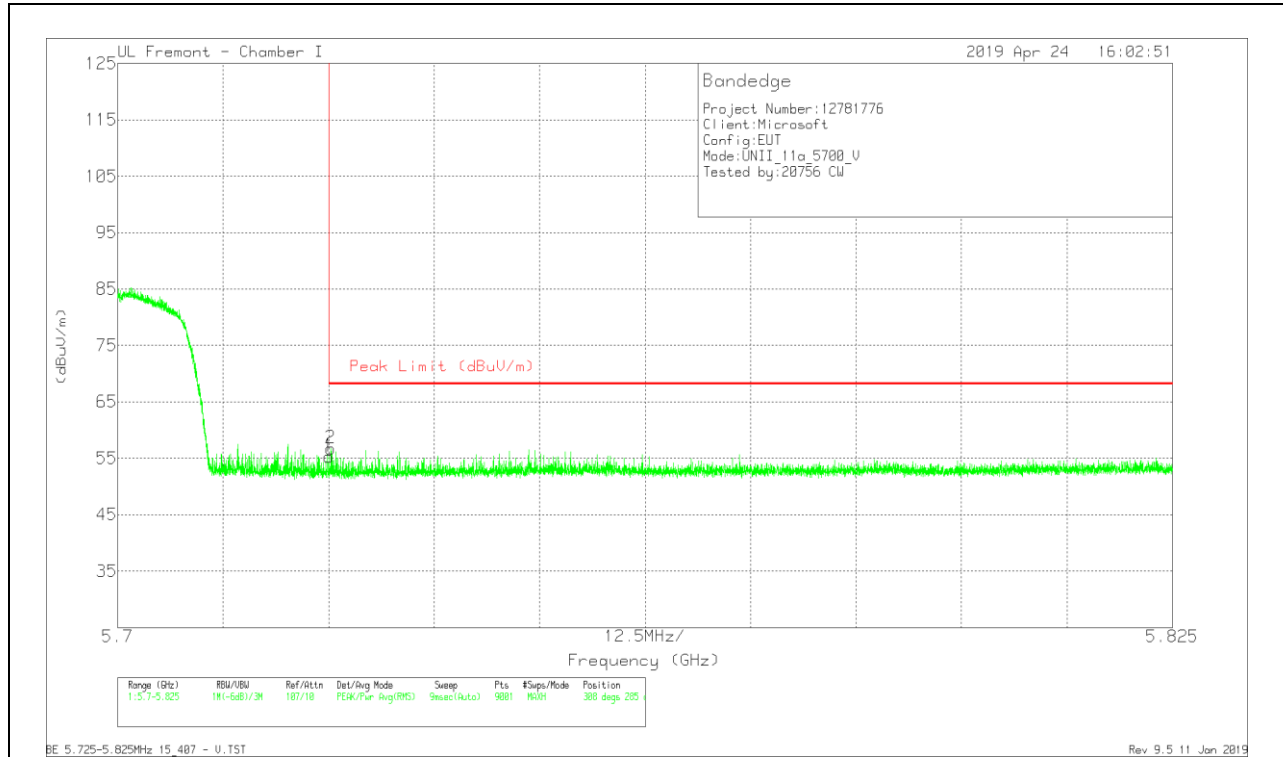



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/ Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.81	Pk	35	-18.5	55.31	68.2	-12.89	308	285	V
2	5.725	40.3	Pk	35	-18.5	56.8	68.2	-11.4	308	285	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

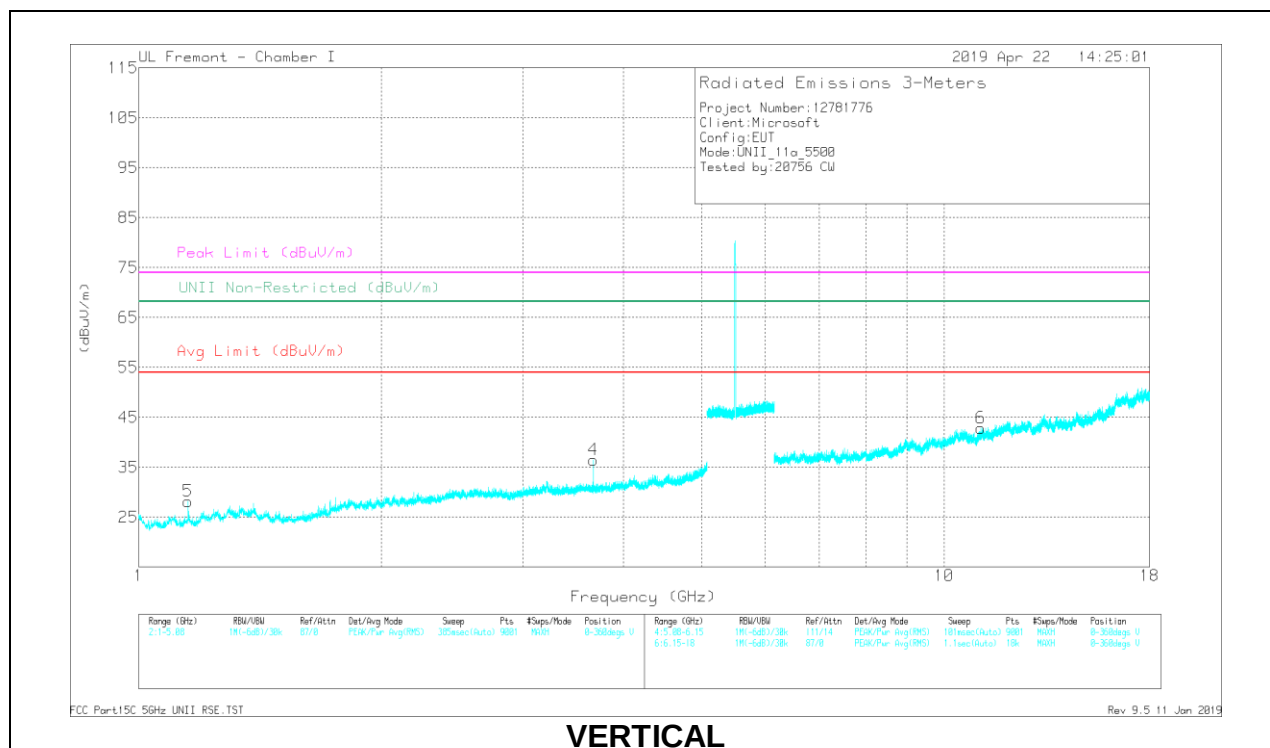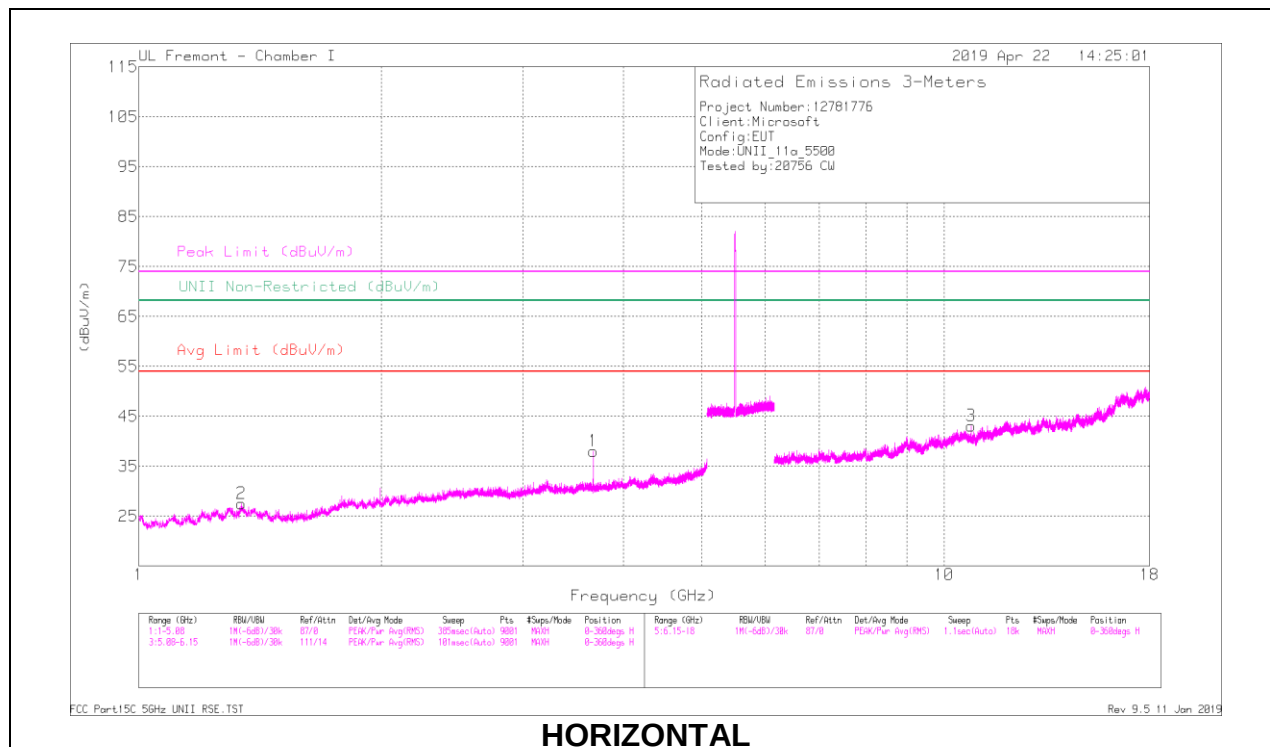

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Ampl/Cbl/Ftr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 3.667	38.65	PK-U	33	-29.5	0	42.15	-	-	74	-31.85	-	-	96	105	H
	* 3.667	33.89	ADR	33	-29.5	.19	37.58	54	-16.42	-	-	-	-	96	105	H
2	* 1.34	39.23	PK-U	29.3	-33.7	0	34.83	-	-	74	-39.17	-	-	183	196	H
	* 1.34	28.96	ADR	29.3	-33.7	.19	24.75	54	-29.25	-	-	-	-	183	196	H
4	* 3.667	39.19	PK-U	33	-29.5	0	42.69	-	-	74	-31.31	-	-	118	120	V
	* 3.667	33.29	ADR	33	-29.5	.19	36.98	54	-17.02	-	-	-	-	118	120	V
5	* 1.15	37.65	PK-U	27.6	-34	0	31.25	-	-	74	-42.75	-	-	332	162	V
	* 1.152	30.85	ADR	27.6	-34	.19	24.64	54	-29.36	-	-	-	-	332	162	V
3	* 10.801	26.73	PK-U	37.8	-16.6	0	47.93	-	-	74	-26.07	-	-	48	241	H
	* 10.803	17.48	ADR	37.8	-16.7	.19	38.77	54	-15.23	-	-	-	-	48	241	H
6	* 11.11	26.38	PK-U	37.8	-16.9	0	47.28	-	-	74	-26.72	-	-	112	224	V
	* 11.108	18.95	ADR	37.8	-16.9	.19	40.04	54	-13.96	-	-	-	-	112	224	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

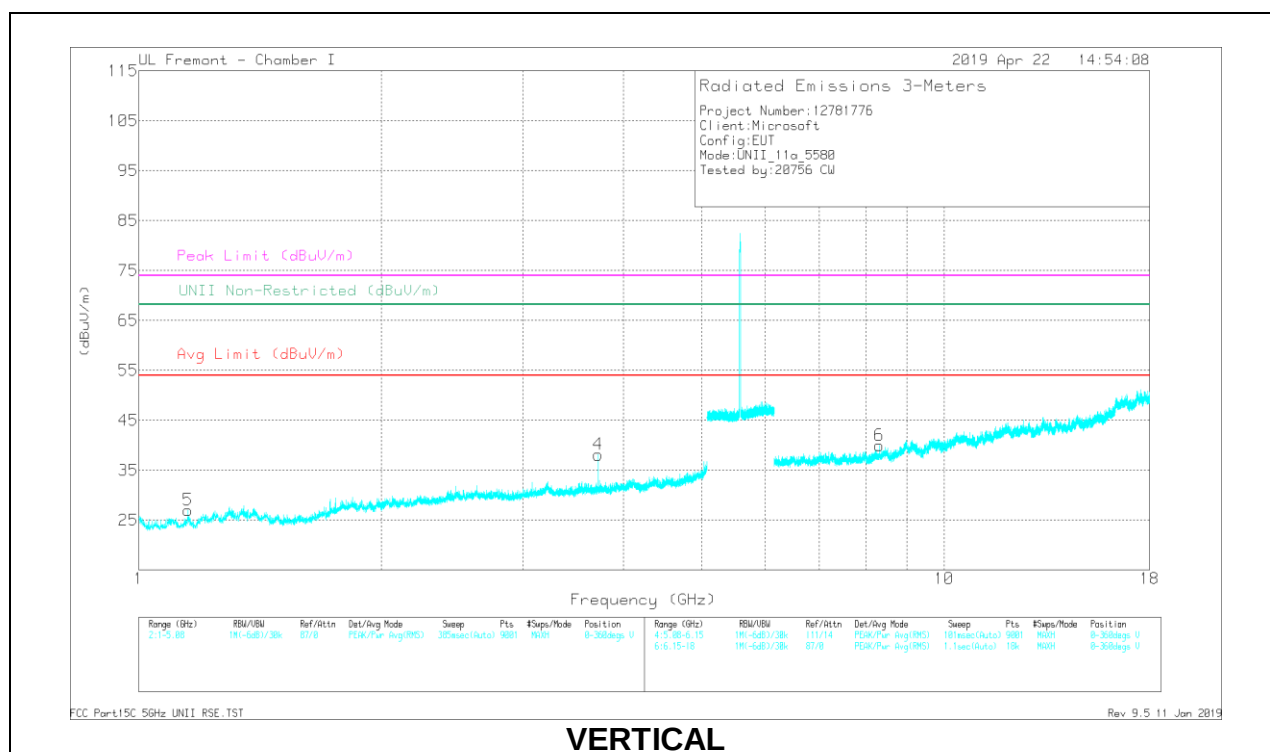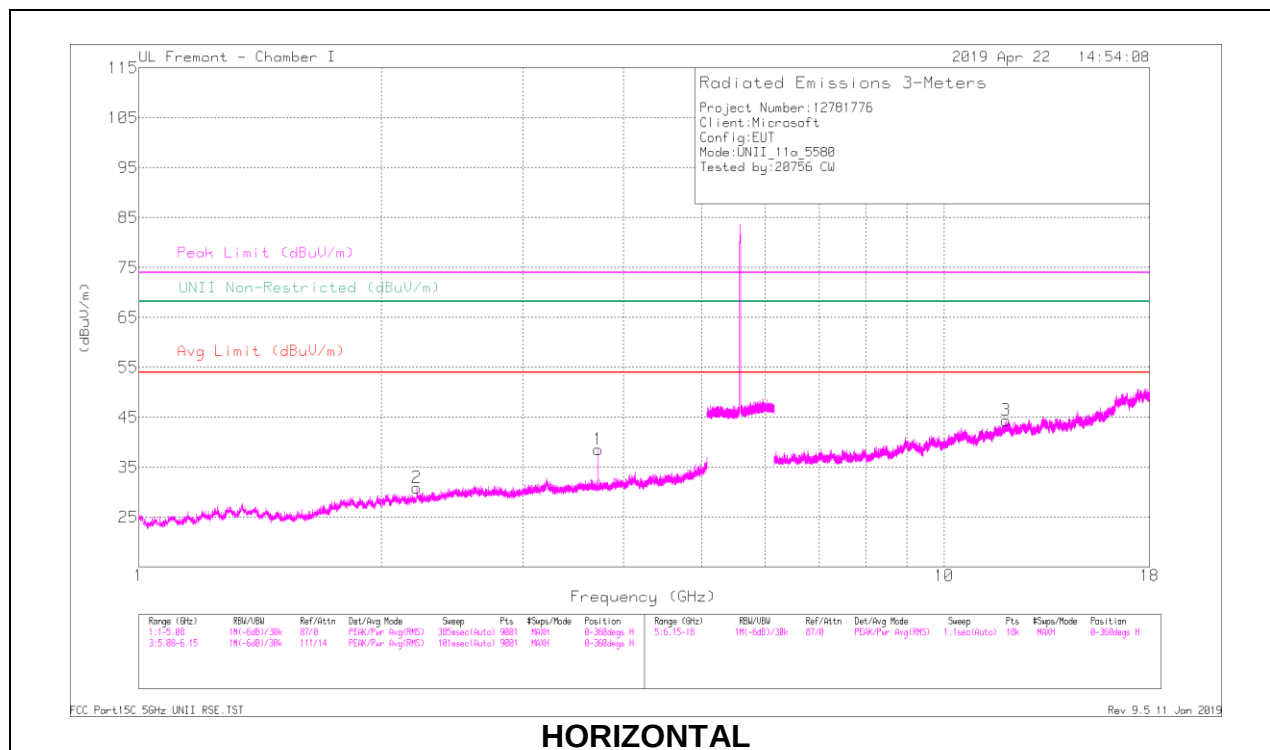

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Ampl/Cbl/Ftr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.72	38.72	PK-U	32.9	-29.2	0	42.42	-	-	74	-31.58	-	-	62	105	H
	* 3.72	33.97	ADR	32.9	-29.2	.19	37.86	54	-16.14	-	-	-	-	62	105	H
2	* 2.217	37.11	PK-U	31.4	-31.9	0	36.61	-	-	74	-37.39	-	-	211	216	H
	* 2.213	27.78	ADR	31.4	-32	.19	27.37	54	-26.63	-	-	-	-	211	216	H
4	* 3.72	39.94	PK-U	32.9	-29.2	0	43.64	-	-	74	-30.36	-	-	93	120	V
	* 3.72	33.69	ADR	32.9	-29.2	.19	37.58	54	-16.42	-	-	-	-	93	120	V
5	* 1.152	39.69	PK-U	27.6	-34	0	33.29	-	-	74	-40.71	-	-	240	170	V
	* 1.152	30.07	ADR	27.6	-34	.19	23.86	54	-30.17	-	-	-	-	240	170	V
3	* 11.936	26.96	PK-U	38.7	-16.2	0	49.46	-	-	74	-24.54	-	-	355	147	H
	* 11.939	18.57	ADR	38.7	-16.2	.19	41.26	54	-12.74	-	-	-	-	355	147	H
6	* 8.309	27.28	PK-U	35.8	-19.7	0	43.38	-	-	74	-30.62	-	-	173	120	V
	* 8.312	19.96	ADR	35.8	-19.7	.19	36.25	54	-17.75	-	-	-	-	173	120	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

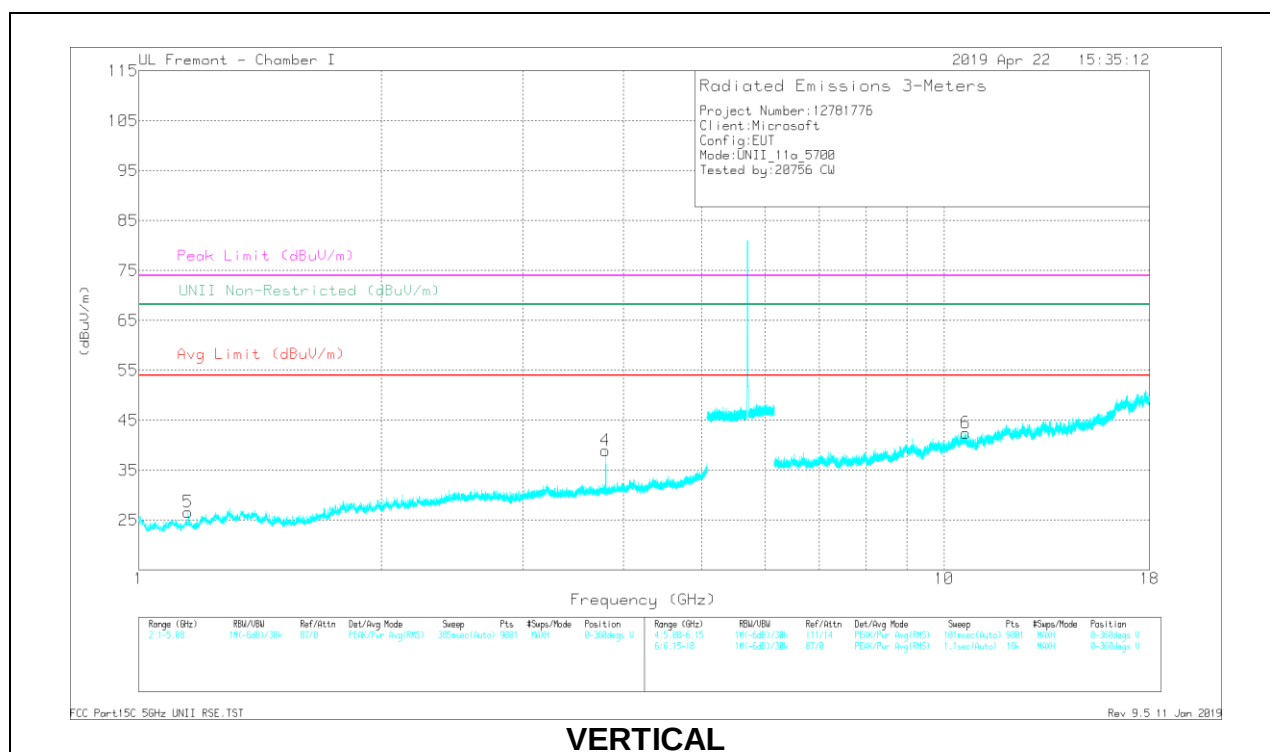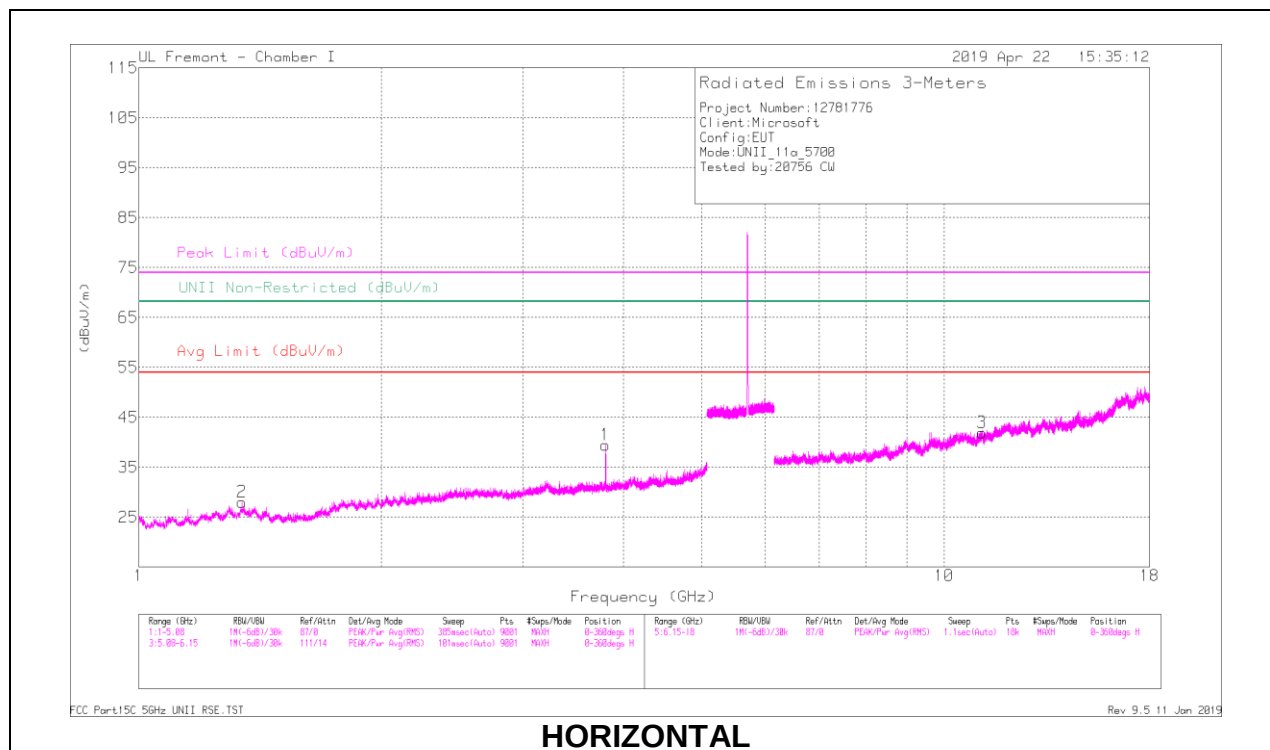

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Ampl/Cbl/Ftr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.8	39.67	PK-U	33.1	-29.8	0	42.97	-	-	74	-31.03	-	-	63	158	H
	* 3.8	35.56	ADR	33.1	-29.8	.19	39.05	54	-14.95	-	-	-	-	63	158	H
2	* 1.343	38.87	PK-U	29.3	-33.6	0	34.57	-	-	74	-39.43	-	-	134	292	H
	* 1.343	28.46	ADR	29.3	-33.6	.19	24.35	54	-29.65	-	-	-	-	134	292	H
4	* 3.8	40.84	PK-U	33.1	-29.8	0	44.14	-	-	74	-29.86	-	-	300	153	V
	* 3.8	35.14	ADR	33.1	-29.8	.19	38.63	54	-15.47	-	-	-	-	300	153	V
5	* 1.152	39.72	PK-U	27.6	-34	0	33.32	-	-	74	-40.68	-	-	118	175	V
	* 1.152	29.88	ADR	27.6	-34	.19	23.67	54	-30.33	-	-	-	-	118	175	V
3	* 11.143	26.69	PK-U	37.9	-16.5	0	48.09	-	-	74	-25.91	-	-	234	127	H
	* 11.142	18.15	ADR	37.9	-16.5	.19	39.74	54	-14.36	-	-	-	-	234	127	H
6	* 10.637	27.18	PK-U	37.8	-16.3	0	48.68	-	-	74	-25.32	-	-	325	122	V
	* 10.636	18.29	ADR	37.8	-16.3	.19	39.98	54	-14.02	-	-	-	-	325	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.6. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND

1TX Antenna 1 MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

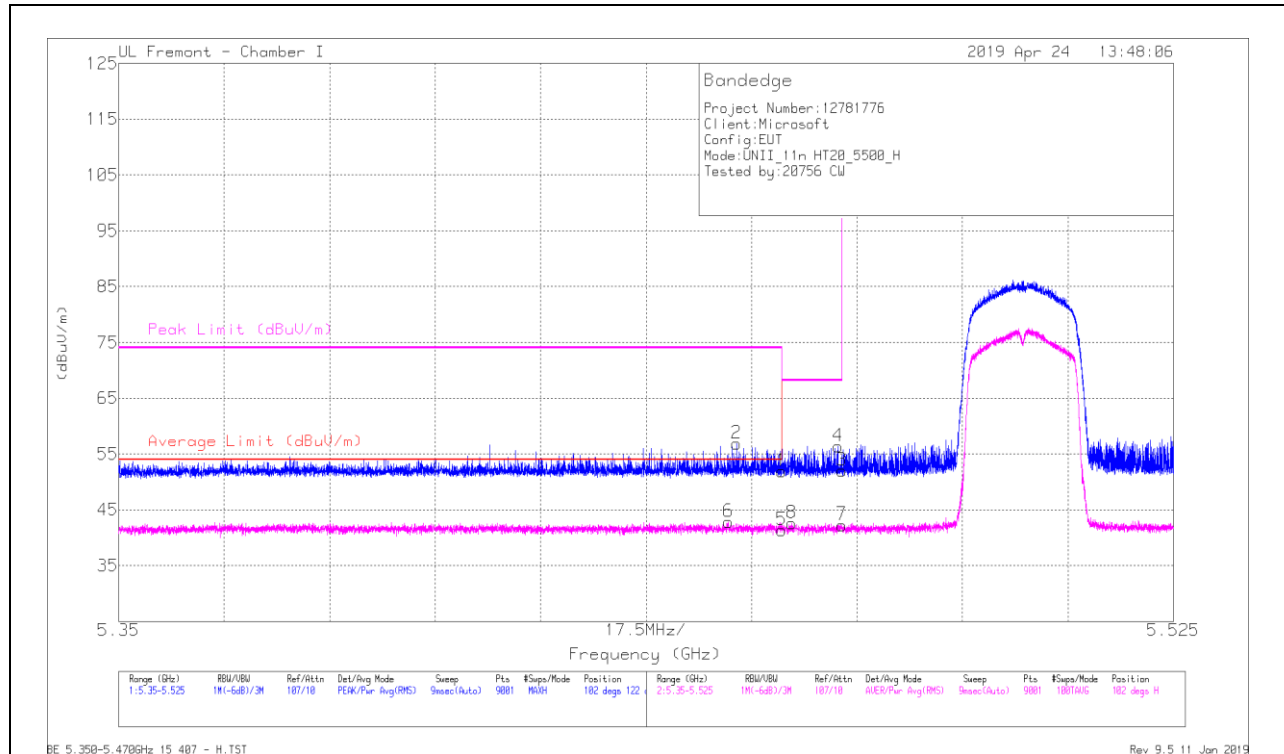

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Ampl/CMI/Ftr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	35.19	PK	34.6	-17.9	0	51.89	-	-	74	-22.11	102	122	H
2	* 5.453	40.12	PK	34.6	-17.9	0	56.82	-	-	74	-17.18	102	122	H
3	5.47	35.3	PK	34.6	-17.9	0	52	-	-	68.2	-16.2	102	122	H
4	5.469	39.81	PK	34.6	-18	0	56.41	-	-	68.2	-11.79	102	122	H
5	* 5.46	24.47	RMS	34.6	-17.9	2	41.37	54	-12.63	-	-	102	122	H
6	* 5.451	25.99	RMS	34.5	-17.9	2	42.79	54	-11.21	-	-	102	122	H
7	5.47	25.38	RMS	34.6	-17.9	2	42.28	-	-	-	-	102	122	H
8	5.462	25.73	RMS	34.6	-17.9	2	42.63	-	-	-	-	102	122	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

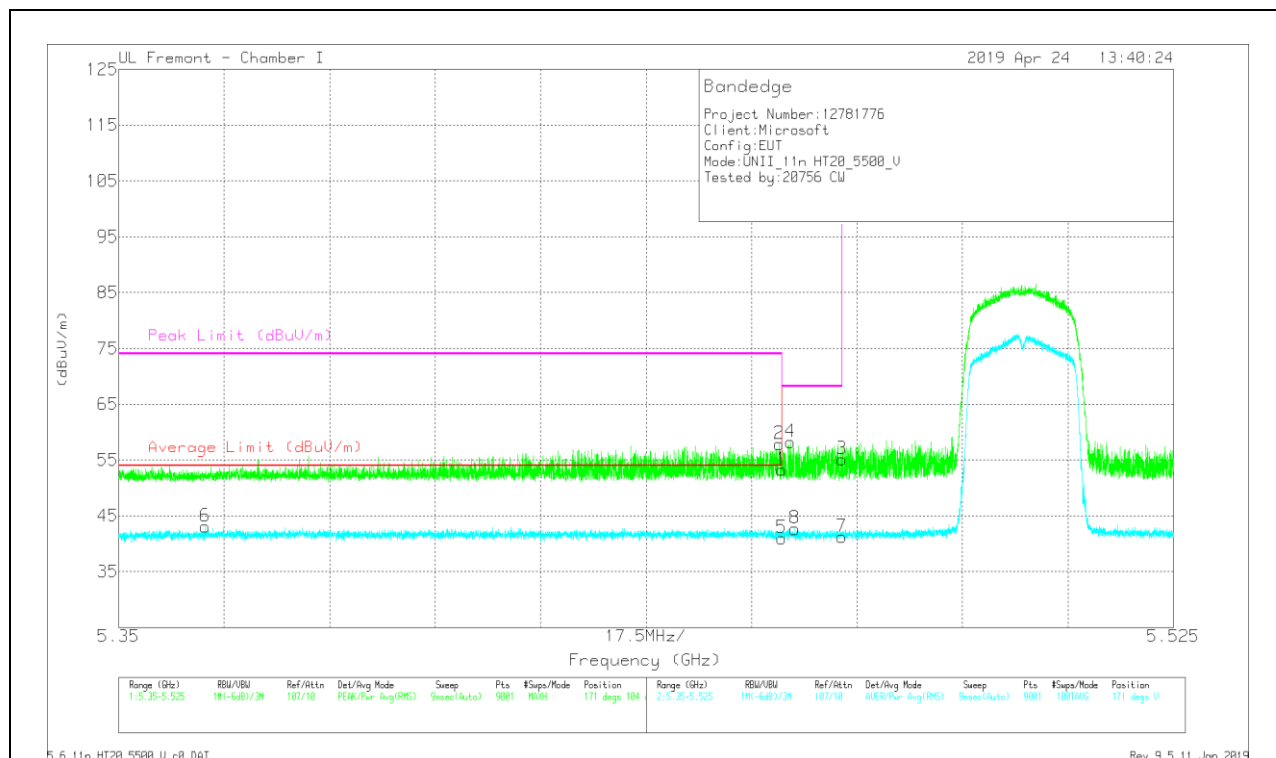

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CM/Ftr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	36.57	Pk	34.6	-17.9	0	53.27	-	-	74	-20.73	171	104	V
2	* 5.46	41.18	Pk	34.6	-17.9	0	57.88	-	-	74	-16.12	171	104	V
3	5.47	38.46	Pk	34.6	-17.9	0	55.16	-	-	68.2	-13.04	171	104	V
4	5.462	41.55	Pk	34.6	-17.9	0	58.25	-	-	68.2	-9.95	171	104	V
5	* 5.46	24.09	RMS	34.6	-17.9	-2	40.99	54	-13.01	-	-	171	104	V
6	* 5.364	26.54	RMS	34.5	-18.2	-2	43.04	54	-10.96	-	-	171	104	V
7	5.47	24.38	RMS	34.6	-17.9	-2	41.28	-	-	-	-	171	104	V
8	5.462	25.76	RMS	34.6	-17.9	-2	42.66	-	-	-	-	171	104	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

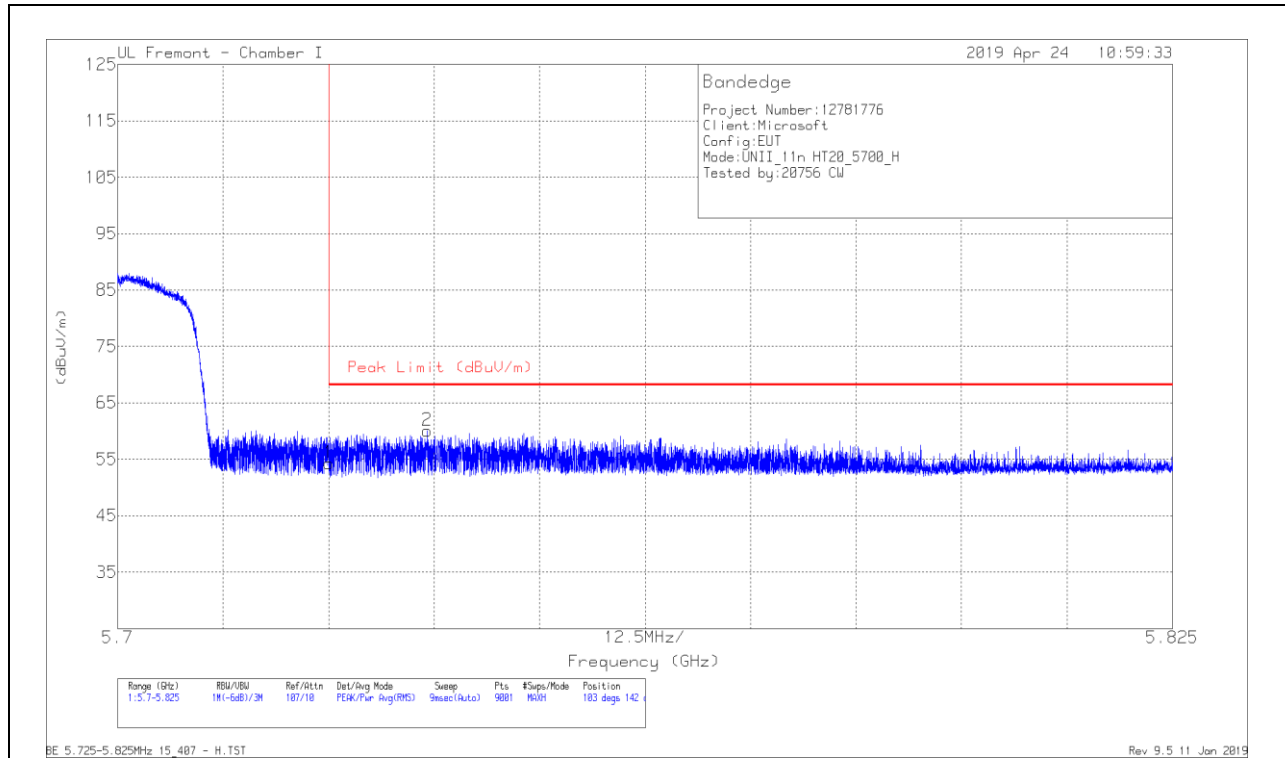

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/ Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.74	Pk	35	-18.5	54.24	68.2	-13.96	103	142	H
2	5.737	43.48	Pk	35	-18.4	60.08	68.2	-8.12	103	142	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

VERTICAL RESULT

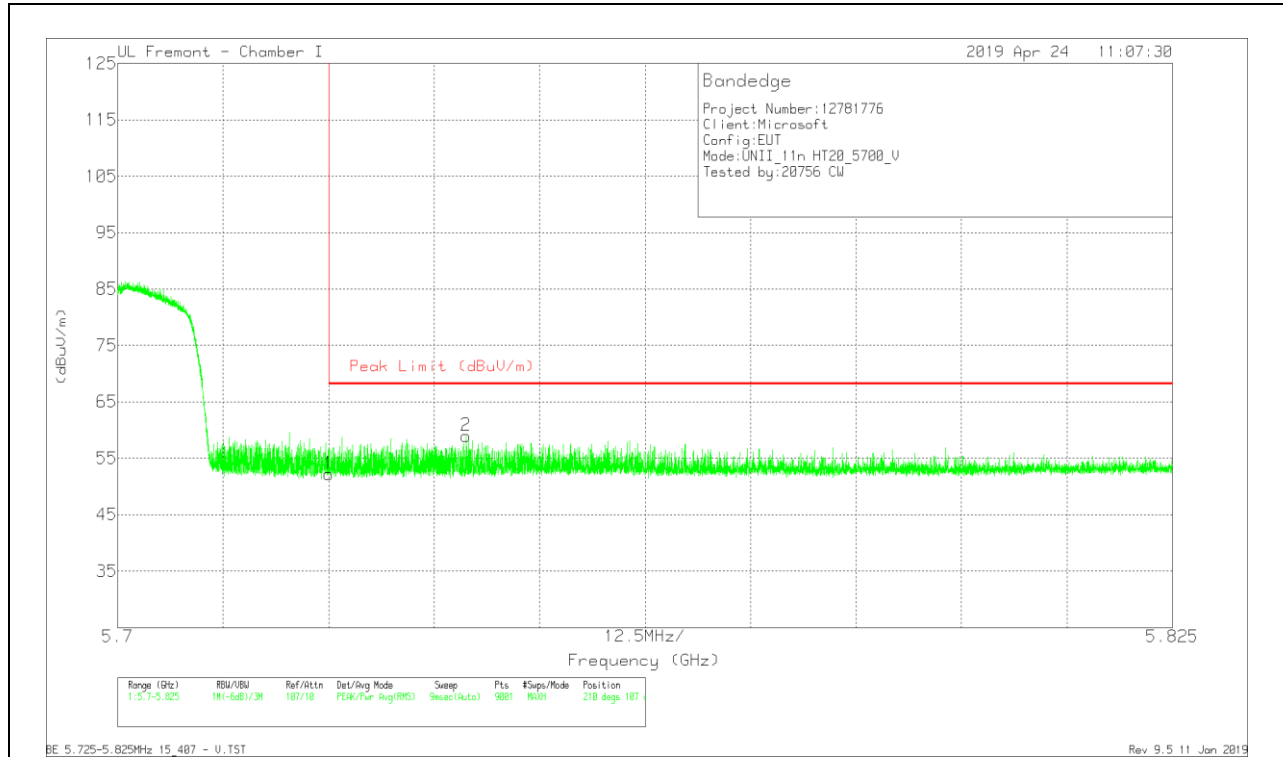



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/ Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.76	Pk	35	-18.5	52.26	68.2	-15.94	210	107	V
2	5.741	42.24	Pk	35	-18.3	58.94	68.2	-9.26	210	107	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

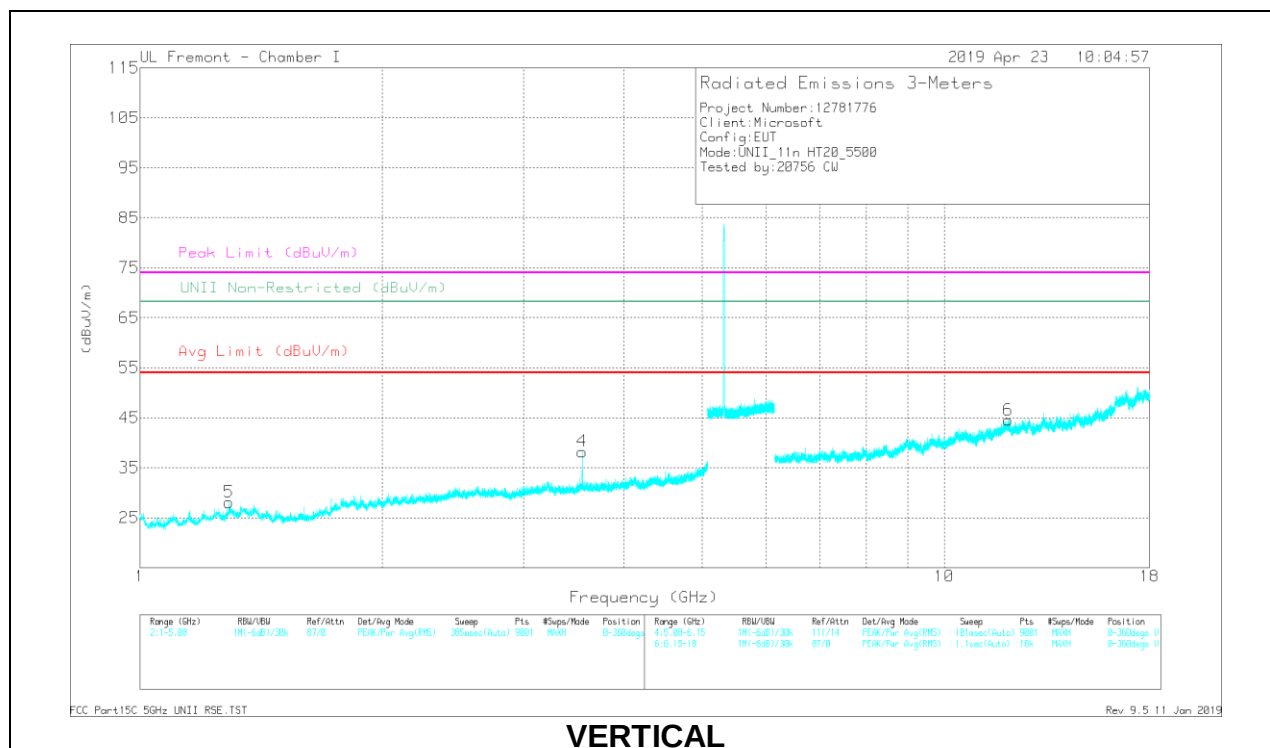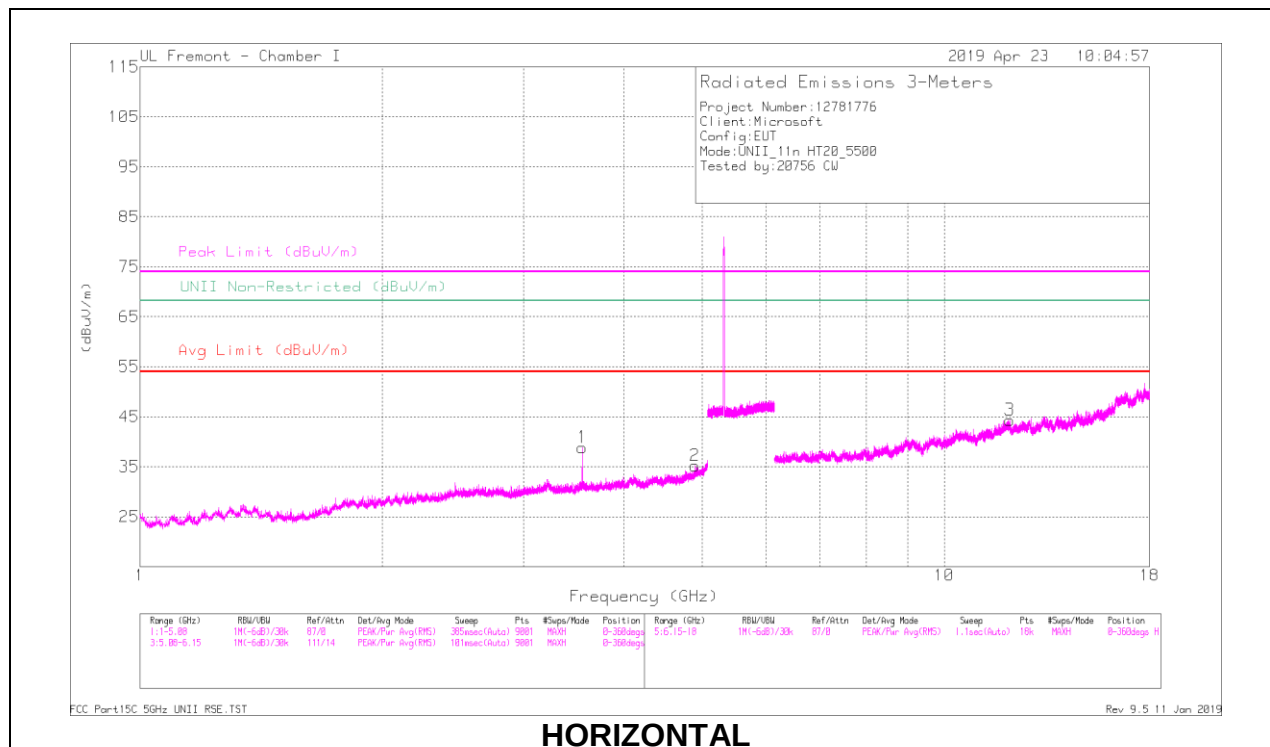

RADIATED EMISSIONS



Marker	Frequency (MHz)	Power Reading (dBuV)	Det	AF T862 (dBm)	Amp C&R (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unfil Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Deg)	Height (m)	Polarity
1	* 3.547	38.7	PK-U	33	-29.4	0	42.3	-	-	74	-31.7	-	-	207	103	H
	* 3.547	33.8	ADR	33	-29.4	2	37.6	54	-16.4	-	-	-	-	207	103	H
2	* 4.895	34.03	PK-U	34.1	-27.1	0	41.03	-	-	74	-32.97	-	-	123	168	H
	* 4.895	24.06	ADR	34.1	-27.1	2	31.26	54	-22.74	-	-	-	-	123	168	H
4	* 3.547	38.74	PK-U	33	-29.4	0	42.34	-	-	74	-31.66	-	-	118	141	V
	* 3.547	33.11	ADR	33	-29.4	2	36.91	54	-17.09	-	-	-	-	118	141	V
5	* 1.29	39.4	PK-U	29.3	-33.8	0	34.9	-	-	74	-39.1	-	-	253	225	V
	* 1.291	28.62	ADR	29.3	-33.8	2	24.32	54	-29.68	-	-	-	-	253	225	V
3	* 12.06	28.37	PK-U	38.9	-16.4	0	50.87	-	-	74	-23.13	-	-	98	149	H
	* 12.061	18.15	ADR	38.9	-16.4	2	40.85	54	-13.15	-	-	-	-	98	149	H
6	* 12	26.44	PK-U	38.8	-16.2	0	49.04	-	-	74	-24.96	-	-	242	146	V
	* 12.003	18.61	ADR	38.9	-16.2	2	41.51	54	-12.49	-	-	-	-	242	146	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

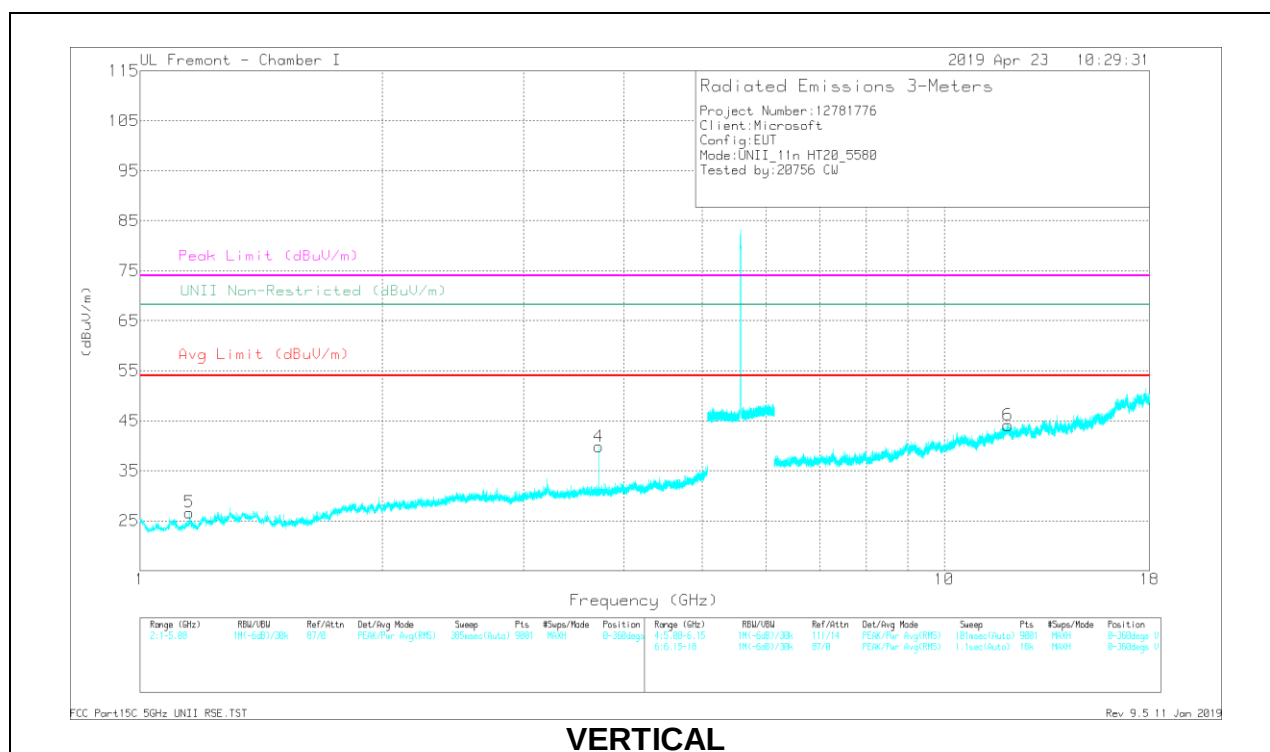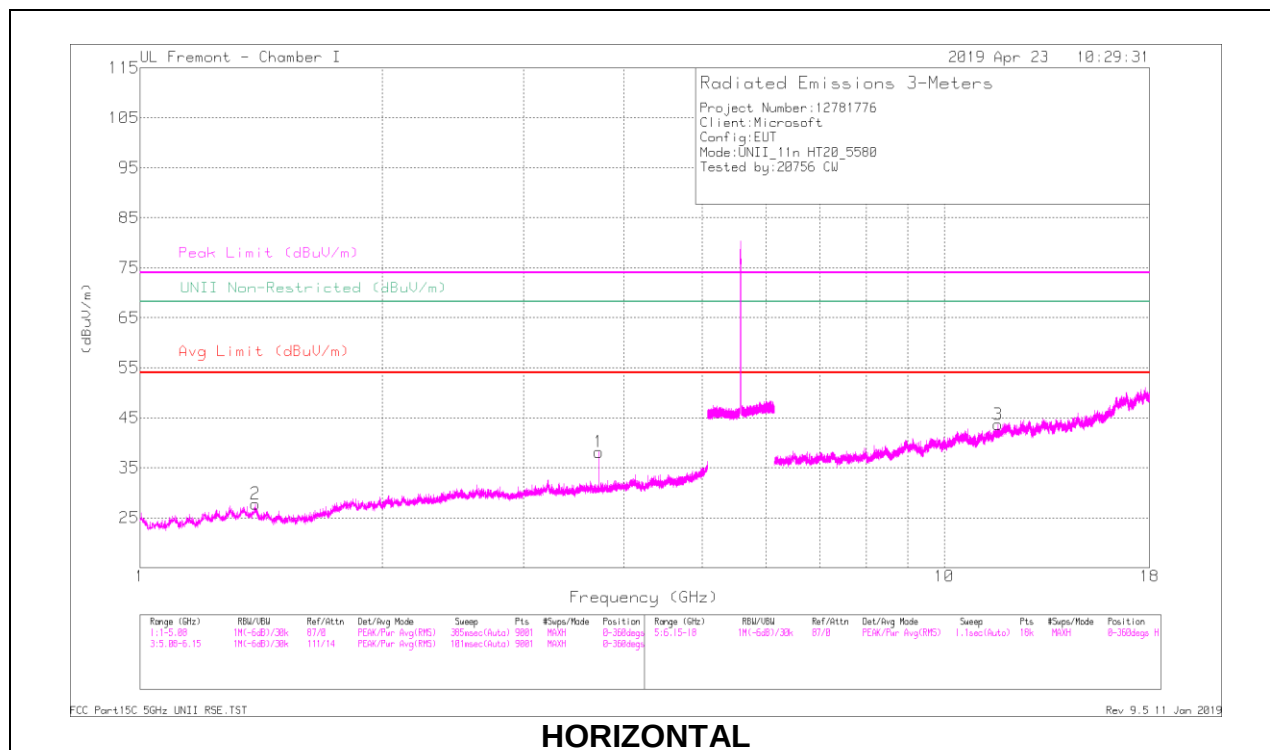

RADIATED EMISSIONS



Marker	Frequency (MHz)	Power Reading (dBuV)	Det	AF T862 (dBm)	Amp C&R (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unfil Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Deg)	Height (m)	Polarity
1	* 3.72	36.16	PK-U	32.9	-29.2	0	39.96	-	-	74	-34.14	-	-	220	105	H
	* 3.72	27.69	ADR	32.9	-29.2	2	31.59	54	-22.41	-	-	-	-	220	105	H
2	* 1.392	37.79	PK-U	29.1	-33.5	0	33.39	-	-	74	-40.61	-	-	343	280	H
	* 1.392	28.82	ADR	29.1	-33.5	2	24.62	54	-29.38	-	-	-	-	343	280	H
4	* 3.72	38.49	PK-U	32.9	-29.2	0	42.19	-	-	74	-31.81	-	-	325	105	V
	* 3.72	34.4	ADR	32.9	-29.2	2	38.3	54	-15.7	-	-	-	-	325	105	V
5	* 1.152	40.76	PK-U	27.6	-34	0	34.36	-	-	74	-39.64	-	-	137	277	V
	* 1.152	30.58	ADR	27.6	-34	2	24.38	54	-29.62	-	-	-	-	137	277	V
3	* 11.659	28.63	PK-U	38.4	-16.7	0	48.33	-	-	74	-25.67	-	-	233	302	H
	* 11.661	18.63	ADR	38.4	-16.7	2	40.53	54	-13.47	-	-	-	-	233	302	H
6	* 12	26.35	PK-U	38.8	-16.2	0	48.95	-	-	74	-25.05	-	-	113	217	V
	* 12.001	18.74	ADR	38.8	-16.2	2	41.54	54	-12.46	-	-	-	-	113	217	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

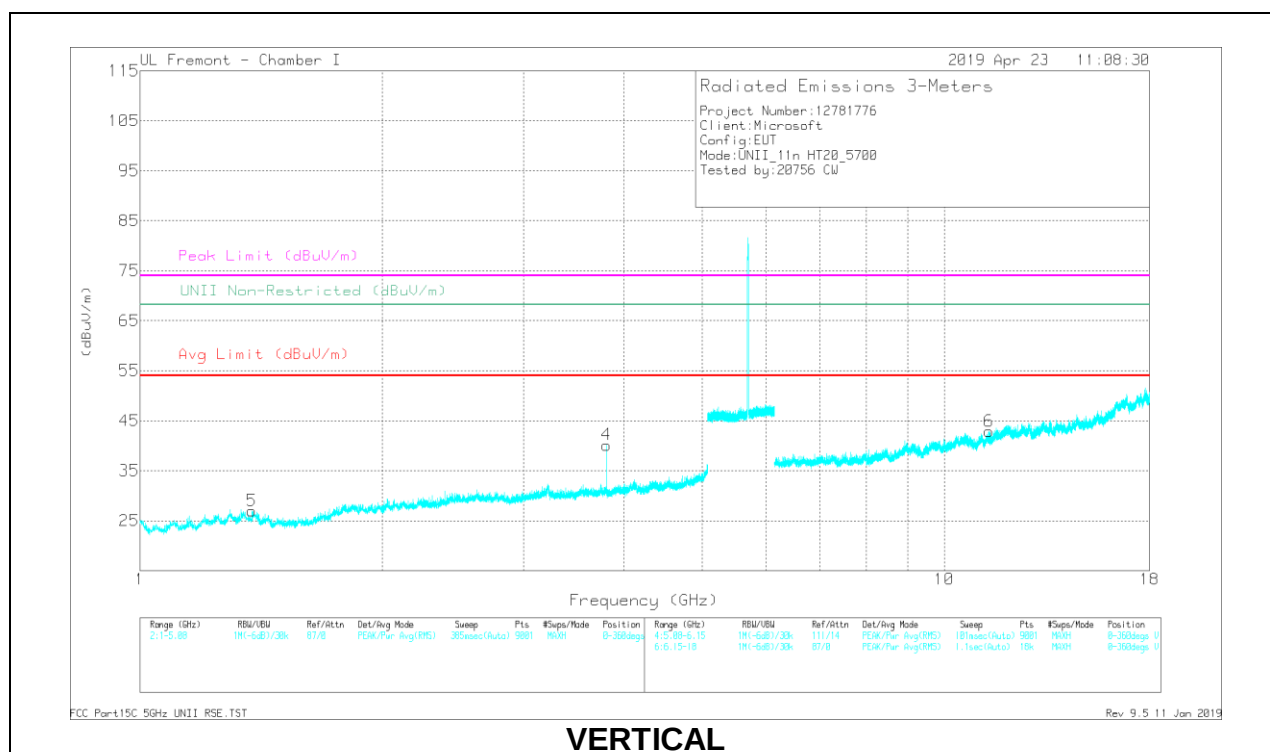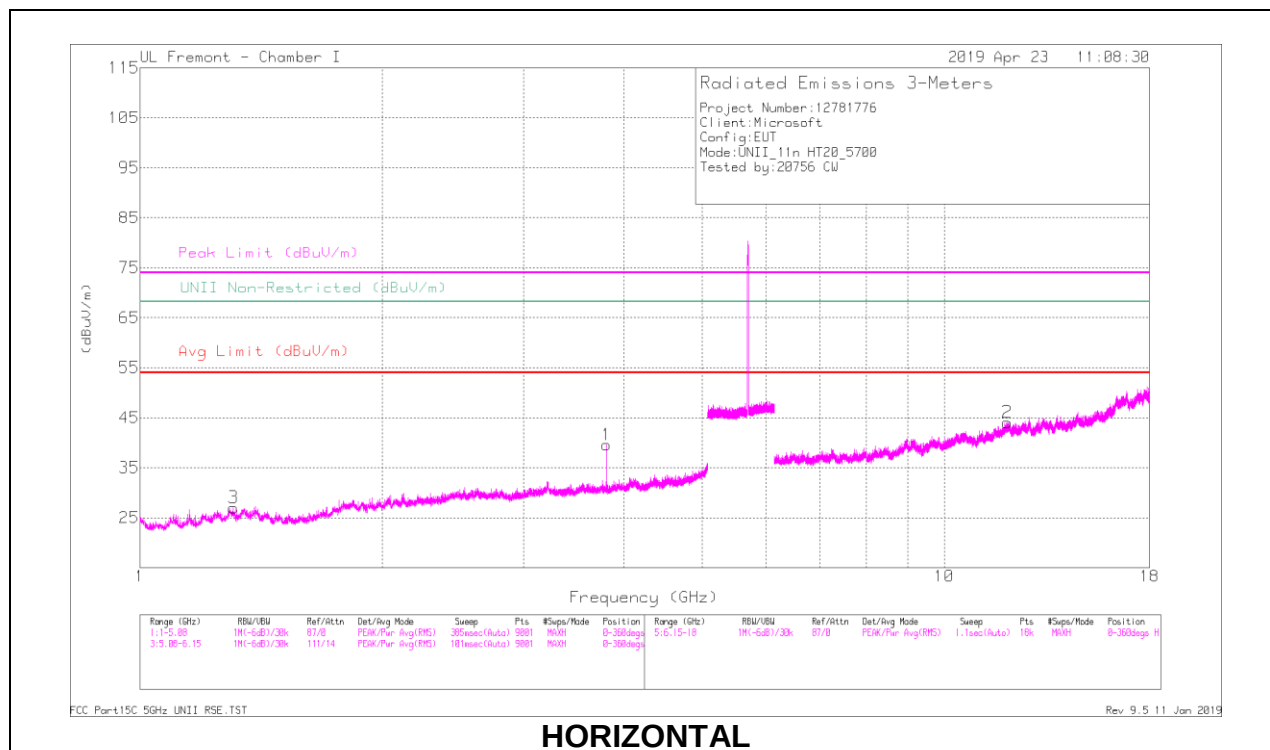

RADIATED EMISSIONS

Marker	Frequency (GHz)	Power Reading (dBuV)	Det	AF T862 (dBm)	Amp/CMR/PtPd (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unfil Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Deg)	Height (cm)	Polarity
1	* 3.8	41.1	PK-U	33.1	-29.8	0	44.4	-	-	74	-29.6	-	-	254	228	H
	* 3.8	36.33	ADR	33.1	-29.8	2	39.83	54	-14.17	-	-	-	-	254	228	H
3	* 1.307	37.27	PK-U	29.4	-33.6	0	33.07	-	-	74	-40.93	-	-	24	191	H
	* 1.306	27.44	ADR	29.4	-33.6	2	23.44	54	-30.56	-	-	-	-	24	191	H
4	* 3.8	39.31	PK-U	33.1	-29.8	0	42.61	-	-	74	-31.39	-	-	212	100	V
	* 3.8	34.71	ADR	33.1	-29.8	2	38.21	54	-15.79	-	-	-	-	212	100	V
5	* 1.377	38	PK-U	29.4	-33.5	0	33.9	-	-	74	-40.1	-	-	318	146	V
	* 1.377	27.08	ADR	29.4	-33.5	2	23.18	54	-30.82	-	-	-	-	318	146	V
2	* 11.975	27.03	PK-U	38.8	-16.3	0	49.53	-	-	74	-24.47	-	-	147	129	H
	* 11.976	18.58	ADR	38.8	-16.3	2	41.28	54	-12.72	-	-	-	-	147	129	H
6	* 11.361	25.87	PK-U	38	-16.5	0	47.37	-	-	74	-26.63	-	-	319	205	V
	* 11.361	17.89	ADR	38	-16.5	2	39.59	54	-14.41	-	-	-	-	319	205	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1TX Antenna 2 MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

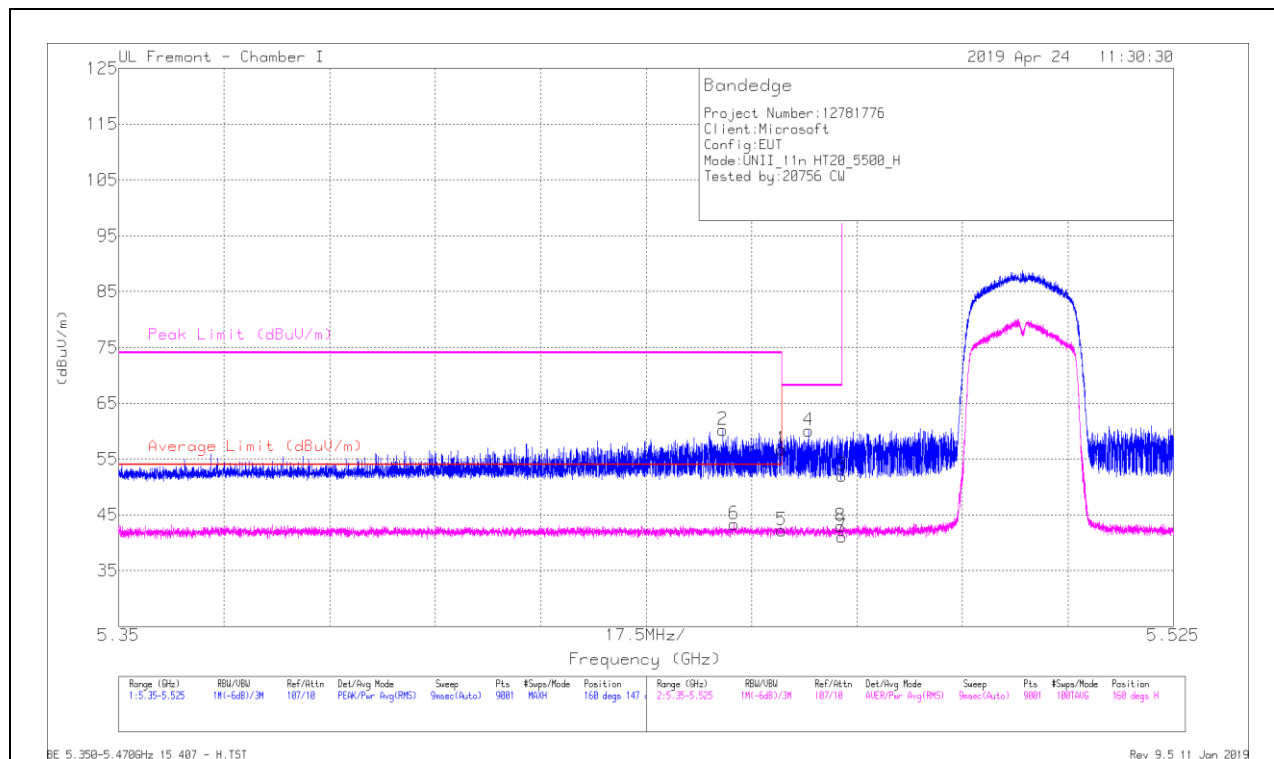


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.01	Pk	34.6	-17.9	0	56.71	-	-	74	-17.29	160	147	H
2	* 5.45	43.62	Pk	34.5	-17.9	0	60.22	-	-	74	-13.78	160	147	H
3	5.47	35.36	Pk	34.6	-17.9	0	52.06	-	-	68.2	-16.14	160	147	H
4	5.465	43.51	Pk	34.6	-18	0	60.11	-	-	68.2	-8.09	160	147	H
5	* 5.46	25.35	RMS	34.6	-17.9	.2	42.25	54	-11.75	-	-	160	147	H
6	* 5.452	26.45	RMS	34.6	-17.9	.2	43.35	54	-10.65	-	-	160	147	H
7	5.47	24.22	RMS	34.6	-17.9	.2	41.12	-	-	-	-	160	147	H
8	5.47	26.15	RMS	34.6	-18	.2	42.95	-	-	-	-	160	147	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

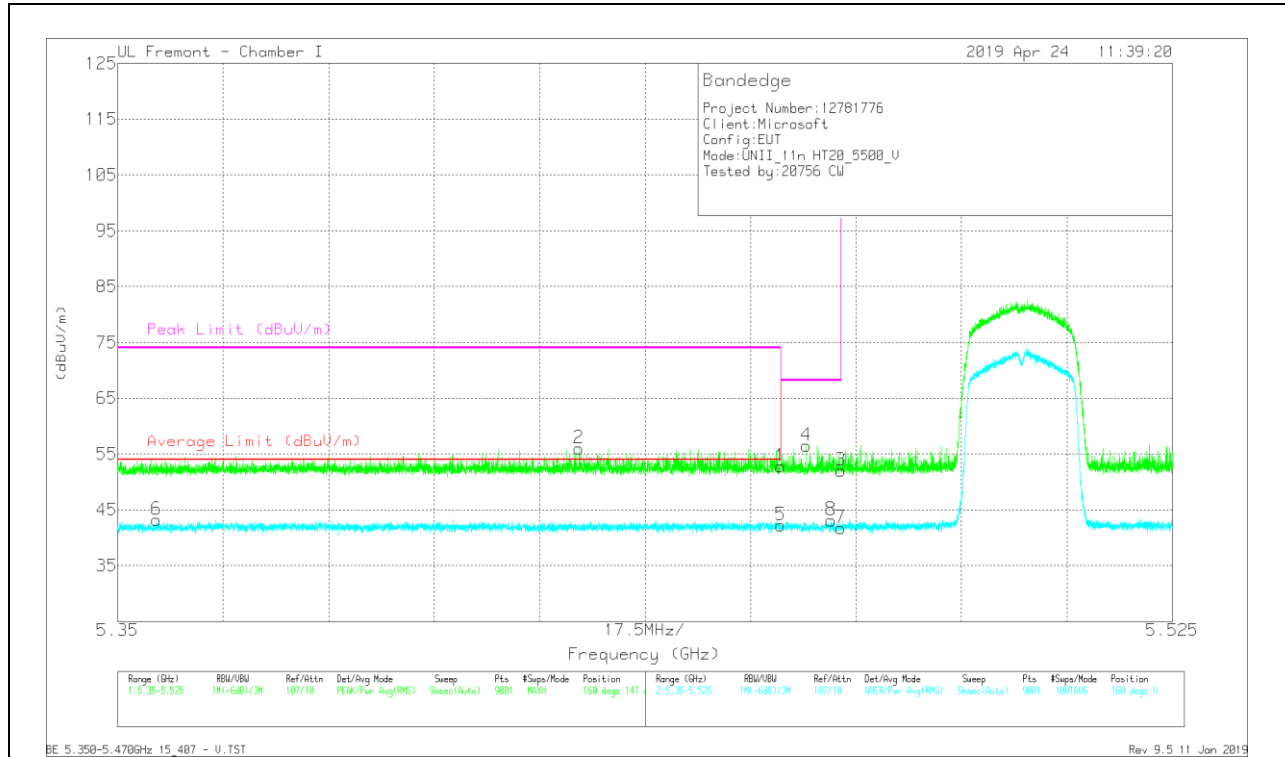

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CM/Fktr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.46	36.07	Pk	34.6	-17.9	0	52.77	-	-	74	-21.23	160	147	V
2	* 5.427	39.6	Pk	34.5	-18.1	0	56	-	-	74	-18	160	147	V
3	5.47	35.38	Pk	34.6	-17.9	0	52.08	-	-	68.2	-16.12	160	147	V
4	5.464	39.87	Pk	34.6	-18	0	56.47	-	-	68.2	-11.73	160	147	V
5	* 5.46	25.29	RMS	34.6	-17.9	-2	42.19	54	-11.81	-	-	160	147	V
6	* 5.356	25.78	RMS	34.4	-18.2	-2	43.18	54	-10.82	-	-	160	147	V
7	5.47	24.84	RMS	34.6	-17.9	-2	41.74	-	-	-	-	160	147	V
8	5.468	26.35	RMS	34.6	-18	-2	43.15	-	-	-	-	160	147	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

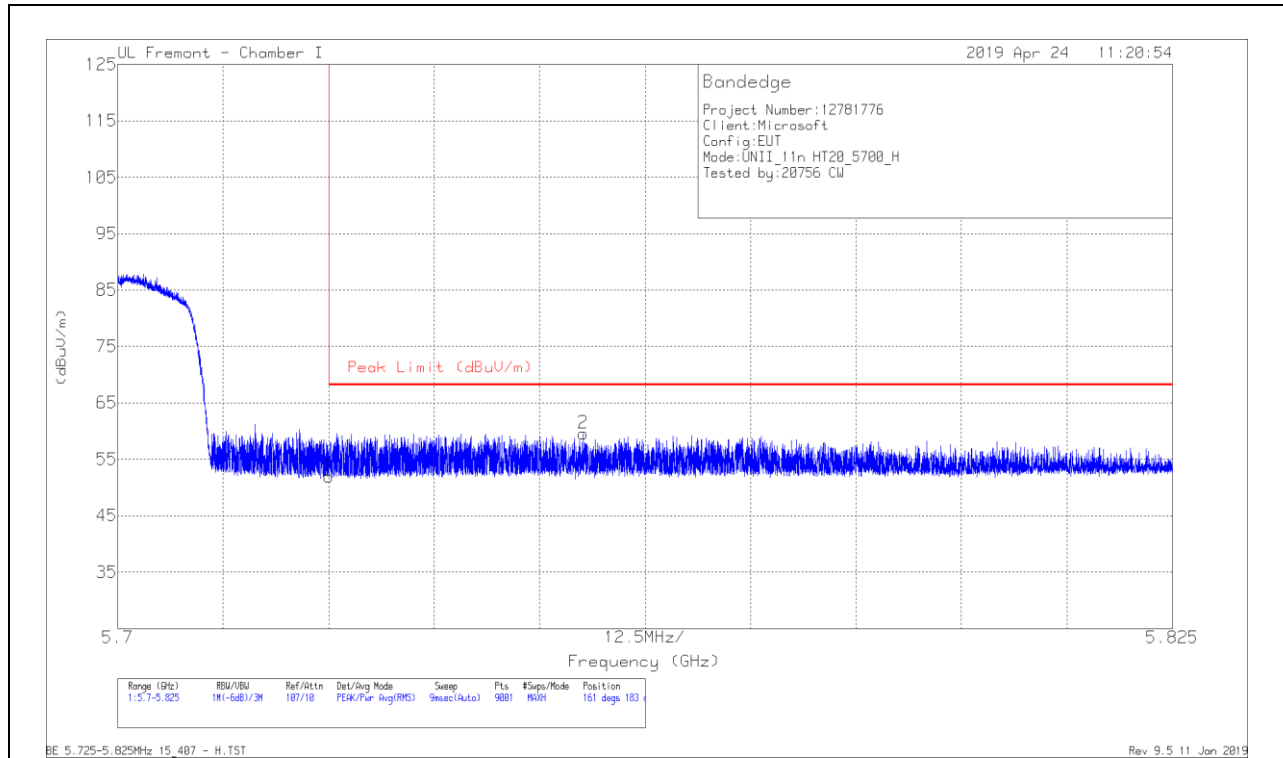

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fitr/ Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.5	Pk	35	-18.5	52	68.2	-16.2	161	183	H
2	5.755	42.79	Pk	35.1	-18.3	59.59	68.2	-8.61	161	183	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

VERTICAL RESULT

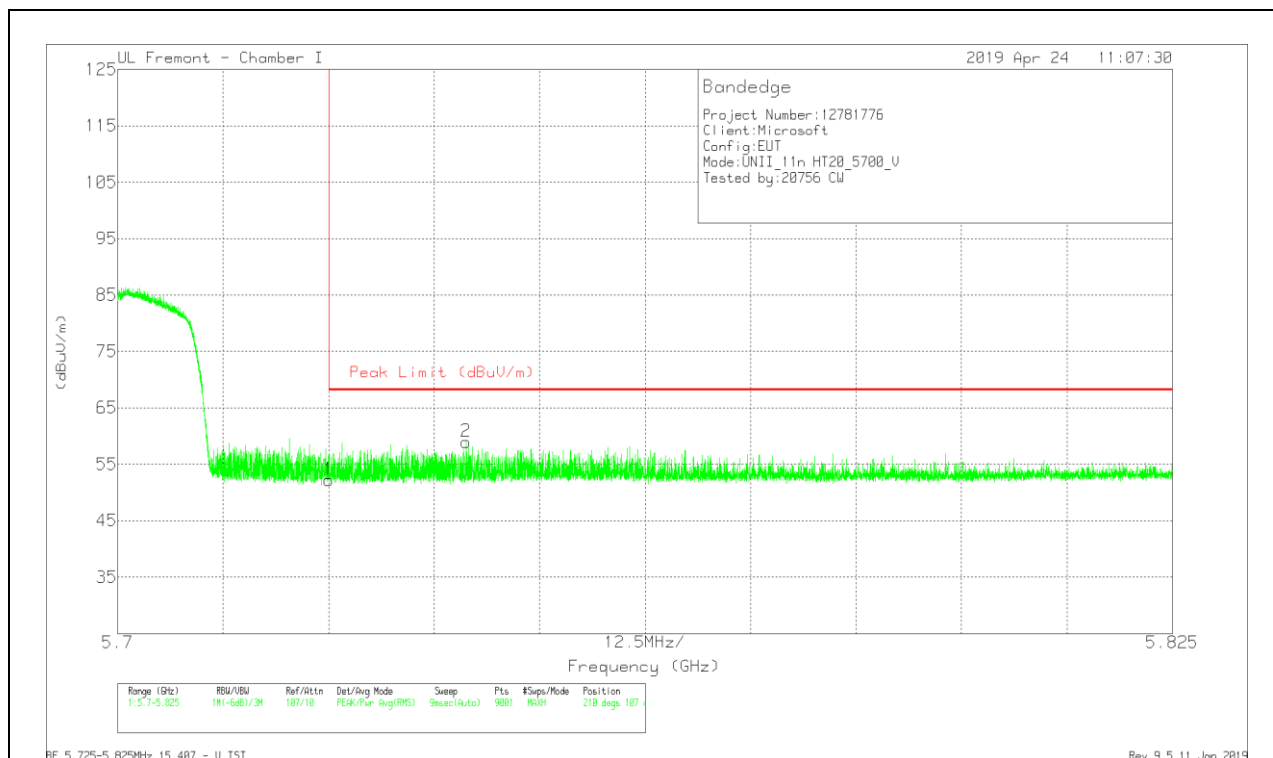



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.76	Pk	35	-18.5	52.26	68.2	-15.94	210	107	V
2	5.741	42.24	Pk	35	-18.3	58.94	68.2	-9.26	210	107	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

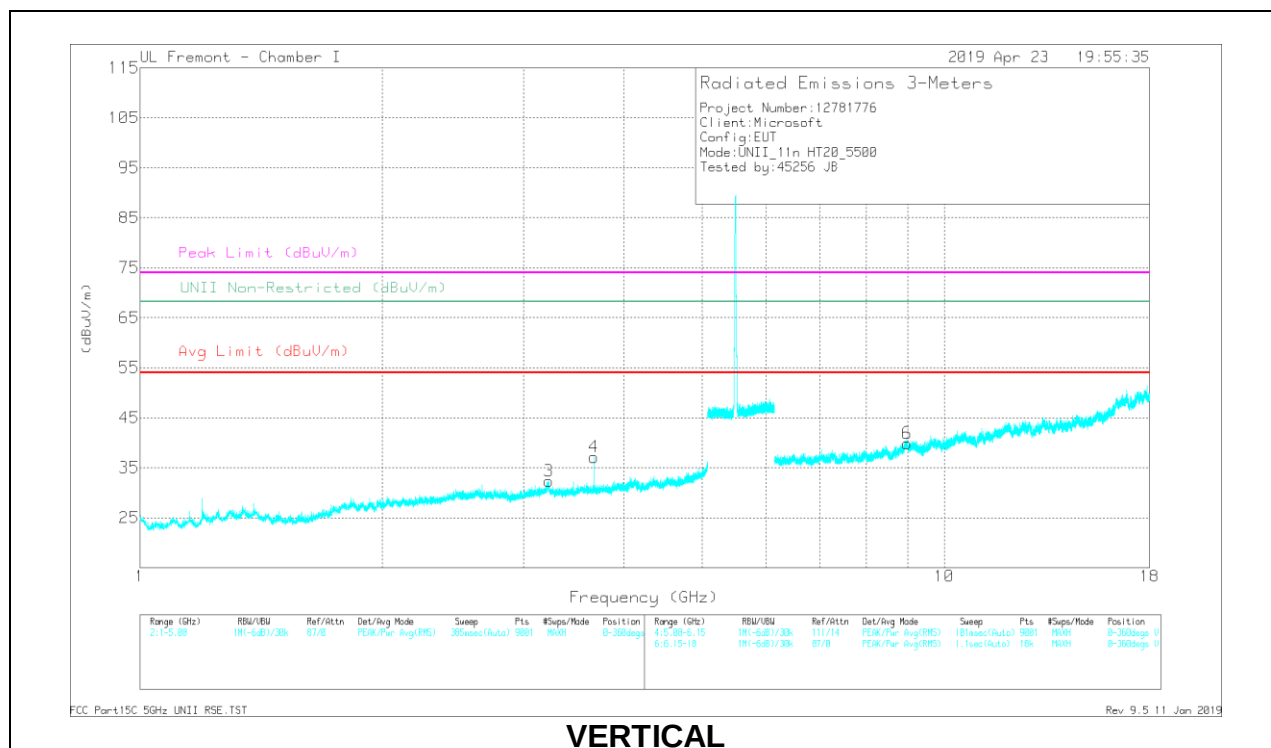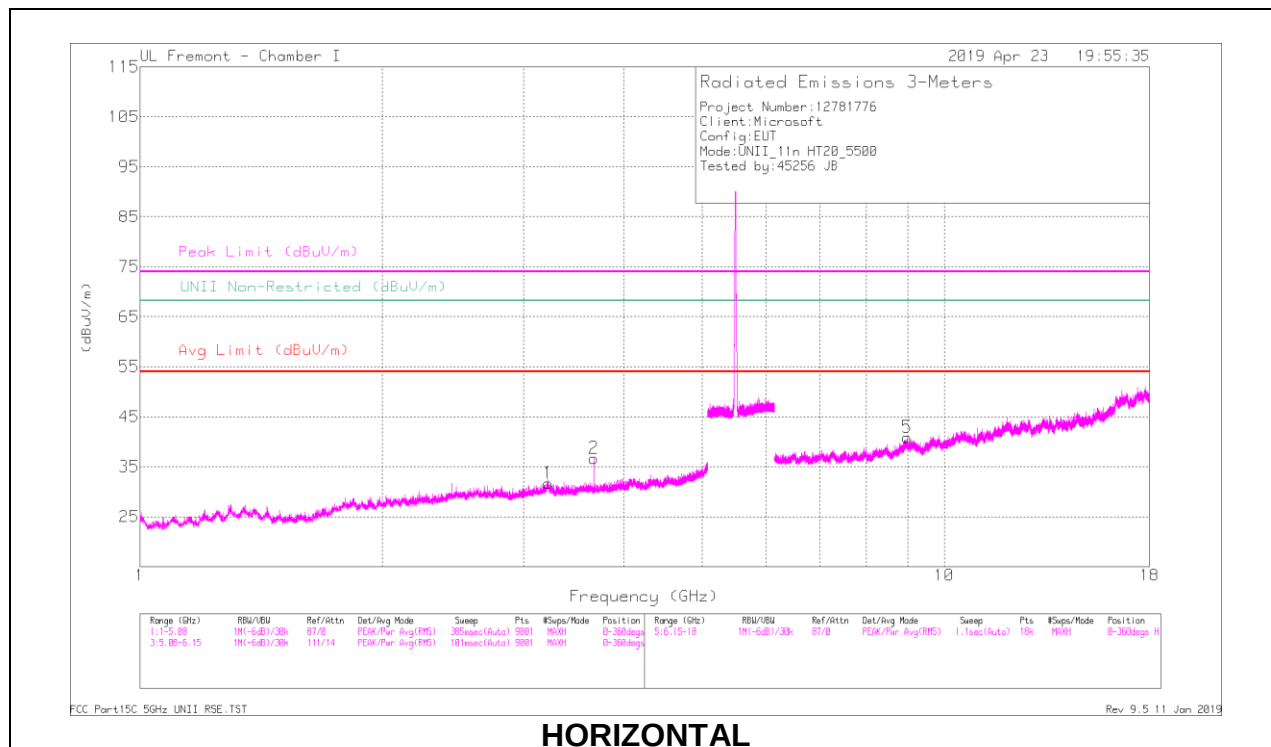

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp(CM/Ft)Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.216	35.81	PK-U	33.4	-29.8	0	39.41	-	-	-	-	68.2	-28.79	269	390	H
2	* 3.667	37.34	PK-U	33	-29.5	0	40.84	-	-	74	-33.16	-	-	125	112	H
	* 3.667	31.67	ADR	33	-29.5	2	35.37	54	-18.63	-	-	-	-	125	112	H
3	3.222	35.56	PK-U	33.2	-29.9	0	38.86	-	-	-	-	68.2	-29.34	44	390	V
4	* 3.667	37.92	PK-U	33	-29.5	0	41.42	-	-	74	-32.58	-	-	139	100	V
	* 3.667	32.24	ADR	33	-29.5	2	35.94	54	-18.06	-	-	-	-	139	100	V
5	8.996	28.54	PK-U	36.2	-17.8	0	46.94	-	-	-	-	68.2	-21.26	290	184	H
6	8.993	28.72	PK-U	36.2	-17.6	0	47.32	-	-	-	-	68.2	-20.88	182	195	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

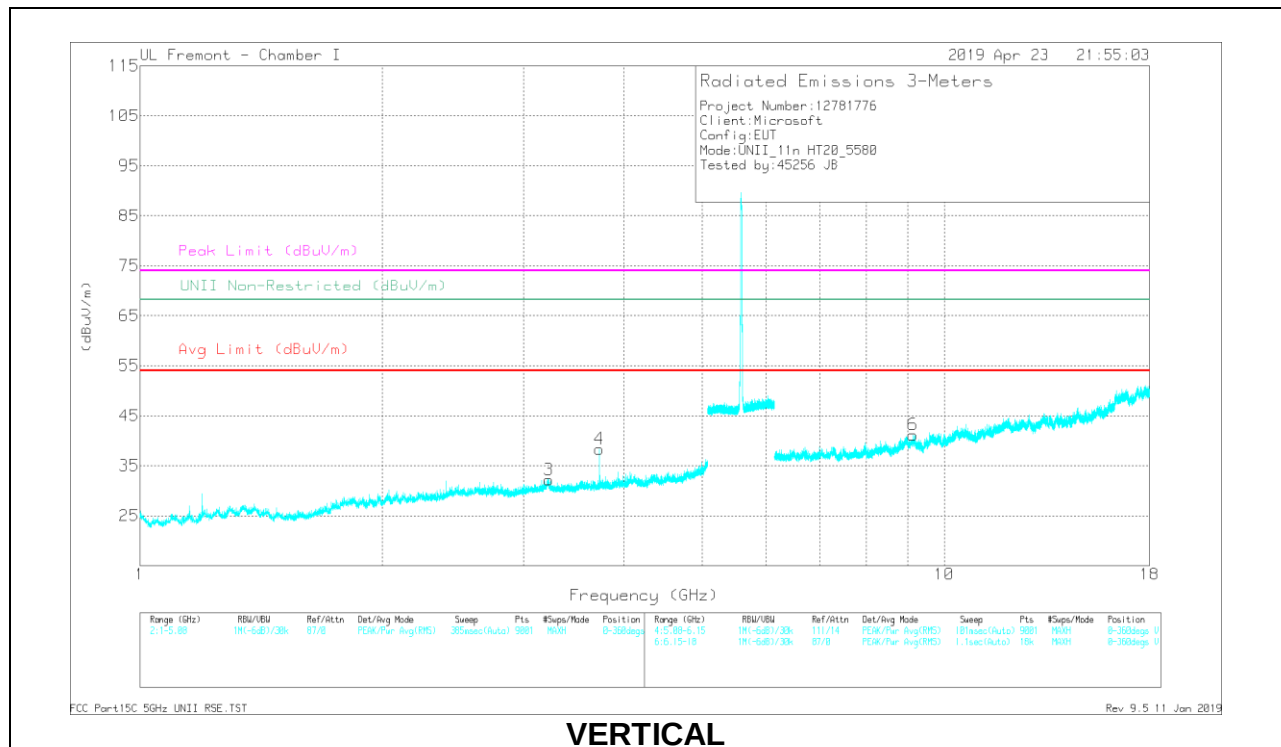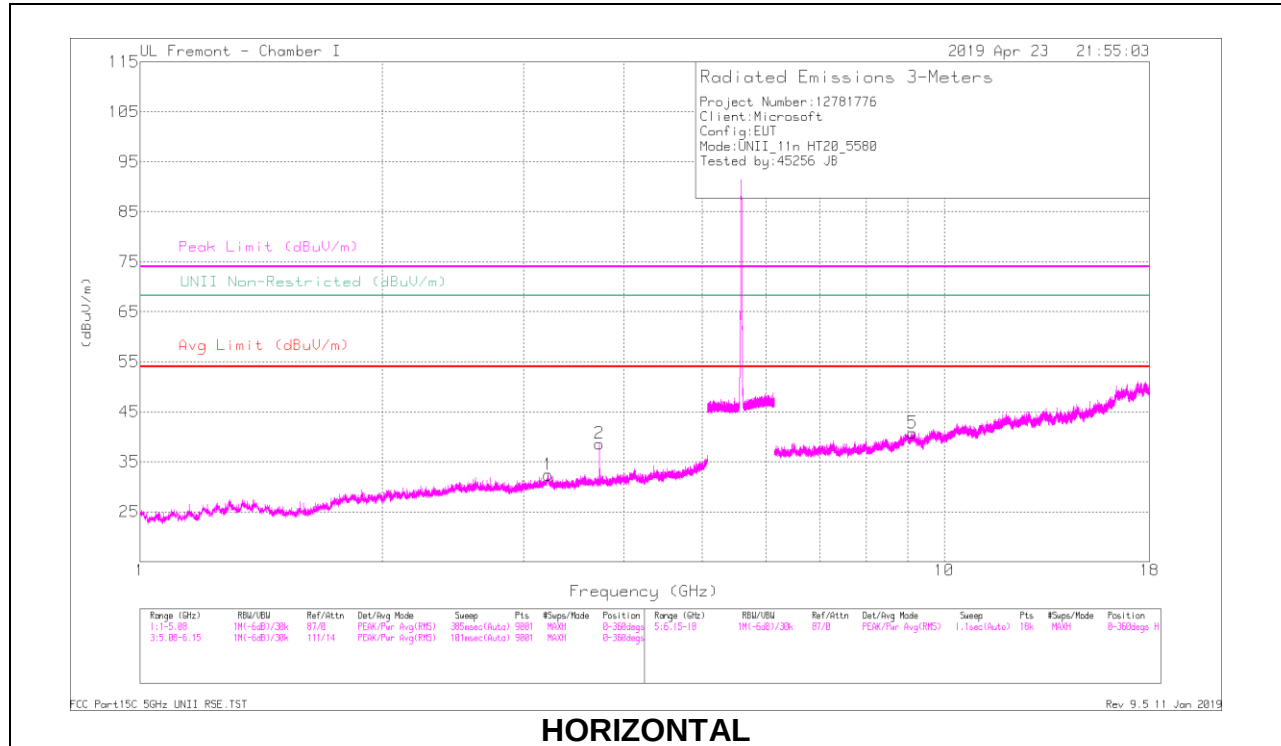

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp(CM/FtoPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unfil Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.22	35.63	PK-U	33.2	-29.8	0	39.03	-	-	-	-	68.2	-29.17	170	159	H
2	* 3.727	36.05	PK-U	32.9	-29.3	0	41.65	-	-	74	-32.35	-	-	317	193	H
	* 3.727	32.02	ADR	32.9	-29.3	2	35.82	54	-18.18	-	-	-	-	317	193	H
3	3.226	35.54	PK-U	33.1	-29.8	0	38.84	-	-	-	-	68.2	-29.36	91	117	V
4	* 3.727	38.79	PK-U	32.9	-29.3	0	42.39	-	-	74	-31.61	-	-	99	110	V
	* 3.727	34.31	ADR	32.9	-29.3	2	38.11	54	-15.89	-	-	-	-	99	110	V
5	* 9.134	28.69	PK-U	36.3	-17.7	0	47.29	-	-	74	-26.71	-	-	59	386	H
	* 9.136	19.67	ADR	36.3	-17.7	2	38.47	54	-15.53	-	-	-	-	59	386	H
6	* 9.143	29.81	PK-U	36.3	-17.7	0	48.41	-	-	74	-25.59	-	-	238	209	V
	* 9.143	19.99	ADR	36.3	-17.7	2	38.79	54	-15.21	-	-	-	-	238	209	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

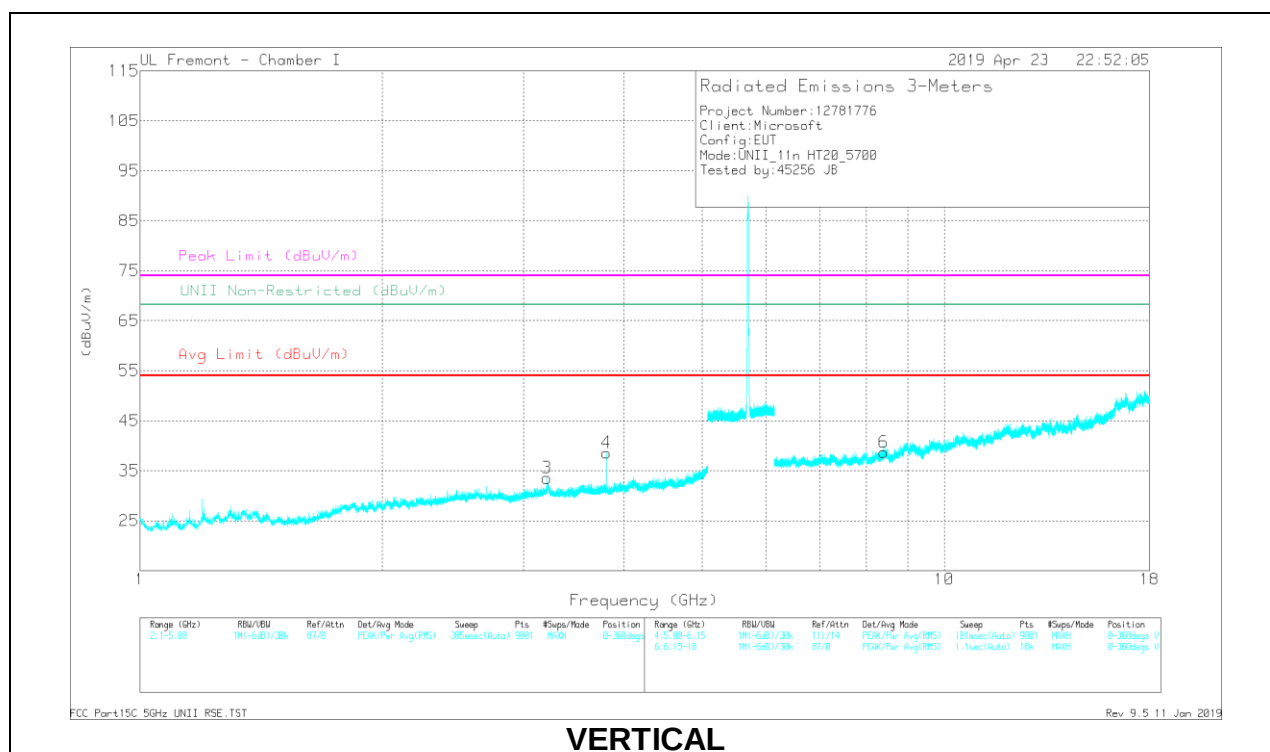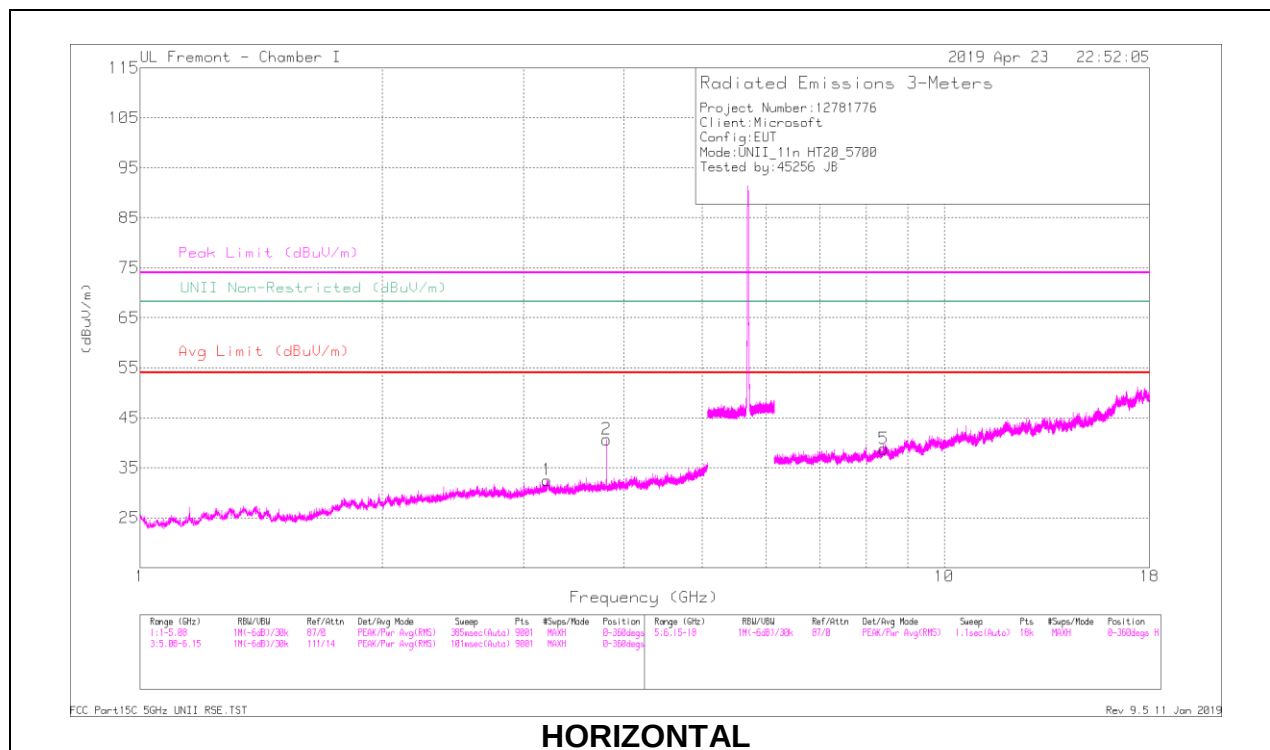

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Chf/Ftd/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.204	36.51	PK-U	33.3	-29.9	0	39.91	-	-	-	-	68.2	-28.29	267	183	H
2	* 3.8	40.45	PK-U	33.1	-29.8	0	43.75	-	-	74	-30.25	-	-	142	114	H
	* 3.8	36.55	ADR	33.1	-29.8	2	40.05	54	-13.95	-	-	-	-	142	114	H
3	3.21	35.65	PK-U	33.6	-29.8	0	39.45	-	-	-	-	68.2	-28.75	188	219	V
4	* 3.8	39.35	PK-U	33.1	-29.8	0	42.65	-	-	74	-31.35	-	-	318	151	V
	* 3.8	33.72	ADR	33.1	-29.8	2	37.22	54	-16.78	-	-	-	-	318	151	V
5	* 8.408	29.31	PK-U	35.7	-19.4	0	45.61	-	-	74	-28.39	-	-	210	316	H
	* 8.408	19.38	ADR	35.7	-19.4	2	35.88	54	-18.12	-	-	-	-	210	316	H
6	* 8.406	29.47	PK-U	35.7	-19.4	0	45.77	-	-	74	-28.23	-	-	295	244	V
	* 8.406	19.93	ADR	35.7	-19.4	2	36.43	54	-17.57	-	-	-	-	295	244	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.7. TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND

1TX Antenna 1 MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

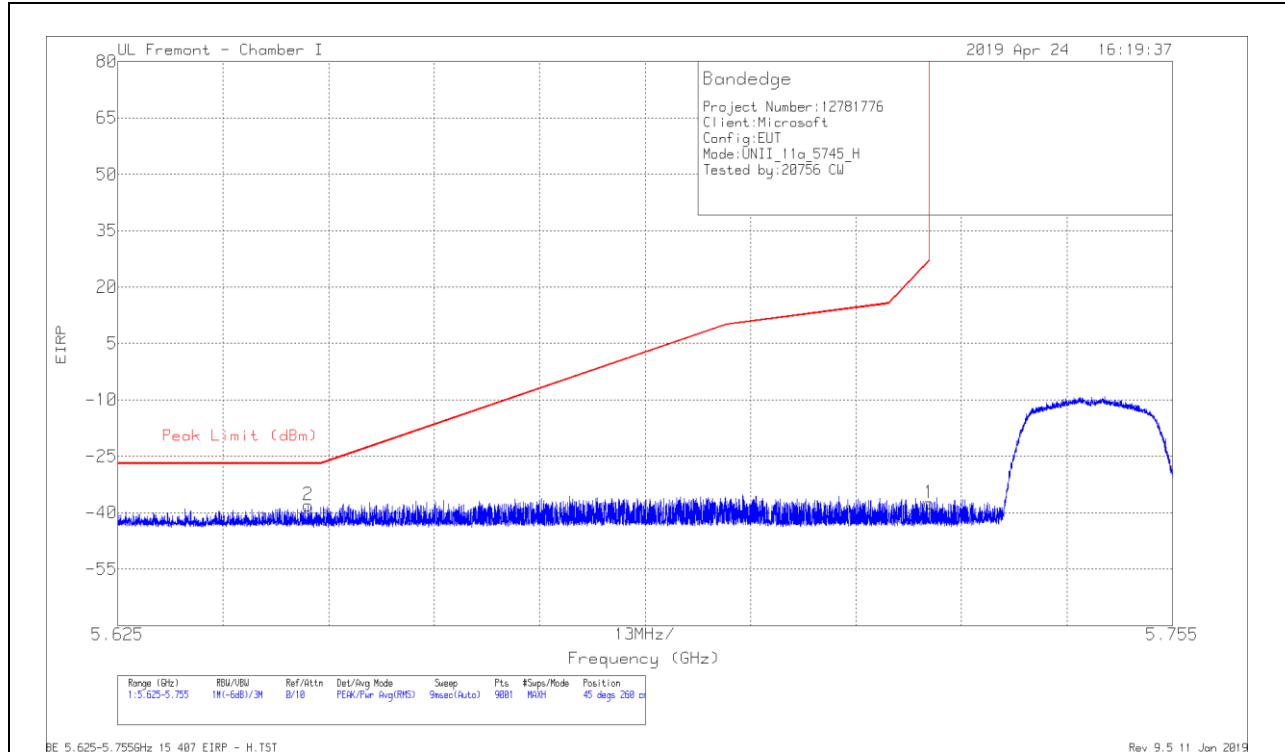


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-65.76	Pk	35	-18.5	11.8	-37.46	26.99	-64.45	45	260	H
2	5.649	-66.28	Pk	35	-18.6	11.8	-38.08	-27	-11.08	45	260	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VERTICAL RESULT

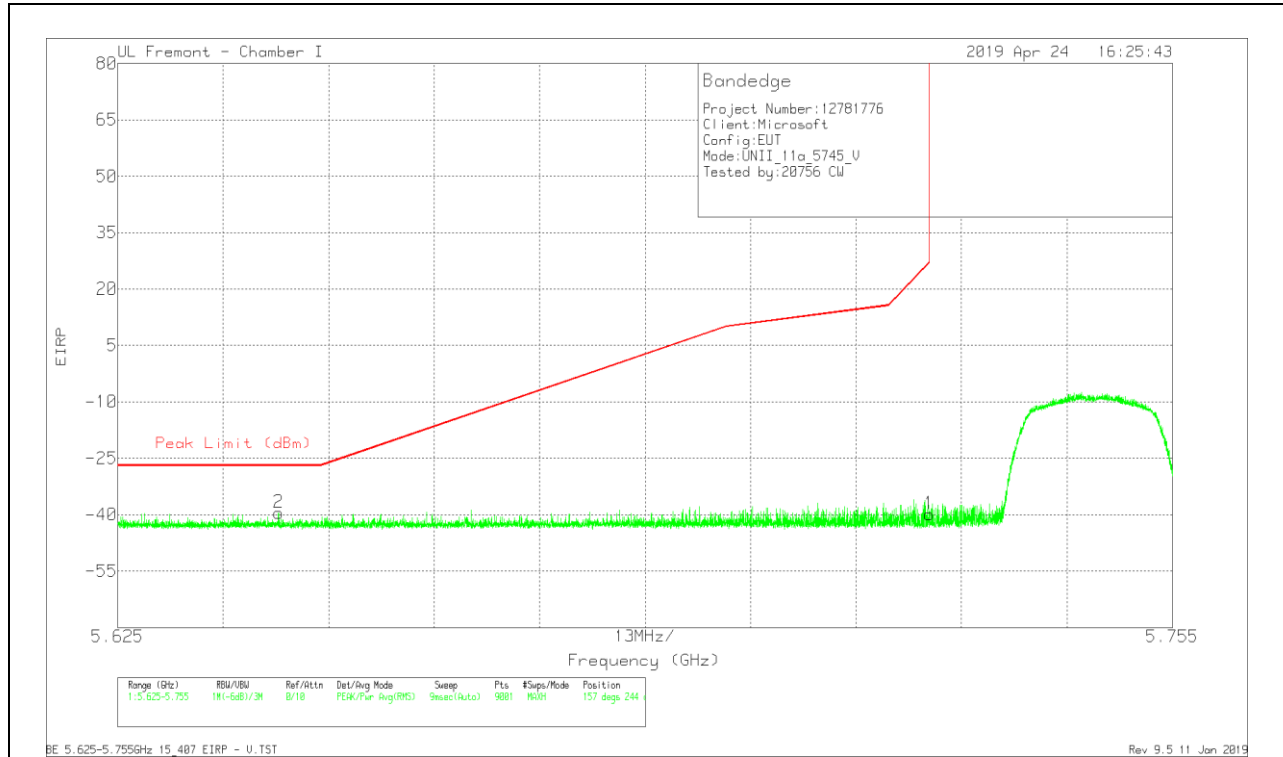


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-68.13	Pk	35	-18.5	11.8	-39.83	26.99	-66.82	157	244	V
2	5.645	-67.89	Pk	35.1	-18.6	11.8	-39.59	-27	-12.59	157	244	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

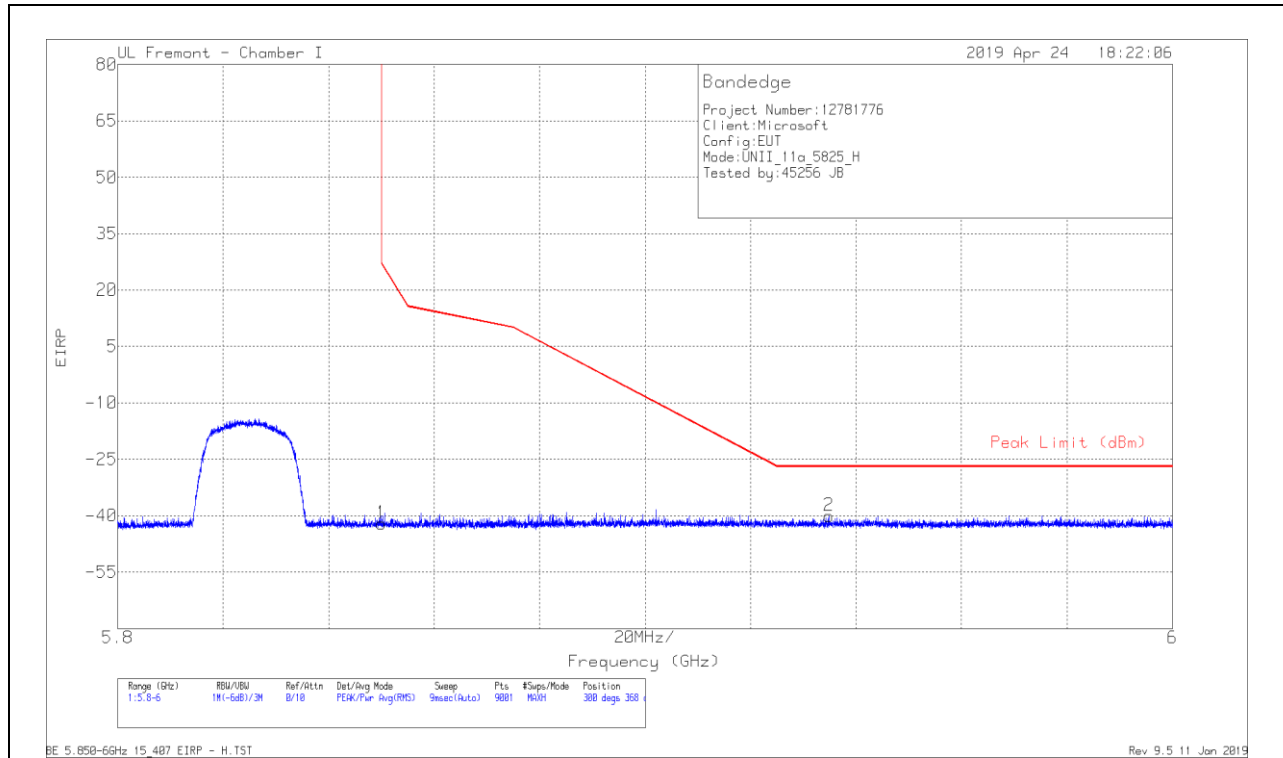


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-71.56	Pk	35.1	-17.4	11.8	-42.06	26.95	-69.01	300	368	H
2	5.935	-69.54	Pk	35.1	-17.4	11.8	-40.04	-27	-13.04	300	368	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VERTICAL RESULT


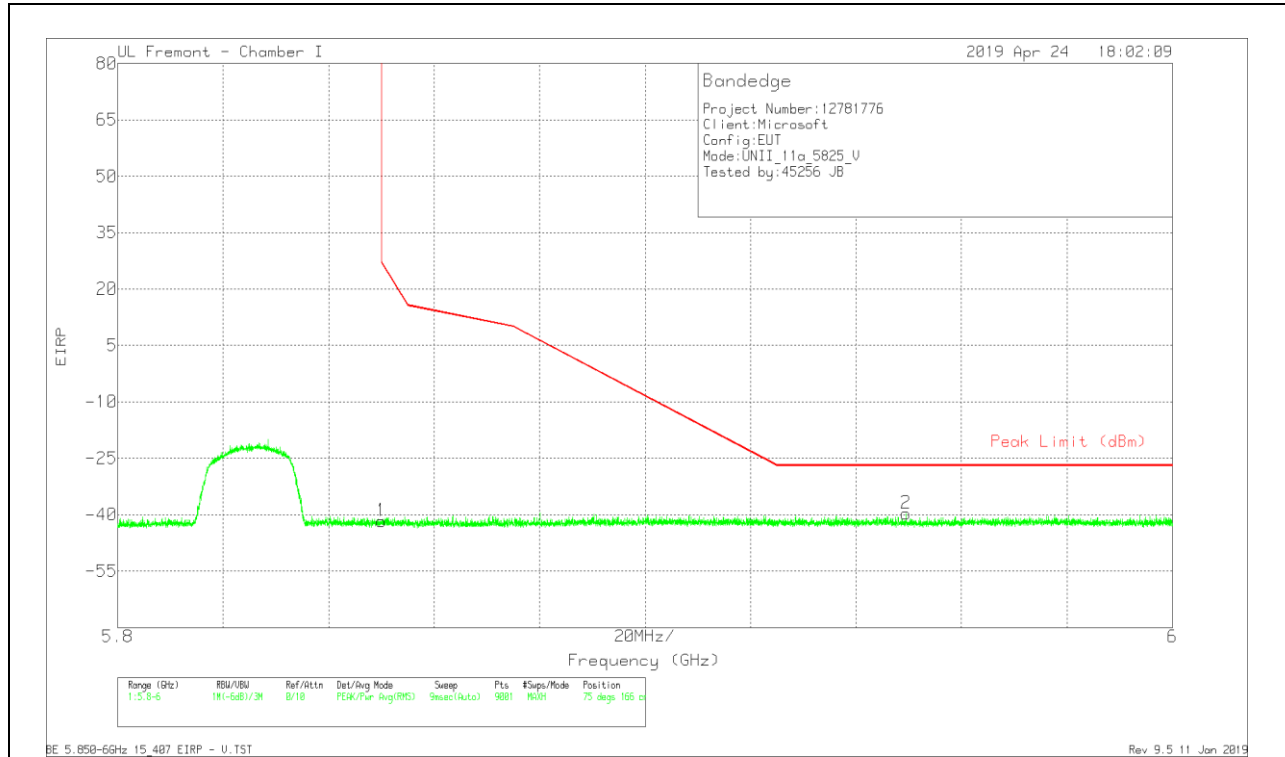


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-71.26	Pk	35.1	-17.4	11.8	0	-41.76	26.95	-68.71	75	166	V
2	5.95	-69.17	Pk	35.2	-17.5	11.8	0	-39.67	-27	-12.67	75	166	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

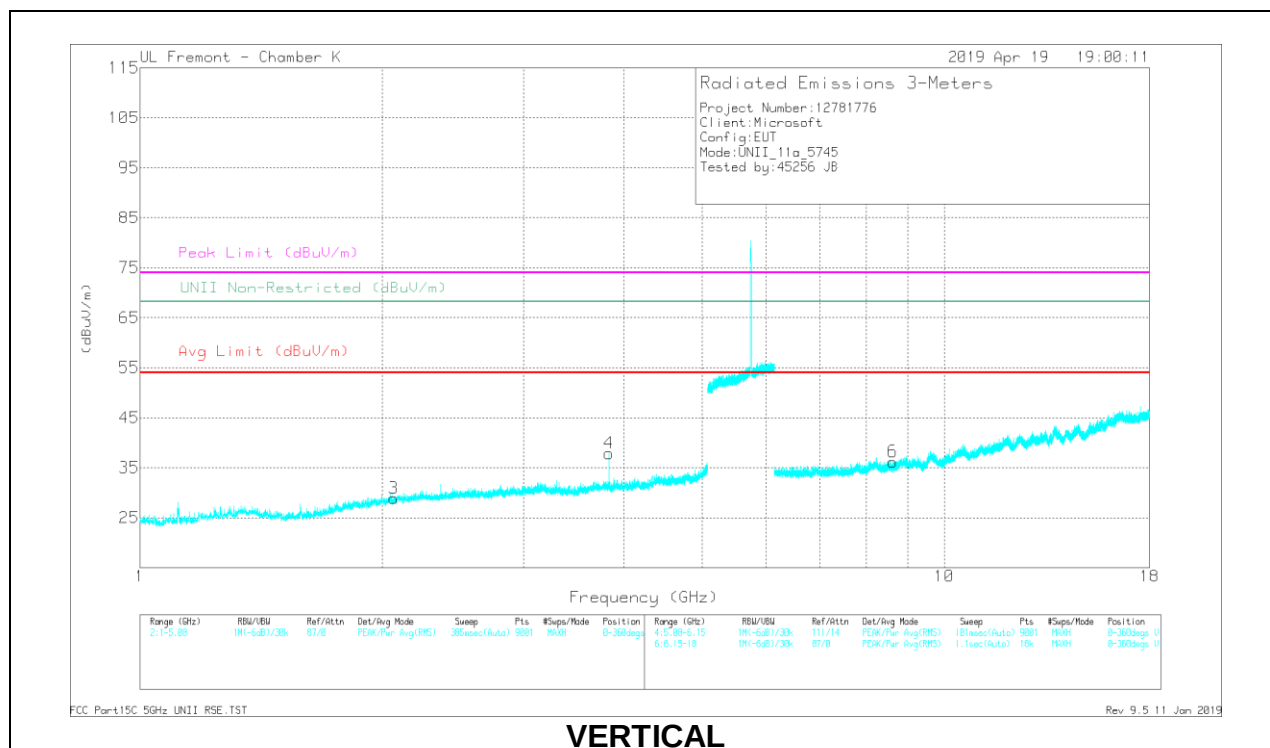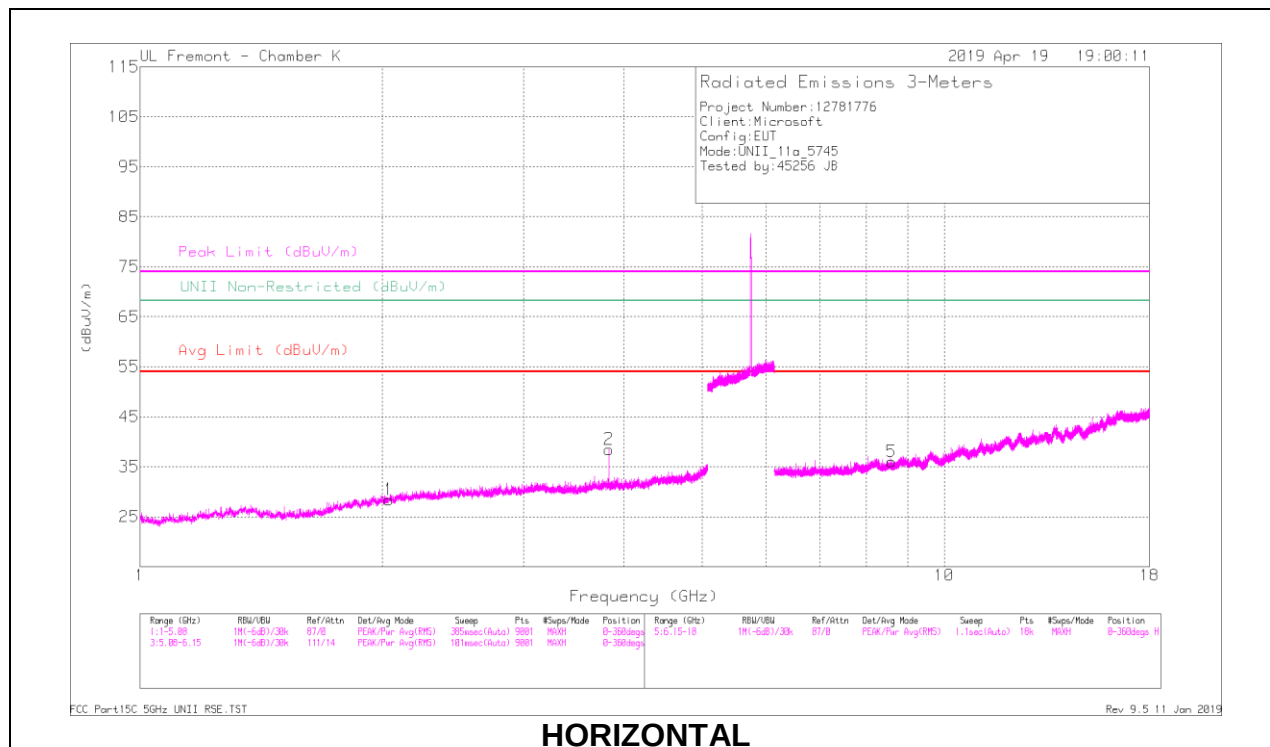

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cable/Fit/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	URRL Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.83	40.78	PK-U	33.4	-31.6	0	42.58	-	-	74	-31.42	-	-	71	190	H
	* 3.83	35.45	ADR	33.4	-31.6	.19	37.44	54	-16.56	-	-	-	-	71	190	H
1	2.039	40.51	PK-U	31.2	-35.1	0	36.61	-	-	-	-	68.2	-31.59	283	384	H
4	* 3.83	40.23	PK-U	33.4	-31.6	0	42.03	-	-	74	-31.97	-	-	301	125	V
	* 3.83	35.34	ADR	33.4	-31.6	.19	37.33	54	-16.67	-	-	-	-	301	125	V
3	2.065	40.27	PK-U	31.3	-35.2	0	36.37	-	-	-	-	68.2	-31.83	88	314	V
5	8.6	31.09	PK-U	35.8	-24.4	0	42.49	-	-	-	-	68.2	-25.71	145	152	H
6	8.632	31.22	PK-U	35.9	-24.5	0	42.62	-	-	-	-	68.2	-25.58	10	370	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

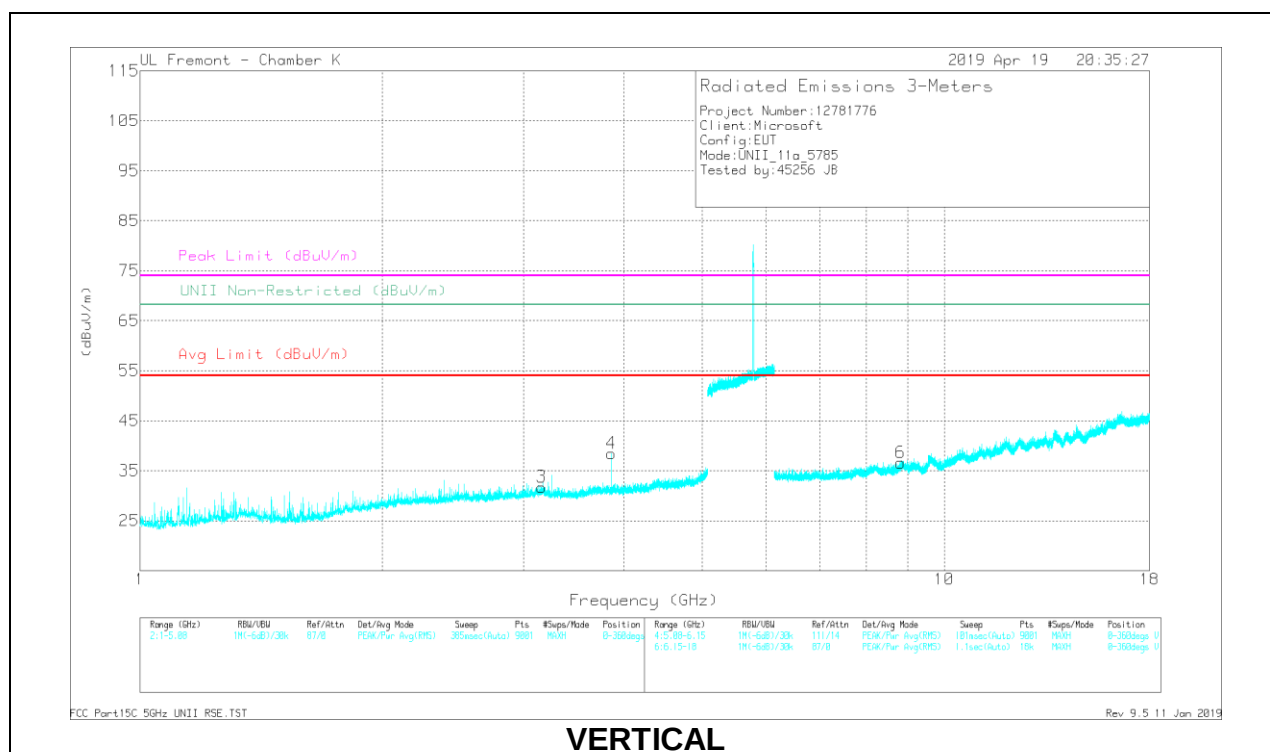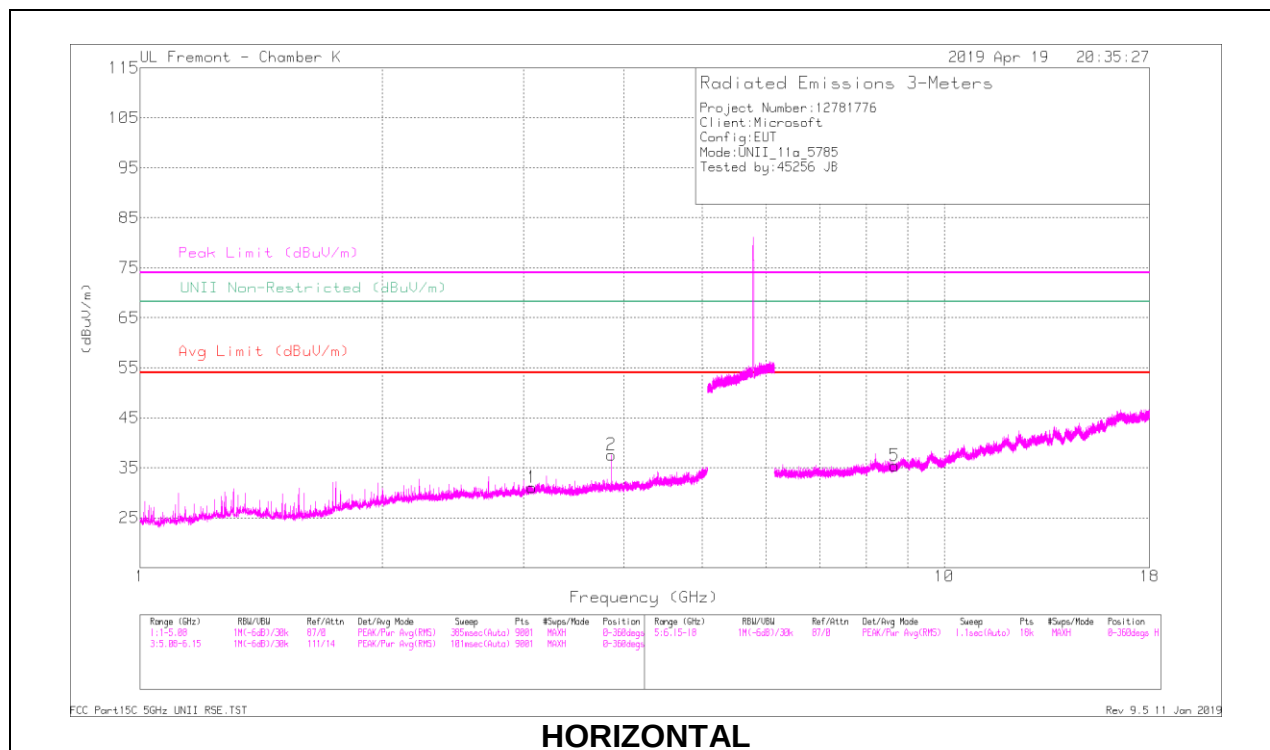

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp(CalFtr)Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	URR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.857	40.77	PK-U	33.4	-31.6	0	42.57	-	-	74	-31.43	-	-	344	348	H
	* 3.857	34.89	ADR	33.4	-31.6	.19	36.88	54	-17.12	-	-	-	-	344	348	H
1	3.071	39.92	PK-U	32.9	-34	0	36.82	-	-	-	-	68.2	-29.38	320	101	H
4	* 3.857	41.1	PK-U	33.4	-31.6	0	42.9	-	-	74	-31.1	-	-	279	124	V
	* 3.857	35.76	ADR	33.4	-31.6	0	37.75	54	-16.25	-	-	-	-	279	124	V
3	3.159	40.19	PK-U	32.9	-33.4	0	39.69	-	-	-	-	68.2	-28.51	307	269	V
5	8.675	32.04	PK-U	35.9	-24.6	0	43.34	-	-	-	-	68.2	-24.86	347	168	H
6	8.825	31.49	PK-U	36.1	-24	0	43.59	-	-	-	-	68.2	-24.61	354	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

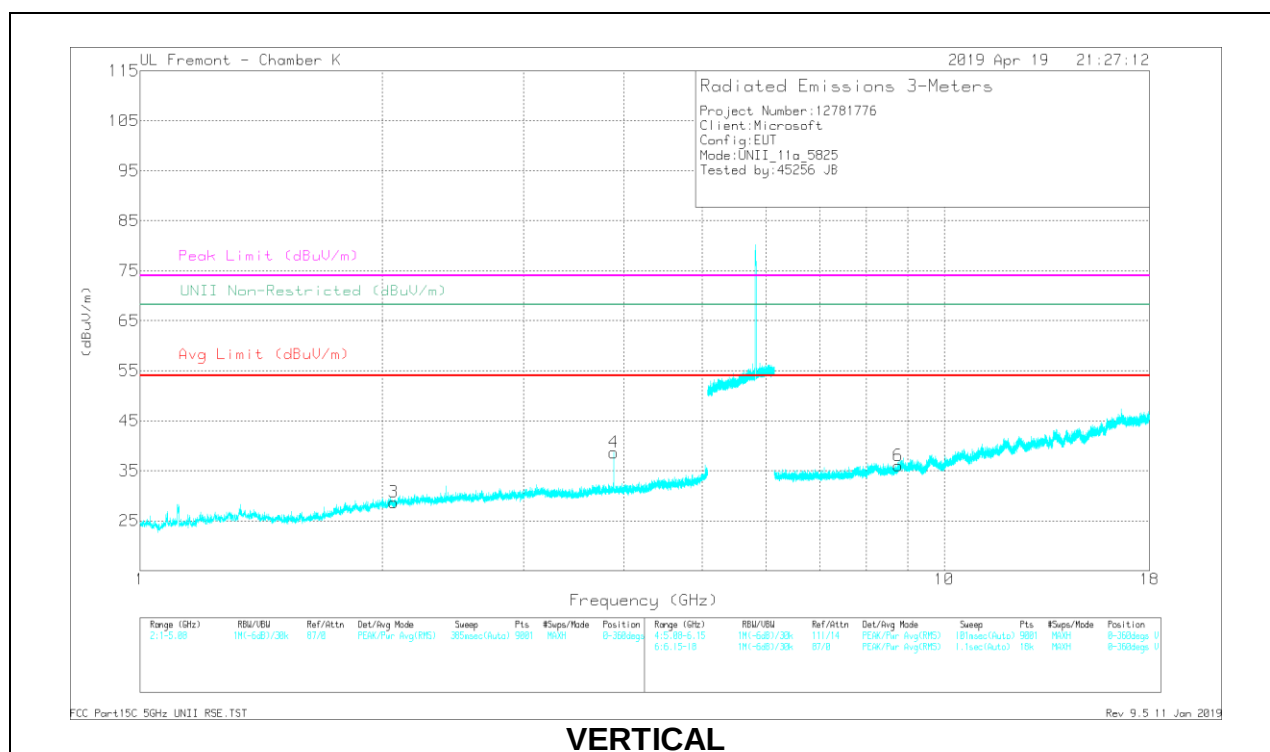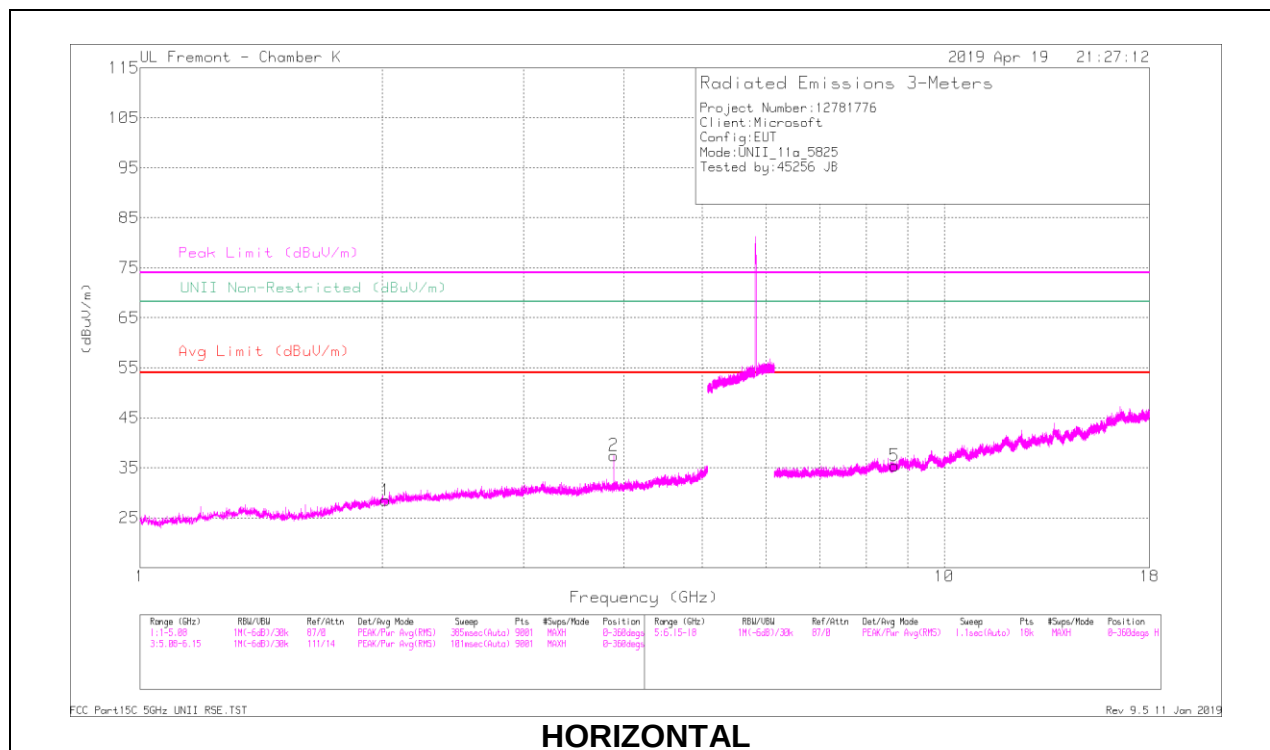

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cable/Fit/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	URRL Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
2	* 3.883	40.4	PK-U	33.4	-31.7	0	42.1	-	-	74	-31.9	-	-	71	200	H
	* 3.883	35.01	ADR	33.4	-31.7	.19	36.9	54	-17.1	-	-	-	-	71	200	H
1	2.019	41.26	PK-U	31.1	-35.1	0	37.26	-	-	-	-	68.2	-30.94	115	279	H
4	* 3.883	40.84	PK-U	33.4	-31.7	0	42.54	-	-	74	-31.46	-	-	284	135	V
	* 3.883	36.62	ADR	33.4	-31.7	.19	37.51	54	-16.49	-	-	-	-	284	135	V
3	2.067	40.17	PK-U	31.4	-35.2	0	36.37	-	-	-	-	68.2	-31.83	150	344	V
5	8.676	31.94	PK-U	35.9	-24.6	0	43.24	-	-	-	-	68.2	-24.96	245	134	H
6	8.761	32.35	PK-U	36.1	-24.6	0	43.85	-	-	-	-	68.2	-24.35	328	385	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

1TX Antenna 2 MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

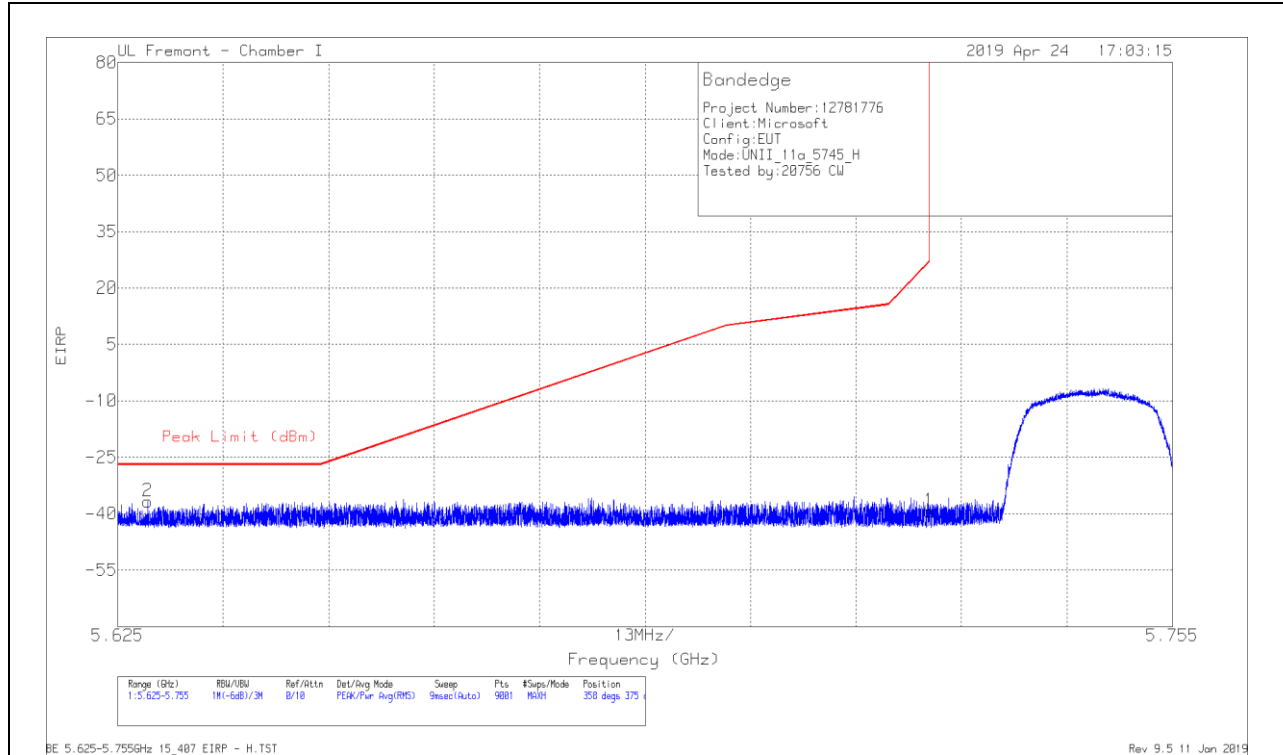

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-67.68	Pk	35	-18.5	11.8	-39.38	26.99	-66.37	358	375	H
2	5.629	-65.11	Pk	35.1	-18.6	11.8	-36.81	-27	-9.81	358	375	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

VERTICAL RESULT

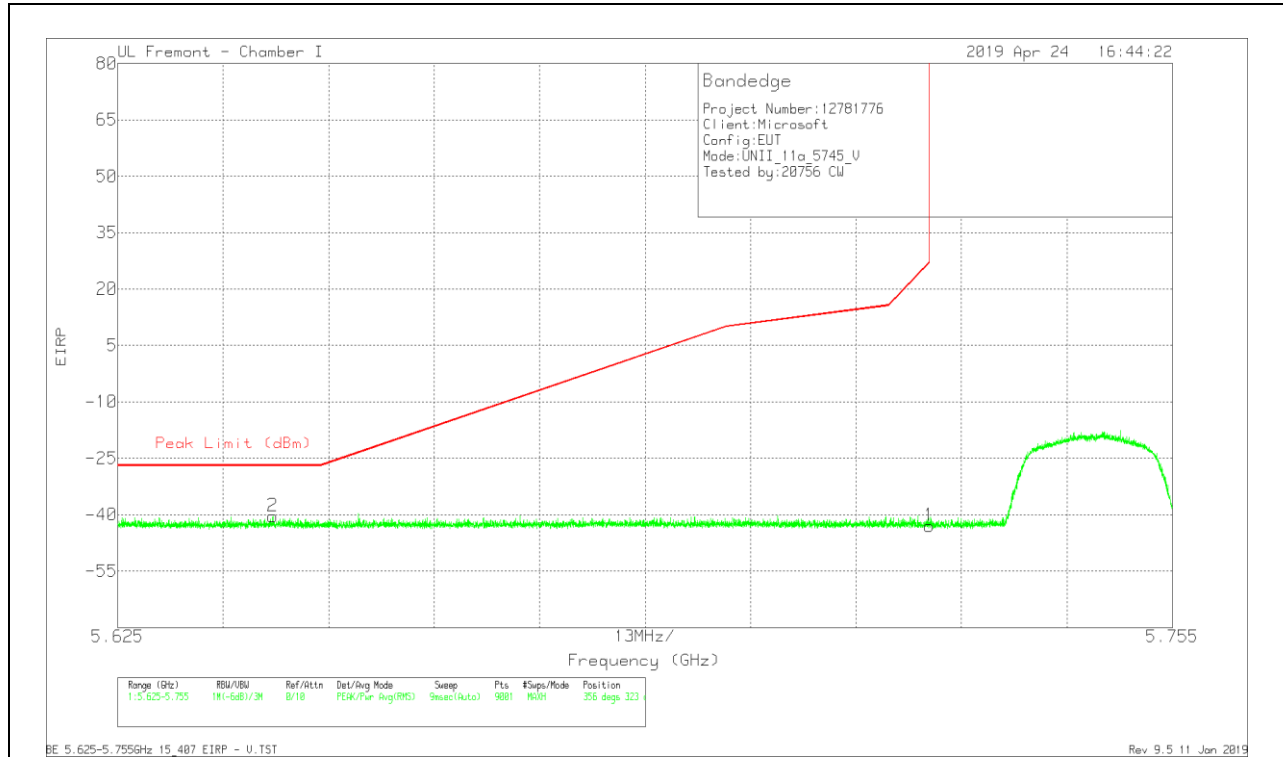


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-71.28	Pk	35	-18.5	11.8	-42.98	26.99	-69.97	356	323	V
2	5.644	-68.81	Pk	35.1	-18.6	11.8	-40.51	-27	-13.51	356	323	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

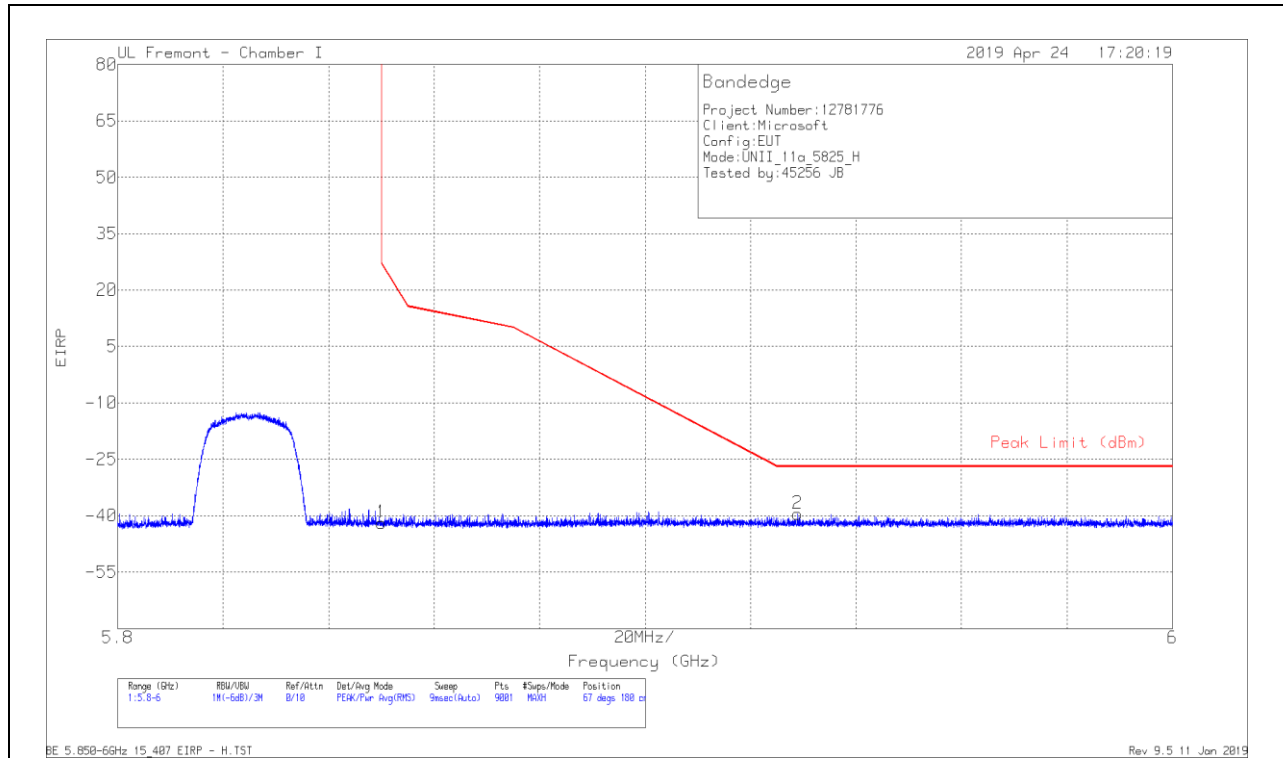


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-71.36	Pk	35.1	-17.4	11.8	-41.86	26.95	-68.81	67	180	H
2	5.929	-69.19	Pk	35.2	-17.4	11.8	-39.59	-27	-12.59	67	180	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VERTICAL RESULT


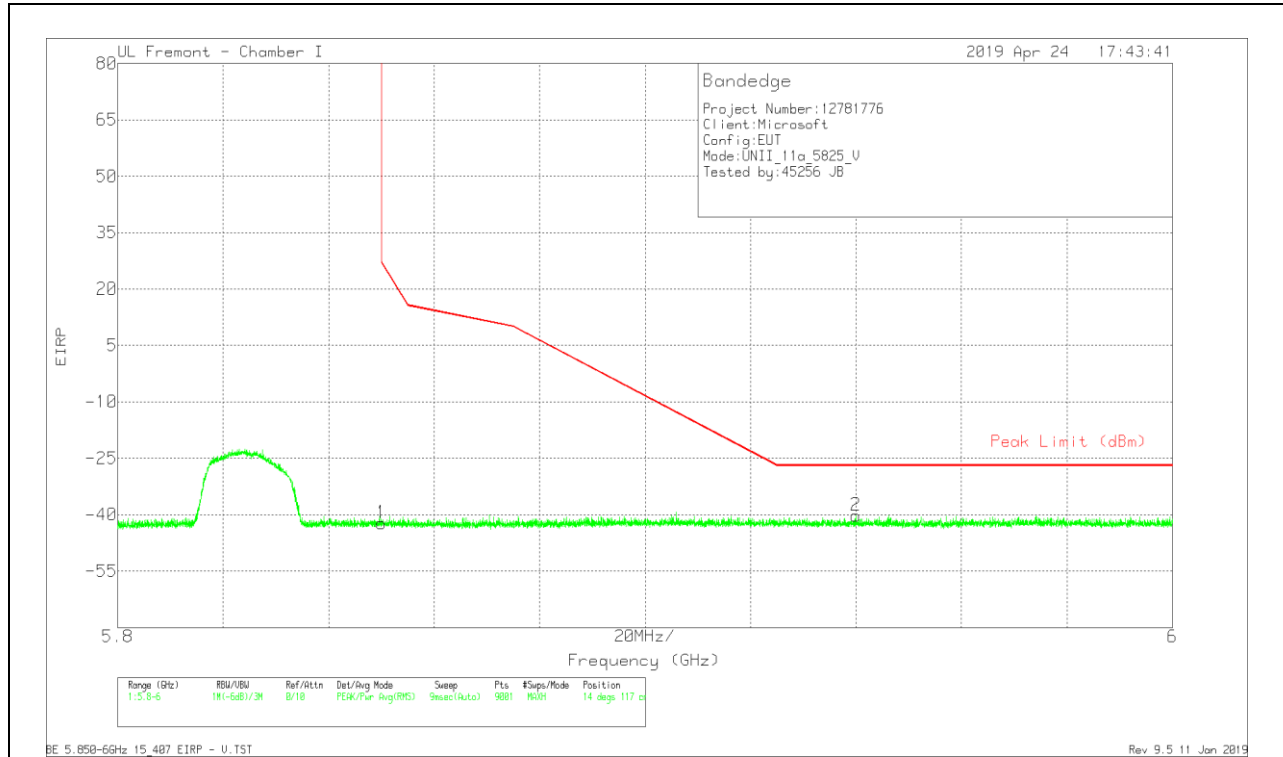


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-71.71	Pk	35.1	-17.4	11.8	0	-42.21	26.95	-69.16	14	117	V
2	5.94	-69.8	Pk	35.2	-17.4	11.8	0	-40.2	-27	-13.2	14	117	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

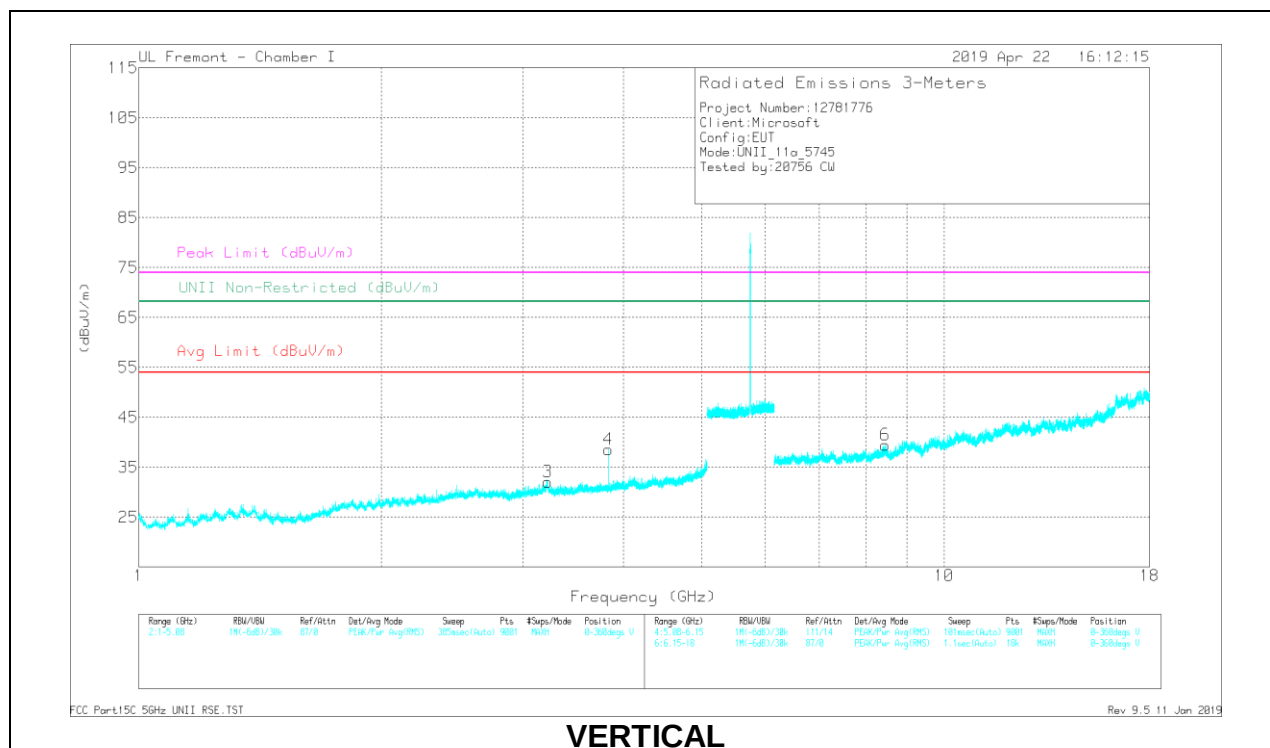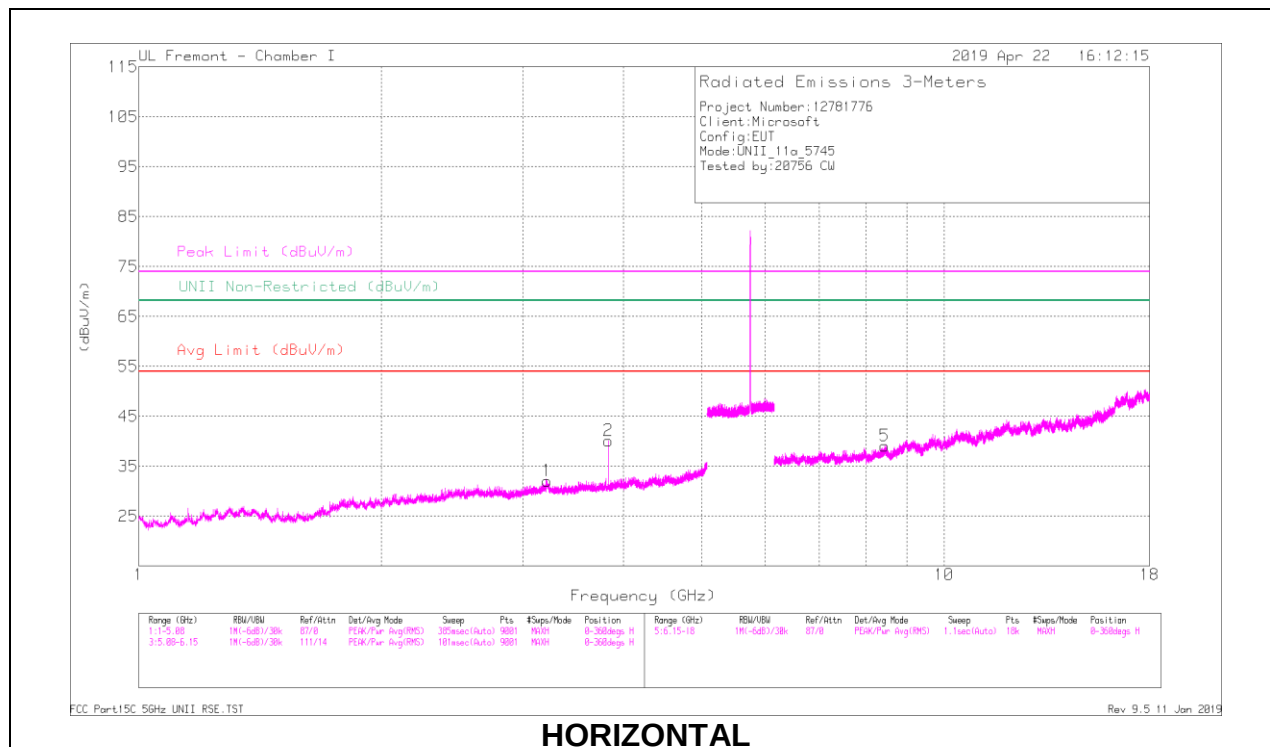

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF-TS62 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.213	35.86	PK-U	33.6	-29.9	0	39.56	-	-	-	-	68.2	-28.64	40	350	H
2	* 3.83	39.55	PK-U	33	-30	0	42.55	-	-	74	-31.45	-	-	61	100	H
	* 3.83	35.72	ADR	33	-30	.19	38.91	54	-15.09	-	-	-	-	61	100	H
3	3.219	37.13	PK-U	33.3	-29.8	0	40.63	-	-	-	-	68.2	-27.57	320	372	V
4	* 3.83	39.73	PK-U	33	-30	0	42.73	-	-	74	-31.27	-	-	76	224	V
	* 3.83	34.32	ADR	33	-30	.19	37.51	54	-16.49	-	-	-	-	76	224	V
5	* 8.438	29.32	PK-U	35.8	-19.1	0	46.02	-	-	74	-27.98	-	-	267	125	H
	* 8.44	19	ADR	35.8	-19.1	.19	35.89	54	-18.11	-	-	-	-	267	125	H
6	* 8.456	28.6	PK-U	35.8	-18.6	0	45.8	-	-	74	-28.2	-	-	310	315	V
	* 8.456	19.14	ADR	35.8	-18.6	.19	36.53	54	-17.47	-	-	-	-	310	315	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

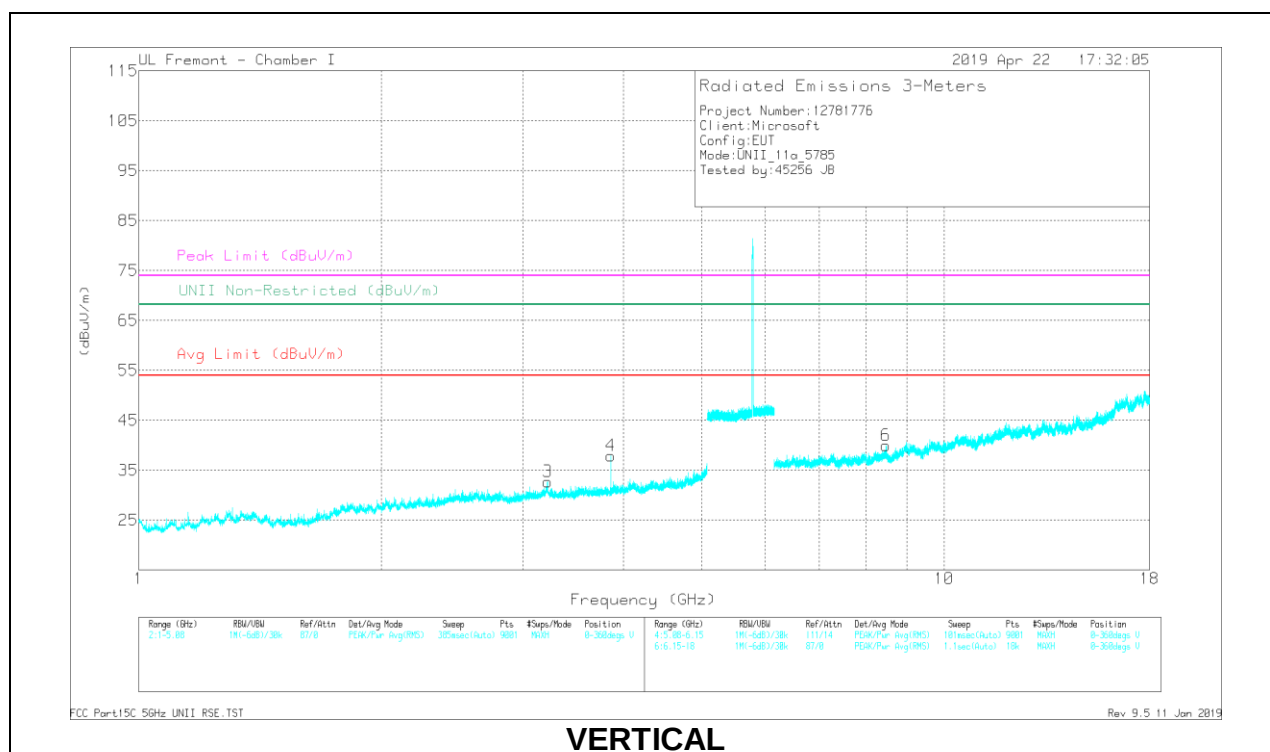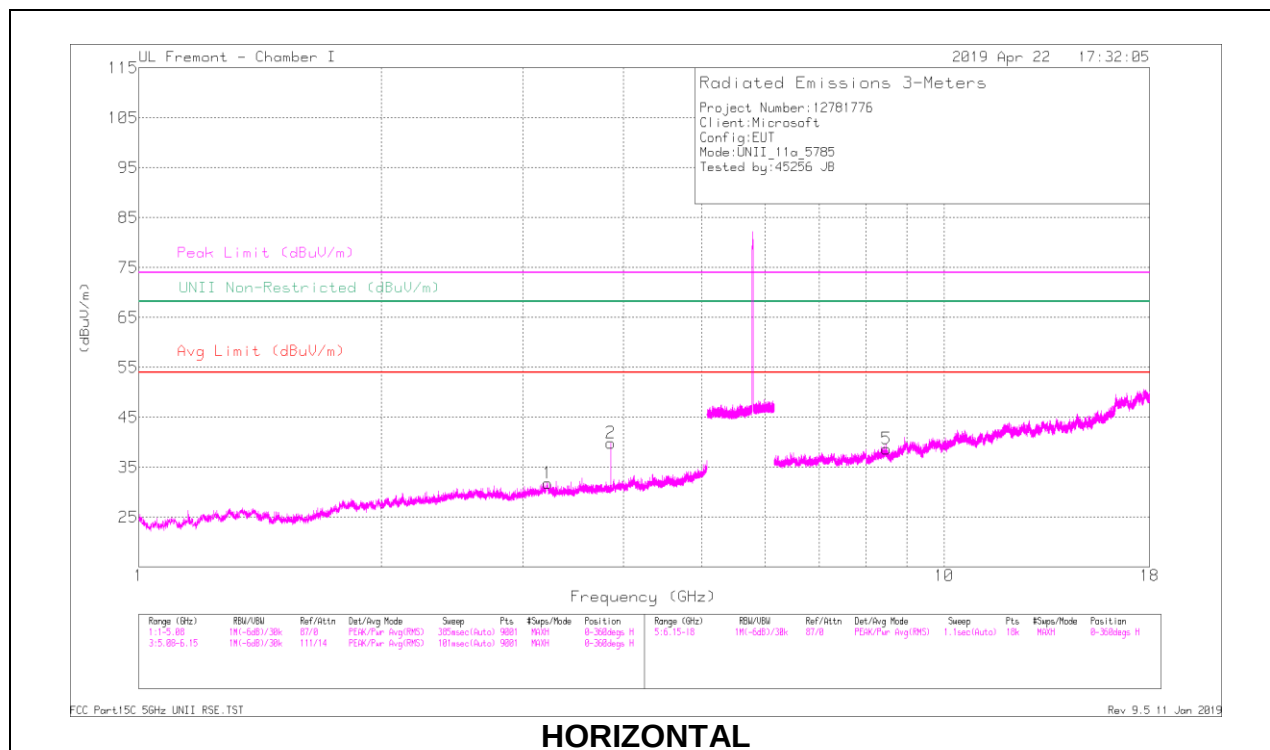

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp(CM/FtoPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unfil Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.222	35.55	PK-U	33.2	-29.9	0	38.85	-	-	-	-	68.2	-29.35	321	391	H
3	3.219	35.59	PK-U	33.2	-29.8	0	38.99	-	-	-	-	68.2	-29.21	315	343	V
2	* 3.857	39.05	PK-U	33	-29.5	0	42.55	-	-	74	-31.45	-	-	73	100	H
	* 3.857	34.51	ADR	33	-29.5	19	38.2	54	-15.8	-	-	-	-	73	100	H
4	* 3.857	38.74	PK-U	33	-29.5	0	42.24	-	-	74	-31.76	-	-	12	100	V
	* 3.857	32.4	ADR	33	-29.5	19	36.09	54	-17.91	-	-	-	-	12	100	V
5	* 8.485	28.78	PK-U	35.8	-18.9	0	45.68	-	-	74	-28.32	-	-	221	279	H
	* 8.483	19.2	ADR	35.8	-18.8	19	36.39	54	-17.61	-	-	-	-	221	279	H
6	* 8.471	29.25	PK-U	35.8	-18.8	0	45.25	-	-	74	-27.75	-	-	8	334	V
	* 8.469	19.95	ADR	35.8	-18.8	19	37.14	54	-16.86	-	-	-	-	8	334	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

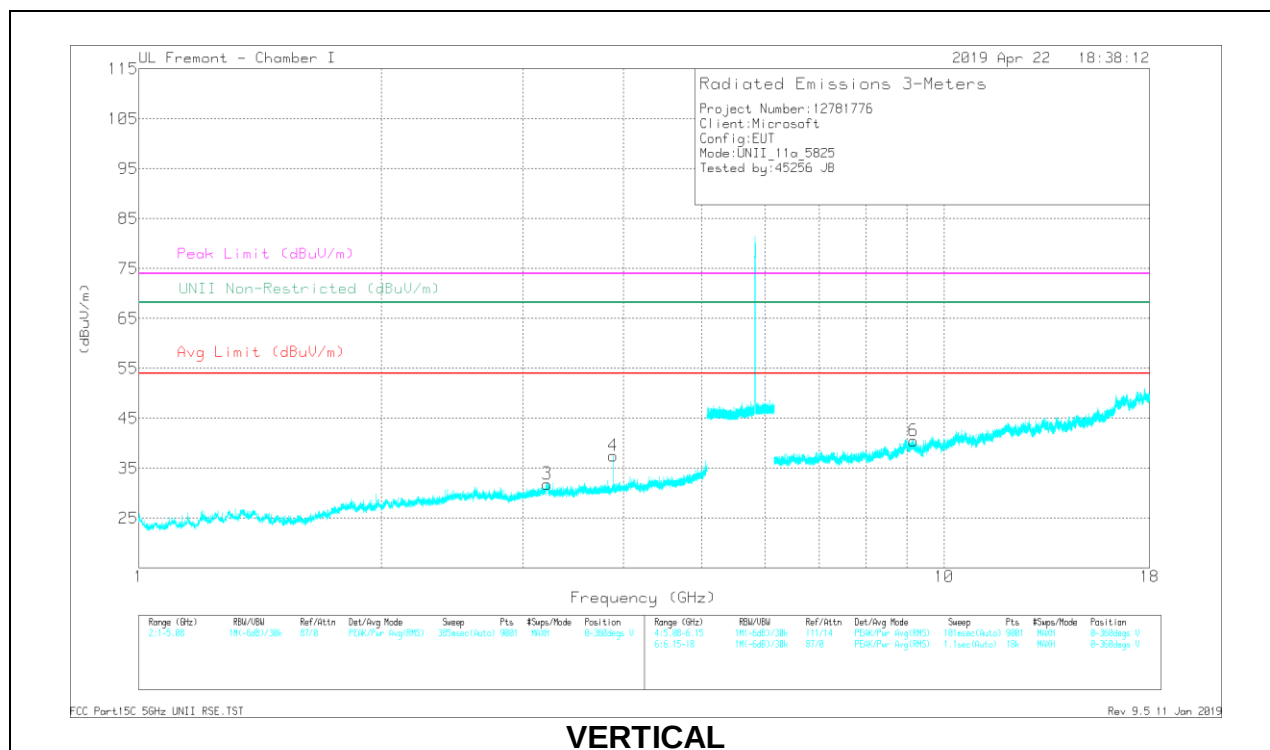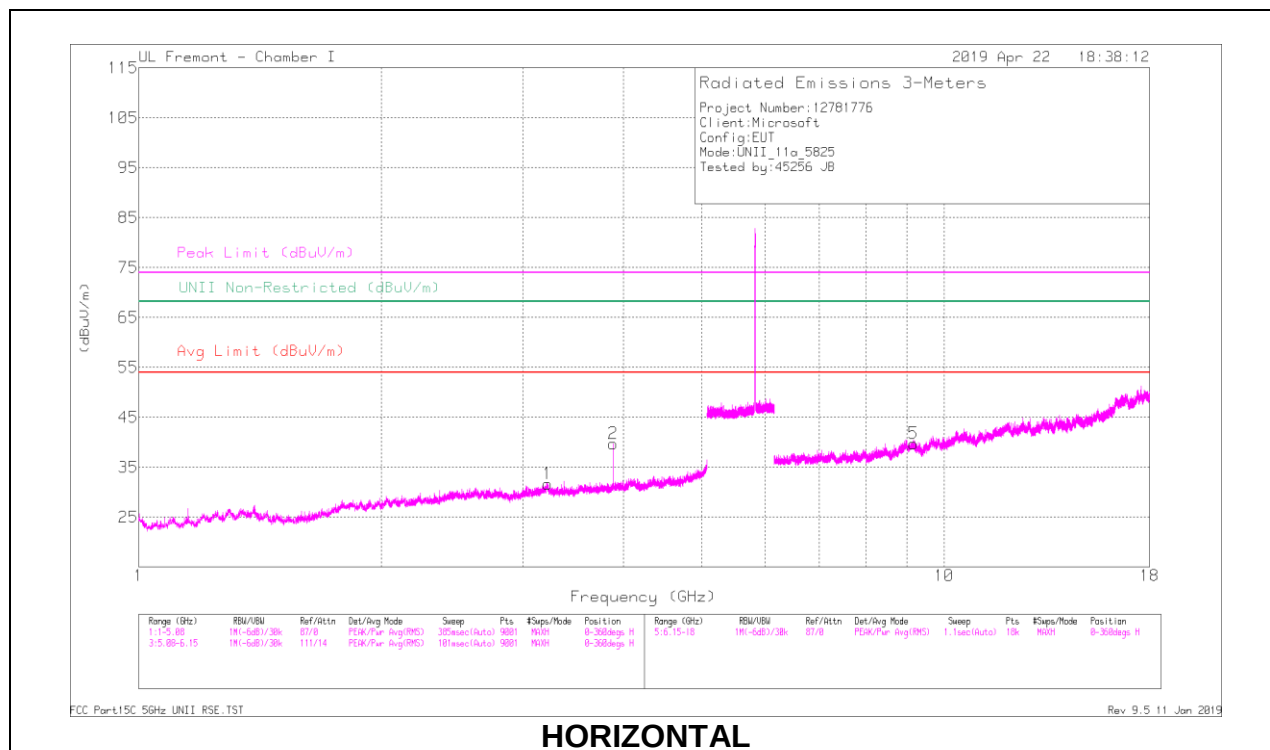

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/ChRtrPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unl Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.22	35.2	PK-U	33.2	-29.8	0	38.6	-	-	-	-	68.2	-29.6	339	335	H
2	* 3.883	36.69	PK-U	33.1	-28.9	0	42.89	-	-	74	-31.11	-	-	242	206	H
	* 3.883	32.92	ADR	33.1	-28.9	19	37.81	54	-16.69	-	-	-	-	242	206	H
3	3.215	35.64	PK-U	33.5	-29.8	0	39.34	-	-	-	-	68.2	-28.86	352	204	V
4	* 3.883	39.12	PK-U	33.1	-28.9	0	43.32	-	-	74	-30.68	-	-	90	210	V
	* 3.883	34.88	ADR	33.1	-28.9	19	39.27	54	-14.63	-	-	-	-	90	210	V
5	* 9.164	28.97	PK-U	36.4	-18	0	47.37	-	-	74	-26.63	-	-	83	390	H
	* 9.165	19.26	ADR	36.4	-18	19	37.85	54	-16.15	-	-	-	-	83	390	H
6	* 9.165	28.5	PK-U	36.4	-18	0	46.9	-	-	74	-27.1	-	-	24	160	V
	* 9.166	19.24	ADR	36.4	-18	19	37.83	54	-16.17	-	-	-	-	24	160	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.8. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

1TX Antenna 1 MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

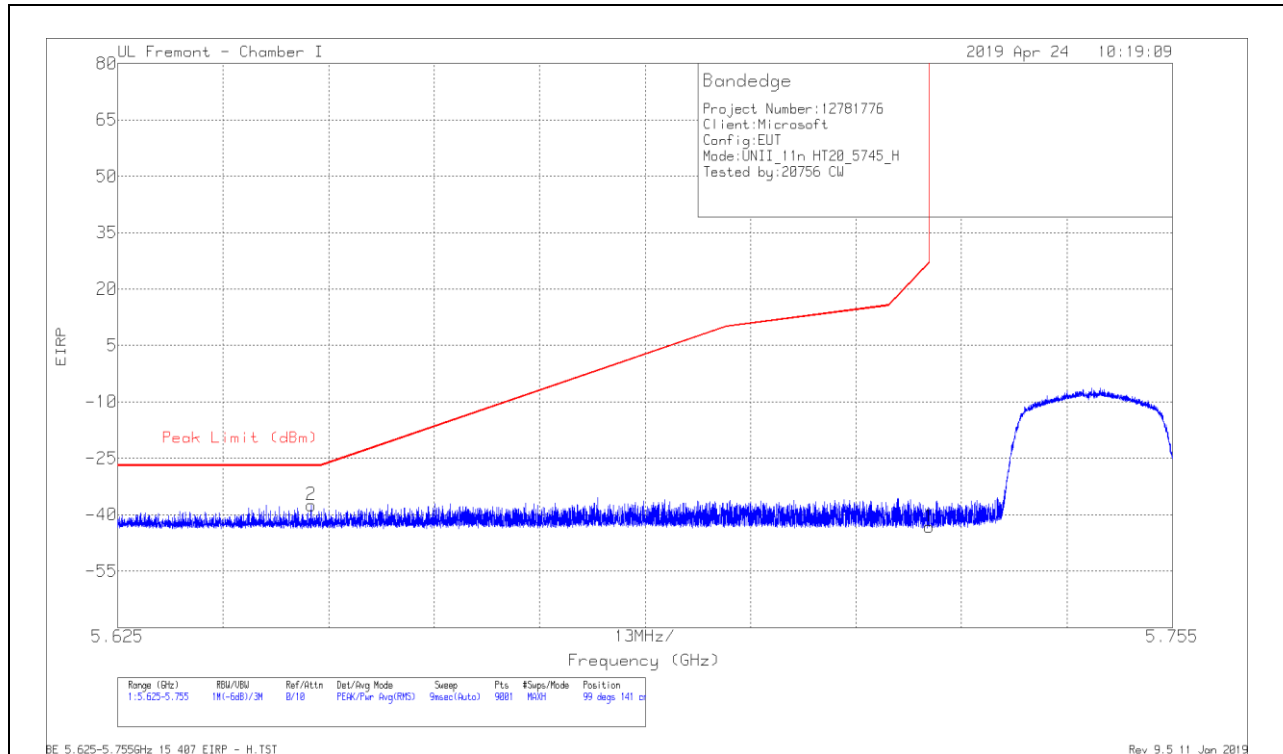


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-71.46	Pk	35	-18.5	11.8	-43.16	26.99	-70.15	99	141	H
2	5.649	-65.6	Pk	35	-18.6	11.8	-37.4	-27	-10.4	99	141	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VERTICAL RESULT

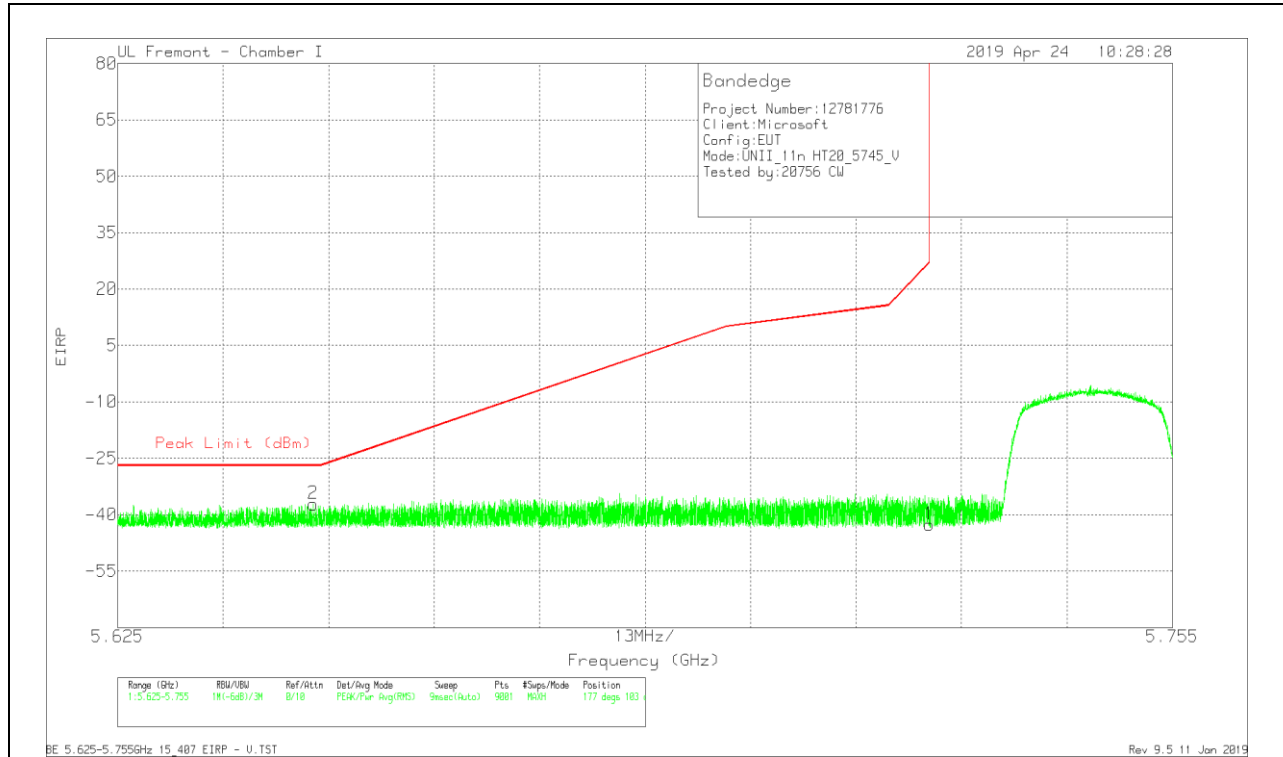


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-70.93	Pk	35	-18.5	11.8	-42.63	26.99	-69.62	177	103	V
2	5.649	-65.4	Pk	35	-18.6	11.8	-37.2	-27	-10.2	177	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

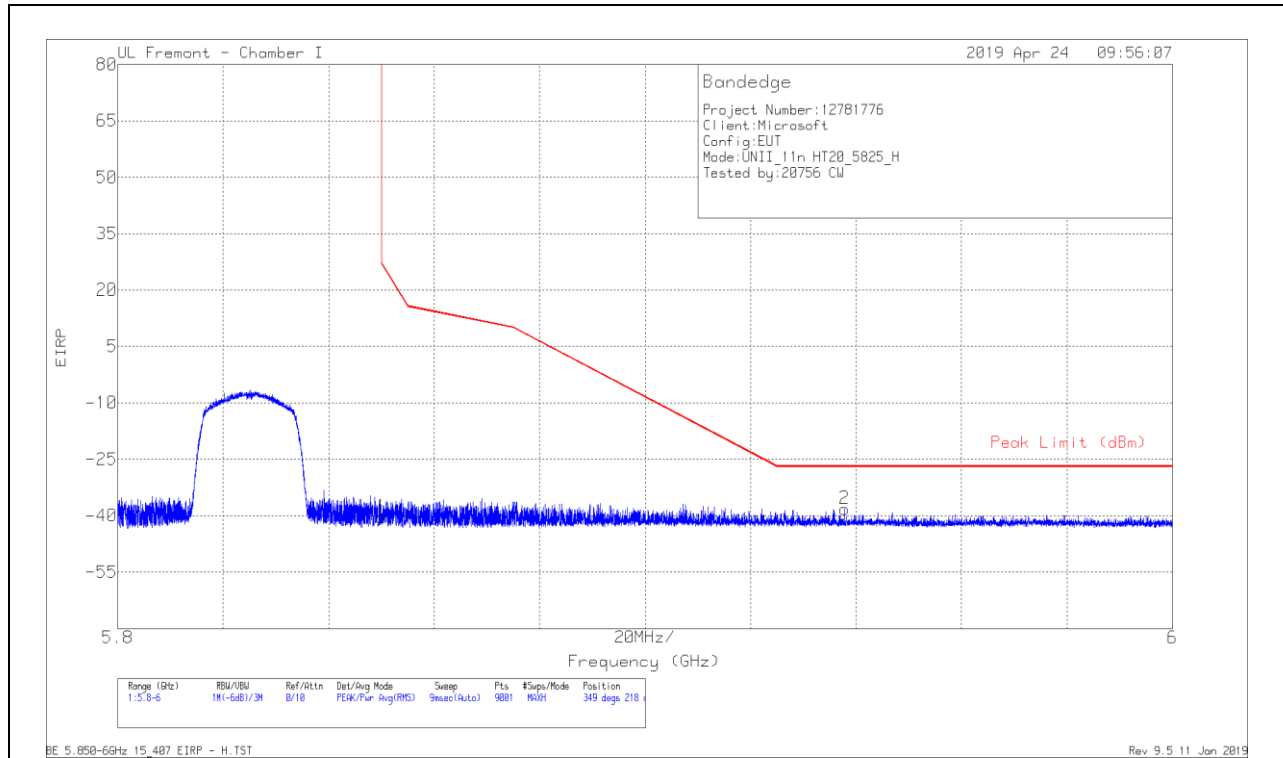

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-69.87	Pk	35.1	-17.4	11.8	-40.37	26.95	-67.32	349	218	H
2	5.938	-67.85	Pk	35.2	-17.4	11.8	-38.25	-27	-11.25	349	218	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector