


2TX Antenna 1 + Antenna 2 MODE: 26-Tones, RU index 0

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

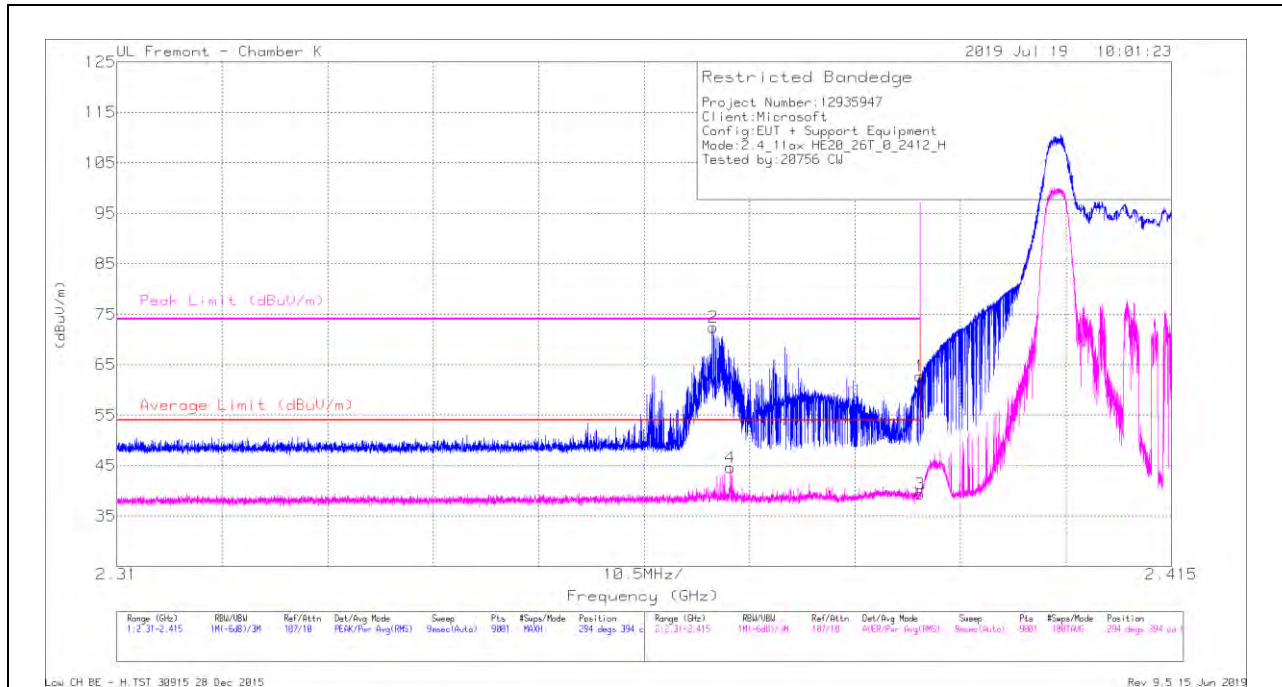


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EM C4294 (dB/m)	Amp/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	55.55	Pk	31.9	-24.7	62.75	-	-	74	-11.25	294	394	H
2	* 2.36939	65.14	Pk	31.9	-24.6	72.44	-	-	74	-1.56	294	394	H
3	* 2.38999	32.22	RMS	31.9	-24.7	39.42	54	-14.58	-	-	294	394	H
4	* 2.37108	37.33	RMS	31.9	-24.6	44.63	54	-9.37	-	-	294	394	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

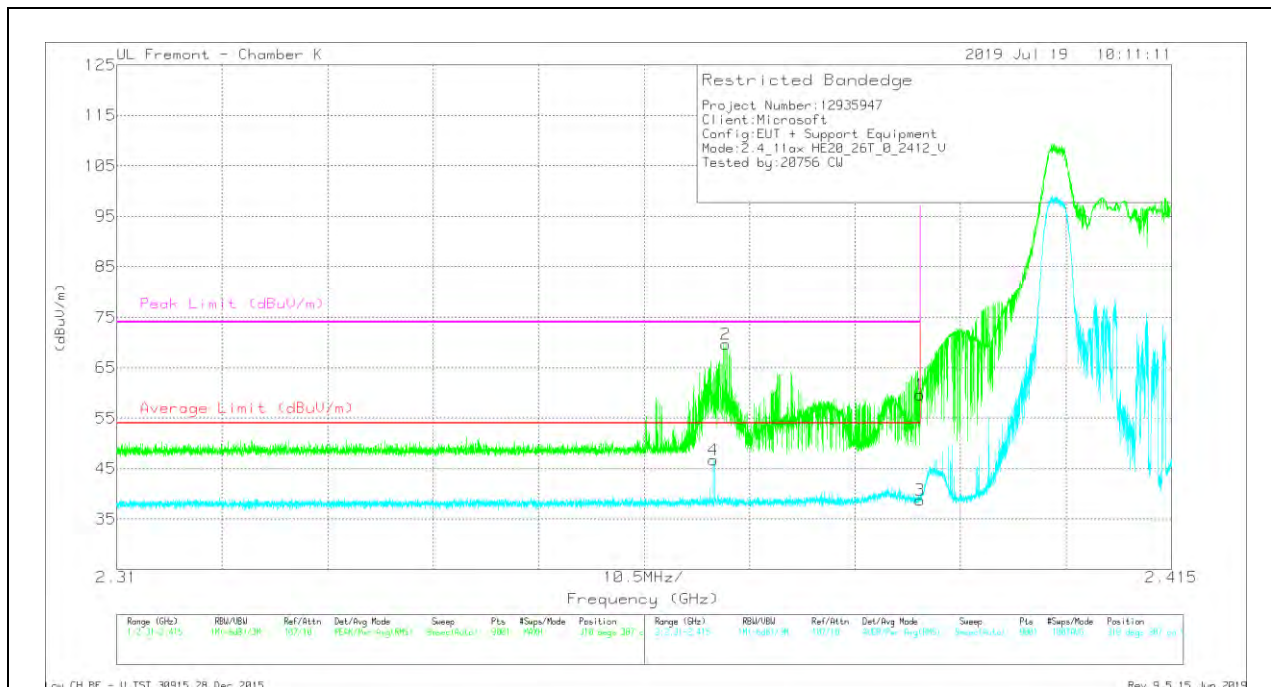

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF EM C4294 (dB/m)	Amp/Cbl/Filt /Pad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	* 2.38999	52.44	Pk	31.9	-24.7	59.64	-	-	74	-14.36	310	387	V
2	* 2.37061	62.34	Pk	31.9	-24.6	69.64	-	-	74	-4.36	310	387	V
3	* 2.38999	31.54	RMS	31.9	-24.7	38.74	54	-15.26	-	-	310	387	V
4	* 2.36937	39.39	RMS	31.9	-24.6	46.69	54	-7.31	-	-	310	387	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

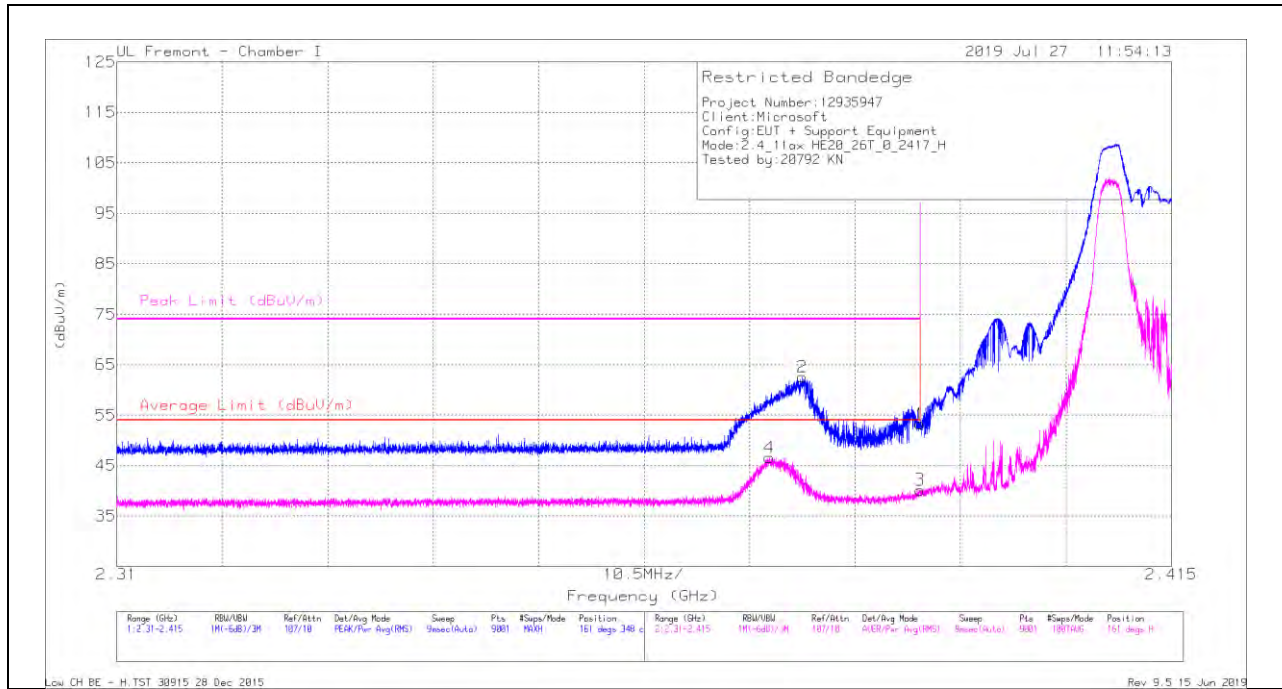


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit n/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.38999	42.96	Pk	31.9	-21.6	53.26	-	-	74	-20.74	161	348	H
2	2.37828	52.14	Pk	31.9	-21.5	62.54	-	-	74	-11.46	161	348	H
3	2.38999	29.87	RMS	31.9	-21.6	40.17	54	-13.83	-	-	161	348	H
4	2.37497	36.14	RMS	31.9	-21.5	46.54	54	-7.46	-	-	161	348	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

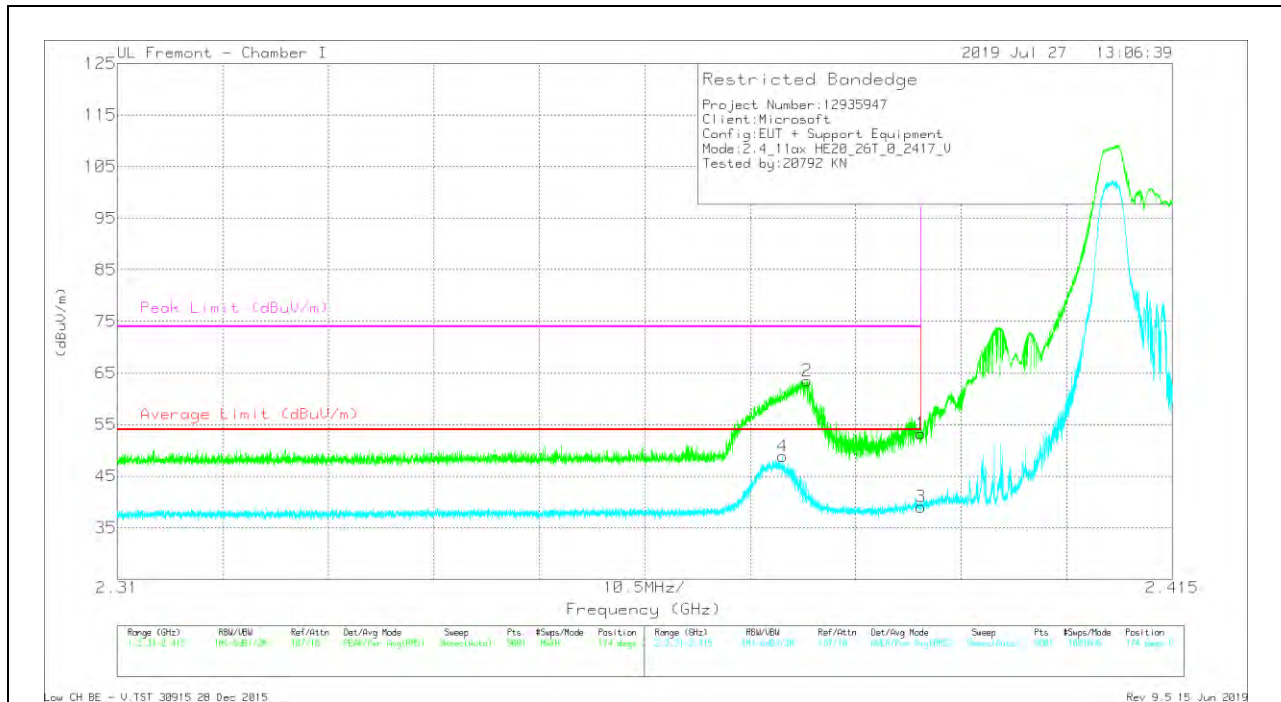

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.38999	42.95	Pk	31.9	-21.6	53.25	-	-	74	-20.75	174	244	V
2	2.37866	53.09	Pk	31.9	-21.5	63.49	-	-	74	-10.51	174	244	V
3	2.38999	28.76	RMS	31.9	-21.6	39.06	54	-14.94	-	-	174	244	V
4	2.37623	38.46	RMS	31.9	-21.5	48.86	54	-5.14	-	-	174	244	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 MODE: 26-Tones, RU index 8

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

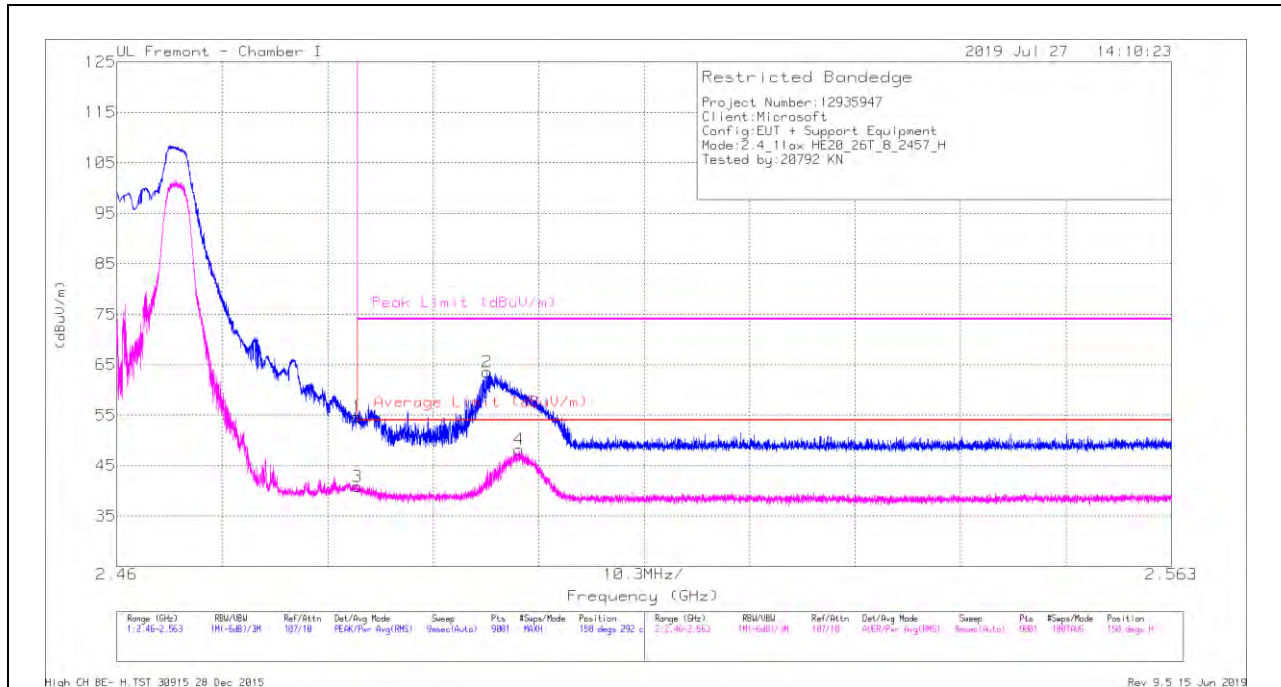


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.48351	43.88	Pk	32.4	-21.7	54.58	-	-	74	-19.42	150	292	H
2	2.49615	53.13	Pk	32.3	-21.8	63.63	-	-	74	-10.37	150	292	H
3	2.48351	30.12	RMS	32.4	-21.7	40.82	54	-13.18	-	-	150	292	H
4	2.4993	37.59	RMS	32.3	-21.7	48.19	54	-5.81	-	-	150	292	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

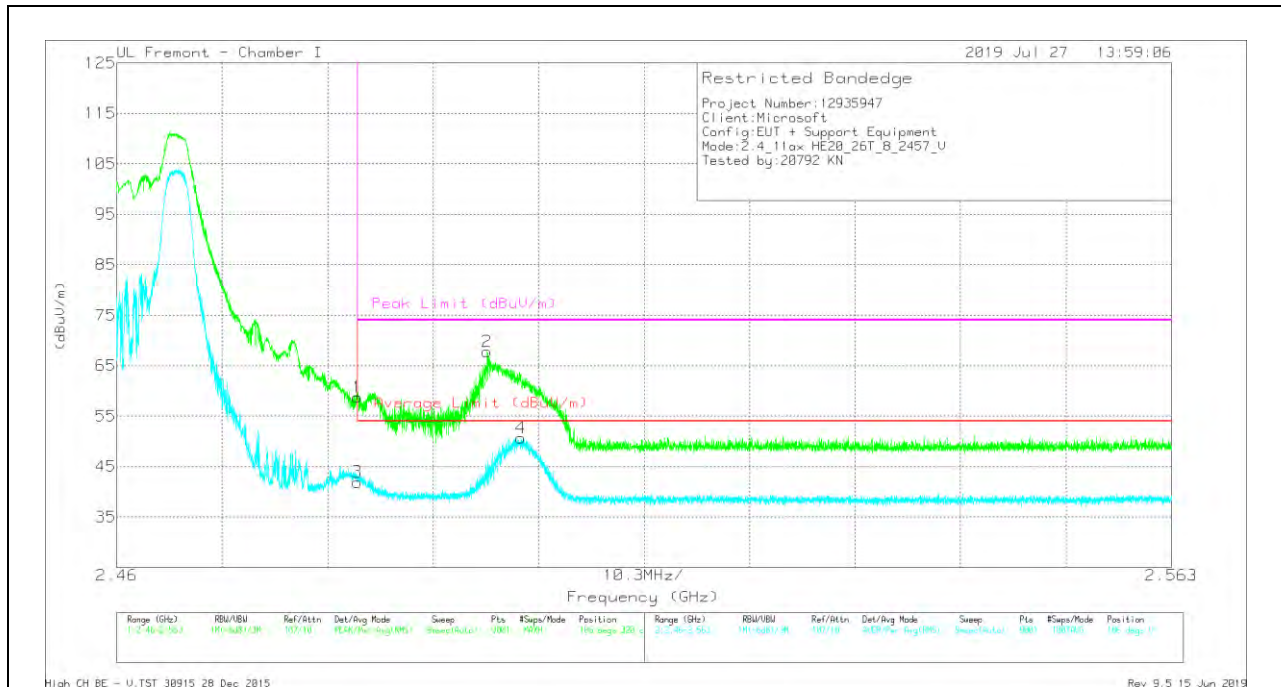

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.48351	48.09	Pk	32.4	-21.7	58.79	-	-	74	-15.21	186	320	V
2	2.49615	57.26	Pk	32.3	-21.8	67.76	-	-	74	-6.24	186	320	V
3	2.48351	31.21	RMS	32.4	-21.7	41.91	54	-12.09	-	-	186	320	V
4	2.49946	40.05	RMS	32.3	-21.7	50.65	54	-3.35	-	-	186	320	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

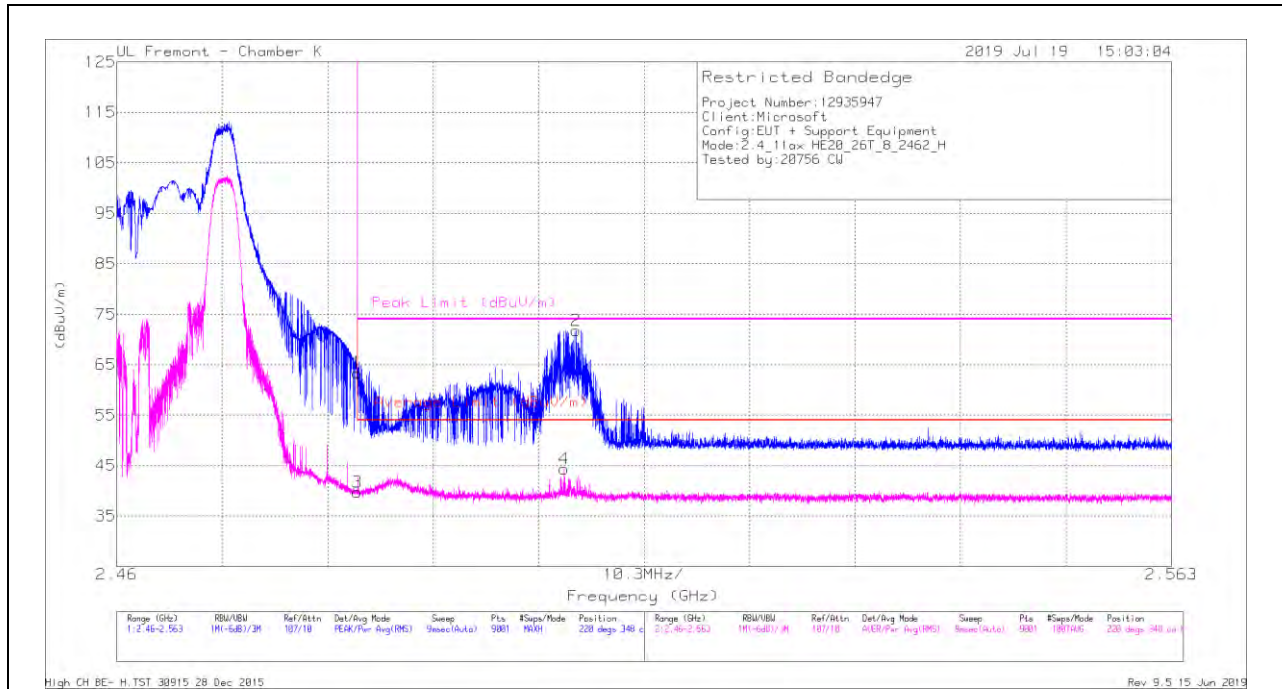


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	55.69	Pk	32.5	-24.8	63.39	-	-	74	-10.61	220	348	H
2	2.50486	64.1	Pk	32.4	-24.7	71.8	-	-	74	-2.2	220	348	H
3	* 2.48351	32.02	RMS	32.5	-24.8	39.72	54	-14.28	-	-	220	348	H
4	2.50371	36.62	RMS	32.4	-24.7	44.32	54	-9.68	-	-	220	348	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

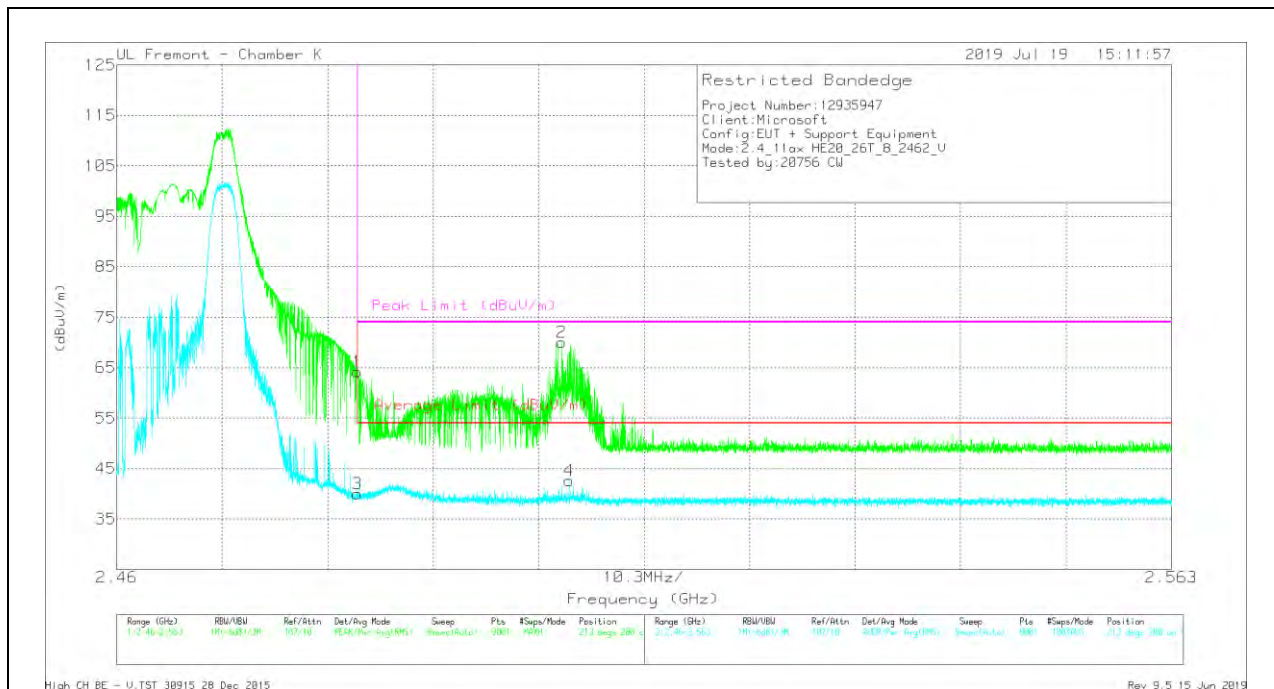

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cb/Flt r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	56.54	Pk	32.5	-24.8	64.24	-	-	74	-9.76	213	280	V
2	2.50346	62.32	Pk	32.4	-24.7	70.02	-	-	74	-3.98	213	280	V
3	* 2.48351	32.31	RMS	32.5	-24.8	40.01	54	-13.99	-	-	213	280	V
4	2.50419	34.9	RMS	32.4	-24.7	42.6	54	-11.4	-	-	213	280	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

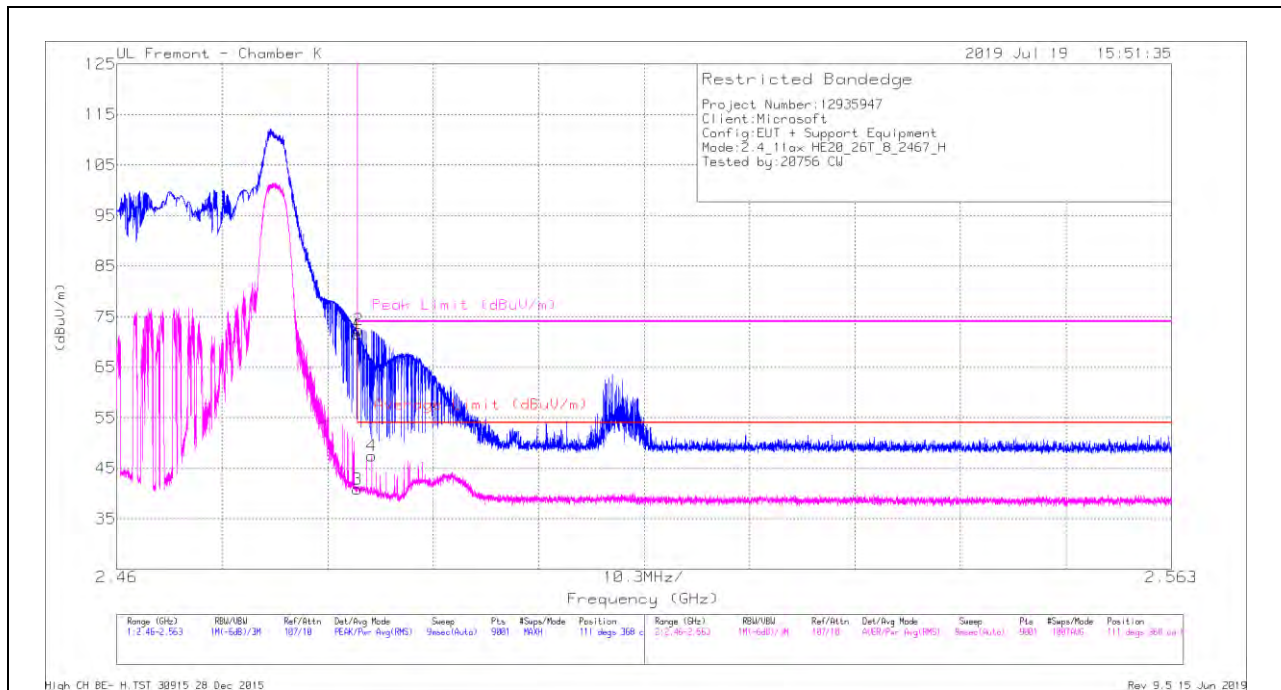


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	63.82	Pk	32.5	-24.8	71.52	-	-	74	-2.48	111	368	H
2	* 2.48361	64.67	Pk	32.5	-24.8	72.37	-	-	74	-1.63	111	368	H
3	* 2.48351	33.12	RMS	32.5	-24.8	40.82	54	-13.18	-	-	111	368	H
4	* 2.48491	39.79	RMS	32.5	-24.8	47.49	54	-6.51	-	-	111	368	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

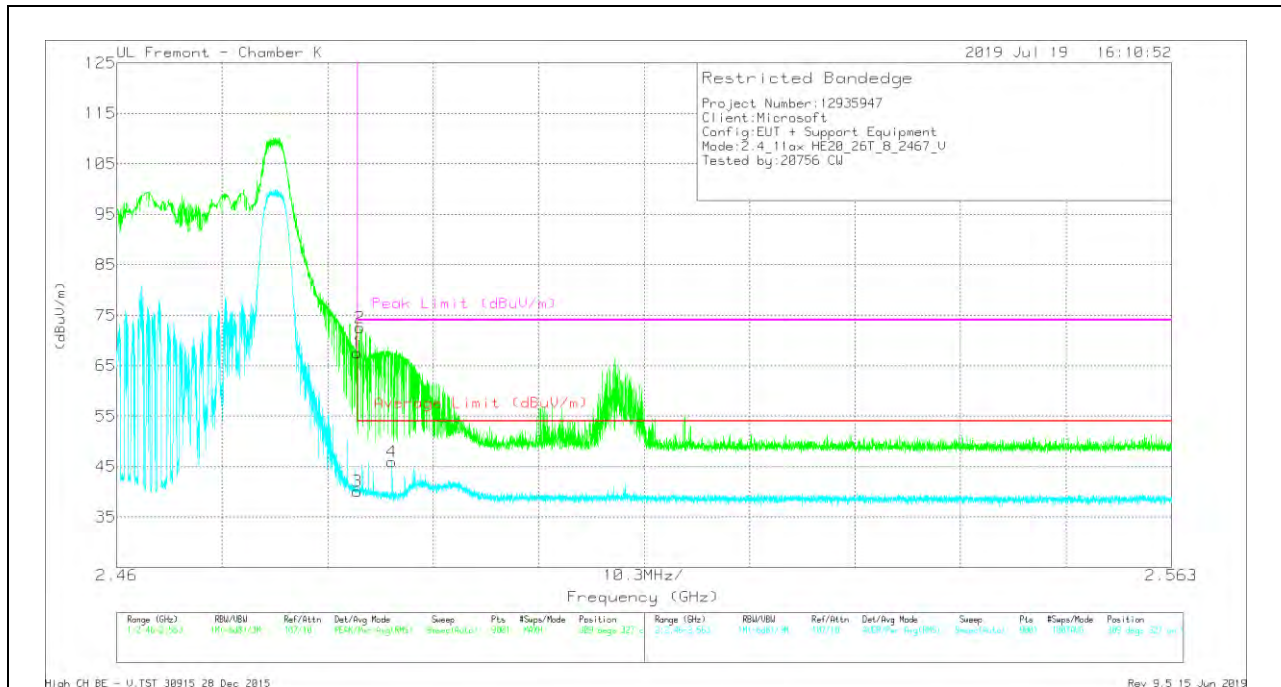

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EM C4294 (dB/m)	Amp/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	* 2.48351	59.8	Pk	32.5	-24.8	67.5	-	-	74	-6.5	309	327	V
2	* 2.48372	64.77	Pk	32.5	-24.8	72.47	-	-	74	-1.53	309	327	V
3	* 2.48351	32.41	RMS	32.5	-24.8	40.11	54	-13.89	-	-	309	327	V
4	* 2.48688	38.24	RMS	32.5	-24.8	45.94	54	-8.06	-	-	309	327	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

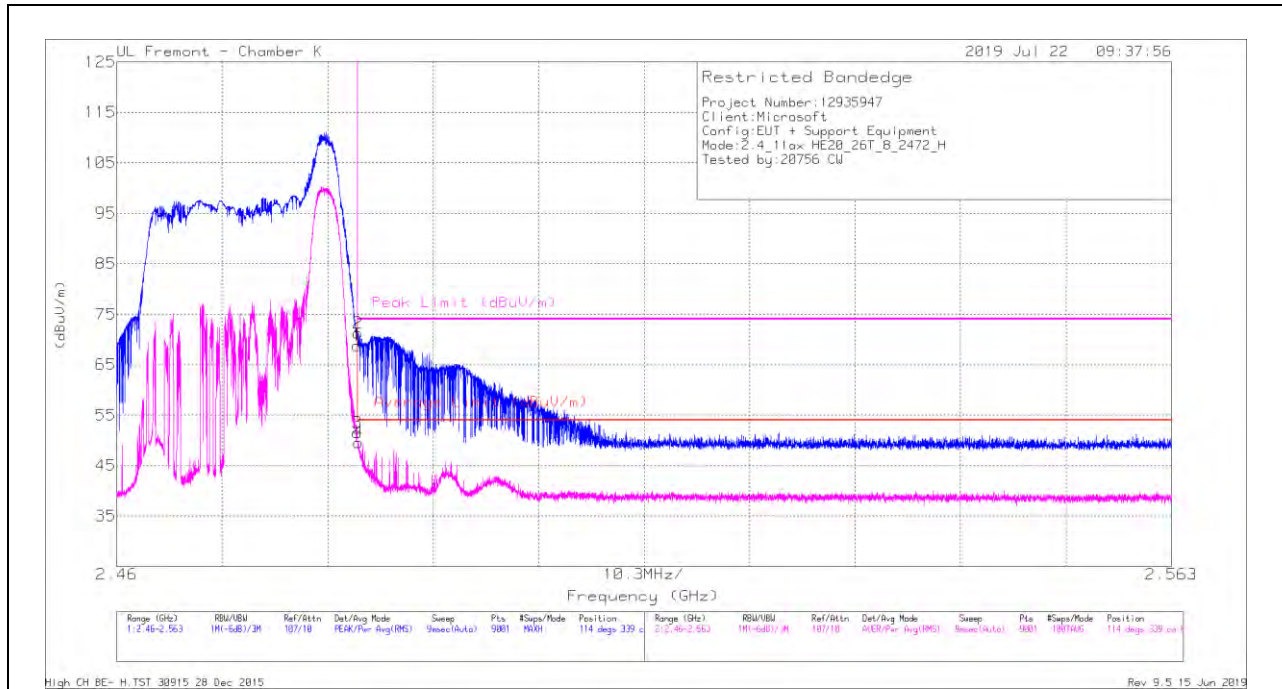


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/CbllFilt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	61.13	Pk	32.5	-24.8	68.83	-	-	74	-5.17	114	339	H
2	* 2.48355	63.57	Pk	32.5	-24.8	71.27	-	-	74	-2.73	114	339	H
3	* 2.48351	43.78	RMS	32.5	-24.8	51.48	54	-2.52	-	-	114	339	H
4	* 2.48363	41.91	RMS	32.5	-24.8	49.61	54	-4.39	-	-	114	339	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

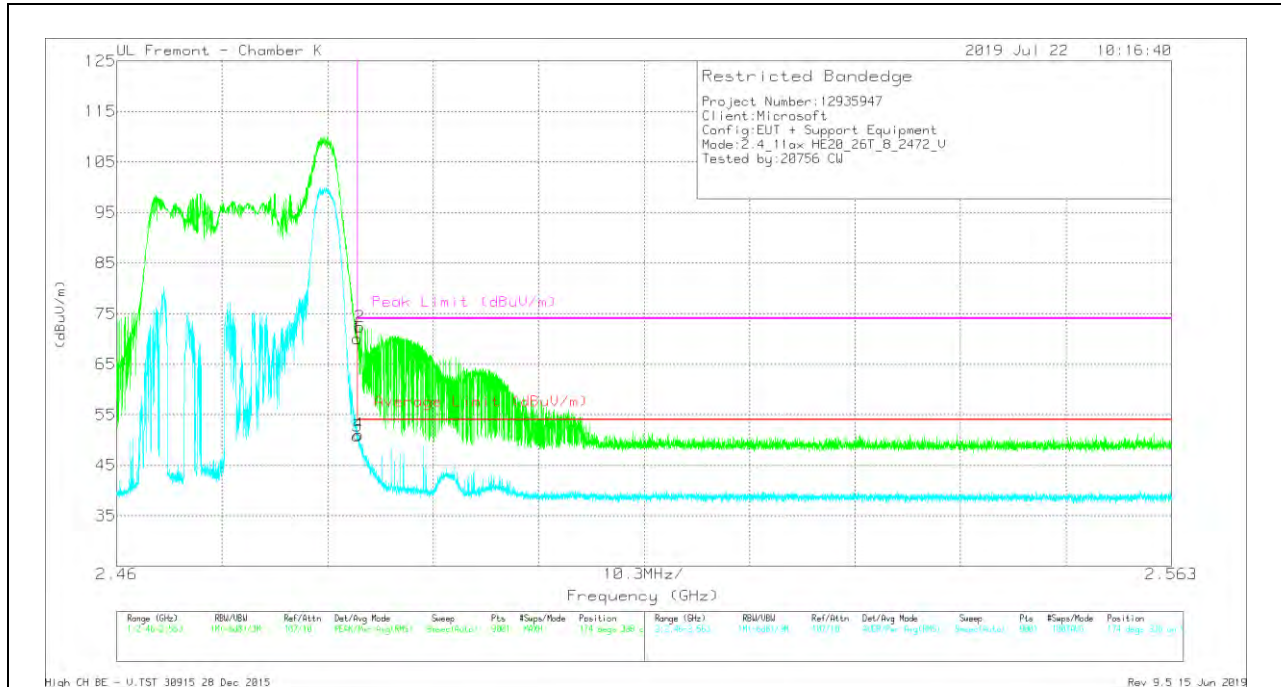



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	62.28	Pk	32.5	-24.8	69.98	-	-	74	-4.02	174	338	V
2	* 2.48377	64.74	Pk	32.5	-24.8	72.44	-	-	74	-1.56	174	338	V
3	* 2.48351	43.1	RMS	32.5	-24.8	50.8	54	-3.2	-	-	174	338	V
4	* 2.48364	43.4	RMS	32.5	-24.8	51.1	54	-2.9	-	-	174	338	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

2TX Antenna 1 + Antenna 2 MODE: 26-Tones, RU index 0

LOW CHANNEL, CH 1 RESULTS

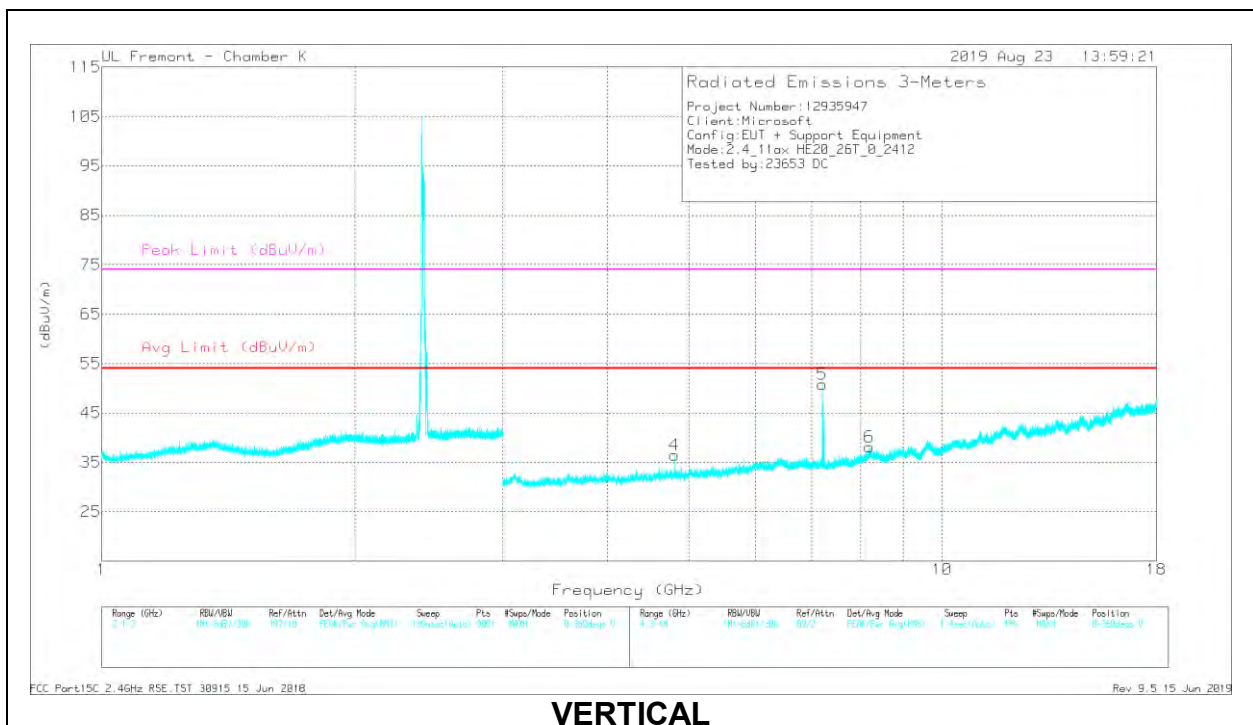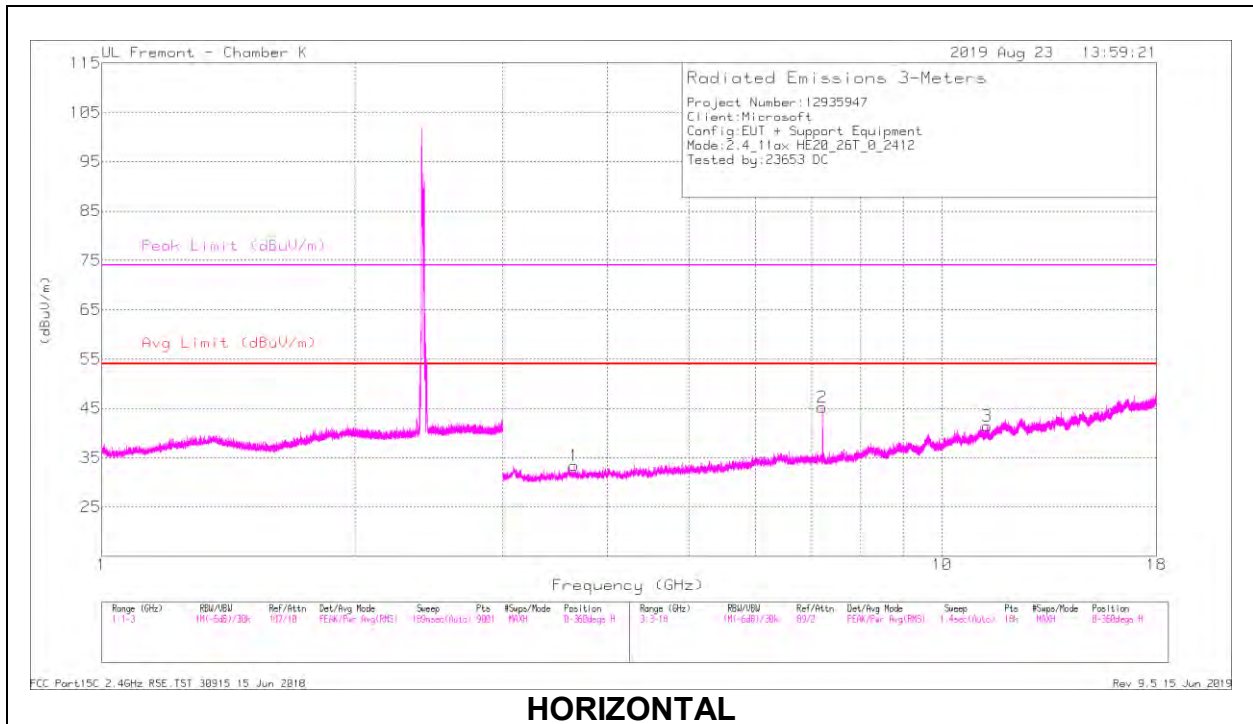

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	7.21099	50.36	PK2	35.6	-26.2	59.76	-	-	-	-	280	335	H
1	* 3.64561	40.45	PK2	33.1	-32.2	41.35	-	-	74	-32.65	201	166	H
	* 3.66009	29.27	MAv1	32.9	-32	30.17	54	-23.83	-	-	201	166	H
3	* 11.31195	31.22	PK2	38.1	-21	48.32	-	-	74	-25.68	212	107	H
	* 11.31369	20.6	MAv1	38.1	-21	37.7	54	-16.3	-	-	212	107	H
5	7.21033	49.72	PK2	35.6	-26.2	59.12	-	-	-	-	350	175	V
4	* 4.80791	41.82	PK2	34.2	-30.2	45.82	-	-	74	-28.18	12	228	V
	* 4.80663	32.63	MAv1	34.2	-30.3	36.53	54	-17.47	-	-	12	228	V
6	* 8.19604	34.42	PK2	35.9	-25.1	45.22	-	-	74	-28.78	341	387	V
	* 8.1968	23.84	MAv1	35.9	-25.1	34.64	54	-19.36	-	-	341	387	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.87243	39.98	PK2	34.1	-30.5	43.58	-	-	74	-30.42	283	294	H
	* 4.87414	29.97	MAv1	34.2	-30.5	33.67	54	-20.33	-	-	283	294	H
2	* 7.31252	46.99	PK2	35.6	-26.3	56.29	-	-	74	-17.71	281	337	H
	* 7.31175	37.38	MAv1	35.6	-26.3	46.68	54	-7.32	-	-	281	337	H
3	* 9.13517	33.52	PK2	36.3	-23.3	46.52	-	-	74	-27.48	195	285	H
	* 9.13626	21.99	MAv1	36.3	-23.3	34.99	54	-19.01	-	-	195	285	H
4	* 4.87528	43.03	PK2	34.2	-30.5	46.73	-	-	74	-27.27	328	244	V
	* 4.87403	34.66	MAv1	34.2	-30.5	38.36	54	-15.64	-	-	328	244	V
5	* 7.30866	47.31	PK2	35.6	-26.3	56.61	-	-	74	-17.39	334	200	V
	* 7.31027	37.54	MAv1	35.6	-26.3	46.84	54	-7.16	-	-	334	200	V
6	* 11.07857	31.4	PK2	37.9	-21	48.3	-	-	74	-25.7	74	321	V
	* 11.07696	21.15	MAv1	38	-21.1	38.05	54	-15.95	-	-	74	321	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	9.27549	31.98	PK2	36.4	-23.5	44.88	-	-	-	-	255	283	H
1	* 4.94087	42.6	PK2	34	-30.6	46	-	-	74	-28	60	267	H
	* 4.94103	32.48	MAv1	34	-30.6	35.88	54	-18.12	-	-	60	267	H
2	* 7.60869	33.58	PK2	35.8	-25.4	43.98	-	-	74	-30.02	91	400	H
	* 7.60872	23.43	MAv1	35.8	-25.4	33.83	54	-20.17	-	-	91	400	H
4	* 4.9402	46.06	PK2	34.1	-30.6	49.56	-	-	74	-24.44	329	268	V
	* 4.94088	37.04	MAv1	34	-30.6	40.44	54	-13.56	-	-	329	268	V
5	* 7.40998	41.61	PK2	35.6	-26.4	50.81	-	-	74	-23.19	355	210	V
	* 7.41078	31.98	MAv1	35.6	-26.4	41.18	54	-12.82	-	-	355	210	V
6	* 12.42866	30.96	PK2	39	-20.1	49.86	-	-	74	-24.14	11	390	V
	* 12.43087	21.09	MAv1	39	-20.1	39.99	54	-14.01	-	-	11	390	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

9.1.2. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 2.4 GHz BAND

2TX Antenna 1 + Antenna 2 MODE: 484-Tones, RU index 65

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

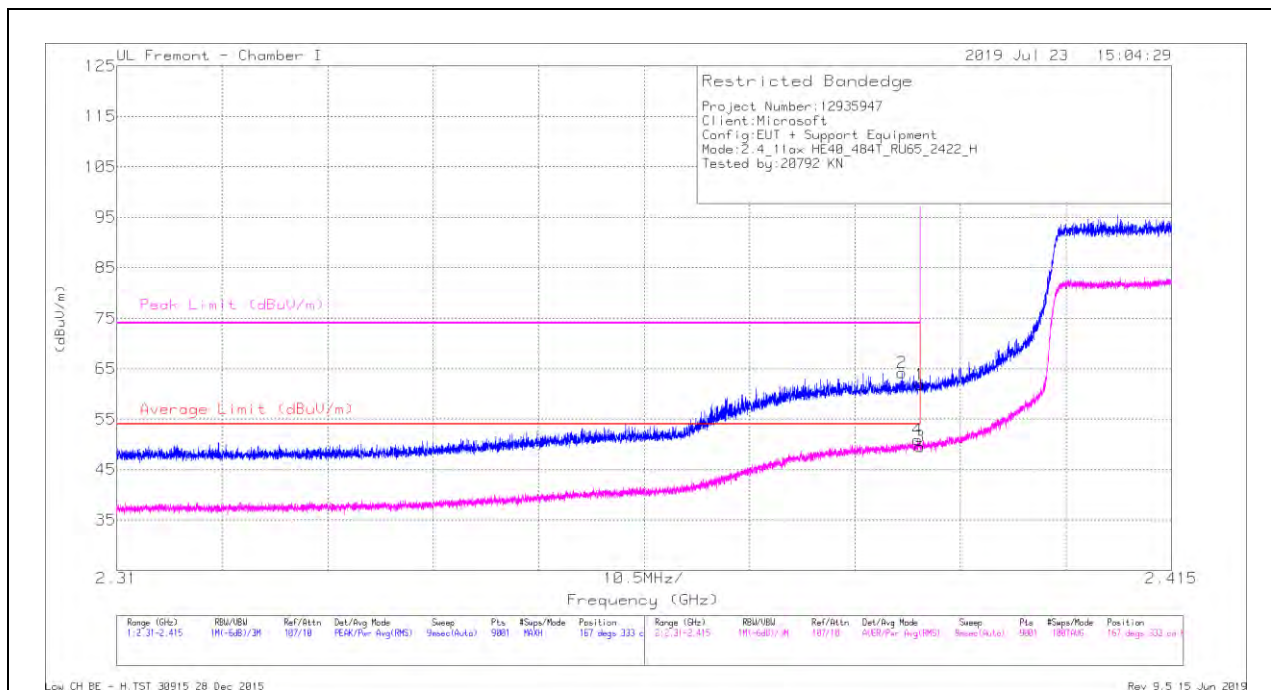


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.38999	51.59	Pk	31.9	-21.6	61.89	-	-	74	-12.11	167	333	H
2	2.38816	53.92	Pk	31.9	-21.6	64.22	-	-	74	-9.78	167	333	H
3	2.38999	39.27	RMS	31.9	-21.6	49.57	54	-4.43	-	-	167	333	H
4	2.38974	40.59	RMS	31.9	-21.6	50.89	54	-3.11	-	-	167	333	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

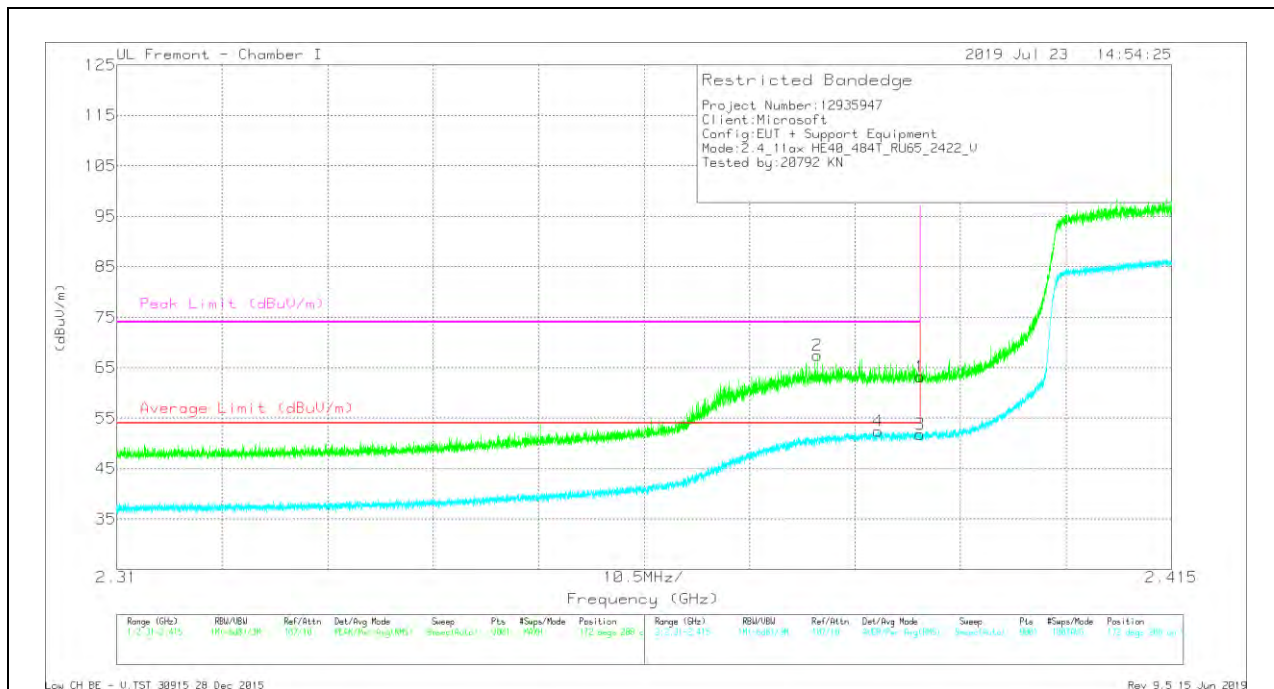


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.38999	52.91	Pk	31.9	-21.6	63.21	-	-	74	-10.79	172	288	V
2	2.37976	57.07	Pk	31.9	-21.5	67.47	-	-	74	-6.53	172	288	V
3	2.38999	41.44	RMS	31.9	-21.6	51.74	54	-2.26	-	-	172	288	V
4	2.38581	42.1	RMS	31.9	-21.6	52.4	54	-1.6	-	-	172	288	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

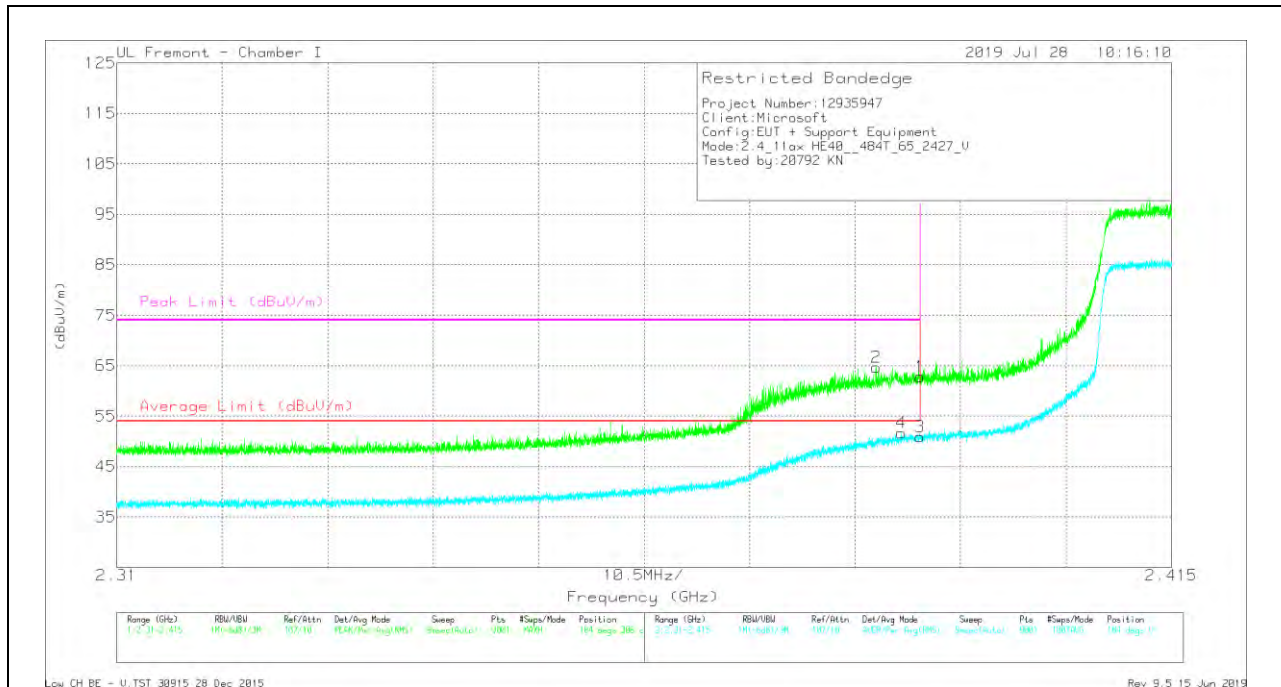


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Flt r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.38999	52.49	Pk	31.9	-21.6	62.79	-	-	74	-11.21	184	306	V
2	2.38559	54.38	Pk	31.9	-21.6	64.68	-	-	74	-9.32	184	306	V
3	2.38999	40.57	RMS	31.9	-21.6	50.87	54	-3.13	-	-	184	306	V
4	2.38812	41.34	RMS	31.9	-21.6	51.64	54	-2.36	-	-	184	306	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

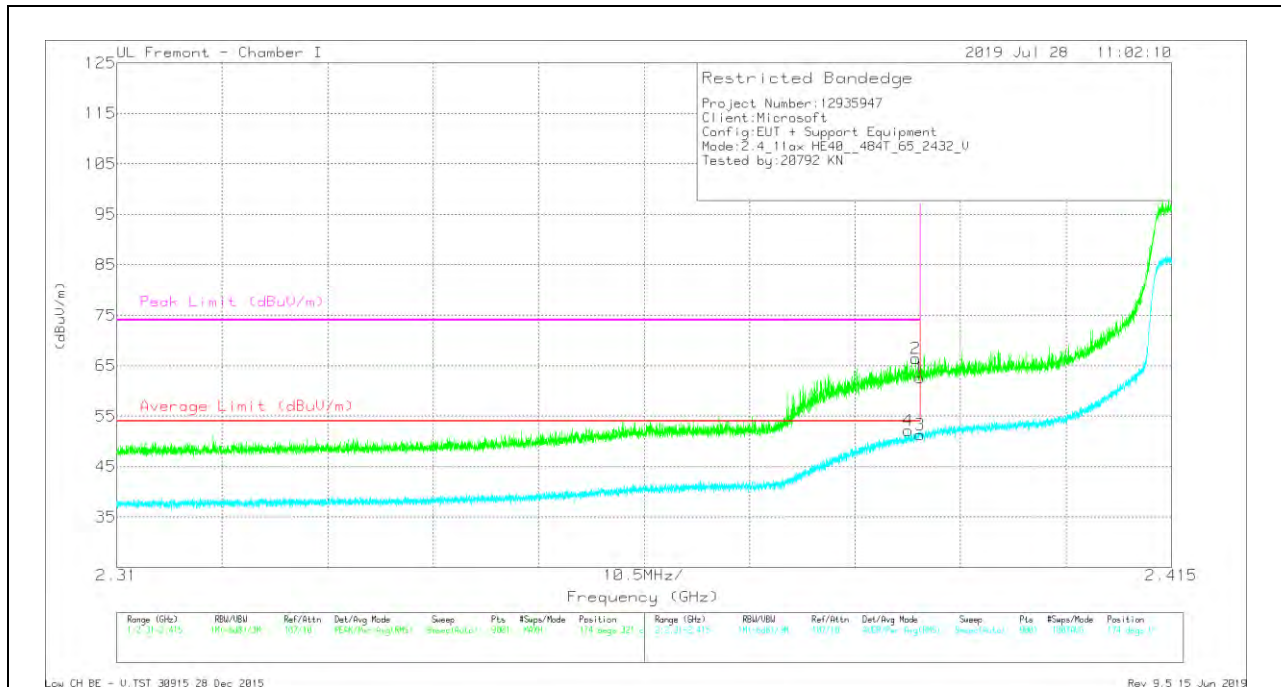

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Flt r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.38999	52.33	Pk	31.9	-21.6	62.63	-	-	74	-11.37	174	321	V
2	2.38952	56.17	Pk	31.9	-21.6	66.47	-	-	74	-7.53	174	321	V
3	2.38999	41.03	RMS	31.9	-21.6	51.33	54	-2.67	-	-	174	321	V
4	2.38878	41.86	RMS	31.9	-21.6	52.16	54	-1.84	-	-	174	321	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW MIDDLE CHANNEL, CH 6)

HORIZONTAL RESULT

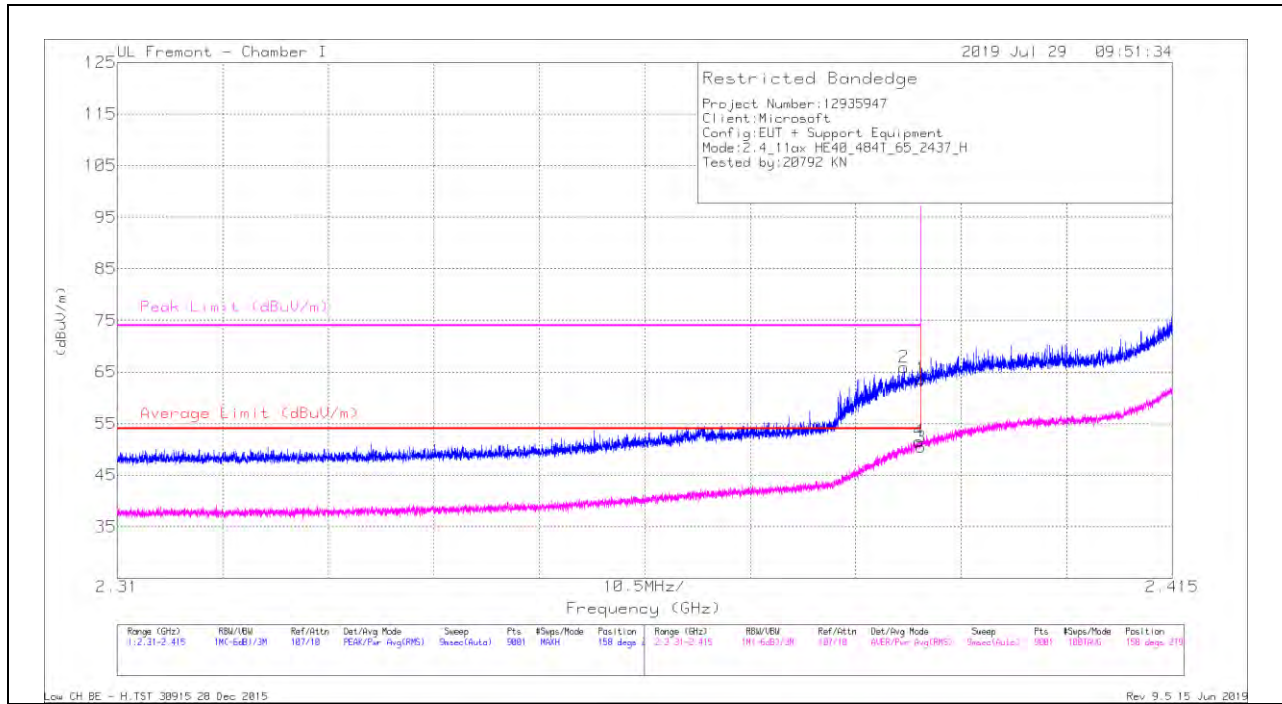


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.38999	53.37	Pk	31.9	-21.6	63.67	-	-	74	-10.33	158	279	H
2	2.38827	55.64	Pk	31.9	-21.6	65.94	-	-	74	-8.06	158	279	H
3	2.38999	40.12	RMS	31.9	-21.6	50.42	54	-3.58	-	-	158	279	H
4	2.38978	41.28	RMS	31.9	-21.6	51.58	54	-2.42	-	-	158	279	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

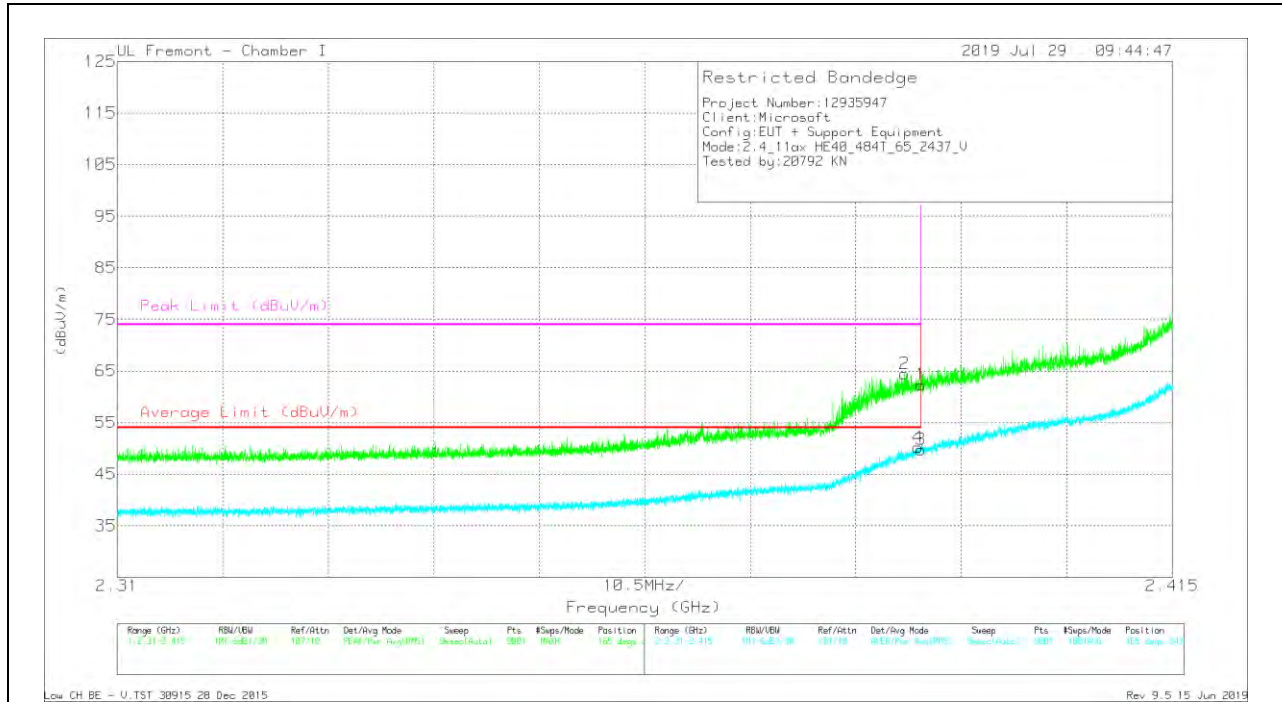

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.38999	52.01	Pk	31.9	-21.6	62.31	-	-	74	-11.69	165	243	V
2	2.38833	54.16	Pk	31.9	-21.6	64.46	-	-	74	-9.54	165	243	V
3	2.38999	39.47	RMS	31.9	-21.6	49.77	54	-4.23	-	-	165	243	V
4	2.3897	39.89	RMS	31.9	-21.6	50.19	54	-3.81	-	-	165	243	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH MIDDLE CHANNEL, CH 6)

HORIZONTAL RESULT

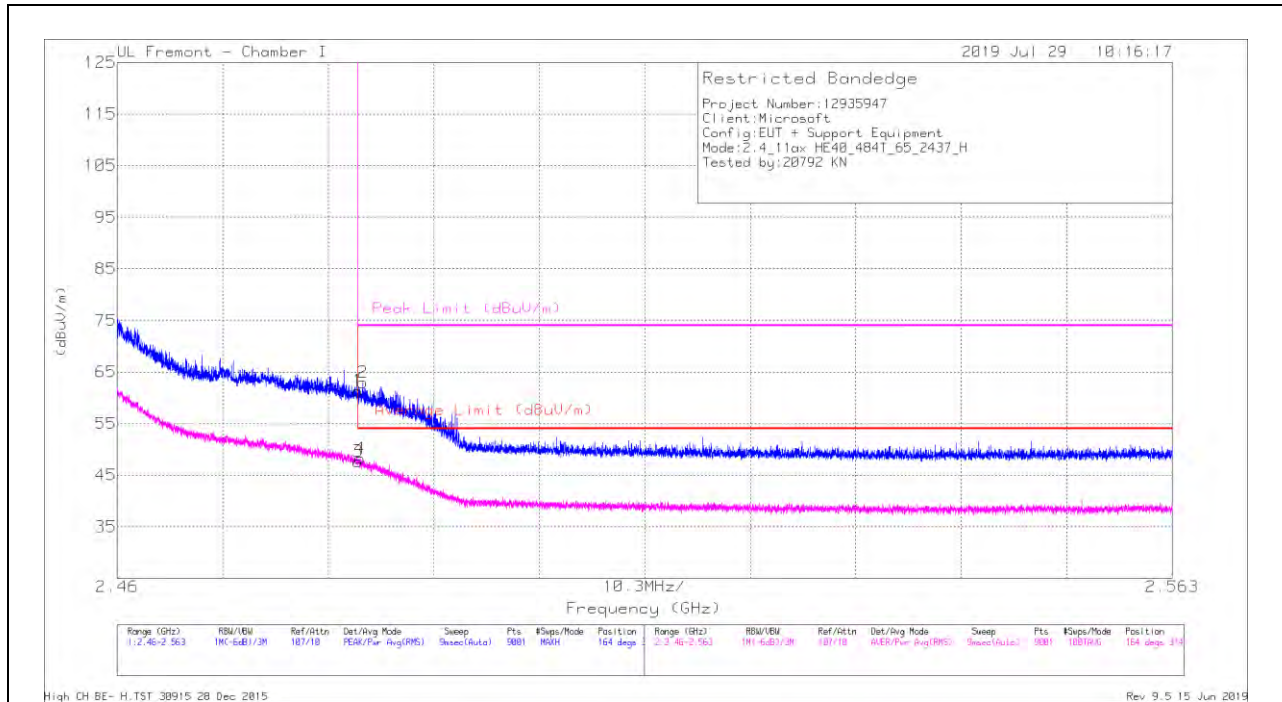


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.48351	50.61	Pk	32.4	-21.7	61.31	-	-	74	-12.69	164	374	H
2	2.48399	52.25	Pk	32.4	-21.7	62.95	-	-	74	-11.05	164	374	H
3	2.48351	36.98	RMS	32.4	-21.7	47.68	54	-6.32	-	-	164	374	H
4	2.4837	37.53	RMS	32.4	-21.7	48.23	54	-5.77	-	-	164	374	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

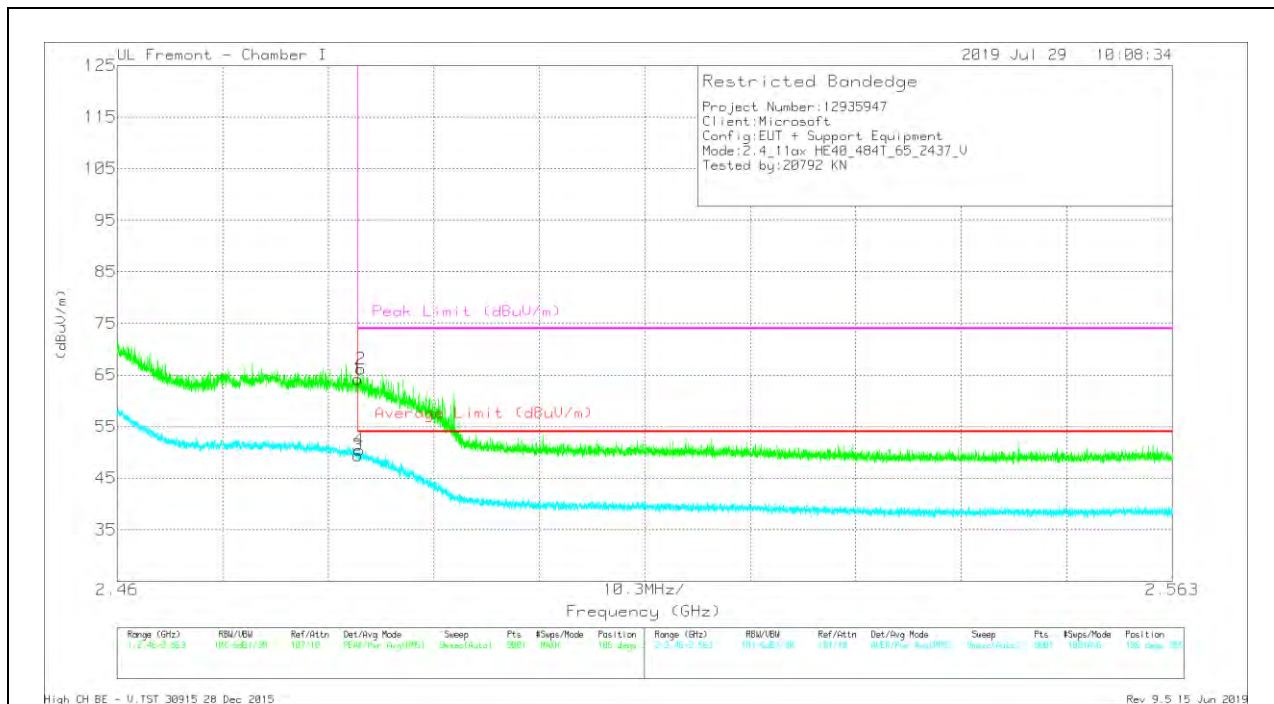

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.48351	53.54	Pk	32.4	-21.7	64.24	-	-	74	-9.76	186	355	V
2	2.4838	55.46	Pk	32.4	-21.7	66.16	-	-	74	-7.84	186	355	V
3	2.48351	38.73	RMS	32.4	-21.7	49.43	54	-4.57	-	-	186	355	V
4	2.48363	39.77	RMS	32.4	-21.7	50.47	54	-3.53	-	-	186	355	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 7)

HORIZONTAL RESULT

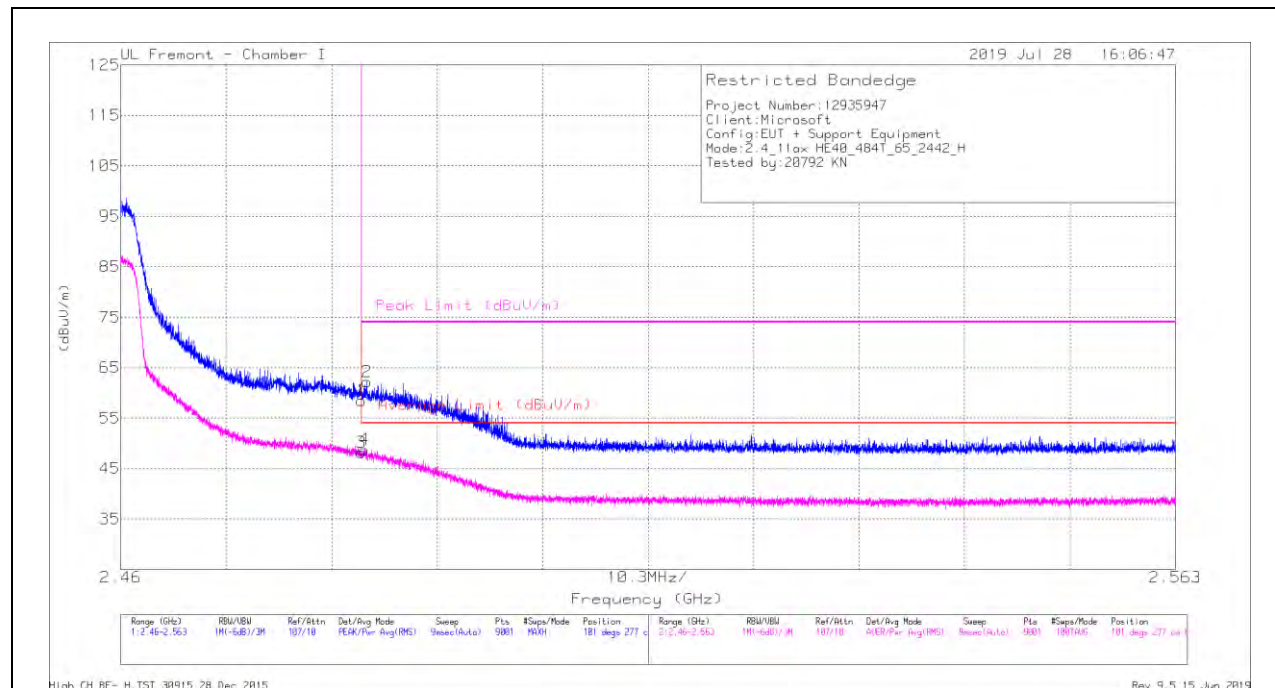


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.48351	47.83	Pk	32.4	-21.7	58.53	-	-	74	-15.47	101	277	H
2	2.48403	51.5	Pk	32.4	-21.7	62.2	-	-	74	-11.8	101	277	H
3	2.48351	37.53	RMS	32.4	-21.7	48.23	54	-5.77	-	-	101	277	H
4	2.48379	38.04	RMS	32.4	-21.7	48.74	54	-5.26	-	-	101	277	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

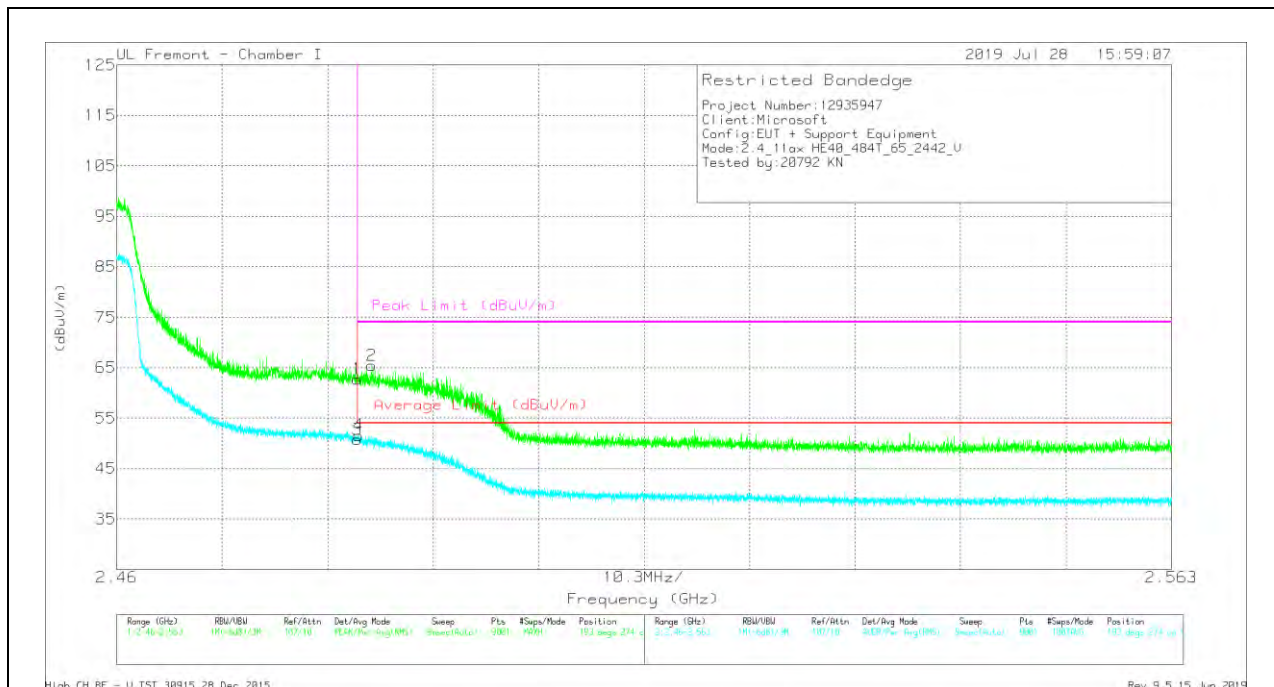

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.48351	52.07	Pk	32.4	-21.7	62.77	-	-	74	-11.23	193	274	V
2	2.4849	54.8	Pk	32.4	-21.8	65.4	-	-	74	-8.6	193	274	V
3	2.48351	40.1	RMS	32.4	-21.7	50.8	54	-3.2	-	-	193	274	V
4	2.48363	40.89	RMS	32.4	-21.7	51.59	54	-2.41	-	-	193	274	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 8)

HORIZONTAL RESULT

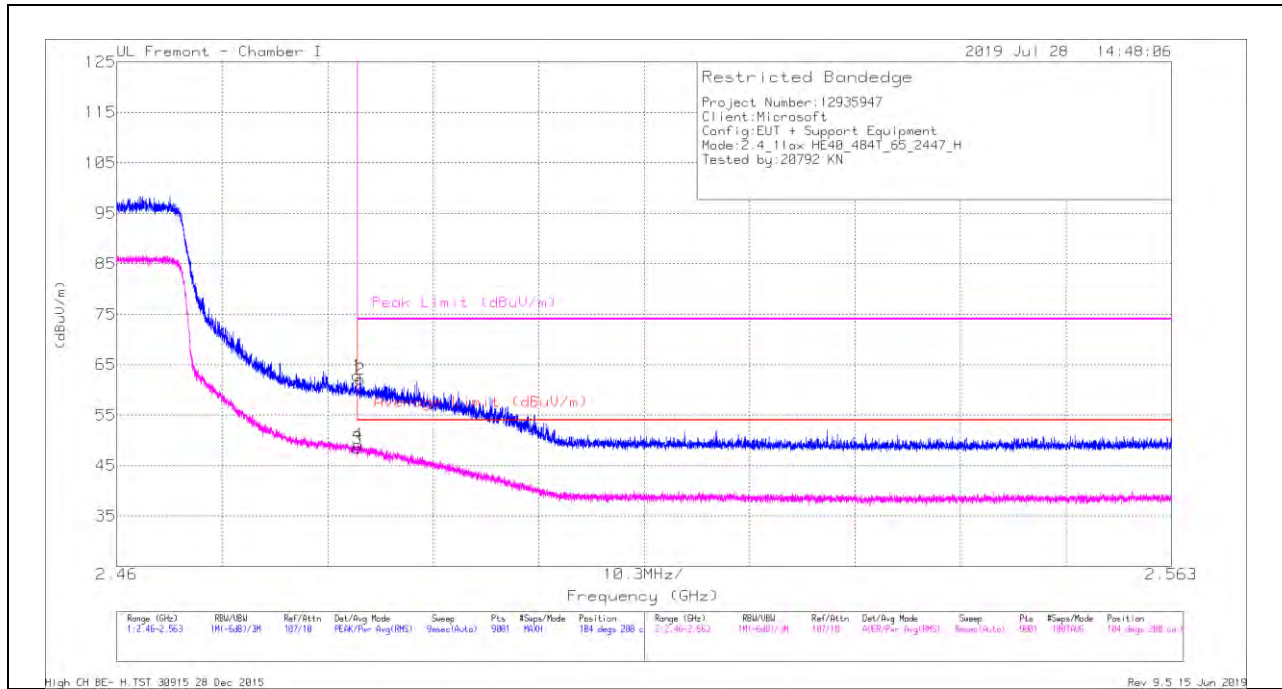


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.48351	52.16	Pk	32.4	-21.7	62.86	-	-	74	-11.14	104	280	H
2	2.48378	51.36	Pk	32.4	-21.7	62.06	-	-	74	-11.94	104	280	H
3	2.48351	37.78	RMS	32.4	-21.7	48.48	54	-5.52	-	-	104	280	H
4	2.48359	38.47	RMS	32.4	-21.7	49.17	54	-4.83	-	-	104	280	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection


VERTICAL RESULT

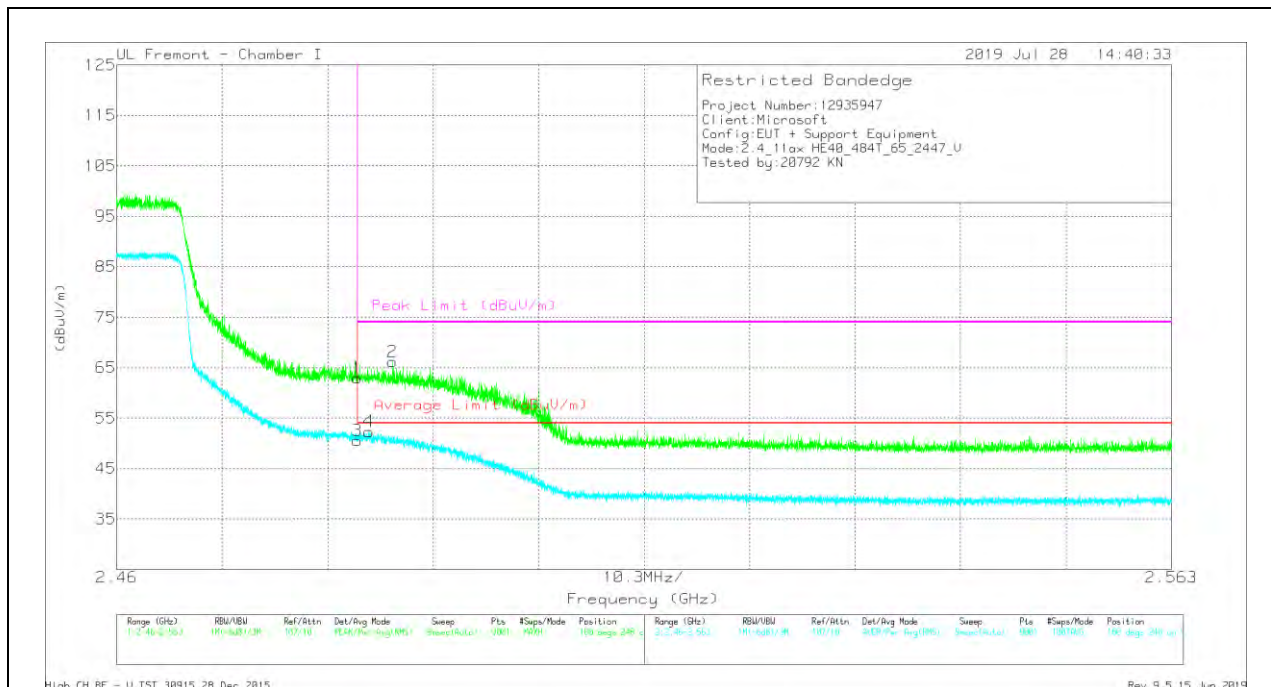

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.48351	52.29	Pk	32.4	-21.7	62.99	-	-	74	-11.01	180	248	V
2	2.48695	55.62	Pk	32.3	-21.7	66.22	-	-	74	-7.78	180	248	V
3	2.48351	39.82	RMS	32.4	-21.7	50.52	54	-3.48	-	-	180	248	V
4	2.48463	41.74	RMS	32.4	-21.8	52.34	54	-1.66	-	-	180	248	V

BANDEDGE (HIGH CHANNEL, CH 9)

HORIZONTAL RESULT

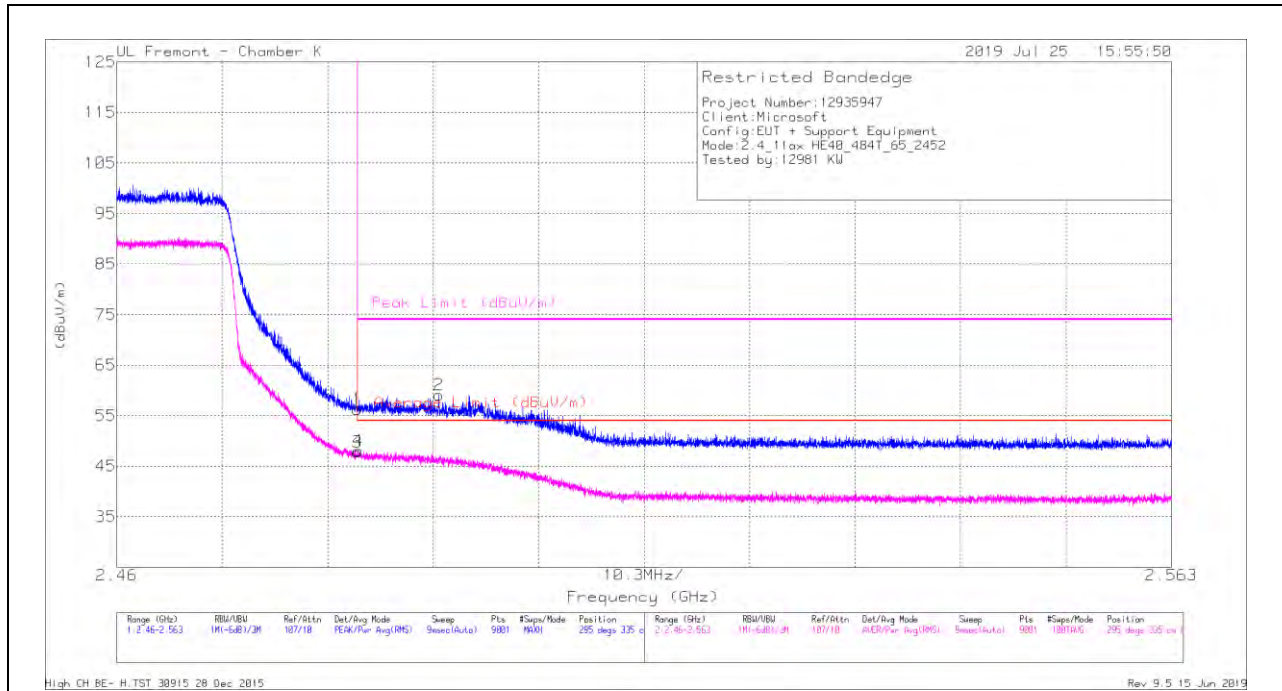


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	48.53	Pk	32.5	-24.8	56.23	-	-	74	-17.77	295	335	H
2	* 2.49144	51.43	Pk	32.5	-24.8	59.13	-	-	74	-14.87	295	335	H
3	* 2.48351	40.06	RMS	32.5	-24.8	47.76	54	-6.24	-	-	295	335	H
4	* 2.48359	40.41	RMS	32.5	-24.8	48.11	54	-5.89	-	-	295	335	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

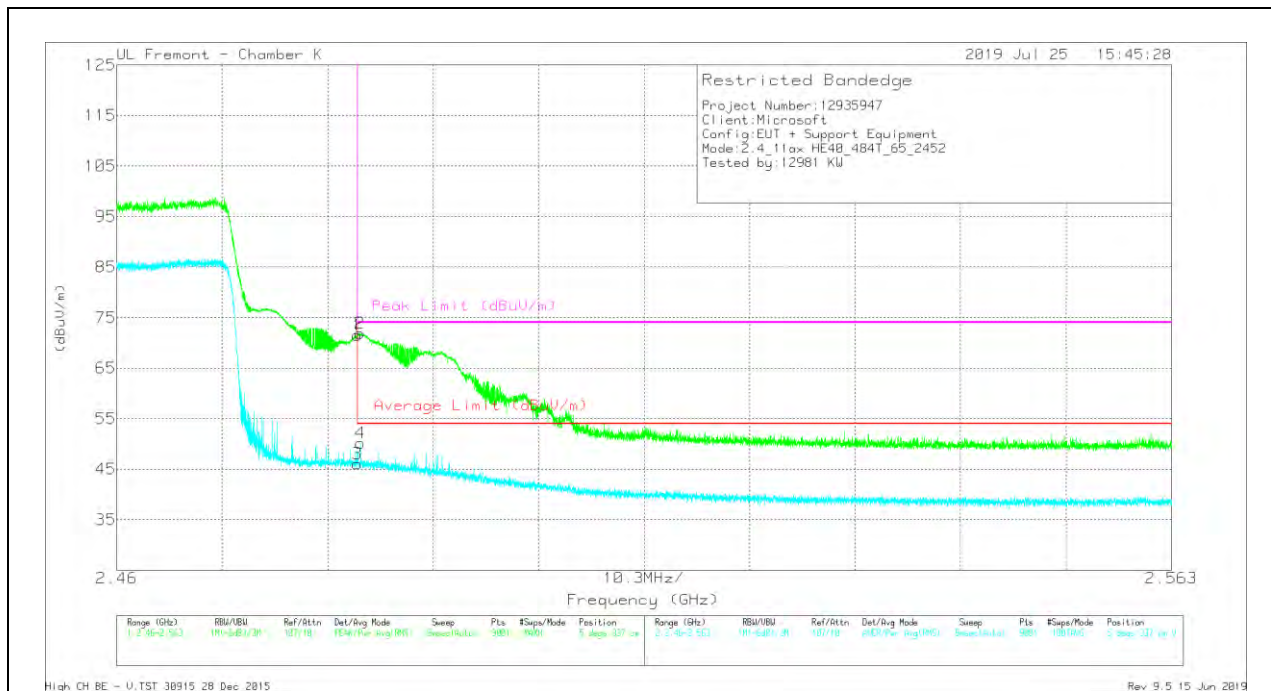

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	63.77	Pk	32.5	-24.8	71.47	-	-	74	-2.53	5	337	V
2	* 2.48374	64.22	Pk	32.5	-24.8	71.92	-	-	74	-2.08	5	337	V
3	* 2.48351	38.32	RMS	32.5	-24.8	46.02	54	-7.98	-	-	5	337	V
4	* 2.48382	42.47	RMS	32.5	-24.8	50.17	54	-3.83	-	-	5	337	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 10)

HORIZONTAL RESULT

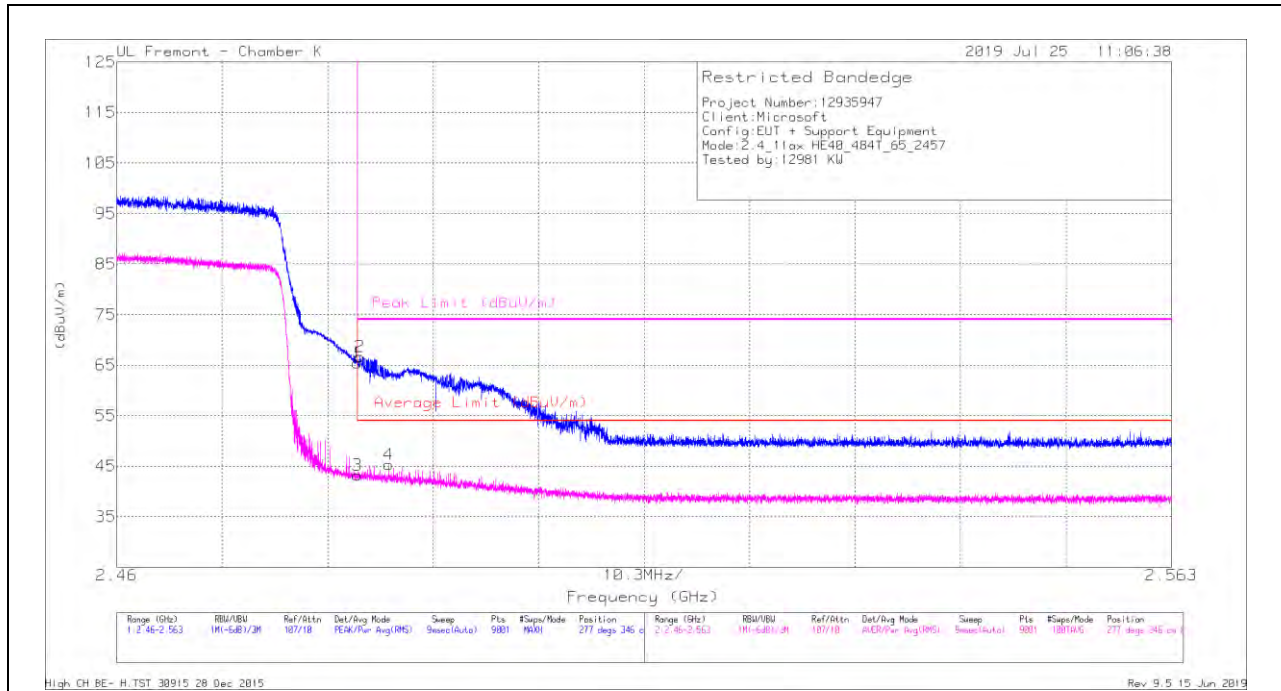


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	57.74	Pk	32.5	-24.8	65.44	-	-	74	-8.56	277	346	H
2	* 2.48376	58.95	Pk	32.5	-24.8	66.65	-	-	74	-7.35	277	346	H
3	* 2.48351	35.5	RMS	32.5	-24.8	43.2	54	-10.8	-	-	277	346	H
4	* 2.48656	37.64	RMS	32.5	-24.8	45.34	54	-8.66	-	-	277	346	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

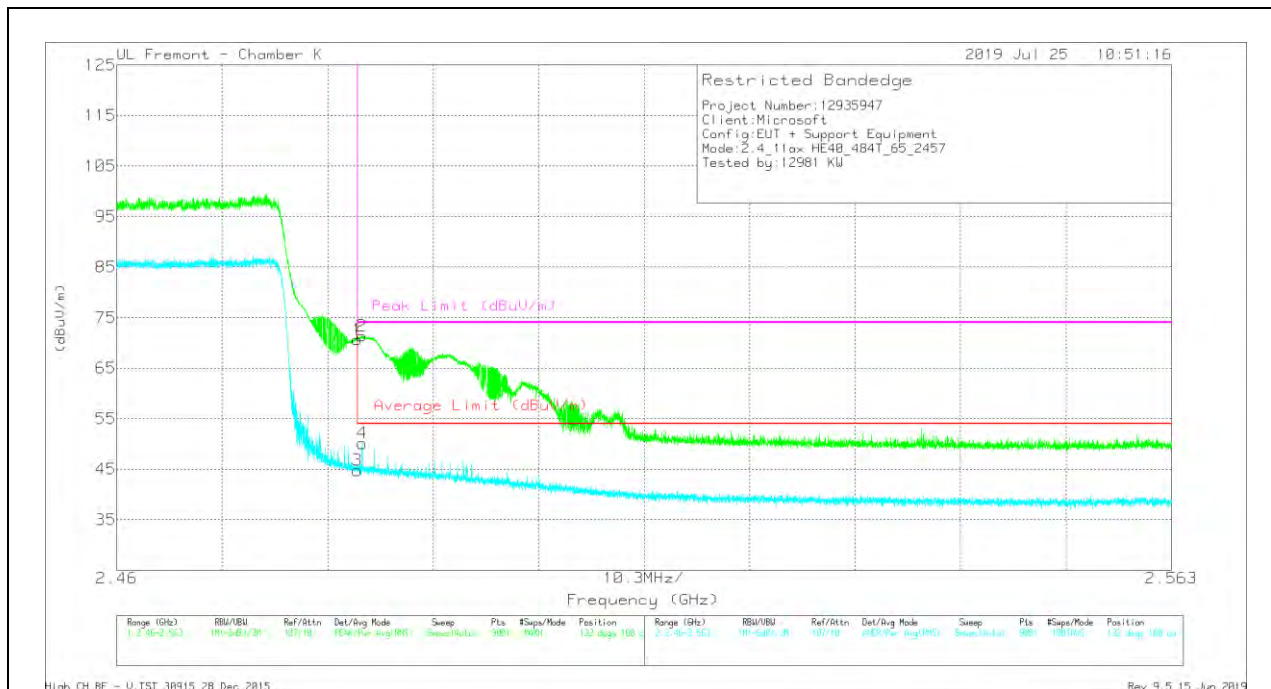


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	63	Pk	32.5	-24.8	70.7	-	-	74	-3.3	132	160	V
2	* 2.48393	63.67	Pk	32.5	-24.8	71.37	-	-	74	-2.63	132	160	V
3	* 2.48351	37.07	RMS	32.5	-24.8	44.77	54	-9.23	-	-	132	160	V
4	* 2.484	42.41	RMS	32.5	-24.8	50.11	54	-3.89	-	-	132	160	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

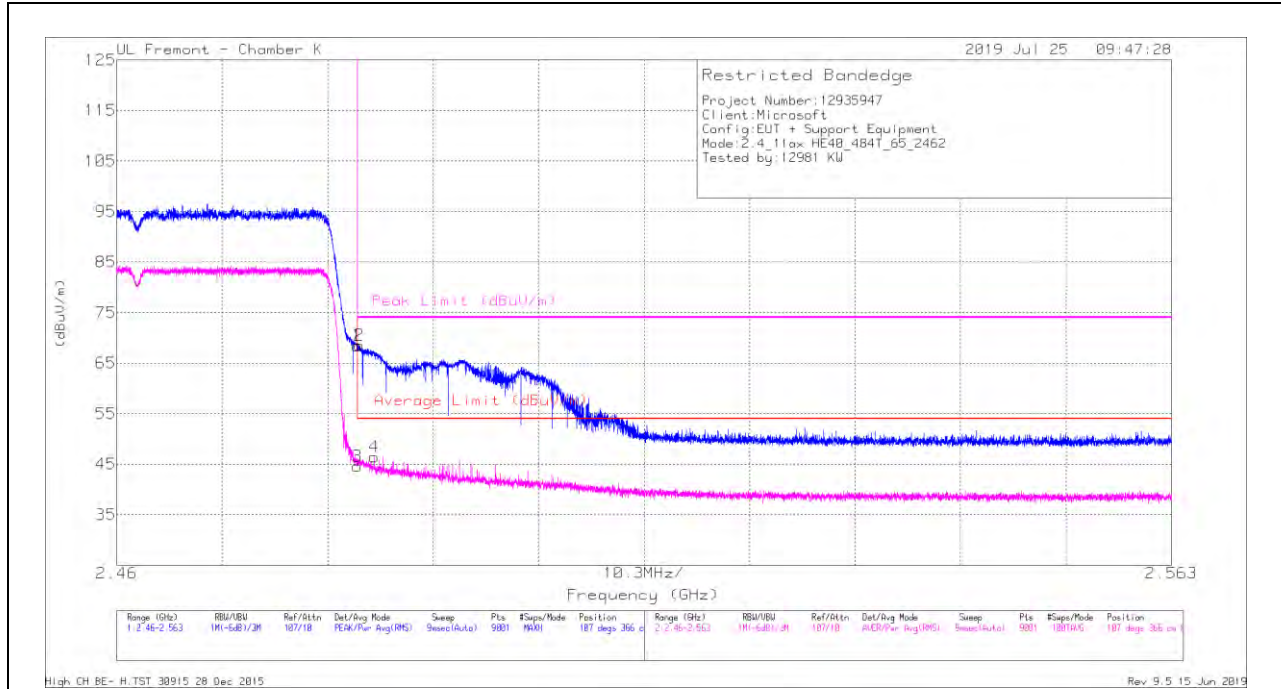


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	60.77	Pk	32.5	-24.8	68.47	-	-	74	-5.53	107	366	H
2	* 2.48369	60.89	Pk	32.5	-24.8	68.59	-	-	74	-5.41	107	366	H
3	* 2.48351	36.87	RMS	32.5	-24.8	44.57	54	-9.43	-	-	107	366	H
4	* 2.48513	38.72	RMS	32.5	-24.8	46.42	54	-7.58	-	-	107	366	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


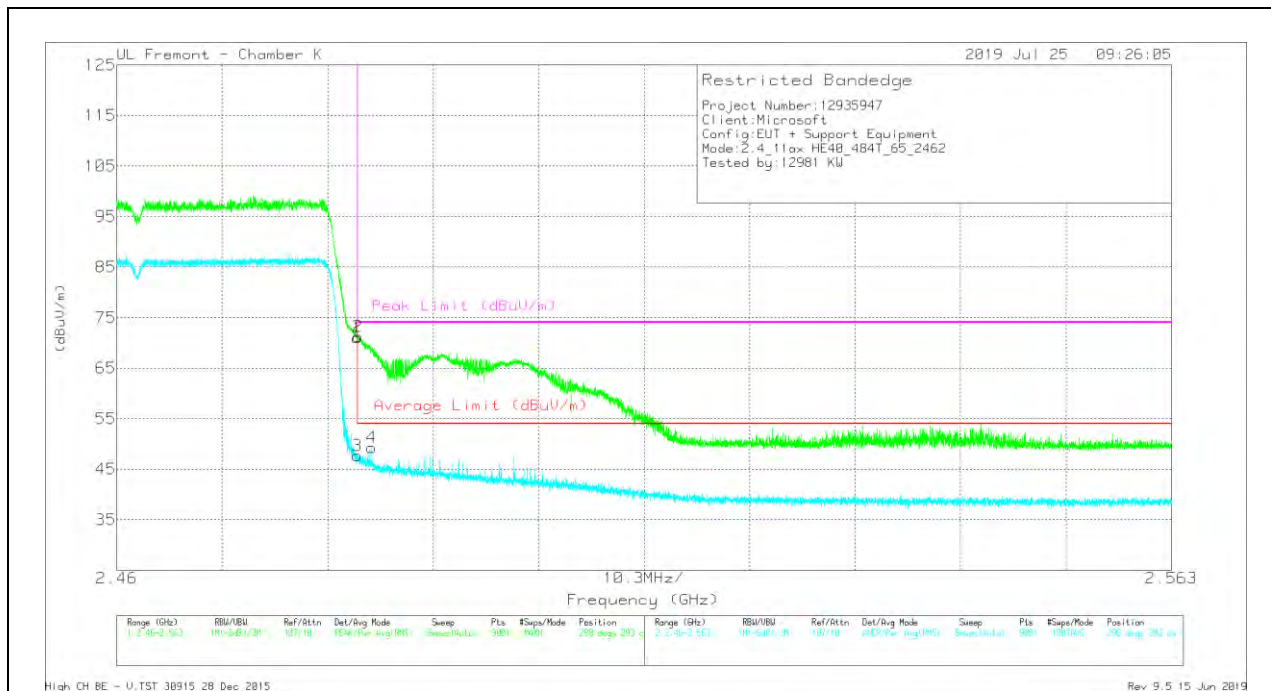


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filt /Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	63.34	Pk	32.5	-24.8	71.04	-	-	74	-2.96	298	293	V
2	* 2.48354	63.56	Pk	32.5	-24.8	71.26	-	-	74	-2.74	298	293	V
3	* 2.48351	40	RMS	32.5	-24.8	47.7	54	-6.3	-	-	298	293	V
4	* 2.48489	41.55	RMS	32.5	-24.8	49.25	54	-4.75	-	-	298	293	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 3 RESULTS

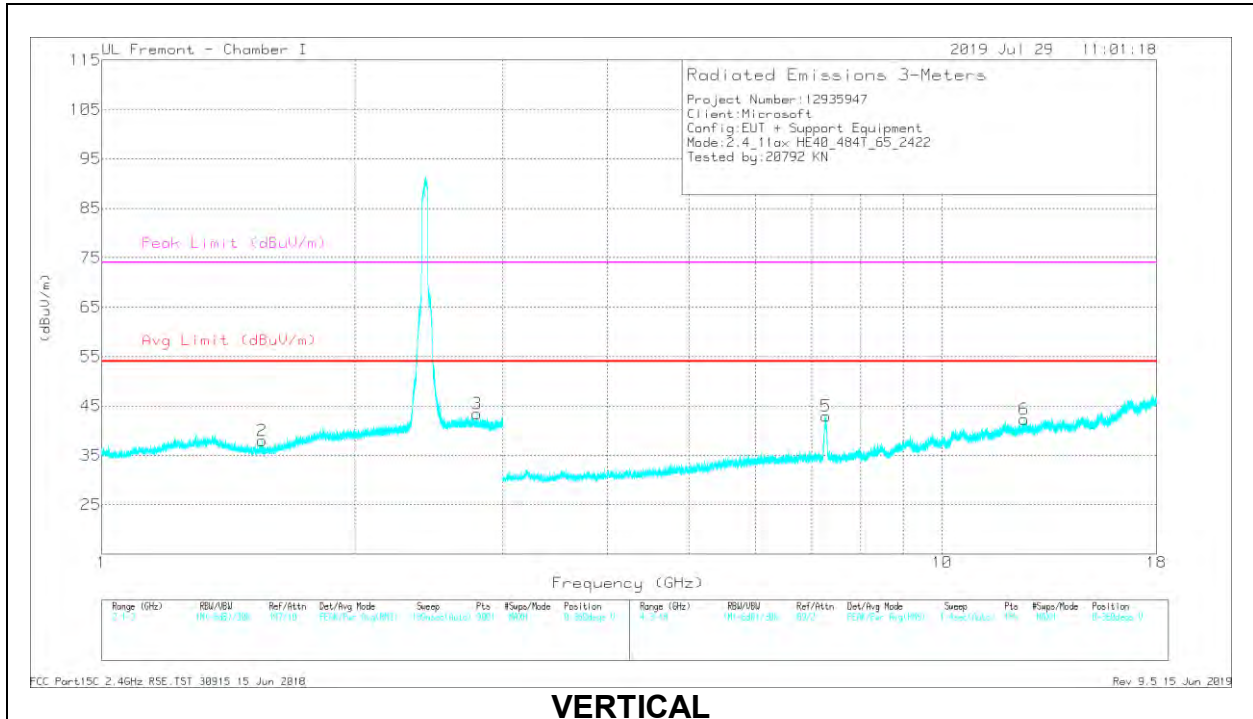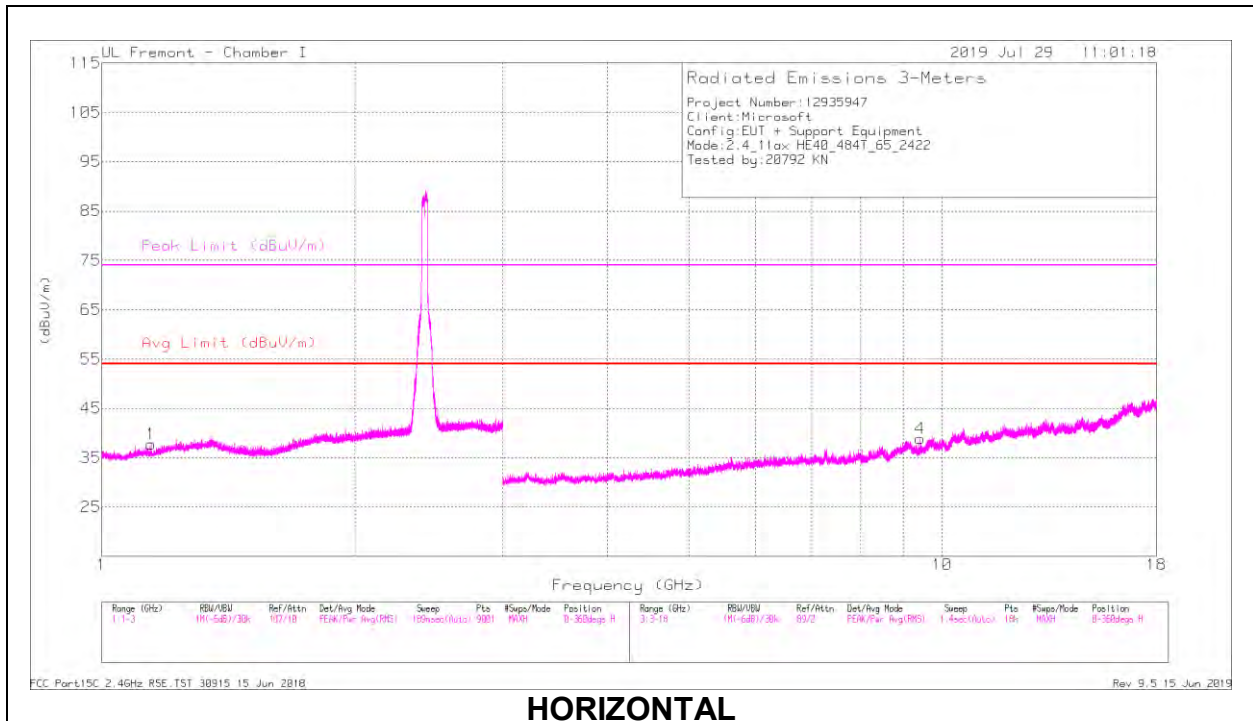


RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.14477	38.81	PK2	27.6	-23.3	43.11	-	-	74	-30.89	199	341	H
	* 1.14574	29.69	MAv1	27.6	-23.3	33.99	54	-20.01	-	-	199	341	H
2	* 1.55133	39.07	PK2	28.1	-23.3	43.87	-	-	74	-30.13	281	155	V
	* 1.552	28.98	MAv1	28.1	-23.3	33.78	54	-20.22	-	-	281	155	V
3	* 2.79363	40.62	PK2	32.3	-20.9	52.02	-	-	74	-21.98	181	389	V
	* 2.79316	28.75	MAv1	32.3	-20.9	40.15	54	-13.85	-	-	181	389	V
4	* 9.41988	29.1	PK2	36.5	-21.4	44.2	-	-	74	-29.8	341	142	H
	* 9.42174	19.9	MAv1	36.5	-21.2	35.2	54	-18.8	-	-	341	142	H
5	* 7.27663	44.23	PK2	35.5	-25.9	53.83	-	-	74	-20.17	218	213	V
	* 7.27541	32.38	MAv1	35.5	-25.9	41.98	54	-12.02	-	-	218	213	V
6	* 12.53392	31.19	PK-U	39	-21.3	48.89	-	-	74	-25.11	10	163	V
	* 12.53311	20.42	ADR	39	-21.2	38.22	54	-15.78	-	-	10	163	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

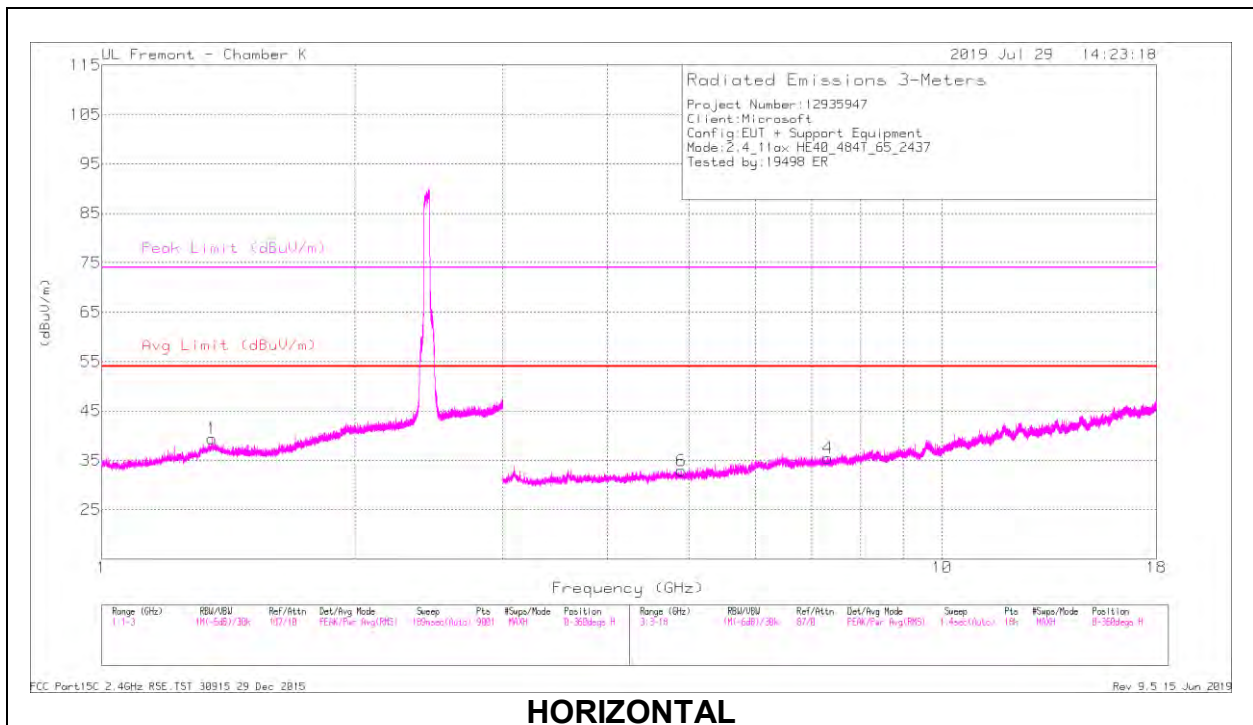

HORIZONTAL

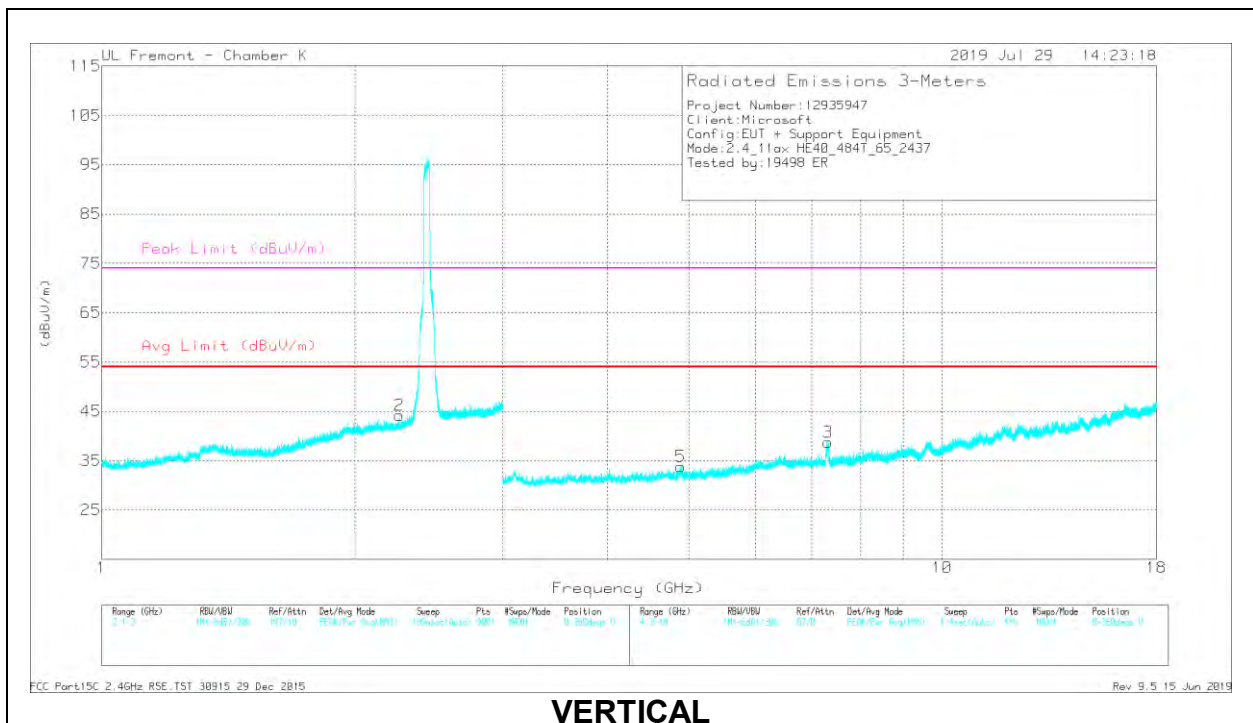



VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.35105	31.11	PK2	29.6	-16.9	43.81	-	-	74	-30.19	50	215	H
	* 1.35401	22.71	MAv1	29.6	-16.9	35.41	54	-18.59	-	-	50	215	H
2	* 2.26306	30.93	PK2	31.5	-14.7	47.73	-	-	74	-26.27	160	170	V
	* 2.26309	22.9	MAv1	31.5	-14.7	39.7	54	-14.3	-	-	160	170	V
4	* 7.32363	35.54	PK2	35.6	-26.4	44.74	-	-	74	-29.26	341	164	H
	* 7.31503	24.07	MAv1	35.6	-26.4	33.27	54	-20.73	-	-	341	164	H
6	* 4.8778	38.8	PK2	34.1	-30.5	42.4	-	-	74	-31.6	103	236	H
	* 4.887	28.07	MAv1	34.1	-30.5	31.67	54	-22.33	-	-	103	236	H
3	* 7.30174	41.6	PK2	35.5	-26.3	50.8	-	-	74	-23.2	175	248	V
	* 7.30138	29.82	MAv1	35.5	-26.3	39.02	54	-14.98	-	-	175	248	V
5	* 4.88044	40.54	PK2	34.1	-30.5	44.14	-	-	74	-29.86	195	228	V
	* 4.89363	29.61	MAv1	34.1	-30.5	33.21	54	-20.79	-	-	195	228	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 11 RESULTS

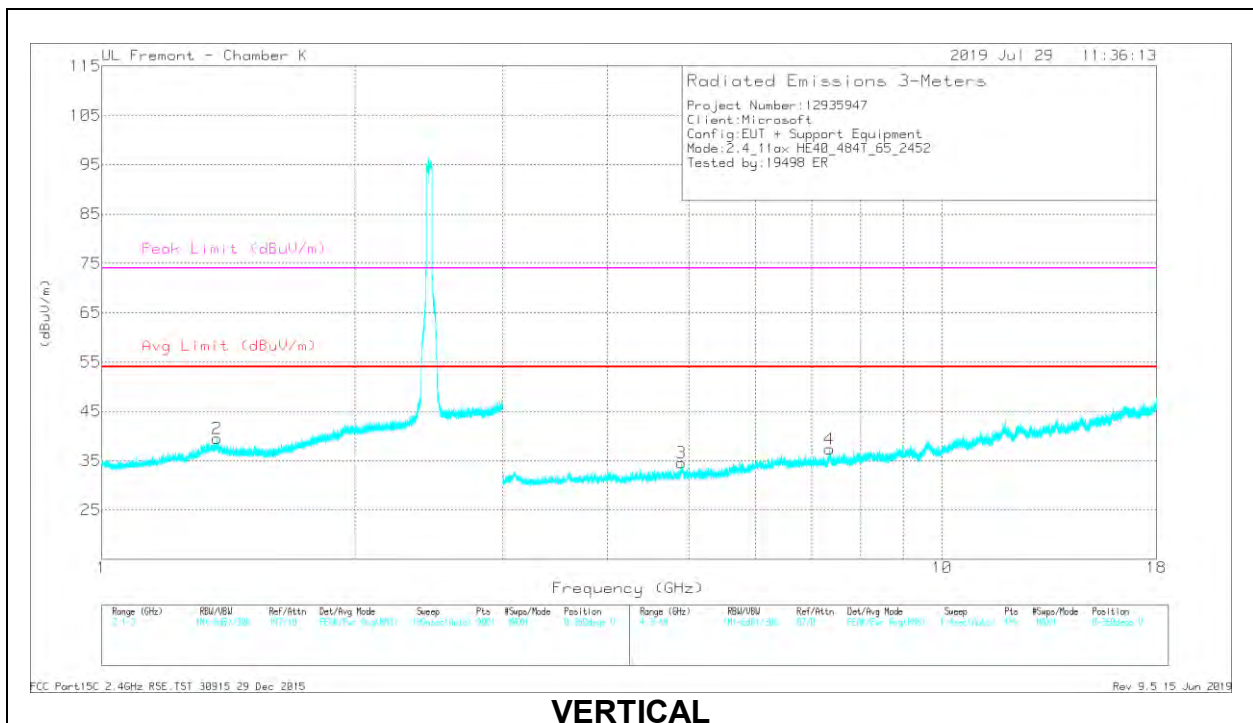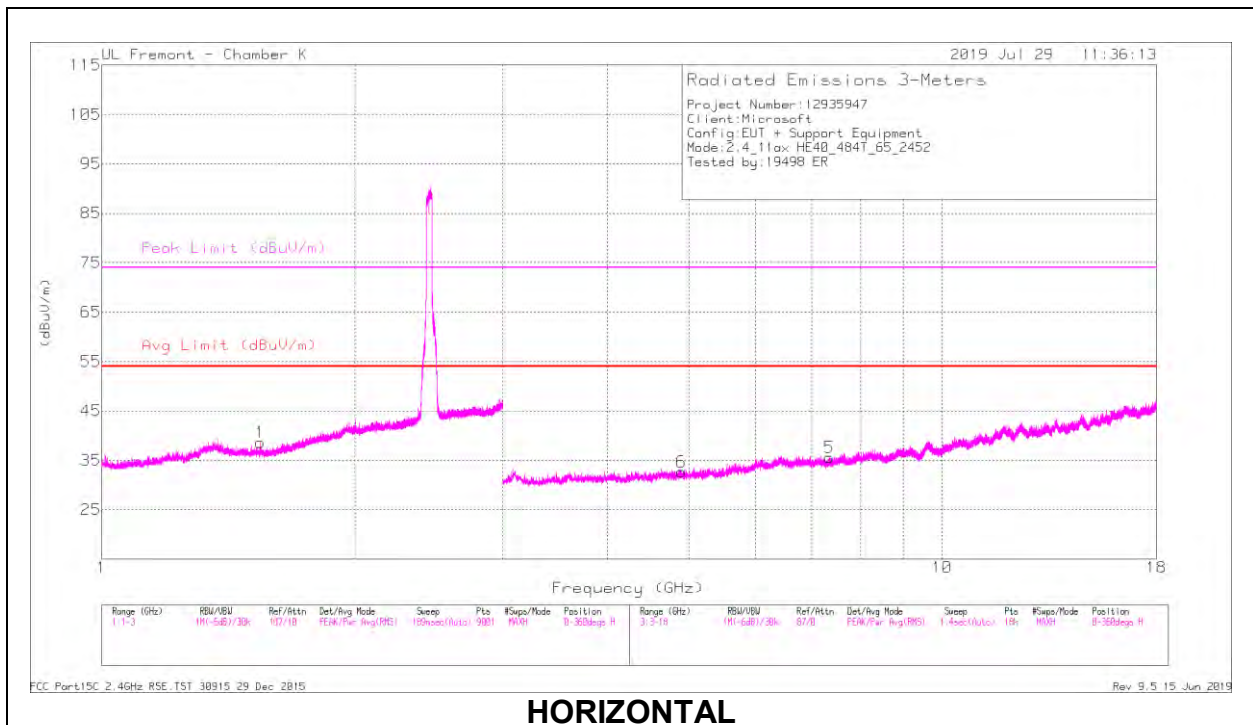

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.54249	32.26	PK2	28.2	-16.3	44.16	-	-	74	-29.84	148	173	H
	* 1.54287	22.25	MAv1	28.2	-16.3	34.15	54	-19.85	-	-	148	173	H
2	* 1.37048	32.46	PK2	29.6	-16.9	45.16	-	-	74	-28.84	66	196	V
	* 1.36889	22.9	MAv1	29.6	-16.9	35.6	54	-18.4	-	-	66	196	V
5	* 7.35001	41.94	PK2	35.6	-26.4	51.14	-	-	74	-22.86	249	310	H
	* 7.34843	30.62	MAv1	35.6	-26.4	39.82	54	-14.18	-	-	249	310	H
6	* 4.90467	39.22	PK2	34.1	-30.6	42.72	-	-	74	-31.28	103	104	H
	* 4.90562	28.1	MAv1	34.1	-30.6	31.6	54	-22.4	-	-	103	104	H
3	* 4.90085	41.99	PK2	34.1	-30.5	45.59	-	-	74	-28.41	188	192	V
	* 4.90411	29.74	MAv1	34.1	-30.5	33.34	54	-20.66	-	-	188	192	V
4	* 7.34691	42.07	PK2	35.6	-26.4	51.27	-	-	74	-22.73	172	207	V
	* 7.34603	29.41	MAv1	35.6	-26.4	38.61	54	-15.39	-	-	172	207	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK2 - KDB558074 Method: Maximum Peak
MAv1 - KDB558074 Option 1 Maximum RMS Average

2TX Antenna 1 + Antenna 2 MODE: 242-Tones, RU index 61

BANDEDGE (LOW CHANNEL, CH 3)

HORIZONTAL RESULT

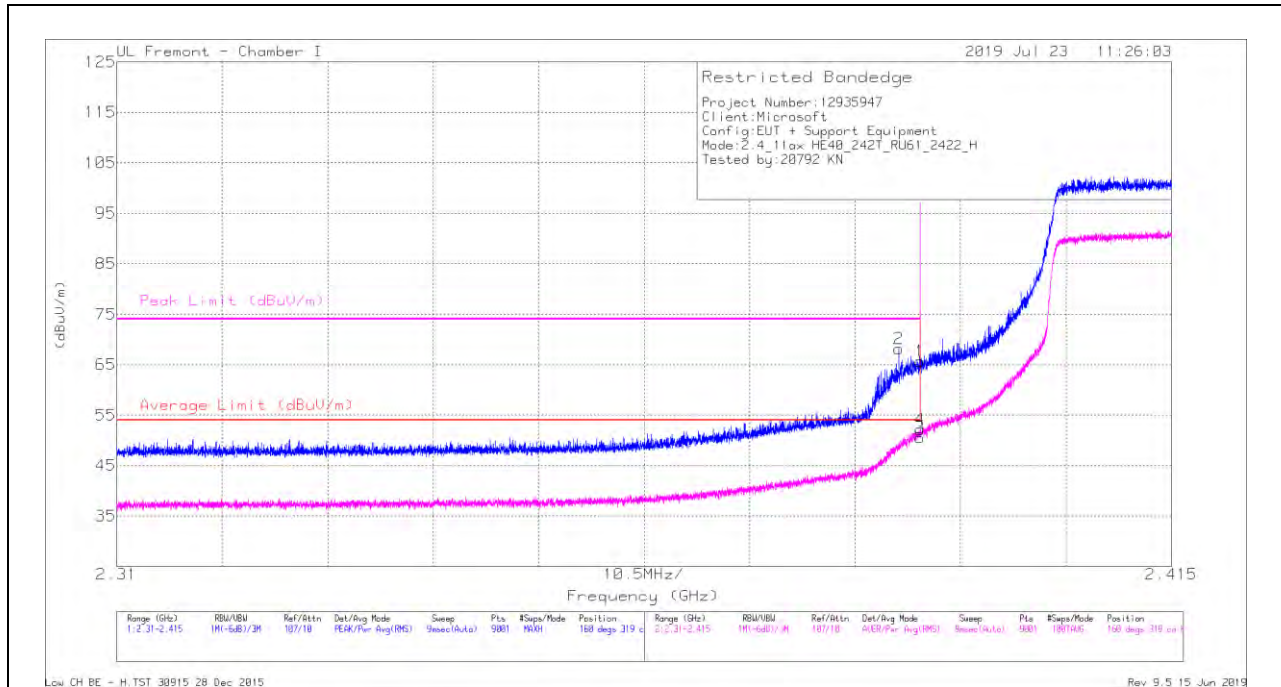


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.38999	55.42	Pk	31.9	-21.6	65.72	-	-	74	-8.28	160	319	H
2	2.38784	57.86	Pk	31.9	-21.6	68.16	-	-	74	-5.84	160	319	H
3	2.38999	40.27	RMS	31.9	-21.6	50.57	54	-3.43	-	-	160	319	H
4	2.38997	41.84	RMS	31.9	-21.6	52.14	54	-1.86	-	-	160	319	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

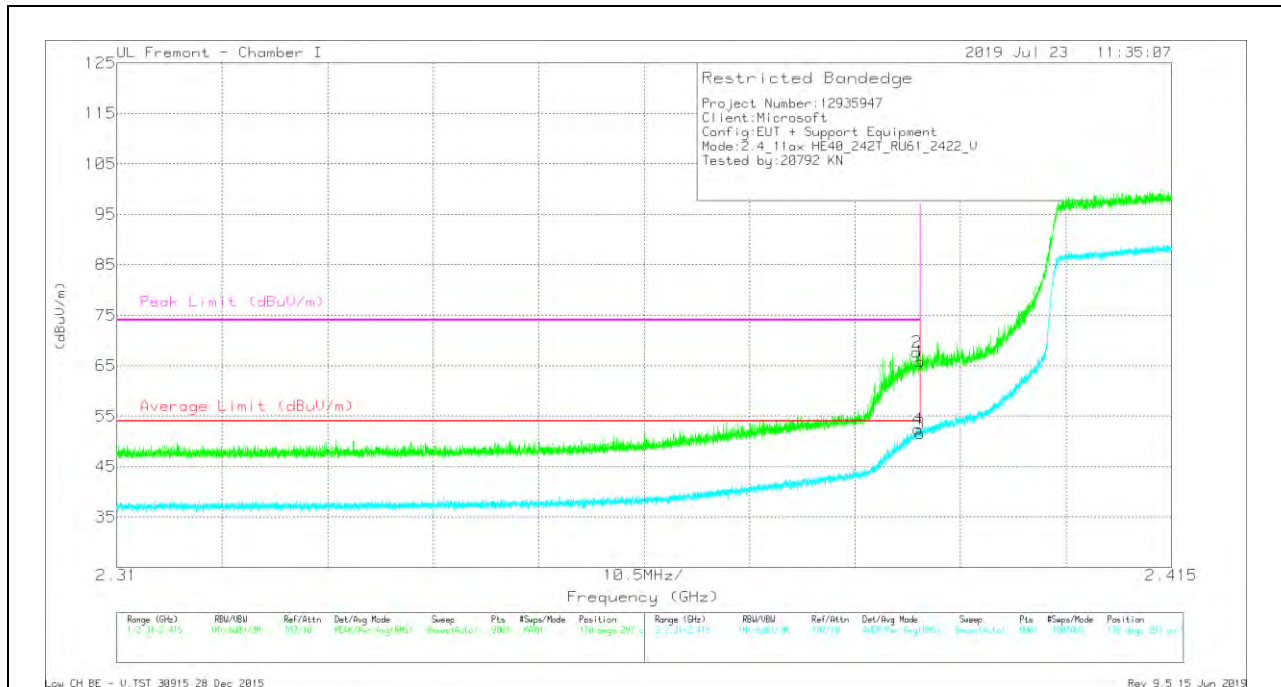

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.38999	55.46	Pk	31.9	-21.6	65.76	-	-	74	-8.24	170	297	V
2	2.38967	57.37	Pk	31.9	-21.6	67.67	-	-	74	-6.33	170	297	V
3	2.38999	41.19	RMS	31.9	-21.6	51.49	54	-2.51	-	-	170	297	V
4	2.38978	42.07	RMS	31.9	-21.6	52.37	54	-1.63	-	-	170	297	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 4)

HORIZONTAL RESULT

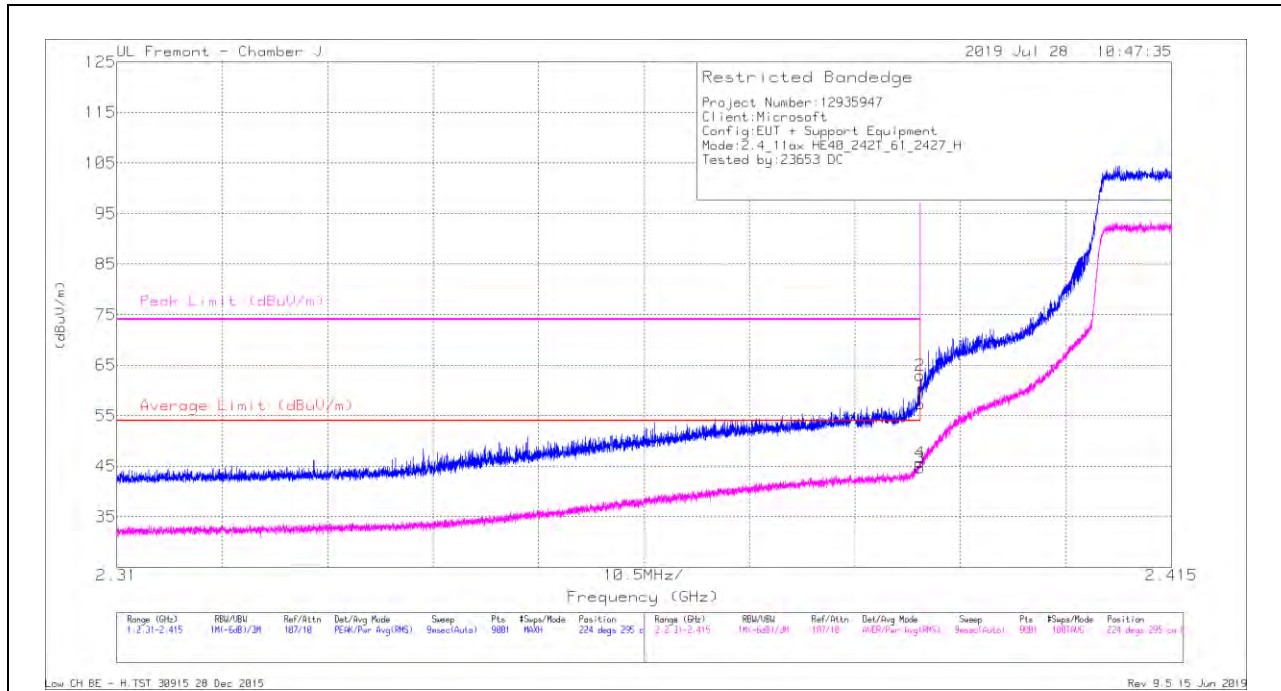


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE018905 S (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	53.43	Pk	29.5	-25.5	57.43	-	-	74	-16.57	224	295	H
2	* 2.38997	58.96	Pk	29.5	-25.5	62.96	-	-	74	-11.04	224	295	H
3	* 2.38999	40.65	RMS	29.5	-25.5	44.65	54	-9.35	-	-	224	295	H
4	* 2.38998	41.7	RMS	29.5	-25.5	45.7	54	-8.3	-	-	224	295	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

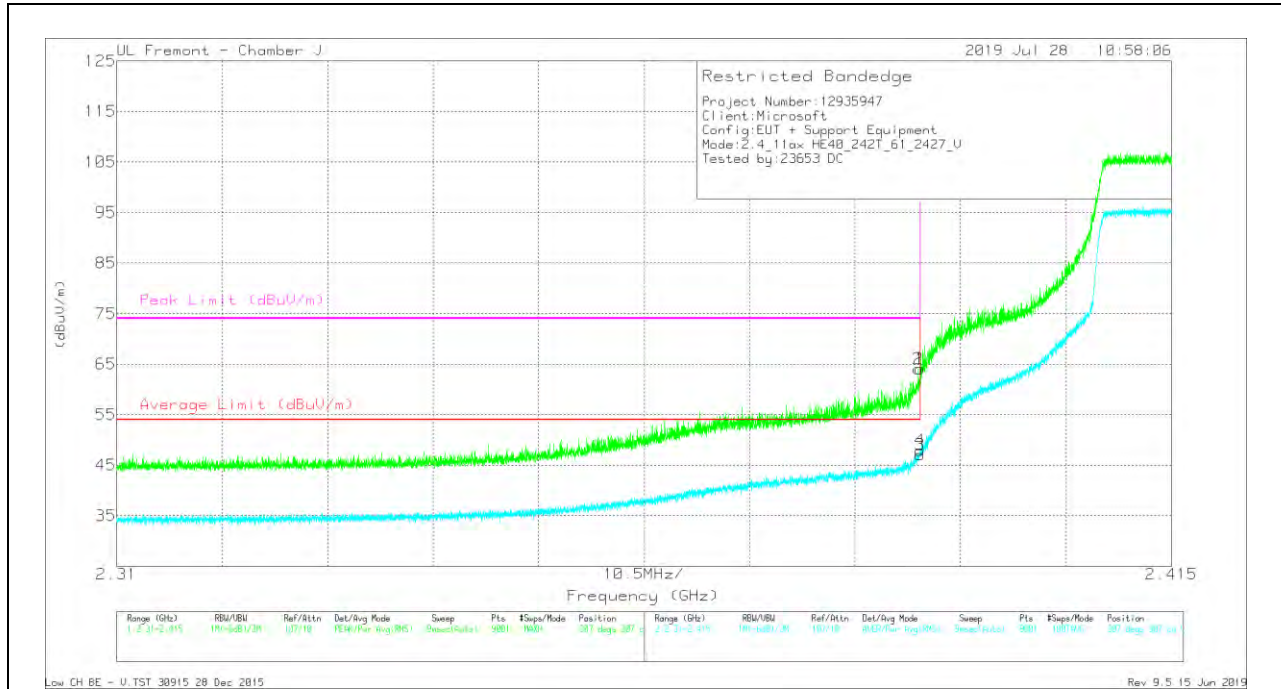

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE018905 5 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	60.07	Pk	29.5	-25.5	64.07	-	-	74	-9.93	307	307	V
2	* 2.38979	60.09	Pk	29.5	-25.5	64.09	-	-	74	-9.91	307	307	V
3	* 2.38999	43.07	RMS	29.5	-25.5	47.07	54	-6.93	-	-	307	307	V
4	* 2.38995	43.93	RMS	29.5	-25.5	47.93	54	-6.07	-	-	307	307	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 MODE: 242-Tones, RU index 62

BANDEDGE (HIGH CHANNEL, CH 8)

HORIZONTAL RESULT

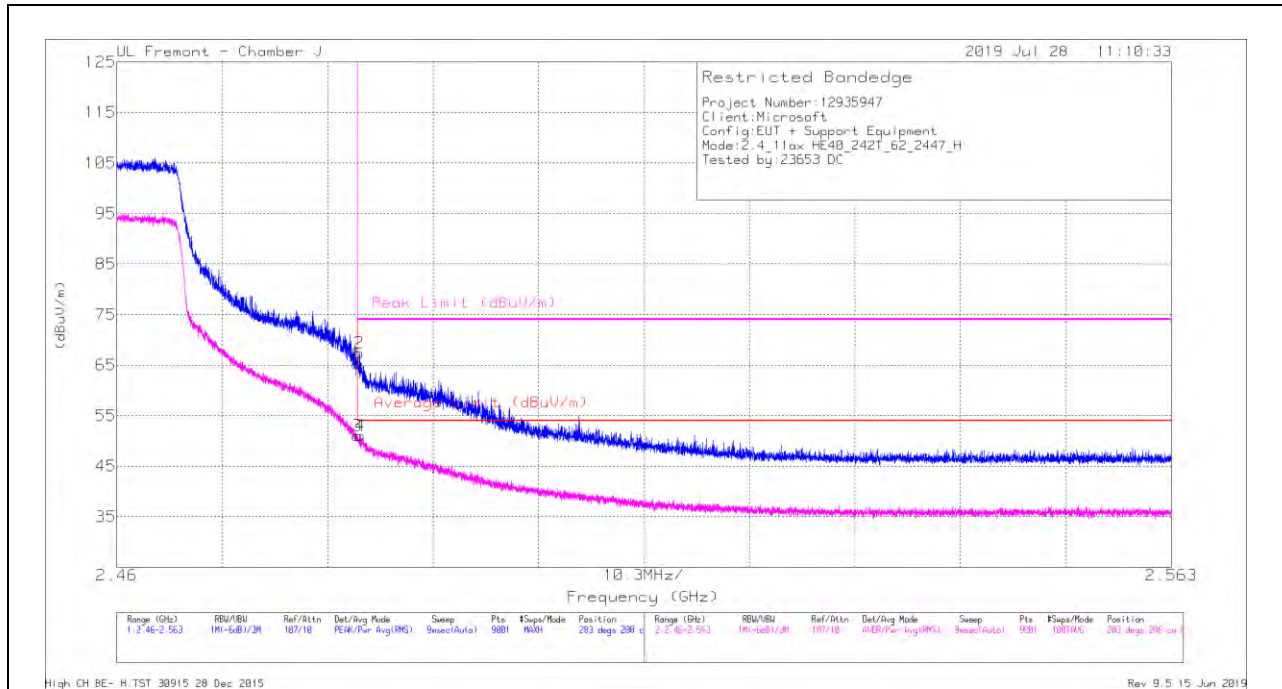


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE0189055 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	60.91	Pk	29.9	-25.5	65.31	-	-	74	-8.69	283	288	H
2	* 2.48368	63.04	Pk	29.9	-25.5	67.44	-	-	74	-6.56	283	288	H
3	* 2.48351	46.66	RMS	29.9	-25.5	51.06	54	-2.94	-	-	283	288	H
4	* 2.48383	46.66	RMS	29.9	-25.5	51.06	54	-2.94	-	-	283	288	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

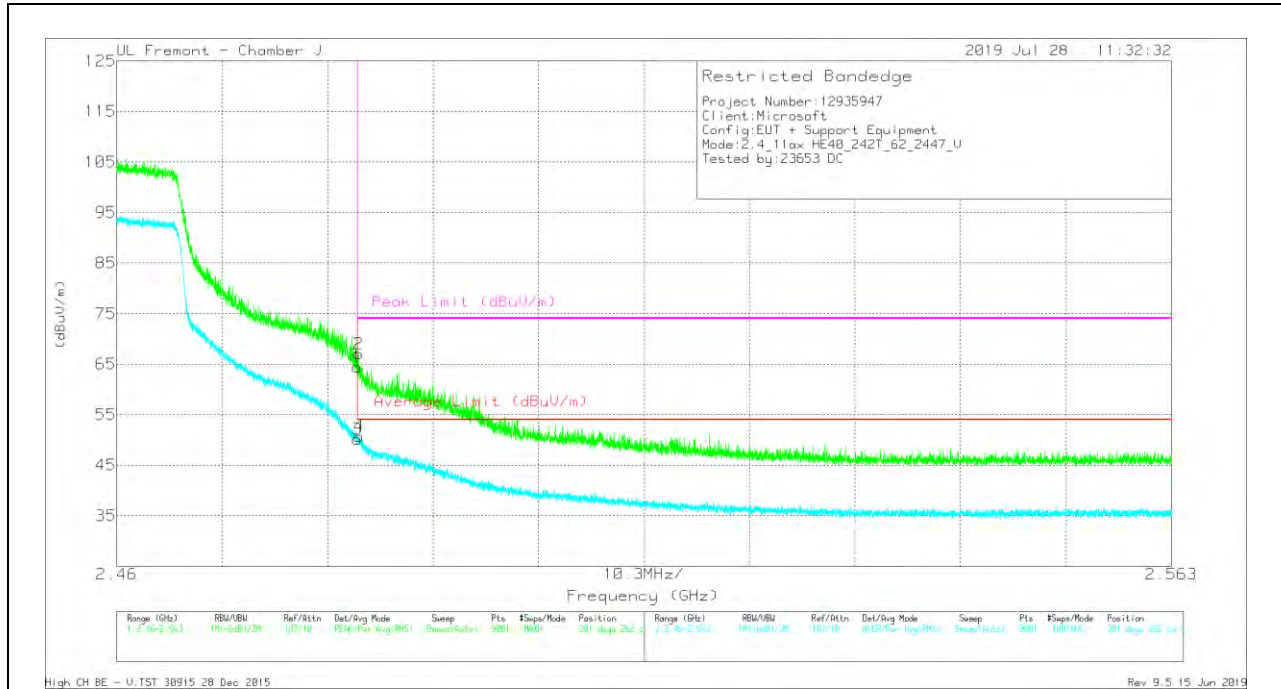

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF PRE018905 5 (dB/m)	Amp/CbI/Filt r/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	60.09	Pk	29.9	-25.5	64.49	-	-	74	-9.51	301	262	V
2	* 2.4836	62.6	Pk	29.9	-25.5	67	-	-	74	-7	301	262	V
3	* 2.48351	45.76	RMS	29.9	-25.5	50.16	54	-3.84	-	-	301	262	V
4	* 2.48366	46.25	RMS	29.9	-25.5	50.65	54	-3.35	-	-	301	262	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection