
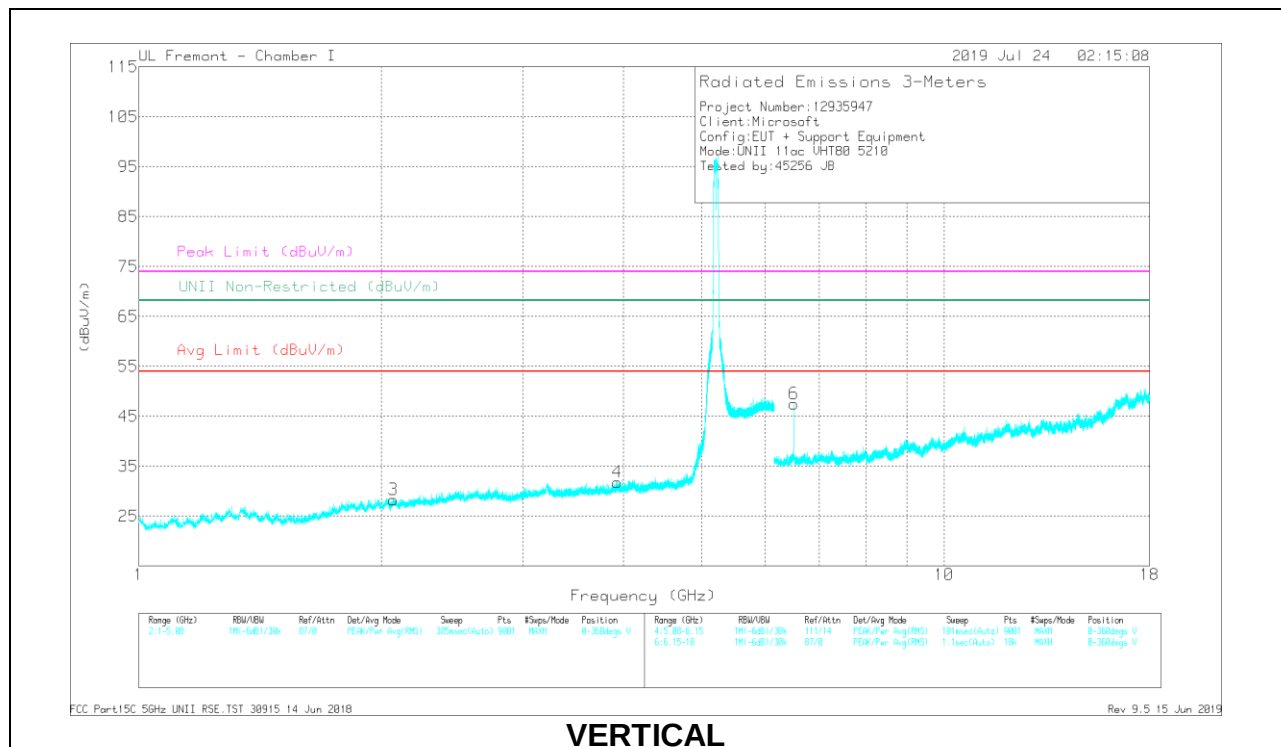


HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

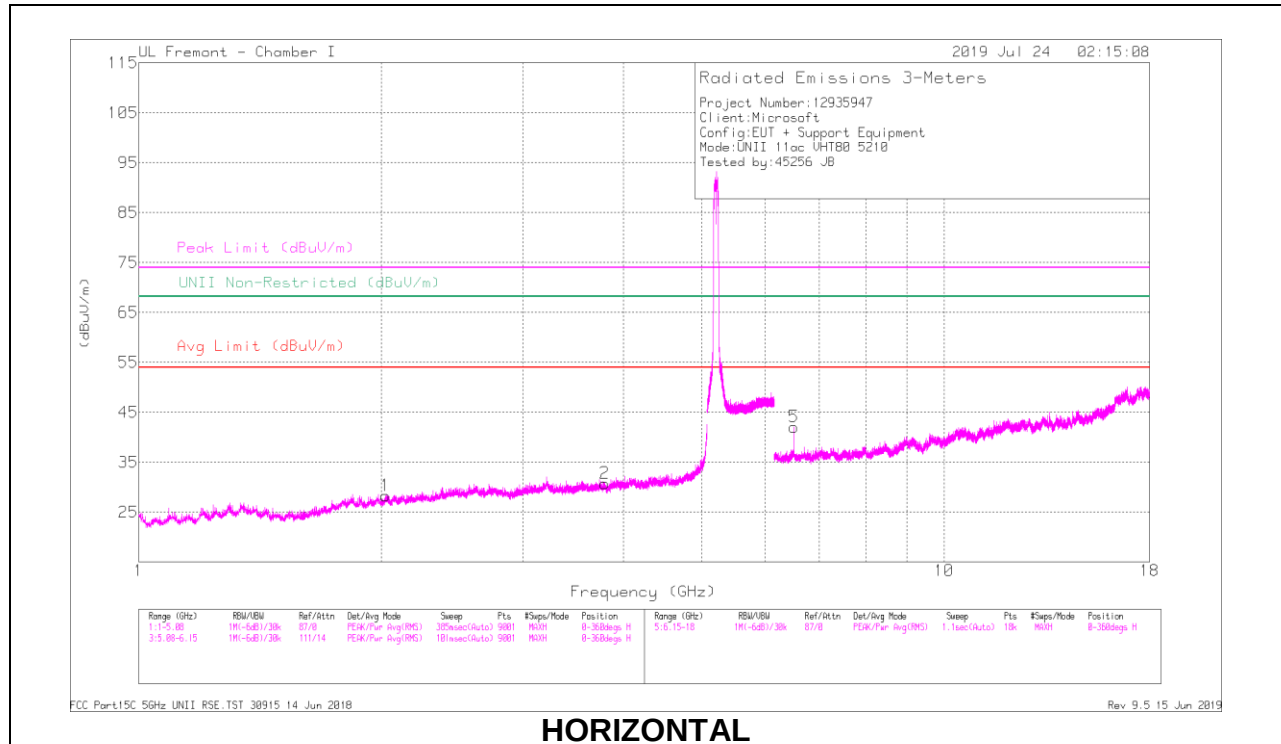

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Tilt2 (dBm)	AmpCofRforPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
2	* 3.78878	34.74	PK-U	32.9	-29.6	0	38.04	-	-	74	-35.96	-	-	275	123	H
	* 3.78859	25.69	ADR	32.9	-29.6	0	28.99	54	-25.01	-	-	-	-	275	123	H
1	2.02567	36.8	PK-U	31	-32.1	0	35.7	-	-	-	-	68.2	-32.5	306	185	H
4	* 3.9327	33.78	PK-U	33.3	-28.8	0	38.28	-	-	74	-35.72	-	-	222	181	V
	* 3.92961	24.12	ADR	33.3	-28.8	0	28.62	54	-25.38	-	-	-	-	222	181	V
3	2.07	36.2	PK-U	31.1	-32.2	0	35.1	-	-	-	-	68.2	-33.1	222	209	V
5	6.5124	31.1	PK-U	35.6	-20.6	0	46.1	-	-	-	-	68.2	-22.1	204	118	H
6	6.51256	35.94	PK-U	35.6	-20.6	0	50.94	-	-	-	-	68.2	-17.26	221	241	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.5. TX ABOVE 1 GHz 802.11ac VHT160 MODE IN THE 5.2 GHz BAND

2TX Antenna 1 + Antenna 2 SDM MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

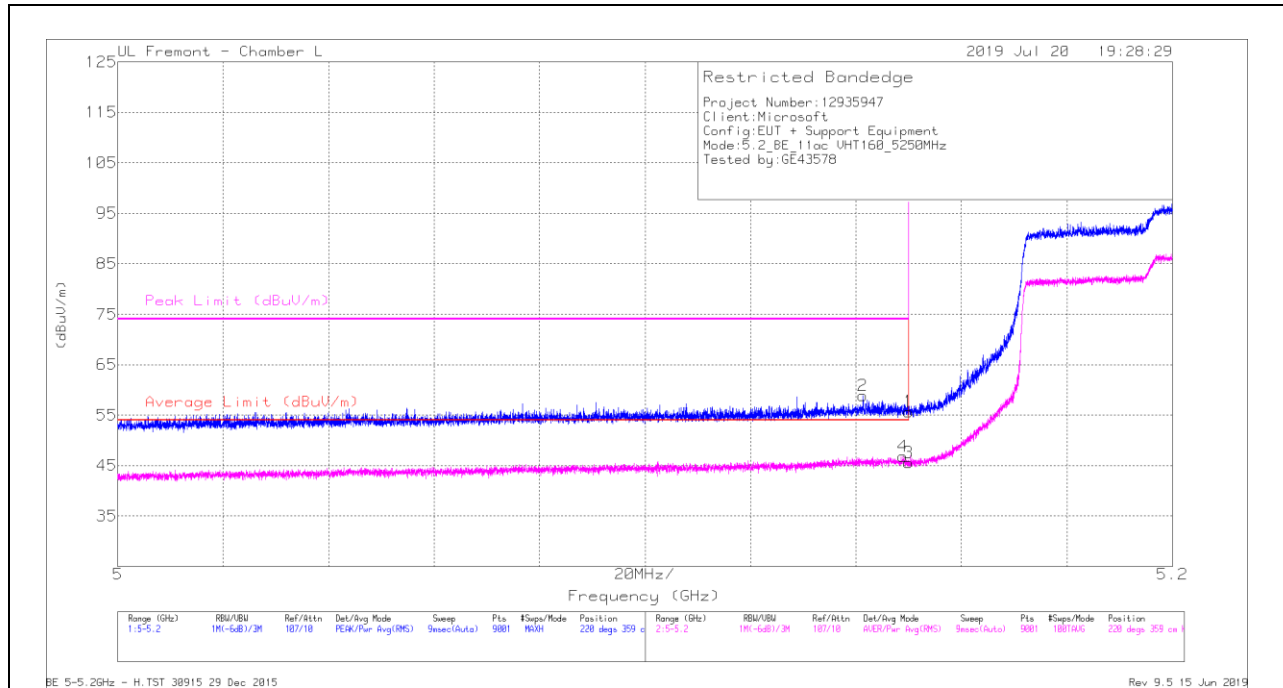


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Y120 (dBm)	AmplCdb/Fit/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Dega)	Height (cm)	Polarity
1	* 5.15	38.89	Pk	34.3	-17.5	0	55.69	-	-	74	-18.31	220	359	H
2	* 5.14131	42.1	Pk	34.3	-17.5	0	58.9	-	-	74	-15.1	220	359	H
3	* 5.15	28.75	RMS	34.3	-17.5	0	45.55	54	-8.45	-	-	220	359	H
4	* 5.14884	29.97	RMS	34.3	-17.5	0	46.77	54	-7.23	-	-	220	359	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

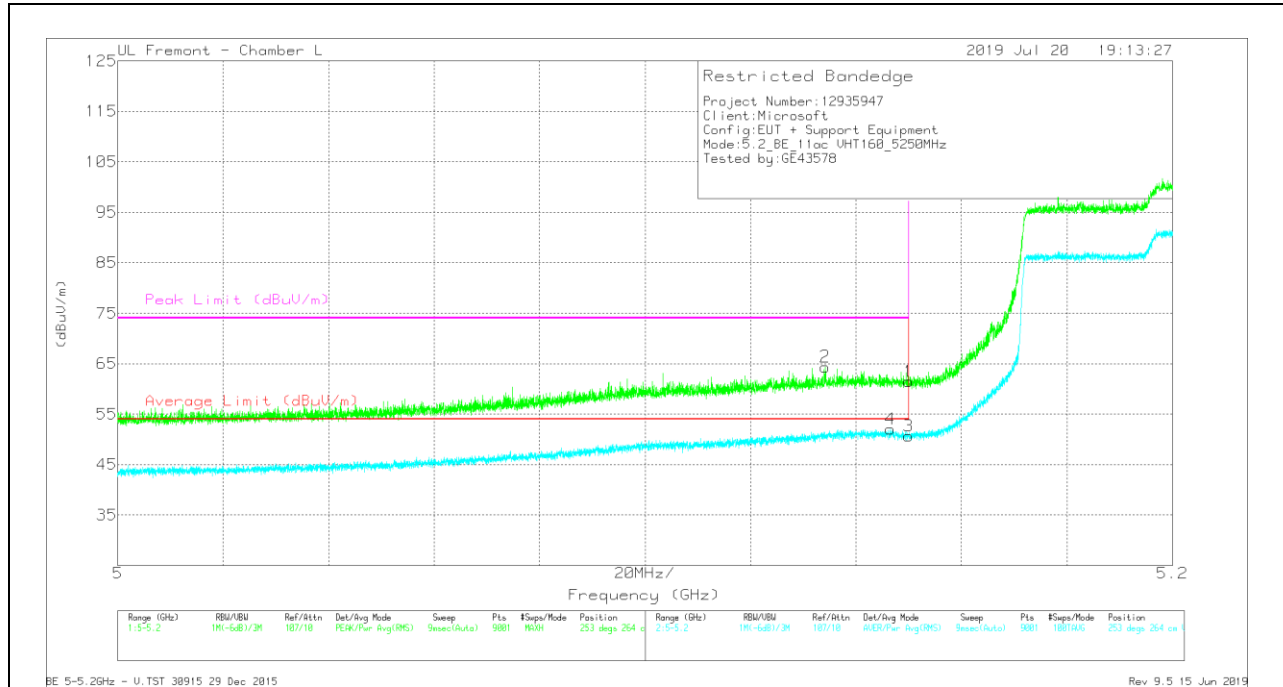

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Y120 (dBm)	AmplCbl/Filtz/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	44.61	Pk	34.3	-17.5	0	61.41	-	-	74	-12.59	253	264	V
2	* 5.13411	47.48	Pk	34.4	-17.5	0	64.38	-	-	74	-9.62	253	264	V
3	* 5.15	33.85	RMS	34.3	-17.5	0	50.65	54	-3.35	-	-	253	264	V
4	* 5.14647	35.19	RMS	34.3	-17.5	0	51.99	54	-2.01	-	-	253	264	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

RESULTS

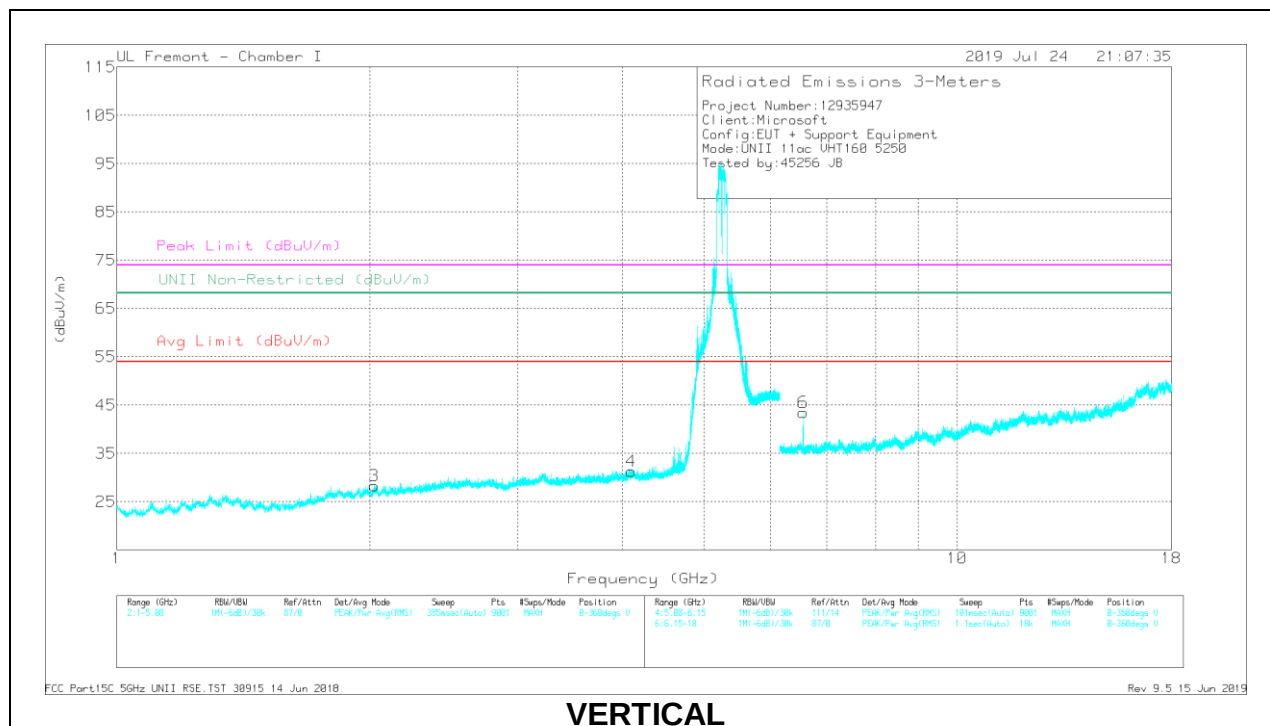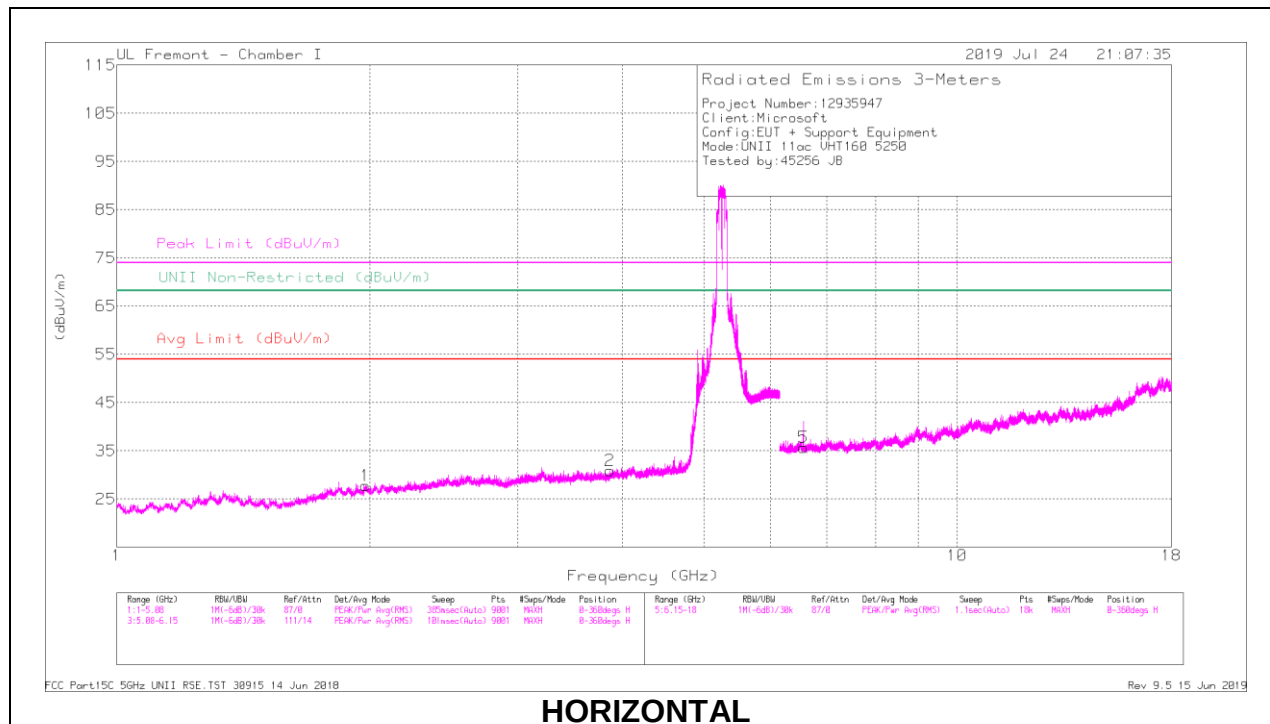

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Tilt2 (dBm)	AmpCorrForPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Deg)	Height (cm)	Polarity
2	* 3.86236	33.39	PK-U	33	-29.3	0	37.09	-	-	74	-36.91	-	-	100	117	H
	* 3.86438	24.74	ADR	33	-29.2	0	28.54	54	-25.46	-	-	-	-	100	117	H
1	1.97863	36.47	PK-U	31	-32.4	0	35.07	-	-	-	-	68.2	-33.13	71	168	H
4	* 4.09469	34.61	PK-U	33.3	-28.2	0	39.71	-	-	74	-34.29	-	-	253	157	V
	* 4.09547	24.28	ADR	33.3	-28.1	0	29.48	54	-24.52	-	-	-	-	253	157	V
3	2.02756	35.8	PK-U	31	-32.1	0	34.7	-	-	-	-	68.2	-33.5	138	168	V
5	6.56405	29.62	PK-U	35.6	-21.6	0	43.62	-	-	-	-	68.2	-24.58	352	145	H
6	6.56248	35.63	PK-U	35.7	-21.6	0	49.73	-	-	-	-	68.2	-18.47	220	228	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.6. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

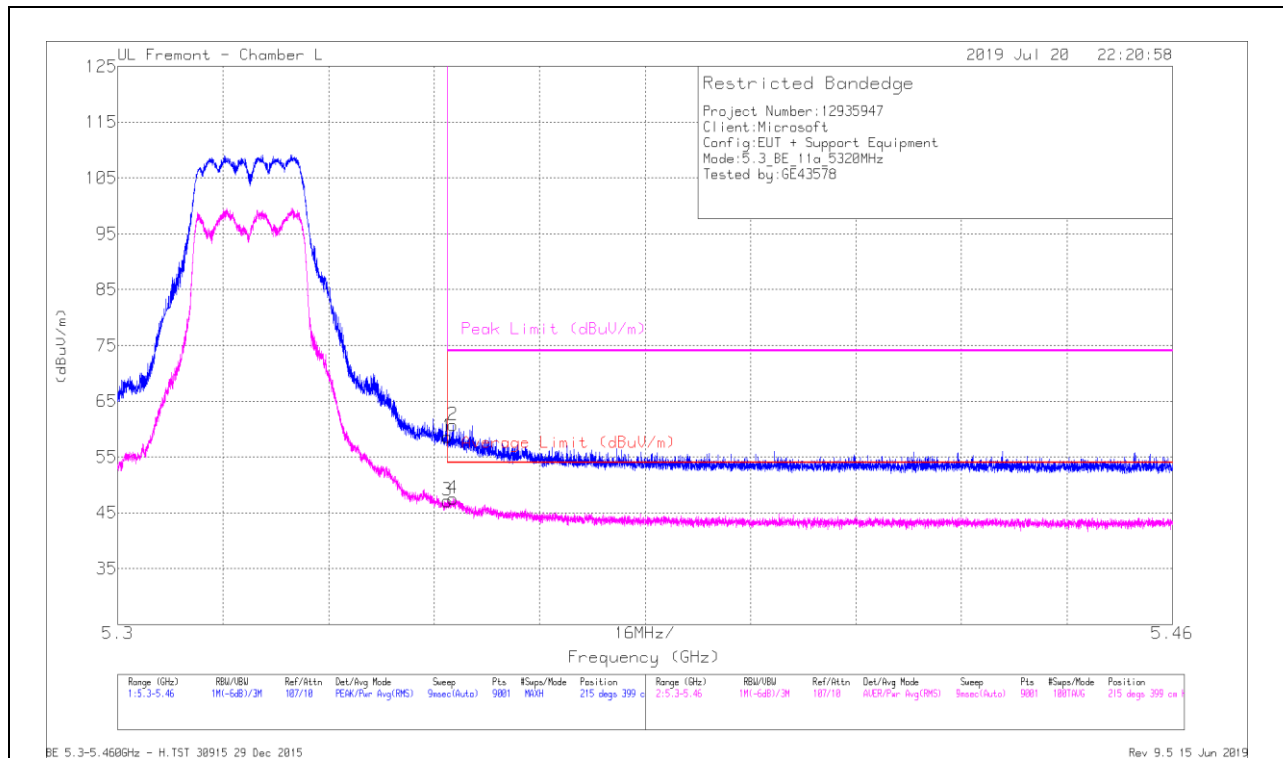


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dBm)	AmplChlFilt/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.35001	41.17	Pk	34.5	-17.1	0	58.57	-	-	74	-15.43	215	399	H
2	*5.35088	43.34	Pk	34.5	-17.1	0	60.74	-	-	74	-13.26	215	399	H
3	*5.35001	29.64	RMS	34.5	-17.1	0	47.13	54	-6.87	-	-	215	399	H
4	*5.35085	30.11	RMS	34.5	-17.1	0	47.6	54	-6.4	-	-	215	399	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

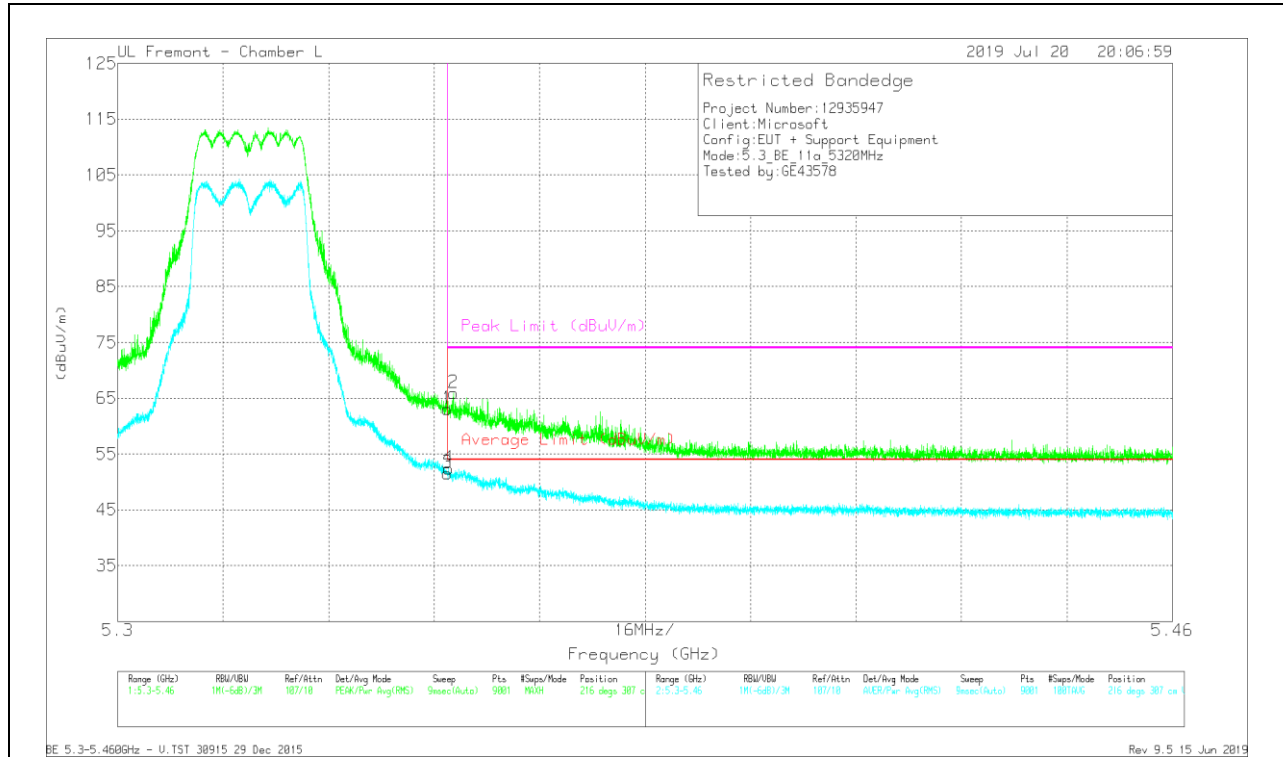

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dBm)	Amp/Clk/Pwr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	*5.35001	45.63	Pk	34.5	-17.1	0	63.03	-	-	74	-10.97	216	307	V
2	*5.35097	48.52	Pk	34.5	-17.1	0	65.92	-	-	74	-8.08	216	307	V
3	*5.35001	34.08	RMS	34.5	-17.1	0	51.57	54	-2.43	-	-	216	307	V
4	*5.35021	34.91	RMS	34.5	-17.1	0	52.4	54	-1.6	-	-	216	307	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

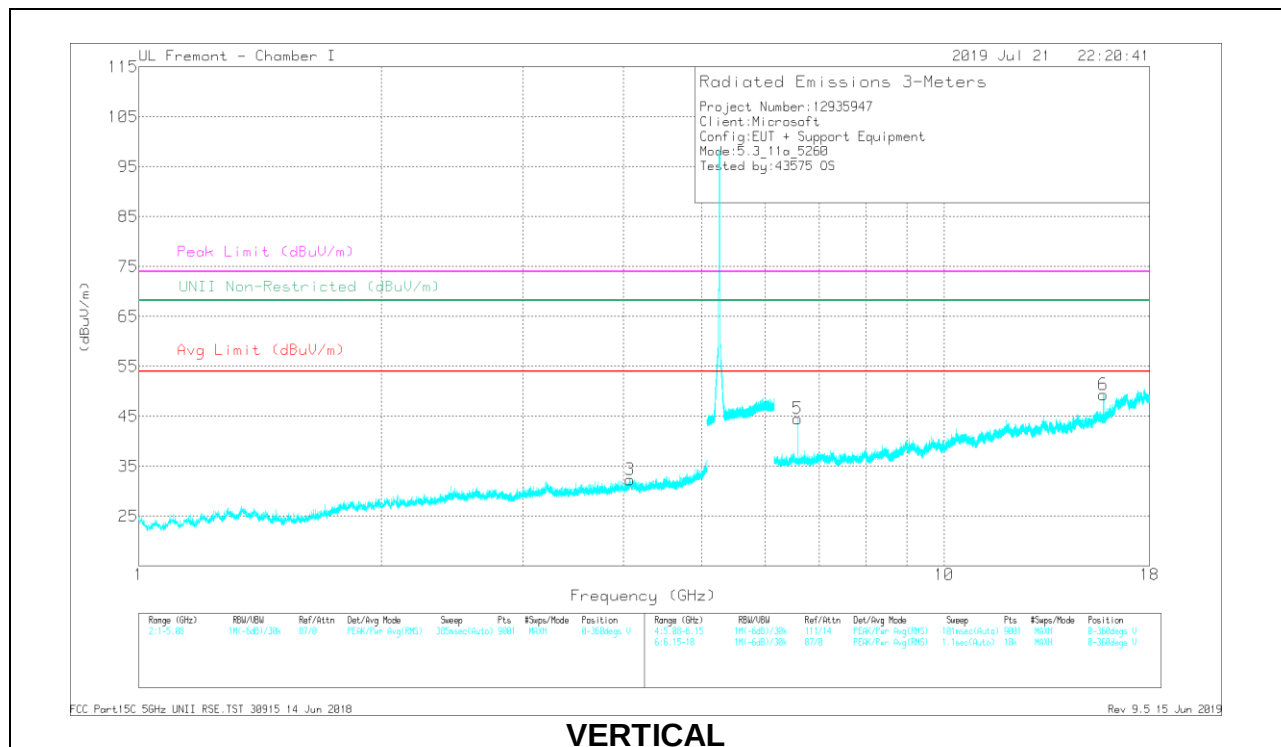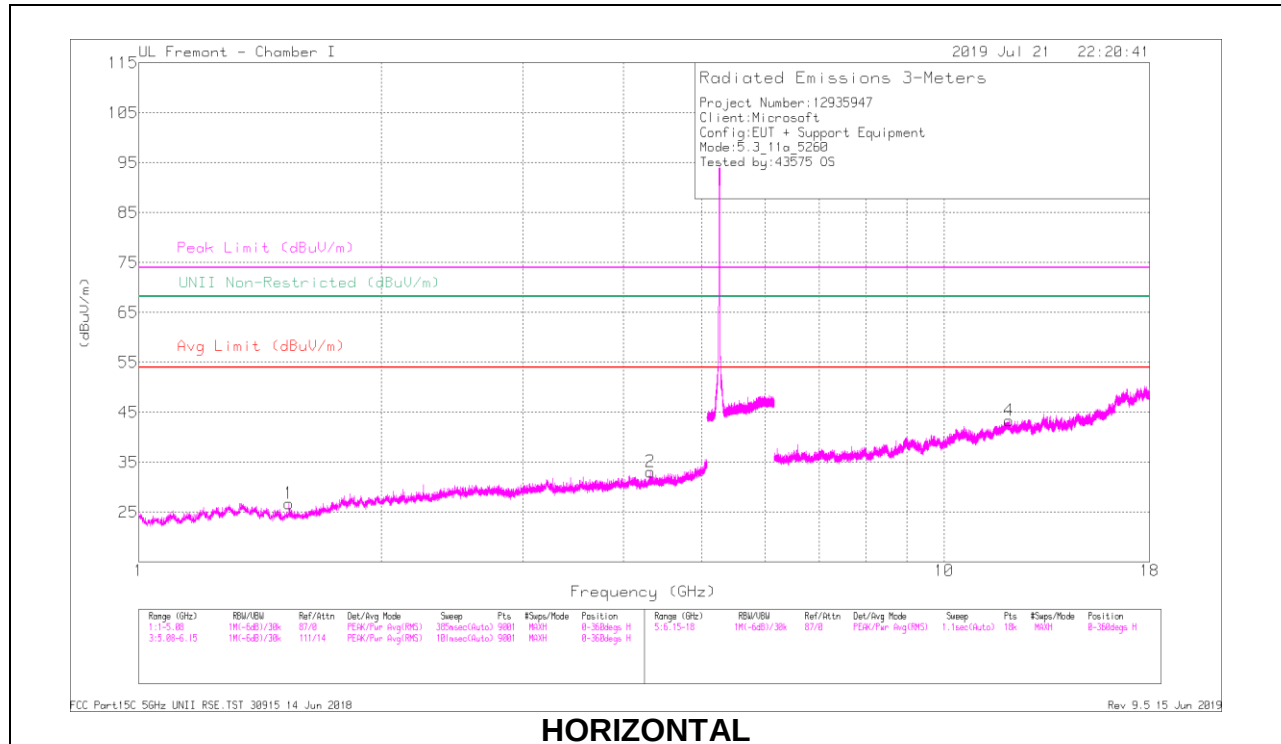

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp CMR PinPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.31714	33.92	PK-U	33.5	-27.9	0	39.52	-	-	74	-34.48	-	-	224	136	H
	* 4.31562	24.06	ADR	33.5	-27.9	0	29.66	54	-24.34	-	-	-	-	224	136	H
1	* 1.53809	39.43	PK-U	28.1	-33.3	0	34.23	-	-	74	-39.77	-	-	137	164	H
	* 1.53603	30.04	ADR	28.1	-33.3	0	24.84	54	-29.16	-	-	-	-	137	164	H
3	* 4.0746	33.34	PK-U	33.4	-28.6	0	38.14	-	-	74	-35.86	-	-	321	191	V
	* 4.07504	24.96	ADR	33.4	-28.6	0	29.76	54	-24.24	-	-	-	-	321	191	V
4	* 12.03251	28.09	PK-U	38.8	-16.4	0	50.49	-	-	74	-23.51	-	-	117	109	H
	* 12.03368	18.52	ADR	38.8	-16.4	0	40.92	54	-13.08	-	-	-	-	117	109	H
6	* 15.77642	35.52	PK-U	40	-14.1	0	61.42	-	-	74	-12.58	-	-	211	281	V
	* 15.77592	24.21	ADR	40	-14.1	0	50.11	54	-3.89	-	-	-	-	211	281	V
5	6.576	34.44	PK-U	35.7	-21.9	0	48.24	-	-	-	-	68.2	-19.96	220	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

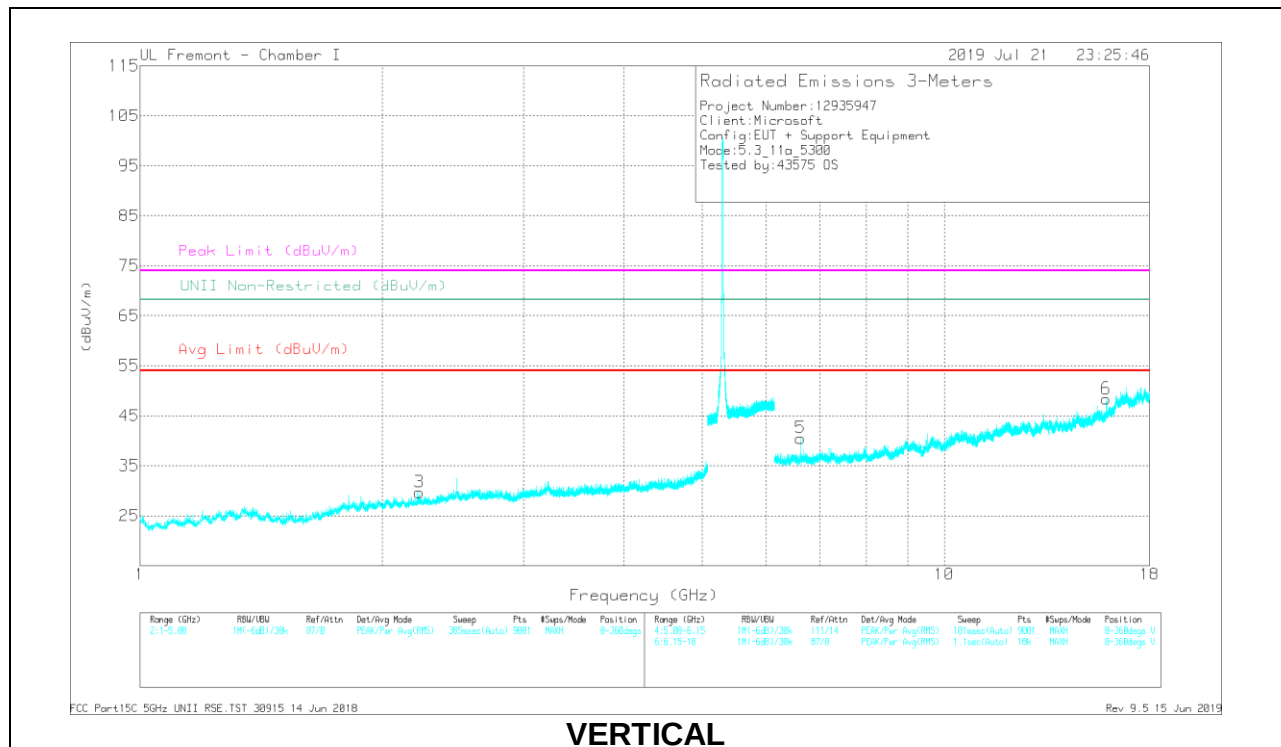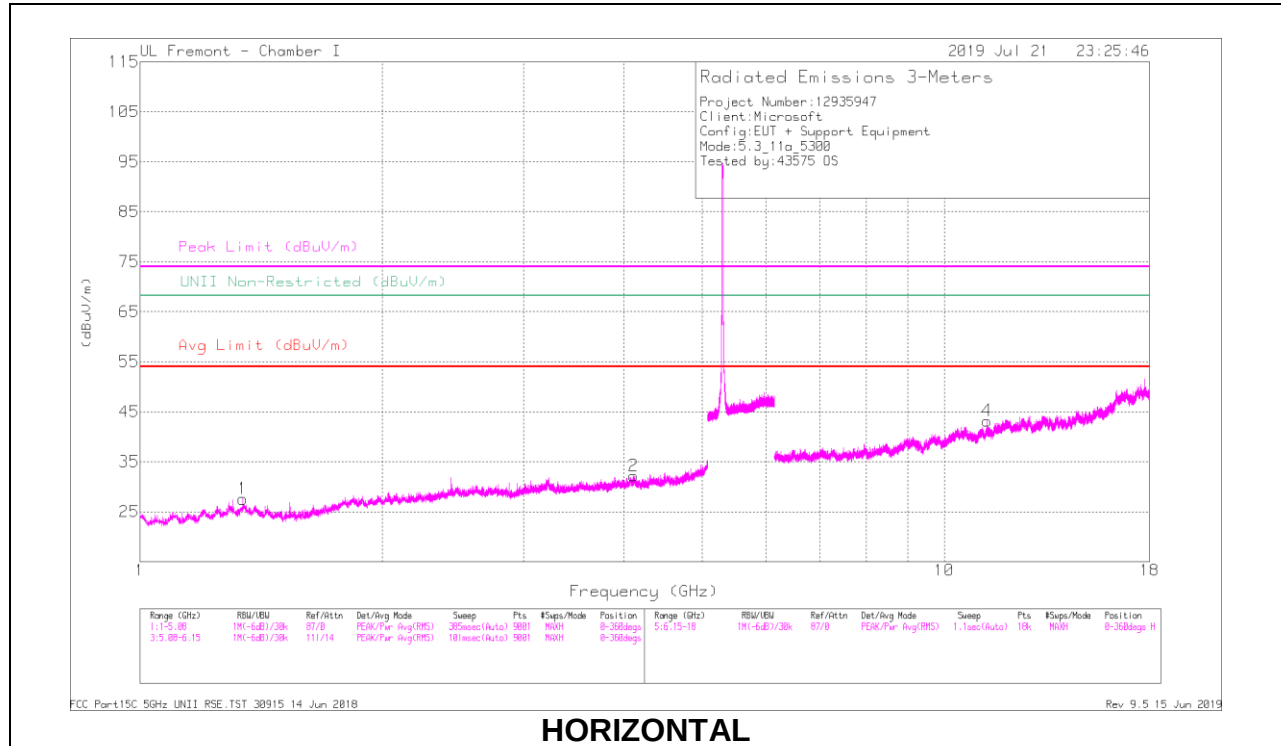

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp CMR PinPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.11137	33.21	PK-U	33.3	-27.7	0	38.81	-	-	74	-35.19	-	-	250	125	H
	* 4.11062	23.73	ADR	33.3	-27.8	0	29.23	54	-24.77	-	-	-	-	250	125	H
1	* 1.34213	37.21	PK-U	29.5	-33.7	0	33.01	-	-	74	-40.99	-	-	215	145	H
	* 1.3421	28.51	ADR	29.5	-33.7	0	24.31	54	-29.69	-	-	-	-	215	145	H
3	* 2.2233	36.36	PK-U	31.4	-31.9	0	35.86	-	-	74	-38.14	-	-	262	143	V
	* 2.22555	27.01	ADR	31.5	-31.9	0	26.61	54	-27.39	-	-	-	-	262	143	V
4	* 11.30779	28.29	PK-U	38	-16.4	0	49.89	-	-	74	-24.11	-	-	146	190	H
	* 11.30734	17.68	ADR	38	-16.4	0	39.28	54	-14.72	-	-	-	-	146	190	H
6	* 15.8968	33.27	PK-U	40.1	-13.5	0	59.87	-	-	74	-14.13	-	-	182	389	V
	* 15.89663	21.62	ADR	40.1	-13.5	0	48.23	54	-5.77	-	-	-	-	182	389	V
5	6.6251	33.69	PK-U	35.6	-21.9	0	47.39	-	-	-	-	68.2	-20.81	166	249	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

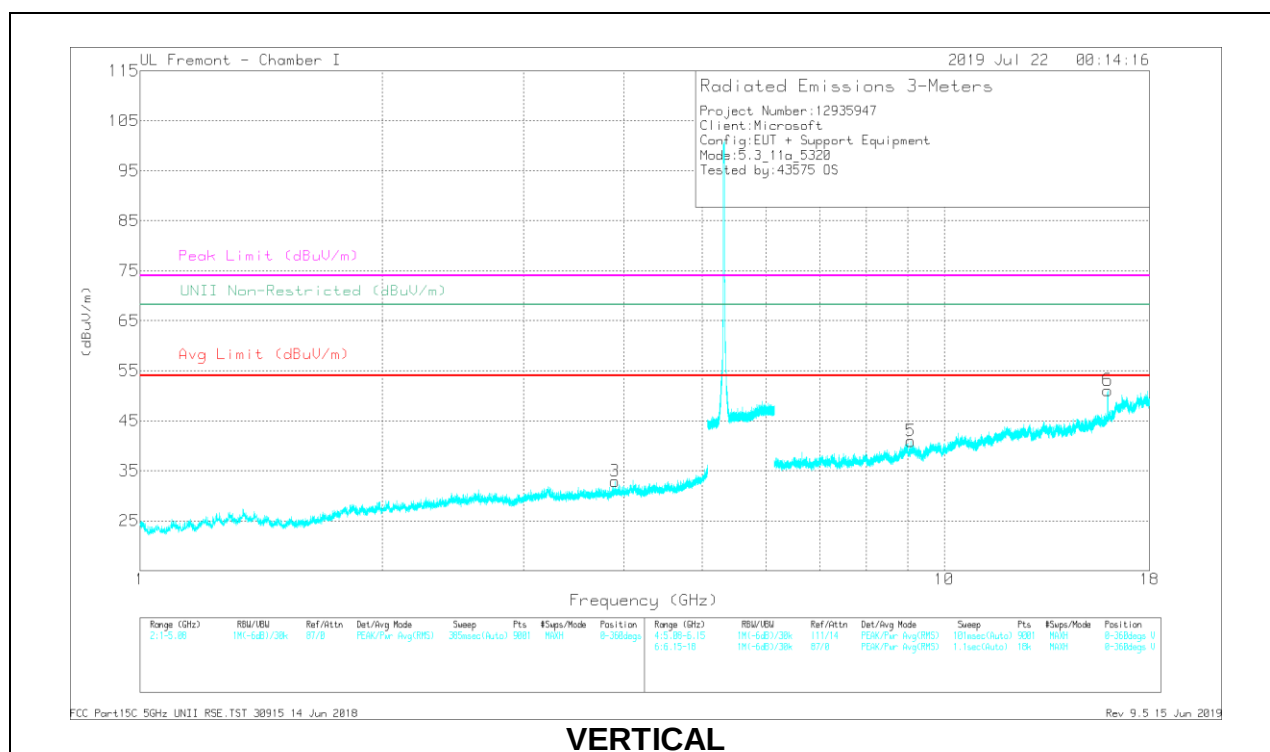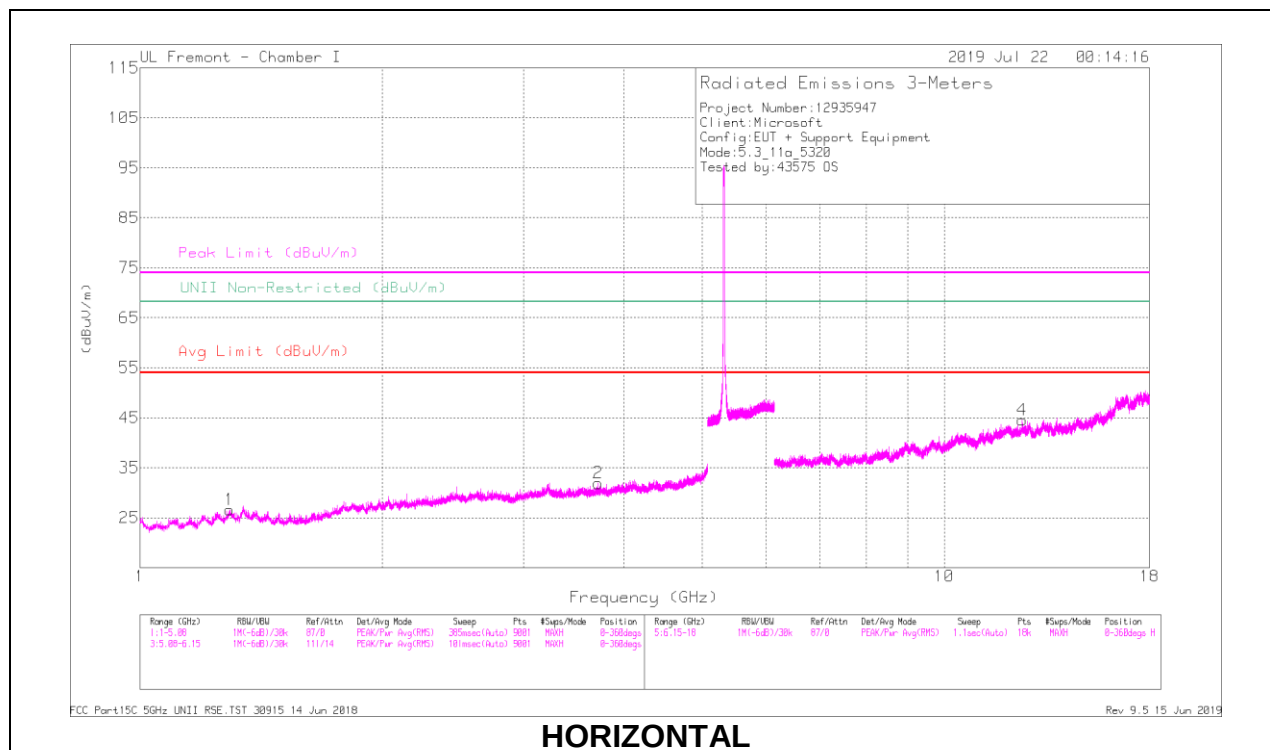

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp CMF in Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.7105	34.27	PK-U	33	-29.2	0	38.07	-	-	74	-35.93	-	-	0	125	H
	* 3.71029	24.84	ADR	33	-29.2	0	28.64	54	-25.36	-	-	-	-	0	125	H
1	* 1.29225	38.08	PK-U	29.4	-33.8	0	33.68	-	-	74	-40.32	-	-	116	137	H
	* 1.29002	28.86	ADR	29.4	-33.8	0	24.46	54	-29.54	-	-	-	-	116	137	H
3	* 3.89104	34.12	PK-U	33.1	-28.7	0	38.52	-	-	74	-35.48	-	-	214	133	V
	* 3.89154	24.87	ADR	33.1	-28.7	0	29.27	54	-24.73	-	-	-	-	214	133	V
4	* 12.50385	27.09	PK-U	39.1	-16.1	0	50.09	-	-	74	-23.91	-	-	167	207	H
	* 12.5017	17.53	ADR	39.1	-16.1	0	40.53	54	-13.47	-	-	-	-	167	207	H
6	* 15.96765	32.81	PK-U	40.2	-13.2	0	59.81	-	-	74	-14.19	-	-	185	351	V
	* 15.96731	23.5	ADR	40.2	-13.2	0	50.5	54	-3.5	-	-	-	-	185	351	V
5	* 9.08795	28.62	PK-U	36.3	-18.1	0	46.82	-	-	74	-27.18	-	-	242	161	V
	* 9.08634	18.99	ADR	36.3	-18.1	0	37.19	54	-16.81	-	-	-	-	242	161	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.7. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHZ BAND

2TX Antenna 1 + Antenna 2 SDM MODE

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

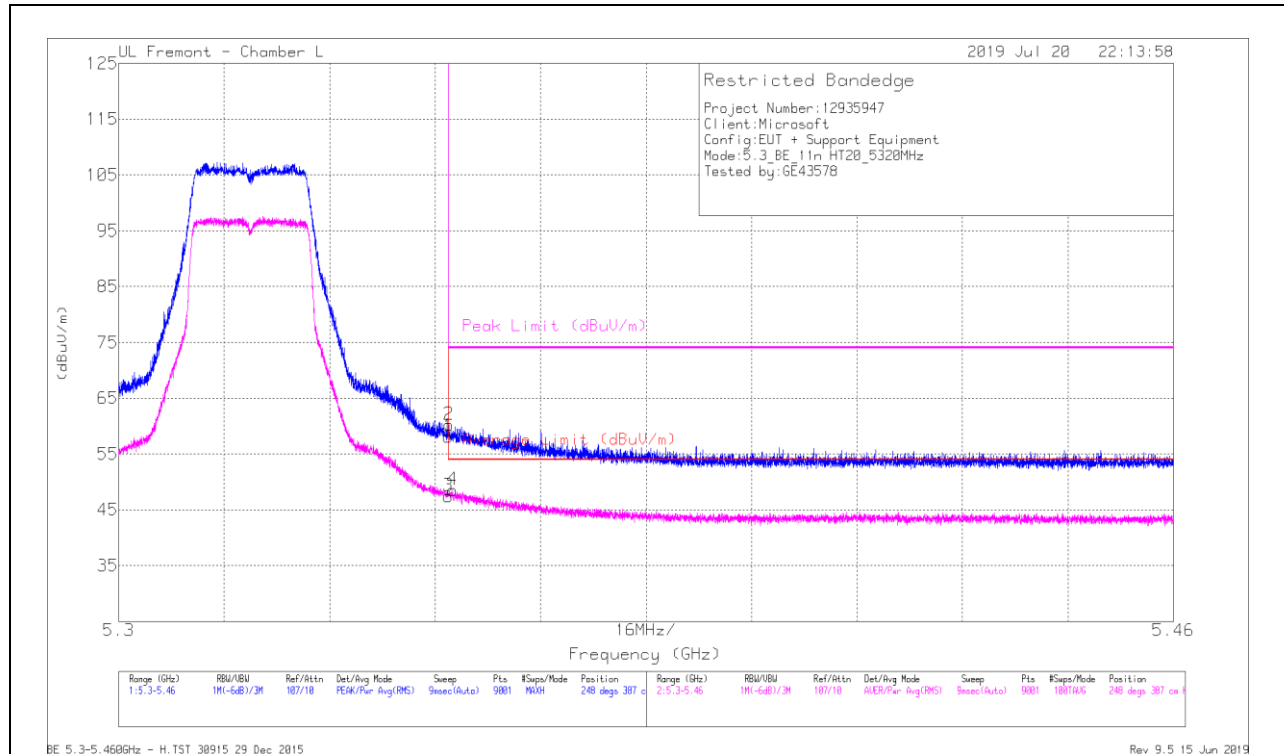


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Y120 (dBm)	Ampl/Cbl/Filtz/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	40.76	Pk	34.5	-17.1	0	58.16	-	-	74	-15.84	248	387	H
2	* 5.3501	42.85	Pk	34.5	-17.1	0	60.25	-	-	74	-13.75	248	387	H
3	* 5.35001	30.08	RMS	34.5	-17.1	0	47.48	54	-6.52	-	-	248	387	H
4	* 5.35065	31.1	RMS	34.5	-17.1	0	48.5	54	-5.5	-	-	248	387	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

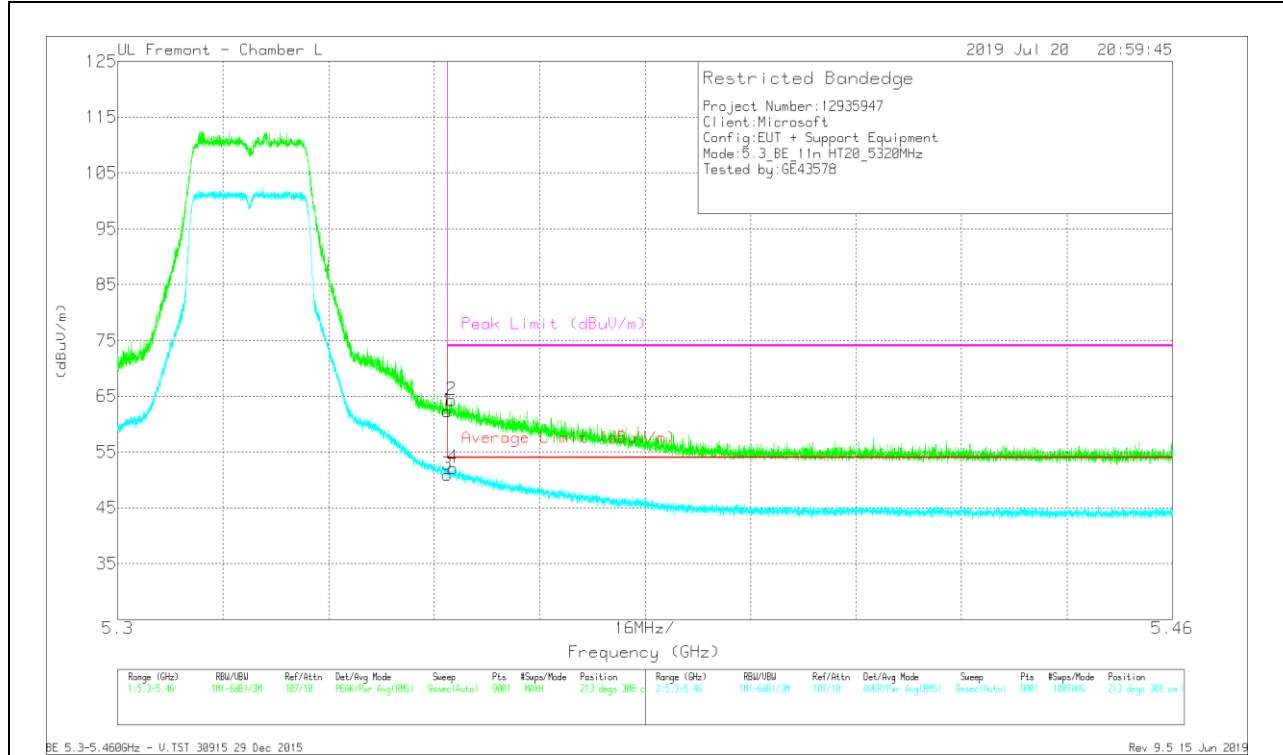

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dBm)	AmpClkRfPwr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.35001	44.93	Pk	34.5	-17.1	0	62.33	-	-	74	-11.67	213	308	V
2	*5.35063	46.87	Pk	34.5	-17.1	0	64.27	-	-	74	-9.73	213	308	V
3	*5.35001	33.48	RMS	34.5	-17.1	0	50.88	54	-3.12	-	-	213	308	V
4	*5.35083	34.72	RMS	34.5	-17.1	0	52.12	54	-1.88	-	-	213	308	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

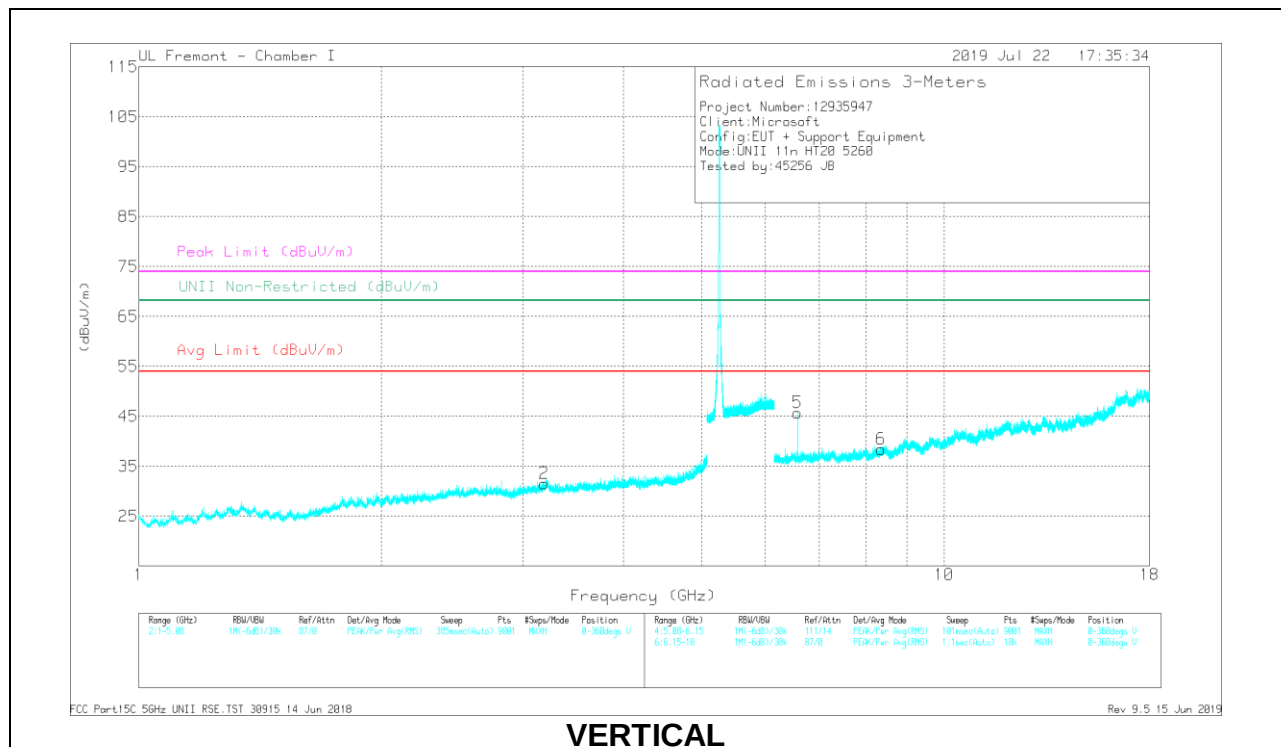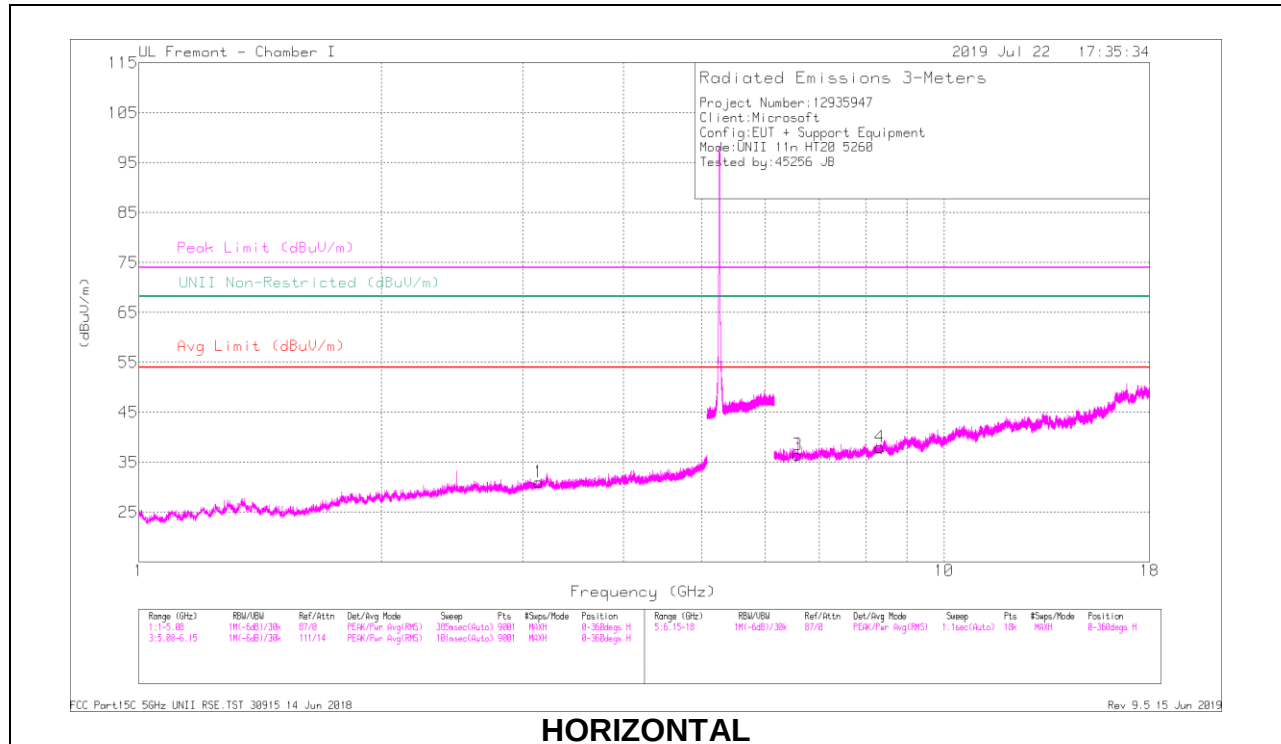

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Tilt2 (dBm)	AmpCorrForPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
1	3.14027	35.78	PK-U	32.7	-30.6	0	37.88	-	-	-	-	68.2	-30.32	146	386	H
	3.14008	26.75	ADR	32.7	-30.6	0	28.85	-	-	-	-	-	-	146	386	H
2	3.19111	36.27	PK-U	32.9	-29.7	0	39.47	-	-	-	-	68.2	-28.73	68	179	V
	3.19092	25.86	ADR	32.9	-29.7	0	29.06	-	-	-	-	-	-	68	179	V
5	6.57704	30.12	PK-U	35.7	-22	0	43.82	-	-	-	-	68.2	-24.38	162	195	H
4	* 8.32501	29.28	PK-U	35.8	-19.9	0	45.18	-	-	74	-28.82	-	-	14	352	H
	* 8.32388	19.61	ADR	35.8	-19.9	0	35.51	54	-18.49	-	-	-	-	14	352	H
3	6.57508	38.19	PK-U	35.7	-21.9	0	51.99	-	-	-	-	68.2	-16.21	214	232	V
6	* 8.35926	29.65	PK-U	35.8	-19.9	0	45.55	-	-	74	-28.45	-	-	132	369	V
	* 8.35813	19.72	ADR	35.8	-19.9	0	35.72	54	-18.28	-	-	-	-	132	369	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

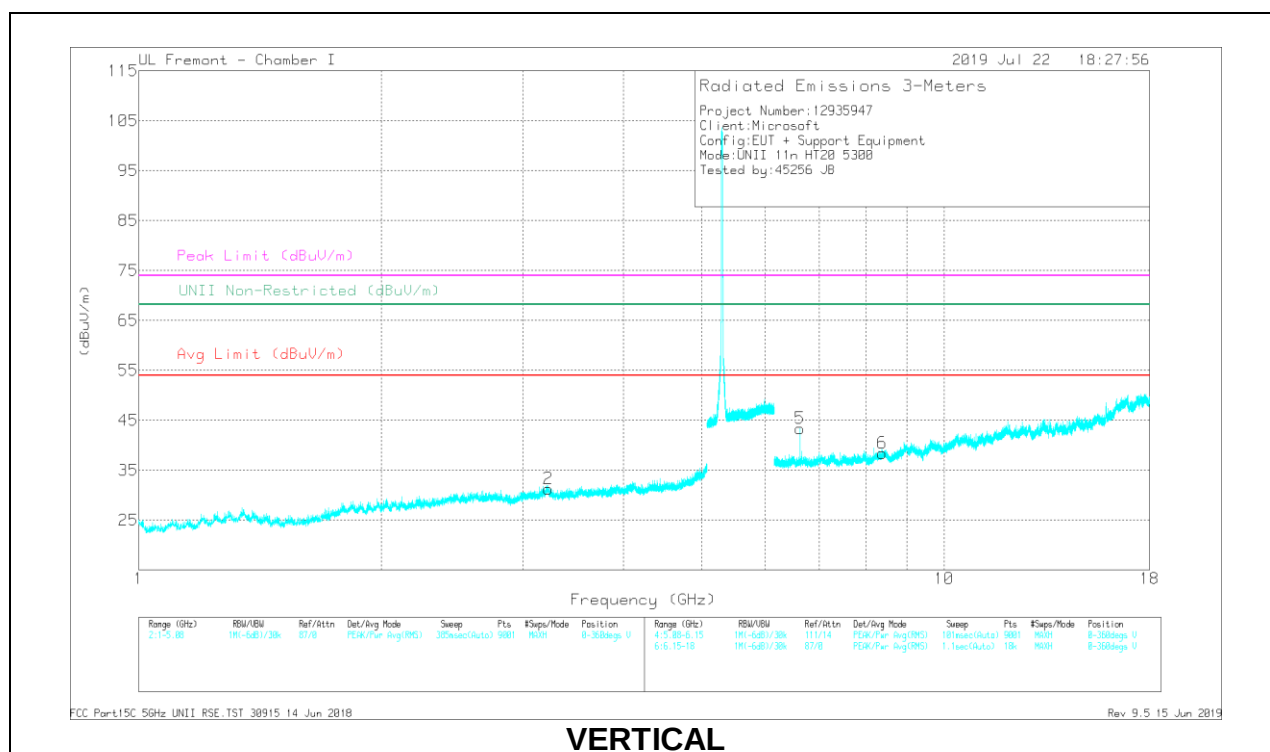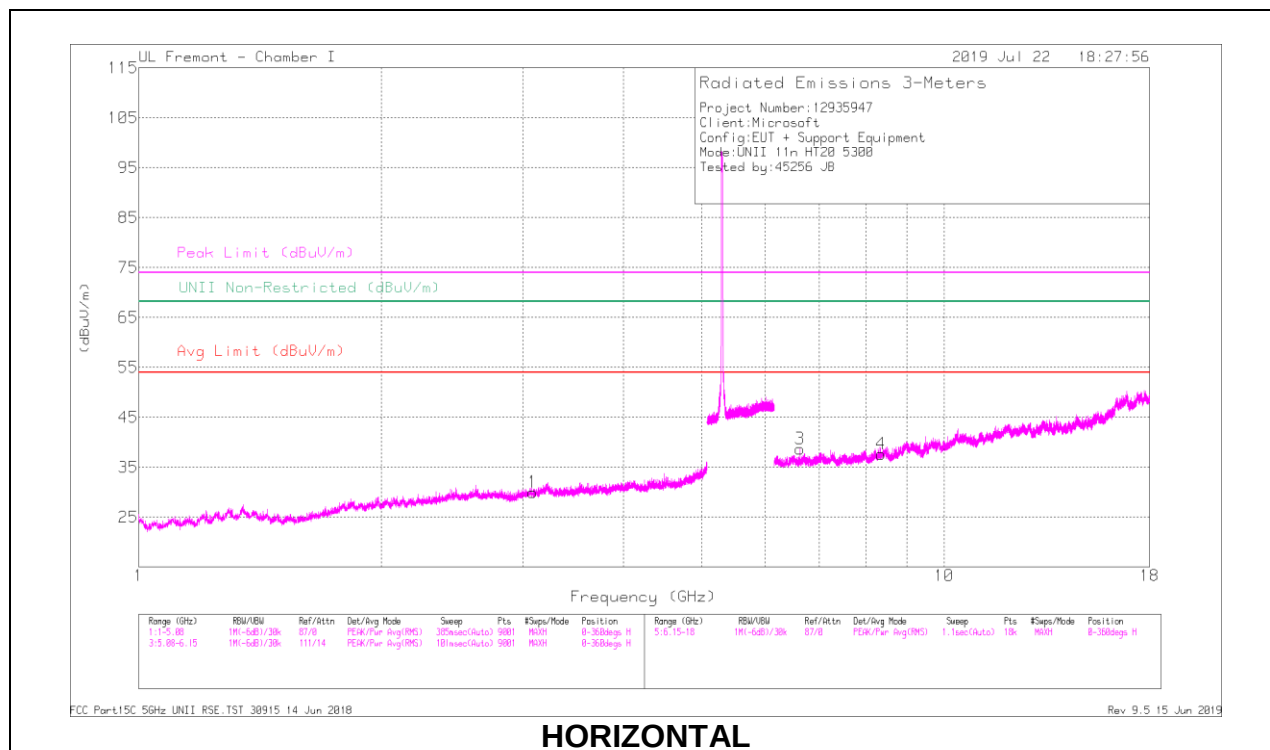

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Tilt2 (dBm)	AmpCofRforPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
1	3.08427	35.36	PK-U	32.7	-30.6	0	37.46	-	-	-	-	68.2	-30.74	299	330	H
2	3.22465	35.24	PK-U	33.2	-29.9	0	38.54	-	-	-	-	68.2	-29.66	283	277	V
3	6.62499	32.59	PK-U	35.6	-22	0	46.19	-	-	-	-	68.2	-22.01	137	399	H
4	* 8.35248	29.13	PK-U	35.8	-19.8	0	45.13	-	-	74	-28.87	-	-	20	154	H
	* 8.35239	19.39	ADR	35.8	-19.8	0	35.39	54	-18.61	-	-	-	-	20	154	H
5	6.62501	34.7	PK-U	35.6	-22	0	48.3	-	-	-	-	68.2	-19.9	234	250	V
6	* 8.37512	29.51	PK-U	35.8	-19.9	0	45.41	-	-	74	-28.59	-	-	263	331	V
	* 8.37704	19.72	ADR	35.8	-19.9	0	35.62	54	-18.38	-	-	-	-	263	331	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

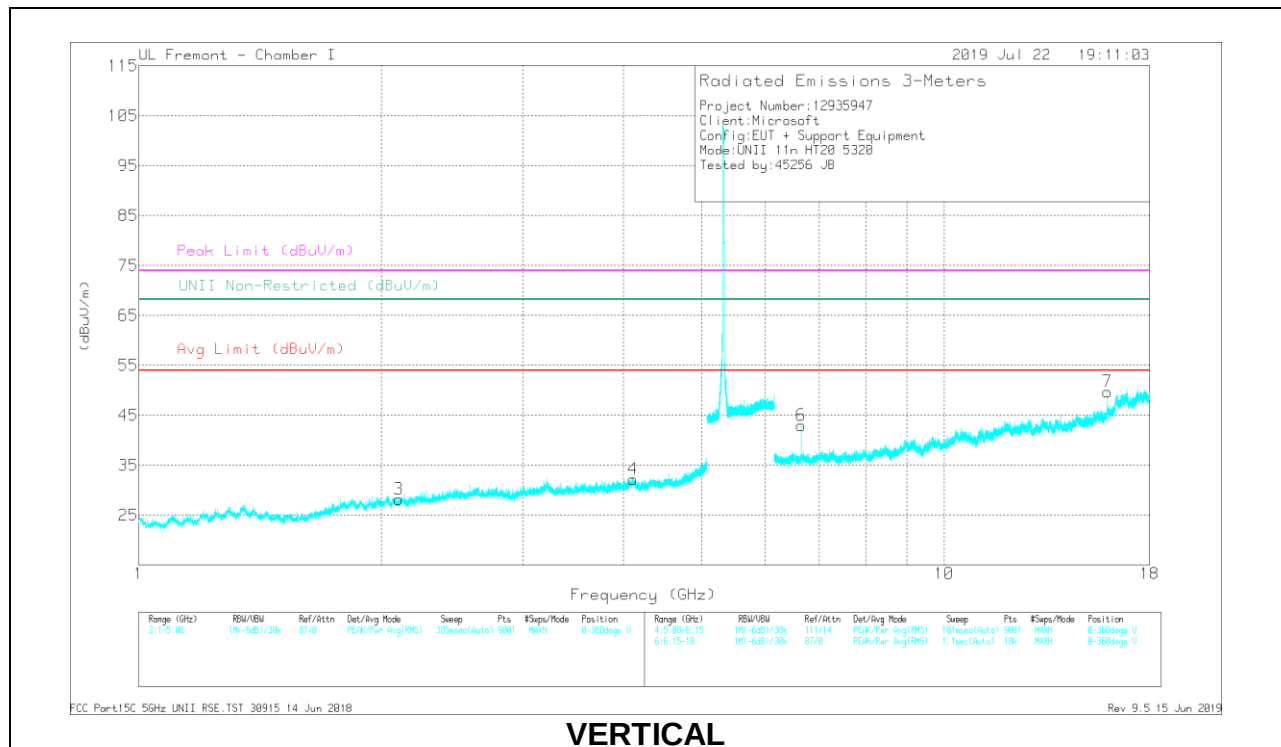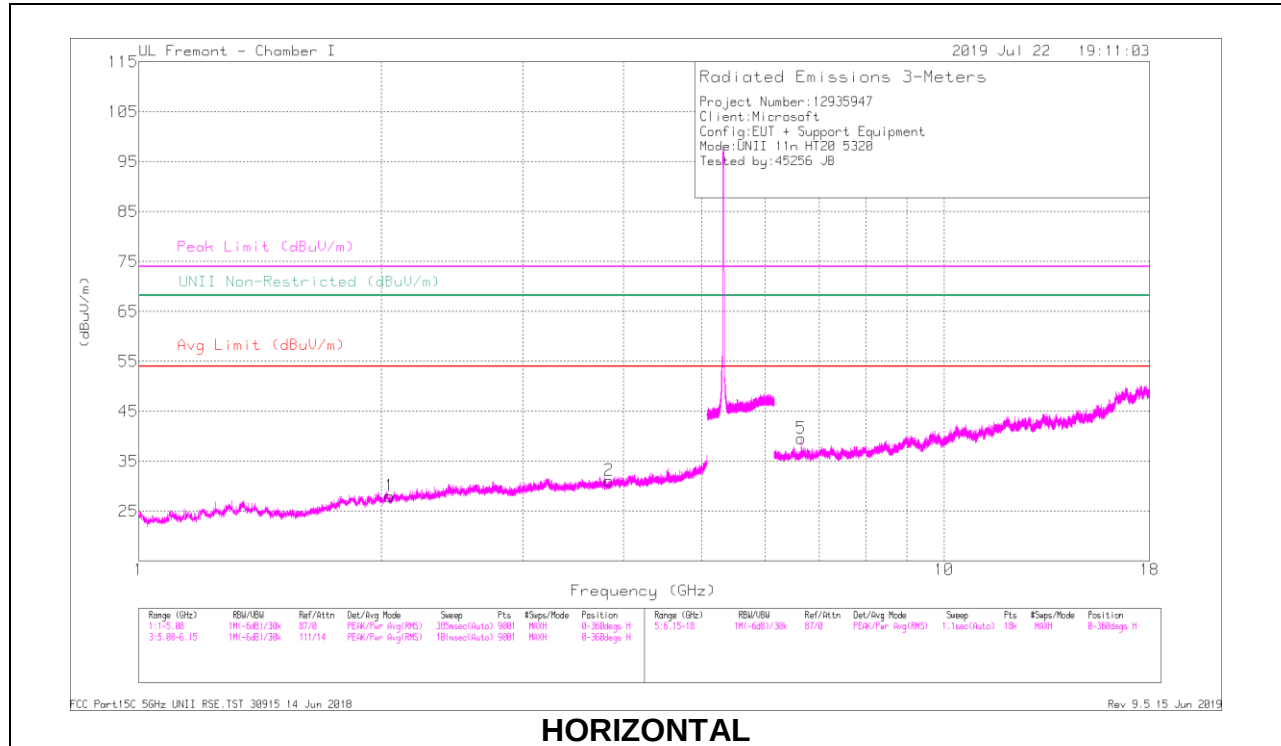

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp CMR in Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.83594	34.36	PK-U	33	-29.9	0	37.46	-	-	74	-36.54	-	-	324	187	H
	* 3.83574	25.43	ADR	33	-30	0	28.43	54	-25.57	-	-	-	-	324	187	H
1	2.04837	36.47	PK-U	31.1	-32.3	0	35.27	-	-	-	-	68.2	-32.93	326	107	H
4	* 4.10953	33.95	PK-U	33.3	-27.8	0	39.48	-	-	74	-34.52	-	-	349	330	V
	* 4.1095	24.54	ADR	33.3	-27.8	0	30.04	54	-23.96	-	-	-	-	349	330	V
3	2.10468	36.32	PK-U	31.1	-32.3	0	35.12	-	-	-	-	68.2	-33.08	133	216	V
5	6.65015	32.07	PK-U	35.6	-21.4	0	46.27	-	-	-	-	68.2	-21.93	139	390	H
7	* 15.96022	35.89	PK-U	40.2	-13.3	0	62.79	-	-	74	-11.21	-	-	219	287	V
	* 15.96027	22.36	ADR	40.2	-13.3	0	49.26	54	-4.74	-	-	-	-	219	287	V
6	6.64992	33.39	PK-U	35.6	-21.4	0	47.59	-	-	-	-	68.2	-20.61	235	196	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.8. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHZ BAND

2TX Antenna 1 + Antenna 2 SDM MODE

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

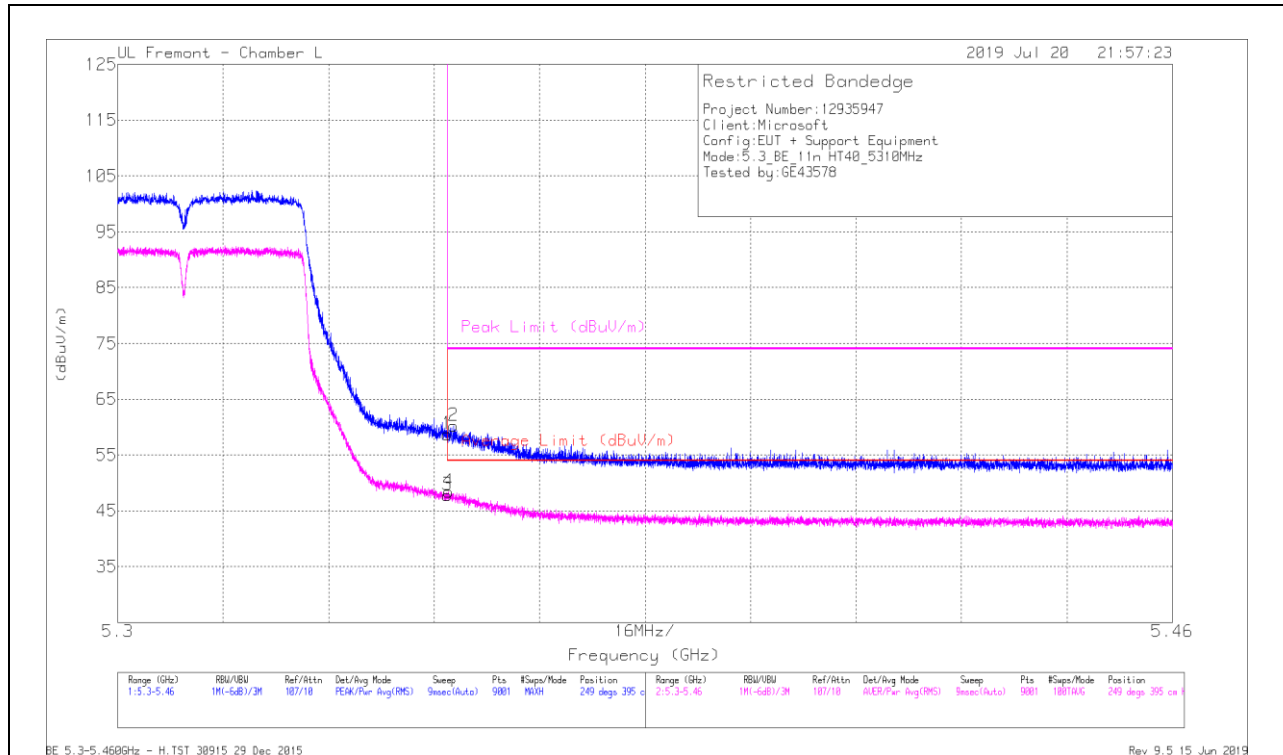


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dBm)	Ampl(Cpl/Filt)/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	41.33	Pk	34.5	-17.1	0	58.73	-	-	74	-15.27	249	395	H
2	* 5.35093	42.88	Pk	34.5	-17.1	0	60.28	-	-	74	-13.72	249	395	H
3	* 5.35001	30.41	RMS	34.5	-17.1	0	47.81	54	-6.19	-	-	249	395	H
4	* 5.35021	31.06	RMS	34.5	-17.1	0	48.46	54	-5.54	-	-	249	395	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

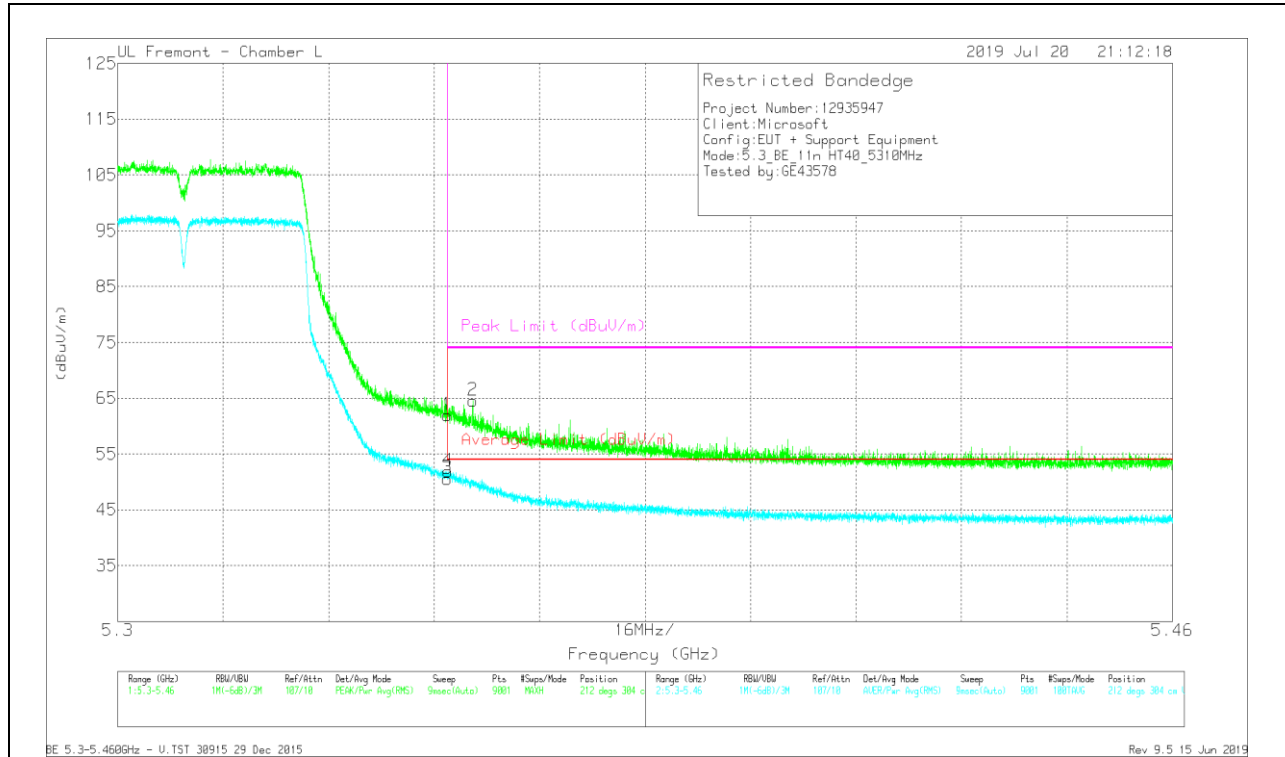

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dBm)	Amplitude/Pk/Pd (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	*5.35001	44.51	Pk	34.5	-17.1	0	61.91	-	-	74	-12.09	212	304	V
2	*5.35385	47.2	Pk	34.5	-17.1	0	64.6	-	-	74	-9.4	212	304	V
3	*5.35001	33.2	RMS	34.5	-17.1	0	50.6	54	-3.4	-	-	212	304	V
4	*5.35012	34.5	RMS	34.5	-17.1	0	51.9	54	-2.1	-	-	212	304	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

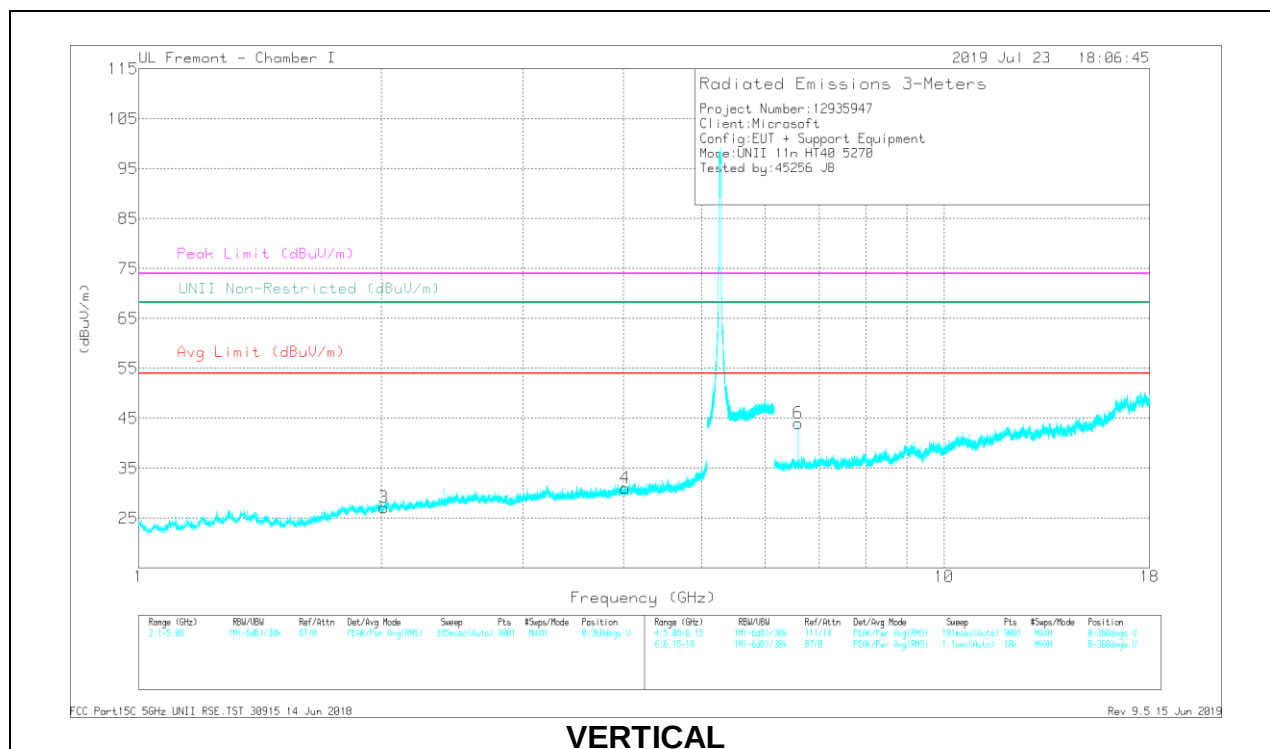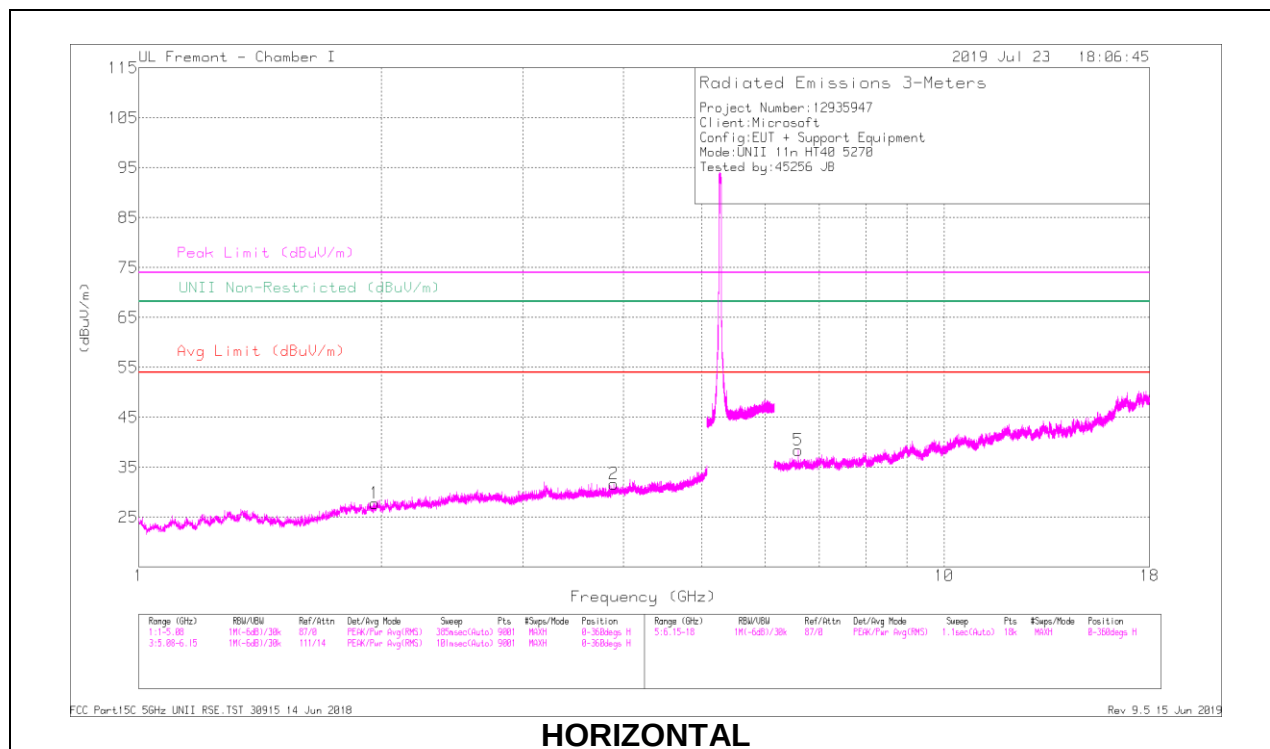

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Tilt2 (dBm)	AmpCofRtrPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
2	* 3.89068	35.08	PK-U	33.1	-28.8	0	39.38	-	-	74	-34.62	-	-	7	133	H
	* 3.89097	24.53	ADR	33.1	-28.8	0	28.83	54	-25.17	-	-	-	-	7	133	H
1	1.96396	36.23	PK-U	31.1	-32.5	0	34.83	-	-	-	-	68.2	-33.37	31	117	H
4	* 4.01493	35.04	PK-U	33.4	-29.9	0	38.54	-	-	74	-35.46	-	-	34	146	V
	* 4.01506	25.87	ADR	33.4	-29.9	0	29.37	54	-24.63	-	-	-	-	34	146	V
3	2.01442	35.91	PK-U	30.8	-32.1	0	34.61	-	-	-	-	68.2	-33.59	31	197	V
5	6.58766	31.22	PK-U	35.7	-22.1	0	44.82	-	-	-	-	68.2	-23.38	320	139	H
6	6.58758	35.71	PK-U	35.7	-22.1	0	49.31	-	-	-	-	68.2	-18.89	223	190	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

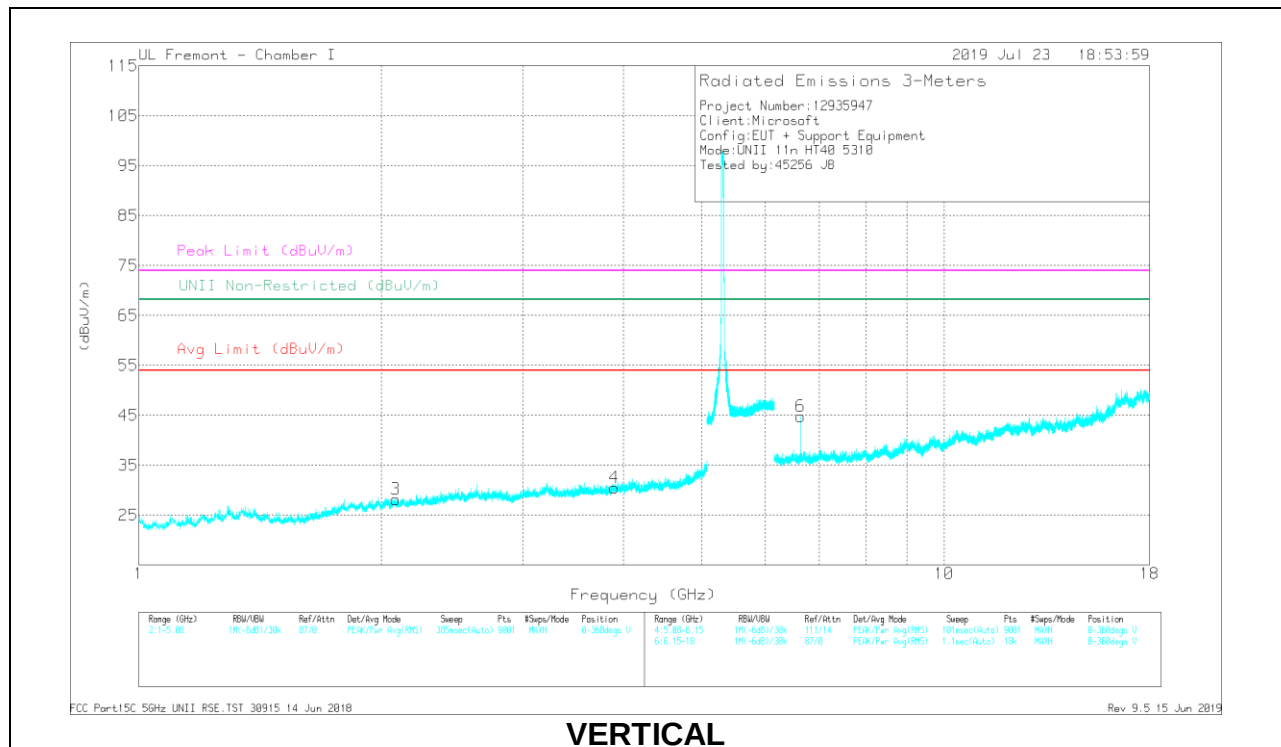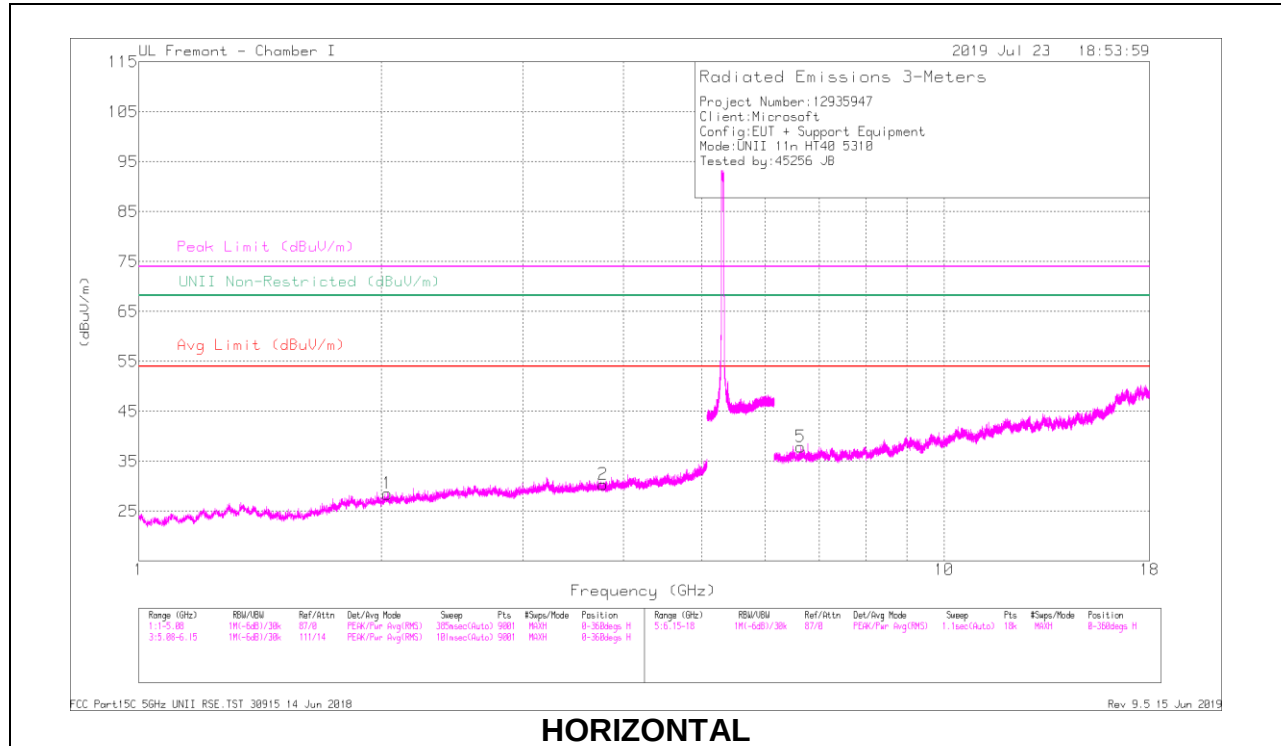

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Tilt2 (dBm)	AmpCorrForPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
2	* 3.77263	33.73	PK-U	33	-29.4	0	37.33	-	-	74	-36.67	-	-	327	163	H
	* 3.77456	25.14	ADR	33	-29.4	0	28.74	54	-25.26	-	-	-	-	327	163	H
1	2.03523	37.43	PK-U	31	-32.1	0	36.33	-	-	-	-	68.2	-31.87	304	148	H
4	* 3.89519	33.17	PK-U	33.2	-28.8	0	37.37	-	-	74	-36.43	-	-	273	173	V
	* 3.89595	24.31	ADR	33.2	-28.8	0	28.71	54	-25.29	-	-	-	-	273	173	V
3	2.0847	37.53	PK-U	31	-32.2	0	36.33	-	-	-	-	68.2	-31.87	154	159	V
5	6.63749	31.64	PK-U	35.7	-21.7	0	45.64	-	-	-	-	68.2	-22.56	142	396	H
6	6.6374	33.27	PK-U	35.7	-21.7	0	47.27	-	-	-	-	68.2	-20.93	242	197	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.9. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

2TX Antenna 1 + Antenna 2 SDM MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

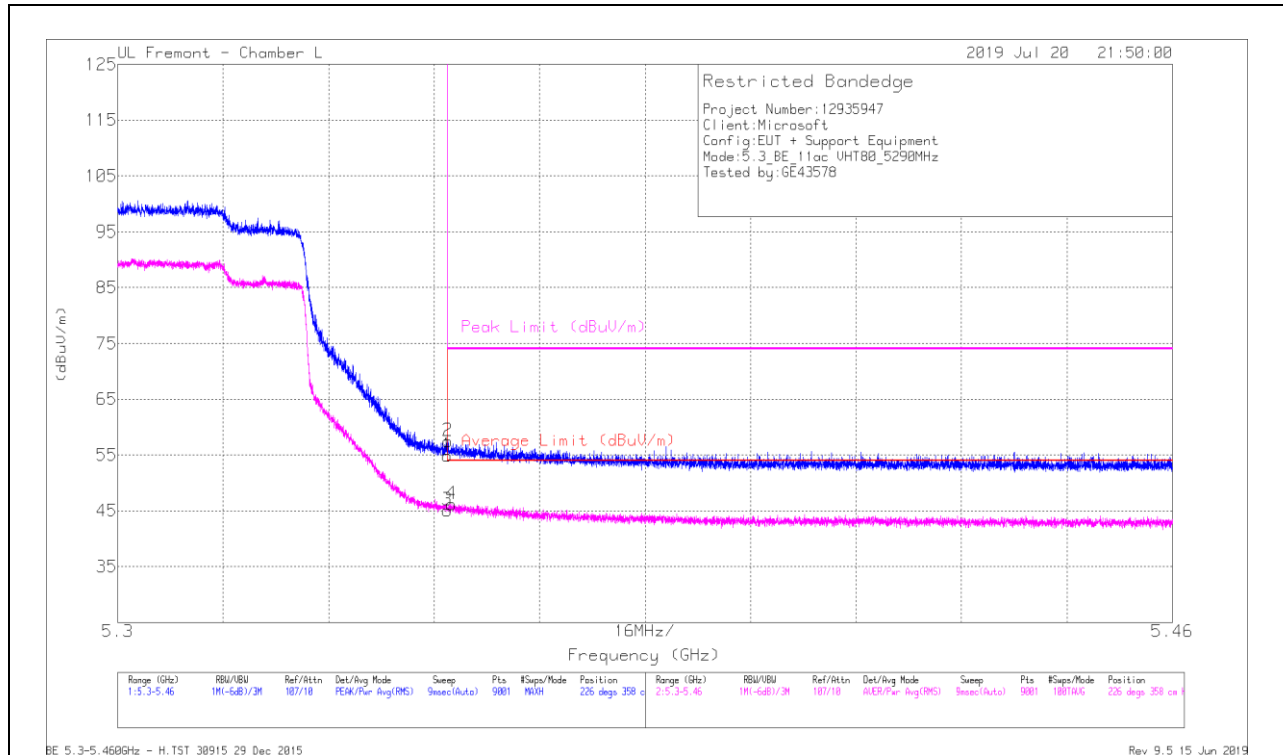


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT120 (dBm)	Ampl/Cpl/Filt/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	37.45	Pk	34.5	-17.1	0	54.85	-	-	74	-19.15	226	358	H
2	* 5.35013	40.11	Pk	34.5	-17.1	0	57.51	-	-	74	-16.49	226	358	H
3	* 5.35001	27.72	RMS	34.5	-17.1	0	45.12	54	-8.88	-	-	226	358	H
4	* 5.35065	28.81	RMS	34.5	-17.1	0	46.21	54	-7.79	-	-	226	358	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

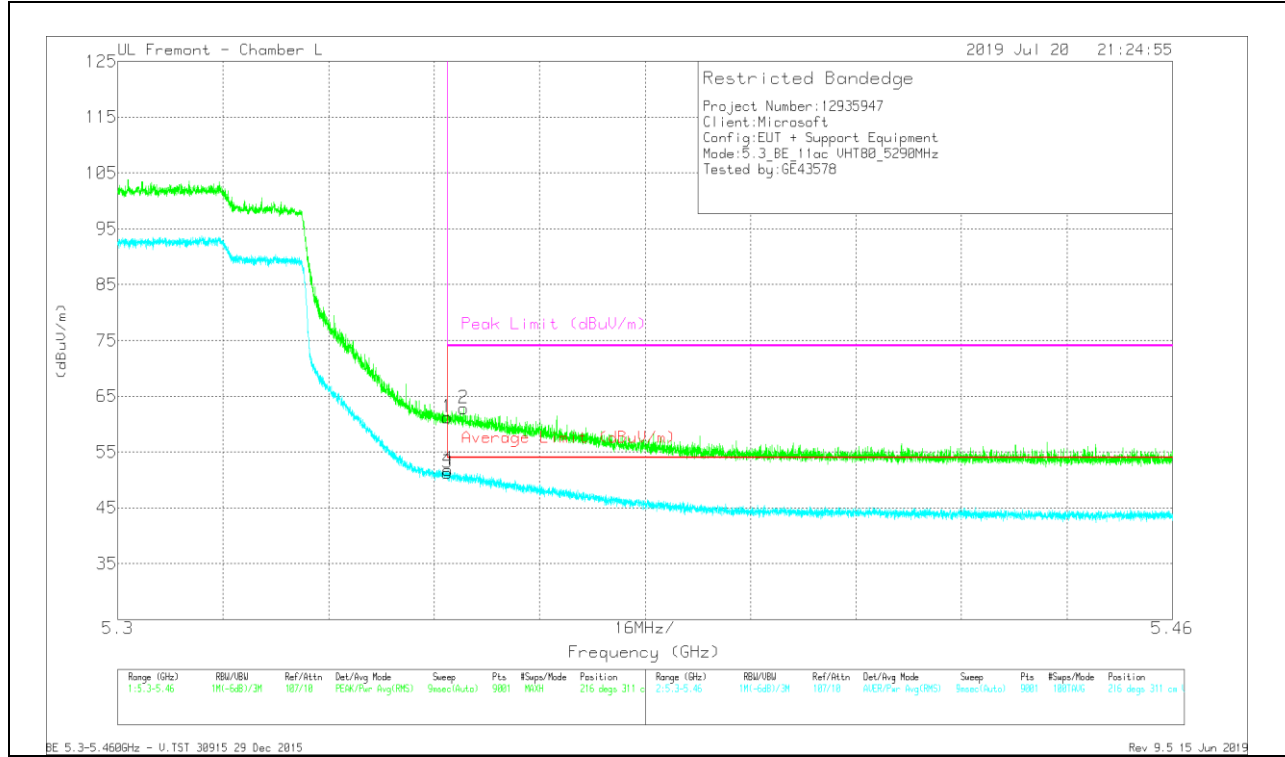

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dBm)	AmpClkRtr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	43.84	Pk	34.5	-17.1	0	61.24	-	-	74	-12.76	216	311	V
2	* 5.35245	45.47	Pk	34.5	-17.1	0	62.87	-	-	74	-11.13	216	311	V
3	* 5.35001	33.86	RMS	34.5	-17.1	0	51.26	54	-2.74	-	-	216	311	V
4	* 5.3501	34.44	RMS	34.5	-17.1	0	51.84	54	-2.16	-	-	216	311	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

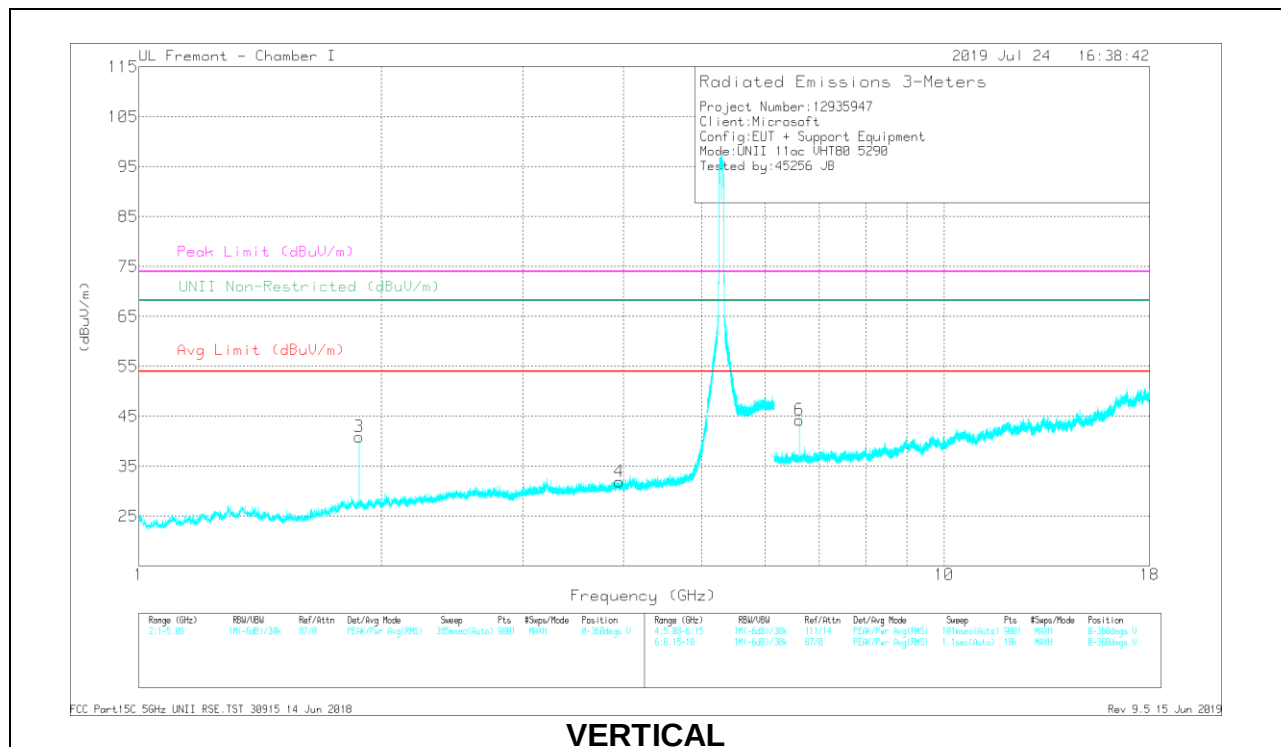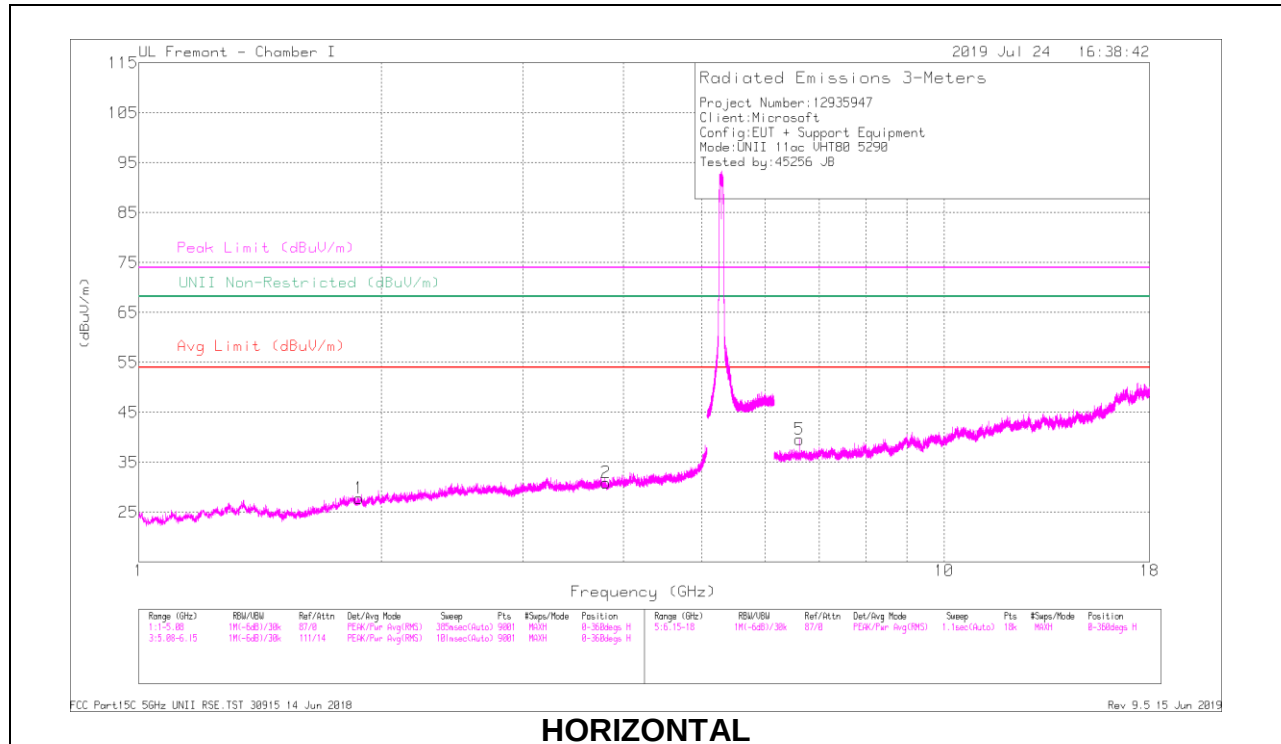

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Tilt (dBm)	Amp Corr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unli Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
2	* 3.80496	35.53	PK-U	32.9	-29.9	0	38.53	-	-	74	-35.47	-	-	11	178	H
	* 3.80257	25.43	ADR	32.9	-29.8	0	28.53	54	-25.47	-	-	-	-	11	178	H
1	1.87581	36.52	PK-U	30.8	-32.6	0	34.72	-	-	-	-	68.2	-33.48	130	135	H
4	* 3.94567	33.78	PK-U	33.4	-29.1	0	38.08	-	-	74	-35.92	-	-	157	170	V
	* 3.9474	24.05	ADR	33.4	-29.1	0	28.35	54	-25.65	-	-	-	-	157	170	V
3	1.87756	36.14	PK-U	30.7	-32.6	0	34.24	-	-	-	-	68.2	-33.96	191	153	V
5	6.61246	32.9	PK-U	35.7	-22.1	0	46.5	-	-	-	-	68.2	-21.7	119	398	H
6	6.61256	34.65	PK-U	35.7	-22.1	0	48.25	-	-	-	-	68.2	-19.95	240	168	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.10. TX ABOVE 1 GHz 802.11ac VHT160 MODE IN THE 5.3 GHz BAND

2TX Antenna 1 + Antenna 2 SDM MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

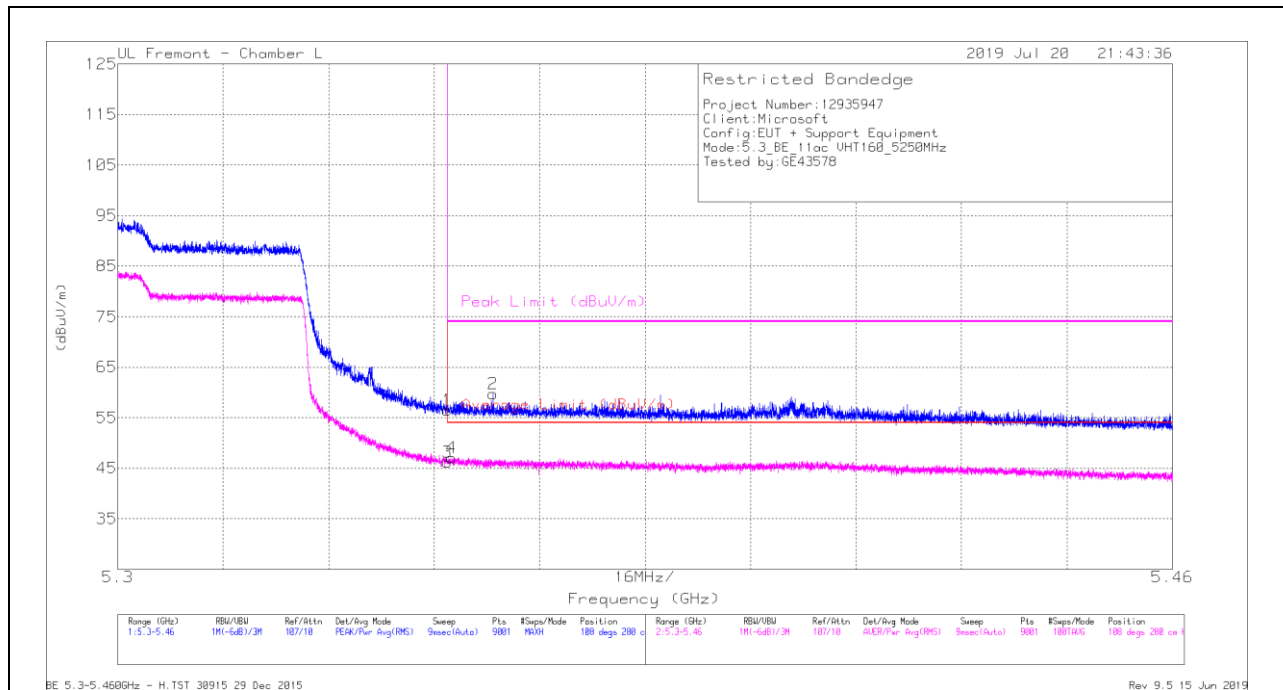


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dBm)	Amp/Cbl/Pttr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*5.35001	39.15	Pk	34.5	-17.1	0	56.55	-	-	74	-17.45	108	280	H
2	*5.35691	42.3	Pk	34.5	-17.1	0	59.7	-	-	74	-14.3	108	280	H
3	*5.35001	28.75	RMS	34.5	-17.1	0	46.15	54	-7.85	-	-	108	280	H
4	*5.35067	29.68	RMS	34.5	-17.1	0	47.08	54	-6.92	-	-	108	280	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

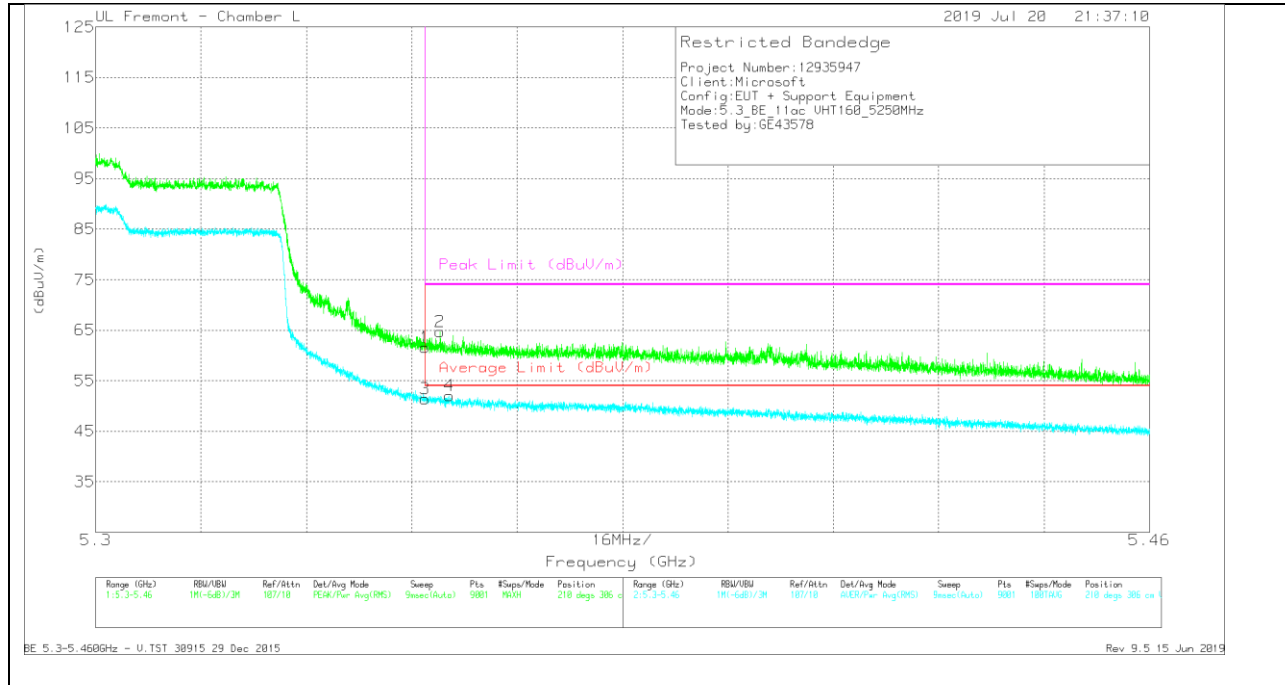

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Y120 (dBm)	AmplCblFiltz/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	*5.35001	44.18	Pk	34.5	-17.1	0	61.58	-	-	74	-12.42	210	306	V
2	*5.35232	47.27	Pk	34.5	-17.1	0	64.67	-	-	74	-9.33	210	306	V
3	*5.35001	34.05	RMS	34.5	-17.1	0	51.45	54	-2.55	-	-	210	306	V
4	*5.35373	34.66	RMS	34.5	-17.1	0	52.06	54	-1.94	-	-	210	306	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

9.1.11. TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

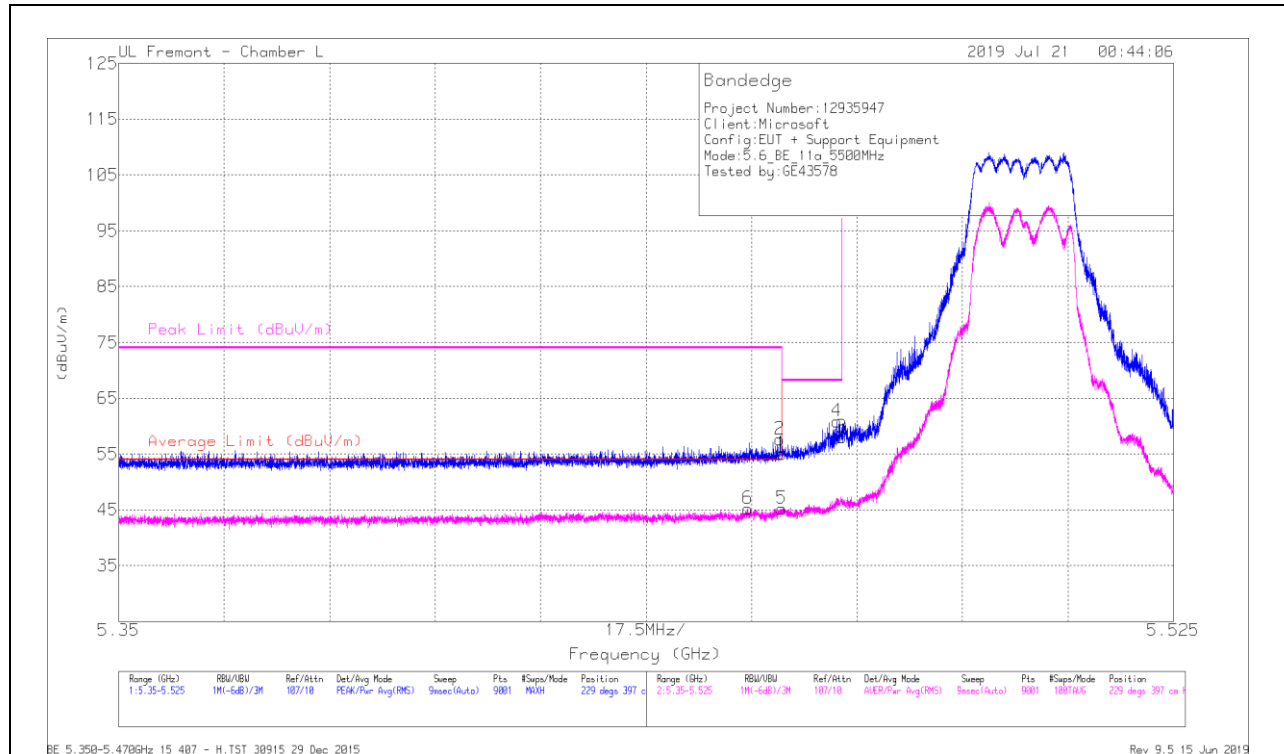


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF Y120 (dBm)	AmplChlFiltz (Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.37	Pk	34.5	-16.9	0	54.97	-	-	74	-19.03	229	397	H
2	* 5.45974	39.97	Pk	34.5	-16.9	0	57.57	-	-	74	-16.43	229	397	H
3	5.46999	40.44	Pk	34.5	-16.9	0	58.04	-	-	68.2	-10.16	229	397	H
4	5.46917	43.22	Pk	34.5	-16.9	0	60.82	-	-	68.2	-7.38	229	397	H
5	* 5.46	27.49	RMS	34.5	-16.9	0	45.18	54	-8.82	-	-	229	397	H
6	* 5.45438	27.53	RMS	34.5	-16.9	0	45.22	54	-8.78	-	-	229	397	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

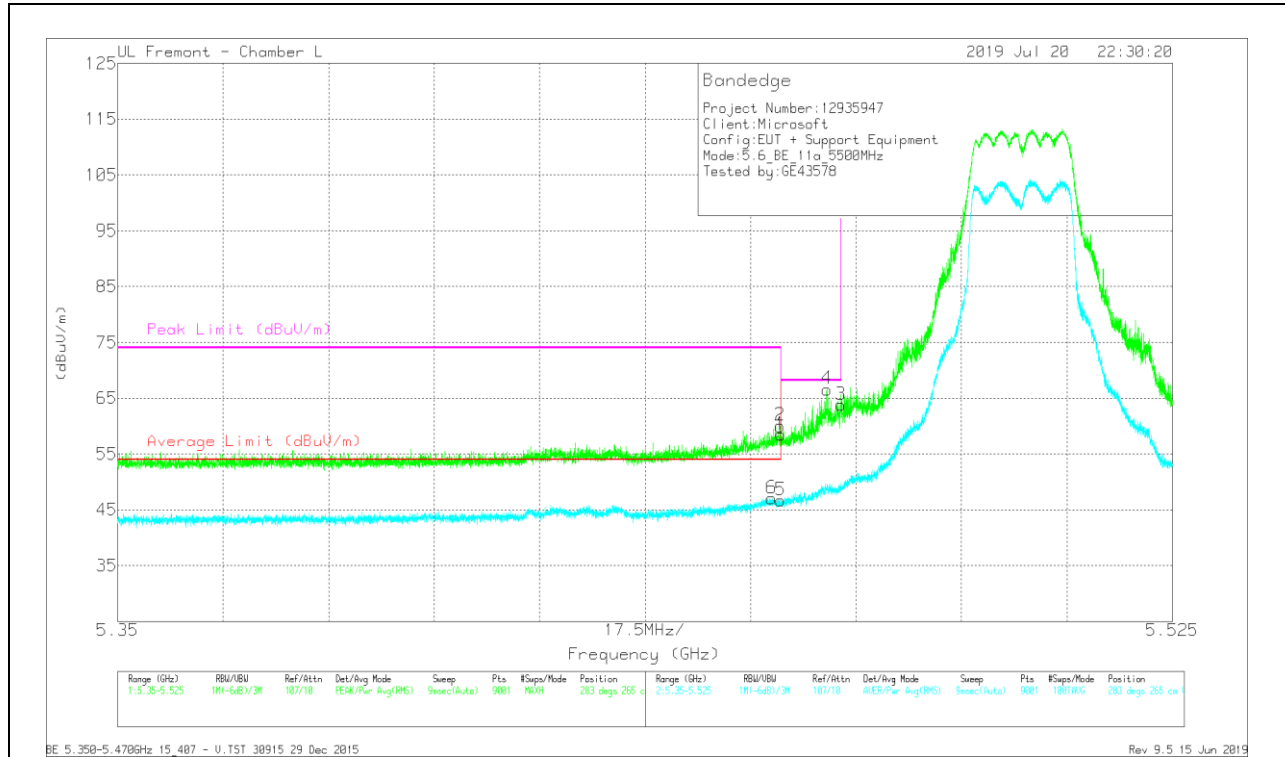


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

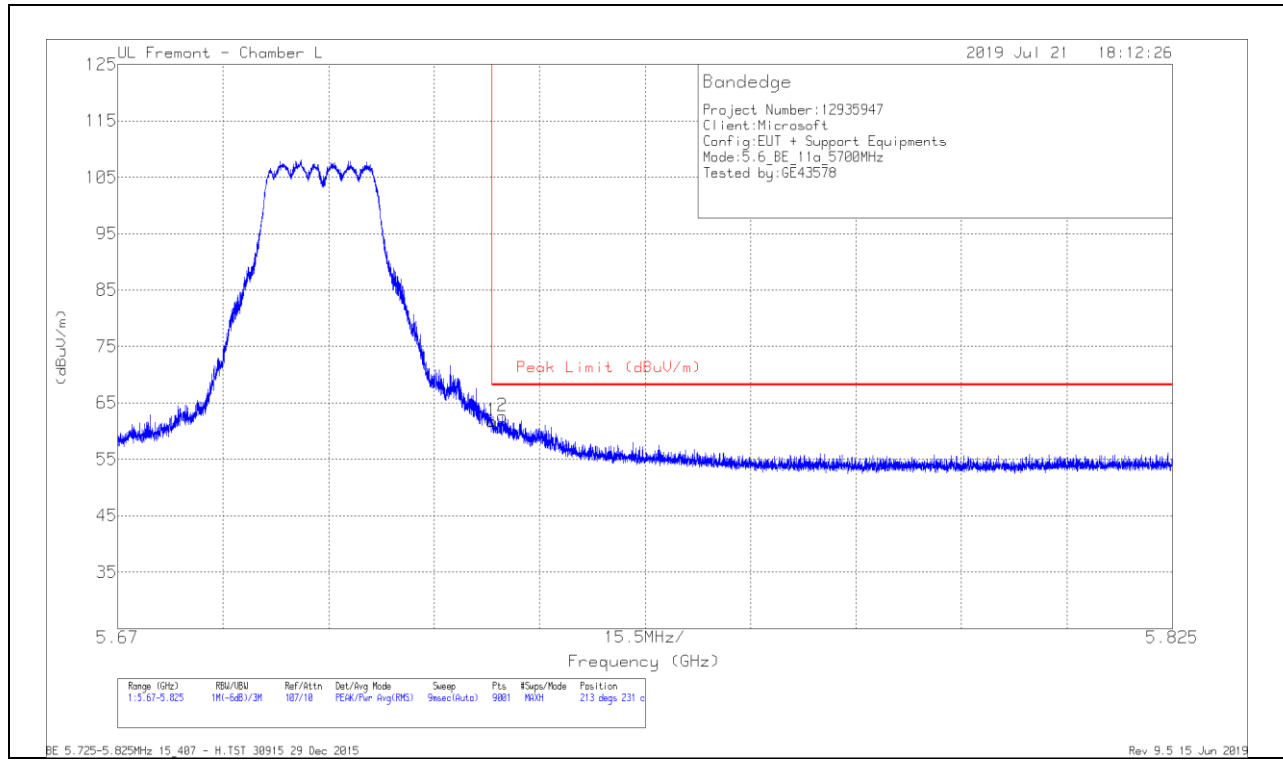

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/ Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	43.84	Pk	34.7	-16.8	61.74	68.2	-6.46	213	231	H
2	5.72656	44.78	Pk	34.7	-16.8	62.68	68.2	-5.52	213	231	H

Pk - Peak detector

VERTICAL RESULT


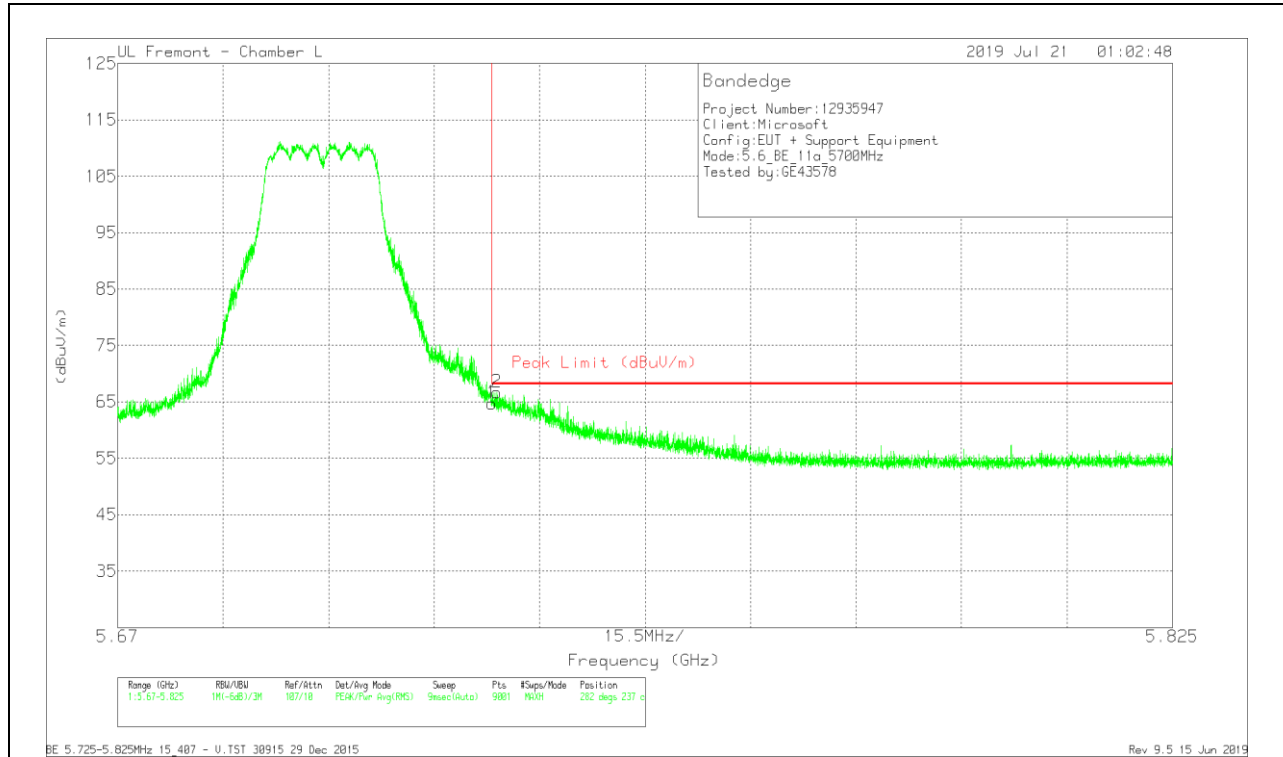


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/ Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	46.88	Pk	34.7	-16.8	64.78	68.2	-3.42	282	237	V
2	5.7257	48.79	Pk	34.7	-16.8	66.69	68.2	-1.51	282	237	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

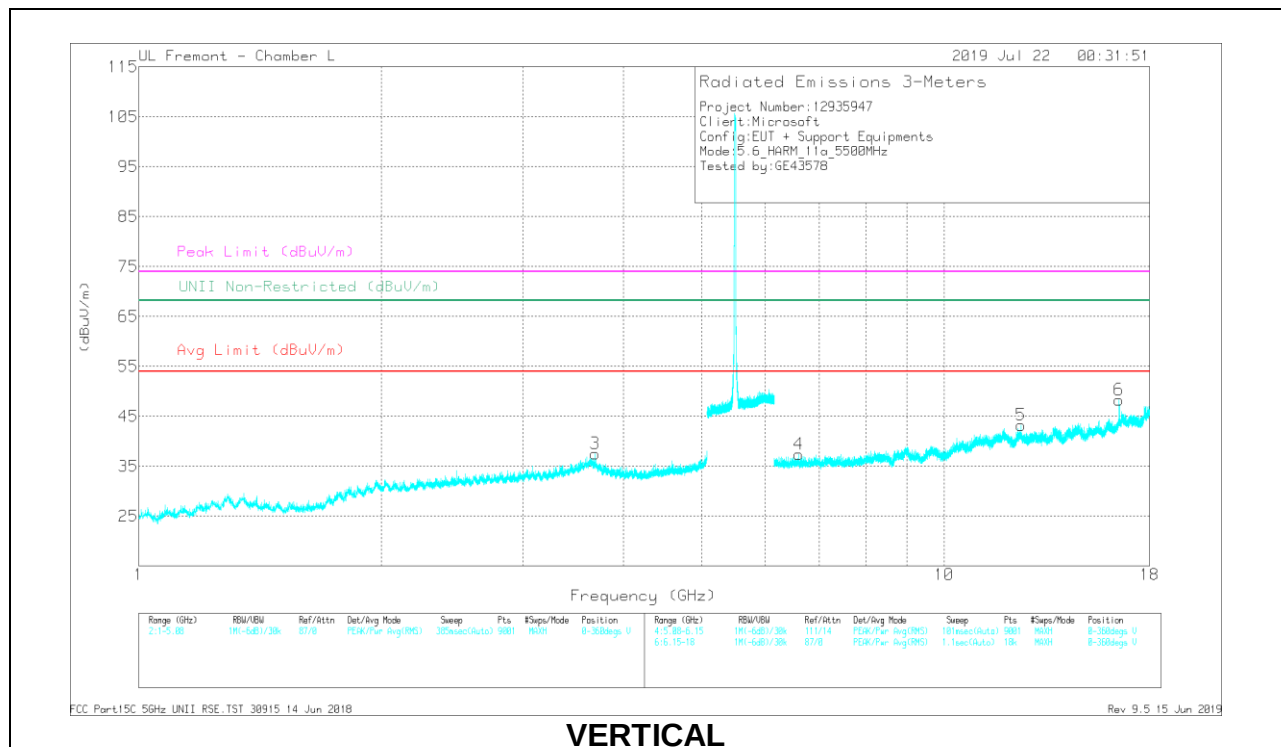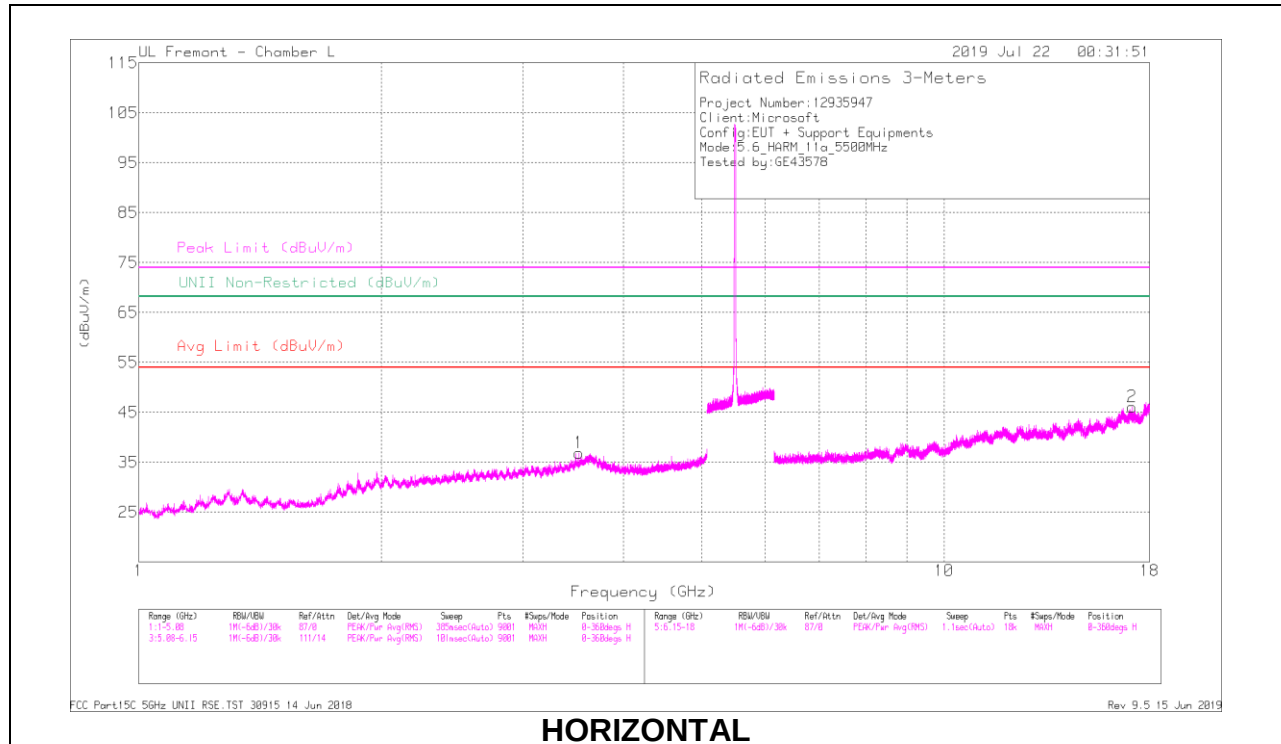

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.52243	36.85	PK-U	35.2	-28.9	0	43.15	-	-	74	-30.85	-	-	5	377	H
	* 3.52425	26.64	ADR	35.3	-28.9	0	33.13	54	-20.87	-	-	-	-	5	377	H
3	* 3.68989	37.18	PK-U	35.5	-28.2	0	44.48	-	-	74	-29.52	-	-	15	103	V
	* 3.69017	26.69	ADR	35.5	-28.2	0	34.08	54	-19.92	-	-	-	-	15	103	V
2	17.13053	28.35	PK-U	40.7	-18.6	0	50.45	-	-	-	-	68.2	-17.75	195	197	H
4	6.99716	39.1	PK-U	35.8	-24.8	0	44.1	-	-	-	-	68.2	-24.1	95	197	V
5	* 12.40959	29.93	PK-U	39.5	-19.9	0	49.53	-	-	74	-24.47	-	-	95	104	V
	* 12.46837	20.15	ADR	39.5	-19.9	0	39.84	54	-14.16	-	-	-	-	95	104	V
6	16.49379	40.16	PK-U	41.2	-19	0	62.36	-	-	-	-	68.2	-5.84	234	297	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

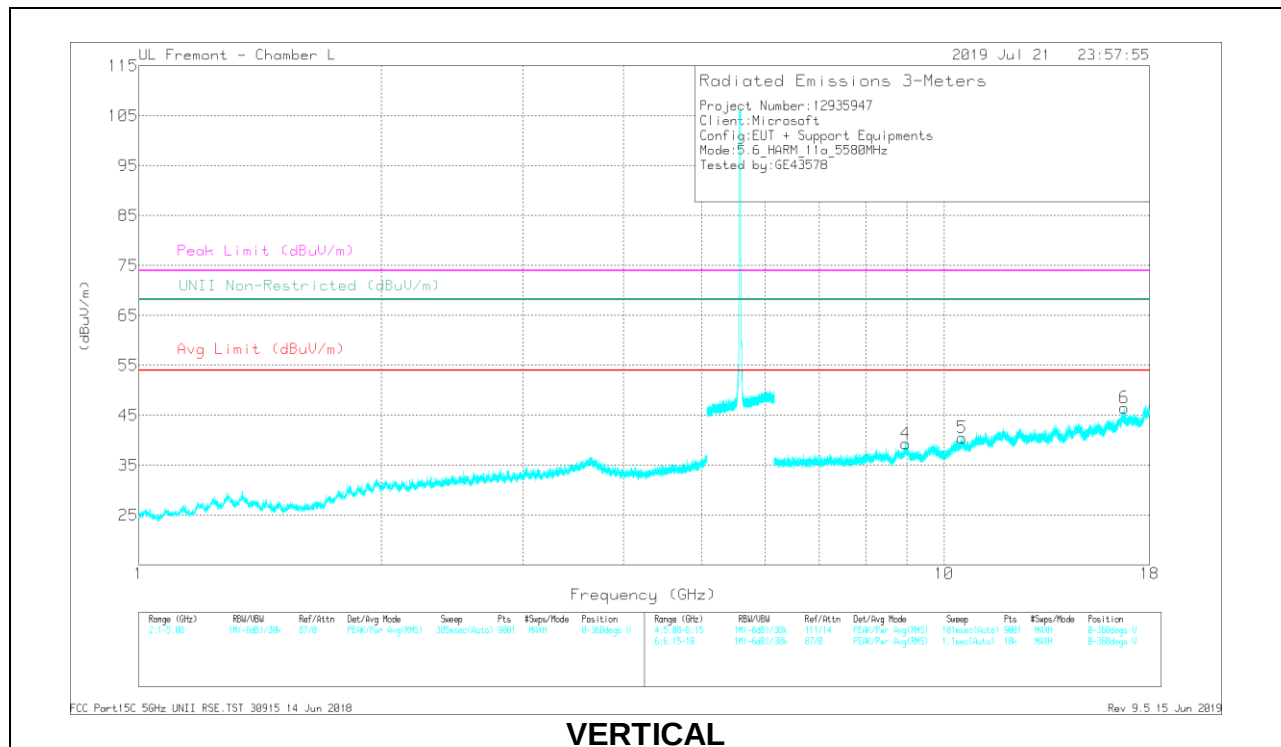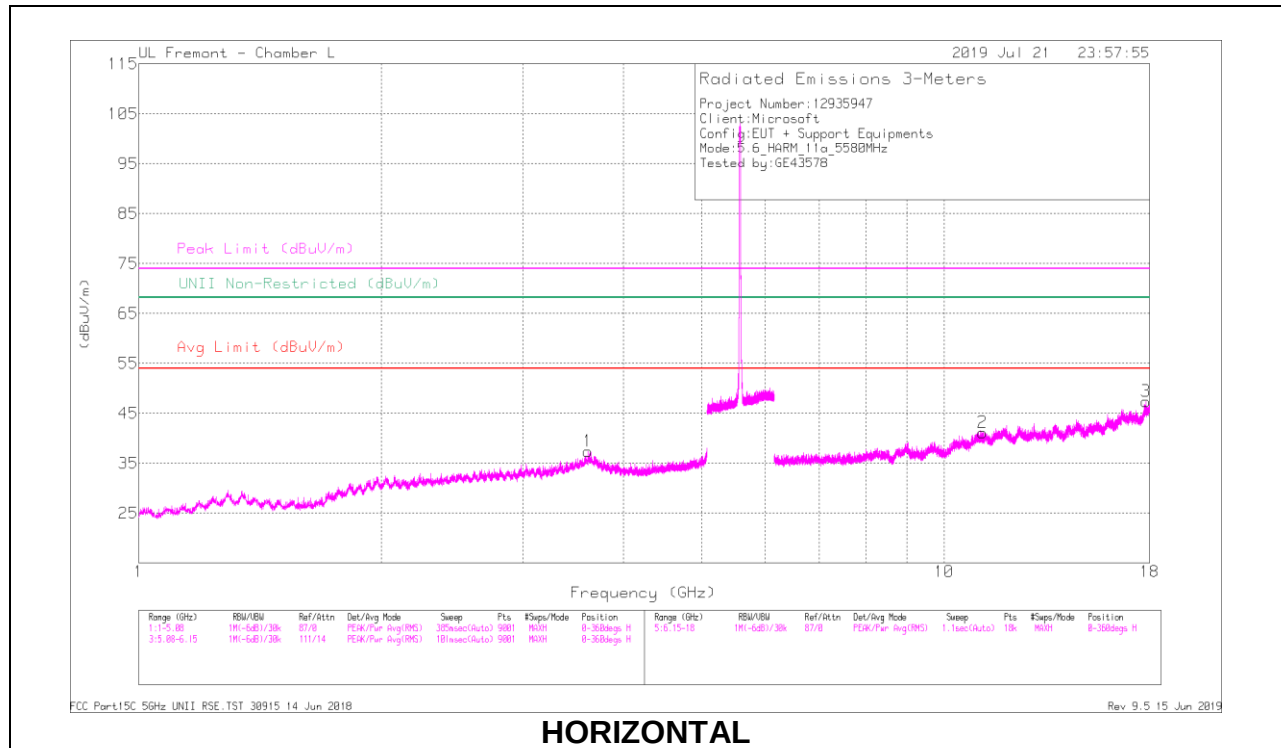

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.61773	35.74	PK-U	36	-28.1	0	43.64	54	-19.66	74	-30.36	-	-	337	100	H
	* 3.61665	26.35	ADR	36	-28.1	0	34.34	54	-19.66	-	-	-	-	337	100	H
2	* 11.16316	29.89	PK-U	38	-20.2	0	47.69	-	-	74	-26.31	-	-	284	196	H
	* 11.16318	19.98	ADR	38	-20.2	0	37.87	54	-16.13	-	-	-	-	284	196	H
3	* 17.80021	28.37	PK-U	41.6	-16.4	0	53.57	-	-	74	-20.43	-	-	267	248	H
	* 17.80216	18.74	ADR	41.7	-16.4	0	44.13	54	-9.87	-	-	-	-	267	248	H
4	8.95791	30.41	PK-U	36	-20.7	0	45.71	-	-	-	-	68.2	-22.49	229	199	V
5	10.52279	29.62	PK-U	37.7	-19.7	0	47.62	-	-	-	-	68.2	-20.58	86	197	V
6	16.74535	30.28	PK-U	41.3	-18.3	0	53.28	-	-	-	-	68.2	-14.92	236	193	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

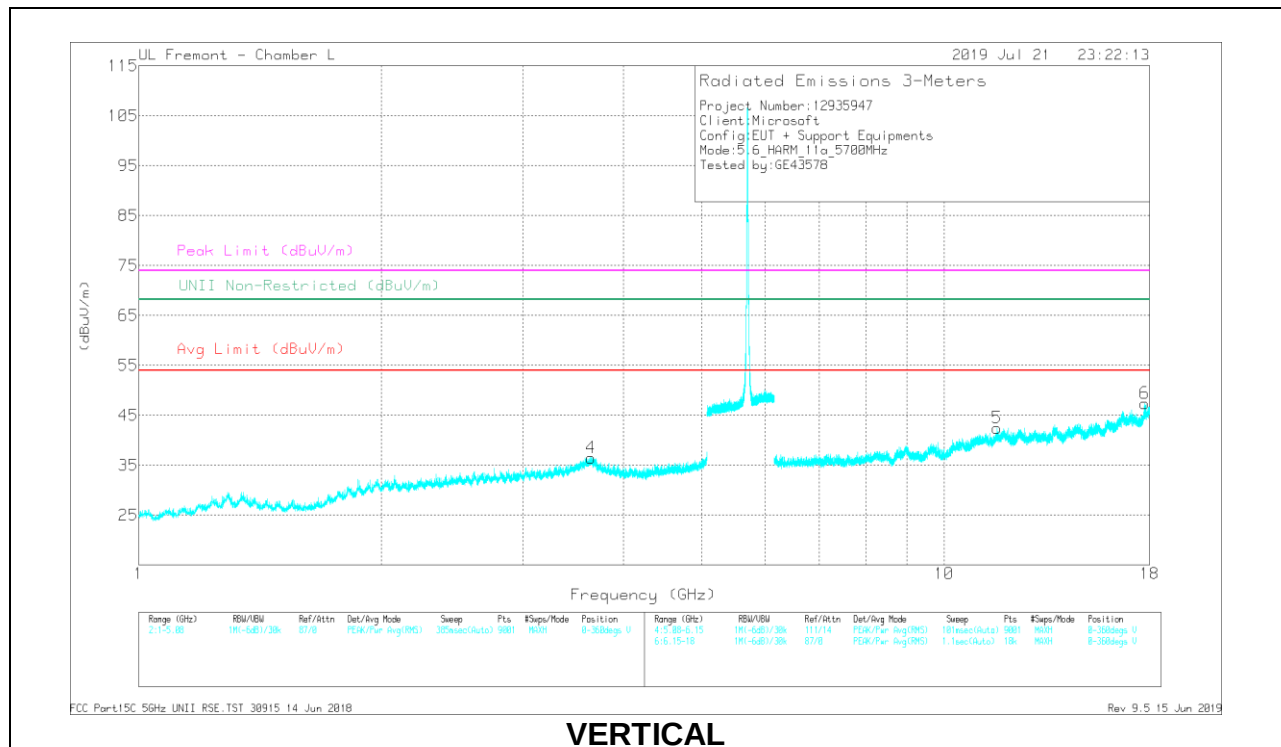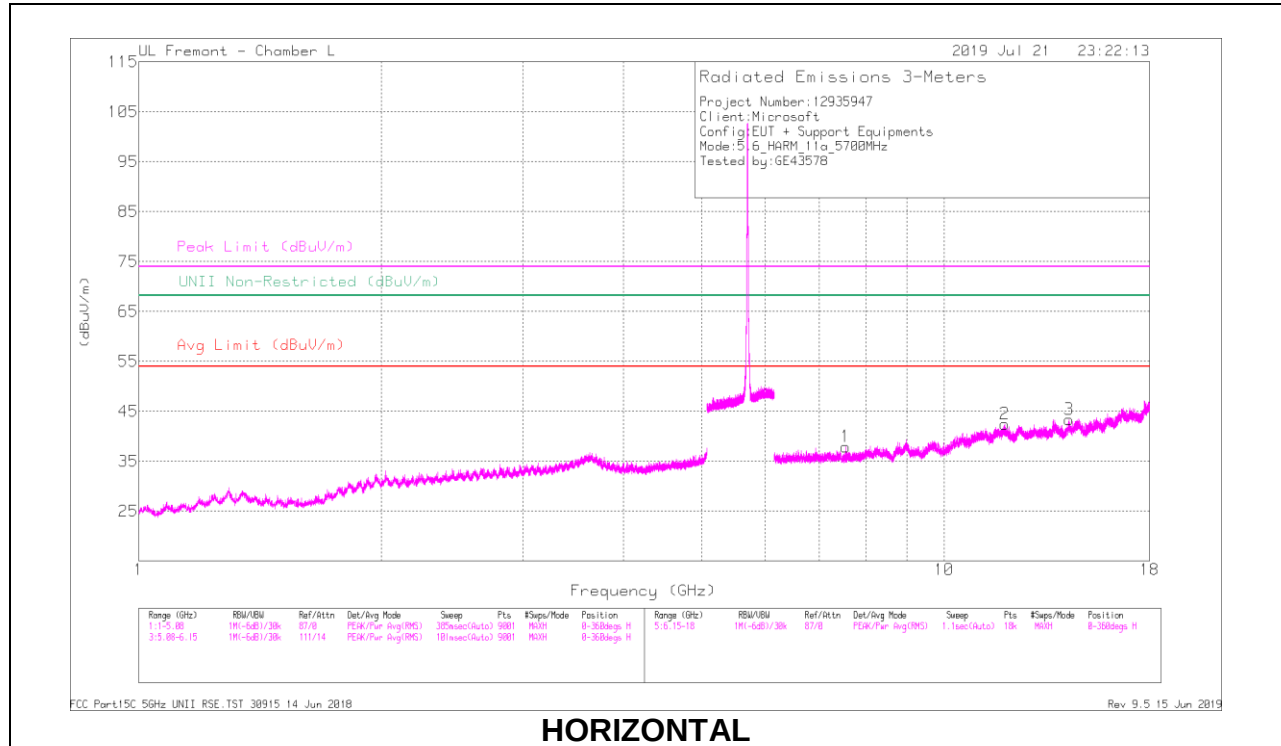

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 3.64212	36.15	PK-U	35.9	-28	0	44.05	54	-20.12	74	-29.95	-	-	249	196	V
	* 3.64195	25.89	ADR	35.9	-28	0	33.88	54	-20.12	-	-	-	-	249	196	V
1	* 7.54591	33.3	PK-U	35.6	-23.9	0	45	-	-	74	-29	-	-	46	103	H
	* 7.54671	22.25	ADR	35.6	-23.8	0	34.14	54	-19.86	-	-	-	-	46	103	H
2	* 11.89396	30.03	PK-U	39.1	-20.2	0	48.93	-	-	74	-25.07	-	-	154	196	H
	* 11.89473	19.76	ADR	39	-20.2	0	38.65	54	-15.35	-	-	-	-	154	196	H
3	14.29709	28.82	PK-U	39.6	-18.5	0	49.92	-	-	-	-	68.2	-18.28	249	102	H
5	* 11.64305	30.24	PK-U	38.7	-19.7	0	49.24	-	-	74	-24.76	-	-	114	129	V
	* 11.64034	20.44	ADR	38.7	-19.8	0	39.43	54	-14.57	-	-	-	-	114	129	V
6	* 17.74522	29.69	PK-U	41.4	-16.7	0	54.39	-	-	74	-19.61	-	-	292	184	V
	* 17.74596	19.67	ADR	41.4	-16.7	0	44.46	54	-9.54	-	-	-	-	292	184	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 144 RESULTS

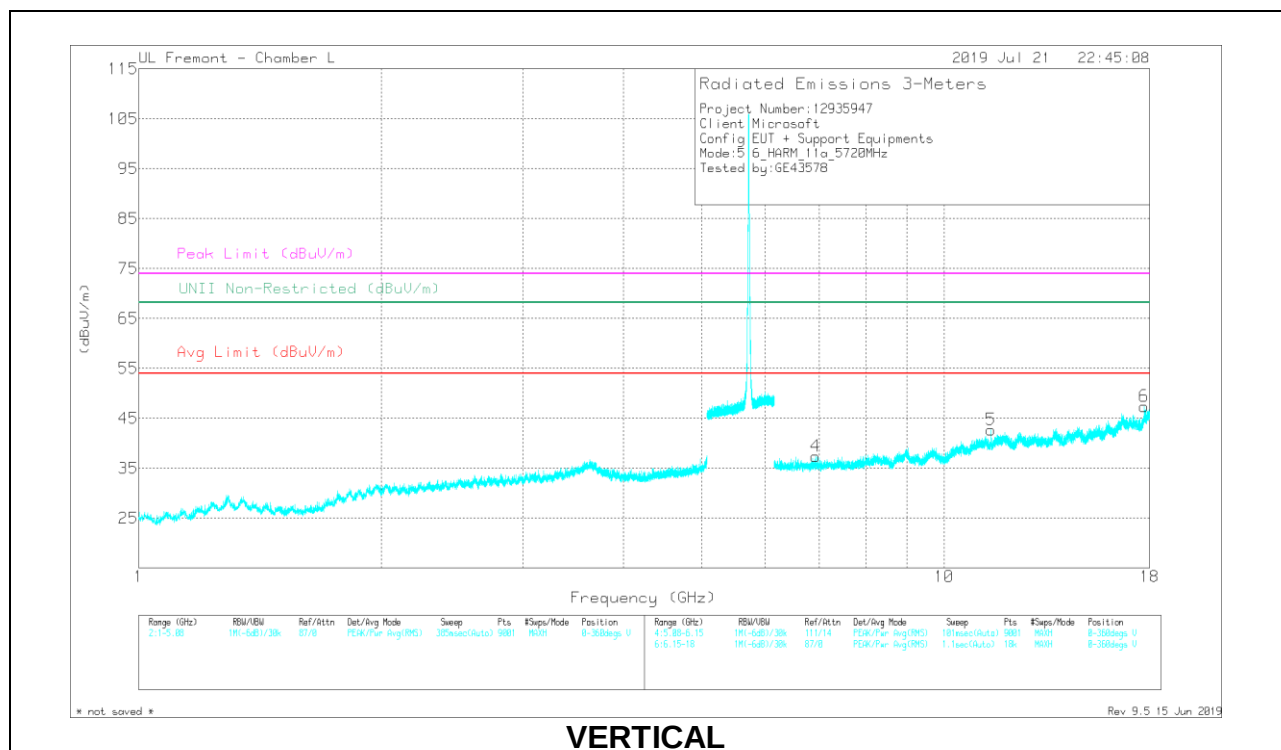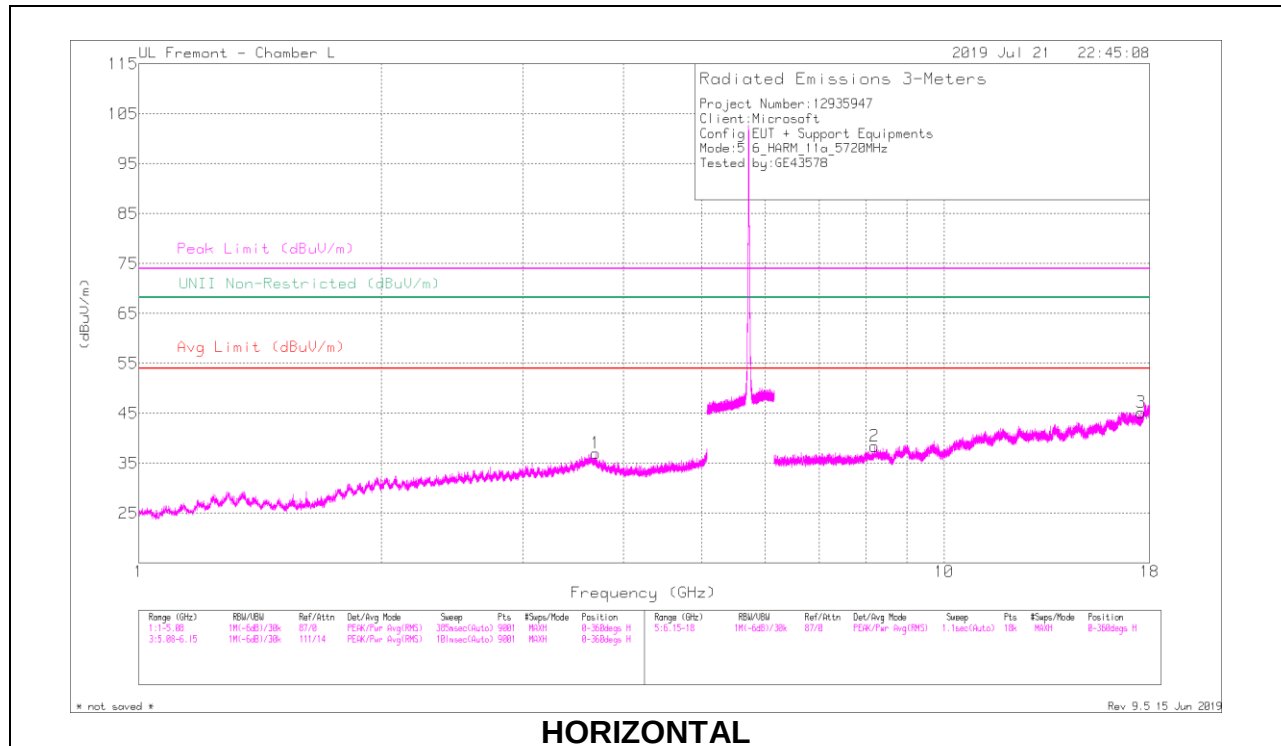

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.6961	36.77	PK-U	35.5	-28.3	0	43.97	54	-20.12	74	-30.03	-	-	91	109	H
	* 3.69652	26.59	ADR	35.5	-28.3	0	33.88	54	-19.3	74	-28.49	-	-	303	196	H
2	* 8.19617	32.21	PK-U	35.7	-22.4	0	45.51	54	-19.3	74	-28.49	-	-	303	196	H
	* 8.19589	21.31	ADR	35.7	-22.4	0	34.7	54	-19.3	74	-28.49	-	-	303	196	H
3	17.58404	29.34	PK-U	40.8	-18.2	0	51.94	54	-13.17	74	-23.56	68.2	-16.26	226	196	H
	6.93183	32.19	PK-U	35.6	-23.9	0	43.89	54	-13.17	74	-23.56	68.2	-24.31	17	196	V
4	* 11.44059	32.14	PK-U	38.3	-20	0	50.44	54	-13.17	74	-23.56	-	-	272	196	V
	* 11.44068	22.44	ADR	38.3	-20	0	40.83	54	-13.17	74	-23.56	-	-	272	196	V
5	* 17.72763	30.73	PK-U	41.3	-16.6	0	55.43	54	-10.42	74	-18.57	-	-	242	103	V
	* 17.7275	18.79	ADR	41.3	-16.6	0	43.58	54	-10.42	74	-18.57	-	-	242	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.12. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND

2TX Antenna 1 + Antenna 2 SDM MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

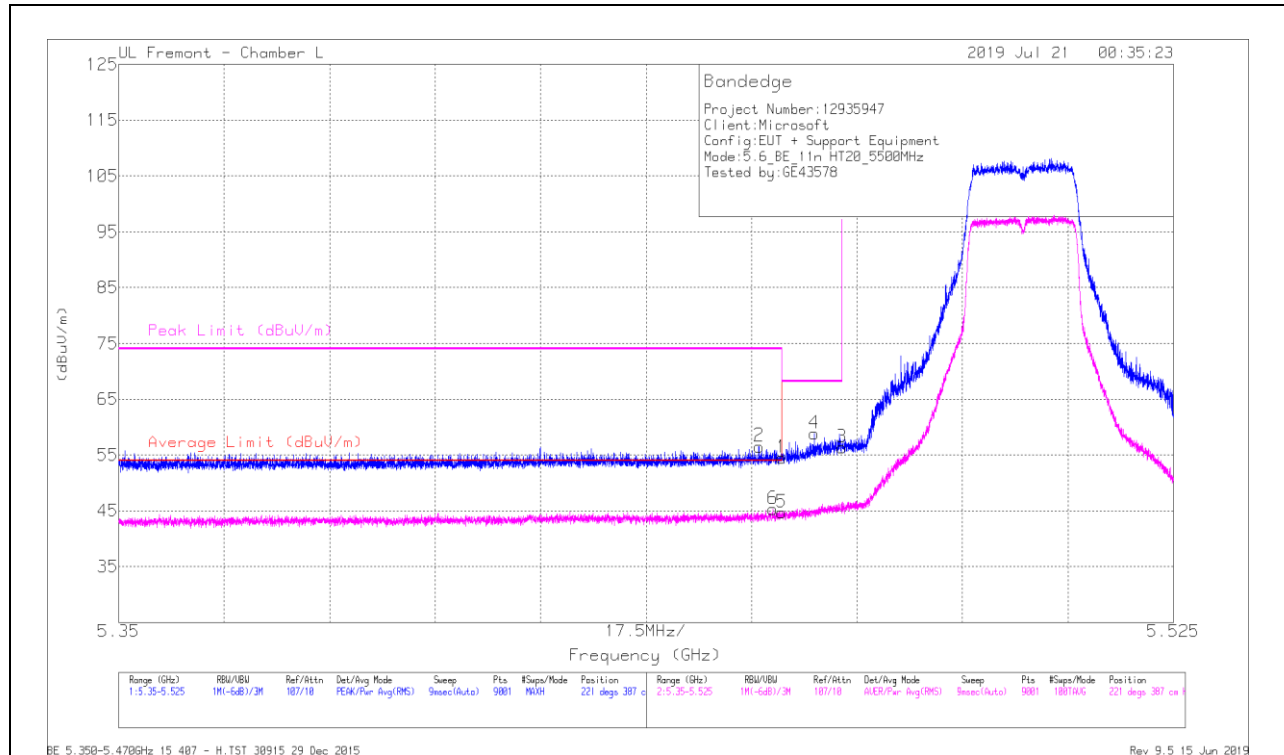


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Ampl/Cpl/FiltriPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	36.89	Pk	34.5	-16.9	0	54.49	-	-	74	-19.51	221	387	H
2	* 5.45622	39.96	Pk	34.5	-16.9	0	56.56	-	-	74	-17.44	221	387	H
3	5.46999	39.75	Pk	34.5	-16.9	0	56.35	-	-	68.2	-11.85	221	387	H
4	5.46542	41.38	Pk	34.4	-16.9	0	58.88	-	-	68.2	-9.32	221	387	H
5	* 5.46	27.16	RMS	34.5	-16.9	0	44.76	54	-9.24	-	-	221	387	H
6	* 5.45852	27.68	RMS	34.5	-16.9	0	45.28	54	-8.72	-	-	221	387	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

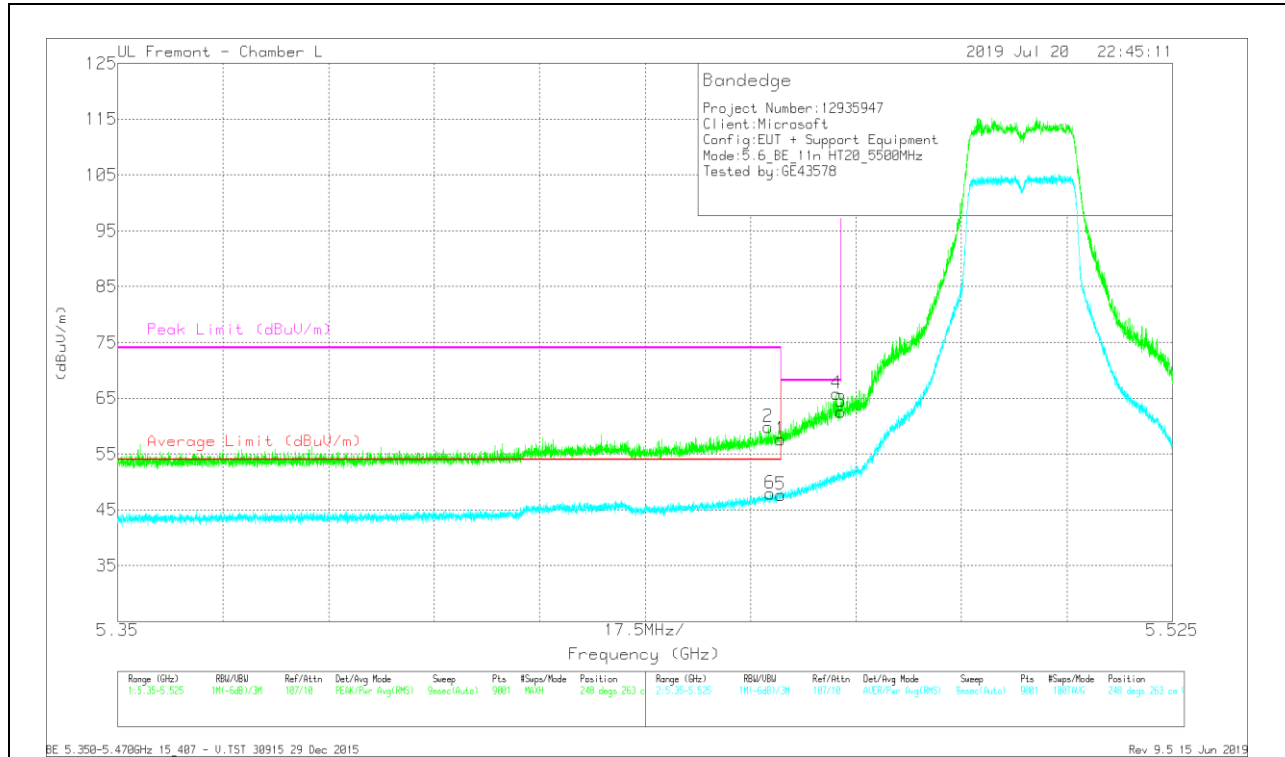

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dBm)	Amplifier/Pwr (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.01	Pk	34.5	-16.9	0	57.61	-	-	74	-16.39	248	263	V
2	* 5.45791	42.25	Pk	34.5	-16.9	0	59.85	-	-	74	-14.15	248	263	V
3	5.46999	44.96	Pk	34.5	-16.9	0	62.56	-	-	68.2	-5.64	248	263	V
4	5.46929	48.19	Pk	34.5	-16.9	0	65.79	-	-	68.2	-2.41	248	263	V
5	* 5.46	30.06	RMS	34.5	-16.9	0	47.66	54	-6.34	-	-	248	263	V
6	* 5.45828	30.31	RMS	34.5	-16.9	0	47.91	54	-6.09	-	-	248	263	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

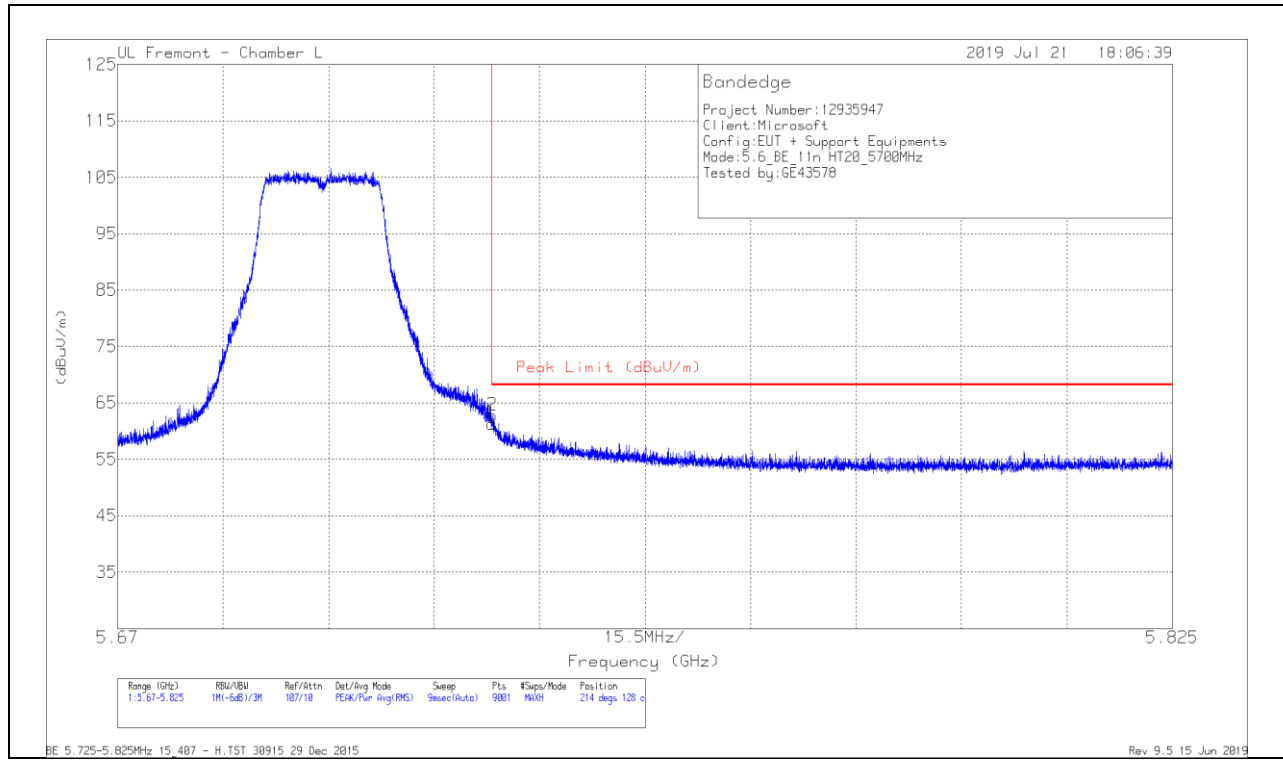

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/ Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	43.44	Pk	34.7	-16.8	61.34	68.2	-6.86	214	128	H
2	5.72509	44.87	Pk	34.7	-16.8	62.77	68.2	-5.43	214	128	H

Pk - Peak detector

VERTICAL RESULT

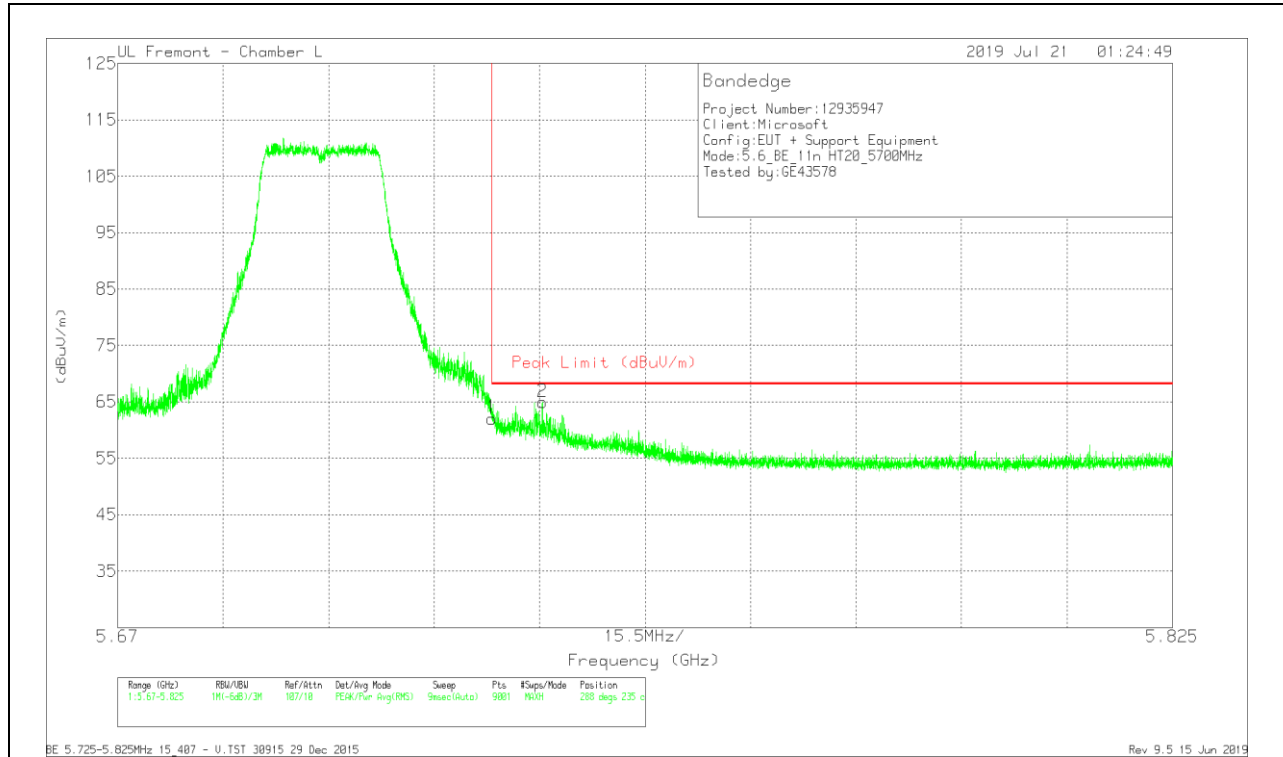

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/ Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	44.19	Pk	34.7	-16.8	62.09	68.2	-6.11	288	235	V
2	5.7324	46.95	Pk	34.8	-16.8	64.95	68.2	-3.25	288	235	V

Pk - Peak detector