


VERTICAL RESULT

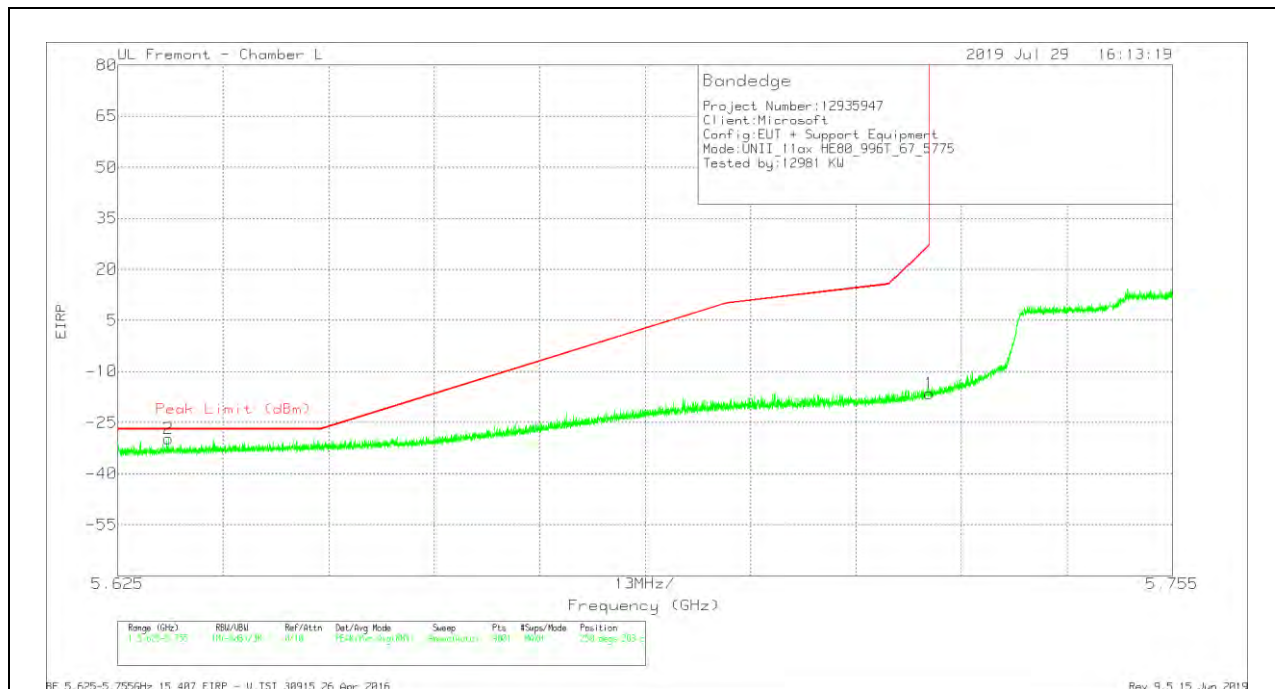


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-46.22	Pk	34.7	-16.8	11.8	-16.52	26.99	-43.51	250	203	V
2	5.63124	-59.54	Pk	34.7	-16.7	11.8	-29.74	-27	-2.74	250	203	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)

HORIZONTAL RESULT

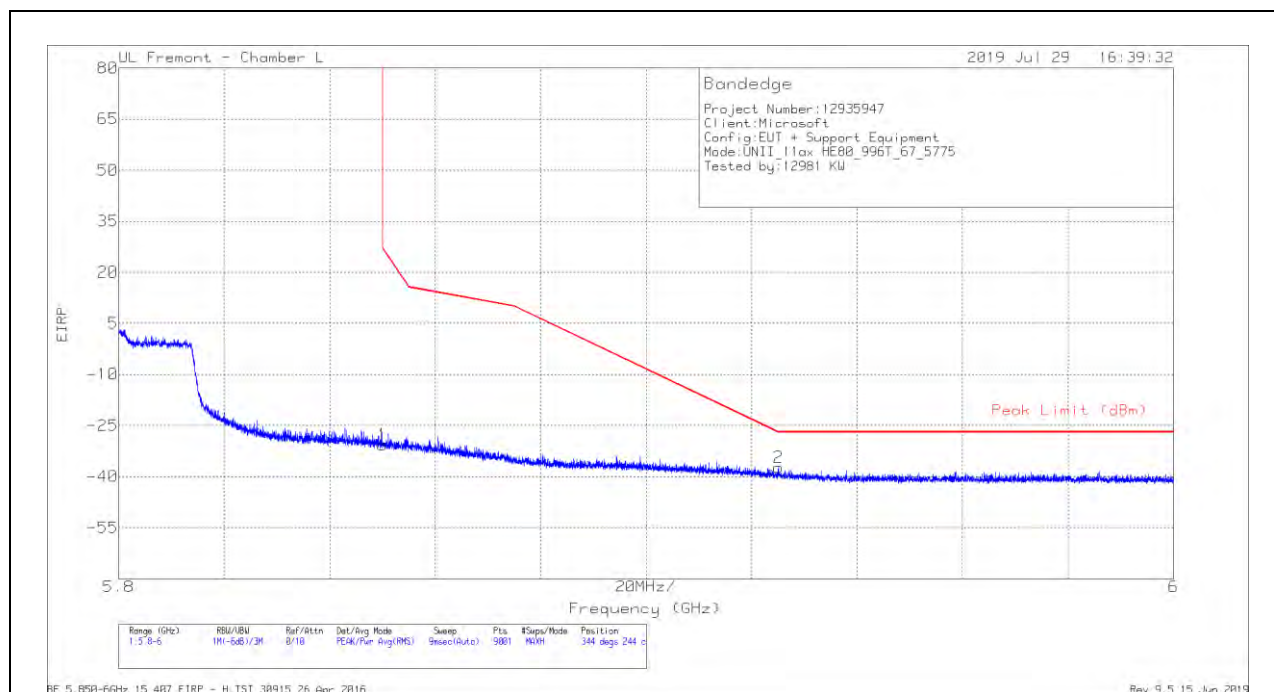


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-60.5	Pk	35	-17	11.8	-30.7	26.95	-57.65	344	244	H
2	5.92509	-67.52	Pk	35.1	-16.7	11.8	-37.32	-27	-10.32	344	244	H

Pk - Peak detector

VERTICAL RESULT

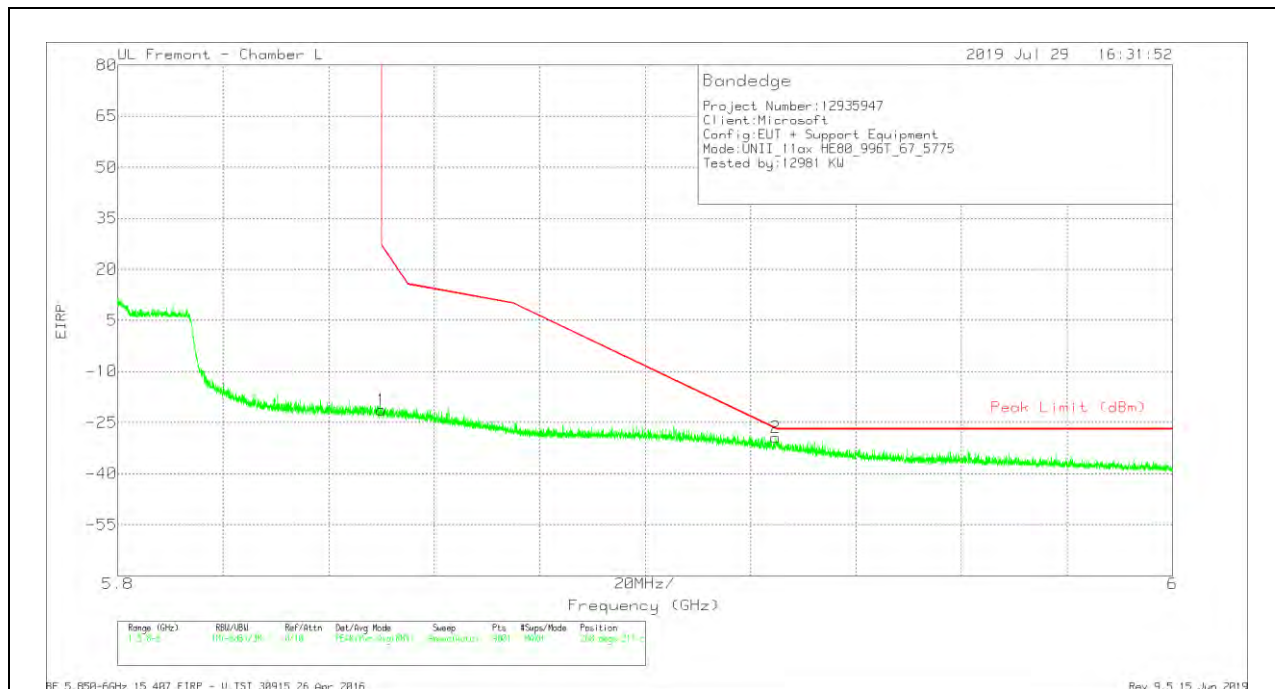

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T120 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-50.99	Pk	35	-17	11.8	-21.19	26.95	-48.14	268	211	V
2	5.92482	-59.52	Pk	35.1	-16.7	11.8	-29.32	-26.87	-2.45	268	211	V

Pk - Peak detector

2TX Chain 0 + Chain 1 OFDMA MODE – 484-Tones, RU Index 65

BANDEDGE (CHANNEL 155 LOW EDGE)

HORIZONTAL RESULT

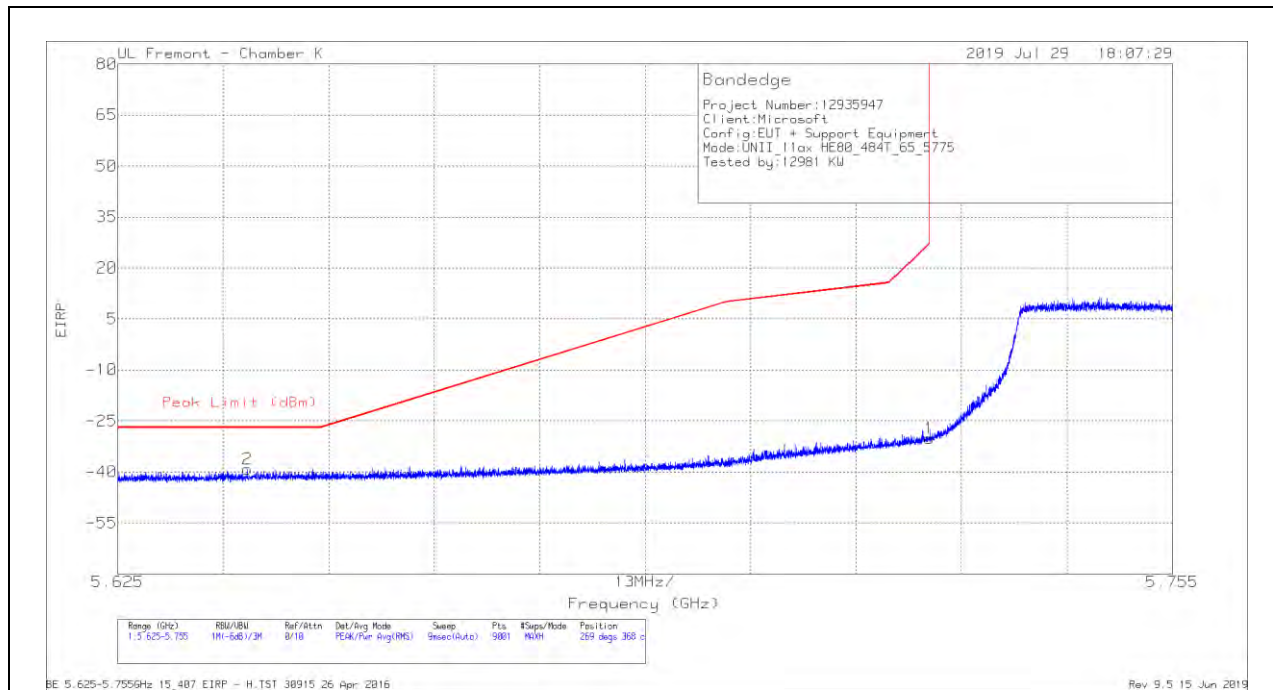


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-57.72	Pk	34.8	-19	11.8	-30.12	26.99	-57.11	269	368	H
2	5.64098	-66.27	Pk	34.8	-19.4	11.8	-39.07	-27	-12.07	269	368	H

Pk - Peak detector

VERTICAL RESULT

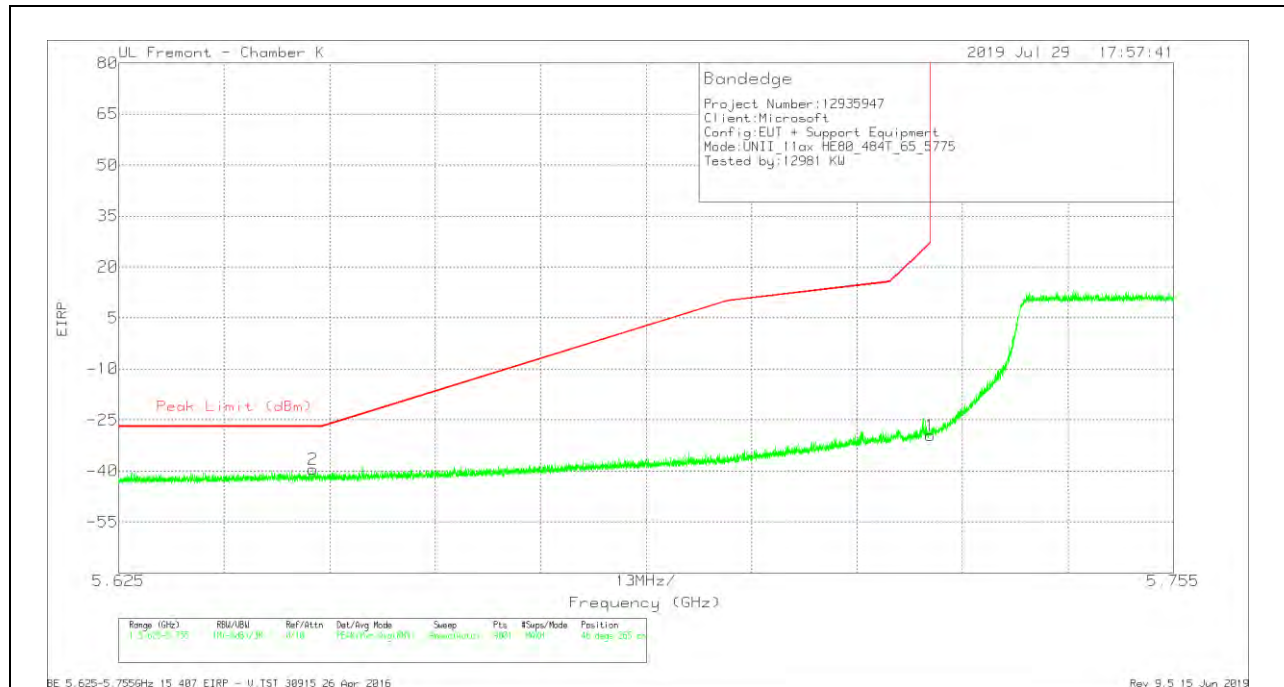

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-57.2	Pk	34.8	-19	11.8	-29.6	26.99	-56.59	46	265	V
2	5.64896	-66.66	Pk	34.8	-19.4	11.8	-39.46	-27	-12.46	46	265	V

Pk - Peak detector

2TX Chain 0 + Chain 1 OFDMA MODE – 484-Tones, RU Index 66

BANDEDGE (CHANNEL 155 HIGH EDGE)

HORIZONTAL RESULT

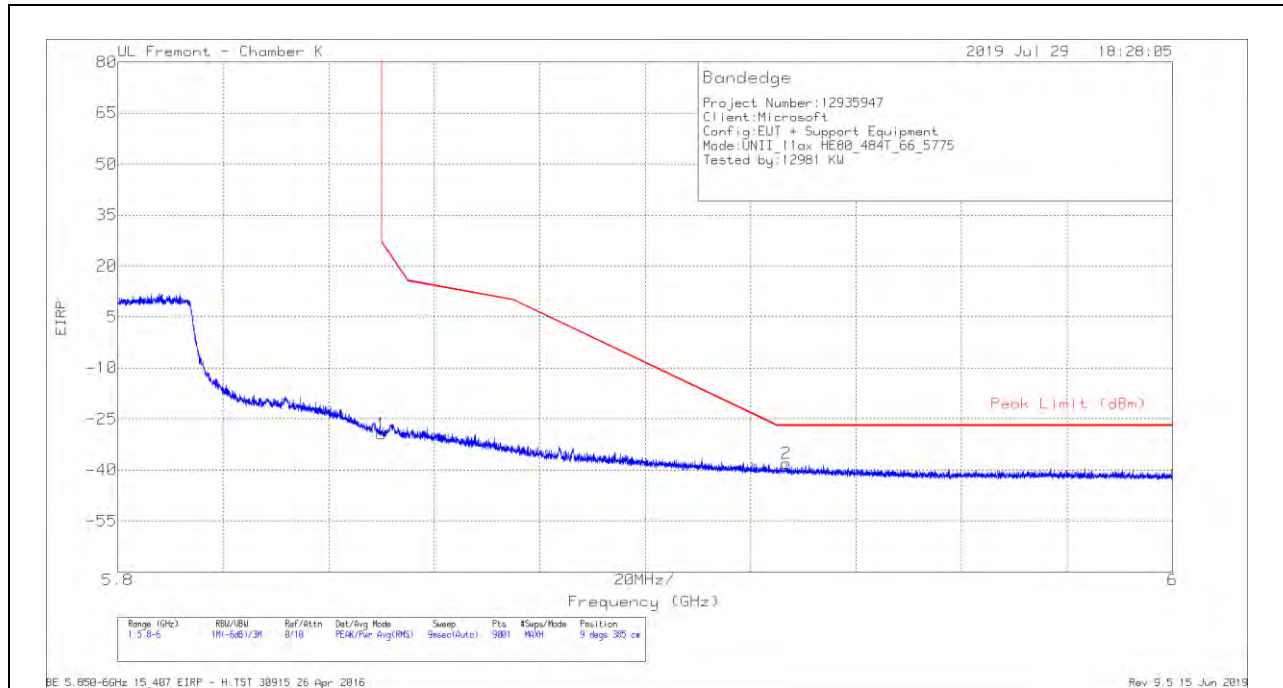


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-57.25	Pk	35	-18.9	11.8	-29.35	26.95	-56.3	9	385	H
2	5.92682	-66.21	Pk	35.1	-18.8	11.8	-38.11	-27	-11.11	9	385	H

Pk - Peak detector

VERTICAL RESULT

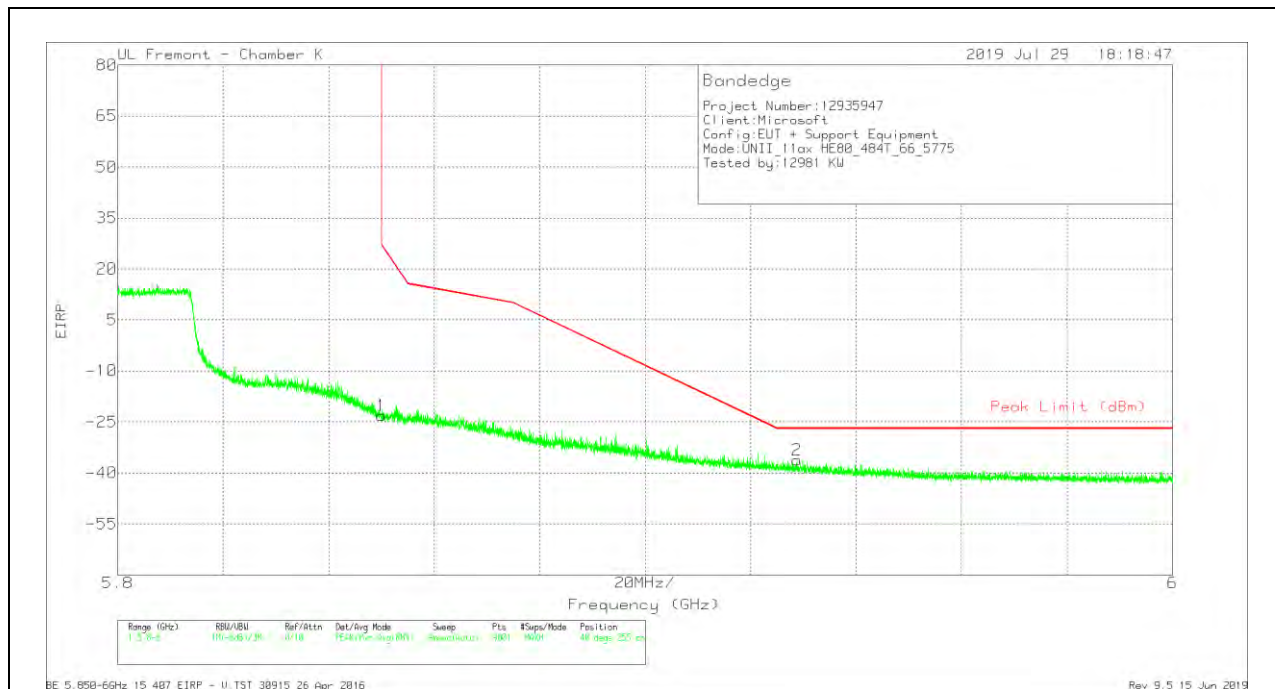

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-51.03	Pk	35	-18.9	11.8	-23.13	26.95	-50.08	40	255	V
2	5.92875	-64.3	Pk	35.1	-18.8	11.8	-36.2	-27	-9.2	40	255	V

Pk - Peak detector

2TX Chain 0 + Chain 1 OFDMA MODE – 242-Tones, RU Index 61

BANDEDGE (CHANNEL 155 LOW EDGE)

HORIZONTAL RESULT

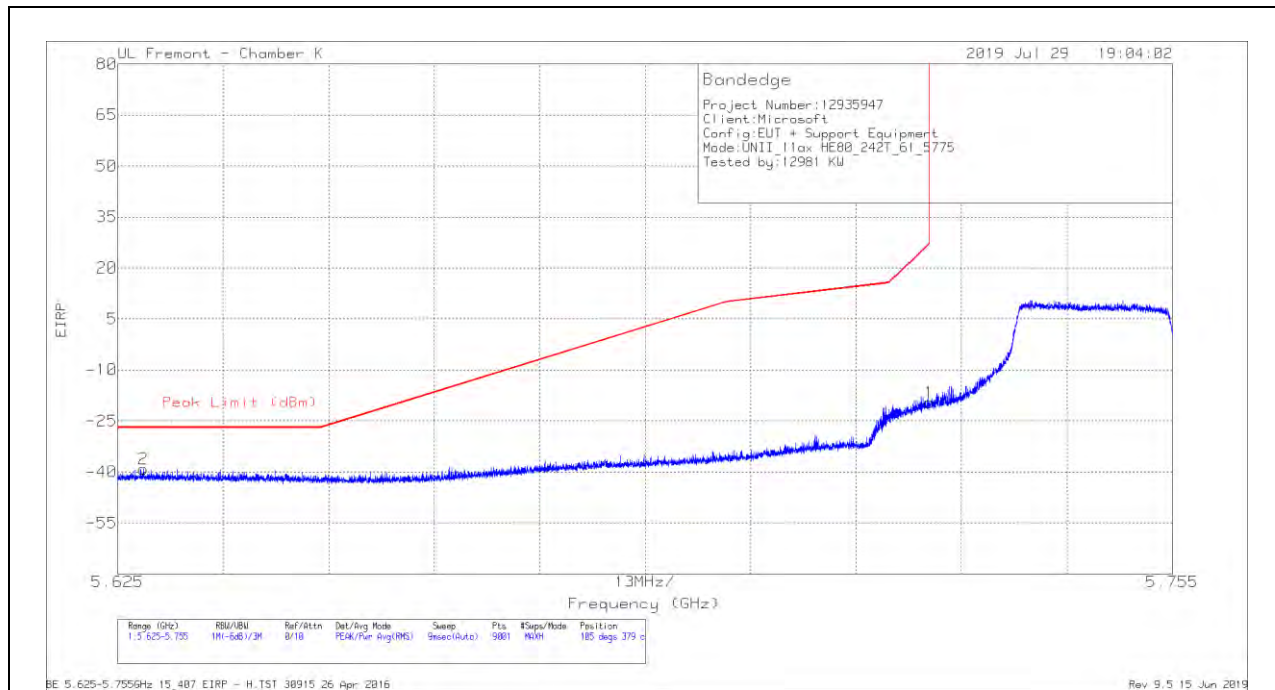


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-47.19	Pk	34.8	-19	11.8	-19.59	26.99	-46.58	105	379	H
2	5.62818	-66.27	Pk	34.9	-19.5	11.8	-39.07	-27	-12.07	105	379	H

Pk - Peak detector

VERTICAL RESULT

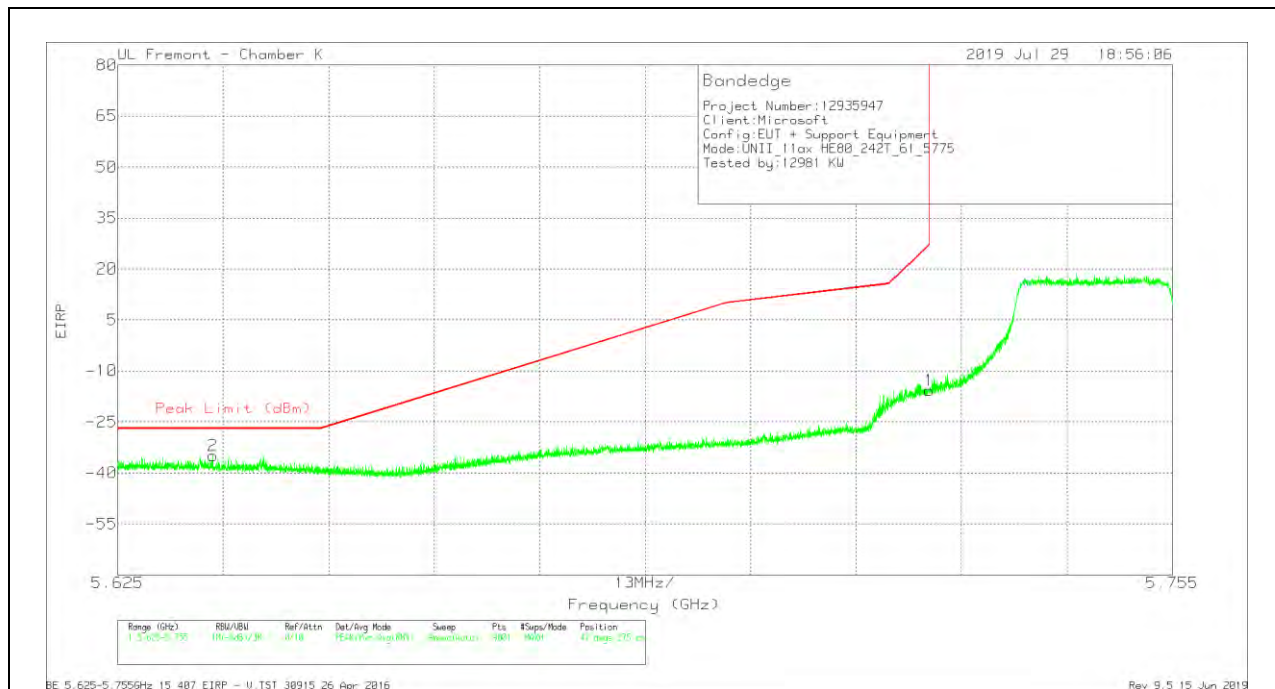

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-43.3	Pk	34.8	-19	11.8	-15.7	26.99	-42.69	47	275	V
2	5.63673	-61.89	Pk	34.7	-19.5	11.8	-34.89	-27	-7.89	47	275	V

Pk - Peak detector

2TX Chain 0 + Chain 1 OFDMA MODE – 242-Tones, RU Index 64

BANDEDGE (CHANNEL 155 HIGH EDGE)

HORIZONTAL RESULT

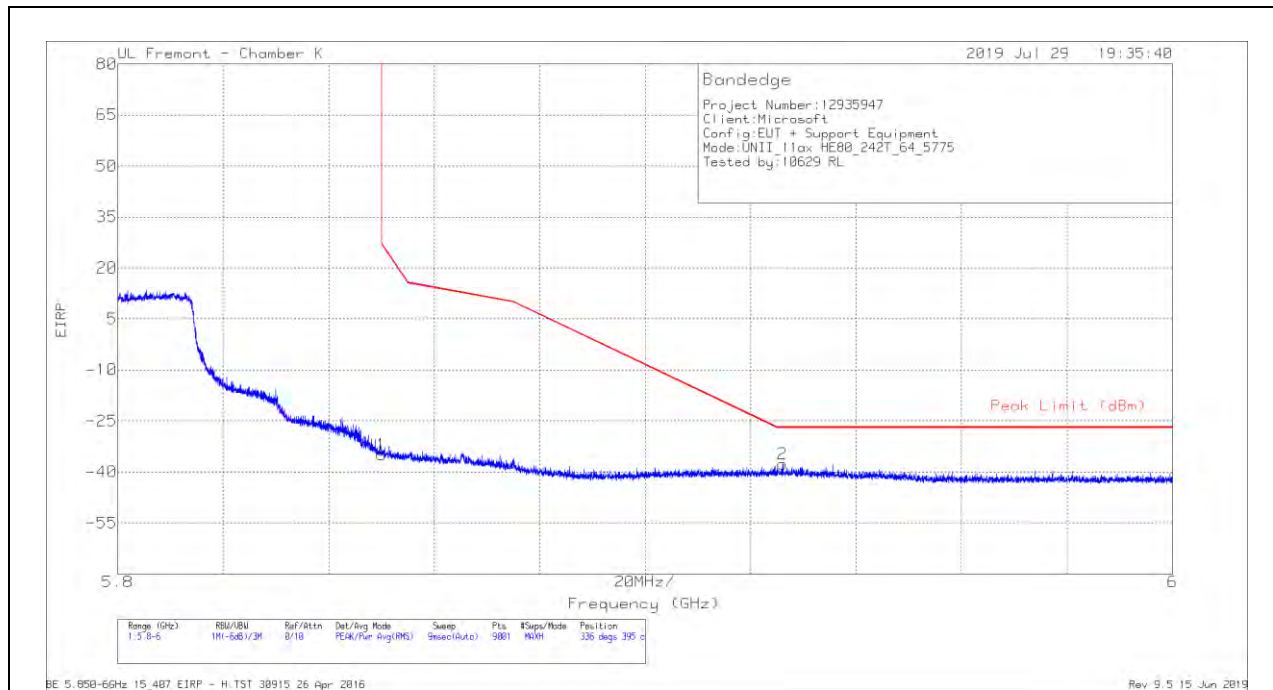


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-62.88	Pk	35	-18.9	11.8	-34.98	26.95	-61.93	336	395	H
2	5.92613	-65.78	Pk	35.1	-18.8	11.8	-37.68	-27	-10.68	336	395	H

Pk - Peak detector

VERTICAL RESULT

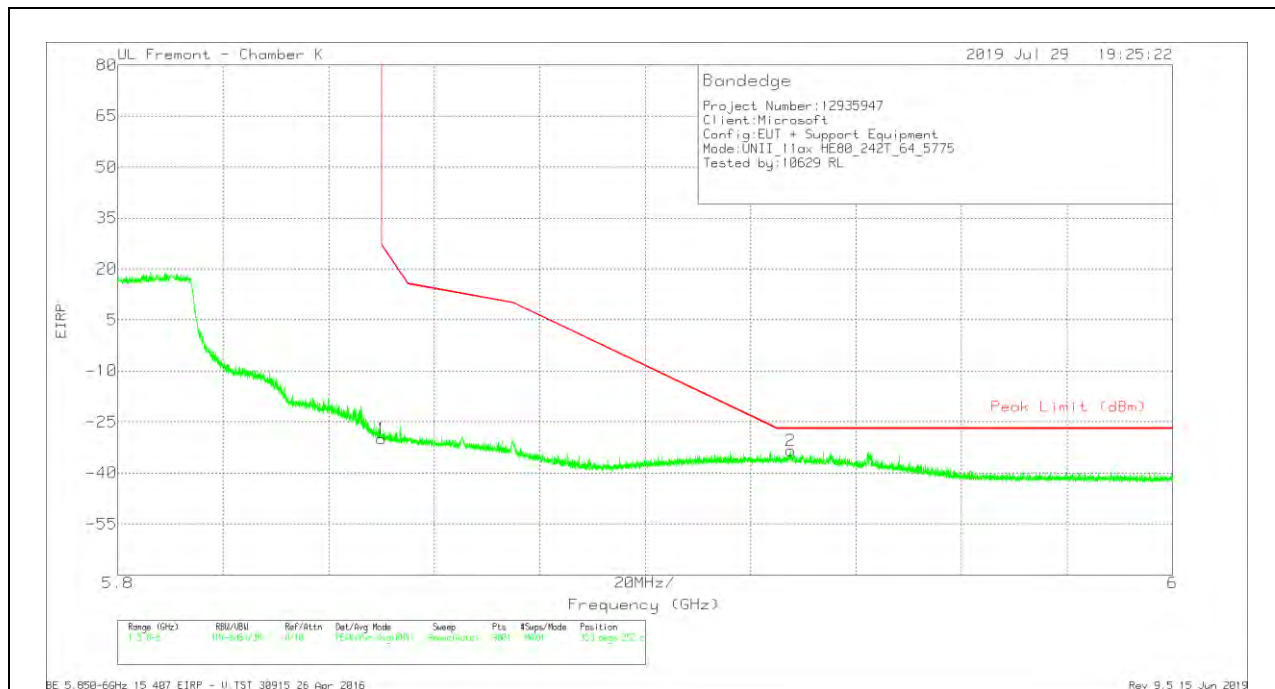

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-57.83	Pk	35	-18.9	11.8	-29.93	26.95	-56.88	353	252	V
2	5.92758	-61.48	Pk	35.1	-18.8	11.8	-33.38	-27	-6.38	353	252	V

Pk - Peak detector

2TX Chain 0 + Chain 1 OFDMA MODE – 106-Tones, RU Index 53

BANDEDGE (CHANNEL 155 LOW EDGE)

HORIZONTAL RESULT

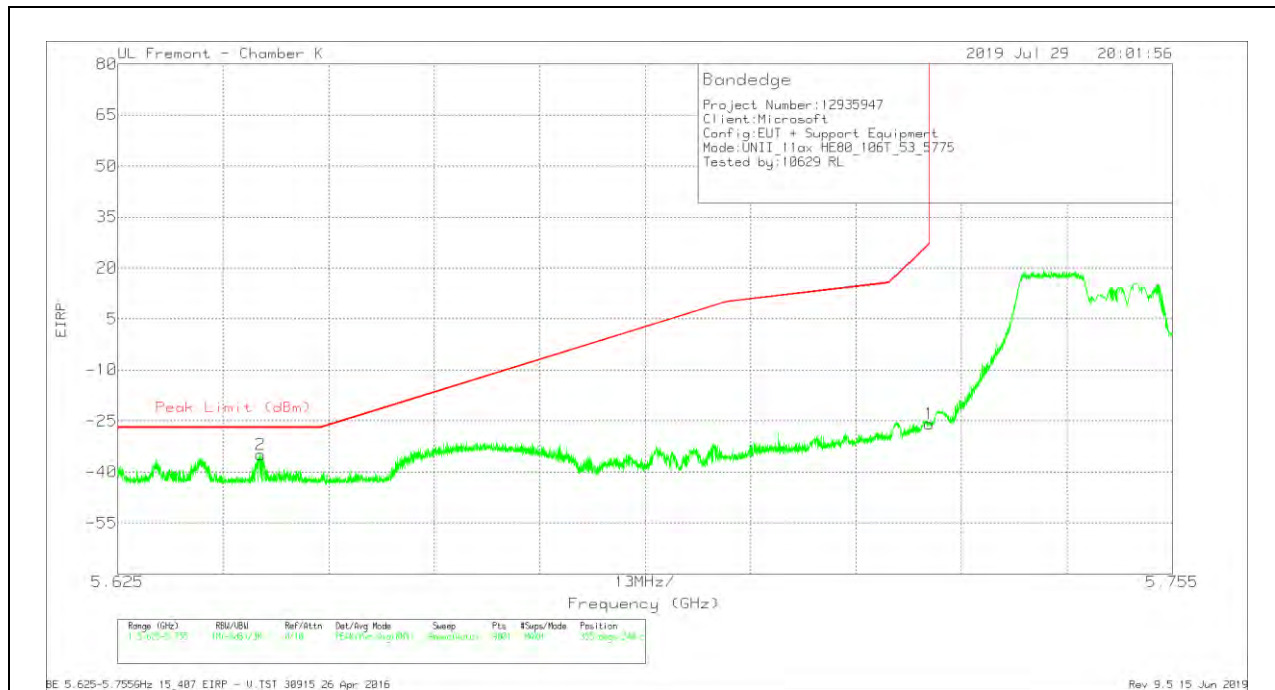


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-53.41	Pk	34.8	-19	11.8	-25.81	26.99	-52.8	355	240	V
2	5.64261	-62.03	Pk	34.8	-19.4	11.8	-34.83	-27	-7.83	355	240	V

Pk - Peak detector

VERTICAL RESULT

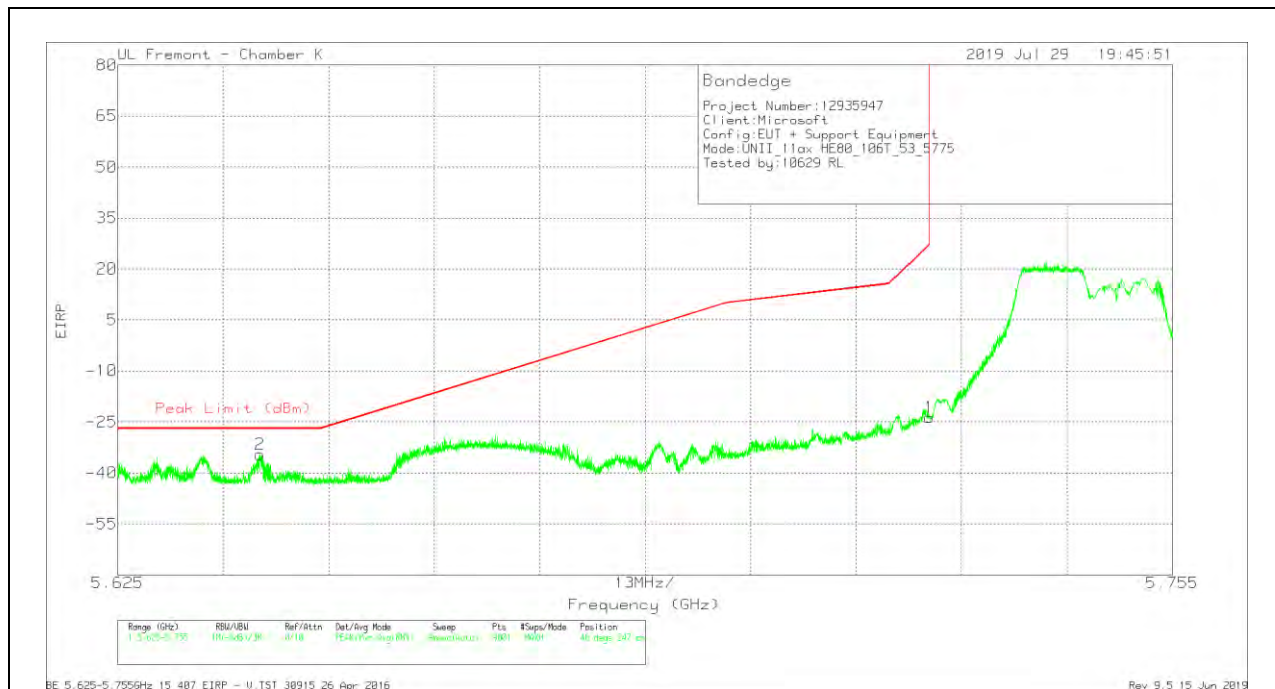

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-51.27	Pk	34.8	-19	11.8	-23.67	26.99	-50.66	46	247	V
2	5.64255	-61.77	Pk	34.8	-19.4	11.8	-34.57	-27	-7.57	46	247	V

Pk - Peak detector

2TX Chain 0 + Chain 1 OFDMA MODE – 106-Tones, RU Index 60

BANDEDGE (CHANNEL 155 HIGH EDGE)

HORIZONTAL RESULT

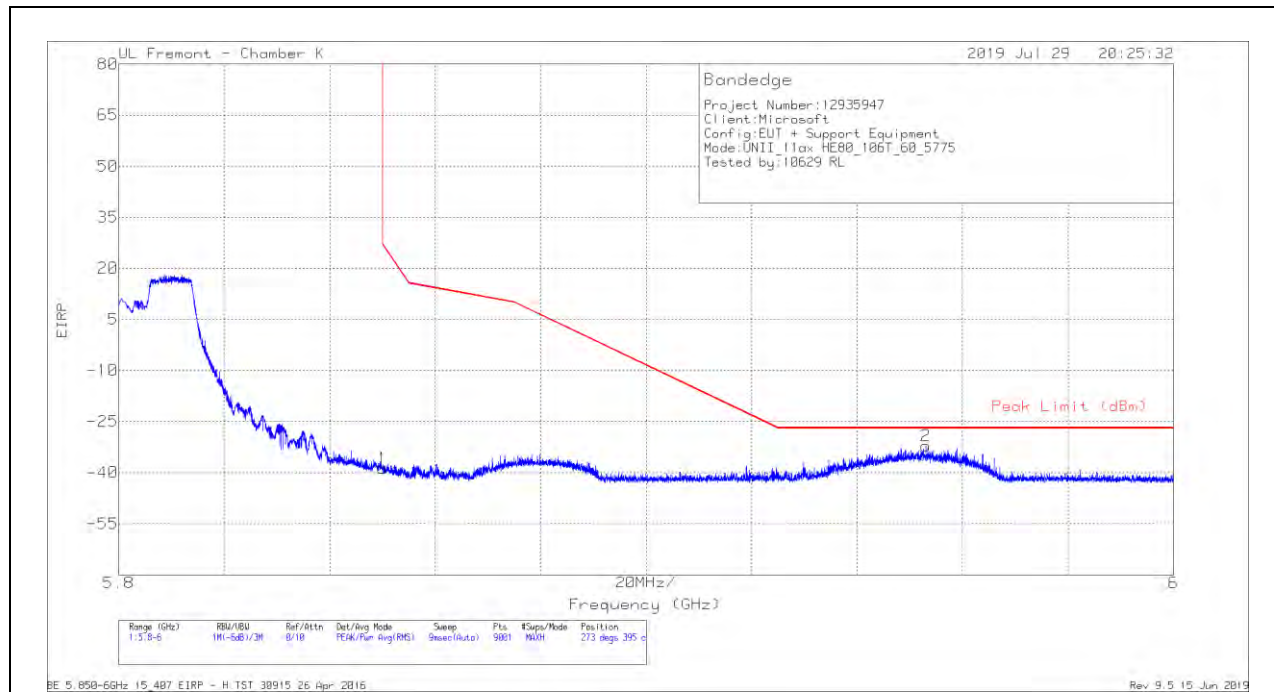


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-66.6	Pk	35	-18.9	11.8	-38.7	26.95	-65.65	273	395	H
2	5.95307	-60.26	Pk	35.1	-18.7	11.8	-32.06	-27	-5.06	273	395	H

Pk - Peak detector

VERTICAL RESULT

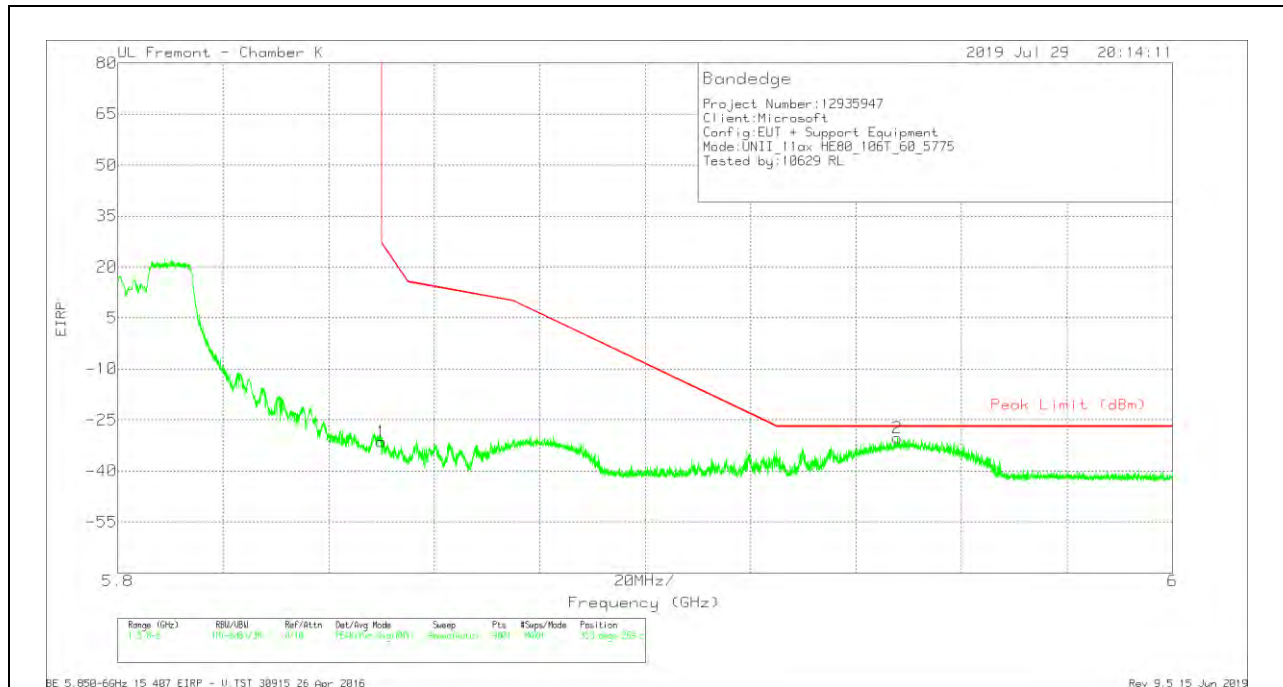

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-59.37	Pk	35	-18.9	11.8	-31.47	26.95	-58.42	353	269	V
2	5.94787	-58.55	Pk	35.1	-18.7	11.8	-30.35	-27	-3.35	353	269	V

Pk - Peak detector

2TX Chain 0 + Chain 1 OFDMA MODE – 52-Tones, RU Index 37

BANDEDGE (CHANNEL 155 LOW EDGE)

HORIZONTAL RESULT

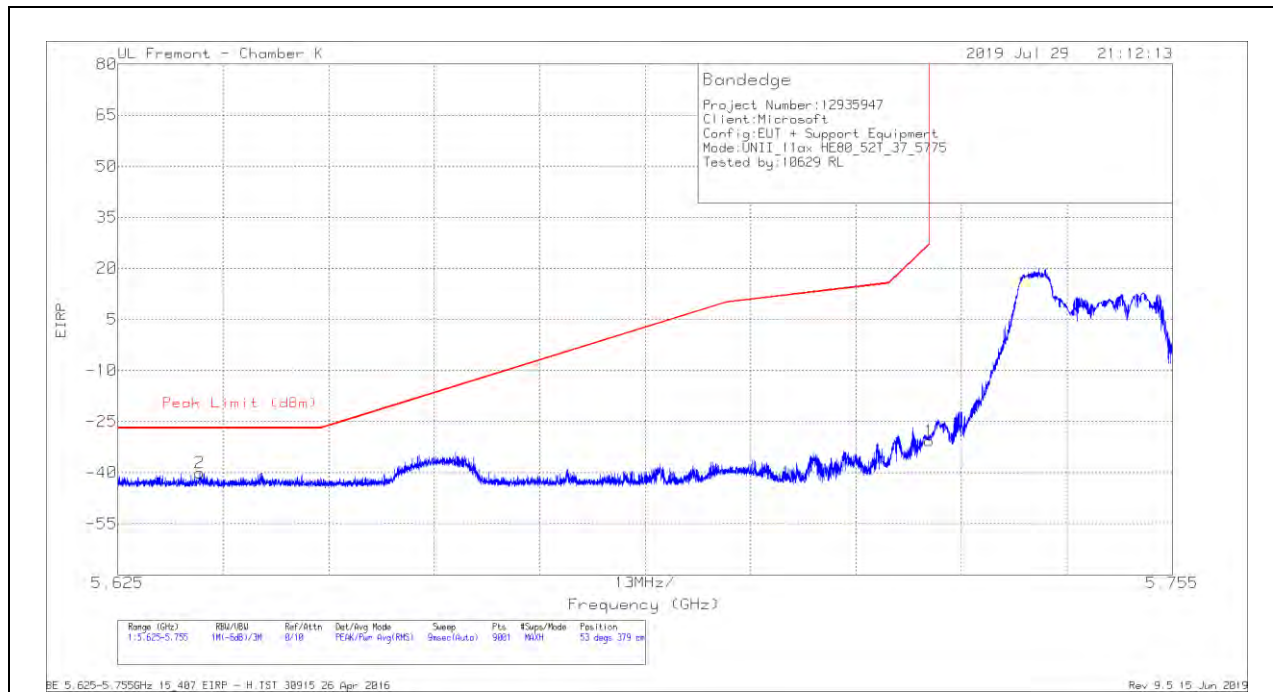

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-58.25	Pk	34.8	-19	11.8	-30.65	26.99	-57.64	53	379	H
2	5.6351	-66.99	Pk	34.7	-19.5	11.8	-39.99	-27	-12.99	53	379	H

Pk - Peak detector

VERTICAL RESULT



Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-52.2	Pk	34.8	-19	11.8	-24.6	26.99	-51.59	0	231	V
2	5.64274	-62.14	Pk	34.8	-19.4	11.8	-34.94	-27	-7.94	0	231	V

Pk - Peak detector

2TX Chain 0 + Chain 1 OFDMA MODE – 52-Tones, RU Index 52

BANDEDGE (CHANNEL 155 HIGH EDGE)

HORIZONTAL RESULT

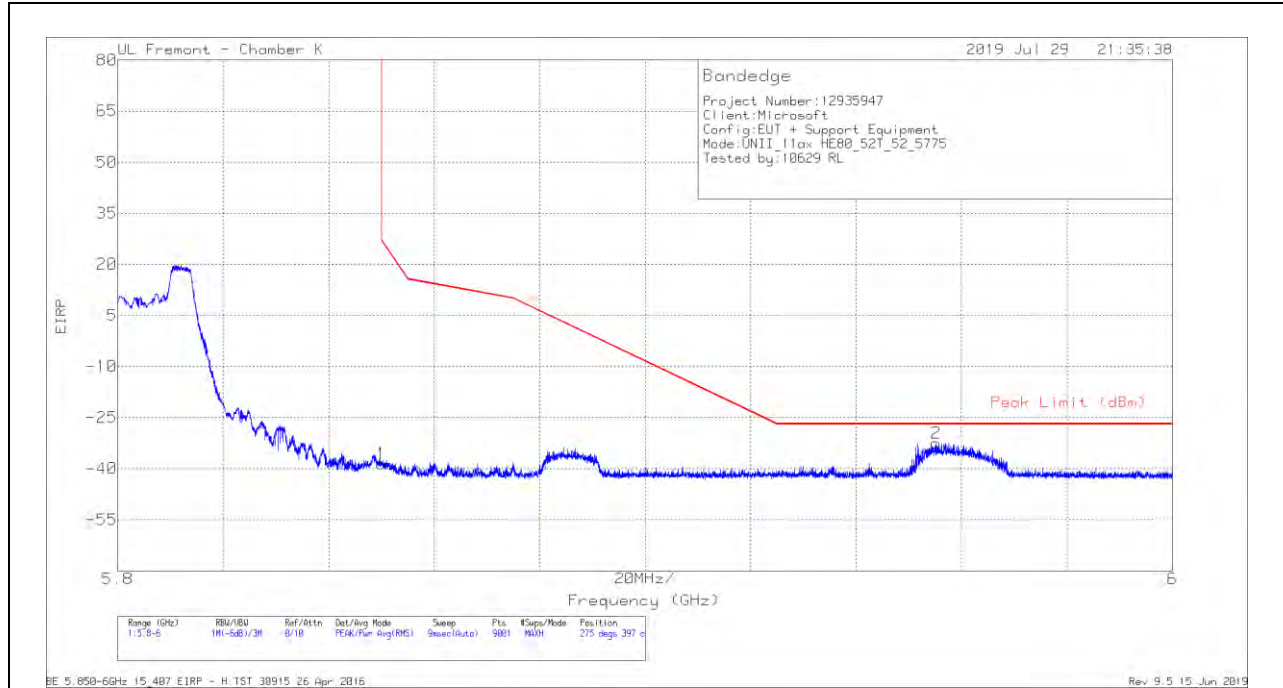


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-66.49	Pk	35	-18.9	11.8	-38.59	26.95	-65.54	275	397	H
2	5.95515	-60.73	Pk	35.1	-18.7	11.8	-32.53	-27	-5.53	275	397	H

Pk - Peak detector

VERTICAL RESULT

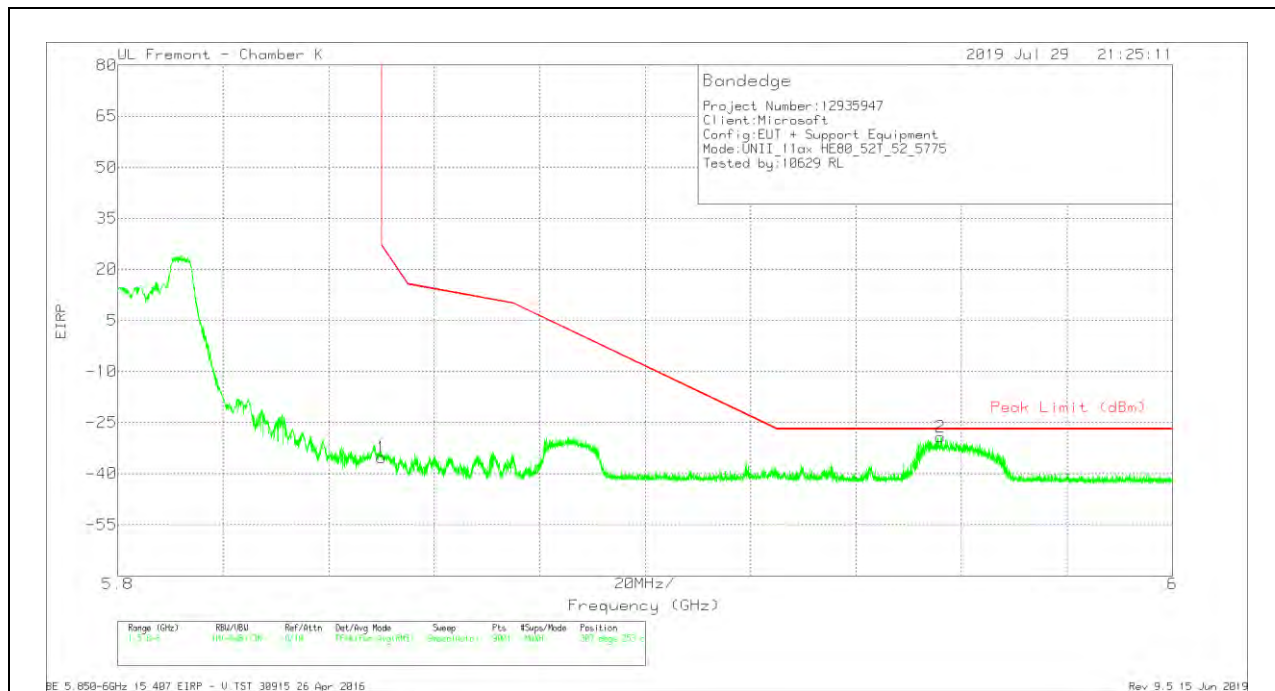

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-63.11	Pk	35	-18.9	11.8	-35.21	26.95	-62.16	307	253	V
2	5.95602	-57.47	Pk	35.1	-18.7	11.8	-29.27	-27	-2.27	307	253	V

Pk - Peak detector

2TX Chain 0 + Chain 1 OFDMA MODE – 26-Tones, RU Index 0

BANDEDGE (CHANNEL 155 LOW EDGE)

HORIZONTAL RESULT

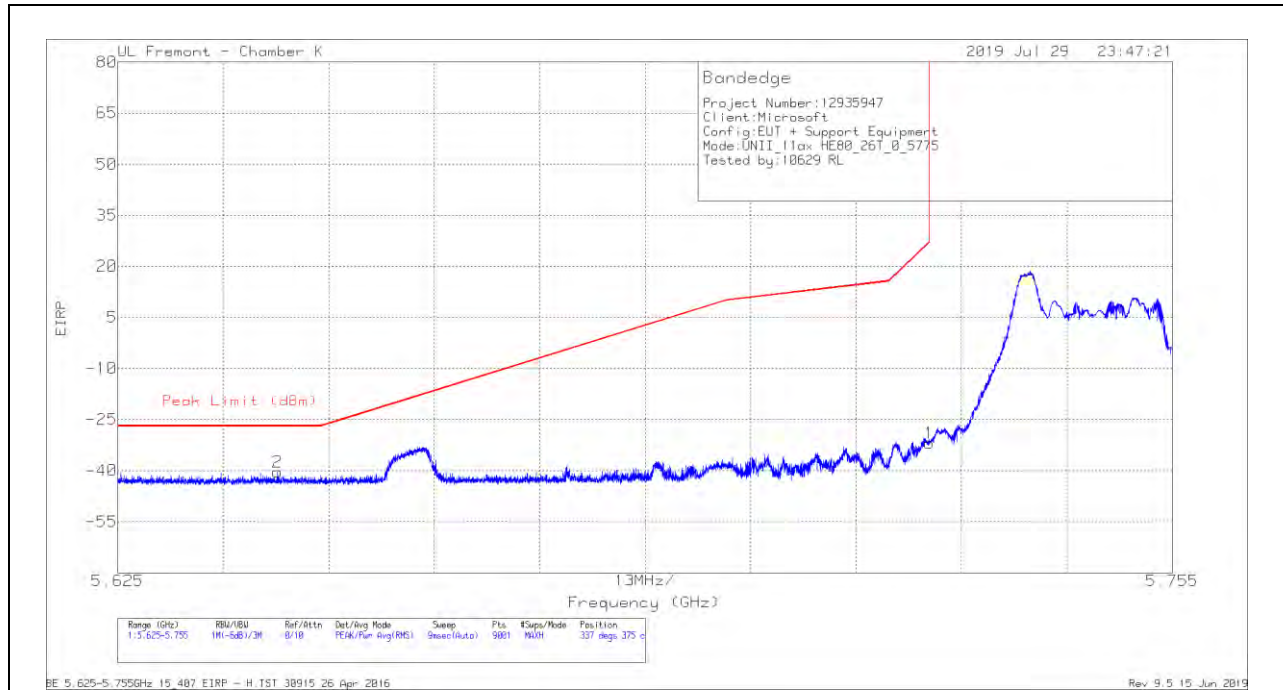


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-59.54	Pk	34.8	-19	11.8	-31.94	26.99	-58.93	337	375	H
2	5.64467	-67.79	Pk	34.9	-19.4	11.8	-40.49	-27	-13.49	337	375	H

Pk - Peak detector

VERTICAL RESULT

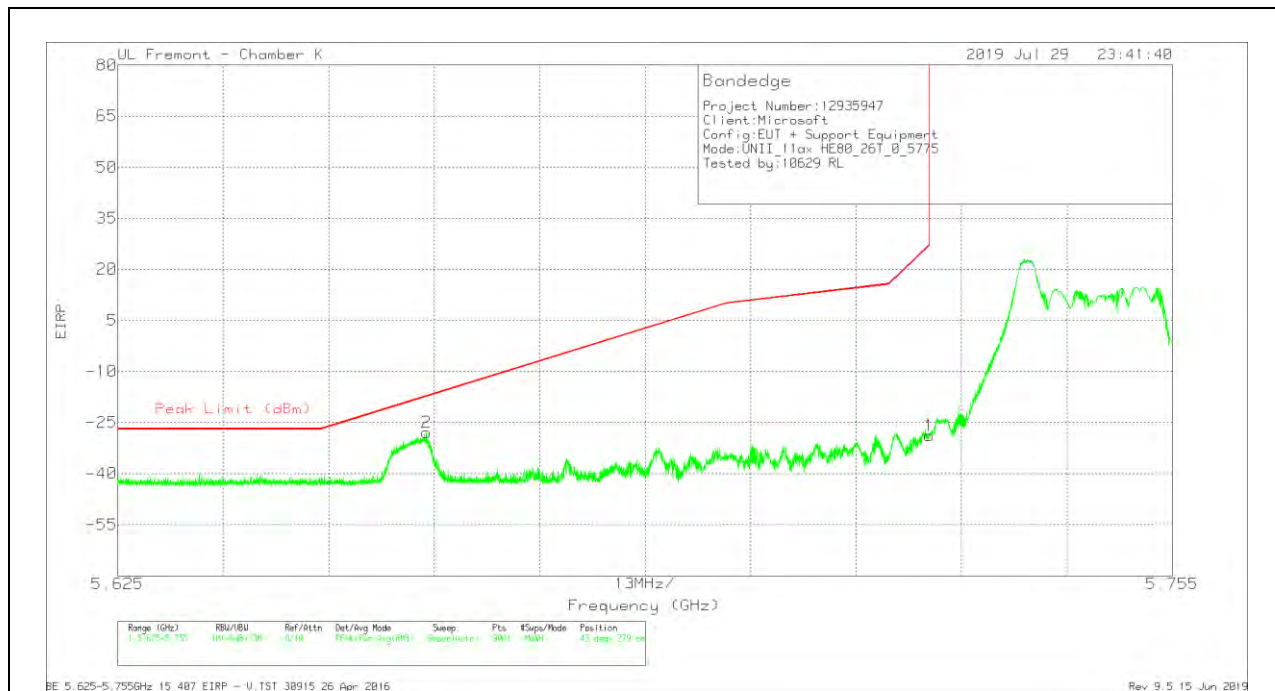

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-56.47	Pk	34.8	-19	11.8	-28.87	26.99	-55.86	43	279	V
2	5.66305	-55.21	Pk	34.8	-19.3	11.8	-27.91	-17.35	-10.56	43	279	V

Pk - Peak detector

2TX Chain 0 + Chain 1 OFDMA MODE – 26-Tones, RU Index 36

BANDEDGE (CHANNEL 155 HIGH EDGE)

HORIZONTAL RESULT




Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-64.54	Pk	35	-18.9	11.8	-36.64	26.95	-63.59	53	383	H
2	5.96191	-60.95	Pk	35.2	-18.7	11.8	-32.65	-27	-5.65	53	383	H

Pk - Peak detector

VERTICAL RESULT

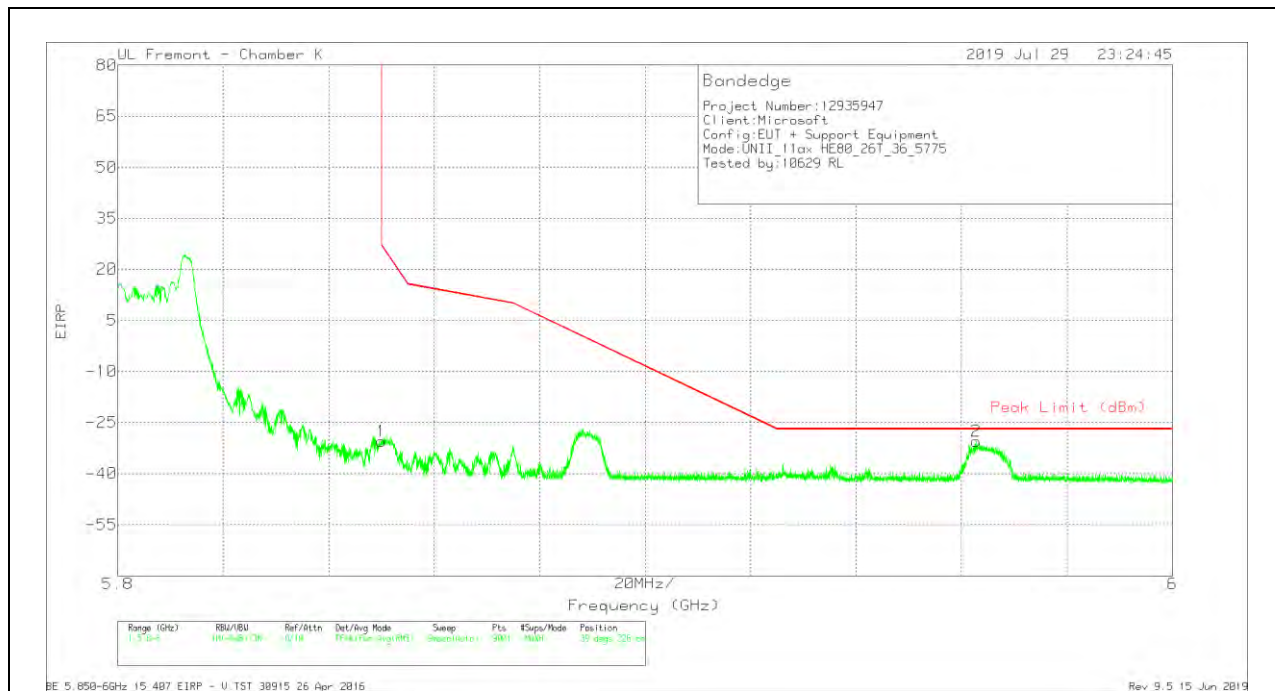

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF EMC4294 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-58.32	Pk	35	-18.9	11.8	-30.42	26.95	-57.37	39	226	V
2	5.96282	-58.7	Pk	35.2	-18.7	11.8	-30.4	-27	-3.4	39	226	V

Pk - Peak detector

10. SETUP PHOTOS

Please refer to 12935947-EP1 for setup photos

END OF TEST REPORT