
8.5.4. 802.11n HT40 MODE

2TX Antenna 1 + Antenna 2 CDD MODE


Duty Cycle CF (dB)	0.47	Included in Calculations of Corr'd PSD
PSD Results		

Channel	Frequency	Chain 0	Chain 1	Total	Limit	Margin
	4 \	Meas	Meas	Corr'd PSD		
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm/ 3kHz)	(dB)
Low 3	2422	-9.72	-8.69	-5.69	8.0	-13.7
Mid 6	2437	-8.91	-8.92	-5.43	8.0	-13.4
High 9	2452	-8.17	-8.48	-4.84	8.0	-12.8
High 10	2457	-8.99	-9.12	-5.57	8.0	-13.6
High 11	2462	-13.52	-13.97	-10.26	8.0	-18.3


LOW CHANNEL 3

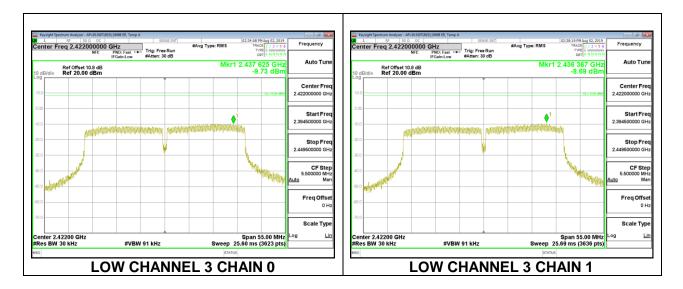


MID CHANNEL 6

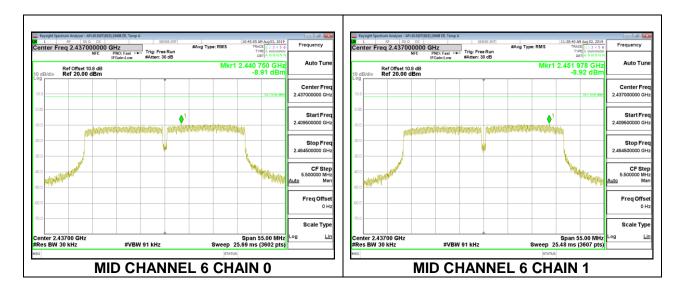


HIGH CHANNEL 9

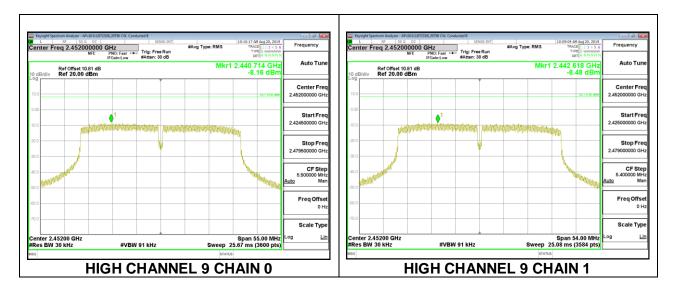

HIGH CHANNEL 10

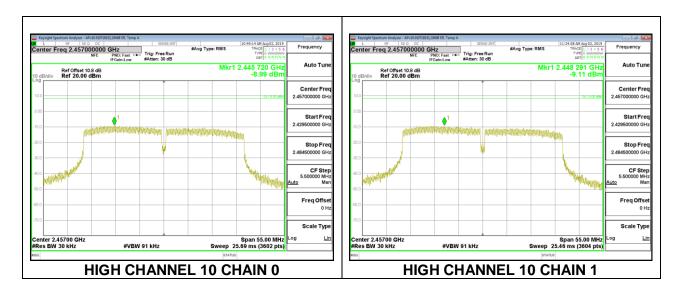

HIGH CHANNEL 11

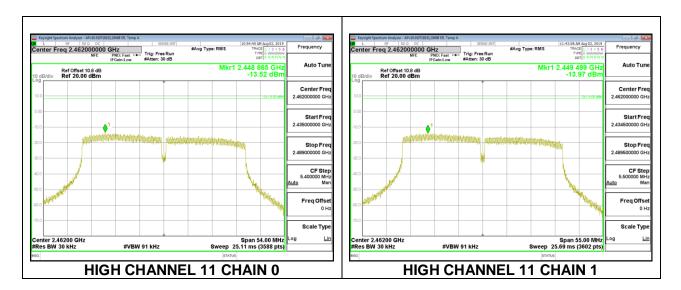

8.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)


RSS-247 5.5

Output power was measured based on the use of average measurement, therefore the required attenuation is 30 dB.


RESULTS


8.6.1. 802.11b MODE

2TX Antenna 1 + Antenna 2 CDD MODE

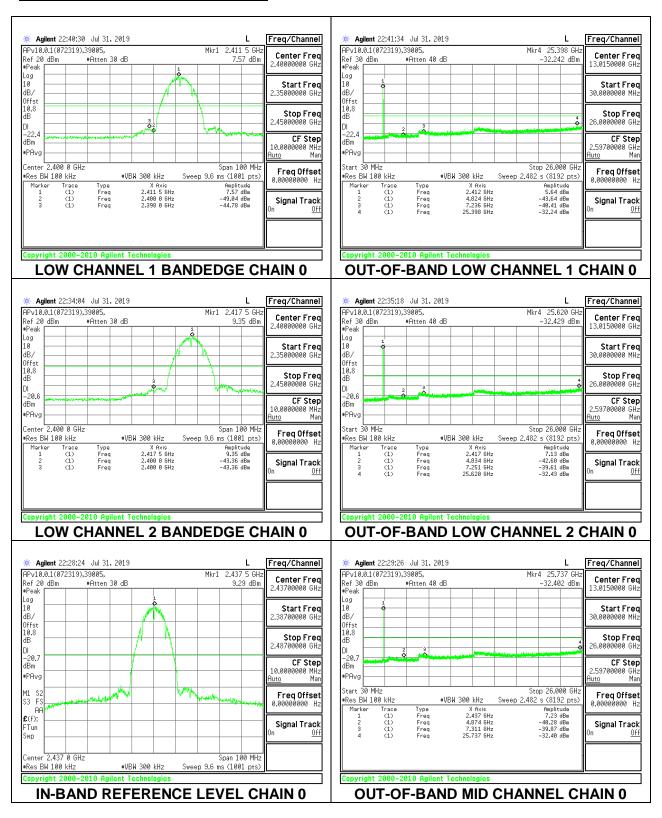


DATE: 9/26/2019

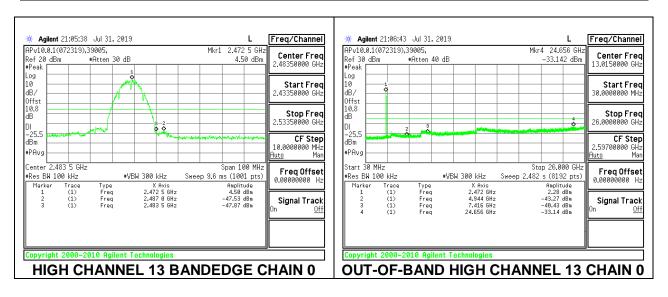

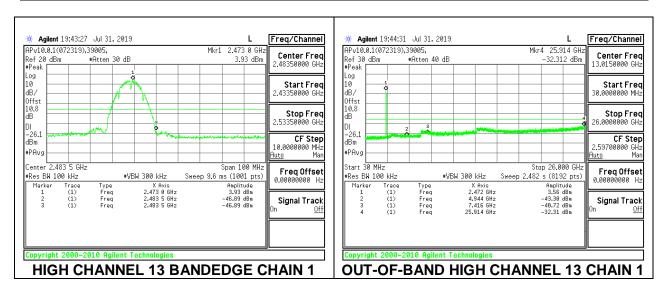


8.6.2. 802.11g MODE

2TX Antenna 1 + Antenna 2 CDD MODE

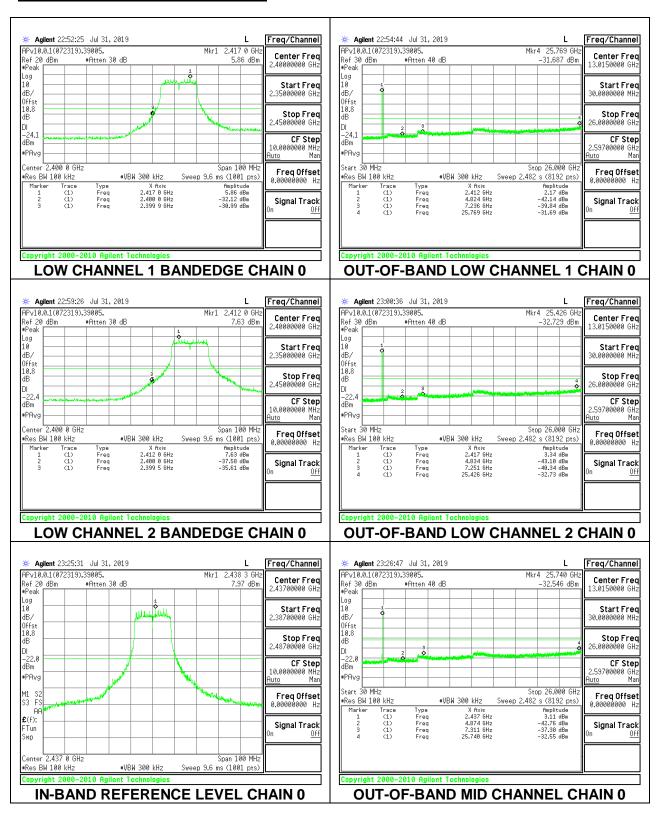


DATE: 9/26/2019

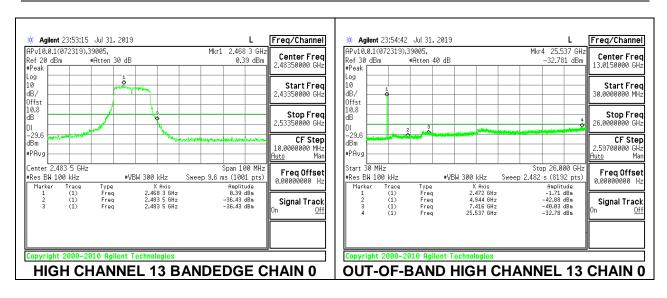

IN-BAND REFERENCE LEVEL CHAIN 1


OUT-OF-BAND MID CHANNEL CHAIN 1


DATE: 9/26/2019

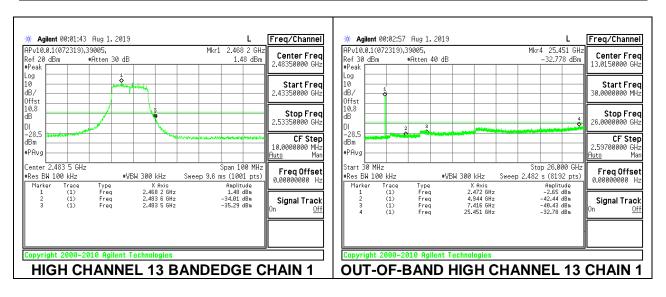



8.6.3. 802.11n HT20 MODE


2TX Antenna 1 + Antenna 2 CDD MODE

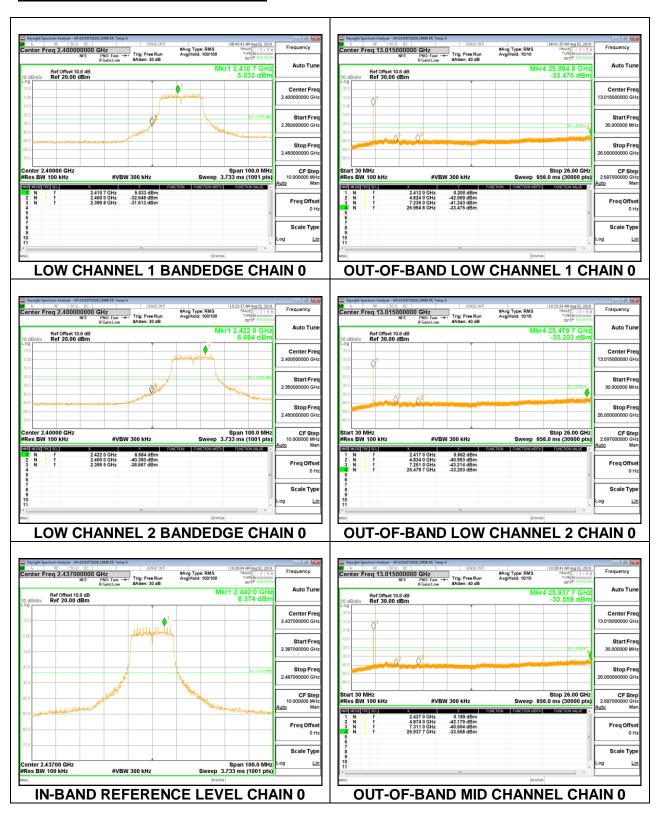

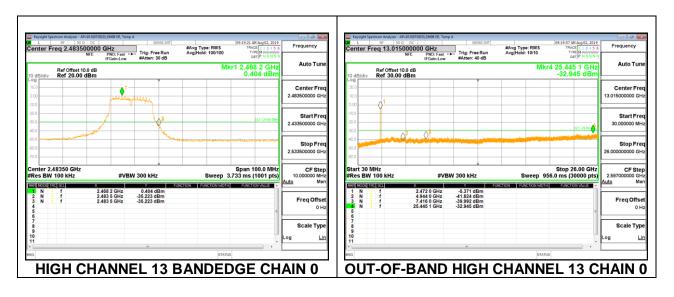

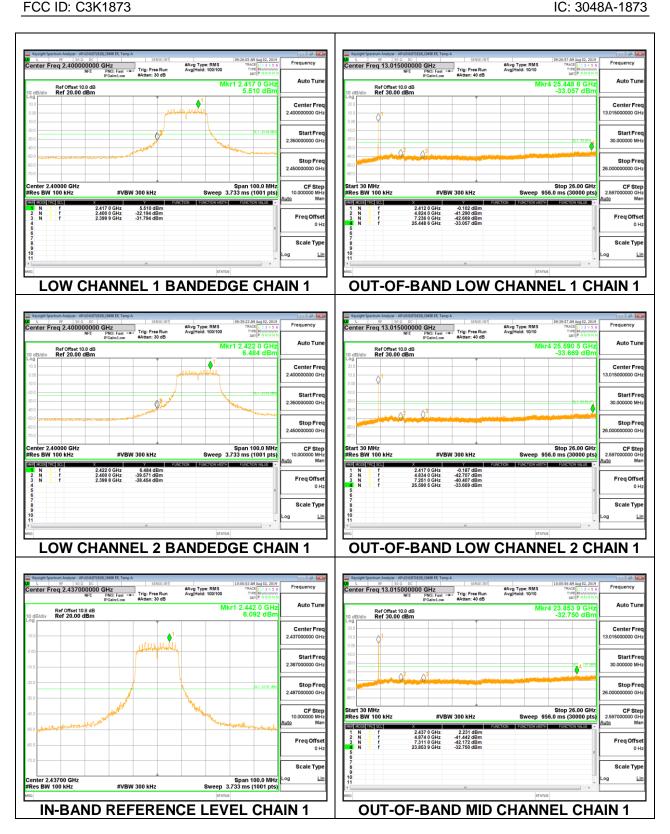

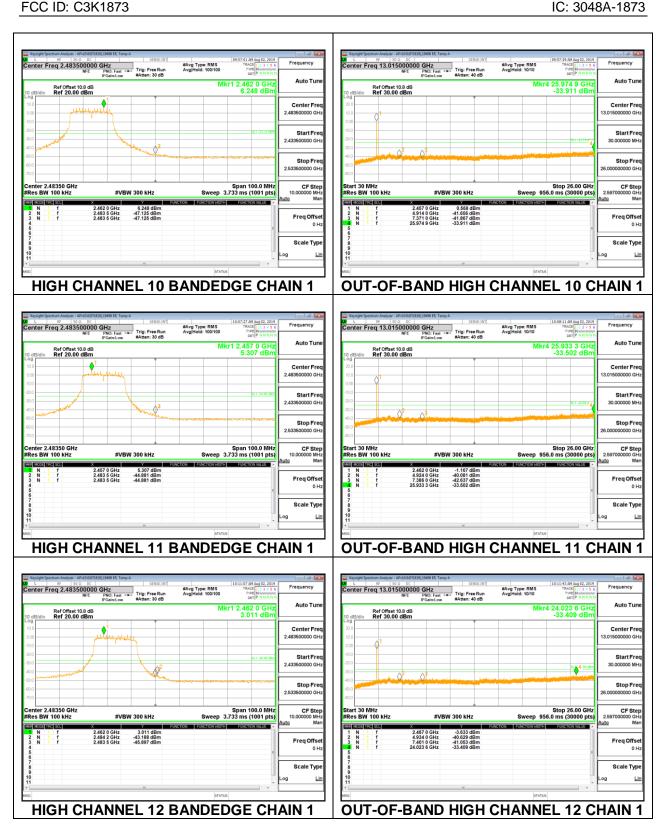

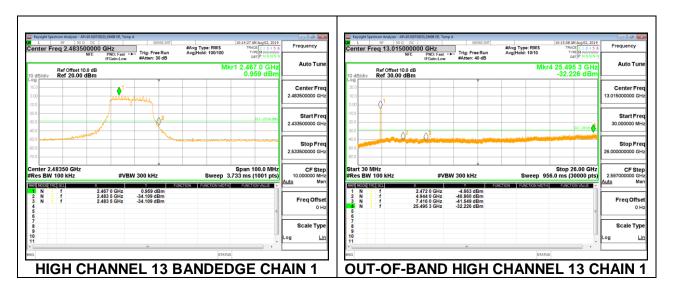

8.6.4. 802.11n HT40 MODE

2TX Antenna 1 + Antenna 2 CDD MODE

