



HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

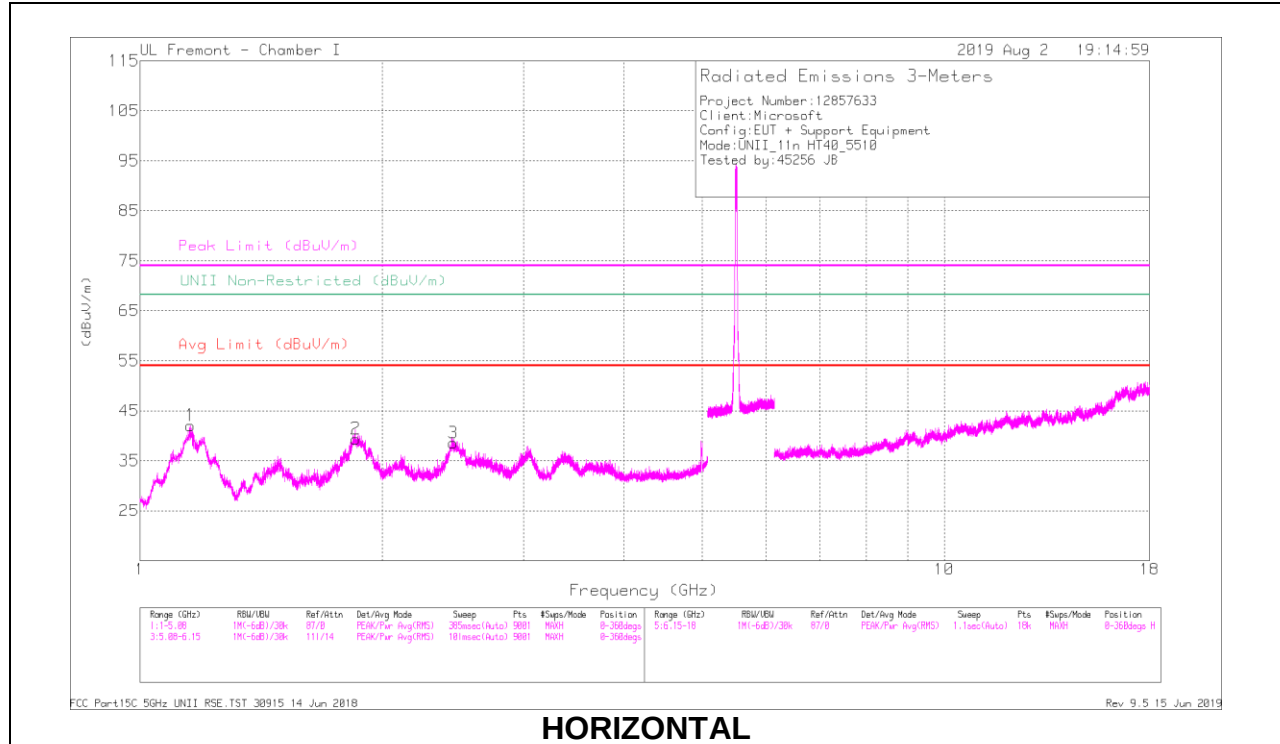

HORIZONTAL

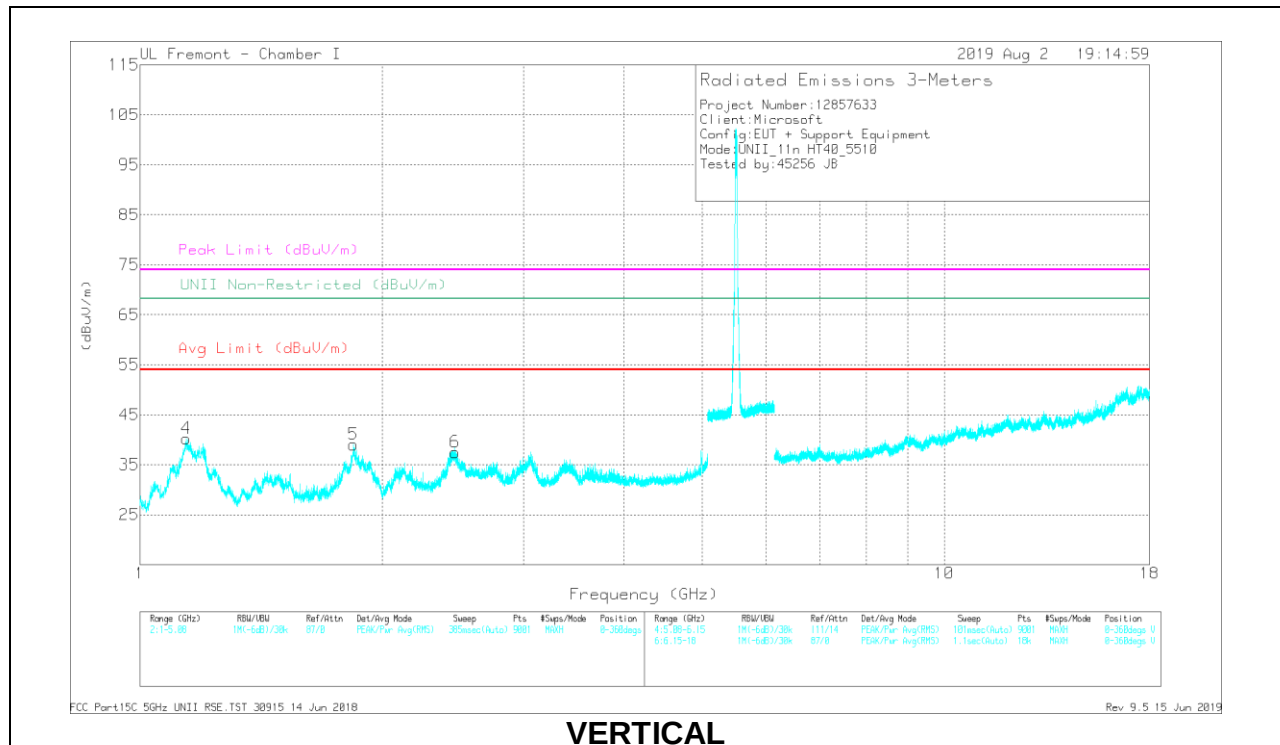

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	AF 1862 (dBm)	Amp(CM)RtrPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.15381	57.71	PK-U	27.6	-34	0	51.31	-	-	74	-22.69	-	-	157	153	H
	* 1.15649	47.21	ADR	27.6	-34	.44	41.25	54	-12.75	-	-	-	-	157	153	H
2	1.85606	52.86	PK-U	30.8	-32.7	0	50.96	-	-	-	-	68.2	-17.24	195	146	H
3	2.45009	46.68	PK-U	32.3	-31.6	0	47.38	-	-	-	-	68.2	-20.82	334	198	H
4	* 1.1428	56.36	PK-U	27.6	-34	0	49.96	-	-	74	-24.04	-	-	258	260	V
	* 1.14271	46.34	ADR	27.6	-34	.44	40.38	54	-13.62	-	-	-	-	258	260	V
5	1.83966	49.93	PK-U	30.7	-32.5	0	48.13	-	-	-	-	68.2	-20.07	129	100	V
6	2.46622	44.44	PK-U	32.3	-31.6	0	45.14	-	-	-	-	68.2	-23.06	324	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

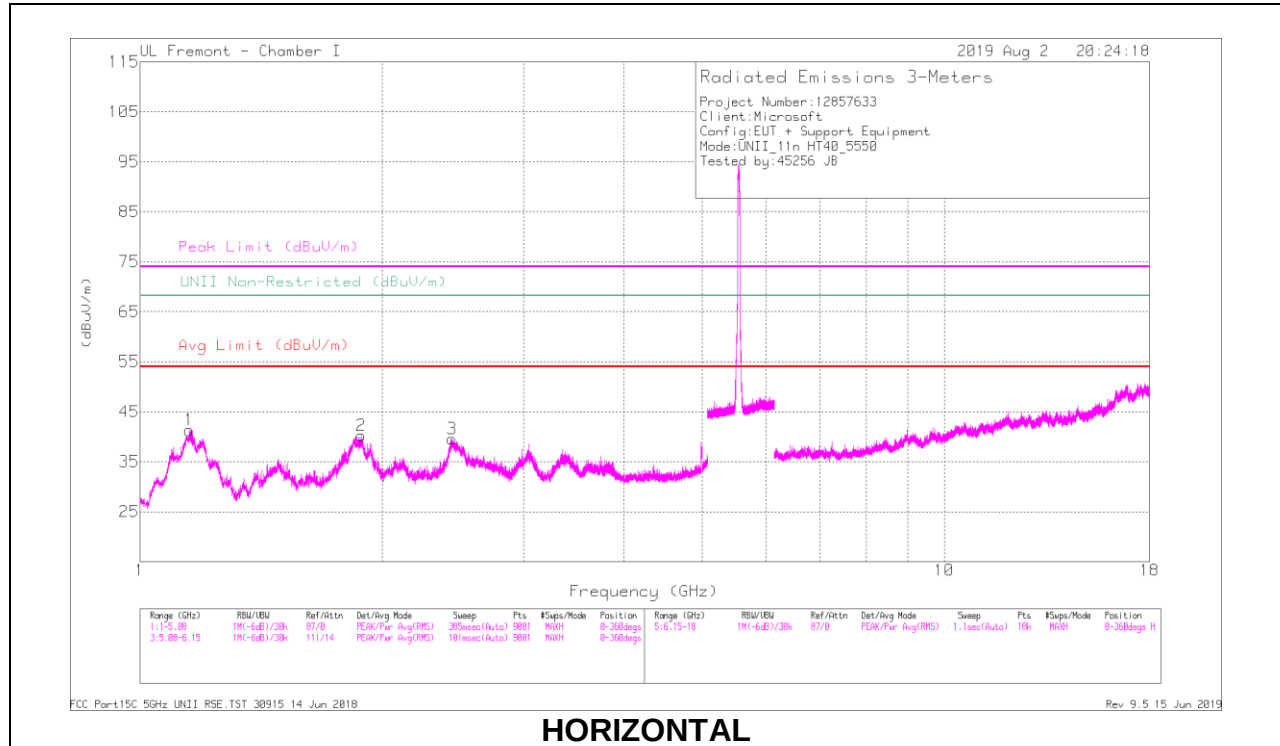

HORIZONTAL

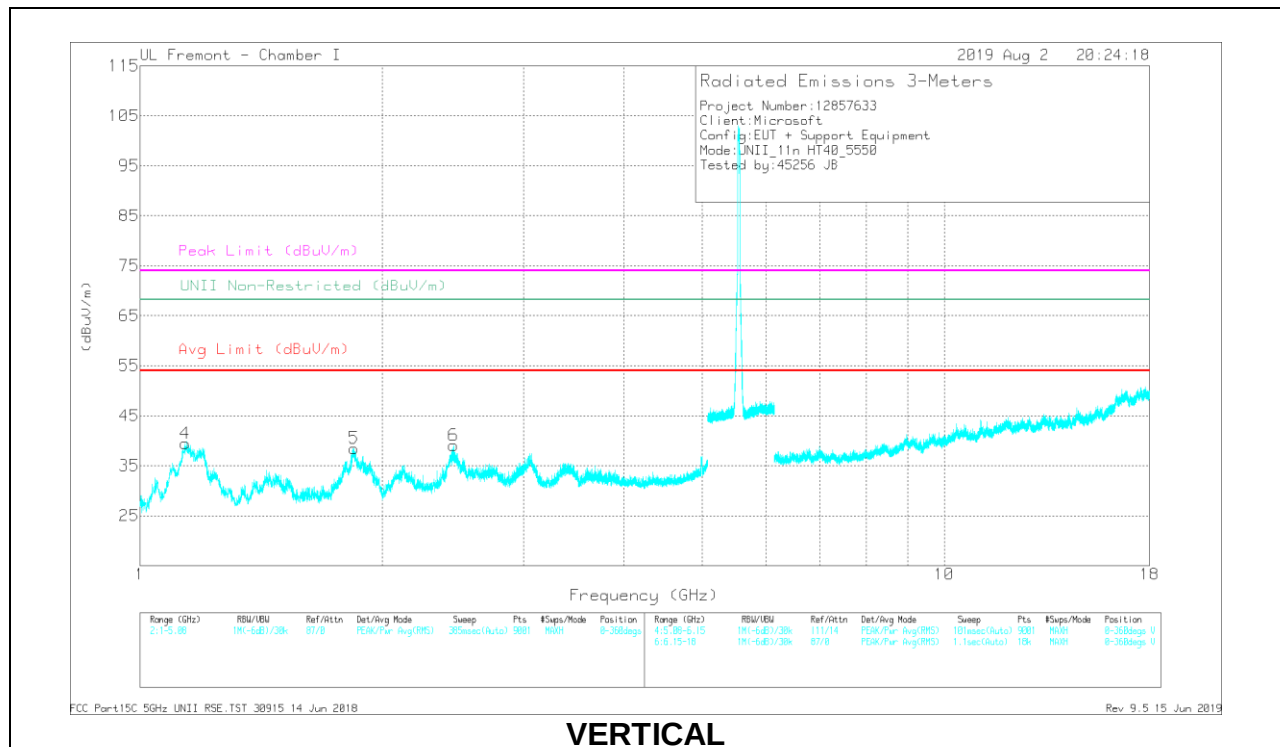

VERTICAL

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	AF 1862 (dBm)	Amp(CM)RtrPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.1531	57.61	PK-U	27.6	-34	0	51.21	-	-	74	-22.79	-	-	152	148	H
	* 1.14971	46.28	ADR	27.6	-34.1	.44	40.22	54	-13.78	-	-	-	-	152	148	H
2	1.8845	51.88	PK-U	30.6	-32.7	0	49.78	-	-	-	-	68.2	-18.42	156	141	H
3	2.44049	47.53	PK-U	32.2	-31.6	0	48.13	-	-	-	-	68.2	-20.07	331	131	H
4	* 1.1382	56.65	PK-U	27.7	-34.1	0	50.25	-	-	74	-23.75	-	-	261	271	V
	* 1.13849	46.87	ADR	27.7	-34.1	.44	40.91	54	-13.09	-	-	-	-	261	271	V
5	1.8454	49.42	PK-U	30.6	-32.7	0	47.32	-	-	-	-	68.2	-20.88	132	100	V
6	2.45371	47.57	PK-U	32.2	-31.7	0	48.07	-	-	-	-	68.2	-20.13	293	214	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

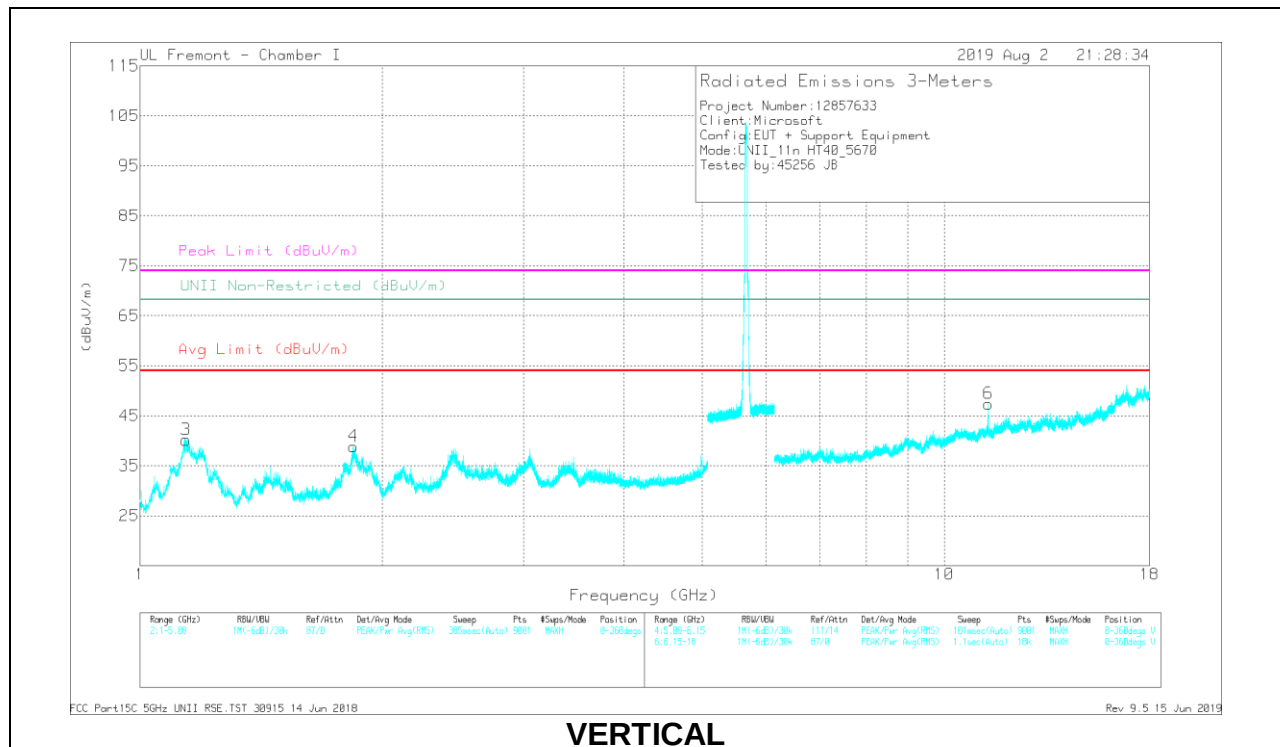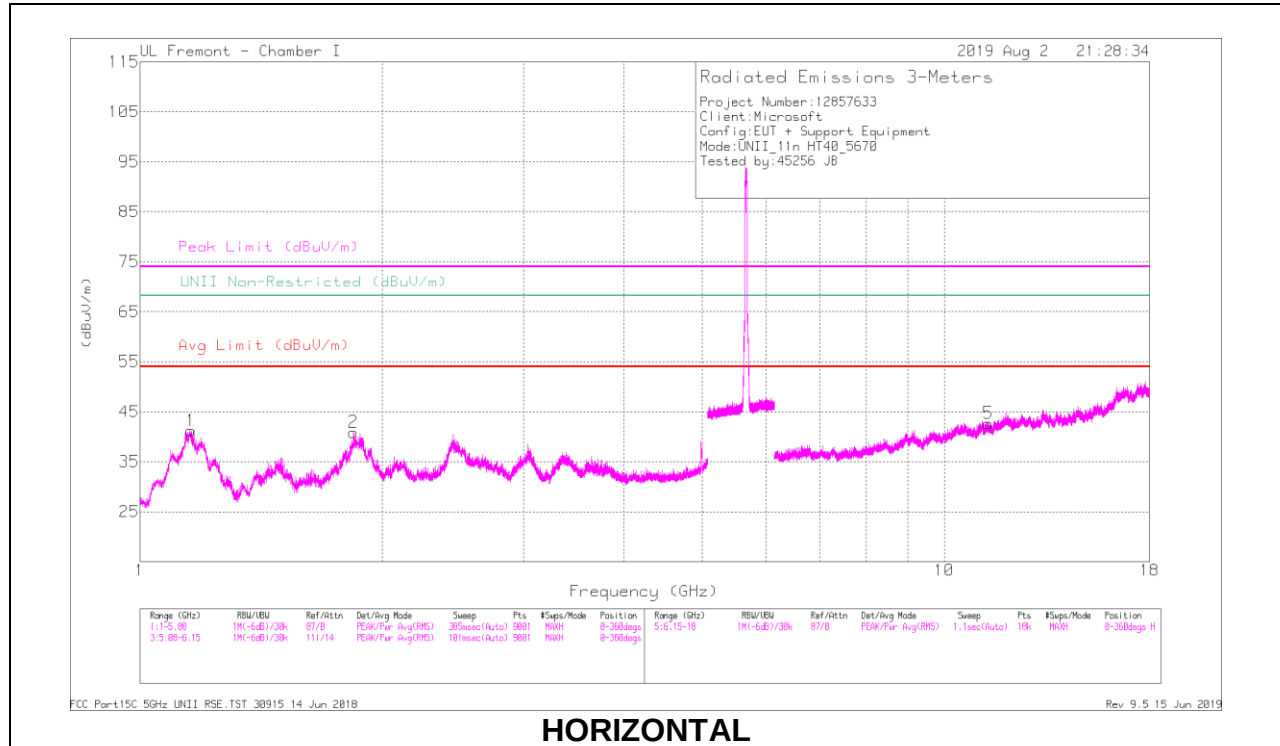

RADIATED EMISSIONS



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 1562 (dBm)	AmpCIS110/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	ULI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.84349	52.31	PK-U	30.7	-32.6	0	50.41	-	-	-	-	68.2	-17.79	164	141	H
1	* 1.15676	57.05	PK-U	27.6	-34	0	50.65	-	-	74	-23.35	-	-	158	207	H
	* 1.15643	46.9	ADR	27.6	-34	.44	40.94	54	-13.06	-	-	-	-	158	207	H
4	1.84207	50.6	PK-U	30.7	-32.6	0	48.7	-	-	-	-	68.2	-19.5	133	102	V
3	* 1.1406	57.78	PK-U	27.6	-34	0	51.38	-	-	74	-22.62	-	-	260	270	V
	* 1.14083	46.44	ADR	27.6	-34	.44	40.48	54	-13.52	-	-	-	-	260	270	V
5	* 1.13448	29.22	PK-U	38.1	-16.6	0	50.72	-	-	74	-23.28	-	-	179	369	H
	* 1.134613	19.23	ADR	38.1	-16.6	.44	41.17	54	-12.83	-	-	-	-	179	369	H
6	* 1.133872	33.28	PK-U	38.1	-16.7	0	54.68	-	-	74	-19.32	-	-	217	205	V
	* 1.133993	24.3	ADR	38.1	-16.7	.44	46.14	54	-7.86	-	-	-	-	217	205	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142 RESULTS

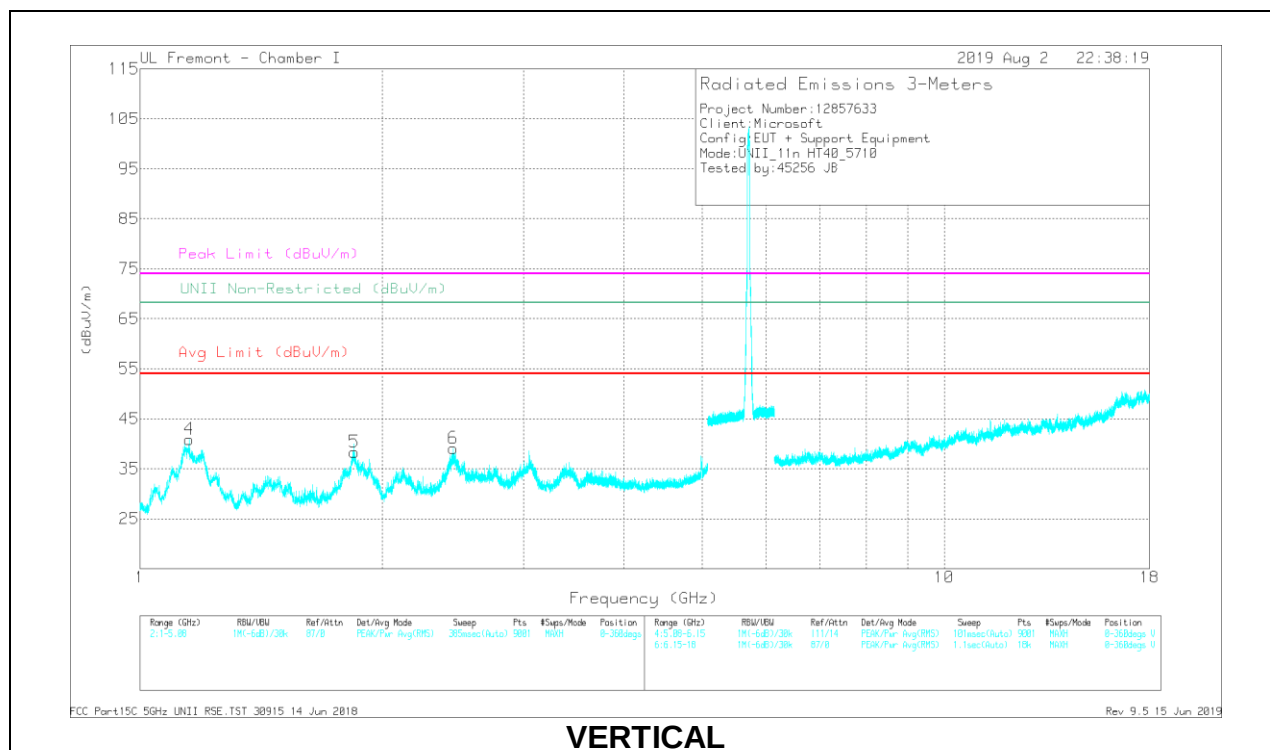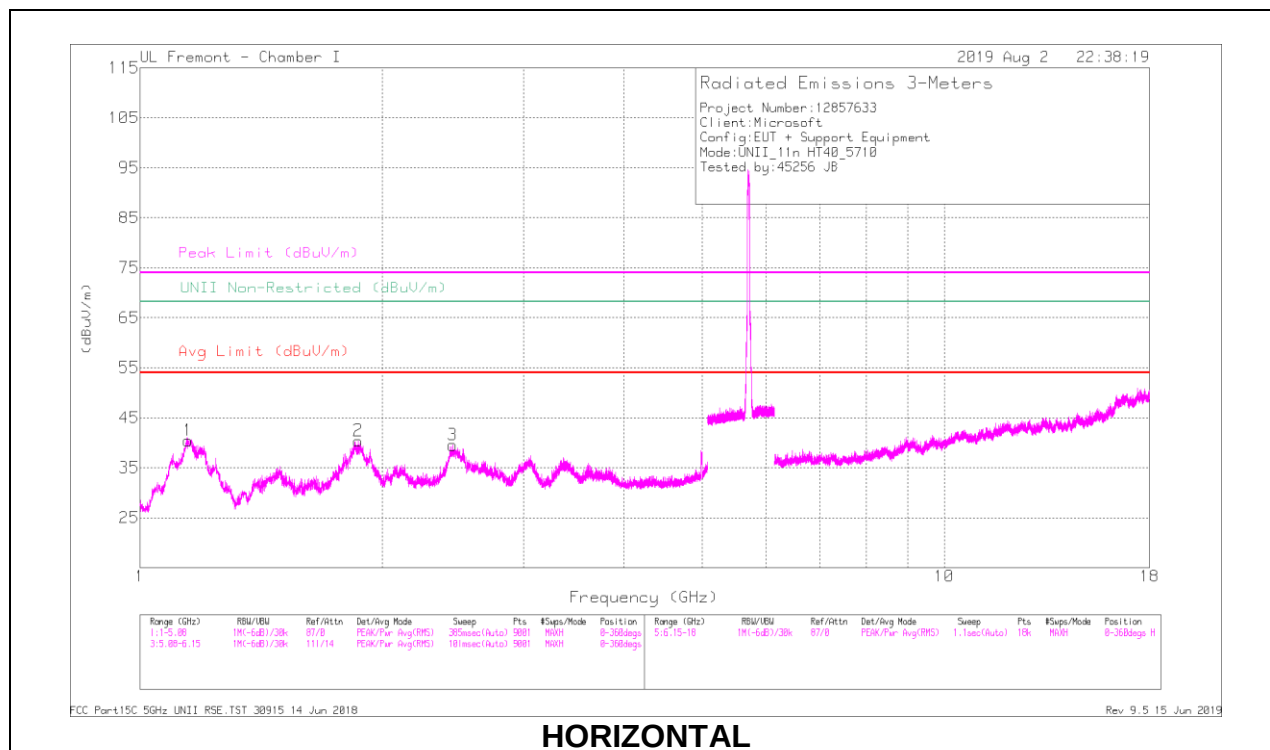

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	AF 1862 (dBm)	Amp CMRR (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.14878	57.59	PK-U	27.6	-34.1	0	51.09	-	-	74	-22.91	-	-	151	203	H
	* 1.14906	46.55	ADR	27.6	-34.1	.44	40.49	54	-13.51	-	-	-	-	151	203	H
2	1.86836	53.56	PK-U	30.8	-32.6	0	51.76	-	-	-	-	68.2	-16.44	164	178	H
3	2.44451	46.97	PK-U	32.2	-31.7	0	47.47	-	-	-	-	68.2	-20.73	332	108	H
4	* 1.15045	54.78	PK-U	27.6	-34	0	48.38	-	-	74	-25.62	-	-	96	111	V
	* 1.15145	44.19	ADR	27.6	-34	.44	38.23	54	-15.77	-	-	-	-	96	111	V
5	1.84533	49.7	PK-U	30.6	-32.7	0	47.6	-	-	-	-	68.2	-20.6	133	102	V
6	2.45214	47.77	PK-U	32.2	-31.7	0	48.27	-	-	-	-	68.2	-19.93	289	225	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.12. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.6 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

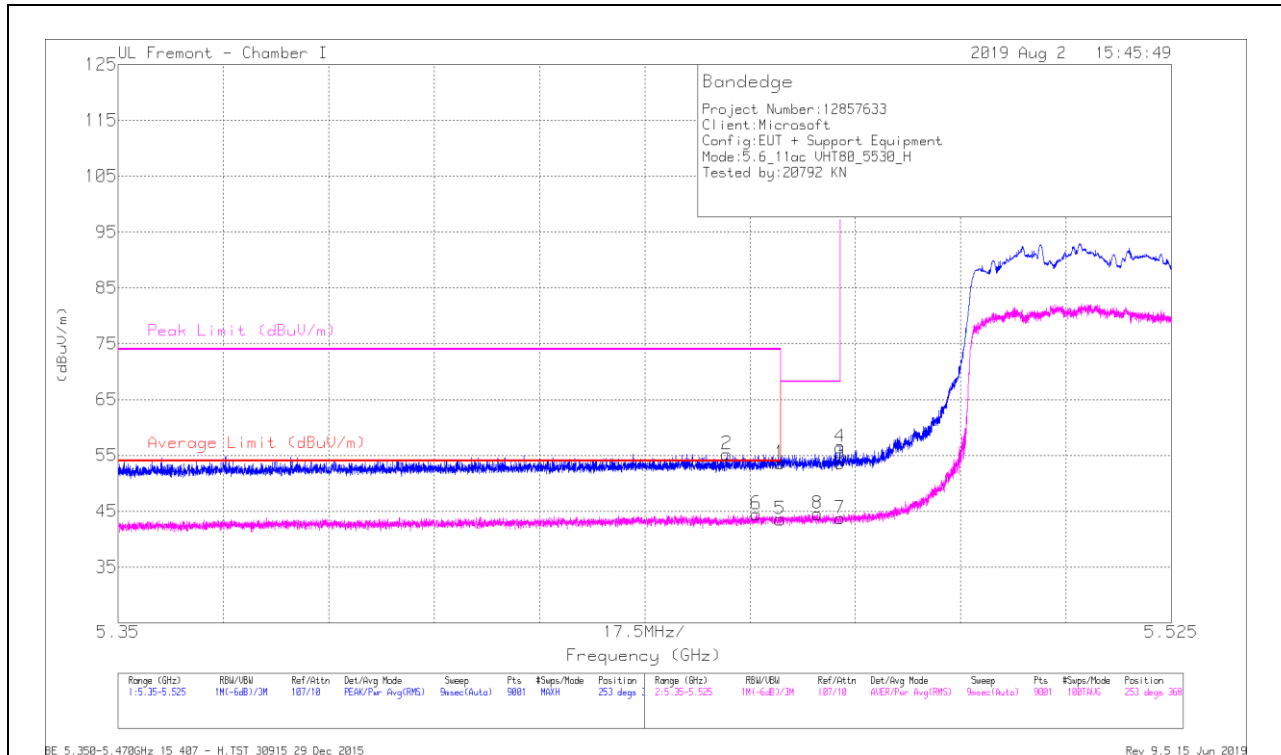

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Chl/Filt/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.46	36.62	Pk	34.9	-17.9	0	53.62	-	-	74	-20.38	253	368	H
2	5.45115	36.33	Pk	34.8	-17.9	0	55.23	-	-	74	-18.77	253	368	H
3	5.46999	36.64	Pk	34.9	-17.9	0	53.64	-	-	68.2	-14.56	253	368	H
4	5.46993	39.56	Pk	34.9	-18	0	56.46	-	-	68.2	-11.74	253	368	H
5	5.46	25.76	RMS	34.9	-17.9	.82	43.58	54	-10.42	-	-	253	368	H
6	5.45605	26.67	RMS	34.9	-17.9	.82	44.49	54	-9.51	-	-	253	368	H
7	5.46999	25.91	RMS	34.9	-17.9	.82	43.73	-	-	-	-	253	368	H
8	5.46618	26.83	RMS	34.9	-18	.82	44.55	-	-	-	-	253	368	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

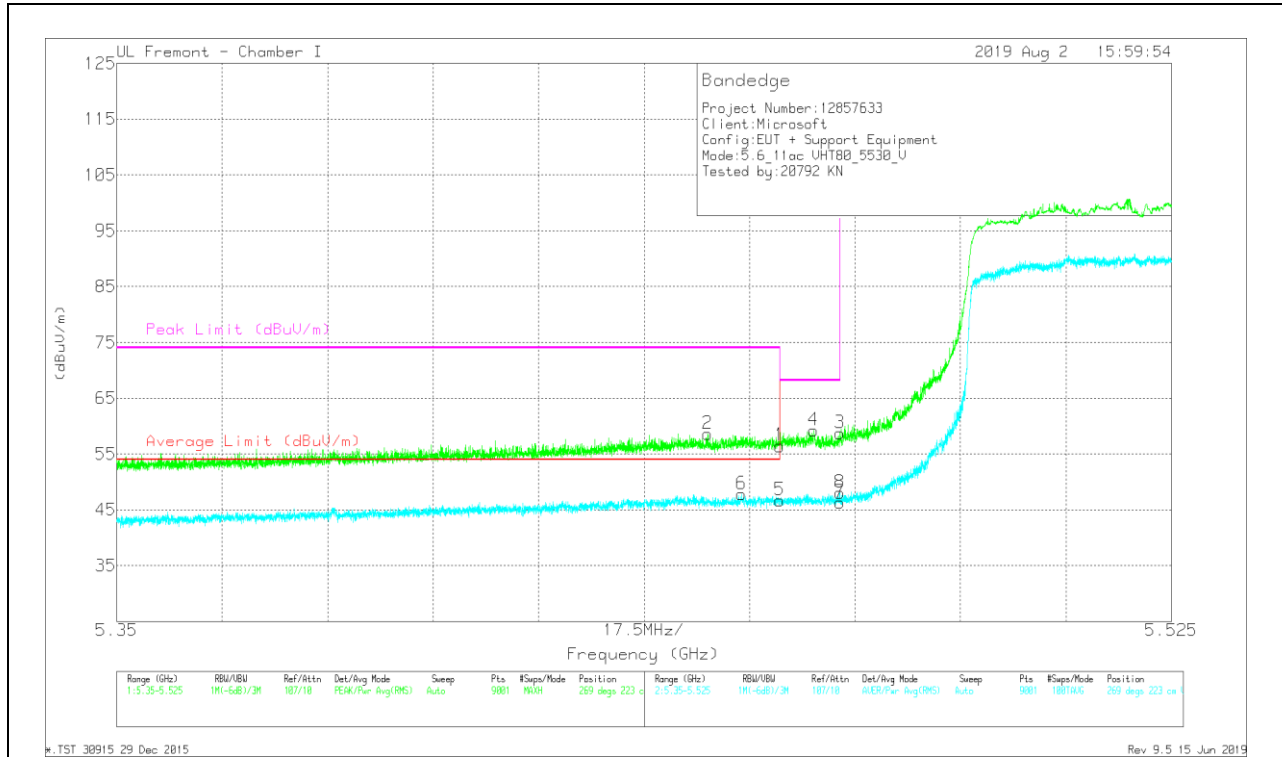


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CM/Filt/Par d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	5.46	39.44	PK	34.9	-17.9	0	56.44	-	-	74	-17.56	269	223	V
2	5.448	41.76	PK	34.8	-17.9	0	58.66	-	-	74	-15.34	269	223	V
3	5.46999	41.69	PK	34.9	-17.9	0	58.69	-	-	68.2	-9.51	269	223	V
4	5.46565	42.32	PK	34.9	-18	0	59.22	-	-	68.2	-8.98	269	223	V
5	5.46	28.83	RMS	34.9	-17.9	82	46.65	54	-7.35	-	-	269	223	V
6	5.45364	30.01	RMS	34.9	-17.9	82	47.83	54	-6.17	-	-	269	223	V
7	5.46999	28.46	RMS	34.9	-17.9	82	46.28	-	-	-	-	269	223	V
8	5.46995	30.25	RMS	34.9	-17.9	82	48.07	-	-	-	-	269	223	V

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

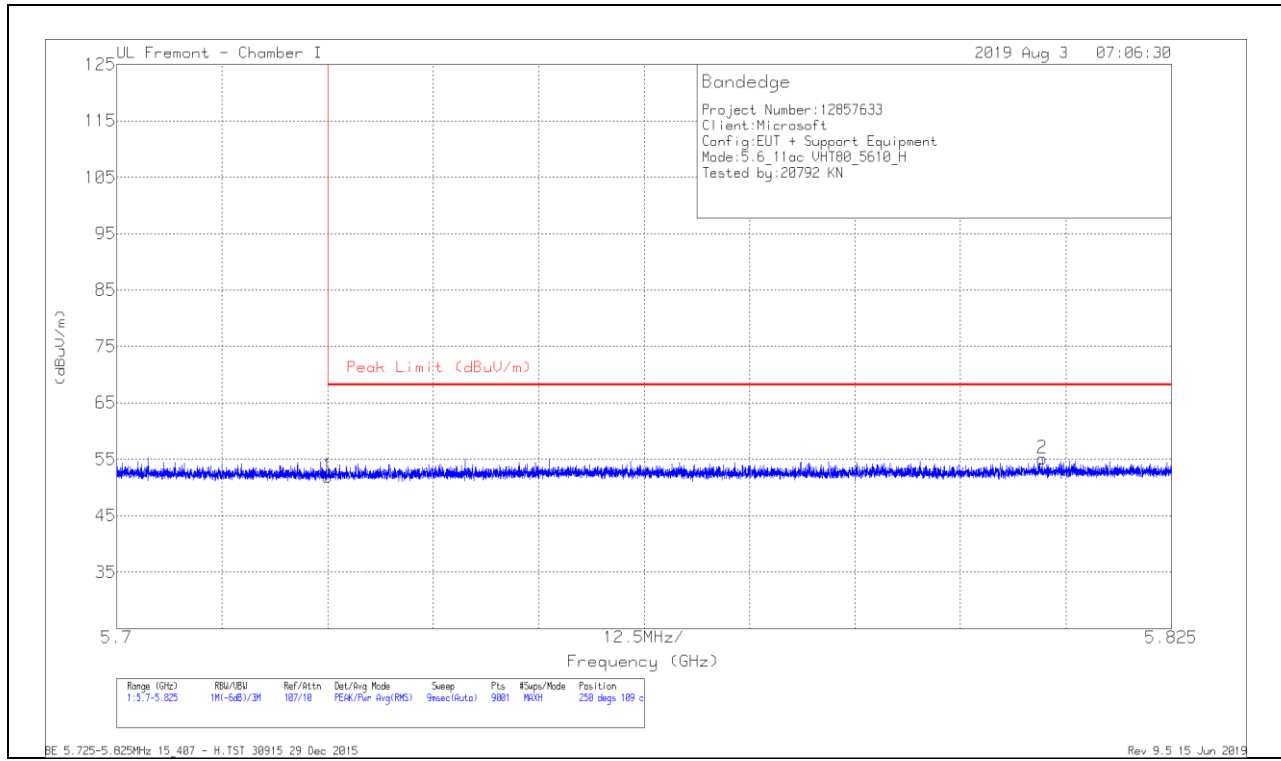

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.58	Pk	34.9	-18.5	0	51.98	68.2	-16.22	250	109	H
2	5.80967	37.82	Pk	35.2	-17.9	0	55.12	68.2	-13.08	250	109	H

Pk - Peak detector

VERTICAL RESULT

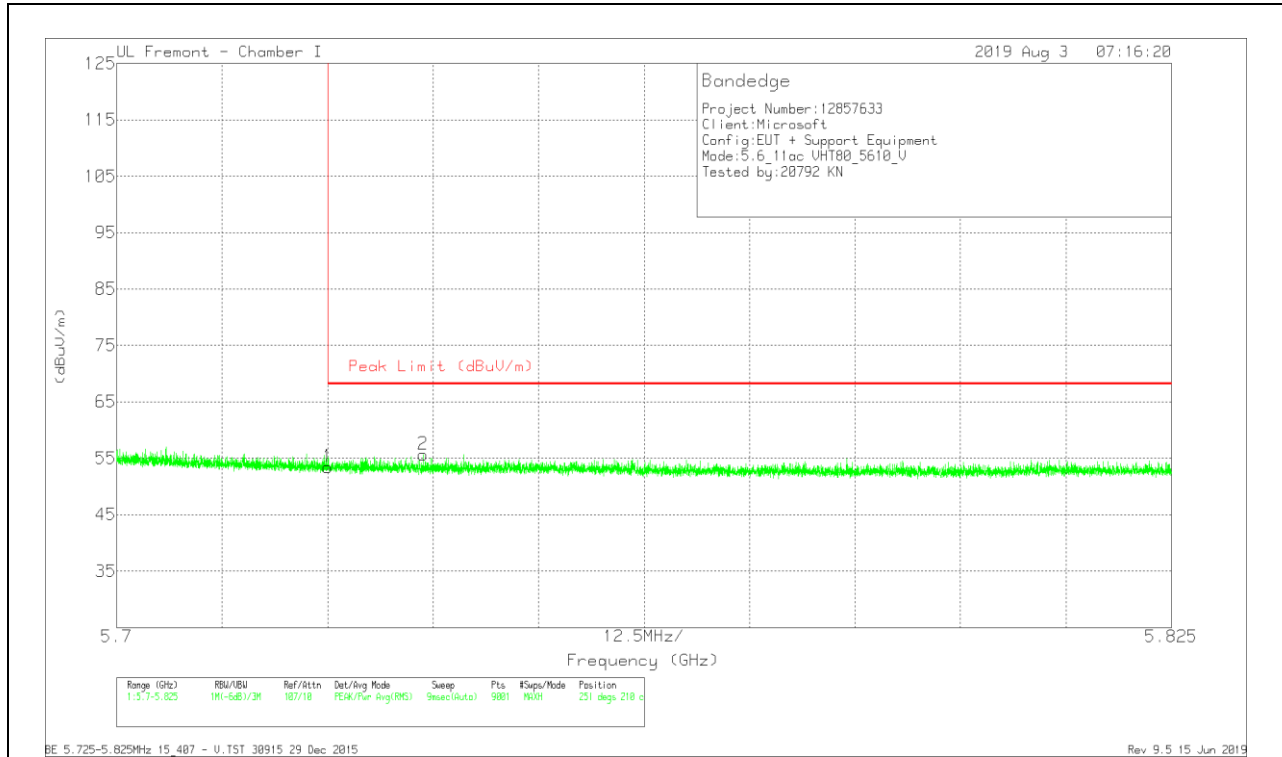


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Ampl/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.06	Pk	34.9	-18.5	0	53.46	68.2	-14.74	251	210	V
2	5.73632	39.05	Pk	35	-18.4	0	55.65	68.2	-12.55	251	210	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

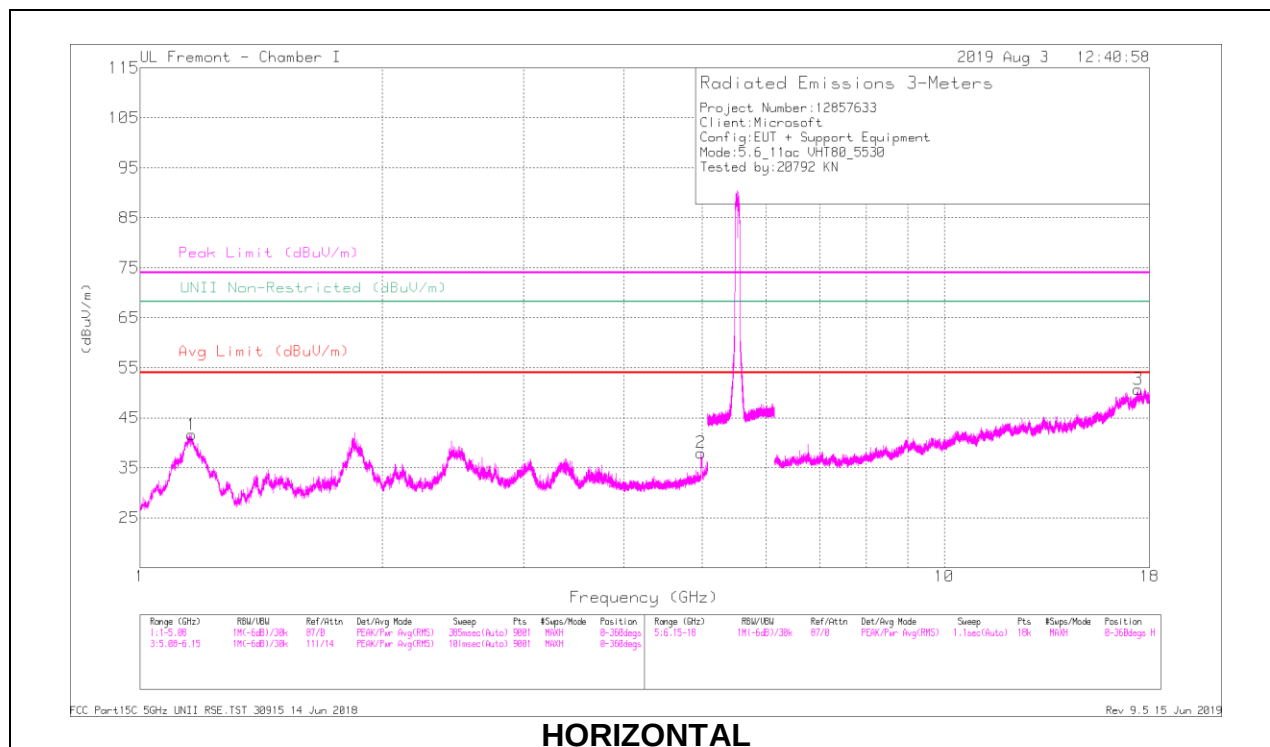

HORIZONTAL

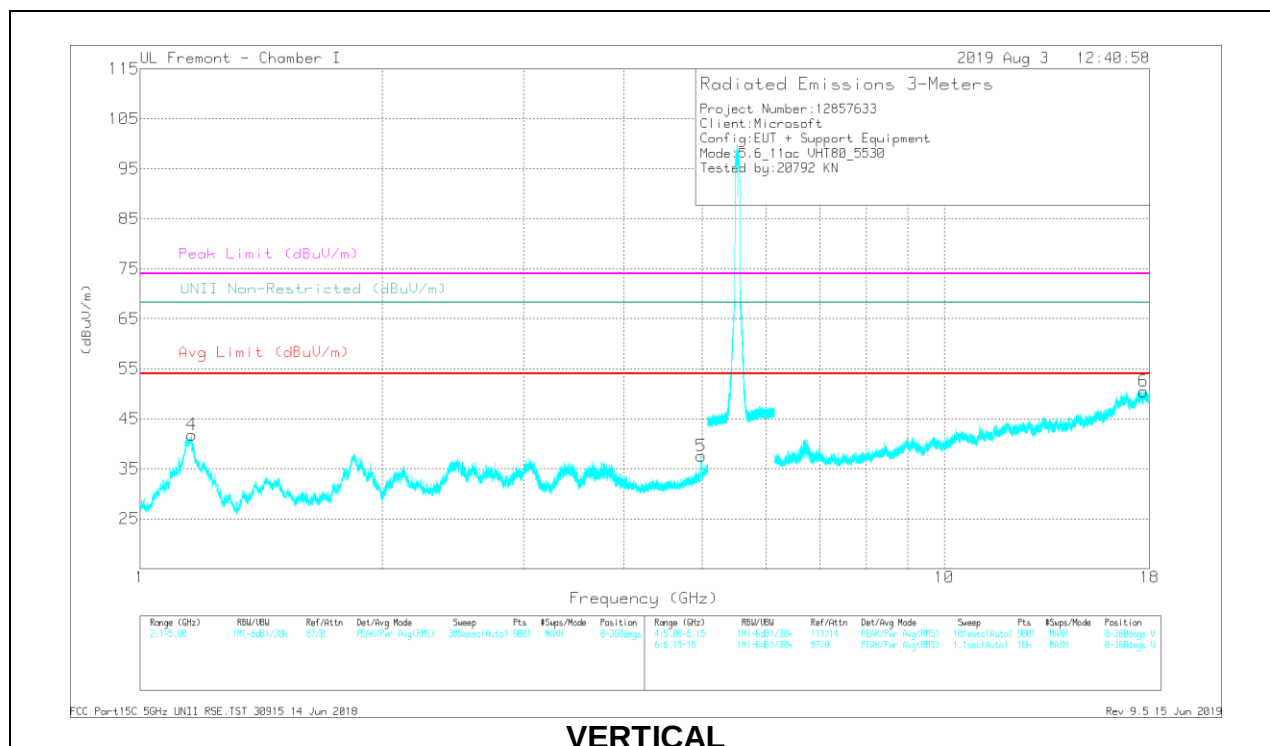

VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meas Reading (dBuV)	Det	AF 1862 (dBm)	Amp/Cat Filter Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.15931	56.7	PK-U	27.6	-34	0	50.3	-	-	74	-23.7	-	-	353	165	H
* 1.15972	46.5	ADR	27.6	-34	.82	40.92	54	-13.08	-	-	-	-	353	165	H
* 4.98142	45.35	PK-U	34.1	-27	0	52.45	-	-	74	-21.55	-	-	94	157	H
* 4.98588	32.6	ADR	34.2	-27.1	.82	40.52	54	-13.48	-	-	-	-	94	157	H
* 1.15675	59.04	PK-U	27.6	-34	0	52.64	-	-	74	-21.36	-	-	264	274	V
* 1.15034	47.18	ADR	27.6	-34	.82	41.6	54	-12.4	-	-	-	-	264	274	V
* 4.98431	40.61	PK-U	34.2	-27.1	0	47.71	-	-	74	-26.29	-	-	116	139	V
* 4.9855	26.56	ADR	34.2	-27.1	.82	34.48	54	-19.52	-	-	-	-	116	139	V
17.43017	26.55	PK-U	41.2	-10.6	0	57.15	-	-	-	-	68.2	-11.05	103	255	H
17.6877	26.69	PK-U	41.5	-10.3	0	57.89	-	-	-	-	68.2	-10.31	221	261	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

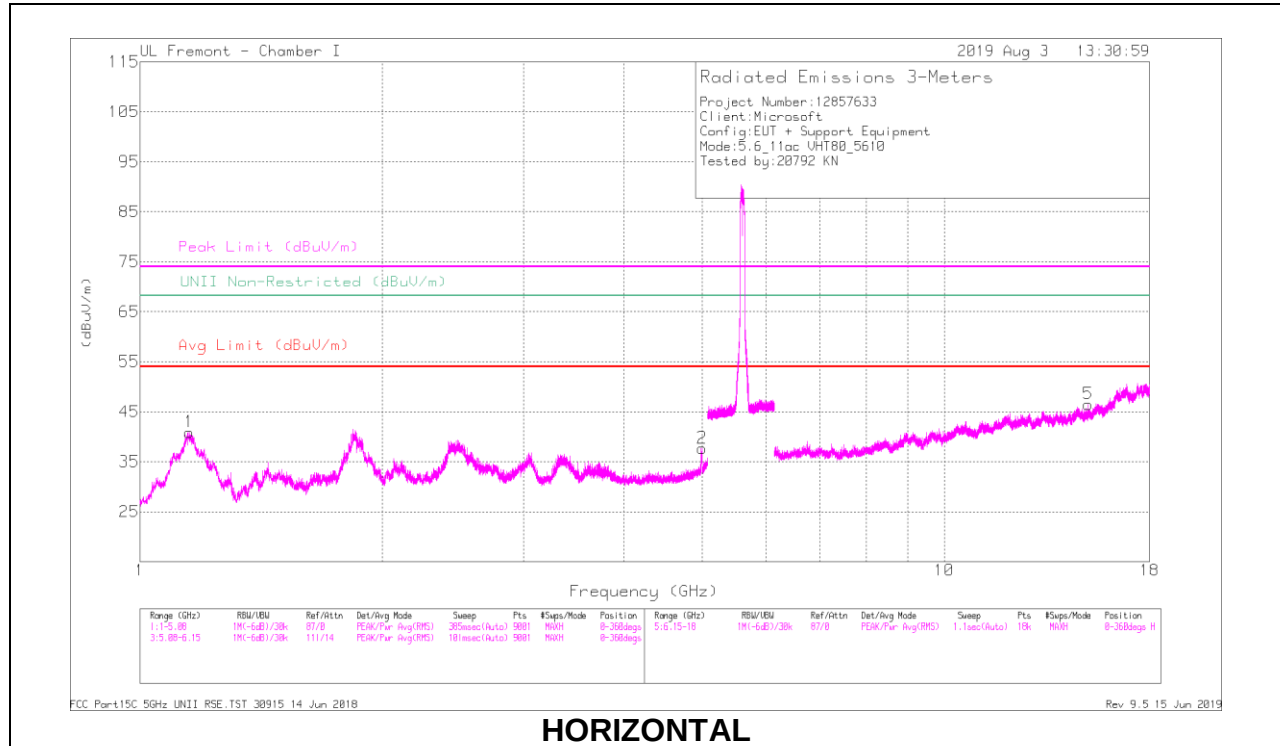

HORIZONTAL

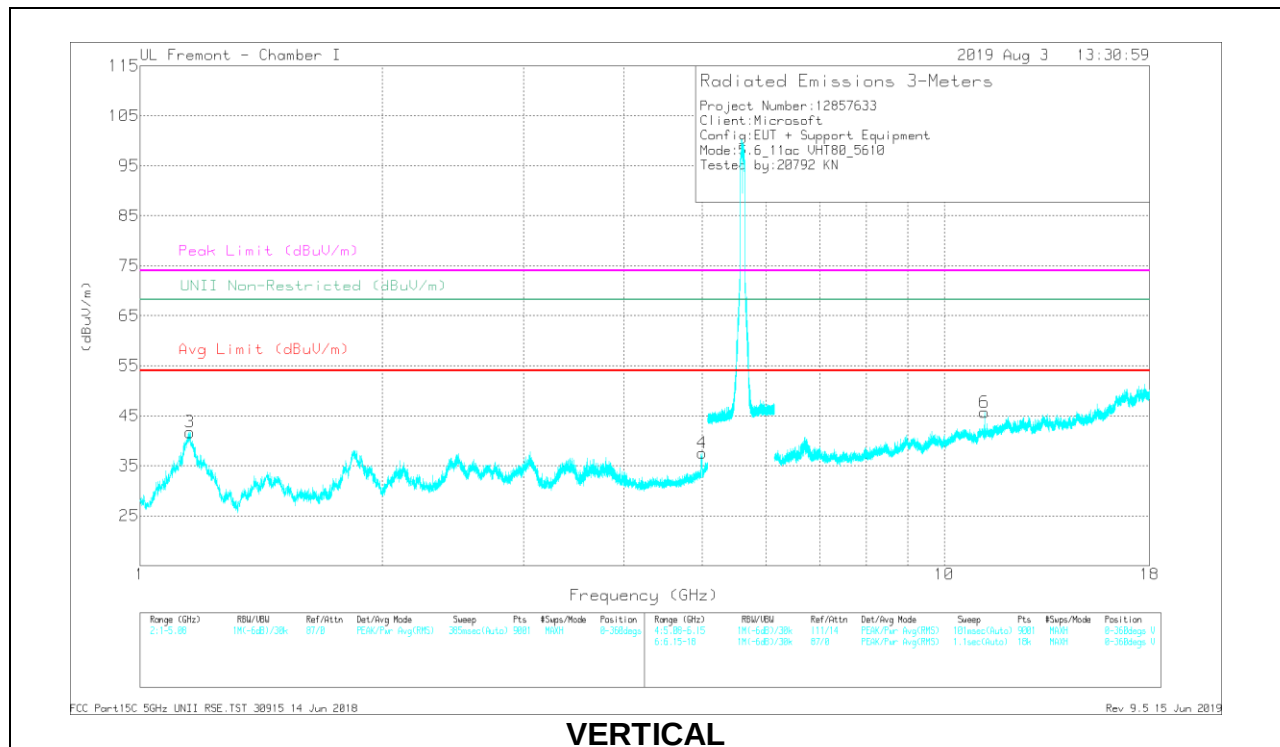

VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meas Reading (dBuV)	Det	AF T862 (dBm)	Amp/ChF (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.15152	57.59	PK-U	27.6	-34	0	51.19	-	-	74	-22.81	-	-	347	224	H
* 1.1528	47.95	ADR	27.6	-34	.82	42.37	54	-11.63	-	-	-	-	347	224	H
* 4.99588	42.69	PK-U	34.2	-27.2	0	49.69	-	-	74	-24.31	-	-	113	162	H
* 4.99506	27.25	ADR	34.2	-27.2	.82	35.07	54	-18.93	-	-	-	-	113	162	H
* 1.15273	57.8	PK-U	27.6	-34	0	51.4	-	-	74	-22.6	-	-	265	277	V
* 1.15148	47.12	ADR	27.6	-34	.82	41.54	54	-12.46	-	-	-	-	265	277	V
* 4.99954	42.86	PK-U	34.3	-27.1	0	50.06	-	-	74	-23.94	-	-	281	214	V
* 4.99778	26.94	ADR	34.2	-27.1	.82	34.86	54	-19.14	-	-	-	-	281	214	V
15.09931	27.53	PK-U	39.6	-14.9	0	62.23	-	-	-	-	68.2	-15.97	195	191	H
* 11.22005	30.78	PK-U	38	-16.9	0	51.88	-	-	74	-22.12	-	-	206	200	V
* 11.21997	23.29	ADR	38	-16.9	.82	45.21	54	-8.79	-	-	-	-	206	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 138 RESULTS

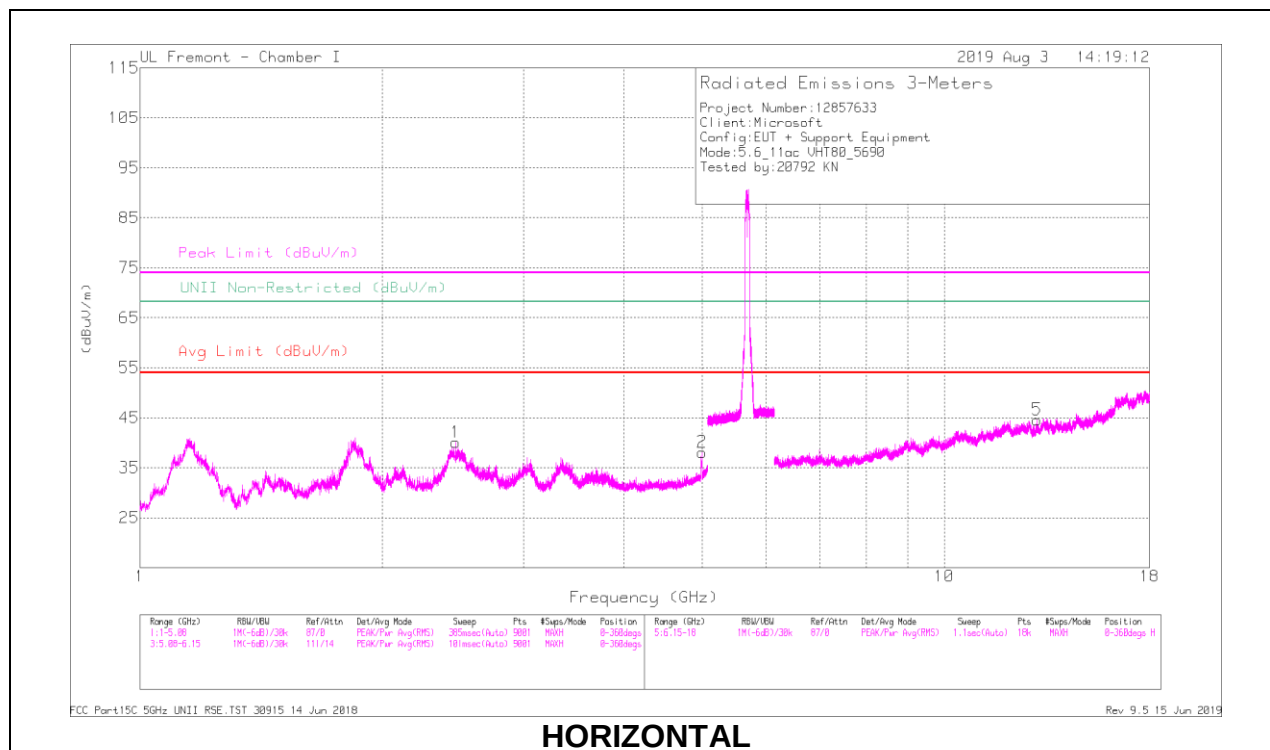

HORIZONTAL

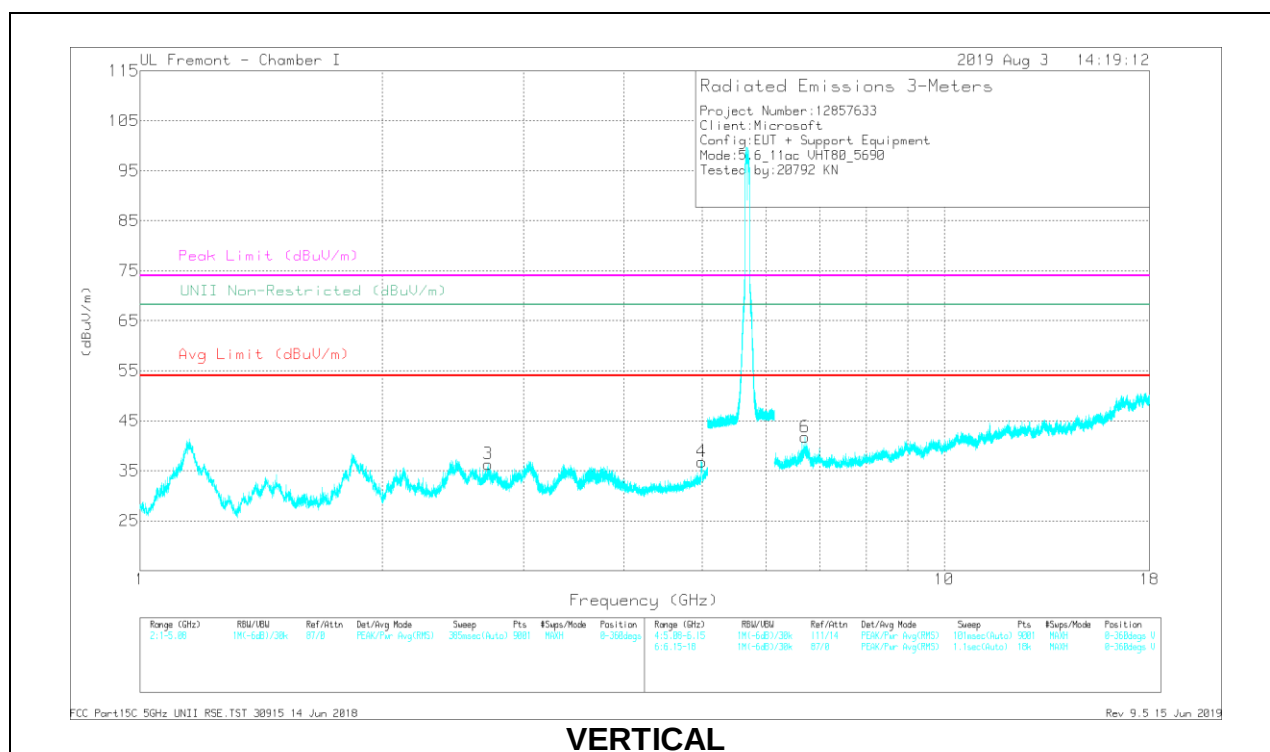

VERTICAL

RADIATED EMISSIONS

Frequency (GHz)	Meas Reading (dBµV)	Det	AF 1862 (dBm)	Amp/Cat Filter Pass (dB)	DC Corr (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	Unit Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 5.0002	41.44	PK-U	34.3	-27.1	0	48.64	-	-	74	-25.36	-	-	90	162	H
* 4.99731	26.72	ADR	34.2	-27.2	.82	34.54	54	-19.46	-	-	-	-	90	162	H
2.46863	47.76	PK-U	32.3	-31.5	0	48.56	-	-	-	-	68.2	-19.64	331	106	H
* 2.70636	43.91	PK-U	32.4	-31.5	0	44.81	-	-	74	-29.19	-	-	315	100	V
* 2.70824	33.71	ADR	32.4	-31.5	.82	35.43	54	-18.57	-	-	-	-	315	100	V
* 4.99362	40.29	PK-U	34.2	-27.2	0	47.29	-	-	74	-26.71	-	-	117	157	V
* 4.99531	26.87	ADR	34.2	-27.2	.82	34.69	54	-19.31	-	-	-	-	117	157	V
13.03896	27.71	PK-U	39.2	-16.7	0	50.21	-	-	-	-	68.2	-17.99	284	133	H
6.71307	35.3	PK-U	35.6	-21	0	49.9	-	-	-	-	68.2	-18.3	291	195	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.13. TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

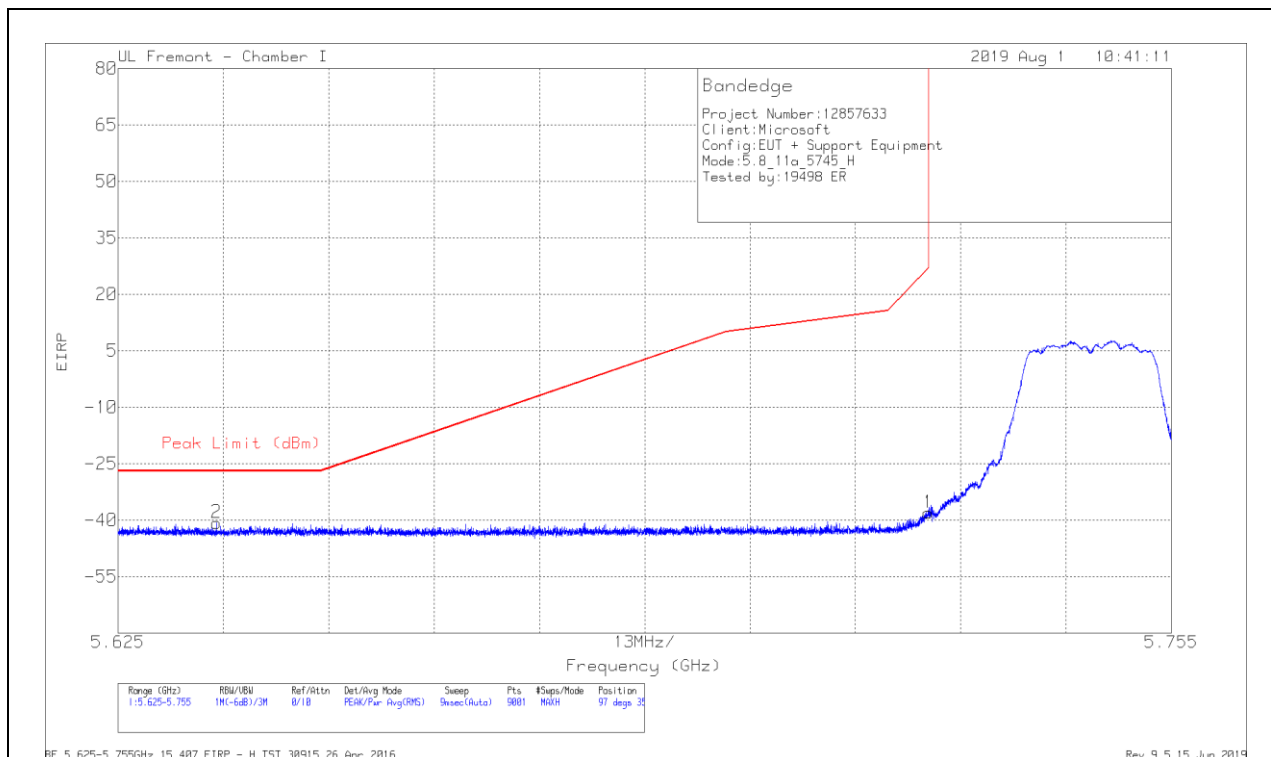

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dBm)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-66.26	Pk	34.9	-18.5	11.8	-38.06	26.99	-65.05	97	357	H
2	5.63715	-68.93	Pk	35	-18.6	11.8	-40.73	-27	-13.73	97	357	H

Pk - Peak detector

VERTICAL RESULT

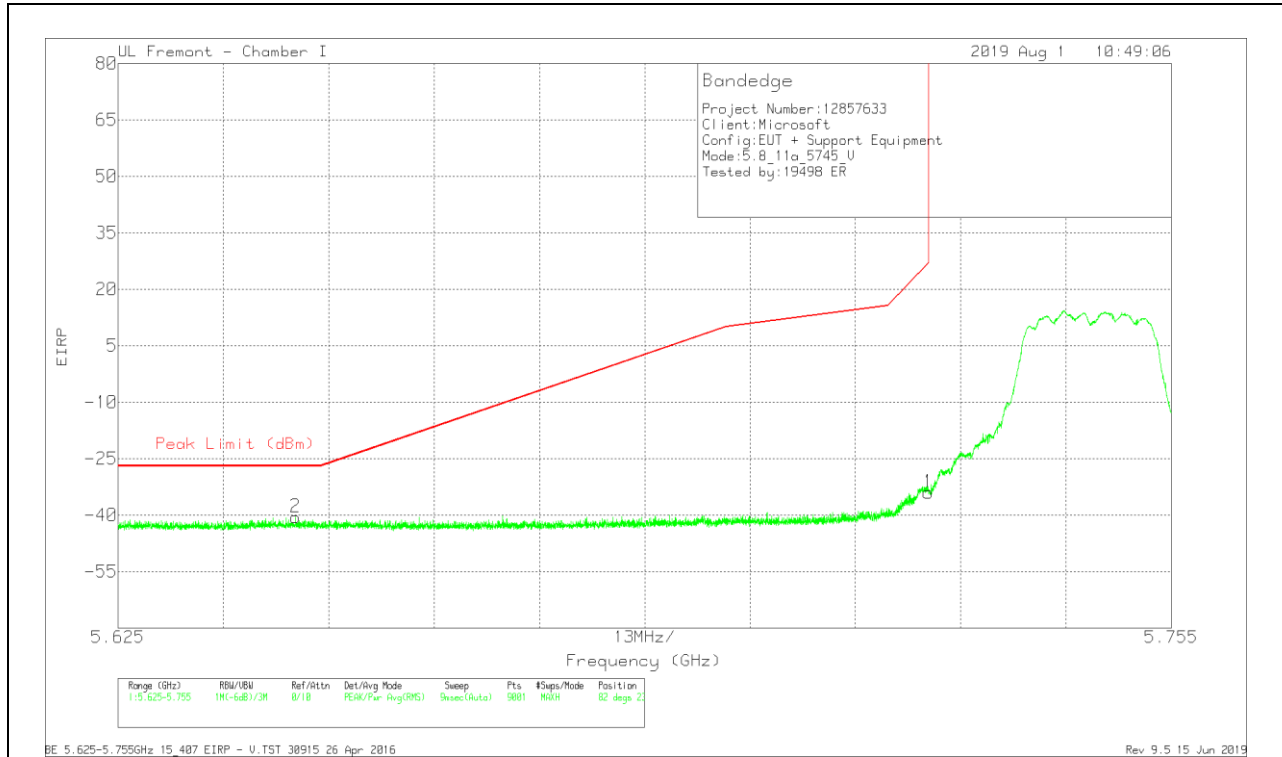


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cb/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-62.16	Pk	34.9	-18.5	11.8	-33.96	26.99	-60.95	82	234	V
2	5.64688	-68.83	Pk	35.1	-18.6	11.8	-40.53	-27	-13.53	82	234	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

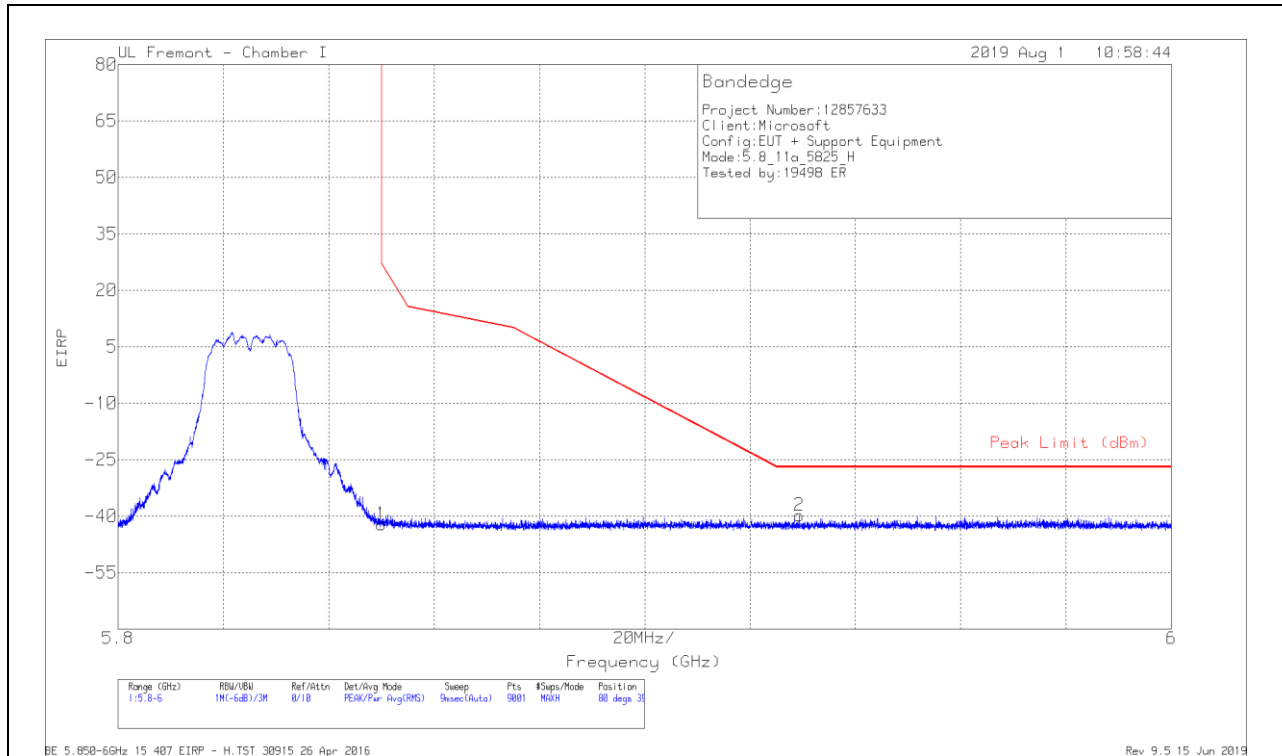

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-71.71	Pk	35.1	-17.4	11.8	-42.21	26.95	-69.16	80	391	H
2	5.92931	-69.35	Pk	35.1	-17.4	11.8	-39.85	-27	-12.85	80	391	H

Pk - Peak detector

VERTICAL RESULT


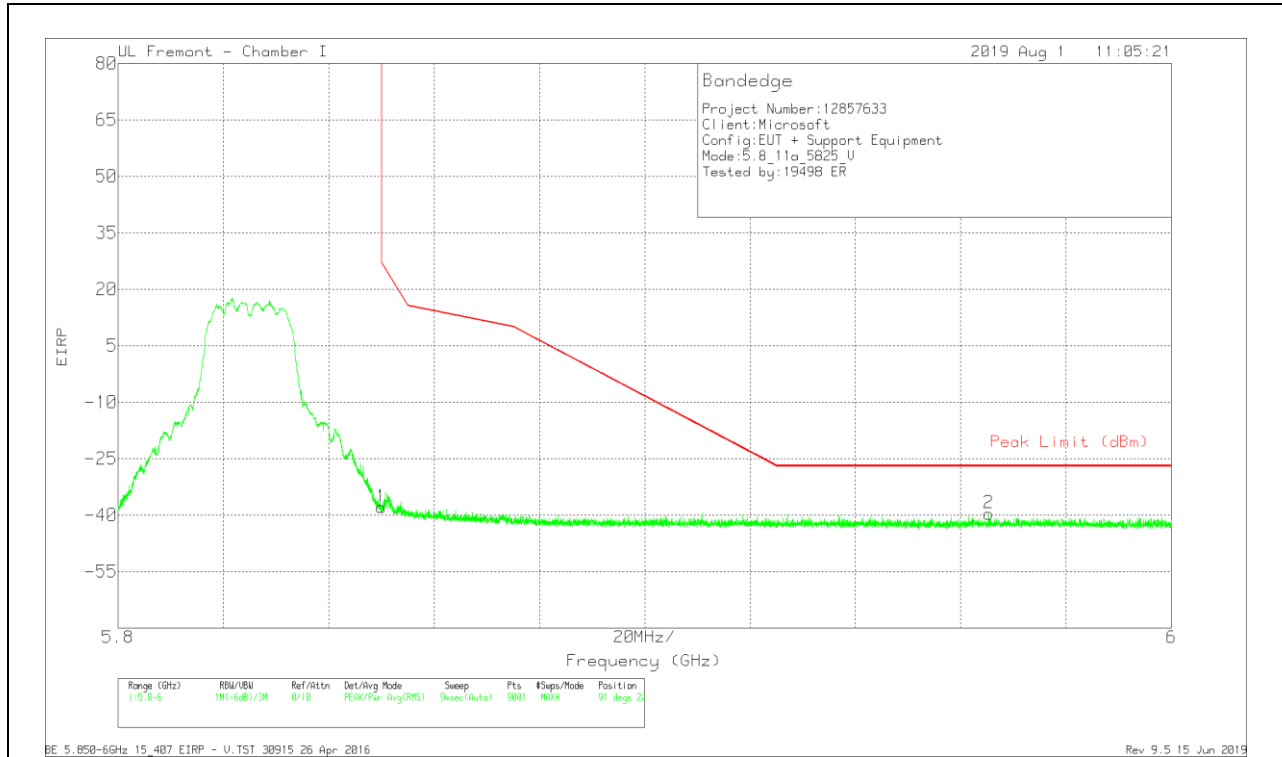


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Ampl/Cb/Filter Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-67.39	Pk	35.1	-17.4	11.8	-37.89	26.95	-64.84	91	223	V
2	5.96529	-69.09	Pk	35.2	-17.5	11.8	-39.59	-27	-12.59	91	223	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

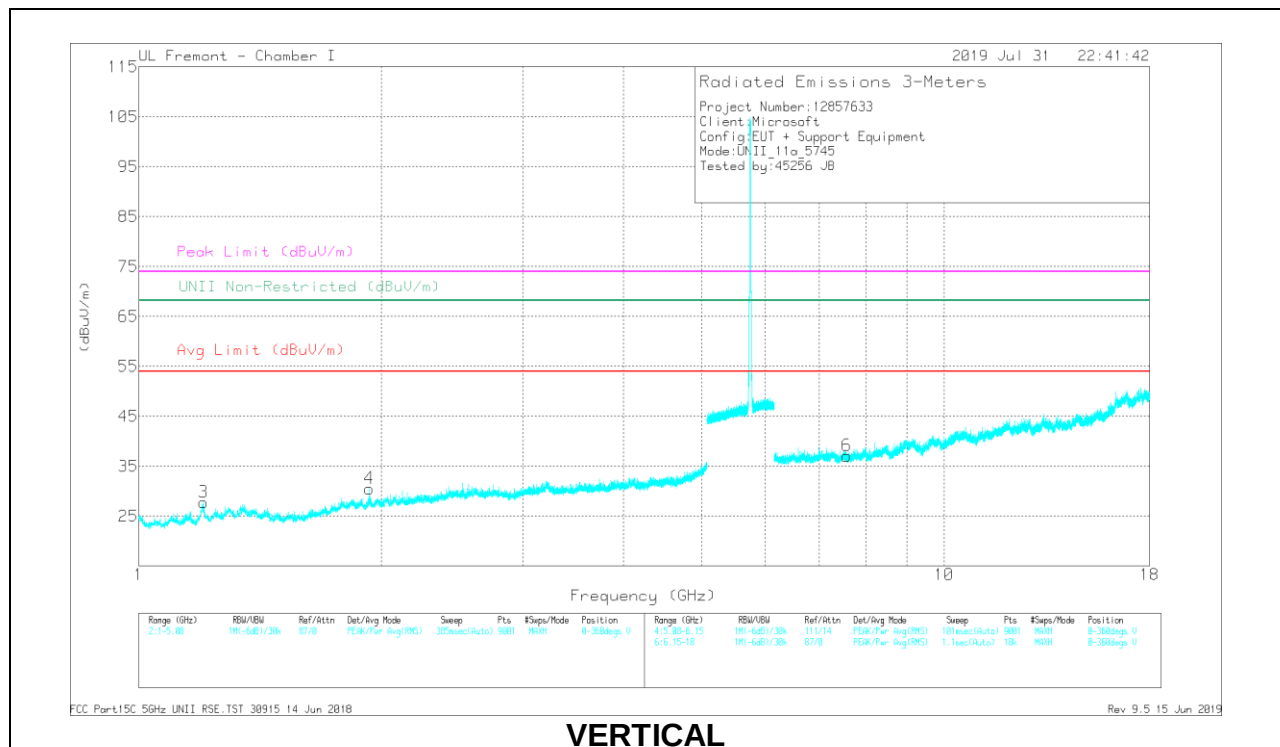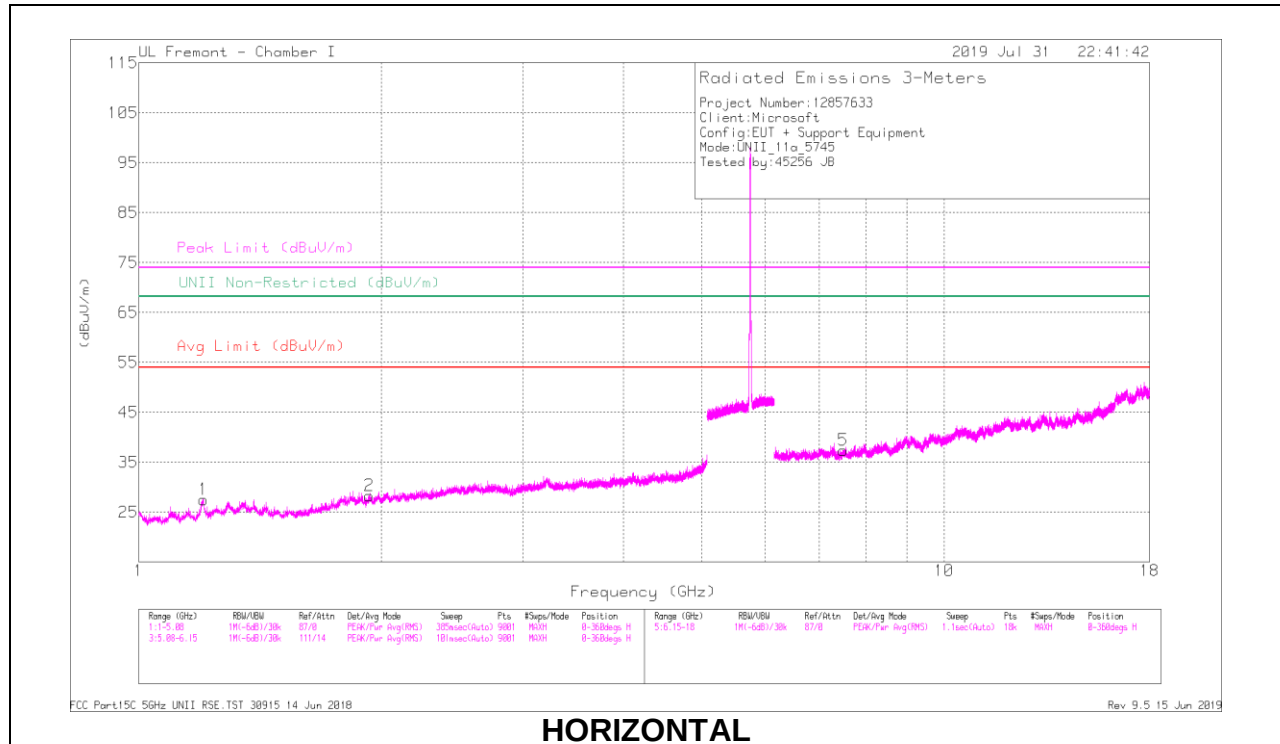

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	AF T662 (dBm)	Amp(CM)RtrPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.93204	38.27	PK-U	30.7	-32.7	0	36.27	-	-	-	-	68.2	-31.93	173	293	H
1	* 1.20555	40.95	PK-U	28.4	-34	0	35.35	-	-	74	-38.65	-	-	328	165	H
	* 1.20347	31.69	ADR	28.5	-34	.22	26.41	54	-27.59	-	-	-	-	328	165	H
4	1.93316	39.3	PK-U	30.7	-32.7	0	37.3	-	-	-	-	68.2	-30.9	21	192	V
3	* 1.20117	41.2	PK-U	28.5	-34	0	35.7	-	-	74	-38.3	-	-	85	269	V
	* 1.20064	31.71	ADR	28.5	-34	.22	26.43	54	-27.57	-	-	-	-	85	269	V
5	* 7.49899	29.12	PK-U	35.5	-19.5	0	45.12	-	-	74	-28.88	-	-	108	116	H
	* 7.49747	19.45	ADR	35.5	-19.5	.22	35.67	54	-18.33	-	-	-	-	108	116	H
6	* 7.57108	28.71	PK-U	35.6	-20.4	0	43.91	-	-	74	-30.09	-	-	321	310	V
	* 7.57271	19.38	ADR	35.6	-20.5	.22	34.7	54	-19.3	-	-	-	-	321	310	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

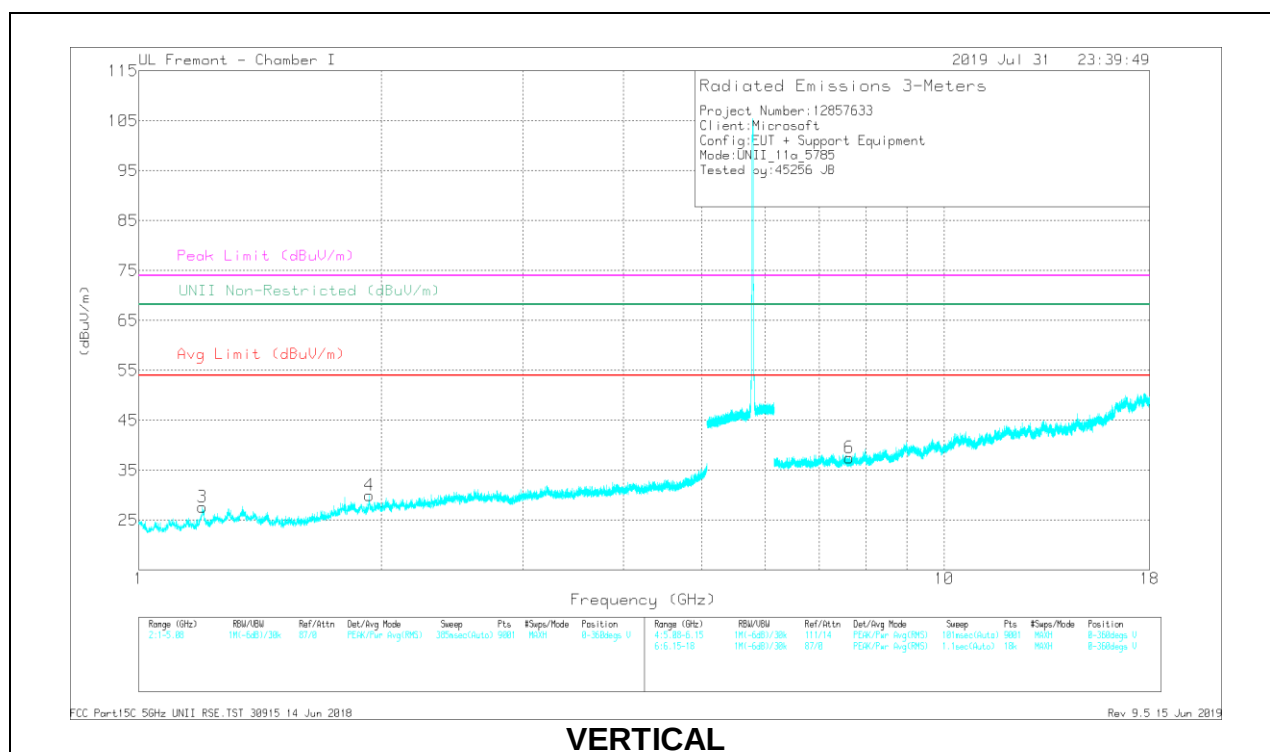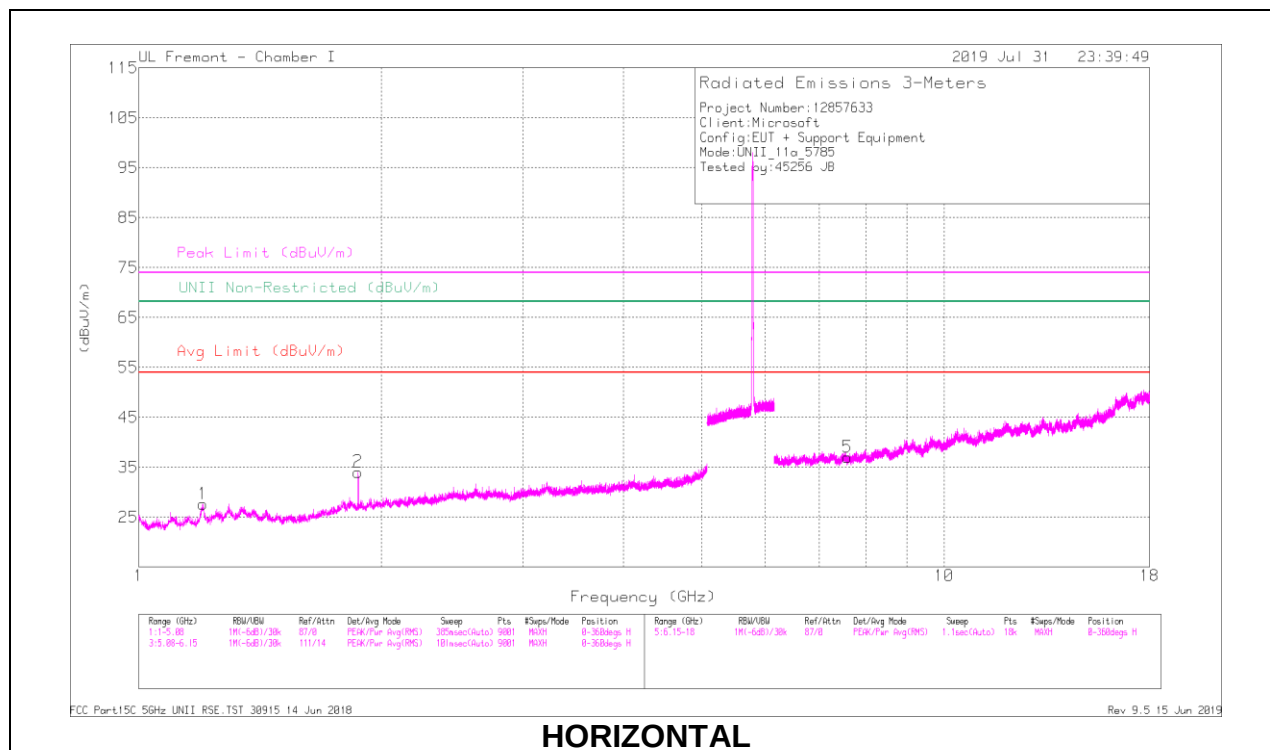

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	AF 1862 (dBm)	Amp(CM)RtrPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.87169	37.43	PK-U	30.9	-32.6	0	35.73	-	-	-	-	68.2	-32.47	259	183	H
1	* 1.19927	40.6	PK-U	28.5	-34	0	35.1	-	74	-	-38.9	-	-	325	172	H
	* 1.19989	31.81	ADR	28.5	-34	.22	26.53	54	-27.47	-	-	-	-	325	172	H
4	1.93338	38.34	PK-U	30.7	-32.7	0	38.34	-	-	-	-	68.2	-31.86	163	196	V
3	* 1.19989	40.9	PK-U	28.5	-34	0	35.4	-	-	74	-38.6	-	-	120	199	V
	* 1.20119	30.8	ADR	28.5	-34	.22	25.52	54	-28.48	-	-	-	-	120	199	V
5	* 7.58466	28.92	PK-U	35.6	-20.6	0	43.92	-	-	74	-30.08	-	-	5	315	H
	* 7.58632	19.7	ADR	35.6	-20.6	.22	34.92	54	-19.08	-	-	-	-	5	315	H
6	* 7.62147	28.76	PK-U	35.7	-20.9	0	43.56	-	-	74	-30.44	-	-	269	100	V
	* 7.623	19.95	ADR	35.7	-20.9	.22	34.97	54	-19.03	-	-	-	-	269	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

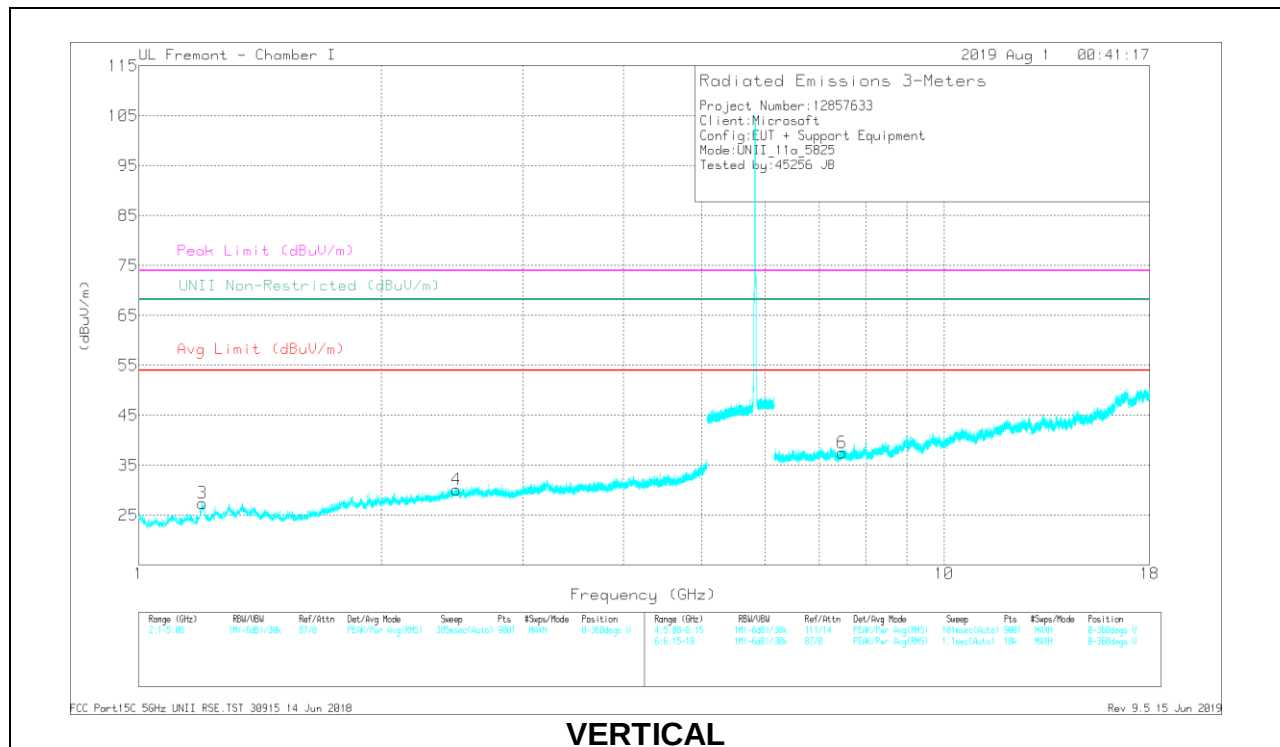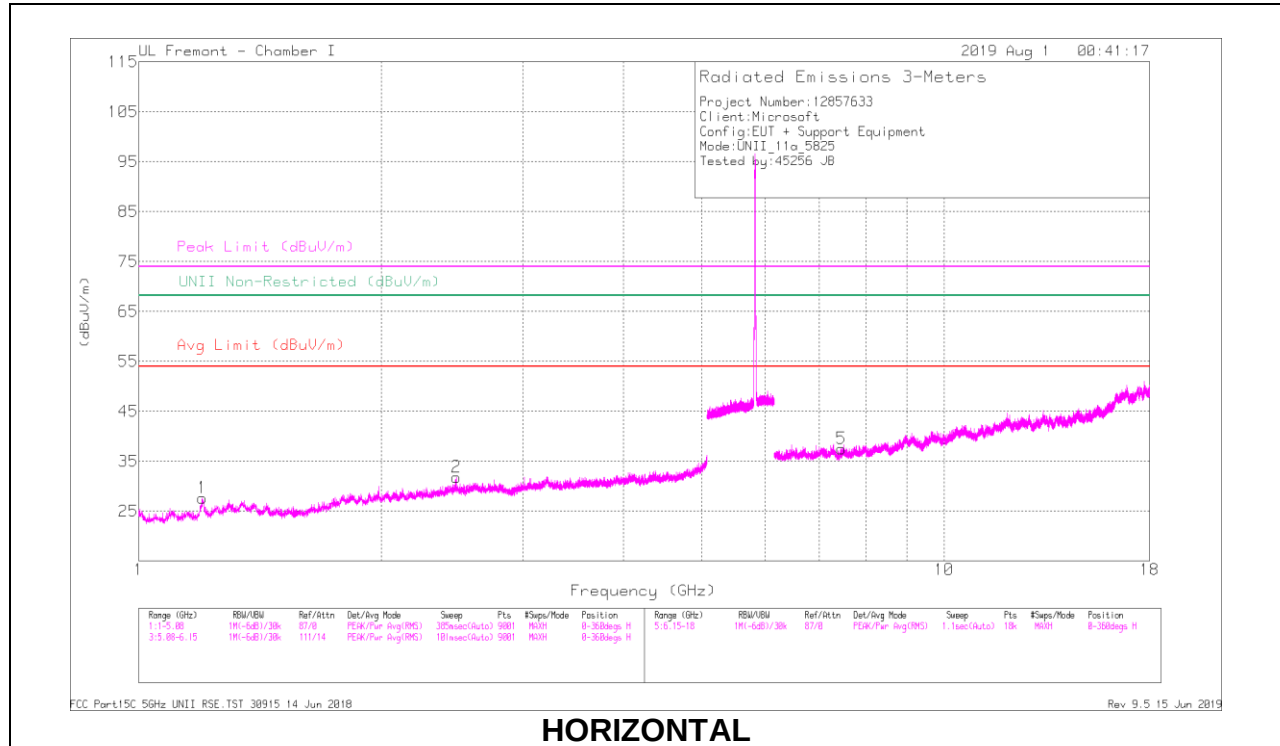

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	AF T862 (dBm)	Amp CMR (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.482	38.12	PK-U	32.4	-31.5	0	39.02	-	-	-	-	68.2	-29.18	289	217	H
1	* 1.20147	40.91	PK-U	28.5	-34	0	35.41	-	74	-	-38.59	-	-	353	158	H
	* 1.19864	31.43	ADR	28.5	-34	.22	26.15	54	-27.85	-	-	-	-	353	158	H
4	2.48022	37.73	PK-U	32.4	-31.5	0	38.63	-	-	-	-	68.2	-29.57	8	144	V
3	* 1.20167	40.83	PK-U	28.5	-34	0	35.33	-	-	74	-38.67	-	-	126	192	V
	* 1.19941	31.32	ADR	28.5	-34	.22	26.04	54	-27.96	-	-	-	-	126	192	V
5	* 7.45634	30.09	PK-U	35.6	-20.4	0	45.29	-	-	74	-28.71	-	-	124	203	H
	* 7.45695	19.69	ADR	35.6	-20.4	.22	35.11	54	-18.89	-	-	-	-	124	203	H
6	* 7.4667	29.16	PK-U	35.5	-20.5	0	44.16	-	-	74	-29.84	-	-	124	169	V
	* 7.46844	20.07	ADR	35.5	-20.5	.22	35.29	54	-18.71	-	-	-	-	124	169	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.14. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

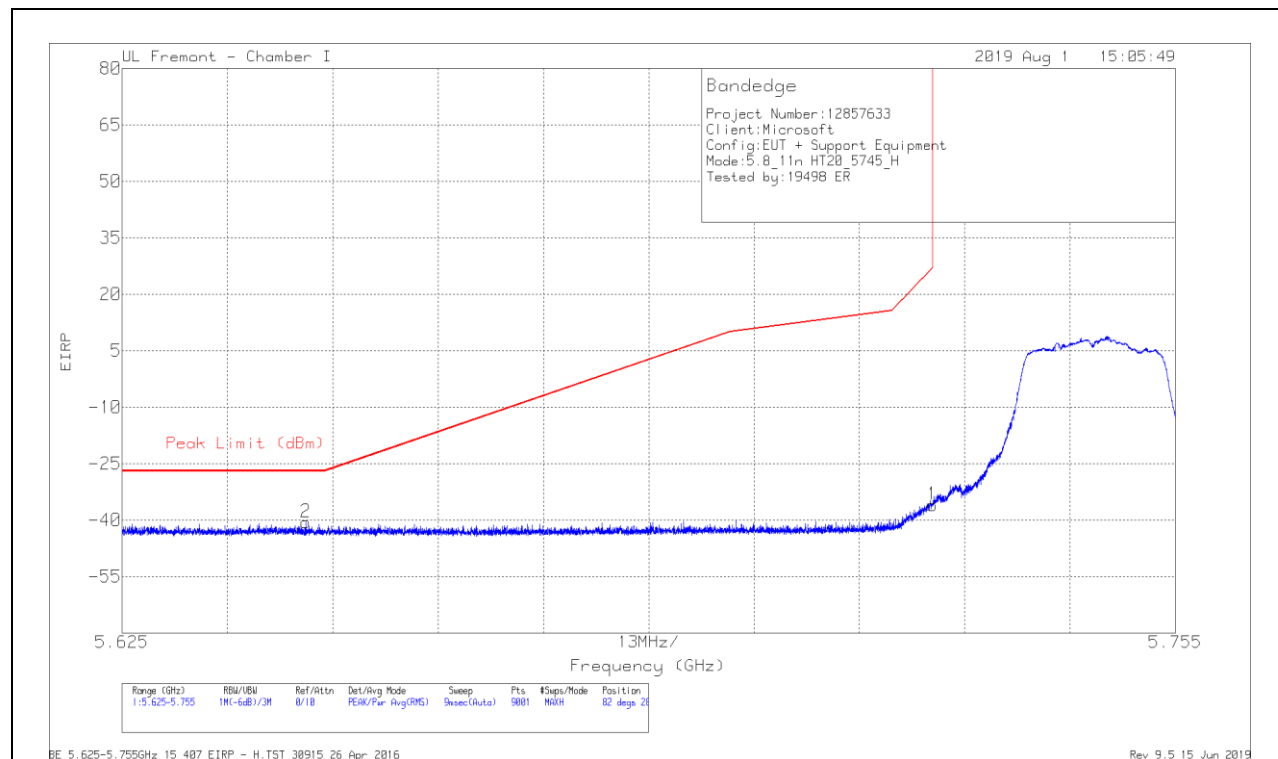

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dBm)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-64.16	Pk	34.9	-18.5	11.8	-35.96	26.99	-62.95	82	288	H
2	5.64768	-68.86	Pk	35.1	-18.6	11.8	-40.56	-27	-13.56	82	288	H

Pk - Peak detector

VERTICAL RESULT

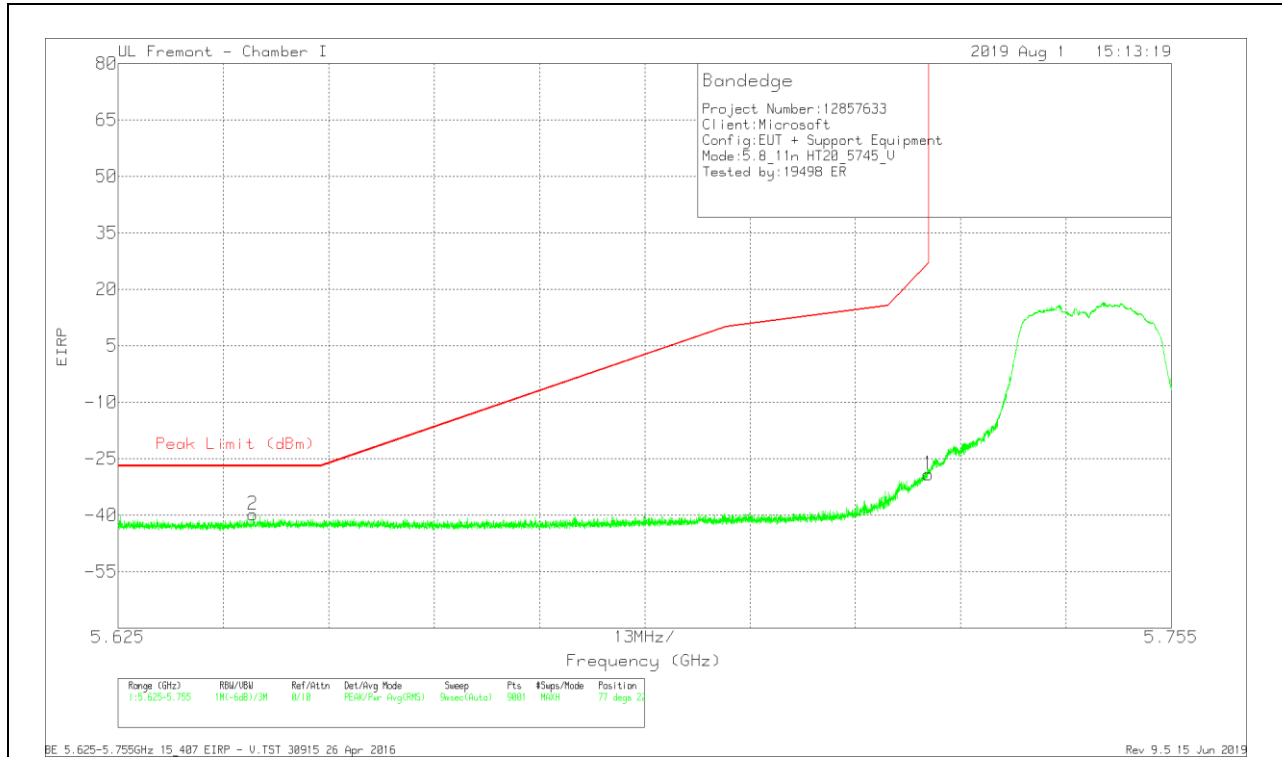


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cb/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-57.34	Pk	34.9	-18.5	11.8	-29.14	26.99	-56.13	77	220	V
2	5.64164	-68.12	Pk	35.1	-18.6	11.8	-39.82	-27	-12.82	77	220	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

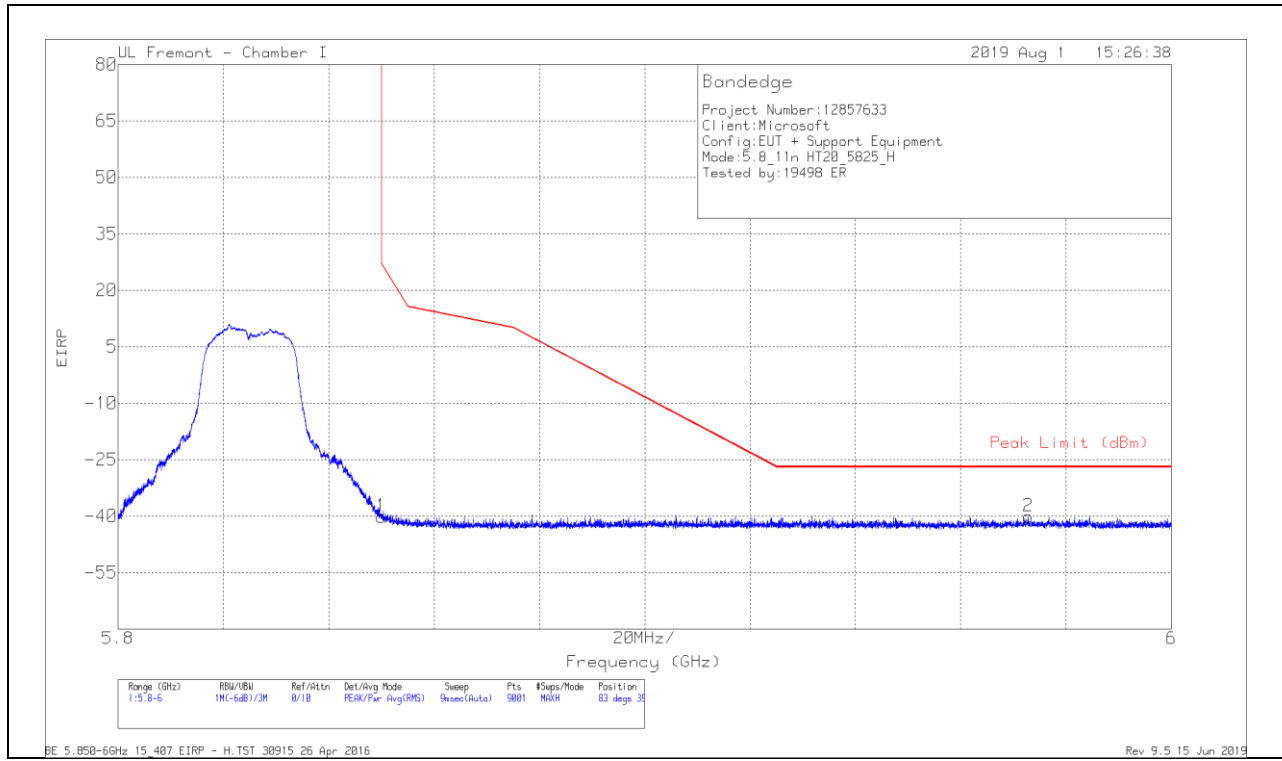

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-69.62	Pk	35.1	-17.4	11.8	-40.12	26.95	-67.07	83	396	H
2	5.9728	-69.81	Pk	35.2	-17.3	11.8	-40.11	-27	-13.11	83	396	H

Pk - Peak detector

VERTICAL RESULT


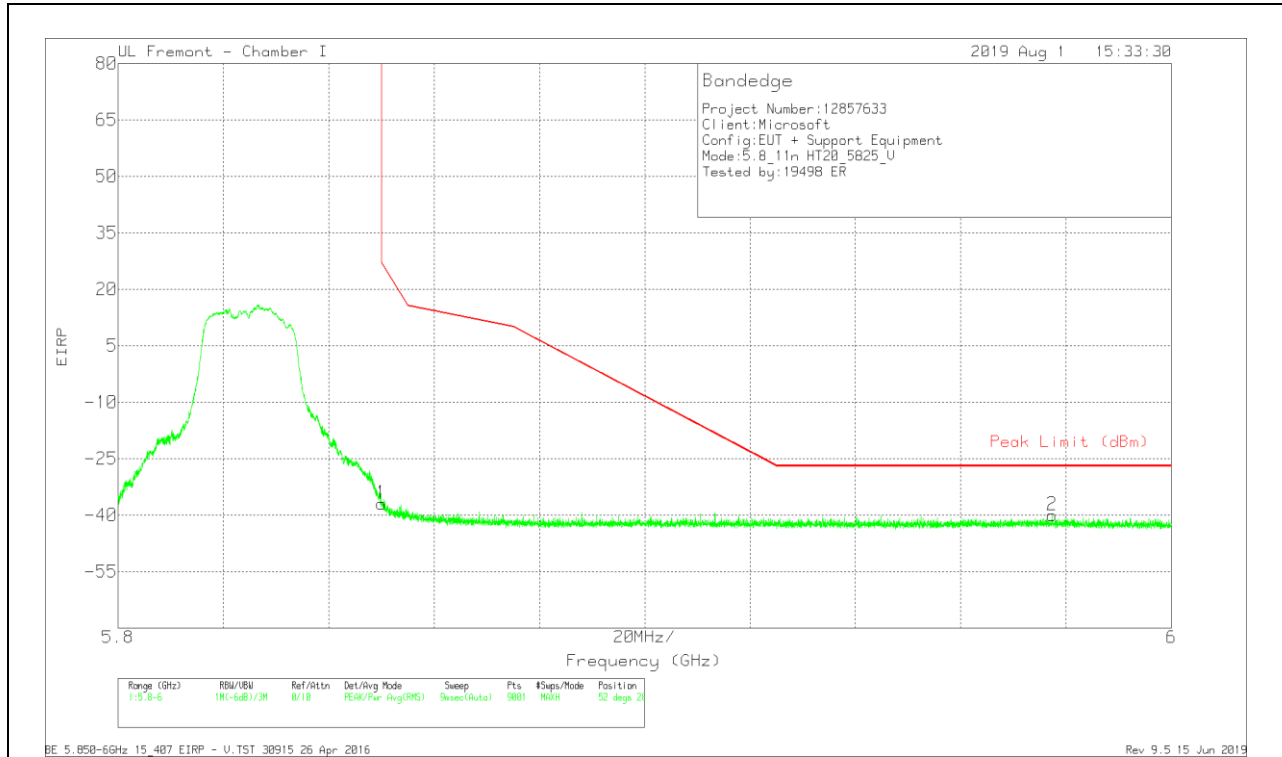


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Ampl/Cb/Filter/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-66.38	Pk	35.1	-17.4	11.8	-36.88	26.95	-63.83	52	280	V
2	5.97733	-69.57	Pk	35.3	-17.5	11.8	-39.97	-27	-12.97	52	280	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

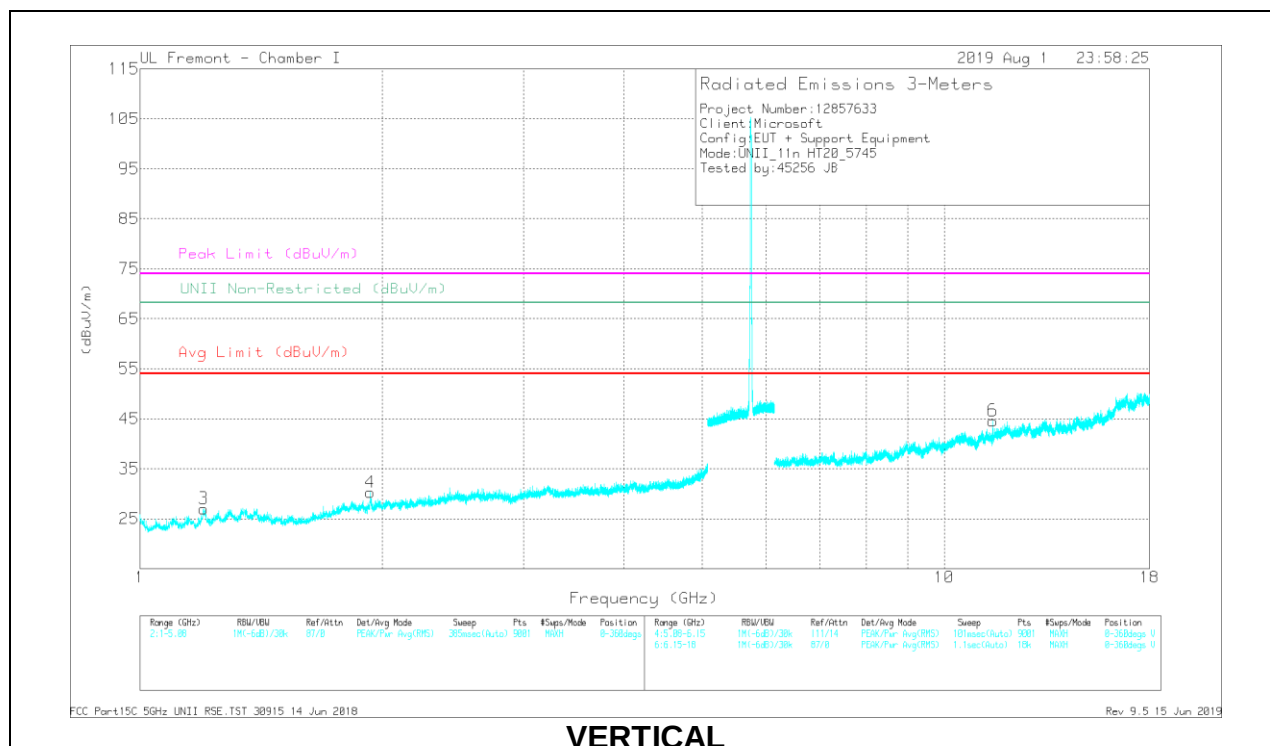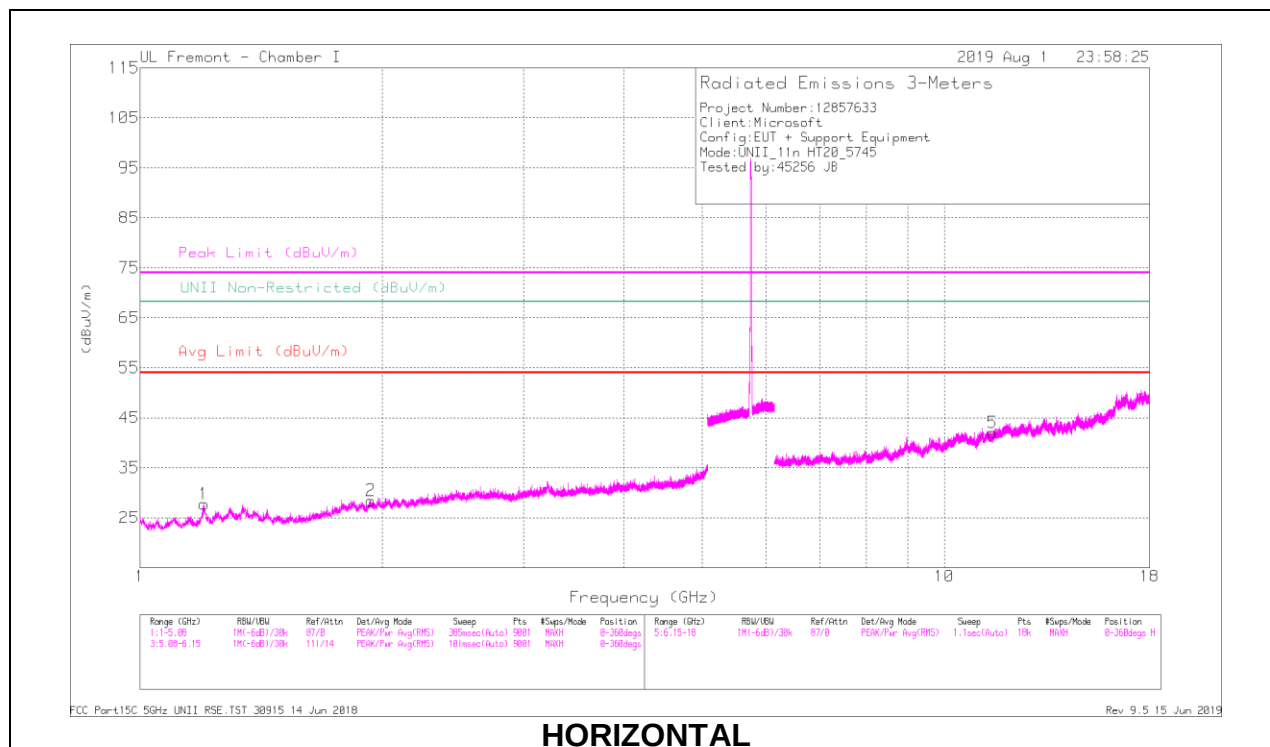

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 1562 (dBm)	Amp CMF for Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	ULR Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.93349	38.38	PK-U	30.7	-32.7	0	36.38	-	-	-	-	68.2	-31.82	295	242	H
1	* 1.20043	40.14	PK-U	28.5	-34	0	34.64	-	-	74	-39.36	-	-	338	184	H
	* 1.20004	31.16	ADR	28.5	-34	-24	25.9	54	-28.1	-	-	-	-	338	184	H
4	1.93228	39.29	PK-U	30.7	-32.7	0	37.29	-	-	-	-	68.2	-30.91	354	149	V
3	* 1.20033	39.98	PK-U	28.5	-34	0	34.48	-	-	74	-39.52	-	-	143	155	V
	* 1.19986	30.51	ADR	28.5	-34	-24	25.25	54	-28.75	-	-	-	-	143	155	V
5	* 11.48311	30.2	PK-U	38.2	-16.9	0	51.5	-	-	74	-22.5	-	-	343	305	H
	* 11.48167	19.29	ADR	38.2	-17	-24	40.73	54	-13.27	-	-	-	-	343	305	H
6	* 11.4897	28.07	PK-U	38.2	-17	0	49.27	-	-	74	-24.73	-	-	57	208	V
	* 11.48996	20.55	ADR	38.2	-17	-24	41.99	54	-12.01	-	-	-	-	57	208	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

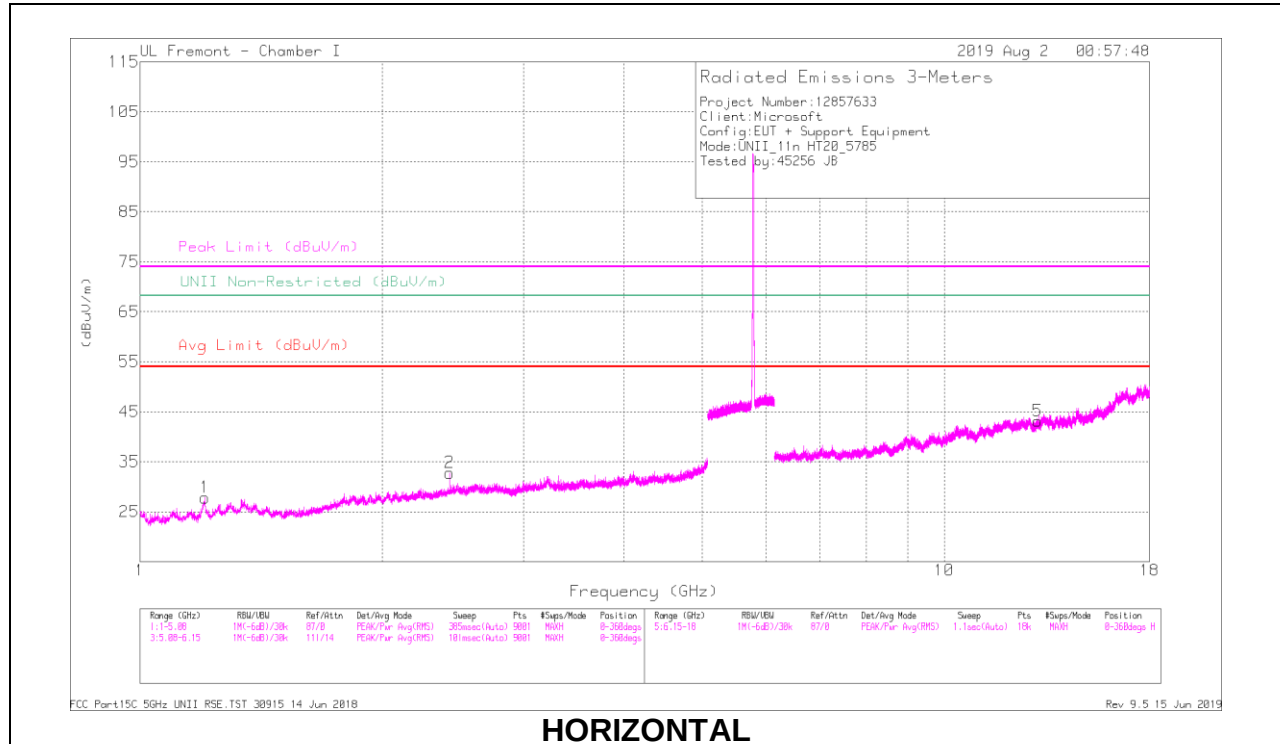

HORIZONTAL

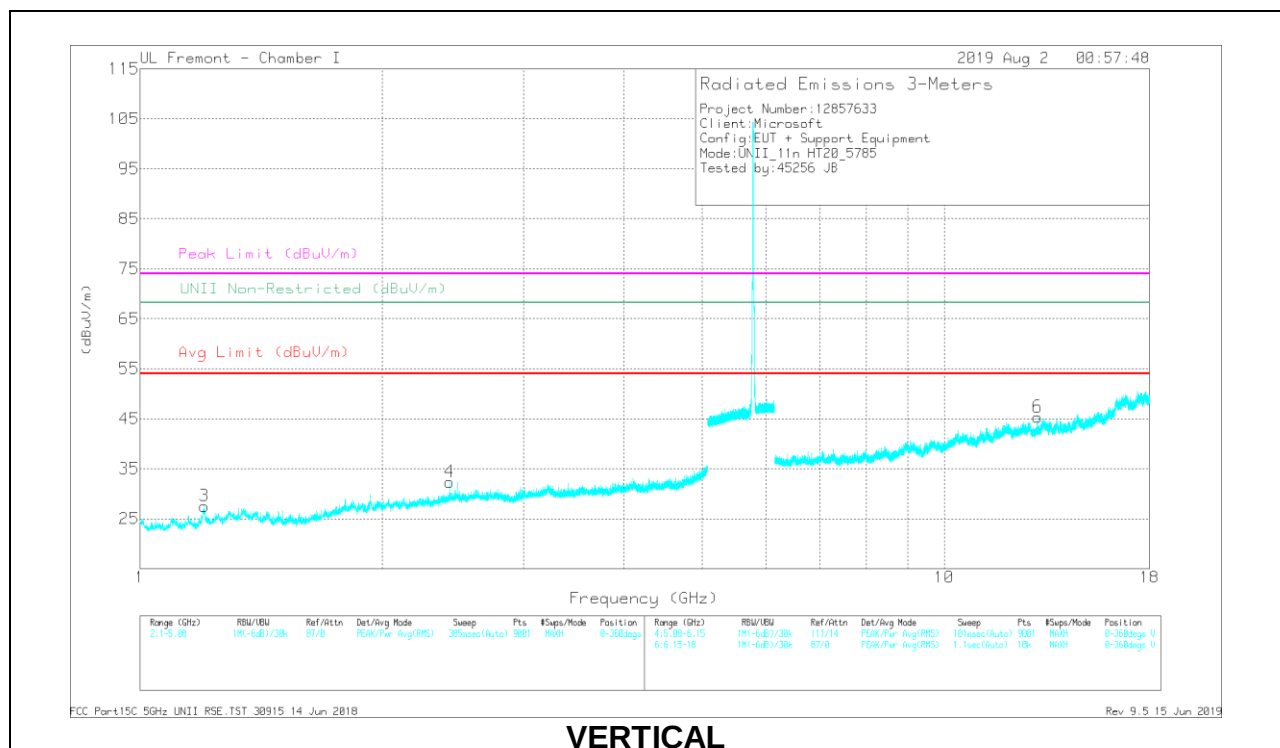

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	AF 1862 (dBm)	Amp(CM)RtrPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.20409	39.98	PK-U	28.5	-34	0	34.48	-	-	74	-39.52	-	-	360	129	H
	* 1.20192	30.99	ADR	28.5	-34	.24	25.73	54	-28.27	-	-	-	-	360	129	H
2	2.42472	36.33	PK-U	32.2	-31.8	0	36.73	-	-	-	-	68.2	-31.47	358	157	H
3	* 1.20065	40.88	PK-U	28.5	-34	0	35.38	-	-	74	-38.62	-	-	121	201	V
	* 1.2016	31.26	ADR	28.5	-34	.24	26	54	-28	-	-	-	-	121	201	V
4	2.42567	37.76	PK-U	32.2	-31.7	0	38.26	-	-	-	-	68.2	-29.94	36	145	V
5	13.06231	27.36	PK-U	39.3	-16.7	0	49.96	-	-	-	-	68.2	-18.24	317	181	H
6	13.06008	27.04	PK-U	39.3	-16.7	0	49.64	-	-	-	-	68.2	-18.56	238	136	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

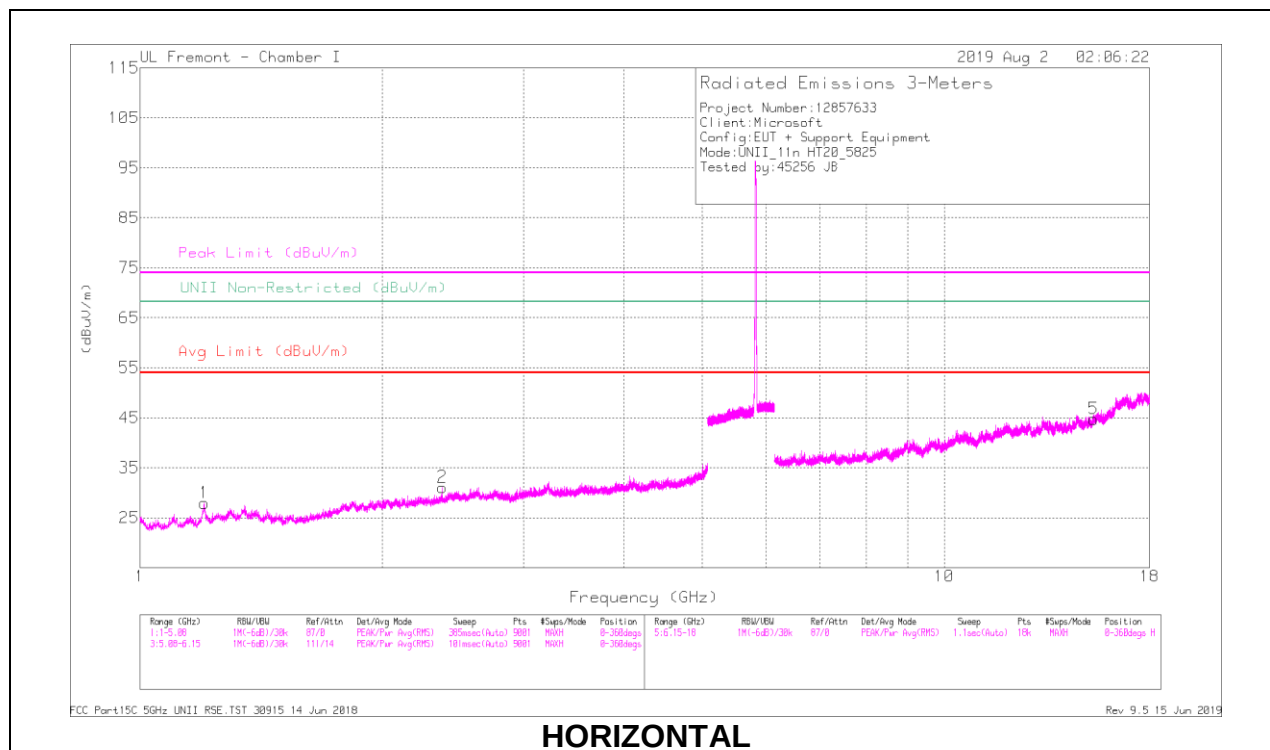

HORIZONTAL

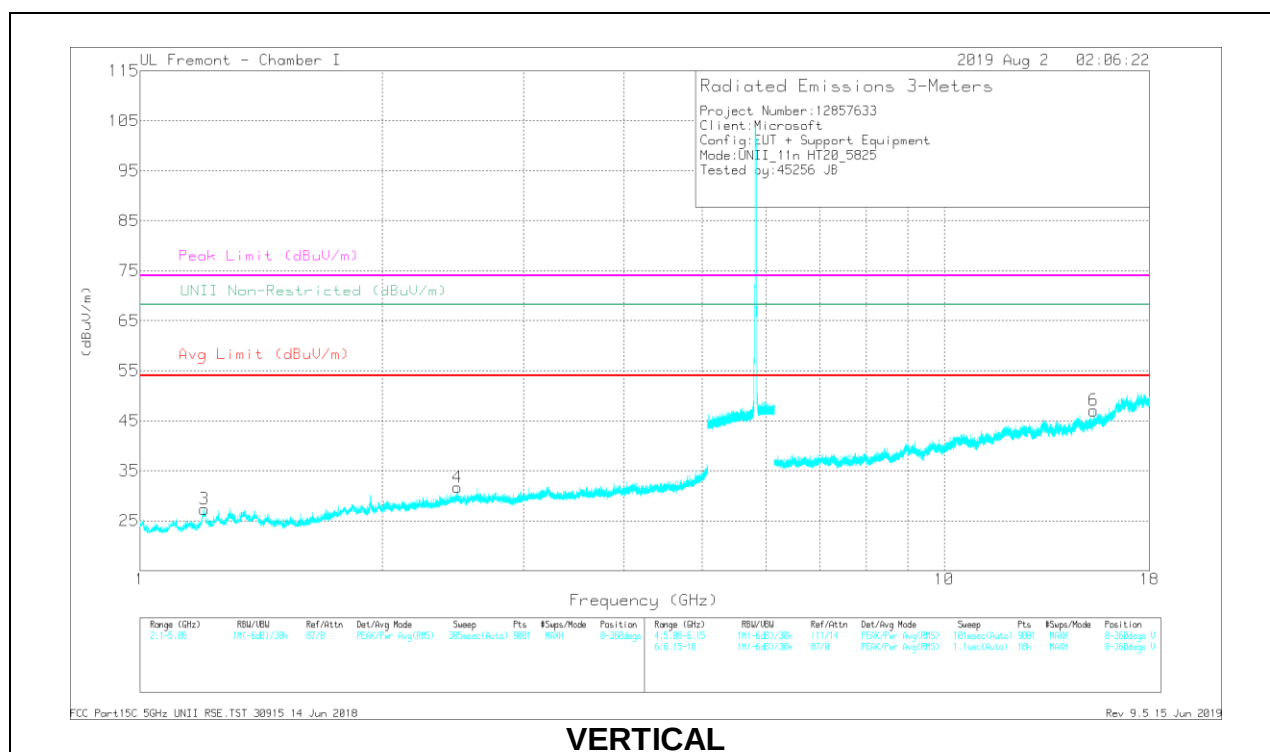

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	AF T862 (dBm)	Amp Cdr (dB) / Pwr Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.20263	40.66	PK-U	28.5	-34	0	35.16	-	-	74	-38.84	-	-	336	131	H
	* 1.20311	31.02	ADR	28.5	-34	.24	25.76	54	-28.24	-	-	-	-	336	131	H
2	* 2.37748	36.19	PK-U	31.9	-31.8	0	36.29	-	-	74	-37.71	-	-	334	242	H
	* 2.37725	26.6	ADR	31.9	-31.8	.24	26.94	54	-27.06	-	-	-	-	334	242	H
4	2.4801	37.3	PK-U	32.4	-31.5	0	38.2	-	-	-	-	68.2	-30	168	212	V
3	* 1.20334	39.94	PK-U	28.5	-34	0	34.44	-	-	74	-39.56	-	-	144	154	V
	* 1.20403	31.91	ADR	28.5	-34	.24	26.65	54	-27.35	-	-	-	-	144	154	V
5	15.33297	27.2	PK-U	39.9	-14.8	0	52.3	-	-	-	-	68.2	-15.9	151	275	H
6	15.34499	27.24	PK-U	40	-14.8	0	52.44	-	-	-	-	68.2	-15.76	66	210	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.15. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANEDGE (LOW CHANNEL)


HORIZONTAL RESULT

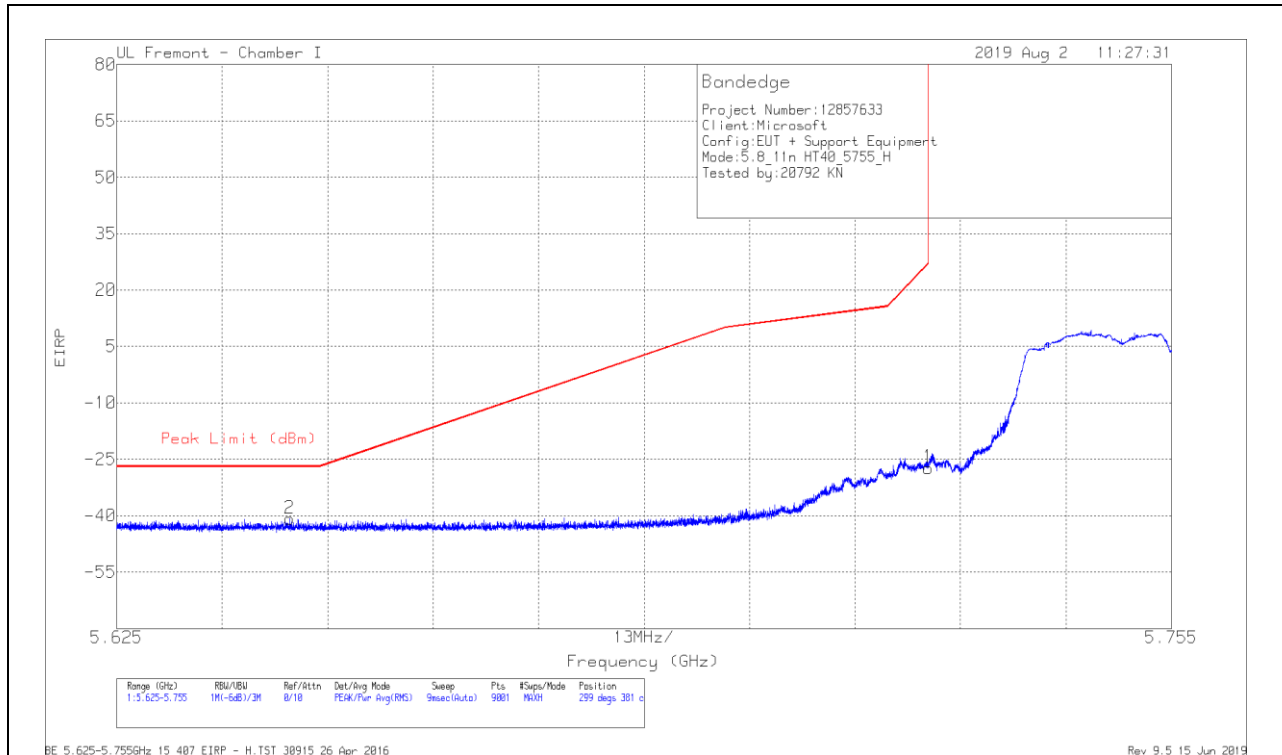

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/CbI/Filt r/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-55.46	Pk	34.9	-18.5	11.8	0	-27.26	26.99	-54.25	299	381	H
2	5.64629	-69.05	Pk	35.1	-18.6	11.8	0	-40.75	-27	-13.75	299	381	H

Pk - Peak detector

VERTICAL RESULT

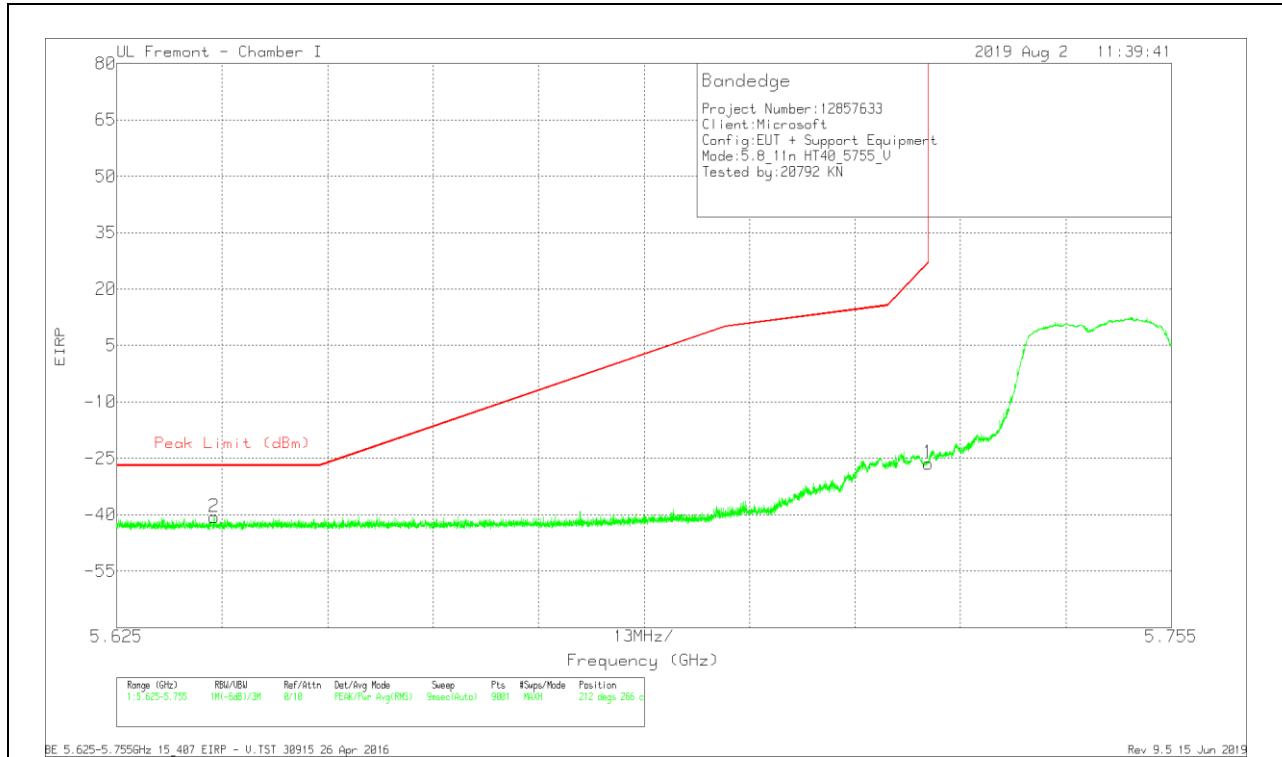


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Ampl/Cbl/Filt r/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-54.54	Pk	34.9	-18.5	11.8	0	-26.34	26.99	-53.33	212	266	V
2	5.637	-68.78	Pk	35	-18.6	11.8	0	-40.58	-27	-13.58	212	266	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

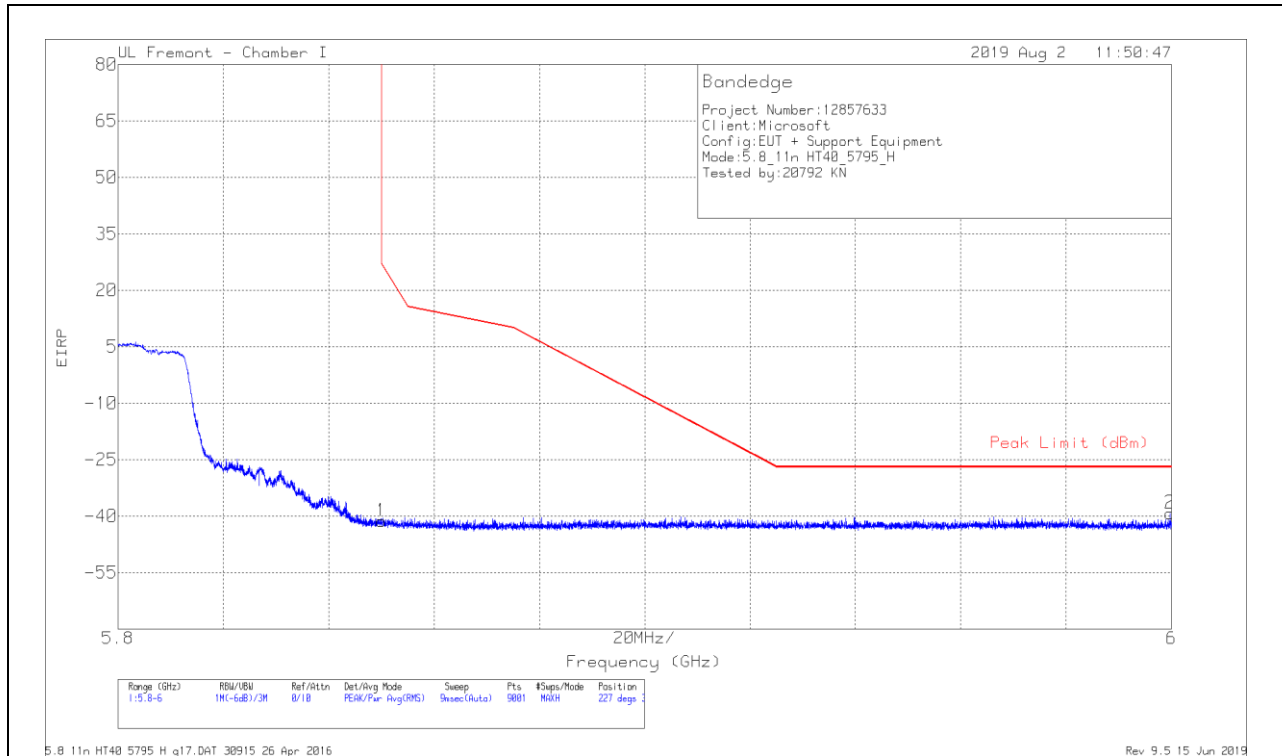

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dBm)	Amp/Cbl/Filr/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-70.8	Pk	35.1	-17.4	11.8	0	-41.3	26.95	-68.25	227	351	H
2	5.99971	-68.84	Pk	35.2	-17.4	11.8	0	-39.24	-27	-12.24	227	351	H

Pk - Peak detector

VERTICAL RESULT


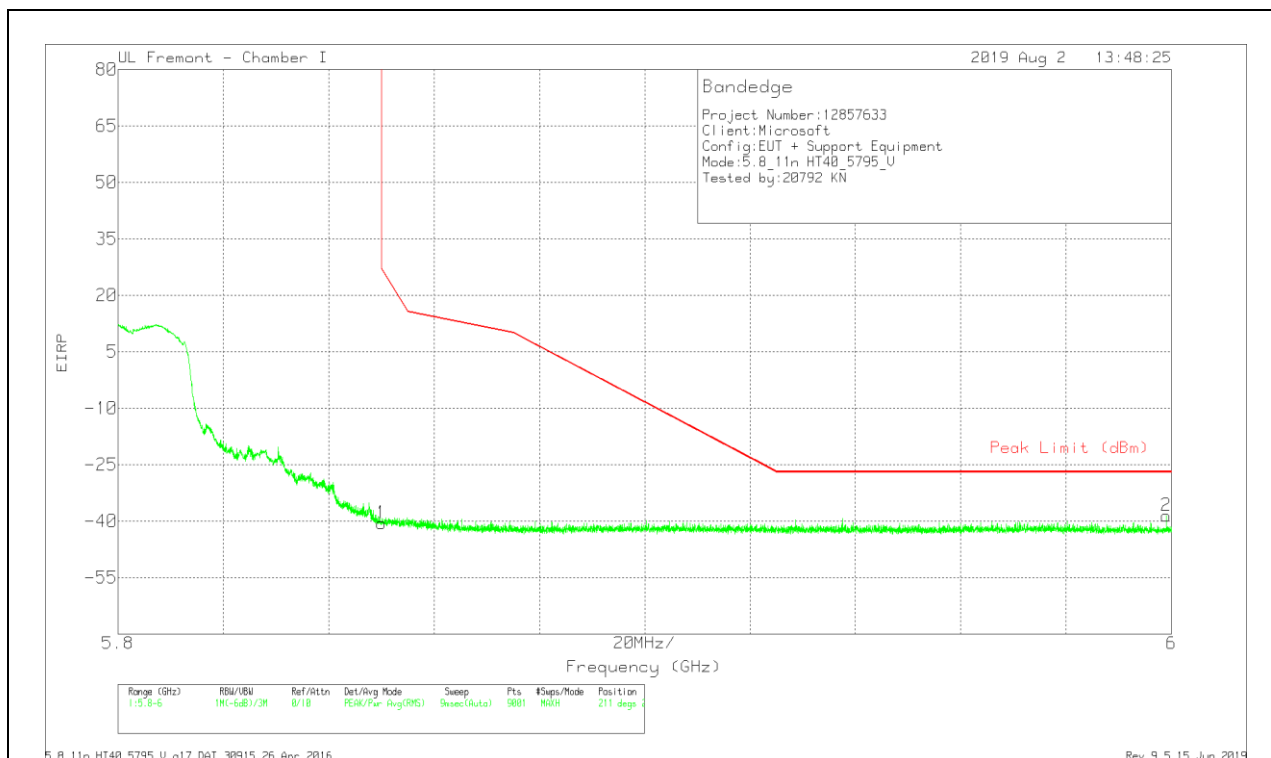


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dBm)	Ampl/Cbl/Filt r/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-70.1	Pk	35.1	-17.4	11.8	0	-40.6	26.95	-67.55	211	267	V
2	5.99907	-68.1	Pk	35.2	-17.5	11.8	0	-38.6	-27	-11.6	211	267	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

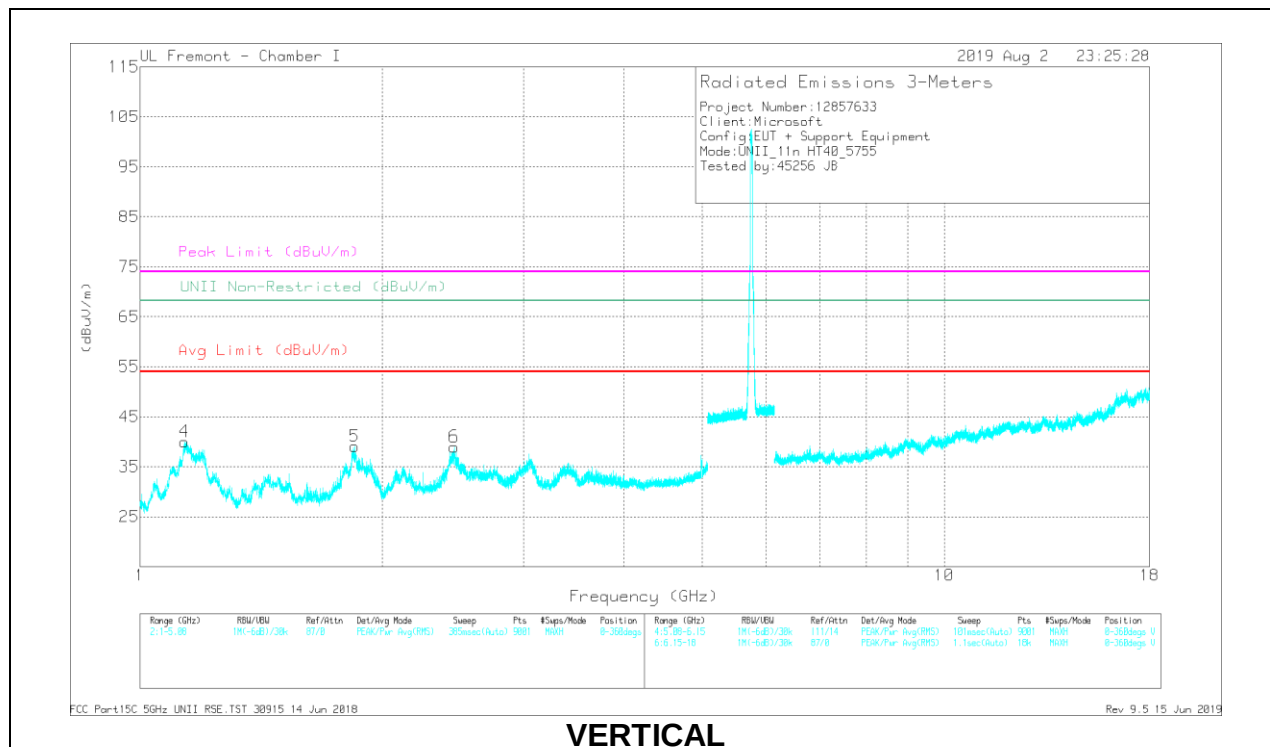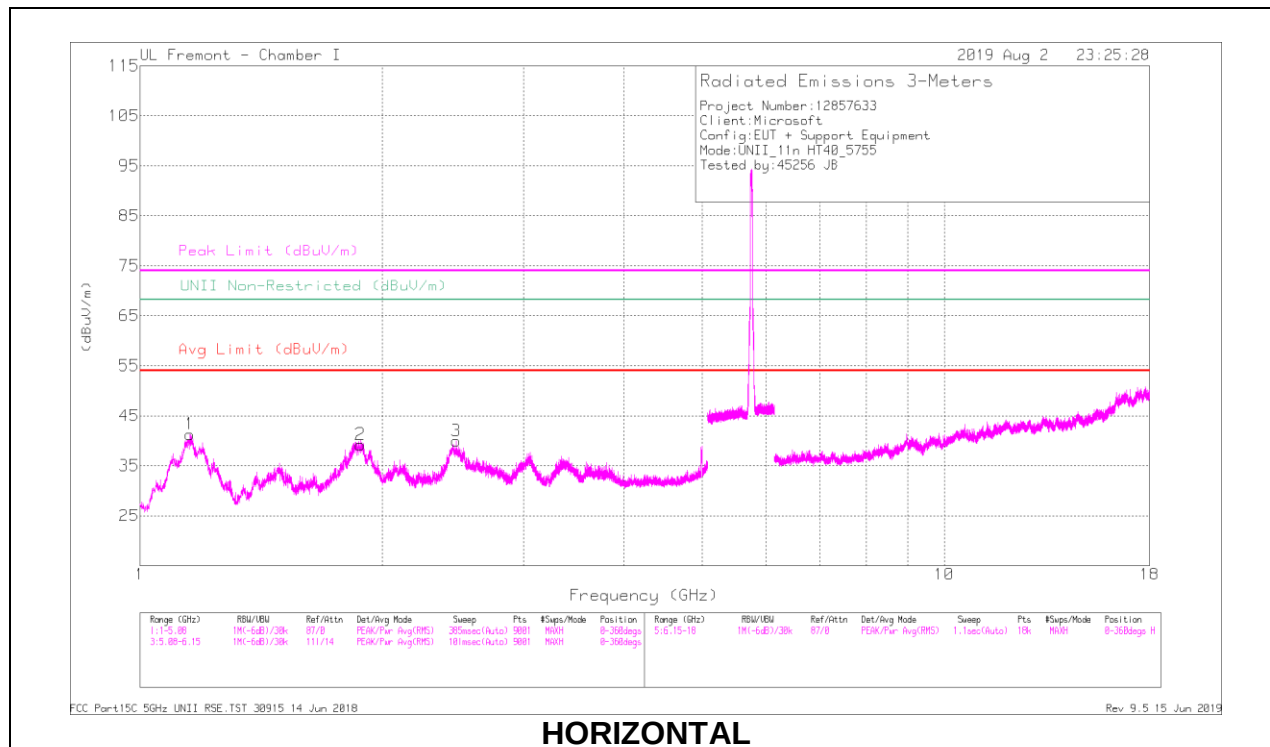

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	AF 1862 (dBm)	Amp(CM)RtrPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.15445	56.23	PK-U	27.6	-34	0	49.83	-	-	74	-24.17	-	-	149	207	H
	* 1.15261	45.92	ADR	27.6	-34	.44	39.96	54	-14.04	-	-	-	-	149	207	H
2	1.87964	51.23	PK-U	30.6	-32.6	0	49.23	-	-	-	-	68.2	-18.97	163	144	H
3	2.47174	47.21	PK-U	32.3	-31.5	0	48.01	-	-	-	-	68.2	-20.19	7	126	H
4	* 1.13614	53.34	PK-U	27.7	-34.1	0	46.94	-	-	74	-27.06	-	-	310	104	V
	* 1.13733	43.57	ADR	27.7	-34.1	.44	37.61	54	-16.39	-	-	-	-	310	104	V
5	1.84692	49.13	PK-U	30.7	-32.7	0	47.13	-	-	-	-	68.2	-21.07	139	106	V
6	2.45809	47.16	PK-U	32.3	-31.7	0	47.76	-	-	-	-	68.2	-20.44	287	195	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

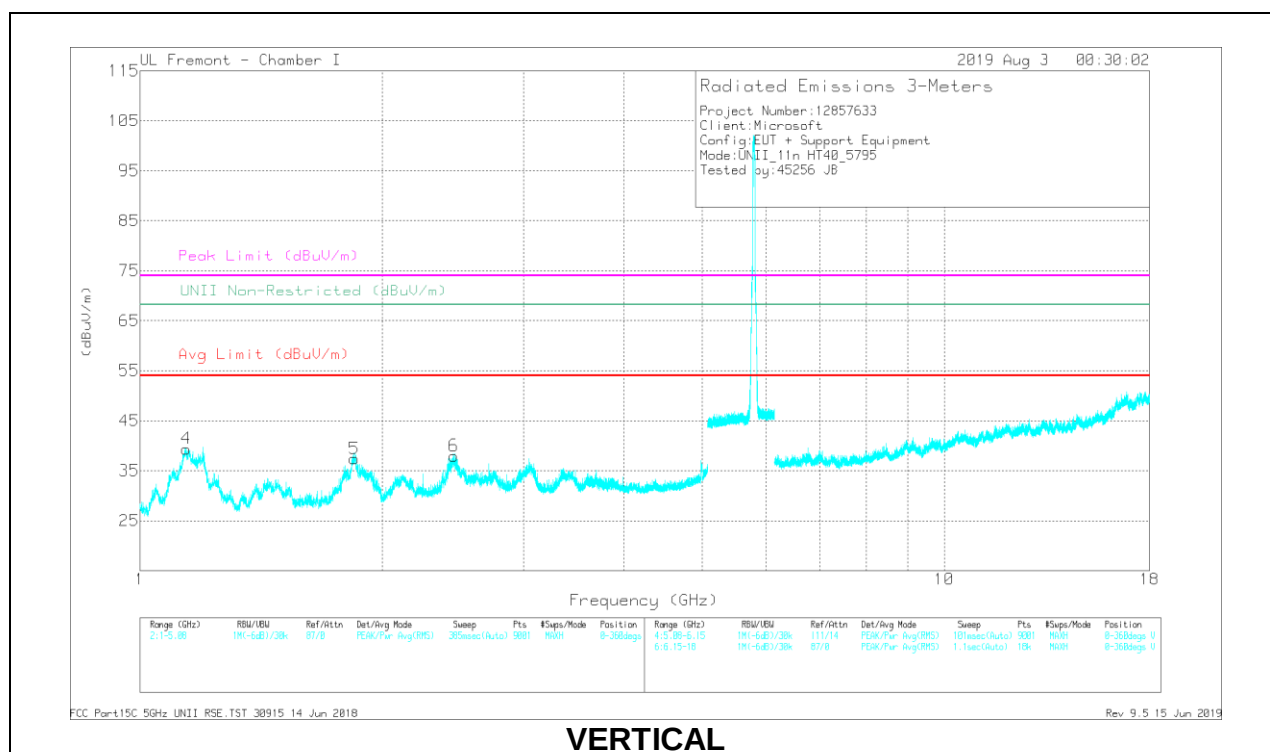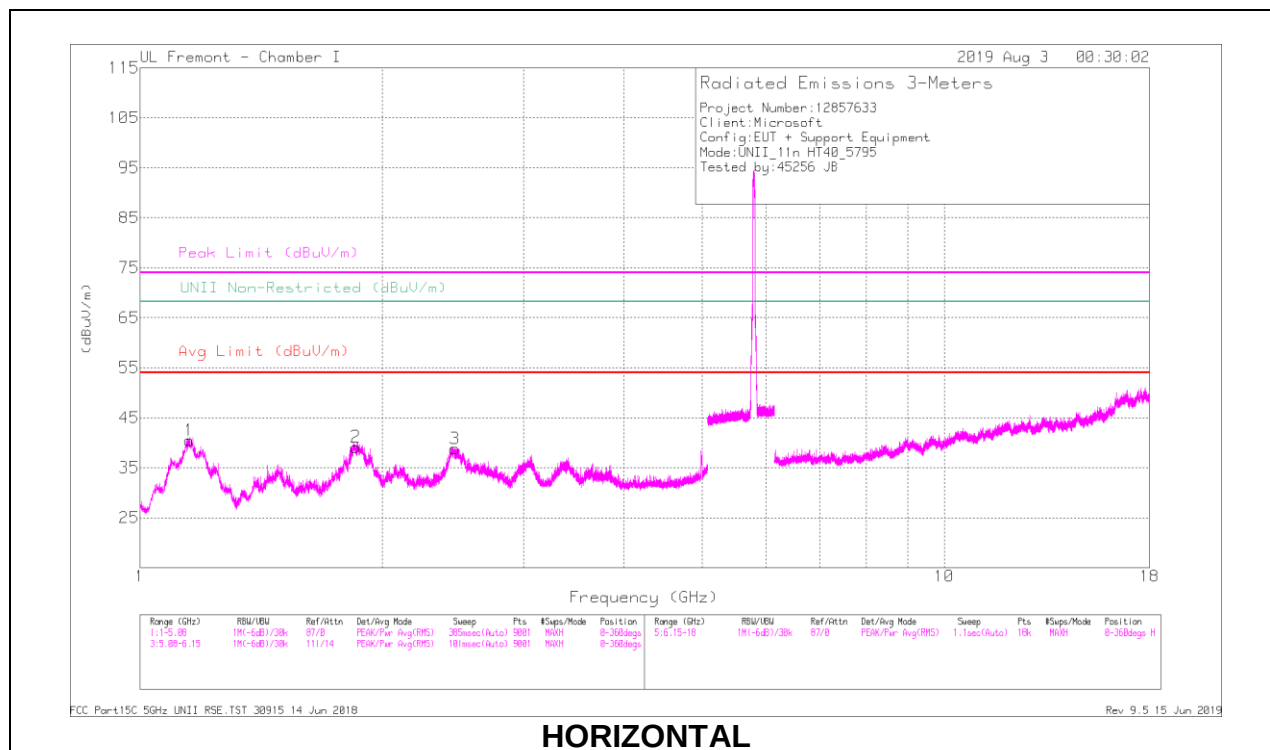

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	AF 1862 (dBm)	Amp(CM)RtrPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.15292	56.98	PK-U	27.6	-34	0	50.58	-	-	74	-23.42	-	-	149	202	H
	* 1.15194	46.53	ADR	27.6	-34	.44	40.57	54	-13.43	-	-	-	-	149	202	H
2	1.85402	50.77	PK-U	30.8	-32.7	0	48.87	-	-	-	-	68.2	-19.33	199	172	H
3	2.46202	46.91	PK-U	32.3	-31.6	0	47.61	-	-	-	-	68.2	-20.59	339	102	H
4	* 1.14198	54.28	PK-U	27.6	-34	0	47.88	-	-	74	-26.12	-	-	309	106	V
	* 1.1399	44.33	ADR	27.6	-34	.44	38.37	54	-15.63	-	-	-	-	309	106	V
5	1.84558	49.84	PK-U	30.6	-32.7	0	47.74	-	-	-	-	68.2	-20.46	133	100	V
6	2.45765	47.05	PK-U	32.3	-31.7	0	47.65	-	-	-	-	68.2	-20.55	288	196	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

9.1.16. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

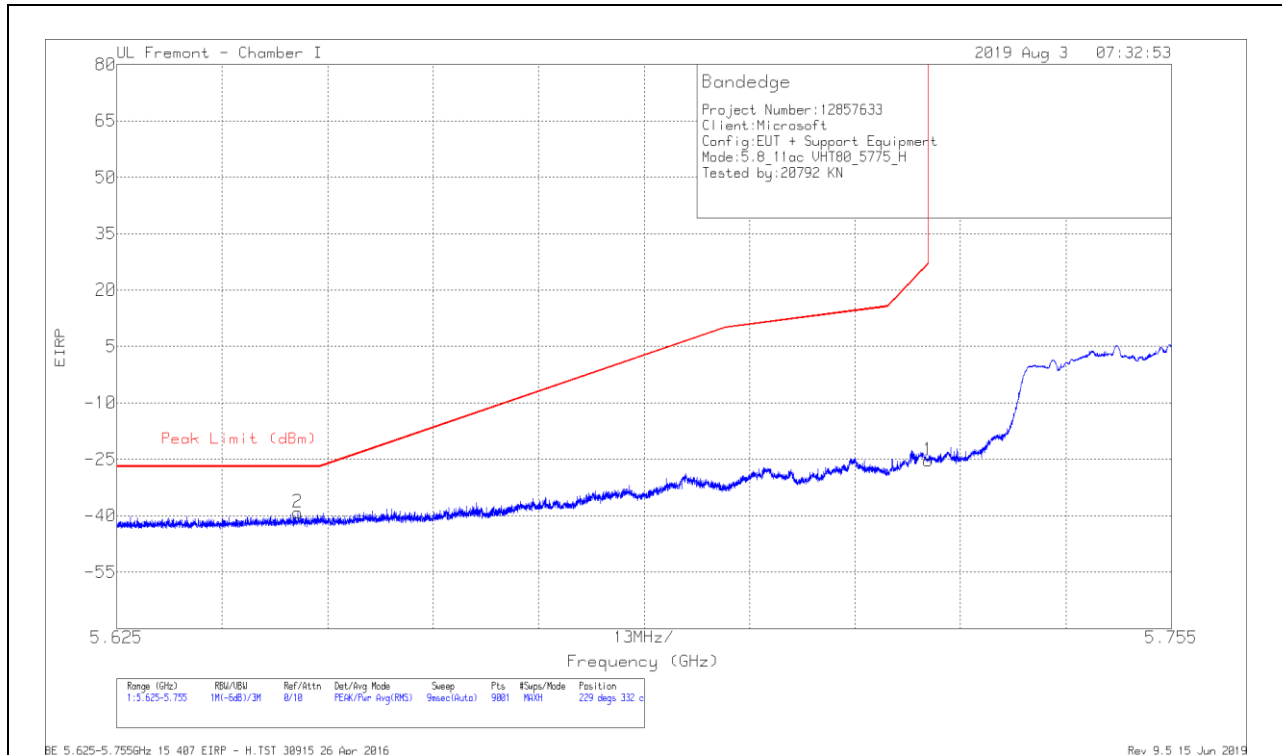

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Amp/CbI/Filt r/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-53.5	Pk	34.9	-18.5	11.8	0	-25.3	26.99	-52.29	229	332	H
2	5.64732	-67.38	Pk	35.1	-18.6	11.8	0	-39.08	-27	-12.08	229	332	H

Pk - Peak detector

VERTICAL RESULT

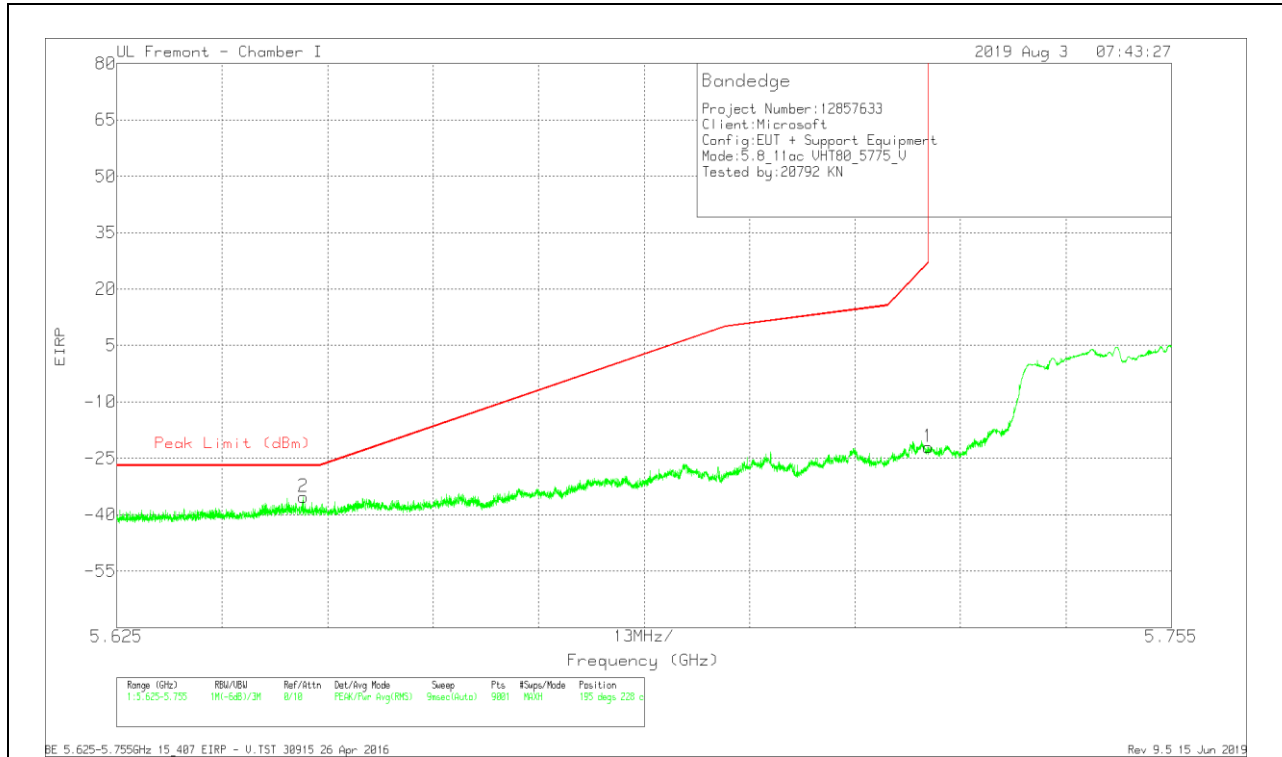


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Ampl/Cbl/Filt r/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-50.26	Pk	34.9	-18.5	11.8	0	-22.06	26.99	-49.05	195	228	V
2	5.648	-63.52	Pk	35.1	-18.6	11.8	0	-35.22	-27	-8.22	195	228	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

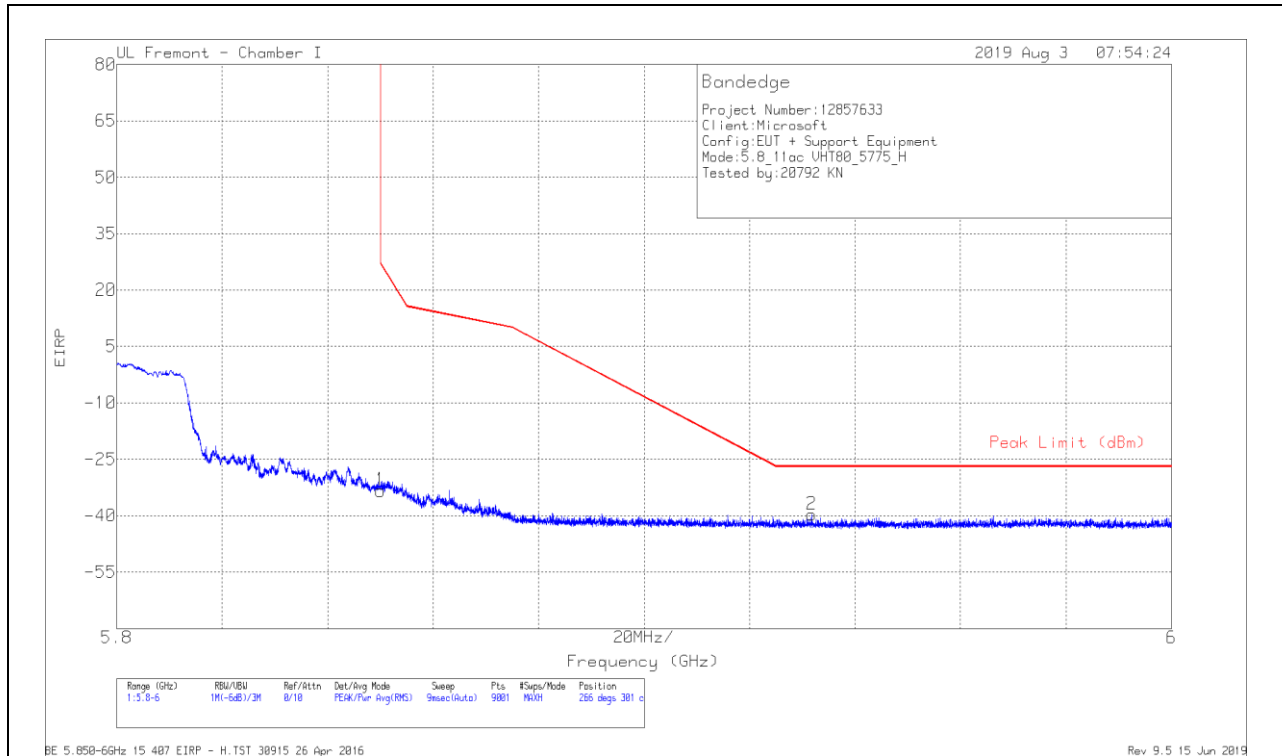

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dBm)	Amp/Cbl/Filt r/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-62.83	Pk	35.1	-17.4	11.8	0	-33.33	26.95	-60.28	266	301	H
2	5.9318	-69.25	Pk	35.1	-17.3	11.8	0	-39.65	-27	-12.65	266	301	H

Pk - Peak detector

VERTICAL RESULT

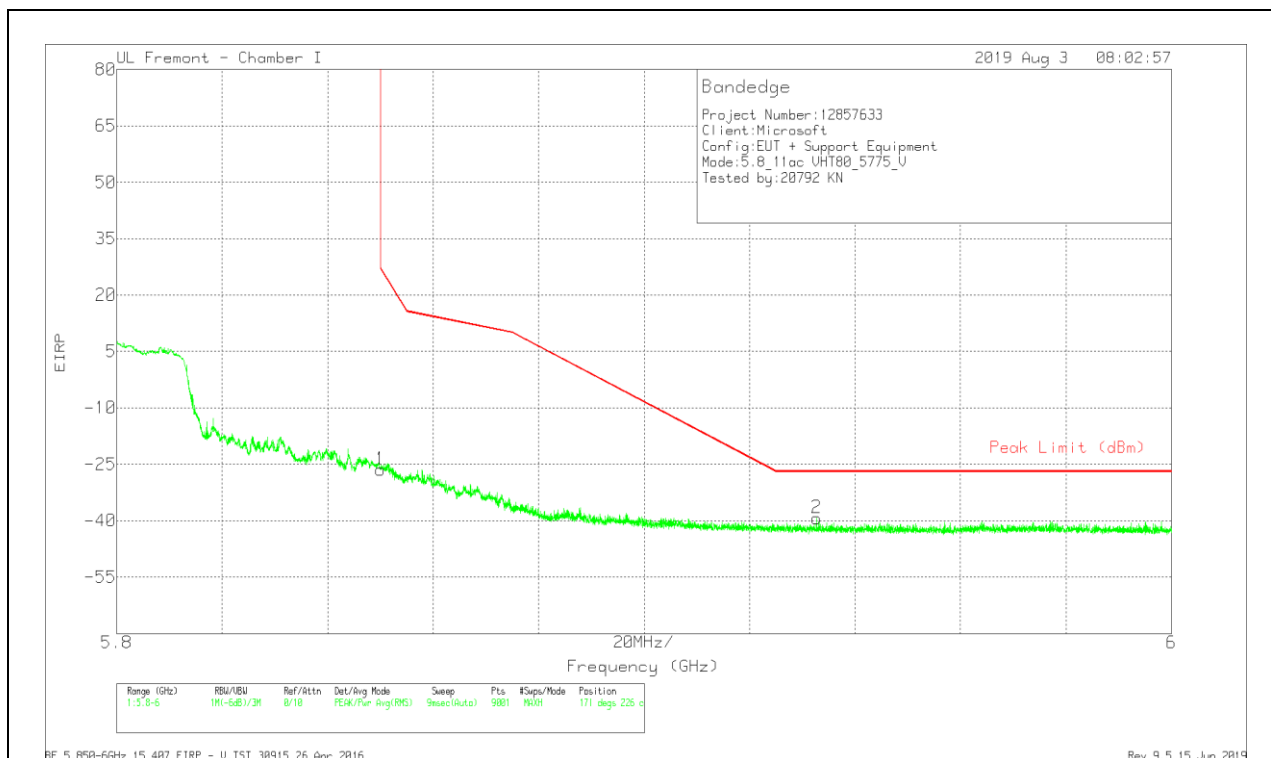

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T862 (dB/m)	Ampl/Cbl/Filt r/Pad (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-55.89	Pk	35.1	-17.4	11.8	0	-26.39	26.95	-53.34	171	226	V
2	5.93271	-68.95	Pk	35.1	-17.3	11.8	0	-39.35	-27	-12.35	171	226	V

Pk - Peak detector