

## FCC Test Report

**Report No.:** RFBEDV-WTW-P20090534-2 R1

**FCC ID:** C3K1950

**Test Model:** 1950, 1951 (See section 3.1 for more detail)

**Received Date:** Sep. 29, 2020

**Test Date:** Sep. 30, 2020 ~ Feb. 04, 2021

**Issued Date:** Feb. 24, 2021

**Applicant:** Microsoft Corporation

**Address:** One Microsoft Way, Redmond, WA 98052-6399, U.S.A

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location (1):** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**Test Location (2):** B2F., No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231,  
Taiwan

**FCC Registration /** 788550 / TW0003

**Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1 Certificate of Conformity .....</b>	<b>5</b>
<b>2 Summary of Test Results .....</b>	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Modification Record .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes .....	8
3.2.1 Test Mode Applicability and Tested Channel Detail .....	9
3.3 Duty Cycle of Test Signal .....	12
3.4 Description of Support Units .....	14
3.4.1 Configuration of System under Test .....	14
3.5 General Description of Applied Standards and References .....	14
<b>4 Test Types and Results .....</b>	<b>15</b>
4.1 Radiated Emission and Bandedge Measurement .....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	15
4.1.2 Test Instruments .....	16
4.1.3 Test Procedures .....	18
4.1.4 Deviation from Test Standard .....	18
4.1.5 Test Set Up .....	19
4.1.6 EUT Operating Conditions .....	20
4.1.7 Test Results .....	21
4.2 Conducted Emission Measurement .....	43
4.2.1 Limits of Conducted Emission Measurement .....	43
4.2.2 Test Instruments .....	43
4.2.3 Test Procedures .....	43
4.2.4 Deviation from Test Standard .....	44
4.2.5 Test Setup .....	44
4.2.6 EUT Operating Conditions .....	44
4.2.7 Test Results .....	45
4.3 6 dB Bandwidth Measurement .....	49
4.3.1 Limits of 6 dB Bandwidth Measurement .....	49
4.3.2 Test Setup .....	49
4.3.3 Test Instruments .....	49
4.3.4 Test Procedure .....	49
4.3.5 Deviation from Test Standard .....	49
4.3.6 EUT Operating Conditions .....	49
4.3.7 Test Results .....	50
4.4 Occupied Bandwidth Measurement .....	52
4.4.1 Test Setup .....	52
4.4.2 Test Instruments .....	52
4.4.3 Test Procedure .....	52
4.4.4 Deviation from Test Standard .....	52
4.4.5 EUT Operating Conditions .....	52
4.4.6 Test Results .....	53
4.5 Conducted Output Power Measurement .....	55
4.5.1 Limits of Conducted Output Power Measurement .....	55
4.5.2 Test Setup .....	55
4.5.3 Test Instruments .....	55
4.5.4 Test Procedures .....	55
4.5.5 Deviation from Test Standard .....	55
4.5.6 EUT Operating Conditions .....	55
4.5.7 Test Results .....	56

4.6	Power Spectral Density Measurement .....	57
4.6.1	Limits of Power Spectral Density Measurement.....	57
4.6.2	Test Setup.....	57
4.6.3	Test Instruments .....	57
4.6.4	Test Procedure .....	57
4.6.5	Deviation from Test Standard .....	57
4.6.6	EUT Operating Condition .....	57
4.6.7	Test Results .....	58
4.7	Conducted Out of Band Emission Measurement .....	60
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	60
4.7.2	Test Setup.....	60
4.7.3	Test Instruments .....	60
4.7.4	Test Procedure .....	60
4.7.5	Deviation from Test Standard .....	60
4.7.6	EUT Operating Condition .....	60
4.7.7	Test Results .....	61
<b>5</b>	<b>Pictures of Test Arrangements.....</b>	<b>65</b>
	<b>Appendix – Information of the Testing Laboratories .....</b>	<b>66</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBEDV-WTW-P20090534-2	Original Release	Feb. 08, 2021
RFBEDV-WTW-P20090534-2 R1	Revise Band-Edge data	Feb. 24, 2021

## 1 Certificate of Conformity

**Product:** Portable Computing Device

**Brand:** Microsoft

**Test Model:** 1950, 1951 (See section 3.1 for more detail)

**Sample Status:** Identical Prototype

**Applicant:** Microsoft Corporation

**Test Date:** Sep. 30, 2020 ~ Feb. 04, 2021

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Lena Wang , Date: Feb. 24, 2021  
Lena Wang / Specialist

Approved by : Dylan Chiou , Date: Feb. 24, 2021  
Dylan Chiou / Senior Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -10.04 dB at 0.20865 MHz.
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -9.83 dB at 214.68 MHz.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Portable Computing Device
<b>Brand</b>	Microsoft
<b>Test Model</b>	1950, 1951
<b>Model Difference</b>	Refer to Note as below
<b>Status of EUT</b>	Identical Prototype
<b>Power Supply Rating</b>	120 Vac
<b>Modulation Type</b>	GFSK
<b>Transfer Rate</b>	LE 4.0: 1 Mbps LE 5.0: 2 Mbps
<b>Operating Frequency</b>	2402 ~ 2480 MHz
<b>Number of Channel</b>	40
<b>Output Power</b>	LE 4.0: 3.581 mW LE 5.0: 4.036 mW
<b>HW Version (Product)</b>	EV2
<b>SW Version (Product)</b>	4.89.137
<b>HW Version (Radio)</b>	N/A
<b>SW Version (Radio)</b>	21.80.2.1
<b>Radio Test Tool &amp; Version</b>	DRTU: 21.80.2.1
<b>Antenna Type</b>	PIFA antenna with -0.1 dBi gain
<b>Antenna Connector</b>	N/A
<b>Accessory Device</b>	Refer to Note as below
<b>Data Cable Supplied</b>	Refer to Note as below

Note:

1. All models are listed as below.

Config.	Brand	Model	Description
1	Microsoft	1950	The difference between 1950 and 1951 models is the C-Cover.
2		1951	1950 - Config 1 and 1951 - Config 2

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter 1	Microsoft	P/M	--
Adapter 2	Microsoft	P/N	--

\* After pretesting, the adapter 1 was the worst case and chose for final test.

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or User's Manual.

### 3.2 Description of Test Modes

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



### 3.2.1 Test Mode Applicability and Tested Channel Detail

<LE 4.0>

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	-	-	√	-	Config. 1
B	√	√	√	√	Config. 2

Where **RE $\geq$ 1G**: Radiated Emission above 1 GHz

**RE<1G**: Radiated Emission below 1 GHz

**PLC**: Power Line Conducted Emission

**APCM**: Antenna Port Conducted Measurement

**Note**: “-” means no effect.

#### **Radiated Emission Test (Above 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
B	0 to 39	0, 19, 39	GFSK	1

#### **Radiated Emission Test (Below 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
B	0 to 39	19	GFSK	1

#### **Power Line Conducted Emission Test:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
A, B	0 to 39	19	GFSK	1

**Antenna Port Conducted Measurement:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
B	0 to 39	0, 19, 39	GFSK	1

# <LE 5.0>

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	-	-	√	-	Config. 1
B	√	√	√	√	Config. 2

Where **RE $\geq$ 1G**: Radiated Emission above 1 GHz **RE<1G**: Radiated Emission below 1 GHz  
**PLC**: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

**Note:** "-" means no effect.

## **Radiated Emission Test (Above 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
B	0 to 39	0, 19, 39	GFSK	2

## **Radiated Emission Test (Below 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
B	0 to 39	39	GFSK	2

## **Power Line Conducted Emission Test:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
A, B	0 to 39	39	GFSK	2

### Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
B	0 to 39	0, 19, 39	GFSK	2

### Test Condition:


Applicable To	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Charles Hsiao
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Karl Lee
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Jones Chang
APCM	25 deg. C, 65 % RH	120 Vac, 60 Hz	Jisyong Wang

### 3.3 Duty Cycle of Test Signal

Duty cycle of test signal is < 98 %, duty factor shall be considered.


<LE 4.0>

Duty cycle =  $0.386/0.625 = 0.618$ , Duty factor =  $10 * \log(1/0.618) = 2.09$

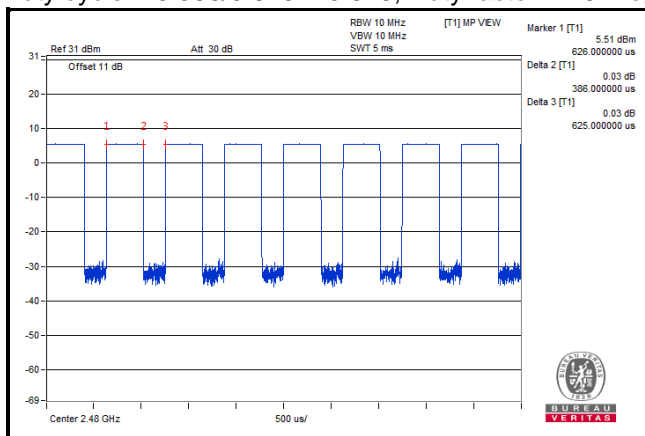

<LE 5.0>


Duty cycle =  $0.204/0.635 = 0.321$ , Duty factor =  $10 * \log(1/0.321) = 4.93$

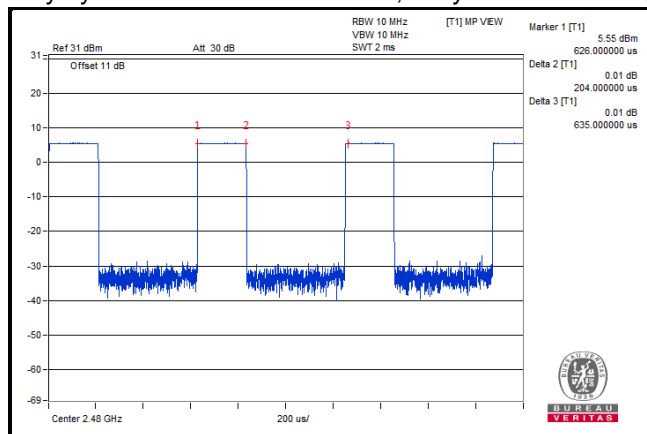

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

#### 3.4.1 Configuration of System under Test



Note: The EUT is tested with all external accessory ports populated.

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

#### Test Standard:

##### **FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

#### References Test Guidance:

##### **KDB 558074 D01 15.247 Meas Guidance v05r02**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Aug. 24, 2020	Aug. 23, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 16, 2020	Apr. 15, 2021
HORN Antenna ETS-Lindgren	3117	00143293	Nov. 24, 2019	Nov. 23, 2020
			Nov. 22, 2020	Nov. 21, 2021
BILOG Antenna SCHWARZBECK	VULB 9168	9168-616	Nov. 12, 2019	Nov. 11, 2020
			Nov. 09, 2020	Nov. 08, 2021
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Nov. 24, 2019	Nov. 23, 2020
			Nov. 22, 2020	Nov. 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Loop Antenna	EM-6879	269	Sep. 17, 2020	Sep. 16, 2021
Preamplifier Agilent	310N	187226	Jun. 17, 2020	Jun. 16, 2021
Preamplifier Agilent	83017A	MY39501357	Jun. 17, 2020	Jun. 16, 2021
Preamplifier EMCI	EMC 184045	980116	Oct. 08, 2019	Oct. 07, 2020
			Oct. 07, 2020	Oct. 06, 2021
Power Meter Anritsu	ML2495A	1012010	Sep. 01, 2020	Aug. 31, 2021
Power Sensor Anritsu	MA2411B	1315050	Sep. 01, 2020	Aug. 31, 2021
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-400)	Jun. 17, 2020	Jun. 16, 2021
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RFC-SMS-100-SMS-24)	Jun. 17, 2020	Jun. 17, 2021
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA



- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HsinTien Chamber 1.

#### 4.1.3 Test Procedures

##### **For Radiated Emission below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

##### **For Radiated Emission above 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz. (RBW = 1 MHz, VBW = 9 kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up


##### <Radiated Emission below 30 MHz>

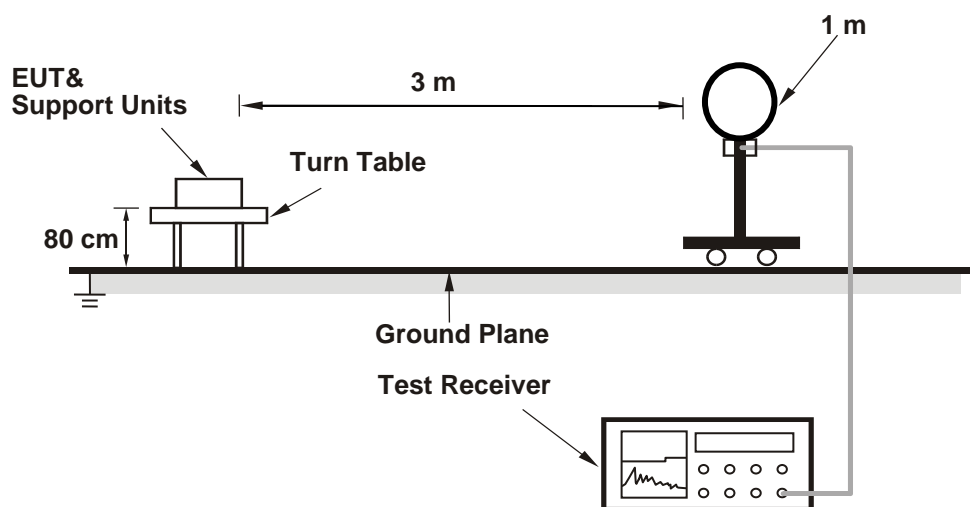

##### <Radiated Emission 30 MHz to 1 GHz>

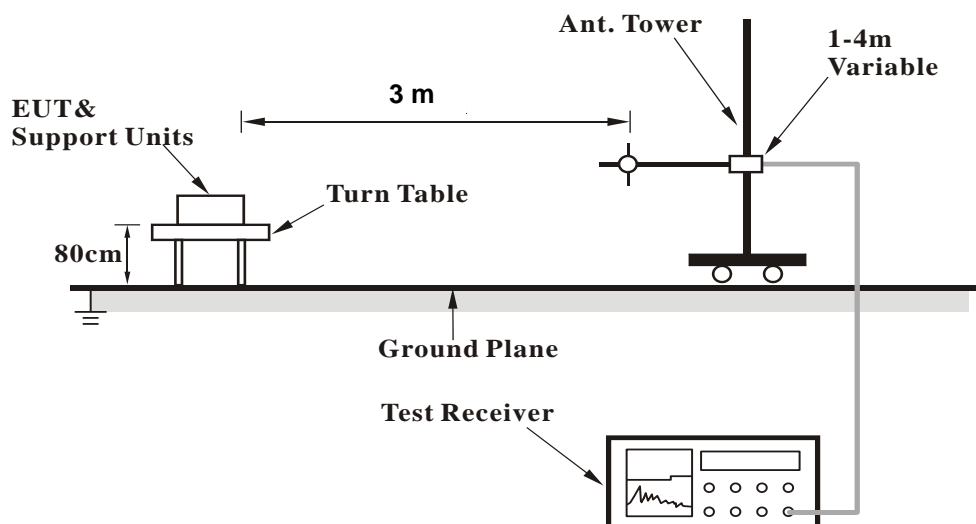

### <Radiated Emission above 1 GHz>

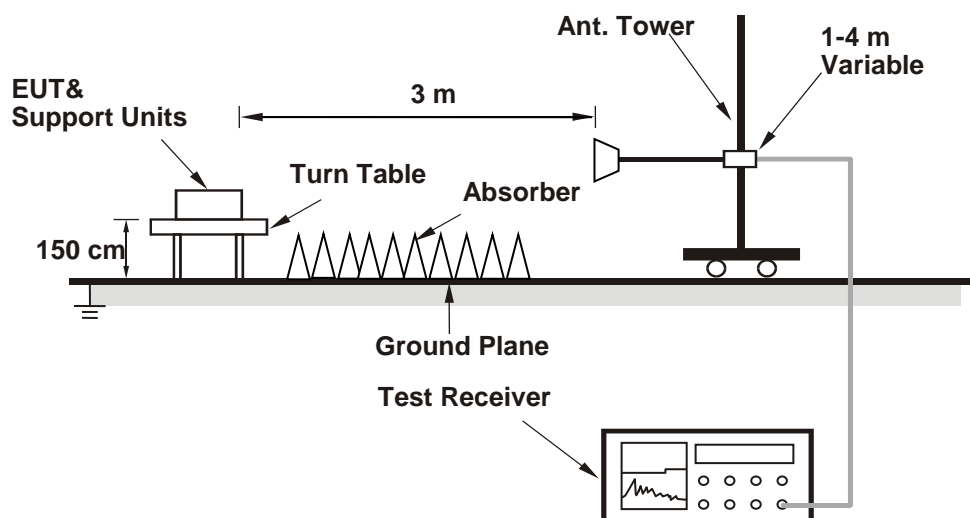

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.


#### 4.1.7 Test Results

##### Above 1 GHz Data:


<LE 4.0>

EUT Test Condition		Measurement Detail	
Channel	Channel 0	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

#### Horizontal

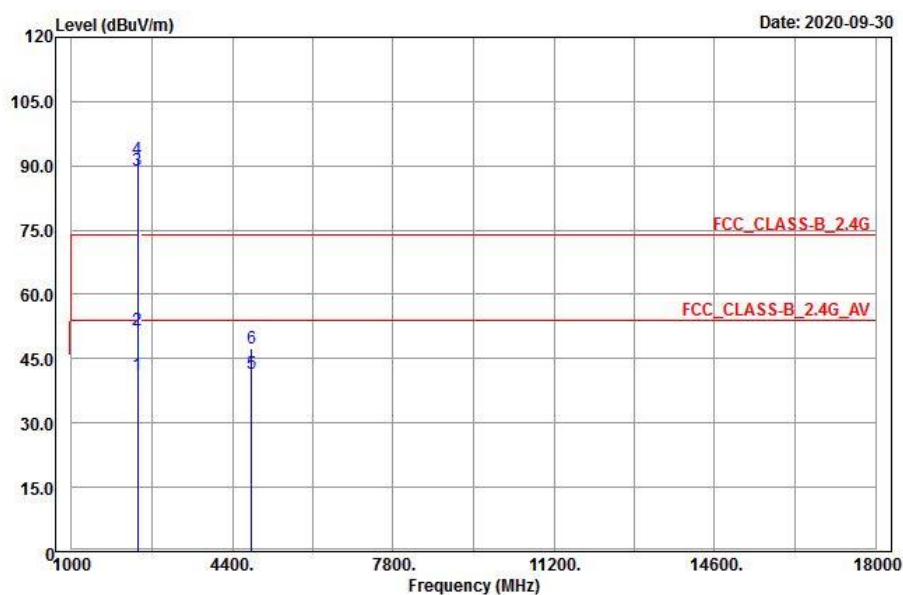

#### Vertical

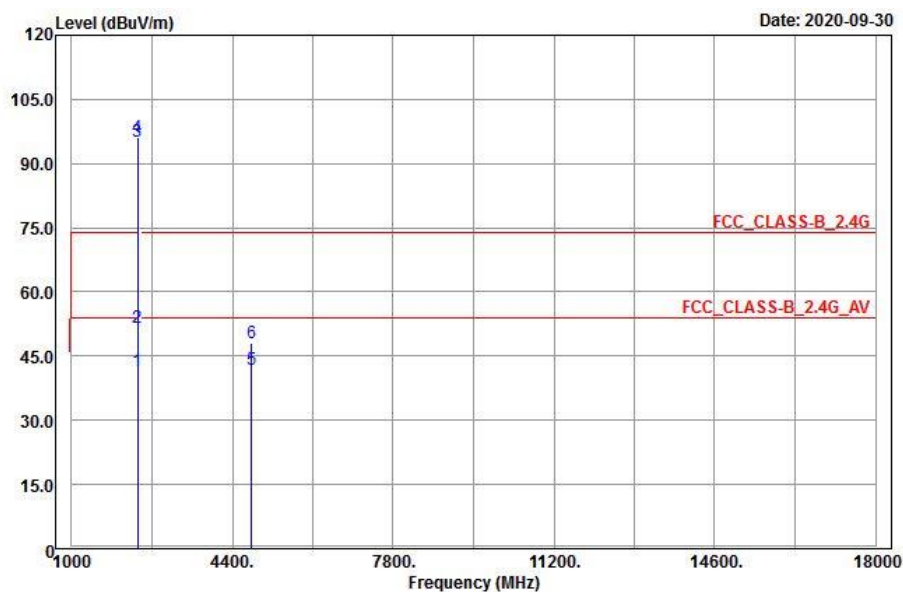

**Antenna Polarity & Test Distance: Horizontal at 3 m**


Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.32	36.82	4.5	54	-12.68	152	117	Average
2390	51.64	47.14	4.5	74	-22.36	152	117	Peak
2402	88.84	84.32	4.52			152	117	Average
2402	91.39	86.87	4.52			152	117	Peak
4804	41.59	31.24	10.35	54	-12.41	126	165	Average
4804	47.29	36.94	10.35	74	-26.71	126	165	Peak

**Antenna Polarity & Test Distance: Vertical at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.46	36.96	4.5	54	-12.54	114	186	Average
2390	51.72	47.22	4.5	74	-22.28	114	186	Peak
2402	95.22	90.7	4.52			114	186	Average
2402	96.21	91.69	4.52			114	186	Peak
4804	41.77	31.42	10.35	54	-12.23	164	196	Average
4804	48.09	37.74	10.35	74	-25.91	164	196	Peak


Remarks:

1. Emission Level = Read Level + Factor  
Margin Value = Emission Level – Limit value
2. 2402 MHz: Fundamental Frequency.
3. The other emission levels were very low against the limit.

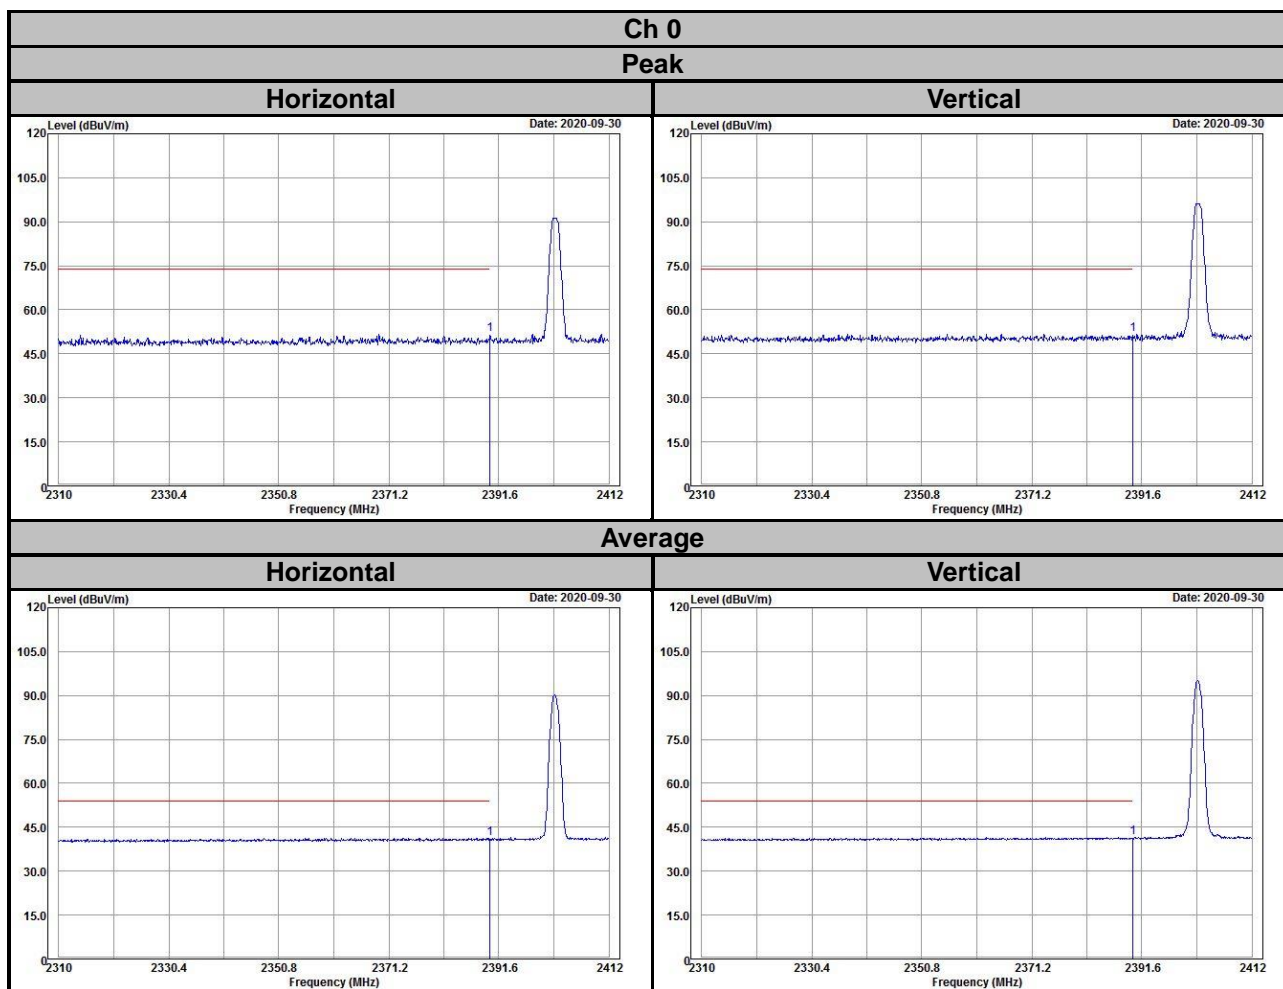


EUT Test Condition		Measurement Detail	
Channel	Channel 19	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

### Horizontal

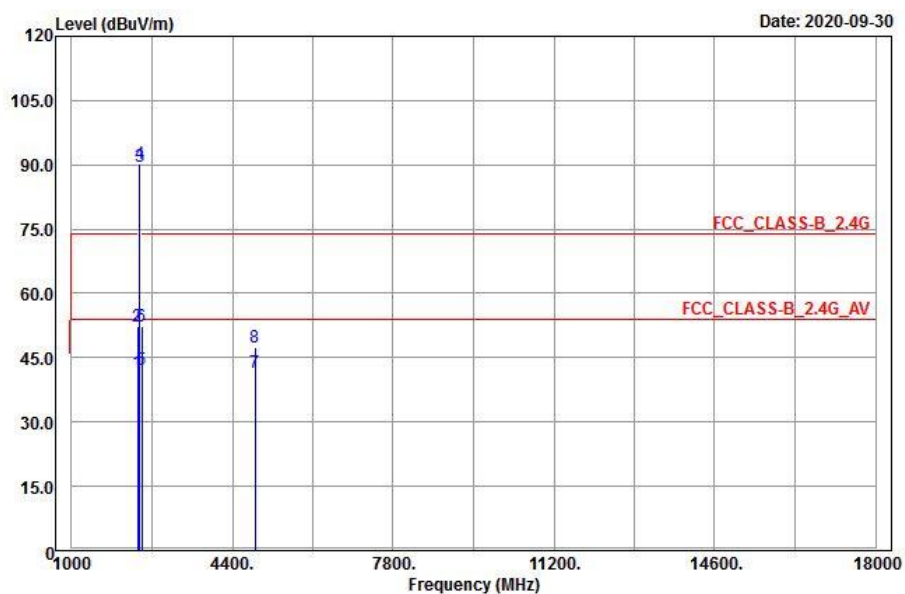

### Vertical

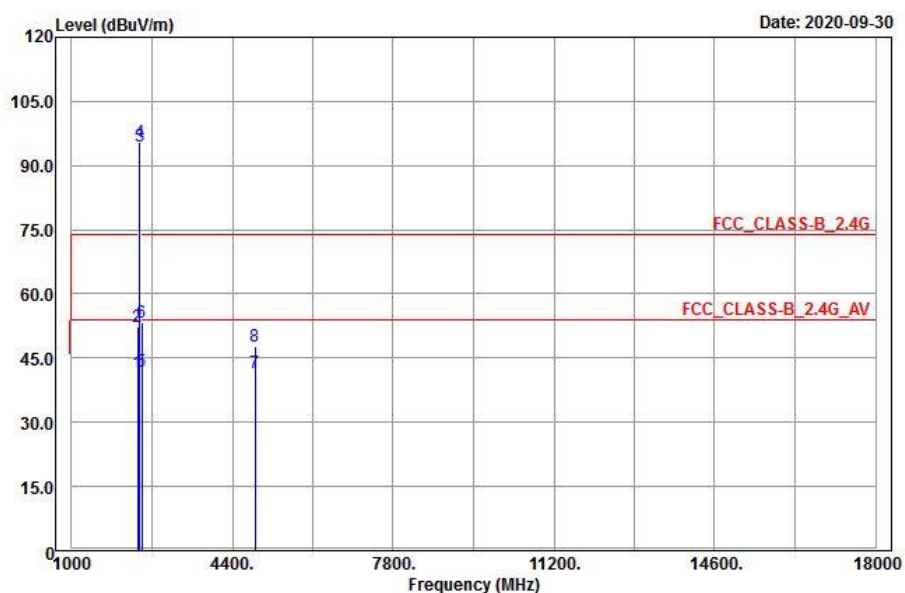



**Antenna Polarity & Test Distance: Horizontal at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.63	37.13	4.5	54	-12.37	152	117	Average
2390	52.2	47.7	4.5	74	-21.8	152	117	Peak
2440	89.48	84.89	4.59			152	117	Average
2440	90.17	85.58	4.59			152	117	Peak
2483.5	42.12	37.46	4.66	54	-11.88	152	117	Average
2483.5	52.31	47.65	4.66	74	-21.69	152	117	Peak
4880	41.55	31.34	10.21	54	-12.45	188	174	Average
4880	47.32	37.11	10.21	74	-26.68	188	174	Peak

**Antenna Polarity & Test Distance: Vertical at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.48	36.98	4.5	54	-12.52	114	201	Average
2390	52.24	47.74	4.5	74	-21.76	114	201	Peak
2440	94.49	89.9	4.59			114	201	Average
2440	95.38	90.79	4.59			114	201	Peak
2483.5	41.95	37.29	4.66	54	-12.05	114	201	Average
2483.5	53.46	48.8	4.66	74	-20.54	114	201	Peak
4880	41.49	31.28	10.21	54	-12.51	162	345	Average
4880	47.62	37.41	10.21	74	-26.38	162	345	Peak


Remarks:

1. Emission Level = Read Level + Factor  
Margin Value = Emission Level – Limit value
2. 2440 MHz: Fundamental Frequency.
3. The other emission levels were very low against the limit.


## Ch 19

### Peak

#### Horizontal

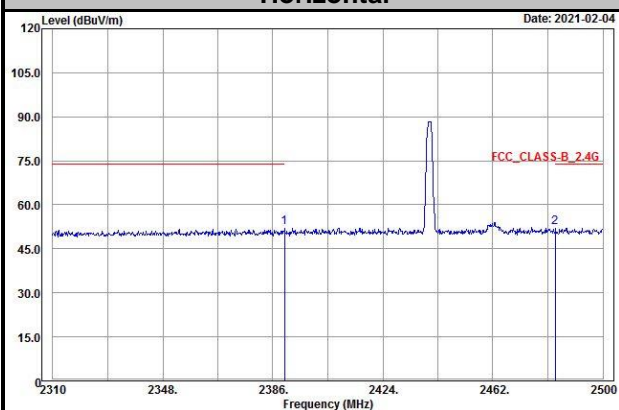


#### Vertical

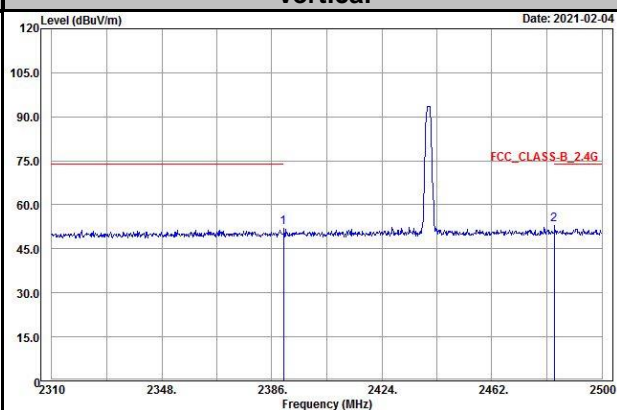


### Average

#### Horizontal

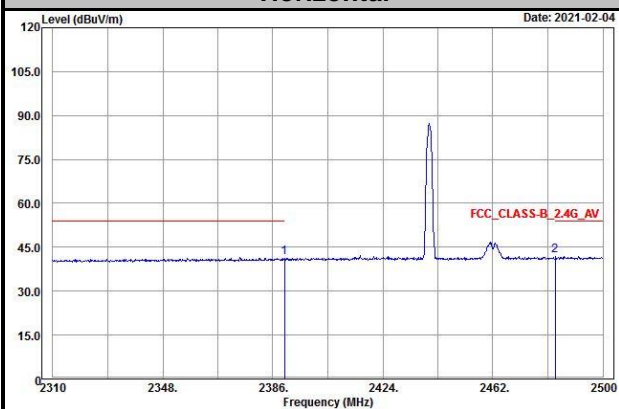


#### Vertical

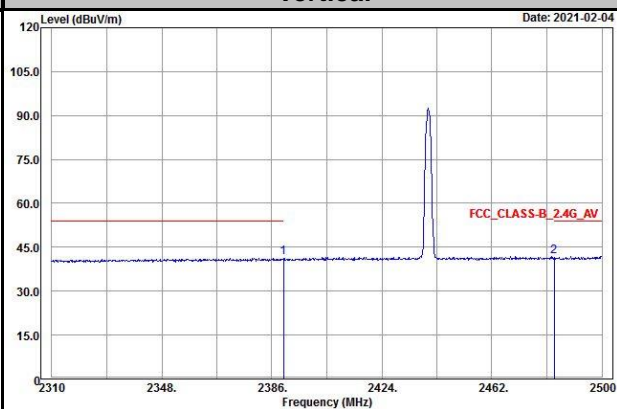


EUT Test Condition		Measurement Detail	
Channel	Channel 39	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

### Horizontal

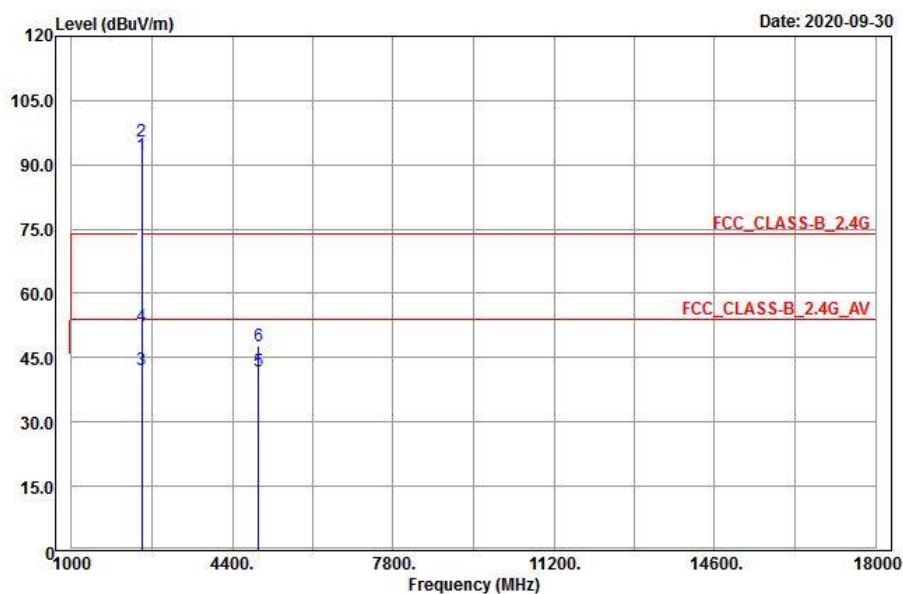

### Vertical

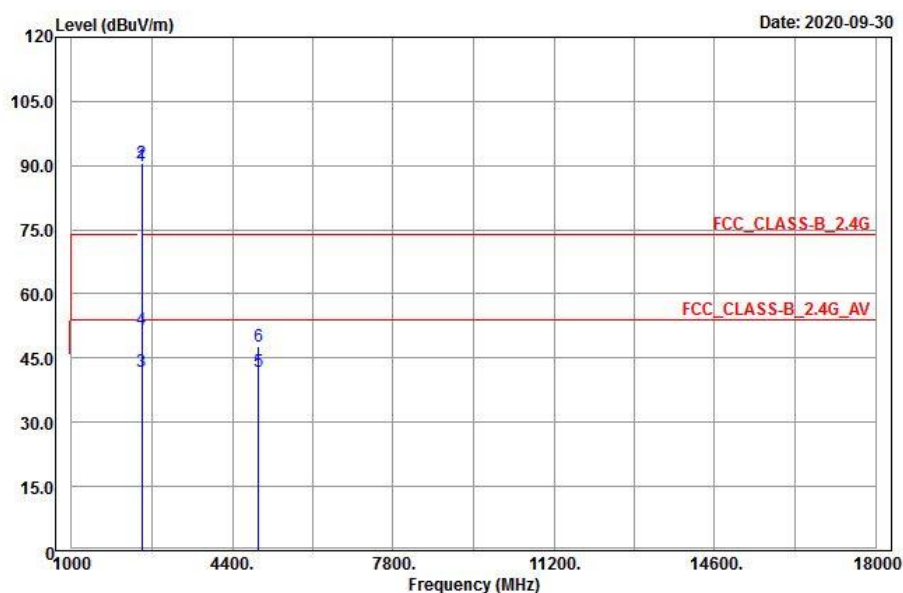

**Antenna Polarity & Test Distance: Horizontal at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	92.14	87.5	4.64			114	201	Average
2480	95.38	90.74	4.64			114	201	Peak
2483.5	42.11	37.45	4.66	54	-11.89	114	201	Average
2483.5	52.18	47.52	4.66	74	-21.82	114	201	Peak
4960	41.82	31.46	10.36	54	-12.18	114	141	Average
4960	47.71	37.35	10.36	74	-26.29	114	141	Peak

**Antenna Polarity & Test Distance: Vertical at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	89.8	85.16	4.64			149	123	Average
2480	90.42	85.78	4.64			149	123	Peak
2483.5	41.99	37.33	4.66	54	-12.01	149	123	Average
2483.5	51.58	46.92	4.66	74	-22.42	149	123	Peak
4960	41.76	31.4	10.36	54	-12.24	106	345	Average
4960	47.68	37.32	10.36	74	-26.32	106	345	Peak


Remarks:

1. Emission Level = Read Level + Factor  
Margin Value = Emission Level – Limit value
2. 2480 MHz: Fundamental Frequency.
3. The other emission levels were very low against the limit.


# Ch 39

## Peak

### Horizontal

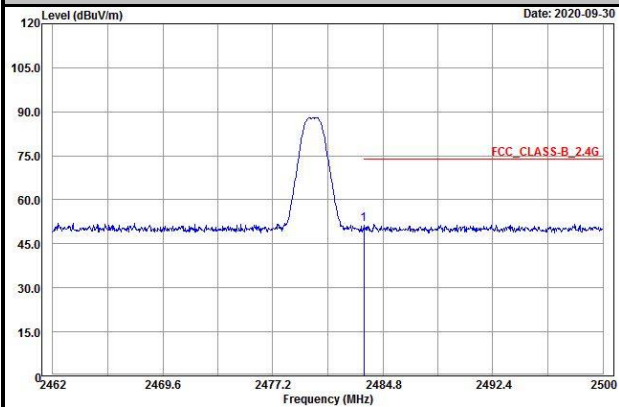


### Vertical

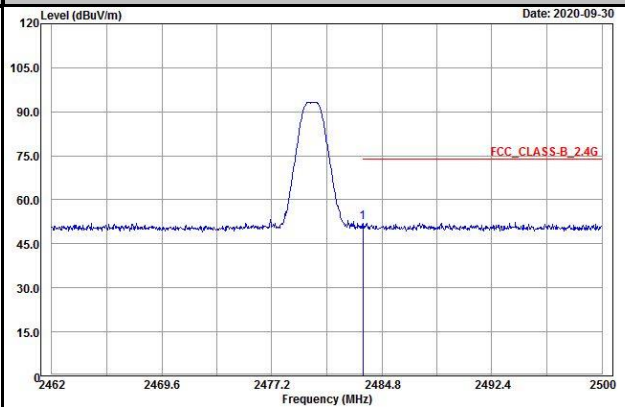


## Average

### Horizontal

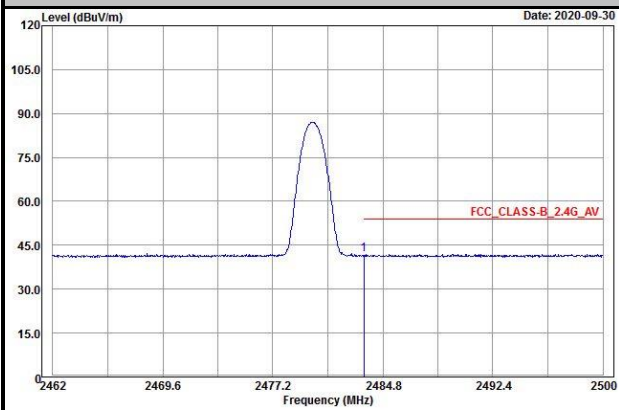


### Vertical

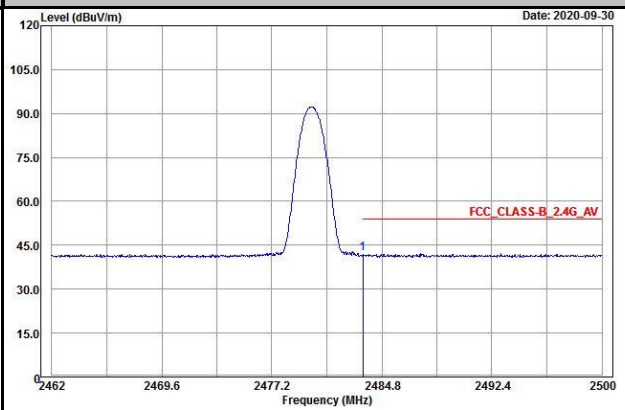


# <LE 5.0>

EUT Test Condition		Measurement Detail	
Channel	Channel 0	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

## Horizontal

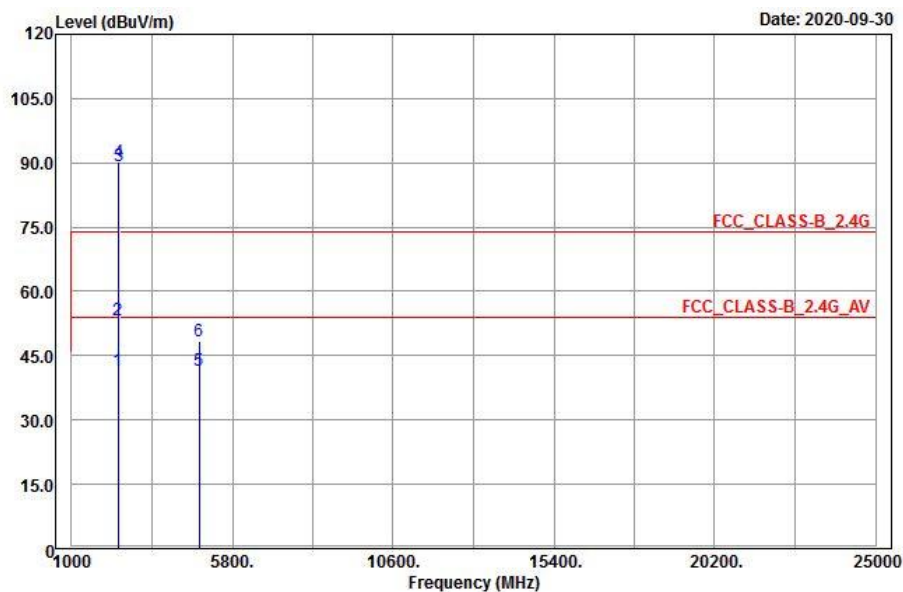

## Vertical

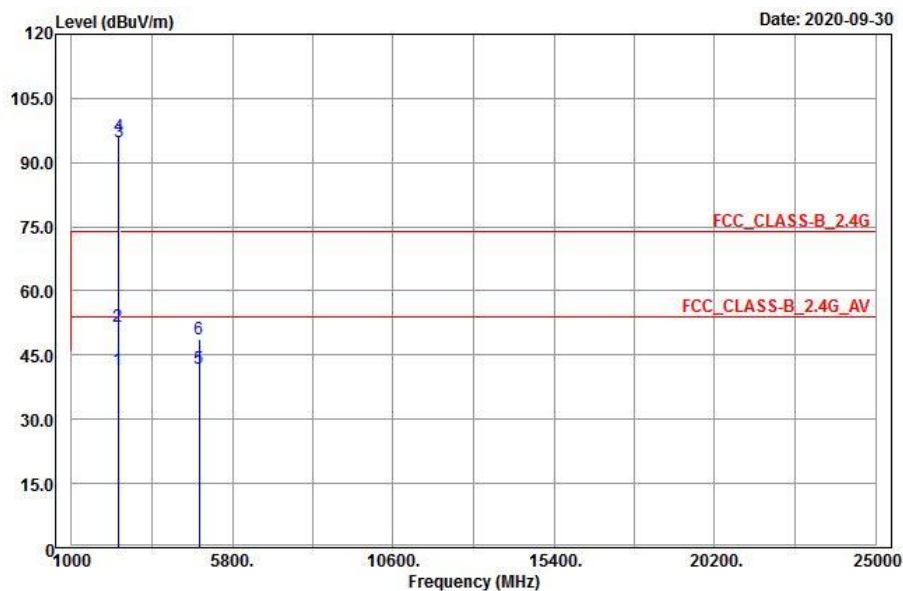

**Antenna Polarity & Test Distance: Horizontal at 3 m**


Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.59	37.09	4.5	54	-12.41	152	117	Average
2390	53.3	48.8	4.5	74	-20.7	152	117	Peak
2402	89.37	84.85	4.52			152	117	Average
2402	90.18	85.66	4.52			152	117	Peak
4804	41.68	31.33	10.35	54	-12.32	122	252	Average
4804	48.35	38	10.35	74	-25.65	122	252	Peak

**Antenna Polarity & Test Distance: Vertical at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.44	36.94	4.5	54	-12.56	114	186	Average
2390	51.72	47.22	4.5	74	-22.28	114	186	Peak
2402	94.78	90.26	4.52			114	186	Average
2402	95.99	91.47	4.52			114	186	Peak
4804	41.85	31.5	10.35	54	-12.15	105	244	Average
4804	48.59	38.24	10.35	74	-25.41	105	244	Peak

Remarks:


1. Emission Level = Read Level + Factor  
Margin Value = Emission Level – Limit value
2. 2402 MHz: Fundamental Frequency.
3. The other emission levels were very low against the limit.

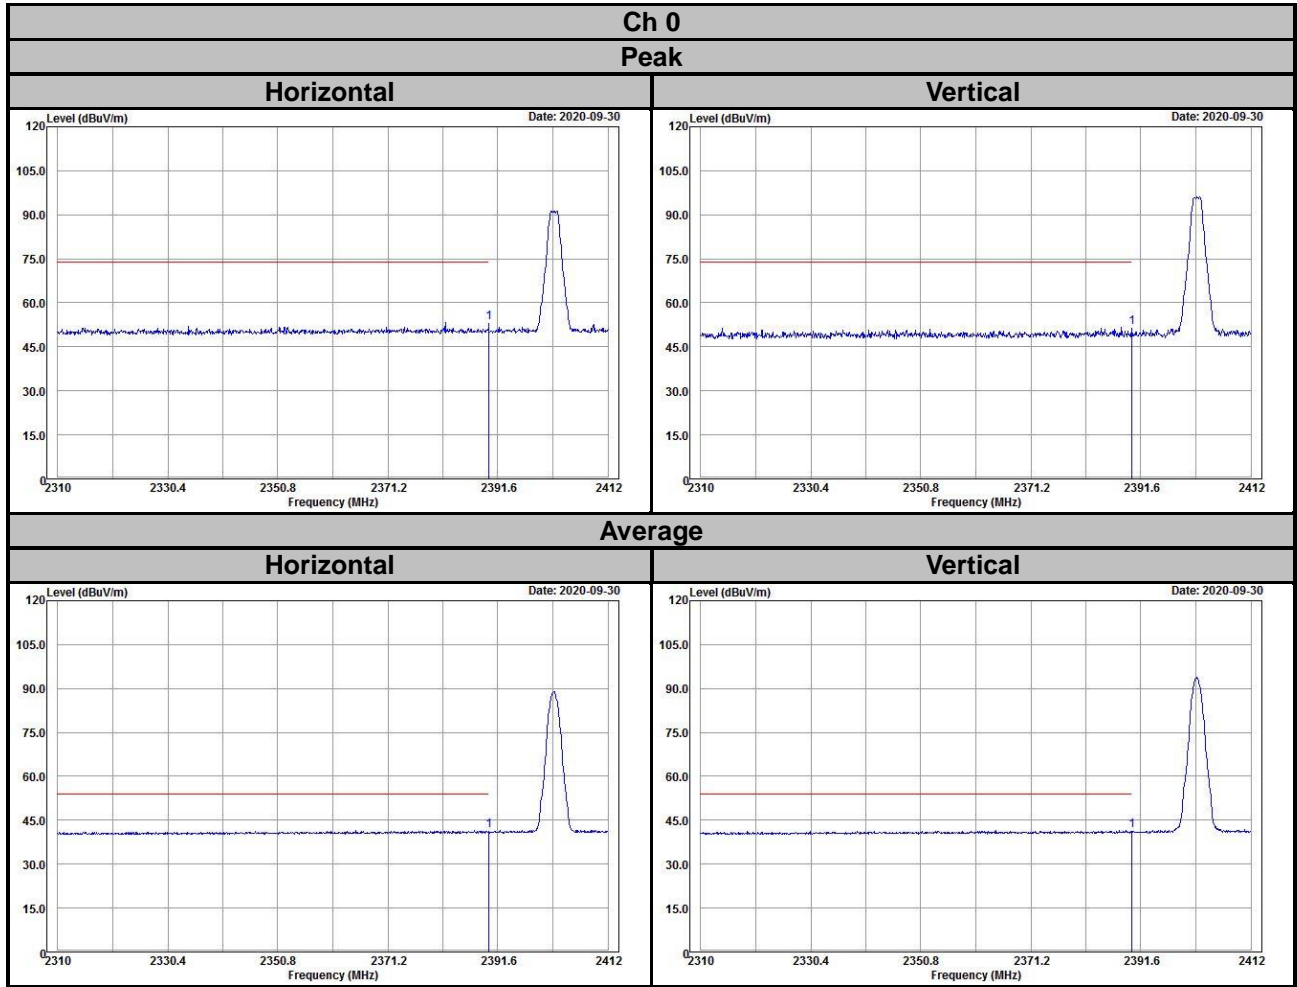




EUT Test Condition		Measurement Detail	
Channel	Channel 19	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

### Horizontal

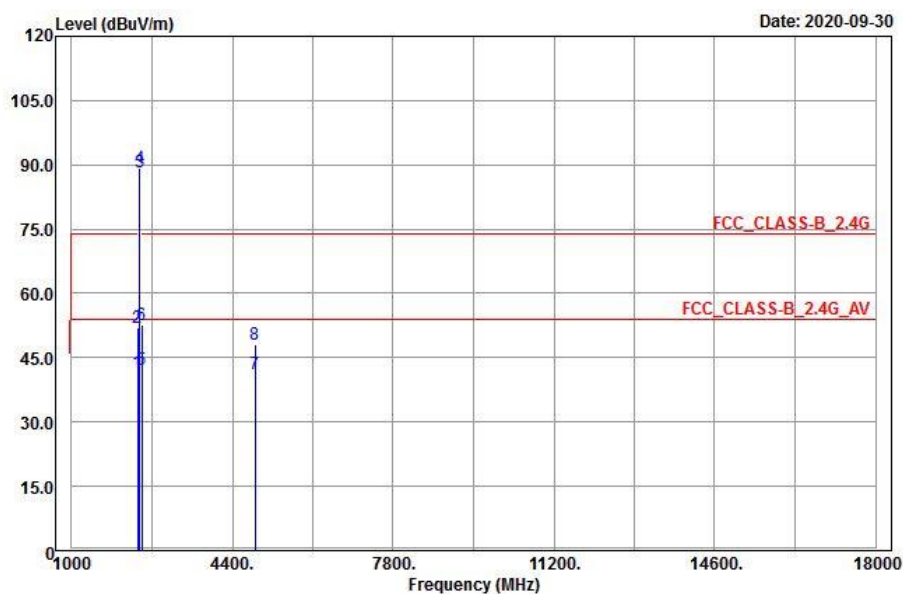

### Vertical

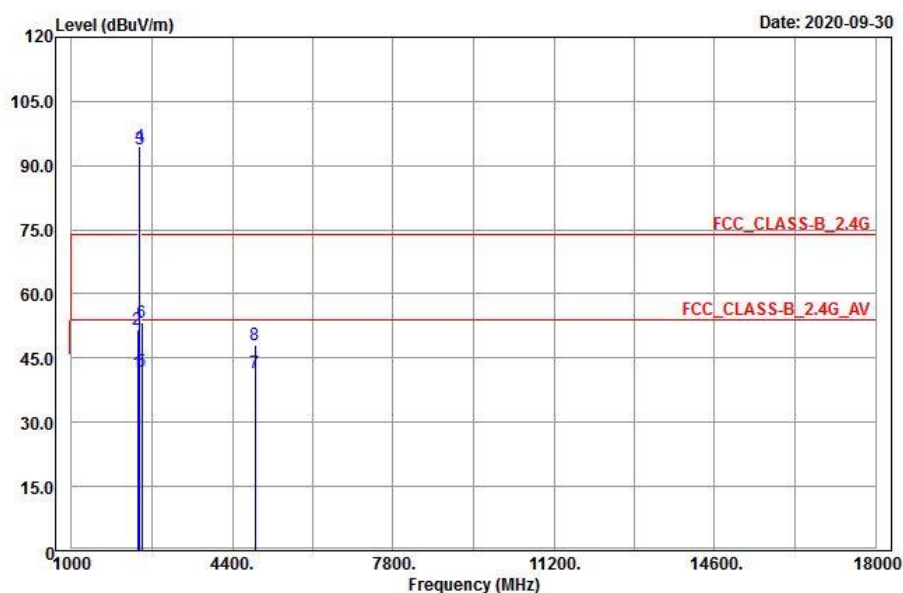

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.41	36.91	4.5	54	-12.59	152	117	Average
2390	52.14	47.64	4.5	74	-21.86	152	117	Peak
2440	88.39	83.8	4.59			152	117	Average
2440	89.36	84.77	4.59			152	117	Peak
2483.5	42.09	37.43	4.66	54	-11.91	152	117	Average
2483.5	52.78	48.12	4.66	74	-21.22	152	117	Peak
4880	41.2	30.99	10.21	54	-12.8	135	359	Average
4880	48.17	37.96	10.21	74	-25.83	135	359	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	41.68	37.18	4.5	54	-12.32	114	201	Average
2390	51.59	47.09	4.5	74	-22.41	114	201	Peak
2440	93.84	89.25	4.59			114	201	Average
2440	94.54	89.95	4.59			114	201	Peak
2483.5	41.95	37.29	4.66	54	-12.05	114	201	Average
2483.5	53.36	48.7	4.66	74	-20.64	114	201	Peak
4880	41.48	31.27	10.21	54	-12.52	107	125	Average
4880	48.11	37.9	10.21	74	-25.89	107	125	Peak


Remarks:

1. Emission Level = Read Level + Factor  
Margin Value = Emission Level – Limit value
2. 2440 MHz: Fundamental Frequency.
3. The other emission levels were very low against the limit.


## Ch 19

### Peak

#### Horizontal

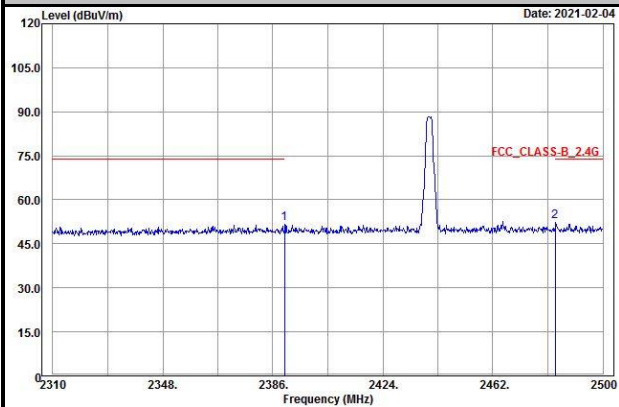


#### Vertical

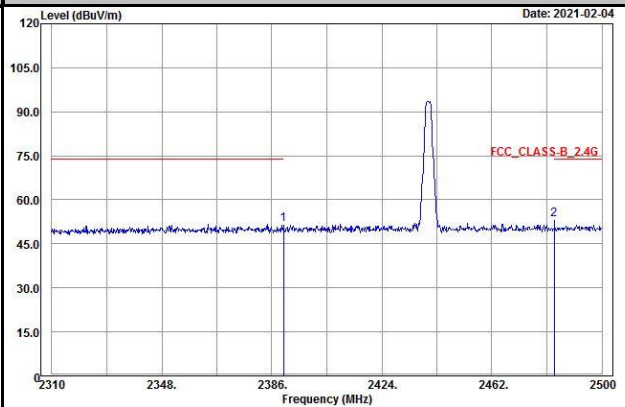


### Average

#### Horizontal

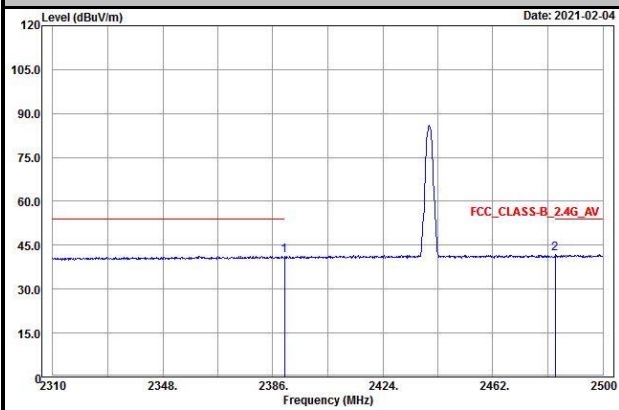


#### Vertical

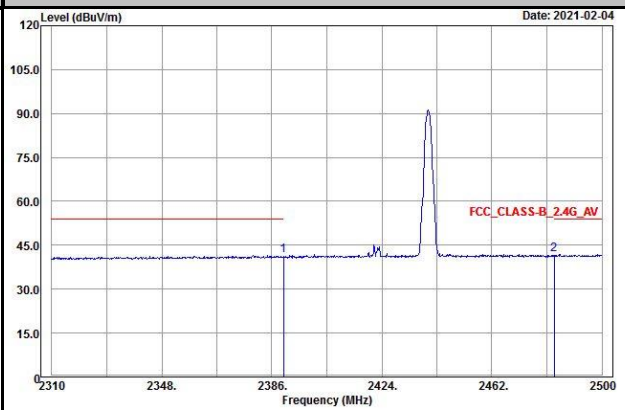


EUT Test Condition		Measurement Detail	
Channel	Channel 39	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Charles Hsiao

### Horizontal

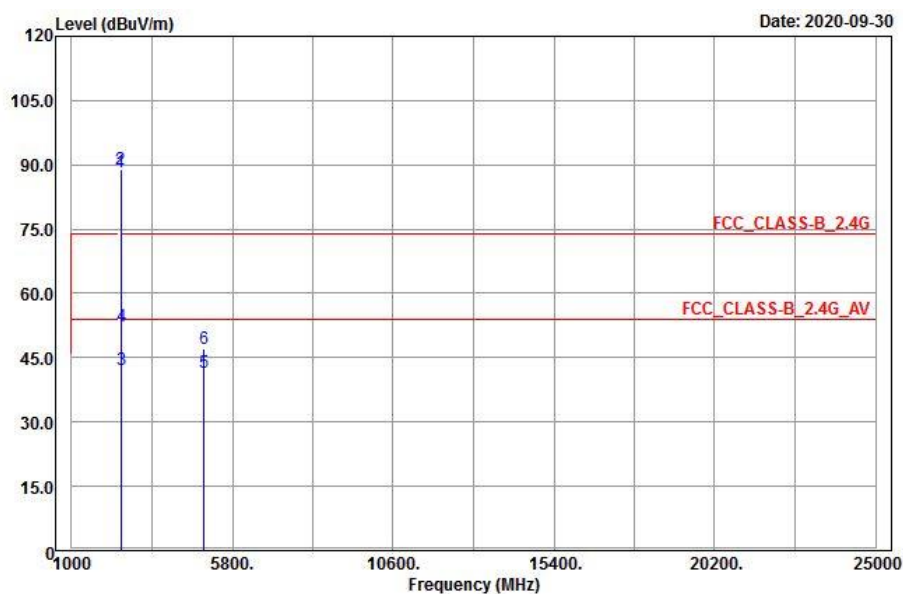

### Vertical

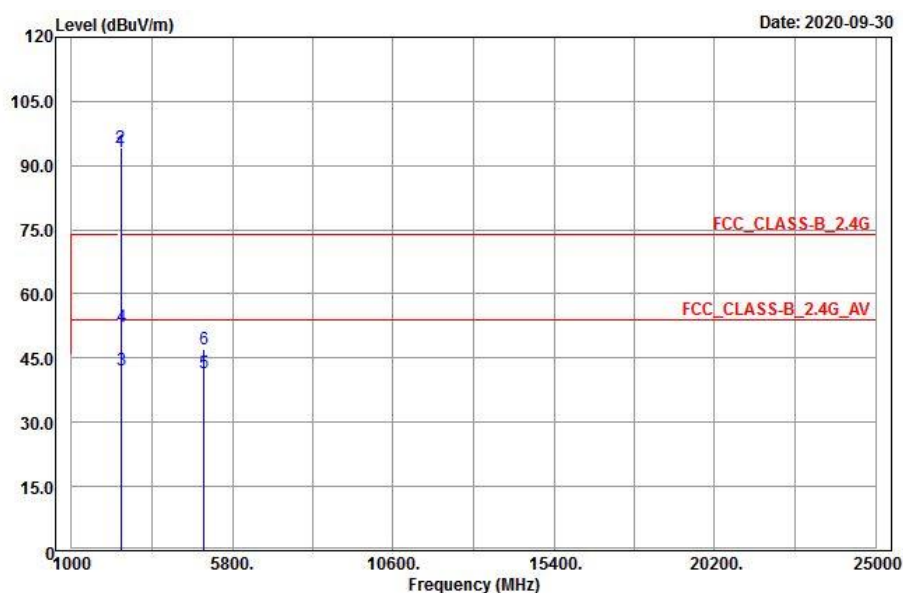

**Antenna Polarity & Test Distance: Horizontal at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	88.41	83.77	4.64			149	123	Average
2480	89	84.36	4.64			149	123	Peak
2483.5	42.27	37.61	4.66	54	-11.73	149	123	Average
2483.5	52.4	47.74	4.66	74	-21.6	149	123	Peak
4960	41.67	31.31	10.36	54	-12.33	162	28	Average
4960	47.03	36.67	10.36	74	-26.97	162	28	Peak

**Antenna Polarity & Test Distance: Vertical at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2480	93.19	88.55	4.64			114	201	Average
2480	94.23	89.59	4.64			114	201	Peak
2483.5	42.1	37.44	4.66	54	-11.9	114	201	Average
2483.5	52.22	47.56	4.66	74	-21.78	114	201	Peak
4960	41.48	31.12	10.36	54	-12.52	115	54	Average
4960	47.17	36.81	10.36	74	-26.83	115	54	Peak


Remarks:

1. Emission Level = Read Level + Factor  
Margin Value = Emission Level – Limit value
2. 2480 MHz: Fundamental Frequency.
3. The other emission levels were very low against the limit.


## Ch 39

### Peak

#### Horizontal

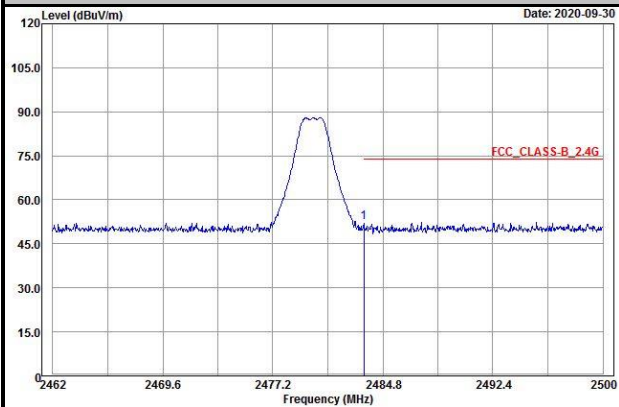


#### Vertical

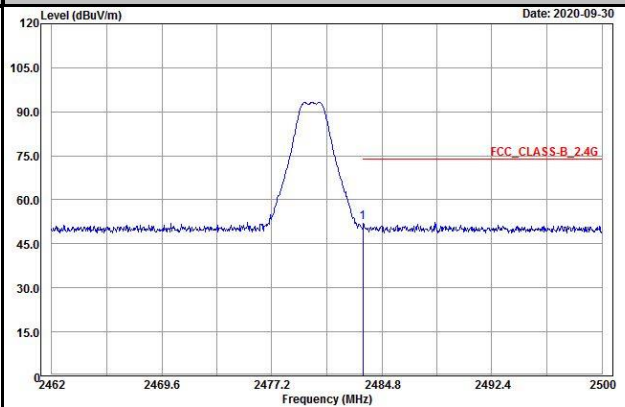


### Average

#### Horizontal

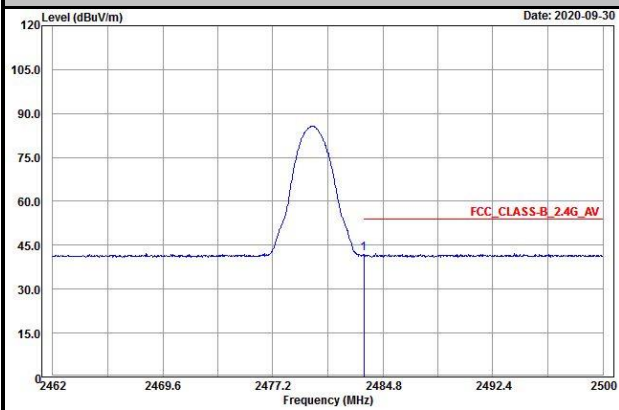

#### Vertical

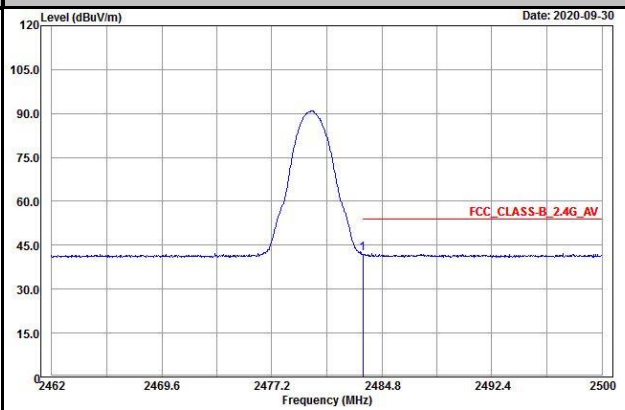

### 9 kHz ~ 30 MHz Data:


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

### 30 MHz ~ 1 GHz Worst-Case Data:


<LE 4.0>

EUT Test Condition		Measurement Detail	
Channel	Channel 19	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Karl Lee

### Horizontal

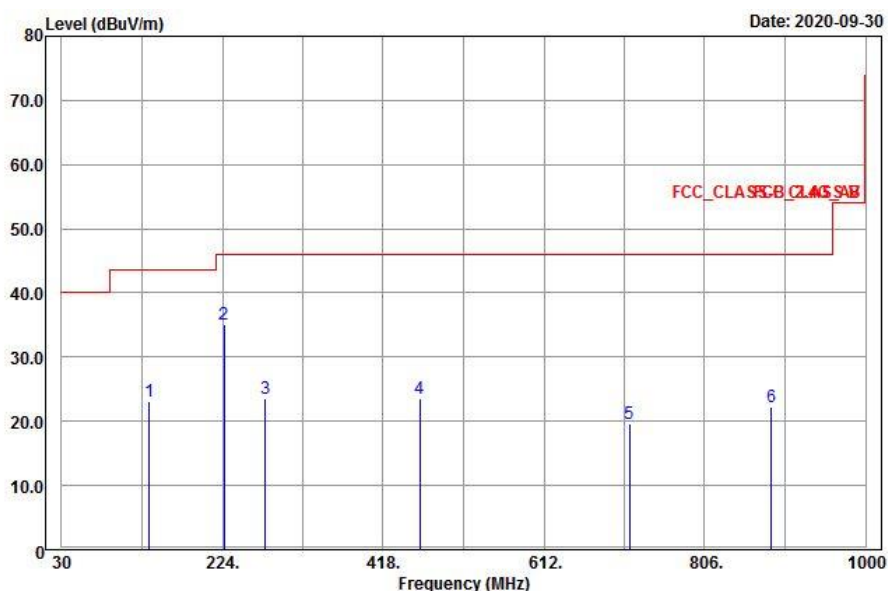

### Vertical

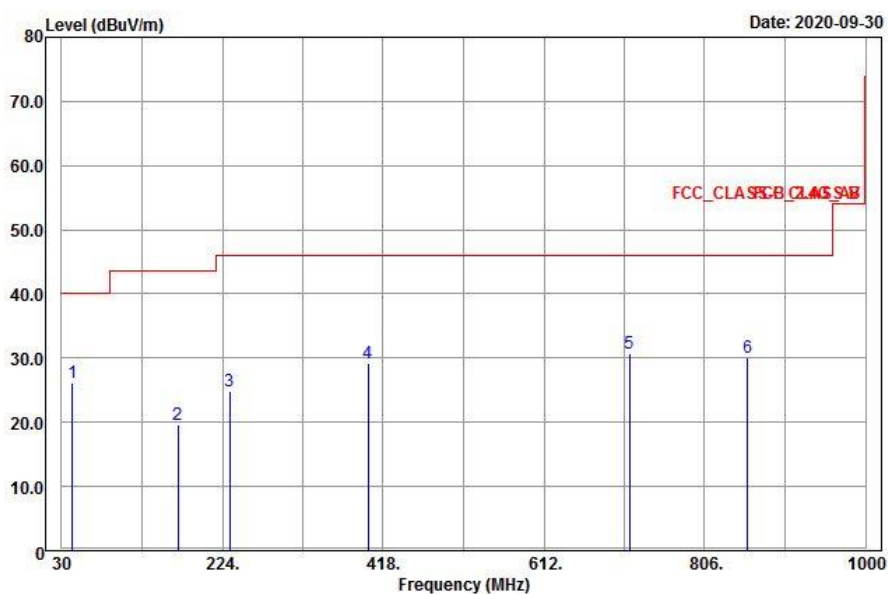

**Antenna Polarity & Test Distance: Horizontal at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
135.84	23.02	43.79	-20.77	43.5	-20.48	127	253	Peak
226.29	35.07	52.65	-17.58	46	-10.93	159	61	Peak
275.7	23.57	40.03	-16.46	46	-22.43	172	222	Peak
462.4	23.56	36.65	-13.09	46	-22.44	130	248	Peak
715.46	19.56	28.47	-8.91	46	-26.44	127	225	Peak
886.14	22.14	28.25	-6.11	46	-23.86	123	327	Peak

**Antenna Polarity & Test Distance: Vertical at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
42.96	26.09	41.82	-15.73	40	-13.91	175	243	Peak
170.67	19.59	39.87	-20.28	43.5	-23.91	209	221	Peak
233.04	24.87	42.17	-17.3	46	-21.13	160	173	Peak
400.1	29.19	43.11	-13.92	46	-16.81	224	106	Peak
715.47	30.68	39.59	-8.91	46	-15.32	102	76	Peak
857.66	30.07	36.7	-6.63	46	-15.93	161	235	Peak

Remarks:


- Emission Level = Read Level + Factor  
Margin Value = Emission Level – Limit value
- The other emission levels were very low against the limit.




<LE 5.0>

EUT Test Condition		Measurement Detail	
Channel	Channel 39	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Karl Lee

Horizontal

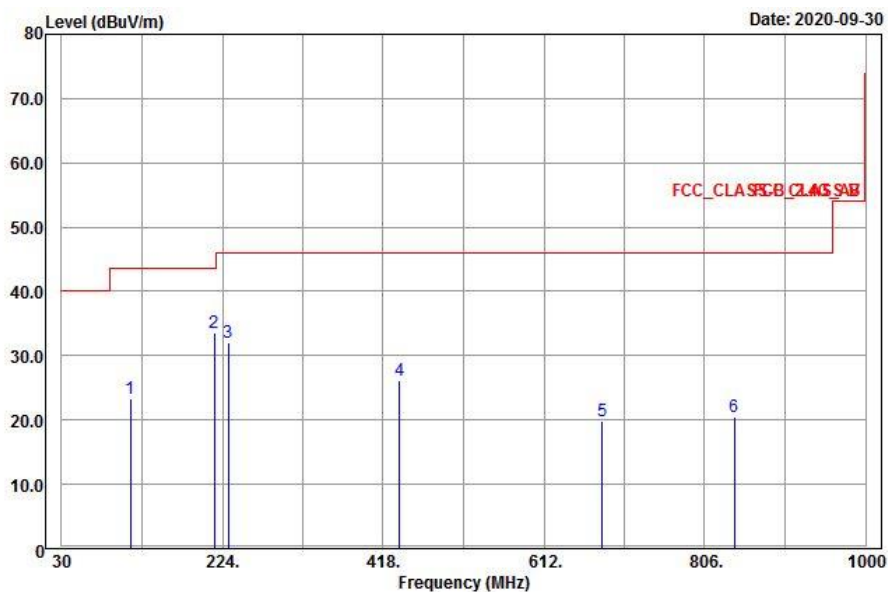

Vertical

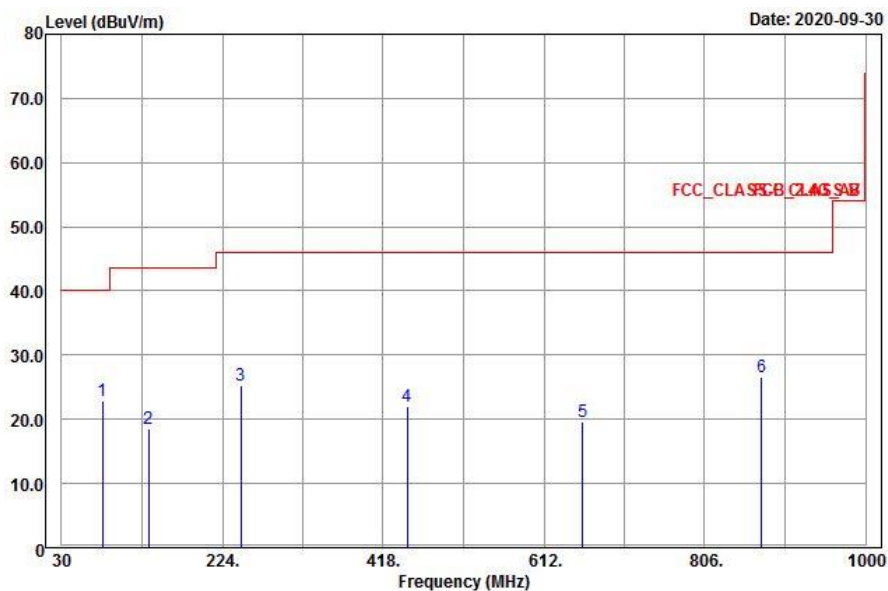

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
113.43	23.26	41.29	-18.03	43.5	-20.24	249	43	Peak
214.68	33.67	51.69	-18.02	43.5	-9.83	156	324	Peak
231.15	32.08	49.44	-17.36	46	-13.92	198	171	Peak
437.9	26.11	39.53	-13.42	46	-19.89	233	124	Peak
682.2	19.74	29.22	-9.48	46	-26.26	195	74	Peak
841.8	20.58	27.51	-6.93	46	-25.42	206	143	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
79.68	22.83	44.16	-21.33	40	-17.17	186	236	Peak
135.03	18.46	39.18	-20.72	43.5	-25.04	152	175	Peak
246.18	25.37	42.28	-16.91	46	-20.63	159	205	Peak
447	21.95	35.27	-13.32	46	-24.05	196	118	Peak
658.4	19.72	29.63	-9.91	46	-26.28	175	223	Peak
874.56	26.58	32.86	-6.28	46	-19.42	166	249	Peak

Remarks:

1. Emission Level = Read Level + Factor  
Margin Value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 04, 2020	Dec. 03, 2021
RF signal cable Woken	5D-FB	Cable-cond1-01	Sep. 04, 2020	Sep. 03, 2021
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 20, 2020	Feb. 19, 2021
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 28, 2020	Aug. 27, 2021
Software ADT	BV ADT_Conc_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).  
 3. The VCCI Site Registration No. is C-12040.

### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz - 30 MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

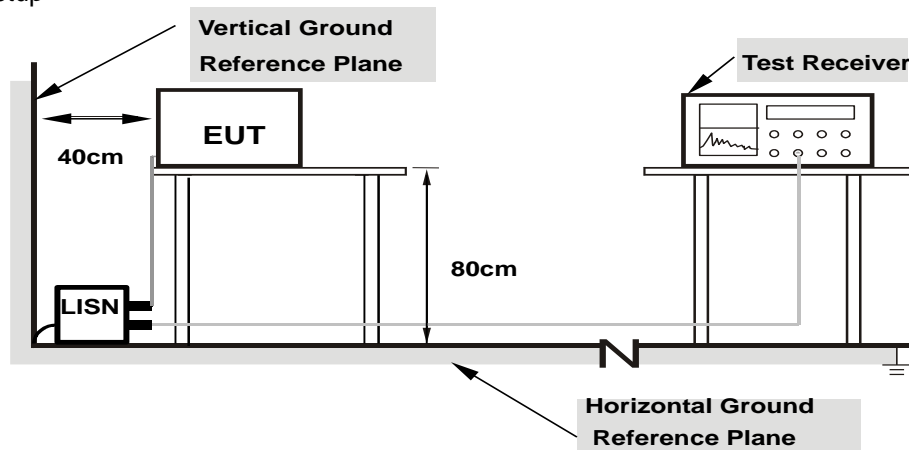

**Note: 1.**Support units were connected to second LISN.

**2.**Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### 4.2.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.


#### 4.2.7 Test Results

<b>Frequency Range</b>	150kHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	18°C, 70%RH
<b>Tested by</b>	Jones Chang	<b>Test Date</b>	2021/1/8
<b>Test Mode</b>	Mode A		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.23211	9.66	42.25	29.13	51.91	38.79	62.37	52.37	-10.46	-13.58
2	0.25166	9.66	35.04	19.21	44.70	28.87	61.70	51.70	-17.00	-22.83
3	0.36114	9.66	32.73	19.00	42.39	28.66	58.70	48.70	-16.31	-20.04
4	0.60356	9.66	24.25	19.75	33.91	29.41	56.00	46.00	-22.09	-16.59
5	2.88309	9.72	28.08	12.82	37.80	22.54	56.00	46.00	-18.20	-23.46
6	23.86024	9.84	22.99	14.76	32.83	24.60	60.00	50.00	-27.17	-25.40

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

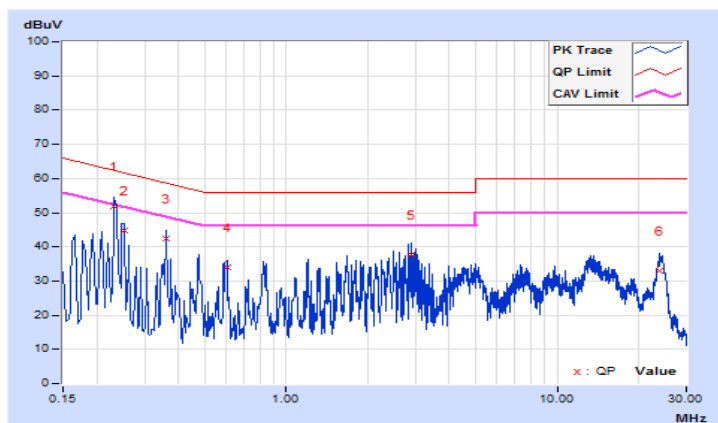


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	18°C, 70%RH
Tested by	Jones Chang	Test Date	2021/1/8
Test Mode	Mode A		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16173	9.68	30.95	13.62	40.63	23.30	65.37	55.37	-24.74	-32.07
2	0.21908	9.68	32.20	14.95	41.88	24.63	62.85	52.85	-20.97	-28.22
3	0.24384	9.68	40.08	23.82	49.76	33.50	61.96	51.96	-12.20	-18.46
4	0.35332	9.68	32.18	20.12	41.86	29.80	58.88	48.88	-17.02	-19.08
5	2.88309	9.75	26.87	7.08	36.62	16.83	56.00	46.00	-19.38	-29.17
6	24.58359	9.97	22.44	14.49	32.41	24.46	60.00	50.00	-27.59	-25.54

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

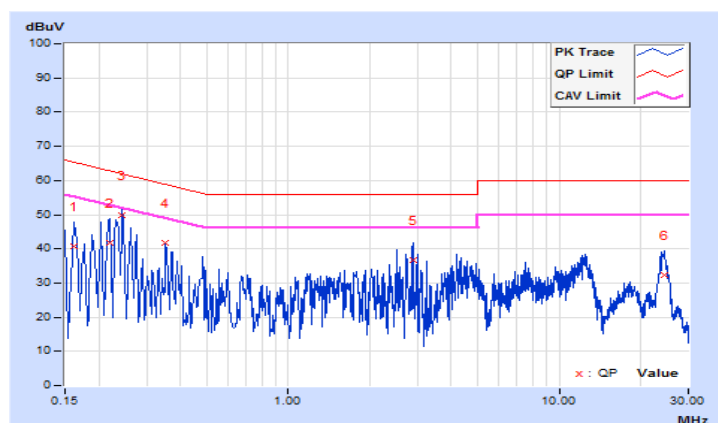


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	18°C, 70%RH
Tested by	Jones Chang	Test Date	2021/1/8
Test Mode	Mode B		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.65	35.21	6.91	44.86	16.56	66.00	56.00	-21.14	-39.44
2	0.15782	9.65	33.21	5.36	42.86	15.01	65.58	55.58	-22.72	-40.57
3	<b>0.20865</b>	<b>9.66</b>	<b>43.56</b>	<b>25.49</b>	<b>53.22</b>	<b>35.15</b>	<b>63.26</b>	<b>53.26</b>	<b>-10.04</b>	<b>-18.11</b>
4	0.22429	9.66	41.59	24.16	51.25	33.82	62.66	52.66	-11.41	-18.84
5	2.71105	9.71	27.23	8.05	36.94	17.76	56.00	46.00	-19.06	-28.24
6	12.97089	9.83	28.84	20.02	38.67	29.85	60.00	50.00	-21.33	-20.15

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

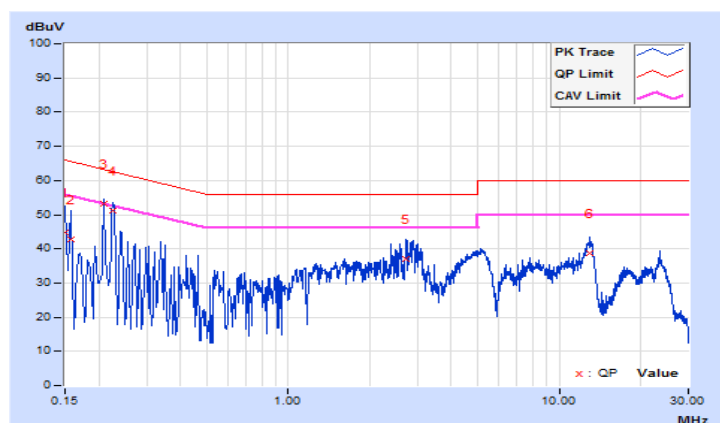


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	18°C, 70%RH
Tested by	Jones Chang	Test Date	2021/1/8
Test Mode	Mode B		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18128	9.68	32.07	4.89	41.75	14.57	64.43	54.43	-22.68	-39.86
2	0.20474	9.68	43.28	23.66	52.96	33.34	63.42	53.42	-10.46	-20.08
3	0.22038	9.68	40.07	21.86	49.75	31.54	62.80	52.80	-13.05	-21.26
4	0.23602	9.68	36.15	21.28	45.83	30.96	62.24	52.24	-16.41	-21.28
5	2.71887	9.74	30.50	9.89	40.24	19.63	56.00	46.00	-15.76	-26.37
6	13.27587	9.90	27.12	18.45	37.02	28.35	60.00	50.00	-22.98	-21.65

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

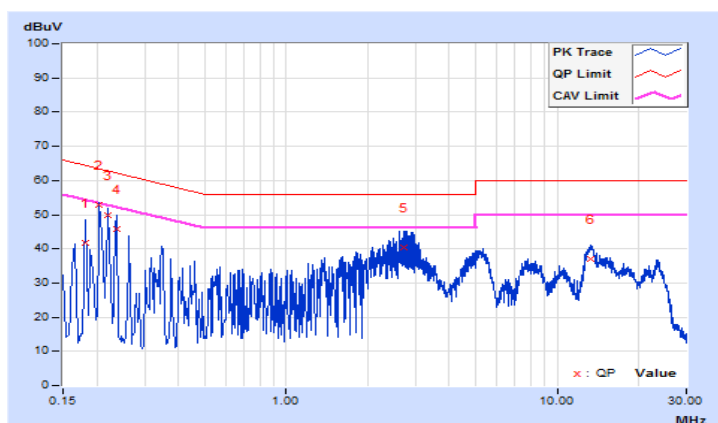




### 4.3 6 dB Bandwidth Measurement

#### 4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.


#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Results


<LE 4.0>

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.68	0.5	Pass
19	2440	0.68	0.5	Pass
39	2480	0.69	0.5	Pass

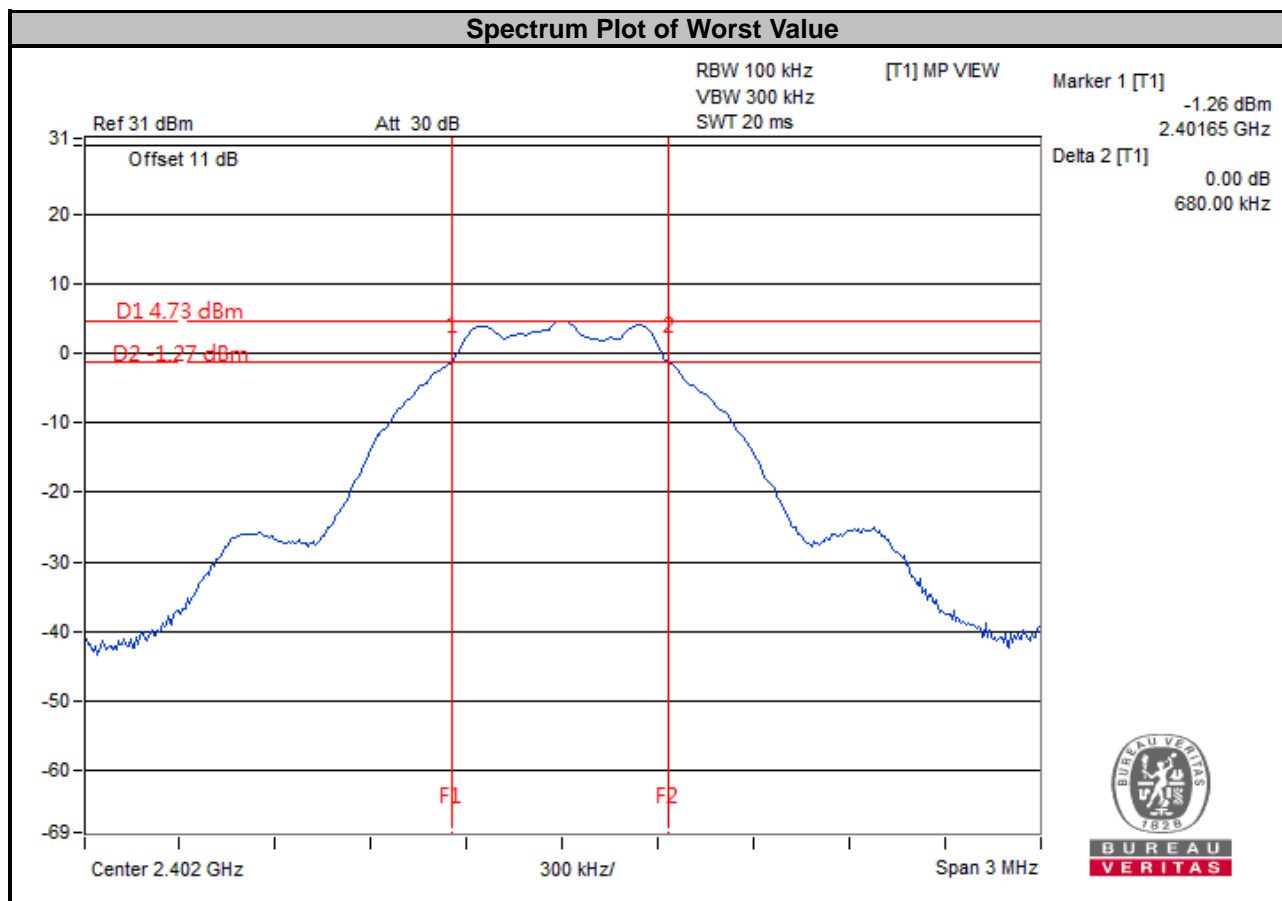


<LE 5.0>

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.12	0.5	Pass
19	2440	1.13	0.5	Pass
39	2480	1.15	0.5	Pass

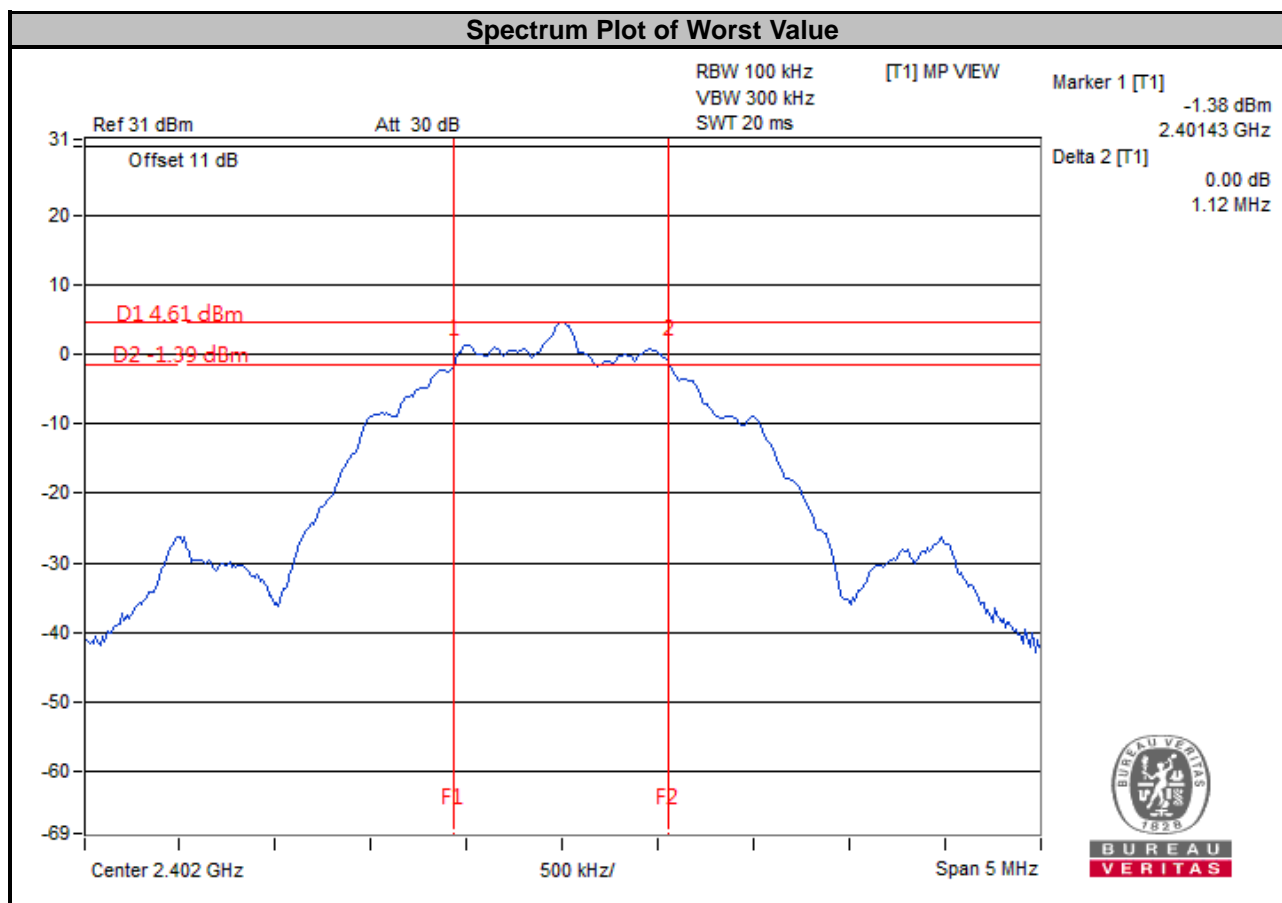

#### 4.4 Occupied Bandwidth Measurement

##### 4.4.1 Test Setup



##### 4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

##### 4.4.4 Deviation from Test Standard

No deviation.


##### 4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.4.6 Test Results


<LE 4.0>

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
0	2402	1.04	Pass
19	2440	1.04	Pass
39	2480	1.04	Pass

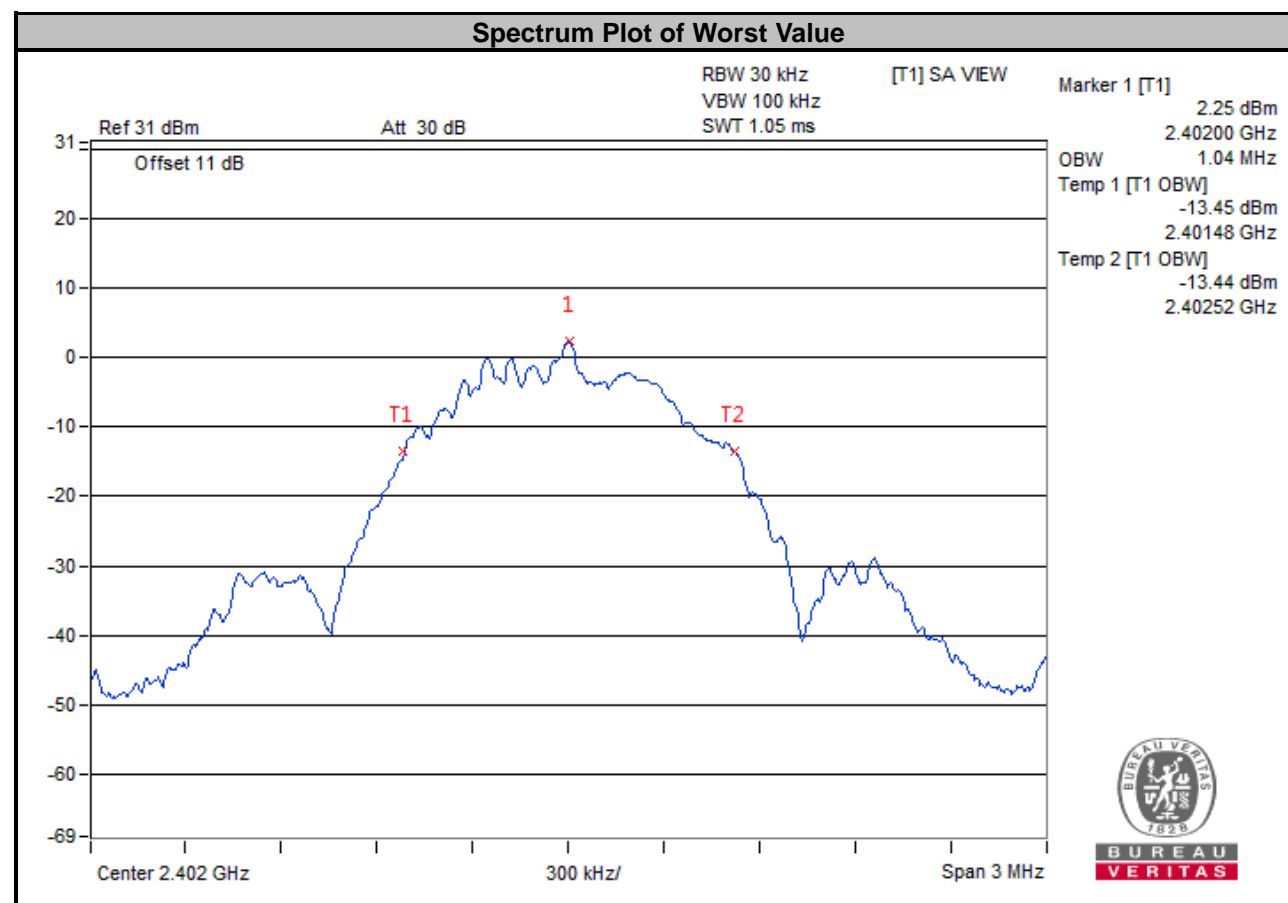

<LE 5.0>

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
0	2402	2.05	Pass
19	2440	2.03	Pass
39	2480	2.04	Pass

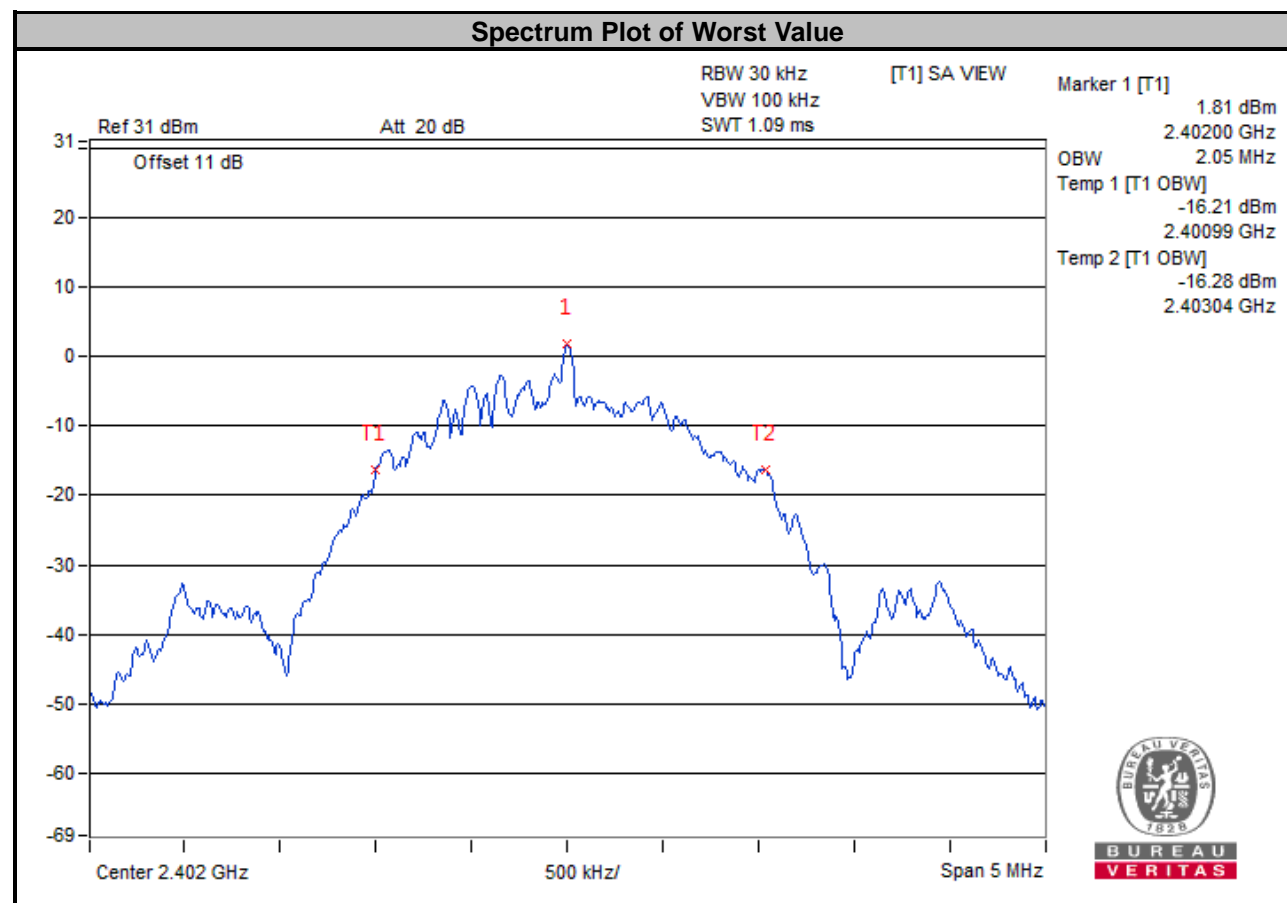


## 4.5 Conducted Output Power Measurement

### 4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

### 4.5.2 Test Setup

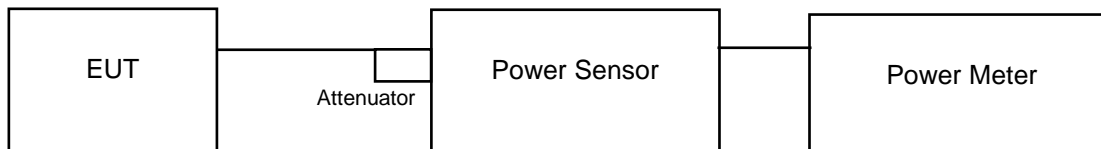

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.5.7 Test Results

##### <LE 4.0>

Channel	Freq. (MHz)	Peak Power		Average Power		Power Limit (mW)	Pass / Fail
		(mW)	(dBm)	(mW)	(dBm)		
0	2402	3.548	5.50	3.516	5.46	1000	Pass
19	2440	3.451	5.38	3.42	5.34	1000	Pass
39	2480	3.581	5.54	3.548	5.50	1000	Pass

##### <LE 5.0>

Channel	Freq. (MHz)	Peak Power		Average Power		Power Limit (mW)	Pass / Fail
		(mW)	(dBm)	(mW)	(dBm)		
0	2402	3.999	6.02	3.954	5.97	1000	Pass
19	2440	3.873	5.88	3.837	5.84	1000	Pass
39	2480	4.036	6.06	3.981	6.00	1000	Pass




## 4.6 Power Spectral Density Measurement

### 4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

.

### 4.6.2 Test Setup



### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set the VBW  $\geq 3 \times \text{RBW}$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

### 4.6.5 Deviation from Test Standard

No deviation.


### 4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.6.7 Test Results


<LE 4.0>

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	2402	-10.18	8	Pass
19	2440	-10.04	8	Pass
39	2480	-10.19	8	Pass

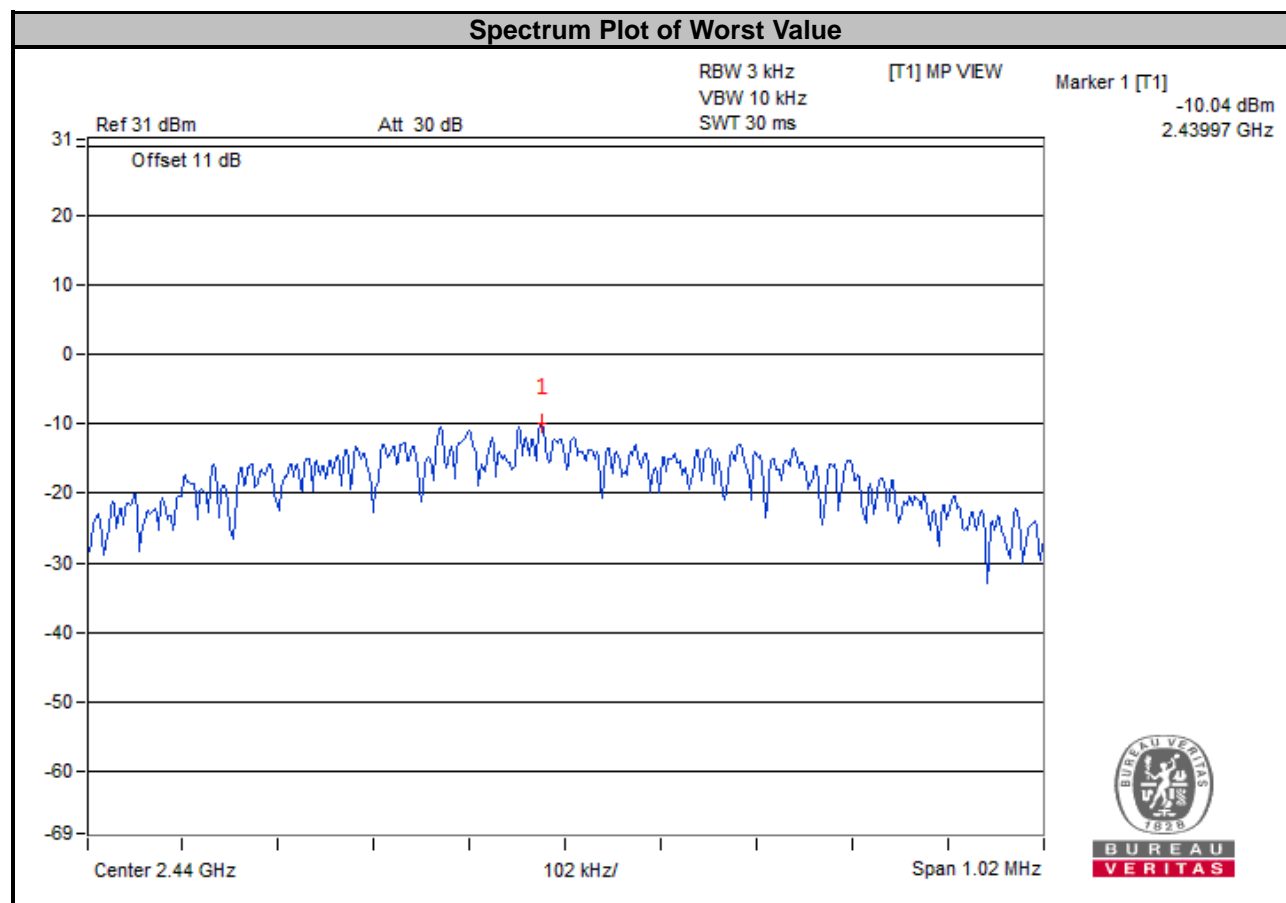

<LE 5.0>

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	2402	-12.97	8	Pass
19	2440	-12.87	8	Pass
39	2480	-12.31	8	Pass

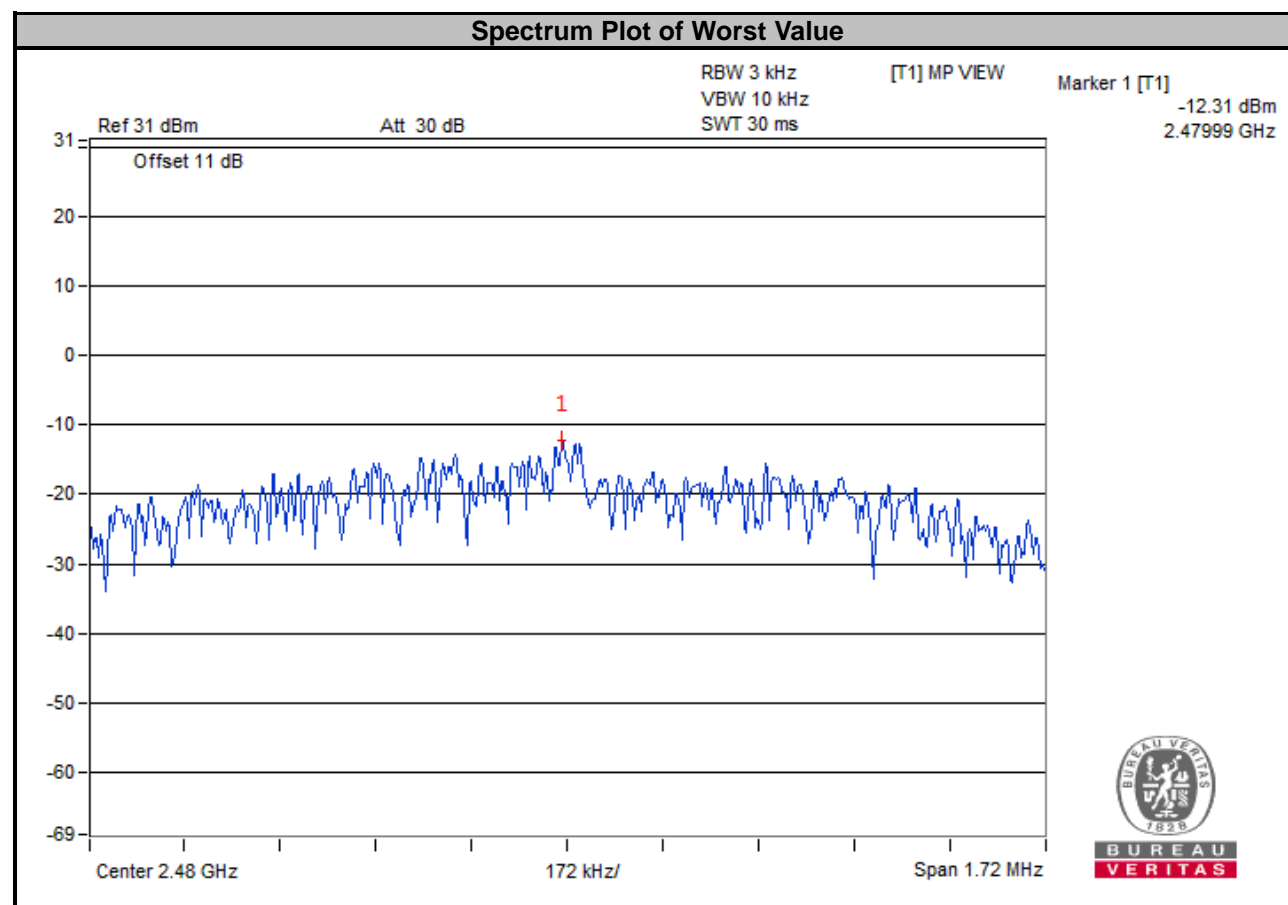


#### 4.7 Conducted Out of Band Emission Measurement

##### 4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

##### 4.7.2 Test Setup



##### 4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.7.4 Test Procedure

###### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

###### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

##### 4.7.5 Deviation from Test Standard

No deviation.


##### 4.7.6 EUT Operating Condition


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.7.7 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20 dB offset below D1. It shows compliance with the requirement.

<LE 4.0>


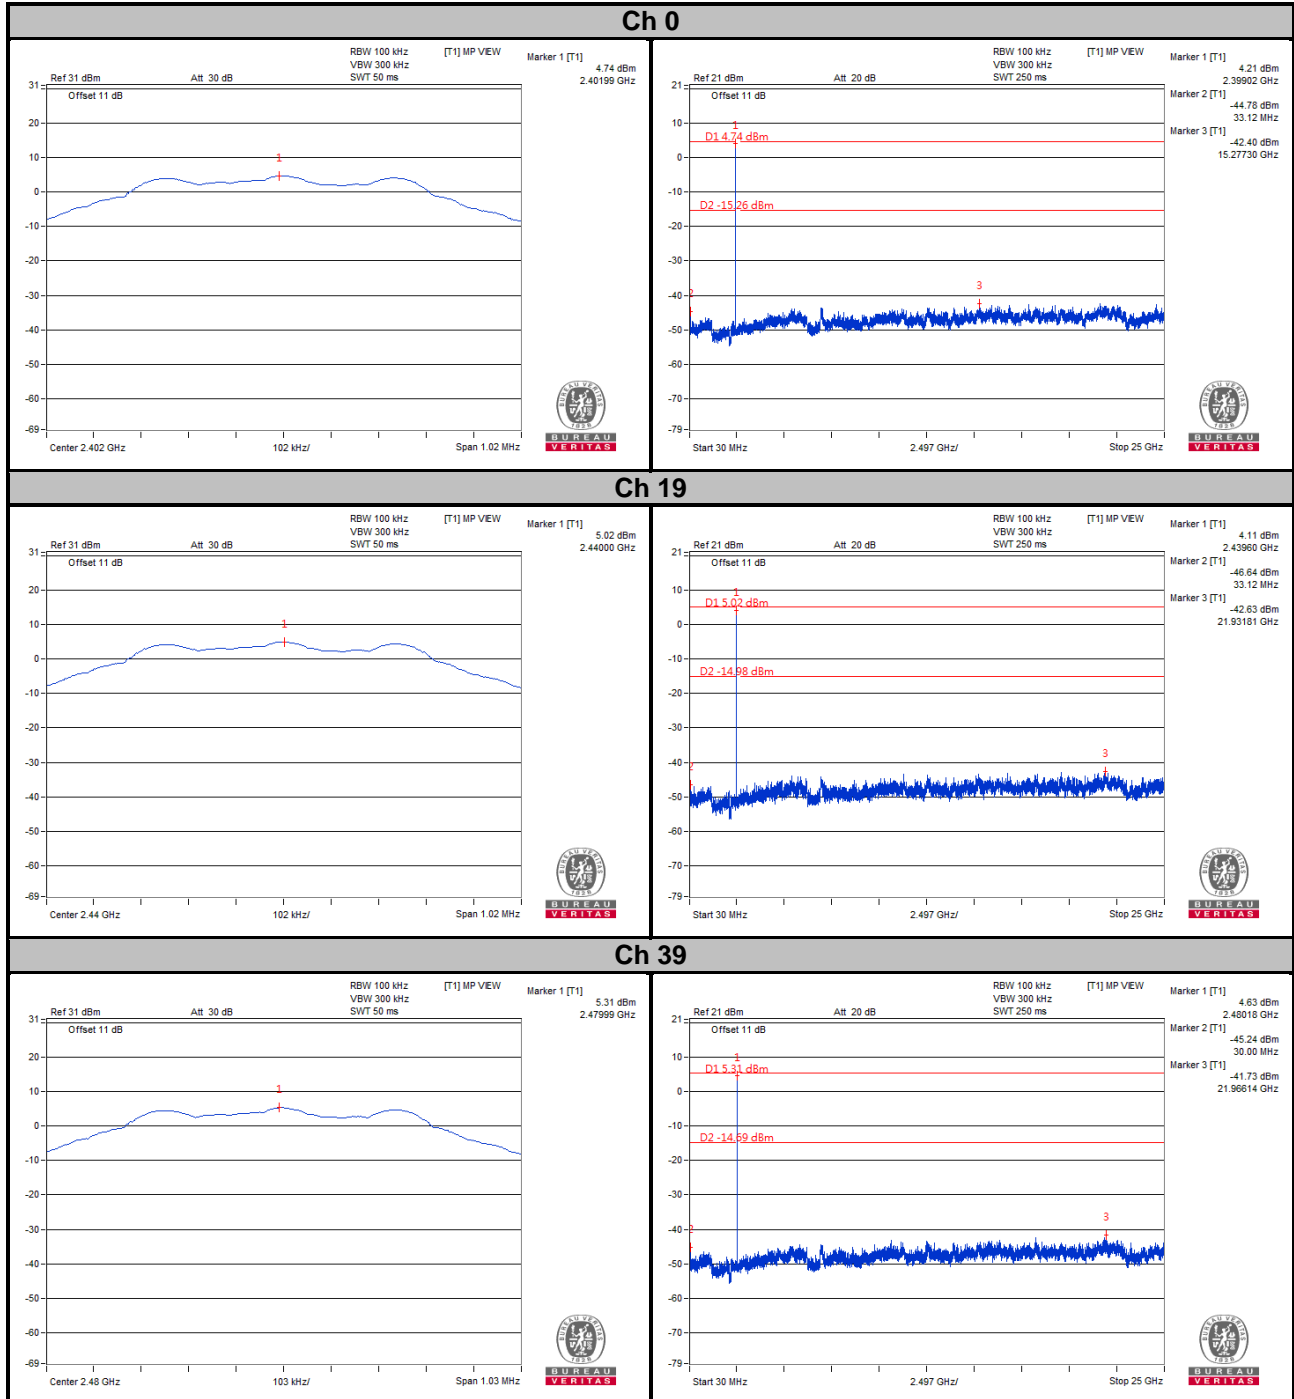


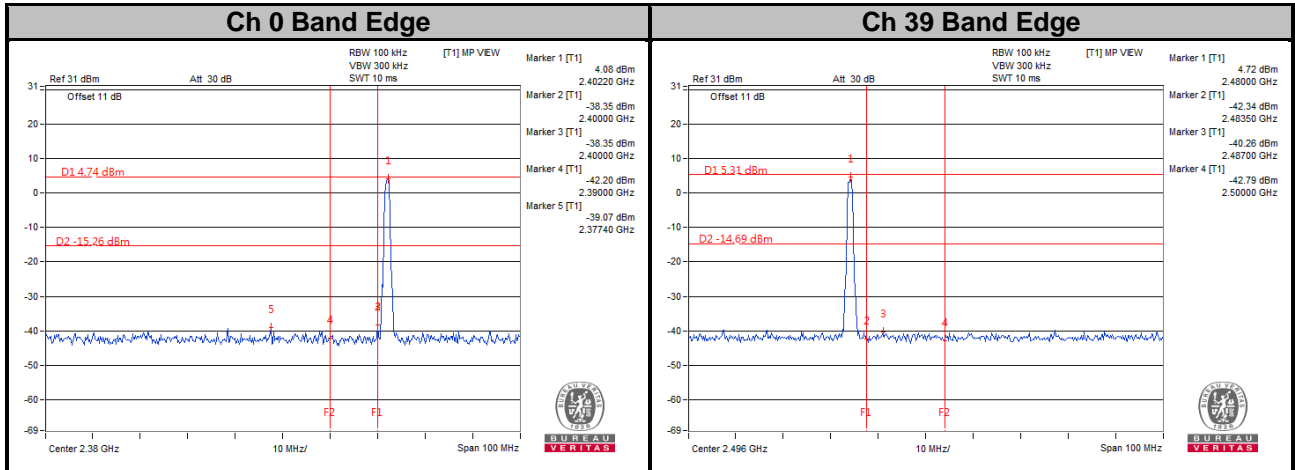



**Note:** VIEW is just to prevent pulse from entering. The method is using maxhold first, wait to waveform stable then view.

<LE 5.0>



### Ch 0

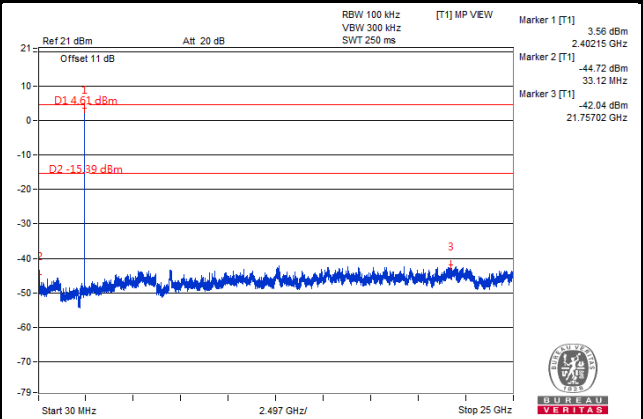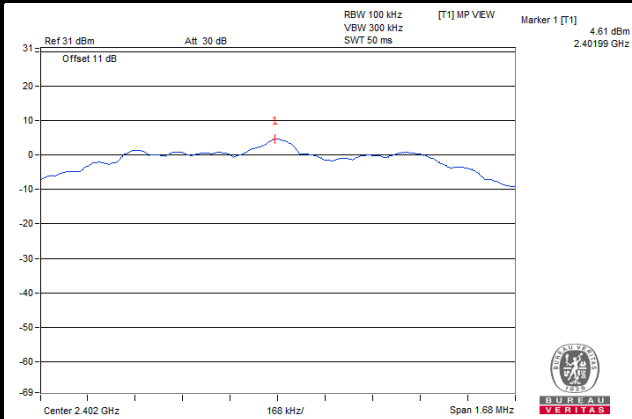


### Ch 19

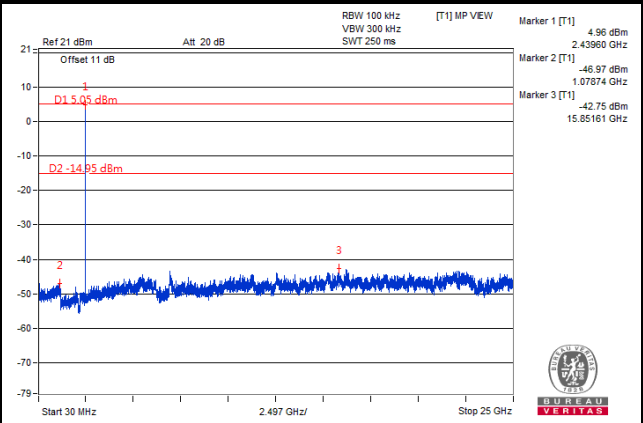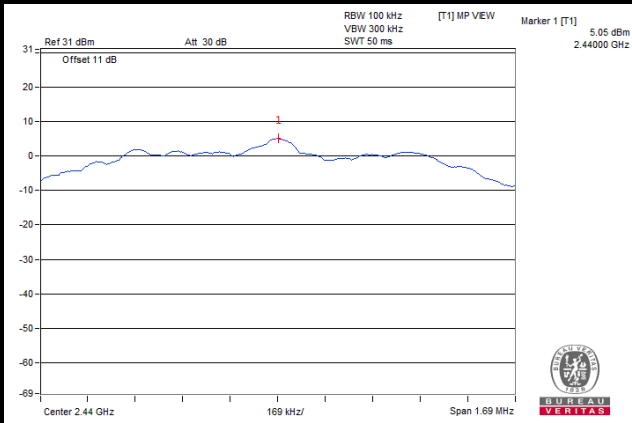

### Ch 39

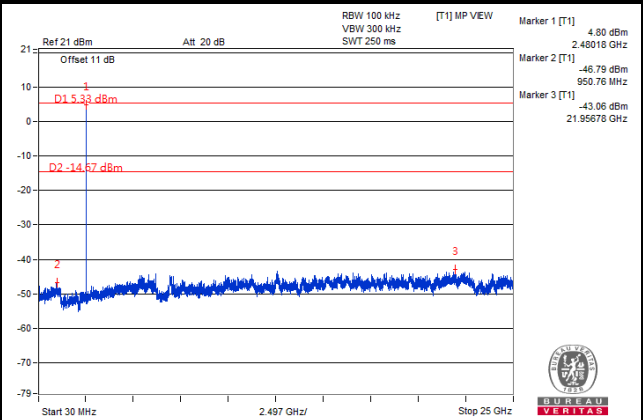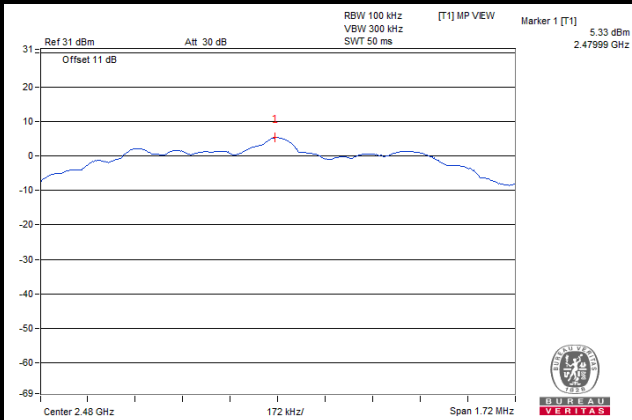

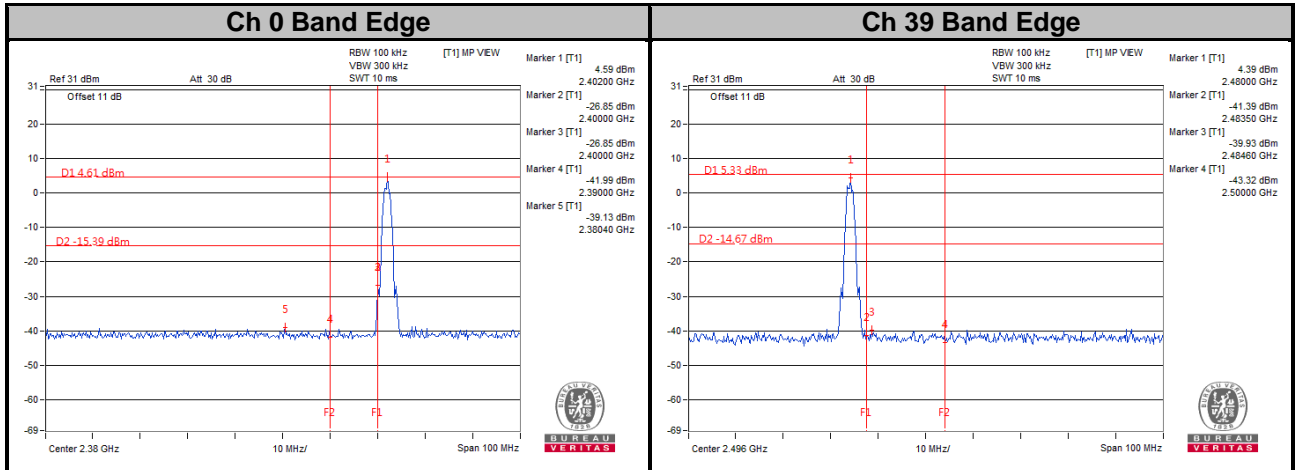

**Note:** VIEW is just to prevent pulse from entering. The method is using maxhold first, wait to waveform stable then view.



## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---