


|           |                                                 |                      |                |
|-----------|-------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                 | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                         | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Horizontal                                      | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_106Tone_RU106_TX_CH 1<br>ANT 0+1 | Test Voltage         | By Notebook PC |

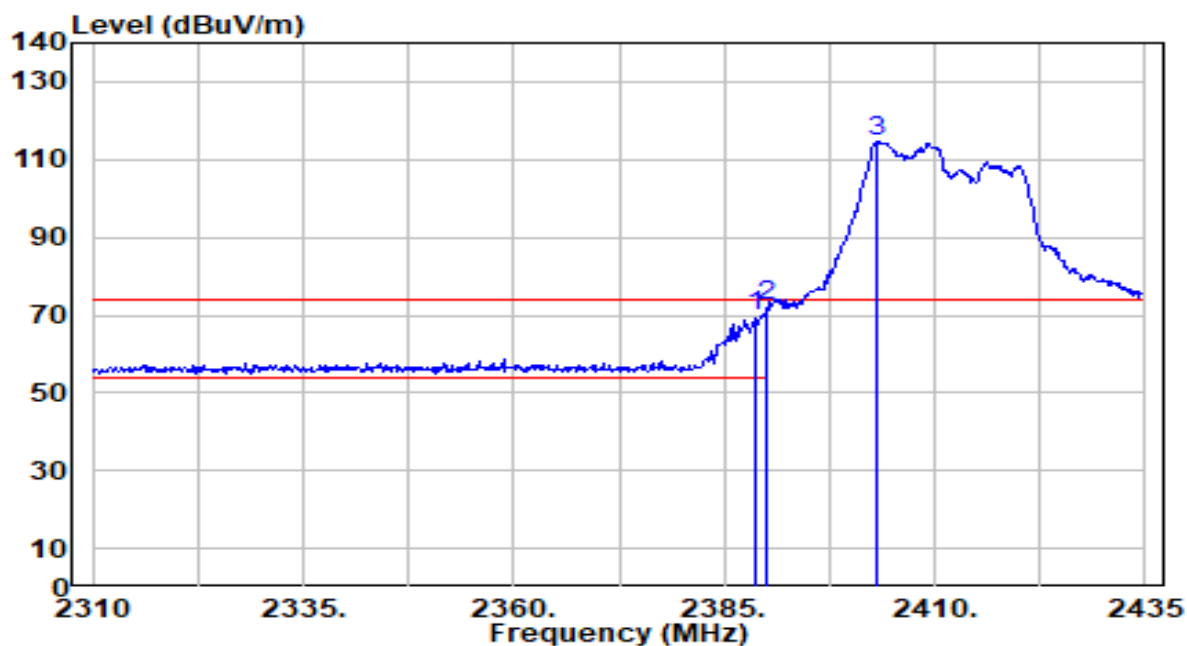


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2388.750        | 39.42          | 30.54      | 69.97                | -4.03       | 74.00          | 253         | 234         | Peak              |
| 2  | * | 2390.000        | 41.62          | 30.55      | 72.17                | -1.83       | 74.00          | 253         | 234         | Peak              |
| 3  |   | 2403.250        | 84.28          | 30.59      | 114.86               | N/A         | N/A            | 253         | 234         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                 |                      |                |
|-----------|-------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                 | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                         | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Horizontal                                      | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_106Tone_RU106_TX_CH 1<br>ANT 0+1 | Test Voltage         | By Notebook PC |

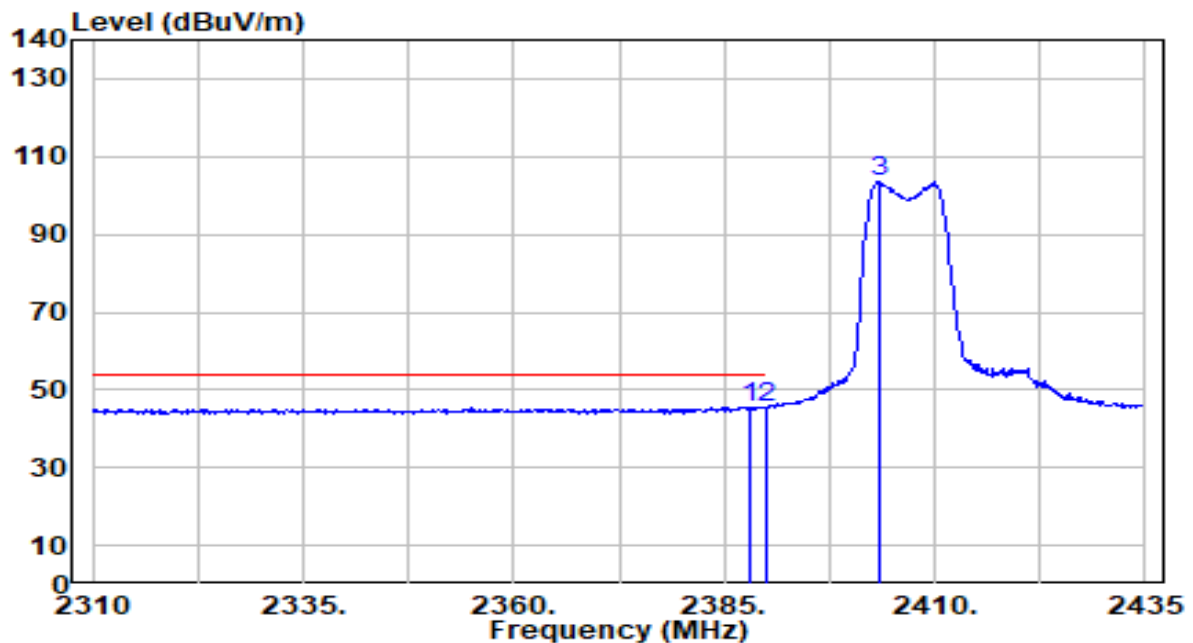


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.125        | 15.14          | 30.54      | 45.69                | -8.31       | 54.00          | 253         | 234         | Average           |
| 2  |   | 2390.000        | 15.10          | 30.55      | 45.65                | -8.35       | 54.00          | 253         | 234         | Average           |
| 3  |   | 2403.375        | 72.99          | 30.59      | 103.57               | N/A         | N/A            | 253         | 234         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                 |                      |                |
|-----------|-------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                 | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                         | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Vertical                                        | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_106Tone_RU106_TX_CH 1<br>ANT 0+1 | Test Voltage         | By Notebook PC |

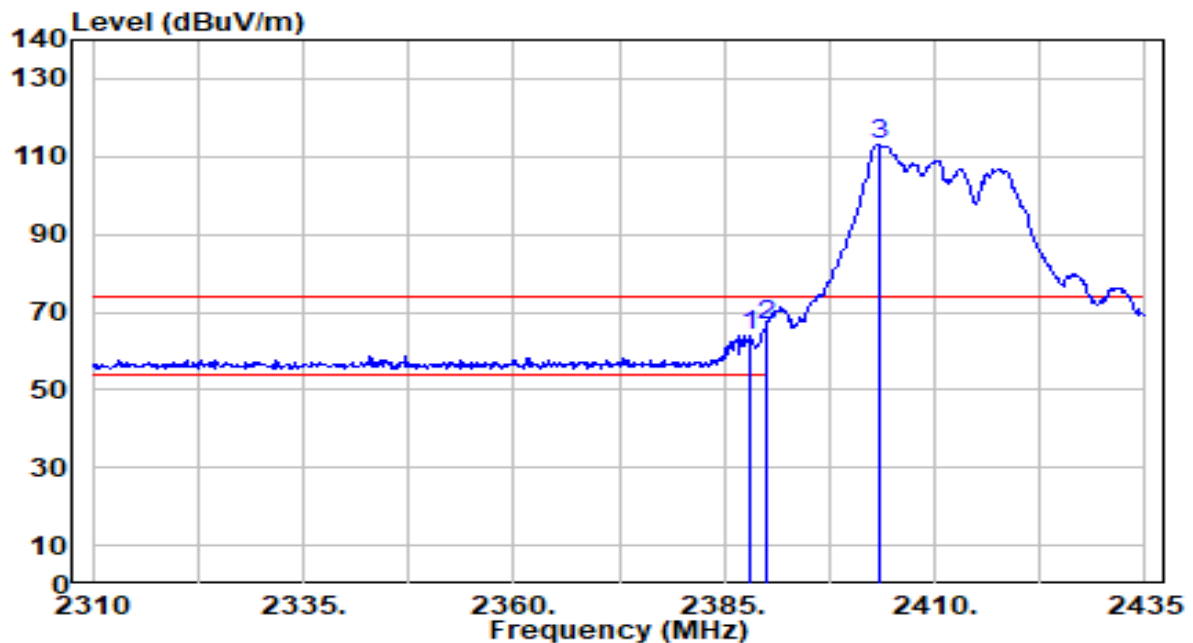


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.125        | 33.23          | 30.54      | 63.77                | -10.23      | 74.00          | 302         | 338         | Peak              |
| 2  | * 2390.000      | 35.91          | 30.55      | 66.46                | -7.54       | 74.00          | 302         | 338         | Peak              |
| 3  | 2403.375        | 82.52          | 30.59      | 113.11               | N/A         | N/A            | 302         | 338         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                 |                      |                |
|-----------|-------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                 | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                         | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Vertical                                        | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_106Tone_RU106_TX_CH 1<br>ANT 0+1 | Test Voltage         | By Notebook PC |

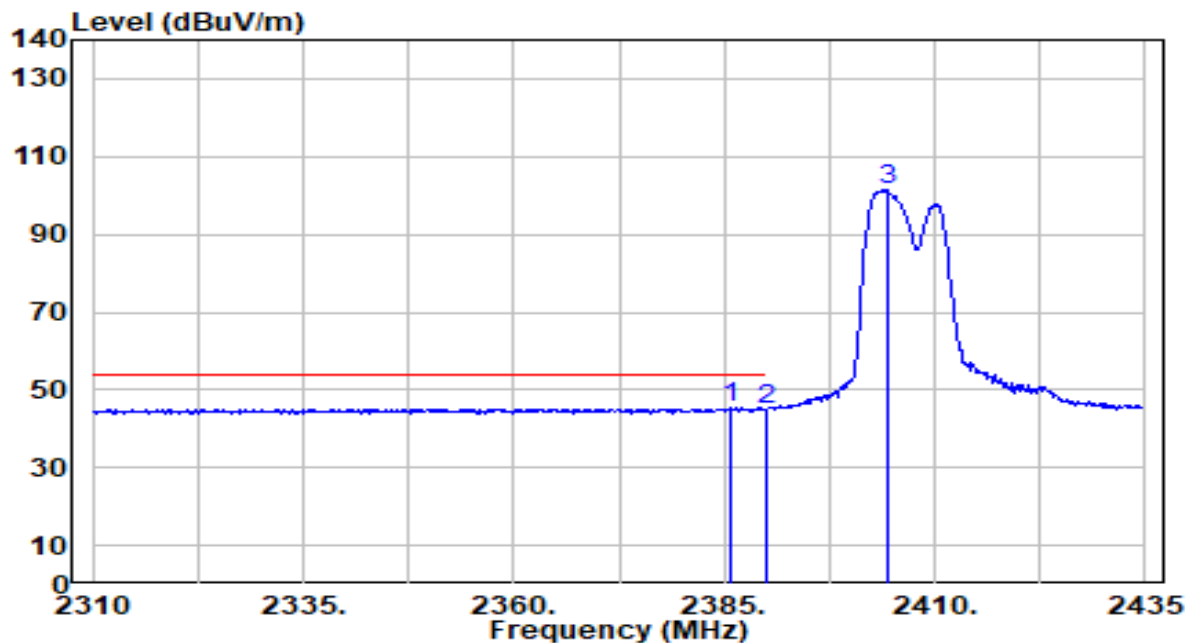


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2385.875        | 14.72          | 30.54      | 45.26                | -8.74       | 54.00          | 302         | 338         | Average           |
| 2  |   | 2390.000        | 14.50          | 30.55      | 45.05                | -8.95       | 54.00          | 302         | 338         | Average           |
| 3  |   | 2404.500        | 70.94          | 30.59      | 101.53               | N/A         | N/A            | 302         | 338         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |                |
|-----------|--------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                  | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                          | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Horizontal                                       | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_106Tone_RU107_TX_CH<br>11 ANT 0+1 | Test Voltage         | By Notebook PC |

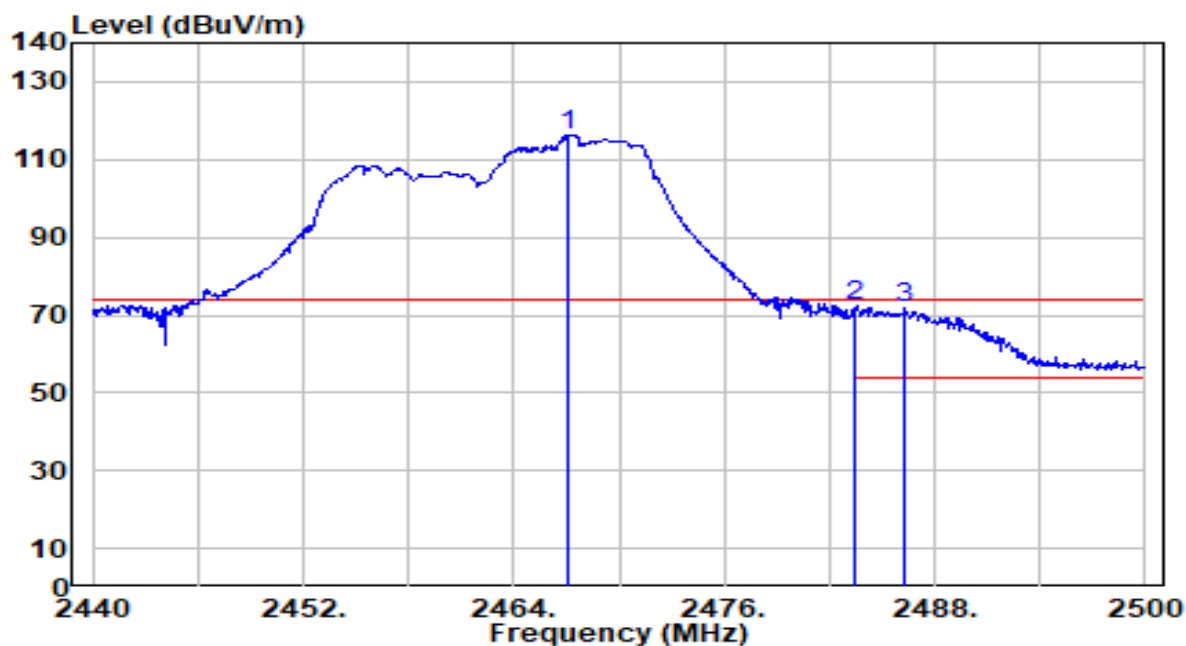


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2467.120        | 85.72          | 30.77      | 116.48               | N/A         | N/A            | 189         | 249         | Peak              |
| 2  | * | 2483.500        | 41.66          | 30.81      | 72.47                | -1.53       | 74.00          | 189         | 249         | Peak              |
| 3  |   | 2486.260        | 41.22          | 30.82      | 72.04                | -1.96       | 74.00          | 189         | 249         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |                |
|-----------|--------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                  | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                          | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Horizontal                                       | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_106Tone_RU107_TX_CH<br>11 ANT 0+1 | Test Voltage         | By Notebook PC |

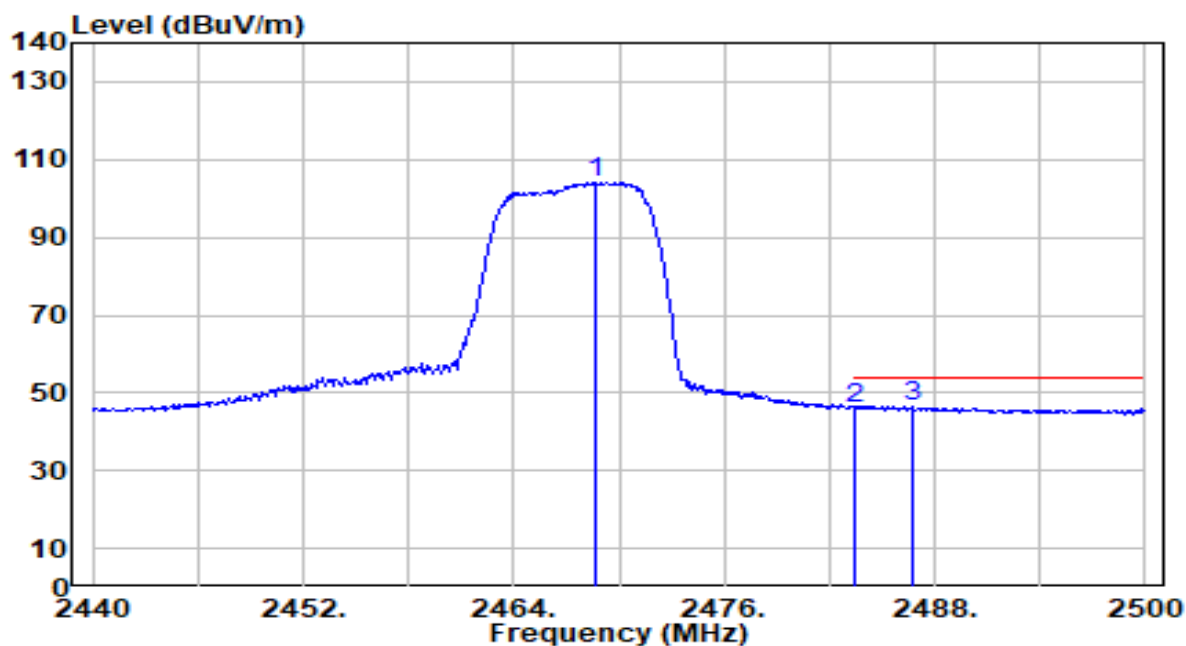


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2468.740        | 73.46          | 30.77      | 104.23               | N/A         | N/A            | 189         | 249         | Average           |
| 2  | 2483.500        | 15.30          | 30.81      | 46.12                | -7.88       | 54.00          | 189         | 249         | Average           |
| 3  | * 2486.740      | 15.60          | 30.82      | 46.42                | -7.58       | 54.00          | 189         | 249         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |                |
|-----------|--------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                  | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                          | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Vertical                                         | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_106Tone_RU107_TX_CH<br>11 ANT 0+1 | Test Voltage         | By Notebook PC |

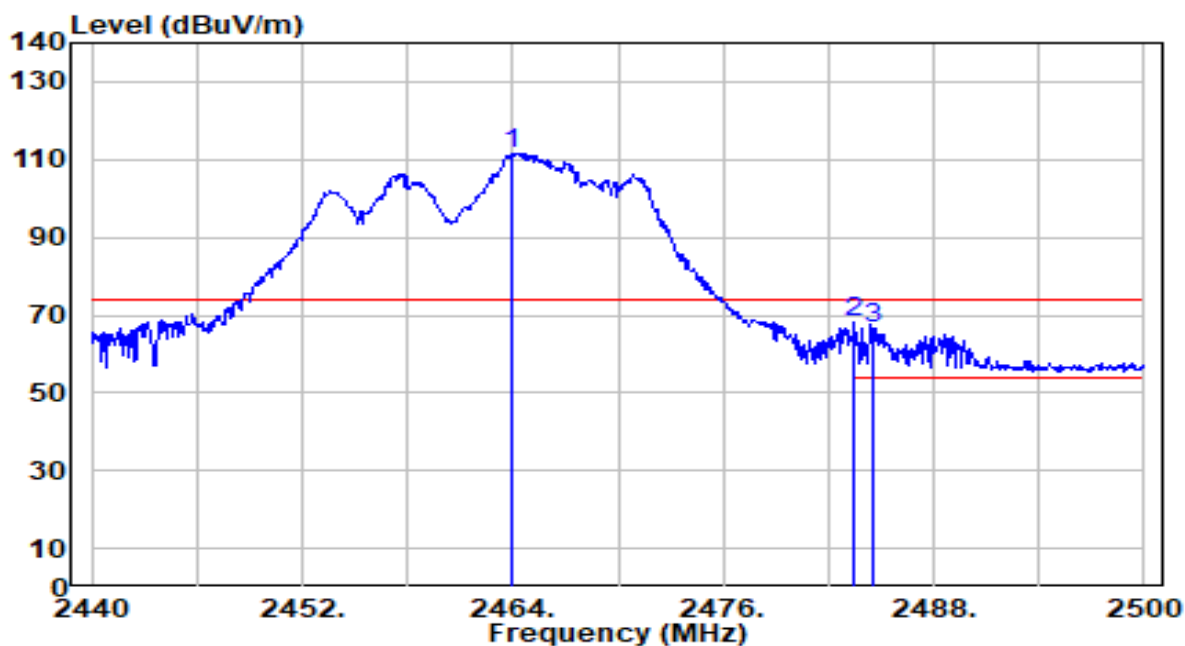


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2463.880        | 80.83          | 30.76      | 111.59               | N/A         | N/A            | 300         | 360         | Peak              |
| 2  | * | 2483.500        | 37.13          | 30.81      | 67.94                | -6.06       | 74.00          | 300         | 360         | Peak              |
| 3  |   | 2484.520        | 35.73          | 30.82      | 66.54                | -7.46       | 74.00          | 300         | 360         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |                |
|-----------|--------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                  | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                          | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Vertical                                         | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_106Tone_RU107_TX_CH<br>11 ANT 0+1 | Test Voltage         | By Notebook PC |

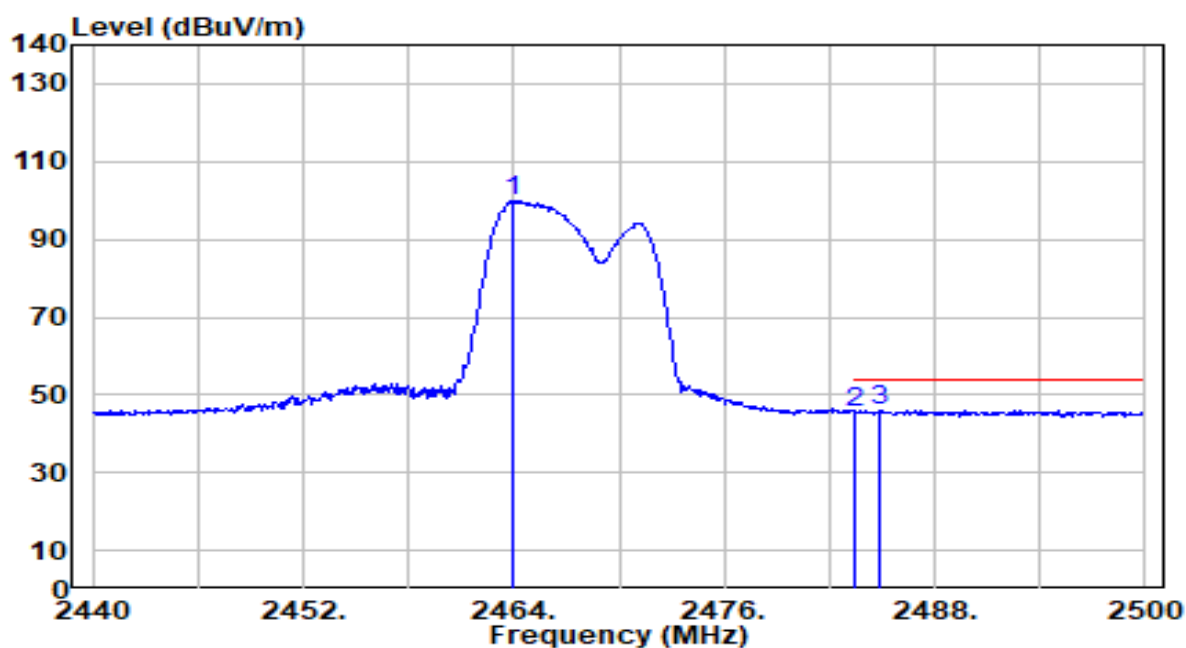


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2463.940        | 69.18          | 30.76      | 99.94                | N/A         | N/A            | 300         | 360         | Average           |
| 2  | 2483.500        | 14.65          | 30.81      | 45.46                | -8.54       | 54.00          | 300         | 360         | Average           |
| 3  | * 2484.820      | 15.24          | 30.82      | 46.05                | -7.95       | 54.00          | 300         | 360         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                 |                      |                |
|-----------|-------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                 | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                         | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Horizontal                                      | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_242Tone_RU122_TX_CH 1<br>ANT 0+1 | Test Voltage         | By Notebook PC |

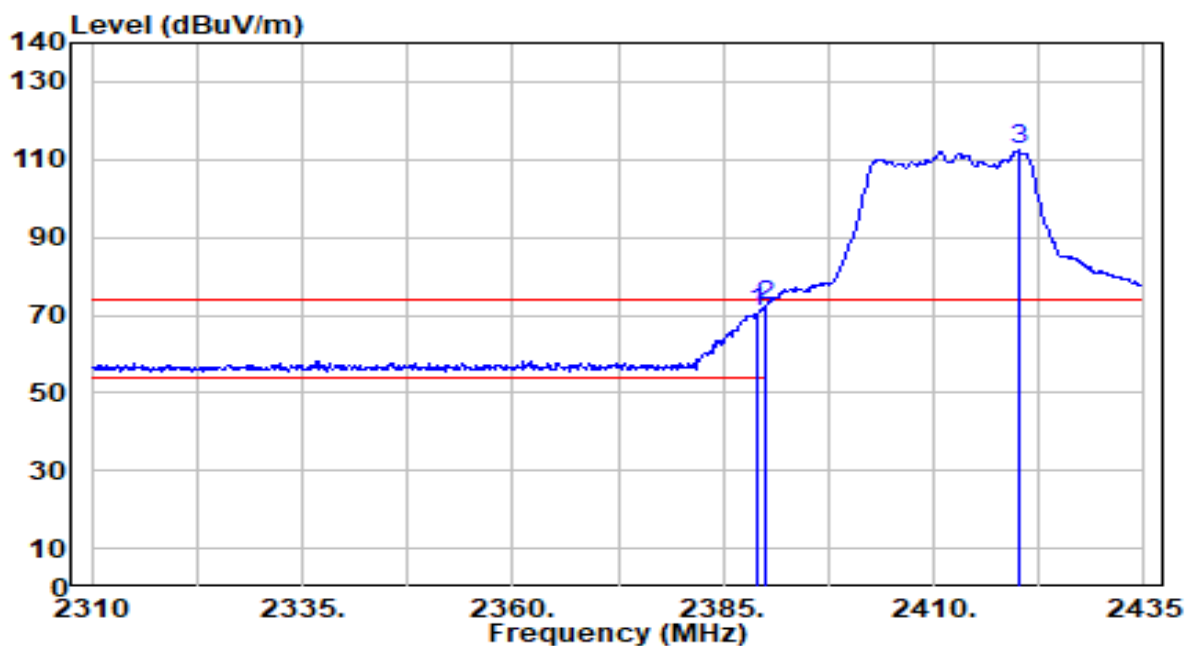


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2389.000        | 40.00          | 30.54      | 70.55                | -3.45       | 74.00          | 253         | 234         | Peak              |
| 2  | * | 2390.000        | 41.91          | 30.55      | 72.46                | -1.54       | 74.00          | 253         | 234         | Peak              |
| 3  |   | 2420.000        | 81.89          | 30.63      | 112.52               | N/A         | N/A            | 253         | 234         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                 |                      |                |
|-----------|-------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                 | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                         | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Horizontal                                      | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_242Tone_RU122_TX_CH 1<br>ANT 0+1 | Test Voltage         | By Notebook PC |

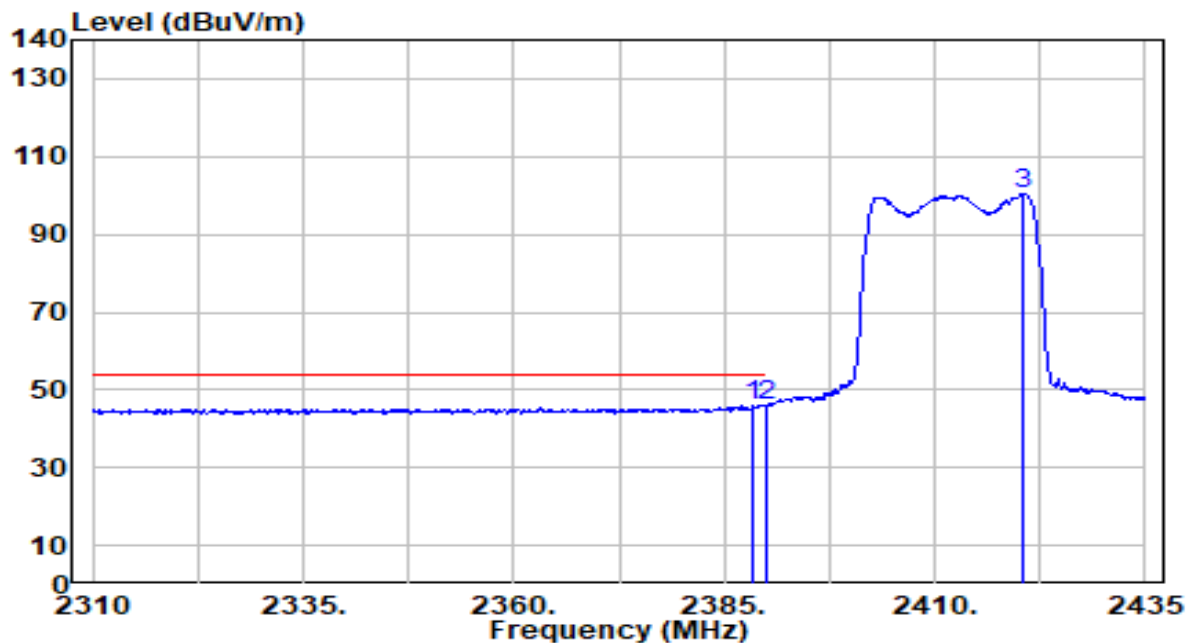


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.375        | 15.55          | 30.54      | 46.10                | -7.90       | 54.00          | 253         | 234         | Average           |
| 2  |   | 2390.000        | 15.55          | 30.55      | 46.09                | -7.91       | 54.00          | 253         | 234         | Average           |
| 3  |   | 2420.500        | 69.87          | 30.63      | 100.50               | N/A         | N/A            | 253         | 234         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                 |                      |                |
|-----------|-------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                 | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                         | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Vertical                                        | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_242Tone_RU122_TX_CH 1<br>ANT 0+1 | Test Voltage         | By Notebook PC |

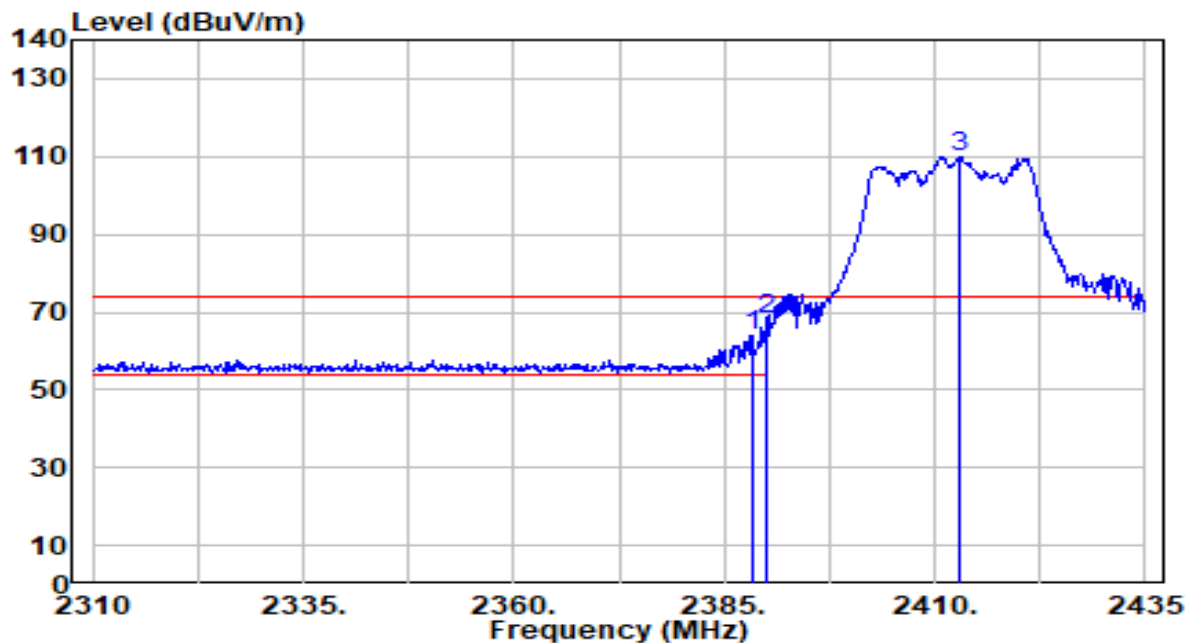


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.250        | 33.30          | 30.54      | 63.84                | -10.16      | 74.00          | 302         | 328         | Peak              |
| 2  | * 2390.000      | 37.62          | 30.55      | 68.17                | -5.83       | 74.00          | 302         | 328         | Peak              |
| 3  | 2412.875        | 79.38          | 30.61      | 109.99               | N/A         | N/A            | 302         | 328         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                 |                      |                |
|-----------|-------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                 | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                         | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Vertical                                        | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_242Tone_RU122_TX_CH 1<br>ANT 0+1 | Test Voltage         | By Notebook PC |

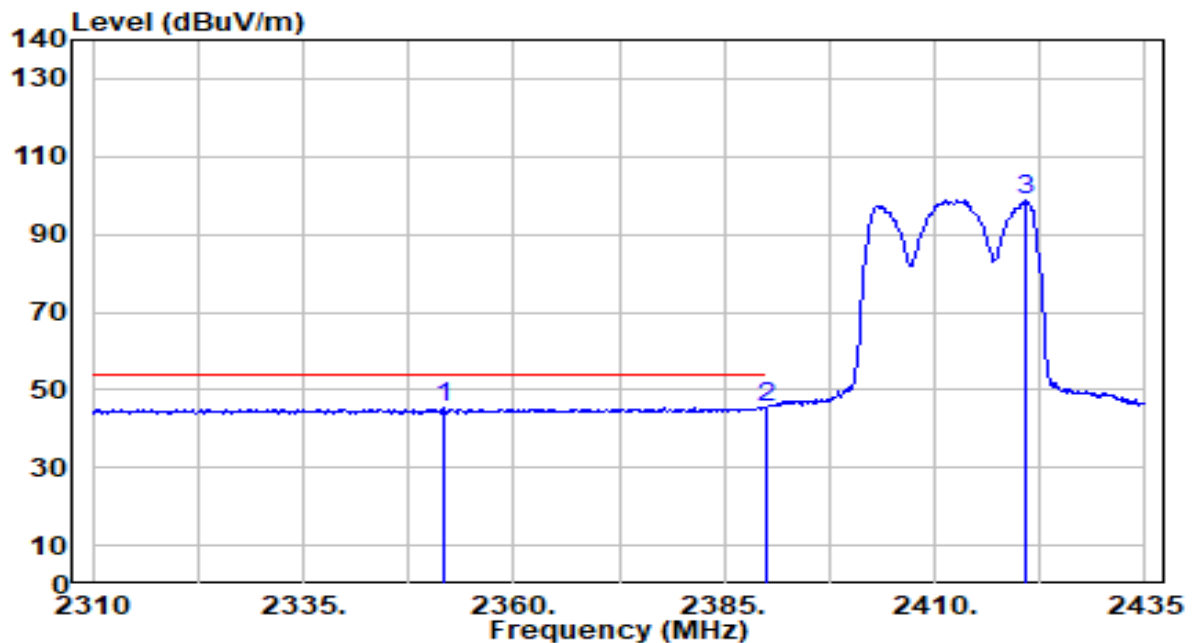


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2351.625        | 14.85          | 30.44      | 45.29                | -8.71       | 54.00          | 302         | 328         | Average           |
| 2  | * | 2390.000        | 15.01          | 30.55      | 45.55                | -8.45       | 54.00          | 302         | 328         | Average           |
| 3  |   | 2420.750        | 68.05          | 30.63      | 98.69                | N/A         | N/A            | 302         | 328         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |                |
|-----------|--------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                  | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                          | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Horizontal                                       | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_242Tone_RU122_TX_CH<br>11 ANT 0+1 | Test Voltage         | By Notebook PC |

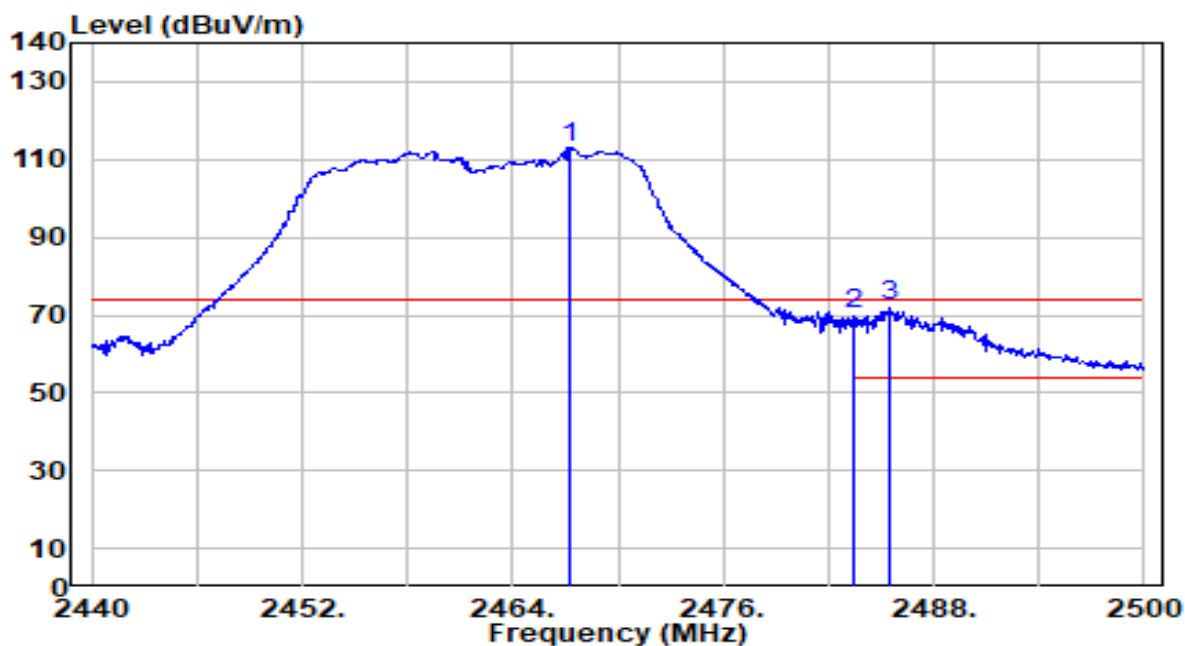


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2467.240        | 82.22          | 30.77      | 112.98               | N/A         | N/A            | 189         | 249         | Peak              |
| 2  | 2483.500        | 39.30          | 30.81      | 70.11                | -3.89       | 74.00          | 189         | 249         | Peak              |
| 3  | * 2485.540      | 41.47          | 30.82      | 72.29                | -1.71       | 74.00          | 189         | 249         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |                |
|-----------|--------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                  | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                          | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Horizontal                                       | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_242Tone_RU122_TX_CH<br>11 ANT 0+1 | Test Voltage         | By Notebook PC |

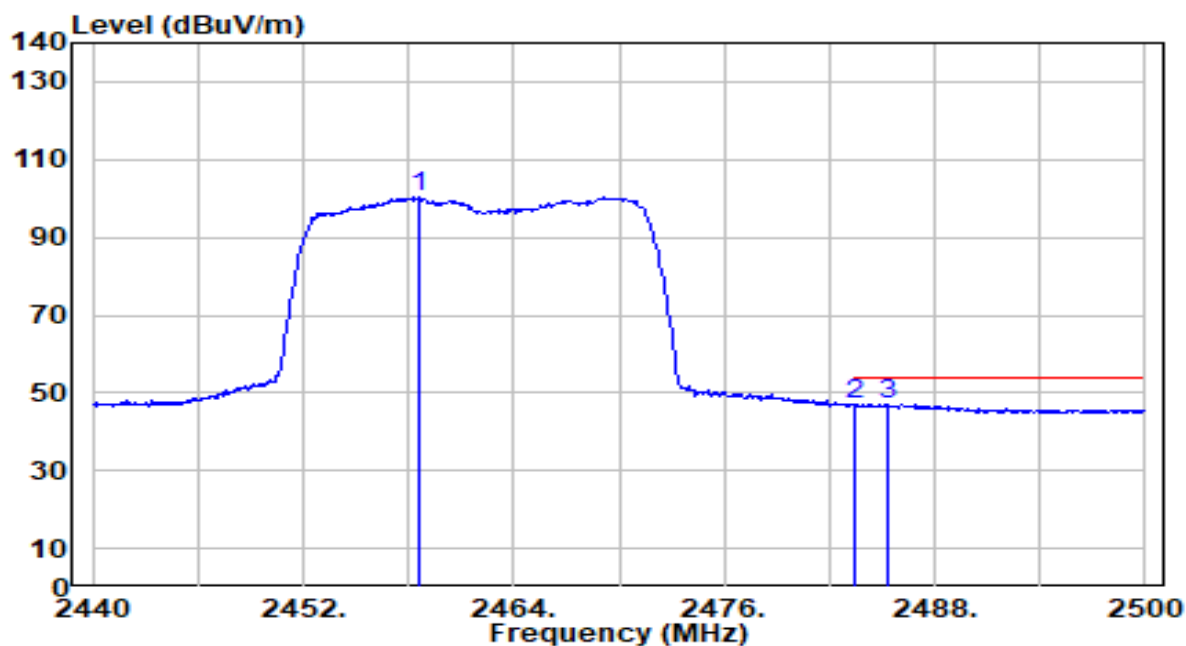


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2458.600        | 69.40          | 30.74      | 100.14               | N/A         | N/A            | 189         | 249         | Average           |
| 2  | 2483.500        | 16.14          | 30.81      | 46.95                | -7.05       | 54.00          | 189         | 249         | Average           |
| 3  | * 2485.360      | 16.20          | 30.82      | 47.02                | -6.98       | 54.00          | 189         | 249         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |                |
|-----------|--------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                  | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                          | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Vertical                                         | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_242Tone_RU122_TX_CH<br>11 ANT 0+1 | Test Voltage         | By Notebook PC |

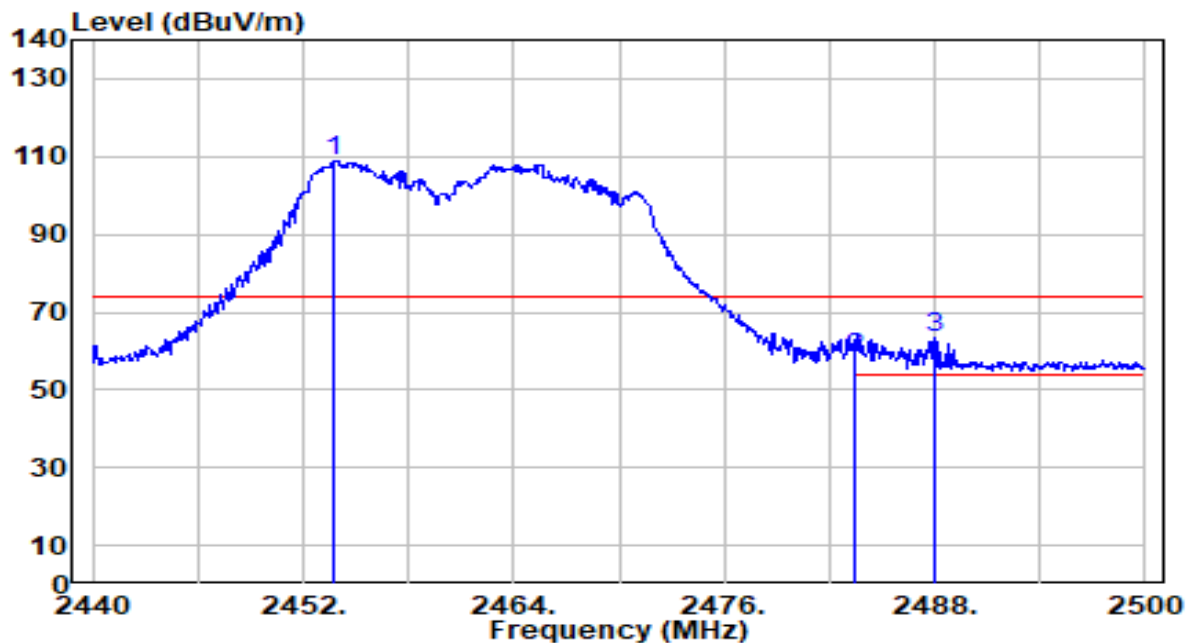


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2453.740        | 78.10          | 30.73      | 108.83               | N/A         | N/A            | 300         | 360         | Peak              |
| 2  | 2483.500        | 27.35          | 30.81      | 58.17                | -15.83      | 74.00          | 300         | 360         | Peak              |
| 3  | * 2488.060      | 32.37          | 30.83      | 63.20                | -10.80      | 74.00          | 300         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |                |
|-----------|--------------------------------------------------|----------------------|----------------|
| EUT       | Mobile Computer                                  | Date of Test         | 2024-11-30     |
| Factor    | DRH18-E                                          | Temp. / Humidity     | 21°C /61%      |
| Polarity  | Vertical                                         | Site / Test Engineer | AC2 / Stanley  |
| Test Mode | 802.11ax-20MHz_242Tone_RU122_TX_CH<br>11 ANT 0+1 | Test Voltage         | By Notebook PC |

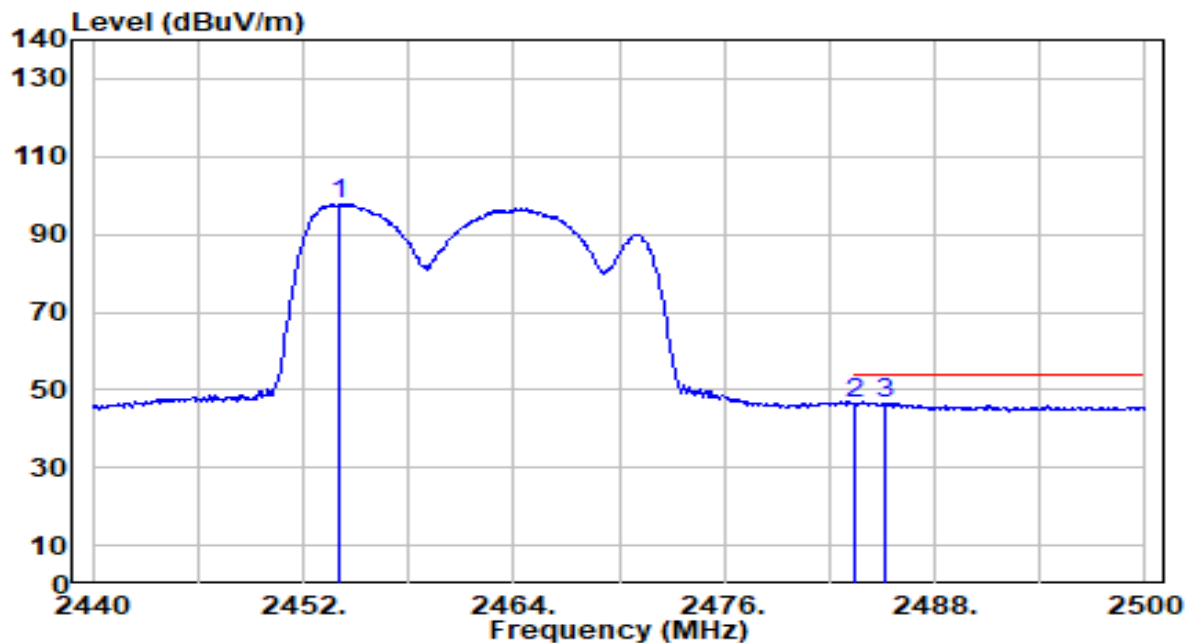

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2454.100        | 67.03          | 30.73      | 97.76                | N/A         | N/A            | 300         | 360         | Average           |
| 2  | 2483.500        | 15.78          | 30.81      | 46.59                | -7.41       | 54.00          | 300         | 360         | Average           |
| 3  | * 2485.180      | 15.89          | 30.82      | 46.71                | -7.29       | 54.00          | 300         | 360         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |           |           |
|-----------------------------------------------|-----------|-----------|
| Frequency (MHz)                               | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50                                   | 66 - 56   | 56 - 46   |
| 0.50 - 5.0                                    | 56        | 46        |
| 5.0 - 30                                      | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

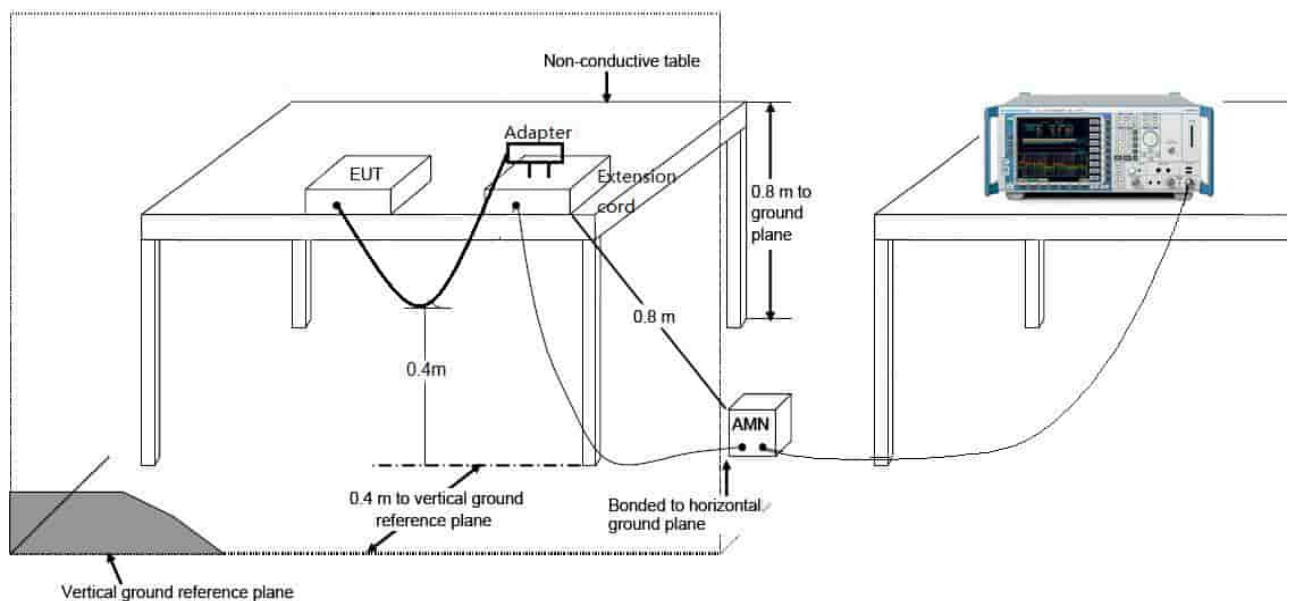

### 7.8.3.Test Result

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | Mobile Computer              | Date of Test         | 2024-11-19   |
| Factor    | CE_ENV216-L1 (Filter ON)     | Temp. / Humidity     | 24.6°C /66%  |
| Polarity  | Line1                        | Site / Test Engineer | SR2 / Ryan   |
| Test Mode | 802.11n-20MHz_TX_CH6_Ant 0+1 | Test Voltage         | AC 120V/60Hz |

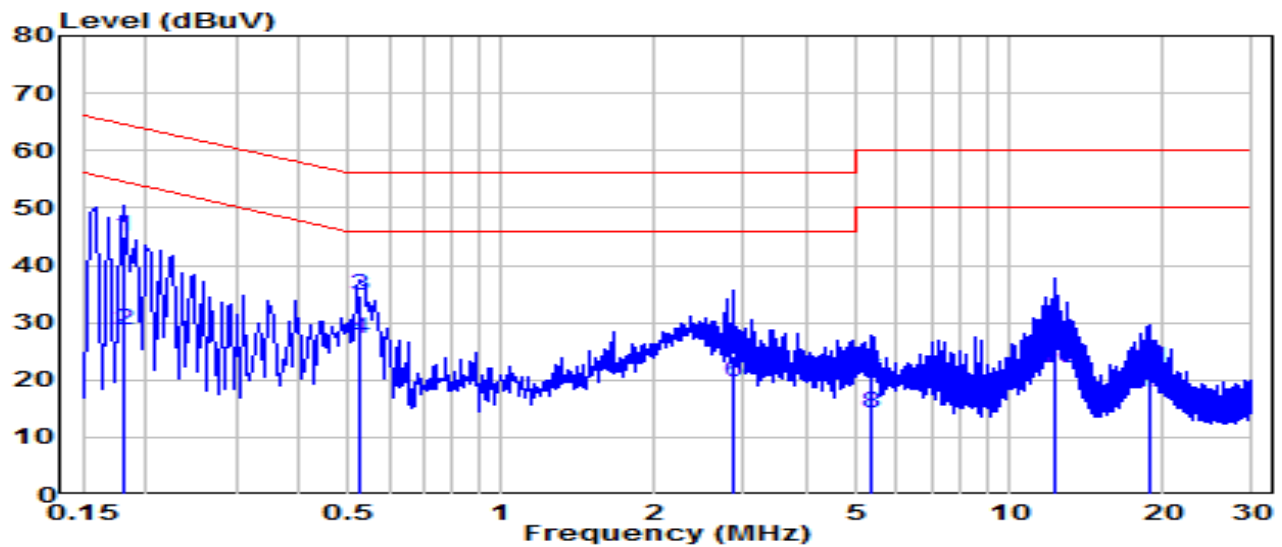


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.181           | 35.35          | 9.63     | 44.99              | -19.43      | 64.42        | QP                |
| 2  | 0.181           | 18.93          | 9.63     | 28.56              | -25.86      | 54.42        | Average           |
| 3  | * 0.523         | 25.04          | 9.65     | 34.69              | -21.31      | 56.00        | QP                |
| 4  | * 0.523         | 17.64          | 9.65     | 27.30              | -18.70      | 46.00        | Average           |
| 5  | 2.845           | 14.41          | 9.71     | 24.12              | -31.88      | 56.00        | QP                |
| 6  | 2.845           | 9.99           | 9.71     | 19.70              | -26.30      | 46.00        | Average           |
| 7  | 5.351           | 10.30          | 9.76     | 20.05              | -39.95      | 60.00        | QP                |
| 8  | 5.351           | 4.37           | 9.76     | 14.13              | -35.87      | 50.00        | Average           |
| 9  | 12.339          | 16.93          | 9.88     | 26.82              | -33.18      | 60.00        | QP                |
| 10 | 12.339          | 12.12          | 9.88     | 22.01              | -27.99      | 50.00        | Average           |
| 11 | 18.913          | 12.15          | 9.93     | 22.08              | -37.92      | 60.00        | QP                |
| 12 | 18.913          | 7.99           | 9.93     | 17.93              | -32.07      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | Mobile Computer              | Date of Test         | 2024-11-19   |
| Factor    | CE_ENV216-N (Filter ON)      | Temp. / Humidity     | 24.6°C /66%  |
| Polarity  | Neutral                      | Site / Test Engineer | SR2 / Ryan   |
| Test Mode | 802.11n-20MHz_TX_CH6_Ant 0+1 | Test Voltage         | AC 120V/60Hz |

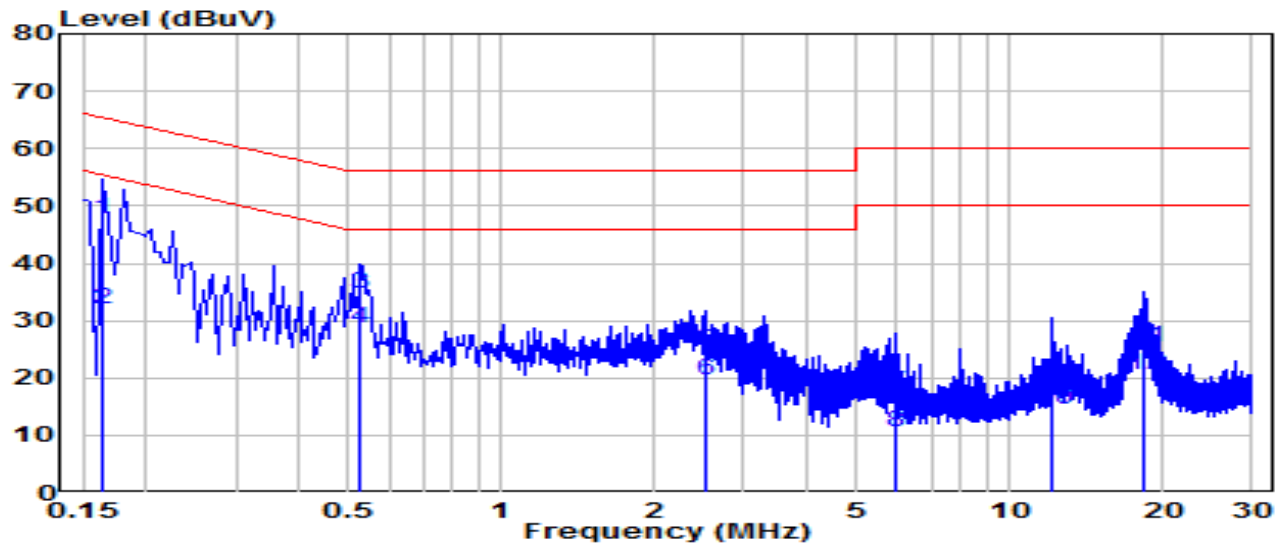


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.163           | 38.16          | 9.63     | 47.79              | -17.49      | 65.28        | QP                |
| 2  | 0.163           | 22.47          | 9.63     | 32.10              | -23.19      | 55.28        | Average           |
| 3  | * 0.528         | 24.93          | 9.65     | 34.58              | -21.42      | 56.00        | QP                |
| 4  | * 0.528         | 18.88          | 9.65     | 28.53              | -17.47      | 46.00        | Average           |
| 5  | 2.526           | 14.93          | 9.72     | 24.65              | -31.35      | 56.00        | QP                |
| 6  | 2.526           | 9.80           | 9.72     | 19.52              | -26.48      | 46.00        | Average           |
| 7  | 5.999           | 7.67           | 9.78     | 17.46              | -42.54      | 60.00        | QP                |
| 8  | 5.999           | 0.79           | 9.78     | 10.58              | -39.42      | 50.00        | Average           |
| 9  | 12.060          | 6.88           | 9.91     | 16.79              | -43.21      | 60.00        | QP                |
| 10 | 12.060          | 4.43           | 9.91     | 14.34              | -35.66      | 50.00        | Average           |
| 11 | 18.477          | 15.25          | 9.98     | 25.23              | -34.77      | 60.00        | QP                |
| 12 | 18.477          | 10.57          | 9.98     | 20.55              | -29.45      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | Mobile Computer              | Date of Test         | 2024-11-19   |
| Factor    | CE_ENV216-L1 (Filter ON)     | Temp. / Humidity     | 24.6°C /66%  |
| Polarity  | Line1                        | Site / Test Engineer | SR2 / Ryan   |
| Test Mode | 802.11n-20MHz_TX_CH6_Ant 0+1 | Test Voltage         | AC 240V/60Hz |

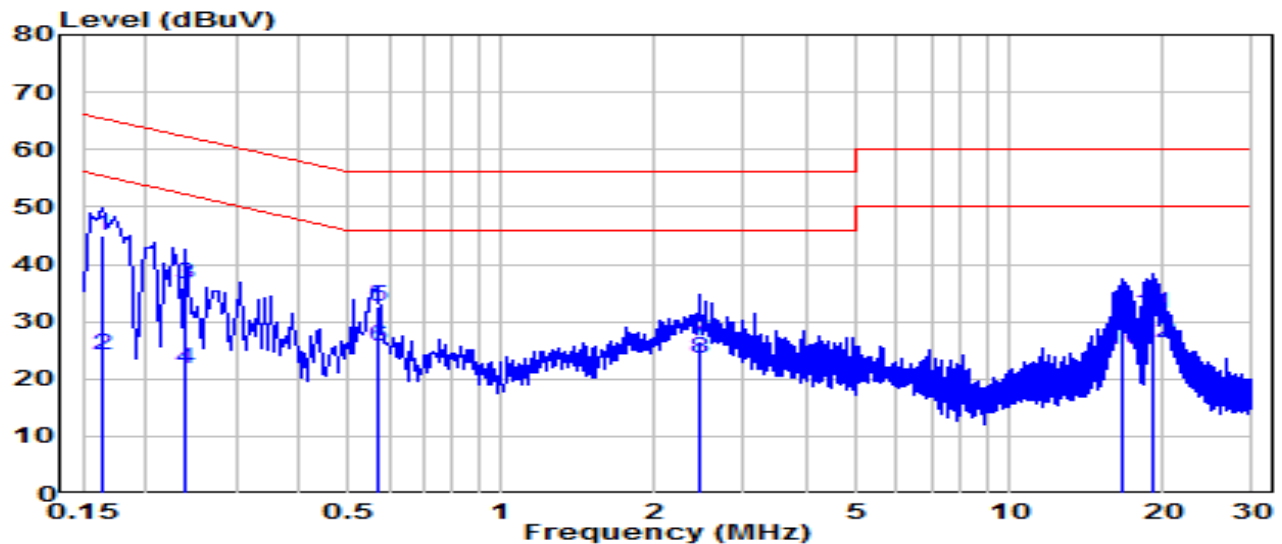


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.163           | 35.34          | 9.63     | 44.97              | -20.31      | 65.28        | QP                |
| 2  | 0.163           | 14.51          | 9.63     | 24.14              | -31.14      | 55.28        | Average           |
| 3  | 0.240           | 26.84          | 9.64     | 36.47              | -25.62      | 62.10        | QP                |
| 4  | 0.240           | 12.20          | 9.64     | 21.83              | -30.27      | 52.10        | Average           |
| 5  | * 0.568         | 22.87          | 9.66     | 32.52              | -23.48      | 56.00        | QP                |
| 6  | * 0.568         | 16.05          | 9.66     | 25.71              | -20.29      | 46.00        | Average           |
| 7  | 2.463           | 16.92          | 9.71     | 26.62              | -29.38      | 56.00        | QP                |
| 8  | 2.463           | 13.76          | 9.71     | 23.47              | -22.53      | 46.00        | Average           |
| 9  | 16.704          | 21.00          | 9.91     | 30.92              | -29.08      | 60.00        | QP                |
| 10 | 16.704          | 15.24          | 9.91     | 25.15              | -24.85      | 50.00        | Average           |
| 11 | 19.102          | 21.54          | 9.93     | 31.47              | -28.53      | 60.00        | QP                |
| 12 | 19.102          | 16.46          | 9.93     | 26.39              | -23.61      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | Mobile Computer              | Date of Test         | 2024-11-19   |
| Factor    | CE_ENV216-N (Filter ON)      | Temp. / Humidity     | 24.6°C /66%  |
| Polarity  | Neutral                      | Site / Test Engineer | SR2 / Ryan   |
| Test Mode | 802.11n-20MHz_TX_CH6_Ant 0+1 | Test Voltage         | AC 240V/60Hz |

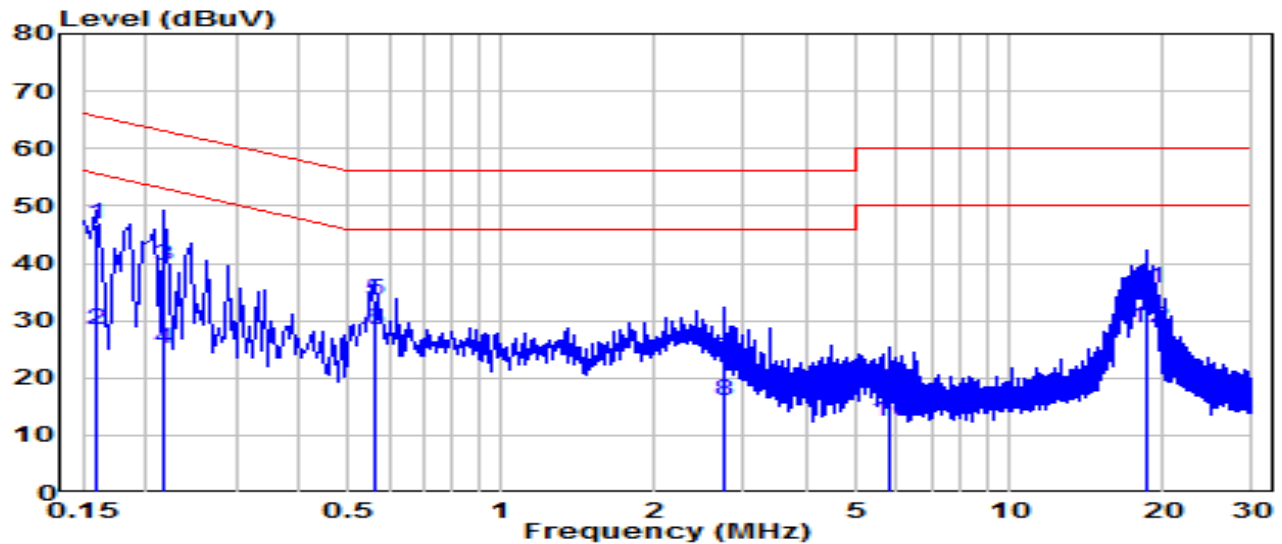

| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV) | Margin (dB) | Limit (dBUV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | 0.159           | 37.20          | 9.63     | 46.83              | -18.69      | 65.52        | QP                |
| 2  | 0.159           | 18.61          | 9.63     | 28.25              | -27.27      | 55.52        | Average           |
| 3  | 0.217           | 29.78          | 9.63     | 39.41              | -23.50      | 62.91        | QP                |
| 4  | 0.217           | 15.34          | 9.63     | 24.97              | -27.94      | 52.91        | Average           |
| 5  | * 0.564         | 23.84          | 9.66     | 33.50              | -22.50      | 56.00        | QP                |
| 6  | * 0.564         | 18.66          | 9.66     | 28.31              | -17.69      | 46.00        | Average           |
| 7  | 2.733           | 13.57          | 9.72     | 23.29              | -32.71      | 56.00        | QP                |
| 8  | 2.733           | 6.22           | 9.72     | 15.94              | -30.06      | 46.00        | Average           |
| 9  | 5.770           | 7.90           | 9.78     | 17.68              | -42.32      | 60.00        | QP                |
| 10 | 5.770           | 2.55           | 9.78     | 12.33              | -37.67      | 50.00        | Average           |
| 11 | 18.580          | 25.58          | 9.98     | 35.56              | -24.44      | 60.00        | QP                |
| 12 | 18.580          | 18.70          | 9.98     | 28.68              | -21.32      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

## **Appendix A : Test Setup Photograph**

Refer to “2408TW0104-UT” file.

## **Appendix B : External Photograph**

Refer to “2408TW0104-UE” file.

## **Appendix C : Internal Photograph**

Refer to “2408TW0104-UI” file.

\_\_\_\_\_ The End \_\_\_\_\_