



FCC RADIO TEST REPORT

FCC ID : HD5-CT30PX0N
Equipment : Mobile computer
Brand Name : Honeywell
Model Name : CT30PX0N
Applicant : Honeywell International Inc.
9680 Old Bailes Road, Fort Mill, SC 29707 USA
Manufacturer : Honeywell International Inc.
9680 Old Bailes Road, Fort Mill, SC 29707 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Nov. 11, 2021 and testing was performed from Nov. 12, 2021 to Dec. 23, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	20
3.3 Power Spectral Density Measurement	21
3.4 Conducted Band Edges and Spurious Emission Measurement	30
3.5 Radiated Band Edges and Spurious Emission Measurement	41
3.6 AC Conducted Emission Measurement.....	46
3.7 Antenna Requirements.....	48
4 List of Measuring Equipment	49
5 Uncertainty of Evaluation.....	51
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR1N0505B	01	Initial issue of report	Jan. 04, 2022
FR1N0505B	02	1. Revise typo 2. Revise description in section 3.5.3 3. Revise List of Measuring Equipment 4. Revise antenna information	Jan. 10, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	4.02 dB under the limit at 2496.120 MHz for WM-BAX-BM-57 4.55 dB under the limit at 2491.640 MHz for NRF52840
3.6	15.207	AC Conducted Emission	Pass	14.26 dB under the limit at 0.659 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Ruby Zou

1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax and NFC.

Product Feature	
Sample 1	EUT with Scanner (S0703)
Sample 2	EUT with Scanner (6803)
Sample 3	EUT with Scanner (N6700)
HW version	EVT1.5
SW version	311.C1.00.0322-N-DEBUG-G2H
Antenna Type	WLAN <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna Bluetooth: PIFA Antenna NFC: Loop Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	1.9

Remark: The above EUT's information is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	CO05-HY, 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY (TAF Code: 3786)
Remark	The Conducted test item subcontracted to Sporton International Inc. Wensan Laboratory

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Z plane as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN Link + Adapter for Sample 1

Remark: For Radiated Test Cases, the tests were performed with Sample 1.

2.3 Connection Diagram of Test System

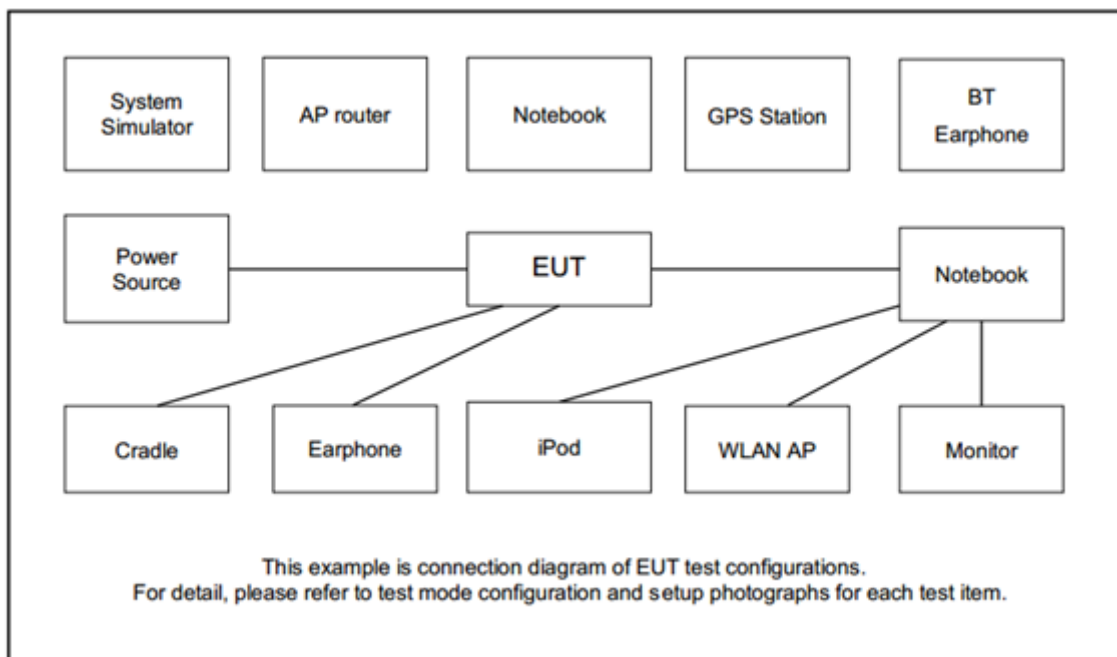

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Notebook	Dell	E3340	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

<WM-BAX-BM-57>

The RF test items, utility "CMD ver.10.0.18362.1256" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

<NRF52840>

The RF test items, utility "Direct Test Mode tool V.0.10.2" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

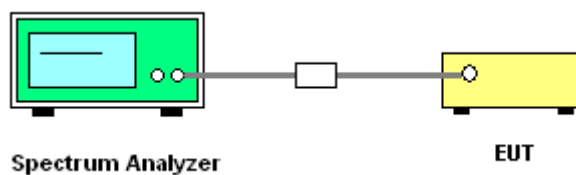




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


<WM-BAX-BM-57>

<1Mbps>

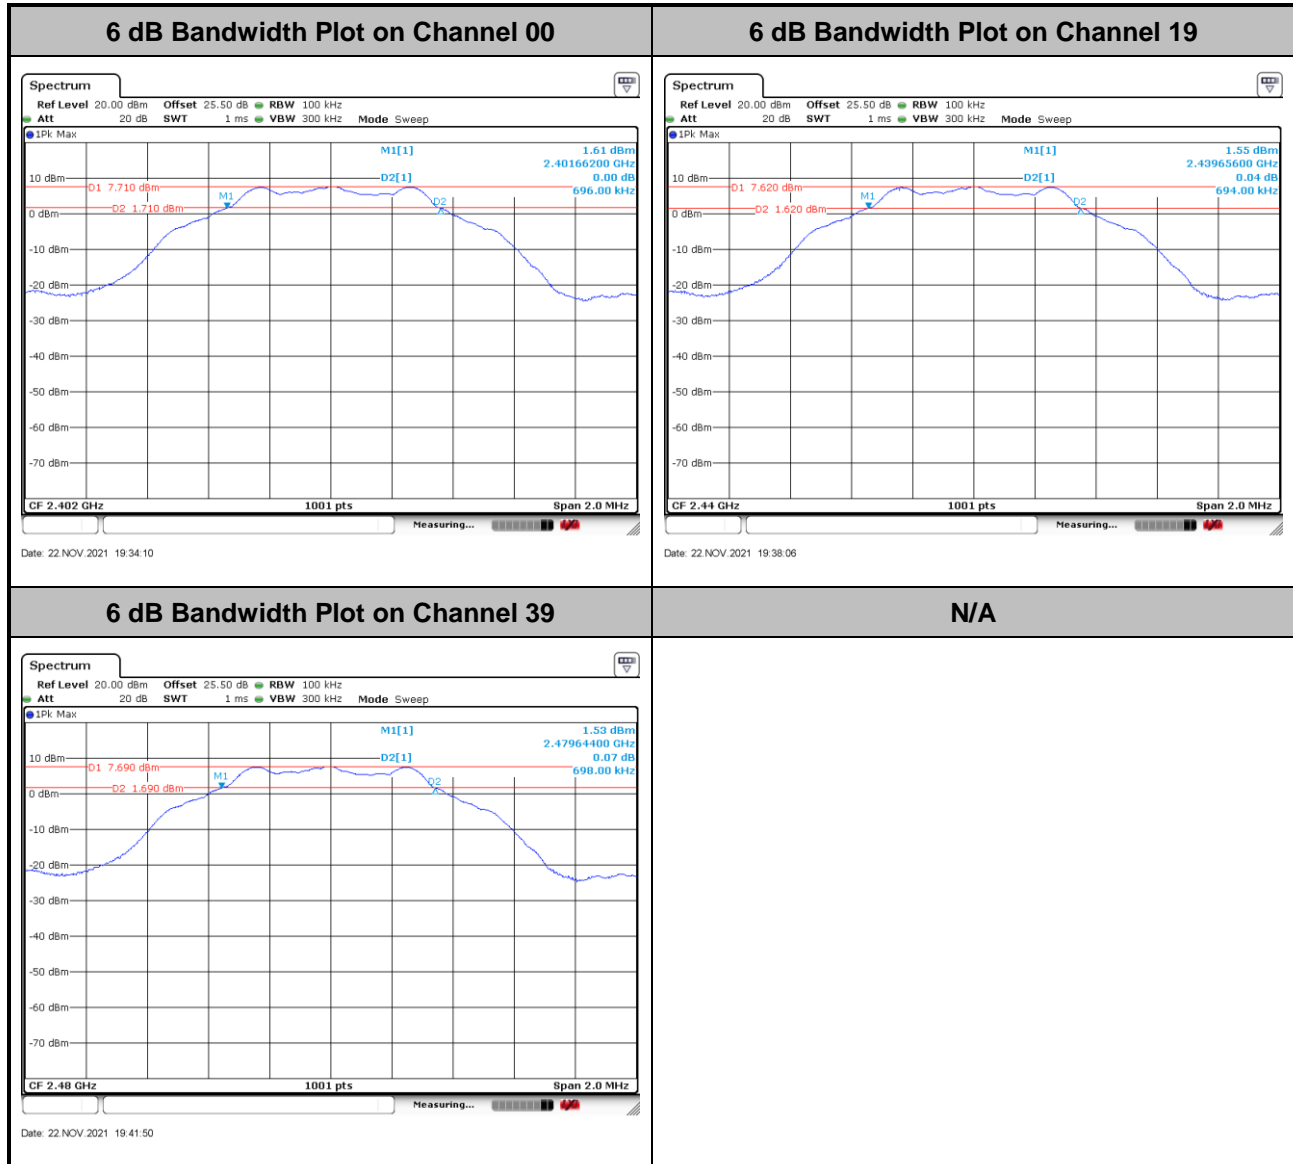



<2Mbps>

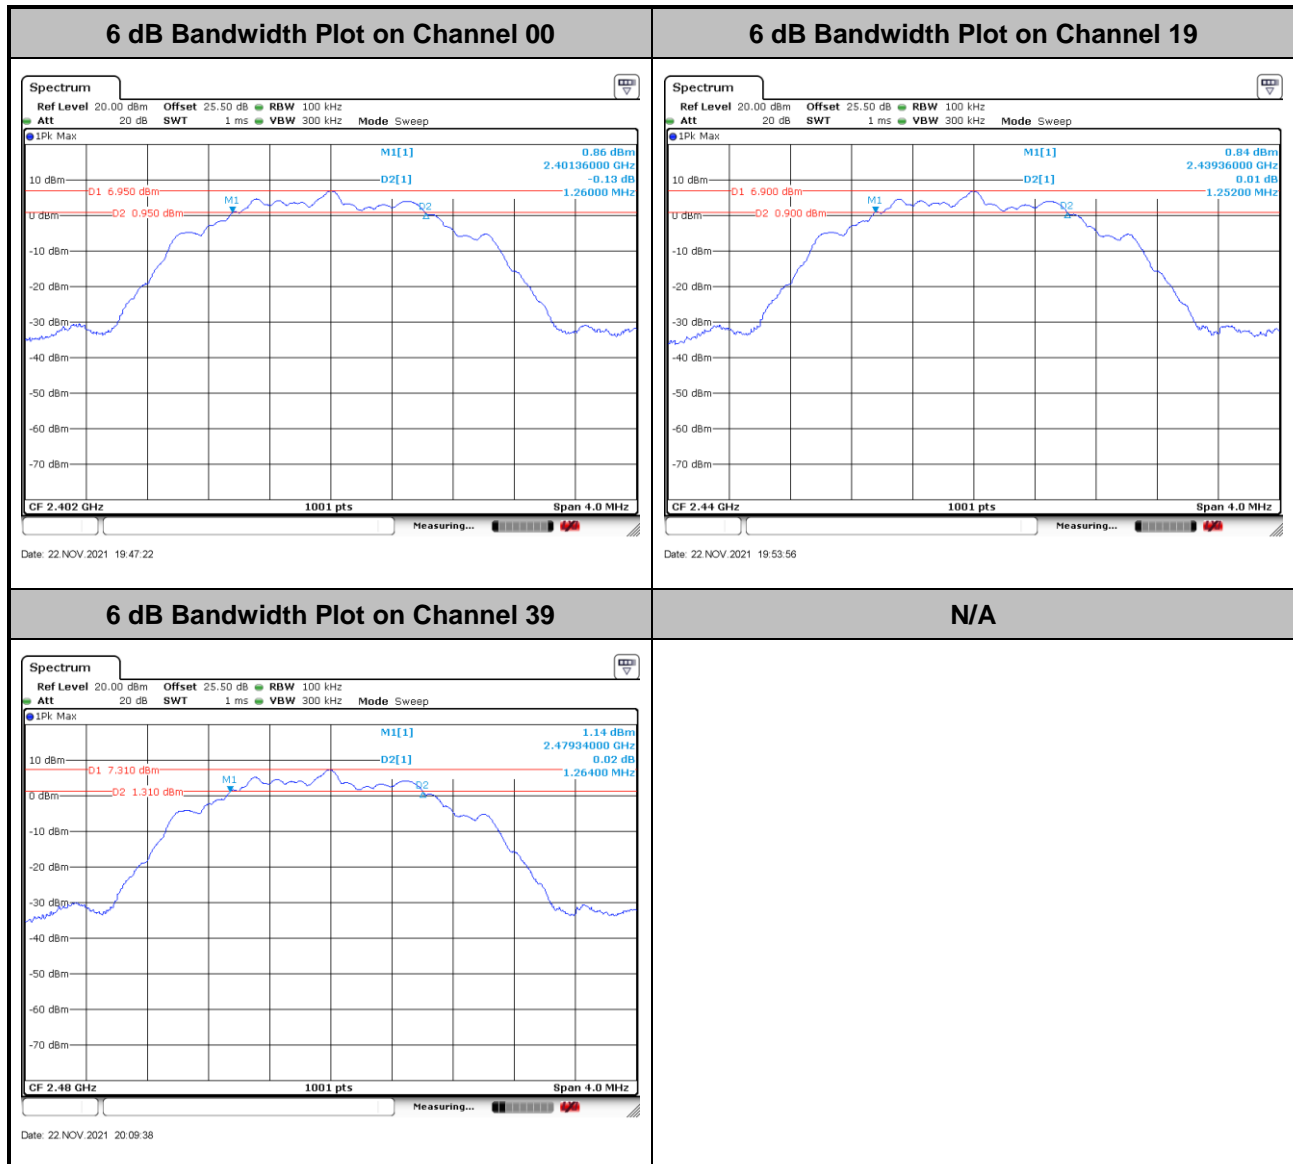




<NRF52840>


<1Mbps>

6 dB Bandwidth Plot on Channel 00

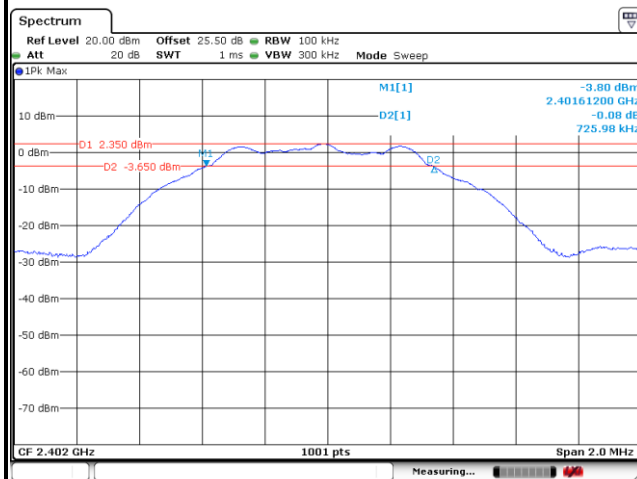


Date: 11 DEC 2021 10:44:45

6 dB Bandwidth Plot on Channel 19

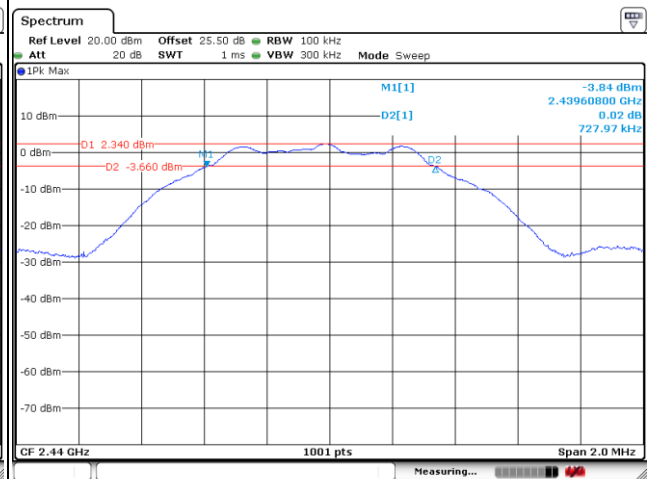

Date: 11 DEC 2021 10:48:05

6 dB Bandwidth Plot on Channel 39

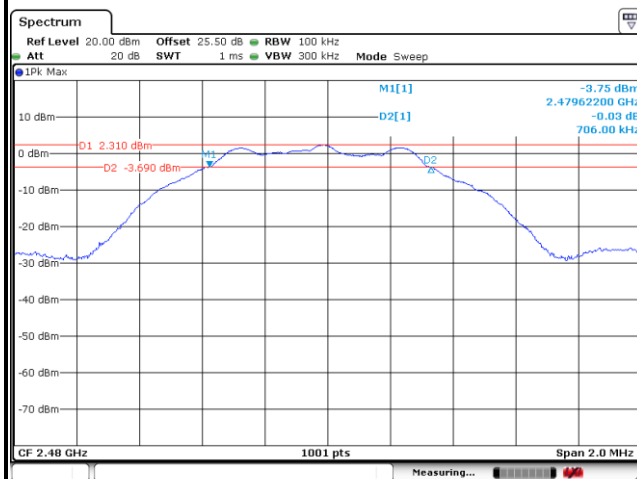


Date: 11 DEC 2021 10:50:45

N/A



<2Mbps>

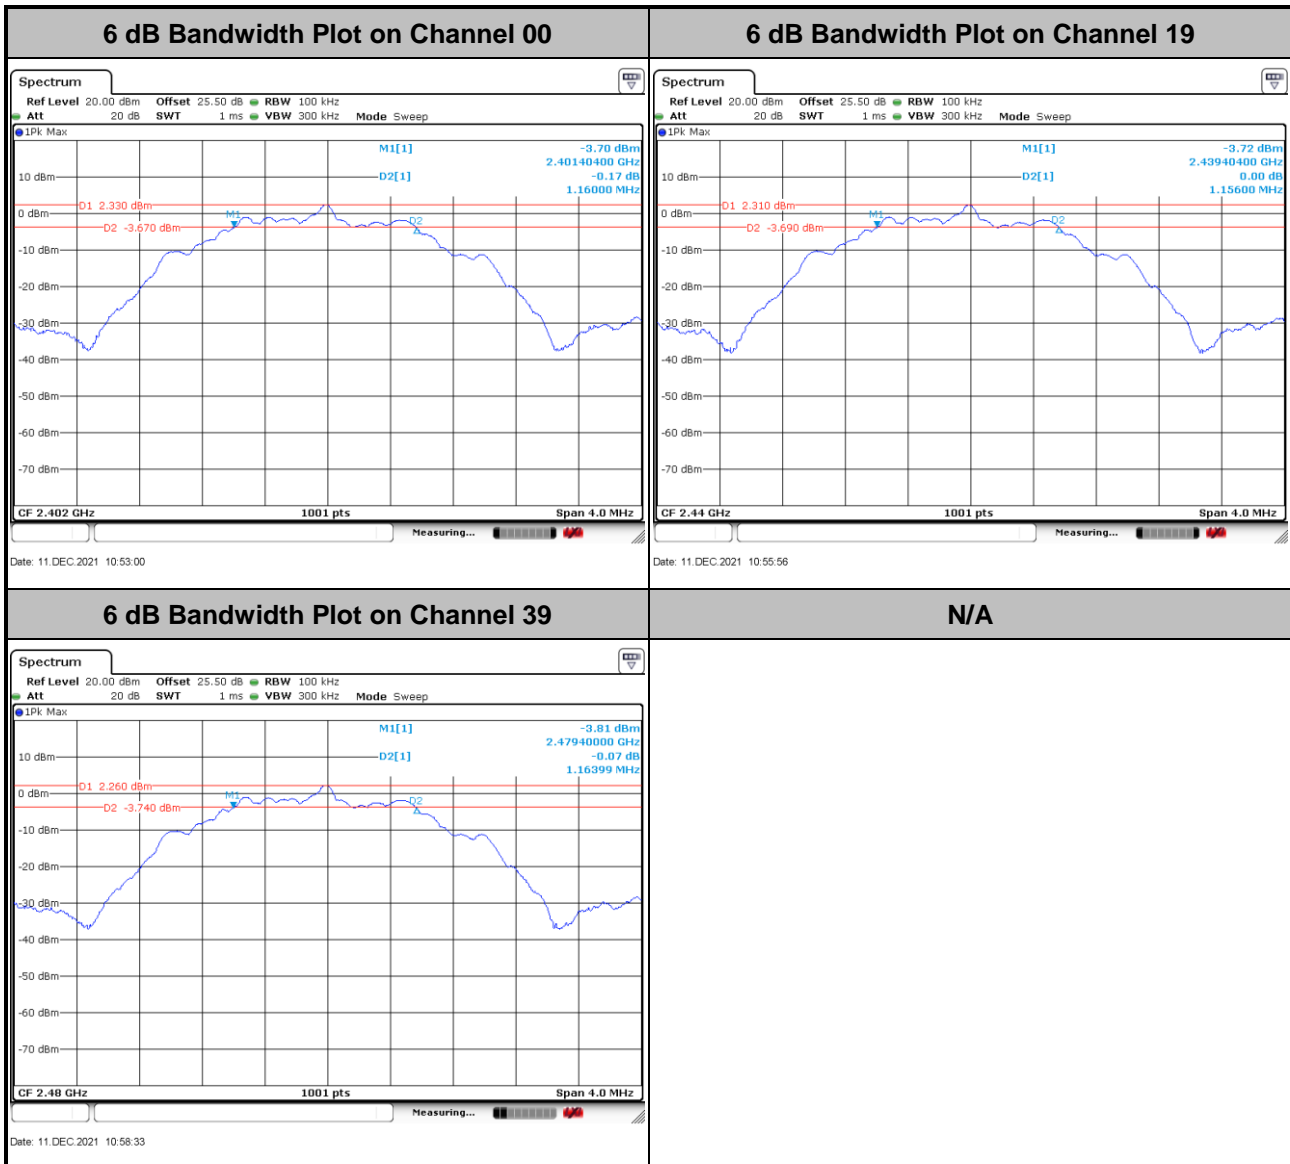




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<WM-BAX-BM-57>


<1Mbps>

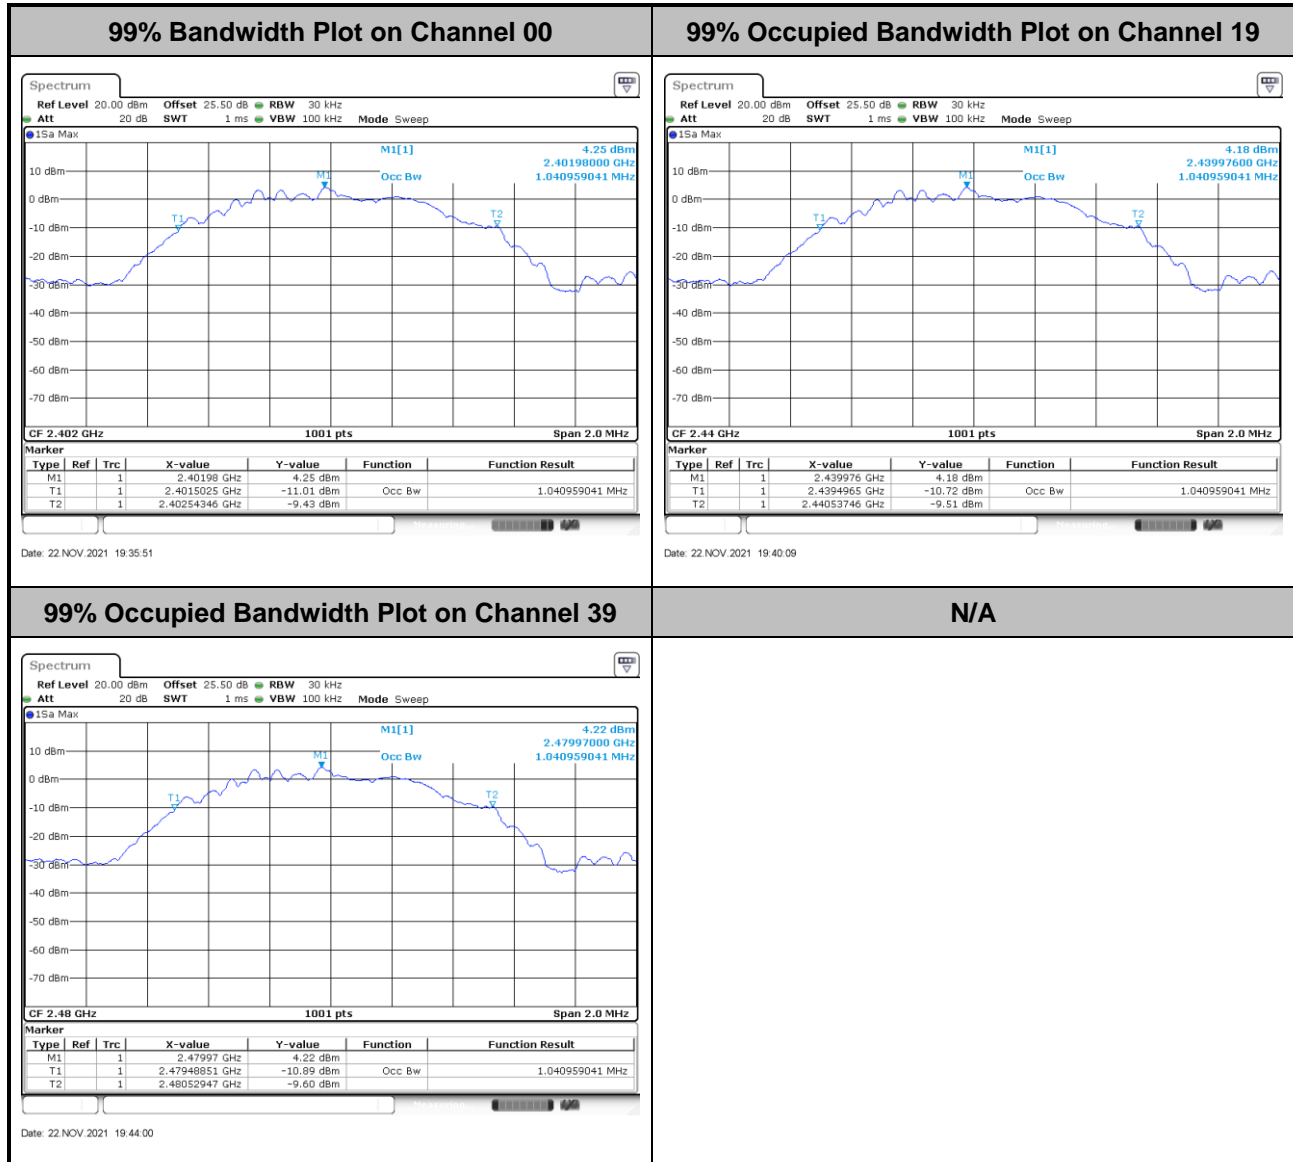

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<2Mbps>

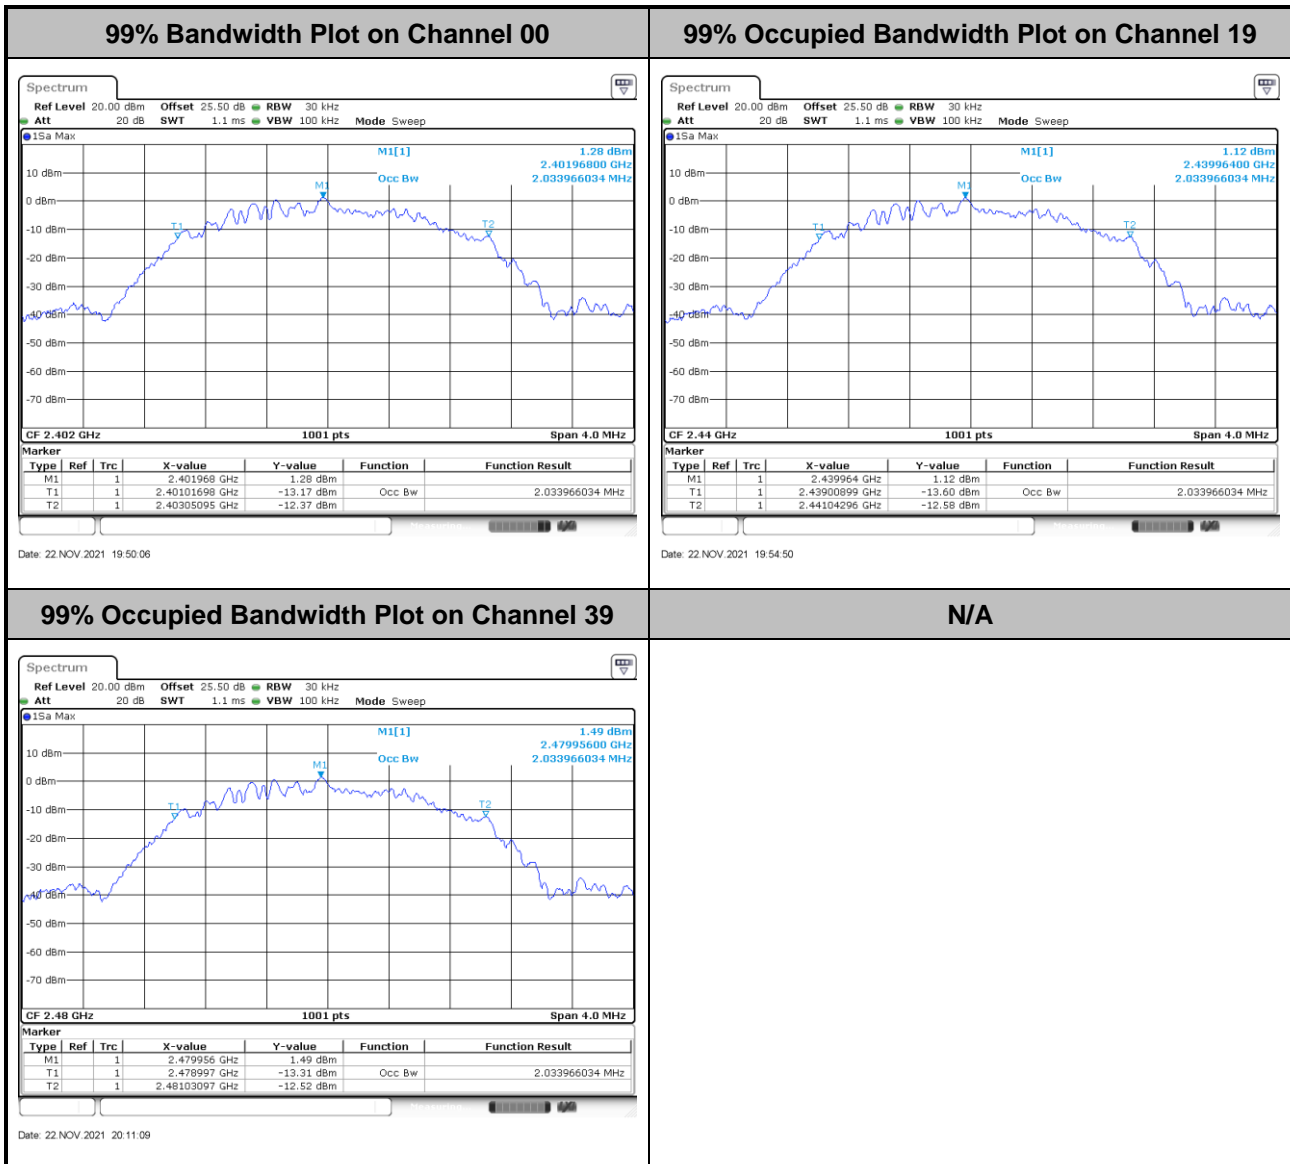


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<NRF52840>


<1Mbps>

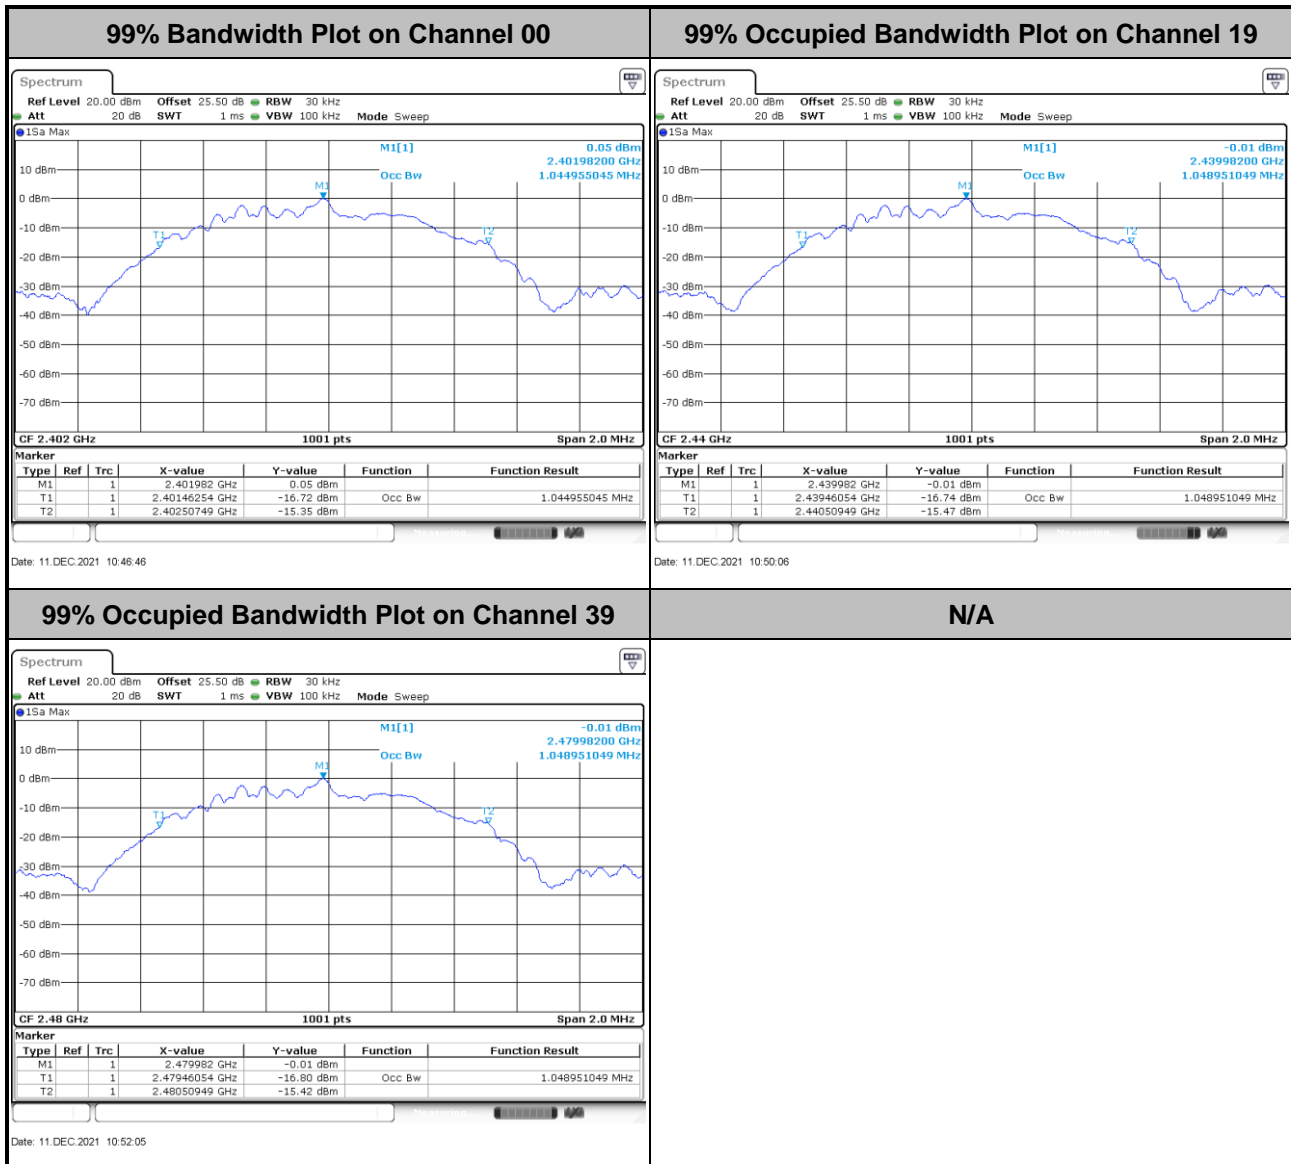

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<2Mbps>

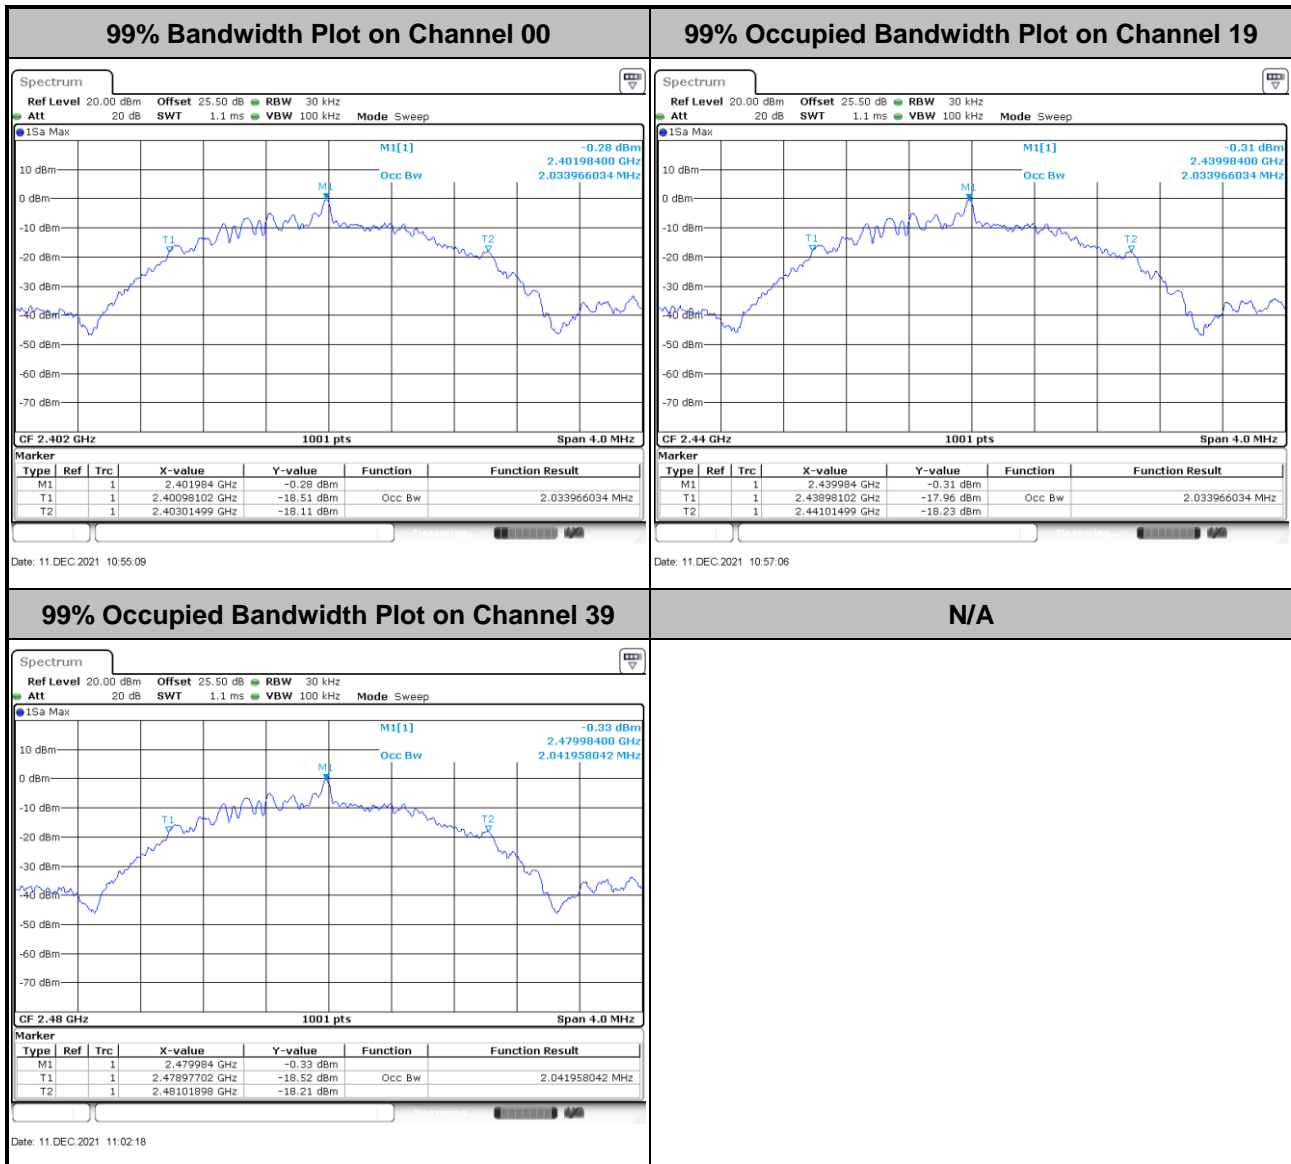

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

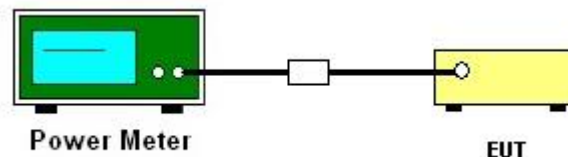

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

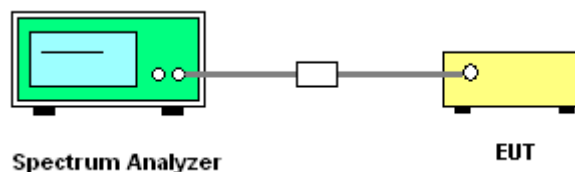

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


<WM-BAX-BM-57>

<1Mbps>

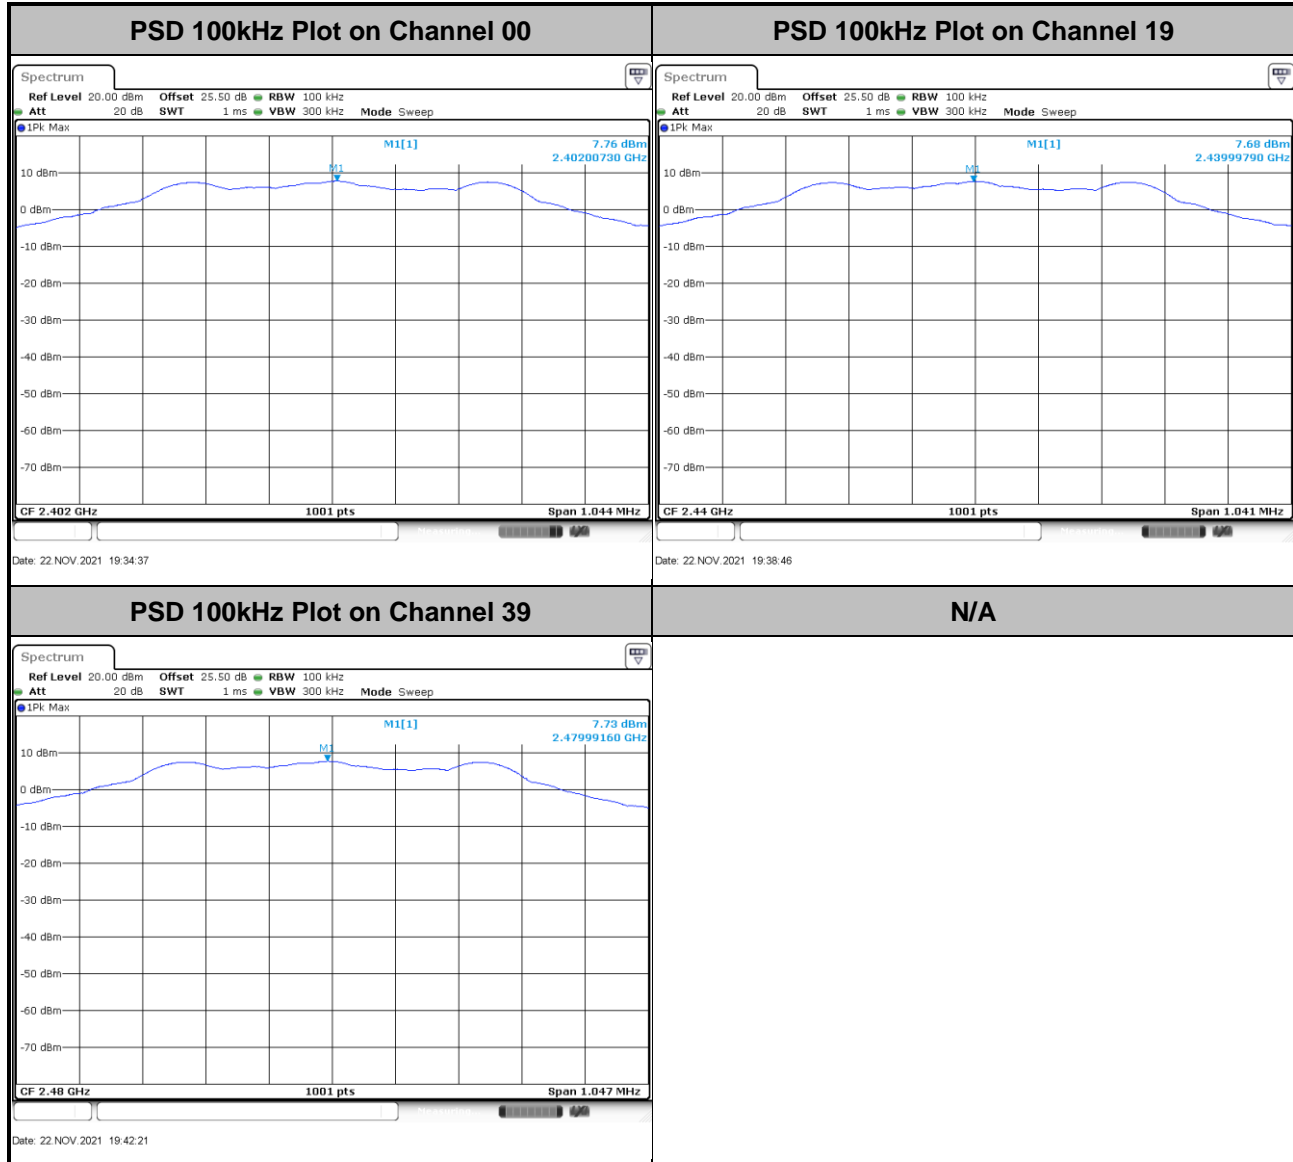




<2Mbps>

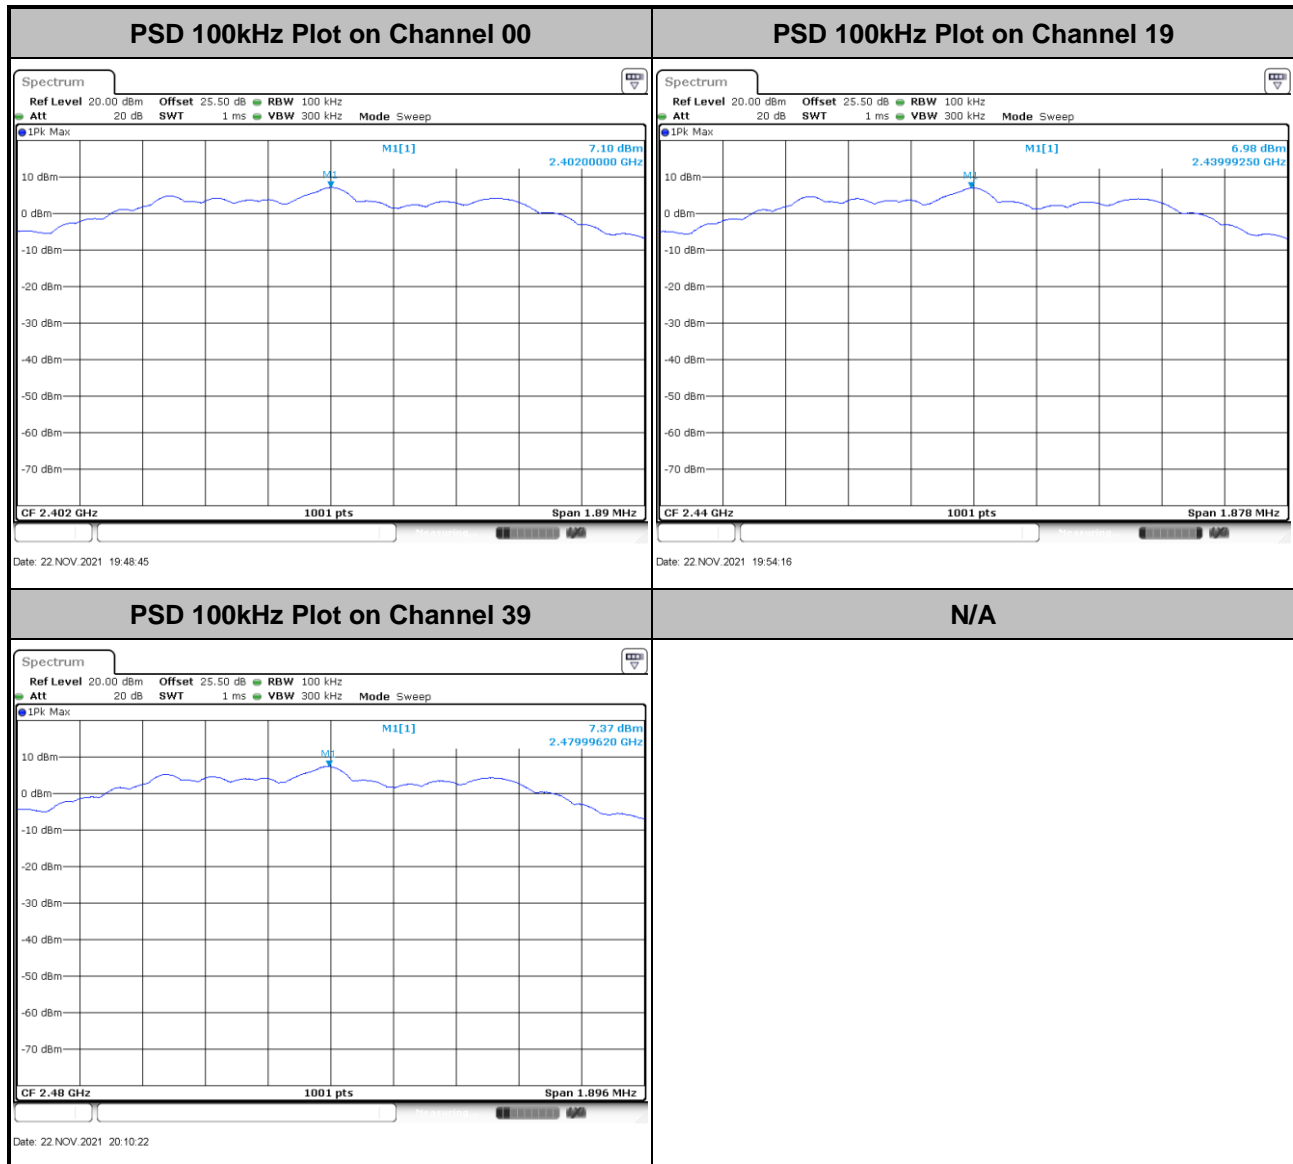




<NRF52840>

<1Mbps>

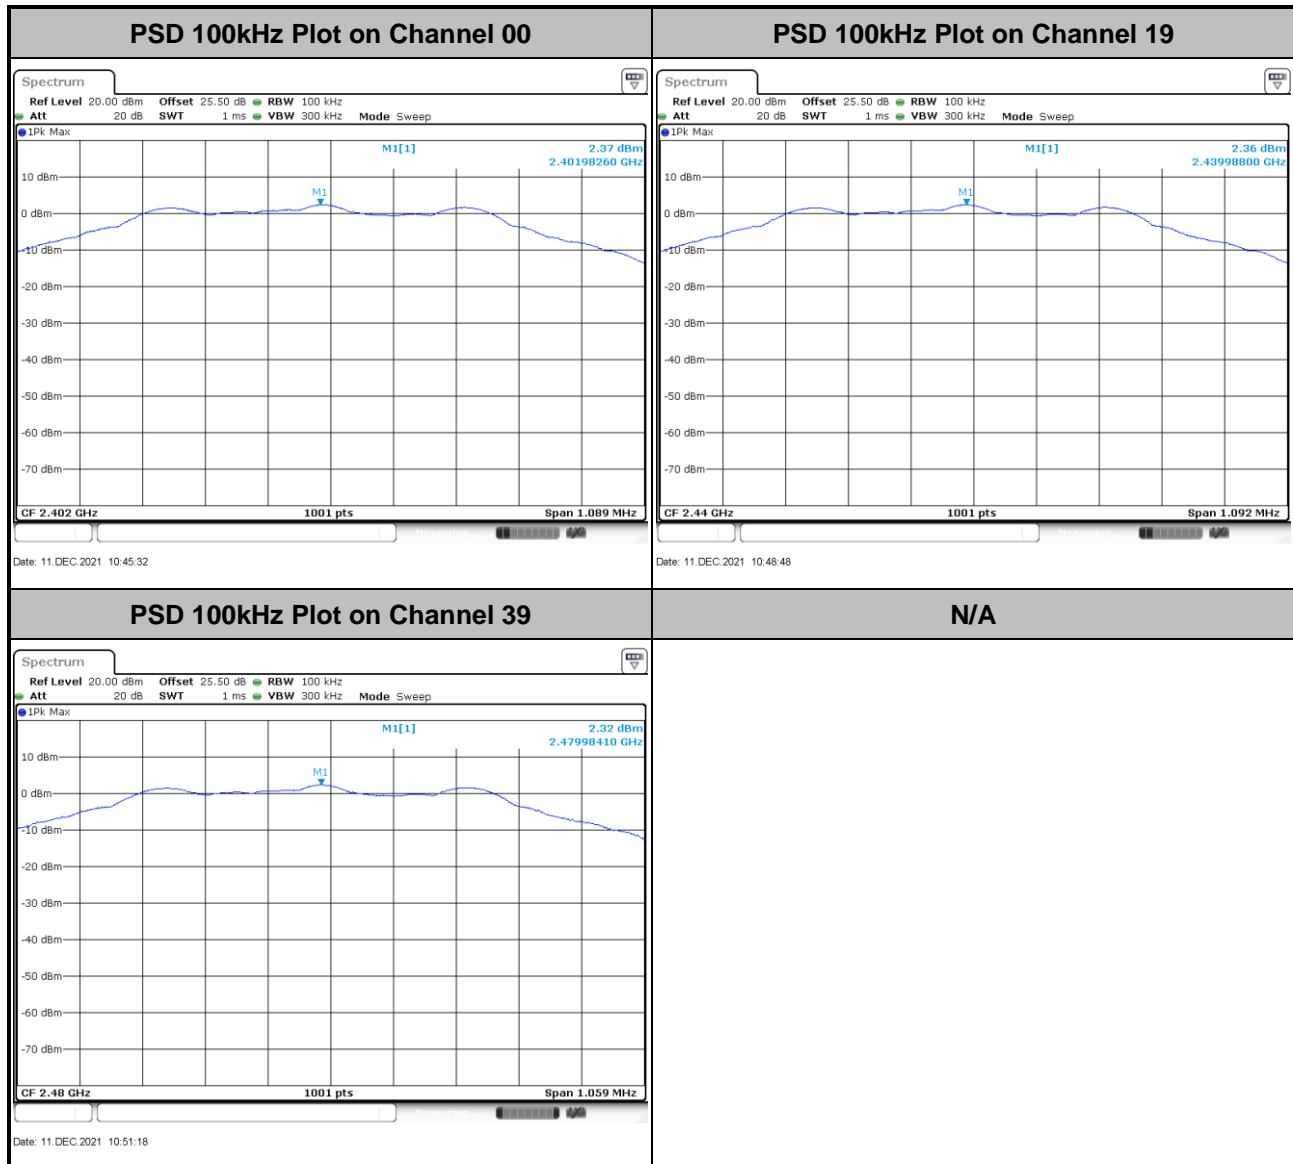



<2Mbps>

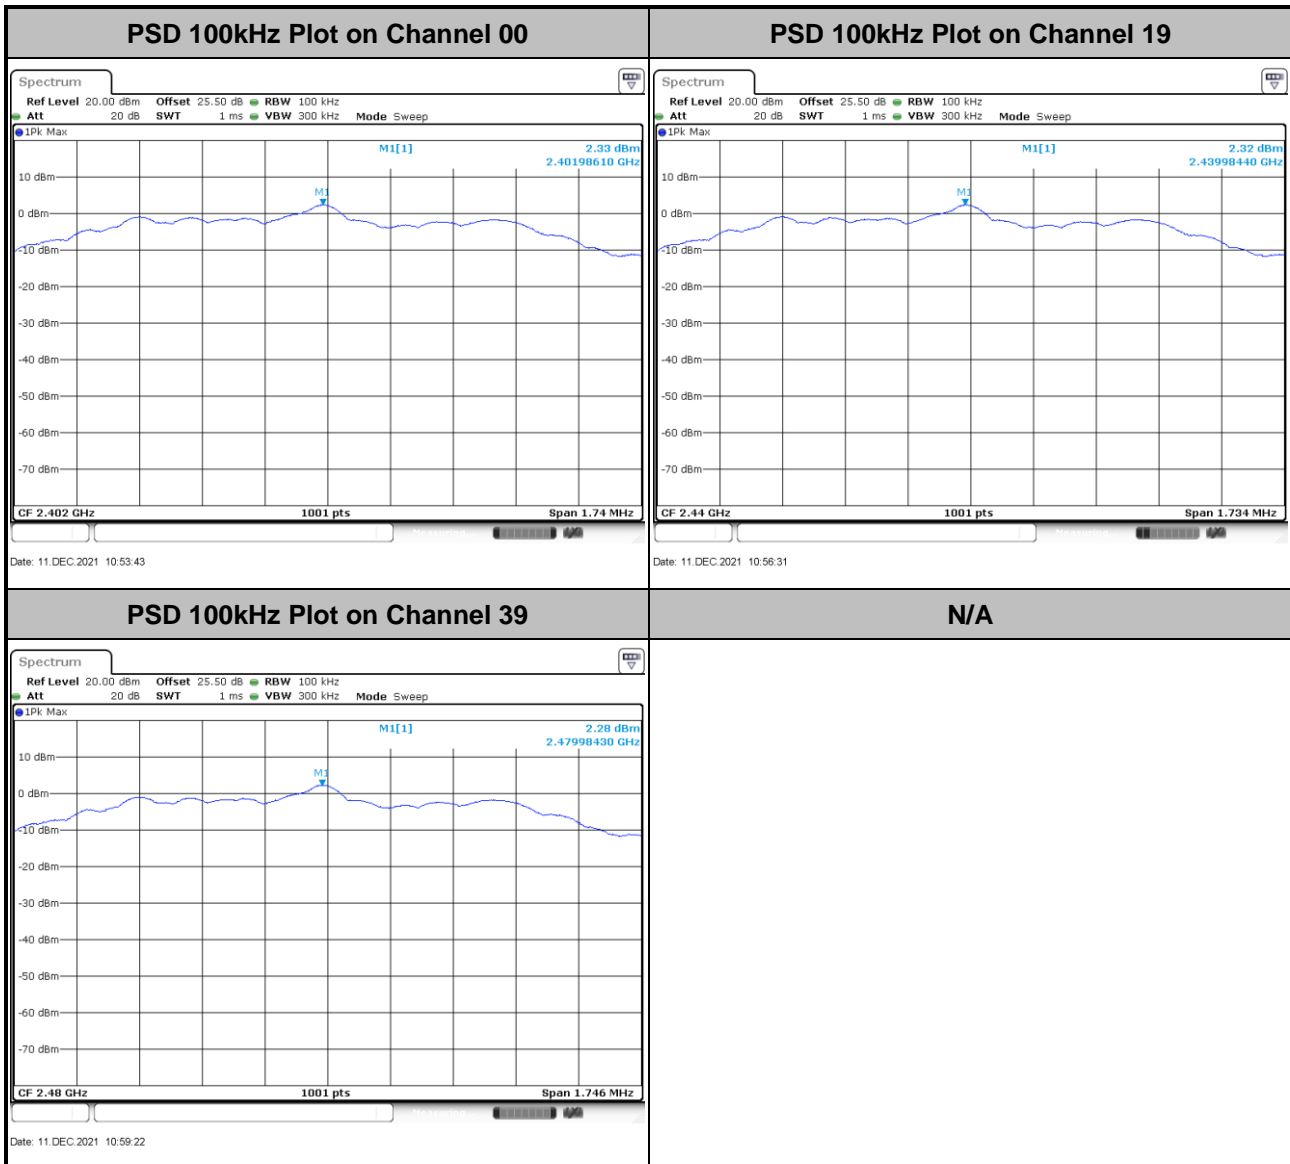




3.3.7 Test Result of Power Spectral Density Plots (3kHz)


<WM-BAX-BM-57>

<1Mbps>

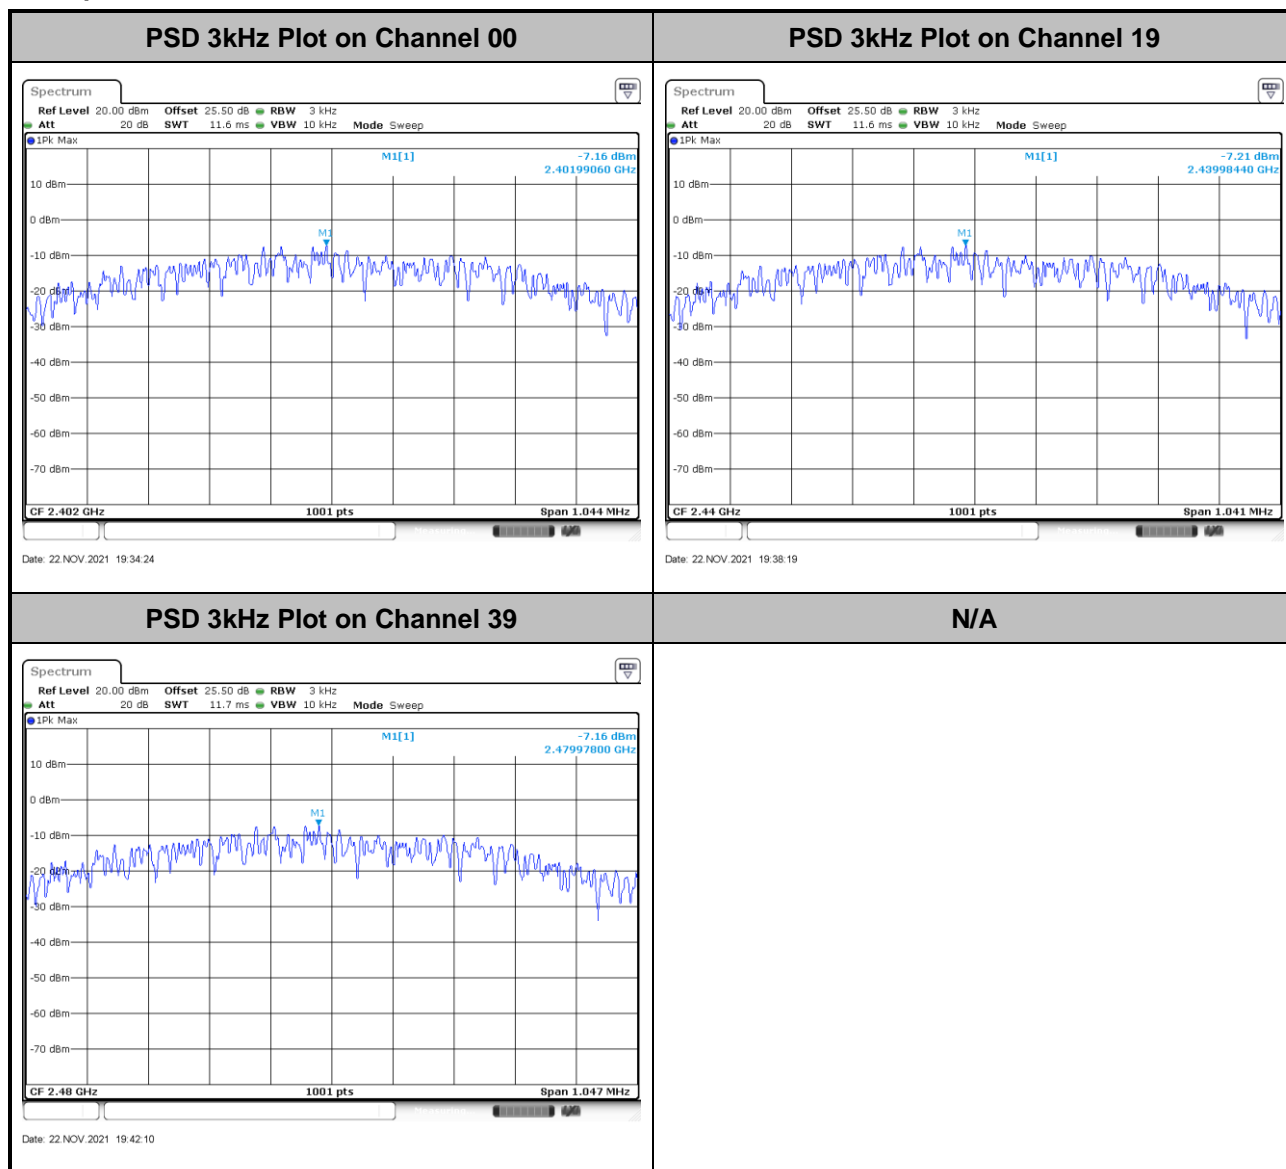




<2Mbps>

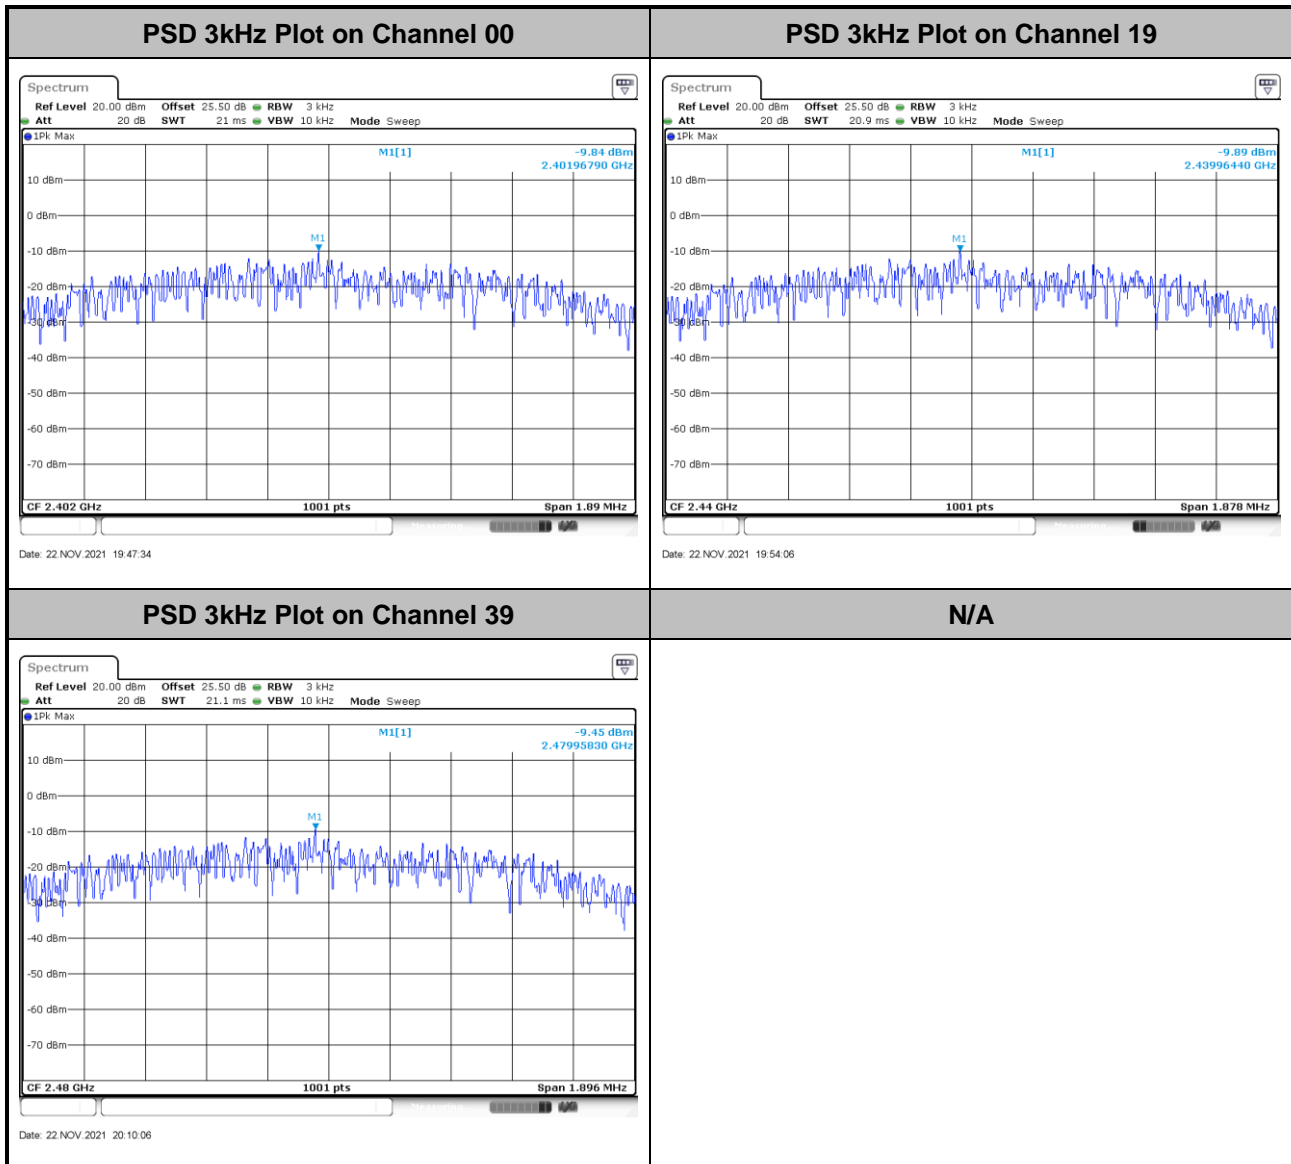




<NRF52840>

<1Mbps>

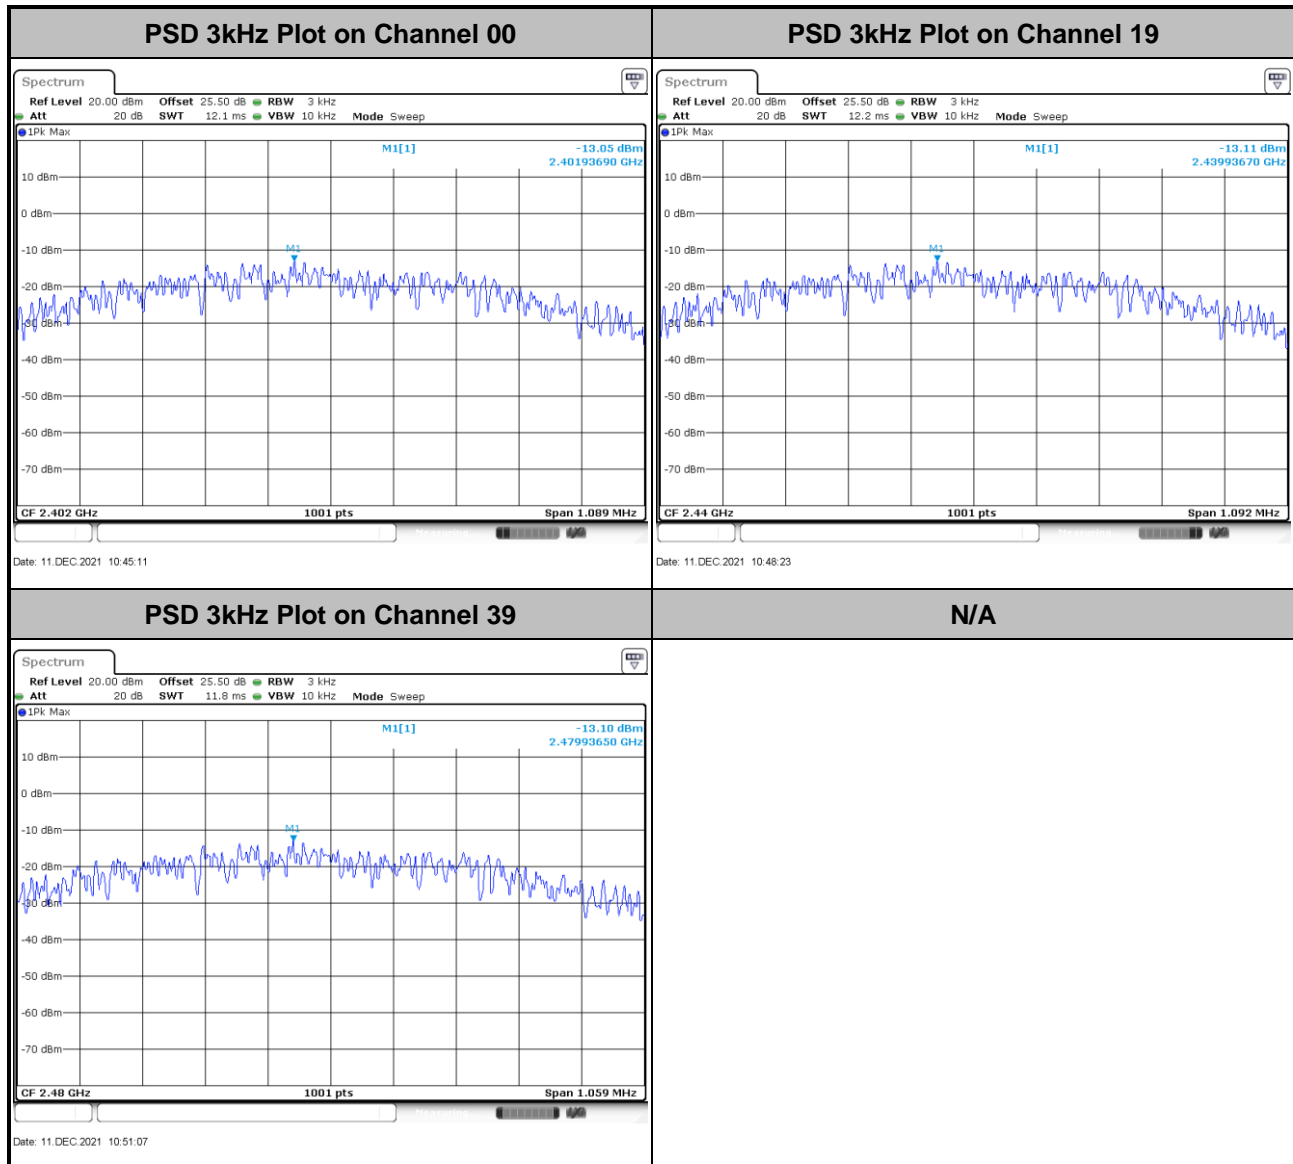



<2Mbps>

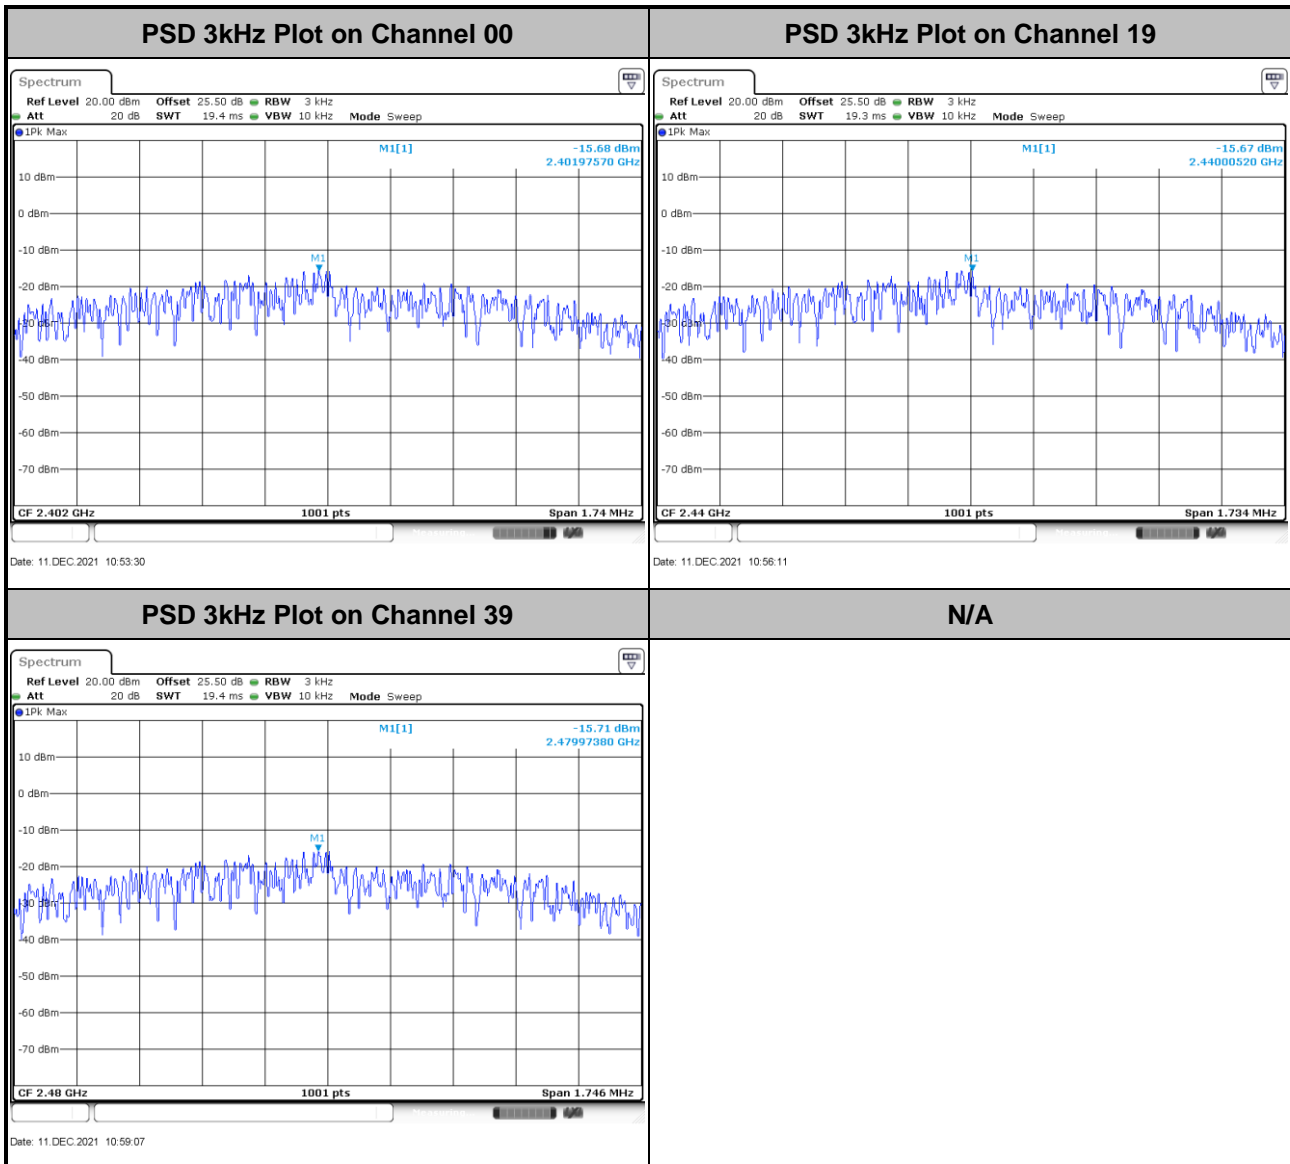

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

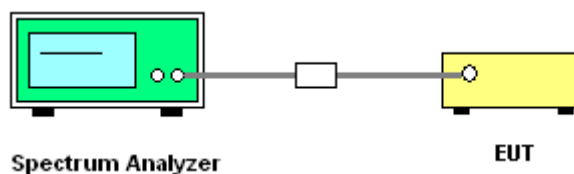


3.4.5 Test Result of Conducted Band Edges Plots

<WM-BAX-BM-57>

<1 Mbps>

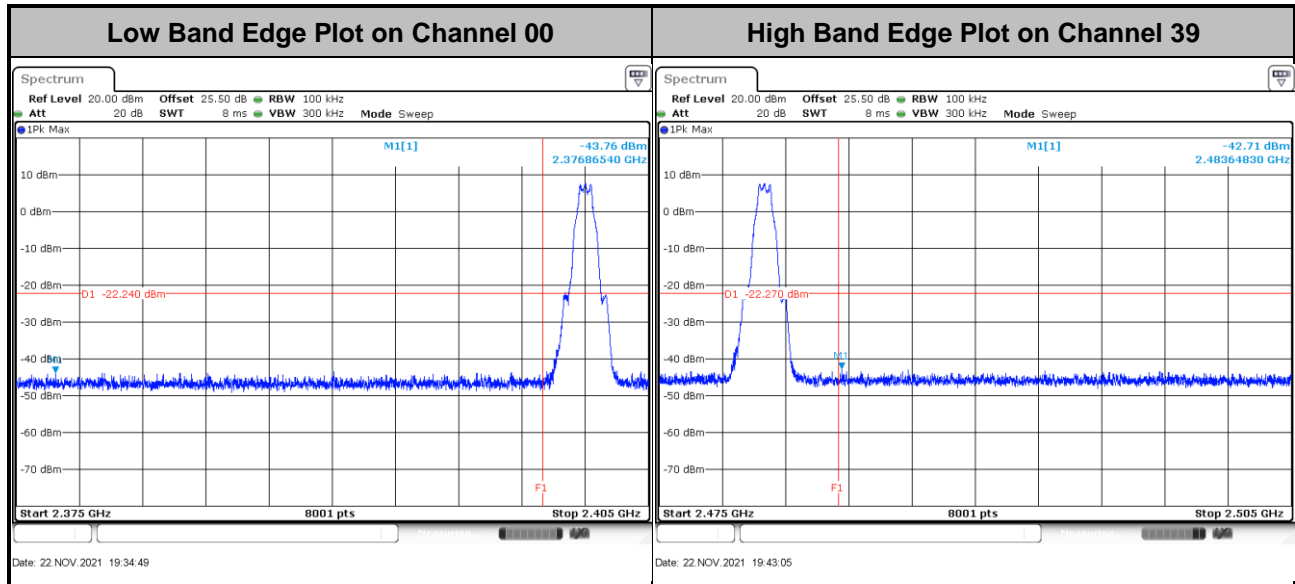


<2Mbps>

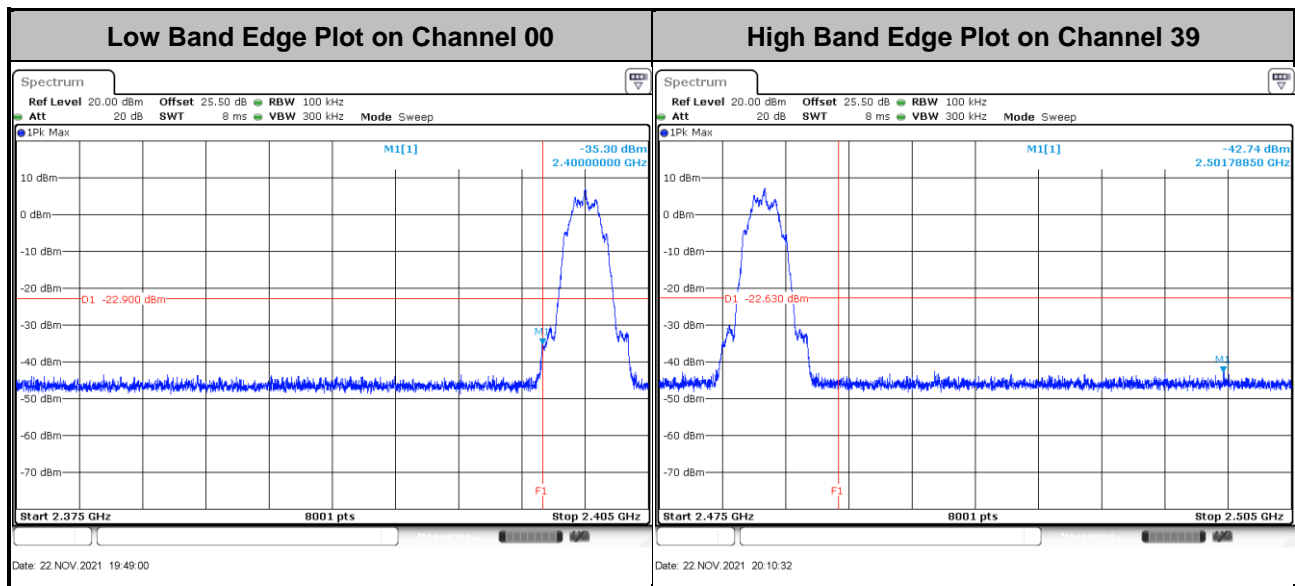




<NRF52840>

<1Mbps>

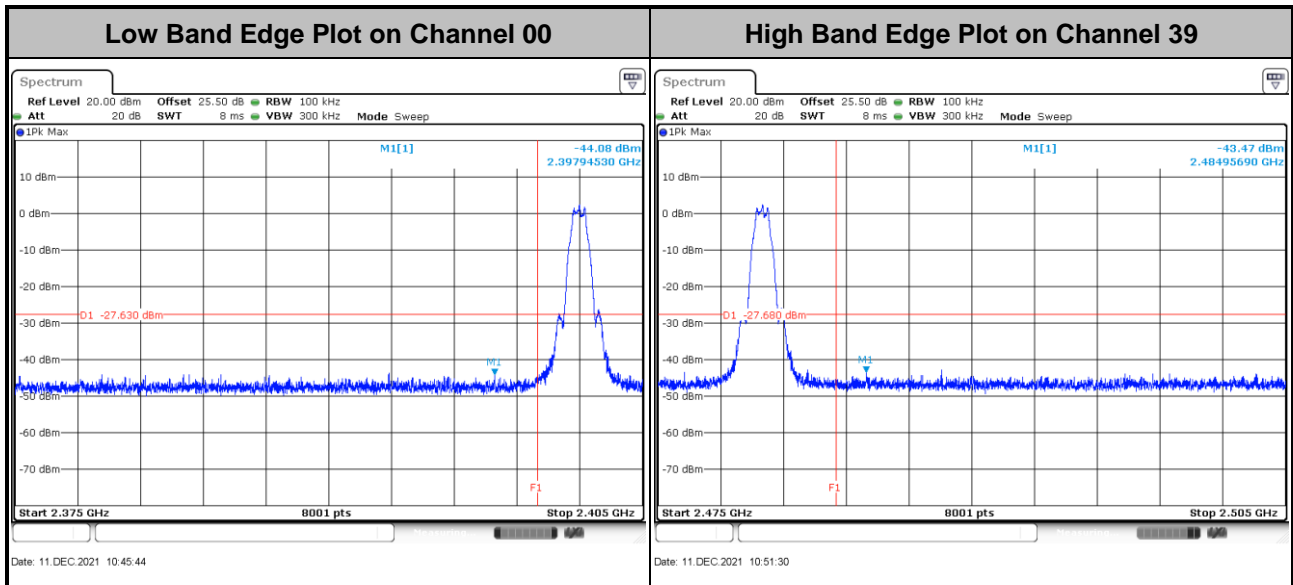

<2Mbps>

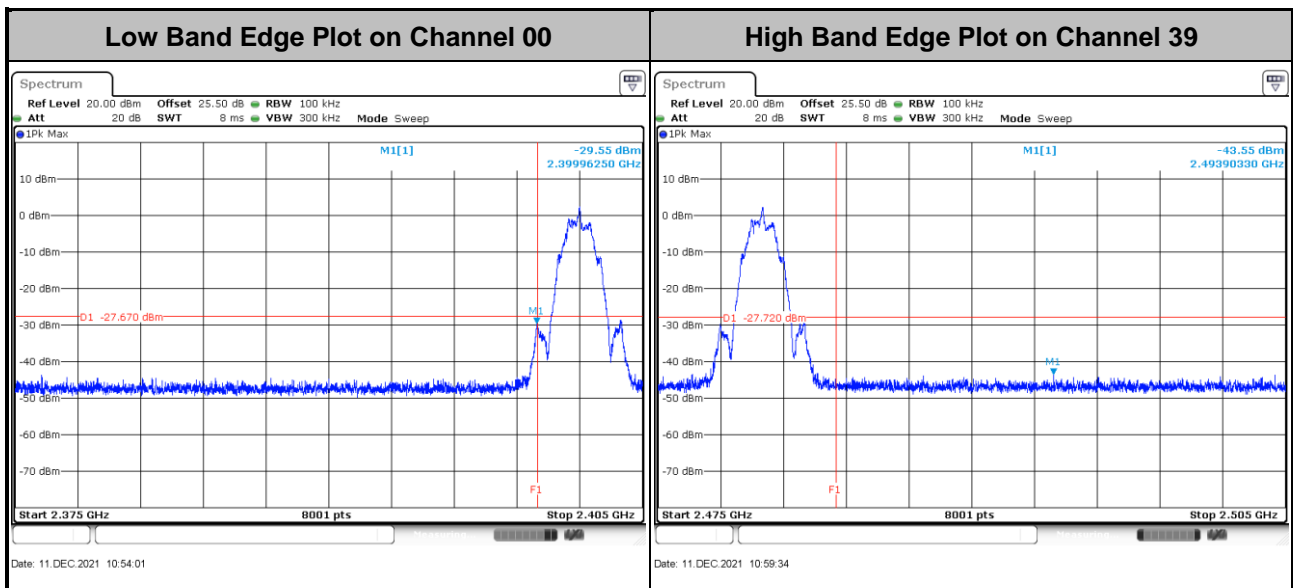




3.4.6 Test Result of Conducted Spurious Emission Plots


<WM-BAX-BM-57>

<1Mbps>

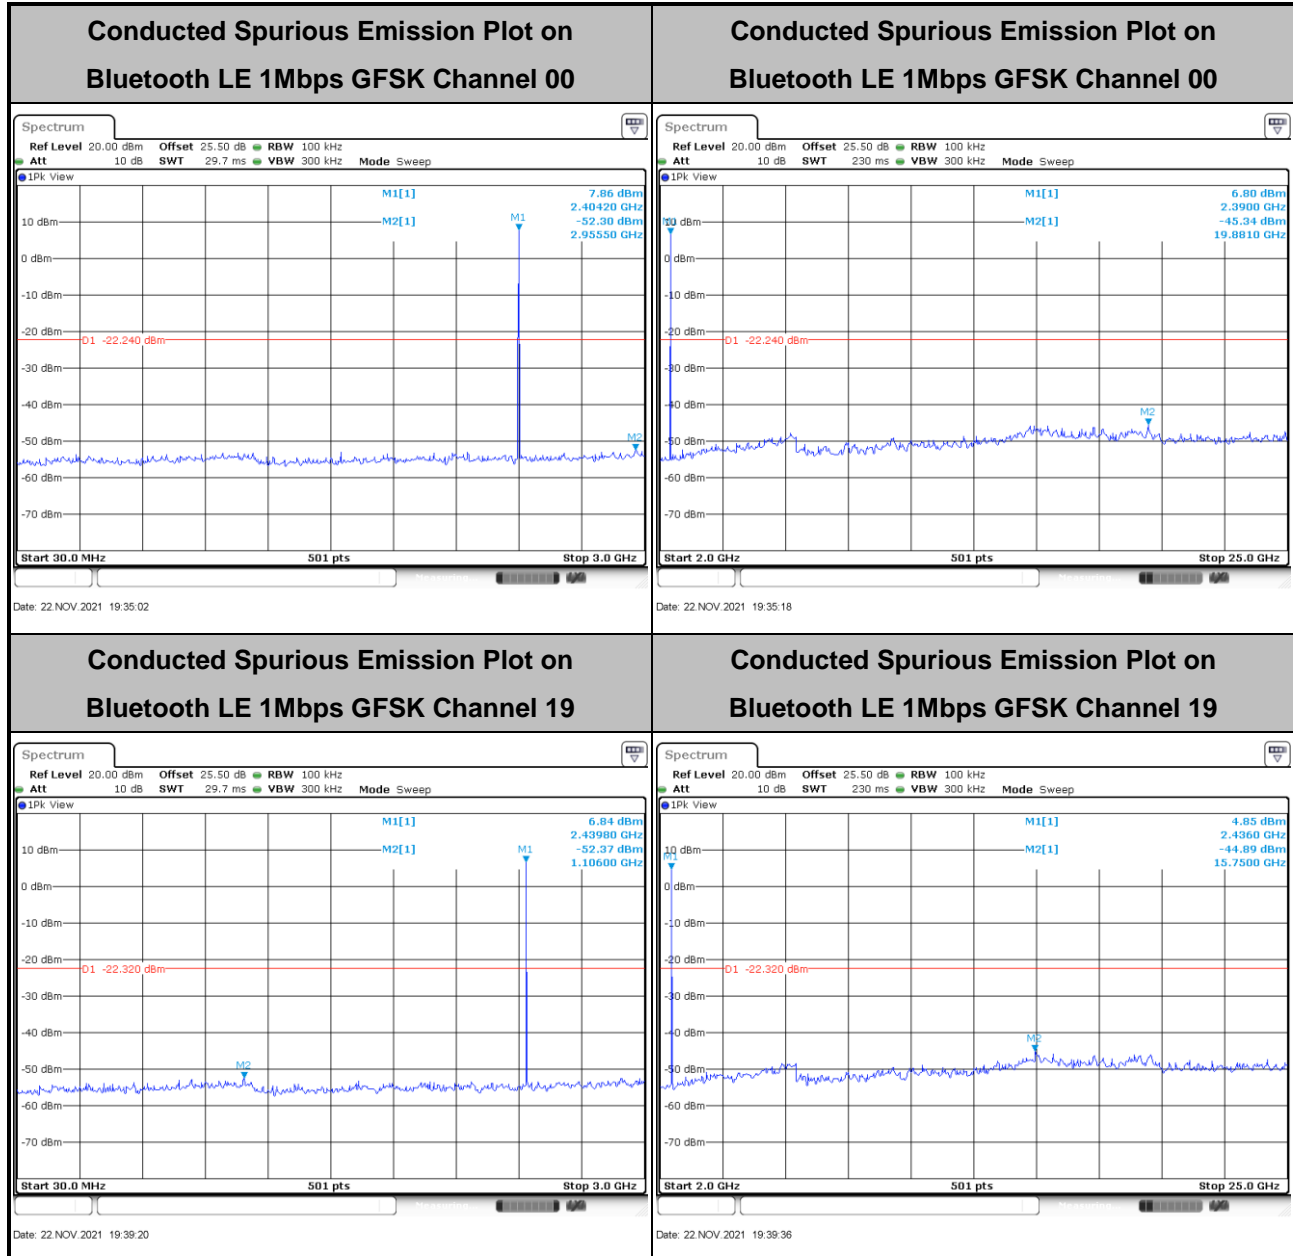




Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 39

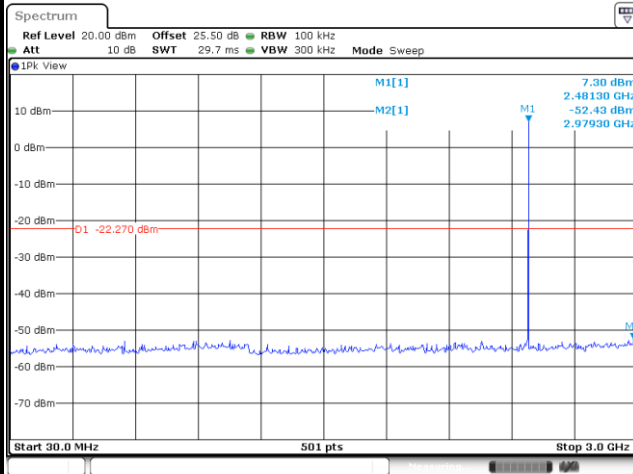

Date: 22.NOV.2021 19:43:28





Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 39

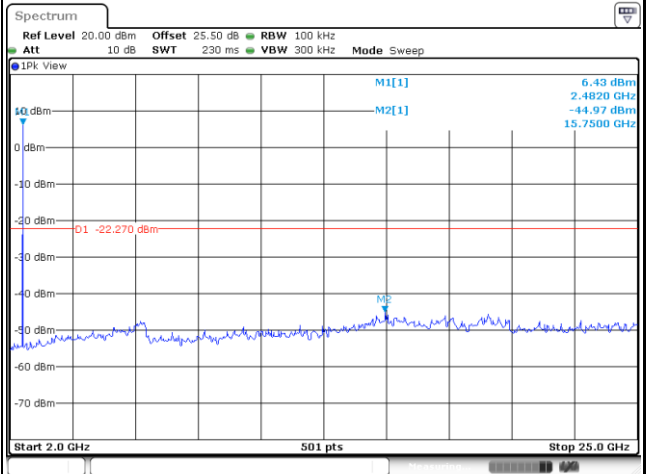

Date: 22.NOV.2021 19:43:46




<2Mbps>

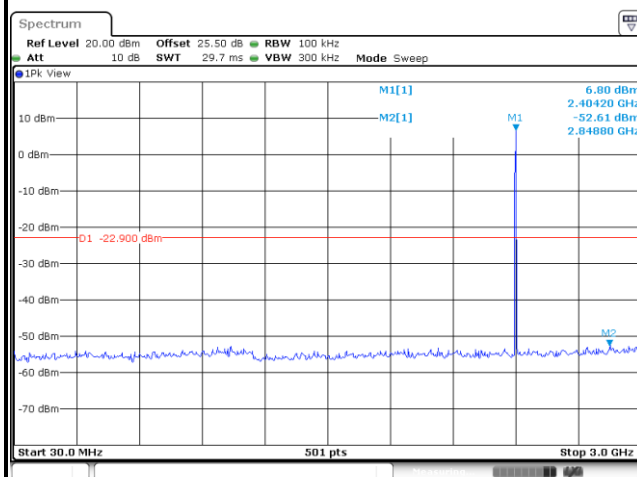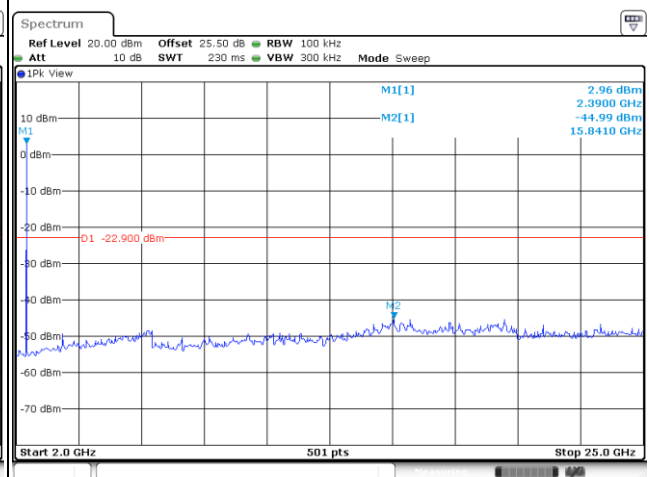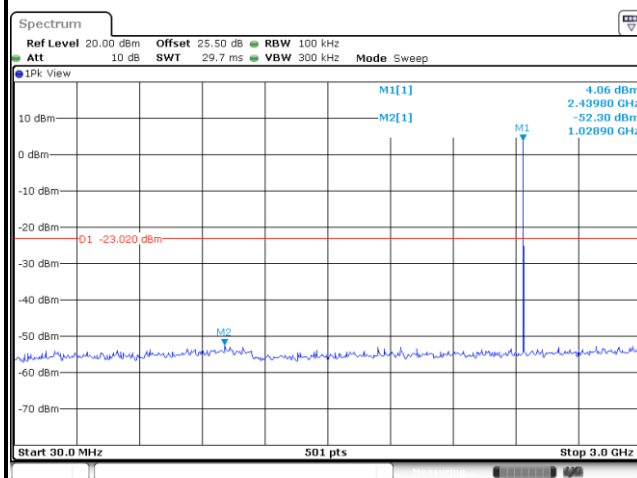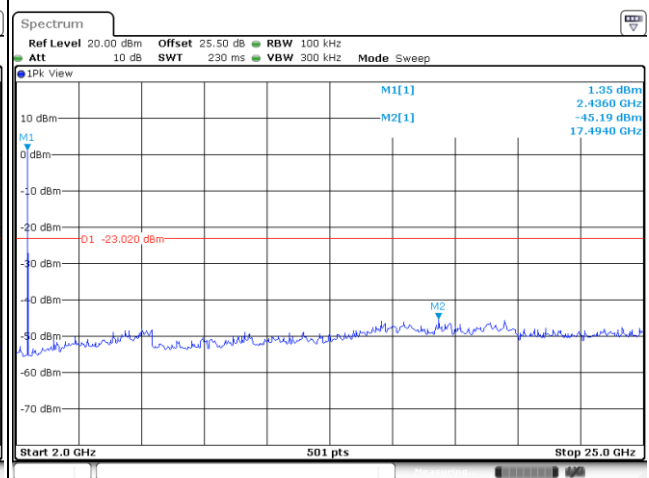
**Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 00****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 00****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 19****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 19**



Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 39

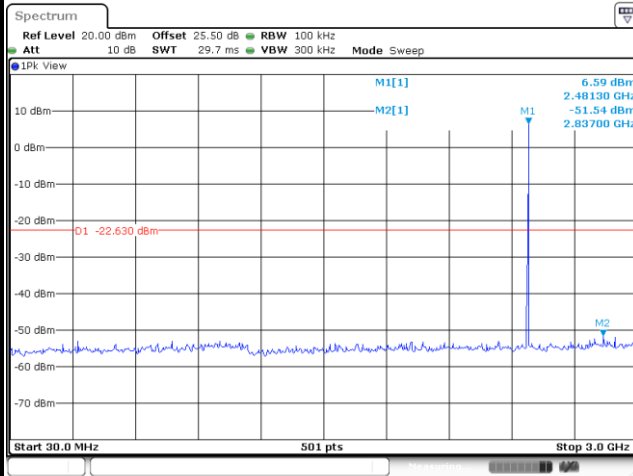


Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 39

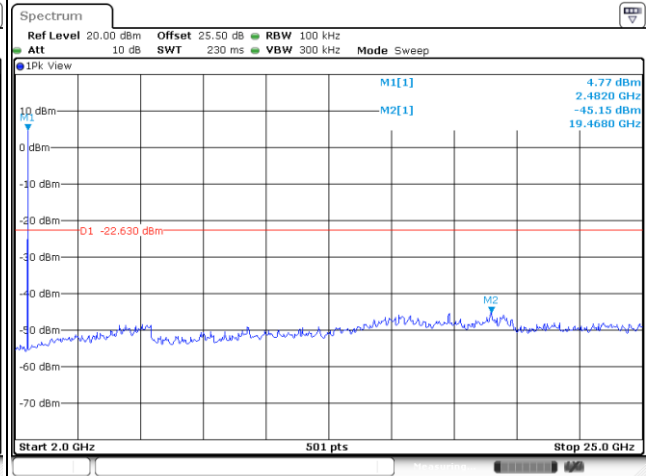




<NRF52840>


<1Mbps>

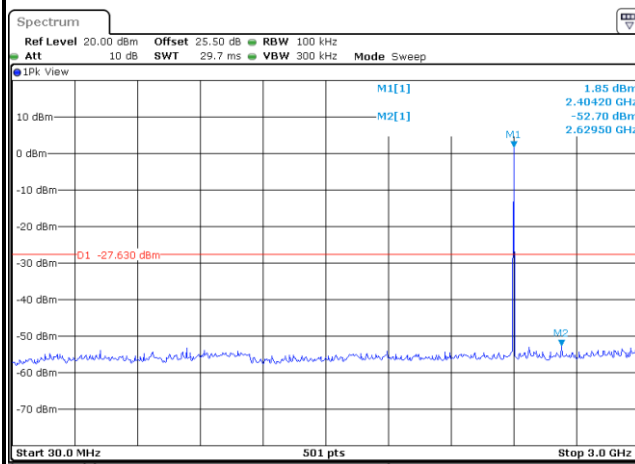**Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 00**


Date: 11.DEC.2021 10:46:27

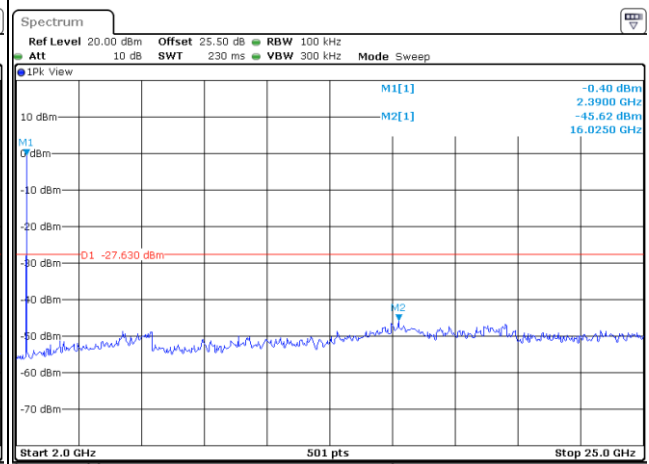**Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 00**


Date: 11.DEC.2021 10:46:37

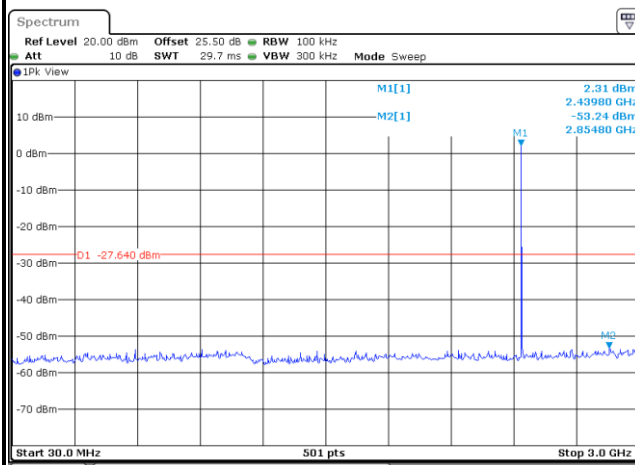**Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 19**

Date: 11.DEC.2021 10:49:04




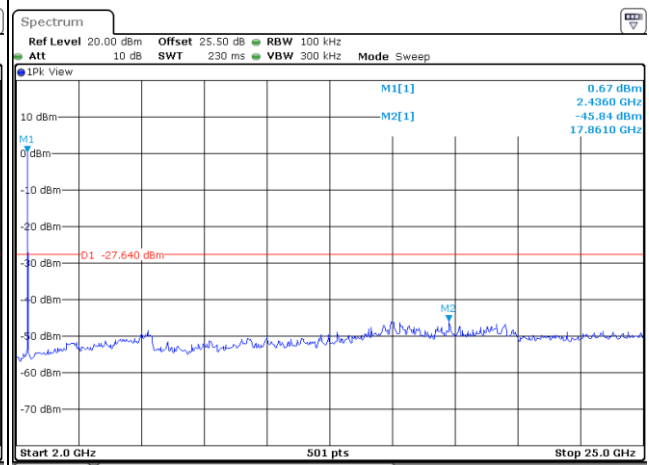
**Conducted Spurious Emission Plot on
Bluetooth LE 1Mbps GFSK Channel 19**

Date: 11.DEC.2021 10:49:29

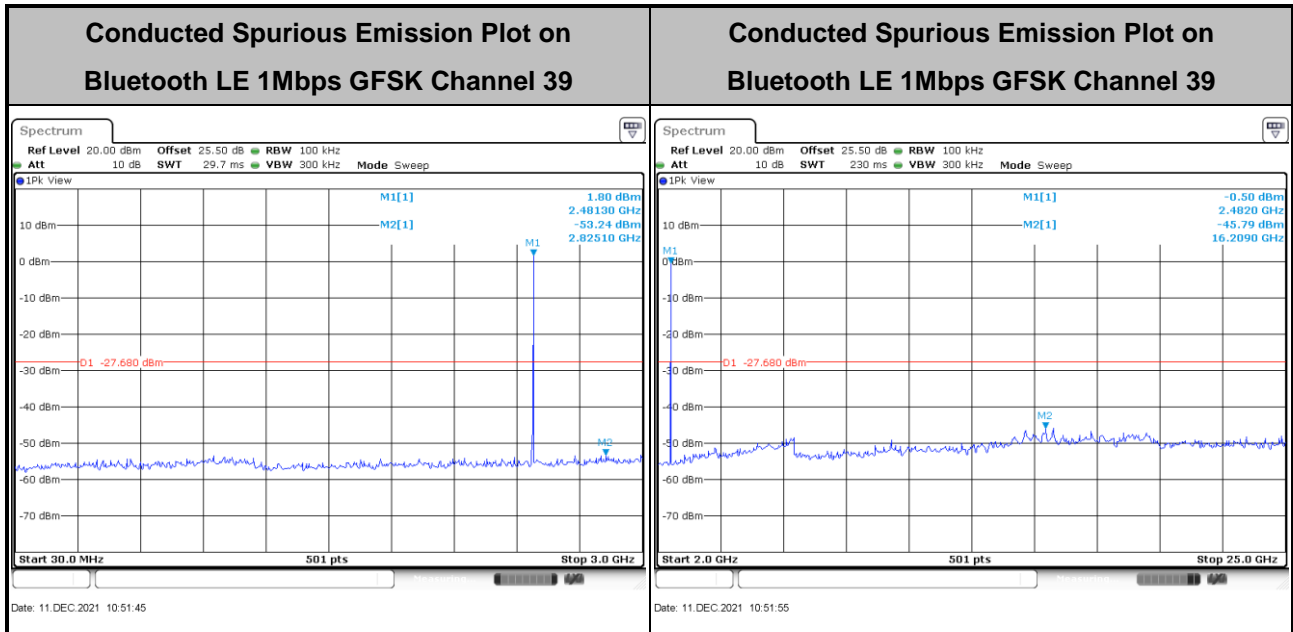




<2Mbps>

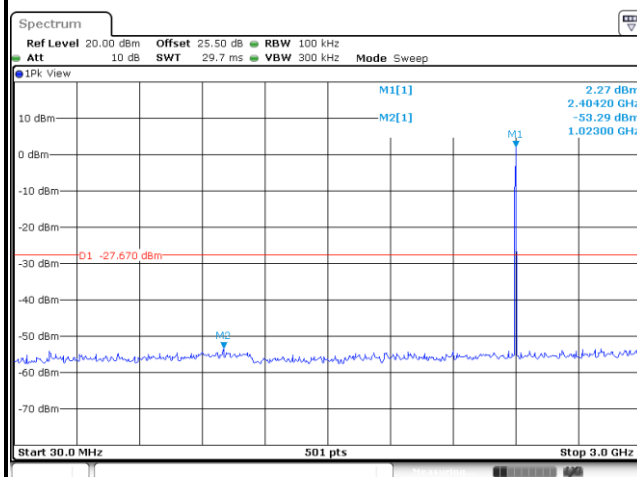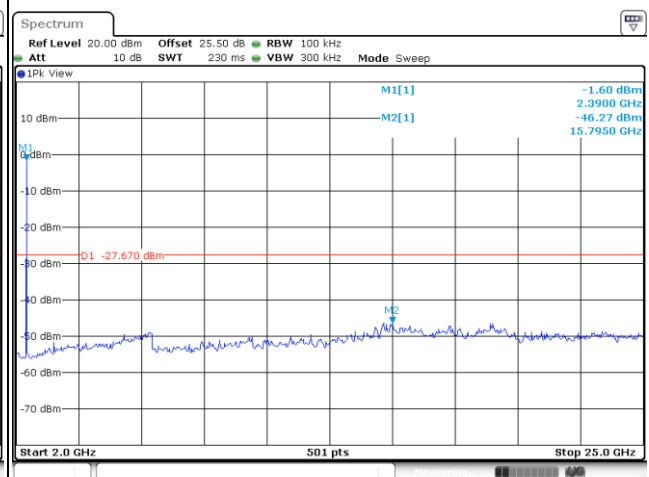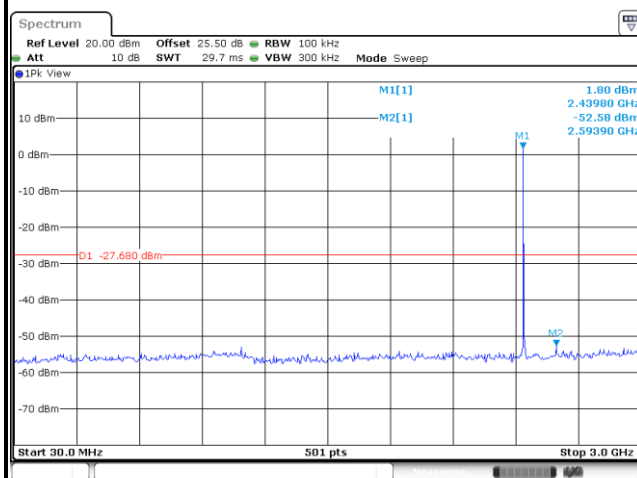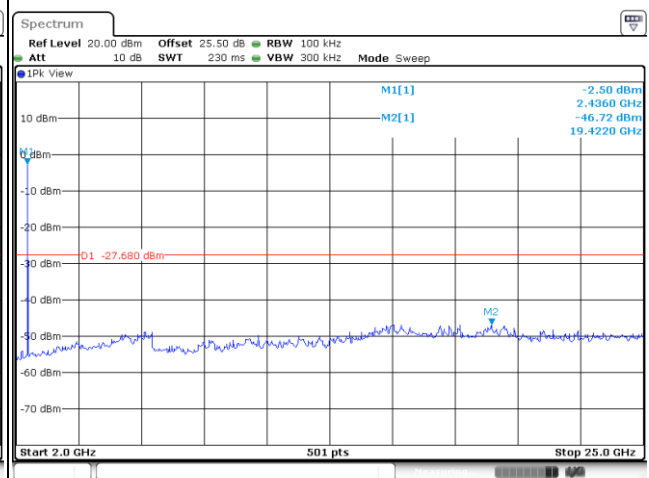
**Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 00****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 00****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 19****Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 19**



Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 39

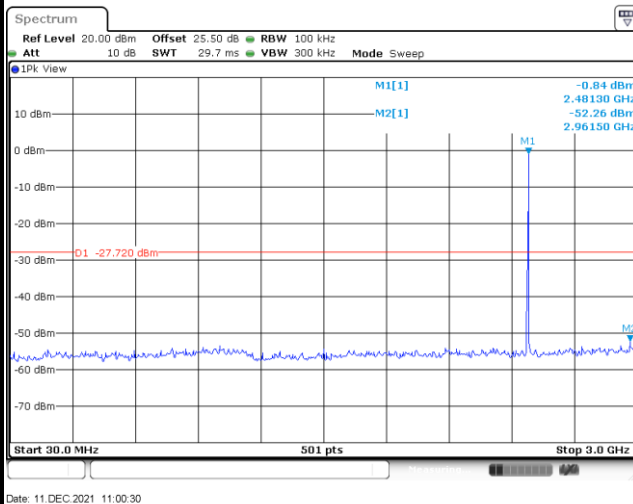

Conducted Spurious Emission Plot on
Bluetooth LE 2Mbps GFSK Channel 39

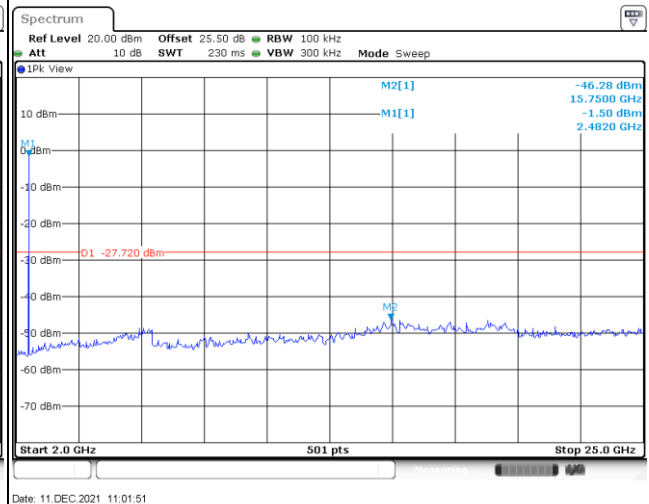

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - For average measurement:
The procedure for method trace averaging is as follows:
 - a) RBW = 1 MHz.
 - b) VBW $\geq [3 \times \text{RBW}]$.
 - c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - e) Sweep time = auto.


- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
 - 2) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

3.5.4 Test Setup


For radiated test below 30MHz

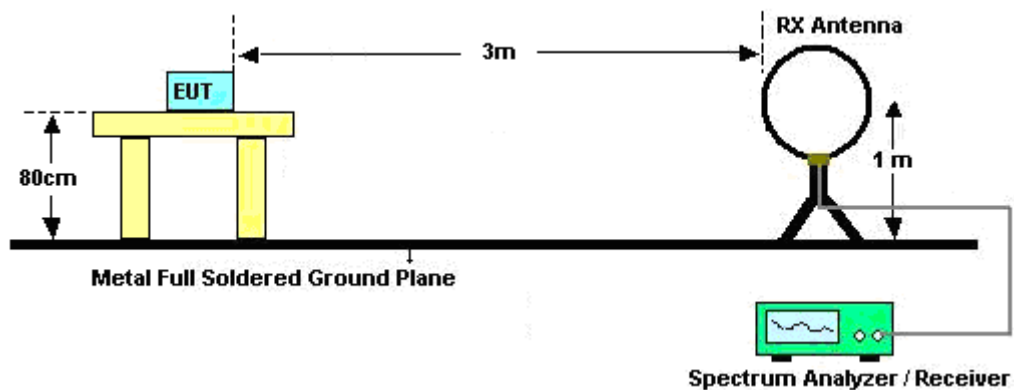


For radiated test from 30MHz to 1GHz

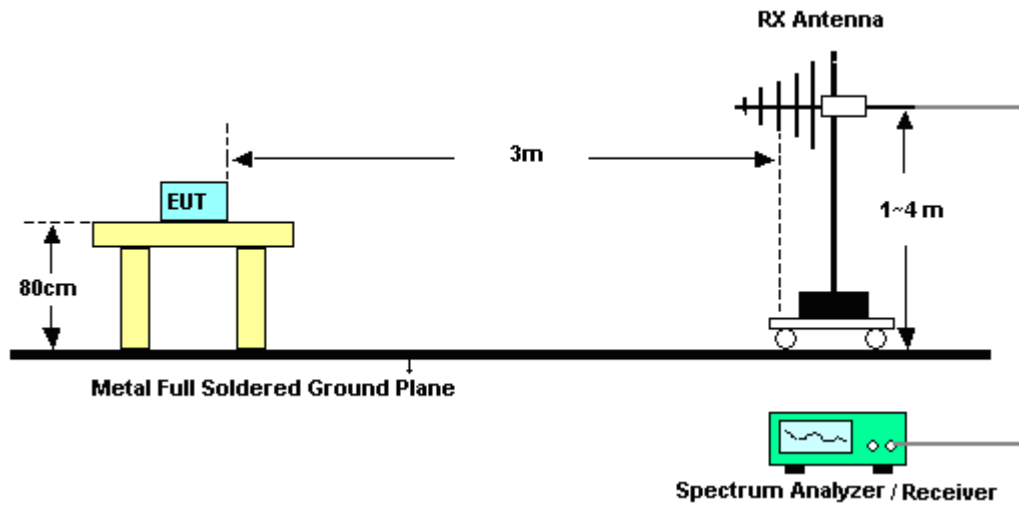

For radiated test from 1GHz to 18GHz

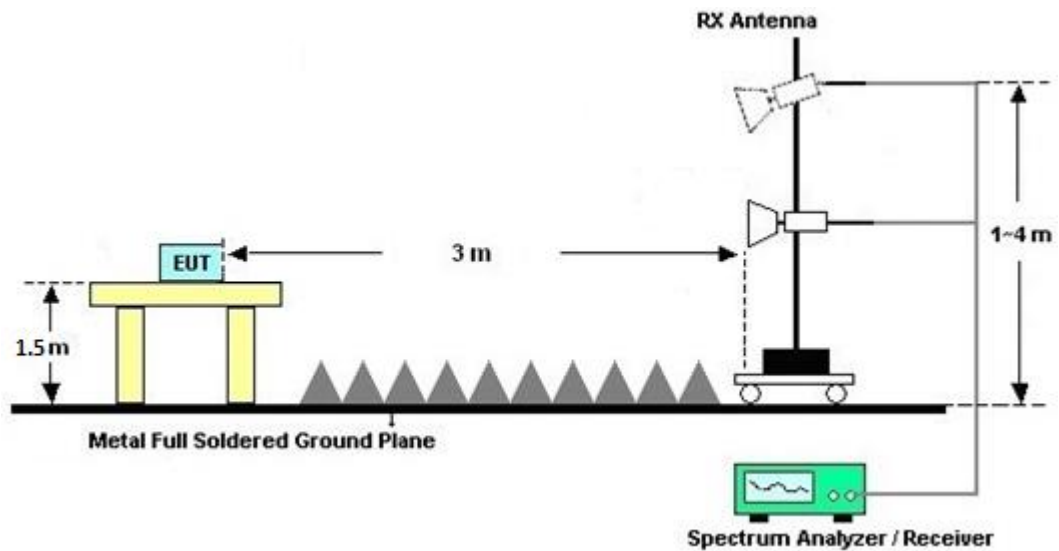

For radiated test above 18GHz

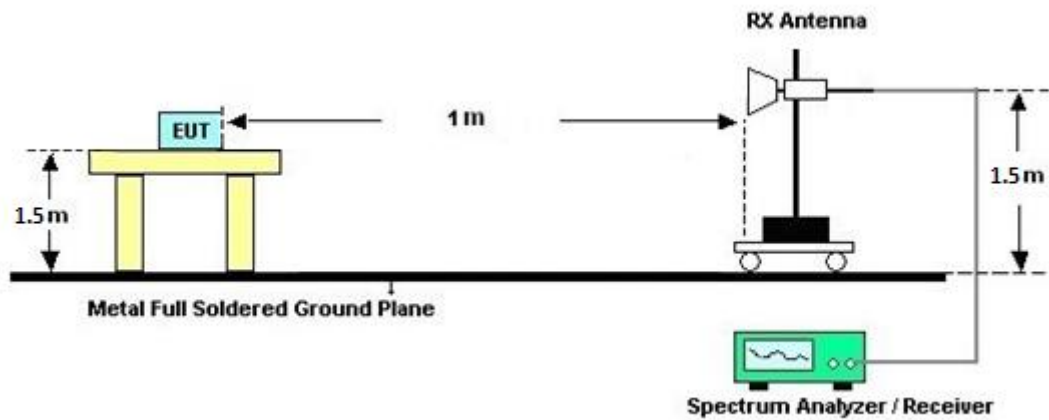

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

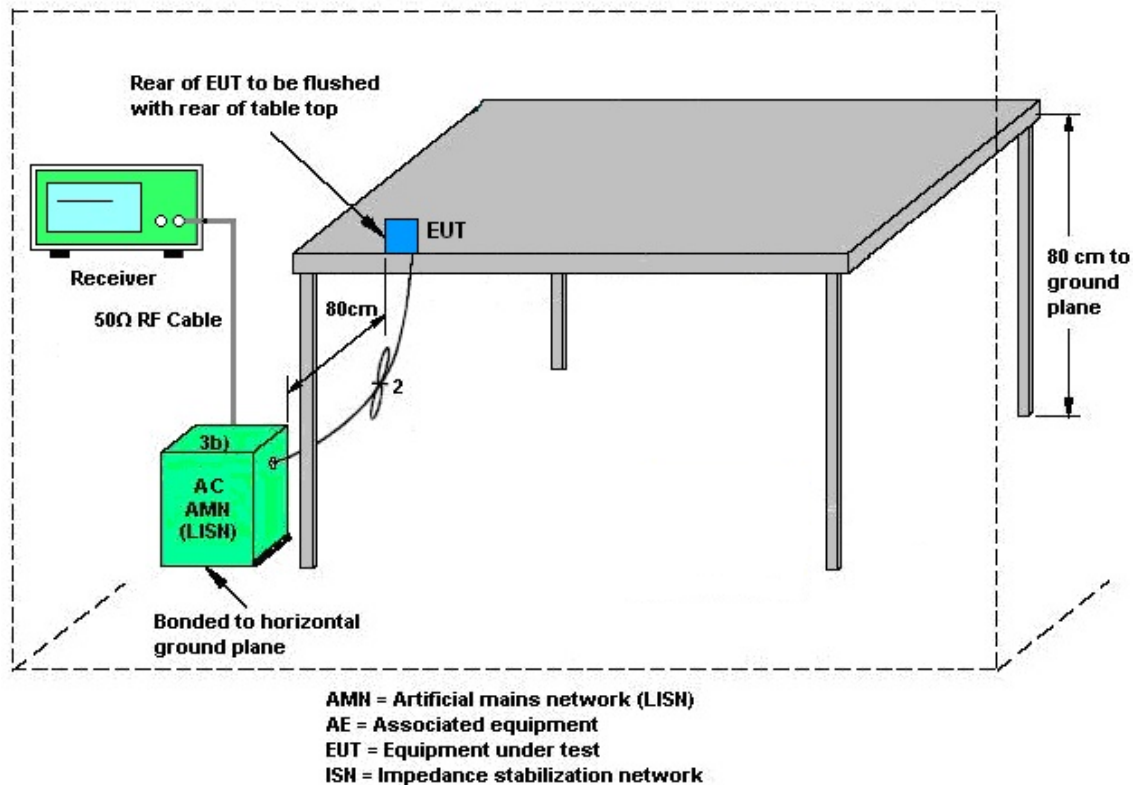

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Apr. 28, 2021	Nov. 15, 2021~Dec. 23, 2021	Apr. 27, 2022	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 01, 2020	Nov. 15, 2021~Nov. 29, 2021	Nov. 30, 2021	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00066584	1GHz~18GHz	Oct. 25, 2021	Nov. 29, 2021~Dec. 23, 2021	Oct. 24, 2022	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Nov. 15, 2021~Dec. 23, 2021	Jan. 03, 2022	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 22, 2021	Nov. 15, 2021~Dec. 23, 2021	Apr. 21, 2022	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 04, 2021	Nov. 15, 2021~Dec. 23, 2021	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Oct. 04, 2021	Nov. 15, 2021~Dec. 23, 2021	Oct. 03, 2022	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Jul. 22, 2021	Nov. 15, 2021~Dec. 23, 2021	Jul. 21, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15682-4	30MHz to 18GHz	Feb. 24, 2021	Nov. 15, 2021~Dec. 23, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971-4	9kHz to 18GHz	Feb. 24, 2021	Nov. 15, 2021~Dec. 23, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655-4	9kHz to 18GHz	Feb. 24, 2021	Nov. 15, 2021~Dec. 23, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2,80 1606/2	18GHz~40GHz	Feb. 24, 2021	Nov. 15, 2021~Dec. 23, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 17, 2021	Nov. 15, 2021~Dec. 23, 2021	Sep. 16, 2022	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Nov. 15, 2021~Dec. 23, 2021	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Nov. 15, 2021~Dec. 23, 2021	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Nov. 15, 2021~Dec. 23, 2021	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Nov. 15, 2021~Dec. 23, 2021	N/A	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	N/A	N/A	N/A	Nov. 15, 2021~Dec. 23, 2021	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	18GHz~40GHz	Dec. 02, 2020	Nov. 15, 2021~Nov. 30, 2021	Dec. 01, 2021	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	18GHz~40GHz	Nov. 30, 2021	Nov. 30, 2021~Dec. 23, 2021	Nov. 29, 2022	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Jul. 23, 2021	Nov. 15, 2021~Dec. 23, 2021	Jul. 22, 2022	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Mar. 09, 2021	Nov. 15, 2021~Dec. 23, 2021	Mar. 08, 2022	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 12, 2021	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 30, 2020	Nov. 12, 2021	Nov. 29, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 18, 2020	Nov. 12, 2021	Nov. 17, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 01, 2020	Nov. 12, 2021	Nov. 30, 2021	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Nov. 12, 2021	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Jul. 28, 2021	Nov. 12, 2021	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 31, 2020	Nov. 12, 2021	Dec. 30, 2021	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 16, 2021	Dec. 09, 2021~Dec. 12, 2021	Nov. 15, 2022	Conducted (TH05-HY)
Power Meter	DARE	RPR3006W	13I00030SNO31(NO:182)	10MHz~6GHz	Dec. 30, 2020	Dec. 09, 2021~Dec. 12, 2021	Dec. 29, 2021	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Dec. 09, 2021~Dec. 12, 2021	Aug. 29, 2022	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW191204(BOX8)	N/A	Jan. 07, 2021	Dec. 09, 2021~Dec. 12, 2021	Jan. 06, 2022	Conducted (TH05-HY)
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 01, 2021	Nov. 19, 2021~Nov. 22, 2021	Feb. 28, 2022	Conducted (TH05-HY)
Power Meter	DARE	RPR3006W	16I00054SNO12	10MHz~6GHz	Dec. 16, 2020	Nov. 19, 2021~Nov. 22, 2021	Dec. 15, 2021	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101564	10Hz ~ 40GHz	Aug. 30, 2021	Nov. 19, 2021~Nov. 22, 2021	Aug. 29, 2022	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2021	Nov. 19, 2021~Nov. 22, 2021	Mar. 16, 2022	Conducted (TH05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.1 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.1 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.8 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.0 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Mina Liu	Temperature:	21~25	°C
Test Date:	2021/11/19~2021/11/22	Relative Humidity:	51~54	%

<WM-BAX-BM-57>

<1Mbps>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.041	0.696	0.50	Pass
BLE	1Mbps	1	19	2440	1.041	0.694	0.50	Pass
BLE	1Mbps	1	39	2480	1.041	0.698	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	7.30	30.00	1.90	9.20	36.00	Pass
BLE	1Mbps	1	19	2440	7.20	30.00	1.90	9.10	36.00	Pass
BLE	1Mbps	1	39	2480	7.50	30.00	1.90	9.40	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	7.76	-7.16	1.90	8.00	Pass
BLE	1Mbps	1	19	2440	7.68	-7.21	1.90	8.00	Pass
BLE	1Mbps	1	39	2480	7.73	-7.16	1.90	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

<2Mbps>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.034	1.260	0.50	Pass
BLE	2Mbps	1	19	2440	2.034	1.252	0.50	Pass
BLE	2Mbps	1	39	2480	2.034	1.264	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	7.30	30.00	1.90	9.20	36.00	Pass
BLE	2Mbps	1	19	2440	7.10	30.00	1.90	9.00	36.00	Pass
BLE	2Mbps	1	39	2480	7.50	30.00	1.90	9.40	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	7.10	-9.84	1.90	8.00	Pass
BLE	2Mbps	1	19	2440	6.98	-9.89	1.90	8.00	Pass
BLE	2Mbps	1	39	2480	7.37	-9.45	1.90	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

Test Engineer:	Mina Liu	Temperature:	21~25	°C
Test Date:	2021/12/9~2021/12/12	Relative Humidity:	51~54	%

<NRF52840>

<1Mbps>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.045	0.726	0.50	Pass
BLE	1Mbps	1	19	2440	1.049	0.728	0.50	Pass
BLE	1Mbps	1	39	2480	1.049	0.706	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	3.60	30.00	1.90	5.50	36.00	Pass
BLE	1Mbps	1	19	2440	3.50	30.00	1.90	5.40	36.00	Pass
BLE	1Mbps	1	39	2480	3.50	30.00	1.90	5.40	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	2.37	-13.05	1.90	8.00	Pass
BLE	1Mbps	1	19	2440	2.36	-13.11	1.90	8.00	Pass
BLE	1Mbps	1	39	2480	2.32	-13.10	1.90	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

<2Mbps>

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.034	1.160	0.50	Pass
BLE	2Mbps	1	19	2440	2.034	1.156	0.50	Pass
BLE	2Mbps	1	39	2480	2.042	1.164	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	3.50	30.00	1.90	5.40	36.00	Pass
BLE	2Mbps	1	19	2440	3.50	30.00	1.90	5.40	36.00	Pass
BLE	2Mbps	1	39	2480	3.50	30.00	1.90	5.40	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.33	-15.68	1.90	8.00	Pass
BLE	2Mbps	1	19	2440	2.32	-15.67	1.90	8.00	Pass
BLE	2Mbps	1	39	2480	2.28	-15.71	1.90	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 1N0505
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

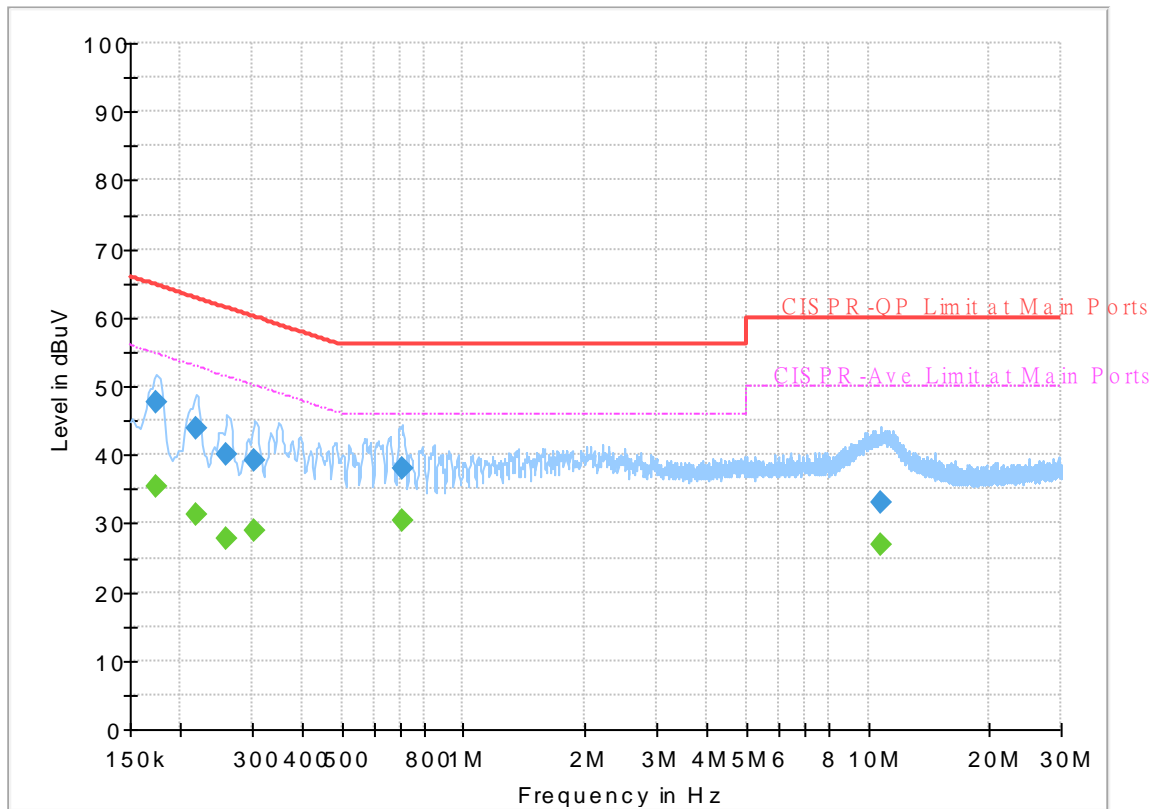


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.174750	---	35.44	54.73	19.29	L1	OFF	19.7
0.174750	47.62	---	64.73	17.11	L1	OFF	19.7
0.217500	---	31.16	52.91	21.75	L1	OFF	19.7
0.217500	43.87	---	62.91	19.04	L1	OFF	19.7
0.260250	---	27.86	51.42	23.56	L1	OFF	19.7
0.260250	40.01	---	61.42	21.41	L1	OFF	19.7
0.305250	---	28.93	50.10	21.17	L1	OFF	19.7
0.305250	39.31	---	60.10	20.79	L1	OFF	19.7
0.703500	---	30.45	46.00	15.55	L1	OFF	20.0
0.703500	38.14	---	56.00	17.86	L1	OFF	20.0
10.763250	---	26.76	50.00	23.24	L1	OFF	20.2
10.763250	33.18	---	60.00	26.82	L1	OFF	20.2

EUT Information

Report NO : 1N0505
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

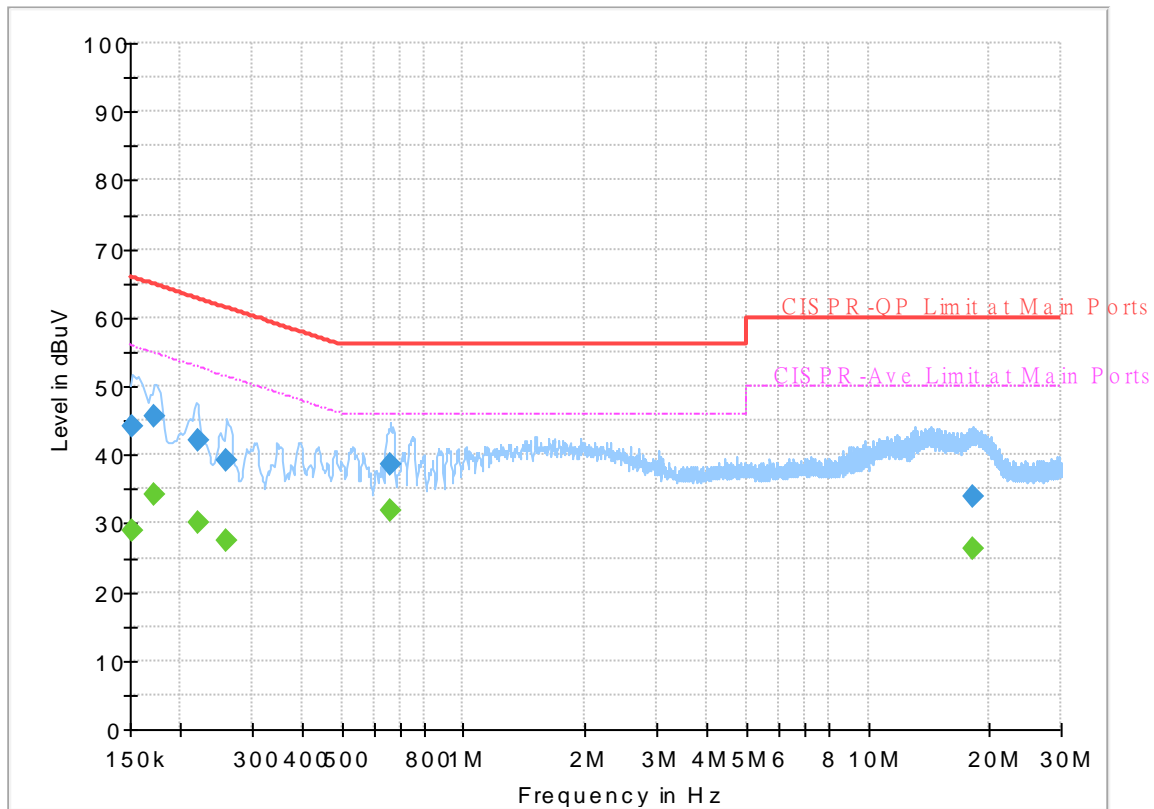

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	29.05	55.88	26.83	N	OFF	19.7
0.152250	44.29	---	65.88	21.59	N	OFF	19.7
0.172500	---	34.08	54.84	20.76	N	OFF	19.7
0.172500	45.60	---	64.84	19.24	N	OFF	19.7
0.219750	---	30.01	52.83	22.82	N	OFF	19.7
0.219750	42.23	---	62.83	20.60	N	OFF	19.7
0.260250	---	27.62	51.42	23.80	N	OFF	19.7
0.260250	39.20	---	61.42	22.22	N	OFF	19.7
0.658500	---	31.74	46.00	14.26	N	OFF	20.0
0.658500	38.50	---	56.00	17.50	N	OFF	20.0
18.228750	---	26.31	50.00	23.69	N	OFF	20.5
18.228750	33.99	---	60.00	26.01	N	OFF	20.5



Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	17.9~22.2°C
		Relative Humidity :	53.1~69%

<WM-BAX-BM-57>

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2386.02	53.88	-20.12	74	39.15	32.02	18.12	35.41	318	138	P	H
		2368.38	45.97	-8.03	54	29.24	31.91	20.23	35.41	318	138	A	H
	*	2402	102.26	-	-	87.39	32.1	18.19	35.42	318	138	P	H
	*	2402	100.55	-	-	83.5	32.1	20.37	35.42	318	138	A	H
													H
		2361.03	54.42	-19.58	74	39.94	31.87	18.01	35.4	111	117	P	V
		2381.715	46.07	-7.93	54	29.2	31.99	20.29	35.41	111	117	A	V
	*	2402	104.99	-	-	90.12	32.1	18.19	35.42	111	117	P	V
	*	2402	103.86	-	-	86.81	32.1	20.37	35.42	111	117	A	V
													V
BLE CH 19 2440MHz		2332.96	54.07	-19.93	74	39.78	31.8	17.88	35.39	307	134	P	H
		2353.4	46	-8	54	29.42	31.82	20.16	35.4	307	134	A	H
	*	2440	100.54	-	-	85.57	32.18	18.22	35.43	307	134	P	H
	*	2440	99.26	-	-	82.11	32.18	20.4	35.43	307	134	A	H
		2495.59	54.82	-19.18	74	39.65	32.38	18.25	35.46	307	134	P	H
		2493.07	46.47	-7.53	54	29.13	32.37	20.43	35.46	307	134	A	H
		2378.18	54.48	-19.52	74	39.84	31.97	18.08	35.41	129	116	P	V
		2375.24	45.9	-8.1	54	29.11	31.95	20.25	35.41	129	116	A	V
	*	2440	103.93	-	-	88.96	32.18	18.22	35.43	129	116	P	V
	*	2440	102.84	-	-	85.69	32.18	20.4	35.43	129	116	A	V
		2486.21	54.62	-19.38	74	39.48	32.34	18.25	35.45	129	116	P	V
		2490.27	46.63	-7.37	54	29.29	32.36	20.43	35.45	129	116	A	V



BLE CH 39 2480MHz	*	2480	103.23	-	-	88.12	32.32	18.24	35.45	300	134	P	H
	*	2480	102.03	-	-	84.74	32.32	20.42	35.45	300	134	A	H
		2498.04	54.92	-19.08	74	39.73	32.39	18.26	35.46	300	134	P	H
		2490.6	46.72	-7.28	54	29.38	32.36	20.43	35.45	300	134	A	H
													H
													H
	*	2480	104.96	-	-	89.85	32.32	18.24	35.45	108	113	P	V
	*	2480	103.88	-	-	86.59	32.32	20.42	35.45	108	113	A	V
		2490.8	55.24	-18.76	74	40.08	32.36	18.25	35.45	108	113	P	V
		2485.28	46.54	-7.46	54	29.22	32.34	20.43	35.45	108	113	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BLE (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	43.01	-30.99	74	53.89	34.2	12.91	57.99	-	-	P	H
		14475	48.07	-25.93	74	44.56	39.62	21.98	58.09	-	-	P	H
		14475	37.2	-16.8	54	33.69	39.62	21.98	58.09	-	-	A	H
		16125	50.23	-23.77	74	41.12	42.3	23.59	56.78	-	-	P	H
		16125	40.01	-13.99	54	30.9	42.3	23.59	56.78	-	-	A	H
		17715	51.63	-22.37	74	41.16	41.97	24.65	56.15	-	-	P	H
		17715	42.33	-11.67	54	31.86	41.97	24.65	56.15	-	-	A	H
													H
													H
													H
													H
													H
		4804	43.05	-30.95	74	53.93	34.2	12.91	57.99	-	-	P	V
		16020	50.79	-23.21	74	42.02	42.06	23.53	56.82	-	-	P	V
		16020	39.27	-14.73	54	30.5	42.06	23.53	56.82	-	-	A	V
		17730	51.91	-22.09	74	41.45	41.94	24.66	56.14	-	-	P	V
		17730	42.48	-11.52	54	32.02	41.94	24.66	56.14	-	-	A	V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	43.07	-30.93	74	53.91	34.2	12.86	57.9	-	-	P	H
		7320	42.96	-31.04	74	49.87	36.1	14.91	57.92	-	-	P	H
		14475	48.17	-25.83	74	44.66	39.62	21.98	58.09	-	-	P	H
		14475	36.49	-17.51	54	32.98	39.62	21.98	58.09	-	-	A	H
		15870	50.22	-23.78	74	41.87	41.91	23.38	56.94	-	-	P	H
		15870	38.9	-15.1	54	30.55	41.91	23.38	56.94	-	-	A	H
		17805	51.82	-22.18	74	41.4	41.81	24.71	56.1	-	-	P	H
		17805	41.86	-12.14	54	31.44	41.81	24.71	56.1	-	-	A	H
													H
													H
													H
													H
		4880	42.57	-31.43	74	53.41	34.2	12.86	57.9	-	-	P	V
		7320	42.03	-31.97	74	48.94	36.1	14.91	57.92	-	-	P	V
		14475	48.01	-25.99	74	44.5	39.62	21.98	58.09	-	-	P	V
		14475	36.07	-17.93	54	32.56	39.62	21.98	58.09	-	-	A	V
		16140	50.25	-23.75	74	41.13	42.3	23.6	56.78	-	-	P	V
		16140	40.12	-13.88	54	31	42.3	23.6	56.78	-	-	A	V
		17715	51.61	-22.39	74	41.14	41.97	24.65	56.15	-	-	P	V
		17715	41.83	-12.17	54	31.36	41.97	24.65	56.15	-	-	A	V
													V
													V
													V
													V

BLE	Note	Frequency	Level	Over Limit	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	Avg. (P/A)	(H/V)
BLE CH 39 2480MHz		4960	42.32	-31.68	74	53.01	34.3	12.82	57.81	-	-	P	H
		7440	42.2	-31.8	74	48.89	36.38	14.97	58.04	-	-	P	H
		14490	47.94	-26.06	74	44.37	39.67	21.99	58.09	-	-	P	H
		15720	50.26	-23.74	74	42.81	41.3	23.22	57.07	-	-	P	H
		15720	39.11	-14.89	54	31.66	41.3	23.22	57.07	-	-	A	H
		17715	51.08	-22.92	74	40.61	41.97	24.65	56.15	-	-	P	H
		17715	40.49	-13.51	54	30.02	41.97	24.65	56.15	-	-	A	H
													H
													H
													H
													H
													H
		4960	41.61	-32.39	74	52.3	34.3	12.82	57.81	-	-	P	V
		7440	41.71	-32.29	74	48.4	36.38	14.97	58.04	-	-	P	V
		14499	47.43	-26.57	74	43.82	39.7	22	58.09	-	-	P	V
		15885	49.77	-24.23	74	41.35	41.96	23.39	56.93	-	-	P	V
		15885	40.11	-13.89	54	31.69	41.96	23.39	56.93	-	-	A	V
		17715	52.37	-21.63	74	41.9	41.97	24.65	56.15	-	-	P	V
		17715	41.36	-12.64	54	30.89	41.97	24.65	56.15	-	-	A	V
													V
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 4. The emission level close to 18GHz is checked that the average emission level is noise floor only.												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2362.71	53.53	-20.47	74	39.04	31.88	18.01	35.4	319	141	P	H
		2381.505	48.87	-5.13	54	29.09	31.99	23.2	35.41	319	141	A	H
	*	2402	101.62	-	-	86.75	32.1	18.19	35.42	319	141	P	H
	*	2402	99.88	-	-	79.92	32.1	23.28	35.42	319	141	A	H
													H
													H
		2371.425	54.37	-19.63	74	39.79	31.93	18.06	35.41	110	117	P	V
		2375.52	49.08	-4.92	54	29.38	31.95	23.16	35.41	110	117	A	V
	*	2404	104.5	-	-	89.61	32.11	18.2	35.42	110	117	P	V
	*	2402	103.12	-	-	83.16	32.1	23.28	35.42	110	117	A	V
													V
													V
BLE CH 19 2440MHz		2310.42	54.48	-19.52	74	40.28	31.8	17.78	35.38	276	142	P	H
		2389.1	48.81	-5.19	54	28.96	32.03	23.23	35.41	276	142	A	H
	*	2440	101.54	-	-	86.57	32.18	18.22	35.43	276	142	P	H
	*	2440	98.97	-	-	78.91	32.18	23.31	35.43	276	142	A	H
		2487.33	54.42	-19.58	74	39.28	32.35	18.24	35.45	276	142	P	H
		2495.1	49.43	-4.57	54	29.17	32.38	23.34	35.46	276	142	A	H
		2315.74	54.08	-19.92	74	39.87	31.8	17.8	35.39	123	117	P	V
		2380.84	48.9	-5.1	54	29.13	31.99	23.19	35.41	123	117	A	V
	*	2440	104.06	-	-	89.09	32.18	18.22	35.43	123	117	P	V
	*	2440	100.53	-	-	80.47	32.18	23.31	35.43	123	117	A	V
		2485.72	54.11	-19.89	74	38.97	32.34	18.25	35.45	123	117	P	V
		2497.48	49.71	-4.29	54	29.43	32.39	23.35	35.46	123	117	A	V



BLE CH 39 2480MHz	*	2480	102.61	-	-	87.5	32.32	18.24	35.45	301	134	P	H
	*	2480	100.76	-	-	80.56	32.32	23.33	35.45	301	134	A	H
		2495.6	55.08	-18.92	74	39.91	32.38	18.25	35.46	301	134	P	H
		2496.12	49.98	-4.02	54	29.72	32.38	23.34	35.46	301	134	A	H
													H
													H
	*	2480	104.39	-	-	89.28	32.32	18.24	35.45	105	114	P	V
	*	2480	102.67	-	-	82.47	32.32	23.33	35.45	105	114	A	V
		2486.72	55.76	-18.24	74	40.62	32.35	18.24	35.45	105	114	P	V
		2485.2	49.67	-4.33	54	29.44	32.34	23.34	35.45	105	114	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BLE (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	42.49	-31.51	74	53.37	34.2	12.91	57.99	-	-	P	H
		14499	47.63	-26.37	74	44.02	39.7	22	58.09	-	-	P	H
		16110	50.43	-23.57	74	41.33	42.3	23.59	56.79	-	-	P	H
		16110	40.43	-13.57	54	31.33	42.3	23.59	56.79	-	-	A	H
		17865	51.96	-22.04	74	41.4	41.87	24.75	56.06	-	-	P	H
		17865	42.11	-11.89	54	31.55	41.87	24.75	56.06	-	-	A	H
													H
													H
													H
													H
													H
													H
		4804	42.84	-31.16	74	53.72	34.2	12.91	57.99	-	-	P	V
		14490	47.39	-26.61	74	43.82	39.67	21.99	58.09	-	-	P	V
		15960	50.17	-23.83	74	41.55	42	23.48	56.86	-	-	P	V
		15960	39.05	-14.95	54	30.43	42	23.48	56.86	-	-	A	V
		17805	51.59	-22.41	74	41.17	41.81	24.71	56.1	-	-	P	V
		17805	41.69	-12.31	54	31.27	41.81	24.71	56.1	-	-	A	V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	43.65	-30.35	74	54.49	34.2	12.86	57.9	-	-	P	H
		7320	41.93	-32.07	74	48.84	36.1	14.91	57.92	-	-	P	H
		14475	47.78	-26.22	74	44.27	39.62	21.98	58.09	-	-	P	H
		16140	50.45	-23.55	74	41.33	42.3	23.6	56.78	-	-	P	H
		16140	39.68	-14.32	54	30.56	42.3	23.6	56.78	-	-	A	H
		17715	51.41	-22.59	74	40.94	41.97	24.65	56.15	-	-	P	H
		17715	41.49	-12.51	54	31.02	41.97	24.65	56.15	-	-	A	H
													H
													H
													H
													H
													H
		4880	43.62	-30.38	74	54.46	34.2	12.86	57.9	-	-	P	V
		7320	42.48	-31.52	74	49.39	36.1	14.91	57.92	-	-	P	V
		14499	47.8	-26.2	74	44.19	39.7	22	58.09	-	-	P	V
		16140	50.44	-23.56	74	41.32	42.3	23.6	56.78	-	-	P	V
		16140	39.9	-14.1	54	30.78	42.3	23.6	56.78	-	-	A	V
		17730	51.66	-22.34	74	41.2	41.94	24.66	56.14	-	-	P	V
		17730	42.01	-11.99	54	31.55	41.94	24.66	56.14	-	-	A	V
													V
													V
													V
													V
													V

BLE	Note	Frequency	Level	Over Limit	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	Avg. (P/A)	(H/V)
BLE CH 39 2480MHz		4960	42.18	-31.82	74	52.87	34.3	12.82	57.81	-	-	P	H
		7440	41.55	-32.45	74	48.24	36.38	14.97	58.04	-	-	P	H
		14475	47.92	-26.08	74	44.41	39.62	21.98	58.09	-	-	P	H
		16200	49.83	-24.17	74	40.63	42.3	23.65	56.75	-	-	P	H
		16200	40.93	-13.07	54	31.73	42.3	23.65	56.75	-	-	A	H
		17730	51.13	-22.87	74	40.67	41.94	24.66	56.14	-	-	P	H
		17730	41.49	-12.51	54	31.03	41.94	24.66	56.14	-	-	A	H
													H
													H
													H
													H
													H
		4960	41.92	-32.08	74	52.61	34.3	12.82	57.81	-	-	P	V
		7440	42.78	-31.22	74	49.47	36.38	14.97	58.04	-	-	P	V
		14490	47.9	-26.1	74	44.33	39.67	21.99	58.09	-	-	P	V
		16035	50.34	-23.66	74	41.53	42.1	23.53	56.82	-	-	P	V
		16035	40.84	-13.16	54	32.03	42.1	23.53	56.82	-	-	A	V
		17790	51.4	-22.6	74	40.99	41.82	24.7	56.11	-	-	P	V
		17790	40.94	-13.06	54	30.53	41.82	24.7	56.11	-	-	A	V
													V
												V	
												V	
												V	
												V	
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												
	3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												
	4. The emission level close to 18GHz is checked that the average emission level is noise floor only.												

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		30	21.87	-18.13	40	26.43	24.57	0.9	30.03	-	-	P	H
		191.46	30.87	-12.63	43.5	43.67	14.86	2.31	29.97	-	-	P	H
		285.15	34	-12	46	42.24	18.99	2.75	29.98	-	-	P	H
		311.2	37.39	-8.61	46	45.2	19.31	2.86	29.98	-	-	P	H
		881.7	31.33	-14.67	46	27.03	28.69	4.64	29.03	-	-	P	H
		941.9	32.97	-13.03	46	27.07	29.8	4.84	28.74	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
		30	33.64	-6.36	40	38.2	24.57	0.9	30.03	-	-	P	V
		58.08	23.98	-16.02	40	40.76	11.87	1.36	30.01	-	-	P	V
		290.28	30.54	-15.46	46	38.62	19.12	2.78	29.98	-	-	P	V
		316.8	29.93	-16.07	46	37.65	19.39	2.87	29.98	-	-	P	V
		904.1	31.82	-14.18	46	27.41	28.62	4.68	28.89	-	-	P	V
		954.5	33.5	-12.5	46	26.78	30.52	4.89	28.69	-	-	P	V
													V
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												
	3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



<NRF52840>
<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2374.575	54.87	-19.13	74	40.26	31.95	18.07	35.41	122	73	P	H
		2349.06	45.73	-8.27	54	29.36	31.8	19.97	35.4	122	73	A	H
	*	2402	74.06	-	-	59.19	32.1	18.19	35.42	122	73	P	H
	*	2402	72.32	-	-	55.43	32.1	20.21	35.42	122	73	A	H
													H
													H
		2367.12	53.86	-20.14	74	39.33	31.9	18.04	35.41	100	114	P	V
		2378.145	45.96	-8.04	54	29.3	31.97	20.1	35.41	100	114	A	V
	*	2402	71.77	-	-	56.9	32.1	18.19	35.42	100	114	P	V
	*	2402	70.3	-	-	53.41	32.1	20.21	35.42	100	114	A	V
													V
													V
BLE CH 19 2440MHz		2368.24	54.3	-19.7	74	39.76	31.91	18.04	35.41	100	74	P	H
		2383.22	46	-8	54	29.28	32	20.13	35.41	100	74	A	H
	*	2440	76.51	-	-	61.54	32.18	18.22	35.43	100	74	P	H
	*	2440	75.22	-	-	58.23	32.18	20.24	35.43	100	74	A	H
		2498.6	54.98	-19.02	74	39.79	32.39	18.26	35.46	100	74	P	H
		2497.27	46.56	-7.44	54	29.35	32.39	20.28	35.46	100	74	A	H
		2327.78	53.88	-20.12	74	39.62	31.8	17.85	35.39	104	113	P	V
		2386.3	46.33	-7.67	54	29.57	32.02	20.15	35.41	104	113	A	V
	*	2440	72.81	-	-	57.84	32.18	18.22	35.43	104	113	P	V
	*	2440	70.83	-	-	53.84	32.18	20.24	35.43	104	113	A	V
		2484.95	55.04	-18.96	74	39.9	32.34	18.25	35.45	104	113	P	V
		2486.28	46.71	-7.29	54	29.54	32.35	20.27	35.45	104	113	A	V



BLE CH 39 2480MHz	*	2480	78.43	-	-	63.32	32.32	18.24	35.45	228	71	P	H
	*	2480	77.29	-	-	60.16	32.32	20.26	35.45	228	71	A	H
		2492.04	54.44	-19.56	74	39.28	32.37	18.25	35.46	228	71	P	H
		2490.52	46.71	-7.29	54	29.53	32.36	20.27	35.45	228	71	A	H
													H
													H
	*	2480	75.22	-	-	60.11	32.32	18.24	35.45	285	5	P	V
	*	2480	73.95	-	-	56.82	32.32	20.26	35.45	285	5	A	V
		2485.32	54.54	-19.46	74	39.4	32.34	18.25	35.45	285	5	P	V
		2492.16	46.5	-7.5	54	29.32	32.37	20.27	35.46	285	5	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****BLE (Harmonic @ 3m)**

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	46.85	-27.15	74	57.73	34.2	12.91	57.99	-	-	P	H
		14499	47.25	-26.75	74	43.64	39.7	22	58.09	-	-	P	H
		16110	49.78	-24.22	74	40.68	42.3	23.59	56.79	-	-	P	H
		16110	39.99	-14.01	54	30.89	42.3	23.59	56.79	-	-	A	H
		17700	51.23	-22.77	74	40.75	42	24.64	56.16	-	-	P	H
		17700	41.23	-12.77	54	30.75	42	24.64	56.16	-	-	A	H
													H
													H
													H
													H
													H
													H
		4804	46.41	-27.59	74	57.29	34.2	12.91	57.99	-	-	P	V
		14475	47.7	-26.3	74	44.19	39.62	21.98	58.09	-	-	P	V
		16185	50.23	-23.77	74	41.06	42.3	23.63	56.76	-	-	P	V
		16185	40.24	-13.76	54	31.07	42.3	23.63	56.76	-	-	A	V
		17730	51.32	-22.68	74	40.86	41.94	24.66	56.14	-	-	P	V
		17730	41.1	-12.9	54	30.64	41.94	24.66	56.14	-	-	A	V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	50.14	-23.86	74	60.98	34.2	12.86	57.9	-	-	P	H
		4880	45.3	-8.7	54	56.14	34.2	12.86	57.9	-	-	A	H
		7320	46.23	-27.77	74	53.14	36.1	14.91	57.92	-	-	P	H
		14499	47.63	-26.37	74	44.02	39.7	22	58.09	-	-	P	H
		16125	49.78	-24.22	74	40.67	42.3	23.59	56.78	-	-	P	H
		16125	39.66	-14.34	54	30.55	42.3	23.59	56.78	-	-	A	H
		17715	51.42	-22.58	74	40.95	41.97	24.65	56.15	-	-	P	H
		17715	41.35	-12.65	54	30.88	41.97	24.65	56.15	-	-	A	H
													H
													H
													H
													H
		4880	45.08	-28.92	74	55.92	34.2	12.86	57.9	-	-	P	V
		7320	47.21	-26.79	74	54.12	36.1	14.91	57.92	-	-	P	V
		14490	47.71	-26.29	74	44.14	39.67	21.99	58.09	-	-	P	V
		15930	50.63	-23.37	74	42.07	42	23.45	56.89	-	-	P	V
		15930	39.9	-14.1	54	31.34	42	23.45	56.89	-	-	A	V
		17835	51.14	-22.86	74	40.66	41.83	24.73	56.08	-	-	P	V
		17835	41.23	-12.77	54	30.75	41.83	24.73	56.08	-	-	A	V
													V
													V
													V
													V
													V

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	50.55	-23.45	74	61.24	34.3	12.82	57.81	239	11	P	H
		4960	46.4	-7.6	54	57.09	34.3	12.82	57.81	239	11	A	H
		7440	50.42	-23.58	74	57.11	36.38	14.97	58.04	203	289	P	H
		7440	47.44	-6.56	54	54.13	36.38	14.97	58.04	203	289	A	H
		14499	48.02	-25.98	74	44.41	39.7	22	58.09	-	-	P	H
		14499	39.24	-14.76	54	35.63	39.7	22	58.09	-	-	A	H
		16140	49.97	-24.03	74	40.85	42.3	23.6	56.78	-	-	P	H
		16140	41.38	-12.62	54	32.26	42.3	23.6	56.78	-	-	A	H
		17700	51.56	-22.44	74	41.08	42	24.64	56.16	-	-	P	H
		17700	40.95	-13.05	54	30.47	42	24.64	56.16	-	-	A	H
													H
													H
		4960	45.27	-28.73	74	55.96	34.3	12.82	57.81	-	-	P	V
		7440	50.28	-23.72	74	56.97	36.38	14.97	58.04	100	123	P	V
		7440	45.03	-8.97	54	51.72	36.38	14.97	58.04	100	123	A	V
		14475	47.64	-26.36	74	44.13	39.62	21.98	58.09	-	-	P	V
		16140	49.94	-24.06	74	40.82	42.3	23.6	56.78	-	-	P	V
		16140	40.69	-13.31	54	31.57	42.3	23.6	56.78	-	-	A	V
		17700	52.03	-21.97	74	41.55	42	24.64	56.16	-	-	P	V
		17700	41.28	-12.72	54	30.8	42	24.64	56.16	-	-	A	V
												V	
												V	
												V	
												V	
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												
	3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												
	4. The emission level close to 18GHz is checked that the average emission level is noise floor only.												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2387.07	54.35	-19.65	74	39.61	32.02	18.13	35.41	124	70	P	H
		2387.07	48.95	-5.05	54	29.42	32.02	22.92	35.41	124	70	A	H
	*	2402	75.52	-	-	60.65	32.1	18.19	35.42	124	70	P	H
	*	2402	73.3	-	-	53.64	32.1	22.98	35.42	124	70	A	H
													H
													H
		2323.965	54.37	-19.63	74	40.12	31.8	17.84	35.39	100	277	P	V
		2376.36	48.83	-5.17	54	29.41	31.96	22.87	35.41	100	277	A	V
	*	2402	70.73	-	-	55.86	32.1	18.19	35.42	100	277	P	V
	*	2402	68.83	-	-	49.17	32.1	22.98	35.42	100	277	A	V
													V
													V
BLE CH 19 2440MHz		2375.94	54.19	-19.81	74	39.57	31.96	18.07	35.41	100	73	P	H
		2380.84	48.7	-5.3	54	29.23	31.99	22.89	35.41	100	73	A	H
	*	2440	77.92	-	-	62.95	32.18	18.22	35.43	100	73	P	H
	*	2440	76.82	-	-	57.06	32.18	23.01	35.43	100	73	A	H
		2486.35	54.91	-19.09	74	39.76	32.35	18.25	35.45	100	73	P	H
		2484.67	49.18	-4.82	54	29.25	32.34	23.04	35.45	100	73	A	H
		2383.36	53.94	-20.06	74	39.24	32	18.11	35.41	100	93	P	V
		2383.92	49.27	-4.73	54	29.77	32	22.91	35.41	100	93	A	V
	*	2440	71.23	-	-	56.26	32.18	18.22	35.43	100	93	P	V
	*	2440	68.44	-	-	48.68	32.18	23.01	35.43	100	93	A	V
		2489.57	54.47	-19.53	74	39.31	32.36	18.25	35.45	100	93	P	V
		2485.79	49.15	-4.85	54	29.22	32.34	23.04	35.45	100	93	A	V



BLE CH 39 2480MHz	*	2480	75.87	-	-	60.76	32.32	18.24	35.45	105	56	P	H
	*	2480	74.6	-	-	54.7	32.32	23.03	35.45	105	56	A	H
		2493.6	55.73	-18.27	74	40.57	32.37	18.25	35.46	105	56	P	H
		2491.64	49.45	-4.55	54	29.49	32.37	23.04	35.45	105	56	A	H
													H
													H
	*	2480	72.79	-	-	57.68	32.32	18.24	35.45	358	20	P	V
	*	2480	70.77	-	-	50.87	32.32	23.03	35.45	358	20	A	V
		2496.04	54.86	-19.14	74	39.69	32.38	18.25	35.46	358	20	P	V
		2492.44	49.3	-4.7	54	29.35	32.37	23.04	35.46	358	20	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	45.61	-28.39	74	56.49	34.2	12.91	57.99	-	-	P	H
		14490	47.41	-26.59	74	43.84	39.67	21.99	58.09	-	-	P	H
		16155	50.25	-23.75	74	41.1	42.3	23.62	56.77	-	-	P	H
		16155	42.78	-11.22	54	33.63	42.3	23.62	56.77	-	-	A	H
		17760	52.15	-21.85	74	41.71	41.88	24.68	56.12	-	-	P	H
		17760	41.49	-12.51	54	31.05	41.88	24.68	56.12	-	-	A	H
													H
													H
													H
													H
													H
													H
		4804	44.87	-29.13	74	55.75	34.2	12.91	57.99	-	-	P	V
		14490	47.65	-26.35	74	44.08	39.67	21.99	58.09	-	-	P	V
		16140	49.66	-24.34	74	40.54	42.3	23.6	56.78	-	-	P	V
		16140	41.78	-12.22	54	32.66	42.3	23.6	56.78	-	-	A	V
		17880	51.5	-22.5	74	40.91	41.88	24.76	56.05	-	-	P	V
		17880	40.71	-13.29	54	30.12	41.88	24.76	56.05	-	-	A	V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	47.39	-26.61	74	58.23	34.2	12.86	57.9	-	-	P	H
		7320	45.13	-28.87	74	52.04	36.1	14.91	57.92	-	-	P	H
		14499	48.04	-25.96	74	44.43	39.7	22	58.09	-	-	P	H
		14499	38.06	-15.94	54	34.45	39.7	22	58.09	-	-	A	H
		16170	50.07	-23.93	74	40.92	42.3	23.62	56.77	-	-	P	H
		16170	40.38	-13.62	54	31.23	42.3	23.62	56.77	-	-	A	H
		17775	52.26	-21.74	74	41.83	41.85	24.69	56.11	-	-	P	H
		17775	41.49	-12.51	54	31.06	41.85	24.69	56.11	-	-	A	H
													H
													H
													H
													H
		4880	45.99	-28.01	74	56.83	34.2	12.86	57.9	-	-	P	V
		7320	46.01	-27.99	74	52.92	36.1	14.91	57.92	-	-	P	V
		14475	47.73	-26.27	74	44.22	39.62	21.98	58.09	-	-	P	V
		16140	51	-23	74	41.88	42.3	23.6	56.78	-	-	P	V
		16140	41.27	-12.73	54	32.15	42.3	23.6	56.78	-	-	A	V
		17700	51.5	-22.5	74	41.02	42	24.64	56.16	-	-	P	V
		17700	42.49	-11.51	54	32.01	42	24.64	56.16	-	-	A	V
													V
													V
													V
													V
													V

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 39 2480MHz		4960	49.84	-24.16	74	60.53	34.3	12.82	57.81	238	12	P	H	
		4960	46.12	-7.88	54	56.81	34.3	12.82	57.81	238	12	A	H	
		7440	51.32	-22.68	74	58.01	36.38	14.97	58.04	203	289	P	H	
		7440	47.06	-6.94	54	53.75	36.38	14.97	58.04	203	289	A	H	
		14490	48.58	-25.42	74	45.01	39.67	21.99	58.09	-	-	P	H	
		14490	38.35	-15.65	54	34.78	39.67	21.99	58.09	-	-	A	H	
		15975	49.82	-24.18	74	41.18	42	23.49	56.85	-	-	P	H	
		15975	41.96	-12.04	54	33.32	42	23.49	56.85	-	-	A	H	
		17730	51.92	-22.08	74	41.46	41.94	24.66	56.14	-	-	P	H	
		17730	40.72	-13.28	54	30.26	41.94	24.66	56.14	-	-	A	H	
													H	
													H	
		4960	43.46	-30.54	74	54.15	34.3	12.82	57.81	-	-	P	V	
		7440	48.82	-25.18	74	55.51	36.38	14.97	58.04	100	127	P	V	
		7440	44.17	-9.83	54	50.86	36.38	14.97	58.04	100	127	A	V	
		14475	48.07	-25.93	74	44.56	39.62	21.98	58.09	-	-	P	V	
		14475	39.4	-14.6	54	35.89	39.62	21.98	58.09	-	-	A	V	
		16125	49.95	-24.05	74	40.84	42.3	23.59	56.78	-	-	P	V	
		16125	40.56	-13.44	54	31.45	42.3	23.59	56.78	-	-	A	V	
		17910	52.22	-21.78	74	41.58	41.89	24.78	56.03	-	-	P	V	
		17910	41.86	-12.14	54	31.22	41.89	24.78	56.03	-	-	A	V	
														V
														V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													
	3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													
	4. The emission level close to 18GHz is checked that the average emission level is noise floor only.													

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		31.08	21.7	-18.3	40	27	23.79	0.94	30.03	-	-	P	H
		192.54	30.36	-13.14	43.5	43.13	14.88	2.32	29.97	-	-	P	H
		285.69	32.86	-13.14	46	41.08	19.01	2.75	29.98	-	-	P	H
		318.2	36.72	-9.28	46	44.43	19.39	2.88	29.98	-	-	P	H
		867.7	32.29	-13.71	46	27.96	28.83	4.63	29.13	-	-	P	H
		953.1	32.78	-13.22	46	26.14	30.46	4.88	28.7	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
		30	33.18	-6.82	40	37.74	24.57	0.9	30.03	-	-	P	V
		58.89	23.78	-16.22	40	40.67	11.76	1.36	30.01	-	-	P	V
		286.77	29.1	-16.9	46	37.29	19.03	2.76	29.98	-	-	P	V
		309.8	28.8	-17.2	46	36.64	19.29	2.85	29.98	-	-	P	V
		874	31.57	-14.43	46	27.23	28.8	4.63	29.09	-	-	P	V
		956.6	33.44	-12.56	46	26.59	30.63	4.9	28.68	-	-	P	V
													V
												V	
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB) + Duty factor(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	17.9~22.2°C
		Relative Humidity :	53.1~69%

Note symbol





-L	Low channel location
-R	High channel location











<WM-BAX-BM-57>
<1Mbps>



2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

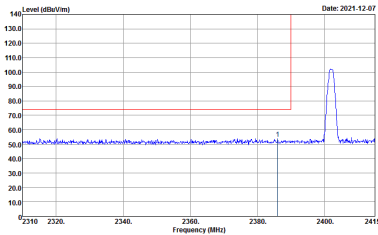
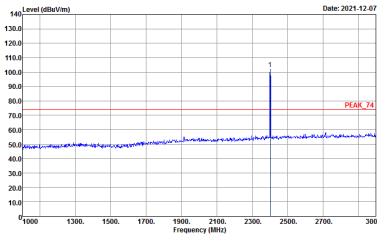
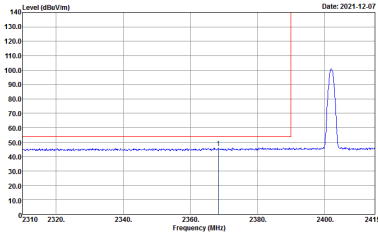
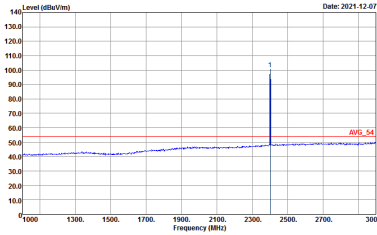
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00066584 HORIZONTAL : RBW:3000.000KHz VBW:3000.000KHz SWTAuto</p>	 <p>Site Condition : 03CH07-HY : PEAK_74 3m HF_ANT_00066584 HORIZONTAL : RBW:3000.000KHz VBW:3000.000KHz SWTAuto</p>
Avg.	 <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00066584 HORIZONTAL : RBW:3000.000KHz VBW:3000.000KHz SWTAuto</p>	 <p>Site Condition : 03CH07-HY : AVG_54 3m HF_ANT_00066584 HORIZONTAL : RBW:3000.000KHz VBW:3000.000KHz SWTAuto</p>

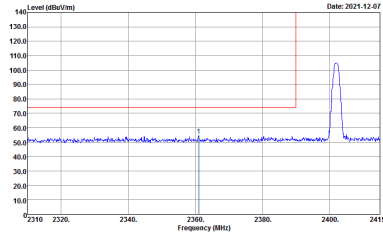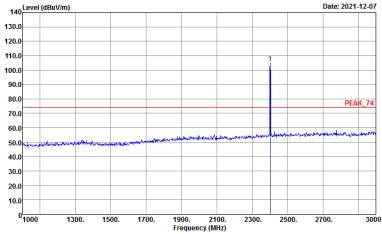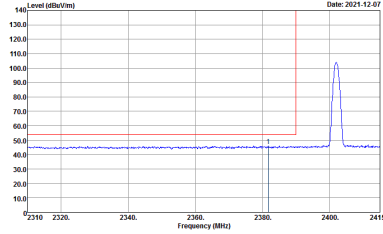
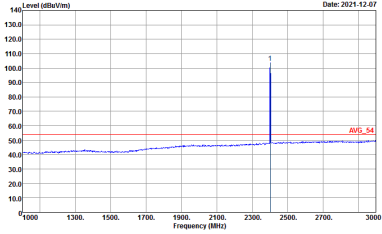
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p>
Avg	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p>	 <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p>

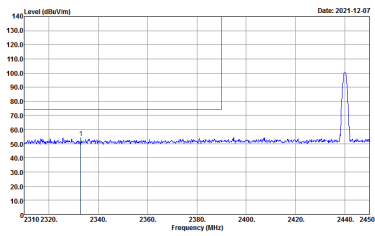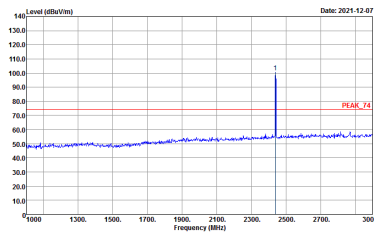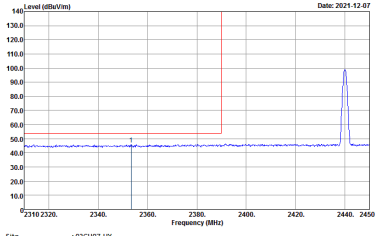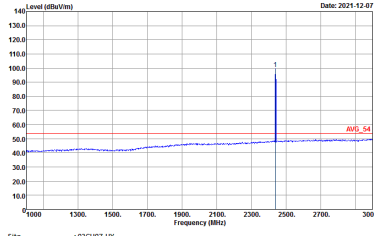BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00060584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00060584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00060584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00060584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>

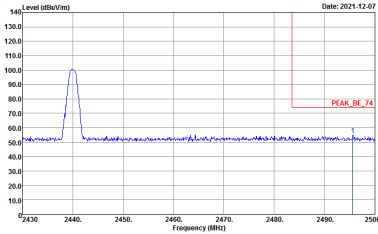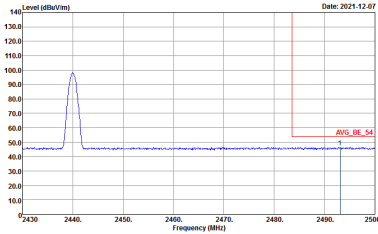BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank

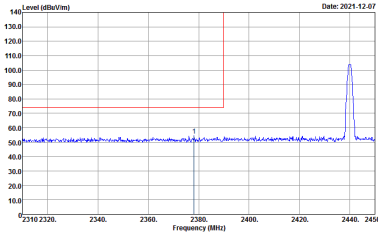
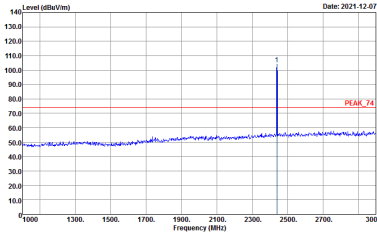
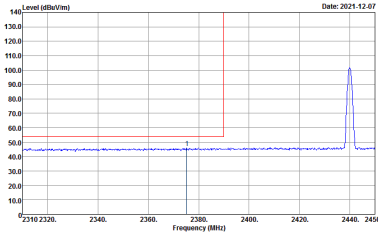
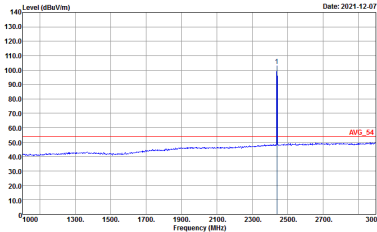


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p></div>	<div><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p></div>
Avg.	<div><p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p></div>	<div><p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p></div>

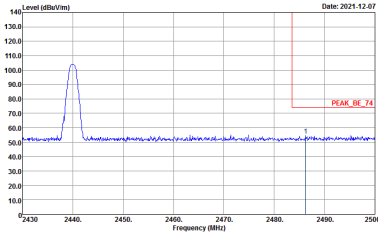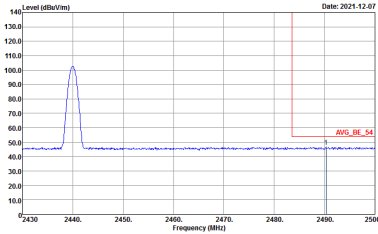BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	<div><p>Level (dBuV/m)</p><p>Date: 2021-12-07</p><p>Frequency (MHz)</p><p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWTAuto</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2021-12-07</p><p>Frequency (MHz)</p><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWTAuto</p></div>
Avg.	<div><p>Level (dBuV/m)</p><p>Date: 2021-12-07</p><p>Frequency (MHz)</p><p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWTAuto</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2021-12-07</p><p>Frequency (MHz)</p><p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWTAuto</p></div>

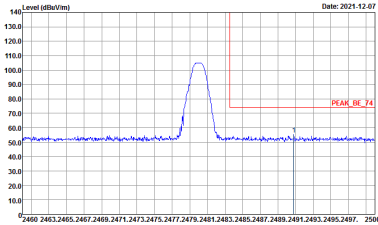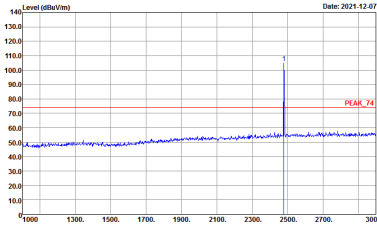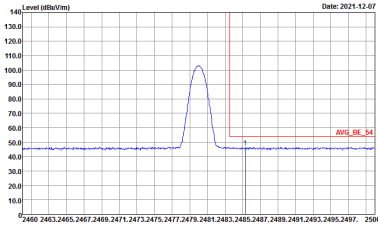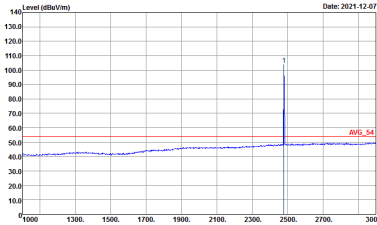BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

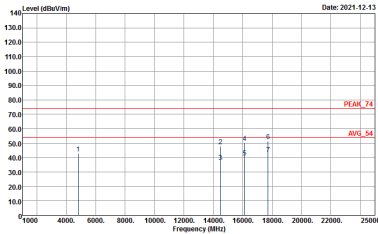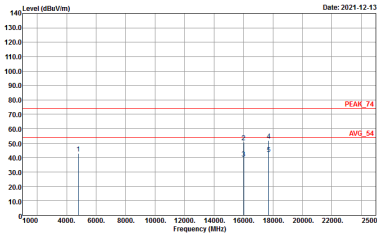BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m) Date: 2021-12-13</p><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 HORIZONTAL Detector : Peak</p></div>	<div><p>Level (dBuV/m) Date: 2021-12-13</p><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL Detector : Peak</p></div>







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m) Date: 2021-12-13</p><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 HORIZONTAL Detector : Peak</p></div>	<div><p>Level (dBuV/m) Date: 2021-12-13</p><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL Detector : Peak</p></div>







<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

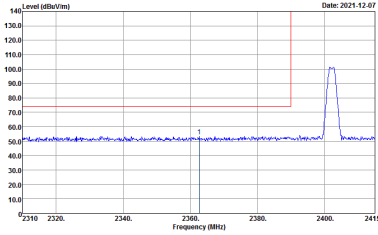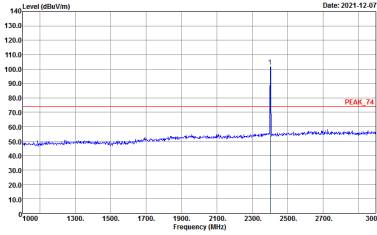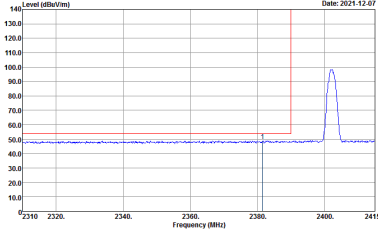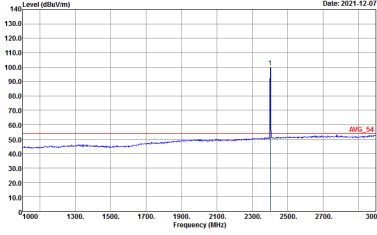BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p>	 <p>Site Condition : 03CH07-HY : PEAK_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p>
Avg.	 <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p>	 <p>Site Condition : 03CH07-HY : AVG_54 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p>

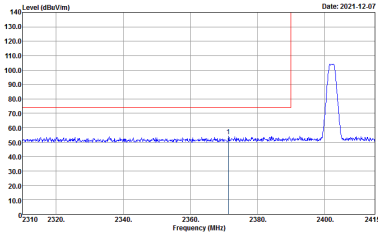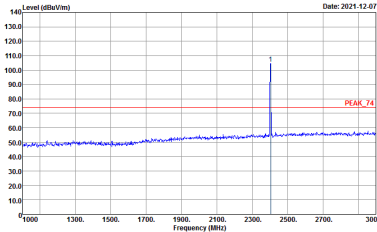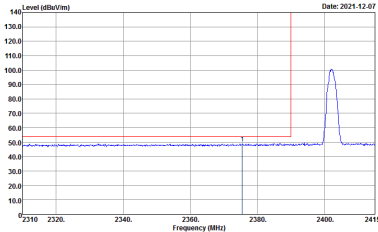
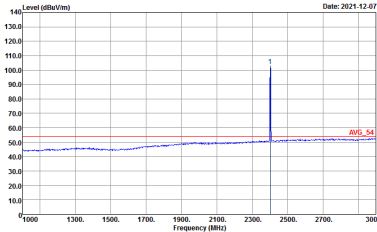


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p></div>	<div><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p></div>
Avg	<div><p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p></div>	<div><p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p></div>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00060584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00060584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00060584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00060584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>

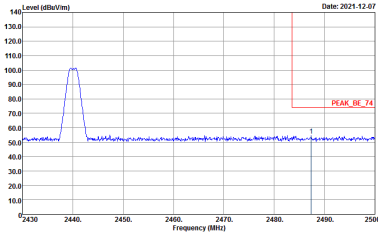
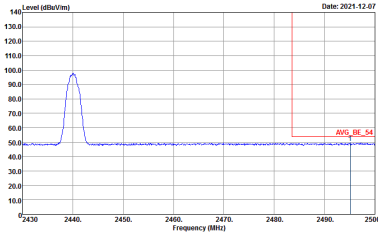






BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>	Left blank
Avg.	<div><p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>	Left blank

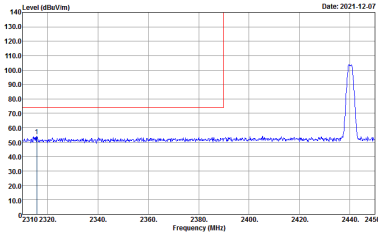
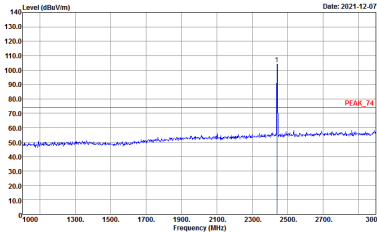
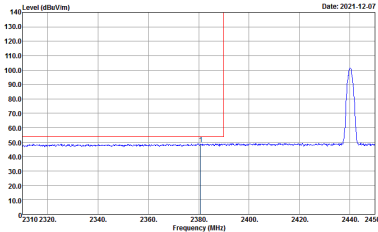
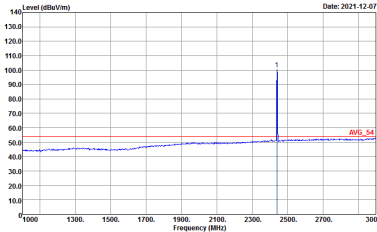


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p></div>	<div><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p></div>
Avg.	<div><p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p></div>	<div><p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p></div>

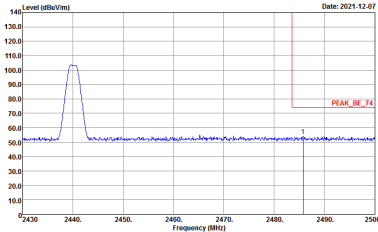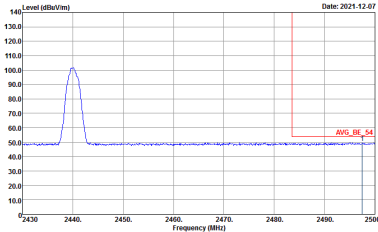

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank

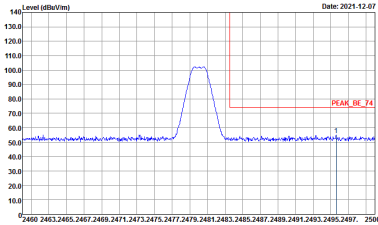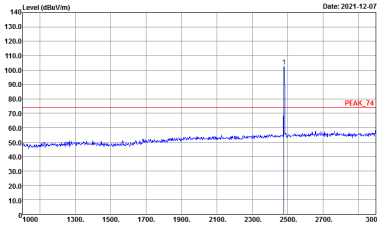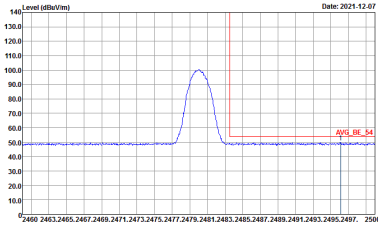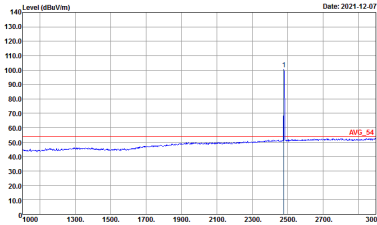BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : AVG_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>

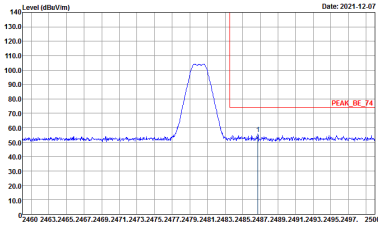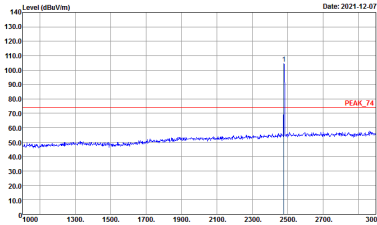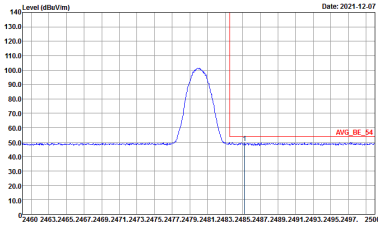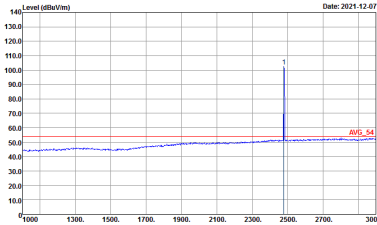BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00066584 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 HORIZONTAL Detector : Peak</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m) Date: 2021.12.13</p><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 HORIZONTAL Detector : Peak</p></div>	<div><p>Level (dBuV/m) Date: 2021.12.13</p><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL Detector : Peak</p></div>





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m) Date: 2021-12-13</p><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 HORIZONTAL Detector : Peak</p></div>	<div><p>Level (dBuV/m) Date: 2021-12-13</p><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL Detector : Peak</p></div>



Emission below 1GHz

2.4GHz BLE (LF)



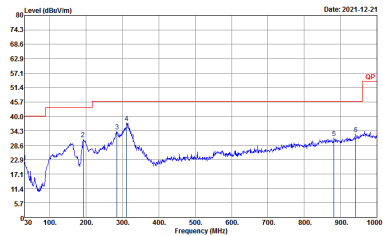
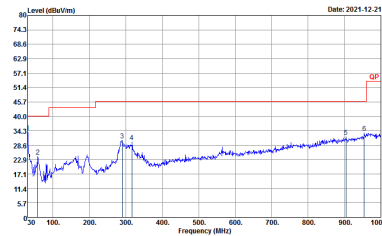
BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	<p>Level (dBμV/m)</p> <p>Date: 2021.12.21</p>  <p>Frequency (MHz)</p> <p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(s) HORIZONTAL Detector : Peak</p>	<p>Level (dBμV/m)</p> <p>Date: 2021.12.21</p>  <p>Frequency (MHz)</p> <p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(s) VERTICAL Detector : Peak</p>



<NRF52840>
<1Mbps>





2.4GHz 2400~2483.5MHz



BLE (Band Edge @ 3m)

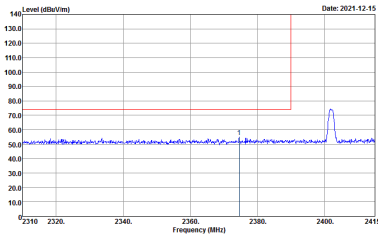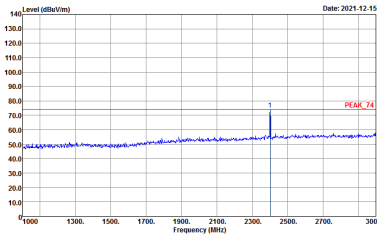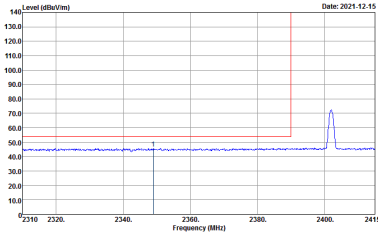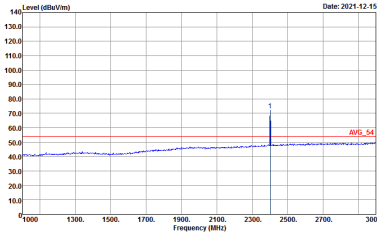BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00066584 HORIZONTAL : RBW:3000.000KHz VBW:3000.000KHz SWTAuto</p>	 <p>Site Condition : 03CH07-HY : PEAK_74 3m HF_ANT_00066584 HORIZONTAL : RBW:3000.000KHz VBW:3000.000KHz SWTAuto</p>
Avg.	 <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00066584 HORIZONTAL : RBW:3000.000KHz VBW:3000.000KHz SWTAuto</p>	 <p>Site Condition : 03CH07-HY : AVG_54 3m HF_ANT_00066584 HORIZONTAL : RBW:3000.000KHz VBW:3000.000KHz SWTAuto</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>	<div><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>
Avg	<div><p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>	<div><p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>

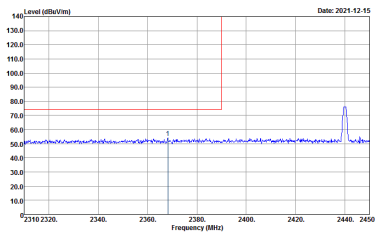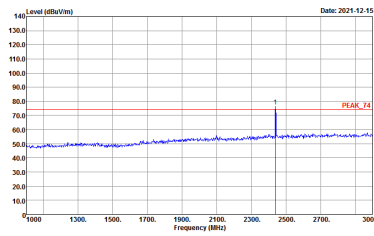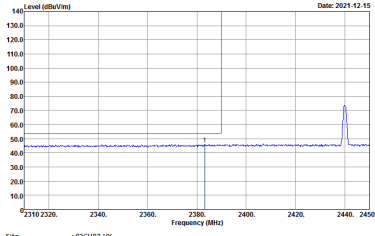
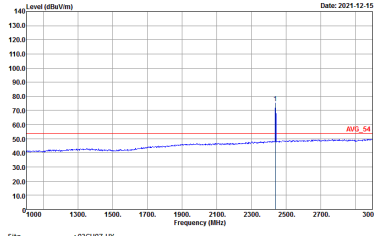
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00060584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00060584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00060584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00060584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>

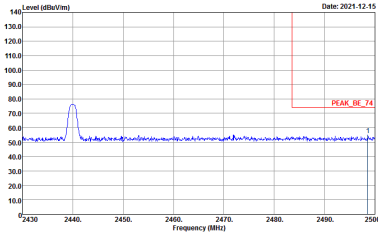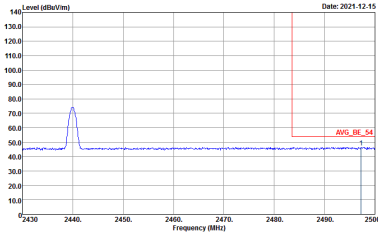BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank

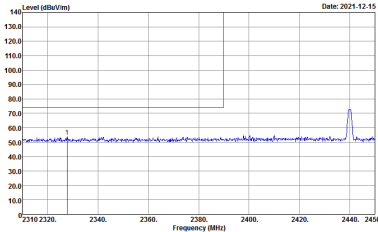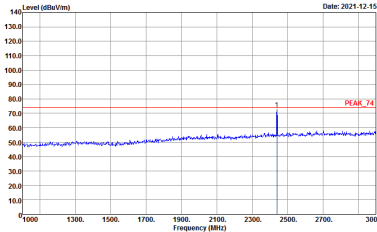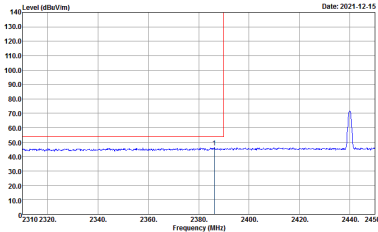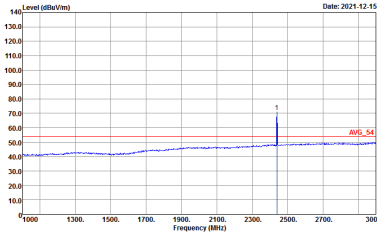

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>	<div><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>
Avg.	<div><p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>	<div><p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>

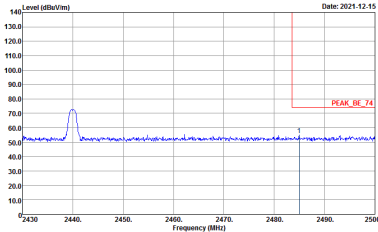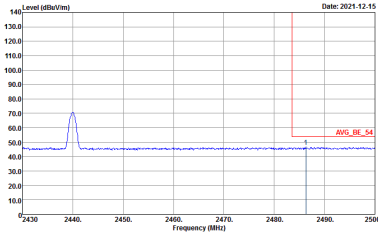

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>	Left blank
Avg.	<div><p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00066584 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	<div><p>Level (dBuV/m) Date: 2021-12-15</p><p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>	<div><p>Level (dBuV/m) Date: 2021-12-15</p><p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>
Avg.	<div><p>Level (dBuV/m) Date: 2021-12-15</p><p>Site : 03CH07-HY Condition : AVG_BE_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>	<div><p>Level (dBuV/m) Date: 2021-12-15</p><p>Site : 03CH07-HY Condition : AVG_74 3m HF_ANT_00066584 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p></div>