


Site: AC1	Time: 2018/05/07 - 18:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5320MHz	

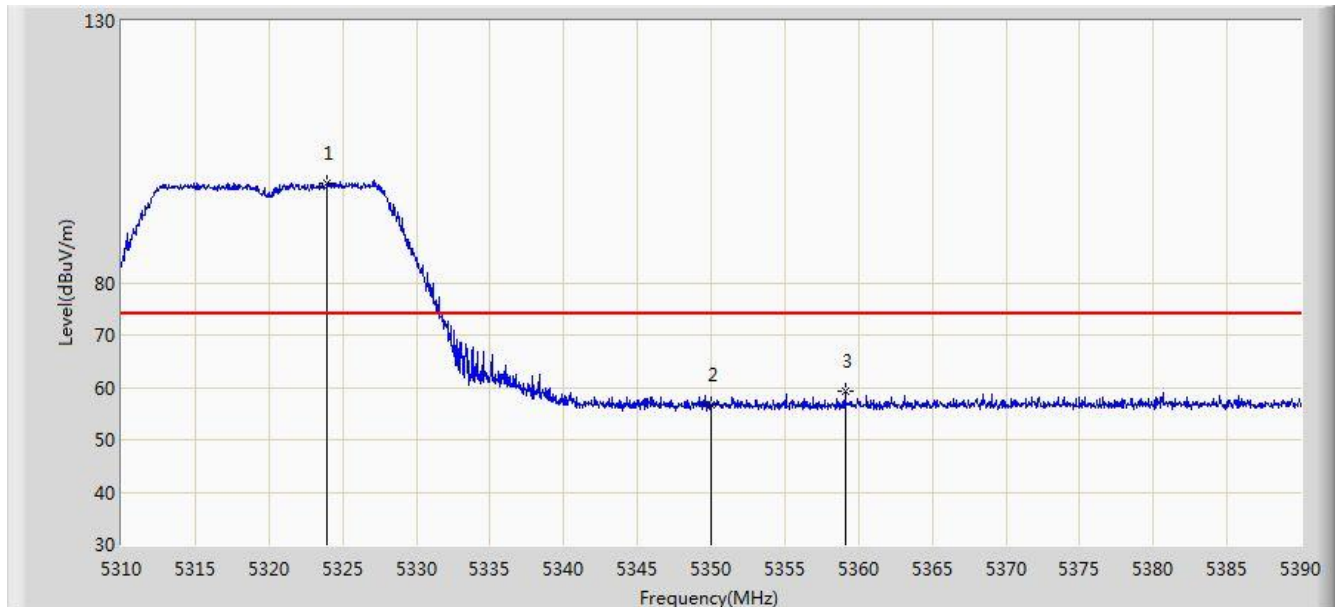


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.960	99.106	92.790	N/A	N/A	6.316	PK
2			5350.000	56.531	50.071	-17.469	74.000	6.460	PK
3			5359.080	59.213	52.718	-14.787	74.000	6.495	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 18:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5320MHz	

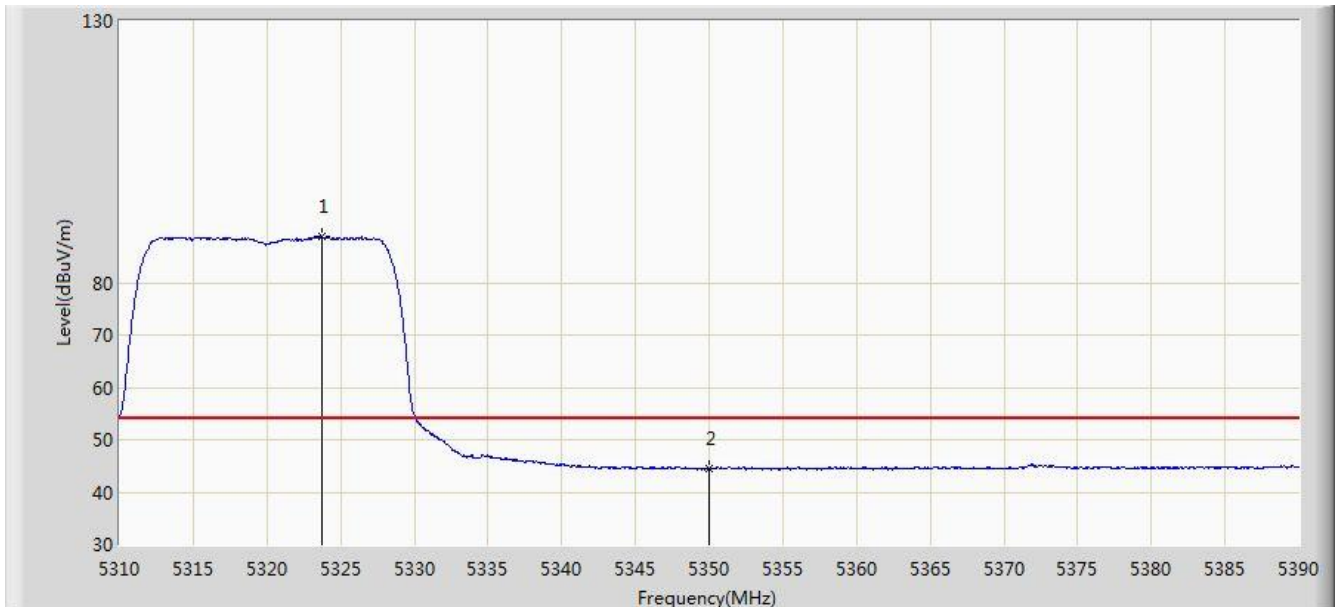


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.720	88.917	82.602	N/A	N/A	6.314	AV
2			5350.000	44.481	38.021	-9.519	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 18:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5320MHz	

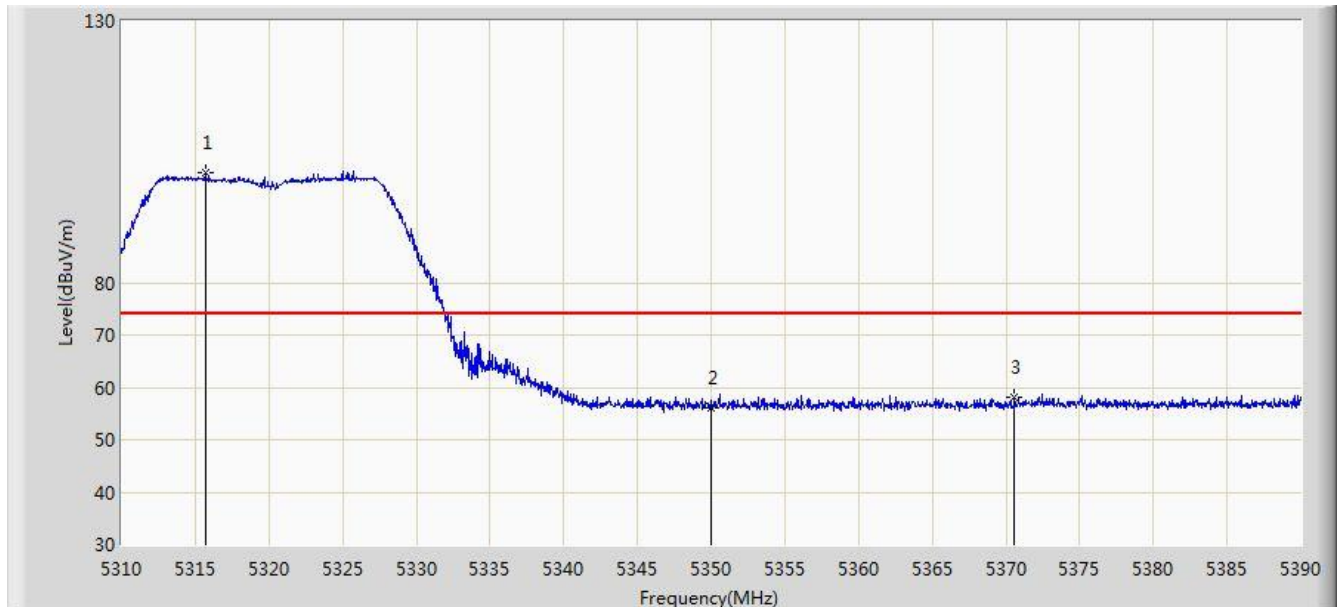


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.720	100.872	94.594	N/A	N/A	6.278	PK
2			5350.000	56.214	49.754	-17.786	74.000	6.460	PK
3			5370.600	58.127	51.595	-15.873	74.000	6.532	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5320MHz	

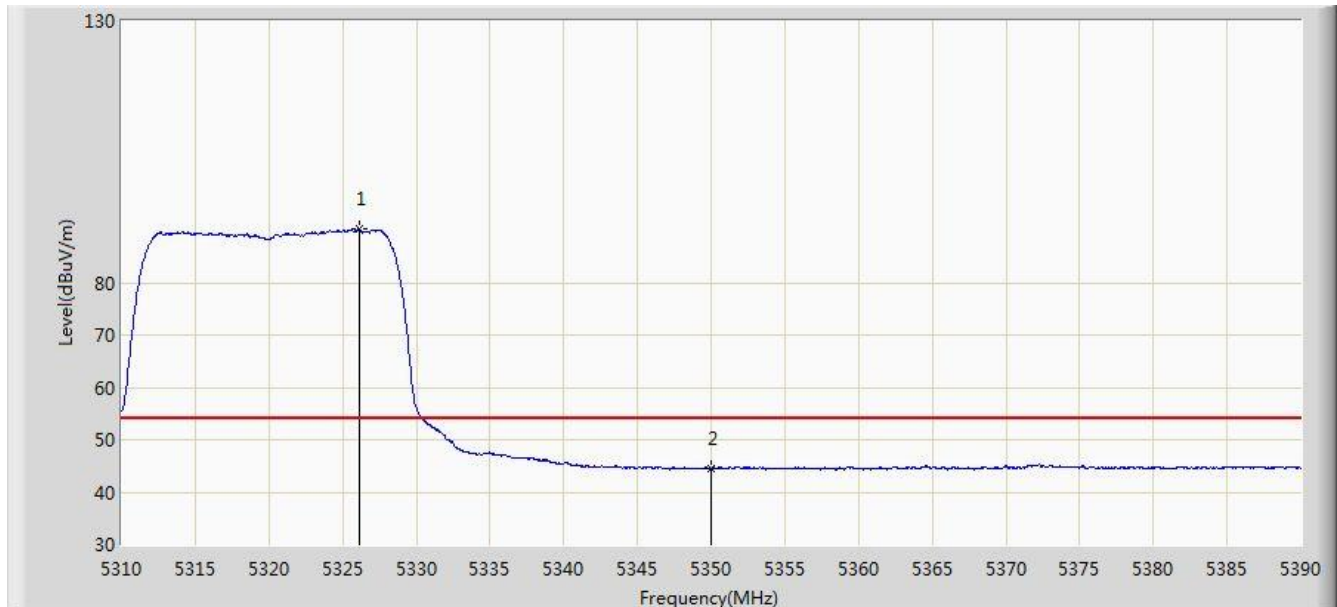


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.120	90.163	83.835	N/A	N/A	6.328	AV
2			5350.000	44.555	38.095	-9.445	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5500MHz	

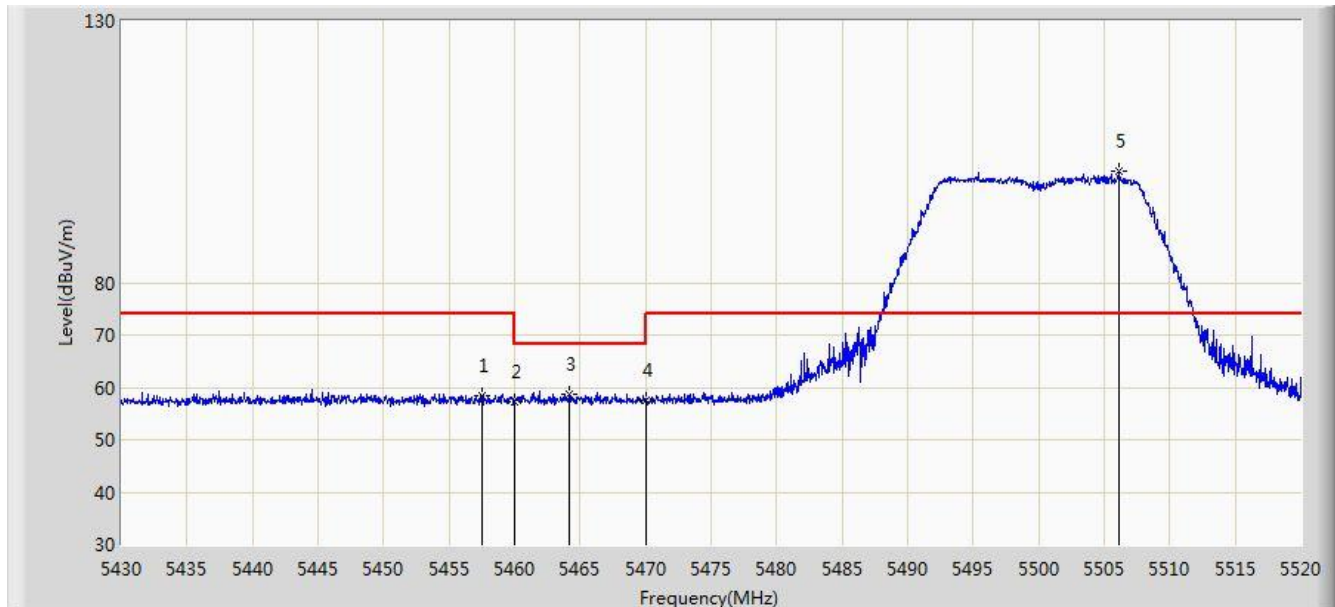


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.495	58.451	51.660	-15.549	74.000	6.790	PK
2			5460.000	57.281	50.479	-16.719	74.000	6.802	PK
3			5464.200	58.757	51.937	-9.443	68.200	6.820	PK
4			5470.000	57.496	50.651	-10.704	68.200	6.845	PK
5		*	5506.095	101.191	94.380	N/A	N/A	6.812	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5500MHz	

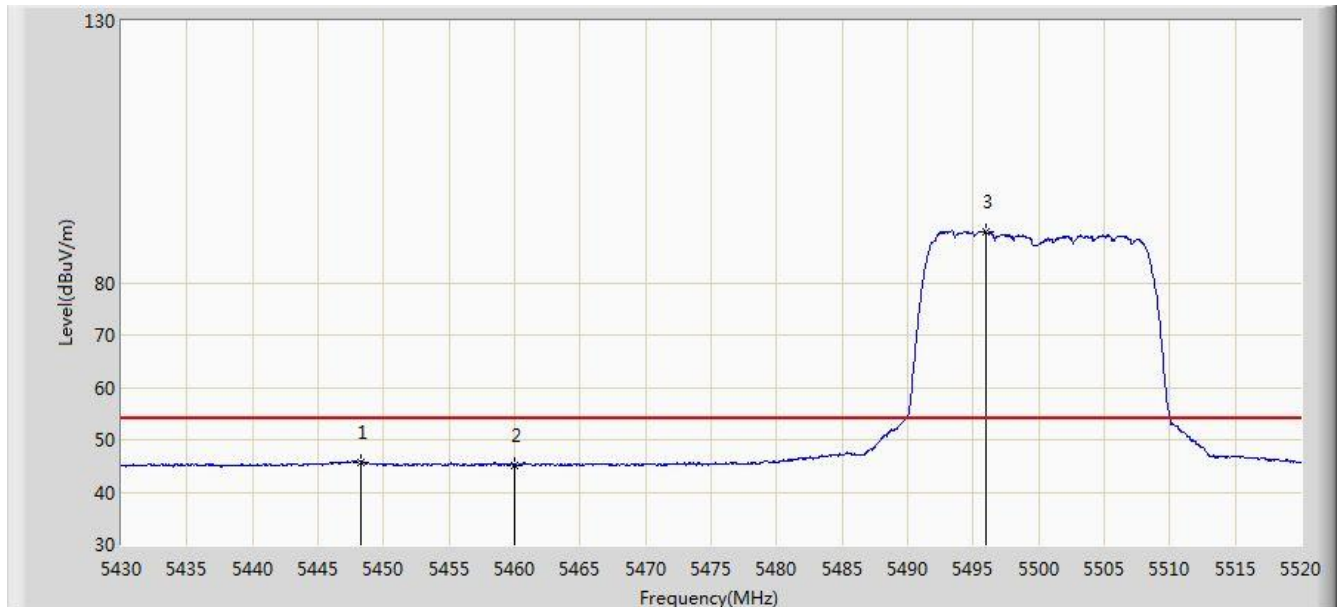


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.270	45.783	39.052	-8.217	54.000	6.731	AV
2			5460.000	45.192	38.390	-8.808	54.000	6.802	AV
3		*	5496.015	89.816	82.990	N/A	N/A	6.826	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5500MHz	

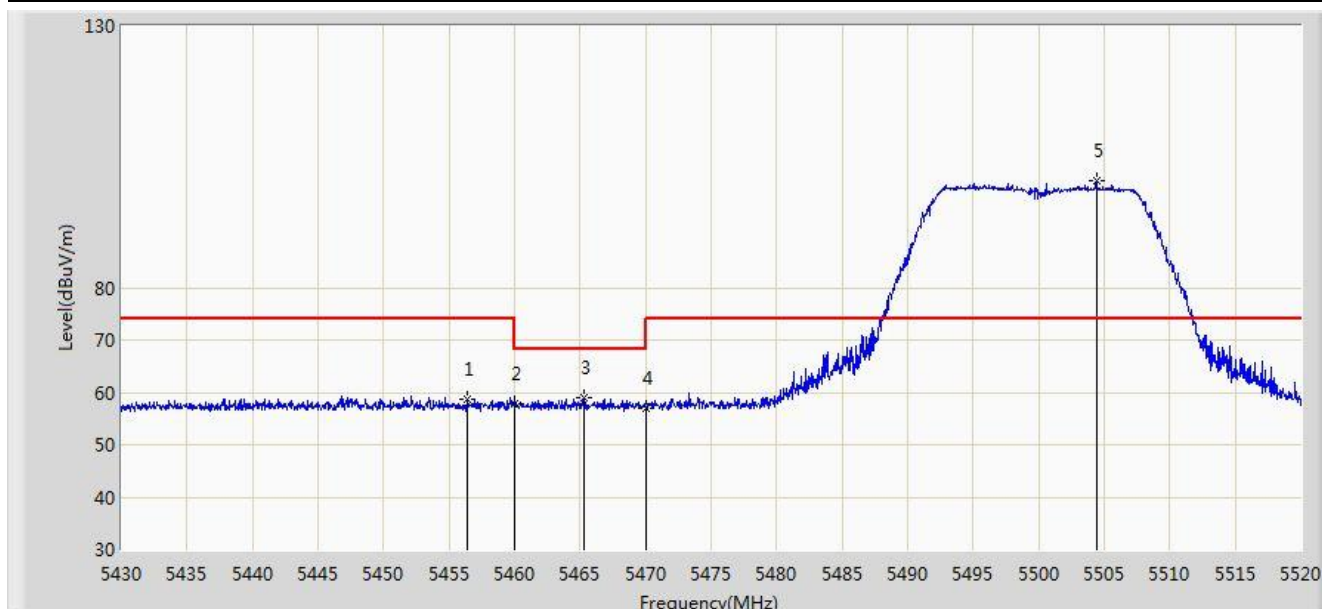


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.415	58.570	51.784	-15.430	74.000	6.786	PK
2			5460.000	57.851	51.049	-16.149	74.000	6.802	PK
3			5465.325	59.032	52.207	-9.168	68.200	6.825	PK
4			5470.000	56.943	50.098	-11.257	68.200	6.845	PK
5		*	5504.385	100.472	93.660	N/A	N/A	6.812	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5500MHz	

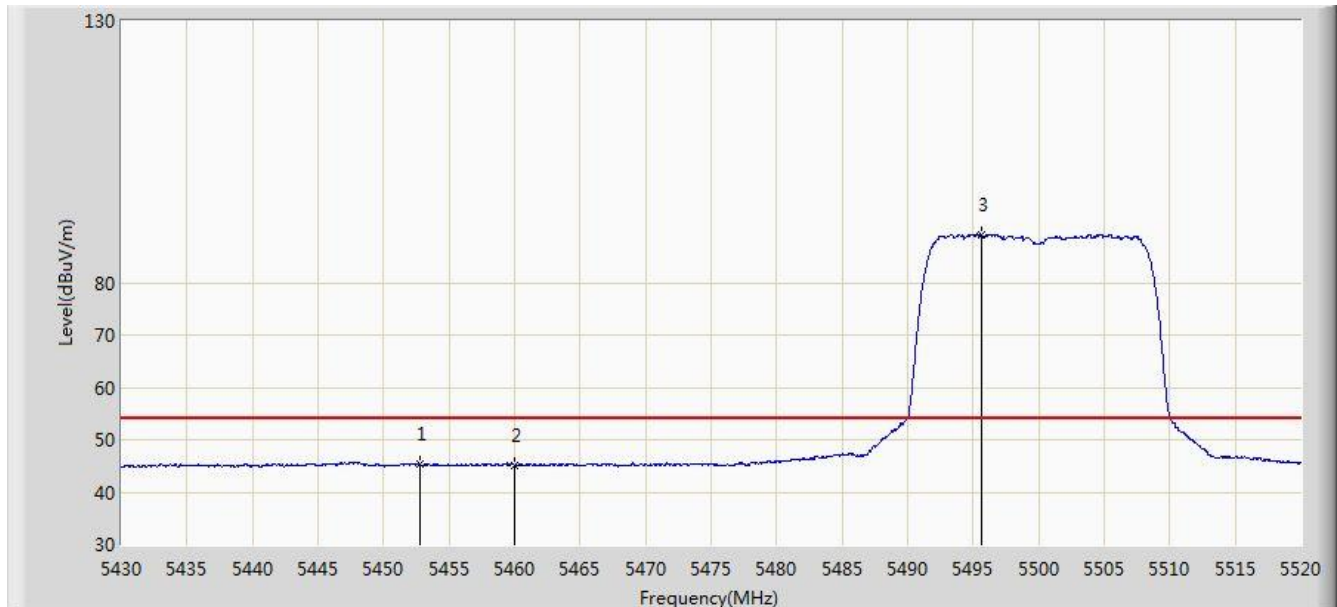


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.770	45.376	38.611	-8.624	54.000	6.766	AV
2			5460.000	45.162	38.360	-8.838	54.000	6.802	AV
3		*	5495.610	89.262	82.435	N/A	N/A	6.827	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5700MHz	

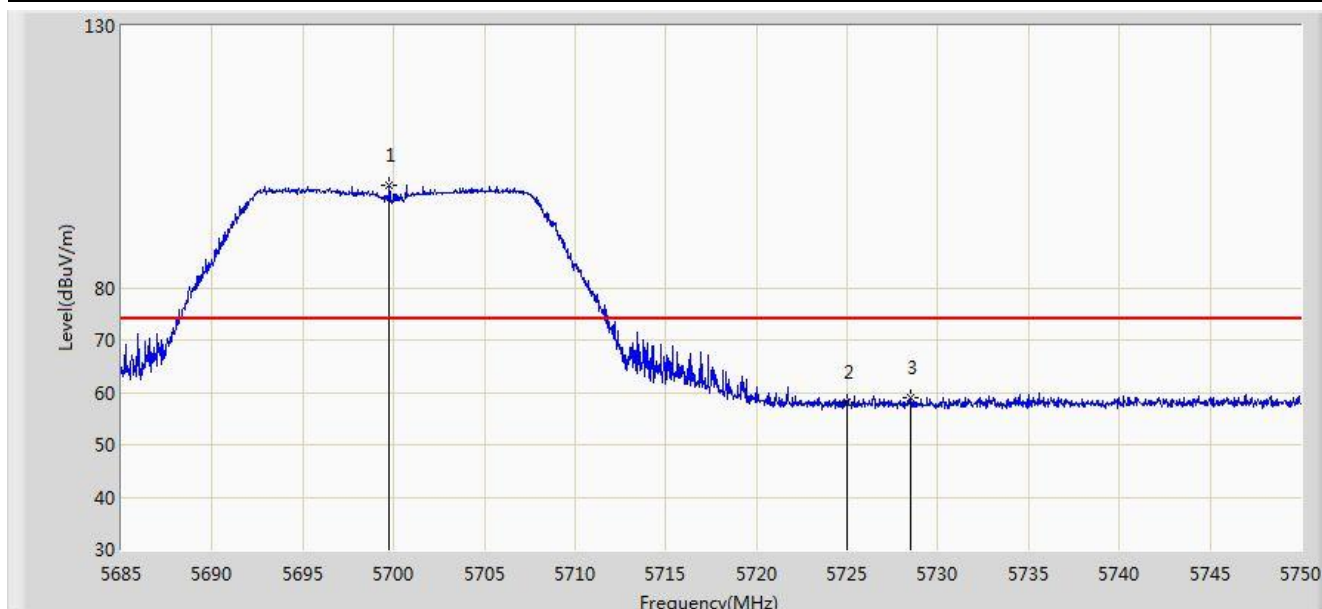


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5699.755	99.442	92.278	N/A	N/A	7.164	PK
2			5725.000	58.048	50.720	-15.952	74.000	7.328	PK
3			5728.518	59.105	51.761	-14.895	74.000	7.344	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5700MHz	

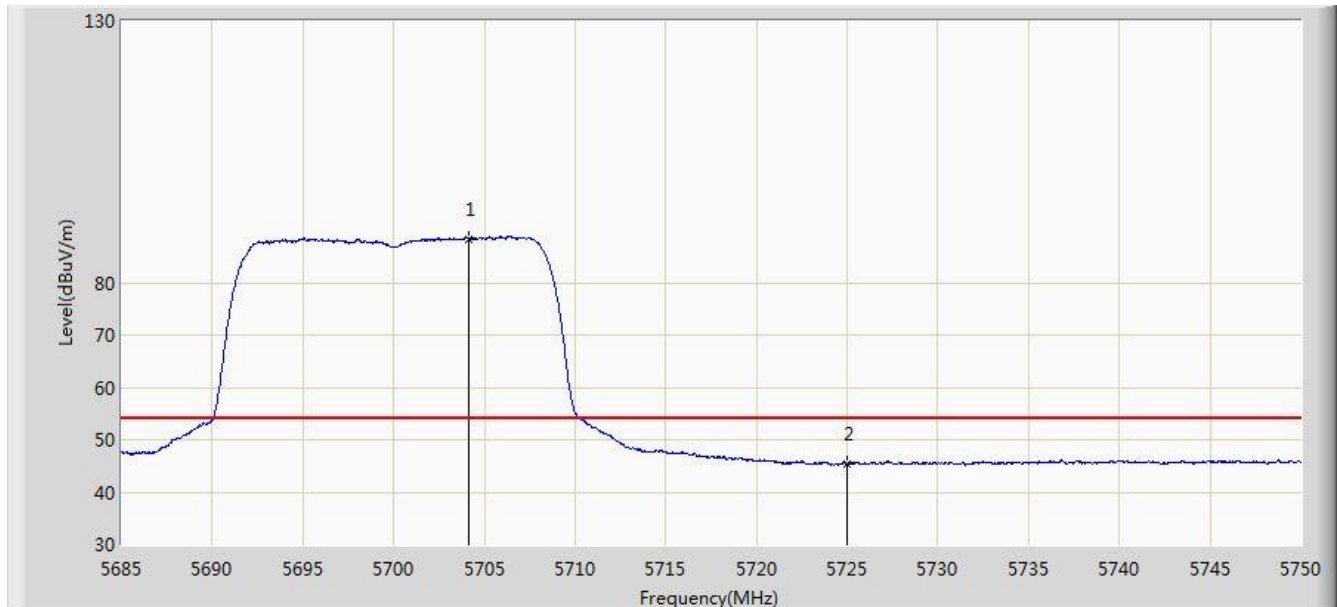


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.175	88.196	81.000	N/A	N/A	7.196	AV
2			5725.000	45.286	37.958	-8.714	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5700MHz	

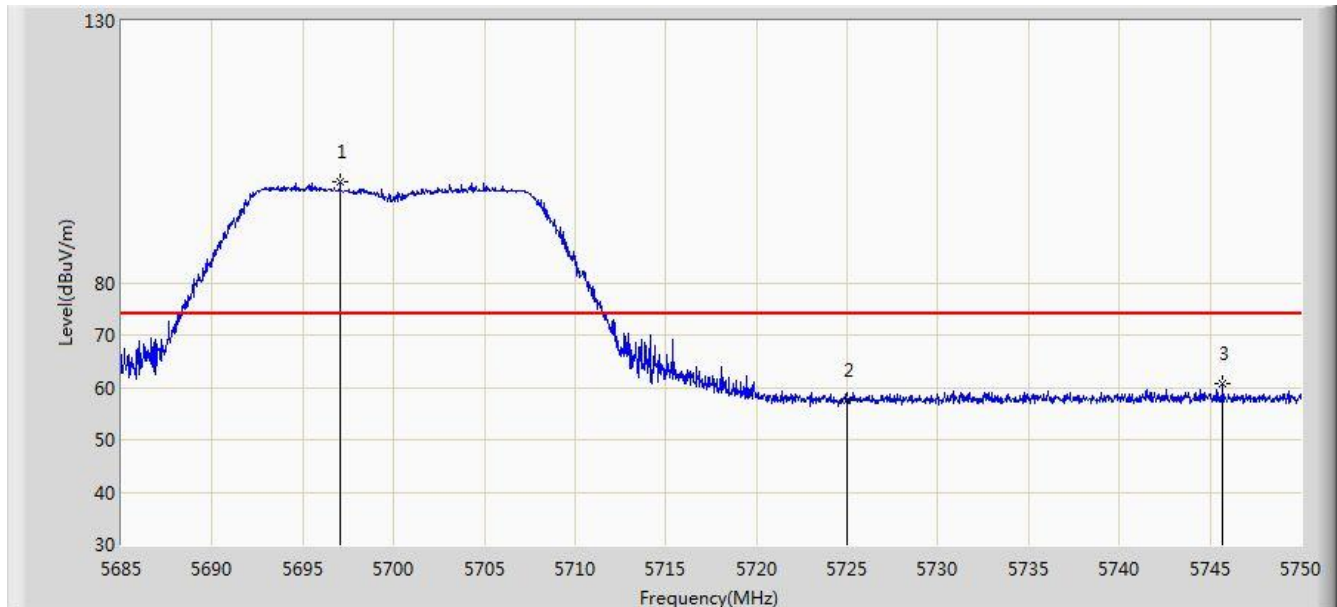


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.058	99.416	92.270	N/A	N/A	7.145	PK
2			5725.000	57.644	50.316	-16.356	74.000	7.328	PK
3			5745.710	60.728	53.323	-13.272	74.000	7.406	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5700MHz	

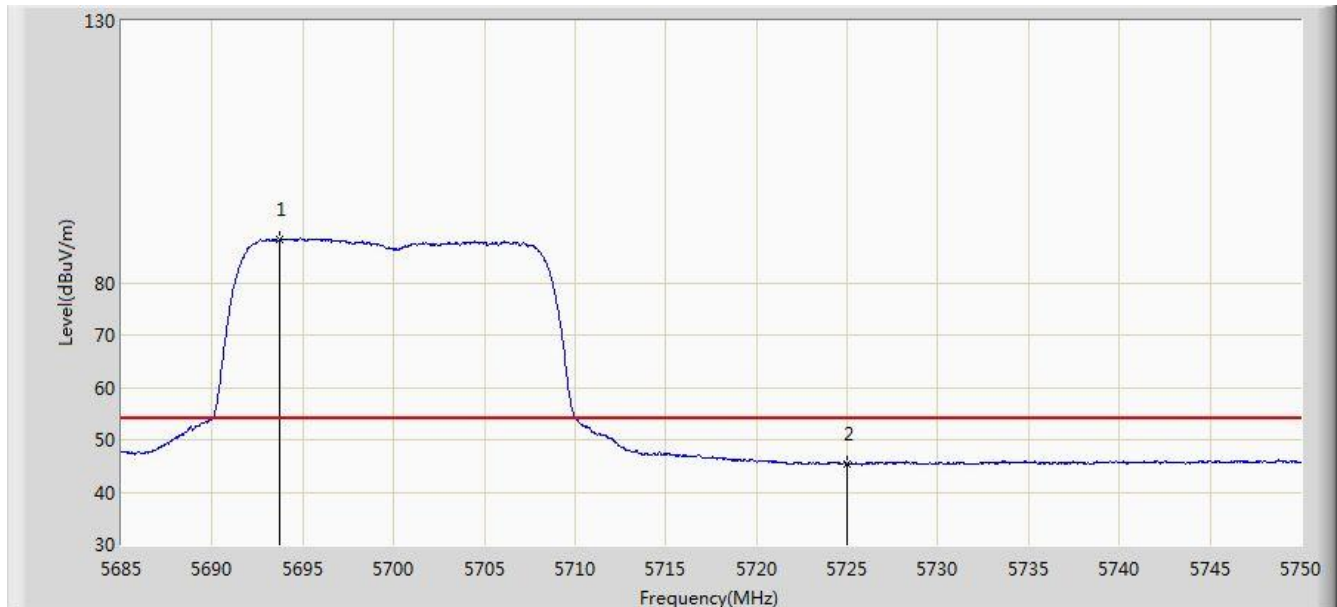


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5693.743	88.232	81.109	N/A	N/A	7.124	AV
2			5725.000	45.365	38.037	-8.635	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:14
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5745MHz	

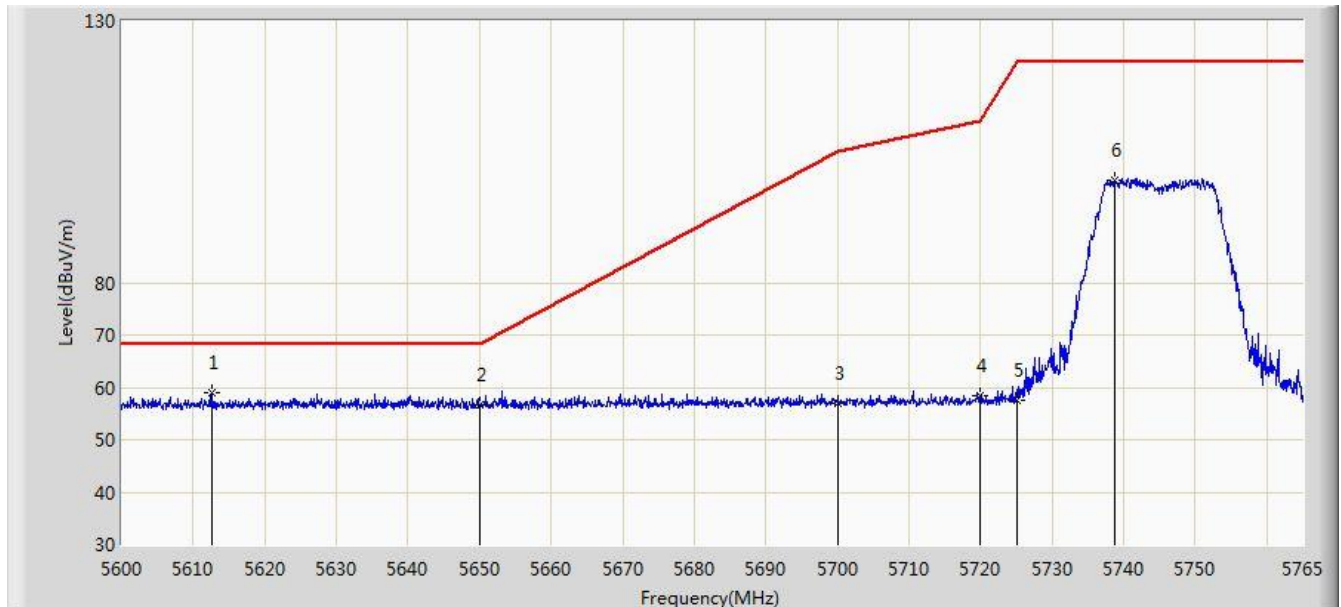


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5612.623	58.866	51.876	-9.334	68.200	6.990	PK
2			5650.000	56.608	49.603	-11.592	68.200	7.005	PK
3			5700.000	56.829	49.664	-48.371	105.200	7.165	PK
4			5720.000	58.281	50.982	-52.519	110.800	7.299	PK
5			5725.000	57.646	50.318	-64.554	122.200	7.328	PK
6			5738.683	99.581	92.194	N/A	N/A	7.387	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:17
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5745MHz	

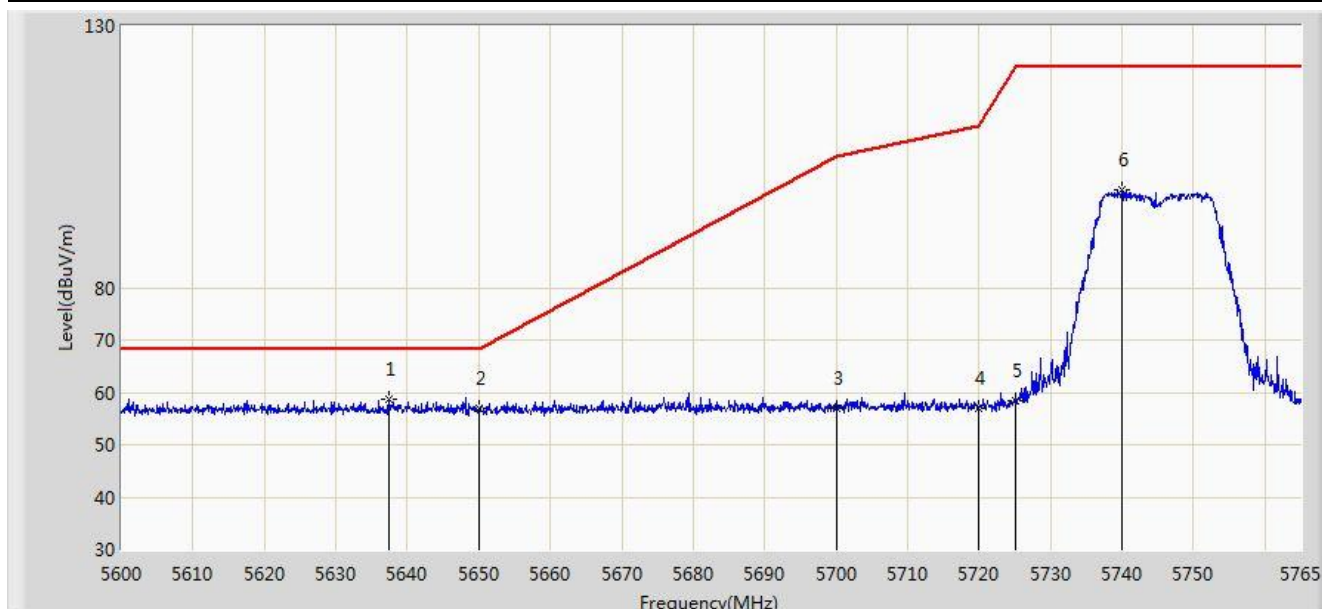


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5637.373	58.633	51.642	-9.567	68.200	6.991	PK
2			5650.000	56.991	49.986	-11.209	68.200	7.005	PK
3			5700.000	57.083	49.918	-48.117	105.200	7.165	PK
4			5720.000	57.087	49.788	-53.713	110.800	7.299	PK
5			5725.000	58.403	51.075	-63.797	122.200	7.328	PK
6			5740.002	98.671	91.279	N/A	N/A	7.392	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:19
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5825MHz	

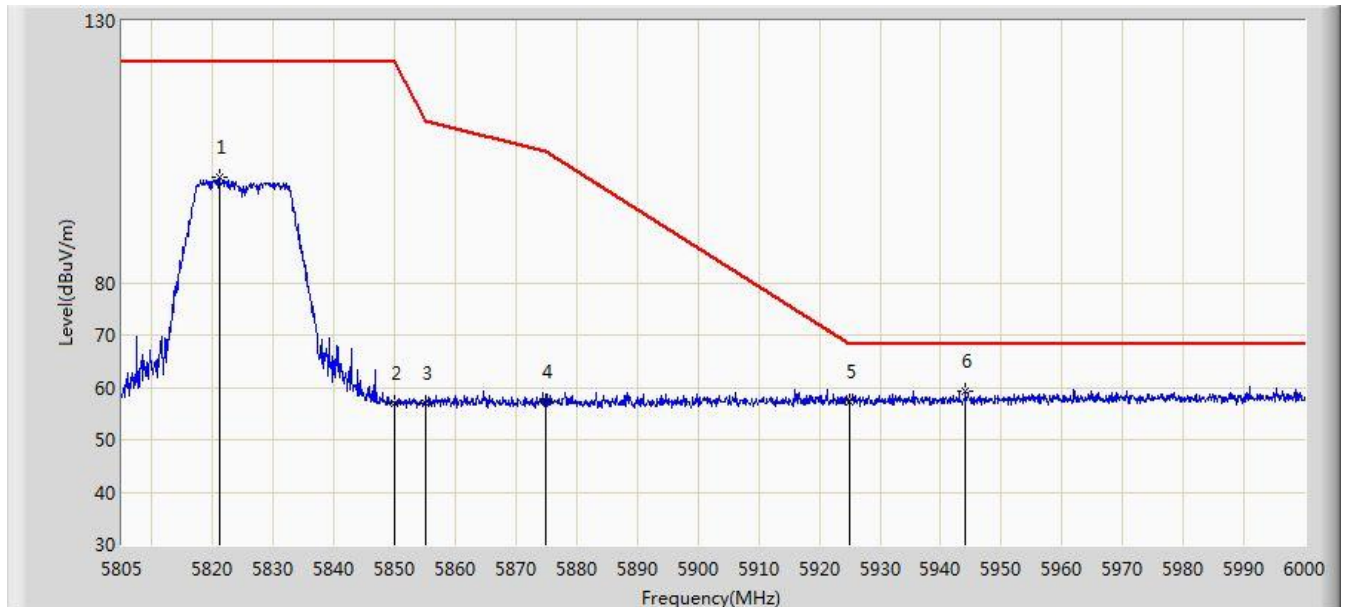


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5821.087	100.056	92.415	N/A	N/A	7.641	PK
2			5850.000	56.930	49.157	-65.270	122.200	7.774	PK
3			5855.000	56.849	49.073	-53.951	110.800	7.775	PK
4			5875.000	57.308	49.490	-47.892	105.200	7.818	PK
5			5925.000	57.376	49.557	-10.824	68.200	7.819	PK
6		*	5944.035	59.415	51.574	-8.785	68.200	7.841	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:21
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11a at channel 5825MHz	

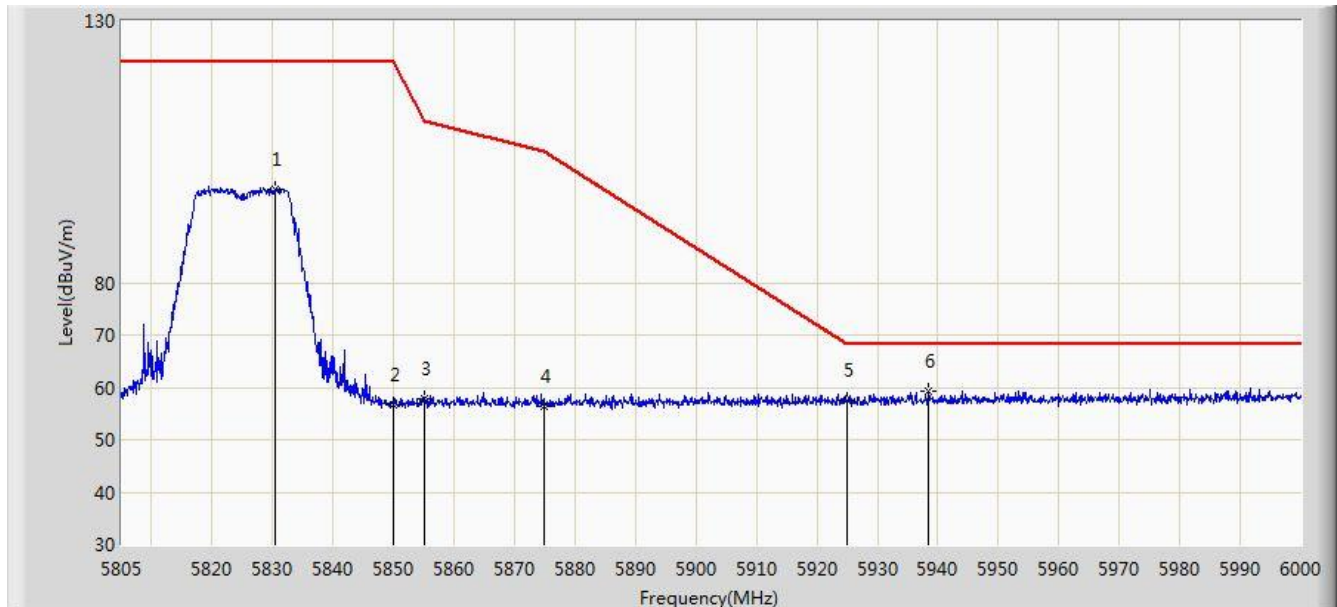


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5830.350	97.720	90.034	N/A	N/A	7.686	PK
2			5850.000	56.661	48.888	-65.539	122.200	7.774	PK
3			5855.000	57.811	50.035	-52.989	110.800	7.775	PK
4			5875.000	56.296	48.478	-48.904	105.200	7.818	PK
5			5925.000	57.451	49.632	-10.749	68.200	7.819	PK
6		*	5938.478	59.362	51.528	-8.838	68.200	7.833	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz	

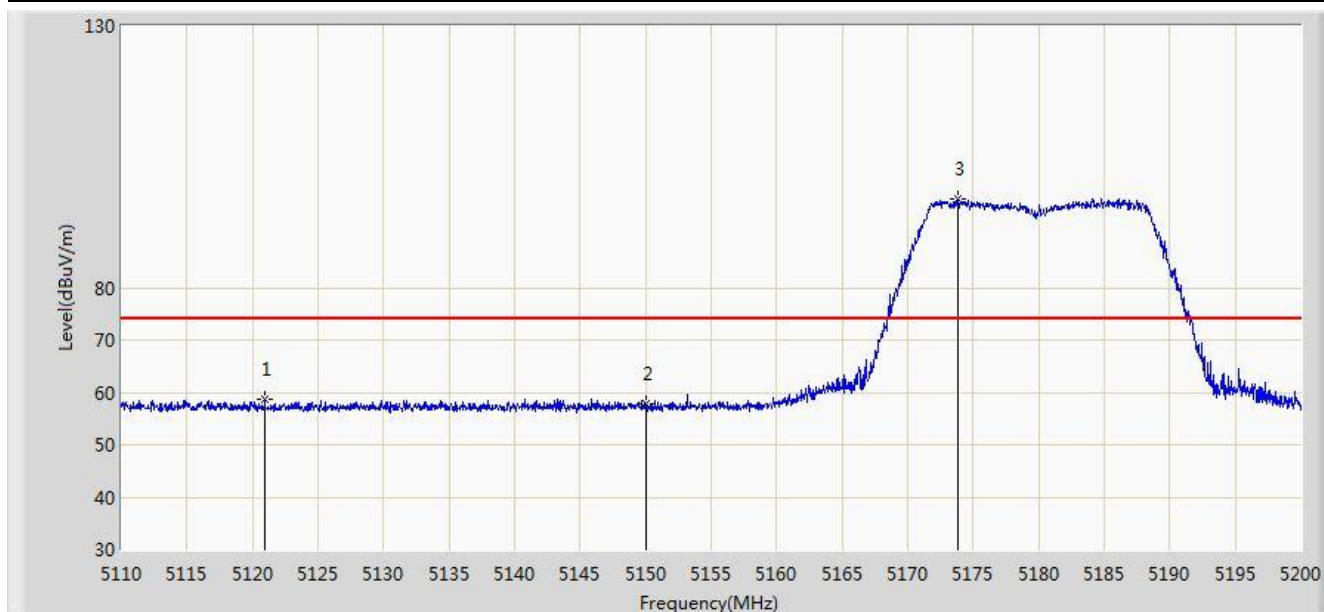


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5120.935	58.754	52.106	-15.246	74.000	6.647	PK
2			5150.000	57.742	51.180	-16.258	74.000	6.562	PK
3		*	5173.855	96.905	90.412	N/A	N/A	6.493	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz	

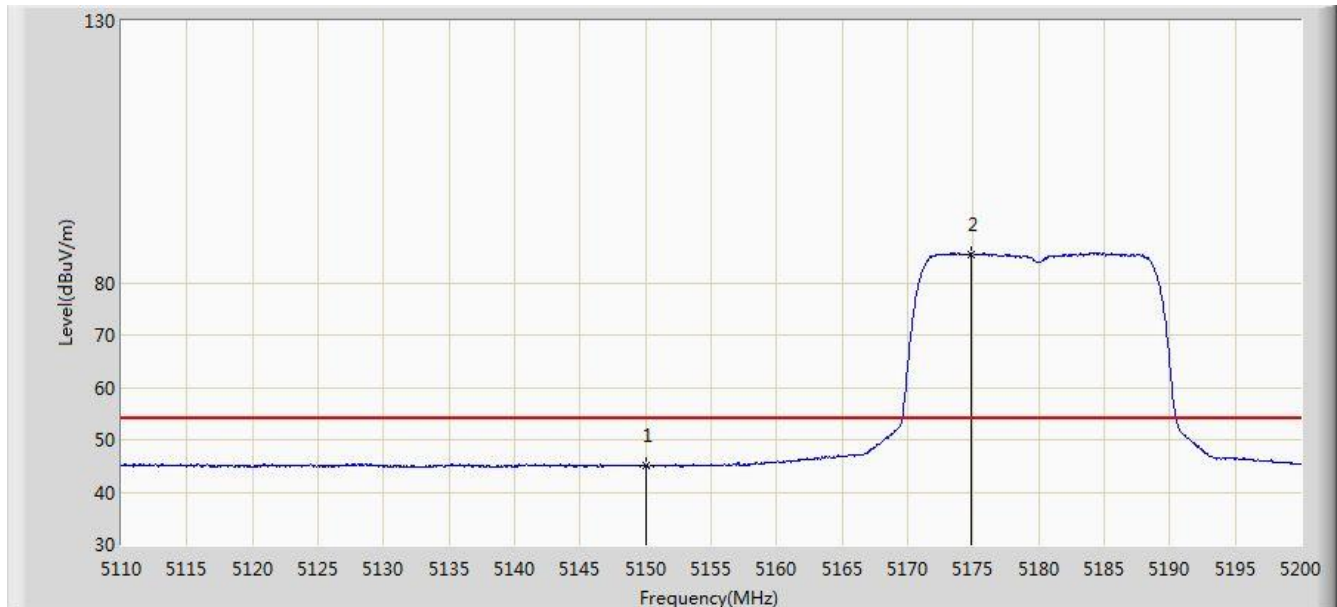


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.932	38.370	-9.068	54.000	6.562	AV
2		*	5174.800	85.503	79.017	N/A	N/A	6.486	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz	

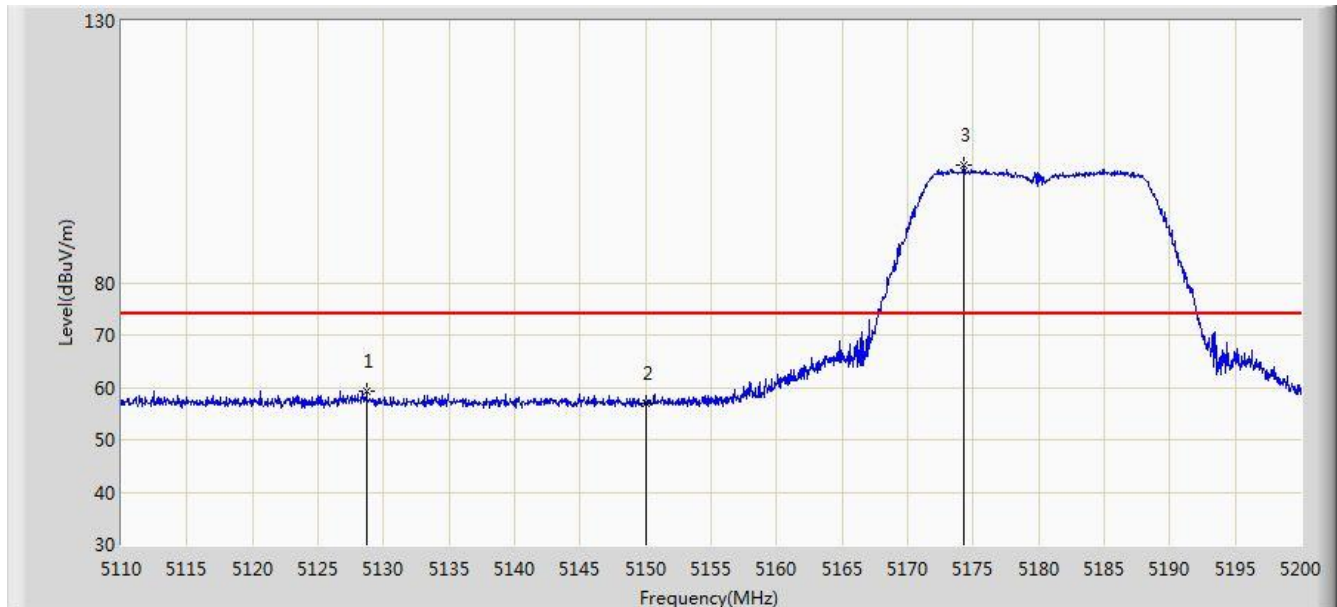


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5128.720	59.410	52.758	-14.590	74.000	6.652	PK
2			5150.000	57.054	50.492	-16.946	74.000	6.562	PK
3		*	5174.260	102.320	95.830	N/A	N/A	6.490	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz	

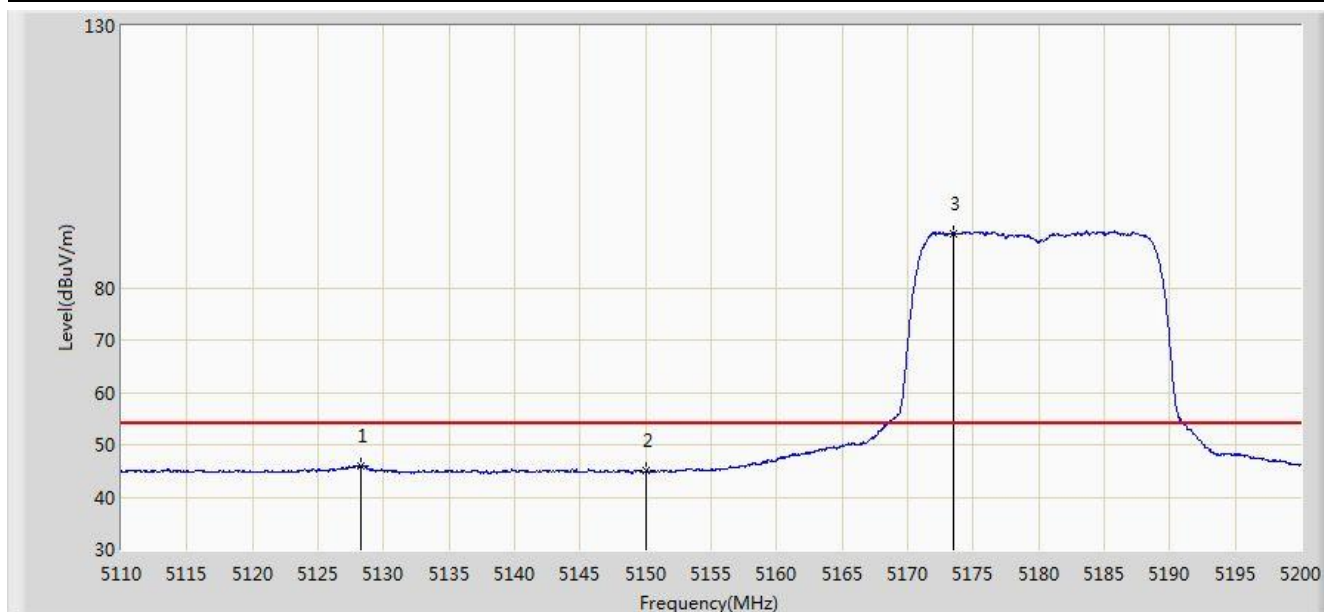


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5128.225	46.001	39.349	-7.999	54.000	6.652	AV
2			5150.000	44.962	38.400	-9.038	54.000	6.562	AV
3		*	5173.495	90.412	83.916	N/A	N/A	6.497	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

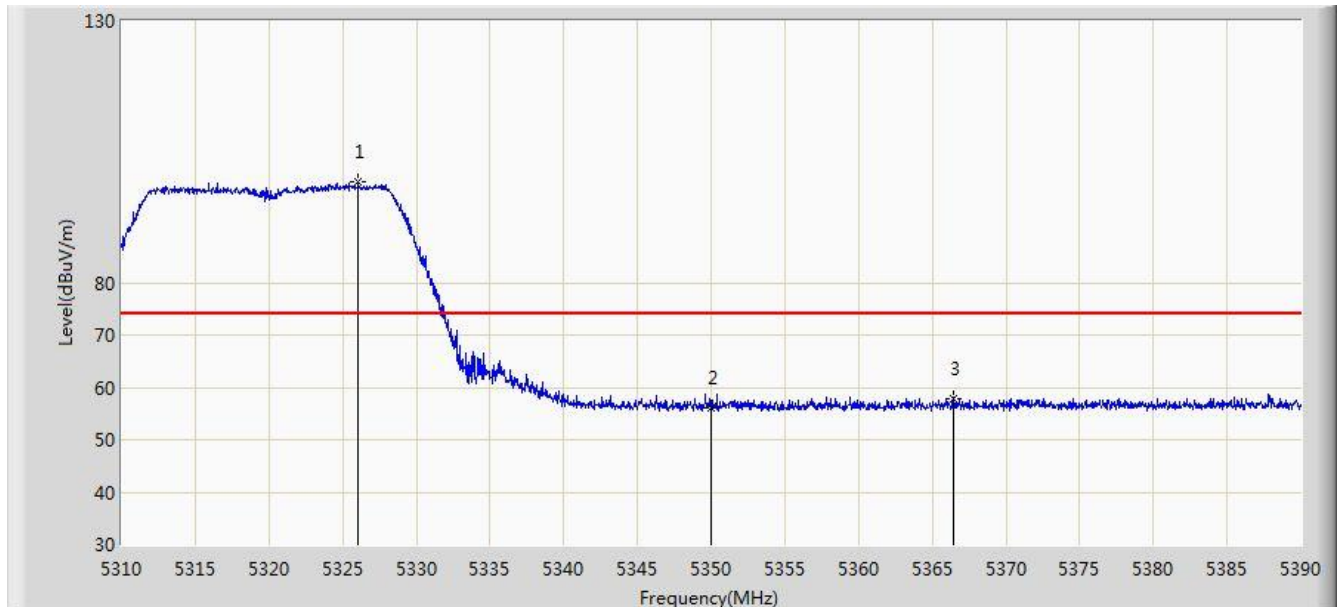


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5326.080	99.378	93.050	N/A	N/A	6.328	PK
2			5350.000	56.139	49.679	-17.861	74.000	6.460	PK
3			5366.400	57.971	51.450	-16.029	74.000	6.522	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

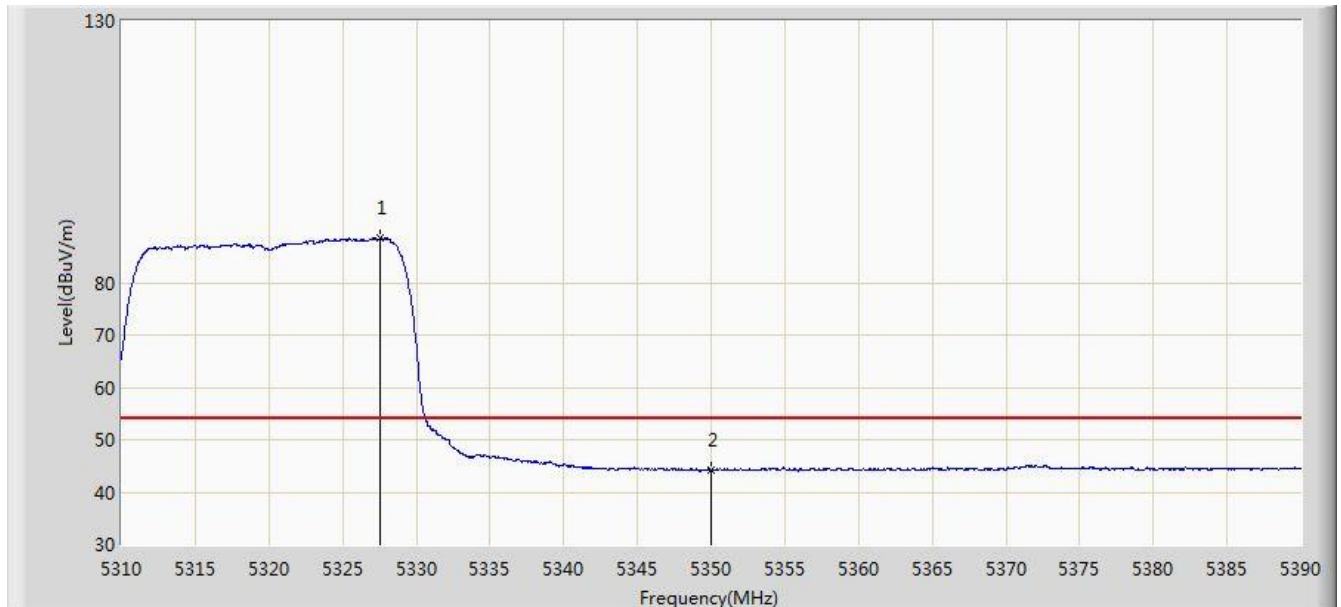


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5327.520	88.549	82.213	N/A	N/A	6.336	AV
2			5350.000	44.124	37.664	-9.876	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

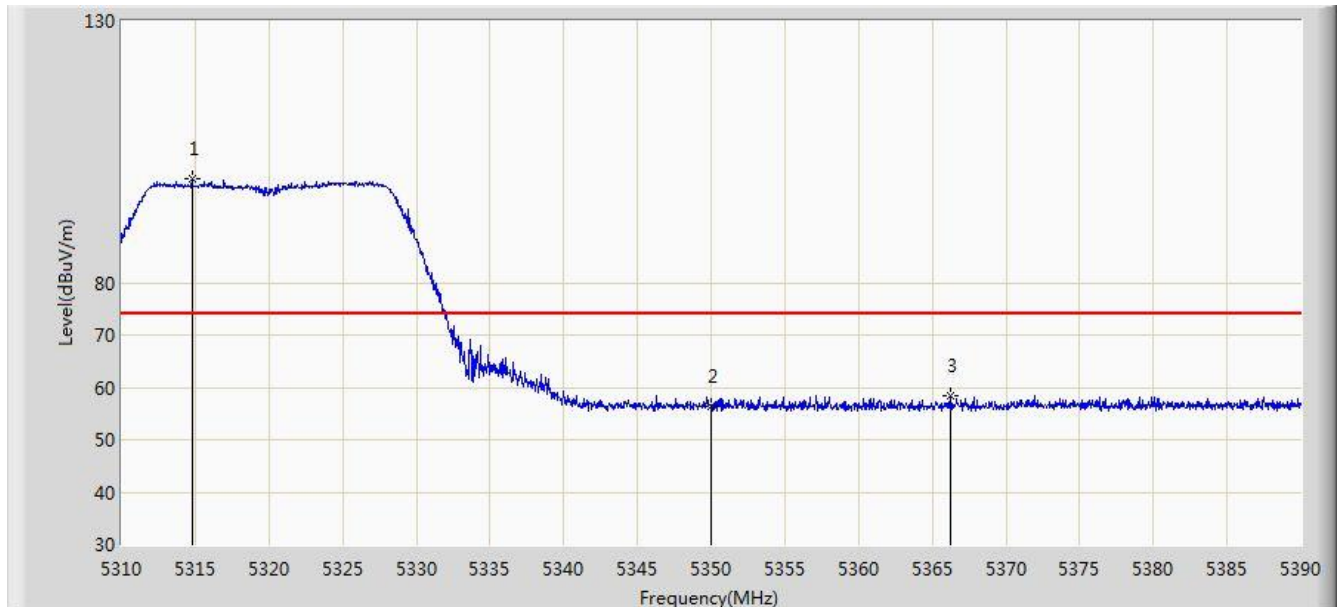


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.800	99.822	93.546	N/A	N/A	6.276	PK
2			5350.000	56.285	49.825	-17.715	74.000	6.460	PK
3			5366.240	58.532	52.011	-15.468	74.000	6.521	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz	

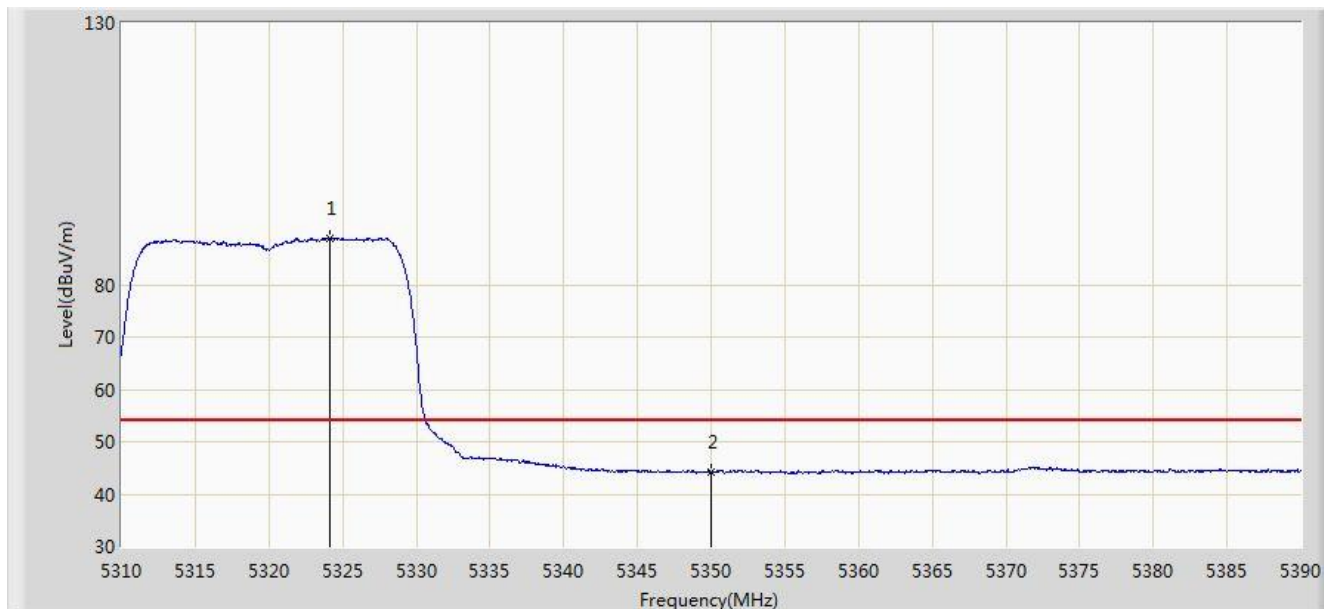


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.120	88.858	82.541	N/A	N/A	6.317	AV
2			5350.000	44.156	37.696	-9.844	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz	

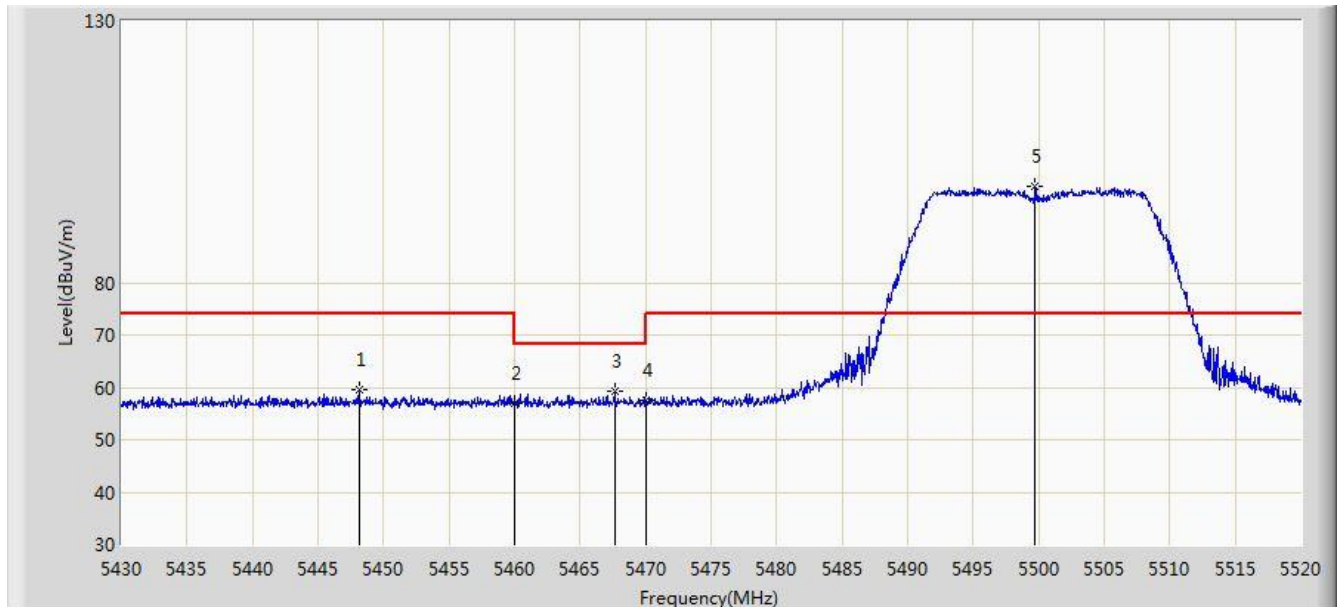


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5448.135	59.600	52.870	-14.400	74.000	6.730	PK
2			5460.000	56.914	50.112	-17.086	74.000	6.802	PK
3			5467.620	59.392	52.557	-8.808	68.200	6.835	PK
4			5470.000	57.559	50.714	-10.641	68.200	6.845	PK
5		*	5499.705	98.296	91.476	N/A	N/A	6.819	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz	

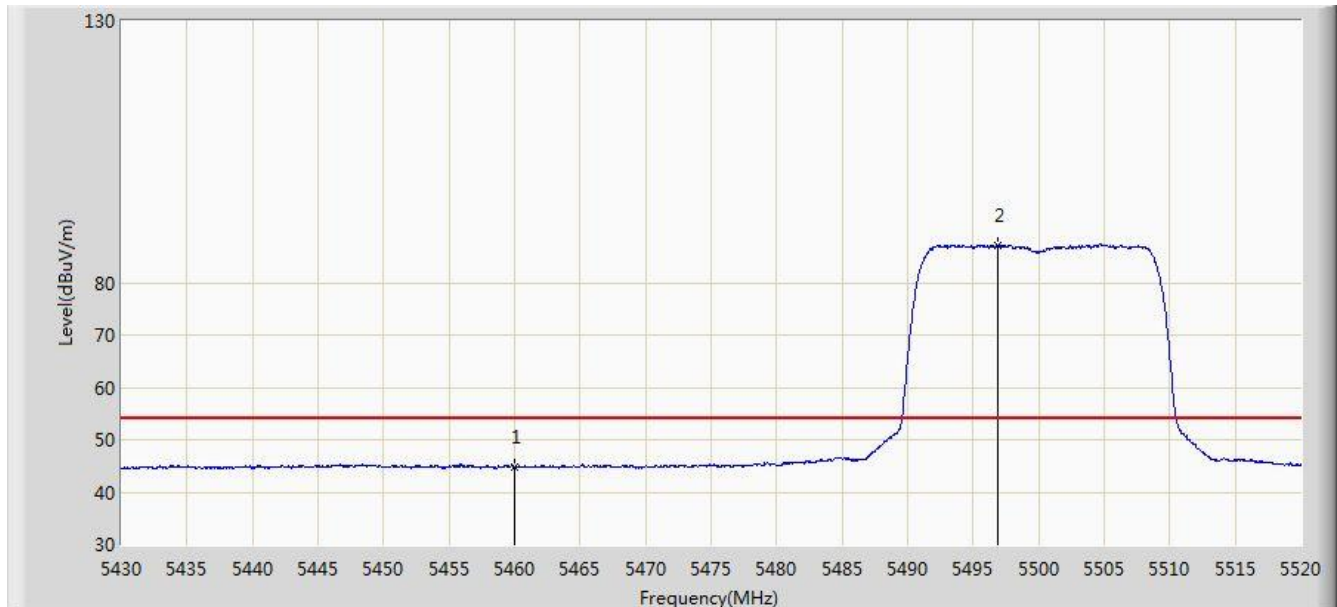


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.905	38.103	-9.095	54.000	6.802	AV
2		*	5496.915	87.028	80.204	N/A	N/A	6.825	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz	

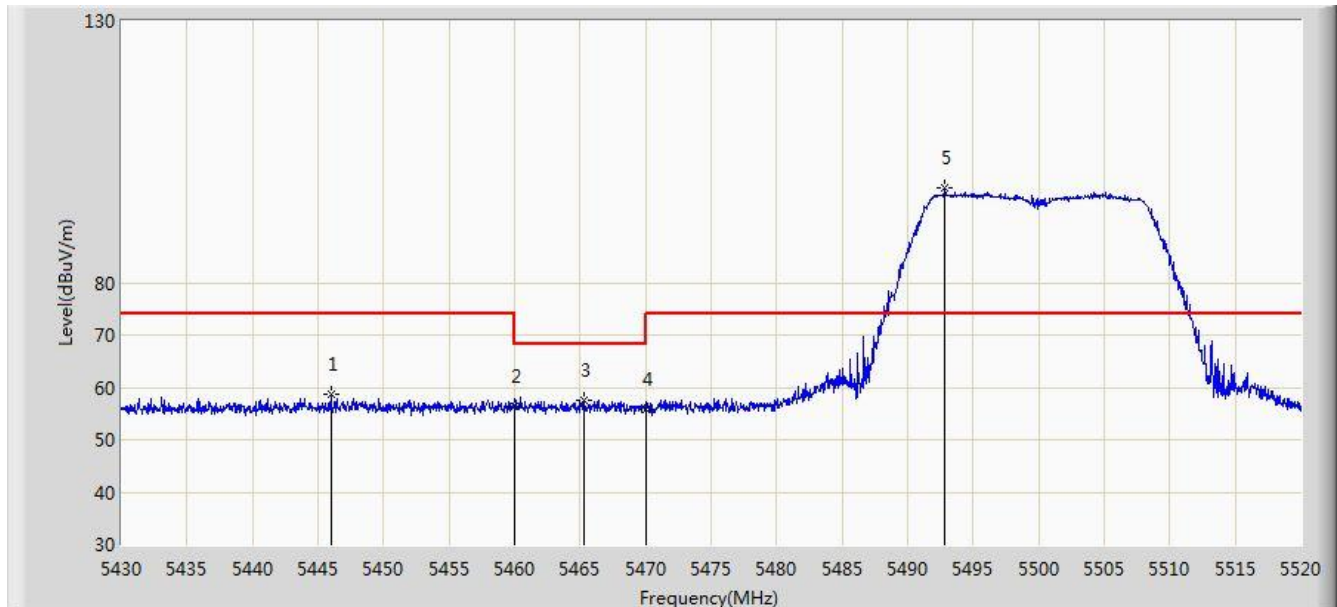


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5445.975	58.836	52.122	-15.164	74.000	6.714	PK
2			5460.000	56.271	49.469	-17.729	74.000	6.802	PK
3			5465.280	57.528	50.703	-10.672	68.200	6.825	PK
4			5470.000	55.763	48.918	-12.437	68.200	6.845	PK
5		*	5492.865	98.119	91.288	N/A	N/A	6.830	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz	

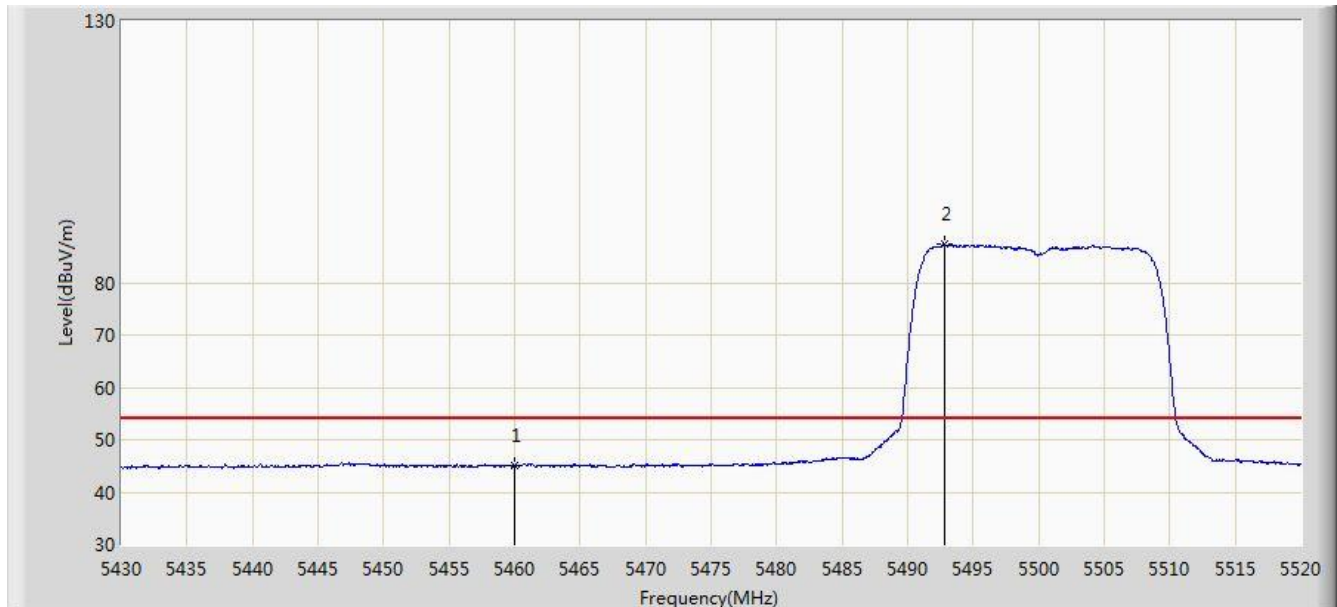


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.937	38.135	-9.063	54.000	6.802	AV
2		*	5492.820	87.378	80.547	N/A	N/A	6.830	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz	

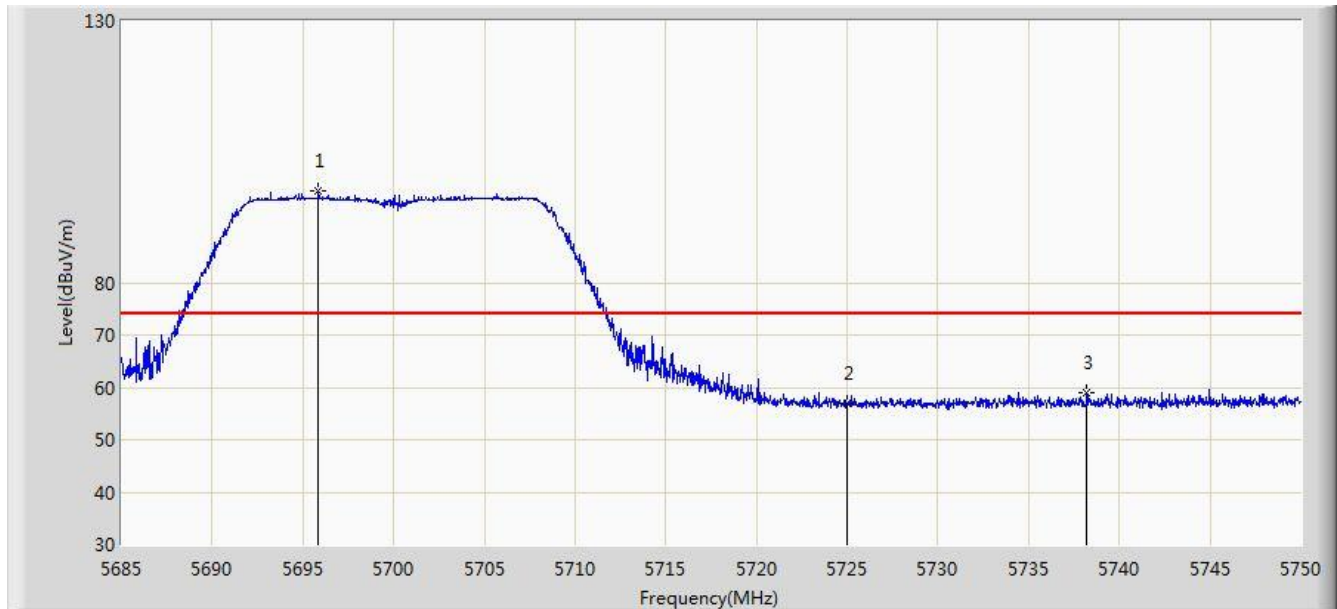


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.855	97.445	90.308	N/A	N/A	7.138	PK
2			5725.000	56.876	49.548	-17.124	74.000	7.328	PK
3			5738.203	58.911	51.526	-15.089	74.000	7.386	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz	

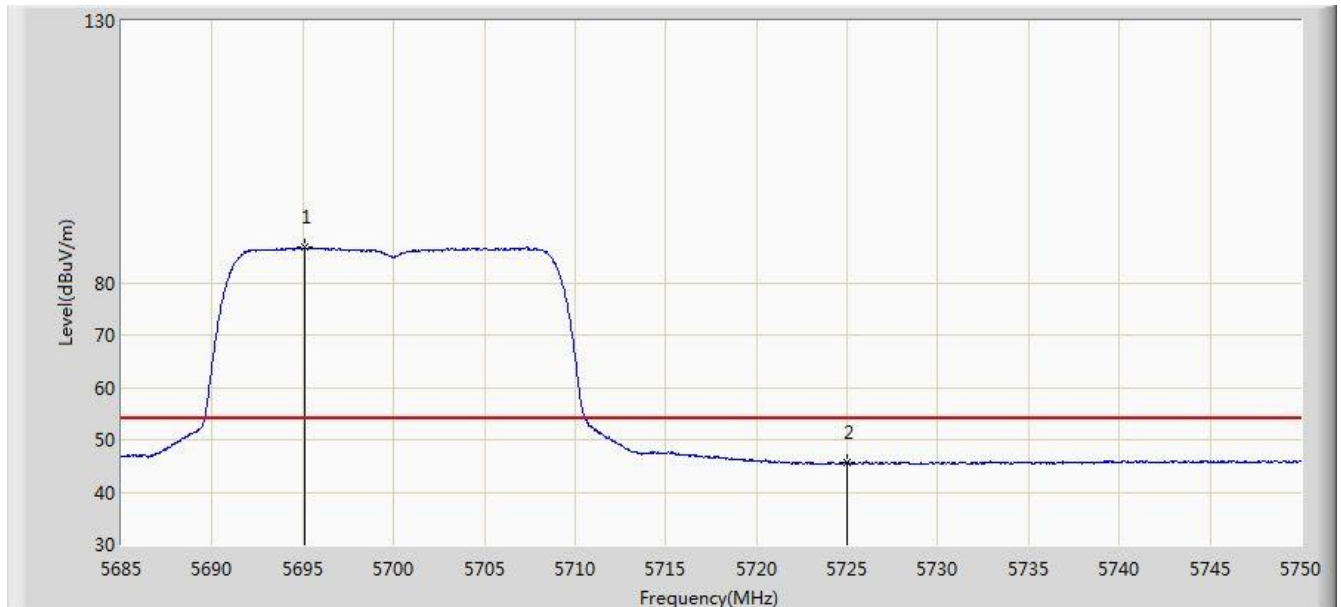


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.107	86.711	79.579	N/A	N/A	7.133	AV
2			5725.000	45.521	38.193	-8.479	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz	

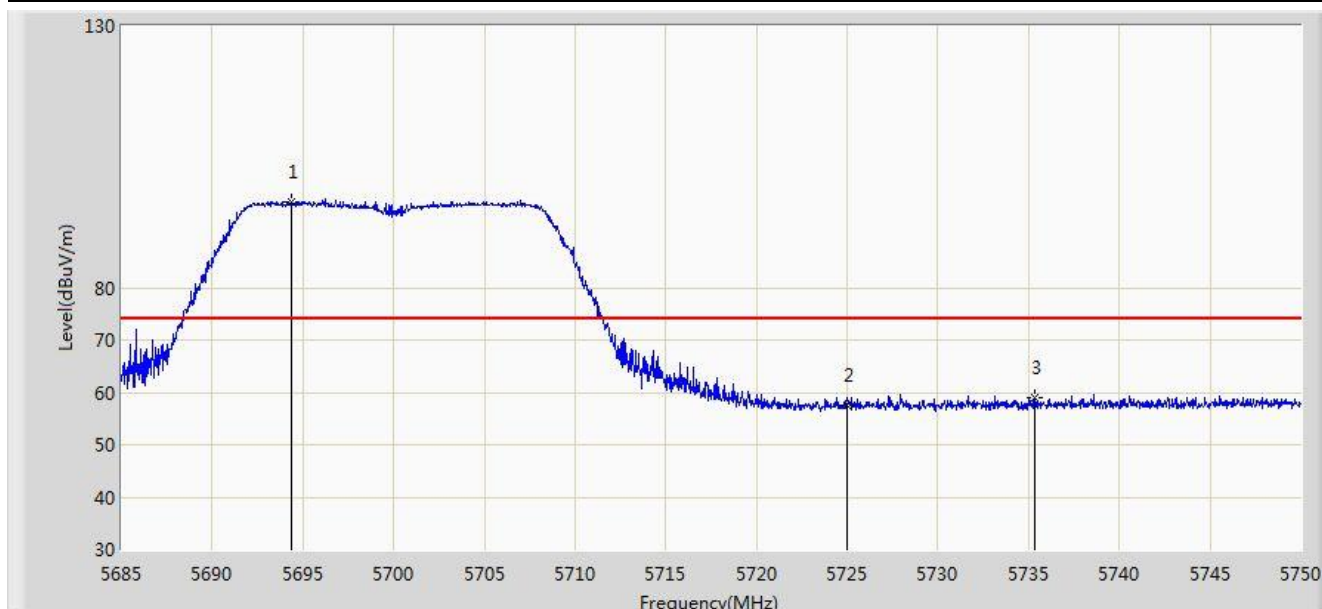


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5694.328	96.388	89.261	N/A	N/A	7.127	PK
2			5725.000	57.436	50.108	-16.564	74.000	7.328	PK
3			5735.375	58.973	51.600	-15.027	74.000	7.374	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz	

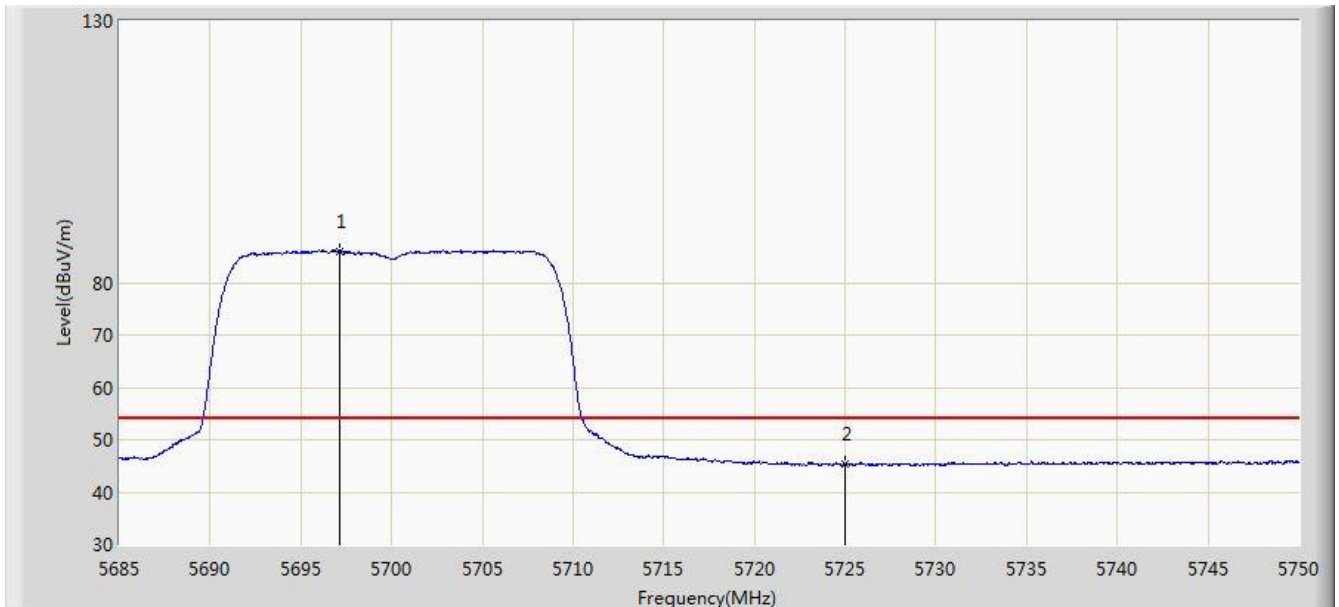


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.123	86.084	78.938	N/A	N/A	7.147	AV
2			5725.000	45.233	37.905	-8.767	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 19:58
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz	

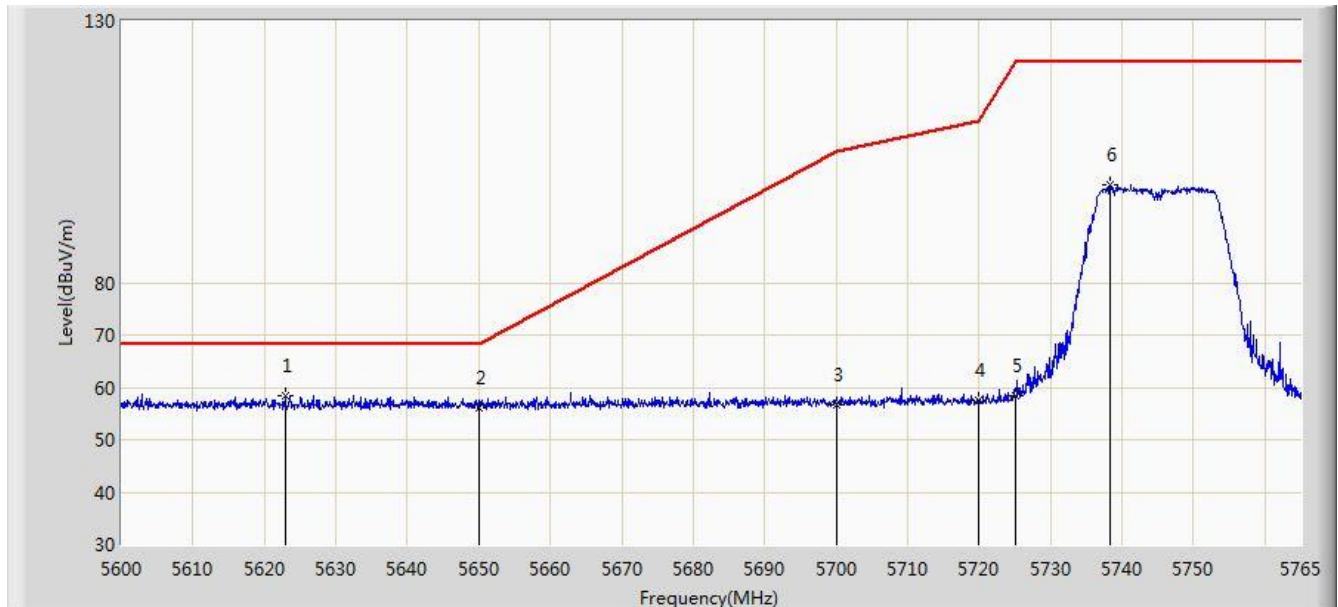


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5622.853	58.457	51.445	-9.743	68.200	7.013	PK
2			5650.000	56.140	49.135	-12.060	68.200	7.005	PK
3			5700.000	56.695	49.530	-48.505	105.200	7.165	PK
4			5720.000	57.543	50.244	-53.257	110.800	7.299	PK
5			5725.000	58.340	51.012	-63.860	122.200	7.328	PK
6			5738.270	98.756	91.371	N/A	N/A	7.386	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:00
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz	

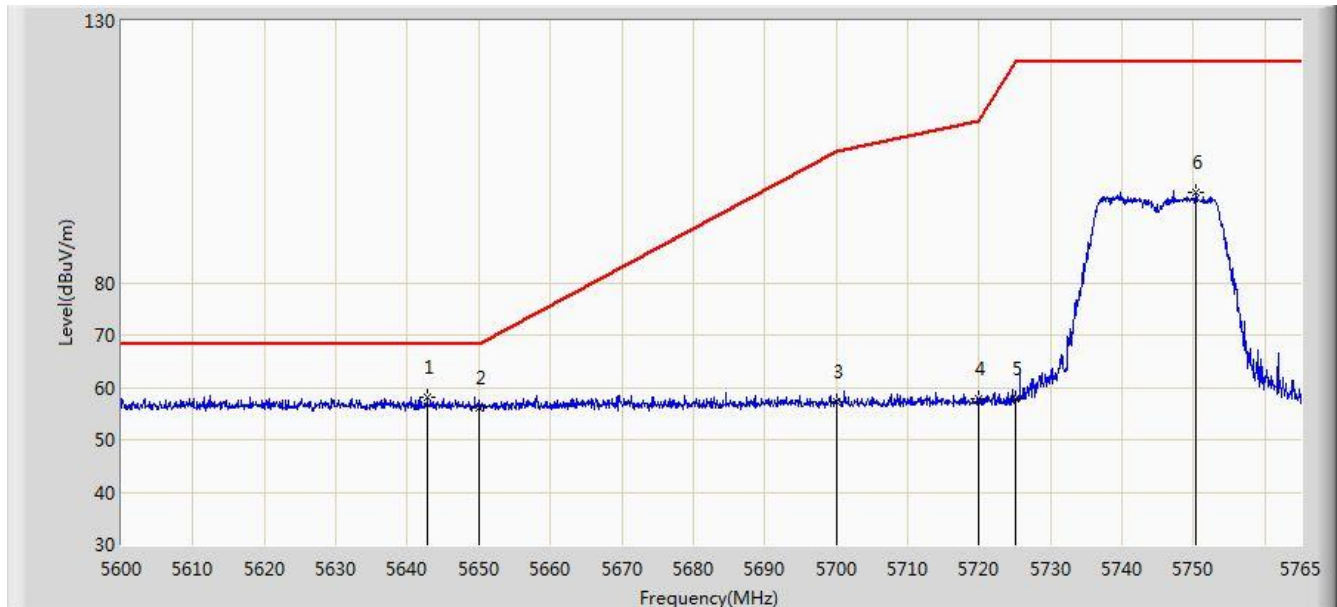


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.817	58.193	51.204	-10.007	68.200	6.989	PK
2			5650.000	56.034	49.029	-12.166	68.200	7.005	PK
3			5700.000	57.127	49.962	-48.073	105.200	7.165	PK
4			5720.000	57.789	50.490	-53.011	110.800	7.299	PK
5			5725.000	57.928	50.600	-64.272	122.200	7.328	PK
6			5750.232	97.349	89.940	N/A	N/A	7.408	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:02
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz	

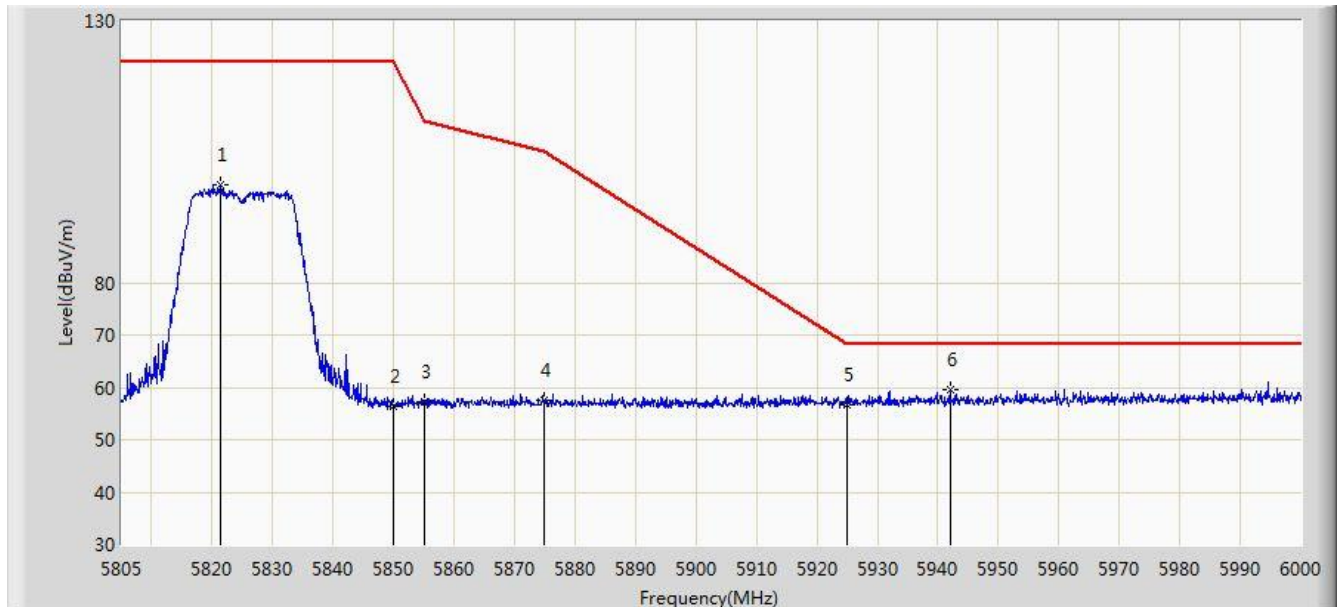


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5821.283	98.627	90.986	N/A	N/A	7.641	PK
2			5850.000	56.442	48.669	-65.758	122.200	7.774	PK
3			5855.000	57.272	49.496	-53.528	110.800	7.775	PK
4			5875.000	57.455	49.637	-47.745	105.200	7.818	PK
5			5925.000	56.782	48.963	-11.418	68.200	7.819	PK
6		*	5941.987	59.512	51.674	-8.688	68.200	7.837	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:04
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz	

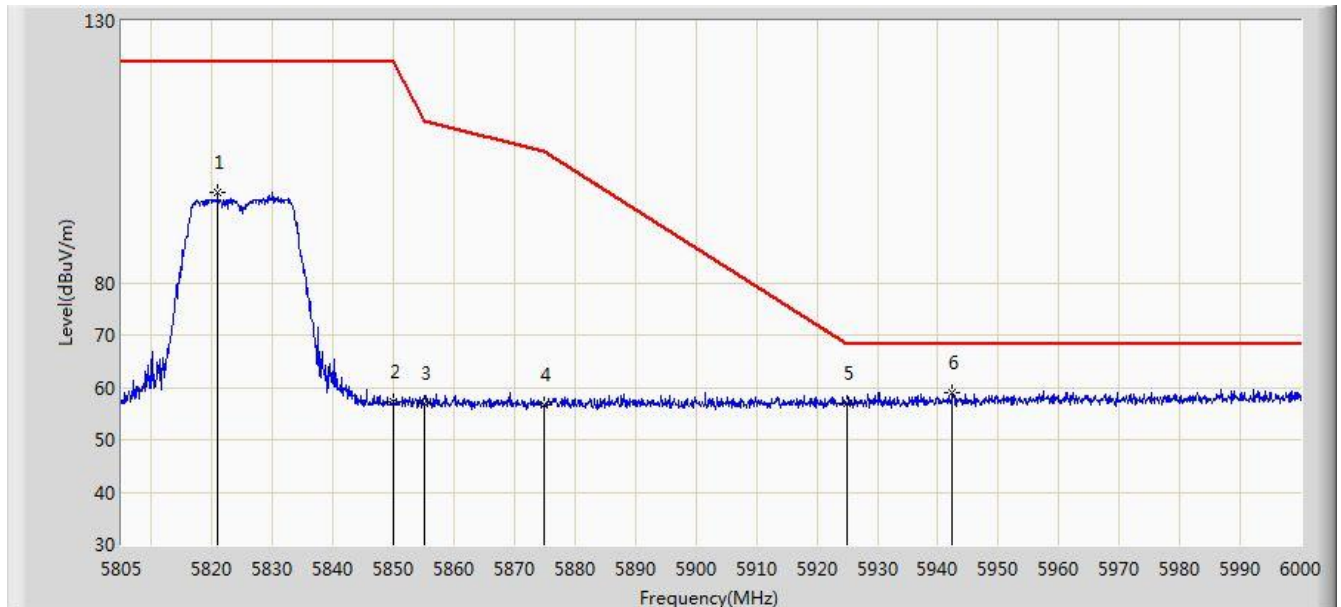


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5820.893	97.242	89.602	N/A	N/A	7.639	PK
2			5850.000	57.354	49.581	-64.846	122.200	7.774	PK
3			5855.000	56.890	49.114	-53.910	110.800	7.775	PK
4			5875.000	56.738	48.920	-48.462	105.200	7.818	PK
5			5925.000	56.866	49.047	-11.334	68.200	7.819	PK
6		*	5942.377	59.040	51.201	-9.160	68.200	7.838	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz	

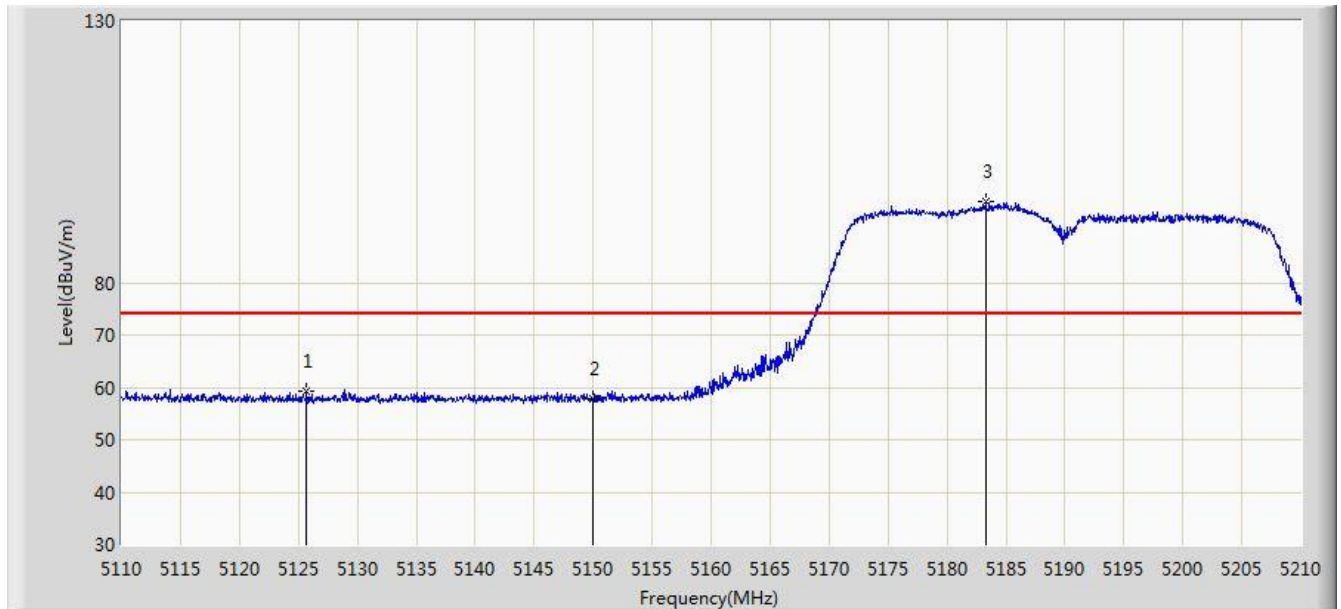


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5125.700	59.292	52.642	-14.708	74.000	6.651	PK
2			5150.000	57.857	51.295	-16.143	74.000	6.562	PK
3		*	5183.300	95.421	89.000	N/A	N/A	6.421	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz	

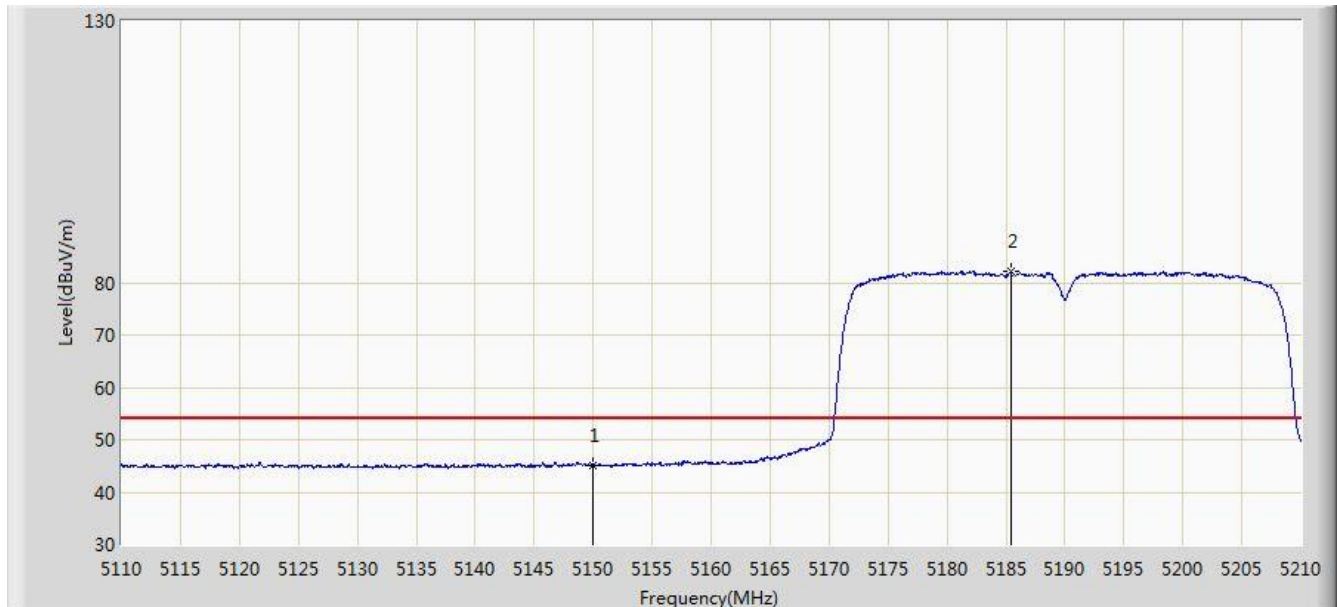


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.204	38.642	-8.796	54.000	6.562	AV
2		*	5185.400	82.083	75.675	N/A	N/A	6.408	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz	

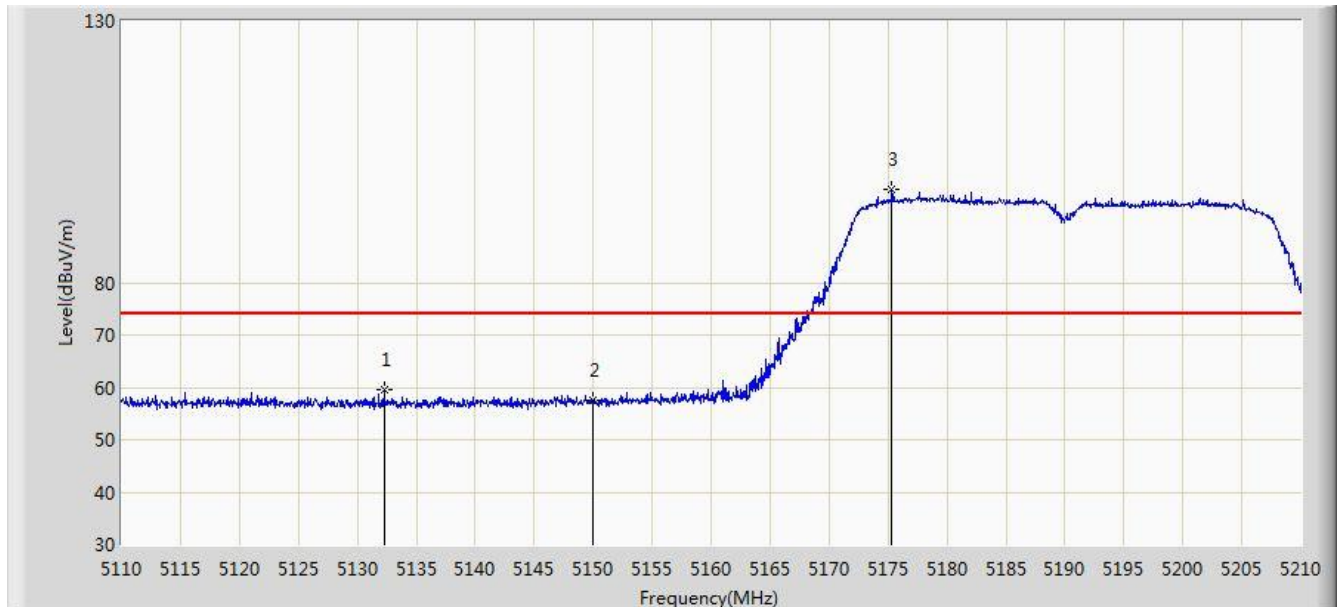


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5132.250	59.542	52.895	-14.458	74.000	6.647	PK
2			5150.000	57.557	50.995	-16.443	74.000	6.562	PK
3		*	5175.350	97.888	91.407	N/A	N/A	6.481	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz	

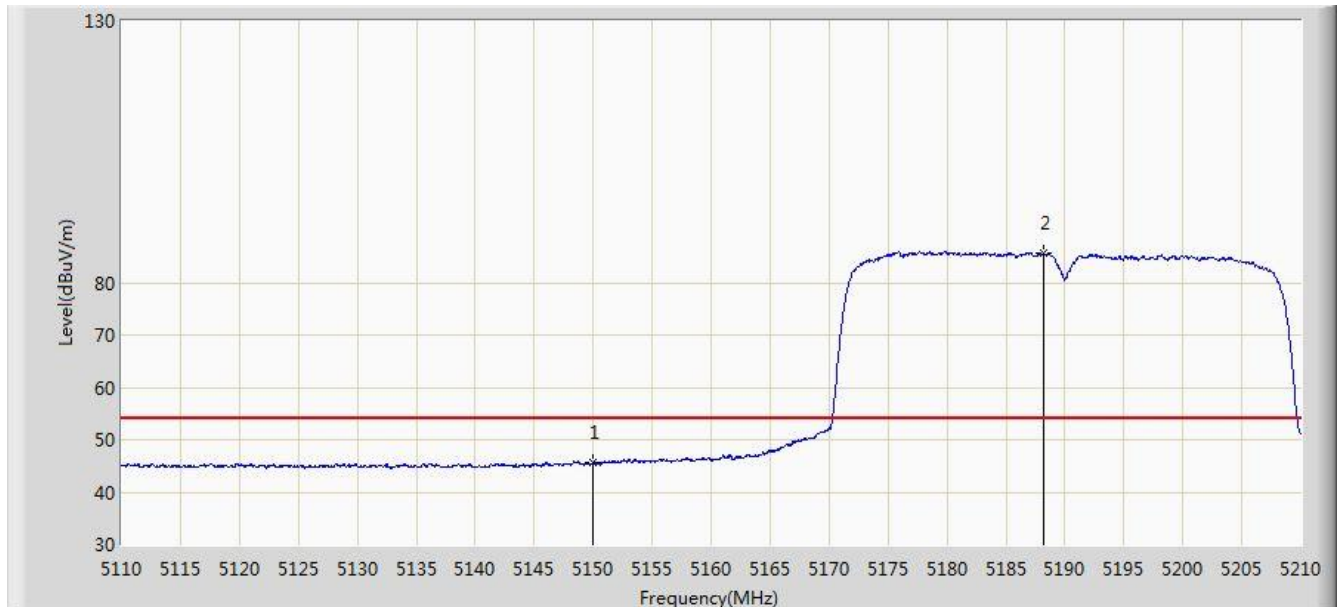


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.706	39.144	-8.294	54.000	6.562	AV
2		*	5188.250	85.777	79.385	N/A	N/A	6.392	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz	

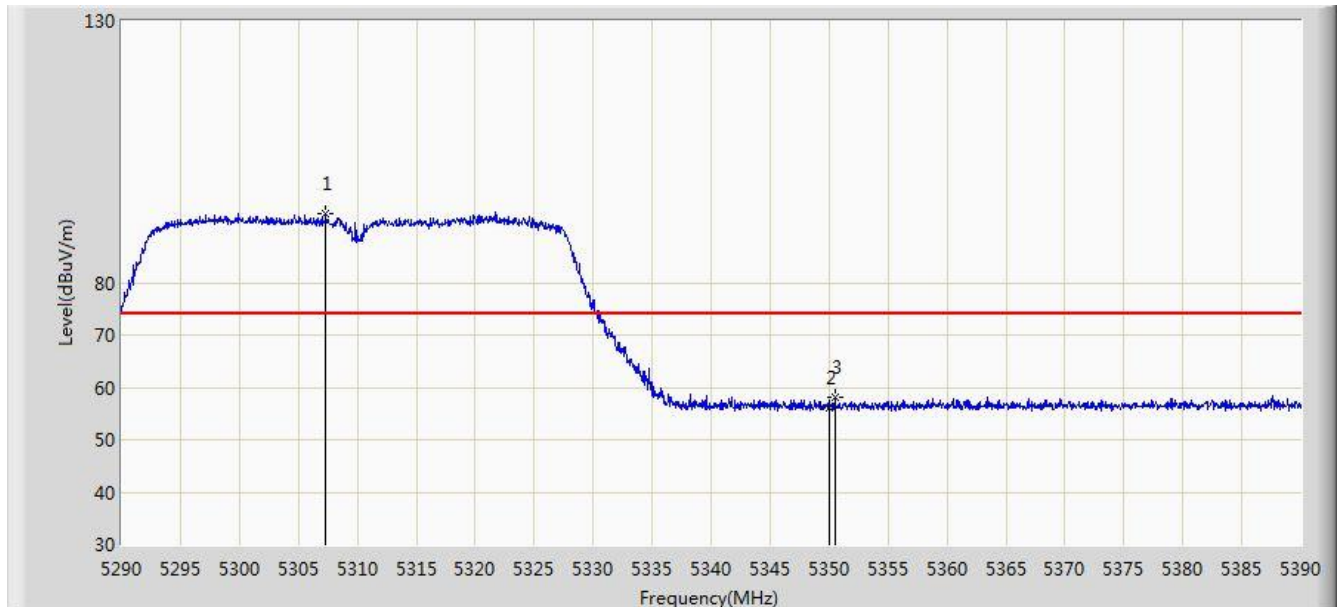


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.350	93.193	86.927	N/A	N/A	6.266	PK
2			5350.000	56.076	49.616	-17.924	74.000	6.460	PK
3			5350.500	57.989	51.526	-16.011	74.000	6.462	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz	

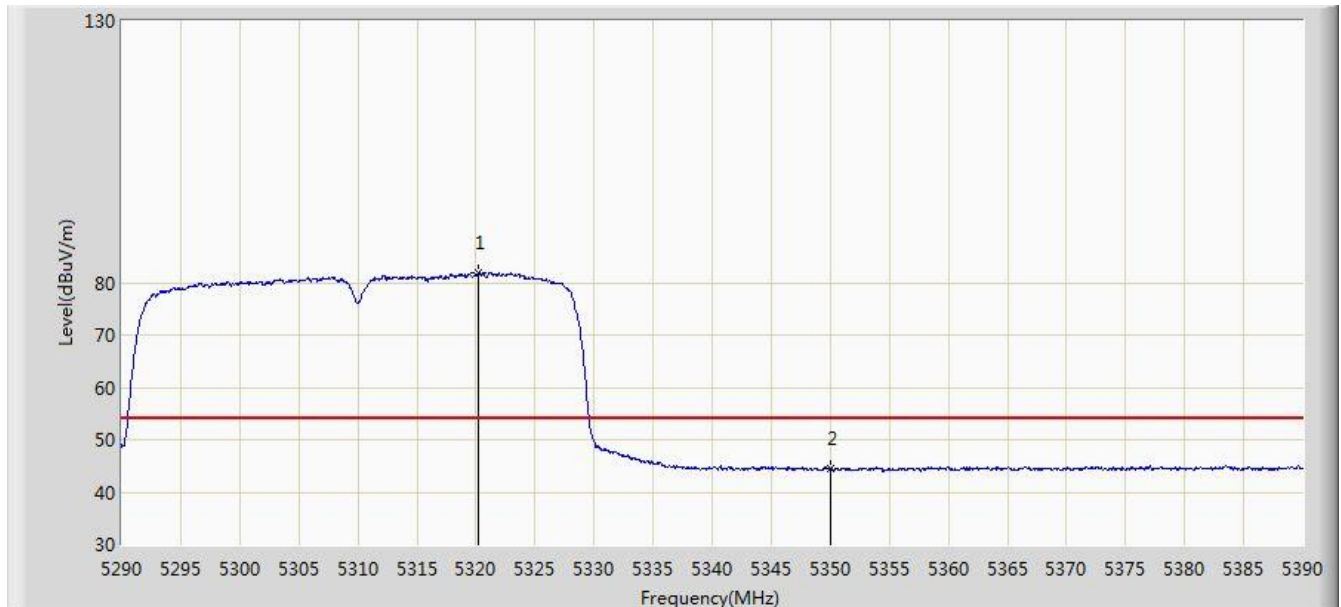


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5320.200	81.743	75.448	N/A	N/A	6.294	AV
2			5350.000	44.472	38.012	-9.528	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz	

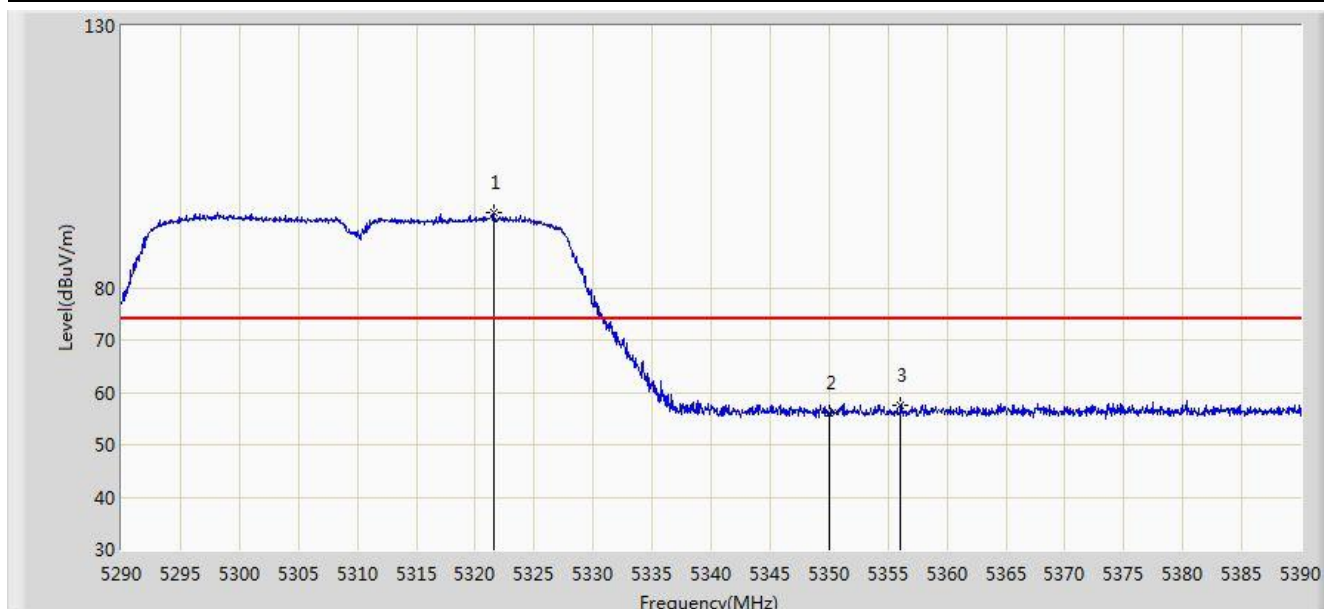


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.550	94.409	88.107	N/A	N/A	6.303	PK
2			5350.000	55.998	49.538	-18.002	74.000	6.460	PK
3			5356.050	57.649	51.164	-16.351	74.000	6.485	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz	

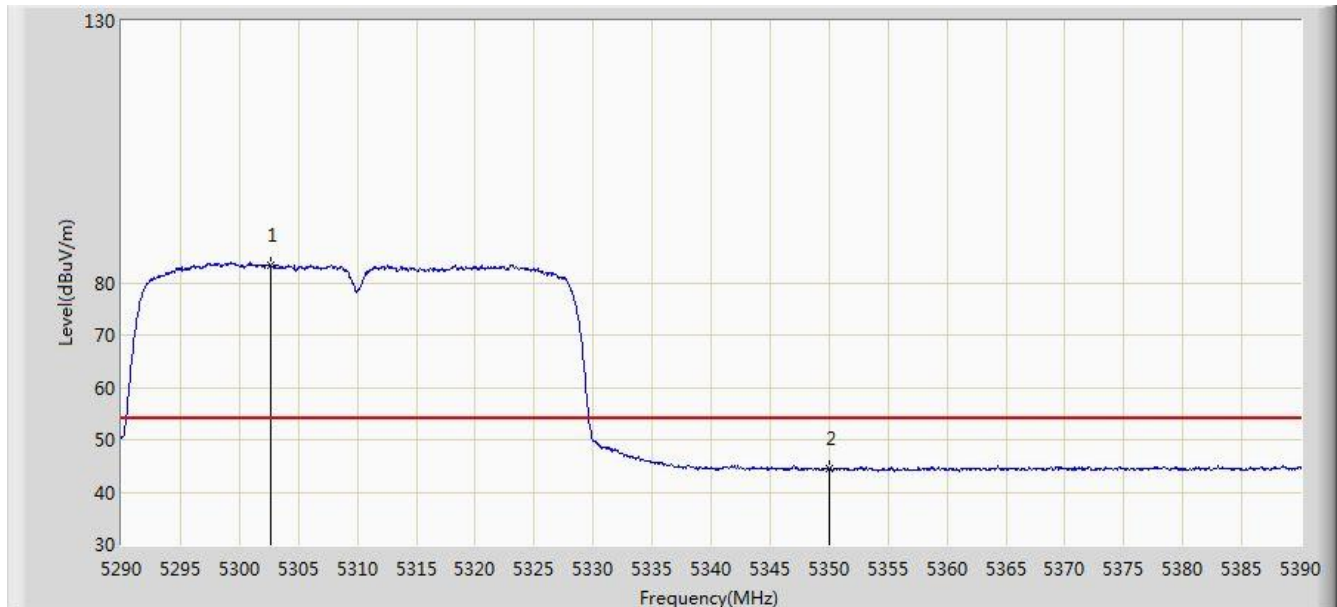


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.700	83.345	77.084	N/A	N/A	6.261	AV
2			5350.000	44.520	38.060	-9.480	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 55100MHz	

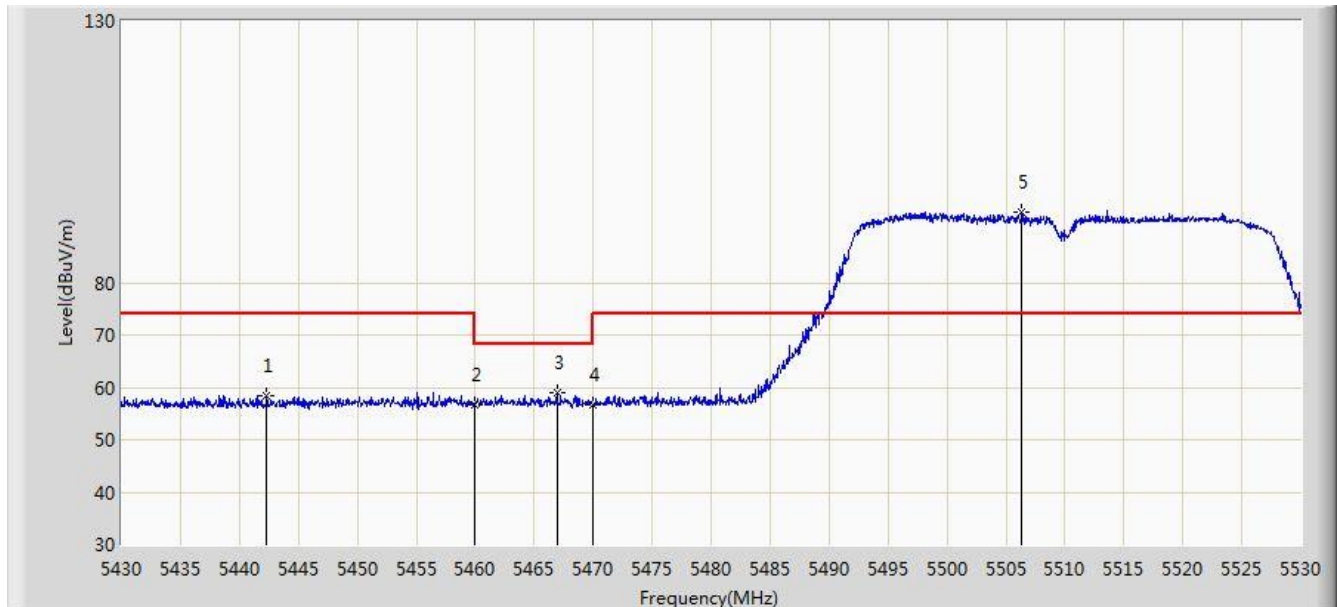


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5442.300	58.505	51.819	-15.495	74.000	6.686	PK
2			5460.000	56.649	49.847	-17.351	74.000	6.802	PK
3			5466.950	58.928	52.096	-9.272	68.200	6.831	PK
4			5470.000	56.676	49.831	-11.524	68.200	6.845	PK
5		*	5506.350	93.599	86.788	N/A	N/A	6.811	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 55100MHz	

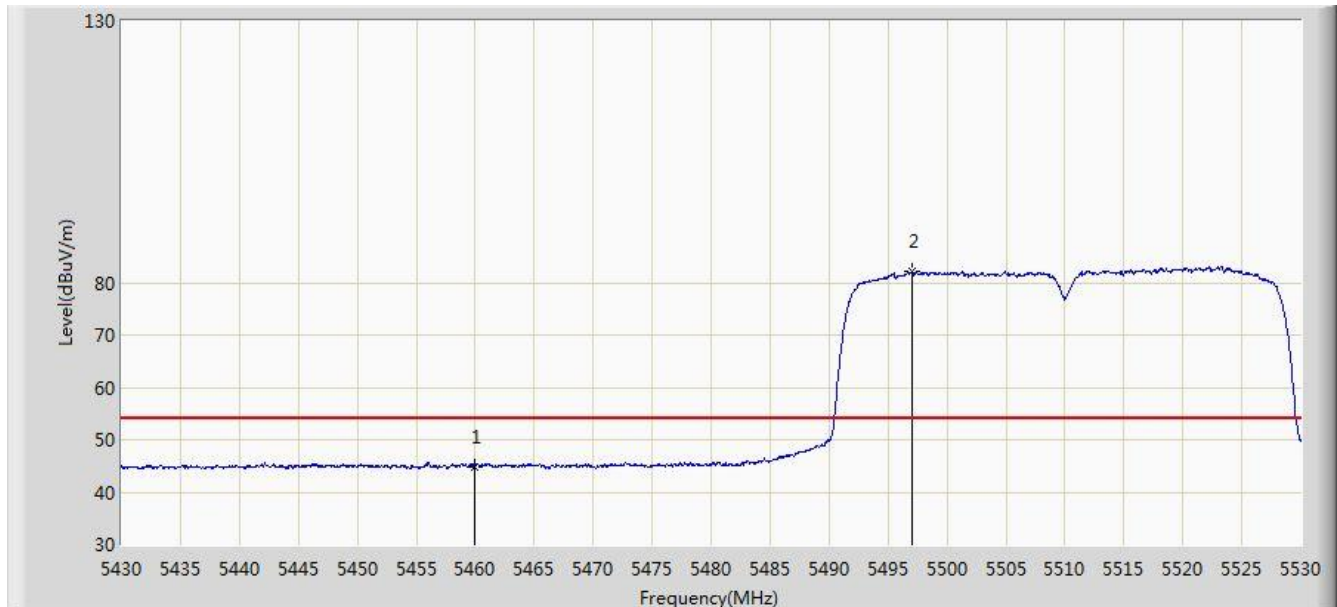


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.846	38.044	-9.154	54.000	6.802	AV
2		*	5497.000	82.058	75.234	N/A	N/A	6.825	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 55100MHz	

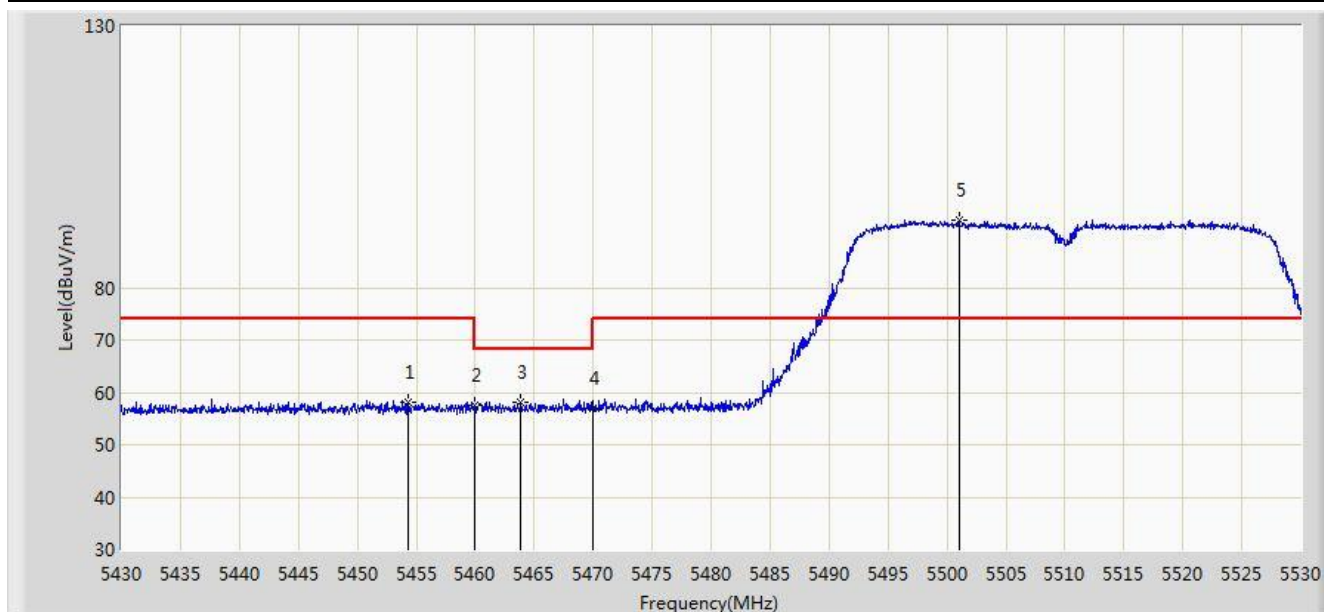


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.350	58.152	51.375	-15.848	74.000	6.777	PK
2			5460.000	57.475	50.673	-16.525	74.000	6.802	PK
3			5463.850	58.249	51.431	-9.951	68.200	6.818	PK
4			5470.000	56.927	50.082	-11.273	68.200	6.845	PK
5		*	5501.000	93.000	86.182	N/A	N/A	6.818	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 55100MHz	

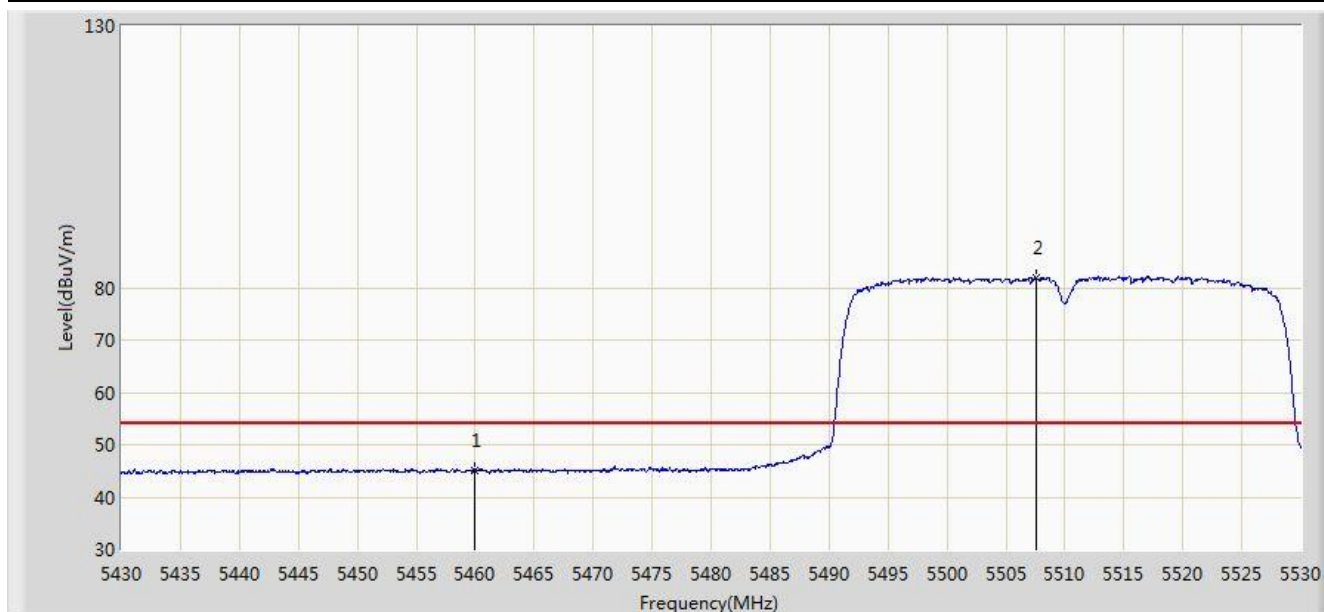


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.051	38.249	-8.949	54.000	6.802	AV
2		*	5507.550	81.794	74.983	N/A	N/A	6.811	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz	

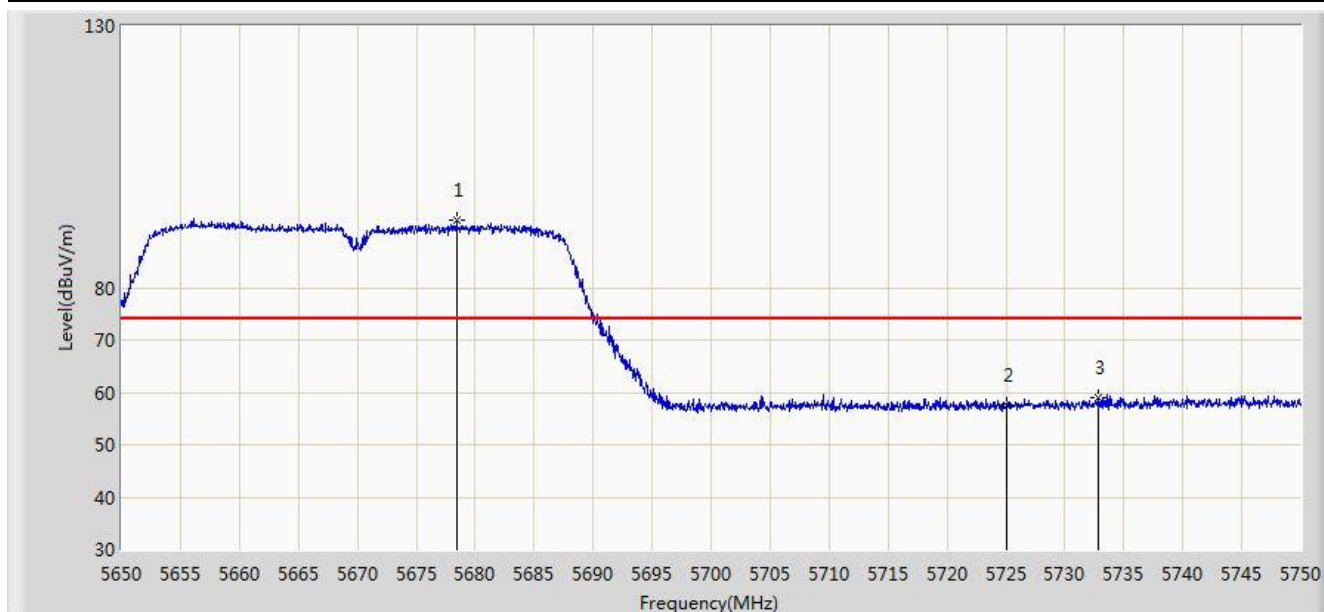


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5678.400	92.971	85.905	N/A	N/A	7.066	PK
2			5725.000	57.680	50.352	-16.320	74.000	7.328	PK
3			5732.800	59.014	51.652	-14.986	74.000	7.363	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz	

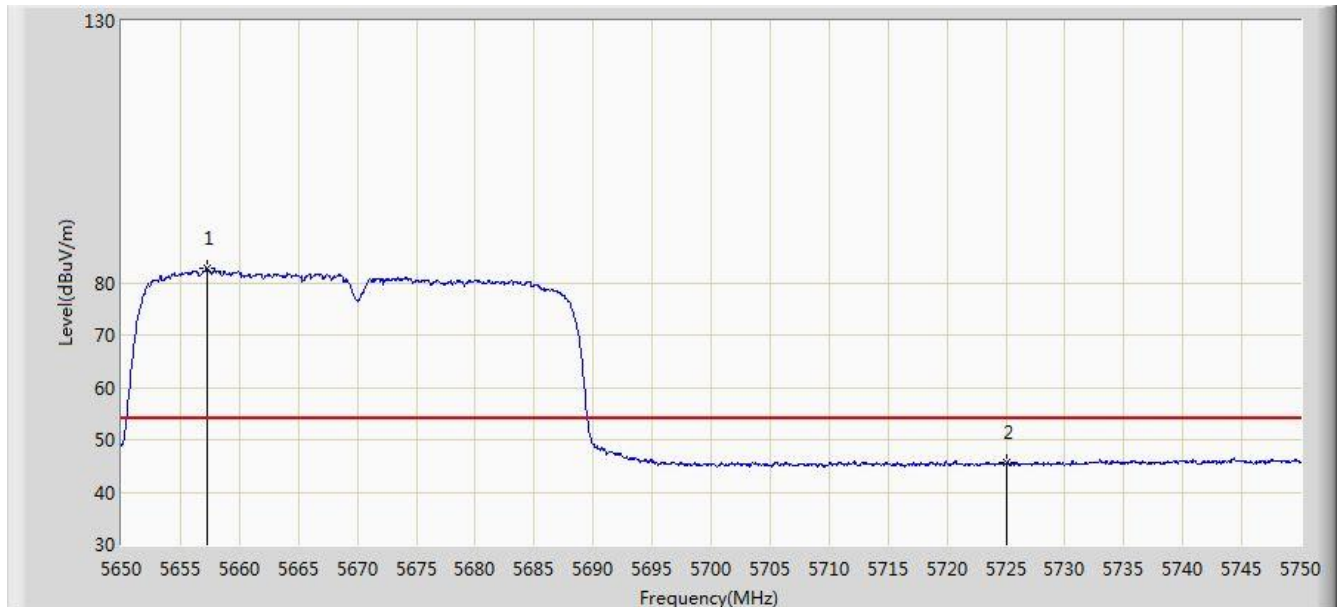


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5657.250	82.697	75.671	N/A	N/A	7.026	AV
2			5725.000	45.557	38.229	-8.443	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz	

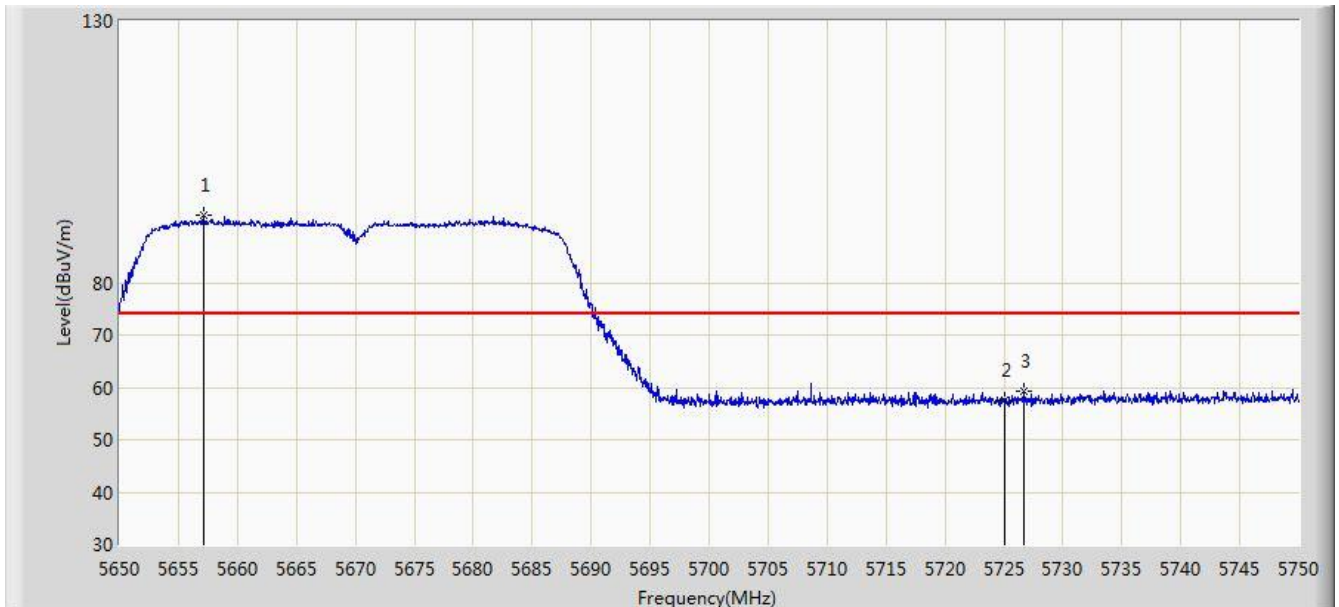


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5657.100	92.972	85.947	N/A	N/A	7.025	PK
2			5725.000	57.433	50.105	-16.567	74.000	7.328	PK
3			5726.650	59.377	52.041	-14.623	74.000	7.336	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz	

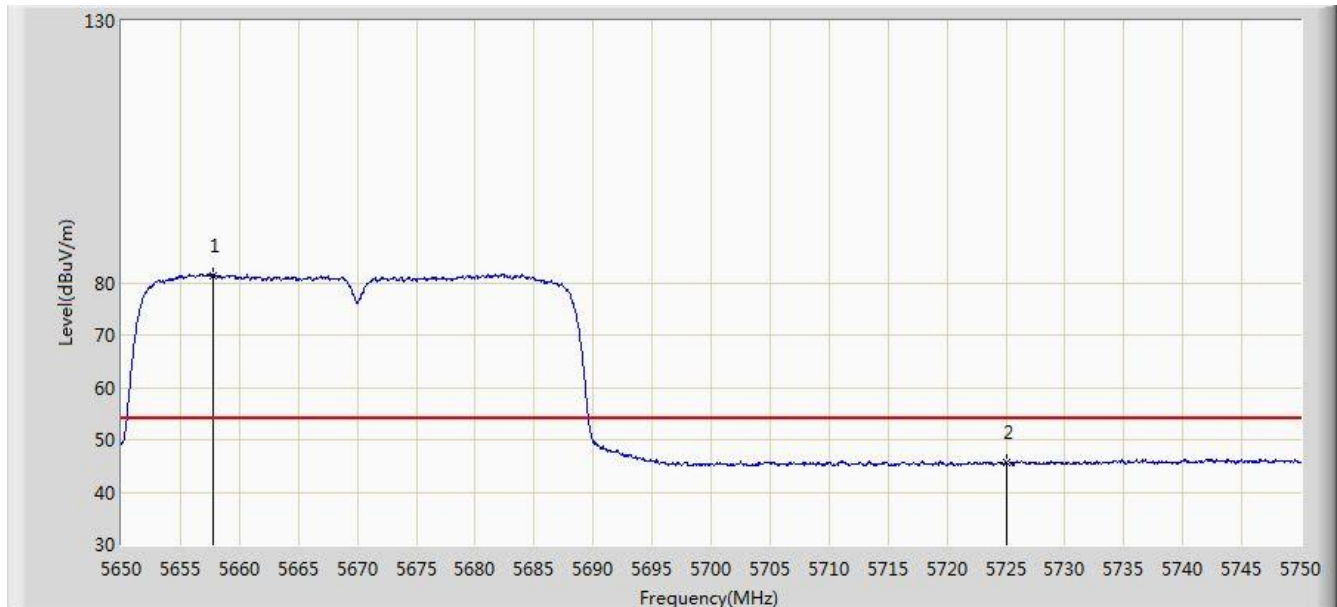


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5657.750	81.443	74.416	N/A	N/A	7.028	AV
2			5725.000	45.735	38.407	-8.265	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:41
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz	

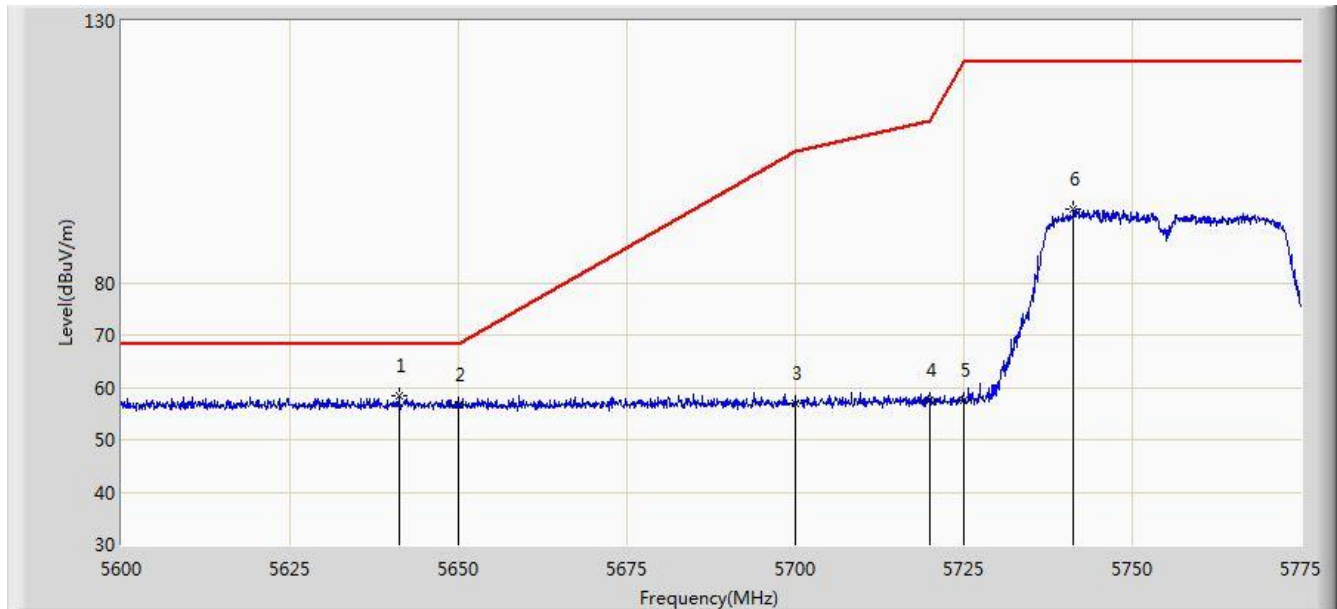


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5641.125	58.422	51.437	-9.778	68.200	6.985	PK
2			5650.000	56.715	49.710	-11.485	68.200	7.005	PK
3			5700.000	56.915	49.750	-48.285	105.200	7.165	PK
4			5720.000	57.669	50.370	-53.131	110.800	7.299	PK
5			5725.000	57.653	50.325	-64.547	122.200	7.328	PK
6			5741.225	93.918	86.522	N/A	N/A	7.397	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:44
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz	

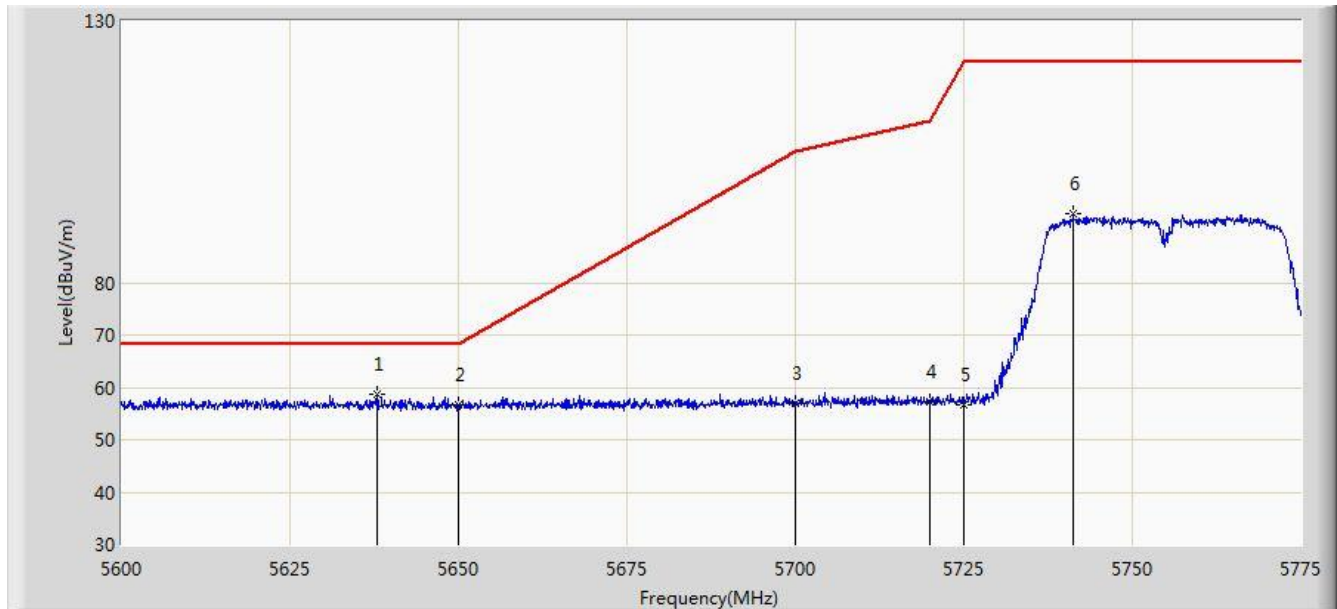


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5637.975	58.608	51.618	-9.592	68.200	6.990	PK
2			5650.000	56.565	49.560	-11.635	68.200	7.005	PK
3			5700.000	56.997	49.832	-48.203	105.200	7.165	PK
4			5720.000	57.136	49.837	-53.664	110.800	7.299	PK
5			5725.000	56.745	49.417	-65.455	122.200	7.328	PK
6			5741.225	93.199	85.803	N/A	N/A	7.397	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:46
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz	

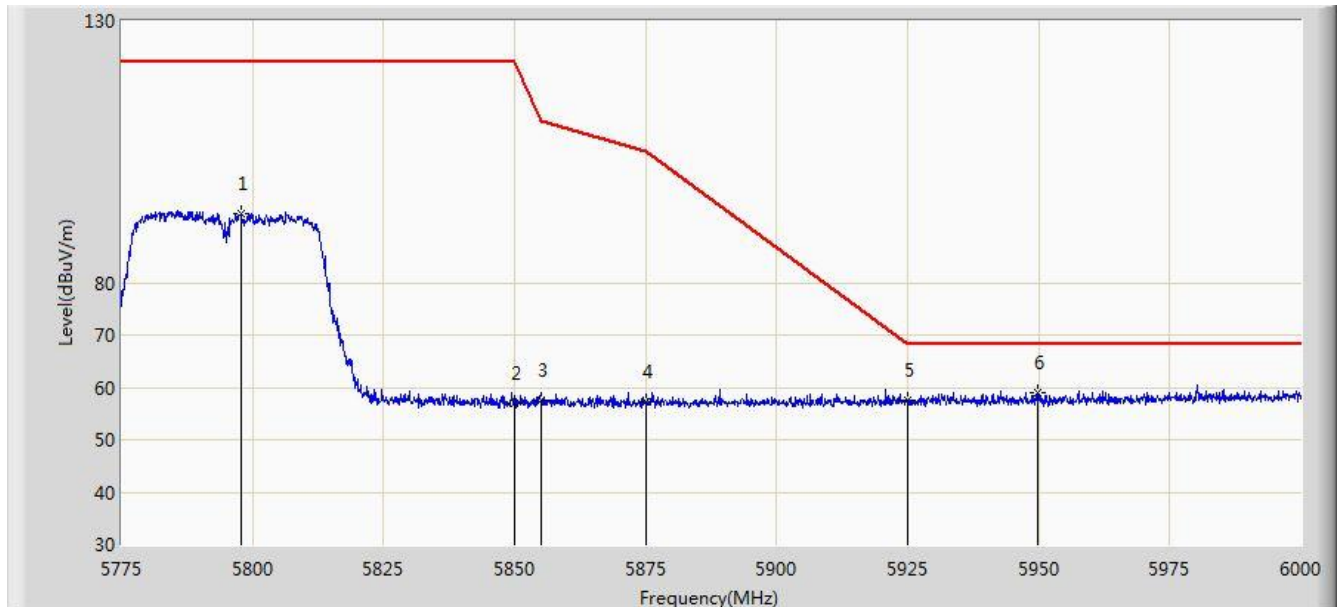


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5797.725	93.213	85.663	N/A	N/A	7.550	PK
2			5850.000	57.088	49.315	-65.112	122.200	7.774	PK
3			5855.000	57.453	49.677	-53.347	110.800	7.775	PK
4			5875.000	57.229	49.411	-47.971	105.200	7.818	PK
5			5925.000	57.604	49.785	-10.596	68.200	7.819	PK
6		*	5949.825	59.061	51.218	-9.139	68.200	7.844	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:47
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz	

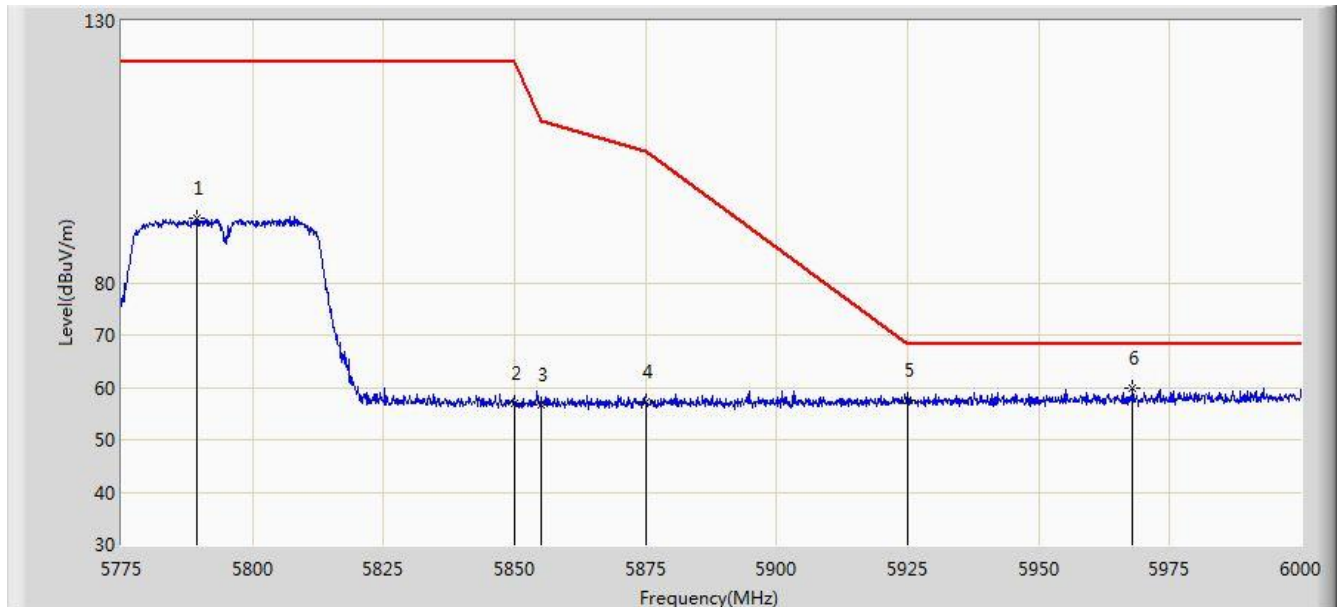


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5789.288	92.325	84.806	N/A	N/A	7.518	PK
2			5850.000	56.975	49.202	-65.225	122.200	7.774	PK
3			5855.000	56.554	48.778	-54.246	110.800	7.775	PK
4			5875.000	57.169	49.351	-48.031	105.200	7.818	PK
5			5925.000	57.422	49.603	-10.778	68.200	7.819	PK
6		*	5967.937	59.989	52.121	-8.211	68.200	7.869	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz	

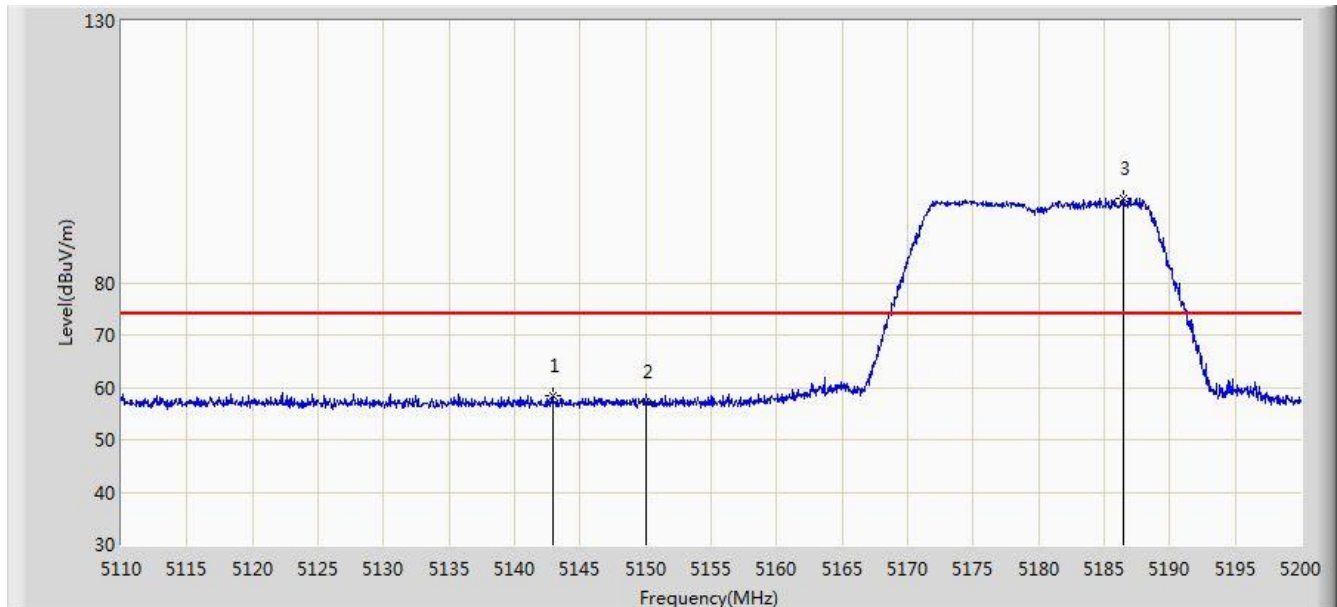


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.895	58.420	51.832	-15.580	74.000	6.588	PK
2			5150.000	57.262	50.700	-16.738	74.000	6.562	PK
3		*	5186.410	96.094	89.692	N/A	N/A	6.402	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz	

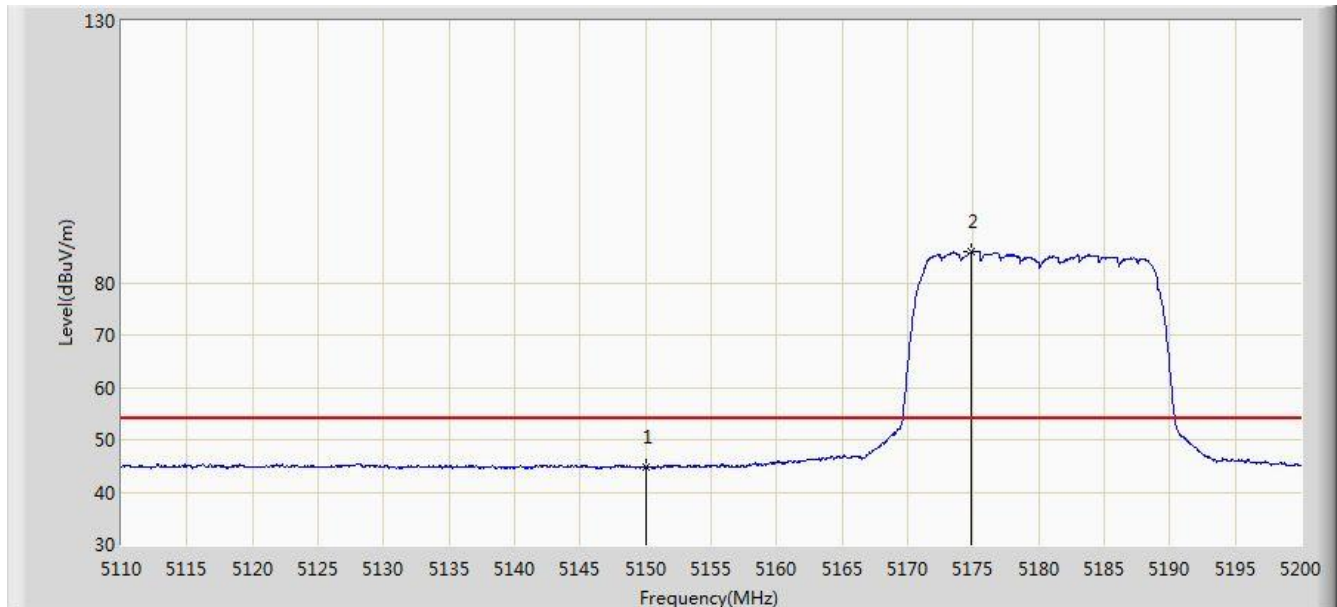


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	44.790	38.228	-9.210	54.000	6.562	AV
2		*	5174.800	85.809	79.323	N/A	N/A	6.486	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz	

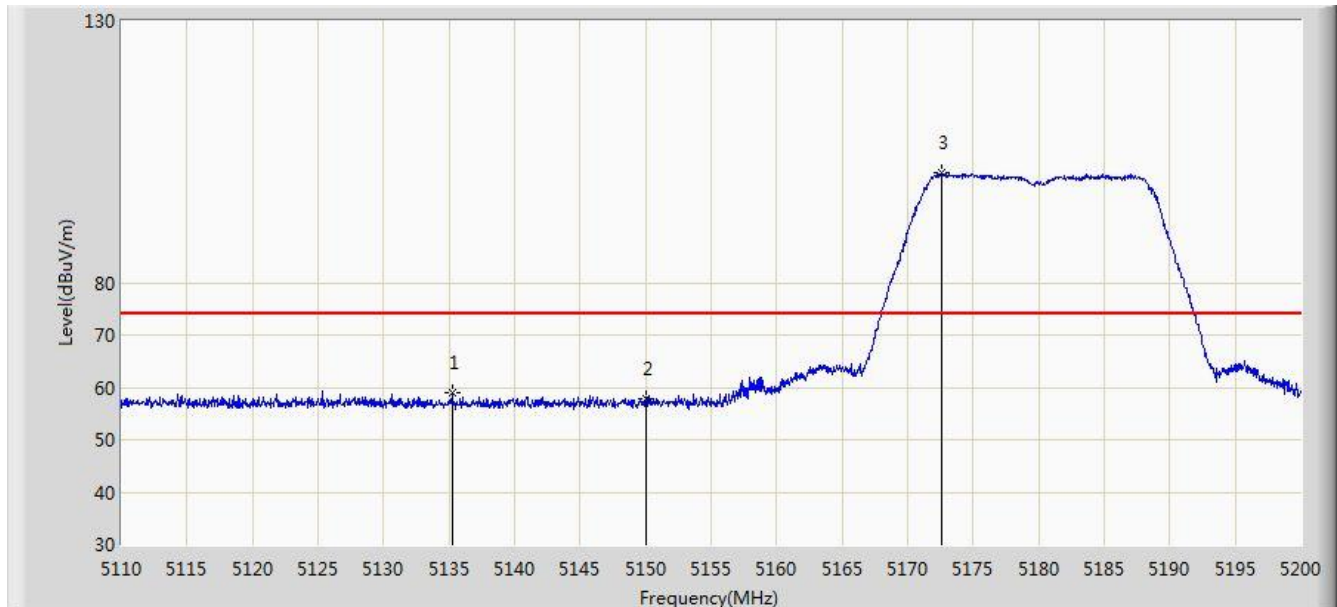


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5135.245	58.864	52.232	-15.136	74.000	6.632	PK
2			5150.000	57.950	51.388	-16.050	74.000	6.562	PK
3		*	5172.595	100.985	94.482	N/A	N/A	6.503	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz	

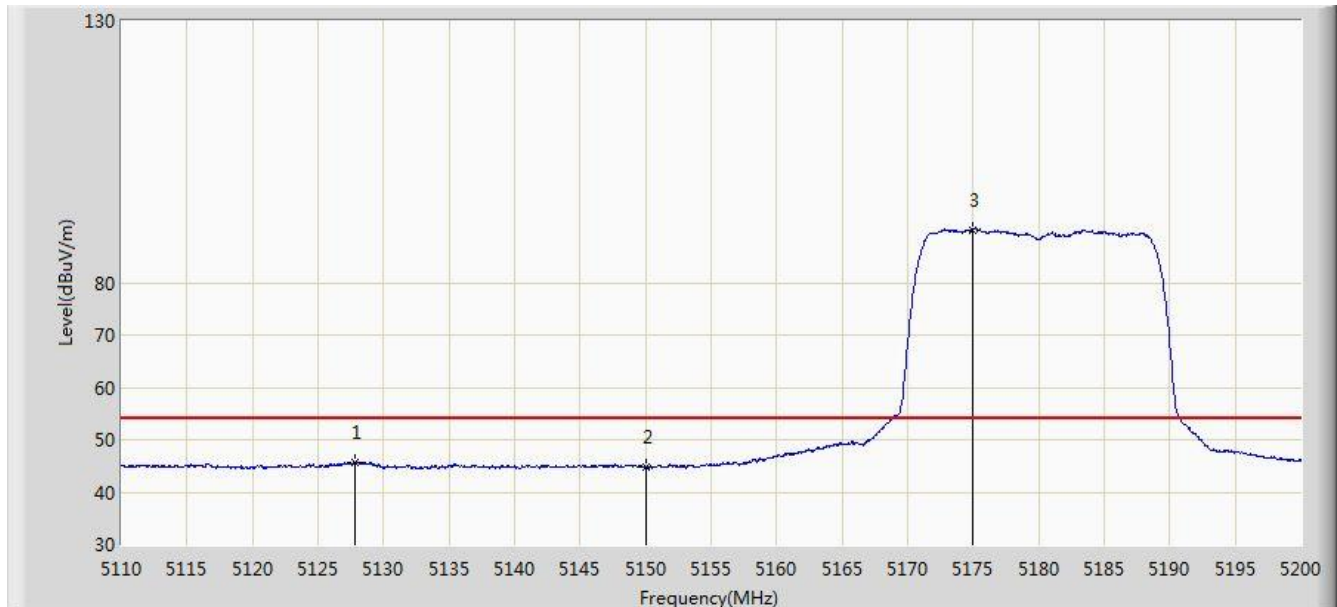


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5127.775	45.723	39.071	-8.277	54.000	6.652	AV
2			5150.000	44.795	38.233	-9.205	54.000	6.562	AV
3		*	5174.935	90.100	83.615	N/A	N/A	6.485	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz	

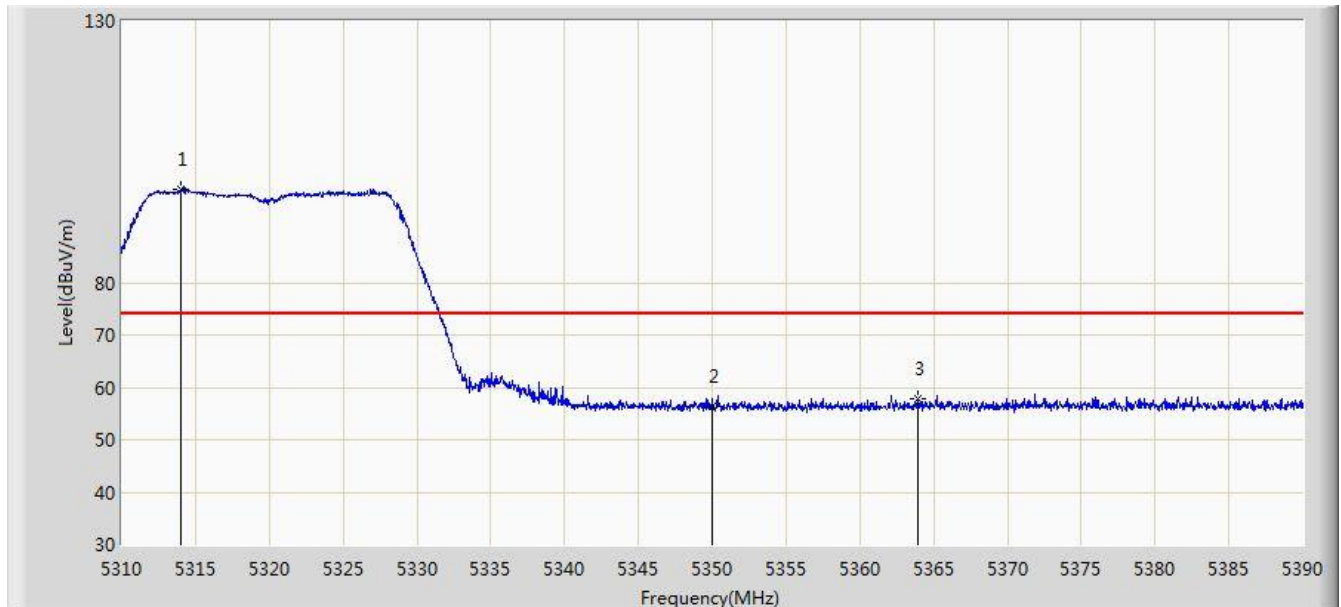


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.960	97.865	91.591	N/A	N/A	6.274	PK
2			5350.000	56.514	50.054	-17.486	74.000	6.460	PK
3			5363.920	57.838	51.326	-16.162	74.000	6.512	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz	

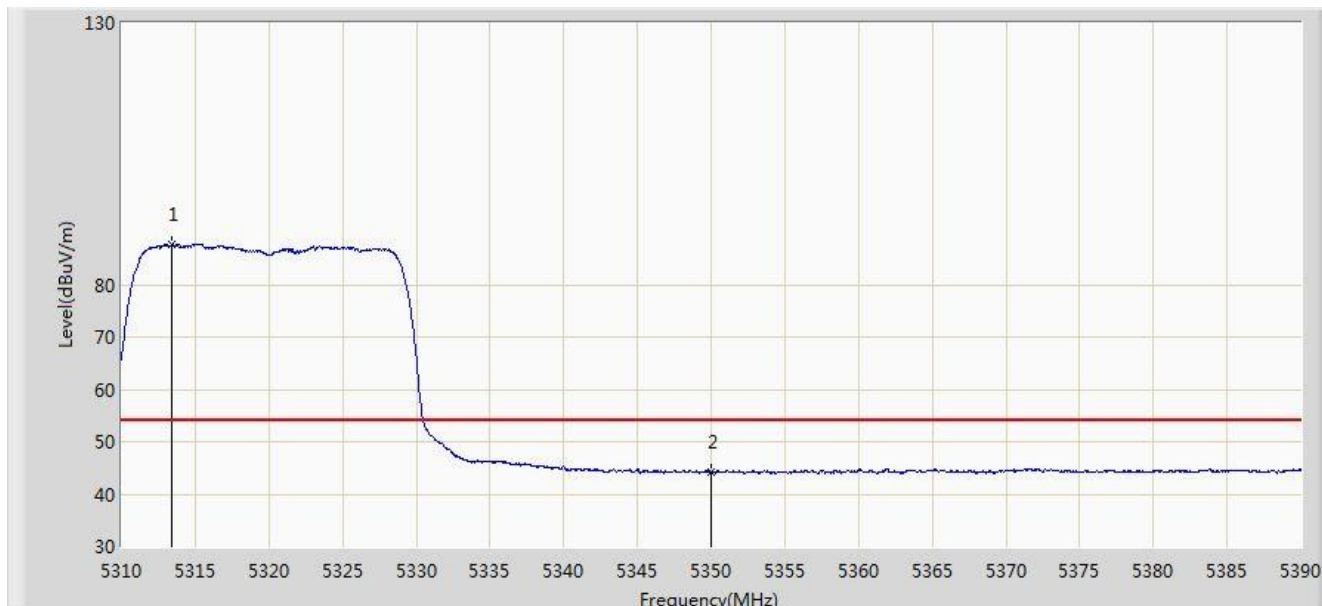


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.400	87.615	81.342	N/A	N/A	6.274	AV
2			5350.000	44.268	37.808	-9.732	54.000	6.460	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 20:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz	

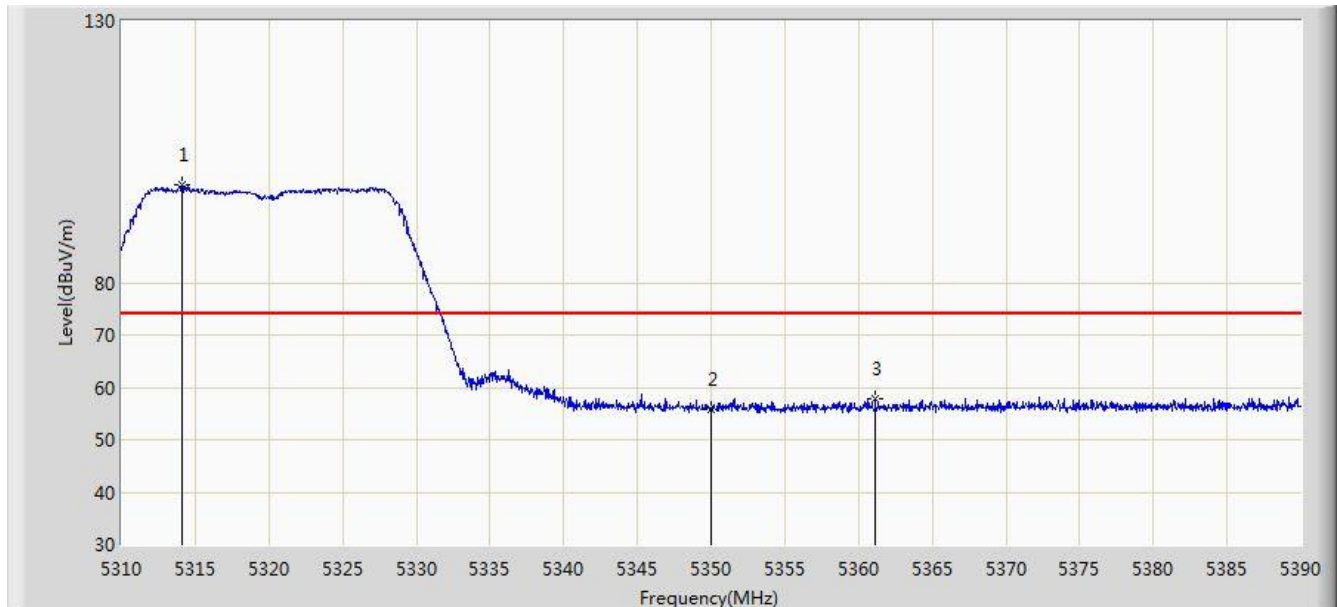


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.160	98.558	92.283	N/A	N/A	6.274	PK
2			5350.000	55.928	49.468	-18.072	74.000	6.460	PK
3			5361.120	57.699	51.196	-16.301	74.000	6.503	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz	

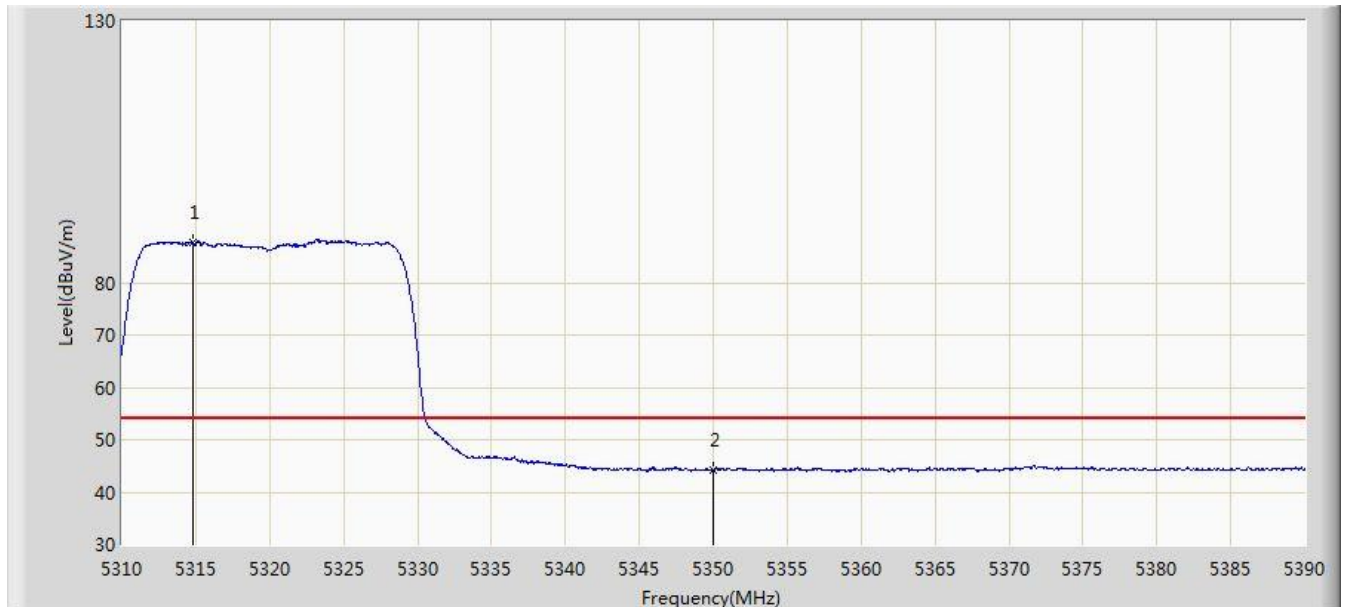


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.800	87.749	81.473	N/A	N/A	6.276	AV
2			5350.000	44.109	37.649	-9.891	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz	

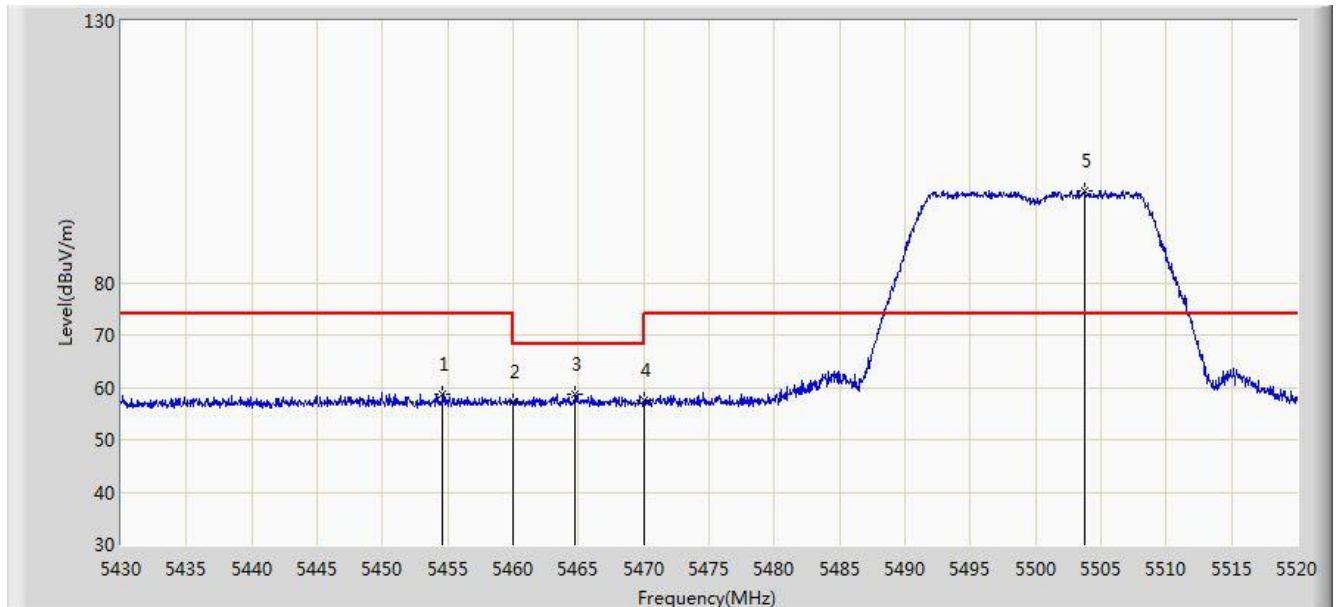


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.615	58.587	51.809	-15.413	74.000	6.778	PK
2			5460.000	57.103	50.301	-16.897	74.000	6.802	PK
3			5464.785	58.571	51.749	-9.629	68.200	6.822	PK
4			5470.000	57.398	50.553	-10.802	68.200	6.845	PK
5		*	5503.710	97.600	90.787	N/A	N/A	6.812	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz	

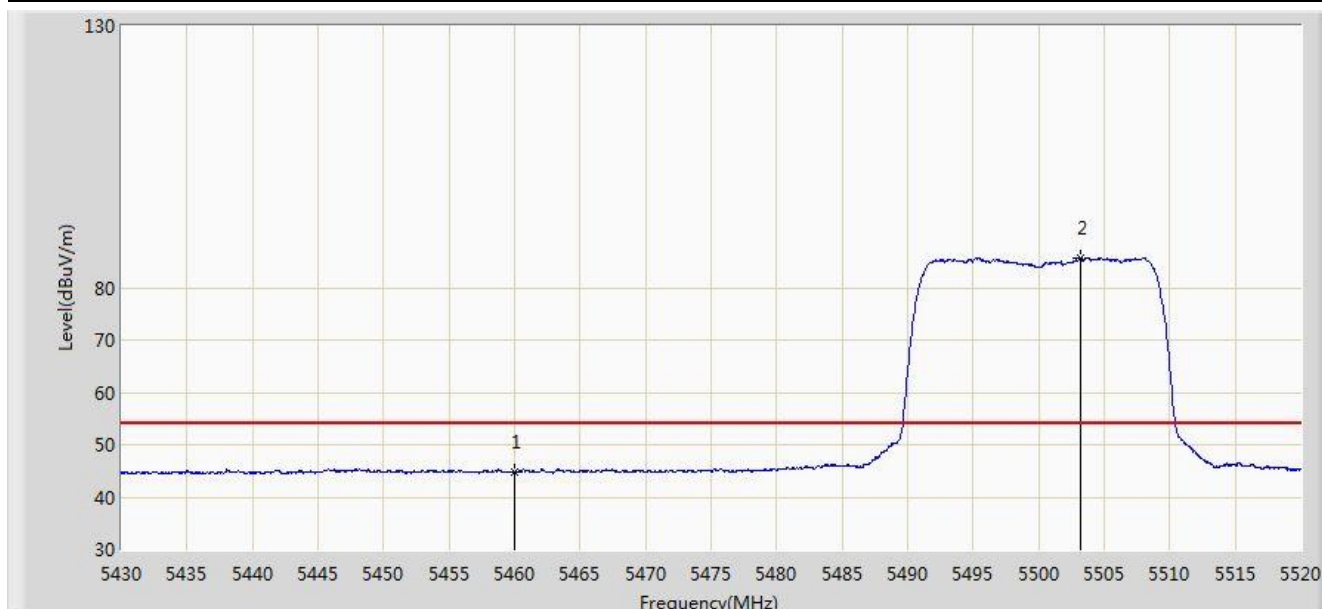


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.696	37.894	-9.304	54.000	6.802	AV
2		*	5503.215	85.778	78.964	N/A	N/A	6.814	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz	

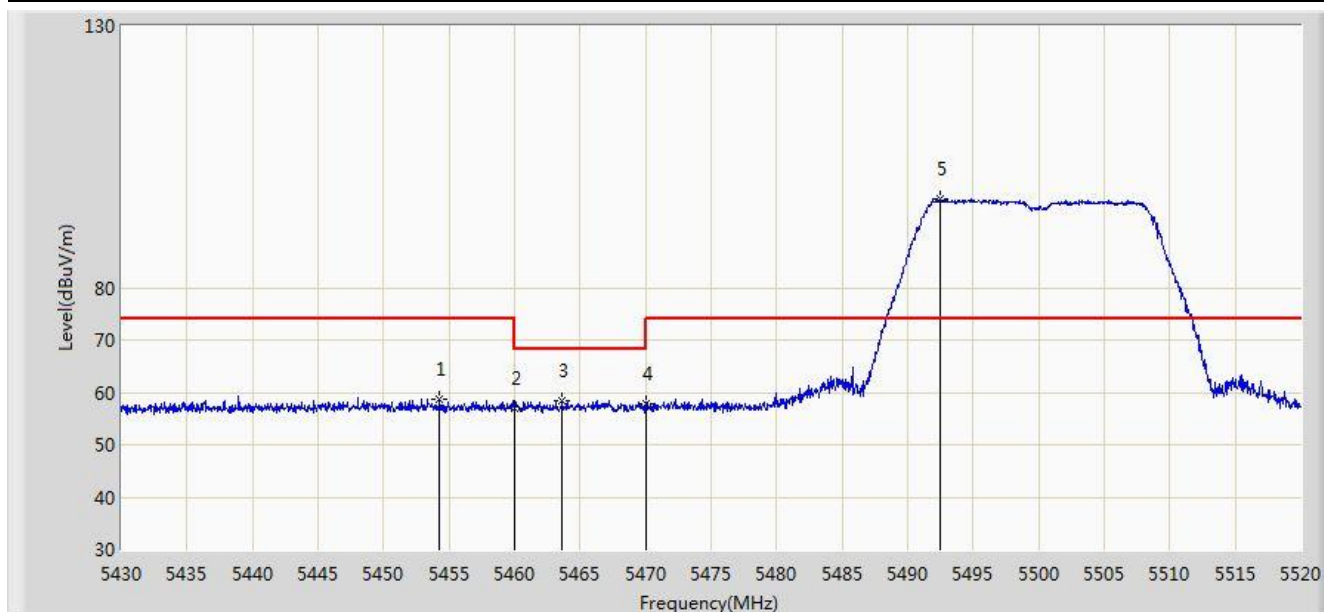


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.300	58.727	51.951	-15.273	74.000	6.776	PK
2			5460.000	56.884	50.082	-17.116	74.000	6.802	PK
3			5463.660	58.534	51.716	-9.666	68.200	6.818	PK
4			5470.000	57.903	51.058	-10.297	68.200	6.845	PK
5		*	5492.460	96.934	90.102	N/A	N/A	6.832	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz	

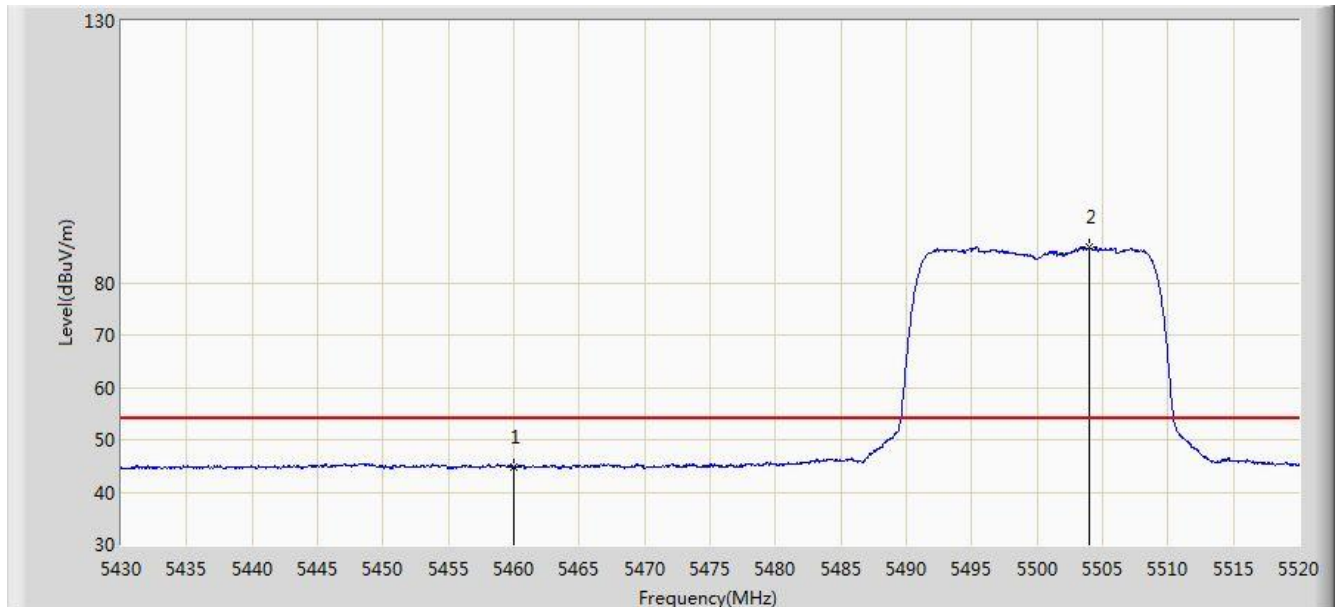


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	44.774	37.972	-9.226	54.000	6.802	AV
2		*	5503.935	86.739	79.926	N/A	N/A	6.813	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz	

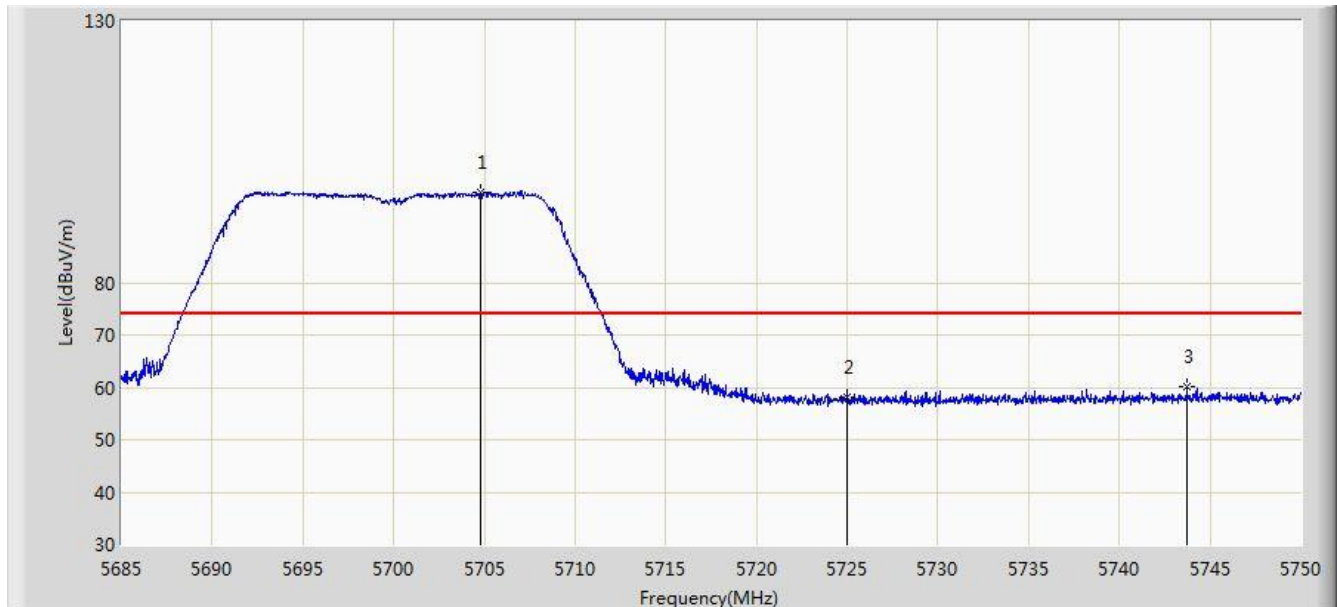


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.792	97.249	90.048	N/A	N/A	7.201	PK
2			5725.000	58.240	50.912	-15.760	74.000	7.328	PK
3			5743.728	60.097	52.693	-13.903	74.000	7.404	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz	

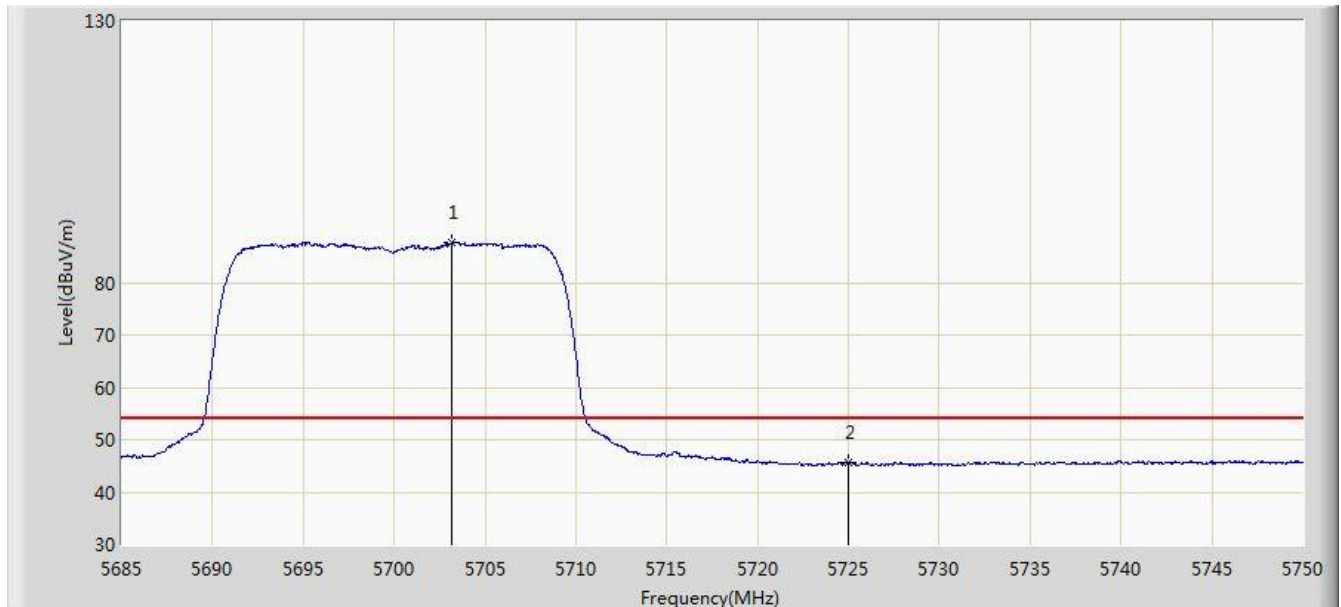


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.167	87.610	80.423	N/A	N/A	7.187	AV
2			5725.000	45.670	38.342	-8.330	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz	

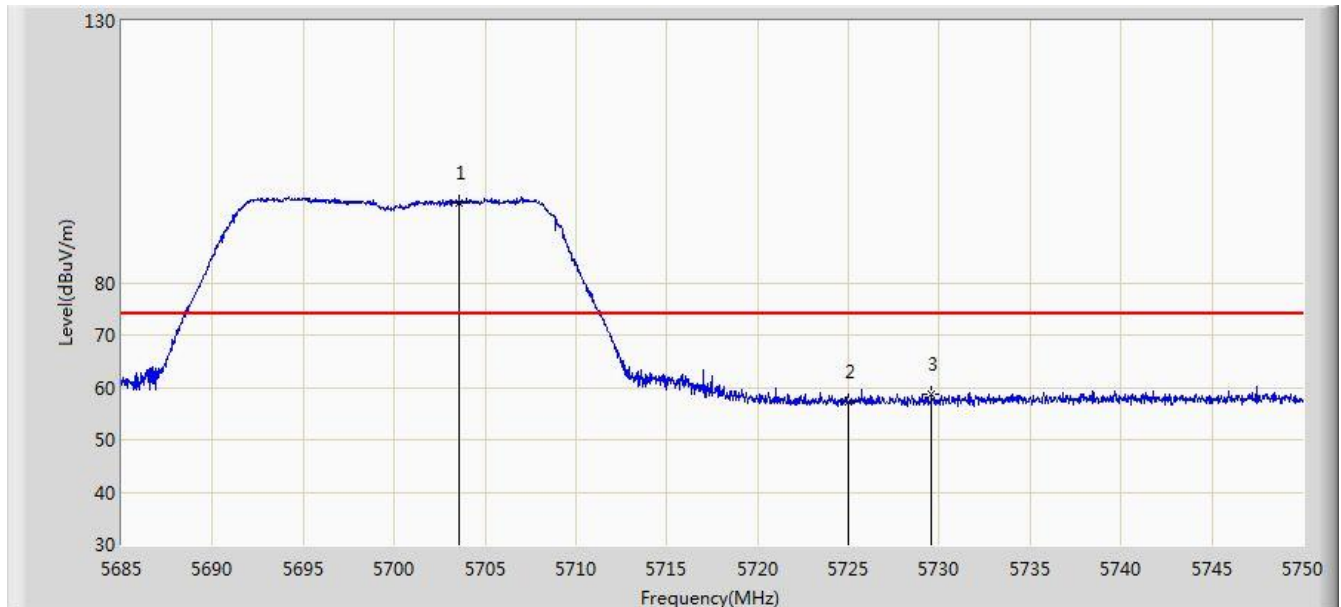


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.558	95.180	87.989	N/A	N/A	7.190	PK
2			5725.000	57.168	49.840	-16.832	74.000	7.328	PK
3			5729.558	58.790	51.441	-15.210	74.000	7.349	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz	

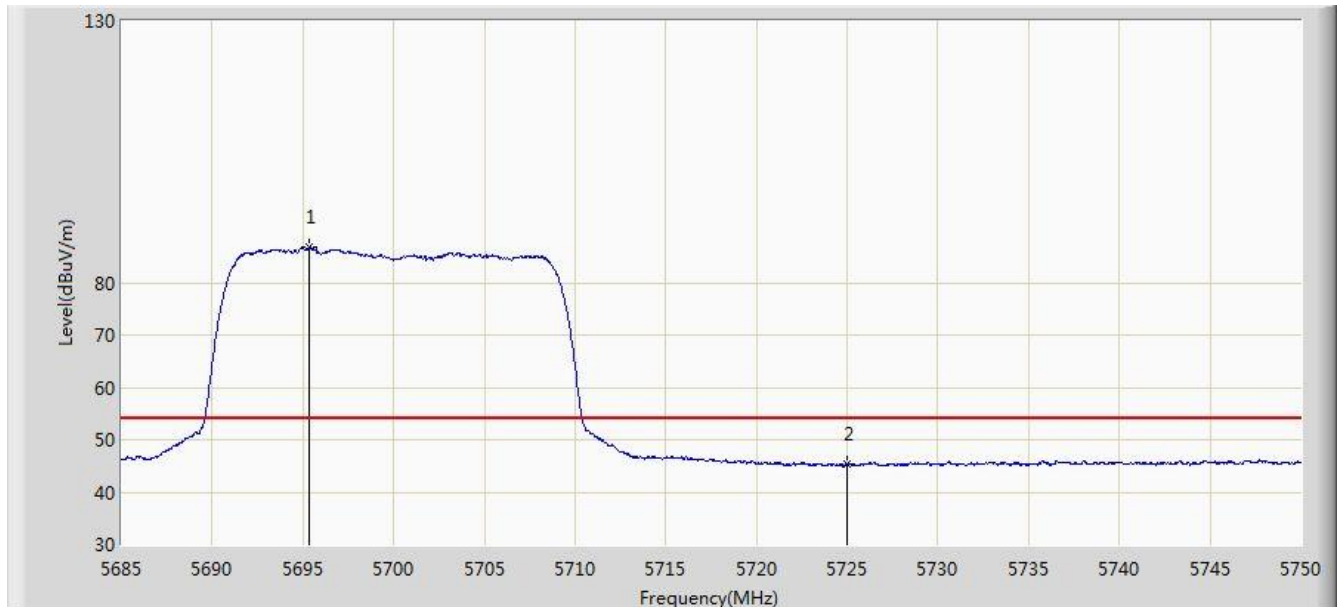


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.368	86.722	79.588	N/A	N/A	7.134	AV
2			5725.000	45.233	37.905	-8.767	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:12
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz	

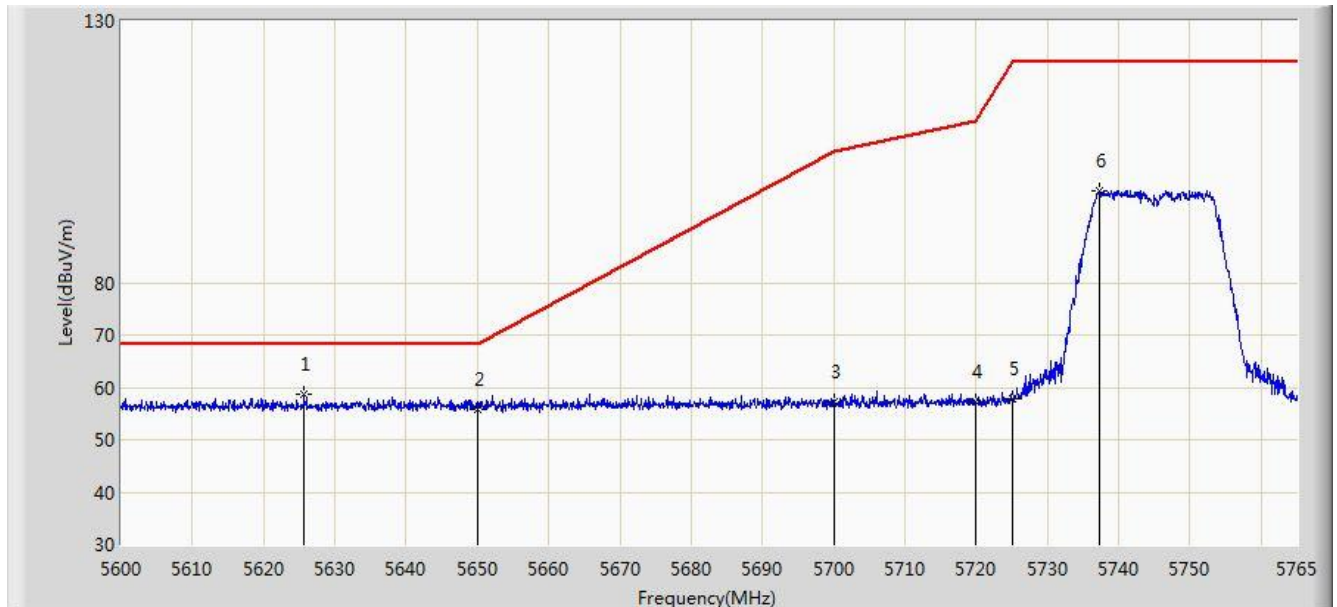


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5625.658	58.602	51.590	-9.598	68.200	7.012	PK
2			5650.000	55.863	48.858	-12.337	68.200	7.005	PK
3			5700.000	57.356	50.191	-47.844	105.200	7.165	PK
4			5720.000	57.375	50.076	-53.425	110.800	7.299	PK
5			5725.000	57.734	50.406	-64.466	122.200	7.328	PK
6			5737.197	97.478	90.097	N/A	N/A	7.381	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:13
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz	

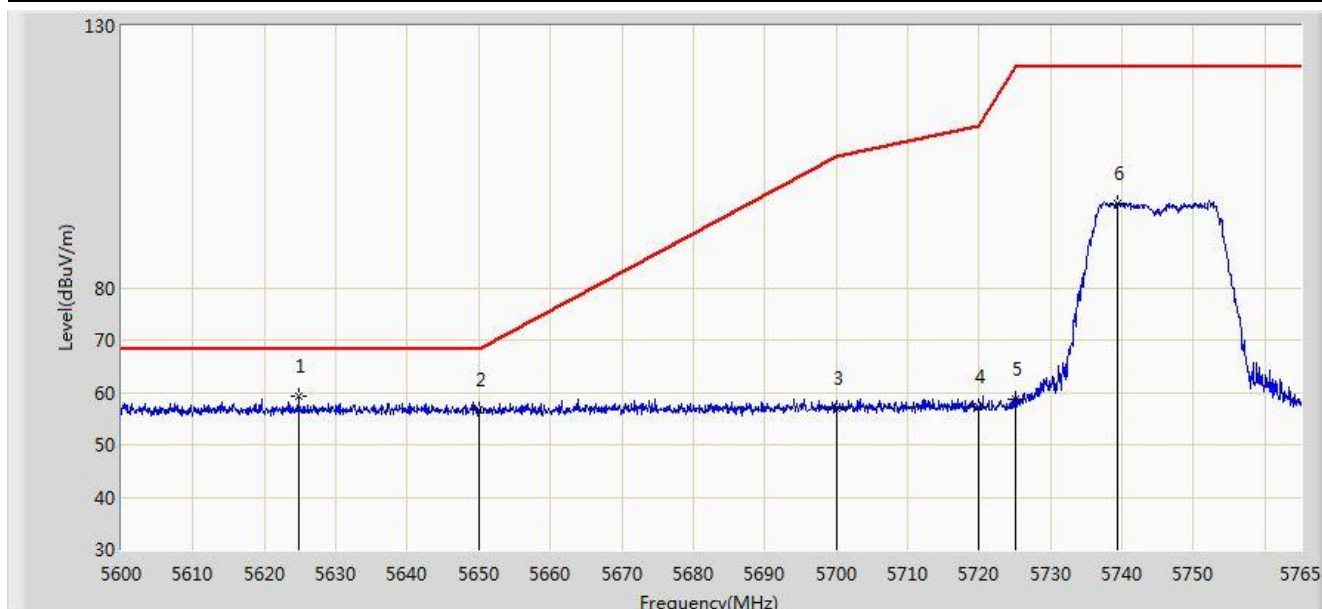


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5624.833	59.387	52.374	-8.813	68.200	7.013	PK
2			5650.000	56.652	49.647	-11.548	68.200	7.005	PK
3			5700.000	57.052	49.887	-48.148	105.200	7.165	PK
4			5720.000	57.132	49.833	-53.668	110.800	7.299	PK
5			5725.000	58.676	51.348	-63.524	122.200	7.328	PK
6			5739.342	96.021	88.632	N/A	N/A	7.389	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:15
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz	

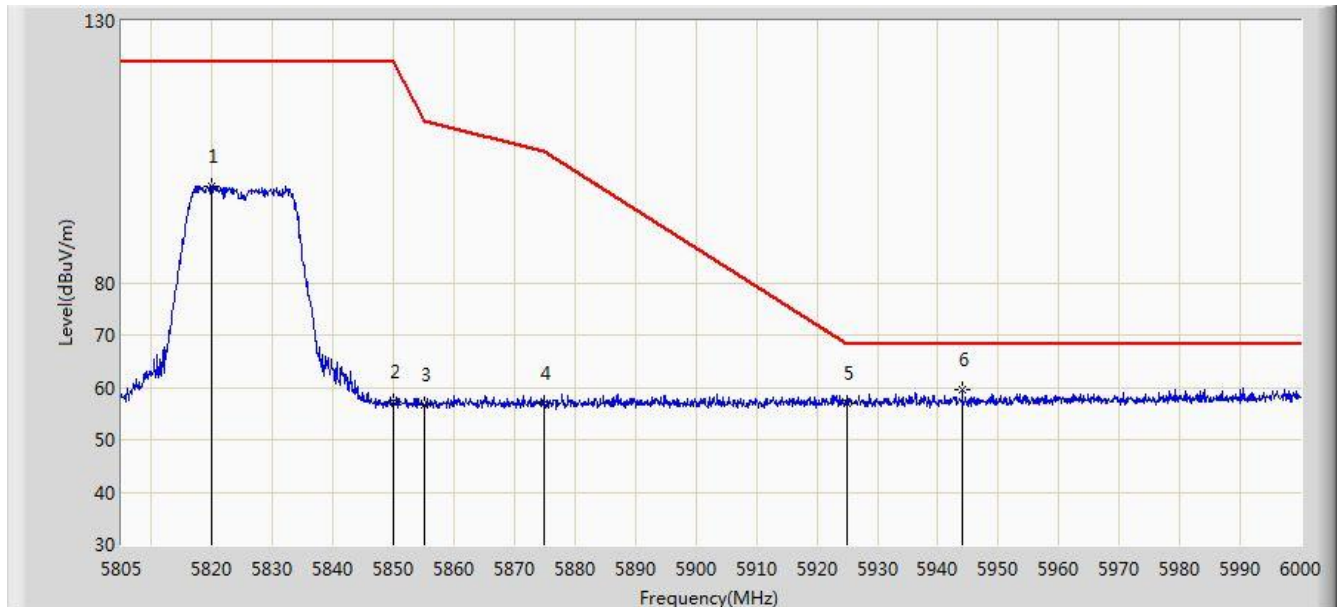


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5819.820	98.493	90.858	N/A	N/A	7.634	PK
2			5850.000	57.337	49.564	-64.863	122.200	7.774	PK
3			5855.000	56.647	48.871	-54.153	110.800	7.775	PK
4			5875.000	56.851	49.033	-48.349	105.200	7.818	PK
5			5925.000	56.901	49.082	-11.299	68.200	7.819	PK
6		*	5944.035	59.581	51.740	-8.619	68.200	7.841	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:17
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz	

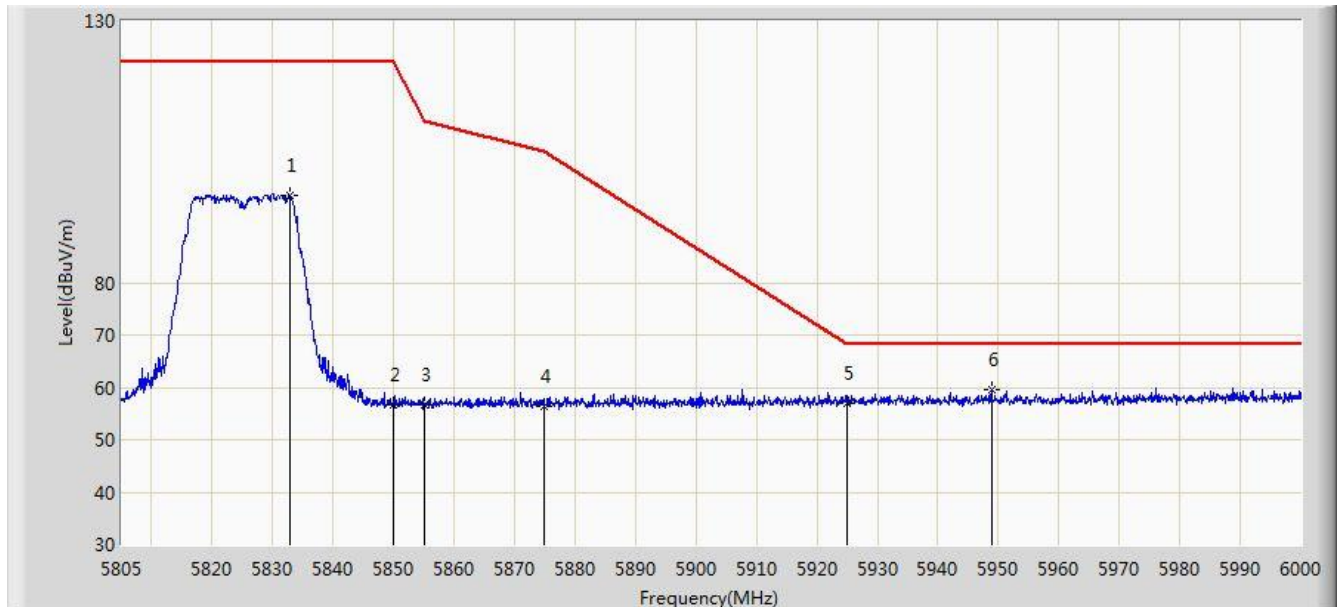


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5832.788	96.738	89.038	N/A	N/A	7.700	PK
2			5850.000	56.718	48.945	-65.482	122.200	7.774	PK
3			5855.000	56.805	49.029	-53.995	110.800	7.775	PK
4			5875.000	56.251	48.433	-48.949	105.200	7.818	PK
5			5925.000	57.098	49.279	-11.102	68.200	7.819	PK
6		*	5948.812	59.596	51.752	-8.604	68.200	7.843	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz	

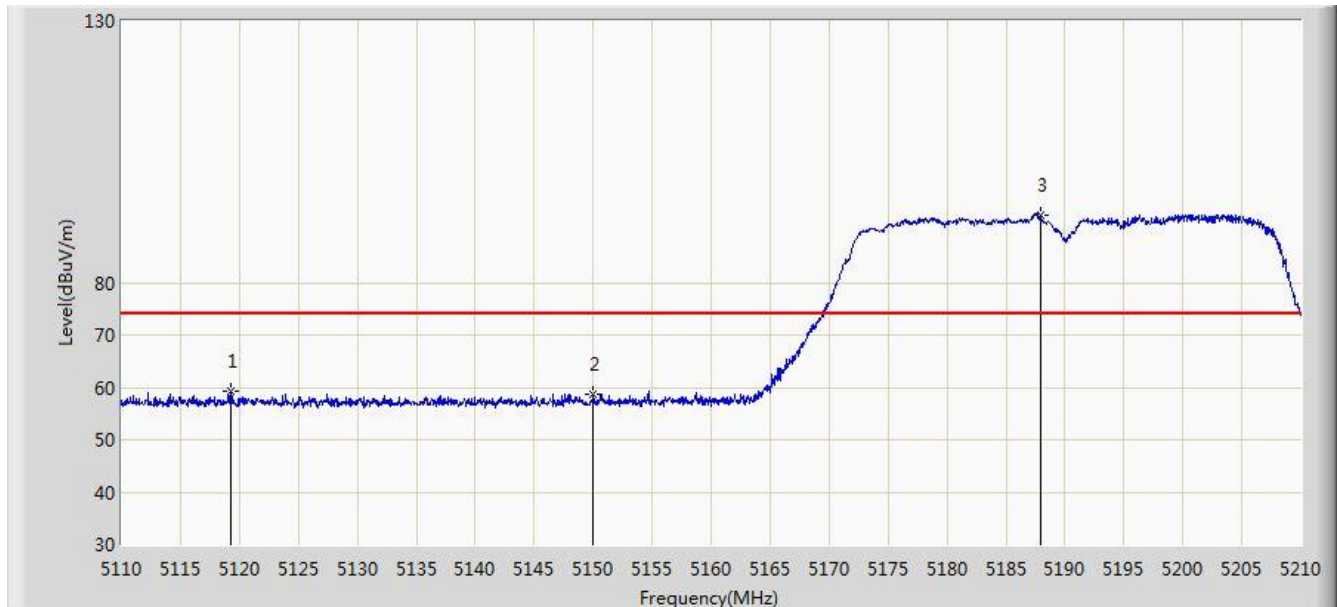


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5119.250	59.390	52.743	-14.610	74.000	6.647	PK
2			5150.000	58.630	52.068	-15.370	74.000	6.562	PK
3		*	5187.900	92.896	86.502	N/A	N/A	6.394	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz	

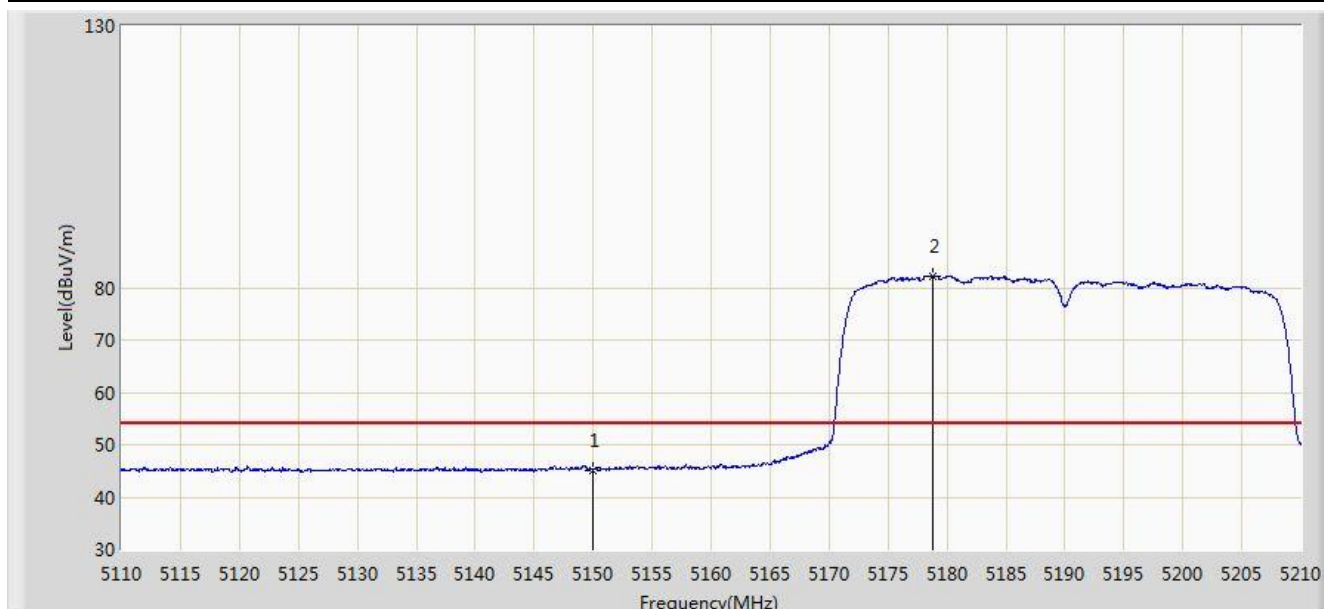


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.111	38.549	-8.889	54.000	6.562	AV
2		*	5178.850	82.275	75.822	N/A	N/A	6.453	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz	

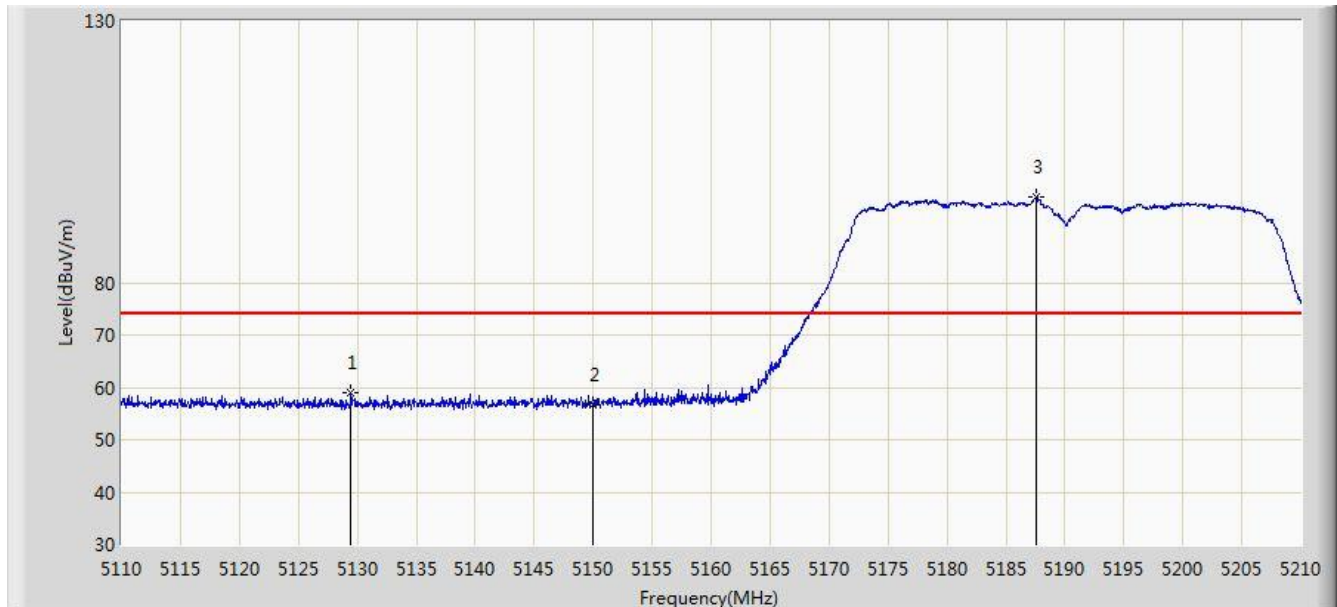


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.450	59.028	52.376	-14.972	74.000	6.652	PK
2			5150.000	56.799	50.237	-17.201	74.000	6.562	PK
3		*	5187.550	96.400	90.004	N/A	N/A	6.395	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz	

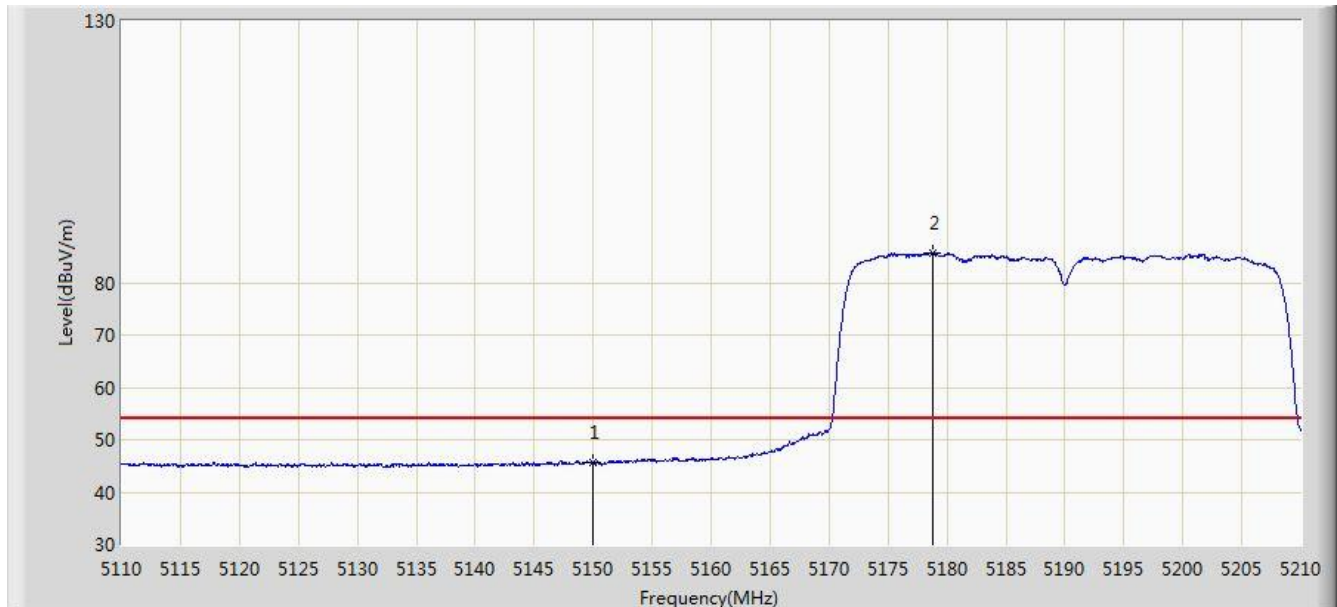


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.662	39.100	-8.338	54.000	6.562	AV
2		*	5178.850	85.621	79.168	N/A	N/A	6.453	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz	

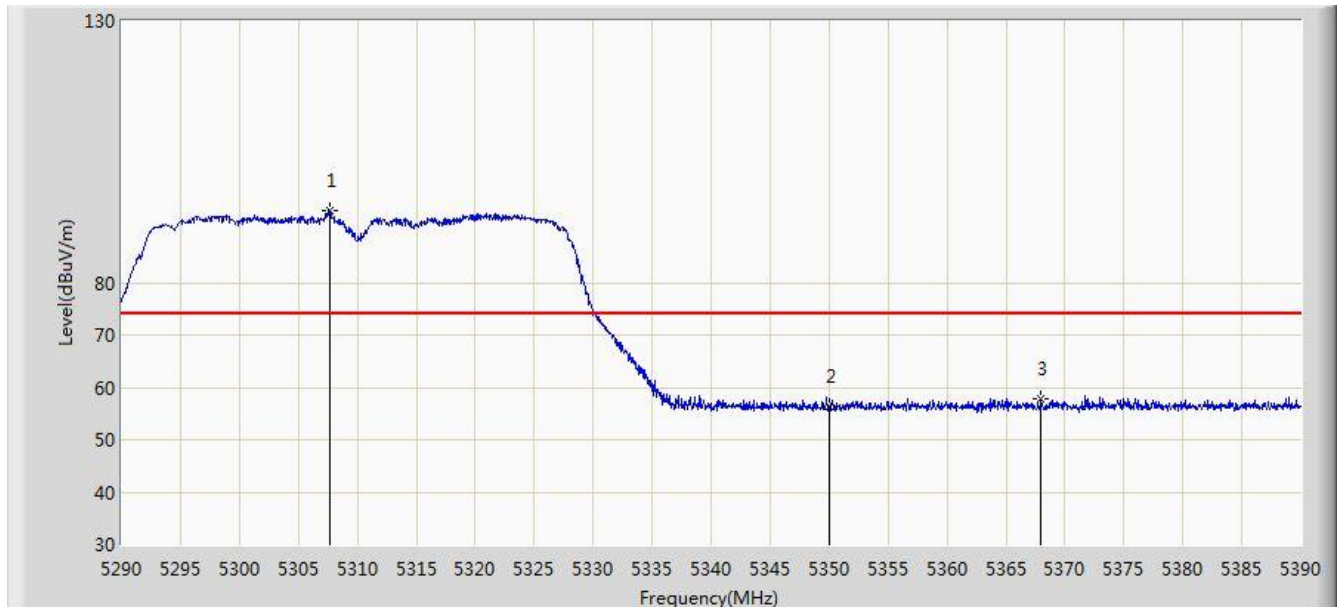


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.700	93.643	87.376	N/A	N/A	6.266	PK
2			5350.000	56.320	49.860	-17.680	74.000	6.460	PK
3			5368.000	57.692	51.165	-16.308	74.000	6.527	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz	

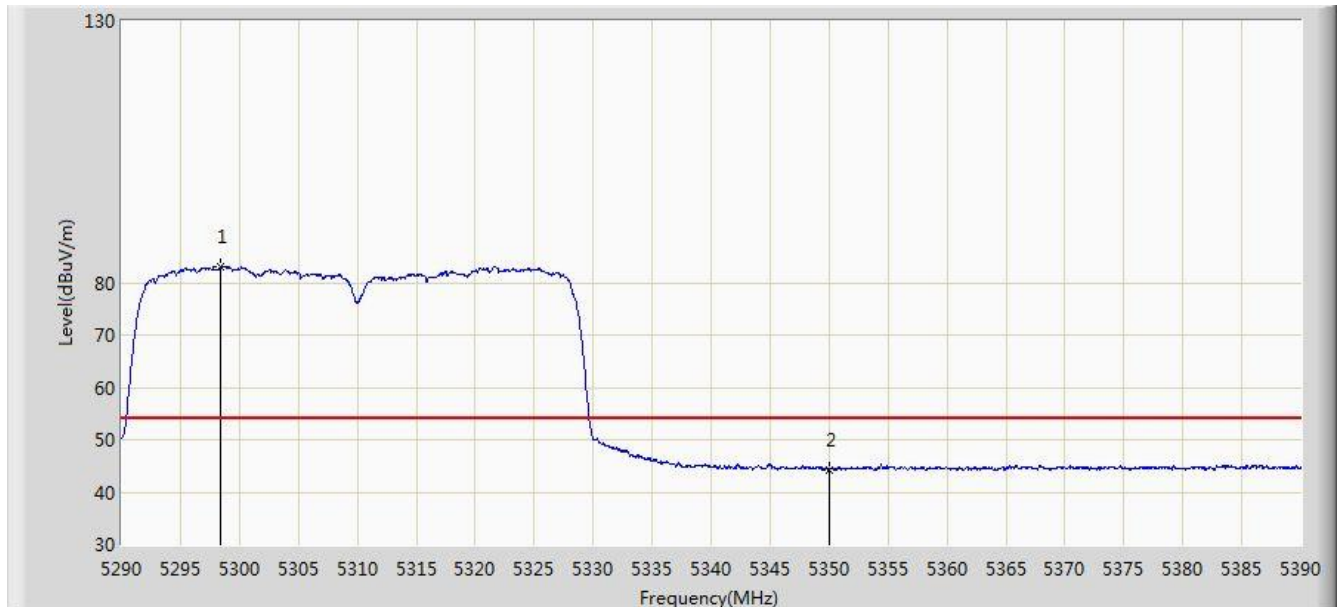


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.400	82.952	76.694	N/A	N/A	6.258	AV
2			5350.000	44.310	37.850	-9.690	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz	

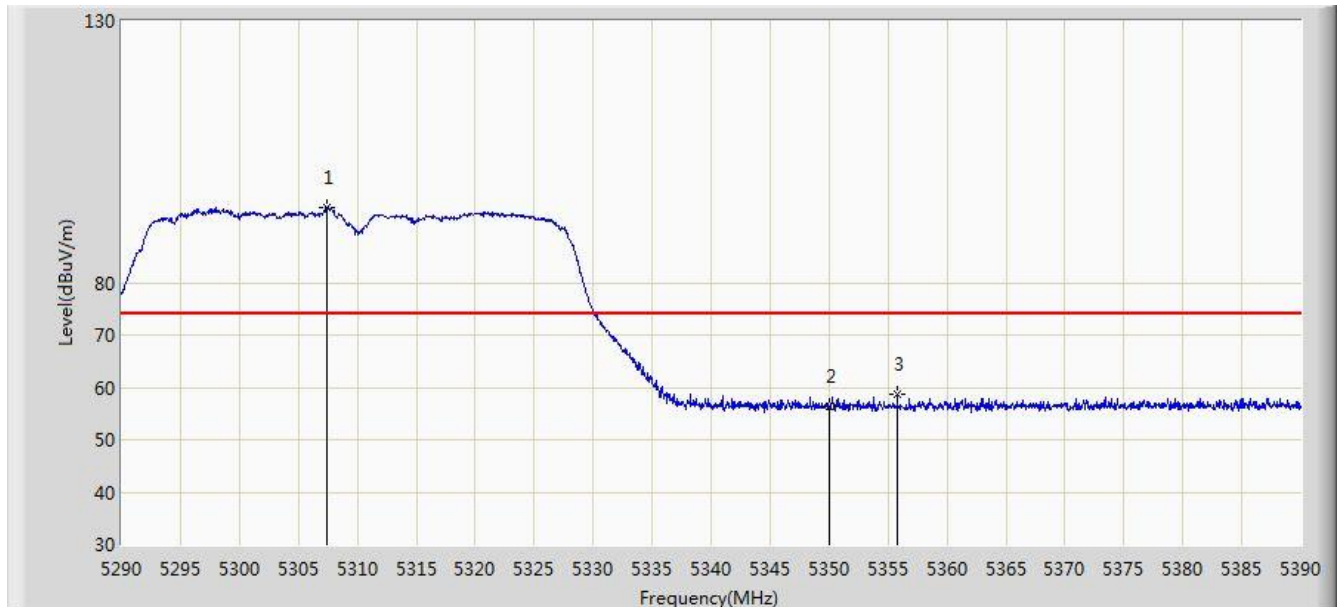


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.400	94.466	88.200	N/A	N/A	6.266	PK
2			5350.000	56.399	49.939	-17.601	74.000	6.460	PK
3			5355.800	58.694	52.210	-15.306	74.000	6.484	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz	

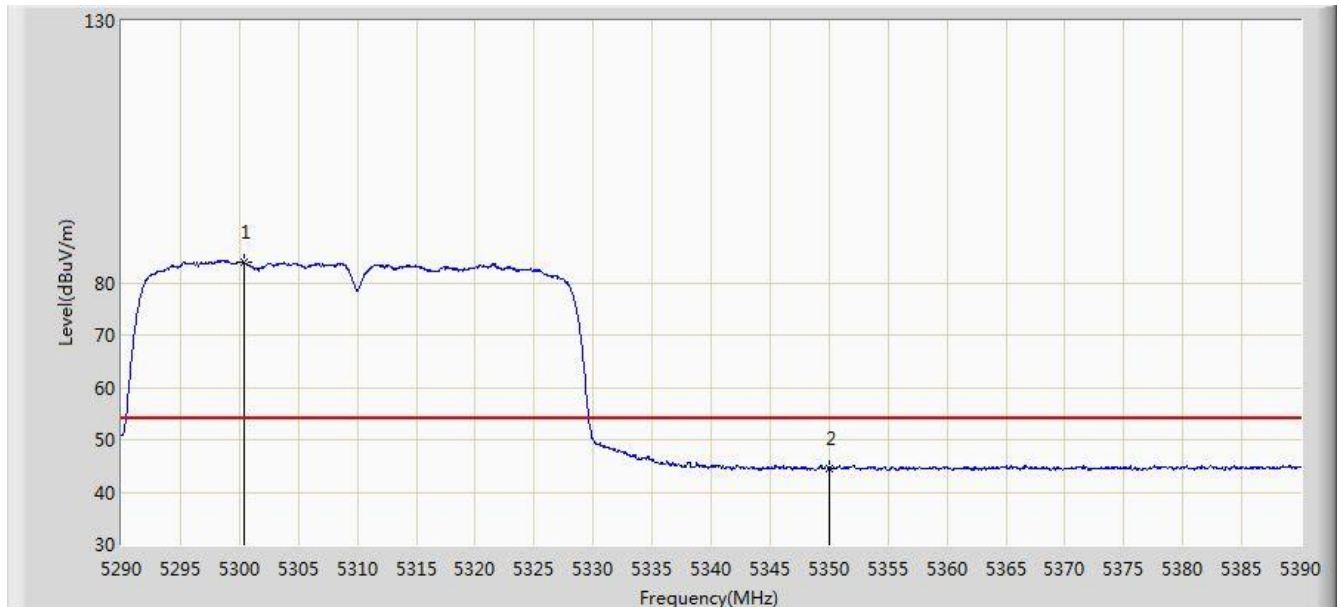


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5300.350	83.893	77.635	N/A	N/A	6.259	AV
2			5350.000	44.585	38.125	-9.415	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz	

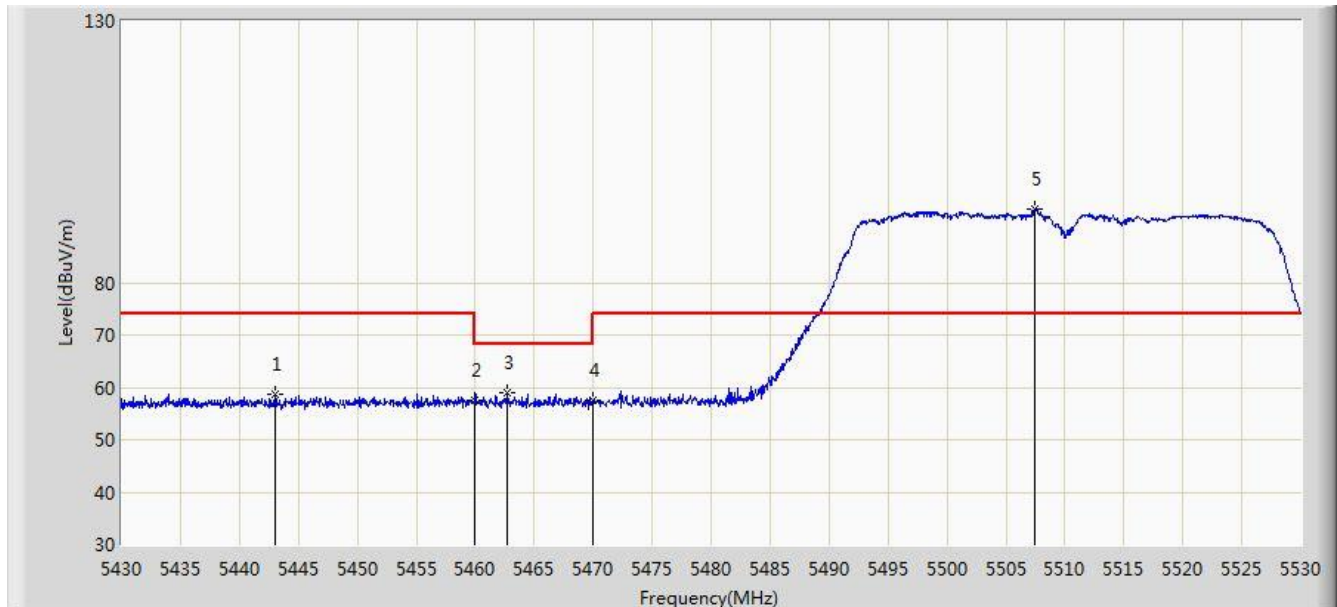


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5443.050	58.597	51.906	-15.403	74.000	6.691	PK
2			5460.000	57.497	50.695	-16.503	74.000	6.802	PK
3			5462.650	58.950	52.137	-9.250	68.200	6.813	PK
4			5470.000	57.497	50.652	-10.703	68.200	6.845	PK
5		*	5507.400	94.035	87.224	N/A	N/A	6.812	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz	

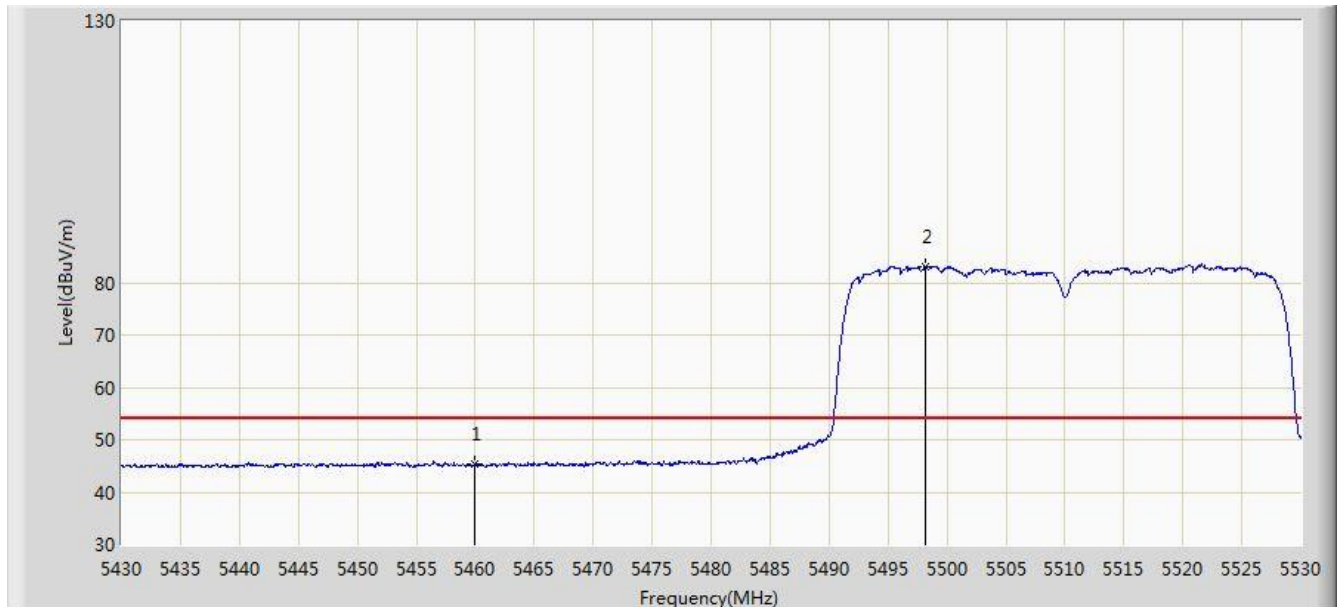


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.451	38.649	-8.549	54.000	6.802	AV
2		*	5498.200	83.133	76.311	N/A	N/A	6.822	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz	

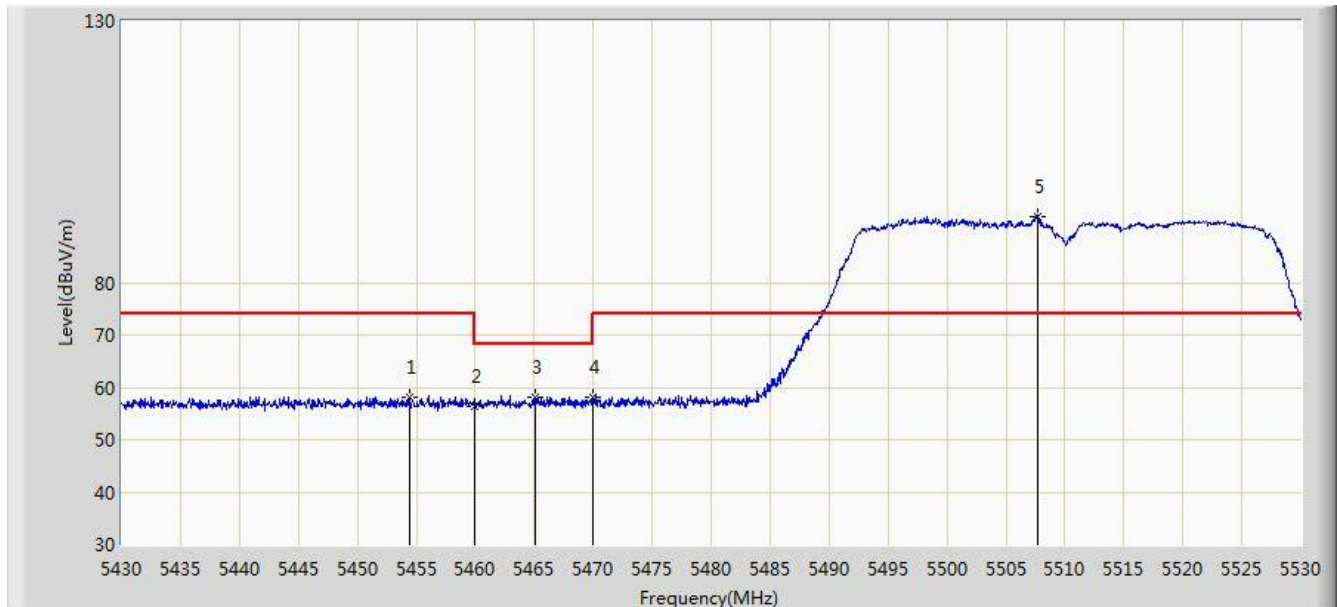


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.450	58.228	51.451	-15.772	74.000	6.777	PK
2			5460.000	56.302	49.500	-17.698	74.000	6.802	PK
3			5465.050	58.119	51.295	-10.081	68.200	6.823	PK
4			5470.000	58.169	51.324	-10.031	68.200	6.845	PK
5		*	5507.700	92.651	85.840	N/A	N/A	6.811	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz	

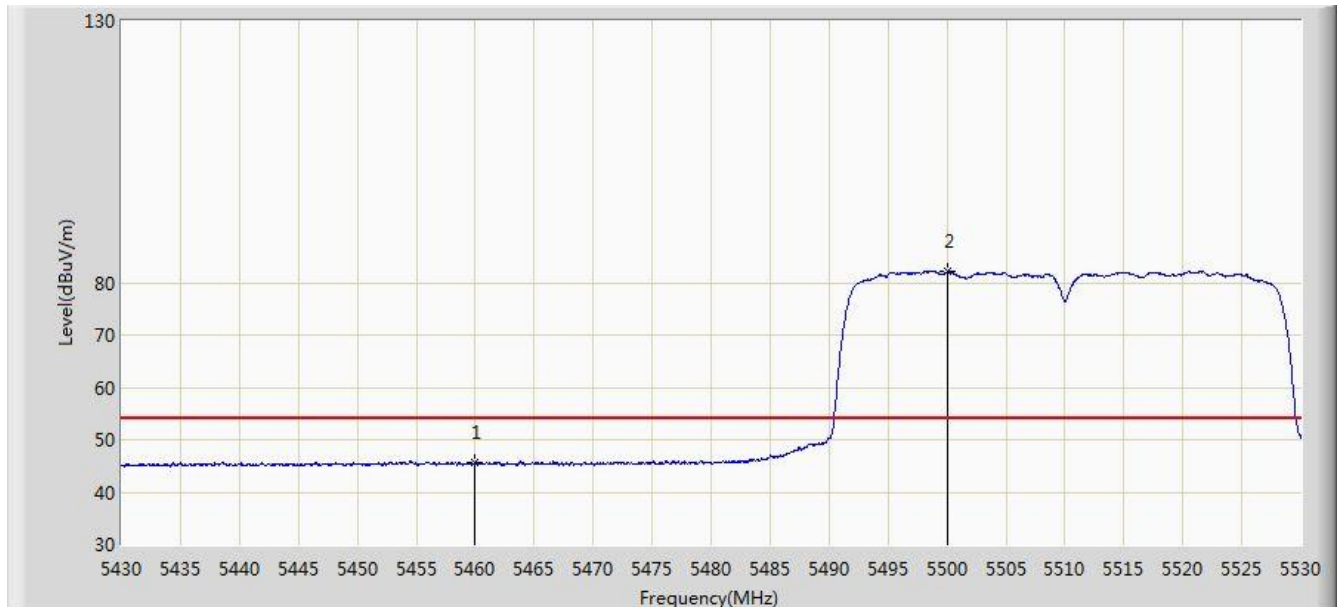


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.613	38.811	-8.387	54.000	6.802	AV
2		*	5500.000	82.032	75.213	N/A	N/A	6.820	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz	

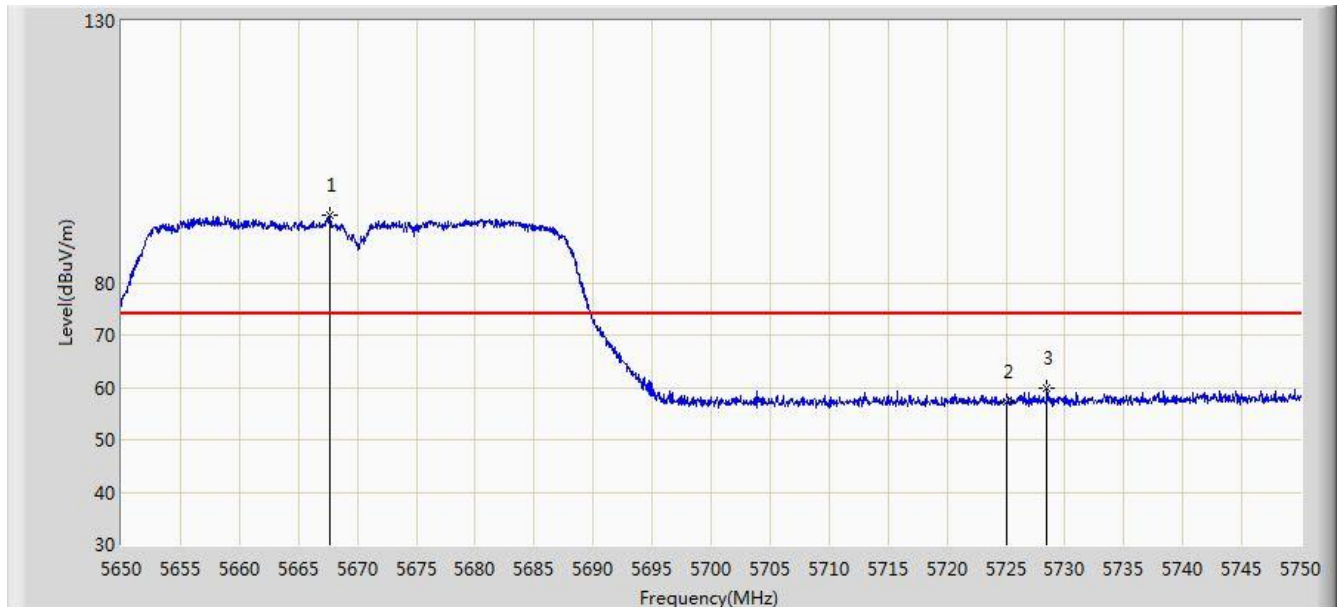


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5667.650	92.929	85.885	N/A	N/A	7.044	PK
2			5725.000	57.138	49.810	-16.862	74.000	7.328	PK
3			5728.450	59.771	52.427	-14.229	74.000	7.344	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz	

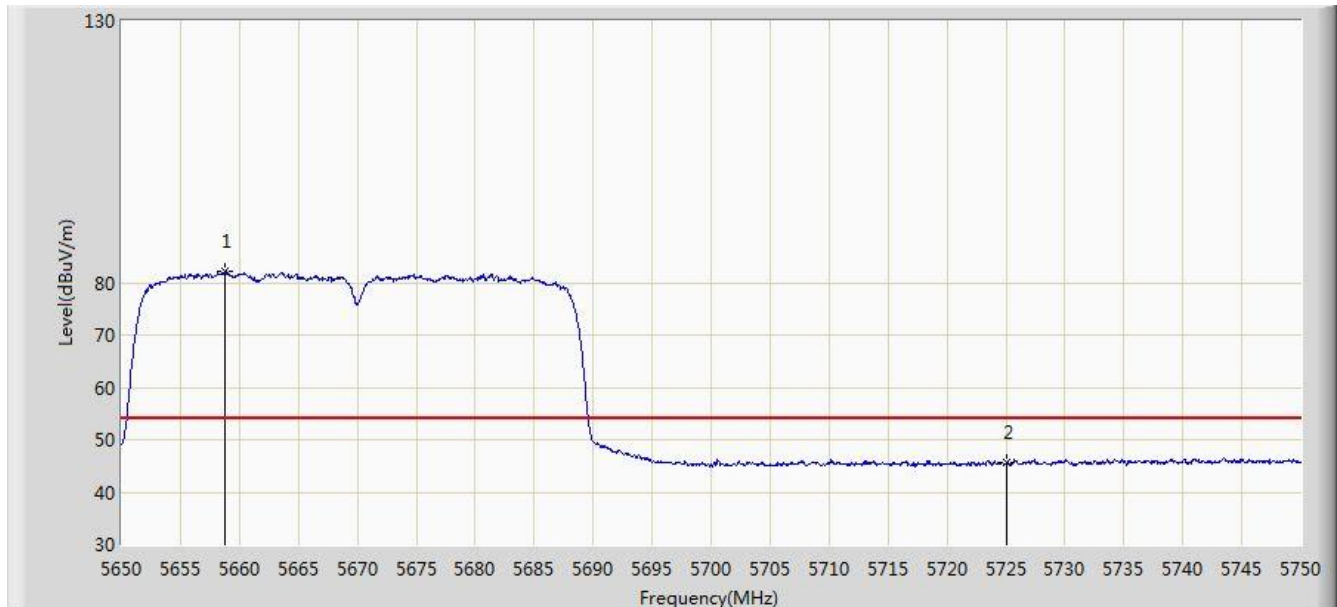


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5658.800	82.032	75.003	N/A	N/A	7.029	AV
2			5725.000	45.710	38.382	-8.290	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz	

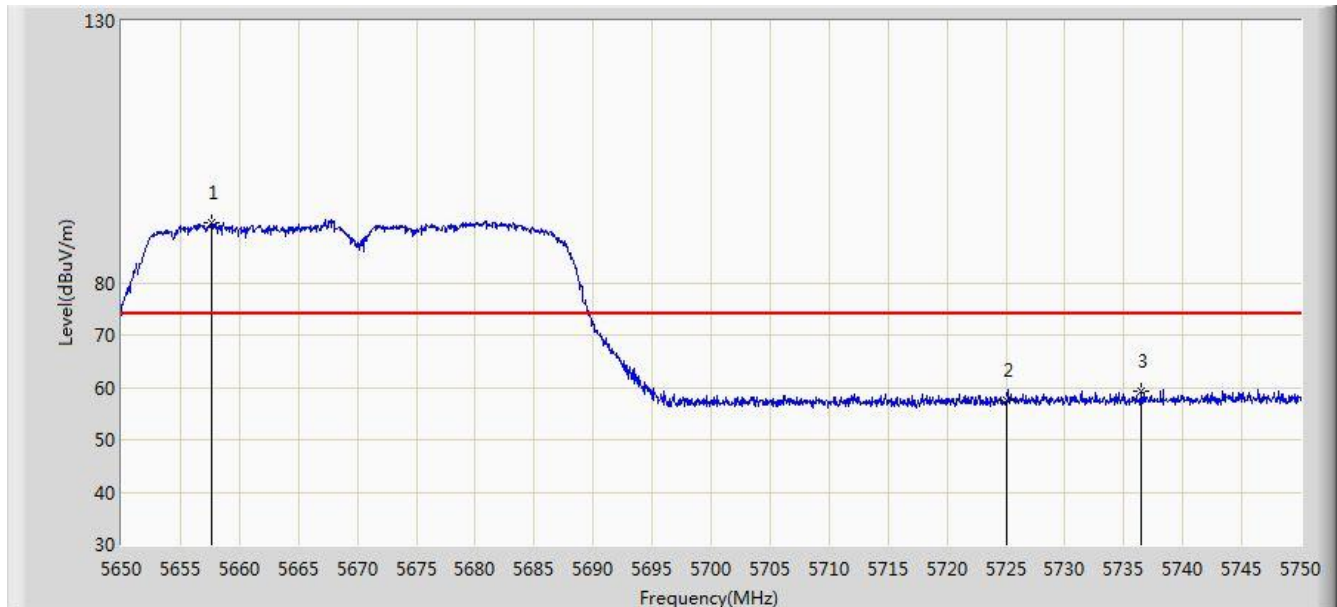


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5657.700	91.365	84.338	N/A	N/A	7.026	PK
2			5725.000	57.578	50.250	-16.422	74.000	7.328	PK
3			5736.450	59.143	51.765	-14.857	74.000	7.377	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz	

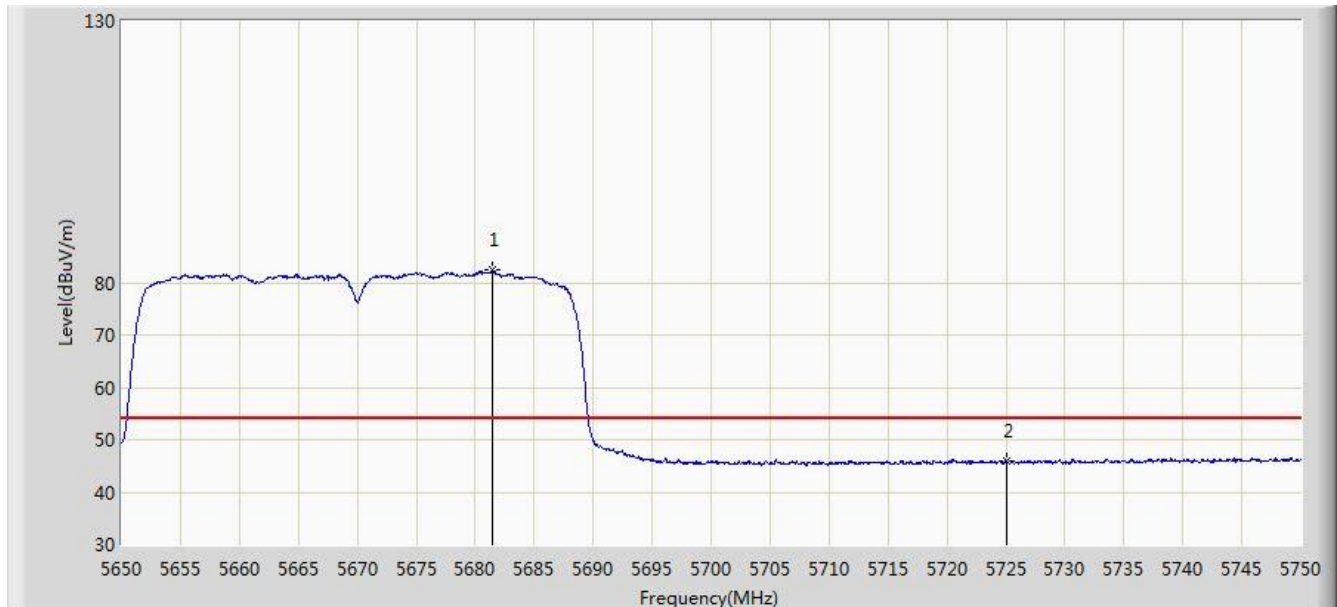


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5681.500	82.391	75.315	N/A	N/A	7.076	AV
2			5725.000	45.960	38.632	-8.040	54.000	7.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:42
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz	

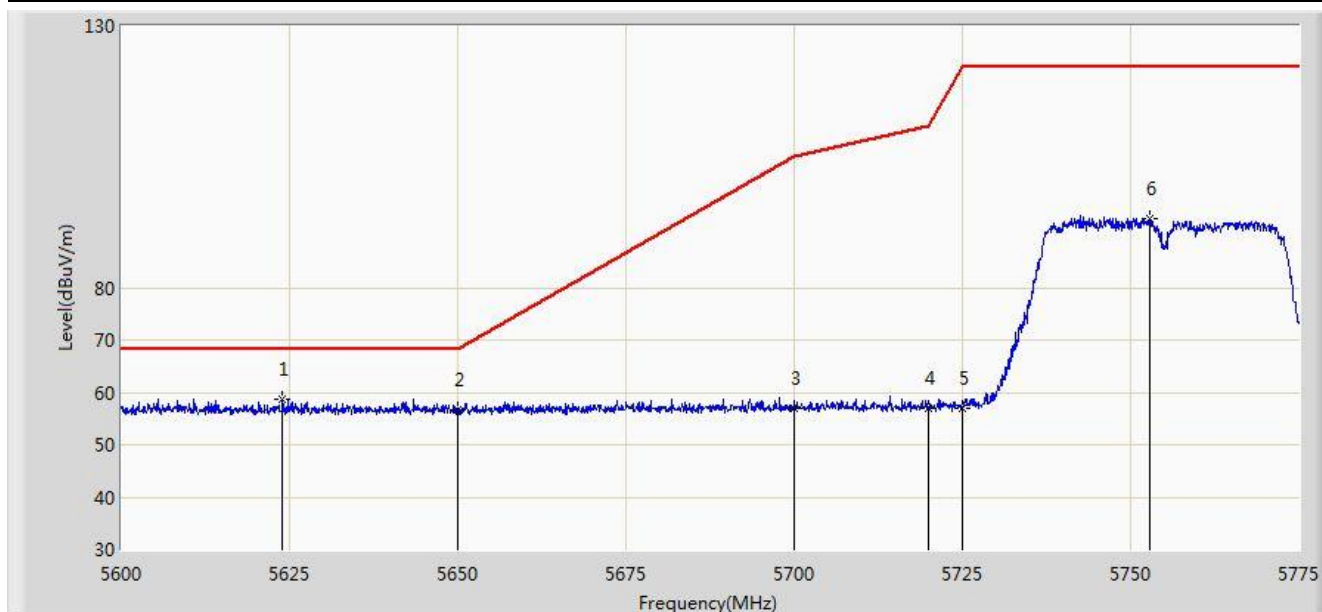


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5623.888	58.729	51.714	-9.471	68.200	7.015	PK
2			5650.000	56.644	49.639	-11.556	68.200	7.005	PK
3			5700.000	57.010	49.845	-48.190	105.200	7.165	PK
4			5720.000	56.842	49.543	-53.958	110.800	7.299	PK
5			5725.000	56.840	49.512	-65.360	122.200	7.328	PK
6			5752.775	93.281	85.871	N/A	N/A	7.411	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:44
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz	

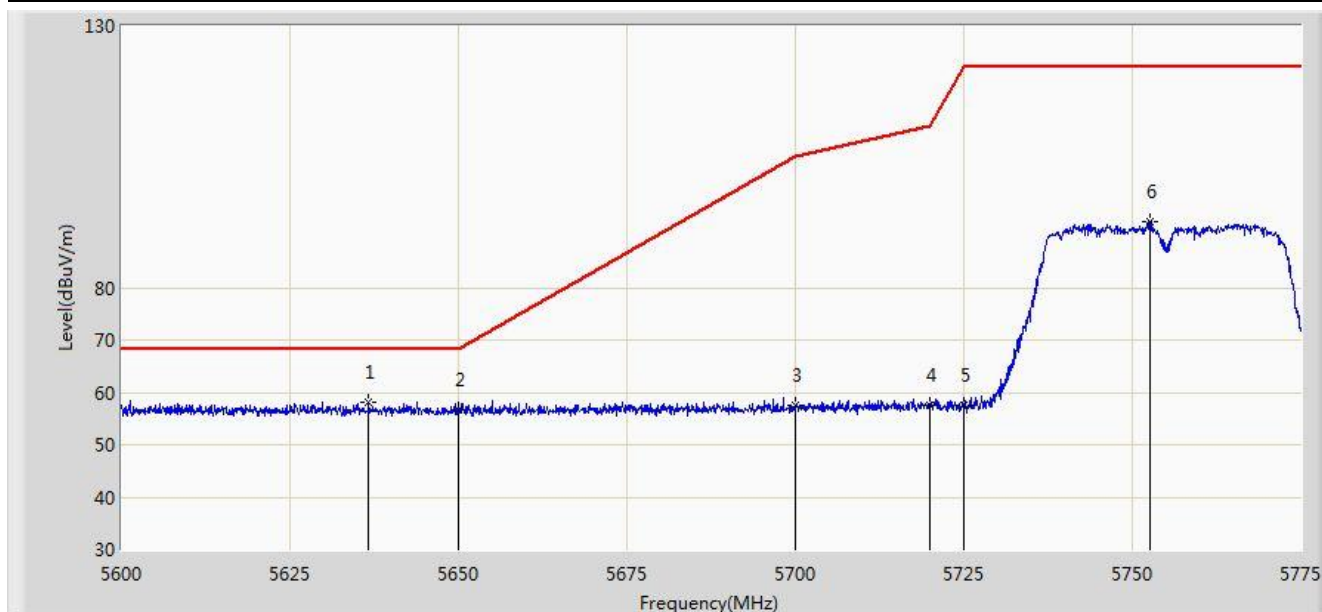


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5636.663	58.218	51.225	-9.982	68.200	6.993	PK
2			5650.000	56.658	49.653	-11.542	68.200	7.005	PK
3			5700.000	57.409	50.244	-47.791	105.200	7.165	PK
4			5720.000	57.637	50.338	-53.163	110.800	7.299	PK
5			5725.000	57.636	50.308	-64.564	122.200	7.328	PK
6			5752.687	92.702	85.292	N/A	N/A	7.411	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:46
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz	

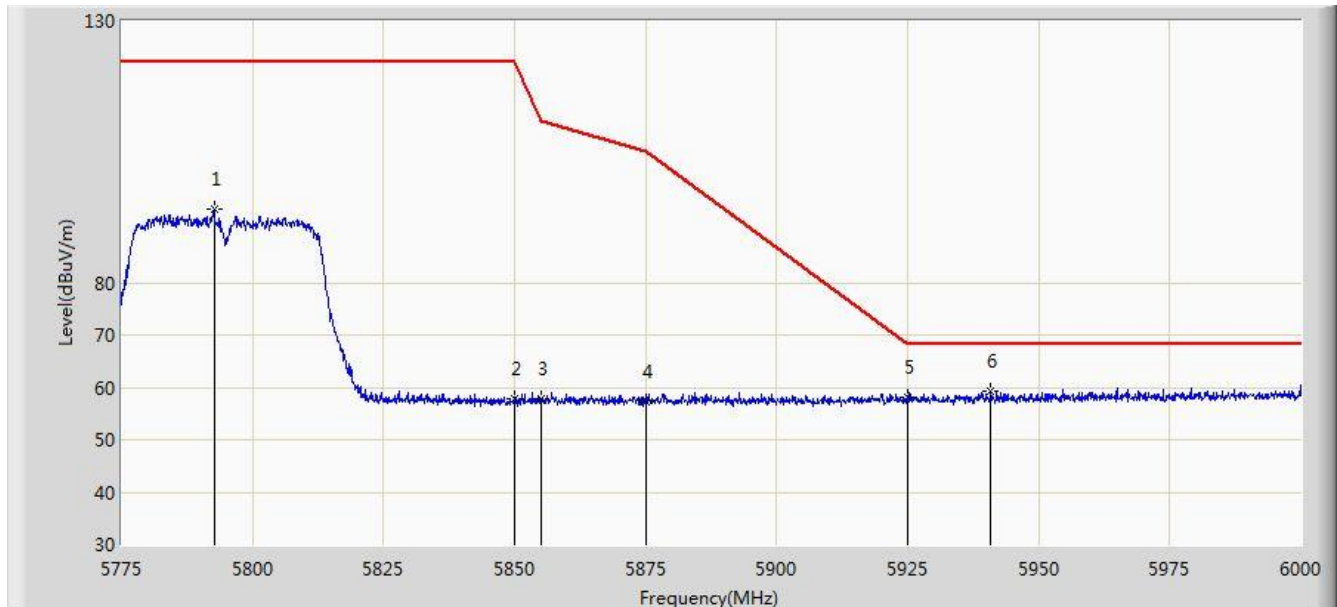


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5792.663	94.198	86.666	N/A	N/A	7.531	PK
2			5850.000	57.916	50.143	-64.284	122.200	7.774	PK
3			5855.000	57.954	50.178	-52.846	110.800	7.775	PK
4			5875.000	57.178	49.360	-48.022	105.200	7.818	PK
5			5925.000	58.017	50.198	-10.183	68.200	7.819	PK
6		*	5940.825	59.362	51.525	-8.838	68.200	7.837	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:49
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz	

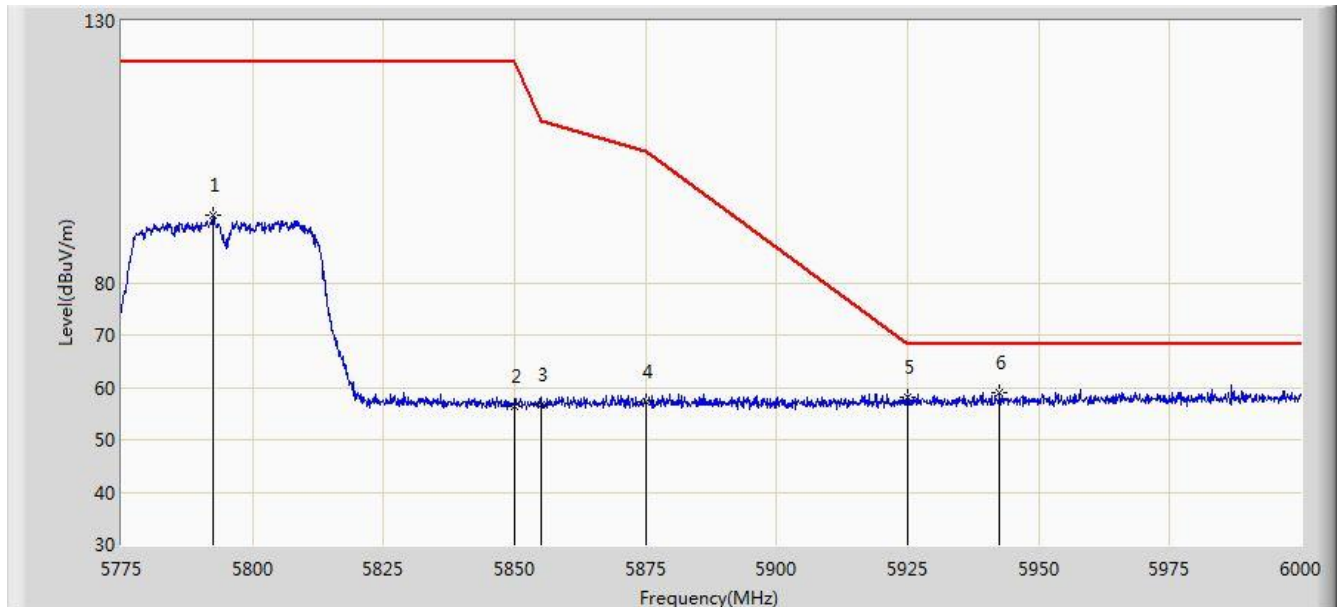


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5792.550	92.773	85.242	N/A	N/A	7.531	PK
2			5850.000	56.407	48.634	-65.793	122.200	7.774	PK
3			5855.000	56.541	48.765	-54.259	110.800	7.775	PK
4			5875.000	57.214	49.396	-47.986	105.200	7.818	PK
5			5925.000	58.138	50.319	-10.062	68.200	7.819	PK
6		*	5942.513	59.048	51.209	-9.152	68.200	7.839	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz	

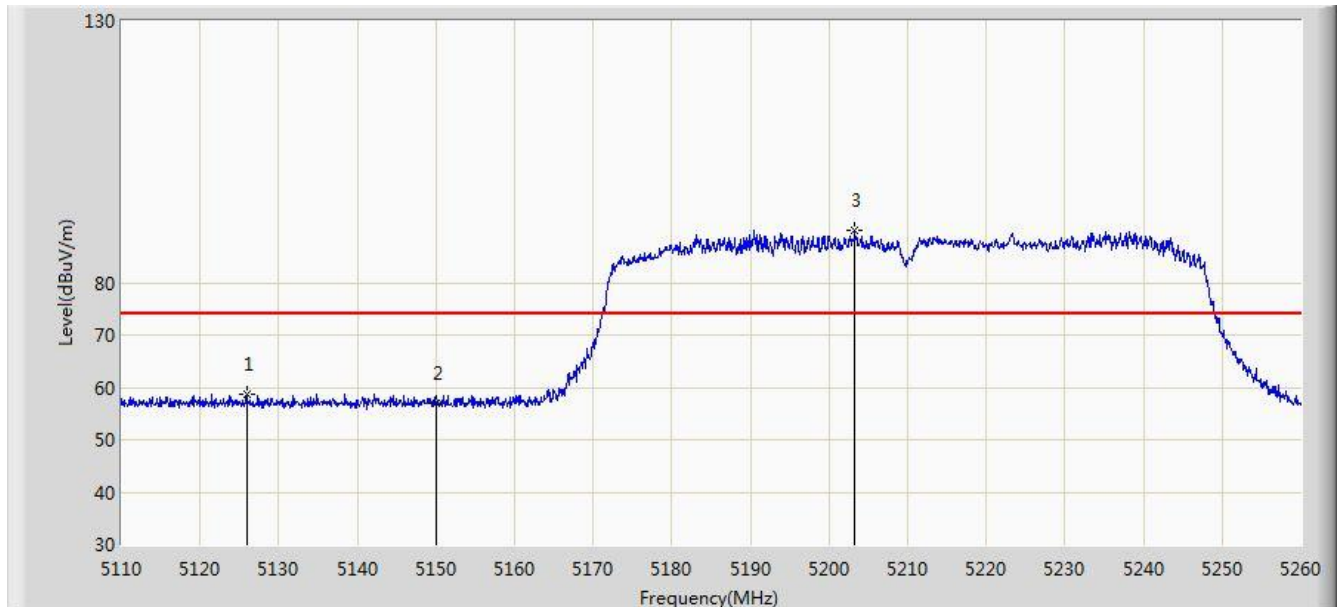


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5125.900	58.782	52.132	-15.218	74.000	6.650	PK
2			5150.000	56.814	50.252	-17.186	74.000	6.562	PK
3		*	5203.225	90.010	83.665	N/A	N/A	6.345	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz	

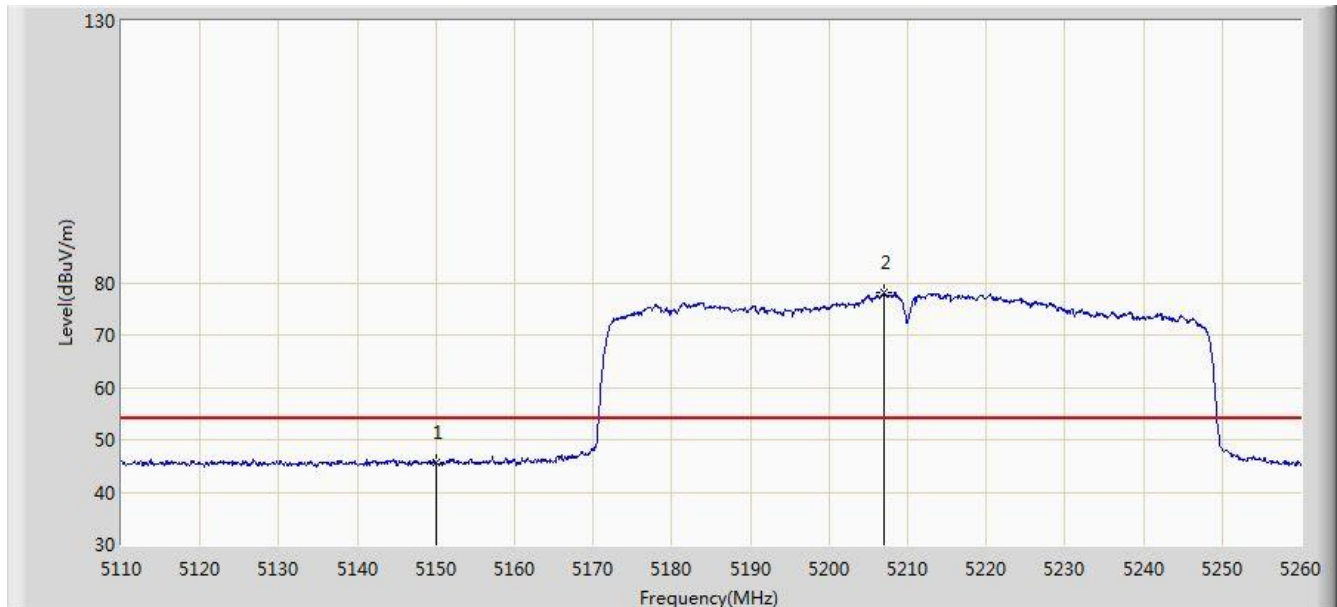


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.656	39.094	-8.344	54.000	6.562	AV
2		*	5206.900	77.994	71.637	N/A	N/A	6.357	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz	

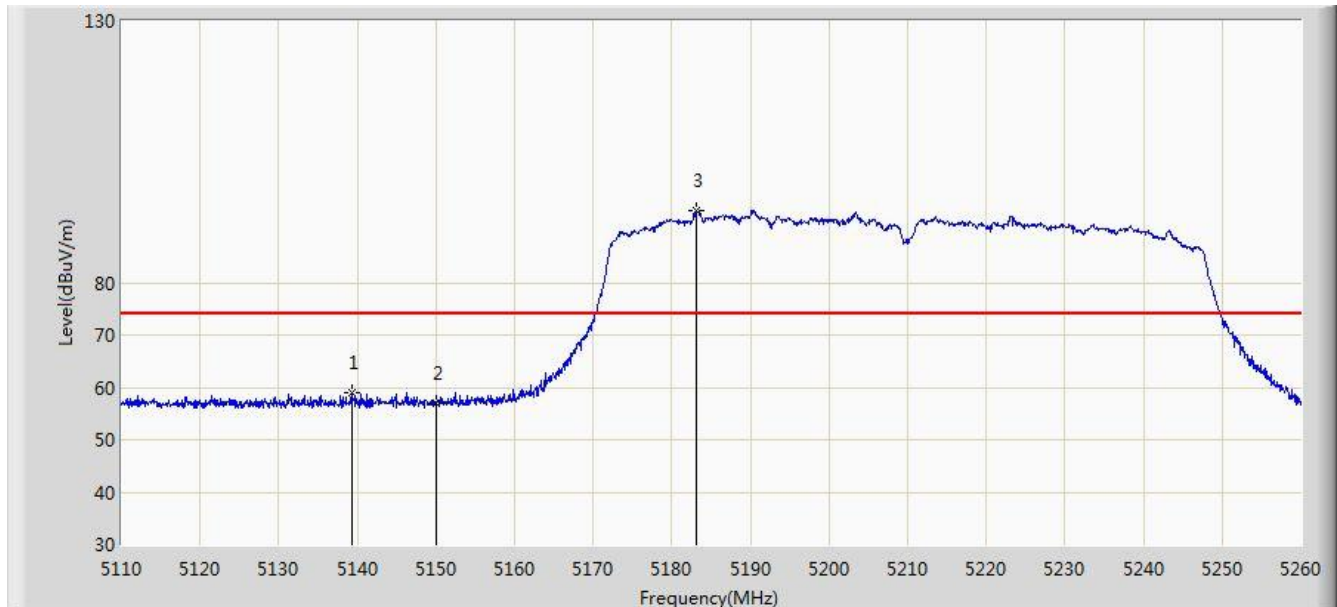


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.250	59.105	52.496	-14.895	74.000	6.609	PK
2			5150.000	57.057	50.495	-16.943	74.000	6.562	PK
3		*	5183.125	93.849	87.427	N/A	N/A	6.421	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz	

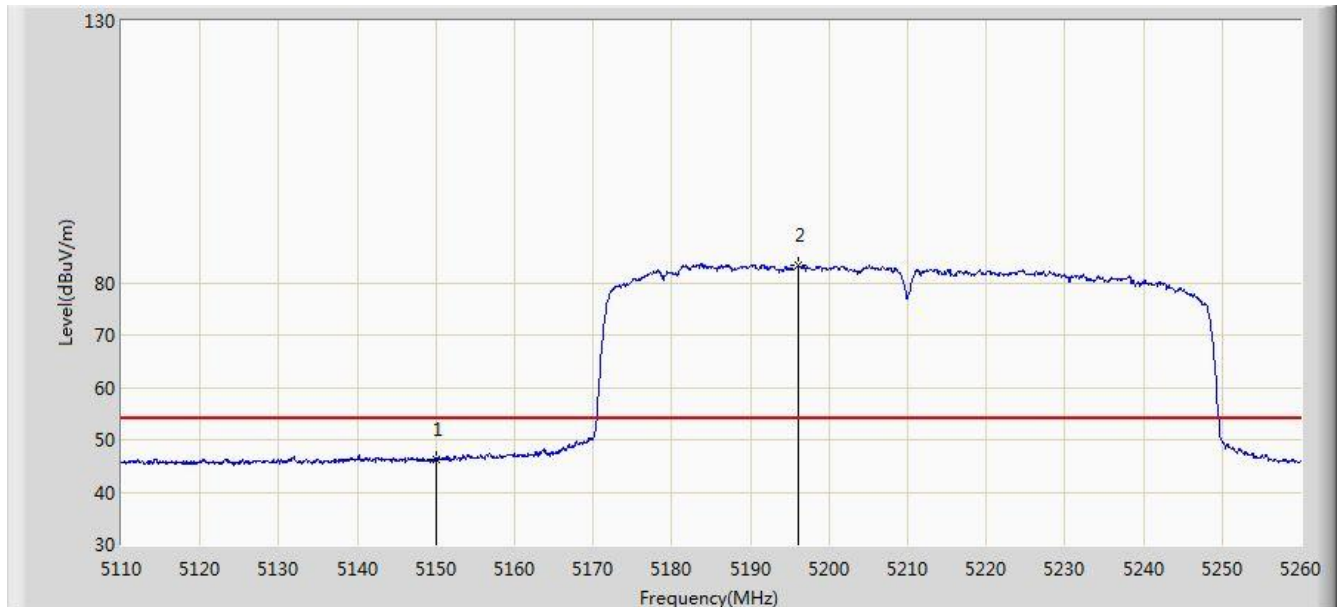


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.243	39.681	-7.757	54.000	6.562	AV
2		*	5196.175	83.263	76.916	N/A	N/A	6.346	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz	

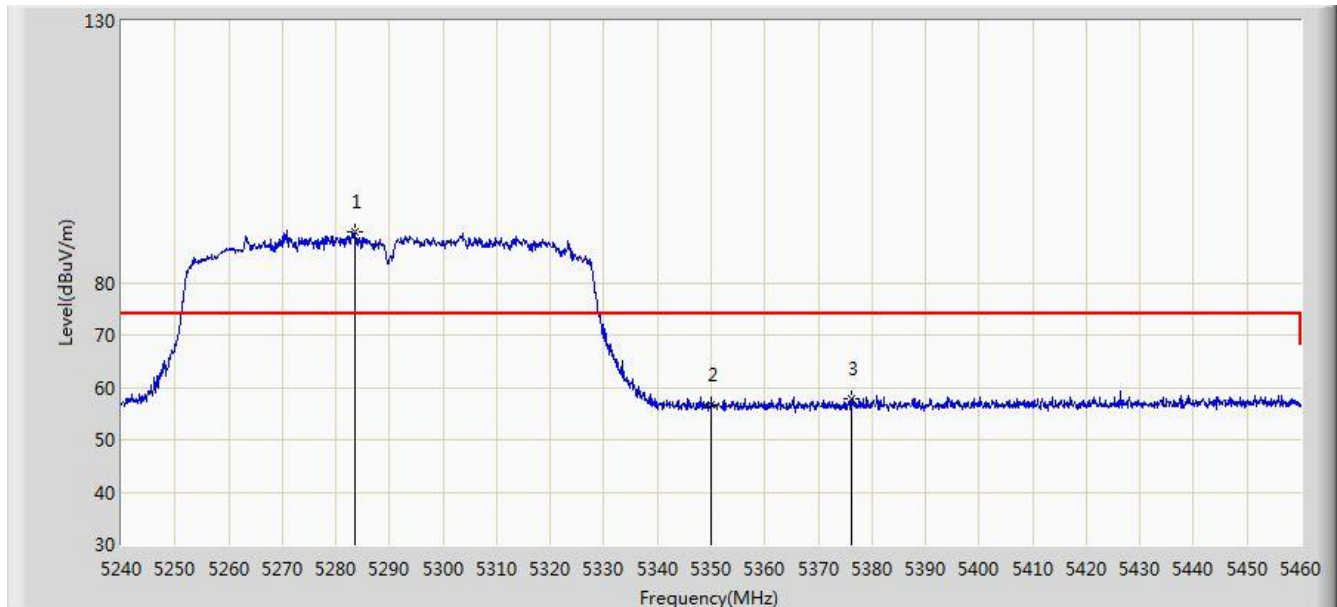


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5283.450	89.680	83.398	N/A	N/A	6.282	PK
2			5350.000	56.682	50.222	-17.318	74.000	6.460	PK
3			5376.290	57.933	51.394	-16.067	74.000	6.540	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz	

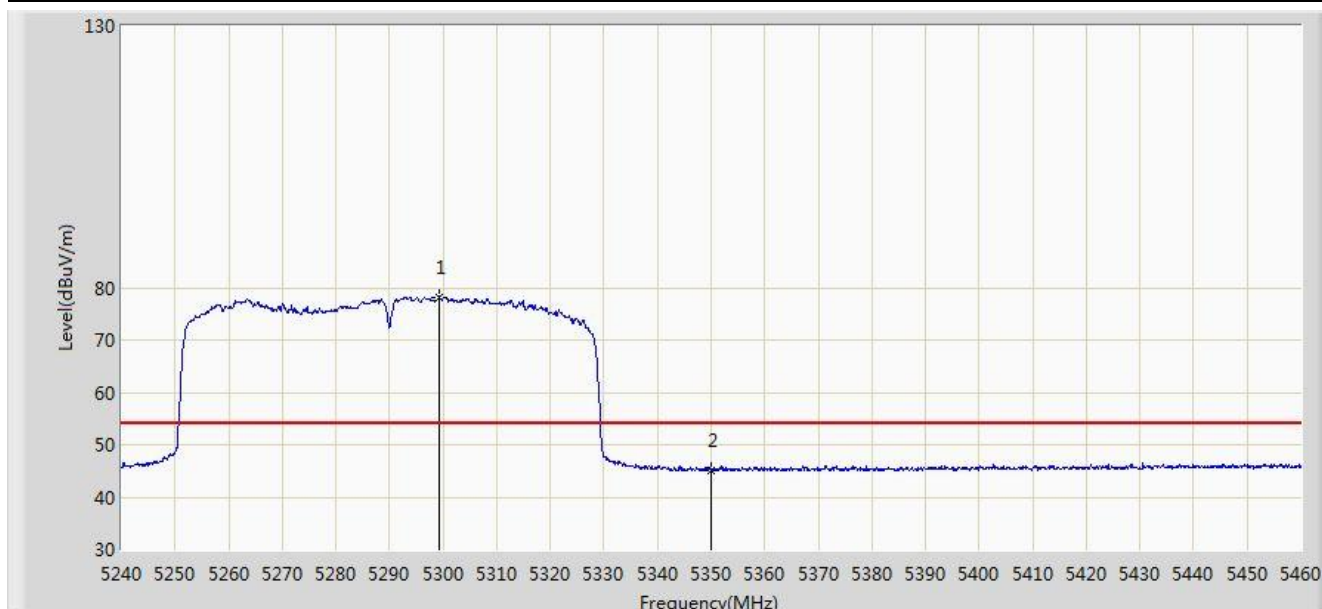


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.180	78.069	71.811	N/A	N/A	6.259	AV
2			5350.000	45.053	38.593	-8.947	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 21:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz	

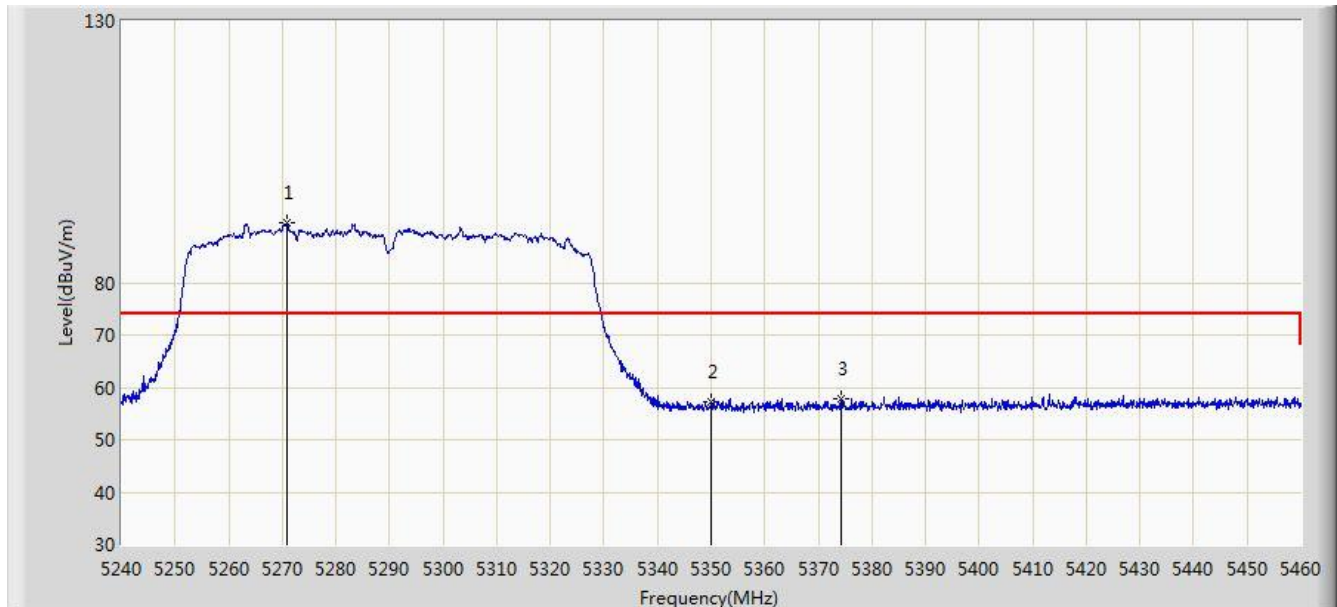


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5270.800	91.444	85.138	N/A	N/A	6.306	PK
2			5350.000	57.175	50.715	-16.825	74.000	6.460	PK
3			5374.200	57.883	51.346	-16.117	74.000	6.537	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 22:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz	

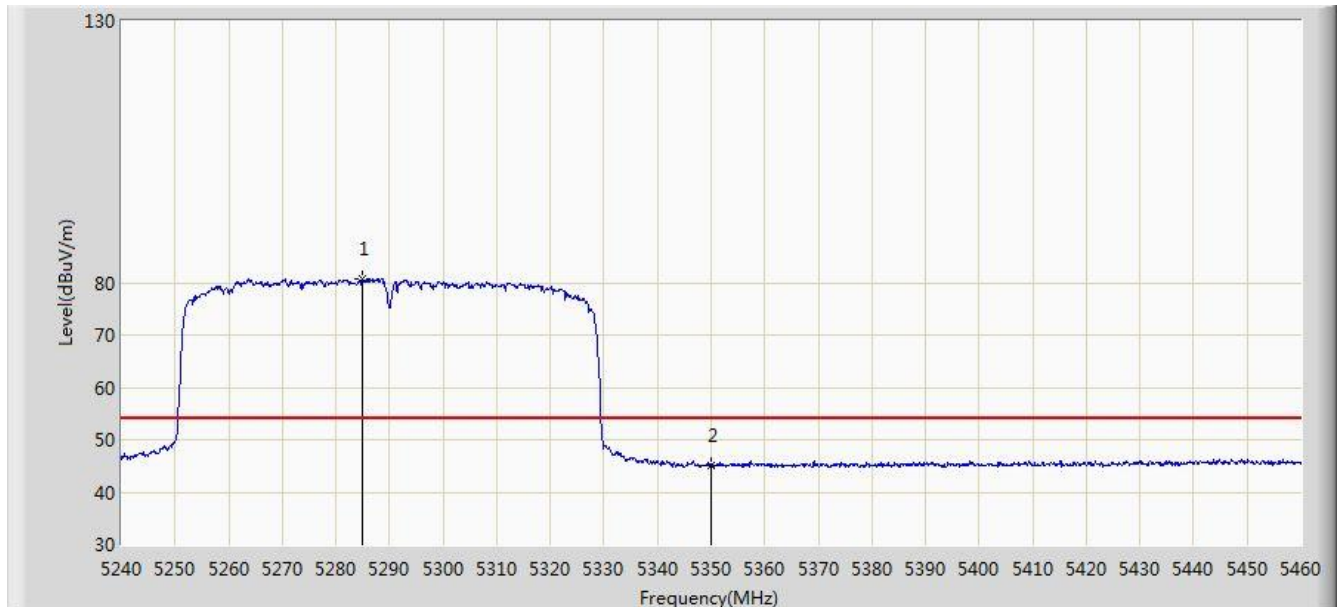


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5284.990	80.837	74.558	N/A	N/A	6.279	AV
2			5350.000	45.186	38.726	-8.814	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 22:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz	

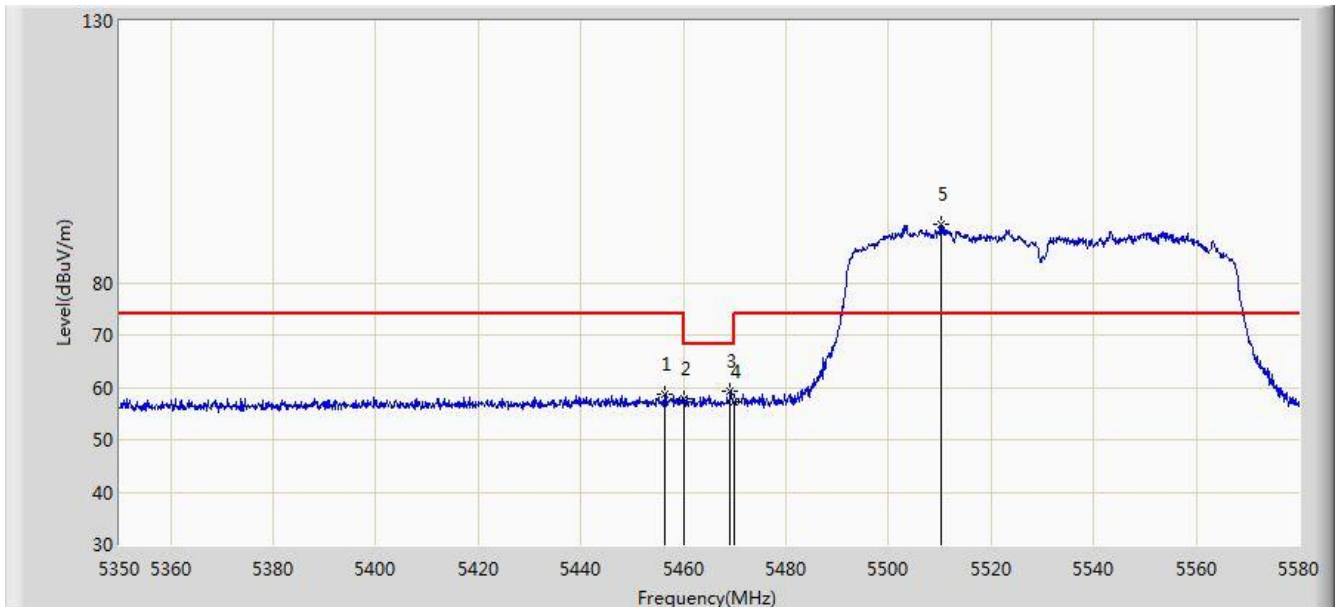


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.260	58.791	52.005	-15.209	74.000	6.785	PK
2			5460.000	57.746	50.944	-16.254	74.000	6.802	PK
3			5469.140	59.387	52.546	-8.813	68.200	6.841	PK
4			5470.000	57.127	50.282	-11.073	68.200	6.845	PK
5		*	5510.195	91.137	84.325	N/A	N/A	6.812	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 22:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz	

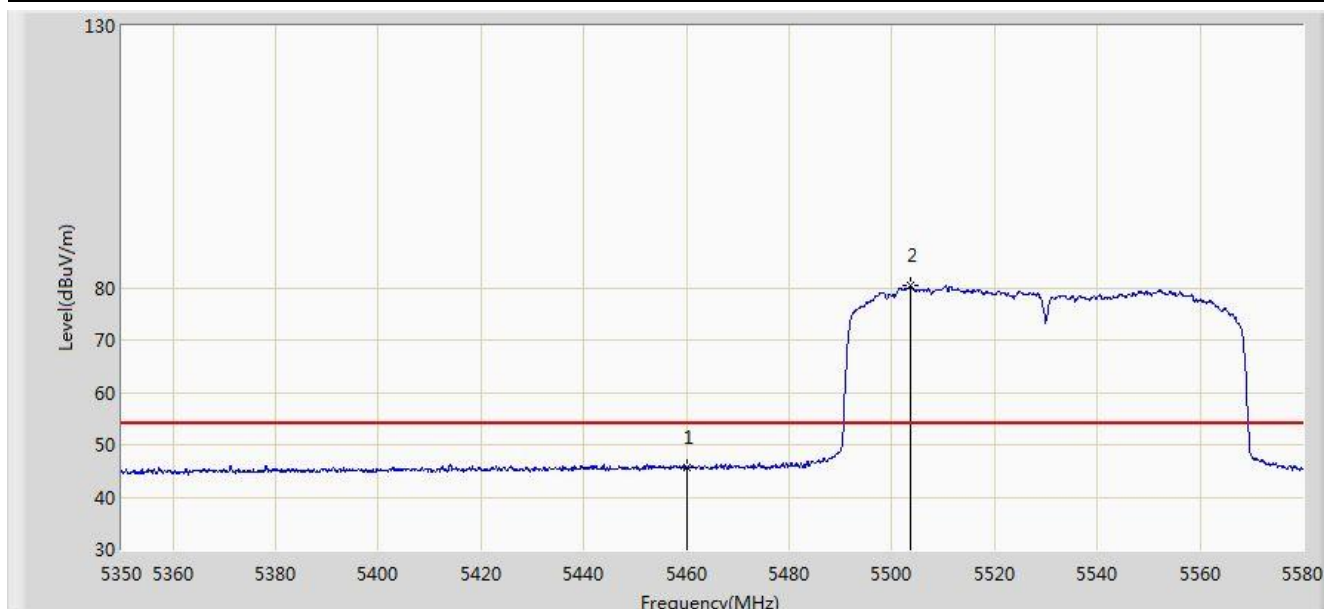


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.561	38.759	-8.439	54.000	6.802	AV
2		*	5503.525	80.303	73.490	N/A	N/A	6.813	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 22:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz	

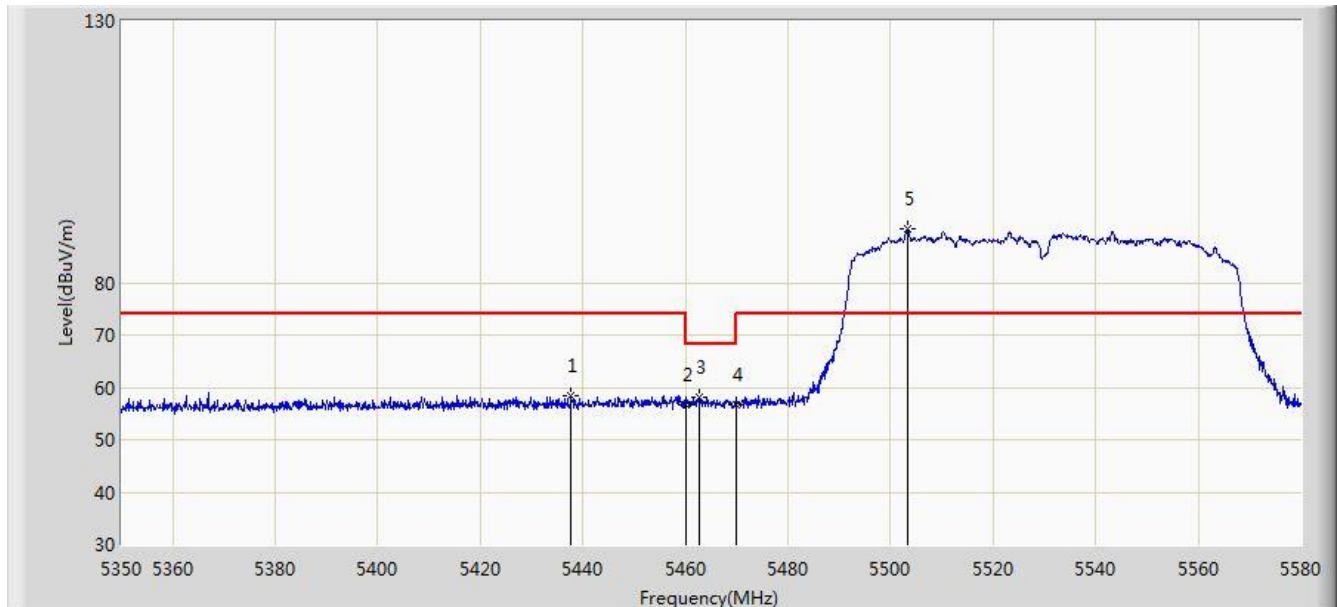


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5437.630	58.448	51.798	-15.552	74.000	6.649	PK
2			5460.000	56.682	49.880	-17.318	74.000	6.802	PK
3			5462.815	58.188	51.374	-10.012	68.200	6.814	PK
4			5470.000	56.620	49.775	-11.580	68.200	6.845	PK
5		*	5503.410	90.261	83.448	N/A	N/A	6.813	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 22:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz	

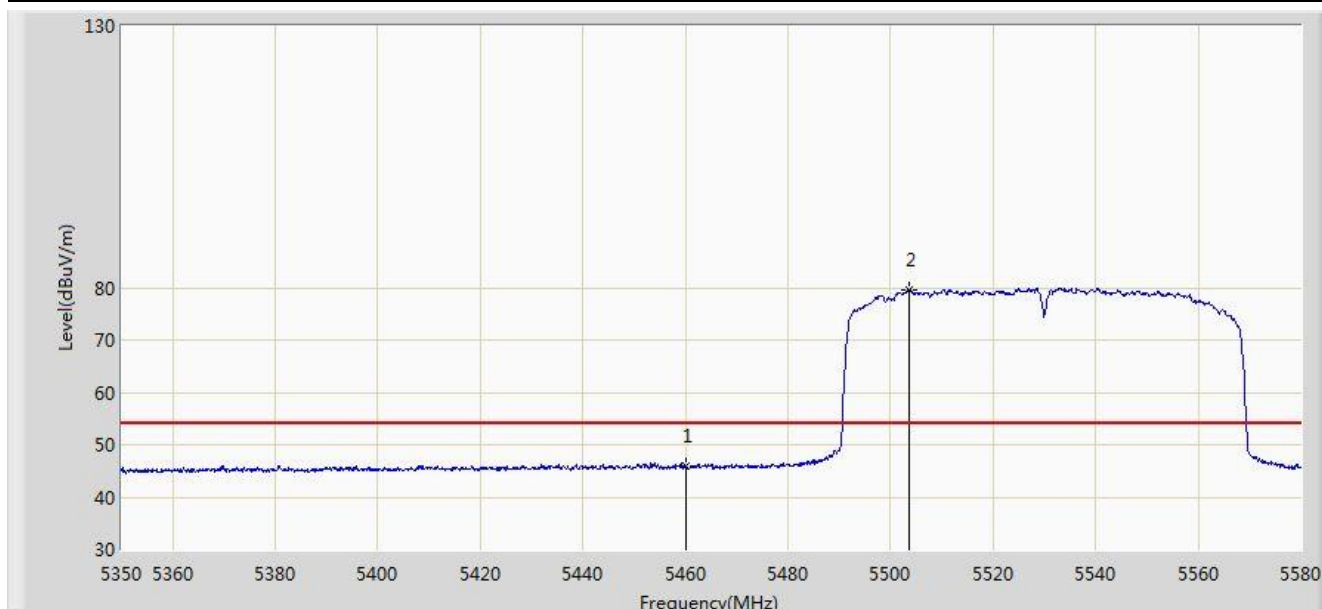


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.037	39.235	-7.963	54.000	6.802	AV
2		*	5503.640	79.683	72.870	N/A	N/A	6.812	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 22:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz	

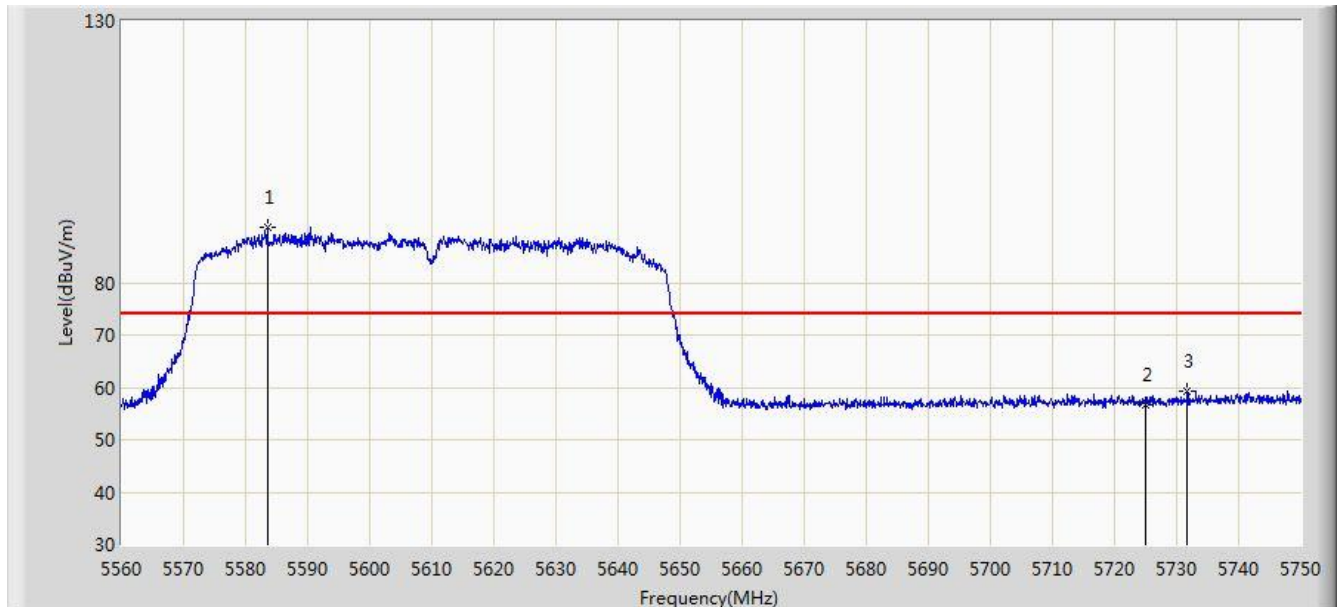


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5583.560	90.532	83.573	N/A	N/A	6.959	PK
2			5725.000	56.761	49.433	-17.239	74.000	7.328	PK
3			5731.760	59.250	51.892	-14.750	74.000	7.358	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 22:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz	

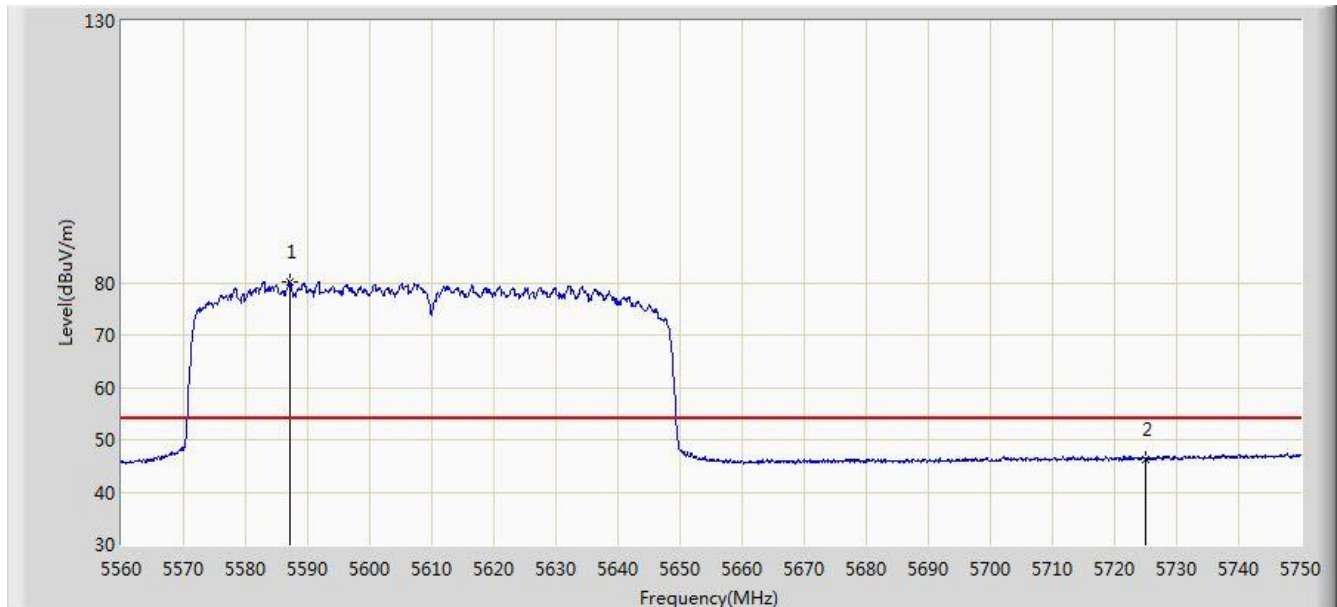


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5587.075	80.037	73.061	N/A	N/A	6.976	AV
2			5725.000	46.341	39.013	-7.659	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 22:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz	

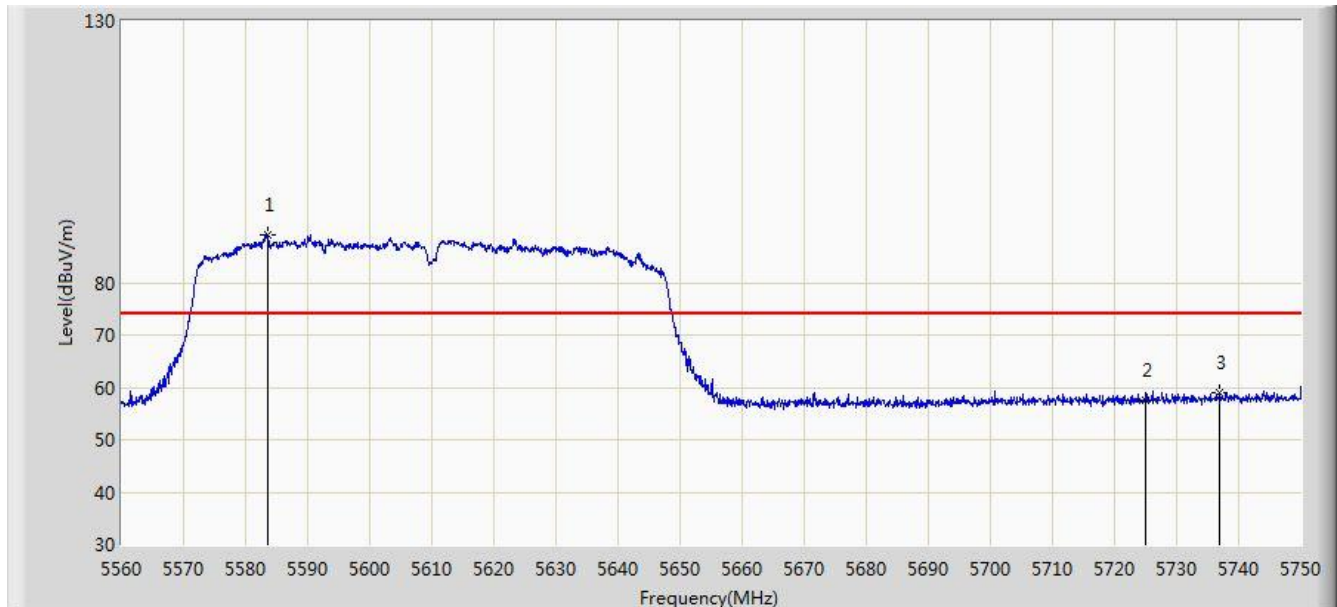


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5583.560	89.191	82.232	N/A	N/A	6.959	PK
2			5725.000	57.665	50.337	-16.335	74.000	7.328	PK
3			5736.985	59.063	51.683	-14.937	74.000	7.380	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 22:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz	

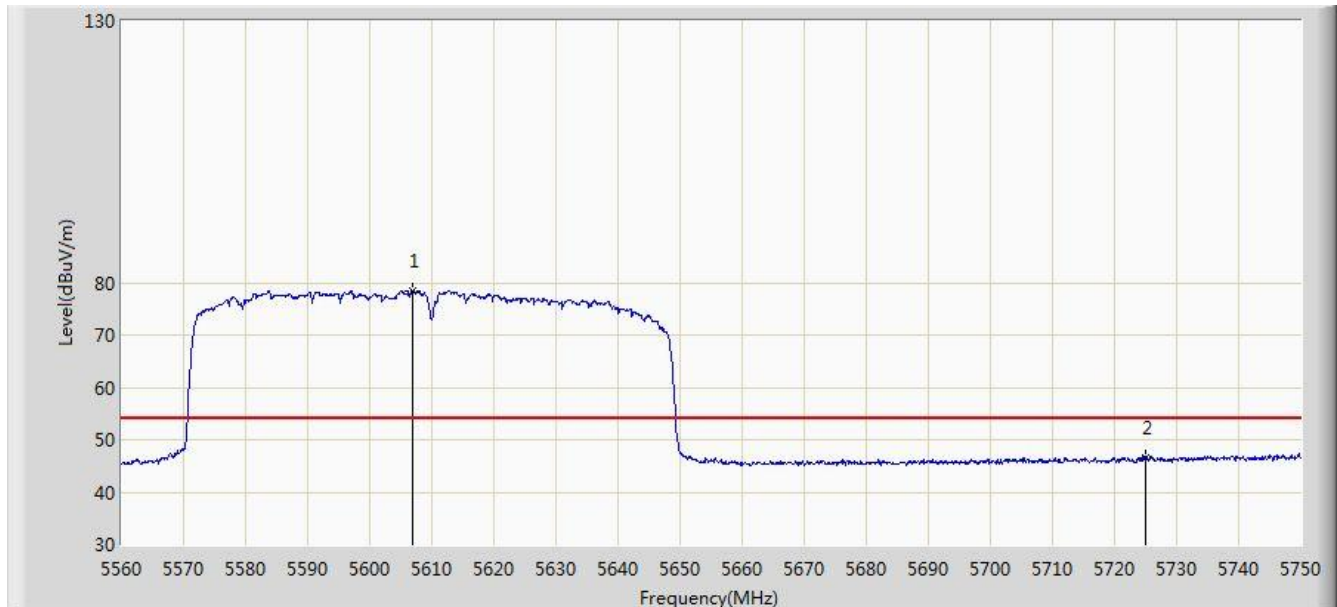


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5606.835	78.430	71.451	N/A	N/A	6.978	AV
2			5725.000	46.633	39.305	-7.367	54.000	7.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 22:13
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz	

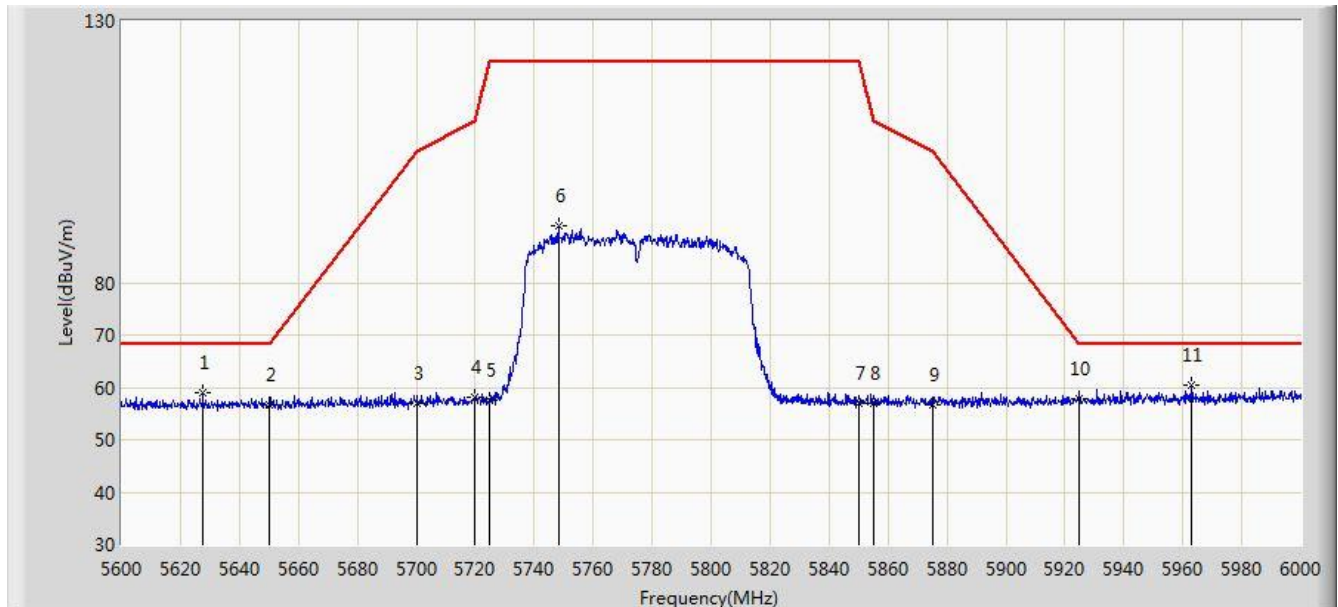


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5627.600	58.990	51.982	-9.210	68.200	7.008	PK
2			5650.000	56.804	49.799	-11.396	68.200	7.005	PK
3			5700.000	56.919	49.754	-48.281	105.200	7.165	PK
4			5720.000	58.078	50.779	-52.722	110.800	7.299	PK
5			5725.000	57.612	50.284	-64.588	122.200	7.328	PK
6			5748.400	90.839	83.432	N/A	N/A	7.407	PK
7			5850.000	56.863	49.090	-65.337	122.200	7.774	PK
8			5855.000	57.077	49.301	-53.723	110.800	7.775	PK
9			5875.000	56.642	48.824	-48.558	105.200	7.818	PK
10			5925.000	57.843	50.024	-10.357	68.200	7.819	PK
11		*	5963.000	60.431	52.571	-7.769	68.200	7.861	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/05/07 - 22:17
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz	

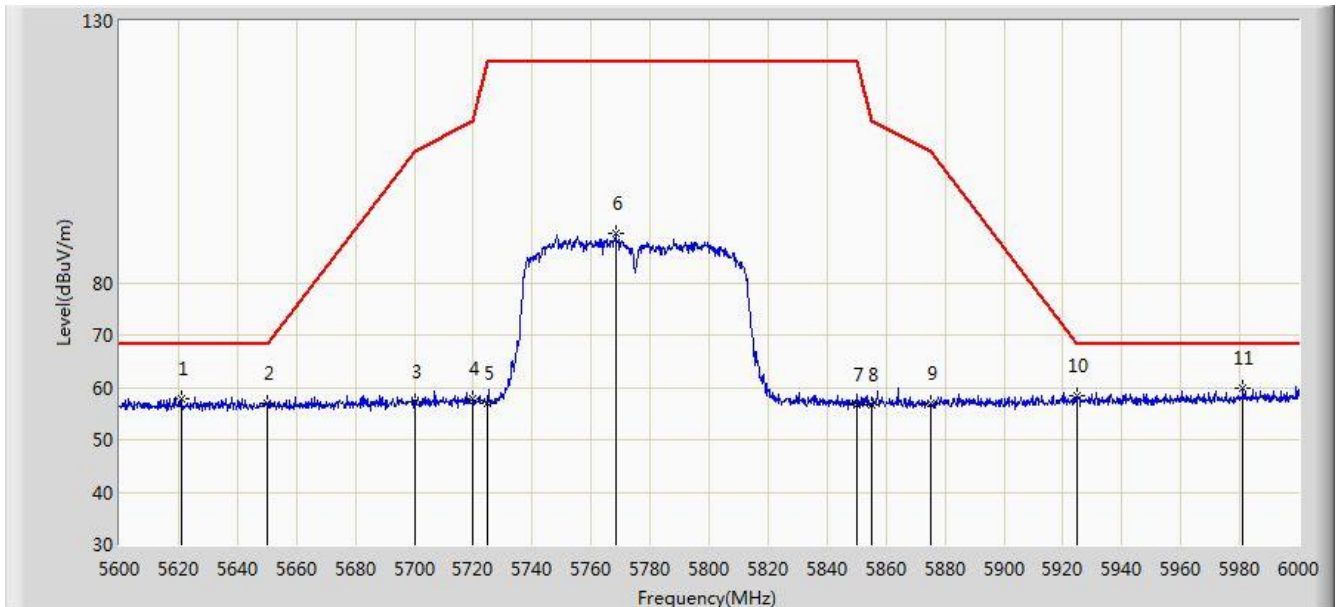

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5621.000	57.914	50.906	-10.286	68.200	7.009	PK
2			5650.000	57.092	50.087	-11.108	68.200	7.005	PK
3			5700.000	57.160	49.995	-48.040	105.200	7.165	PK
4			5720.000	57.944	50.645	-52.856	110.800	7.299	PK
5			5725.000	57.084	49.756	-65.116	122.200	7.328	PK
6			5768.200	89.475	82.033	N/A	N/A	7.443	PK
7			5850.000	56.733	48.960	-65.467	122.200	7.774	PK
8			5855.000	56.628	48.852	-54.172	110.800	7.775	PK
9			5875.000	57.041	49.223	-48.159	105.200	7.818	PK
10			5925.000	58.315	50.496	-9.885	68.200	7.819	PK
11		*	5981.200	59.848	51.957	-8.352	68.200	7.890	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

7.10. AC Conducted Emissions Measurement


7.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

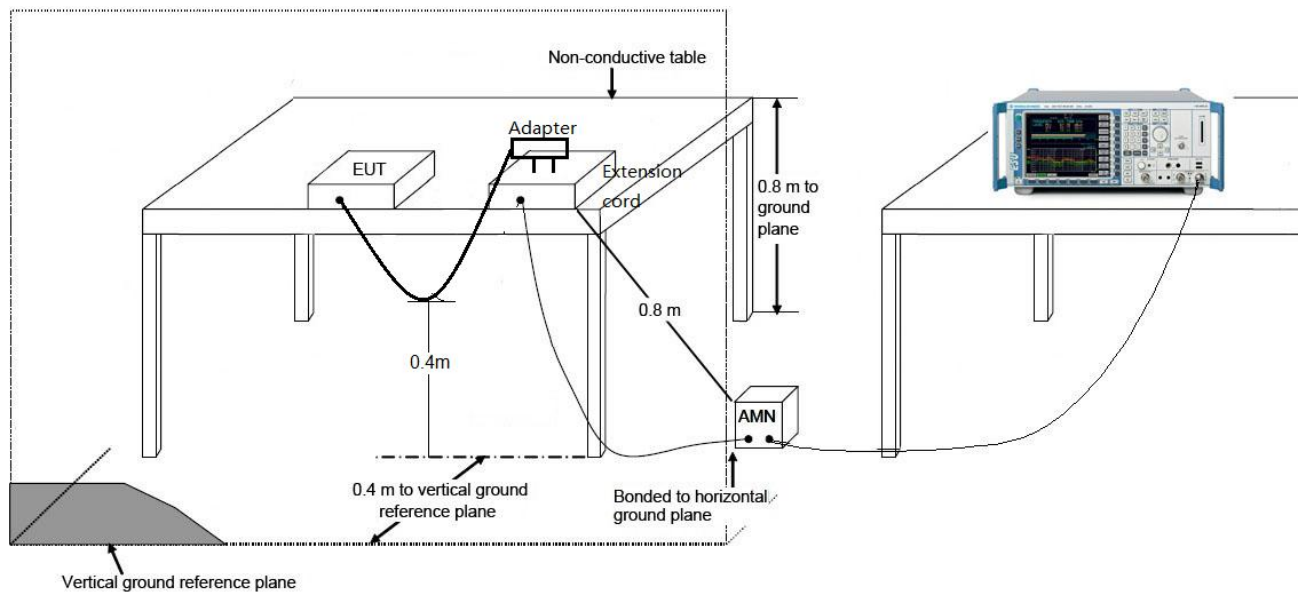

7.10.3.Test Result

Site: SR2	Time: 2018/05/08 - 15:59
Limit: FCC_Part15.207_CE_AC Power	Engineer: Polly Zong
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Mode 1	

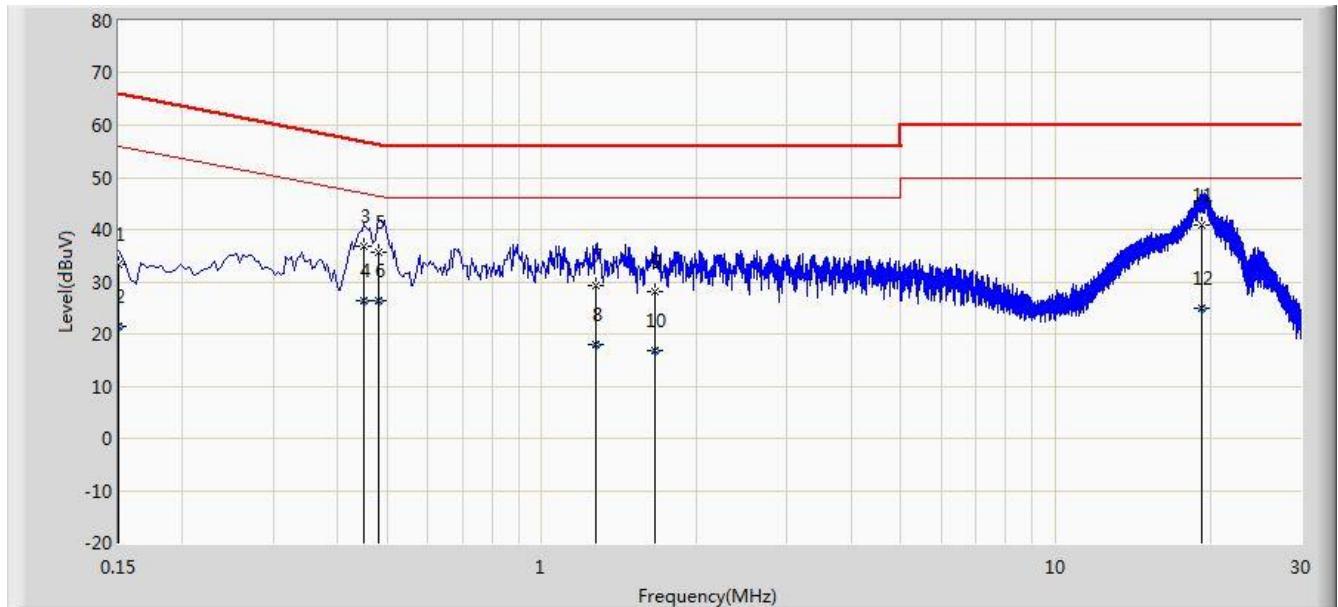


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	33.462	22.294	-32.538	66.000	11.168	QP
2			0.150	21.395	10.227	-34.605	56.000	11.168	AV
3			0.450	36.941	26.815	-19.934	56.875	10.126	QP
4			0.450	26.425	16.299	-20.450	46.875	10.126	AV
5			0.482	35.737	25.585	-20.568	56.305	10.152	QP
6			0.482	26.460	16.308	-19.845	46.305	10.152	AV
7			1.270	29.166	19.267	-26.834	56.000	9.899	QP
8			1.270	18.018	8.119	-27.982	46.000	9.899	AV
9			1.662	28.221	18.338	-27.779	56.000	9.883	QP
10			1.662	16.697	6.814	-29.303	46.000	9.883	AV
11		*	19.222	40.923	30.792	-19.077	60.000	10.131	QP
12			19.222	24.976	14.845	-25.024	50.000	10.131	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2018/05/08 - 16:06
Limit: FCC_Part15.207_CE_AC Power	Engineer: Polly Zong
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Mode 1	

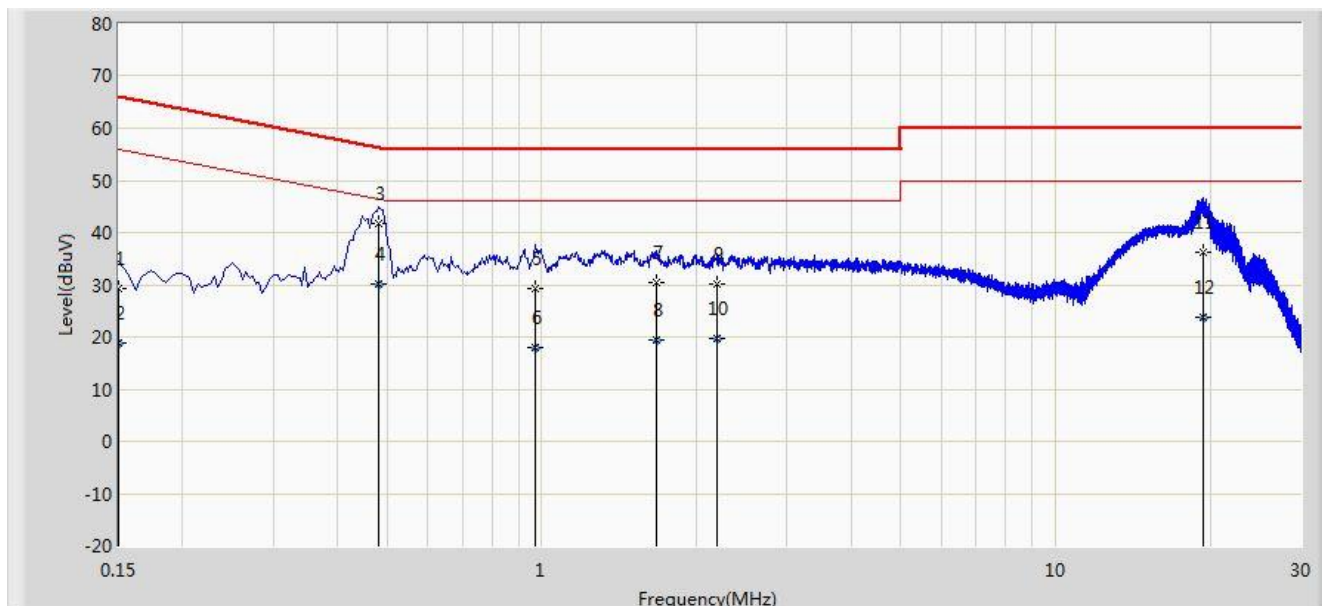

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	29.401	18.259	-36.599	66.000	11.142	QP
2			0.150	18.730	7.588	-37.270	56.000	11.142	AV
3		*	0.482	41.711	31.538	-14.594	56.305	10.173	QP
4			0.482	30.181	20.008	-16.123	46.305	10.173	AV
5			0.970	29.226	19.301	-26.774	56.000	9.925	QP
6			0.970	17.848	7.923	-28.152	46.000	9.925	AV
7			1.666	30.392	20.507	-25.608	56.000	9.885	QP
8			1.666	19.385	9.500	-26.615	46.000	9.885	AV
9			2.190	30.276	20.407	-25.724	56.000	9.869	QP
10			2.190	19.694	9.825	-26.306	46.000	9.869	AV
11			19.382	36.156	25.997	-23.844	60.000	10.159	QP
12			19.382	23.826	13.667	-26.174	50.000	10.159	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Mobile Computer** is in compliance with Part 15E of the FCC rules & ISED rules.

The End
