


Site: WZ-AC1	Time: 2021/03/19 - 11:05
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

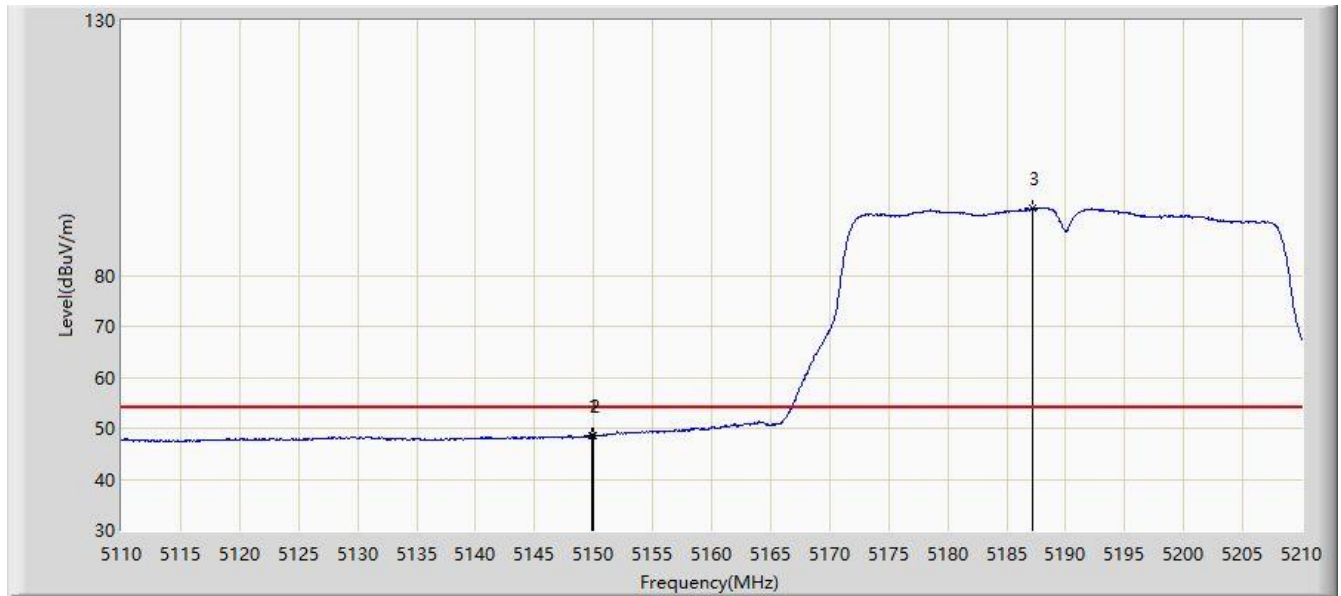


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.850	48.632	43.099	-5.368	54.000	5.533	AV
2			5150.000	48.456	42.923	-5.544	54.000	5.534	AV
3		*	5187.200	93.221	87.458	N/A	N/A	5.763	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:07
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

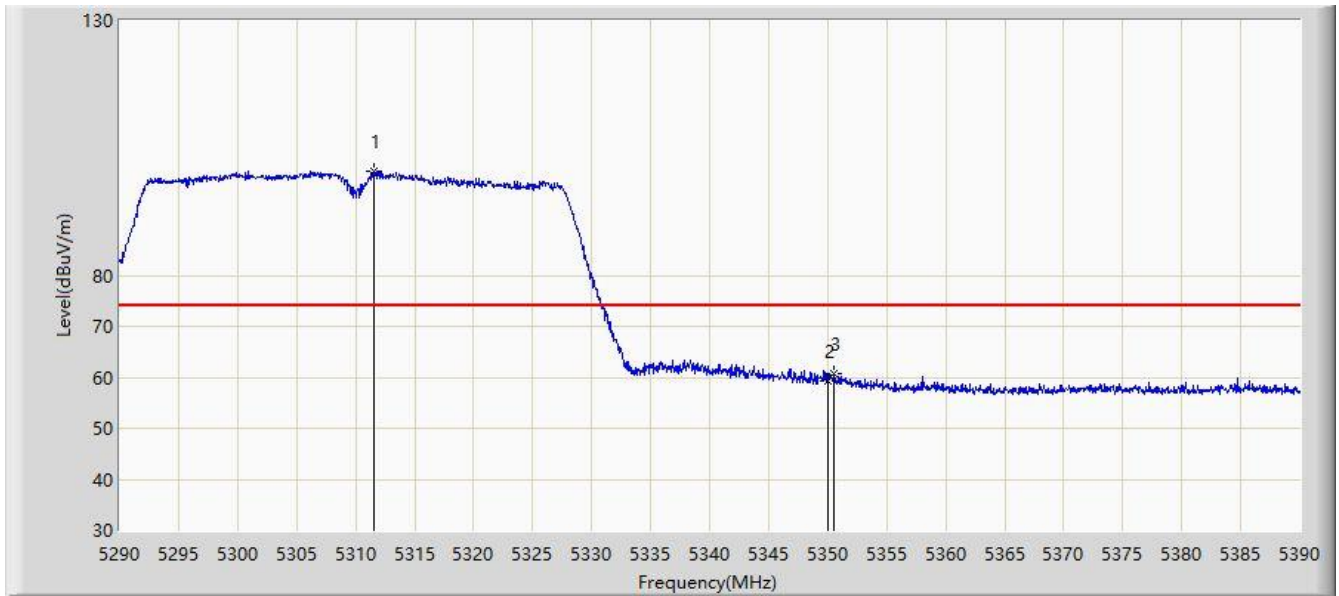


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	5311.600	100.488	95.360	N/A	N/A	5.127	PK
2			5350.000	59.141	53.367	-14.859	74.000	5.774	PK
3			5350.550	60.616	54.852	-13.384	74.000	5.764	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:09
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

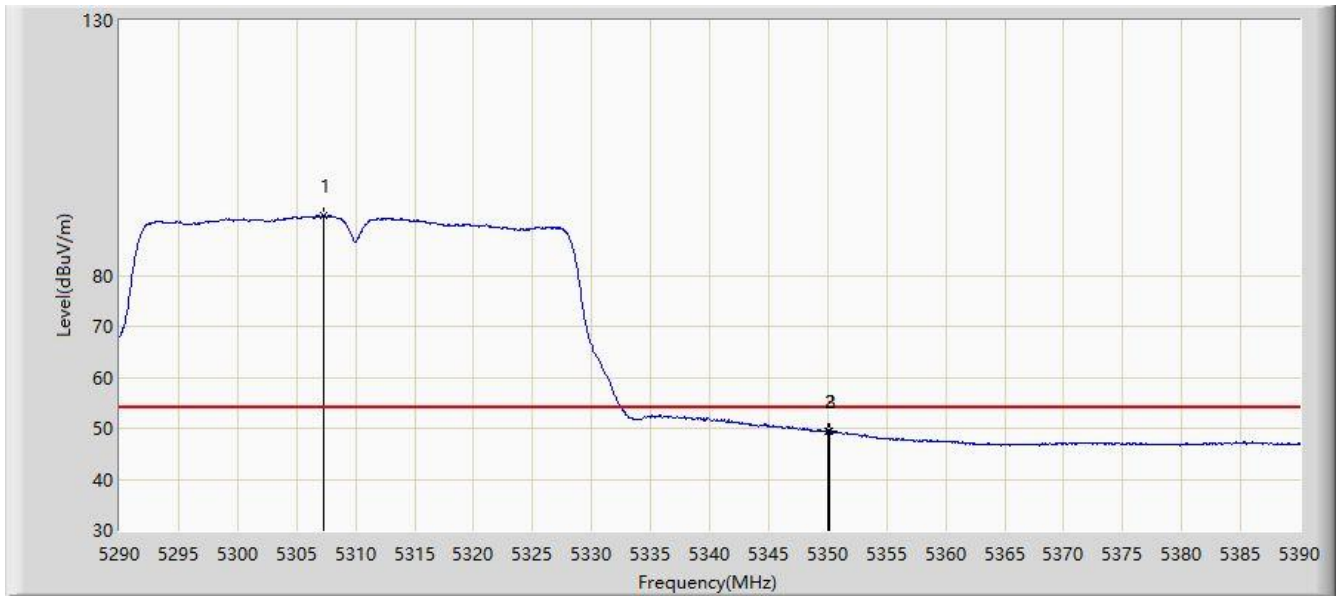


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	5307.250	91.679	86.569	N/A	N/A	5.110	AV
2			5350.000	49.416	43.642	-4.584	54.000	5.774	AV
3			5350.200	49.487	43.716	-4.513	54.000	5.770	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:11
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

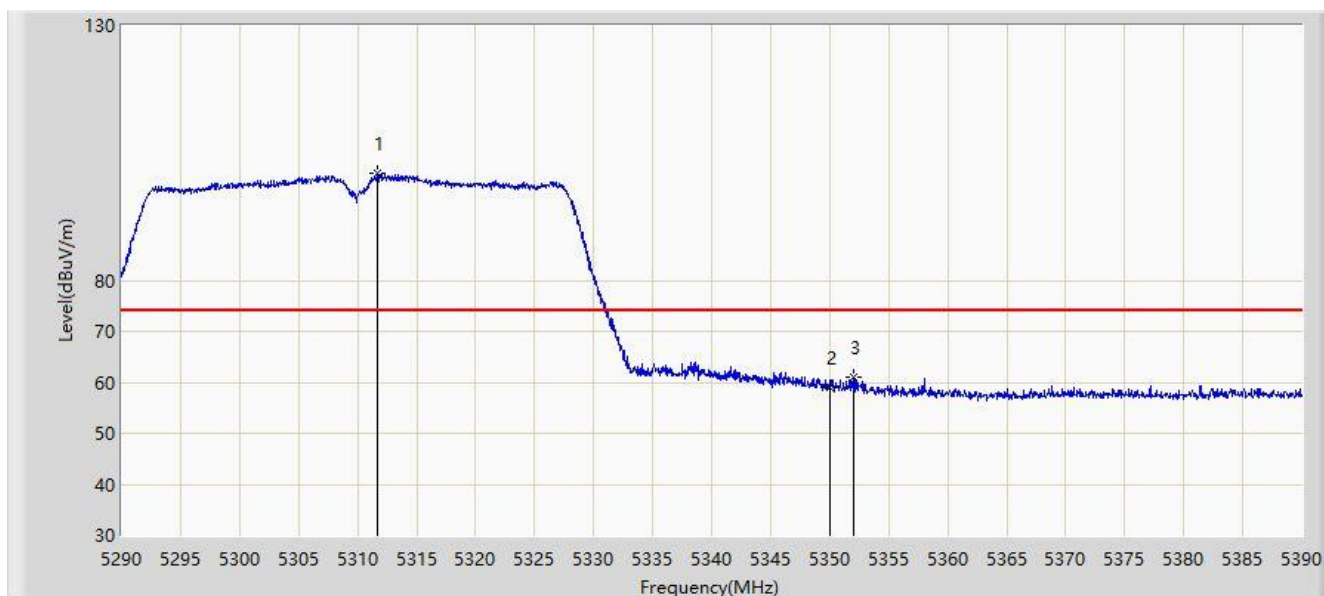


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5311.650	100.934	95.806	N/A	N/A	5.129	PK
2			5350.000	59.056	53.282	-14.944	74.000	5.774	PK
3			5352.000	60.947	55.211	-13.053	74.000	5.736	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:12
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

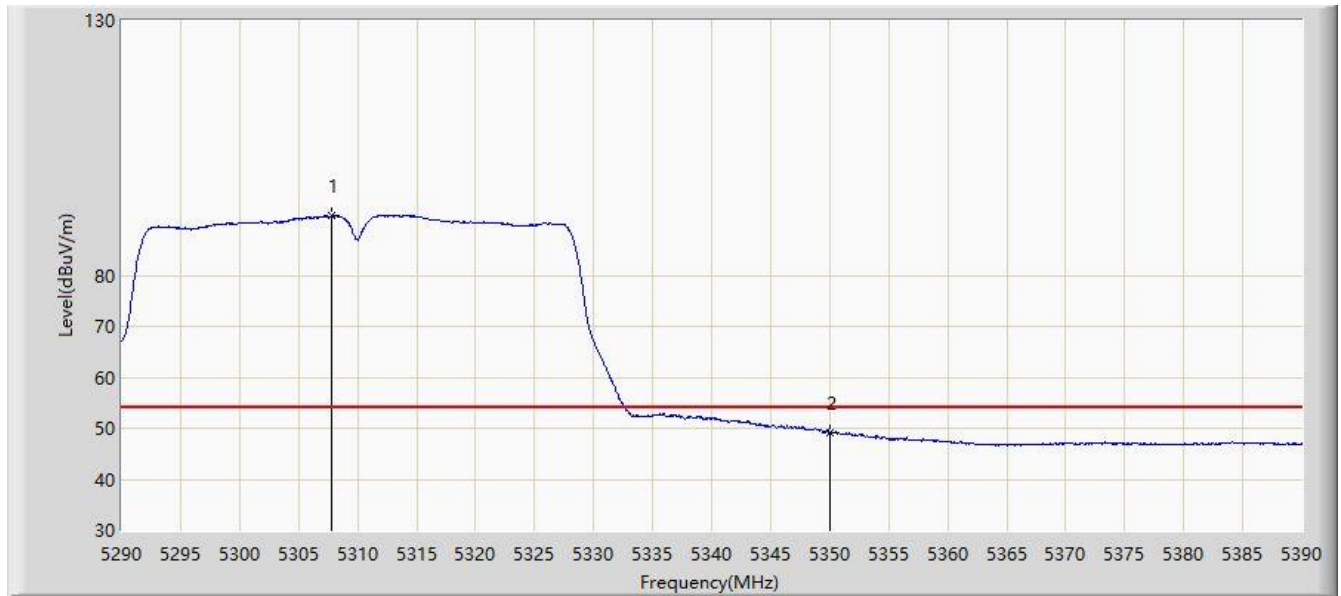


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	5307.800	91.663	86.557	N/A	N/A	5.105	AV
2			5350.000	49.250	43.476	-4.750	54.000	5.774	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:15
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

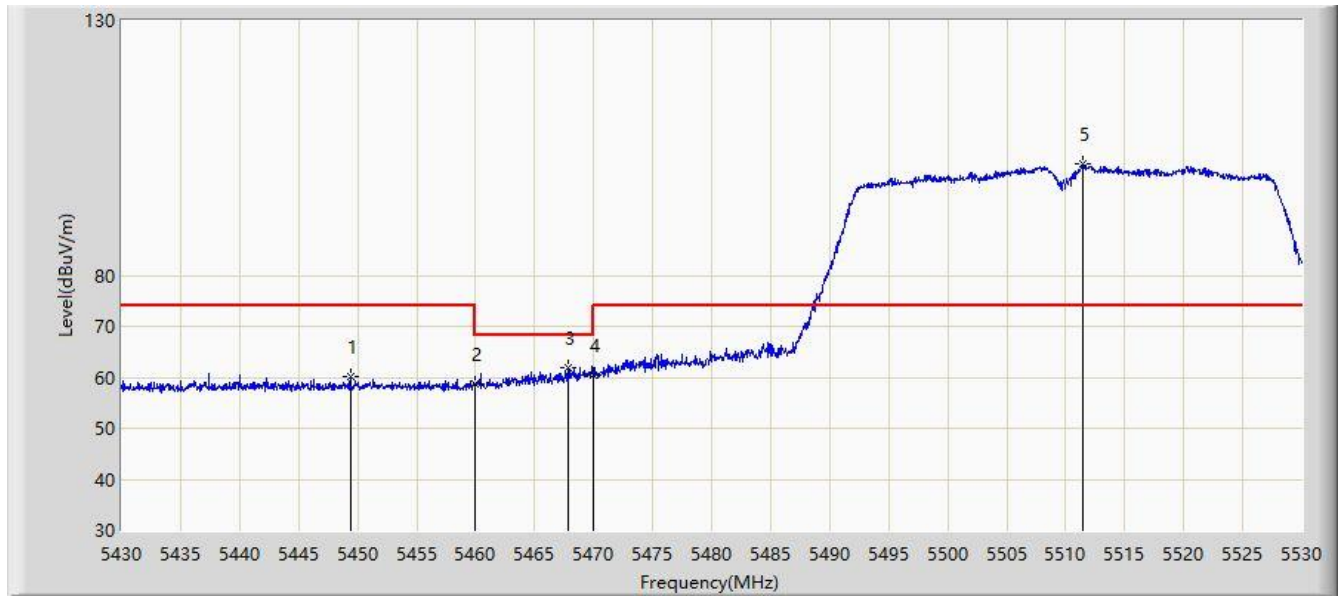


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5449.400	60.041	54.246	-13.959	74.000	5.796	PK
2			5460.000	58.816	53.048	-15.184	74.000	5.768	PK
3			5467.850	61.867	56.156	-6.333	68.200	5.712	PK
4			5470.000	60.567	54.872	-7.633	68.200	5.695	PK
5		*	5511.450	101.821	96.077	N/A	N/A	5.744	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:17
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

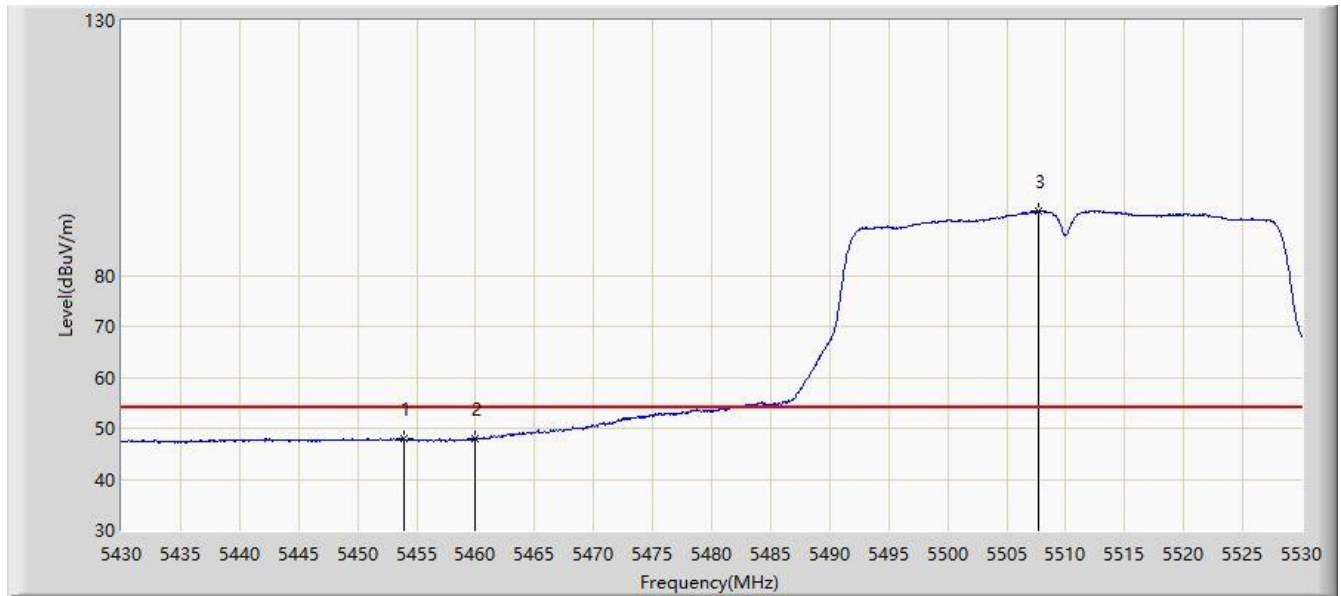


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.900	48.073	42.261	-5.927	54.000	5.813	AV
2			5460.000	47.869	42.101	-6.131	54.000	5.768	AV
3		*	5507.650	92.585	86.865	N/A	N/A	5.720	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:18
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

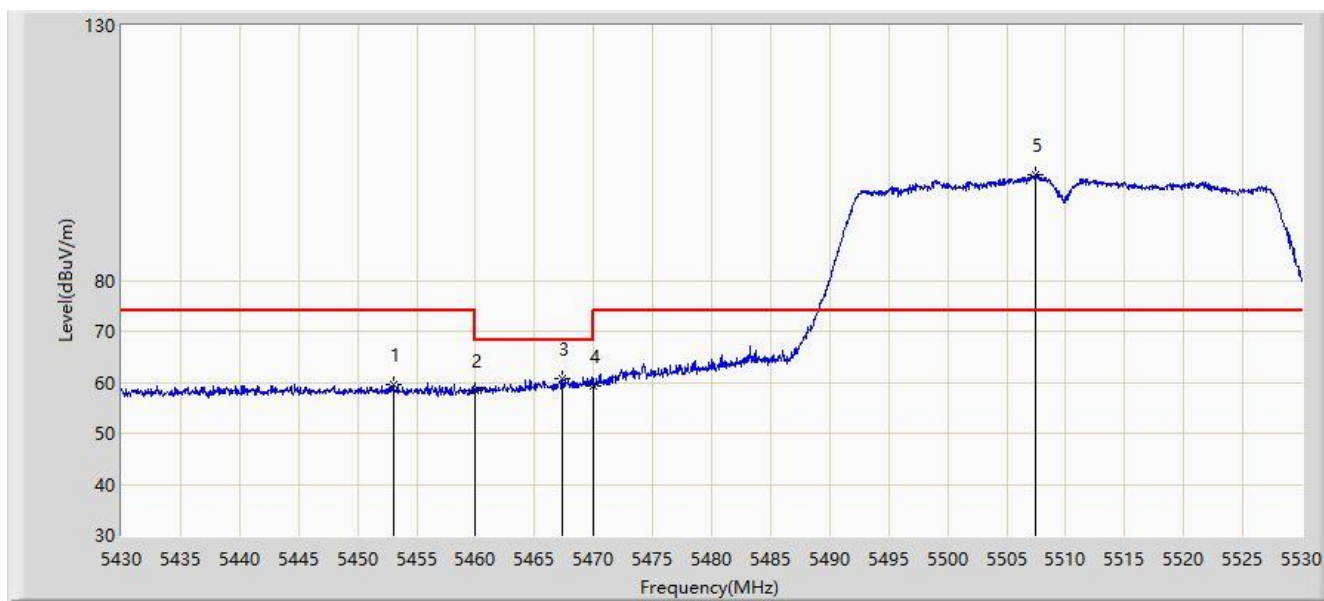


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.000	59.659	53.847	-14.341	74.000	5.812	PK
2			5460.000	58.417	52.649	-15.583	74.000	5.768	PK
3			5467.300	60.820	55.105	-7.380	68.200	5.715	PK
4			5470.000	59.353	53.658	-8.847	68.200	5.695	PK
5		*	5507.400	100.739	95.020	N/A	N/A	5.719	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:20
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

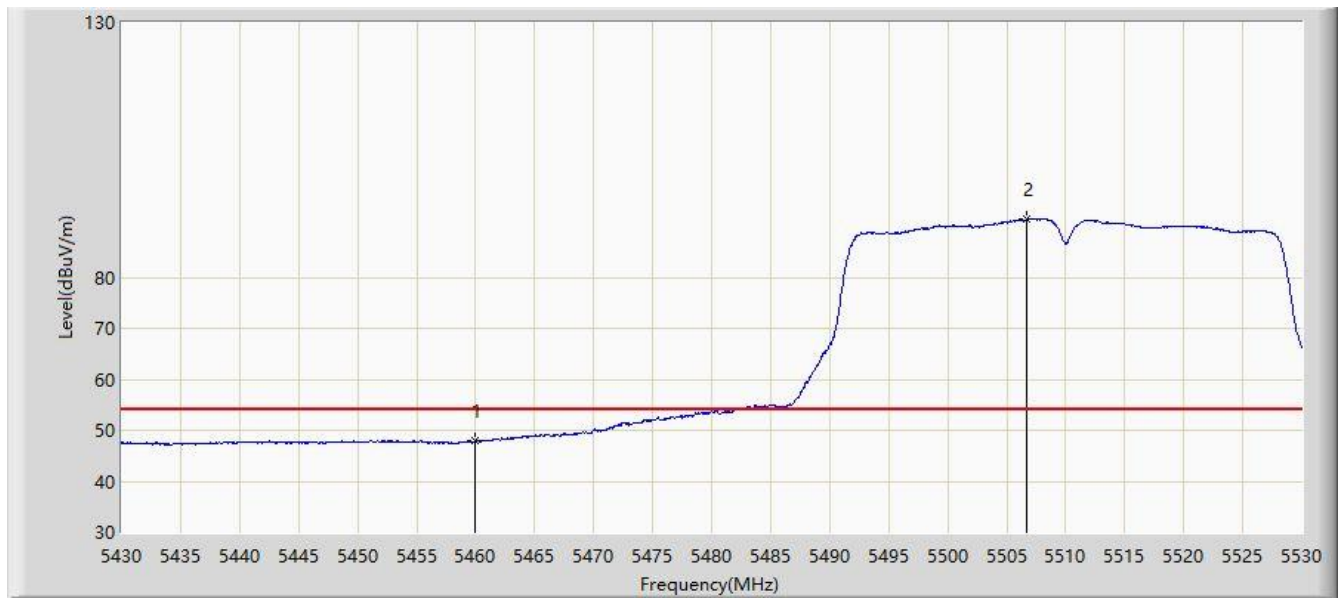


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.993	42.225	-6.007	54.000	5.768	AV
2		*	5506.700	91.349	85.629	N/A	N/A	5.721	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/06/04 - 02:13
Limit: FCC_Part15_Band Edge(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by n-HT40 at Channel 5670MHz	

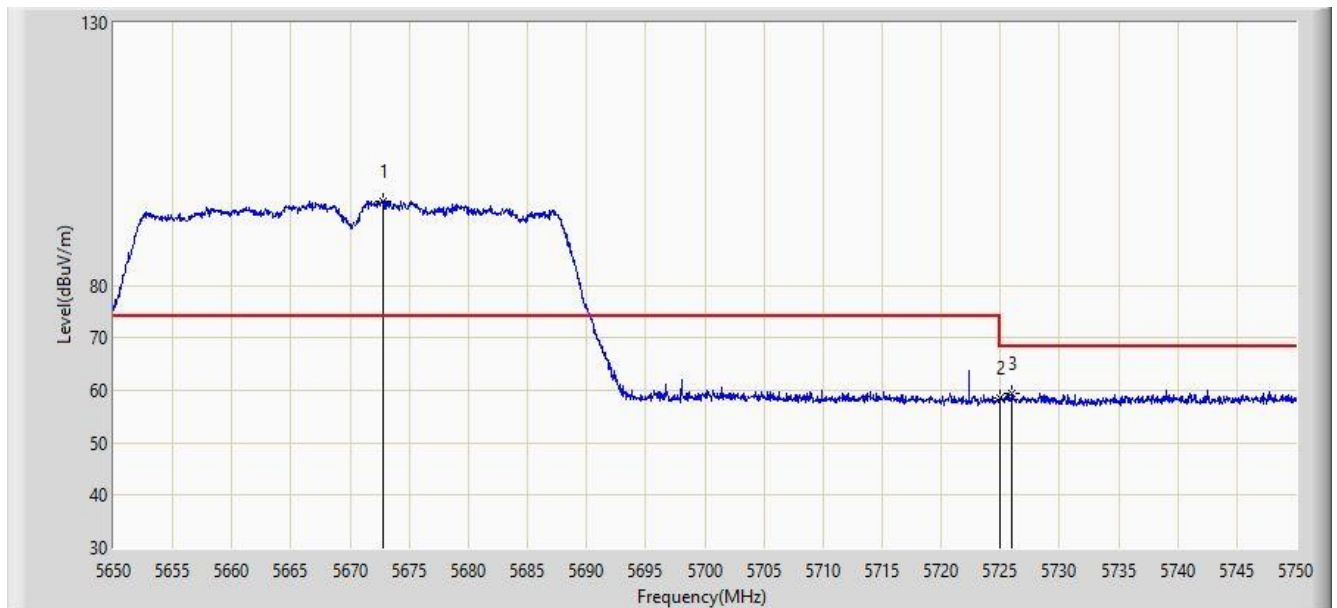


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5672.750	96.021	91.398	N/A	N/A	4.622	PK
2		5725.000	58.507	53.996	-9.693	68.200	4.511	PK
3		5725.950	59.504	54.994	-8.696	68.200	4.510	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/06/04 - 02:14
Limit: FCC_Part15_Band Edge(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by n-HT40 at Channel 5670MHz	

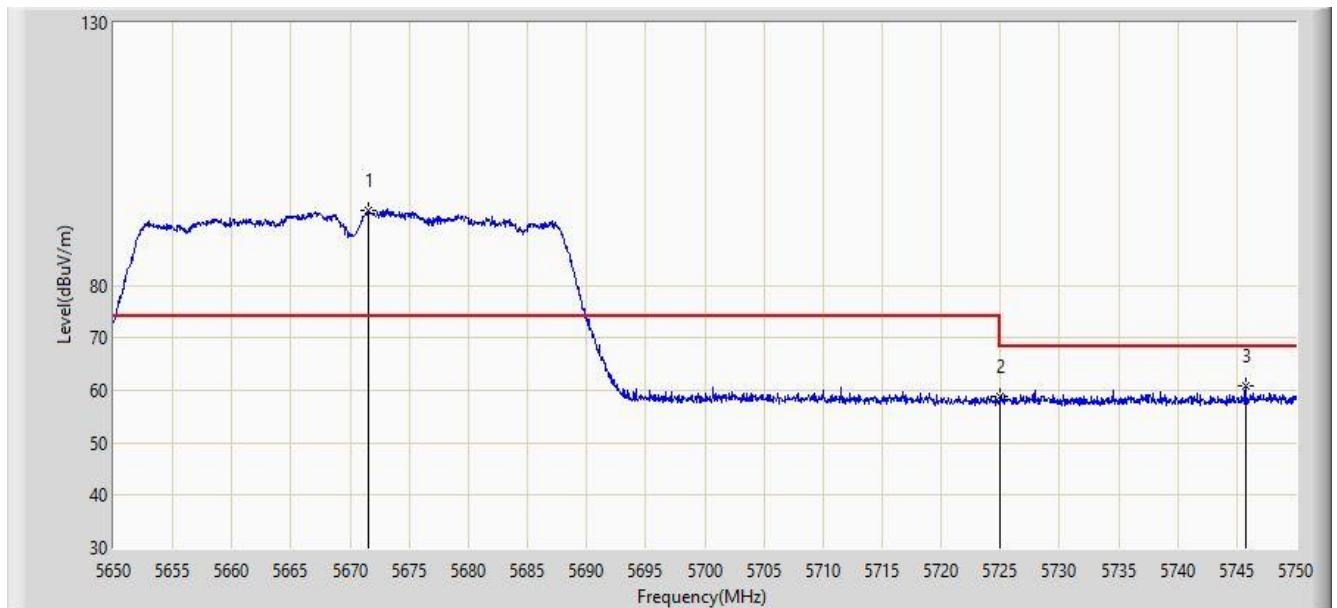


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5671.550	94.268	89.662	N/A	N/A	4.606	PK
2		5725.000	58.935	54.424	-9.265	68.200	4.511	PK
3		5745.750	60.900	56.381	-7.300	68.200	4.519	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:26
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

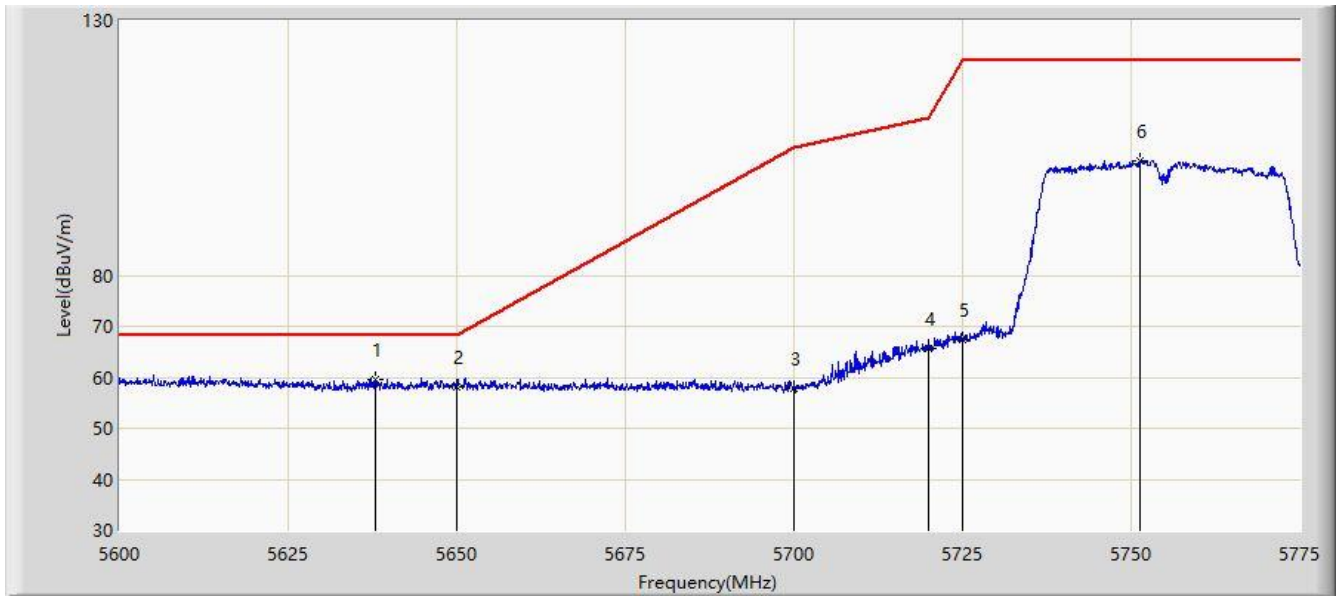


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5637.888	59.695	54.226	-8.505	68.200	5.469	PK
2			5650.000	58.246	52.710	-9.954	68.200	5.536	PK
3			5700.000	57.874	52.071	-47.326	105.200	5.803	PK
4			5720.000	65.728	60.100	-45.072	110.800	5.629	PK
5			5725.000	67.460	61.869	-54.740	122.200	5.591	PK
6			5751.375	102.577	96.553	-19.623	122.200	6.024	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:28
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

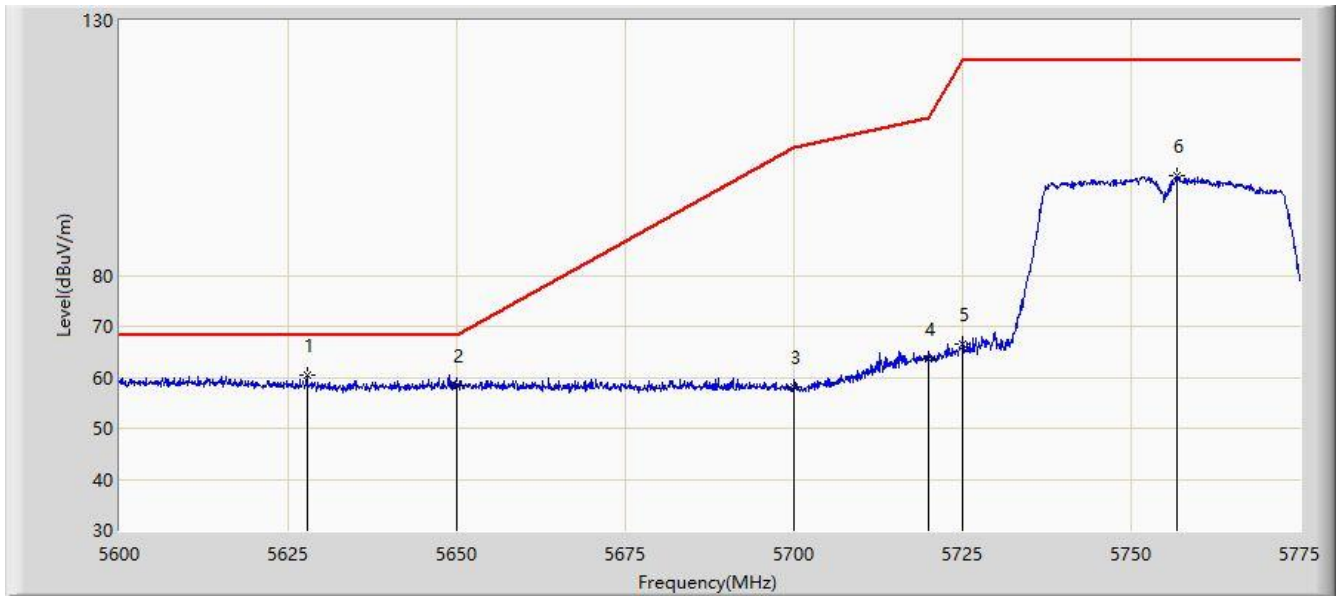


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	5627.825	60.441	54.799	-7.759	68.200	5.642	PK
2			5650.000	58.496	52.960	-9.704	68.200	5.536	PK
3			5700.000	58.098	52.295	-47.102	105.200	5.803	PK
4			5720.000	63.577	57.949	-47.223	110.800	5.629	PK
5			5725.000	66.533	60.942	-55.667	122.200	5.591	PK
6			5756.712	99.538	93.429	-22.662	122.200	6.110	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:30
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

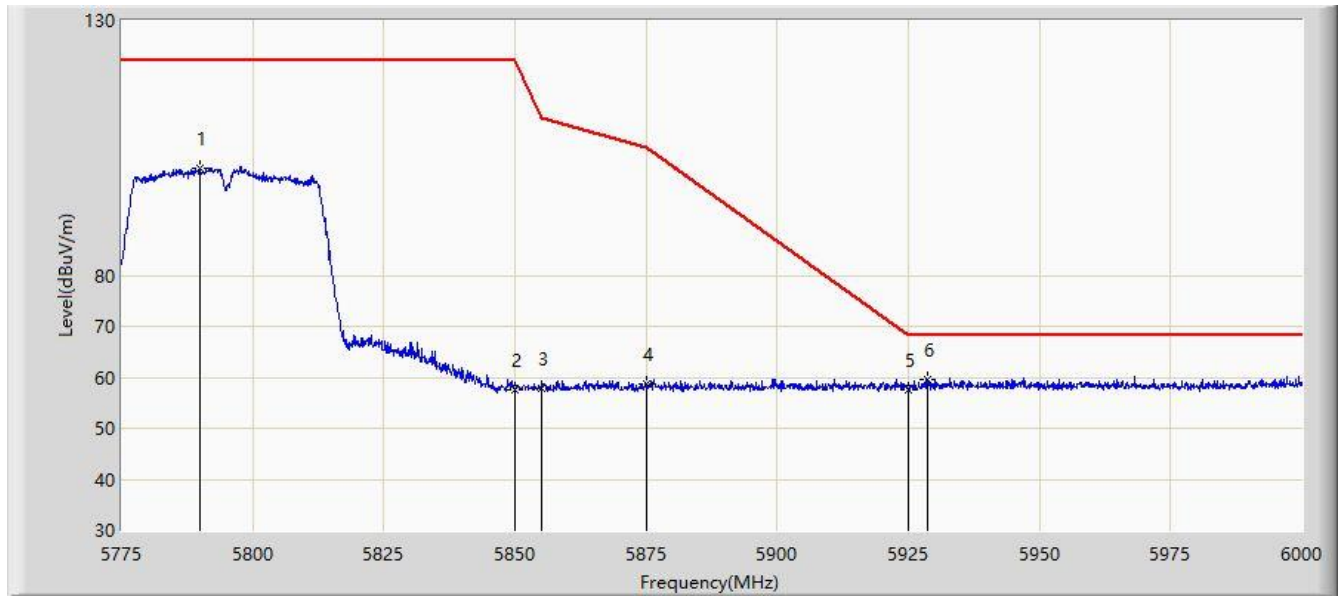


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5790.075	101.004	95.138	-21.196	122.200	5.866	PK
2			5850.000	57.539	51.577	-64.661	122.200	5.961	PK
3			5855.000	57.910	51.904	-52.890	110.800	6.007	PK
4			5875.000	58.664	52.599	-46.536	105.200	6.065	PK
5			5925.000	57.646	51.474	-10.554	68.200	6.173	PK
6		*	5928.788	59.662	53.422	-8.538	68.200	6.240	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:33
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

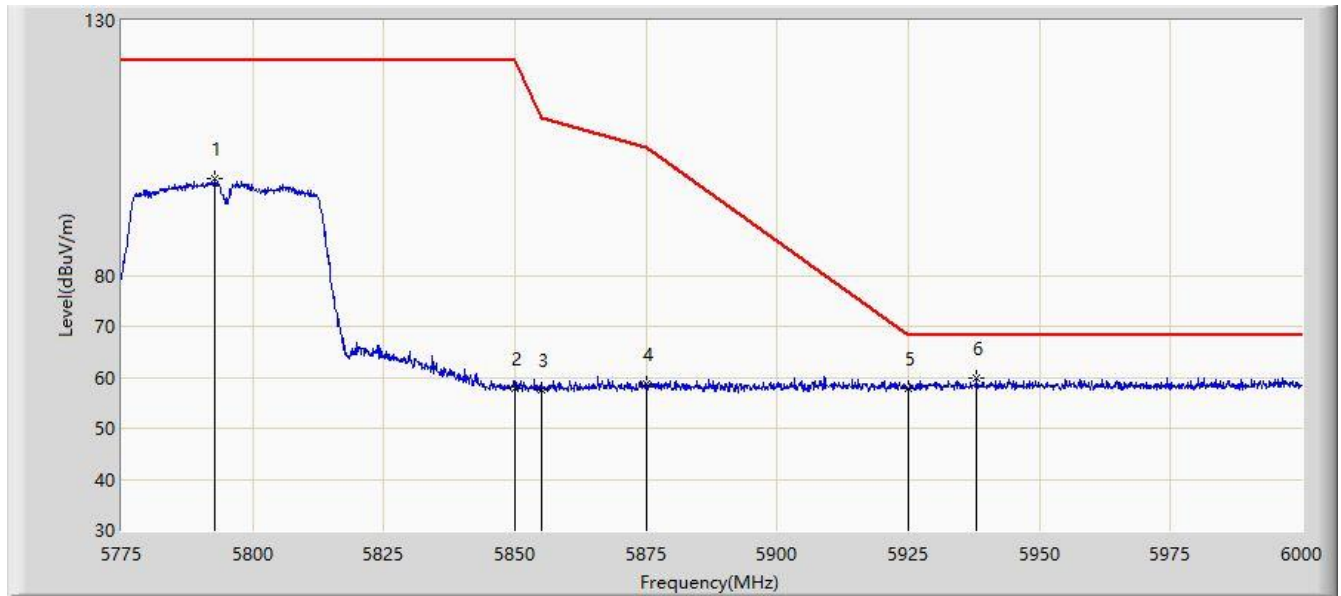


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5792.888	98.989	93.130	-23.211	122.200	5.859	PK
2			5850.000	57.750	51.788	-64.450	122.200	5.961	PK
3			5855.000	57.585	51.579	-53.215	110.800	6.007	PK
4			5875.000	58.639	52.574	-46.561	105.200	6.065	PK
5			5925.000	57.845	51.673	-10.355	68.200	6.173	PK
6		*	5938.013	59.865	53.548	-8.335	68.200	6.318	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:36
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

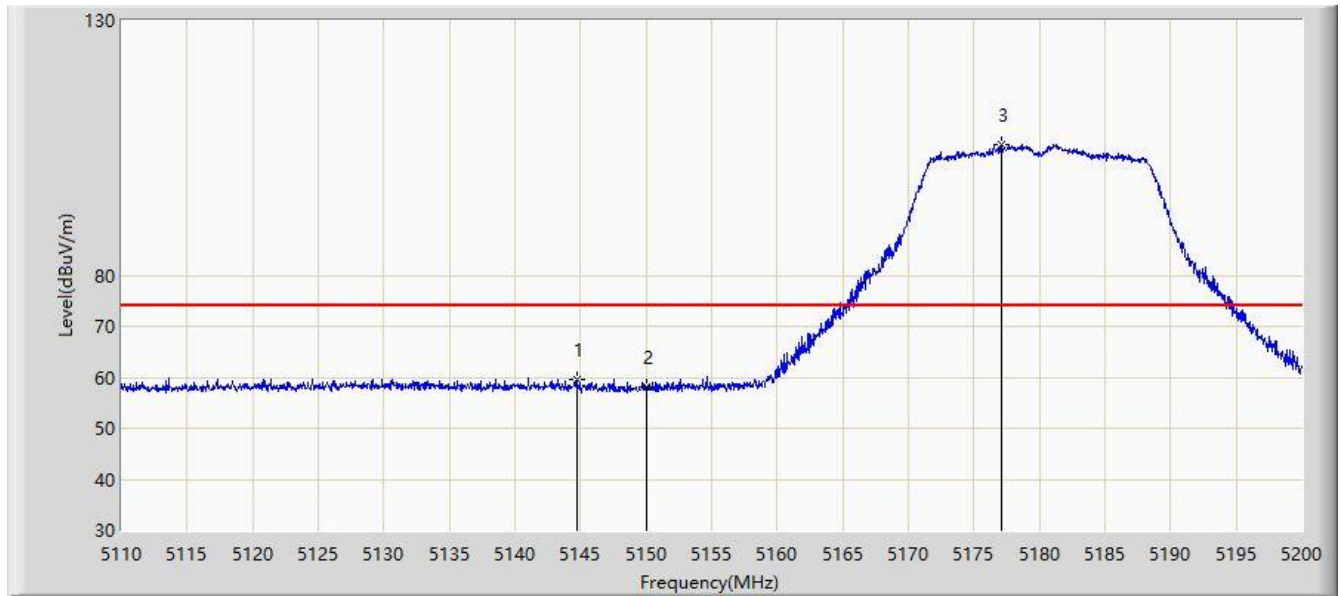


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.785	59.707	54.123	-8.493	68.200	5.584	PK
2			5150.000	58.255	52.722	-9.945	68.200	5.534	PK
3		*	5177.050	105.544	99.855	N/A	N/A	5.689	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:38
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

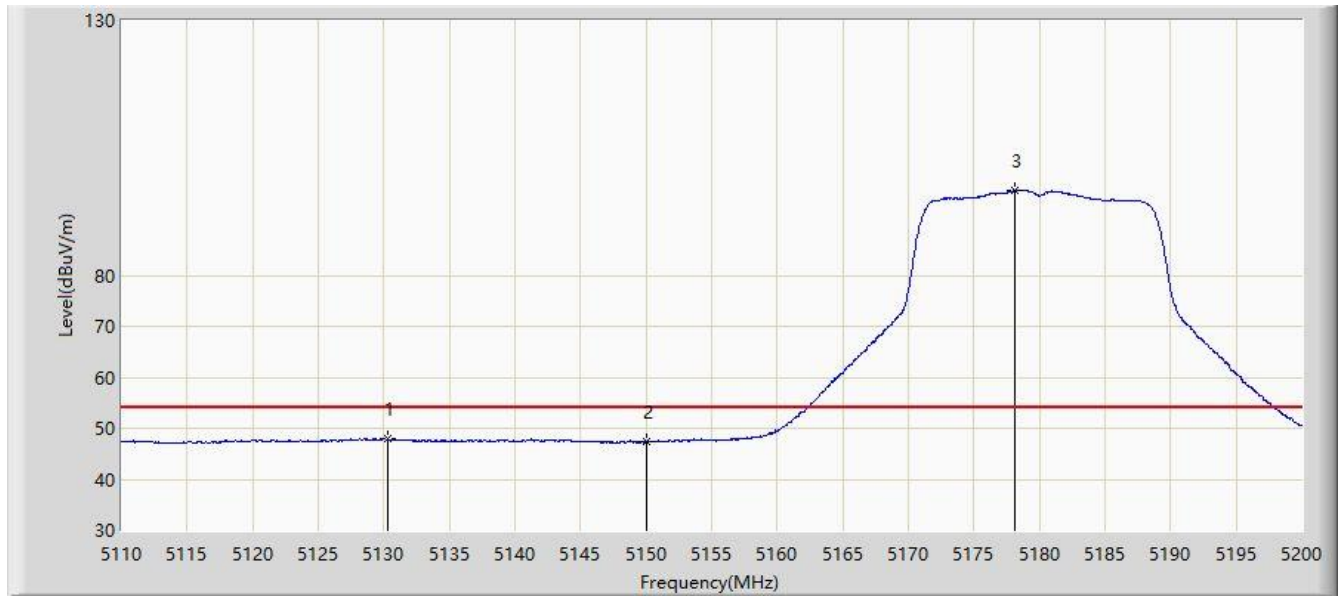


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5130.295	47.862	42.041	-6.138	54.000	5.821	AV
2			5150.000	47.270	41.737	-6.730	54.000	5.534	AV
3		*	5178.130	96.649	90.945	N/A	N/A	5.705	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:42
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

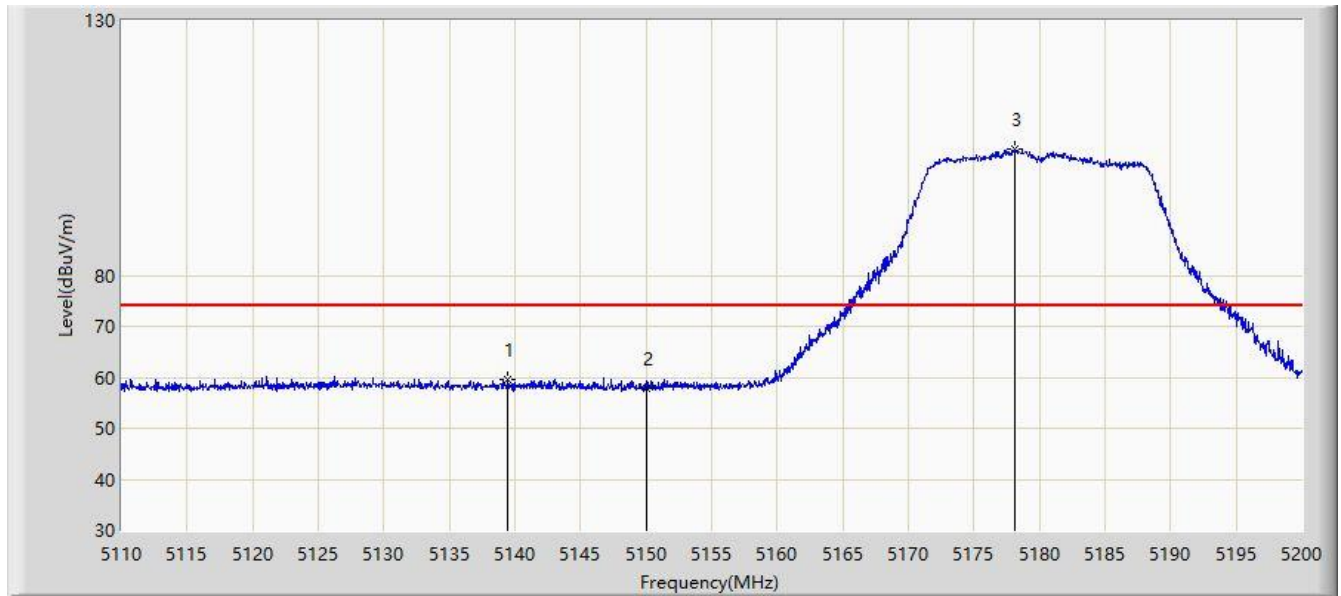


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.475	59.601	53.931	-14.399	74.000	5.670	PK
2			5150.000	57.886	52.353	-16.114	74.000	5.534	PK
3		*	5178.130	104.803	99.099	N/A	N/A	5.705	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:44
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

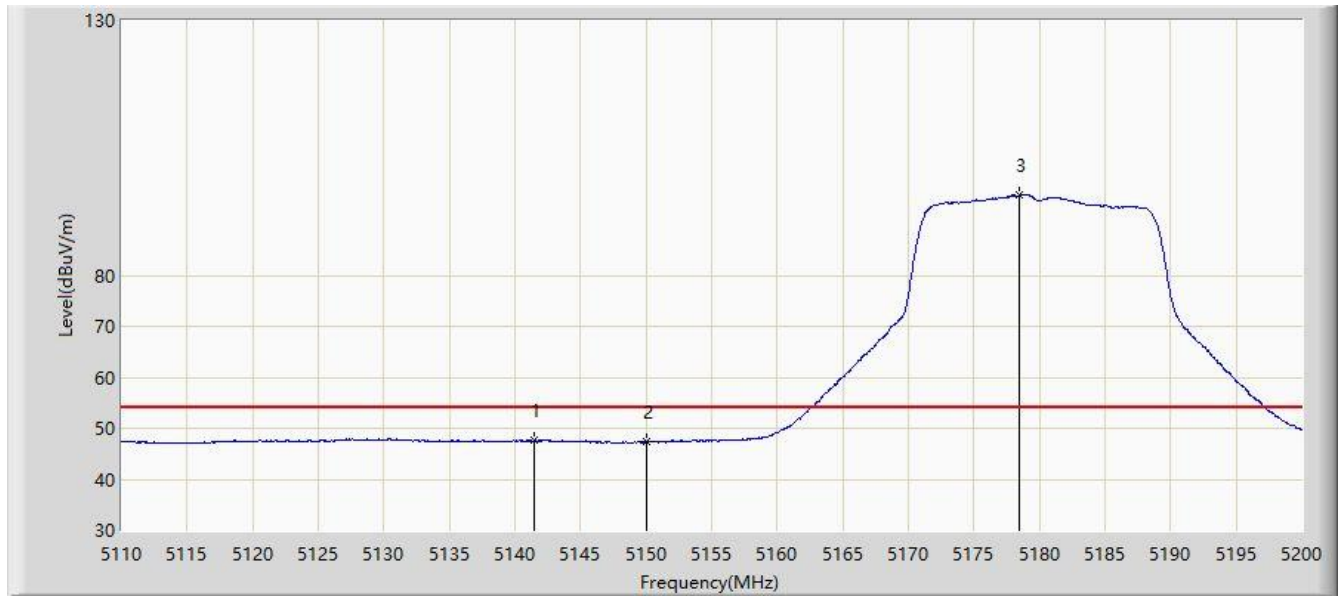


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5141.410	47.601	41.962	-6.399	54.000	5.639	AV
2			5150.000	47.252	41.719	-6.748	54.000	5.534	AV
3		*	5178.490	95.708	89.998	N/A	N/A	5.709	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/06/04 - 02:17
Limit: FCC_Part15_Band Edge(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by ac-VHT20 at Channel 5320MHz	

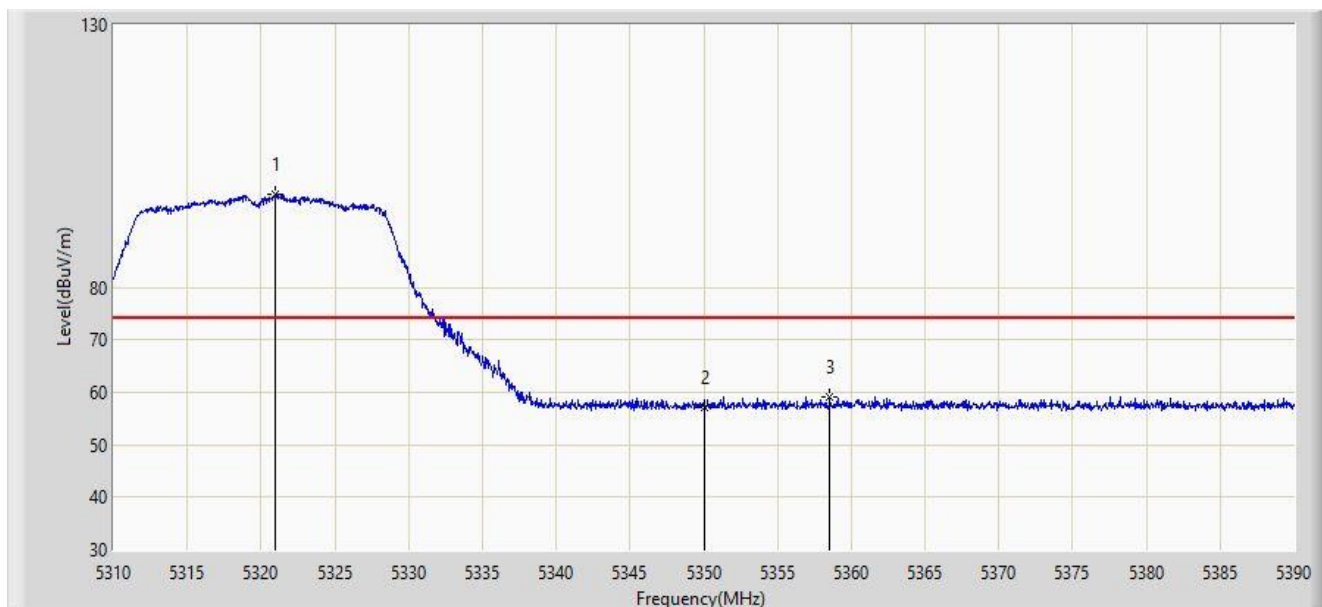


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5320.960	97.649	93.830	N/A	N/A	3.818	PK
2		5350.000	57.207	53.190	-16.793	74.000	4.017	PK
3		5358.560	59.061	55.042	-14.939	74.000	4.019	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/06/04 - 02:19
Limit: FCC_Part15_Band Edge(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by ac-VHT20 at Channel 5320MHz	

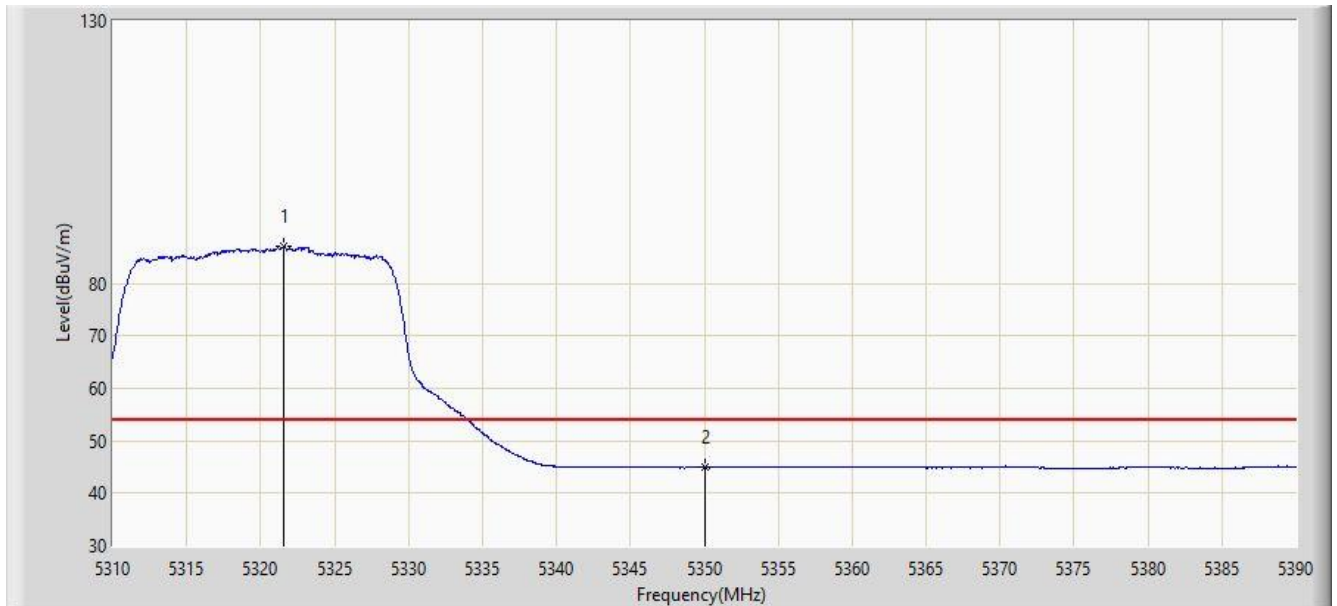


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5321.600	87.012	83.190	N/A	N/A	3.821	AV
2		5350.000	44.931	40.914	-9.069	54.000	4.017	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/06/04 - 02:21
Limit: FCC_Part15_Band Edge(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by ac-VHT20 at Channel 5320MHz	

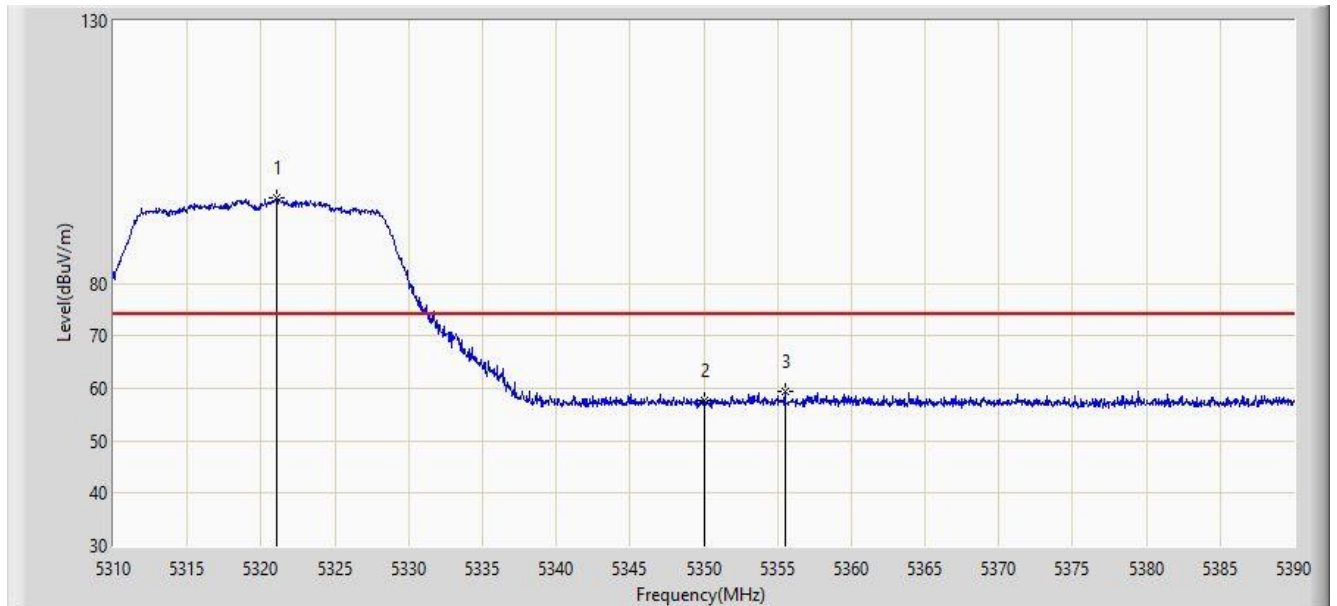


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5321.040	96.174	92.355	N/A	N/A	3.819	PK
2		5350.000	57.589	53.572	-16.411	74.000	4.017	PK
3		5355.480	59.498	55.474	-14.502	74.000	4.024	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/06/04 - 02:22
Limit: FCC_Part15_Band Edge(3m)	Engineer: Buter Shi
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by ac-VHT20 at Channel 5320MHz	

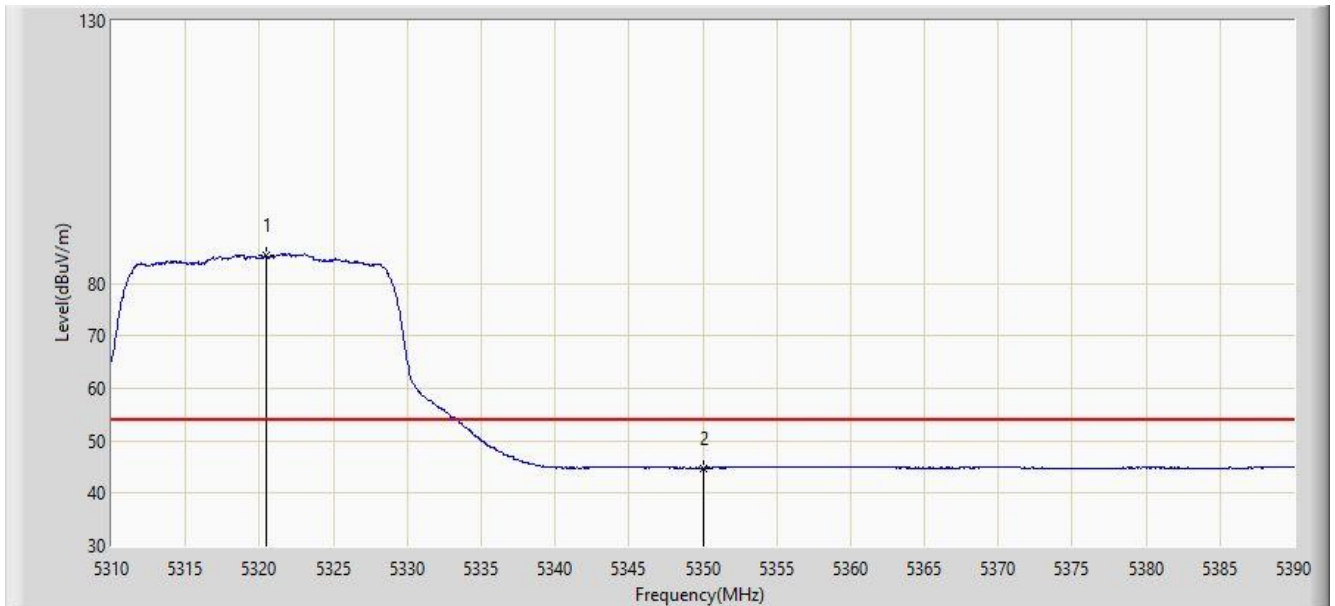


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5320.440	85.457	81.640	N/A	N/A	3.817	AV
2		5350.000	44.827	40.810	-9.173	54.000	4.017	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:53
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

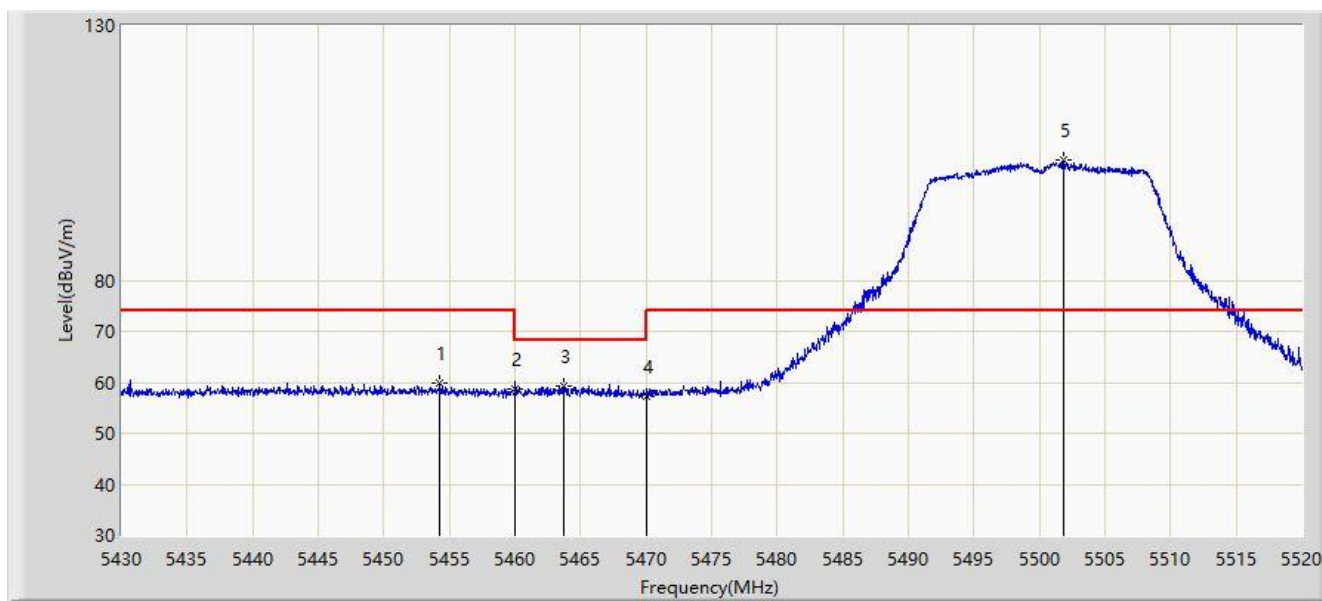


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5454.300	59.748	53.938	-14.252	74.000	5.809	PK
2			5460.000	58.667	52.899	-15.333	74.000	5.768	PK
3			5463.750	59.270	53.529	-8.930	68.200	5.741	PK
4			5470.000	57.318	51.623	-10.882	68.200	5.695	PK
5		*	5501.865	103.649	97.946	N/A	N/A	5.703	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:55
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

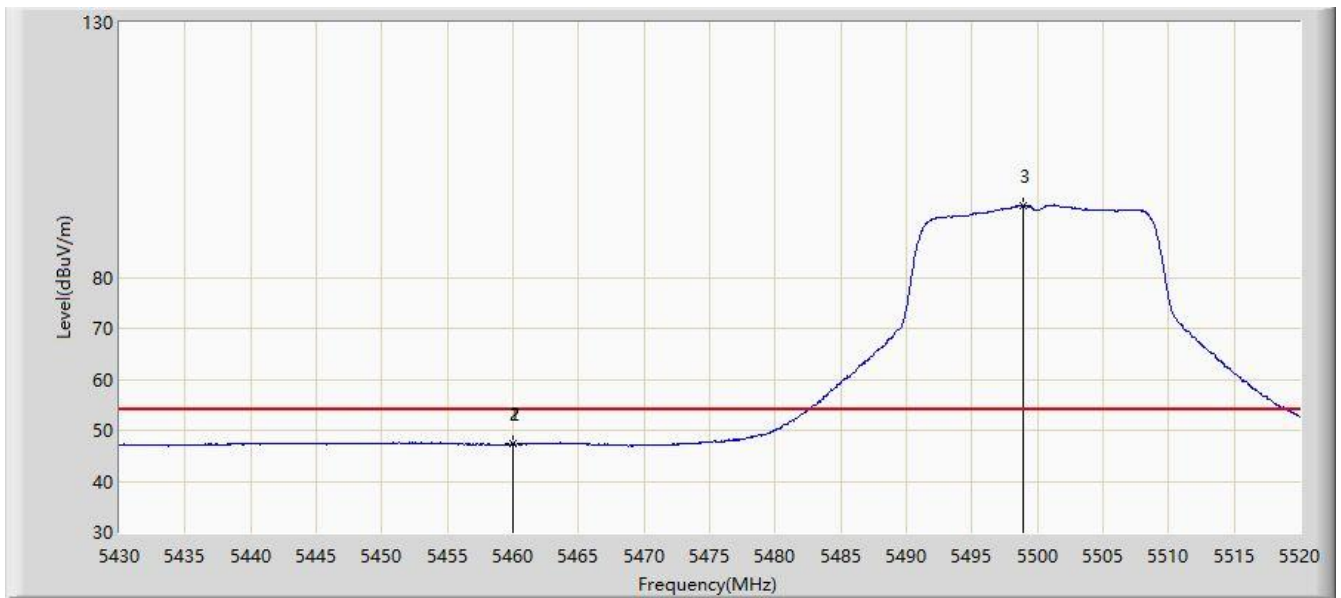


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.970	47.405	41.637	-6.595	54.000	5.769	AV
2			5460.000	47.352	41.584	-6.648	54.000	5.768	AV
3		*	5498.940	94.147	88.463	N/A	N/A	5.685	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:56
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

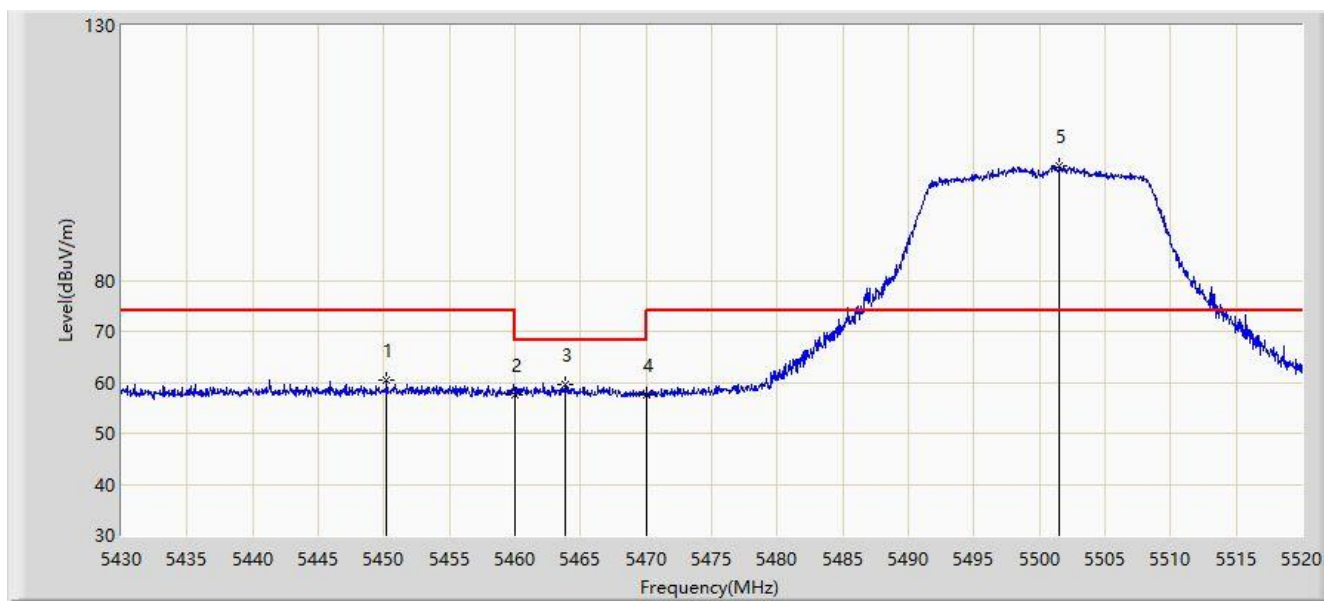


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5450.205	60.376	54.577	-13.624	74.000	5.799	PK
2			5460.000	57.578	51.810	-16.422	74.000	5.768	PK
3			5463.795	59.672	53.931	-8.528	68.200	5.740	PK
4			5470.000	57.595	51.900	-10.605	68.200	5.695	PK
5		*	5501.550	102.594	96.893	N/A	N/A	5.701	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 11:58
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

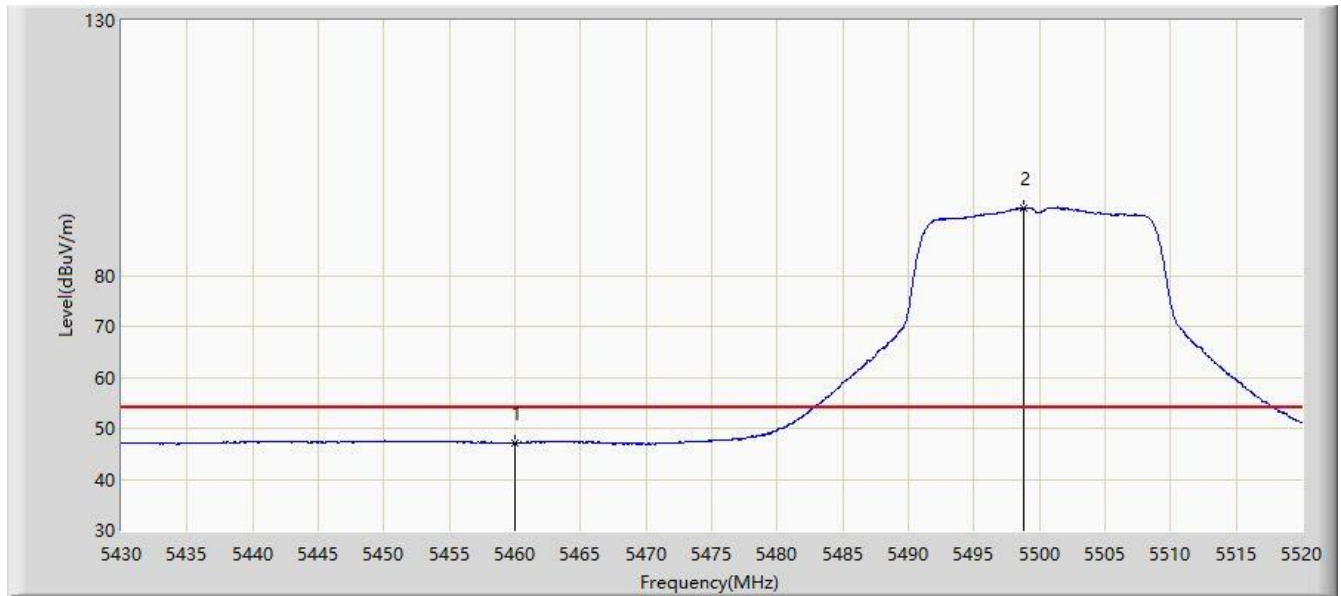


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.134	41.366	-6.866	54.000	5.768	AV
2		*	5498.805	93.220	87.537	N/A	N/A	5.683	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:06
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

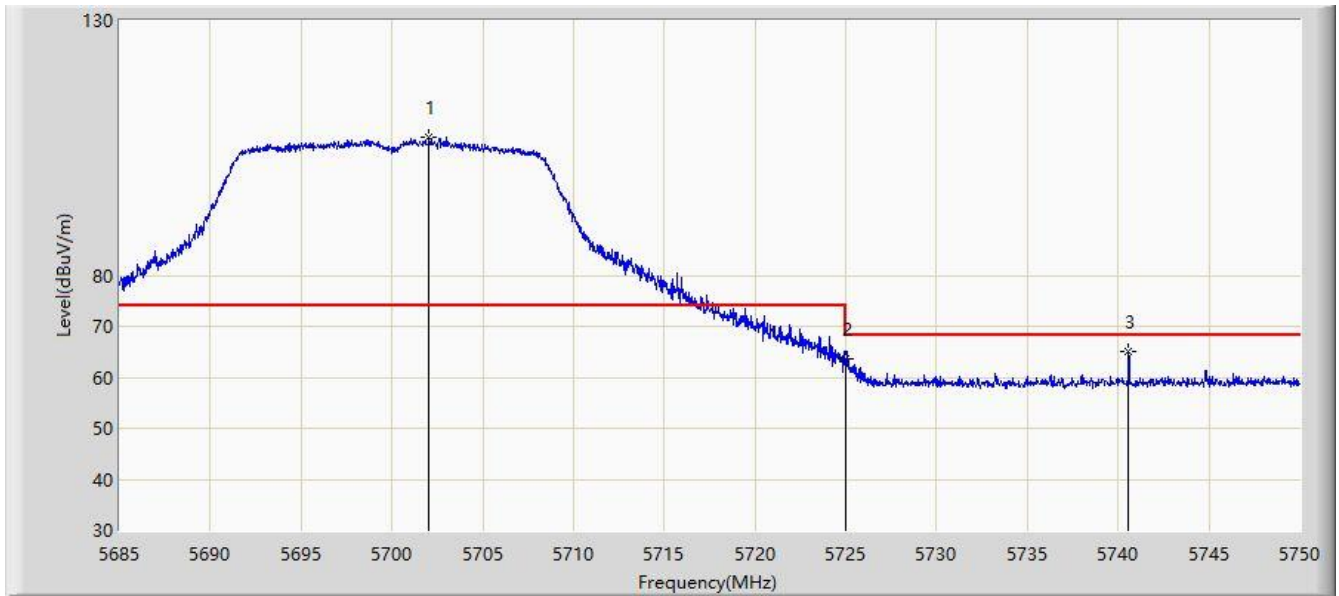


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.062	107.046	101.222	N/A	N/A	5.824	PK
2			5725.000	63.569	57.978	-4.631	68.200	5.591	PK
3			5740.575	65.164	59.308	-3.036	68.200	5.856	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:09
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

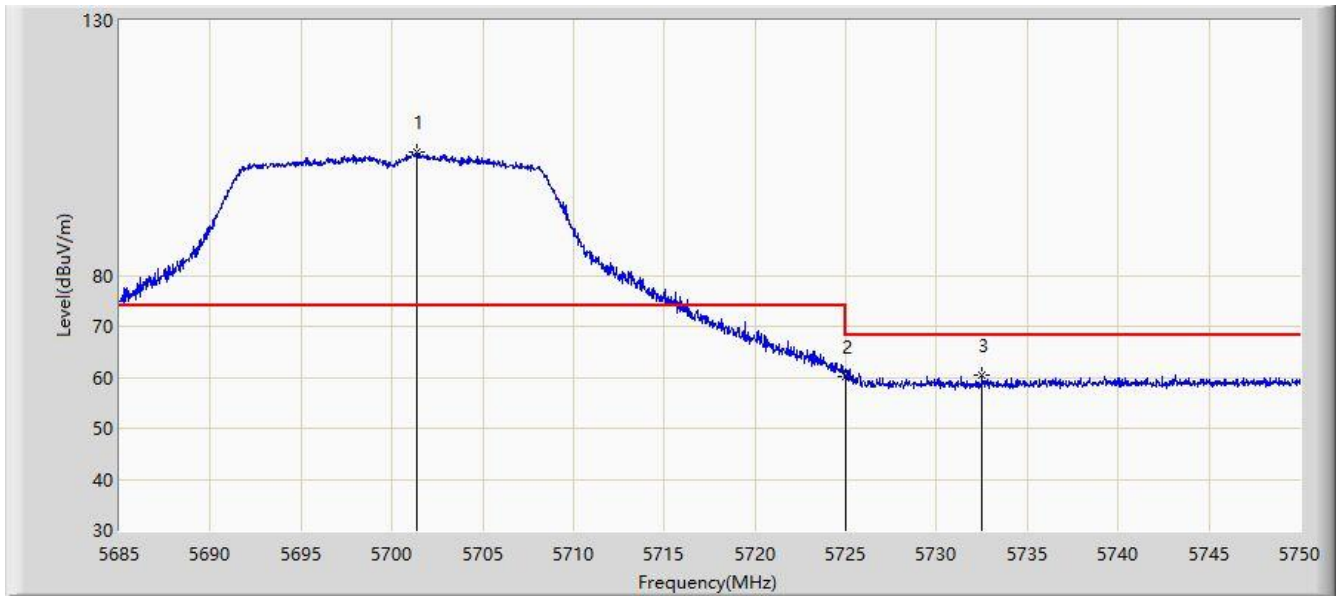


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	5701.348	104.122	98.305	N/A	N/A	5.817	PK
2			5725.000	60.238	54.647	-7.962	68.200	5.591	PK
3			5732.515	60.332	54.619	-7.868	68.200	5.713	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:13
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

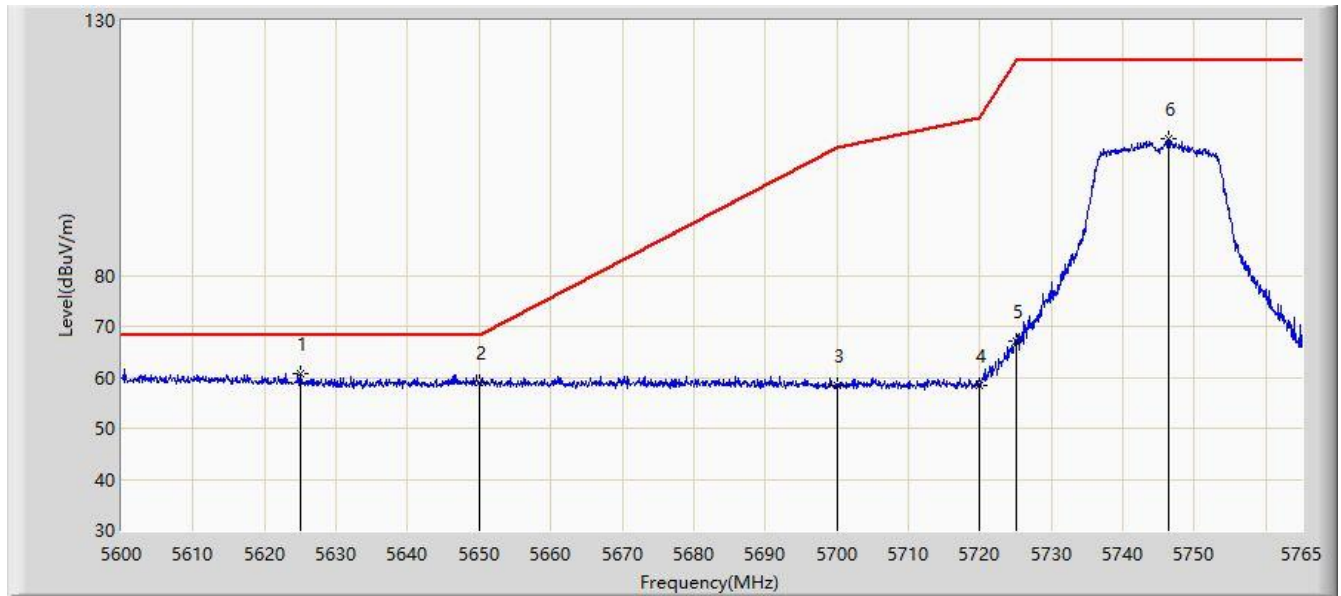


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	5624.998	60.740	55.011	-7.460	68.200	5.729	PK
2			5650.000	59.006	53.470	-9.194	68.200	5.536	PK
3			5700.000	58.513	52.710	-46.687	105.200	5.803	PK
4			5720.000	58.399	52.771	-52.401	110.800	5.629	PK
5			5725.000	67.164	61.573	-55.036	122.200	5.591	PK
6			5746.437	106.712	100.767	-15.488	122.200	5.945	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:18
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

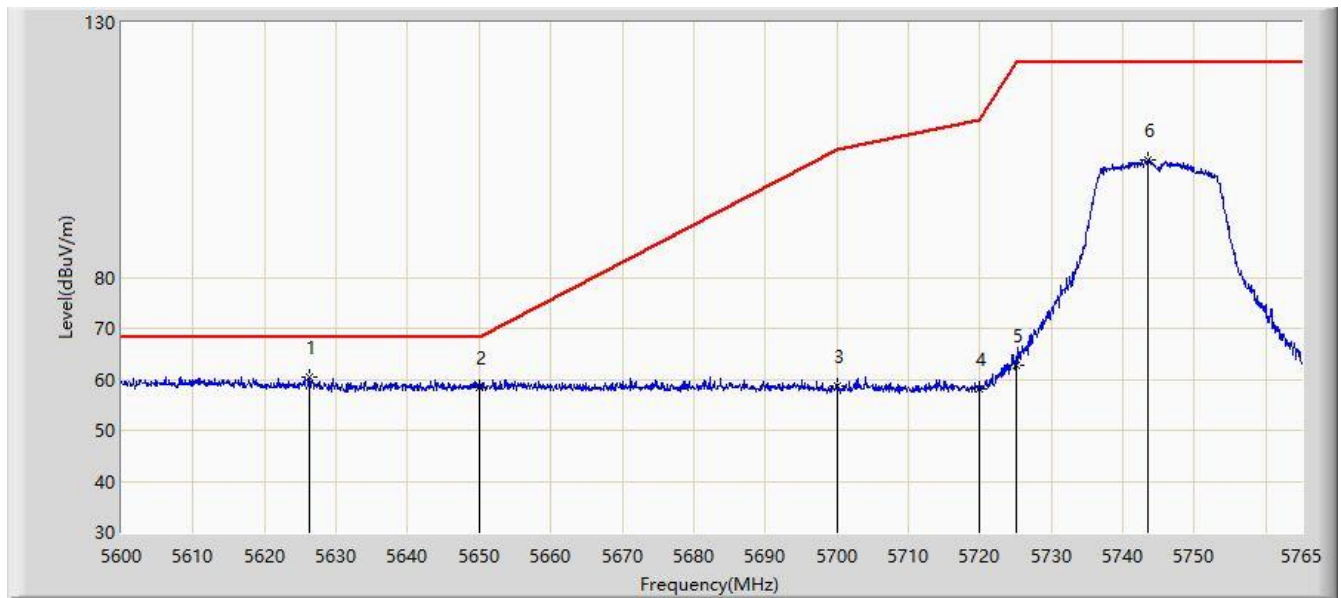


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5626.317	60.454	54.766	-7.746	68.200	5.689	PK
2			5650.000	58.453	52.917	-9.747	68.200	5.536	PK
3			5700.000	58.722	52.919	-46.478	105.200	5.803	PK
4			5720.000	58.245	52.617	-52.555	110.800	5.629	PK
5			5725.000	62.853	57.262	-59.347	122.200	5.591	PK
6			5743.550	103.167	97.268	-19.033	122.200	5.899	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:20
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

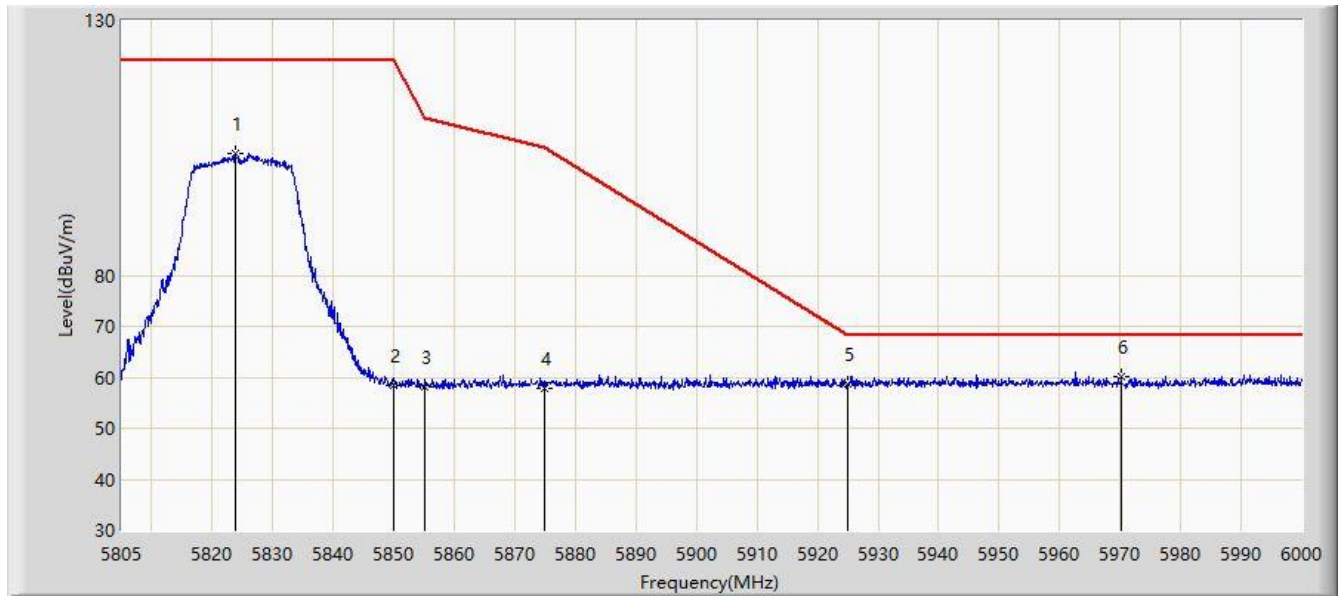


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5823.720	103.829	97.847	-18.371	122.200	5.982	PK
2			5850.000	58.364	52.402	-63.836	122.200	5.961	PK
3			5855.000	58.248	52.242	-52.552	110.800	6.007	PK
4			5875.000	57.913	51.848	-47.287	105.200	6.065	PK
5			5925.000	58.641	52.469	-9.559	68.200	6.173	PK
6		*	5970.165	60.015	54.040	-8.185	68.200	5.974	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:22
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

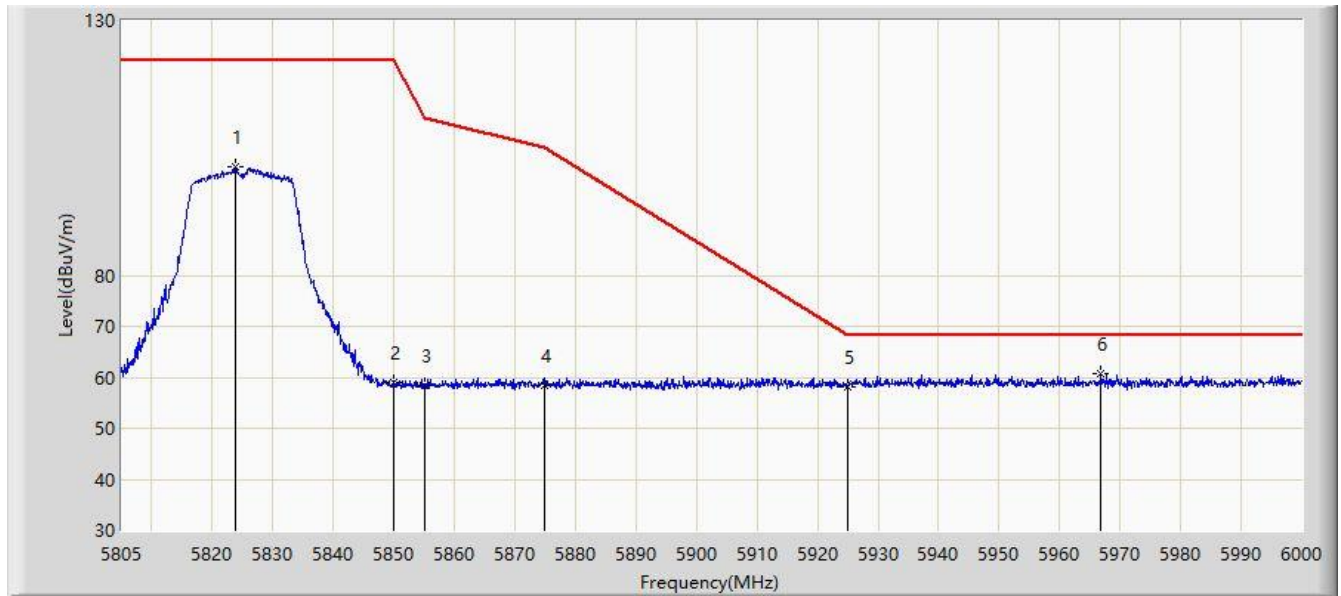


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5823.915	101.189	95.205	-21.011	122.200	5.984	PK
2			5850.000	59.018	53.056	-63.182	122.200	5.961	PK
3			5855.000	58.504	52.498	-52.296	110.800	6.007	PK
4			5875.000	58.352	52.287	-46.848	105.200	6.065	PK
5			5925.000	58.212	52.040	-9.988	68.200	6.173	PK
6		*	5966.850	60.866	54.875	-7.334	68.200	5.991	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:23
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

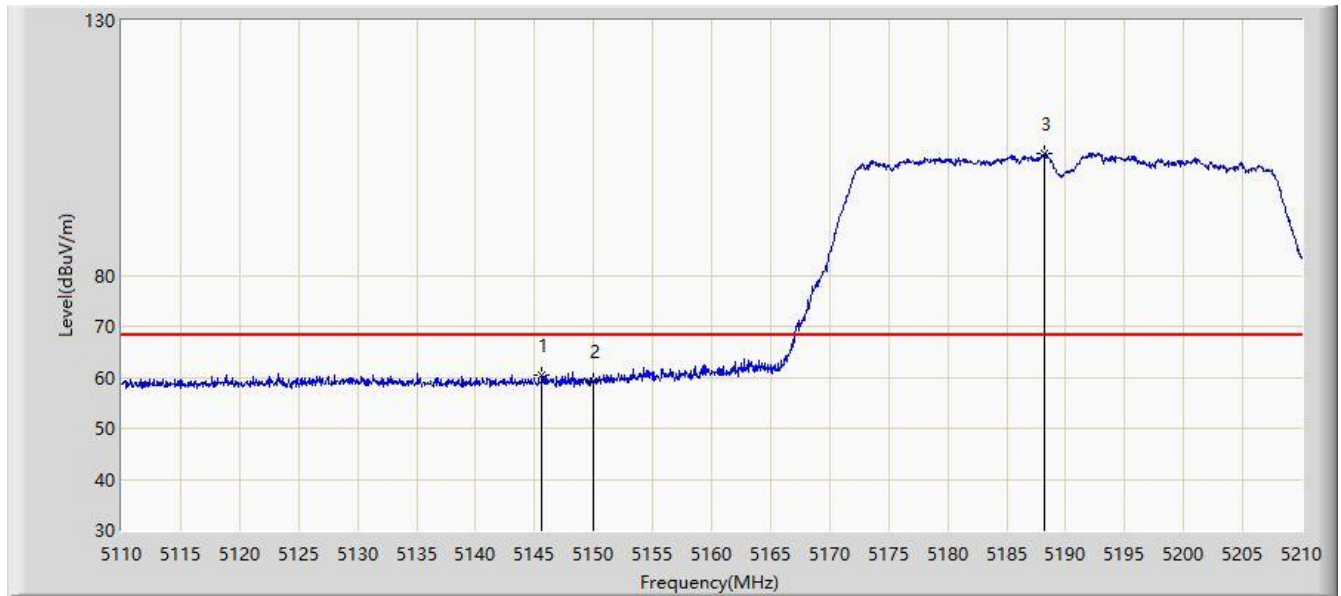


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5145.600	60.330	54.759	-7.870	68.200	5.571	PK
2			5150.000	59.168	53.635	-9.032	68.200	5.534	PK
3		*	5188.150	103.842	98.082	N/A	N/A	5.759	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:26
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

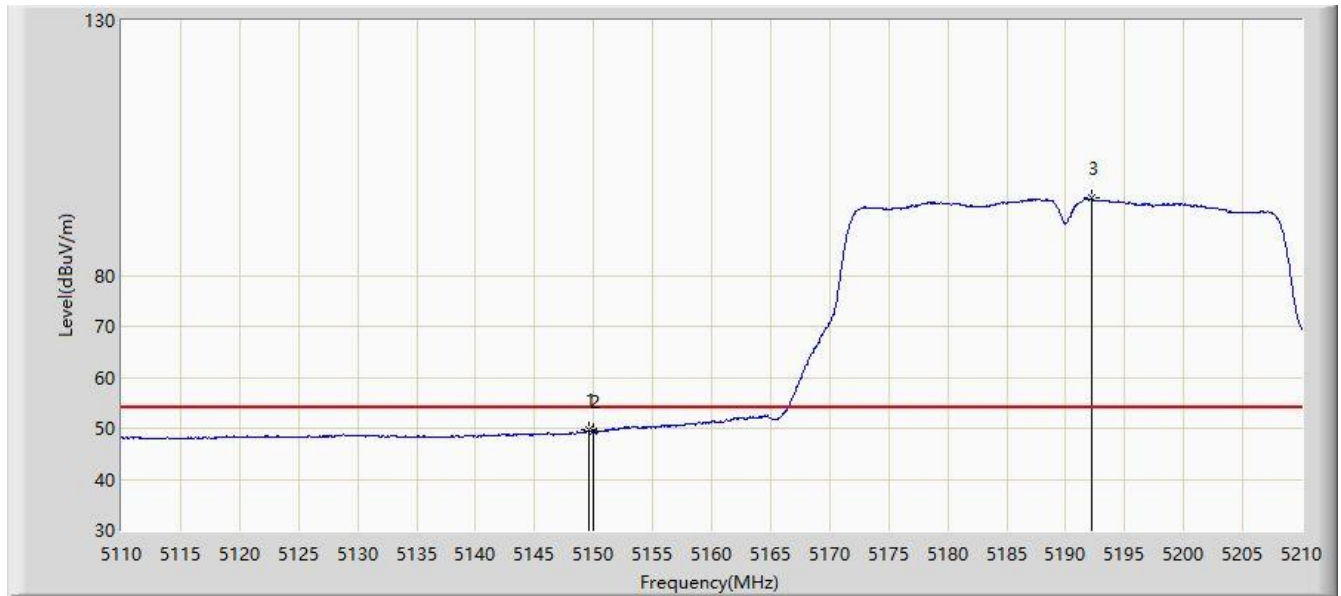


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5149.550	49.604	44.071	-4.396	54.000	5.533	AV
2			5150.000	49.360	43.827	-4.640	54.000	5.534	AV
3		*	5192.250	95.089	89.345	N/A	N/A	5.743	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:29
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

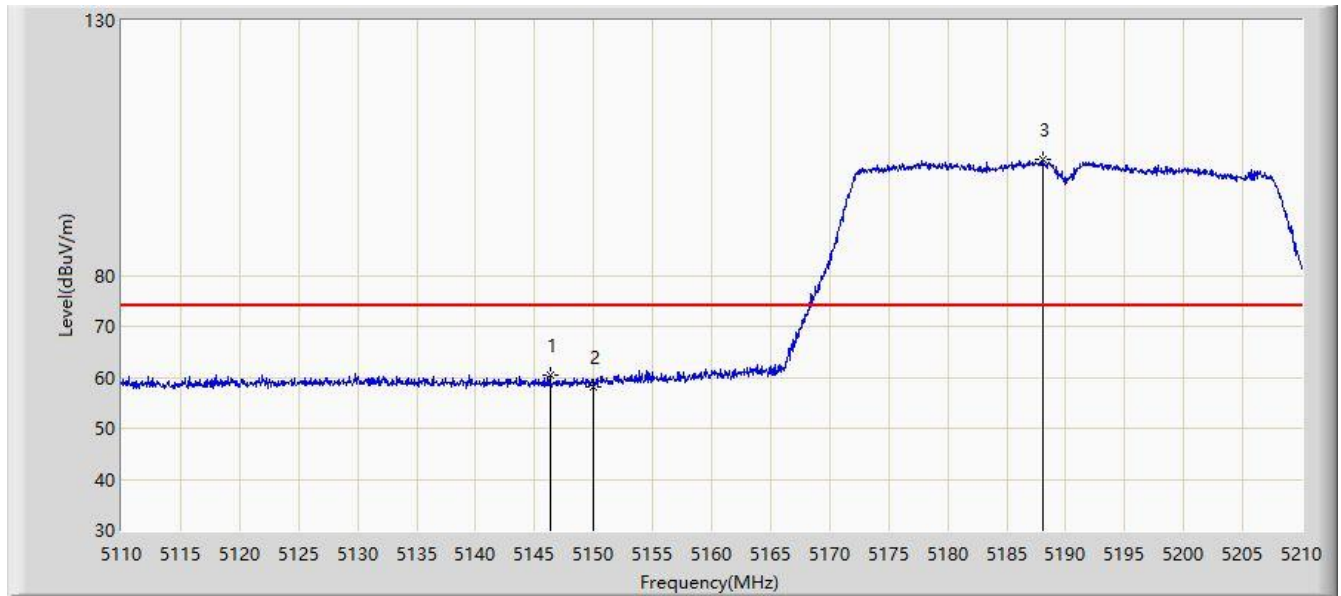


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5146.300	60.530	54.970	-13.470	74.000	5.560	PK
2			5150.000	58.213	52.680	-15.787	74.000	5.534	PK
3		*	5188.050	102.640	96.880	N/A	N/A	5.759	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:31
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

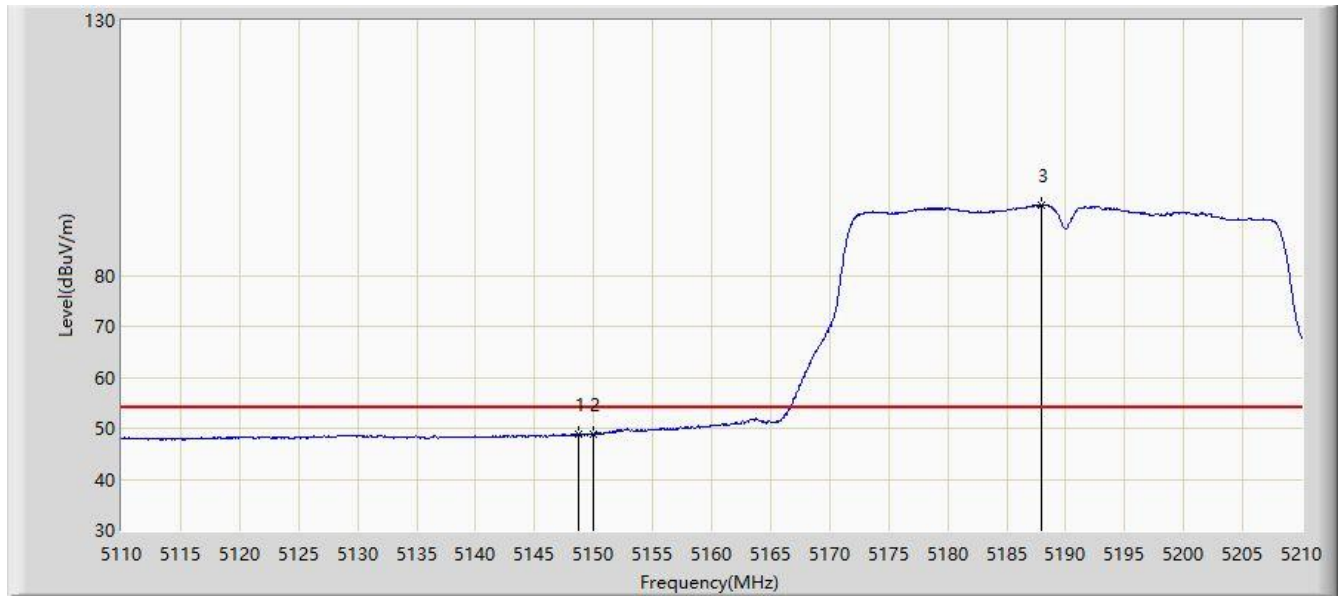


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.700	48.927	43.394	-5.073	54.000	5.533	AV
2			5150.000	48.748	43.215	-5.252	54.000	5.534	AV
3		*	5188.000	93.828	88.068	N/A	N/A	5.760	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:33
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

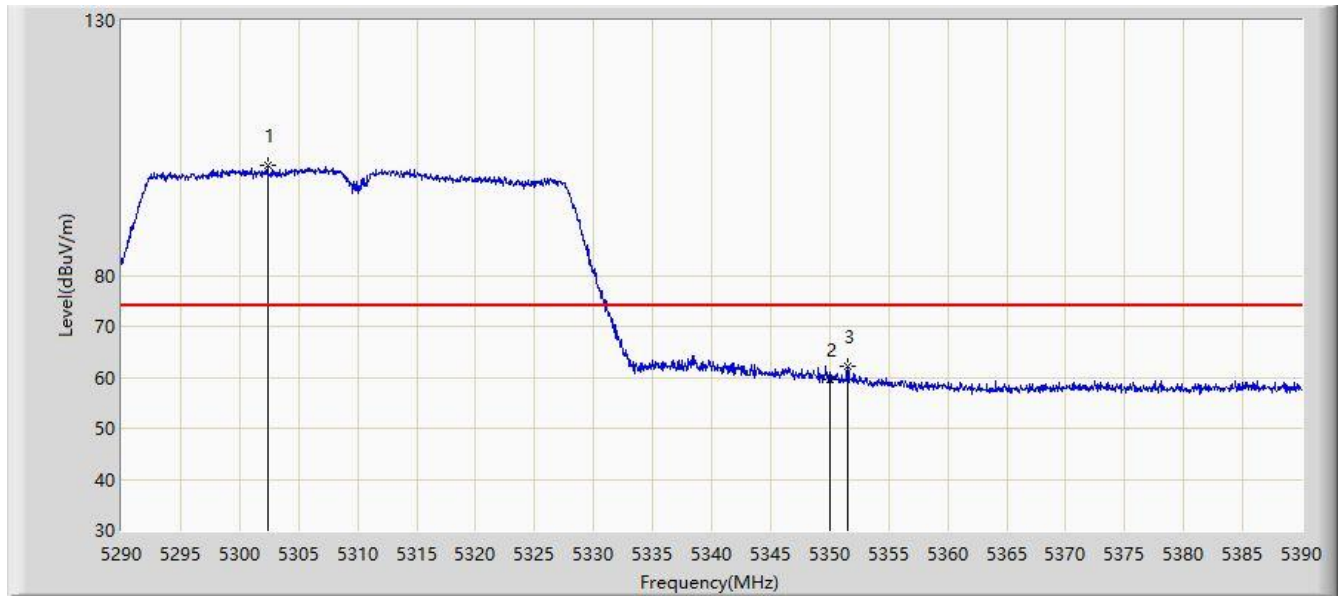


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	5302.350	101.466	96.319	N/A	N/A	5.146	PK
2			5350.000	59.492	53.718	-14.508	74.000	5.774	PK
3			5351.550	62.164	56.419	-11.836	74.000	5.745	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:35
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

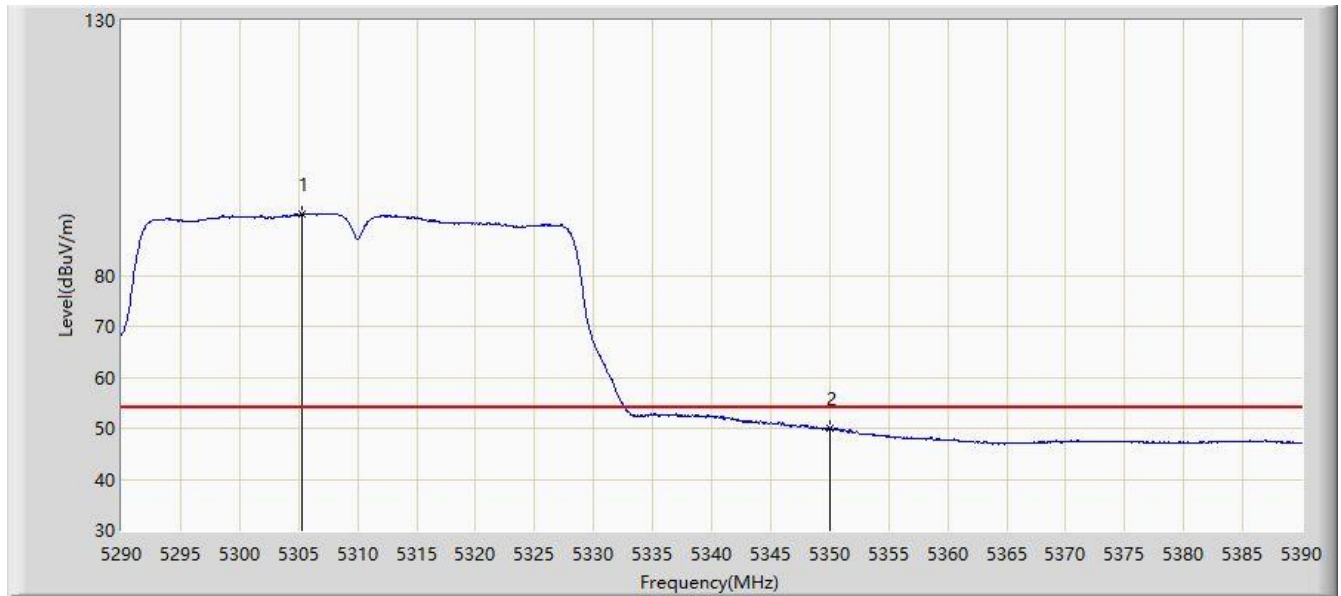


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	5305.250	92.000	86.875	N/A	N/A	5.126	AV
2			5350.000	50.029	44.255	-3.971	54.000	5.774	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:40
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

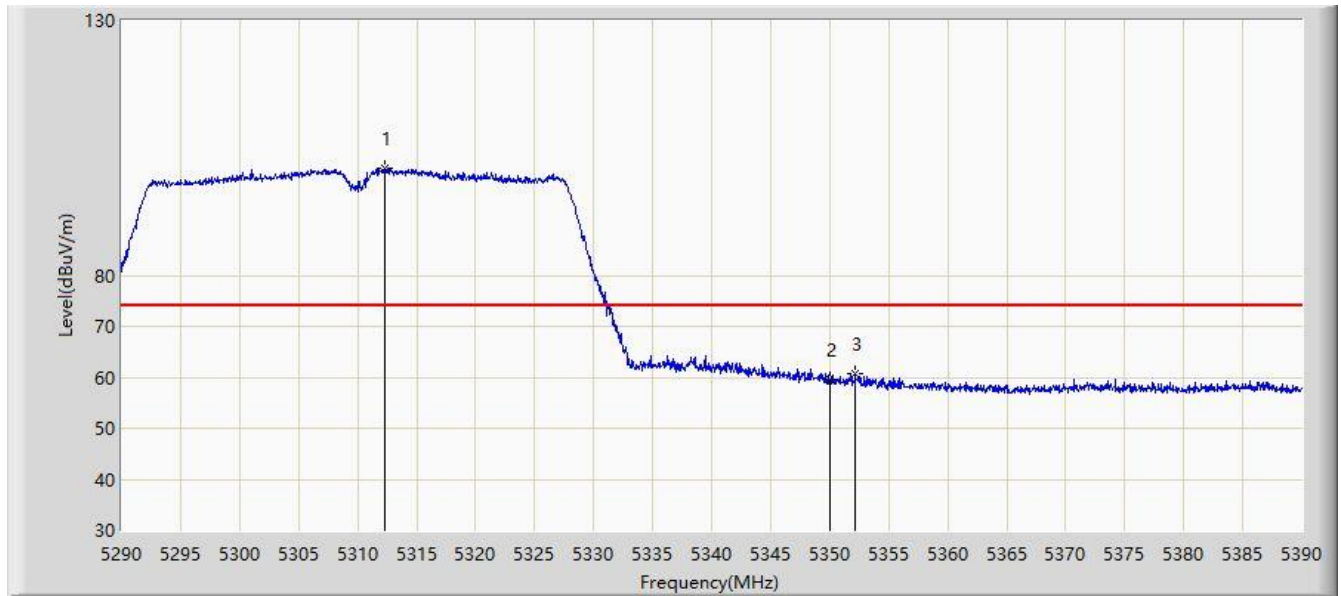


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.250	101.007	95.868	N/A	N/A	5.139	PK
2			5350.000	59.457	53.683	-14.543	74.000	5.774	PK
3			5352.150	60.747	55.015	-13.253	74.000	5.733	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:41
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

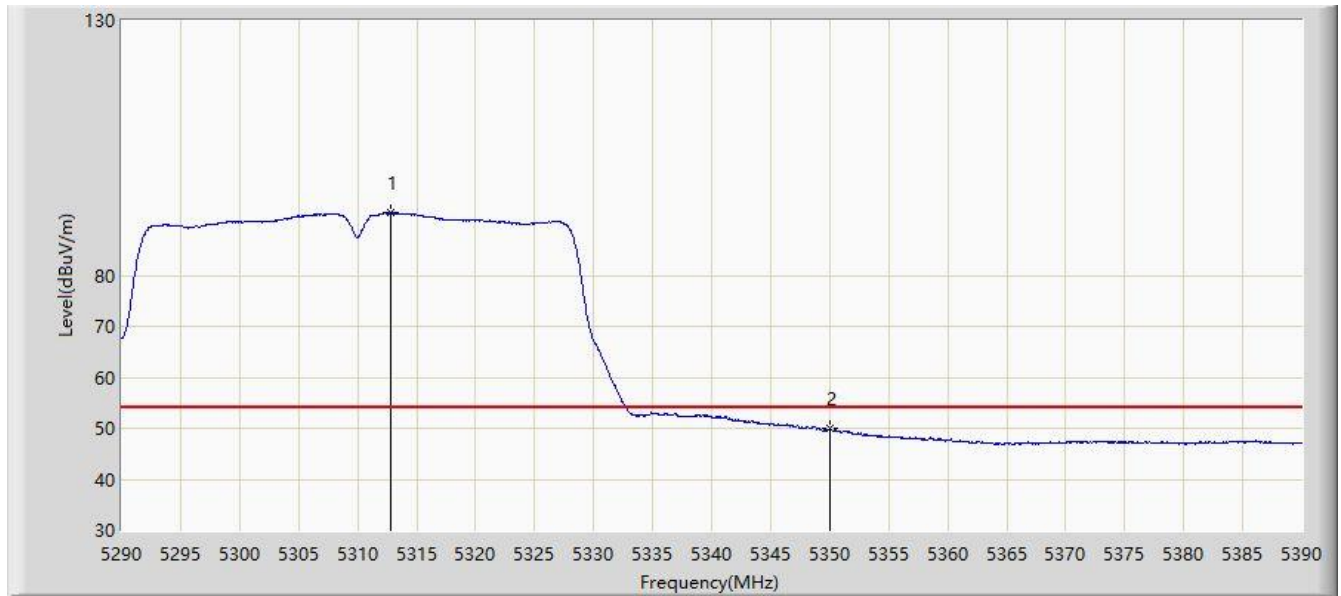


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	5312.800	92.293	87.143	N/A	N/A	5.150	AV
2			5350.000	49.879	44.105	-4.121	54.000	5.774	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:43
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

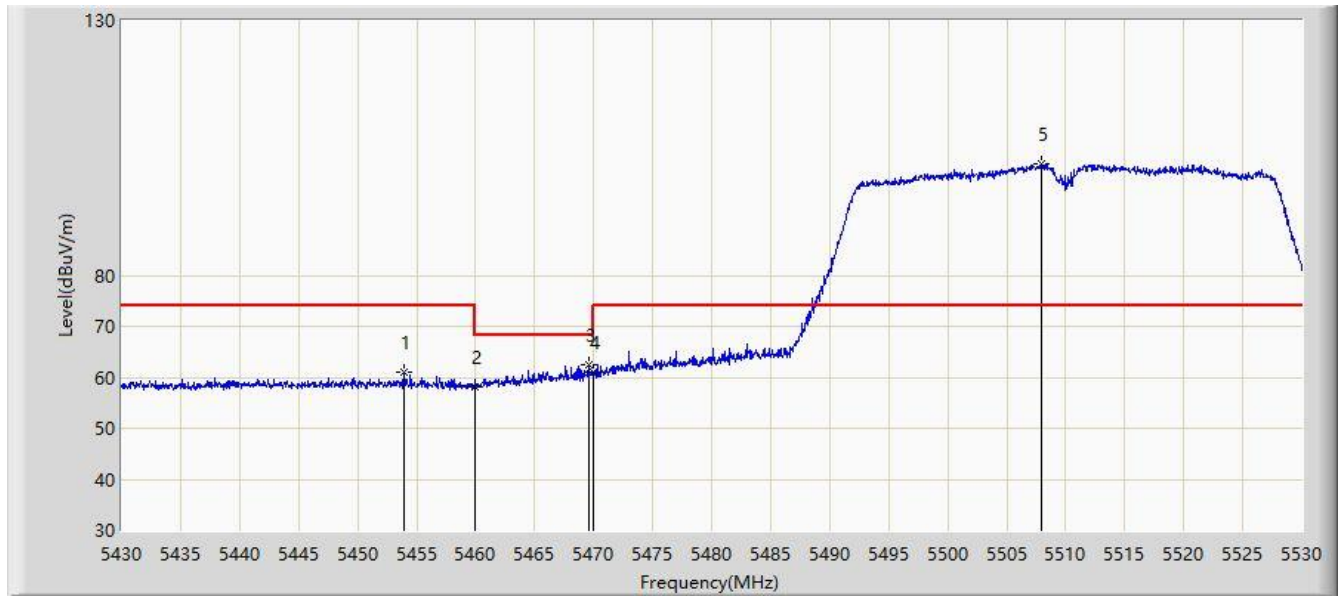


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.950	60.954	55.142	-13.046	74.000	5.812	PK
2			5460.000	58.167	52.399	-15.833	74.000	5.768	PK
3			5469.550	62.494	56.795	-5.706	68.200	5.699	PK
4			5470.000	60.977	55.282	-7.223	68.200	5.695	PK
5		*	5507.950	101.771	96.049	N/A	N/A	5.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:46
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

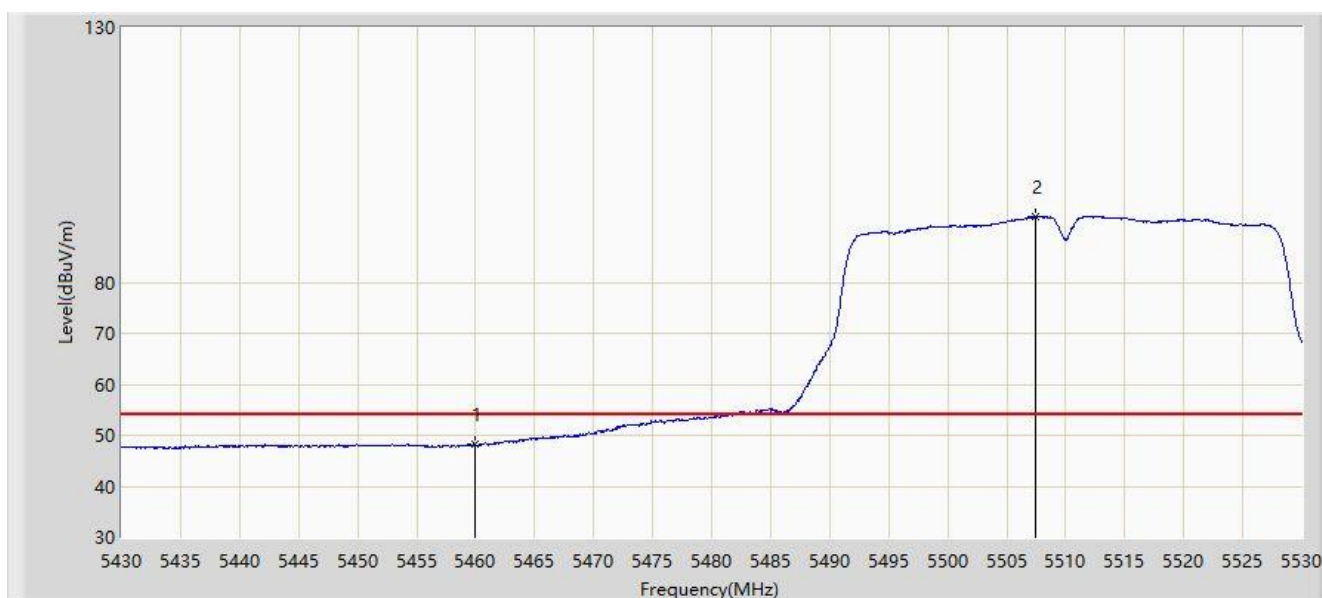


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.219	42.451	-5.781	54.000	5.768	AV
2		*	5507.500	92.943	87.223	N/A	N/A	5.720	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:47
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

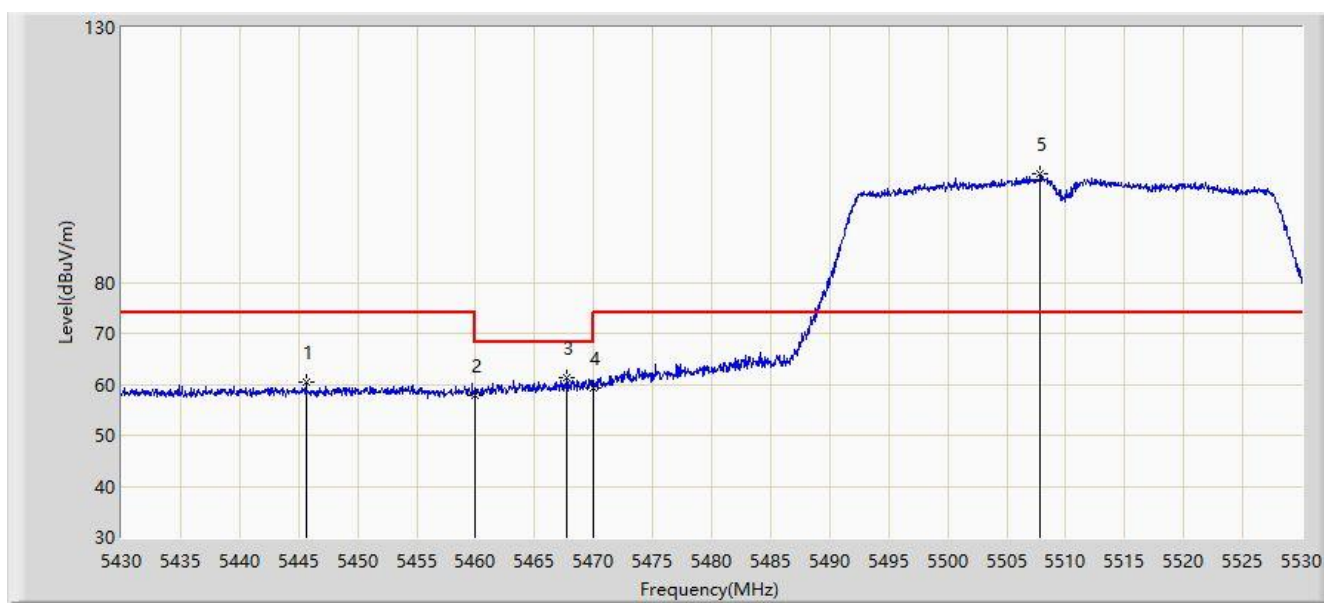


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5445.650	60.392	54.614	-13.608	74.000	5.778	PK
2			5460.000	57.947	52.179	-16.053	74.000	5.768	PK
3			5467.750	61.415	55.703	-6.785	68.200	5.712	PK
4			5470.000	59.213	53.518	-8.987	68.200	5.695	PK
5		*	5507.850	101.189	95.467	N/A	N/A	5.722	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:49
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

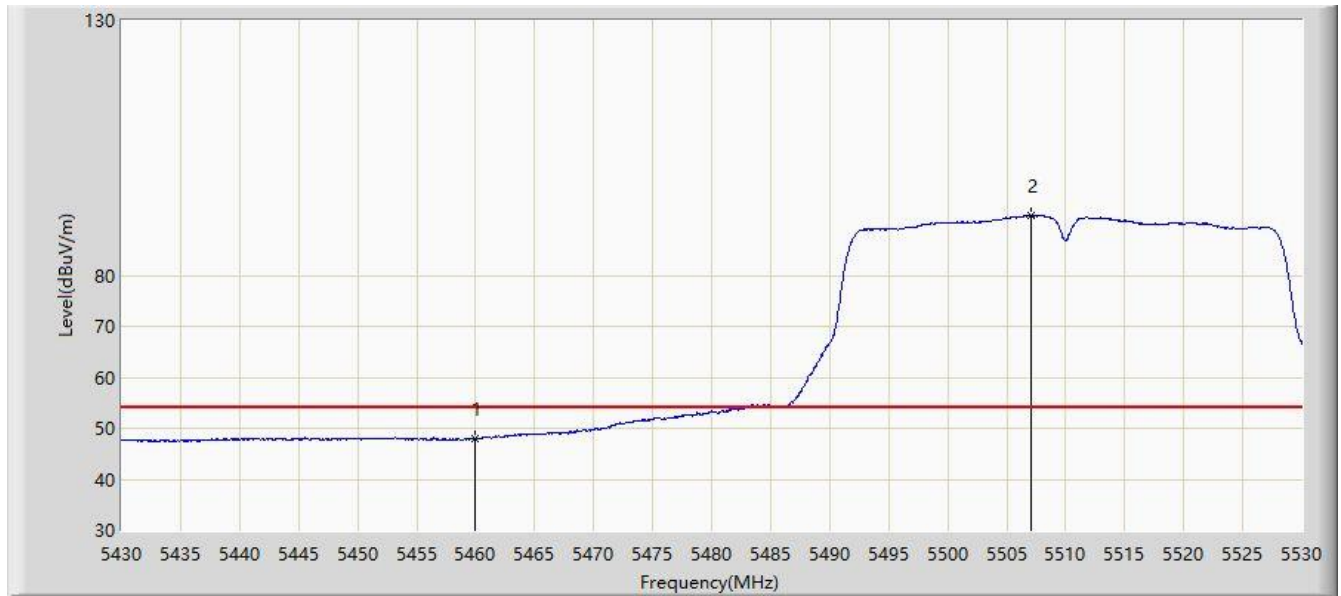


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.900	42.132	-6.100	54.000	5.768	AV
2		*	5507.100	91.677	85.958	N/A	N/A	5.719	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 13:52
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

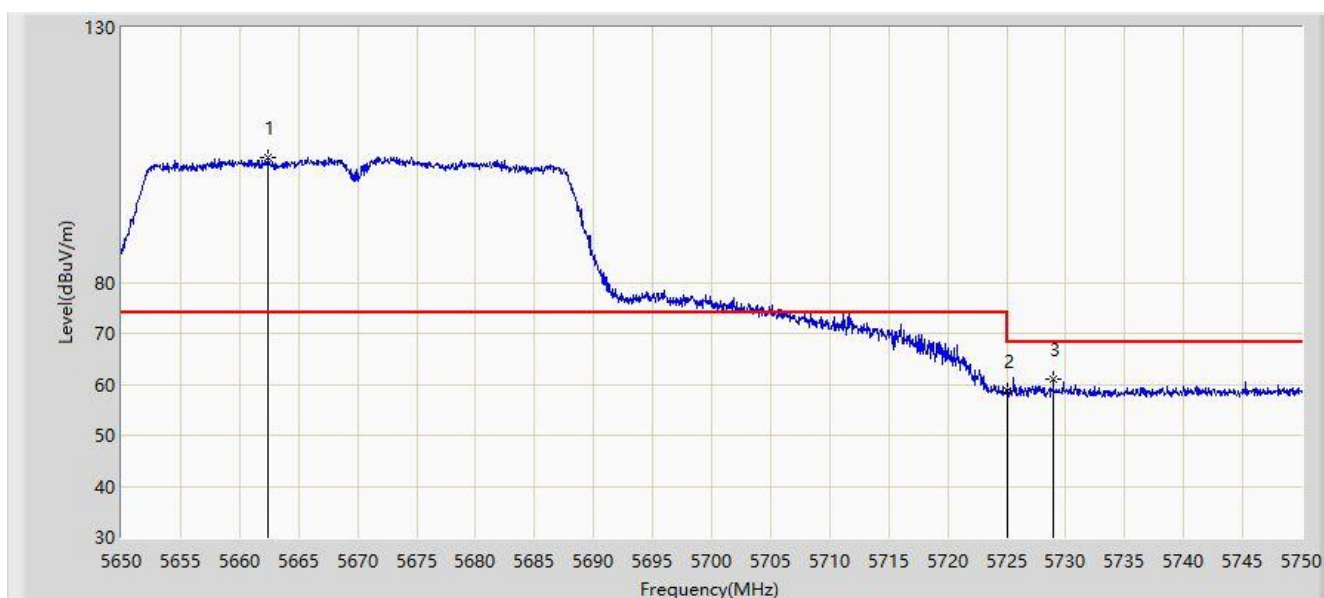


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5662.350	104.379	98.769	N/A	N/A	5.610	PK
2			5725.000	58.606	53.015	-9.594	68.200	5.591	PK
3			5728.950	61.086	55.436	-7.114	68.200	5.650	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:00
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

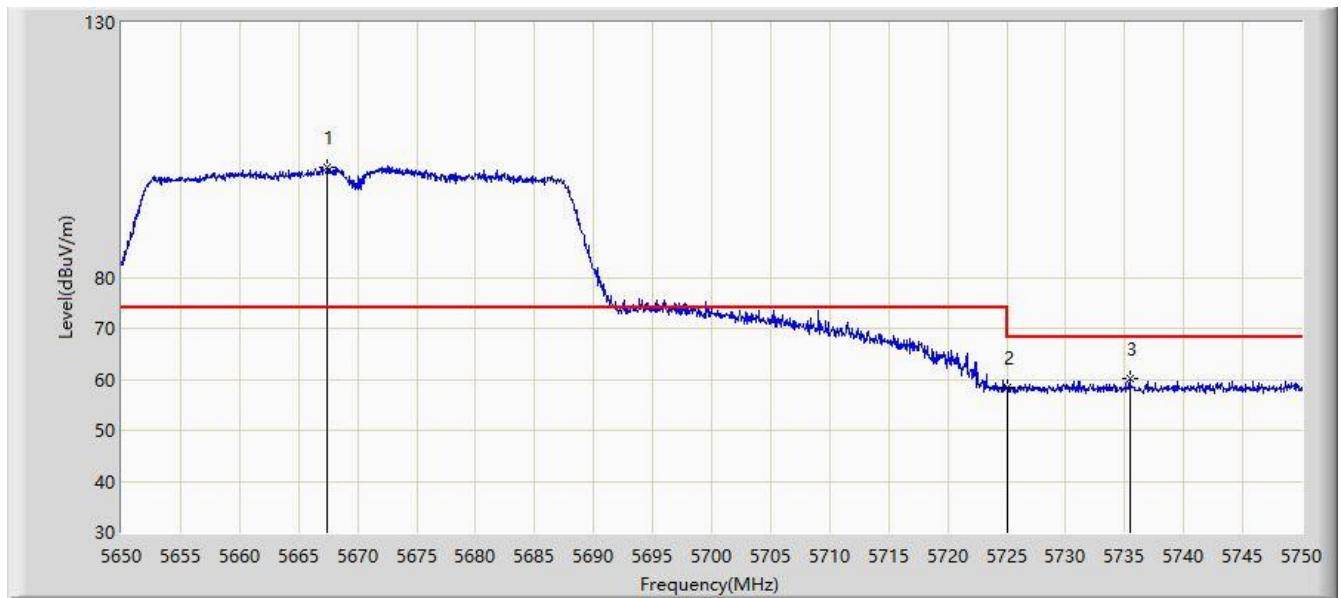


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	5667.450	101.618	95.963	N/A	N/A	5.655	PK
2			5725.000	58.368	52.777	-9.832	68.200	5.591	PK
3			5735.450	60.052	54.287	-8.148	68.200	5.765	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:02
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

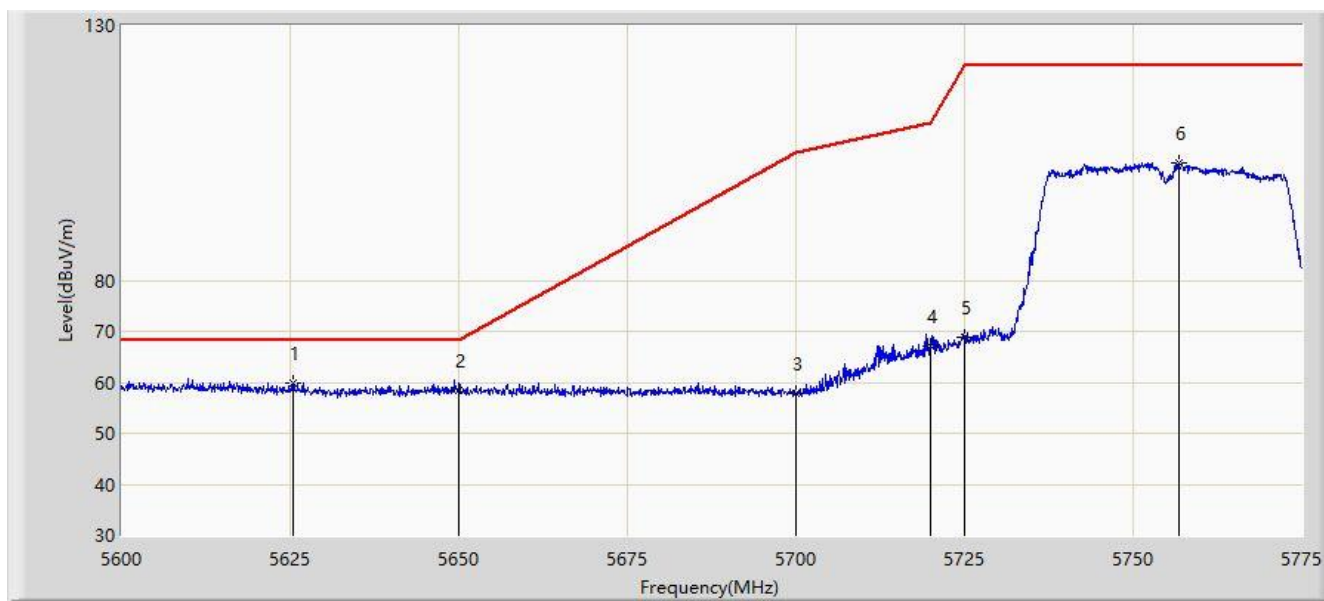


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5625.462	59.737	54.022	-8.463	68.200	5.715	PK
2			5650.000	58.488	52.952	-9.712	68.200	5.536	PK
3			5700.000	57.686	51.883	-47.514	105.200	5.803	PK
4			5720.000	67.079	61.451	-43.721	110.800	5.629	PK
5			5725.000	68.805	63.214	-53.395	122.200	5.591	PK
6			5756.888	103.188	97.076	-19.012	122.200	6.112	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:06
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

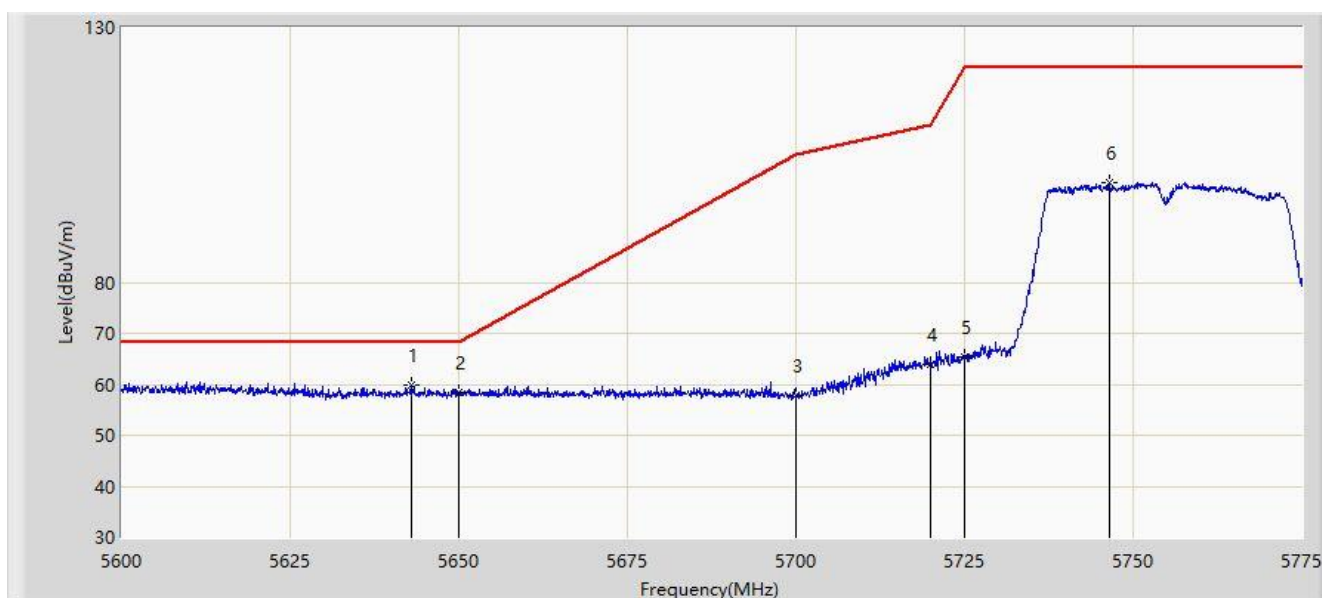


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.875	59.919	54.440	-8.281	68.200	5.478	PK
2			5650.000	58.438	52.902	-9.762	68.200	5.536	PK
3			5700.000	57.686	51.883	-47.514	105.200	5.803	PK
4			5720.000	63.796	58.168	-47.004	110.800	5.629	PK
5			5725.000	65.288	59.697	-56.912	122.200	5.591	PK
6			5746.388	99.516	93.571	-22.684	122.200	5.944	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:08
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

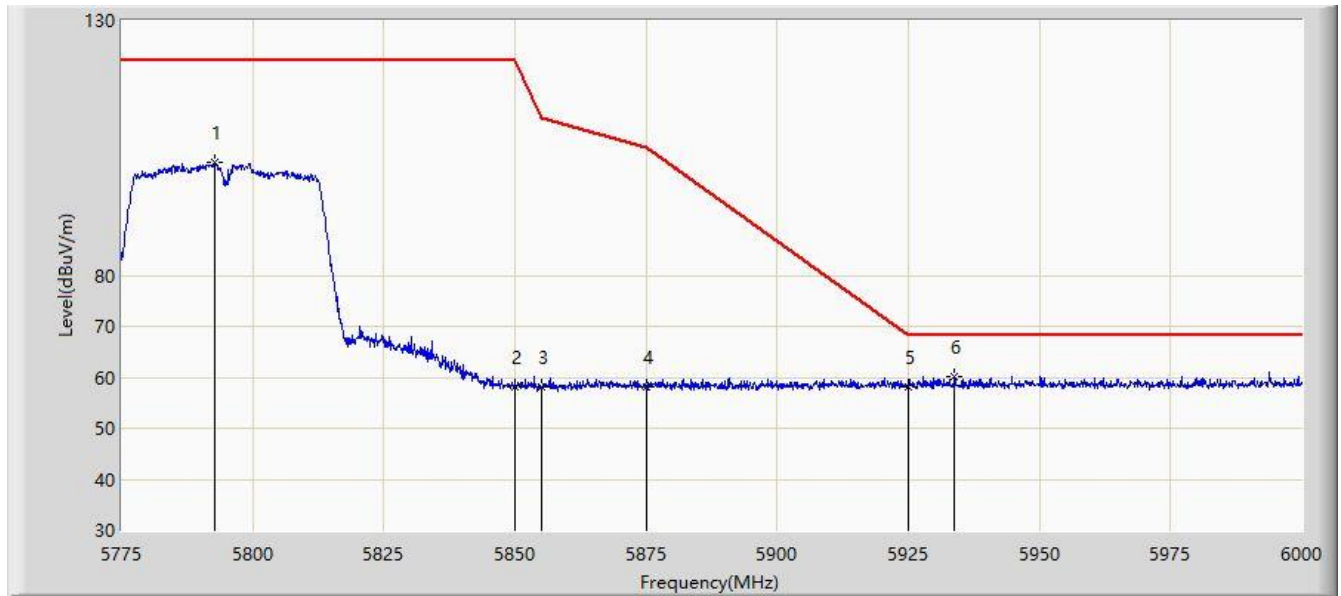


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5792.775	102.146	96.287	-20.054	122.200	5.860	PK
2			5850.000	58.143	52.181	-64.057	122.200	5.961	PK
3			5855.000	58.078	52.072	-52.722	110.800	6.007	PK
4			5875.000	58.018	51.953	-47.182	105.200	6.065	PK
5			5925.000	58.201	52.029	-9.999	68.200	6.173	PK
6		*	5933.737	60.035	53.748	-8.165	68.200	6.288	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:10
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

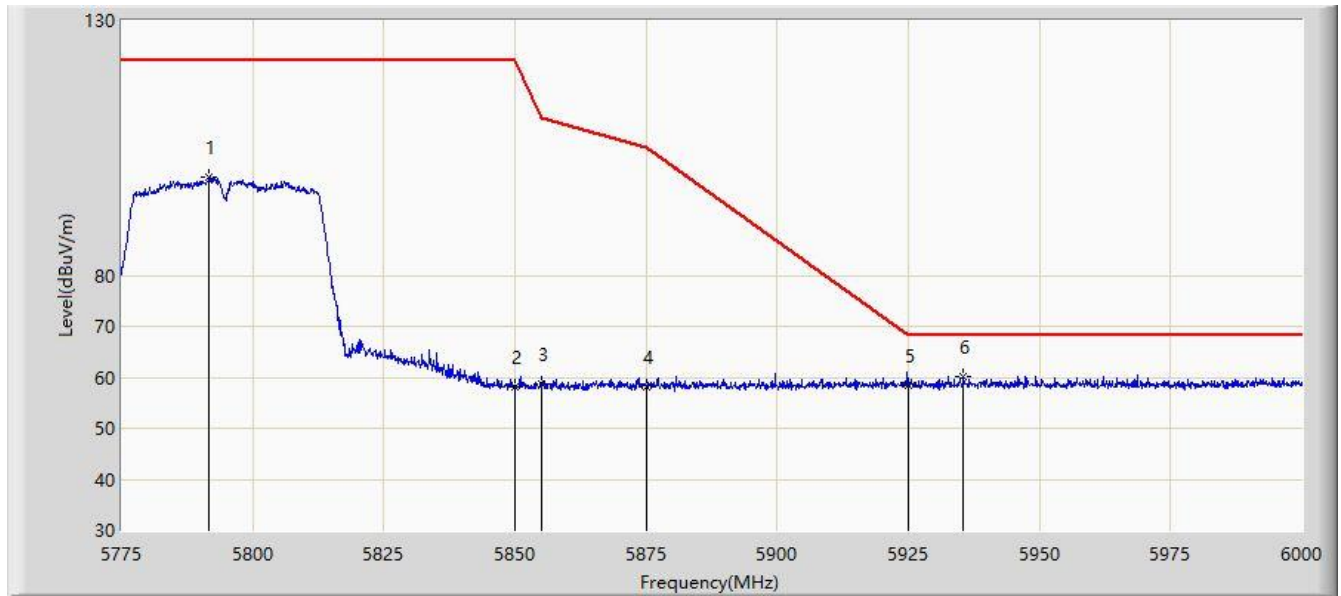


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5791.763	99.253	93.391	-22.947	122.200	5.862	PK
2			5850.000	58.043	52.081	-64.157	122.200	5.961	PK
3			5855.000	58.795	52.789	-52.005	110.800	6.007	PK
4			5875.000	58.098	52.033	-47.102	105.200	6.065	PK
5			5925.000	58.376	52.204	-9.824	68.200	6.173	PK
6		*	5935.425	60.025	53.726	-8.175	68.200	6.299	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:12
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

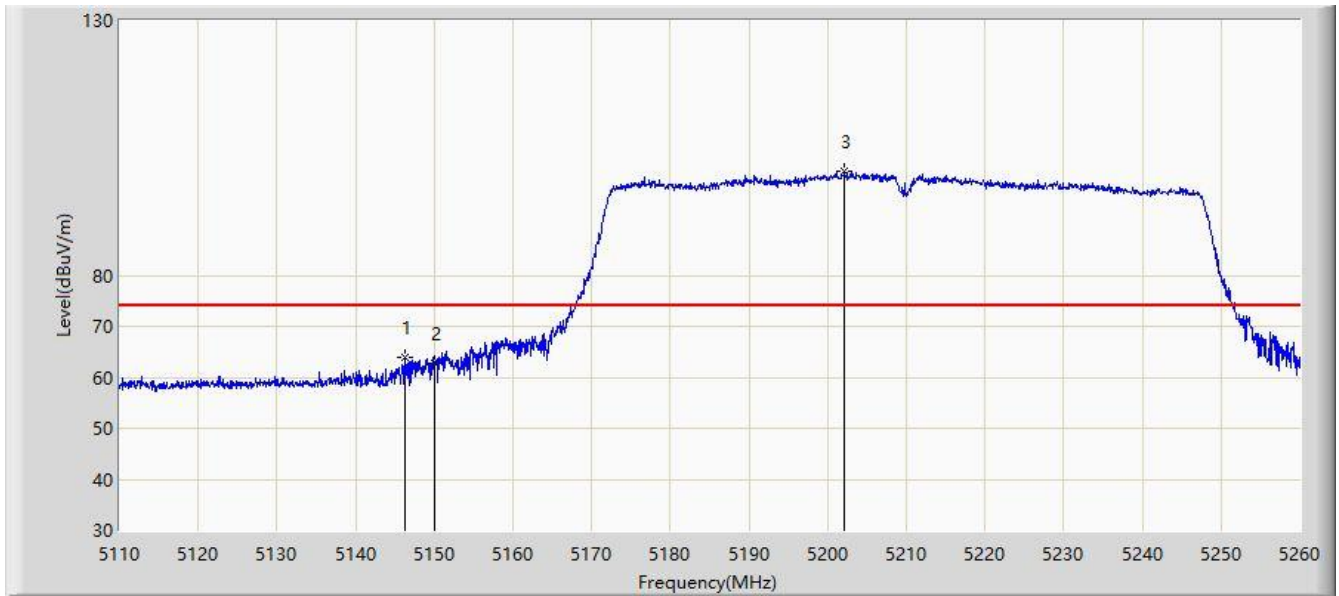


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5146.225	63.957	58.396	-10.043	74.000	5.561	PK
2			5150.000	62.636	57.103	-11.364	74.000	5.534	PK
3		*	5202.100	100.345	94.659	N/A	N/A	5.686	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:15
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

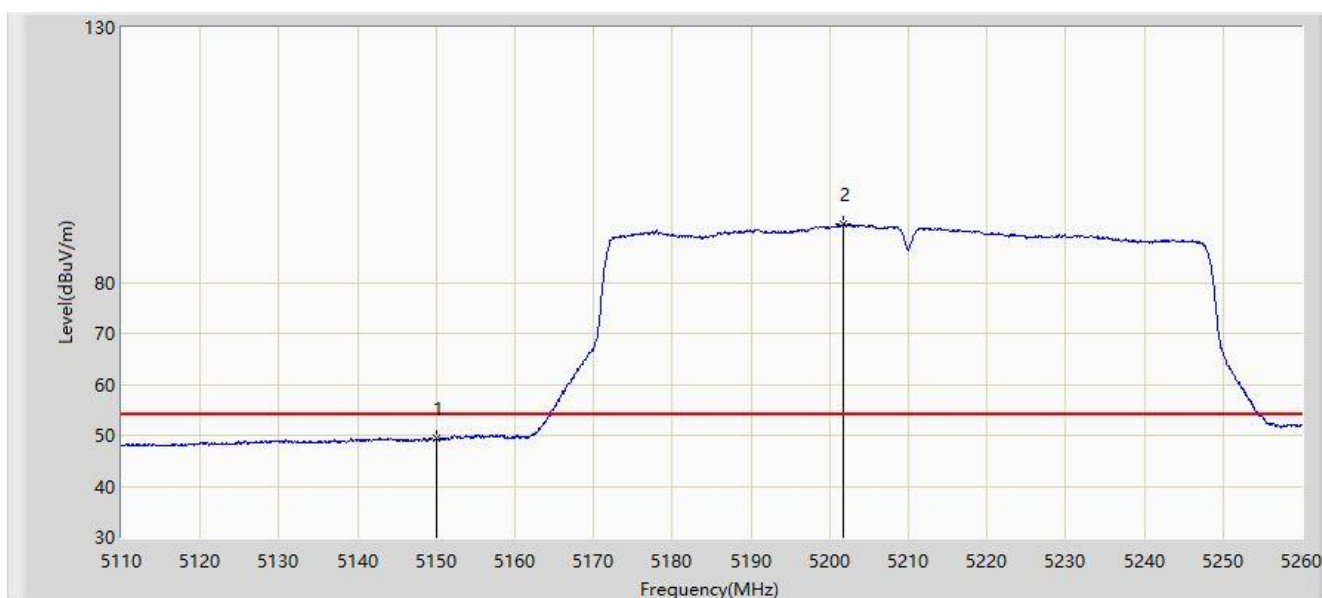


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5150.000	49.373	43.840	-4.627	54.000	5.534	AV
2		*	5201.800	91.360	85.668	N/A	N/A	5.691	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:17
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

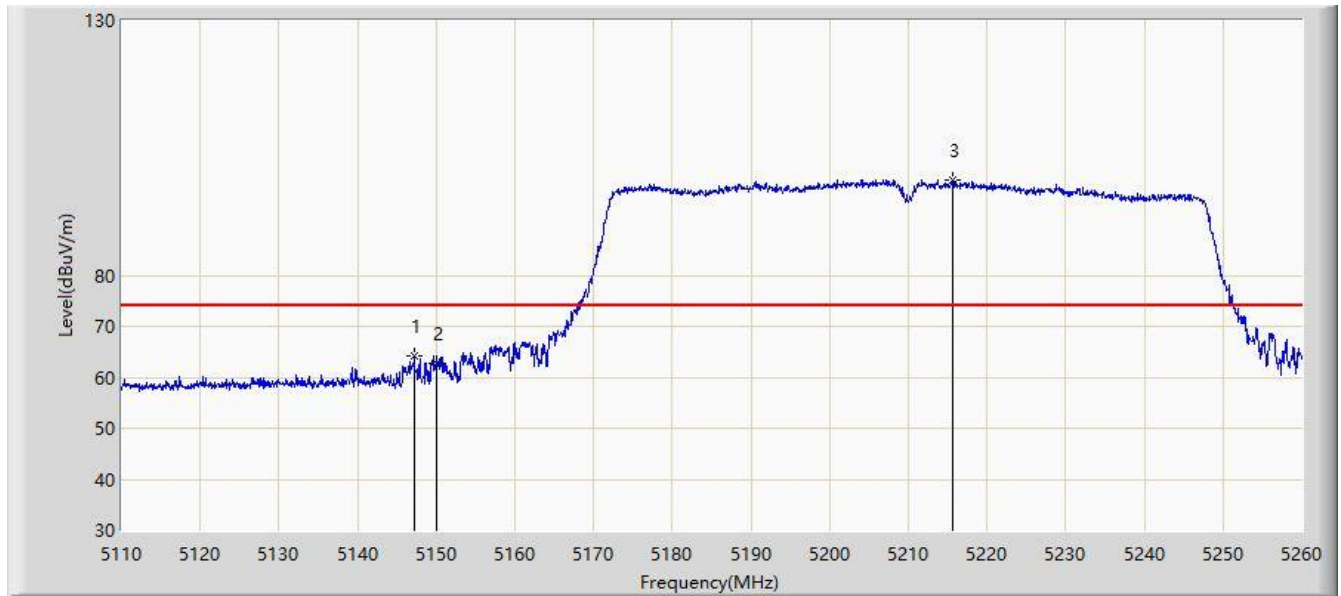


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.200	64.342	58.797	-9.658	74.000	5.546	PK
2			5150.000	62.719	57.186	-11.281	74.000	5.534	PK
3		*	5215.675	98.824	93.409	N/A	N/A	5.415	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:19
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

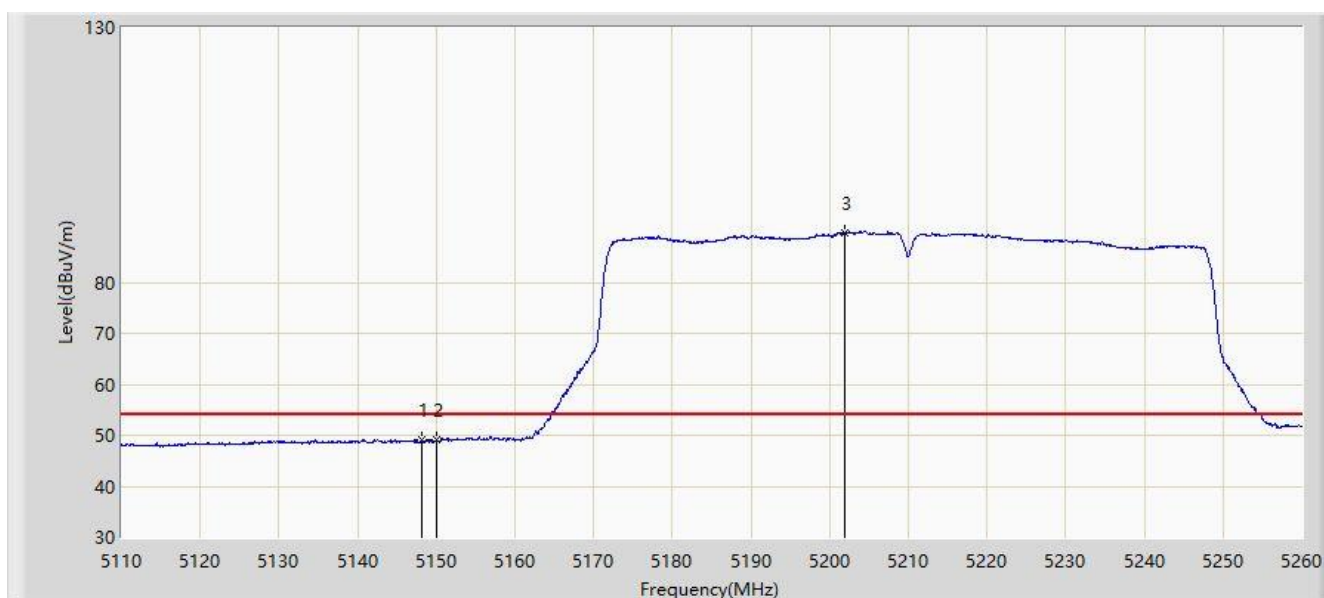


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.100	49.235	43.701	-4.765	54.000	5.534	AV
2			5150.000	49.036	43.503	-4.964	54.000	5.534	AV
3		*	5201.875	89.785	84.095	N/A	N/A	5.690	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:21
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

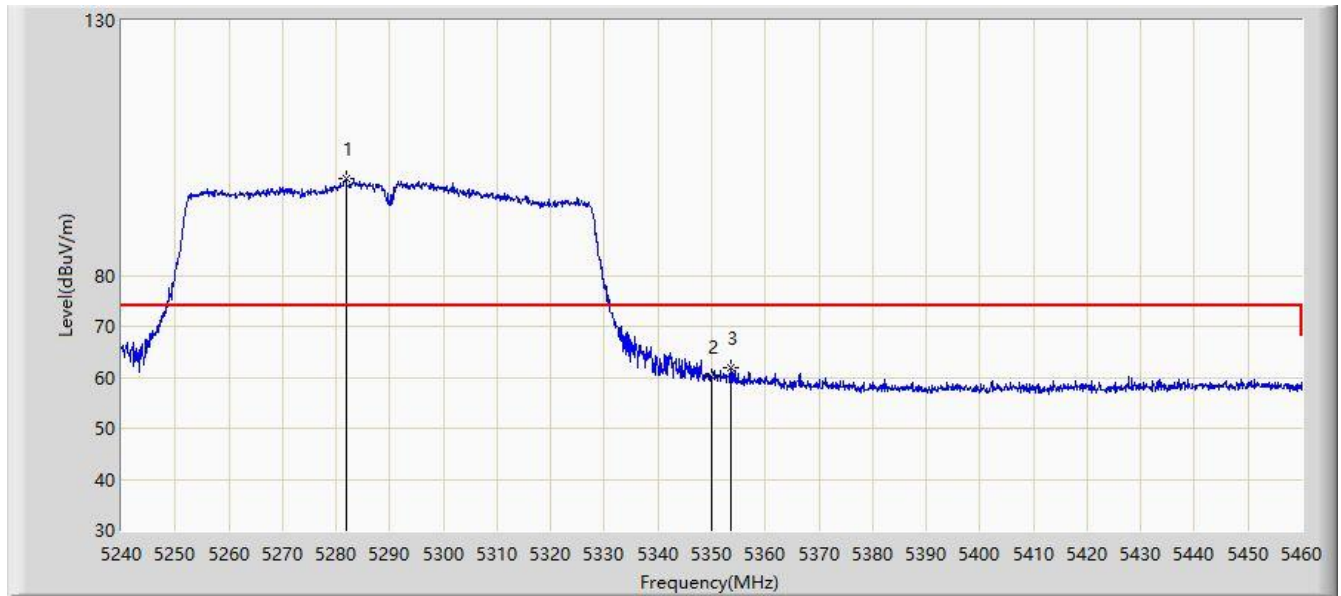


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	5281.800	99.012	93.751	N/A	N/A	5.261	PK
2			5350.000	60.177	54.403	-13.823	74.000	5.774	PK
3			5353.520	61.956	56.260	-12.044	74.000	5.696	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:23
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

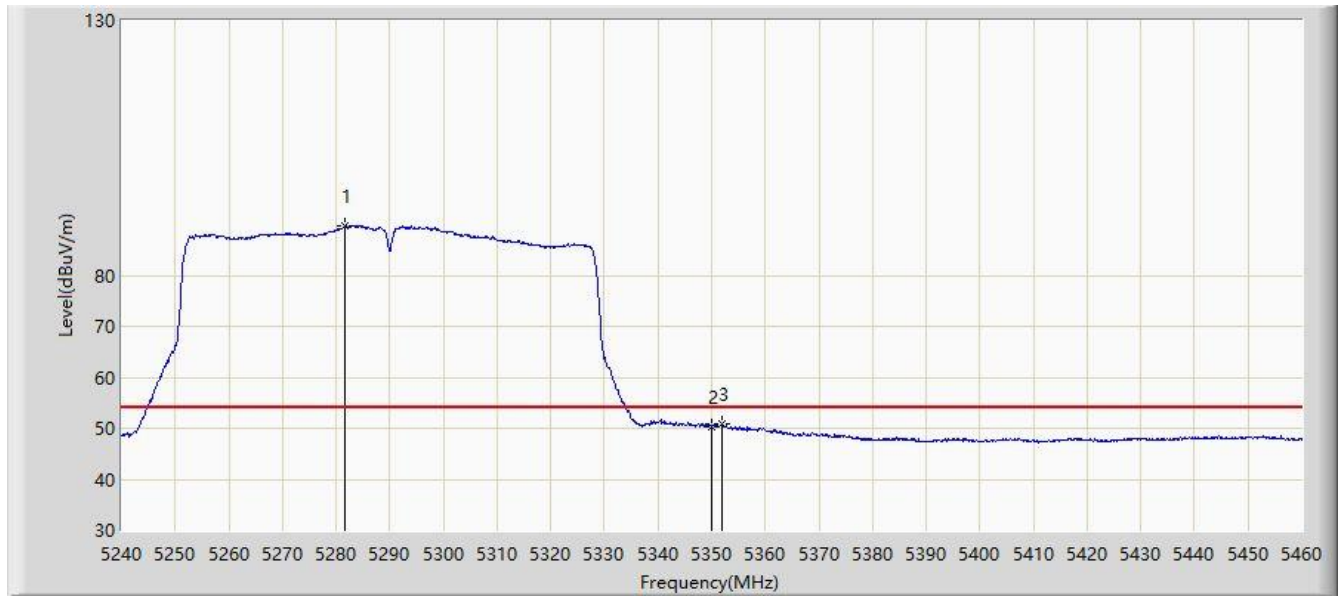


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5281.690	89.662	84.402	N/A	N/A	5.261	AV
2			5350.000	50.383	44.609	-3.617	54.000	5.774	AV
3			5351.870	50.736	44.997	-3.264	54.000	5.739	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:24
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

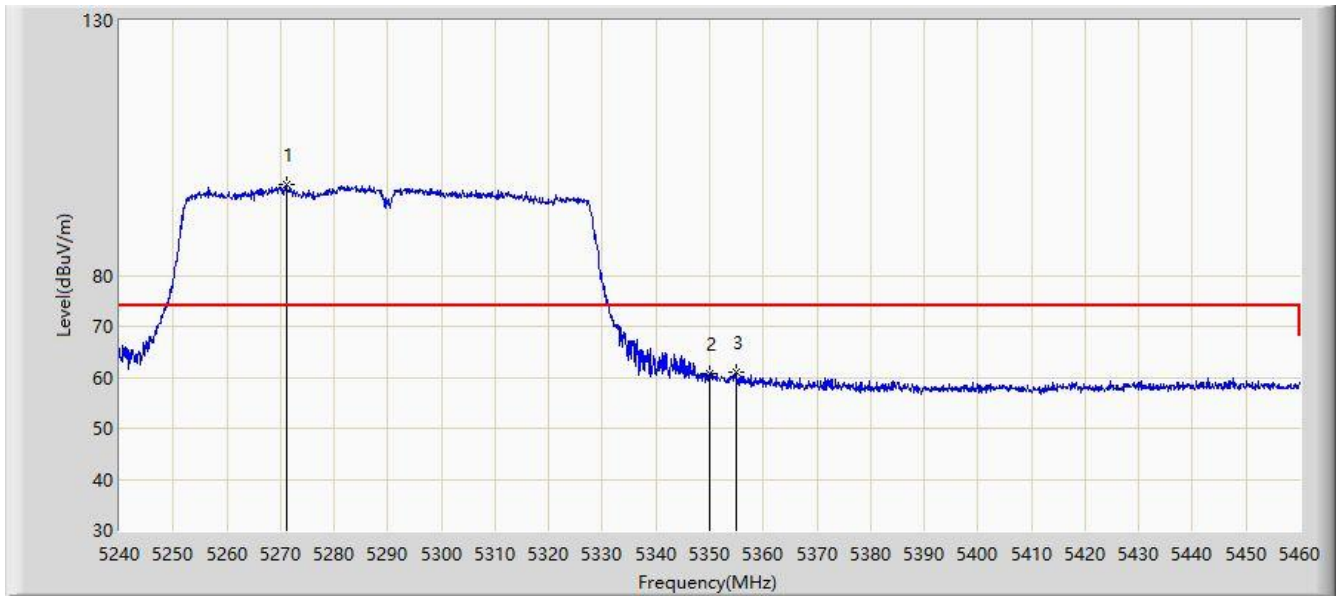


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5271.020	97.716	92.426	N/A	N/A	5.290	PK
2			5350.000	60.660	54.886	-13.340	74.000	5.774	PK
3			5354.840	61.045	55.384	-12.955	74.000	5.662	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:26
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

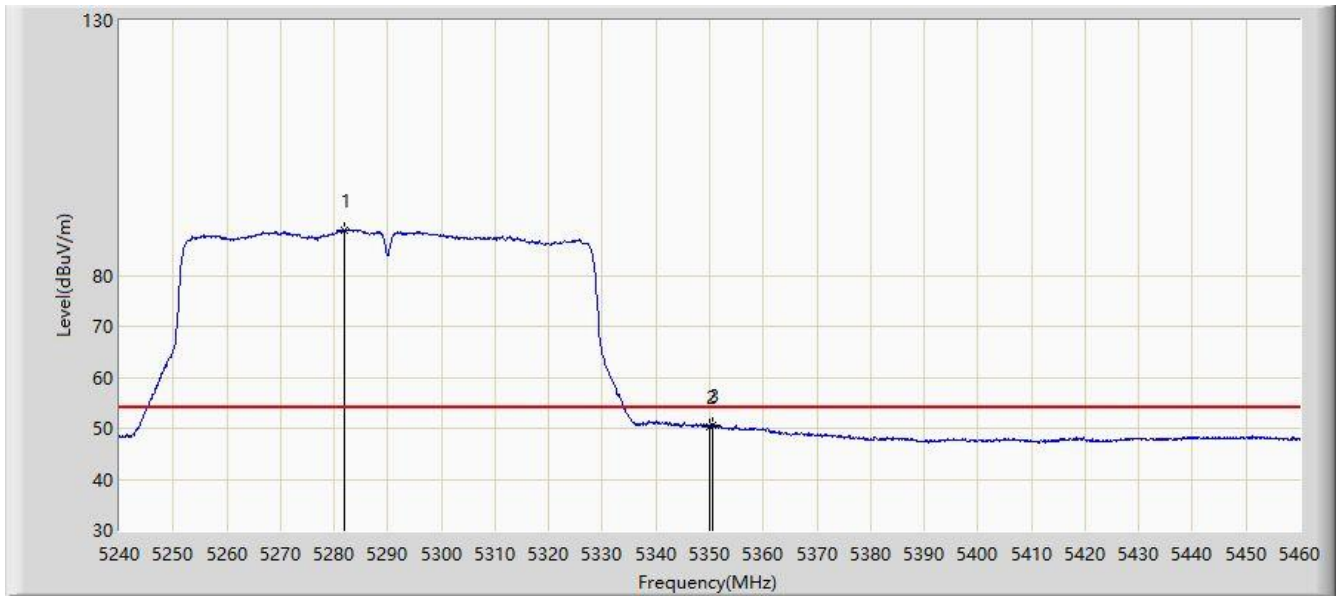


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5281.910	88.947	83.686	N/A	N/A	5.261	AV
2			5350.000	50.304	44.530	-3.696	54.000	5.774	AV
3			5350.440	50.674	44.908	-3.326	54.000	5.767	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:28
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

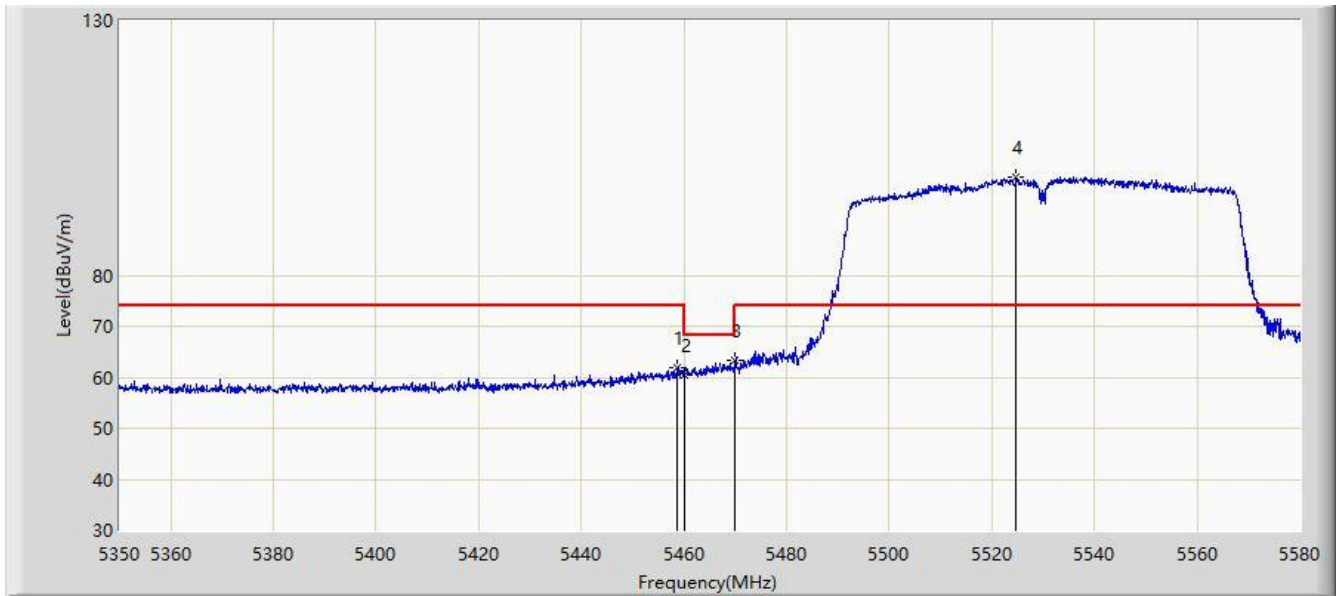


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			5458.675	61.860	56.082	-12.140	74.000	5.778	PK
2			5460.000	60.534	54.766	-13.466	74.000	5.768	PK
3			5470.000	63.268	57.573	-4.932	68.200	5.695	PK
4		*	5524.800	99.246	93.447	N/A	N/A	5.799	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:30
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

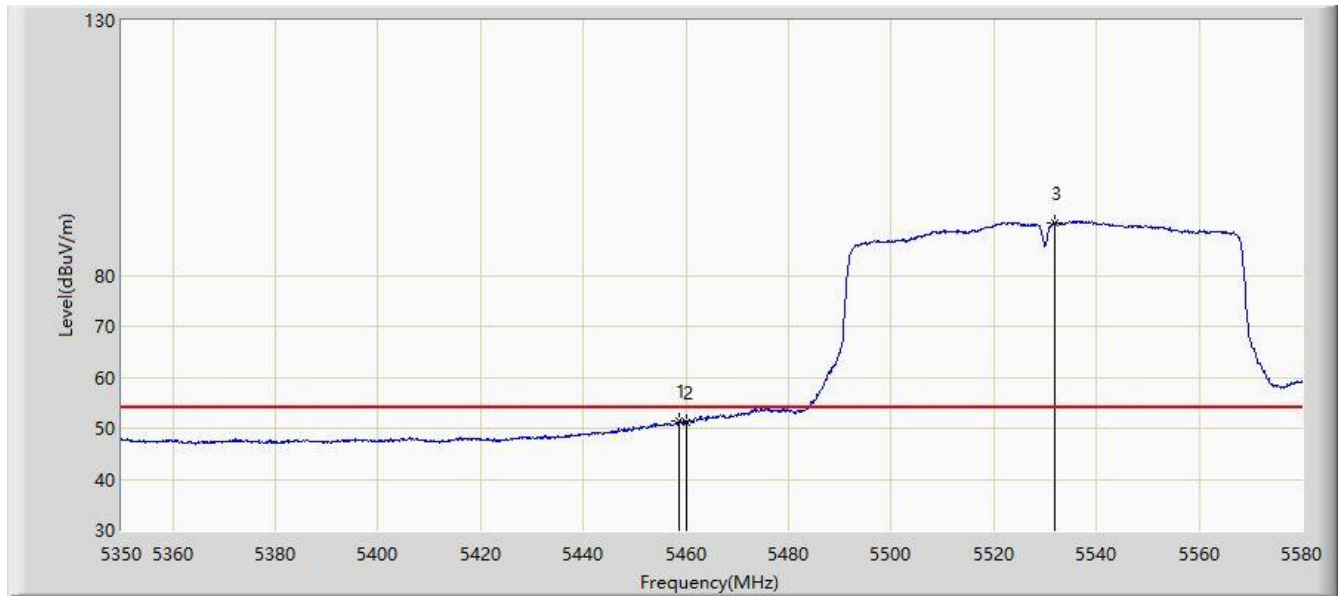


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.790	51.319	45.542	-2.681	54.000	5.777	AV
2			5460.000	51.063	45.295	-2.937	54.000	5.768	AV
3		*	5531.815	90.420	84.482	N/A	N/A	5.938	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:33
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

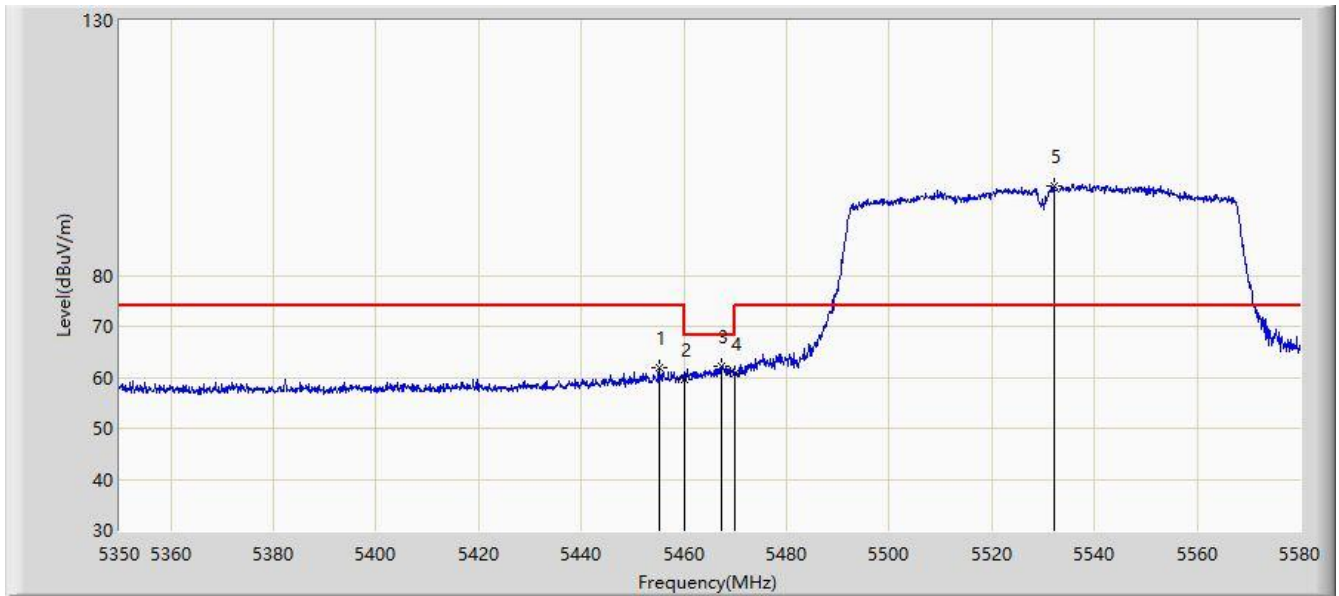


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5455.110	61.840	56.036	-12.160	74.000	5.804	PK
2			5460.000	59.457	53.689	-14.543	74.000	5.768	PK
3			5467.185	62.165	56.449	-6.035	68.200	5.716	PK
4			5470.000	60.750	55.055	-7.450	68.200	5.695	PK
5		*	5532.160	97.553	91.608	N/A	N/A	5.945	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:35
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

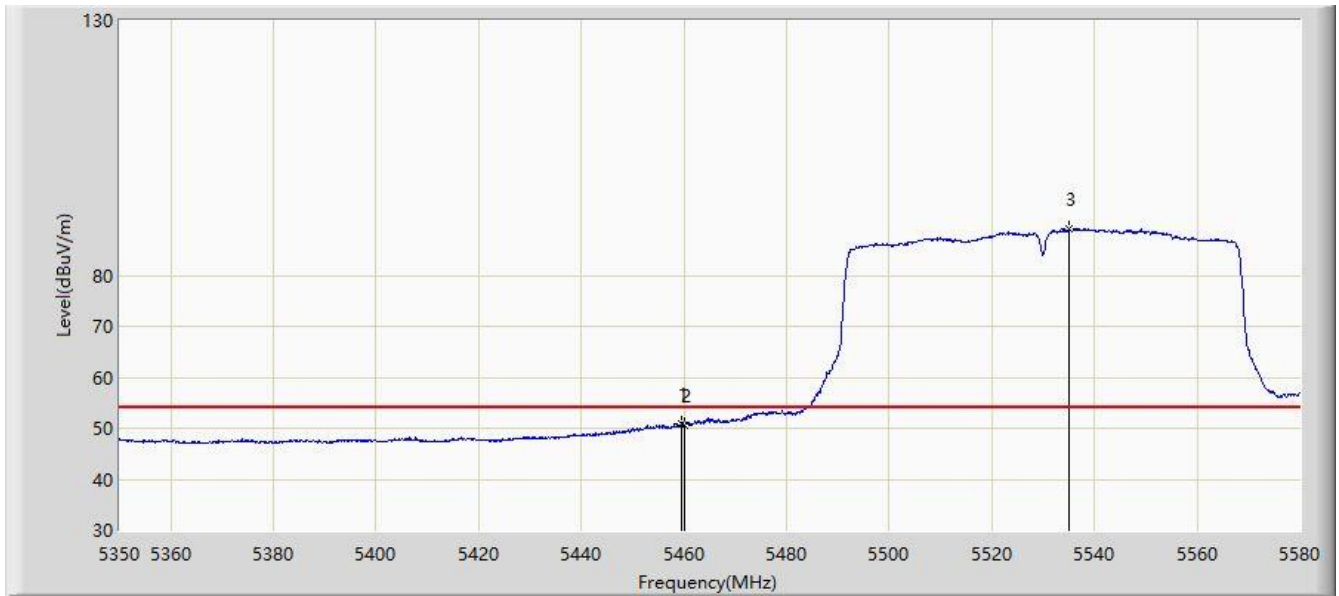


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.595	50.775	45.004	-3.225	54.000	5.771	AV
2			5460.000	50.470	44.702	-3.530	54.000	5.768	AV
3		*	5535.035	89.065	83.057	N/A	N/A	6.008	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/19 - 14:37
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

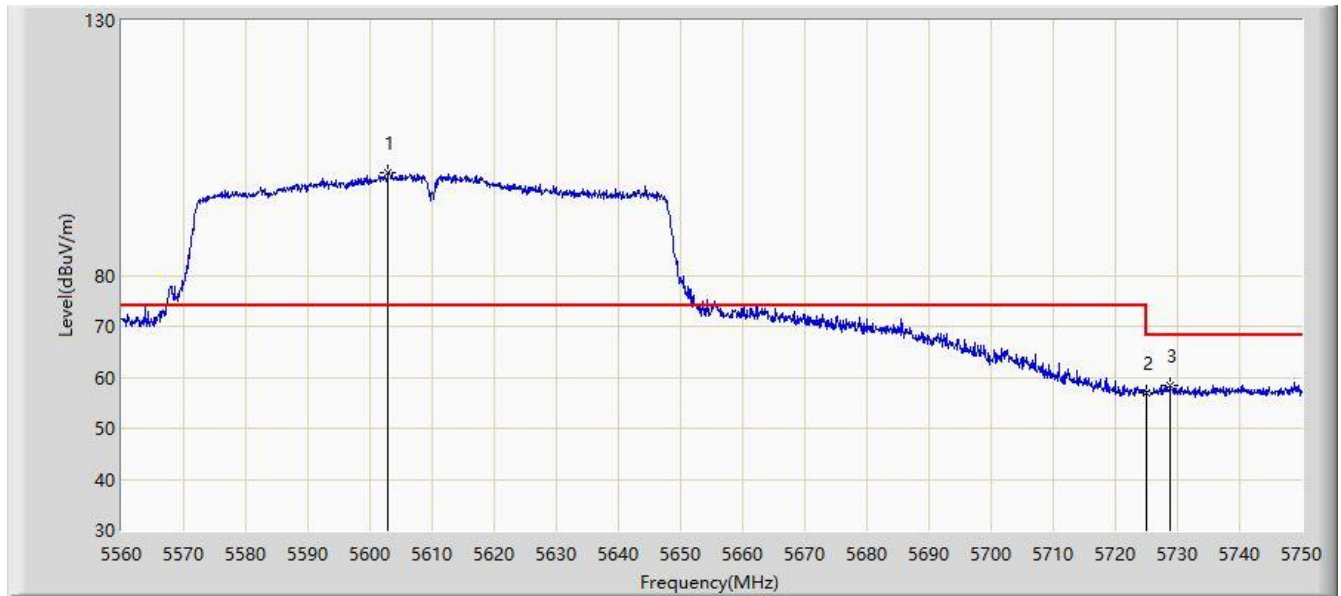


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5602.940	100.249	94.300	N/A	N/A	5.950	PK
2			5725.000	56.925	51.334	-11.275	68.200	5.591	PK
3			5728.815	58.459	52.812	-9.741	68.200	5.647	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/20 - 17:19
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

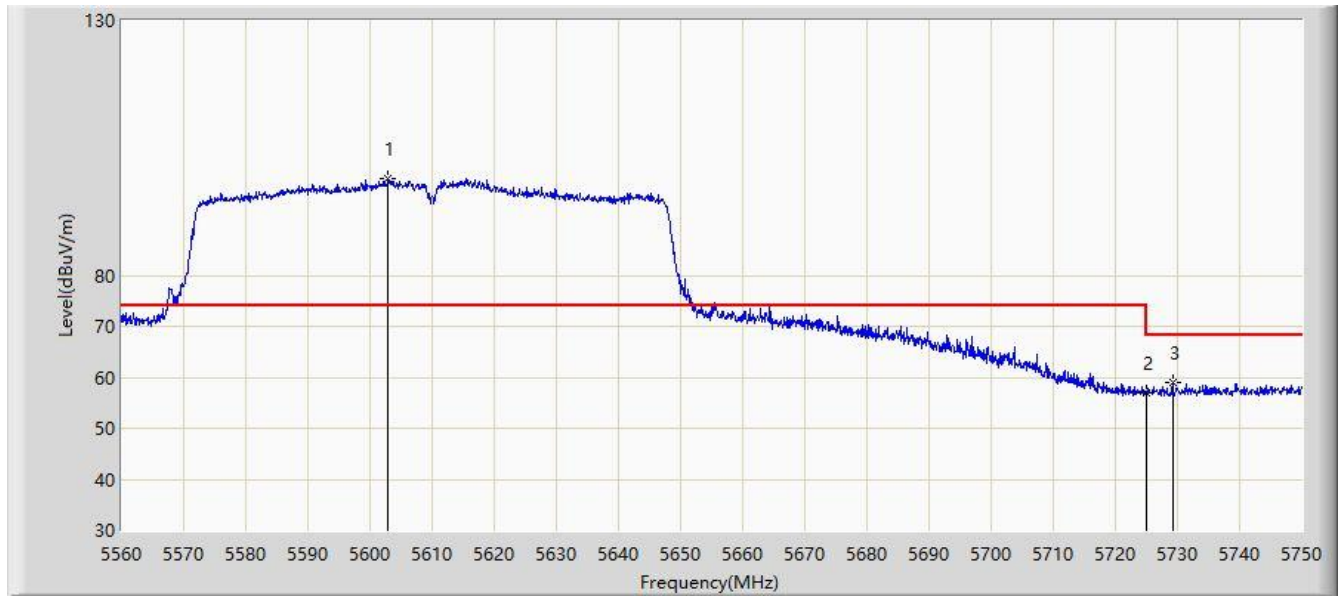


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5602.940	99.079	93.130	N/A	N/A	5.950	PK
2			5725.000	56.868	51.277	-11.332	68.200	5.591	PK
3			5729.195	59.112	53.458	-9.088	68.200	5.654	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/20 - 17:25
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

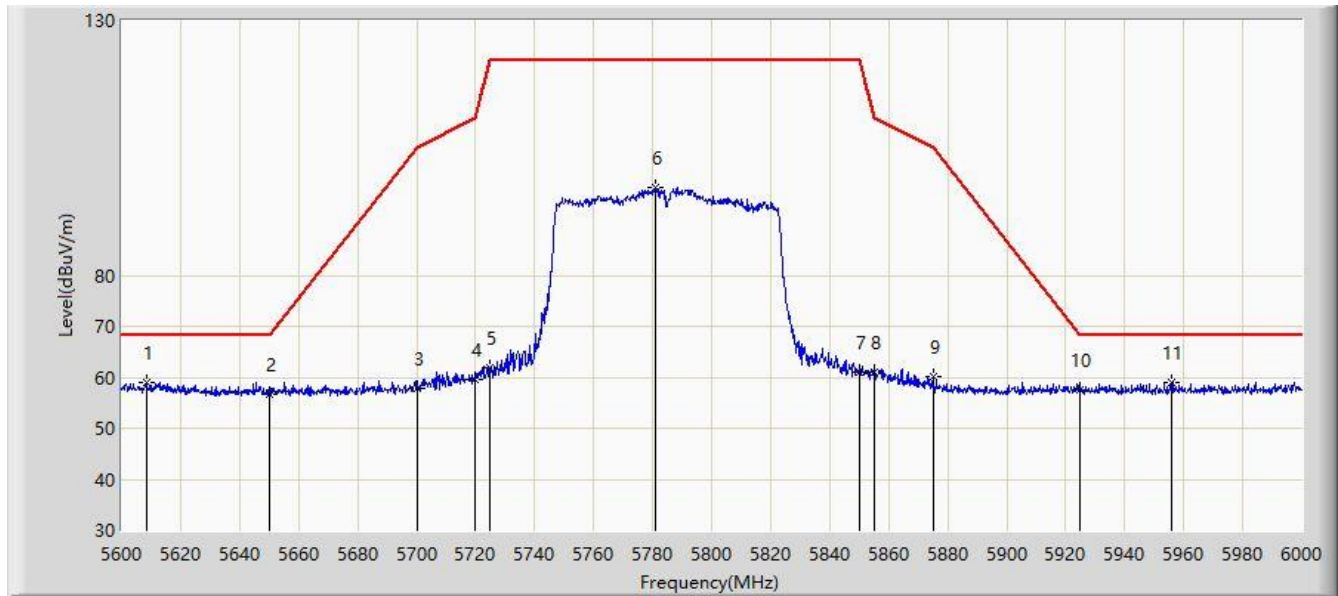


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5608.400	59.114	53.130	-9.086	68.200	5.984	PK
2			5650.000	56.601	51.065	-11.599	68.200	5.536	PK
3			5700.000	57.868	52.065	-47.332	105.200	5.803	PK
4			5720.000	59.466	53.838	-51.334	110.800	5.629	PK
5			5725.000	61.859	56.268	-60.341	122.200	5.591	PK
6			5780.800	97.290	91.402	-24.910	122.200	5.888	PK
7			5850.000	61.069	55.107	-61.131	122.200	5.961	PK
8			5855.000	61.056	55.050	-49.744	110.800	6.007	PK
9			5875.000	60.050	53.985	-45.150	105.200	6.065	PK
10			5925.000	57.494	51.322	-10.706	68.200	6.173	PK
11			5955.800	58.864	52.736	-9.336	68.200	6.128	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC1	Time: 2021/03/20 - 17:29
Limit: FCC_Part15_15.209 RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

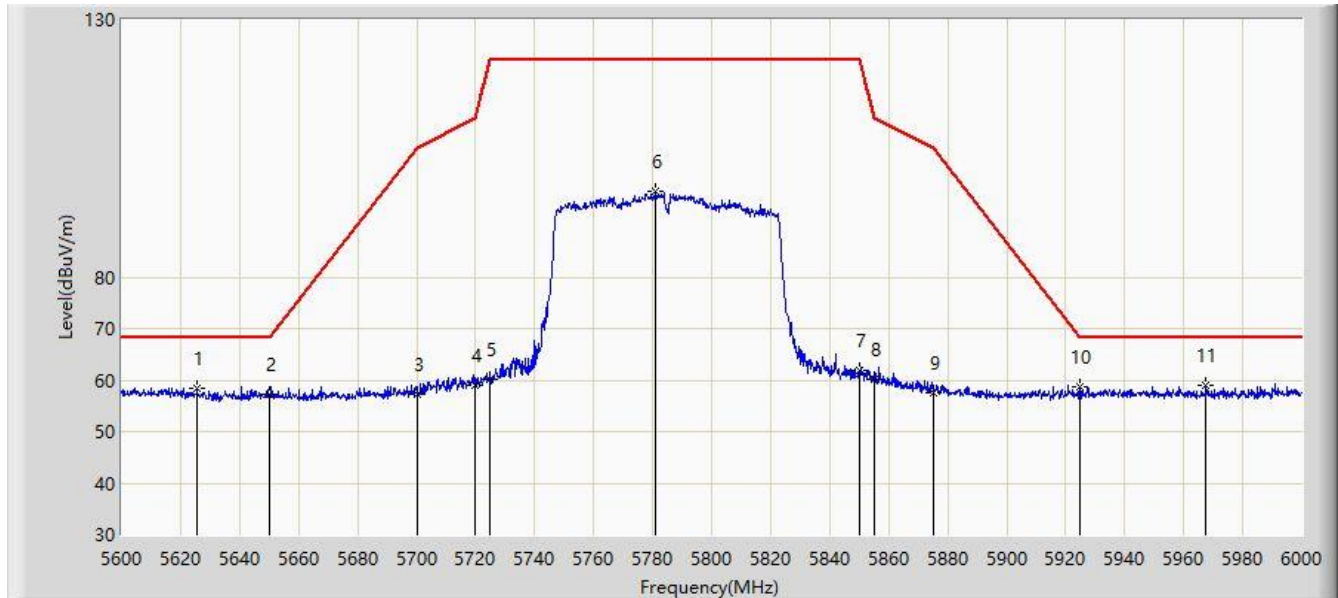

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5625.600	58.533	52.823	-9.667	68.200	5.710	PK
2			5650.000	57.262	51.726	-10.938	68.200	5.536	PK
3			5700.000	57.376	51.573	-47.824	105.200	5.803	PK
4			5720.000	59.057	53.429	-51.743	110.800	5.629	PK
5			5725.000	60.179	54.588	-62.021	122.200	5.591	PK
6			5781.200	96.541	90.654	-25.659	122.200	5.886	PK
7			5850.000	61.790	55.828	-60.410	122.200	5.961	PK
8			5855.000	60.083	54.077	-50.717	110.800	6.007	PK
9			5875.000	57.631	51.566	-47.569	105.200	6.065	PK
10			5925.000	58.818	52.646	-9.382	68.200	6.173	PK
11		*	5967.600	59.074	53.087	-9.126	68.200	5.987	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

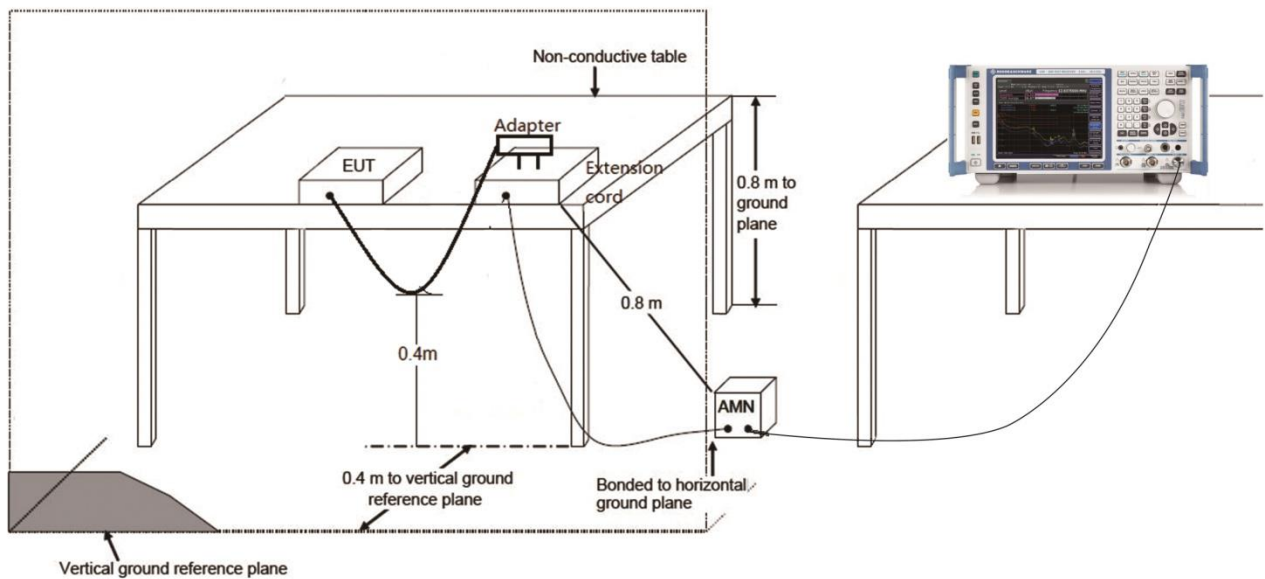

6.10.3.Test Result

Site: WZ-SR2	Time: 2021/04/19
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_Without Adapter	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz	

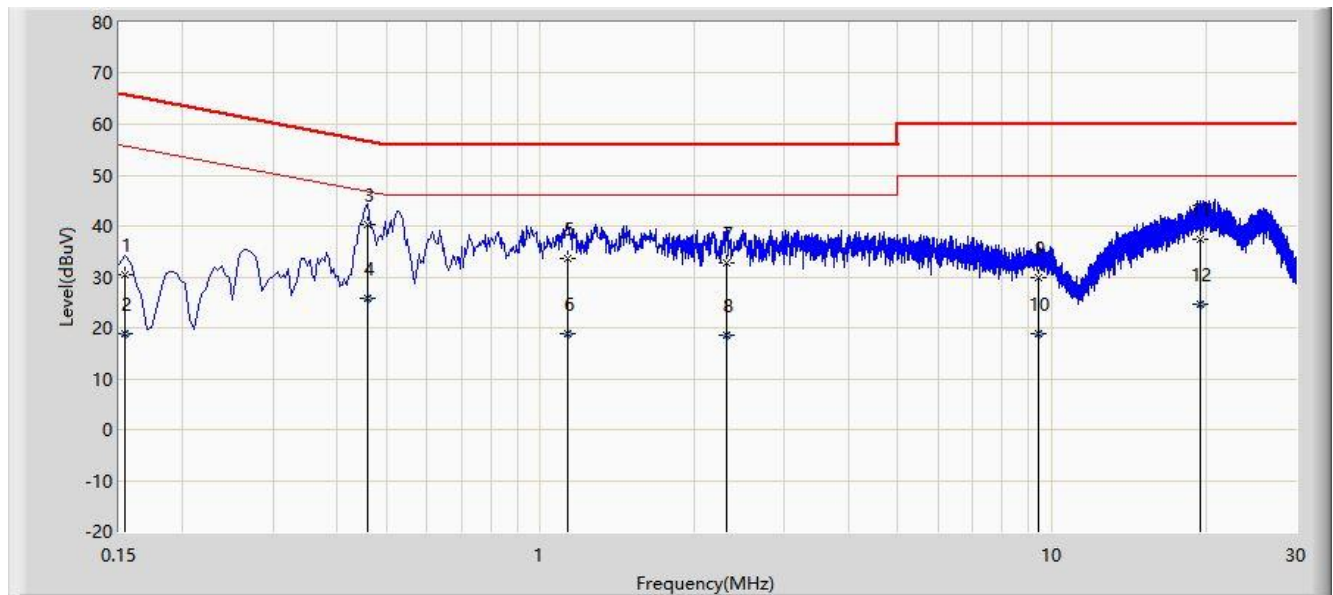


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor	Type
1			0.154	30.487	20.697	-35.294	65.781	9.790	QP
2			0.154	18.763	8.973	-37.018	55.781	9.790	AV
3		*	0.458	40.277	30.424	-16.452	56.729	9.853	QP
4			0.458	25.733	15.880	-20.996	46.729	9.853	AV
5			1.130	33.508	23.617	-22.492	56.000	9.891	QP
6			1.130	18.771	8.880	-27.229	46.000	9.891	AV
7			2.306	32.800	22.848	-23.200	56.000	9.952	QP
8			2.306	18.693	8.741	-27.307	46.000	9.952	AV
9			9.418	29.837	19.247	-30.163	60.000	10.590	QP
10			9.418	18.796	8.206	-31.204	50.000	10.590	AV
11			19.542	37.355	26.639	-22.645	60.000	10.716	QP
12			19.542	24.641	13.925	-25.359	50.000	10.716	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2021/04/19
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_Without Adapter	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz	

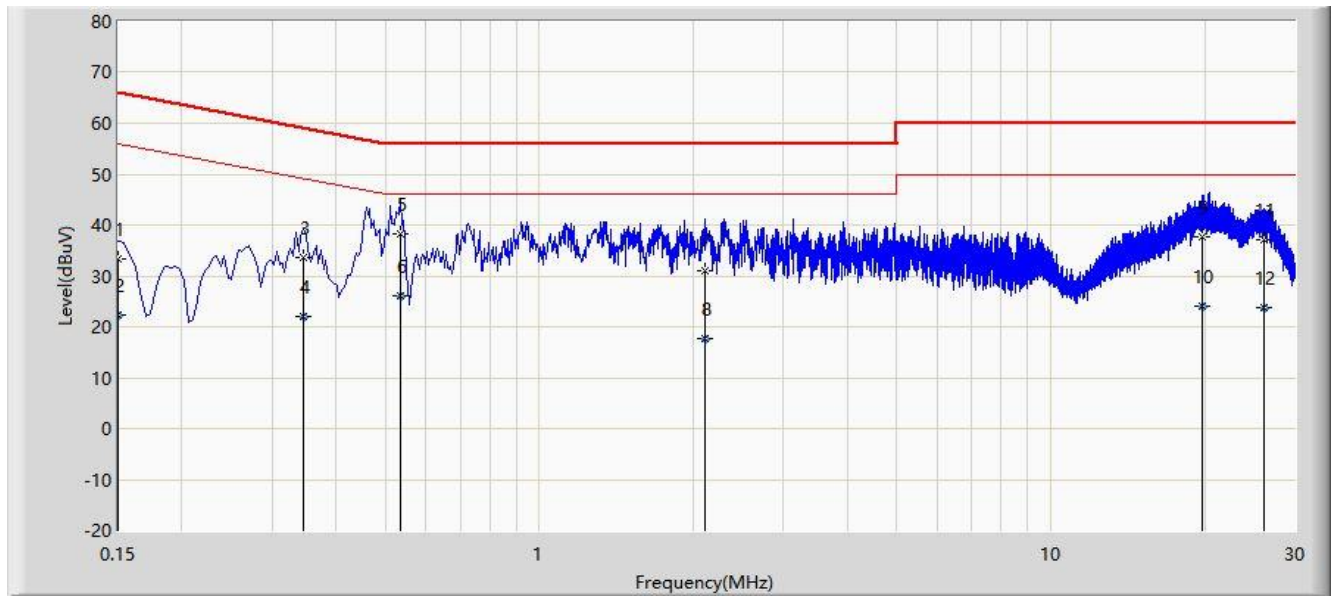

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor	Type
1			0.150	33.214	23.417	-32.786	66.000	9.798	QP
2			0.150	22.186	12.389	-33.814	56.000	9.798	AV
3			0.346	33.513	23.669	-25.545	59.058	9.844	QP
4			0.346	21.972	12.128	-27.086	49.058	9.844	AV
5		*	0.534	38.375	28.502	-17.625	56.000	9.874	QP
6			0.534	26.049	16.176	-19.951	46.000	9.874	AV
7			2.114	30.976	21.056	-25.024	56.000	9.920	QP
8			2.114	17.665	7.745	-28.335	46.000	9.920	AV
9			19.778	37.775	26.957	-22.225	60.000	10.818	QP
10			19.778	24.180	13.361	-25.820	50.000	10.818	AV
11			26.110	36.998	26.112	-23.002	60.000	10.886	QP
12			26.110	23.800	12.914	-26.200	50.000	10.886	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules.

The End

Appendix A - Test Setup Photograph

Refer to “2102RSU043-UT” file.

Appendix B - EUT Photograph

Refer to “2102RSU043-UE” file.