



WCDMA Band V Band Edge


Channel 4132 (826.4MHz)

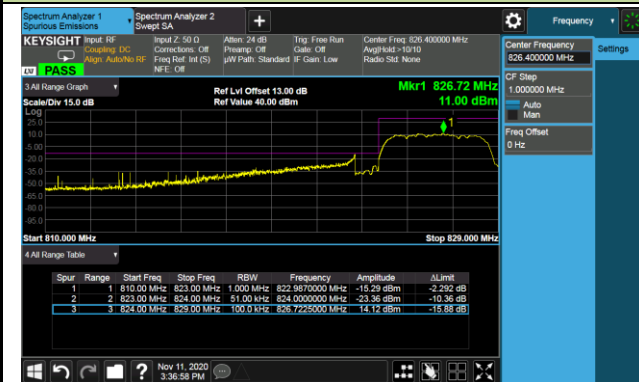

Channel 4233 (846.6MHz)

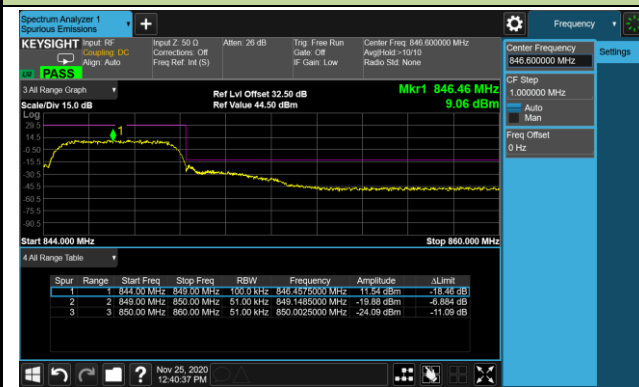


Extended Band Edge

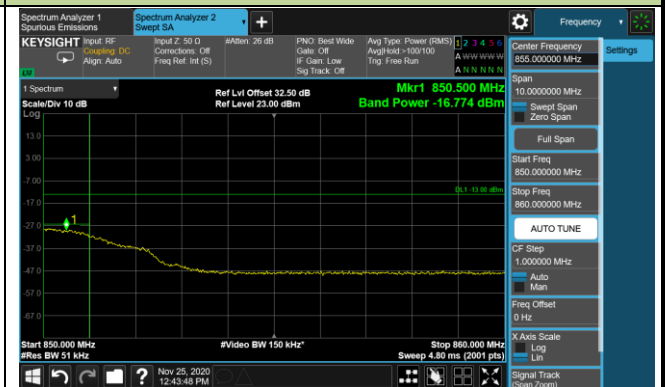


Product	Mobile Computer	Test Engineer	Candy Luo
Test Date	2020/11/27	Test Site	SIP-SR6
Test Band	CDMA2000 BC0, BC1	Test Result	Pass

CDMA2000 BC0 Band Edge

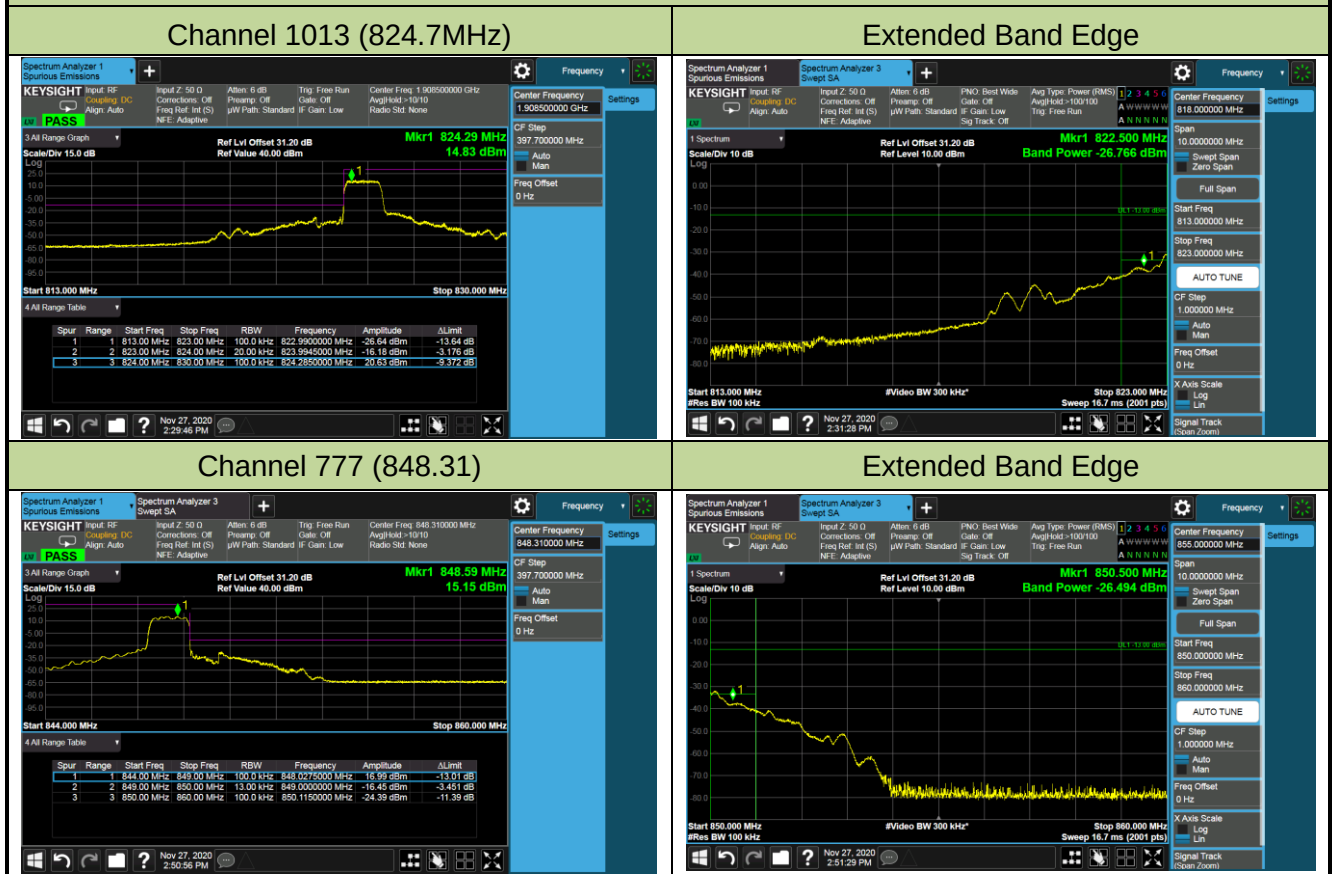

CDMA2000 BC1 Band Edge


Channel 25 (1851.25MHz)

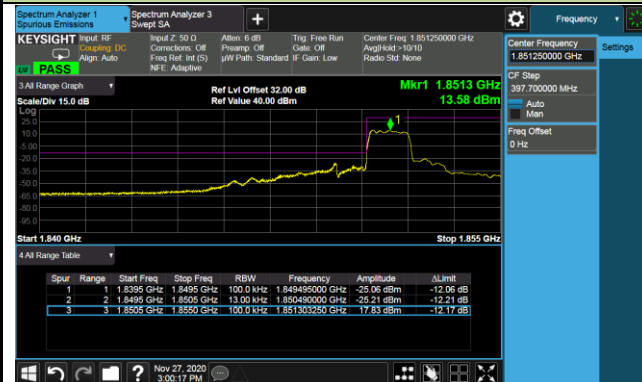

Extended Band Edge



Channel 1175 (1908.75MHz)

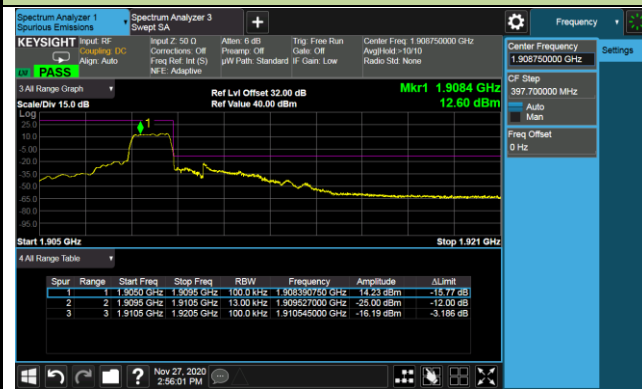

Extended Band Edge



5.6. Peak to Average Ratio

5.6.1. Test Limit

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.


5.6.2. Test Procedure Used

ANSI C63.26-2015 - Section 5.2.3.4 (CCDF).

5.6.3. Test Setting

1. Set the resolution / measurement bandwidth $\geq$ signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Record the maximum PARR level associated with a probability of 0.1%

5.6.4. Test Setup

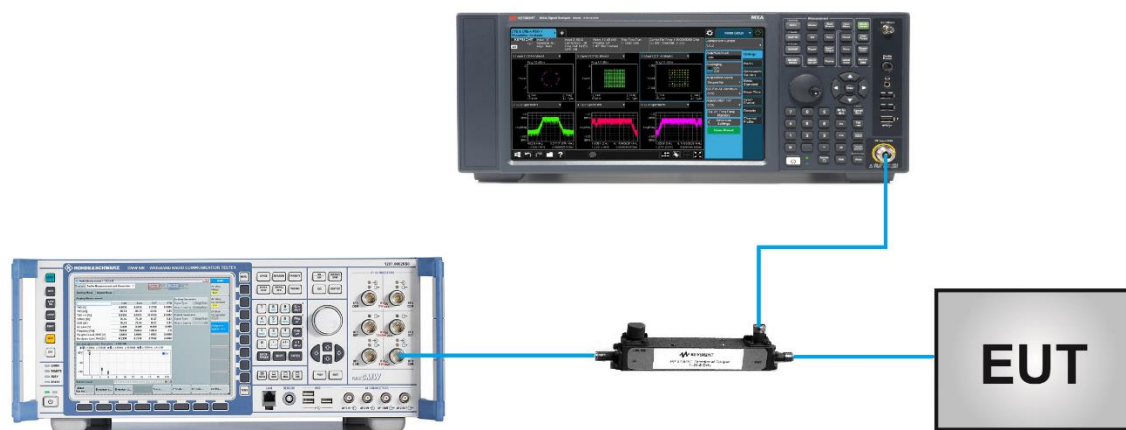

5.6.5. Test Result

Product	Mobile Computer	Test Engineer	Candy Luo
Test Date	2020/11/11 ~ 2020/11/27	Test Site	SIP-SR6
Test Result	Pass		


Channel No.	Frequency (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
GPRS 850				
128	824.2	10.27	≤ 13.00	Pass
189	836.4	9.69	≤ 13.00	Pass
251	848.8	9.67	≤ 13.00	Pass
EDGE 850				
128	824.2	10.63	≤ 13.00	Pass
189	836.4	10.49	≤ 13.00	Pass
251	848.8	9.64	≤ 13.00	Pass
GPRS 1900				
512	1850.2	9.74	≤ 13.00	Pass
661	1880	9.16	≤ 13.00	Pass
810	1909.8	9.45	≤ 13.00	Pass
EDGE 1900				
512	1850.2	9.90	≤ 13.00	Pass
661	1880	8.41	≤ 13.00	Pass
810	1909.8	9.81	≤ 13.00	Pass
WCDMA Band II				
9262	1852.4	3.05	≤ 13.00	Pass
9400	1880	3.20	≤ 13.00	Pass
9538	1907.6	3.16	≤ 13.00	Pass
WCDMA Band IV				
1312	1712.4	3.05	≤ 13.00	Pass
1413	1732.6	3.12	≤ 13.00	Pass
1513	1752.6	3.08	≤ 13.00	Pass
CDMA2000 BC1				
25	1851.25	4.02	≤ 13.00	Pass
600	1880.0	4.12	≤ 13.00	Pass
1175	1908.75	3.96	≤ 13.00	Pass

GPRS 850 Peak-Average Ratio


Channel 128 (824.2MHz)



Channel 189 (836.4MHz)

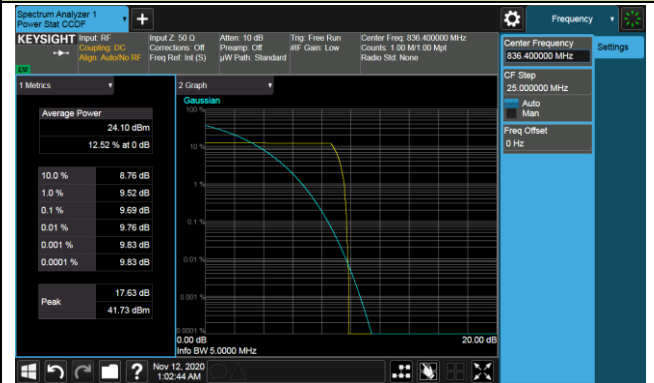


Channel 251 (848.8MHz)

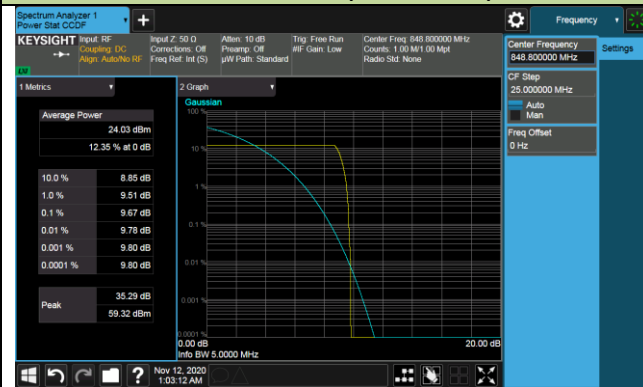

EDGE 850 Peak-Average Ratio


Channel 128 (824.2MHz)

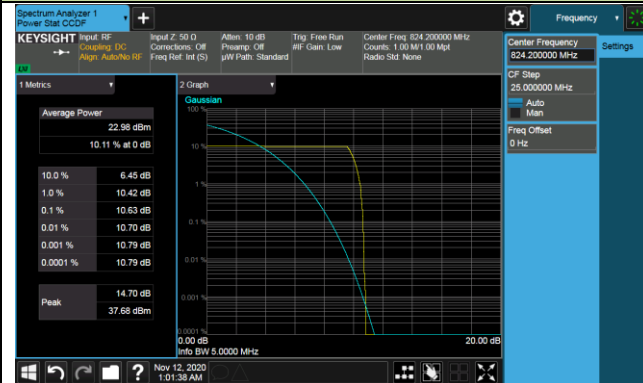

Channel 128 (824.2MHz)



Channel 251 (848.8MHz)

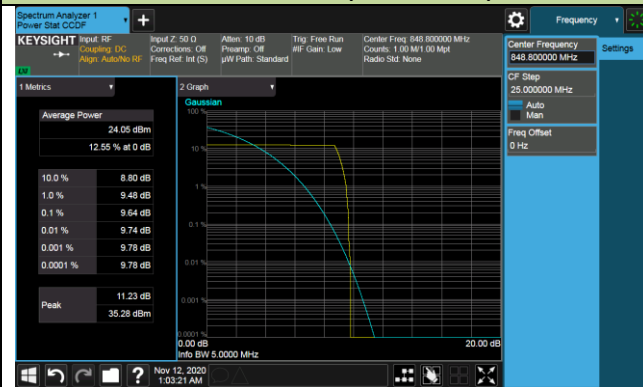

GPRS 1900 Peak-Average Ratio

Channel 512 (1850.2MHz)



Channel 661 (1880.0MHz)



Channel 810 (1909.8MHz)



EDGE 1900 Peak-Average Ratio

Channel 512 (1850.2MHz)



Channel 661 (1880.0MHz)




Channel 810 (1909.8MHz)




WCDMA Band II Peak-Average Ratio


Channel 9262 (1852.4MHz)

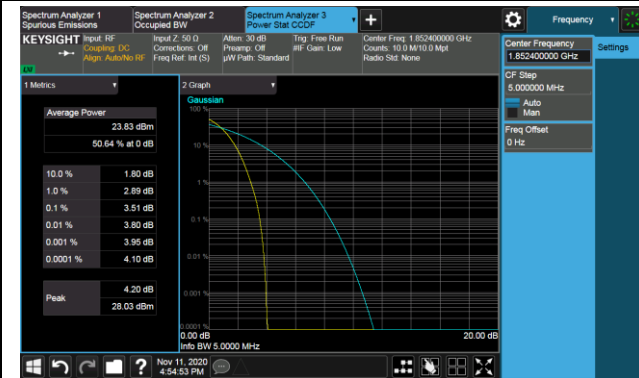

Channel 9400 (1880.0MHz)

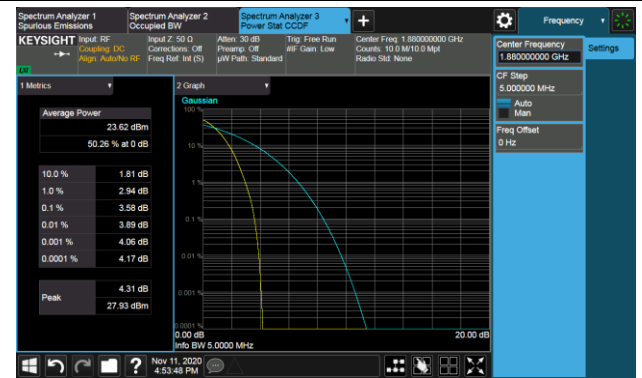


Channel 9538 (1907.6MHz)

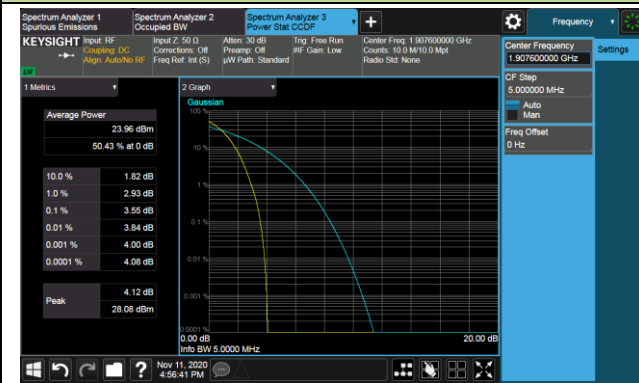

WCDMA Band IV Peak-Average Ratio


Channel 1312 (1712.4MHz)

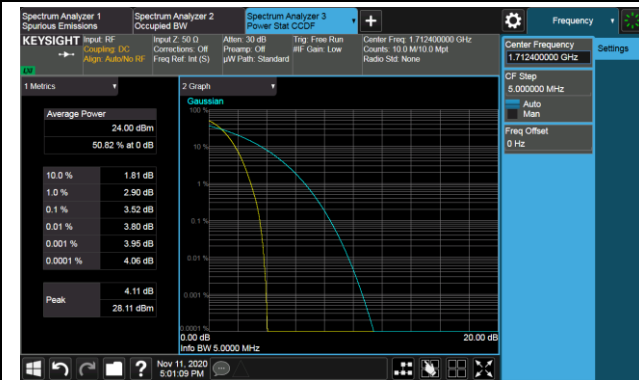

Channel 1413 (1732.6MHz)



Channel 1513 (1752.6MHz)

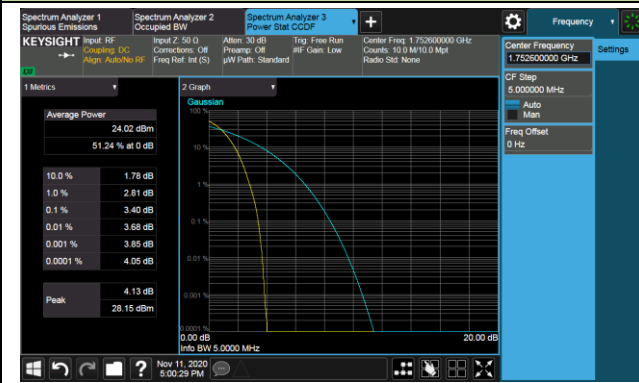

CMDA2000 BC1 Peak-Average Ratio


Channel 25 (1851.25MHz)



Channel 600 (1880.0MHz)



Channel 1175 (1908.75MHz)

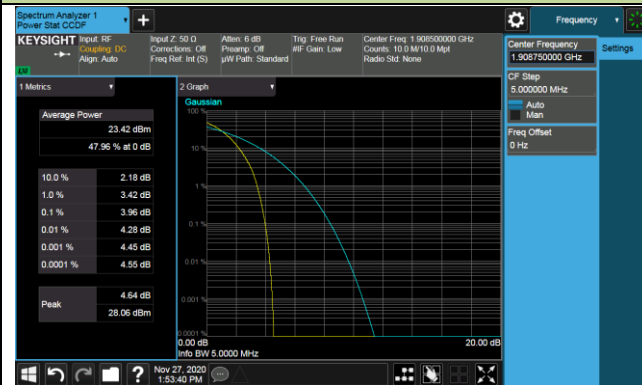

5.7. Conducted Spurious Emissions

5.7.1. Test Limit

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

5.7.2. Test Procedure Used


ANSI C63.26-2015 - Section 5.7

5.7.3. Test Setting

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW $\geq 3 \times$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.

To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.7.4. Test Setup

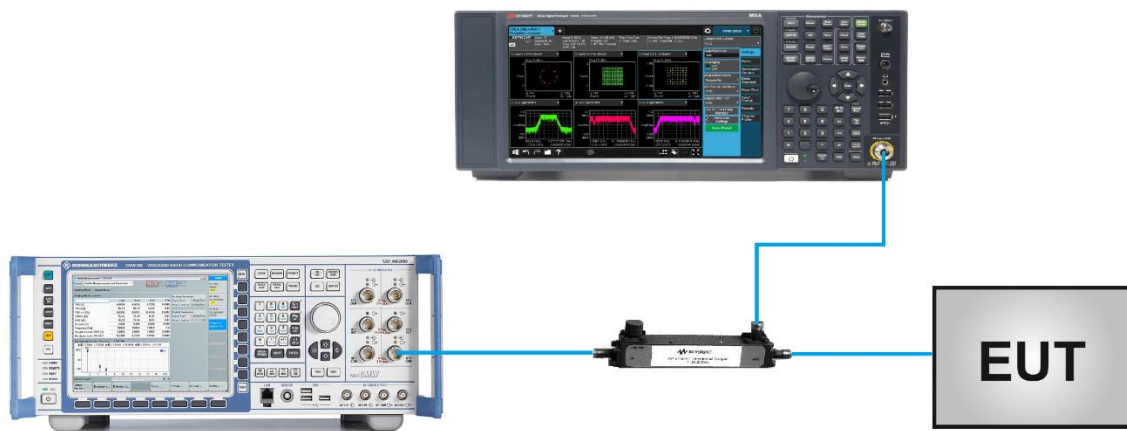


5.7.5.Test Result

Product	Mobile Computer	Test Engineer	Candy Luo
Test Date	2020/11/12	Test Site	SIP-SR6
Test Band	GPRS 850 / 1900	Test Result	Pass


Mode	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
GPRS 850	824.2	30 ~ 10000	-42.81	≤ -13.00	Pass
	836.4	30 ~ 10000	-44.39	≤ -13.00	Pass
	848.8	30 ~ 10000	-44.99	≤ -13.00	Pass
GPRS 1900	1850.2	30 ~ 20000	-44.73	≤ -13.00	Pass
	1880.0	30 ~ 20000	-42.67	≤ -13.00	Pass
	1909.8	30 ~ 20000	-44.42	≤ -13.00	Pass
EDGE 850	824.2	30 ~ 10000	-43.38	≤ -13.00	Pass
	836.4	30 ~ 10000	-44.43	≤ -13.00	Pass
	848.8	30 ~ 10000	-43.12	≤ -13.00	Pass
EDGE 1900	1850.2	30 ~ 20000	-43.90	≤ -13.00	Pass
	1880.0	30 ~ 20000	-40.79	≤ -13.00	Pass
	1909.8	30 ~ 20000	-43.88	≤ -13.00	Pass

GPRS850 Conducted Spurious Emission

Channel 128 (824.20MHz)

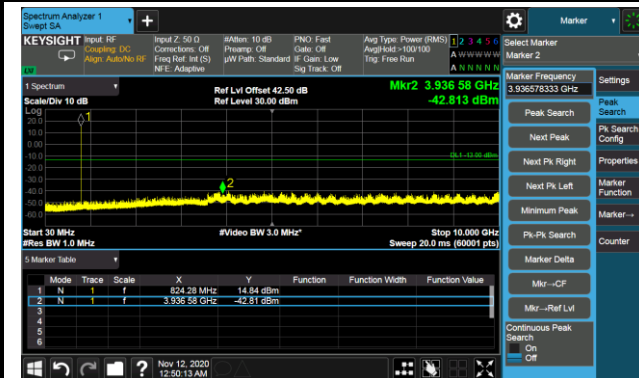

Channel 189 (836.40MHz)

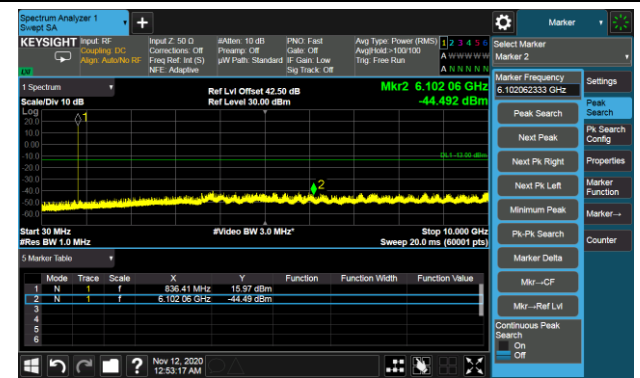


Channel 251 (848.80MHz)




GPRS1900 Conducted Spurious Emission


Channel 512 (1850.20MHz)

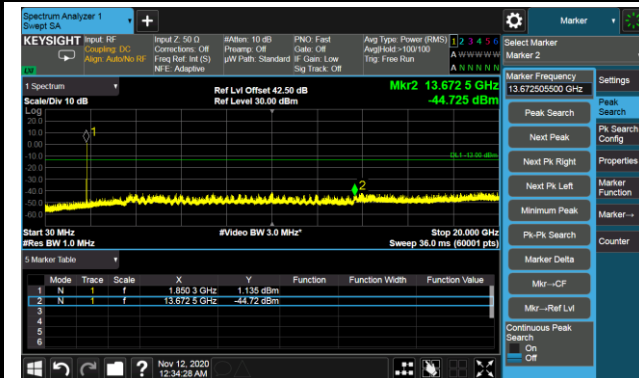

Channel 661 (1880.00MHz)

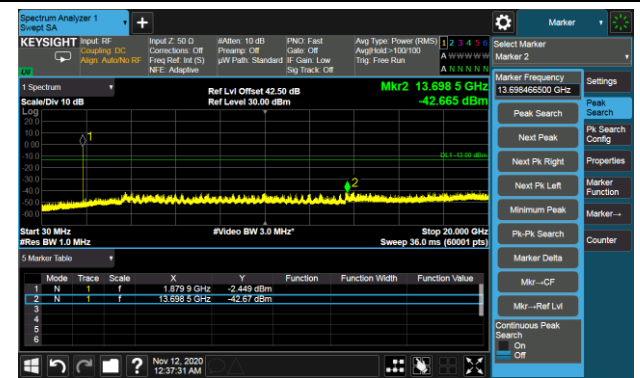


Channel 810 (1909.80MHz)

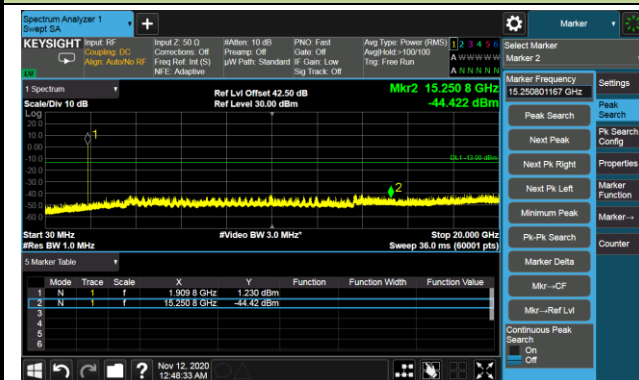


EDGE850 Conducted Spurious Emission


Channel 128 (824.20MHz)

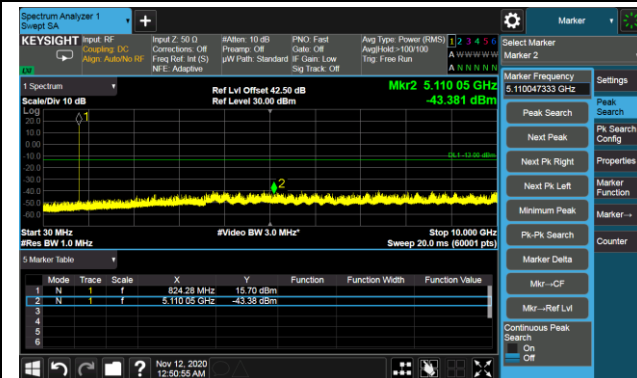

Channel 189 (836.40MHz)

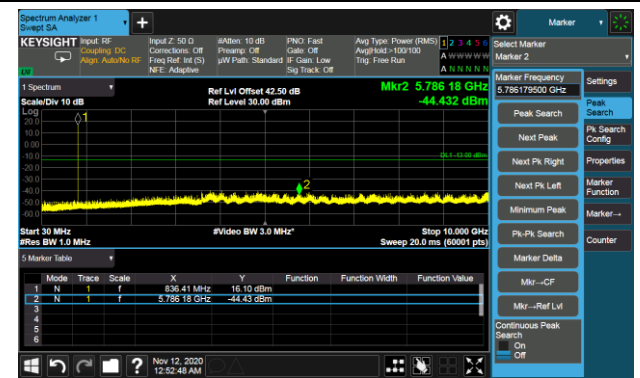


Channel 251 (848.80MHz)

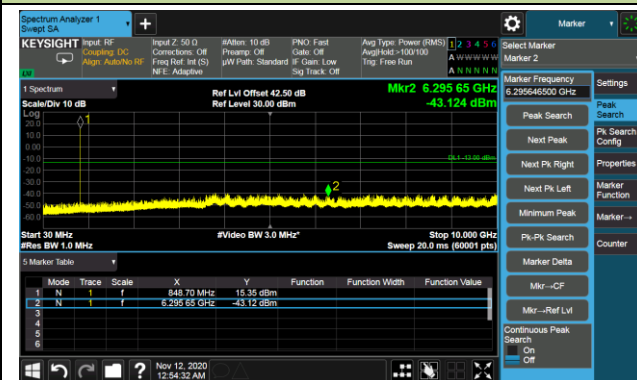


EDGE1900 Conducted Spurious Emission


Channel 512 (1850.20MHz)

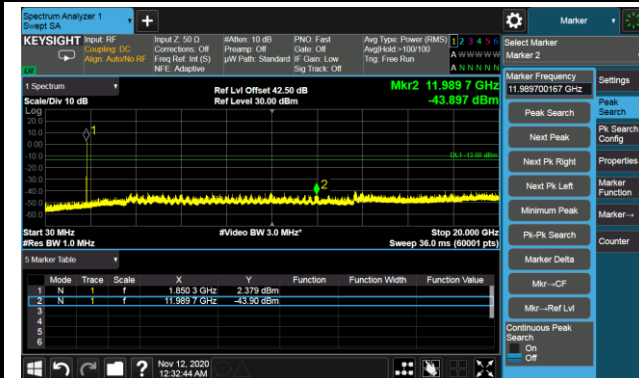

Channel 661 (1880.00MHz)

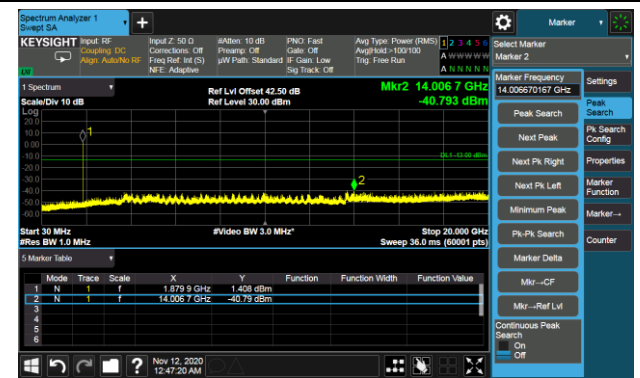

Channel 810 (1909.80MHz)

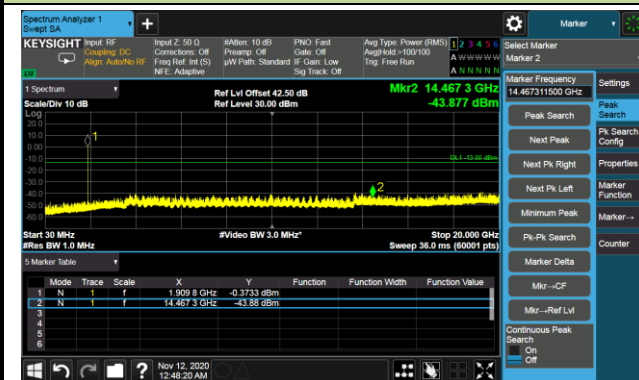


Product	Mobile Computer	Test Engineer	Candy Luo
Test Date	2020/11/23	Test Site	SIP-SR6
Test Band	Band II, IV, V	Test Result	Pass


Mode	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
WCDMA Band II	1852.4	30 ~ 20000	-54.66	≤ -13.00	Pass
	1880.0	30 ~ 20000	-53.52	≤ -13.00	Pass
	1907.6	30 ~ 20000	-53.56	≤ -13.00	Pass
WCDMA Band IV	1712.4	30 ~ 20000	-55.63	≤ -13.00	Pass
	1732.4	30 ~ 20000	-51.02	≤ -13.00	Pass
	1752.6	30 ~ 20000	-52.99	≤ -13.00	Pass
WCDMA Band V	826.4	30 ~ 10000	-50.13	≤ -13.00	Pass
	836.4	30 ~ 10000	-49.40	≤ -13.00	Pass
	846.6	30 ~ 10000	-50.75	≤ -13.00	Pass

WCDMA Band II

Channel 9262 (1852.4MHz)

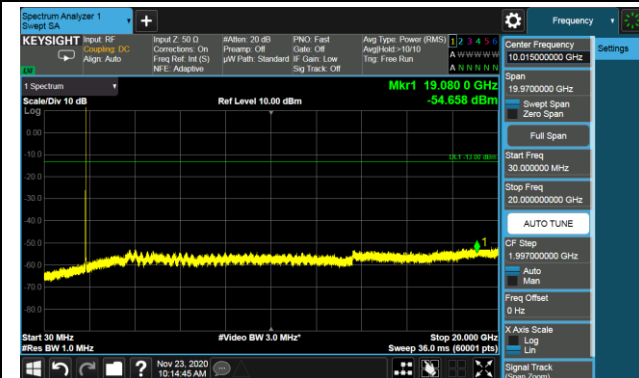

Channel 9400 (1880.0MHz)

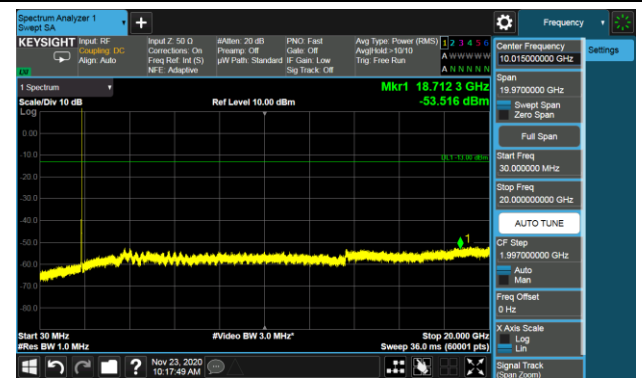


Channel 9538 (1907.6MHz)




WCDMA Band IV


Channel 1312 (1712.4MHz)

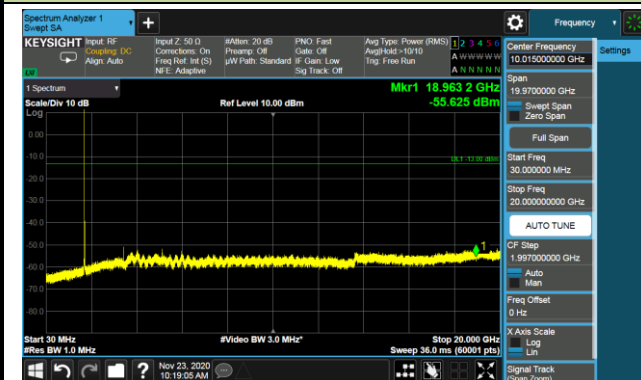

Channel 1413 (1732.6MHz)

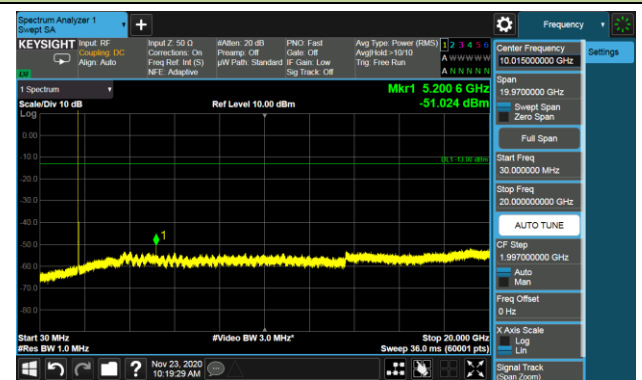

Channel 1513 (1752.6MHz)

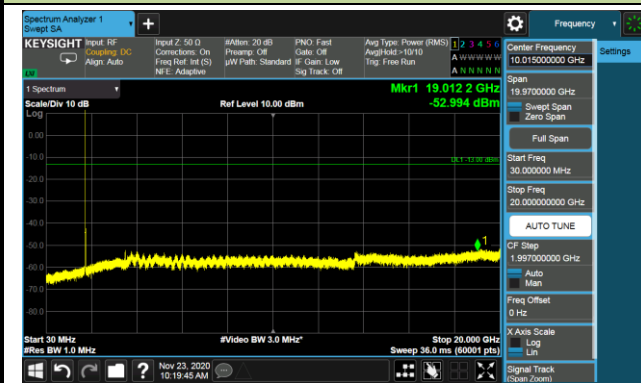

WCDMA Band V


Channel 4132 (826.4MHz)



Channel 4182 (836.4MHz)



Channel 4233 (846.6MHz)

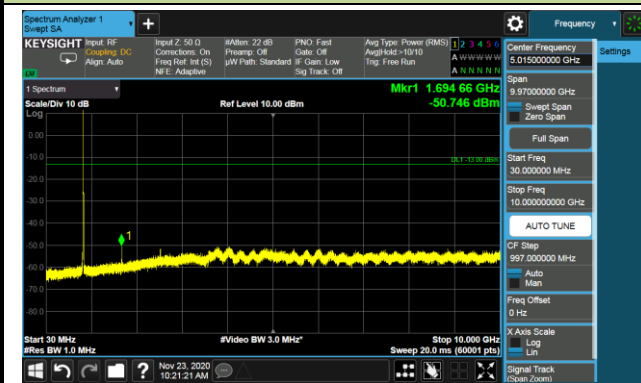


Product	Mobile Computer	Test Engineer	Candy Luo
Test Date	2020/11/27	Test Site	SIP-SR6
Test Band	CDMA2000 BC0, BC1	Test Result	Pass


Mode	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
CDMA2000 BC0	824.70	30 ~ 10000	-54.36	≤ -13.00	Pass
	836.52	30 ~ 10000	-53.82	≤ -13.00	Pass
	848.31	30 ~ 10000	-53.63	≤ -13.00	Pass
CDMA2000 BC1	1851.25	30 ~ 20000	-57.13	≤ -13.00	Pass
	1880.00	30 ~ 20000	-60.32	≤ -13.00	Pass
	1908.75	30 ~ 20000	-62.37	≤ -13.00	Pass

CDMA2000 BC0

Channel 1013 (824.7MHz)

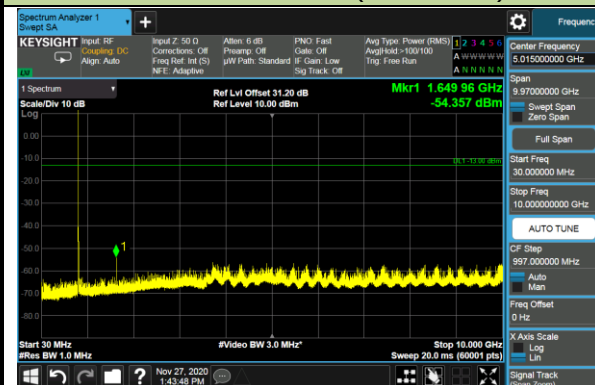

Channel 384 (836.52MHz)

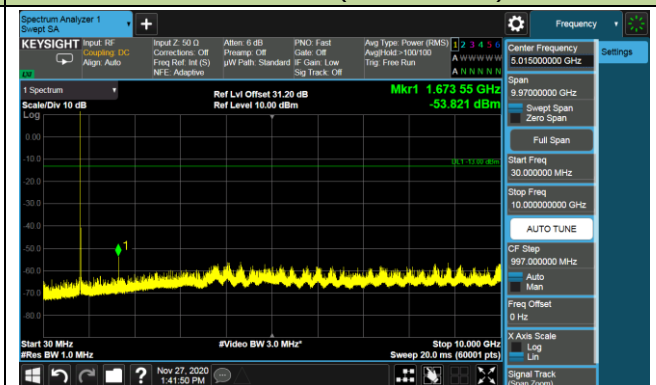


Channel 777 (848.31MHz)



CDMA2000 BC1

Channel 25(1851.25 MHz)

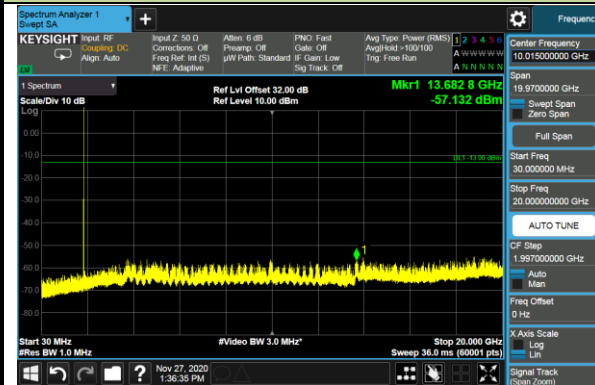

Channel 600(1880 MHz)



Channel 1175 (1908.75 MHz)



5.8. Radiated Spurious Emissions Measurements

5.8.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

$E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log D + 104.8$; where D is the measurement distance in meters. The emission limit equal to 82.3dB $\mu\text{V/m}$.

5.8.2. Test Procedure Used


ANSI C63.26-2015 - Section 5.2.7 & 5.5

5.8.3. Test Setting


1. RBW = 1MHz
2. VBW $\geq 3 \times$ RBW
3. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

5.8.4. Test Setup

Below 1GHz Test Setup:

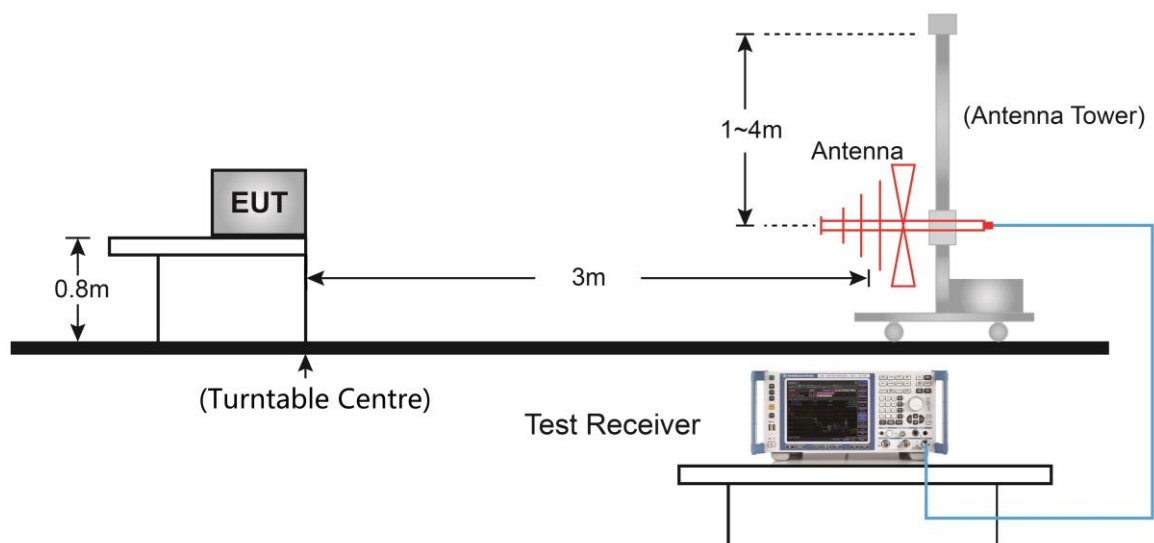

Above 1GHz Test Setup:

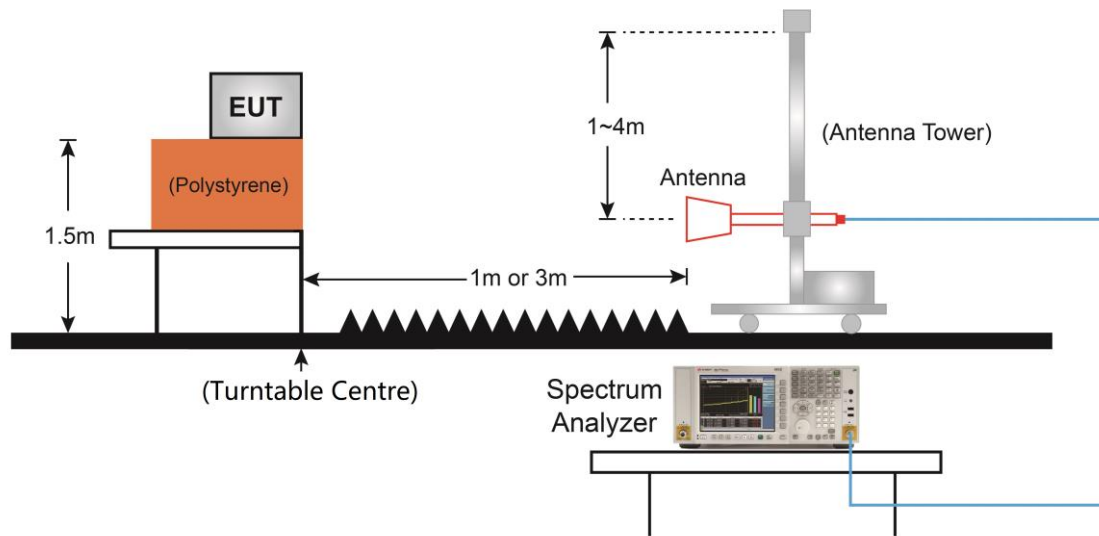

5.8.5.Test Result

Product	Mobile Computer	Test Site	WZ-AC2
Test Engineer	Jason Gao	Test Date	2020/11/18
Test Mode	GPRS 850		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Bottom CH 128 (824.2MHz)							
136.2	19.9	15.3	35.2	82.3	-47.1	Peak	Horizontal
197.8	15.1	19.1	34.3	82.3	-48.0	Peak	Horizontal
122.6	21.2	16.5	37.7	82.3	-44.6	Peak	Vertical
193.4	17.8	18.5	36.4	82.3	-45.9	Peak	Vertical
1646.0	68.9	-4.7	64.2	82.3	-18.1	Peak	Horizontal
2470.5	58.7	-1.6	57.2	82.3	-25.1	Peak	Horizontal
1646.0	60.6	-4.7	55.9	82.3	-26.4	Peak	Vertical
2470.5	60.4	-1.6	58.9	82.3	-23.4	Peak	Vertical
Middle CH 189 (836.4MHz)							
123.1	18.9	16.5	35.4	82.3	-46.9	Peak	Horizontal
190.1	17.2	18.0	35.2	82.3	-47.1	Peak	Horizontal
125.1	19.9	16.3	36.2	82.3	-46.1	Peak	Vertical
192.5	18.4	18.4	36.7	82.3	-45.6	Peak	Vertical
1671.5	64.1	-4.9	59.2	82.3	-23.1	Peak	Horizontal
2513.0	58.2	-1.6	56.6	82.3	-25.7	Peak	Horizontal
1671.5	61.5	-4.9	56.7	82.3	-25.6	Peak	Vertical
2513.0	56.9	-1.6	55.3	82.3	-27.0	Peak	Vertical
Top CH 251 (848.8MHz)							
123.1	19.1	16.5	35.5	82.3	-46.8	Peak	Horizontal
192.5	17.3	18.4	35.6	82.3	-46.7	Peak	Horizontal
124.1	19.8	16.4	36.1	82.3	-46.2	Peak	Vertical
192.5	18.9	18.4	37.2	82.3	-45.1	Peak	Vertical
1697.0	59.7	-4.6	55.1	82.3	-27.2	Peak	Horizontal
1892.5	46.7	-4.1	42.6	82.3	-39.7	Peak	Horizontal
1697.0	57.8	-4.6	53.3	82.3	-29.0	Peak	Vertical
1901.0	46.9	-4.1	42.8	82.3	-39.5	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).							

Product	Mobile Computer	Test Site	WZ-AC2
Test Engineer	Jason Gao	Test Date	2020/11/18
Test Mode	GPRS 1900		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Bottom CH 512 (1850.2MHz)							
124.6	22.7	16.3	39.0	82.3	-43.3	Peak	Horizontal
188.1	19.7	17.8	37.5	82.3	-44.8	Peak	Horizontal
122.6	19.5	16.5	36.0	82.3	-46.3	Peak	Vertical
201.2	17.0	18.8	35.8	82.3	-46.5	Peak	Vertical
3703.0	40.3	0.2	40.5	82.3	-41.8	Peak	Horizontal
5547.5	39.5	4.0	43.5	82.3	-38.8	Peak	Horizontal
3703.0	42.5	0.2	42.6	82.3	-39.7	Peak	Vertical
5547.5	37.6	4.0	41.6	82.3	-40.7	Peak	Vertical
Middle CH 661 (1880.0MHz)							
123.1	22.8	16.5	39.3	82.3	-43.0	Peak	Horizontal
189.1	19.2	17.9	37.1	82.3	-45.2	Peak	Horizontal
129.9	20.0	15.8	35.8	82.3	-46.5	Peak	Vertical
196.4	17.9	19.0	37.0	82.3	-45.3	Peak	Vertical
3762.5	41.6	0.4	42.0	82.3	-40.3	Peak	Horizontal
5641.0	42.2	4.7	46.8	82.3	-35.5	Peak	Horizontal
3762.5	42.4	0.4	42.8	82.3	-39.5	Peak	Vertical
5641.0	39.6	4.7	44.3	82.3	-38.0	Peak	Vertical
Top CH 810 (1909.8MHz)							
131.4	20.4	15.7	36.1	82.3	-46.2	Peak	Horizontal
187.1	19.4	17.7	37.0	82.3	-45.3	Peak	Horizontal
125.1	20.9	16.3	37.2	82.3	-45.1	Peak	Vertical
193.9	20.0	18.6	38.6	82.3	-43.7	Peak	Vertical
3822.0	39.3	0.3	39.6	82.3	-42.7	Peak	Horizontal
5726.0	40.4	4.6	45.1	82.3	-37.2	Peak	Horizontal
3822.0	38.6	0.3	38.9	82.3	-43.4	Peak	Vertical
5726.0	38.1	4.6	42.7	82.3	-39.6	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).							

Product	Mobile Computer	Test Site	WZ-AC2
Test Engineer	Jason Gao	Test Date	2020/11/18
Test Mode	WCDMA Band II		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Bottom CH 9262 (1852.4MHz)							
132.3	19.8	15.6	35.4	82.3	-46.9	Peak	Horizontal
187.6	19.1	17.7	36.8	82.3	-45.5	Peak	Horizontal
130.9	21.1	15.7	36.9	82.3	-45.4	Peak	Vertical
193.9	19.1	18.6	37.8	82.3	-44.5	Peak	Vertical
7247.5	34.7	10.8	45.5	82.3	-36.8	Peak	Horizontal
11642.0	33.1	17.7	50.7	82.3	-31.6	Peak	Horizontal
7587.5	35.2	11.0	46.2	82.3	-36.1	Peak	Vertical
13869.0	32.5	21.9	54.4	82.3	-27.9	Peak	Vertical
Middle CH 9400 (1880.0MHz)							
131.4	20.3	15.7	35.9	82.3	-46.4	Peak	Horizontal
187.6	19.2	17.7	36.9	82.3	-45.4	Peak	Horizontal
124.6	21.1	16.3	37.5	82.3	-44.8	Peak	Vertical
188.6	20.1	17.8	37.9	82.3	-44.4	Peak	Vertical
6703.5	35.2	8.4	43.6	82.3	-38.7	Peak	Horizontal
14727.5	33.9	21.3	55.2	82.3	-27.1	Peak	Horizontal
7953.0	35.4	11.0	46.4	82.3	-35.9	Peak	Vertical
13945.5	32.6	22.0	54.6	82.3	-27.7	Peak	Vertical
Top CH 9538 (1907.6MHz)							
131.9	20.2	15.6	35.8	82.3	-46.5	Peak	Horizontal
188.1	18.8	17.8	36.6	82.3	-45.7	Peak	Horizontal
129.9	22.0	15.8	37.9	82.3	-44.4	Peak	Vertical
194.4	19.0	18.7	37.7	82.3	-44.6	Peak	Vertical
7315.5	34.4	11.1	45.5	82.3	-36.8	Peak	Horizontal
13894.5	32.1	22.2	54.3	82.3	-28.0	Peak	Horizontal
4170.5	37.7	1.6	39.4	82.3	-42.9	Peak	Vertical
7162.5	35.0	10.5	45.5	82.3	-36.8	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).

Product	Mobile Computer	Test Site	WZ-AC2
Test Engineer	Jason Gao	Test Date	2020/11/18
Test Mode	WCDMA Band IV		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Bottom CH 1312 (1712.4MHz)							
133.3	20.2	15.5	35.7	82.3	-46.6	Peak	Horizontal
186.7	19.2	17.6	36.8	82.3	-45.5	Peak	Horizontal
130.9	21.2	15.7	36.9	82.3	-45.4	Peak	Vertical
187.1	20.4	17.7	38.0	82.3	-44.3	Peak	Vertical
8157.0	34.9	10.9	45.8	82.3	-36.5	Peak	Horizontal
13835.0	32.0	22.2	54.3	82.3	-28.0	Peak	Horizontal
8080.5	35.0	11.5	46.5	82.3	-35.8	Peak	Vertical
13869.0	32.6	21.9	54.5	82.3	-27.8	Peak	Vertical
Middle CH 1413 (1732.6MHz)							
124.6	22.6	16.3	39.0	82.3	-43.3	Peak	Horizontal
188.6	19.3	17.8	37.2	82.3	-45.1	Peak	Horizontal
122.6	19.2	16.5	35.7	82.3	-46.6	Peak	Vertical
203.1	17.0	18.6	35.6	82.3	-46.7	Peak	Vertical
6729.0	36.0	8.3	44.3	82.3	-38.0	Peak	Horizontal
11693.0	32.0	18.5	50.5	82.3	-31.8	Peak	Horizontal
5037.5	36.1	4.0	40.1	82.3	-42.2	Peak	Vertical
12228.5	31.9	19.2	51.1	82.3	-31.2	Peak	Vertical
Top CH 1513 (1752.6MHz)							
123.1	22.8	16.5	39.2	82.3	-43.1	Peak	Horizontal
188.1	19.8	17.8	37.6	82.3	-44.7	Peak	Horizontal
130.9	20.0	15.7	35.8	82.3	-46.5	Peak	Vertical
201.7	17.1	18.8	35.9	82.3	-46.4	Peak	Vertical
8004.0	34.3	11.5	45.8	82.3	-36.5	Peak	Horizontal
10809.0	33.5	16.6	50.1	82.3	-32.2	Peak	Horizontal
7247.5	34.6	10.8	45.4	82.3	-36.9	Peak	Vertical
11829.0	31.8	18.4	50.2	82.3	-32.1	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).							

Product	Mobile Computer	Test Site	WZ-AC2
Test Engineer	Jason Gao	Test Date	2020/11/18
Test Mode	WCDMA Band V		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Bottom CH 4132 (826.4MHz)							
121.7	13.0	16.6	29.6	82.3	-52.7	Peak	Horizontal
183.3	12.0	17.2	29.2	82.3	-53.1	Peak	Horizontal
45.5	12.0	20.5	32.5	82.3	-49.8	Peak	Vertical
198.3	13.8	19.1	32.9	82.3	-49.4	Peak	Vertical
3660.5	38.5	0.4	39.0	82.3	-43.3	Peak	Horizontal
8004.0	35.0	11.5	46.5	82.3	-35.8	Peak	Horizontal
3660.5	39.3	0.4	39.7	82.3	-42.6	Peak	Vertical
8242.0	36.0	11.0	47.0	82.3	-35.3	Peak	Vertical
Middle CH 4183 (836.6MHz)							
133.8	11.1	15.4	26.6	82.3	-55.7	Peak	Horizontal
194.9	8.5	18.8	27.3	82.3	-55.0	Peak	Horizontal
38.7	13.6	19.1	32.6	82.3	-49.7	Peak	Vertical
182.3	17.7	17.1	34.9	82.3	-47.4	Peak	Vertical
7222.0	34.0	11.2	45.1	82.3	-37.2	Peak	Horizontal
11939.5	33.1	18.5	51.7	82.3	-30.6	Peak	Horizontal
3074.0	39.8	-1.1	38.7	82.3	-43.6	Peak	Vertical
7477.0	35.1	10.8	45.9	82.3	-36.4	Peak	Vertical
Top CH 4233 (846.6MHz)							
120.7	13.5	16.7	30.2	82.3	-52.1	Peak	Horizontal
182.8	11.5	17.2	28.7	82.3	-53.6	Peak	Horizontal
45.5	11.8	20.5	32.3	82.3	-50.0	Peak	Vertical
184.2	13.2	17.3	30.5	82.3	-51.8	Peak	Vertical
8250.5	35.4	10.9	46.3	82.3	-36.0	Peak	Horizontal
14736.0	34.1	21.2	55.3	82.3	-27.0	Peak	Horizontal
4765.5	36.3	3.5	39.8	82.3	-42.5	Peak	Vertical
8607.5	34.8	11.9	46.7	82.3	-35.6	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).							

Product	Mobile Computer	Test Site	WZ-AC2
Test Engineer	Antony Yang	Test Date	2020/11/18
Test Mode	CDMA2000 BC0		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Bottom CH 1013 (824.7MHz)							
184.2	17.4	17.3	34.7	82.3	-47.6	Peak	Horizontal
316.2	6.0	21.4	27.4	82.3	-54.9	Peak	Horizontal
135.7	16.4	15.3	31.7	82.3	-50.6	Peak	Vertical
184.2	13.3	17.3	30.6	82.3	-51.7	Peak	Vertical
4663.5	33.8	4.1	37.9	82.3	-44.4	Peak	Horizontal
9551.0	30.5	14.9	45.4	82.3	-36.9	Peak	Horizontal
7154.0	31.0	11.7	42.7	82.3	-39.6	Peak	Vertical
15271.5	30.1	22.7	52.8	82.3	-29.5	Peak	Vertical
Middle CH 384 (836.52MHz)							
46.0	3.1	20.5	23.6	82.3	-58.7	Peak	Horizontal
183.7	18.2	17.3	35.5	82.3	-46.8	Peak	Horizontal
44.1	11.9	20.5	32.4	82.3	-49.9	Peak	Vertical
132.8	18.5	15.5	34.0	82.3	-48.3	Peak	Vertical
6525.0	31.1	9.0	40.1	82.3	-42.2	Peak	Horizontal
11514.5	28.8	19.3	48.1	82.3	-34.2	Peak	Horizontal
5088.5	34.3	4.4	38.7	82.3	-43.6	Peak	Vertical
10579.5	28.6	18.0	46.6	82.3	-35.7	Peak	Vertical
Top CH 777 (848.31MHz)							
123.6	16.1	16.4	32.5	82.3	-49.8	Peak	Horizontal
194.4	16.8	18.7	35.5	82.3	-46.8	Peak	Horizontal
44.1	11.3	20.5	31.8	82.3	-50.5	Peak	Vertical
136.2	18.7	15.3	34.0	82.3	-48.3	Peak	Vertical
5063.0	33.6	4.7	38.3	82.3	-44.0	Peak	Horizontal
10282.0	30.0	17.2	47.2	82.3	-35.1	Peak	Horizontal
7188.0	31.5	11.9	43.4	82.3	-38.9	Peak	Vertical
12211.5	28.6	21.0	49.6	82.3	-32.7	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).							

Product	Mobile Computer	Test Site	WZ-AC2
Test Engineer	Antony Yang	Test Date	2020/11/18
Test Mode	CDMA2000 BC1		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Bottom CH 25 (1851.25MHz)							
187.6	18.7	17.7	36.4	82.3	-45.9	Peak	Horizontal
521.3	3.8	25.4	29.2	82.3	-53.1	Peak	Horizontal
187.6	18.7	17.7	36.4	82.3	-45.9	Peak	Vertical
521.3	3.8	25.4	29.2	82.3	-53.1	Peak	Vertical
3703.0	37.7	1.0	38.7	82.3	-43.6	Peak	Horizontal
9270.5	31.3	15.3	46.6	82.3	-35.7	Peak	Horizontal
6091.5	32.4	7.3	39.7	82.3	-42.6	Peak	Vertical
10290.5	28.9	17.4	46.3	82.3	-36.0	Peak	Vertical
Middle CH 600 (1880MHz)							
187.6	19.7	17.7	37.4	82.3	-44.9	Peak	Horizontal
642.6	3.1	27.6	30.7	82.3	-51.6	Peak	Horizontal
131.4	18.7	15.7	34.4	82.3	-47.9	Peak	Vertical
920.9	4.0	31.7	35.7	82.3	-46.6	Peak	Vertical
6635.5	32.0	9.2	41.2	82.3	-41.1	Peak	Horizontal
11149.0	29.2	18.1	47.3	82.3	-35.0	Peak	Horizontal
7383.5	31.3	12.3	43.6	82.3	-38.7	Peak	Vertical
12211.5	29.0	21.0	50.0	82.3	-32.3	Peak	Vertical
Top CH 1175 (1908.75MHz)							
188.1	18.7	17.8	36.5	82.3	-45.8	Peak	Horizontal
676.0	3.0	28.3	31.3	82.3	-51.0	Peak	Horizontal
135.7	18.7	15.3	34.0	82.3	-48.3	Peak	Vertical
970.9	3.7	31.7	35.4	82.3	-46.9	Peak	Vertical
4893.0	33.9	4.1	38.0	82.3	-44.3	Peak	Horizontal
14268.5	26.8	24.6	51.4	82.3	-30.9	Peak	Horizontal
7927.5	31.4	12.2	43.6	82.3	-38.7	Peak	Vertical
11514.5	29.1	19.3	48.4	82.3	-33.9	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).							

6. CONCLUSION

The data collected relate only the item(s) tested and show that unit is compliance with FCC Rules.

The End

Appendix A - Test Setup Photograph

Refer to “2010RSU078-UT” file.

Appendix B - EUT Photograph

Refer to “2010RSU078-UE” file.