



20MHz Channel Bandwidth

Low CH.

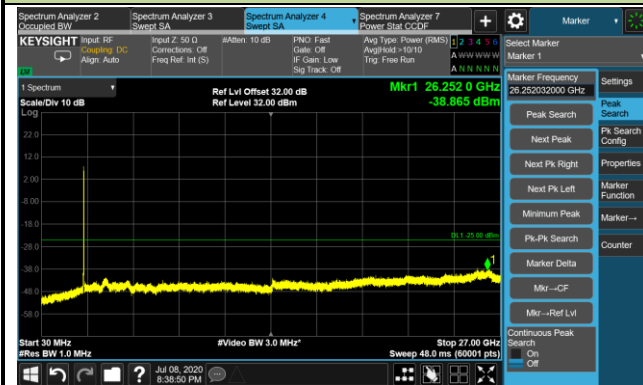


Mid CH.

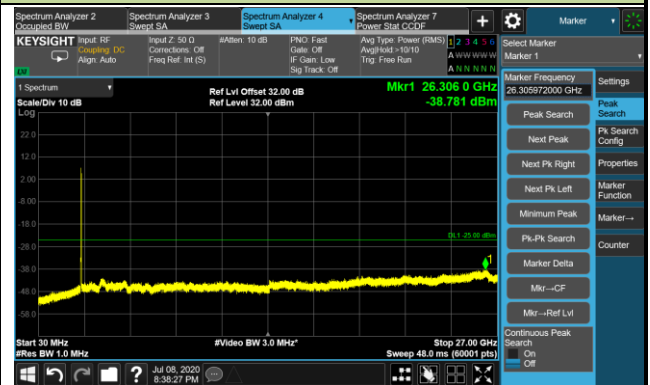



High CH.




Product	Tablet	Test Site	SR5
Test Engineer	Candy Luo	Test Date	2020/07/8
Test Band	Band 12		
Test Result	Pass		

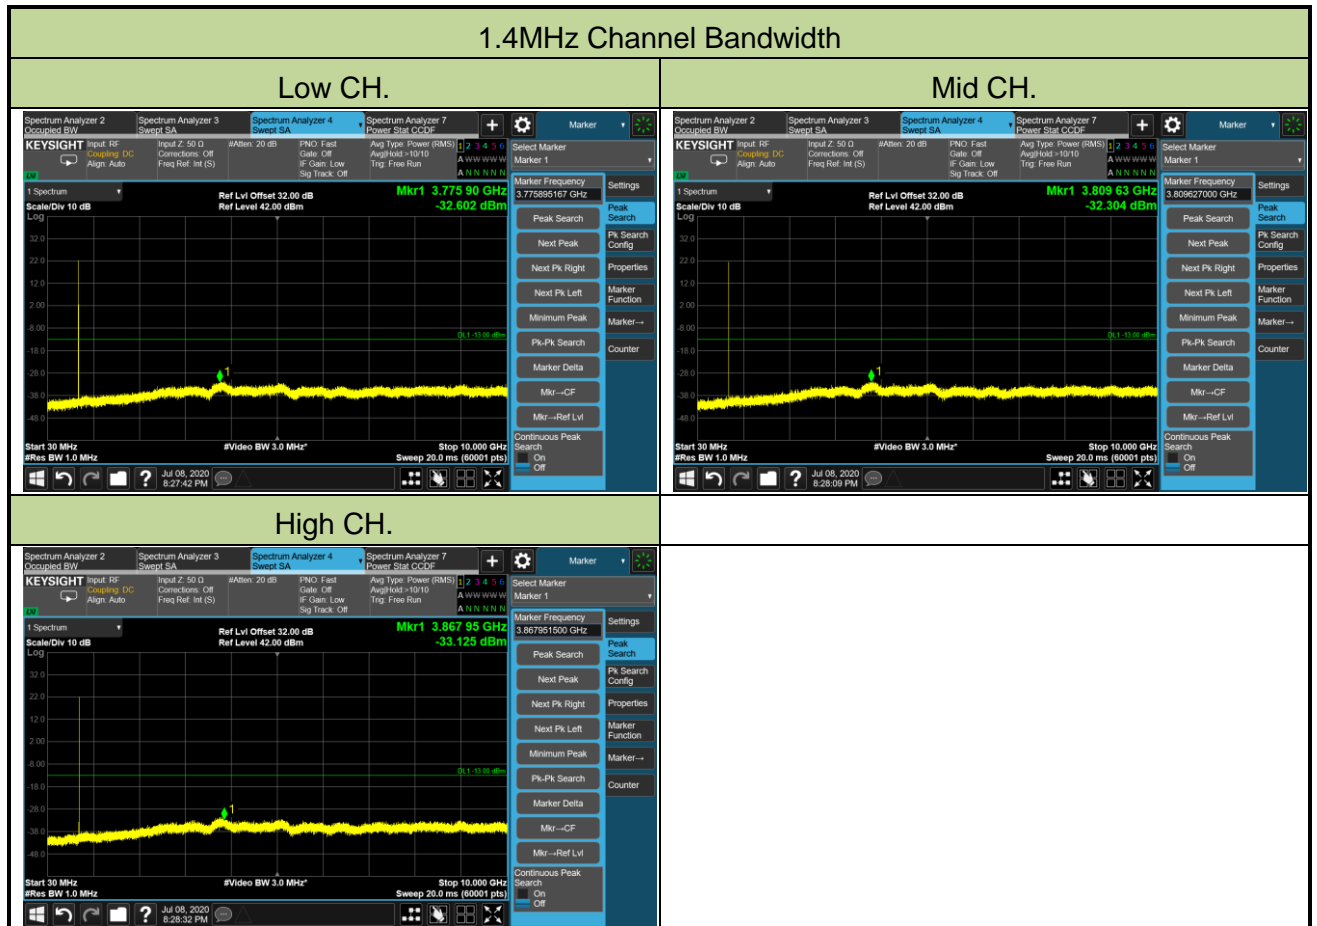


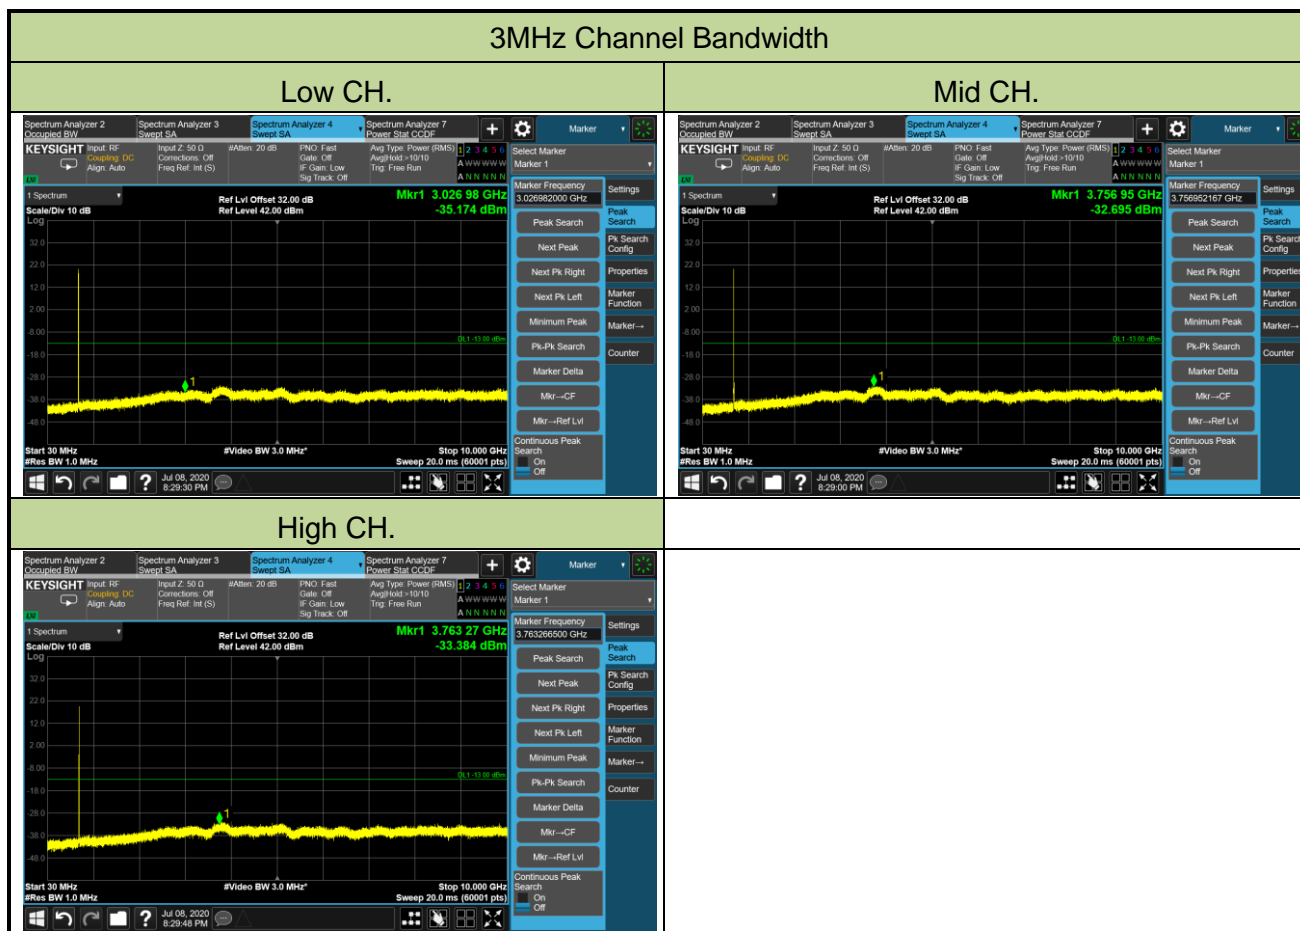

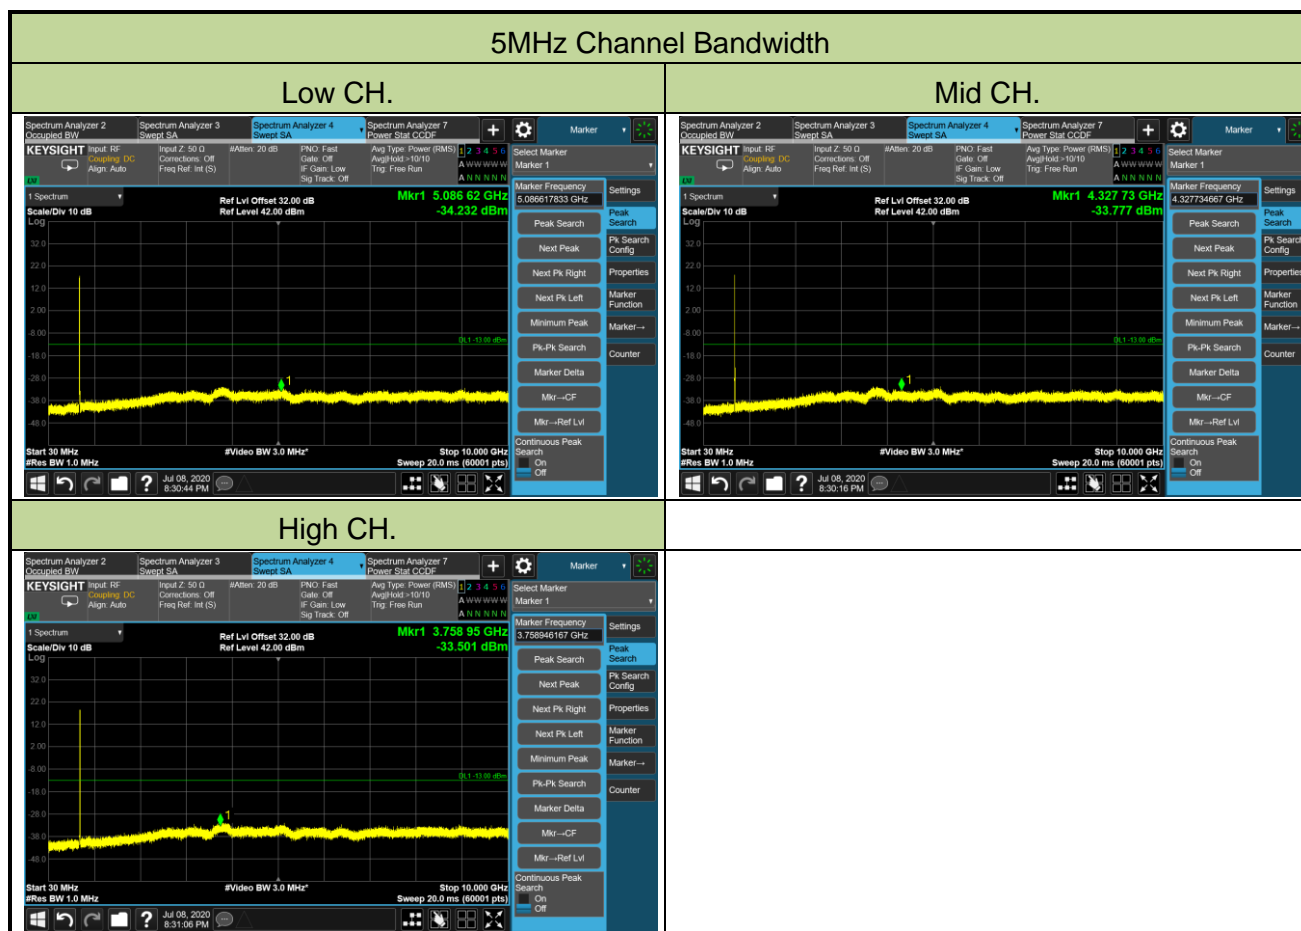

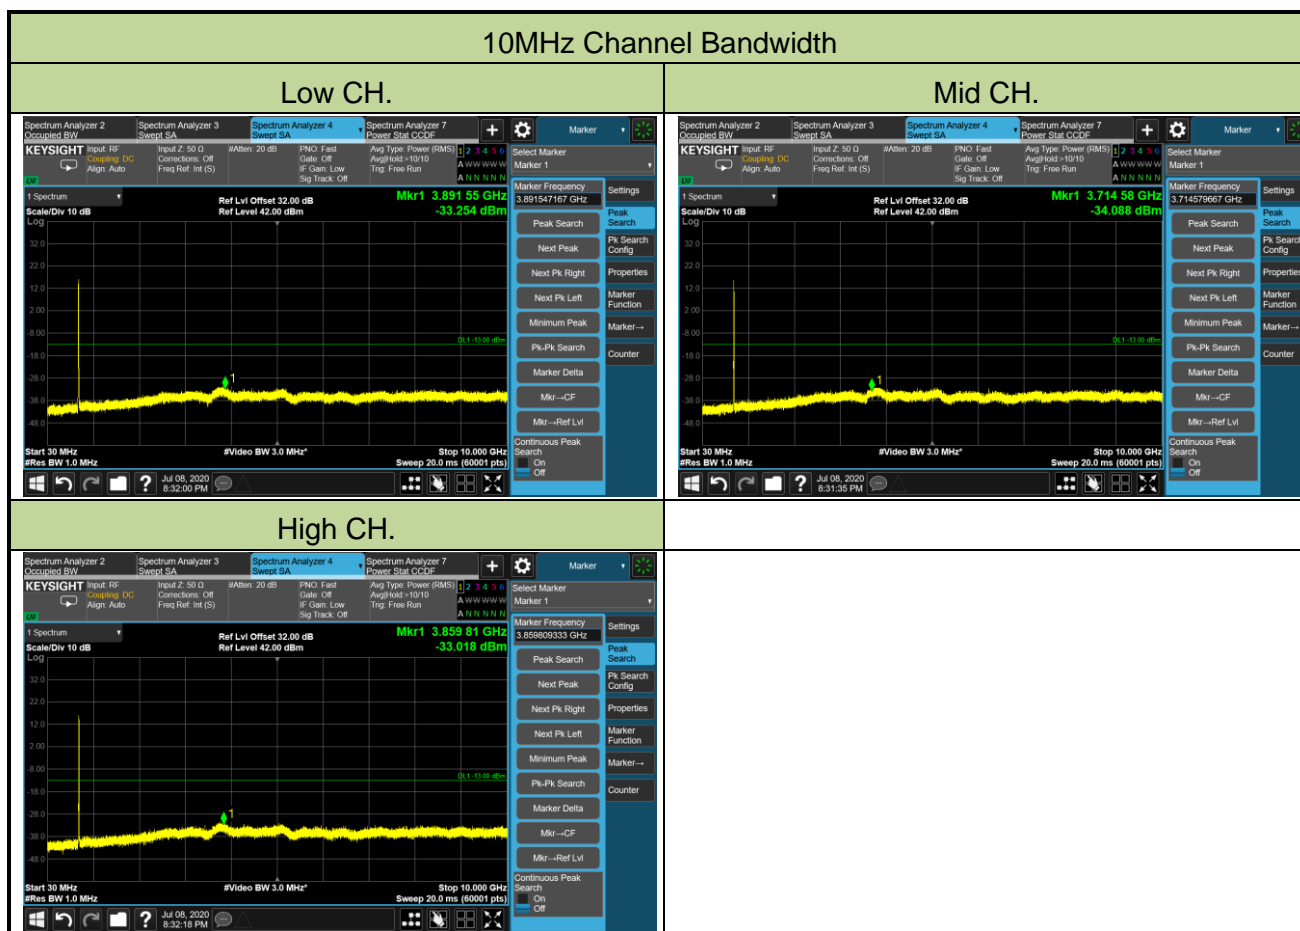


Product	Tablet	Test Site	SR5
Test Engineer	Candy Luo	Test Date	2020/07/09
Test Band	Band 13		
Test Result	Pass		

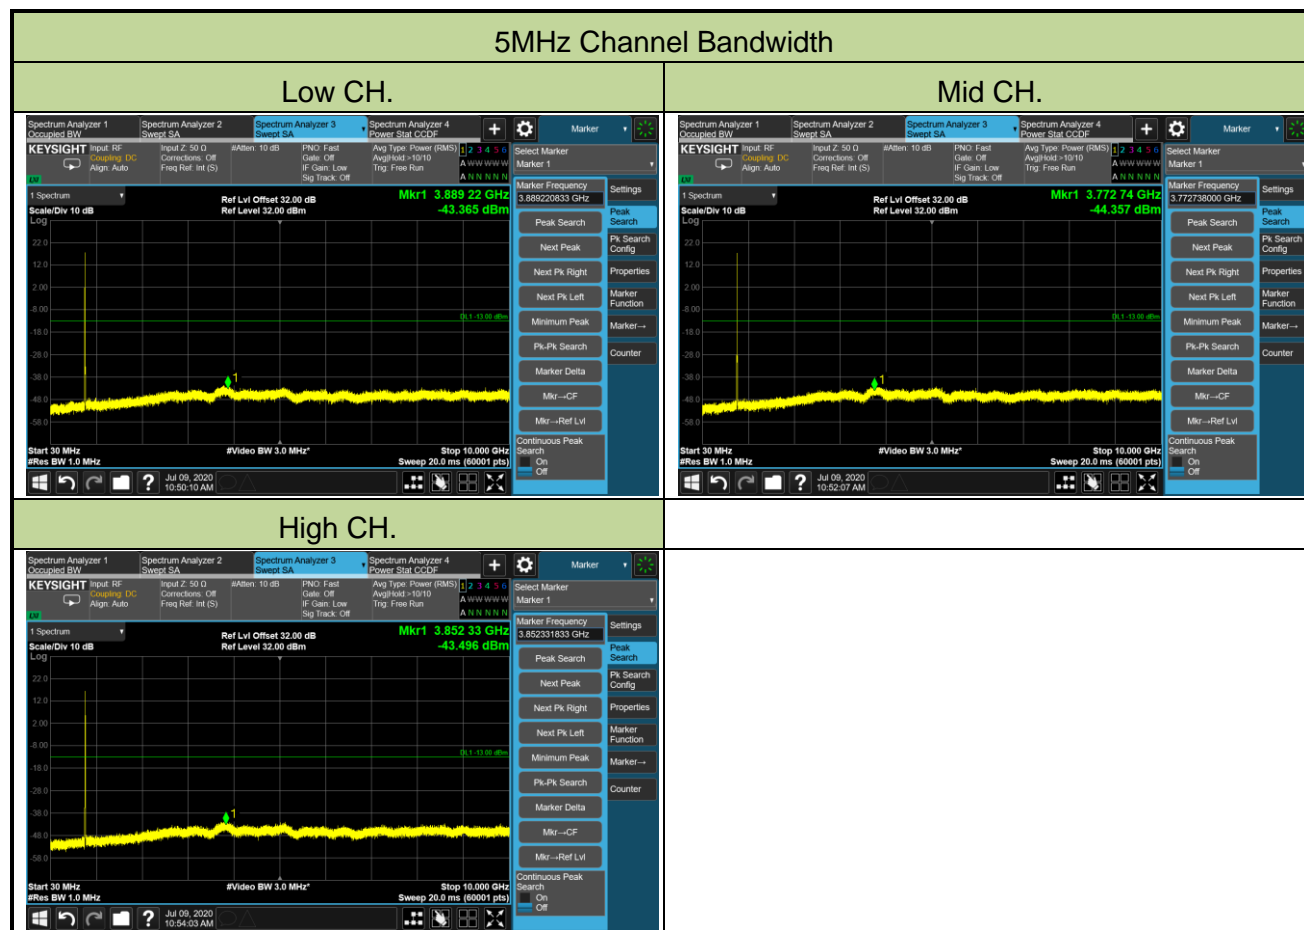


10MHz Channel Bandwidth


Low CH.

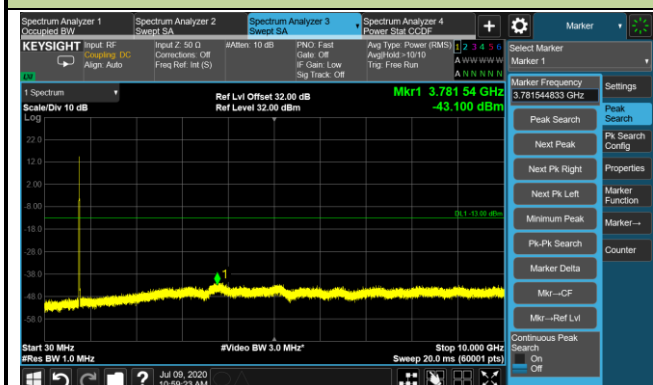


Mid CH.

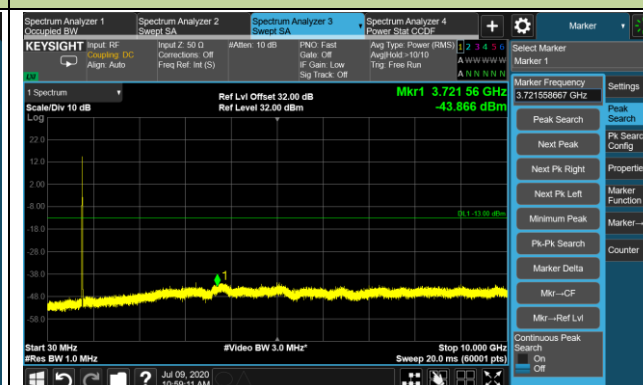


High CH.

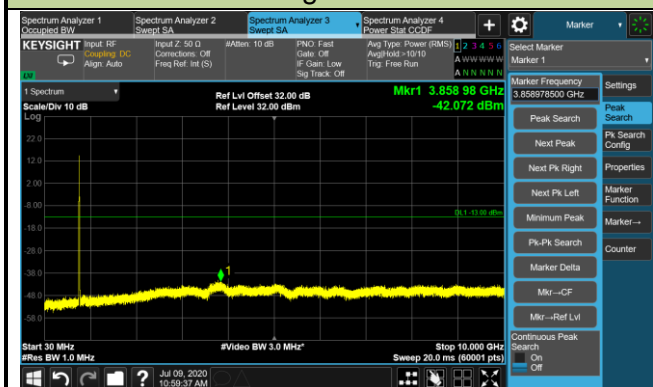



Product	Tablet	Test Site	SR5
Test Engineer	Candy Luo	Test Date	2020/07/09
Test Band	Band 17		
Test Result	Pass		

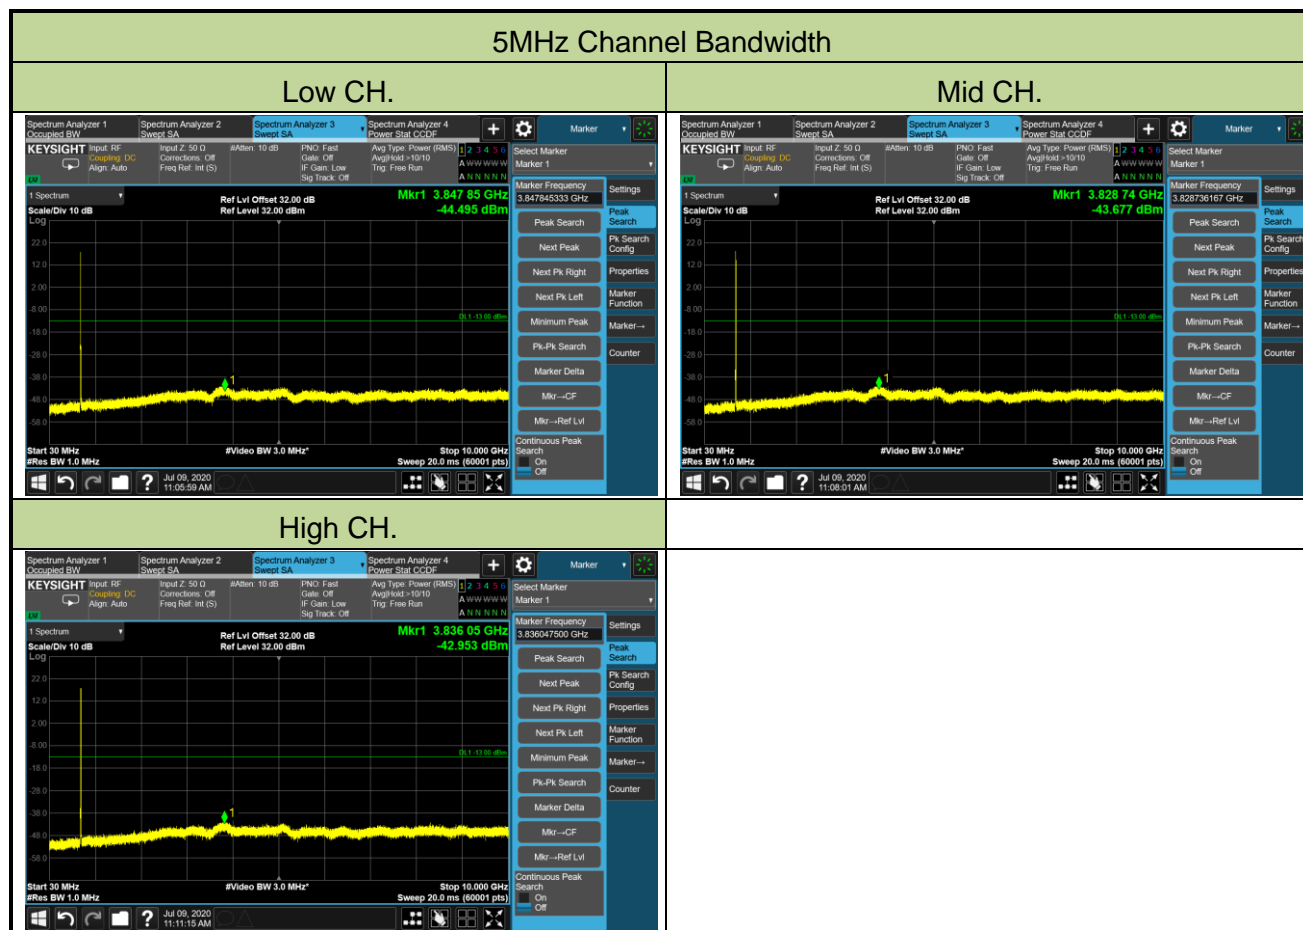


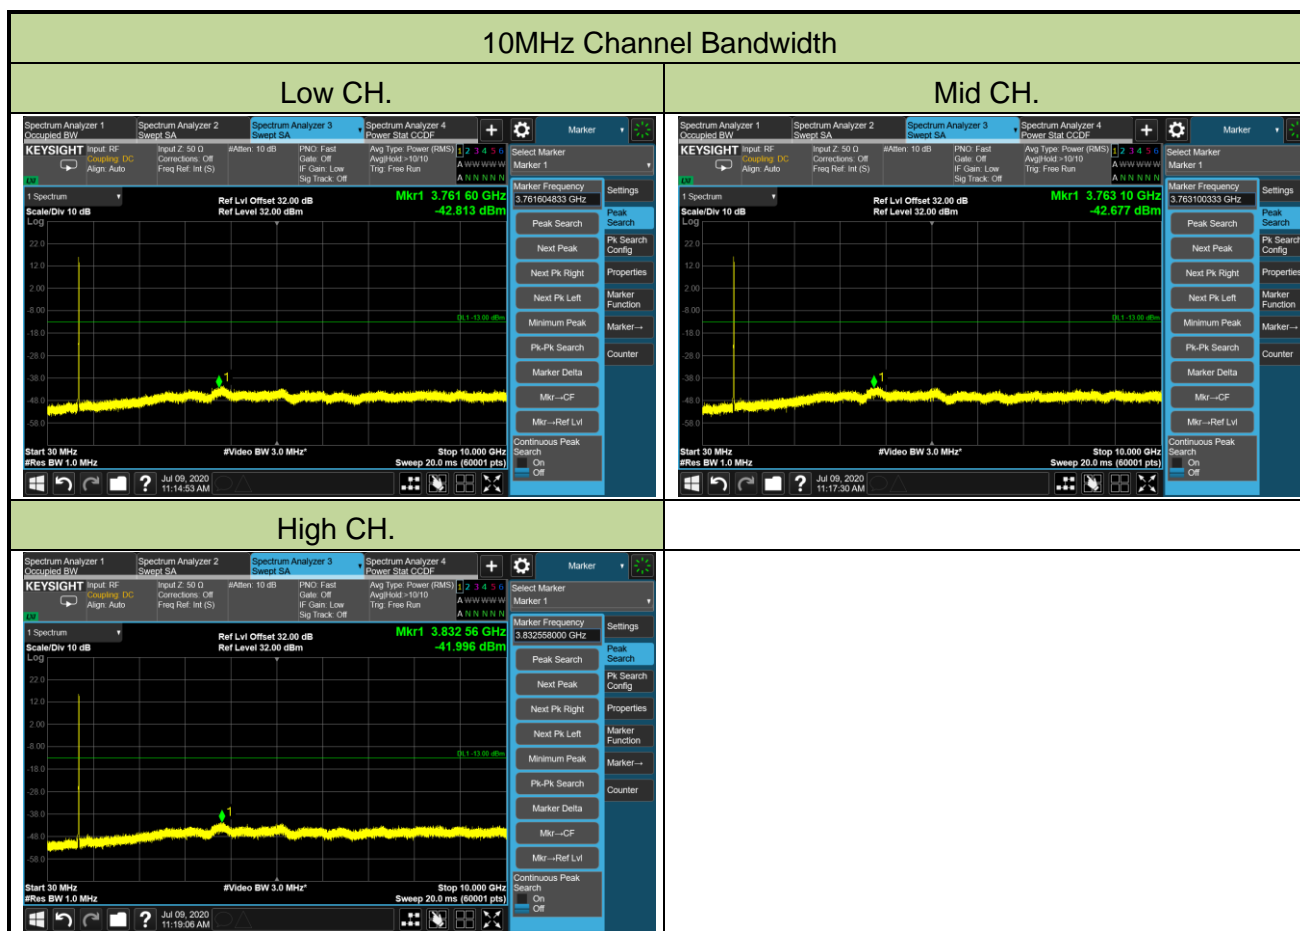


Product	Tablet	Test Site	SR5
Test Engineer	Candy Luo	Test Date	2020/07/09
Test Band	Band 38		
Test Result	Pass		

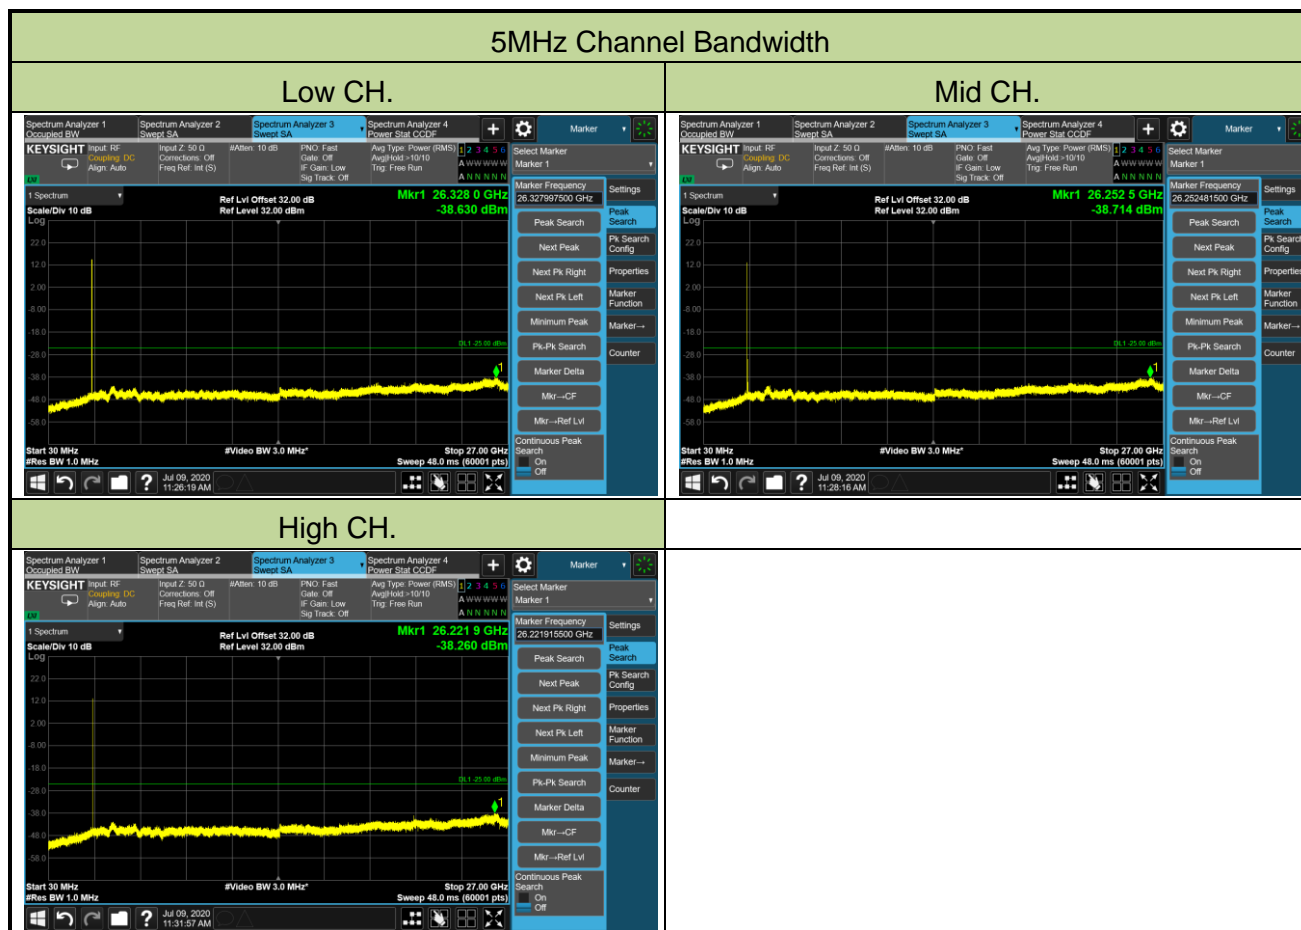


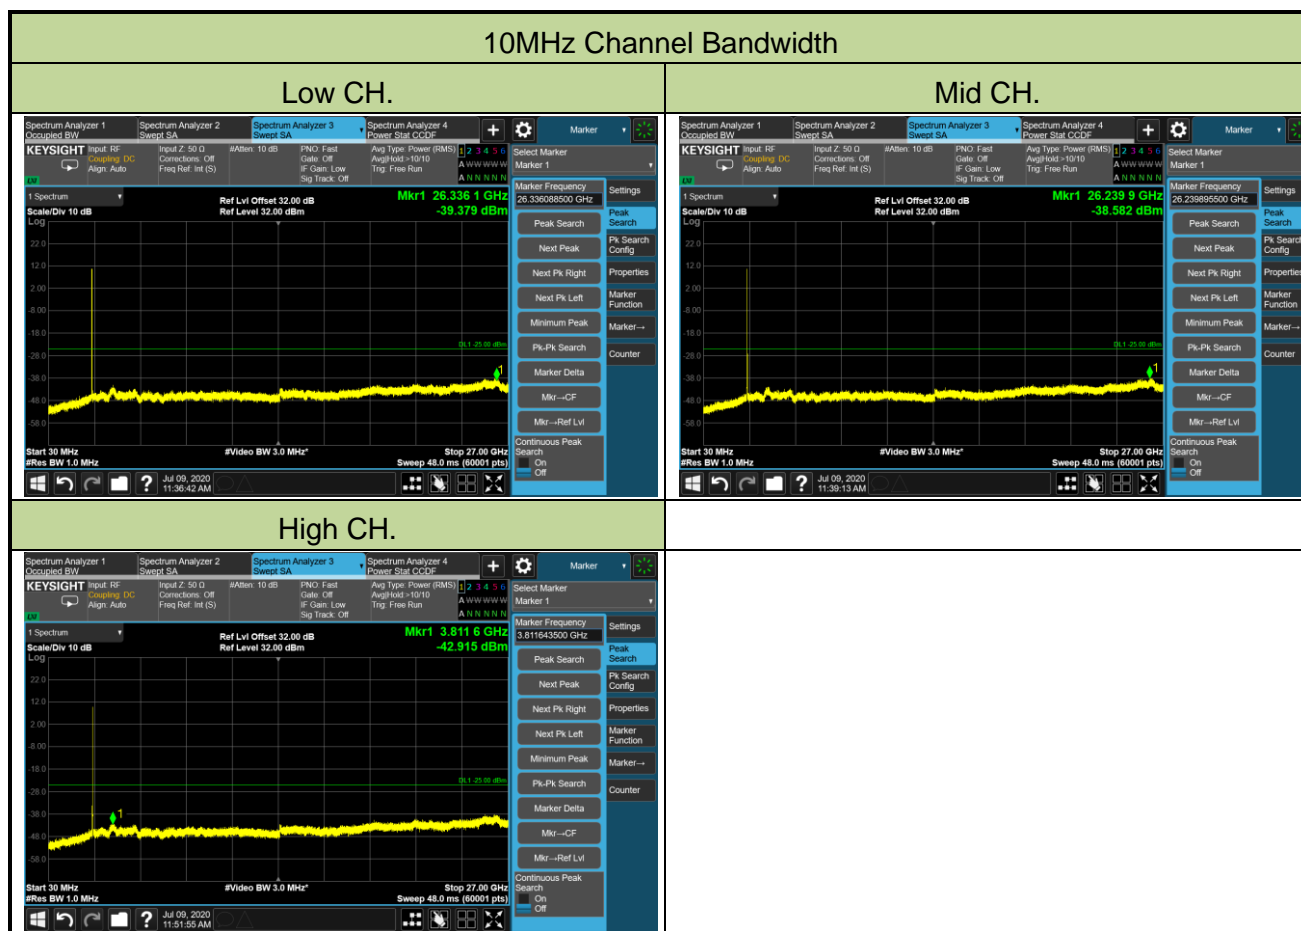


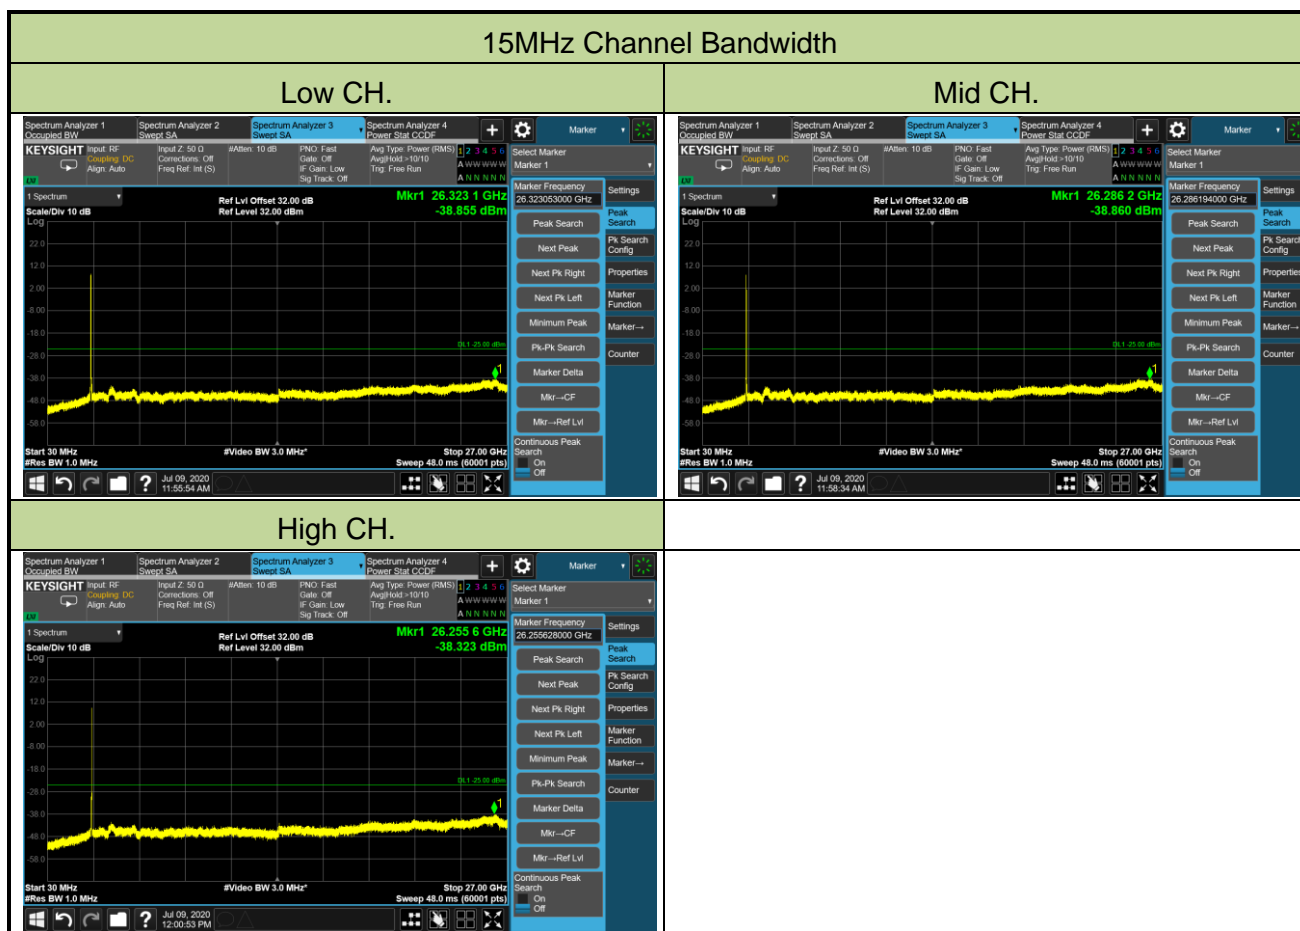


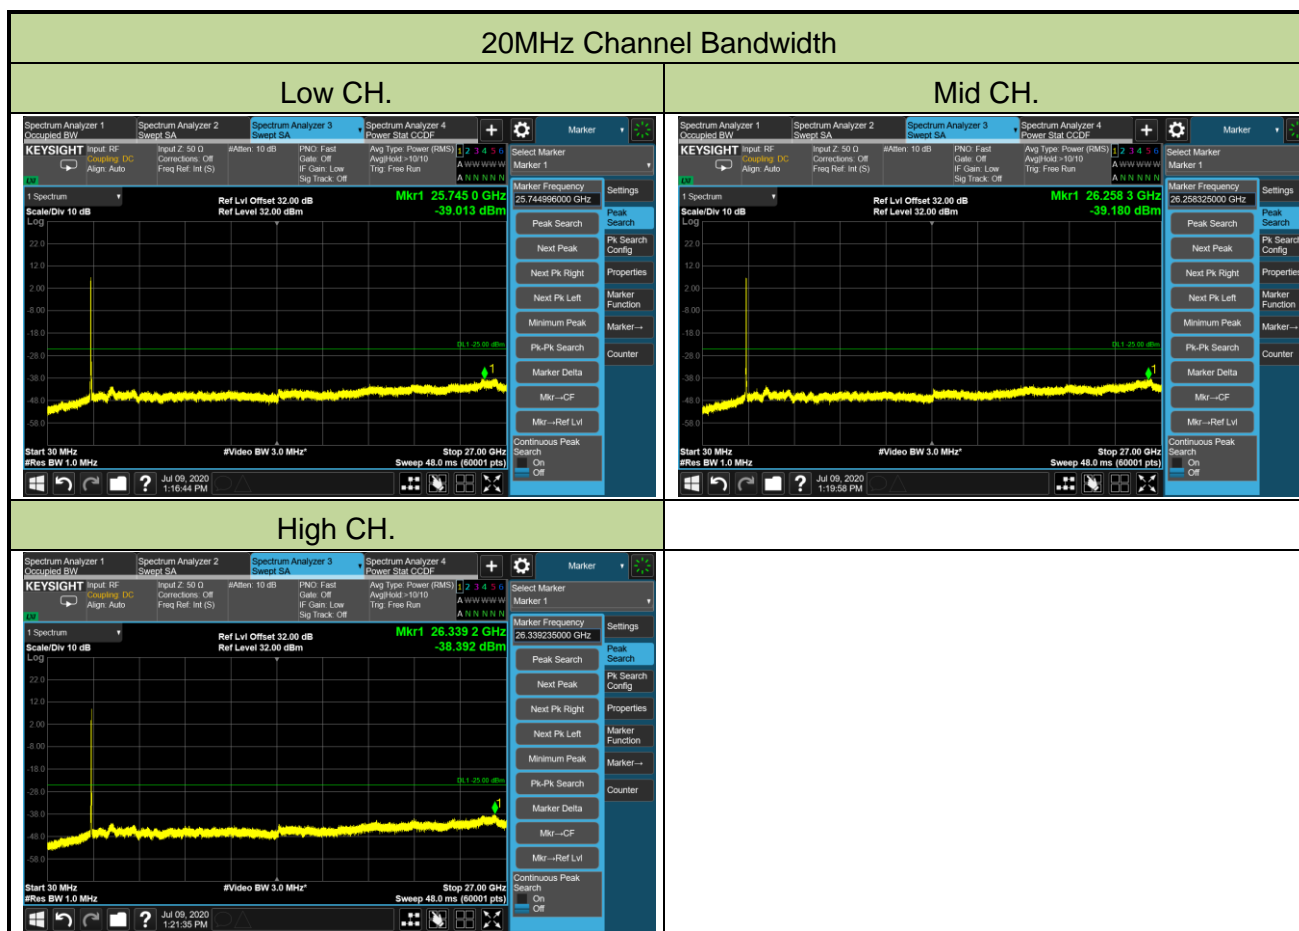


Product	Tablet	Test Site	SR5
Test Engineer	Candy Luo	Test Date	2020/07/09
Test Band	Band 41		
Test Result	Pass		

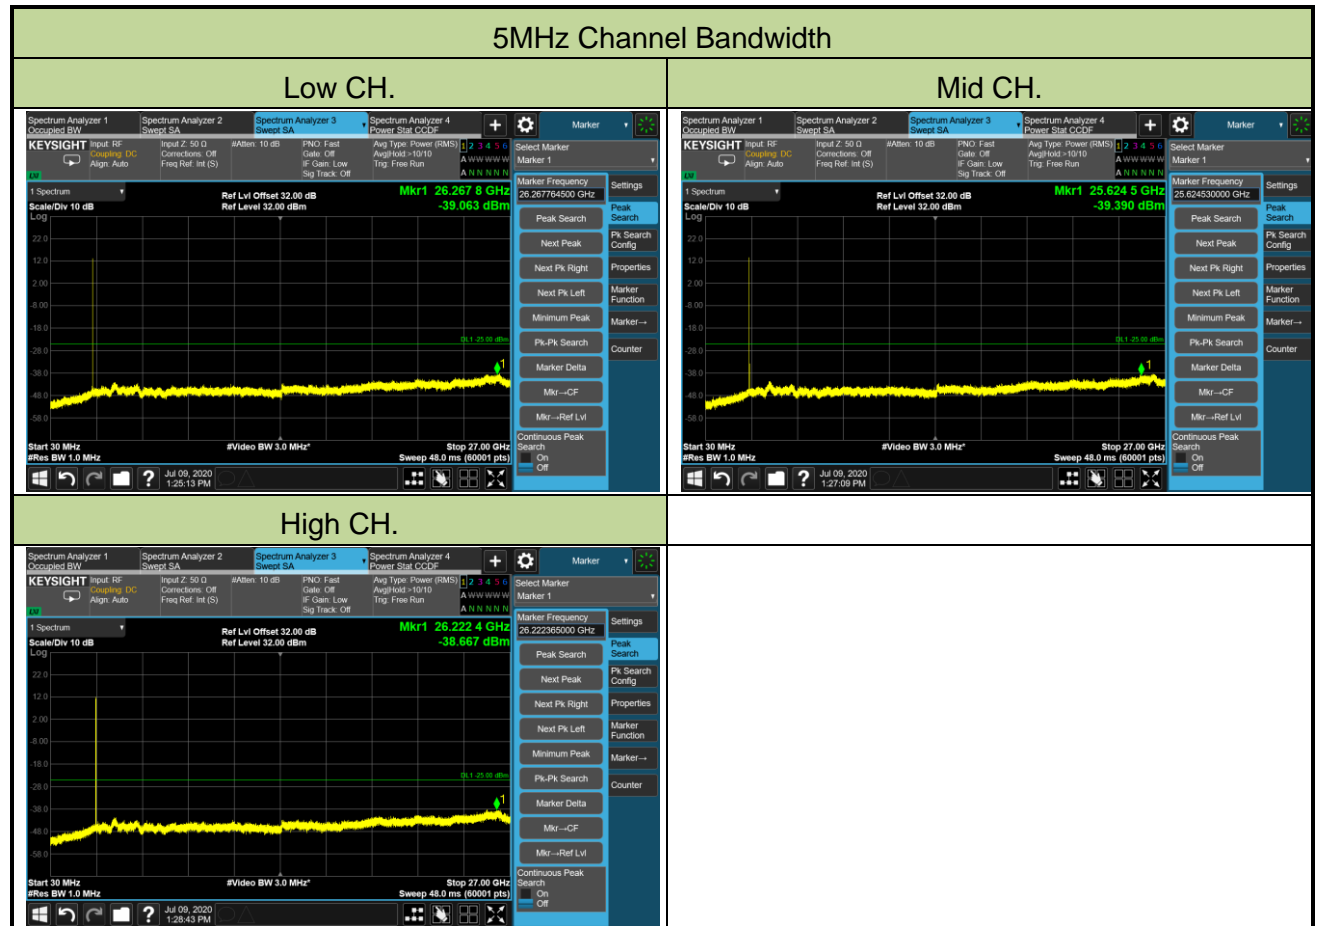

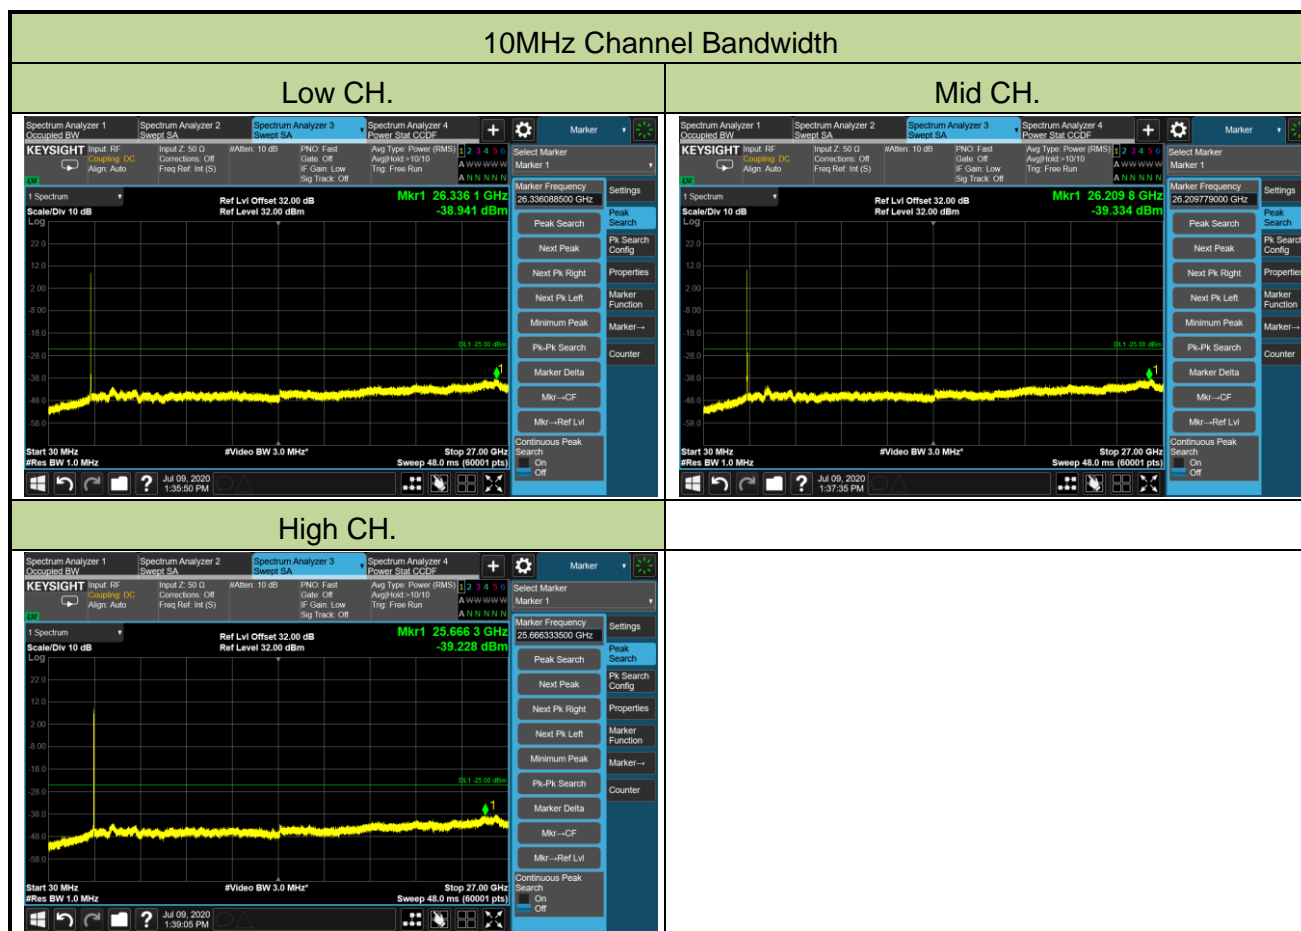

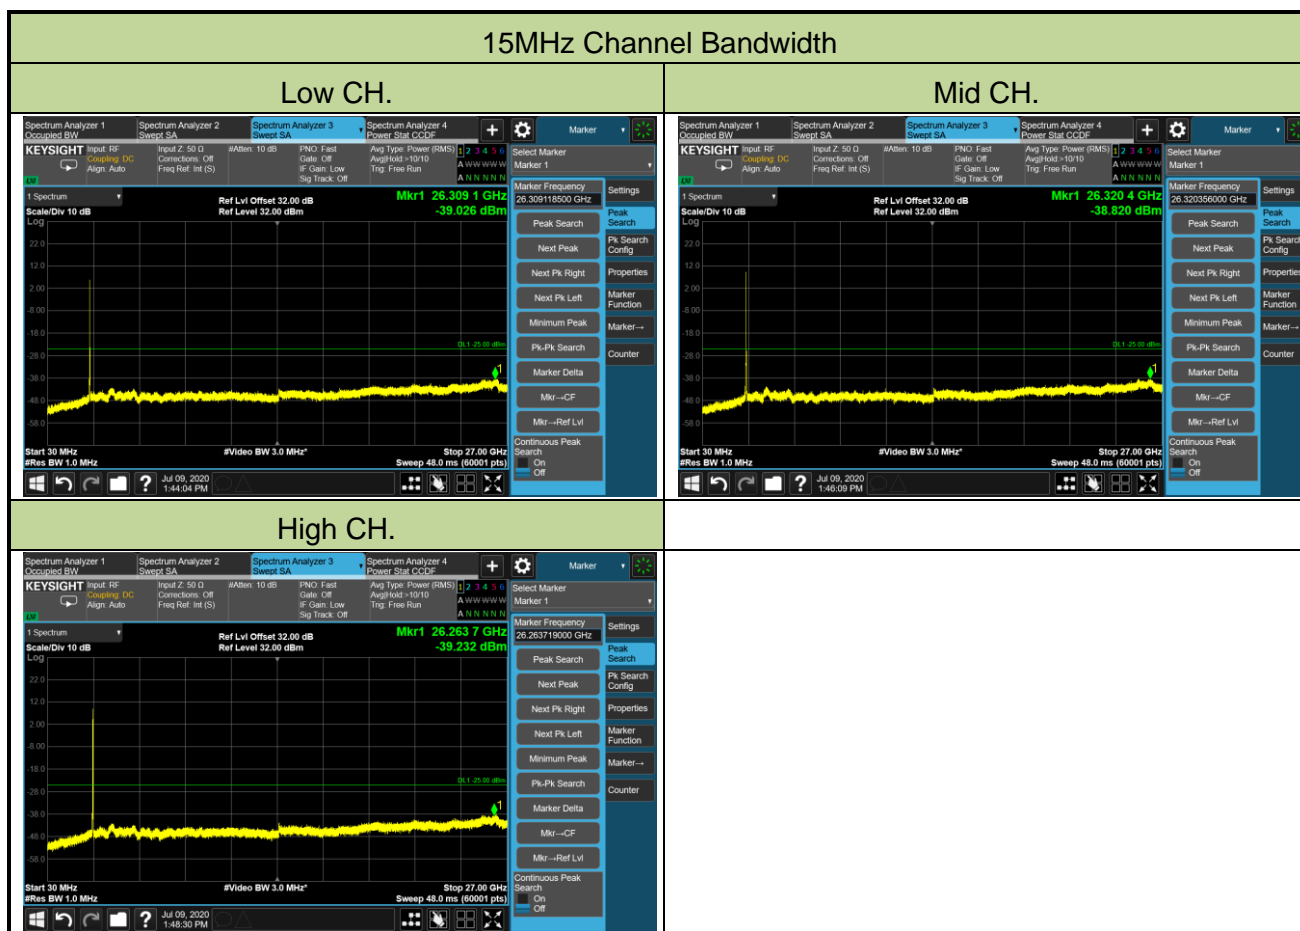

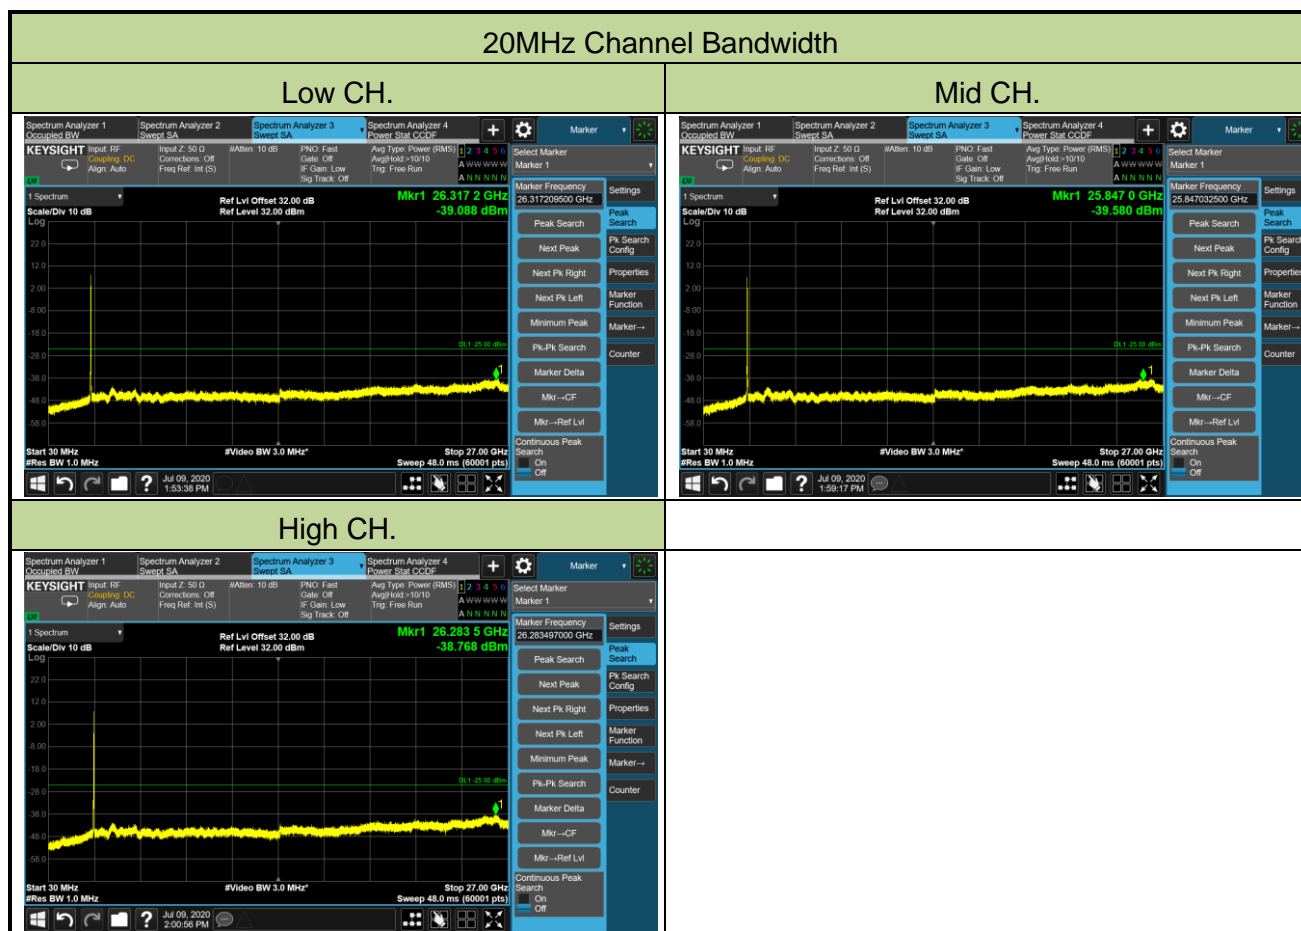

5.5. Peak-Average Ratio

5.5.1. Test Limit

The transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.


5.5.2. Test Procedure

ANSI C63.26-2015 - Section 5.2.3.4 (CCDF)

5.5.3. Test Setting

1. Set the resolution / measurement bandwidth \geq signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Record the maximum PARR level associated with a probability of 0.1%

5.5.4. Test Setup

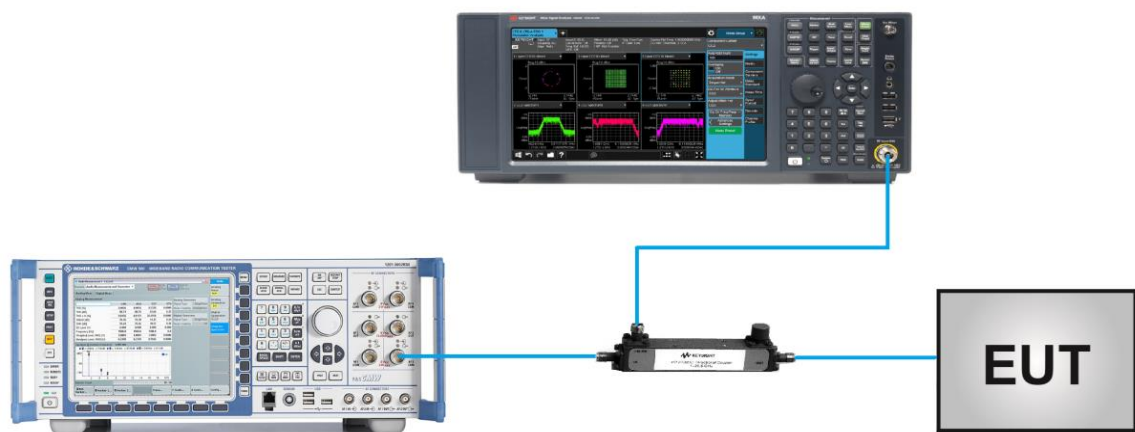

5.5.5. Test Result

Product	Tablet	Test Site	SR5
Test Engineer	Candy Luo	Test Date	2020/07/08
Test Band	Band 2		

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	Peak to Average Ratio (dB)	Limit (dB)	Result
Low Channel					
1860.0	20	1	3.53	≤ 13.00	Pass
1860.0	20	100	5.17	≤ 13.00	Pass
Middle Channel					
1880.0	20	1	3.54	≤ 13.00	Pass
1880.0	20	100	4.90	≤ 13.00	Pass
High Channel					
1900.0	20	1	3.49	≤ 13.00	Pass
1900.0	20	100	4.97	≤ 13.00	Pass