




# FCC RADIO TEST REPORT

**FCC ID** : J9C-QC64MA  
**Equipment** : QC64MA 802.11ad/ay module  
**Brand Name** : Qualcomm Technologies, Inc.  
**Model Name** : QC64MA  
**Applicant** : Qualcomm Technologies, Inc.  
5775 Morehouse Drive, San Diego , California,  
United States 92121  
**Manufacturer** : Qualcomm Technologies, Inc.  
5775 Morehouse Drive, San Diego , California,  
United States 92121  
**Standard** : 47 CFR FCC Part 15.255

The product was received on Apr. 08, 2019, and testing was started from Apr. 08, 2019 and completed on May 21, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013, 47 CFR FCC Part 15.255 and Millimeter Wave Test Procedures and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

  
Approved by: Cliff Chang

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description .....</b>	<b>5</b>
1.1 Information.....	5
1.2 Accessories .....	9
1.3 Support Equipment.....	9
1.4 EUT Operation during Test .....	10
1.5 Test Setup Diagram .....	11
1.6 Testing Applied Standards .....	14
1.7 Testing Location .....	14
<b>2 Test Configuration of Equipment under Test.....</b>	<b>15</b>
2.1 Test Channel Frequencies .....	15
2.2 Conformance Tests and Related Test Frequencies.....	16
2.3 Far Field Boundary Calculations .....	17
<b>3 Transmitter Test Result .....</b>	<b>18</b>
3.1 AC Power Conducted Emissions .....	18
3.2 Occupied Bandwidth .....	23
3.3 EIRP Power .....	34
3.4 Peak Conducted Power.....	38
3.5 Transmitter Spurious Emissions.....	41
3.6 Frequency Stability .....	79
3.7 Operation Restriction and Group Installation .....	84
<b>4 Test Equipment and Calibration Data .....</b>	<b>85</b>
<b>5 Measurement Uncertainty .....</b>	<b>87</b>

### Appendix A. Test Photos

#### Photographs of EUT v01



TEL : 886-3-656-9065  
FAX : 886-3-656-9085  
Report Template No.: CB Ver1.0



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	FCC 15.207	AC Power Conducted Emissions	PASS	-
3.2	FCC 15.255(e)	Occupied Bandwidth	PASS	-
3.3	FCC 15.255(c)	EIRP Power	PASS	-
3.4	FCC 15.255(c)	Peak Conducted Power	PASS	-
3.5	FCC 15.255(d)	Transmitter Spurious Emissions	PASS	-
3.6	FCC 15.255(f)	Frequency Stability	PASS	-
3.7	FCC 15.255(a),(h)	Operation Restriction and Group Installation	PASS	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

1. The test mode were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Sam Chen**

**Report Producer: Wendy Pan**



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

RF General Information	
Standard Frequency Range	57-71 GHz
Operating Frequency Range	57-66 GHz
The Channel Plan(s)	For 802.11ad mode: Channel 1: 58.32 GHz Channel 2: 60.48 GHz Channel 3: 62.64 GHz Channel 4: 64.80 GHz For 802.11ay mode: Channel 9: 59.40 GHz Channel 10: 61.56 GHz Channel 11: 63.72 GHz

### 1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Qualcomm	-	Integral	N/A	15.3

Note: The above information was declared by manufacturer.

**1.1.3 Power Levels****For 802.11ad mode:**

<b>Worst Power Levels for Channel 1</b>			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Antenna gain	15.3    dBi		
Frequency (GHz)	Highest setting ( $P_{high}$ ): (dBm)		
	Modulation	AV Power	Peak Power
58.32	MCS8	28.57	38.68

<b>Worst Power Levels for Channel 2</b>			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Antenna gain	15.3    dBi		
Frequency (GHz)	Highest setting ( $P_{high}$ ): (dBm)		
	Modulation	AV Power	Peak Power
60.48	MCS8	27.55	37.62

<b>Worst Power Levels for Channel 3</b>			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Integral antenna gain	15.3    dBi		
Frequency (GHz)	Highest setting ( $P_{high}$ ): (dBm)		
	Modulation	AV Power	Peak Power
62.64	MCS8	29.76	40.00

<b>Worst Power Levels for Channel 4</b>			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Integral antenna gain	15.3    dBi		
Frequency (GHz)	Highest setting ( $P_{high}$ ): (dBm)		
	Modulation	AV Power	Peak Power
64.80	MCS8	28.58	38.66



For 802.11 ay mode:

Worst Power Levels for Channel 9			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Antenna gain	15.3 dBi		
Frequency (GHz)	Highest setting (P <sub>high</sub> ): (dBm)		
	Modulation	AV Power	Peak Power
59.4	MCS8	27.74	39.85

Worst Power Levels for Channel 10			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Antenna gain	15.3 dBi		
Frequency (GHz)	Highest setting (P <sub>high</sub> ): (dBm)		
	Modulation	AV Power	Peak Power
61.56	MCS8	28.49	40.40

Worst Power Levels for Channel 11			
Applicable power levels	<input type="checkbox"/> Conducted <input checked="" type="checkbox"/> EIRP		
Integral antenna gain	15.3 dBi		
Frequency (GHz)	Highest setting (P <sub>high</sub> ): (dBm)		
	Modulation	AV Power	Peak Power
63.72	MCS8	27.86	39.40

### 1.1.4 Operating Conditions

Junction Temperature Operating Range.	
<input checked="" type="checkbox"/> -20 °C to +100 °C	
<input type="checkbox"/> 0 °C to +40 °C	
<input type="checkbox"/> Other:	
EUT Power Type	From Host System

### 1.1.5 Equipment Use Condition

Equipment Use Condition	
<input type="checkbox"/> Fixed field disturbance sensors at 61-61.5GHz	
<input type="checkbox"/> Except fixed field disturbance sensors at 61-61.5GHz	
<input checked="" type="checkbox"/> Except fixed field disturbance sensors	

**1.1.6 User Condition**

Intended Operation	
<input checked="" type="checkbox"/>	Indoor
<input type="checkbox"/>	Outdoor (except outdoor fixed Point to Point)
<input type="checkbox"/>	Outdoor fixed Point to Point

Note: The above information was declared by manufacturer.

**1.1.7 Duty Cycle**

For 802.11ad and 802.11ay

Duty Cycle (%)	Duty Cycle Factor
100	0





## 1.2 Accessories

N/A

## 1.3 Support Equipment

For Test Site No: CO01-CB

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PC	GIGABYTE	GB-BSi3H-6100	N/A
B	NB	HP	8470w	N/A
C	Device	Qualcomm	QC64MA	N/A
D	PC	GIGABYTE	GB-BKi5HA-7200	N/A
E	Fixture	Qualcomm	25-YB407-P1	N/A
F	Fixture	Qualcomm	25-YB407-P1	N/A
G	Keyboard	iCooky	SK068	N/A
H	Mouse	Logitech	M-U0026	N/A
I	Printer	EPSON	LQ-300+	N/A
J	Modem	ACEEX	DM1414	N/A
K	LCD Monitor	SAMSUNG	LS19MJEKBZ/XTW	N/A

For Test Site No: 03CH01-CB (below 1GHz)

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PC	GIGABYTE	GB-BSi3H-6100	N/A
B	Notebook	HP	8470w	N/A
C	Device	Qualcomm	QC64MA	N/A
D	PC	GIGABYTE	GB-BKi5HA-7200	N/A
E	Fixture	Qualcomm	25-YB407-P1	N/A
F	Fixture	Qualcomm	25-YB407-P1	N/A
G	Keyboard	iCooky	SK068	N/A
H	Mouse	Logitech	M-U0026	N/A
I	Printer	EPSON	LQ-300+	N/A
J	Modem	ACEEX	DM1414	N/A
K	LCD Monitor	SAMSUNG	LS19MJEKBZ/XTW	N/A



**For Test Site No: 03CH01-CB (above 1GHz):**

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	HP	8470w	N/A
B	PC	GIGABYTE	GB-BSi3H-6100	N/A
C	Fixture	Qualcomm	25-YB407-P1	N/A

**For Test Site No: TH01-CB**

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	N/A

## **1.4 EUT Operation during Test**

**For CTX Mode:**


During the test, executed the test program to control the EUT continuously transmit RF signal.

**For Normal Link:**


During the test, the EUT operation to normal function.

## 1.5 Test Setup Diagram


**Test Setup Diagram - AC Power Conducted Emissions**

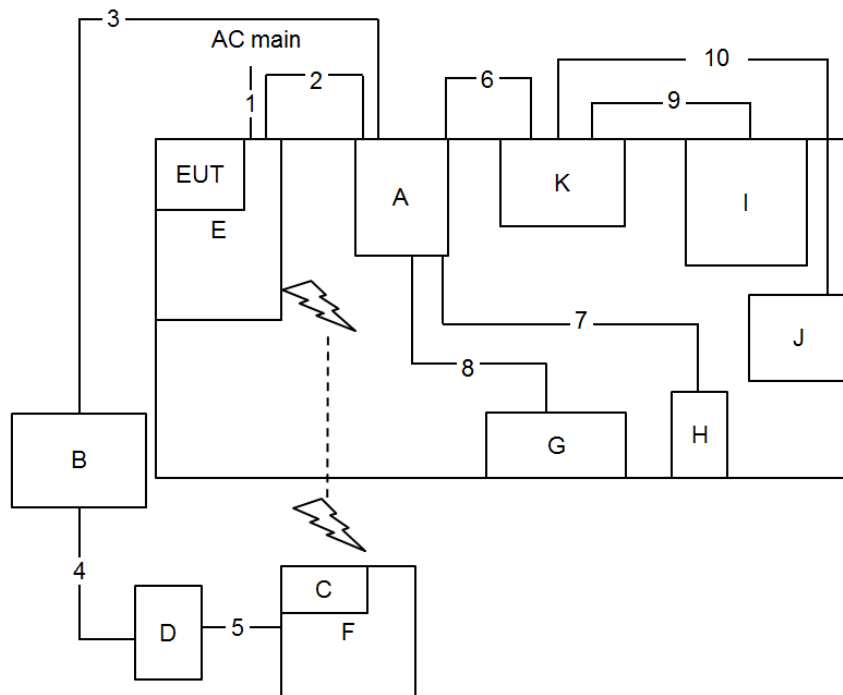

Item	Connection	Shielded	Length
1	Power Cable	No	2.9m
2	Cable	Yes	0.4m
3	RJ-45 Cable	No	10m
4	RJ-45 Cable	No	10m
5	Cable	No	0.4m
6	VGA Cable	Yes	1.8m
7	USB Cable	Yes	1.8m
8	USB Cable	Yes	1.8m
9	USB Cable	Yes	1.8m
10	RS-323 to USB Cable	Yes	2.6m

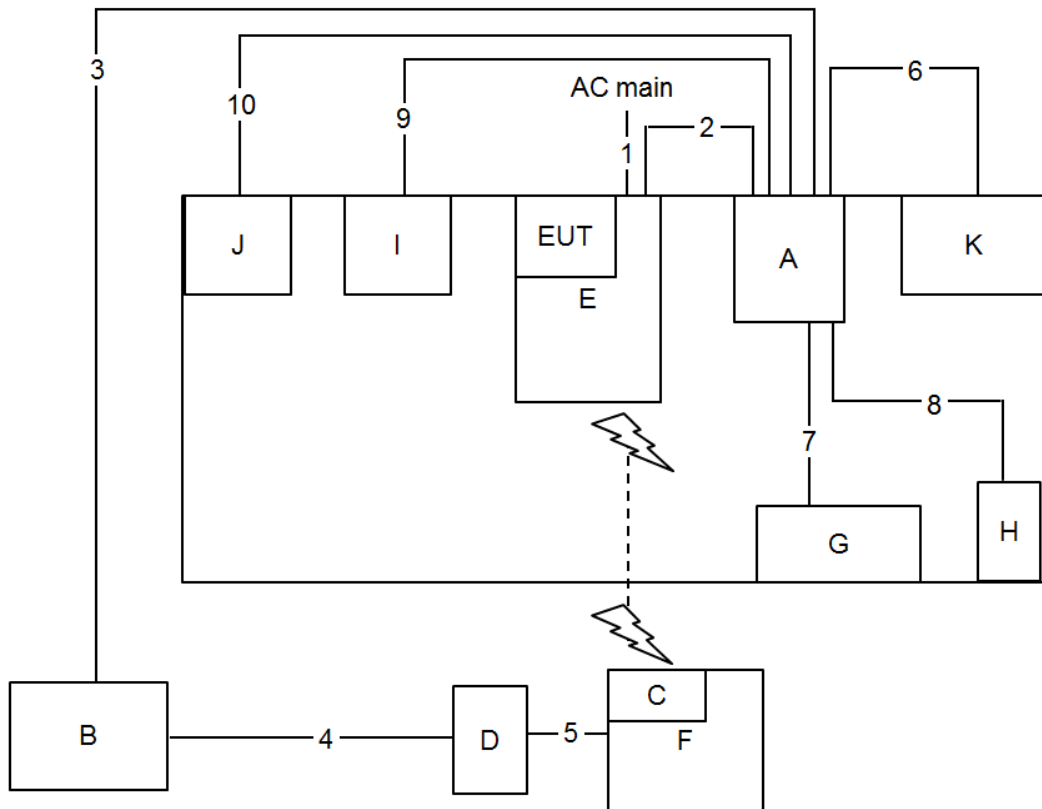**Test Setup Diagram - Transmitter Spurious Emissions below 1 GHz**


Item	Connection	Shielded	Length
1	Power Cable	No	2.9m
2	Cable	Yes	0.15m
3	RJ-45 Cable	No	10m
4	RJ-45 Cable	No	10m
5	Cable	No	0.4m
6	VGA Cable	Yes	1.8m
7	USB Cable	Yes	1.8m
8	USB Cable	Yes	1.8m
9	USB Cable	Yes	1.8m
10	RS-323 to USB Cable	Yes	2.6m

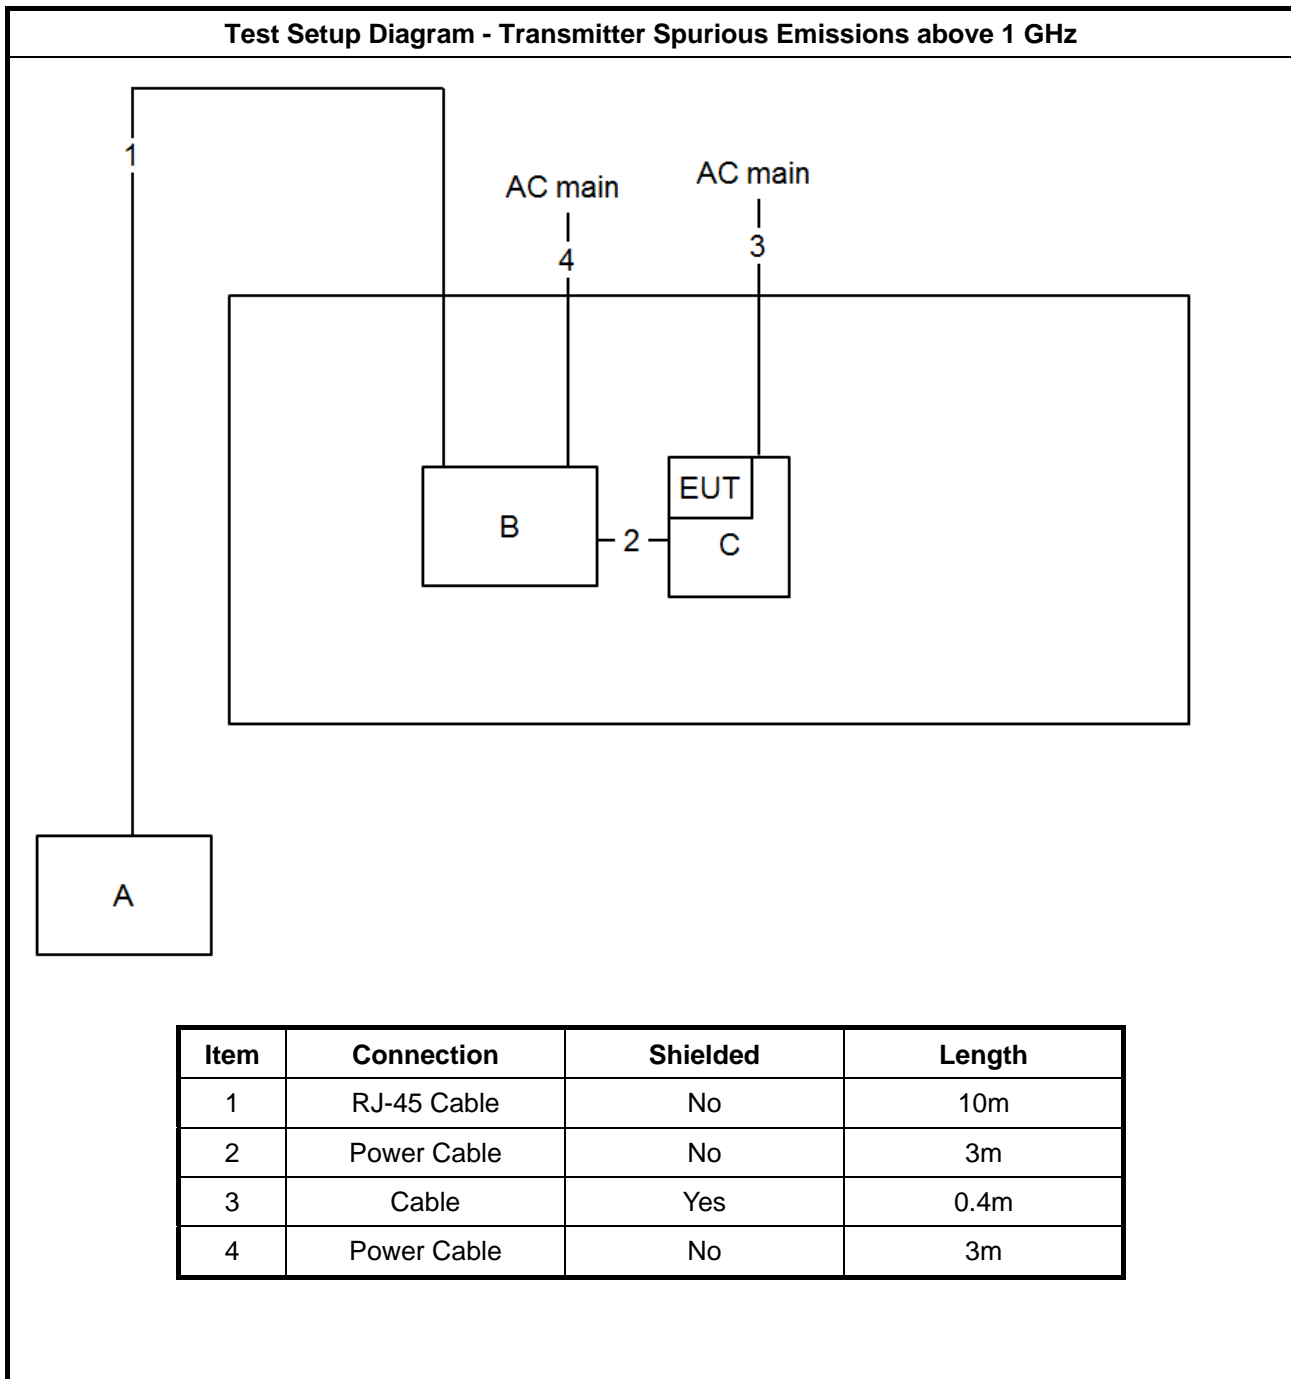**Test Setup Diagram - Transmitter Spurious Emissions above 1 GHz**




## 1.6 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.255
- ♦ ANSI C63.10-2013 Section 9. "Procedures for testing millimeter-wave systems"

## 1.7 Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085
Test Site No.		
CO01-CB	03CH01-CB	TH01-CB

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086B with Industry Canada.



## 2 Test Configuration of Equipment under Test

### 2.1 Test Channel Frequencies

Nominal Channel Bandwidth of 802.11ad mode			
Channel 1 (GHz)	Channel 2 (GHz)	Channel 3 (GHz)	Channel 4 (GHz)
58.32	60.48	62.64	64.80

Nominal Channel Bandwidth of 802.11ay mode		
Channel 9 (GHz)	Channel 10 (GHz)	Channel 11 (GHz)
59.40	61.56	63.72



## 2.2 Conformance Tests and Related Test Frequencies

Test Item	Test Frequencies (GHz)	
	802.11ad mode	802.11ay mode
AC Power Conducted Emissions	Random frequency(Normal link)	
Occupied Bandwidth	58.32/60.48/62.64/64.80	59.40/61.56/63.72
EIRP Power	58.32/60.48/62.64/64.80	59.40/61.56/63.72
Peak Conducted Power	58.32/60.48/62.64/64.80	59.40/61.56/63.72
Transmitter Spurious Emissions (below 1 GHz)	Random frequency(Normal link)	
Transmitter Spurious Emissions (1 GHz-40 GHz)	58.32/60.48/62.64/64.80	59.40/61.56/63.72
Transmitter Spurious Emissions (above 40 GHz)	58.32/60.48/62.64/64.80	59.40/61.56/63.72
Frequency Stability	60.48	61.56

Note1: The EUT has two mode one is AP mode and other is STA mode, only the AP mode was tested and recorded in this test report that is designated by the manufacturer.

Note2: The worst-case data rate is determined to be MCS8 for all Channel as specified by the applicant.

The following test modes were performed for all tests:

### For Conducted Emission test:

Mode 1. Normal Link - AP mode

### For Radiated Emission Below 1GHz test:

The EUT was performed at X axis, Y axis and Z axis position and the worst case was found at Z axis. So the measurement will follow this same test configuration.

Mode 1. Normal Link - EUT in Z axis AP mode

### For Radiated Emission Above 1GHz test:

The EUT was performed at X axis, Y axis and Z axis position and the worst case was found at Z axis. So the measurement will follow this same test configuration.

Mode 1. EUT in Z axis / 60GHz 802.11ad mode

Mode 2. EUT in Z axis / 60GHz 802.11ay mode





## 2.3 Far Field Boundary Calculations

The far-field boundary is given as:

$$\text{far field} = (2 * L^2) / \lambda$$

where:

L = Largest Antenna Dimension, including the reflector, in meters

$\lambda$  = wavelength in meters

**For 802.11ad mode:**

Far Field (m)				
Frequency (GHz)	L (m)	Lambda (m)	d(Far Field) (m)	d(Far Field) (cm)
58.32	0.025	0.0051440	0.243	24.30
60.48	0.025	0.0049603	0.252	25.20
62.64	0.025	0.0047893	0.261	26.10
64.80	0.025	0.0046296	0.270	27.00

**For 802.11 ay mode:**

Far Field (m)				
Frequency (GHz)	L (m)	Lambda (m)	d(Far Field) (m)	d(Far Field) (cm)
59.40	0.02	0.0050505	0.158	15.84
61.56	0.02	0.0048733	0.164	16.42
63.72	0.02	0.0047081	0.170	16.99



### **3 Transmitter Test Result**

#### **3.1 AC Power Conducted Emissions**

##### **3.1.1 Limit of AC Power Conducted Emissions**

AC Power Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note: * Decreases with the logarithm of the frequency.		


##### **3.1.2 Measuring Instruments**

Refer a measuring instruments list in this test report.

##### **3.1.3 Test Procedures**

Method of measurement: Refer as ANSI C63.10-2013, clause 6.2.

### 3.1.4 Test Setup

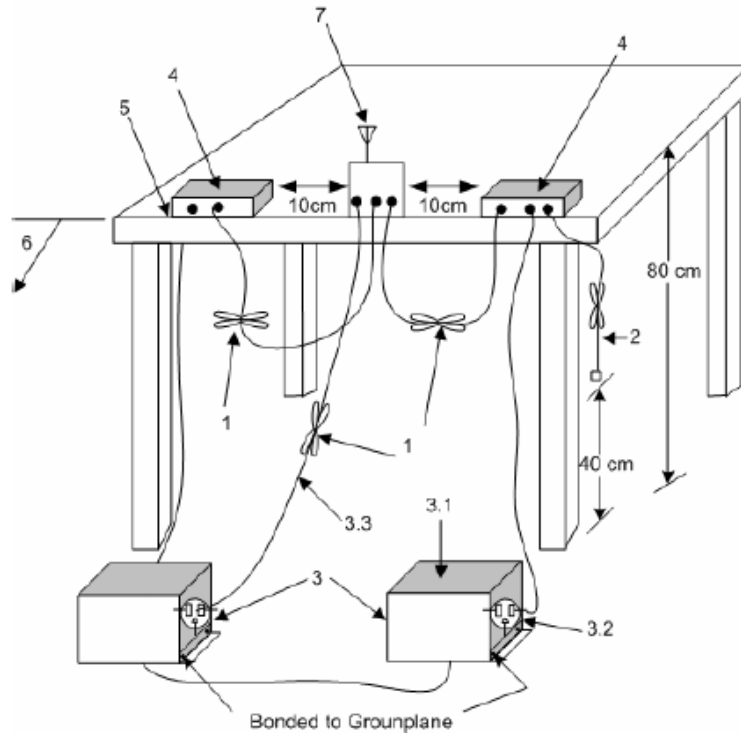

1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.

2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$  loads. LISN may be placed on top of, or immediately beneath, reference ground plane.

3.1—All other equipment powered from additional LISN(s).

3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.

3.3—LISN at least 80 cm from nearest part of EUT chassis.

4—Non-EUT components of EUT system being tested.

5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop.

6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.



### 3.1.5 Test Result of AC Power Conducted Emissions

<b>Test Conditions</b>	see ANSI C63.10, clause 5.11
<b>Test Setup</b>	see ANSI C63.10, clause 6.2.3
<p>NOTE 1: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes. If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.12 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing.</p> <p>NOTE 2: "&gt;20dB" means the tables in this clause should only list values of spurious emissions that exceed the level of 20 dB below the applicable limit, see ANSI C63.4, clause 10.1.8.1.</p>	




# FCC RADIO TEST REPORT

Report No. : FR931421

Temp	23.7~24°C	Humidity	61~61.2%
Test Engineer	Ryo Fan	Phase	Line
Configuration	Normal Link		

12/04/2019

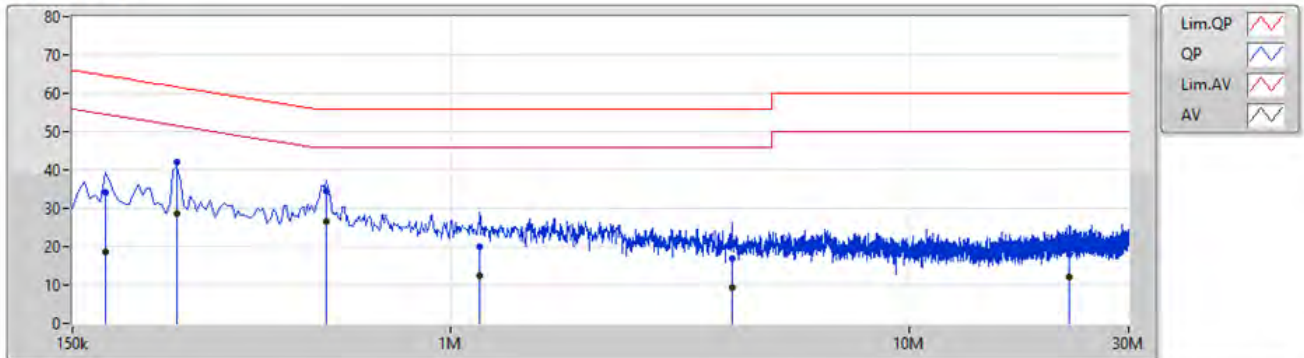


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)				
QP	177k	33.98	64.62	-30.64	10.00	Line	-	23.98	0.06	0.15	9.79				
AV	177k	18.57	54.62	-36.05	10.00	Line	-	8.57	0.06	0.15	9.79				
QP	253.5k	41.95	61.64	-19.69	9.99	Line	-	31.96	0.06	0.13	9.80				
AV	253.5k	28.67	51.64	-22.97	9.99	Line	-	18.68	0.06	0.13	9.80				
QP	537k	34.33	56.00	-21.67	10.02	Line	-	24.31	0.06	0.15	9.81				
AV	537k	26.56	46.00	-19.44	10.02	Line	"Worst"	16.54	0.06	0.15	9.81				
QP	1.158M	20.06	56.00	-35.94	10.10	Line	-	9.96	0.07	0.21	9.82				
AV	1.158M	12.45	46.00	-33.55	10.10	Line	-	2.35	0.07	0.21	9.82				
QP	4.097M	16.89	56.00	-39.11	10.06	Line	-	6.83	0.12	0.13	9.81				
AV	4.097M	9.23	46.00	-36.77	10.06	Line	-	-0.83	0.12	0.13	9.81				
QP	22.272M	18.05	60.00	-41.95	10.55	Line	-	7.50	0.31	0.24	10.00				
AV	22.272M	12.07	50.00	-37.93	10.55	Line	-	1.52	0.31	0.24	10.00				



Temp	23.7~24°C	Humidity	61~61.2%
Test Engineer	Ryo Fan	Phase	Neutral
Configuration	Normal Link		

12/04/2019

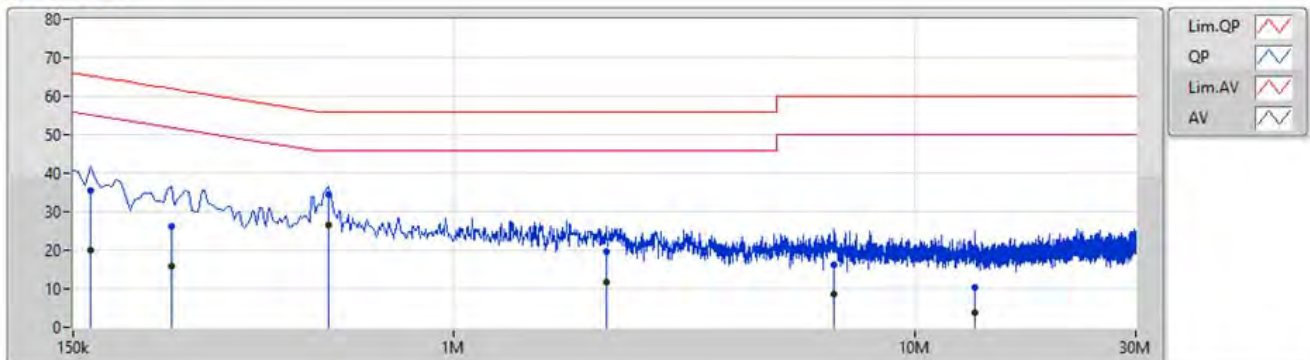

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	AF (dB)	CL (dB)	AT (dB)			
QP	163.5k	35.52	65.27	-29.75	9.99	Neutral	-	25.53	0.04	0.16	9.79			
AV	163.5k	19.90	55.27	-35.37	9.99	Neutral	-	9.91	0.04	0.16	9.79			
QP	244.5k	26.33	61.95	-35.62	9.97	Neutral	-	16.36	0.04	0.13	9.80			
AV	244.5k	15.90	51.95	-36.05	9.97	Neutral	-	5.93	0.04	0.13	9.80			
QP	537k	34.35	56.00	-21.65	10.01	Neutral	-	24.34	0.05	0.15	9.81			
AV	537k	26.56	46.00	-19.44	10.01	Neutral	"Worst"	16.55	0.05	0.15	9.81			
QP	2.139M	19.69	56.00	-36.31	10.12	Neutral	-	9.57	0.07	0.22	9.83			
AV	2.139M	11.73	46.00	-34.27	10.12	Neutral	-	1.61	0.07	0.22	9.83			
QP	6.662M	16.14	60.00	-43.86	10.16	Neutral	-	5.98	0.15	0.14	9.87			
AV	6.662M	8.60	50.00	-41.40	10.16	Neutral	-	-1.56	0.15	0.14	9.87			
QP	13.443M	10.43	60.00	-49.57	10.34	Neutral	-	0.09	0.22	0.20	9.92			
AV	13.443M	3.68	50.00	-46.32	10.34	Neutral	-	-6.66	0.22	0.20	9.92			



## 3.2 Occupied Bandwidth

### 3.2.1 Limit of Occupied Bandwidth

<b>6dBc Bandwidth</b> (see Note 1)	None
<b>99% Occupied Bandwidth</b> (see Note 2)	None
NOTE 1: The 6dBc bandwidth is the frequency bandwidth of the signal power at the -6 dBc points when measured with a 100 kHz resolution bandwidth. These measurements shall also be performed at normal test conditions.	
NOTE 2: The 99% occupied bandwidth is the frequency bandwidth of the signal power at the 99% channel power of occupied bandwidth when resolution bandwidth should be approximately 1 % to 5 % of the occupied bandwidth (OBW). These measurements shall also be performed at normal test conditions.	


### 3.2.2 Measuring Instruments

Refer a measuring instruments list in this test report.

### 3.2.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 6.9.2.

### 3.2.4 Test Setup

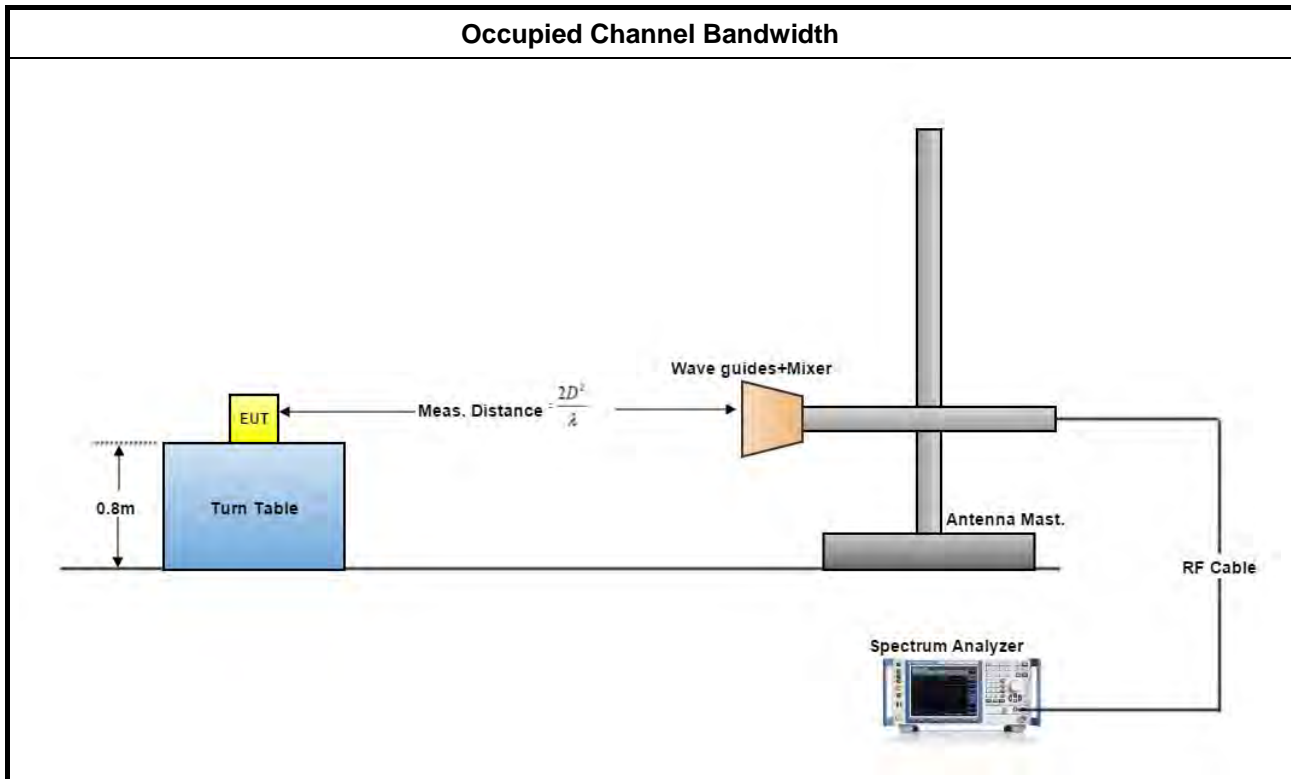



**3.2.5 Test Result of Occupied Bandwidth**

<b>Test Conditions</b>	see ANSI C63.10, clause 5.11
<b>Test Setup</b>	see ANSI C63.10, clause 6.9.2
NOTE: If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing. Refer as ANSI C63.10, clause 15, observe and record with plotted graphs or photographs the worst-case (i.e., widest) occupied bandwidth produced by these different modulation sources.	

<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Gary Chu	<b>Test Mode</b>	1 (802.11ad mode)
<b>Test Results</b>			
<b>Test Freq. (GHz)</b>	<b>6 dBc Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>	<b>Limit (MHz)</b>
58.32	1606.40	2916.06	N/A
60.48	1563.00	3068.01	N/A
62.64	1584.70	2843.70	N/A
64.80	1577.40	3017.37	N/A



<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Eddie Weng	<b>Test Mode</b>	2 (802.11 ay mode)
<b>Test Results</b>			
<b>Test Freq. (GHz)</b>	<b>6 dBc Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>	<b>Limit (MHz)</b>
59.40	2562.00	5768.16	N/A
61.56	2258.00	5034.44	N/A
63.72	2836.00	5079.59	N/A




### 3.2.5.1 Bandwidth Plots


For 802.11ad mode


Test Frequency: 58.32 GHz

#### 6 dBc Bandwidth

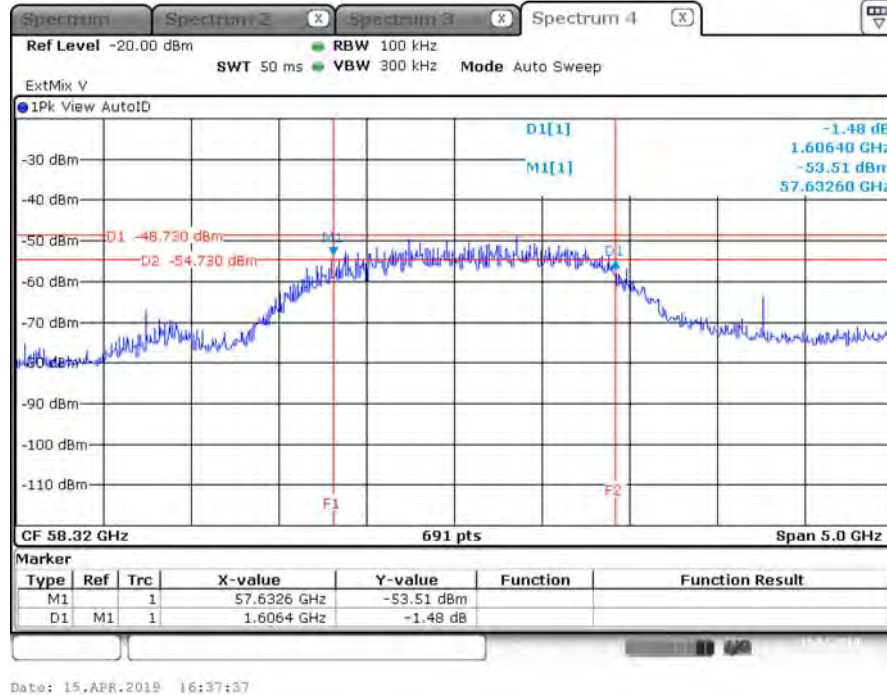


#### Occupied Bandwidth


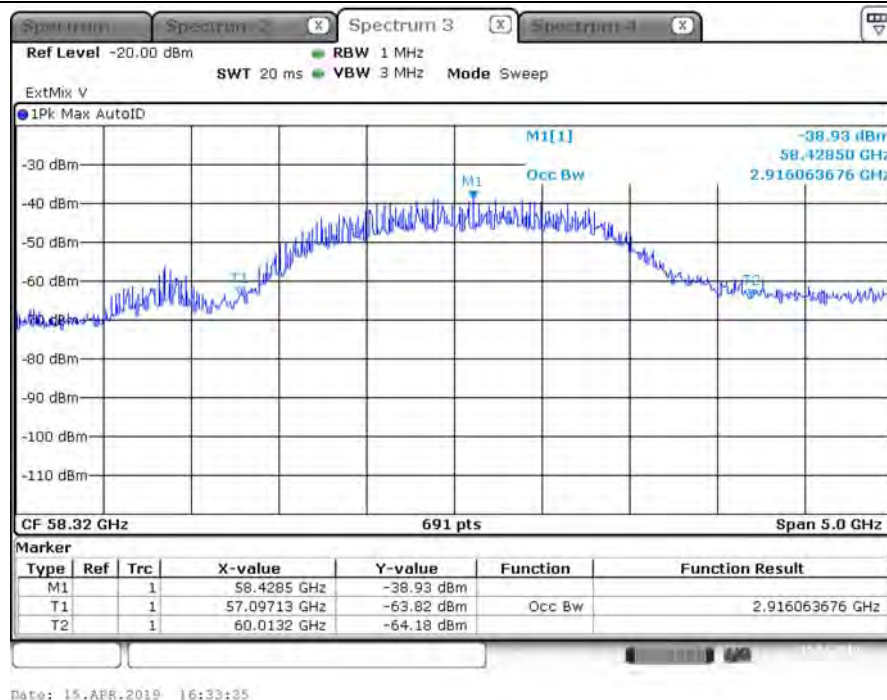


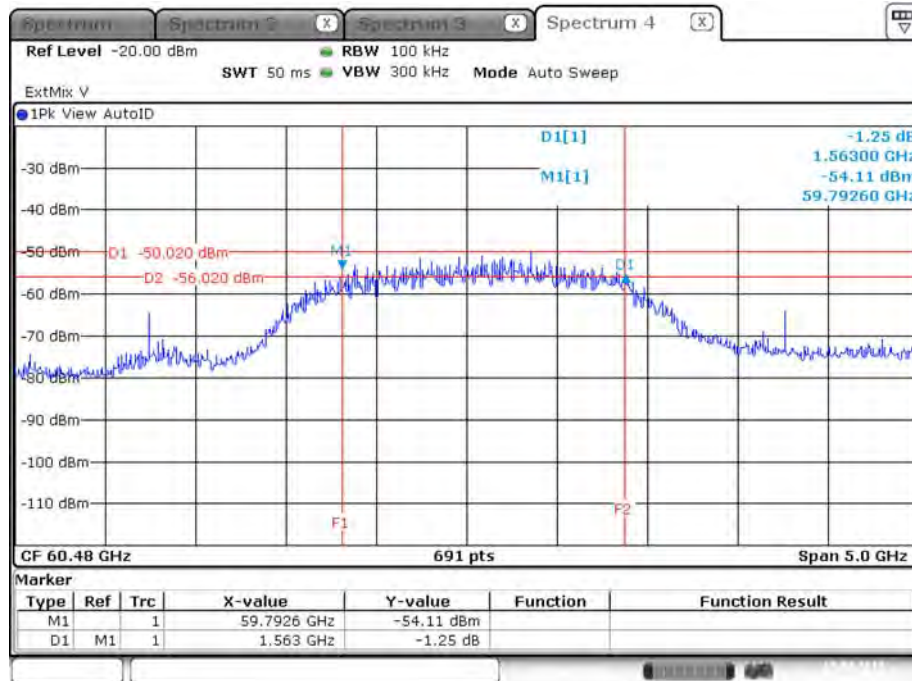**Test Frequency: 60.48 GHz****6 dBc Bandwidth**



Date: 15.APR.2019 17:13:51

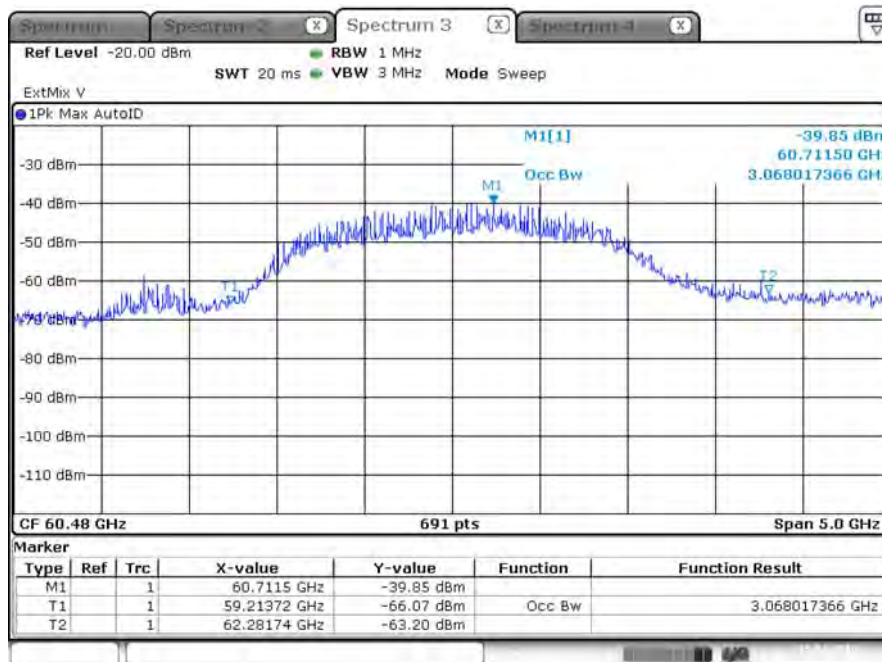**Occupied Bandwidth**

Date: 15.APR.2019 17:10:10

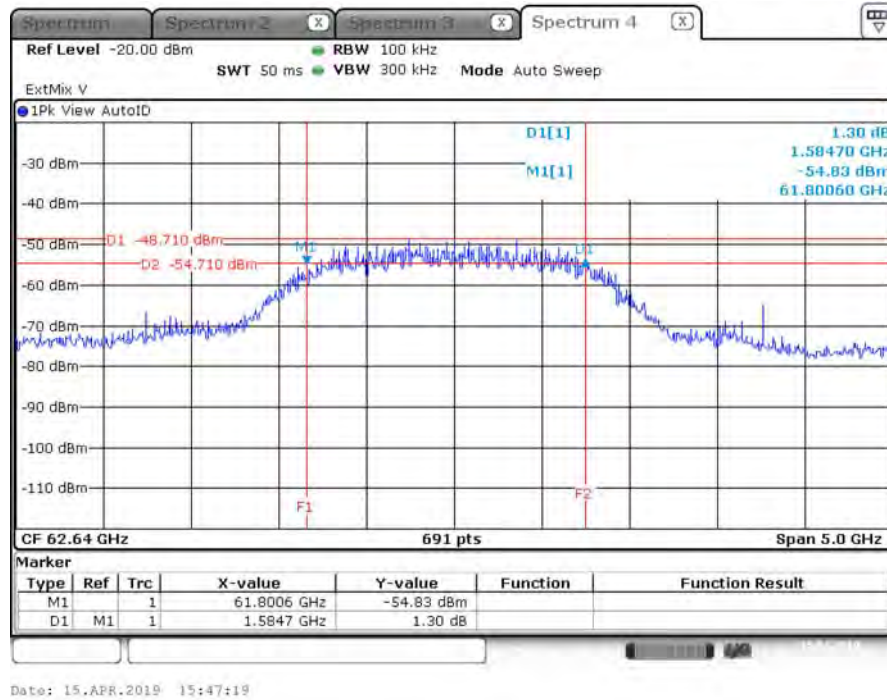
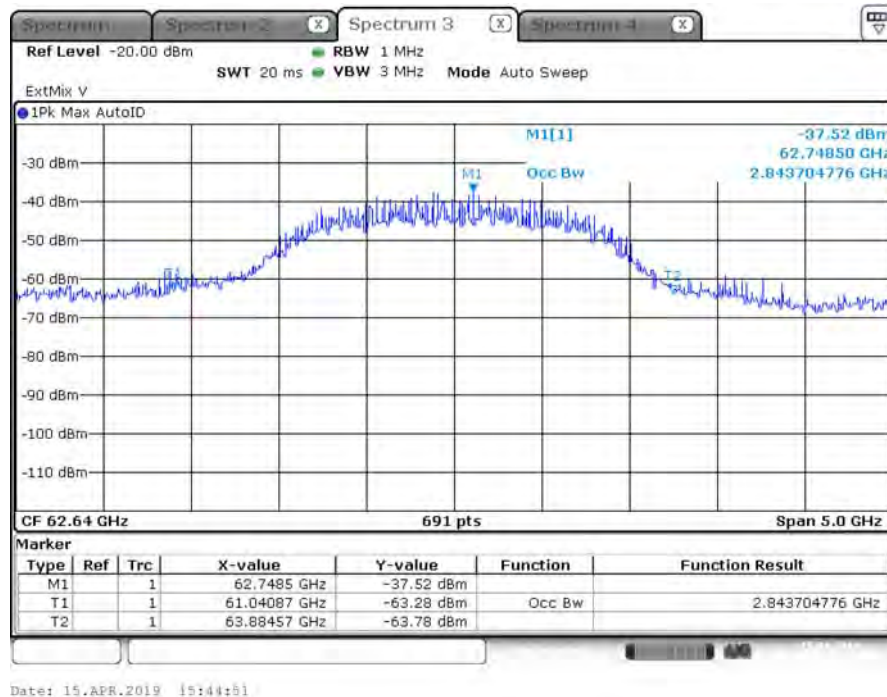
**Test Frequency: 62.64 GHz****6 dBc Bandwidth****Occupied Bandwidth**

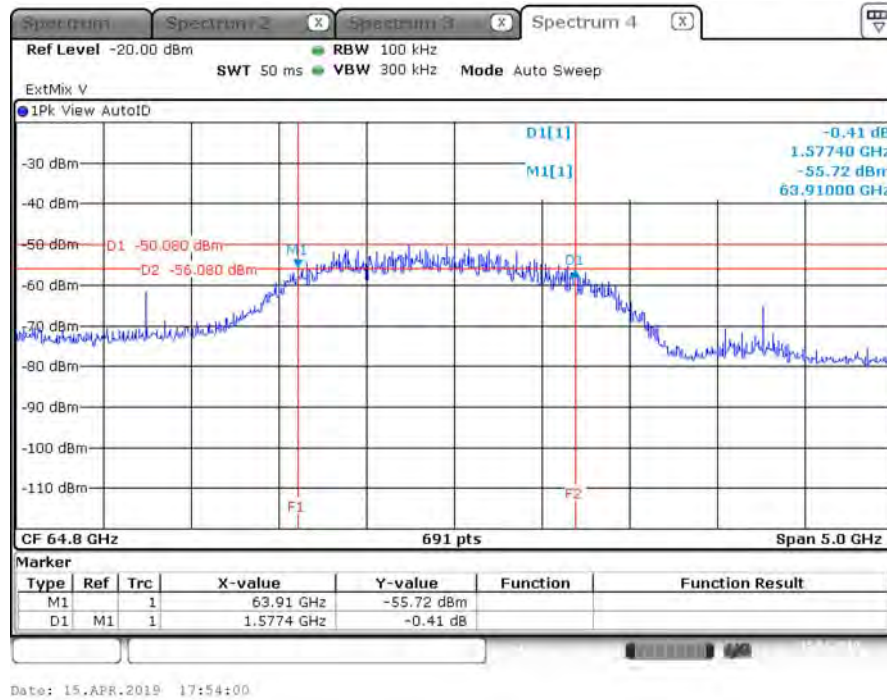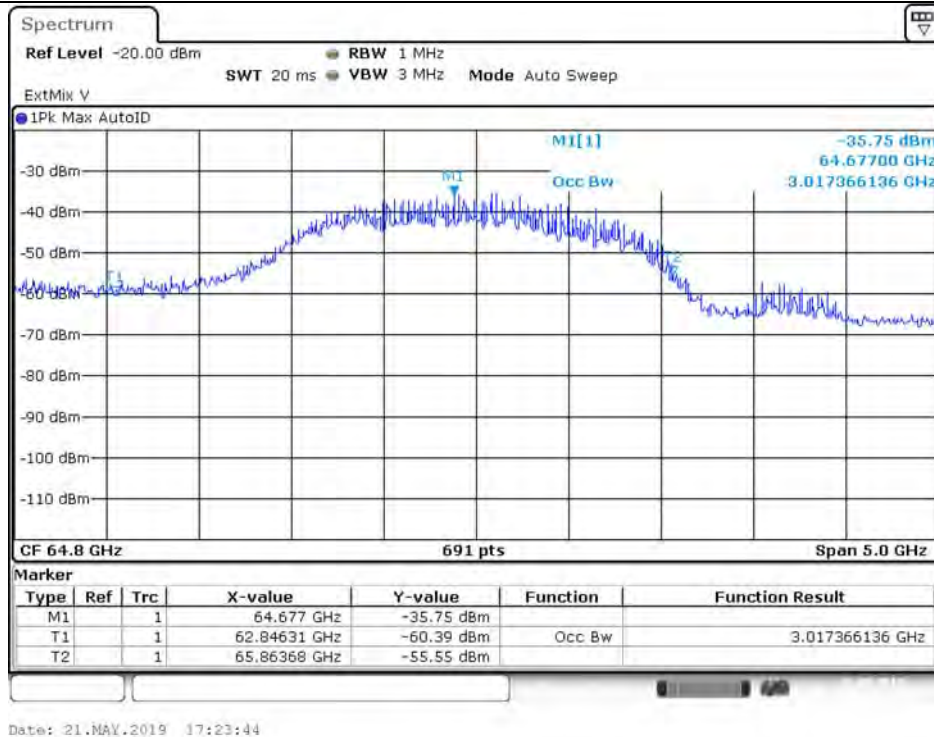


**Test Frequency: 64.80 GHz****6 dBc Bandwidth****Occupied Bandwidth**




For 802.11 ay mode:

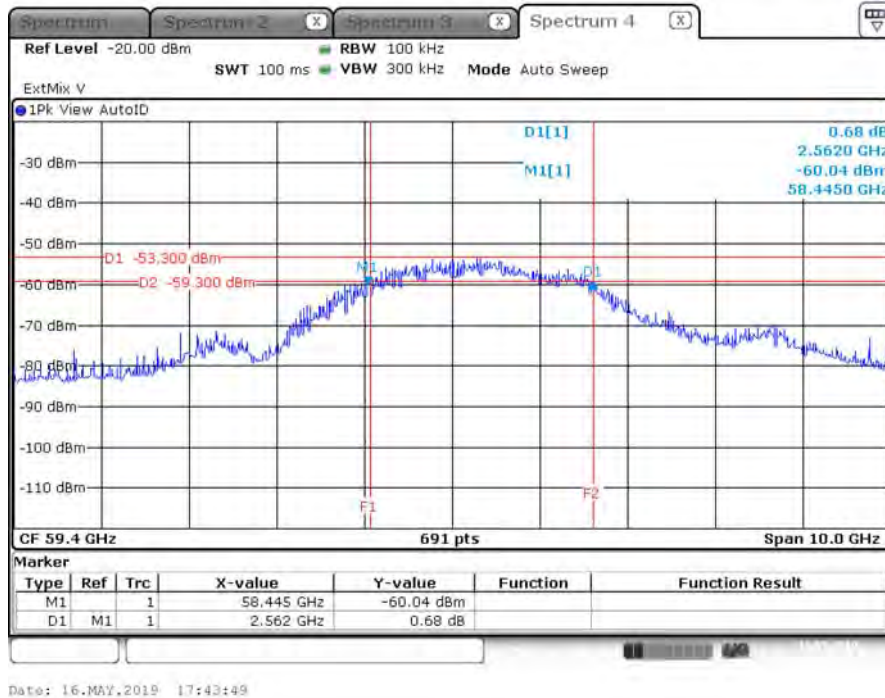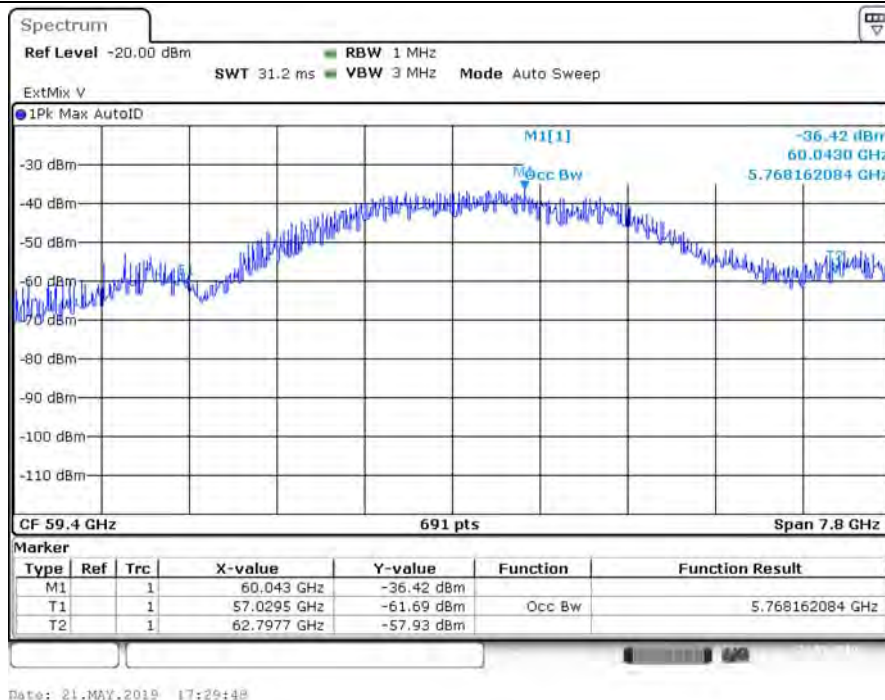**Test Frequency: 59.40 GHz****6 dBc Bandwidth****Occupied Bandwidth**


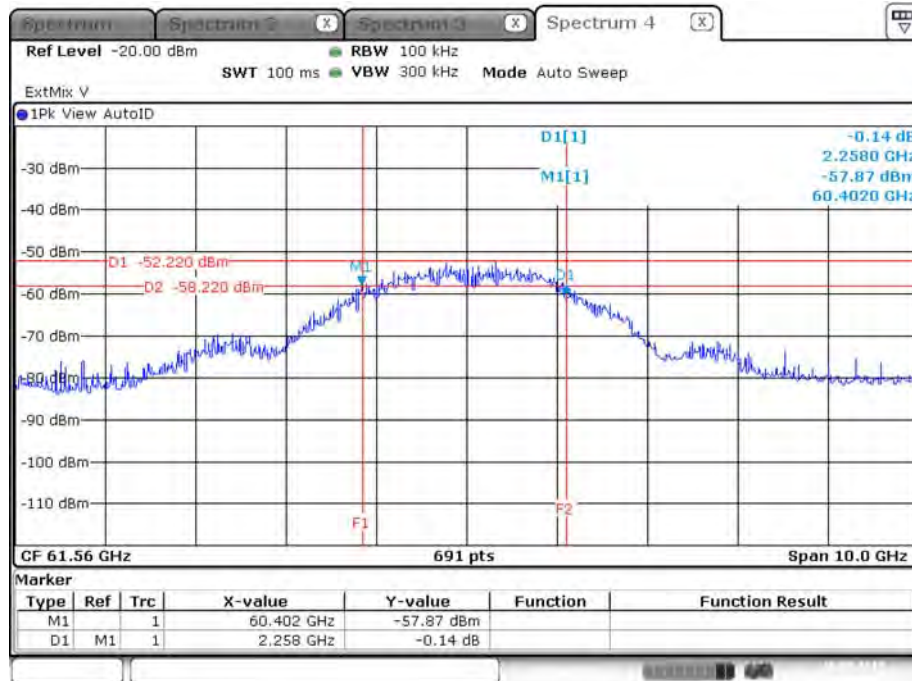
**Test Frequency: 61.56 GHz****6 dBc Bandwidth**

Date: 16.MAY.2019 18:19:16

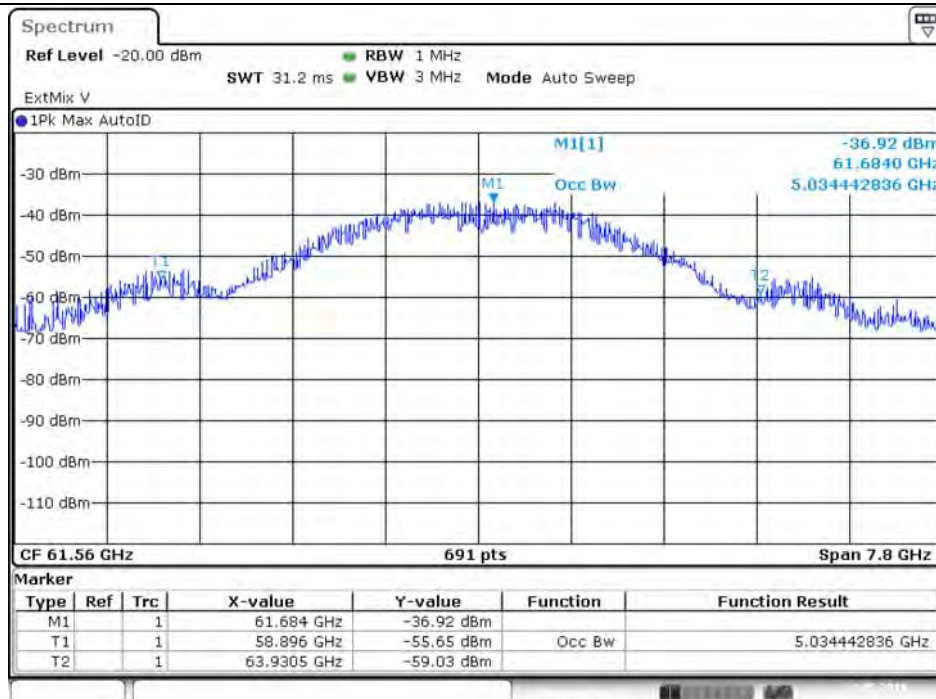**Occupied Bandwidth**

Date: 21.MAY.2019 17:32:53

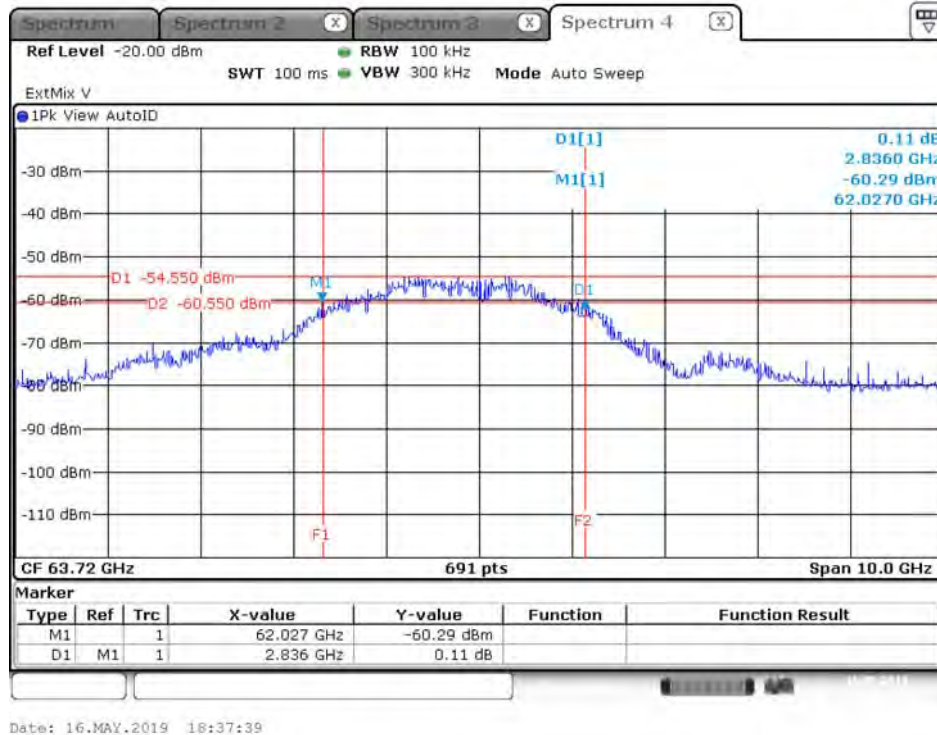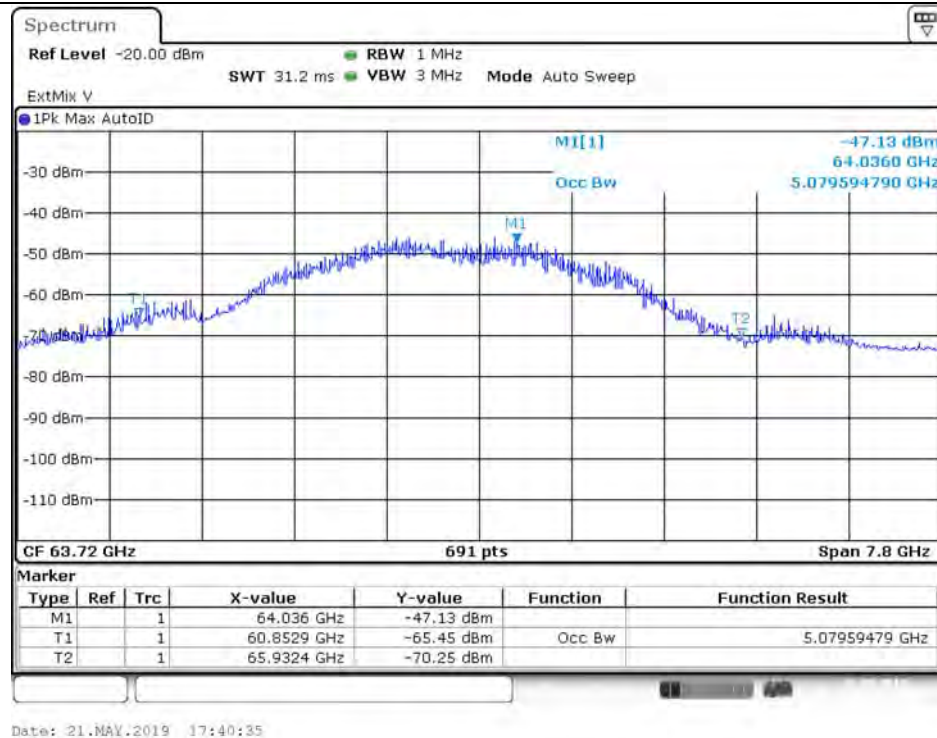

**Test Frequency: 63.72 GHz****6 dBc Bandwidth****Occupied Bandwidth**



### **3.3 EIRP Power**

#### **3.3.1 Limit of EIRP Power**

<b>EIRP Power Limit</b>		
<b>Use Condition</b>	<b>EIRP Average Power</b>	<b>EIRP Peak Power</b>
Fixed field disturbance sensors at within the frequency band 61-61.5GHz	40 dBm	43 dBm
Fixed field disturbance sensors at outside of the band 61-61.5GHz	10 dBm	13 dBm
Except fixed field disturbance sensors at 61-61.5GHz	N/A	10 dBm
Except outdoor fixed Point to Point	40 dBm	43 dBm
Outdoor fixed Point to Point	82 dBm	85 dBm
Note: For fixed point-to-point transmitters located outdoors, the average power of any emission shall not exceed 82 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi. The peak power of any emission shall not exceed 85 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.		

NOTE: For the applicable limit, see FCC 15.255 (c)


#### **3.3.2 Measuring Instruments**

Refer a measuring instruments list in this test report.

#### **3.3.3 Test Procedures**

Method of measurement: Refer as ANSI C63.10-2013 clause 9.3 & 9.5.

### 3.3.4 Test Setup

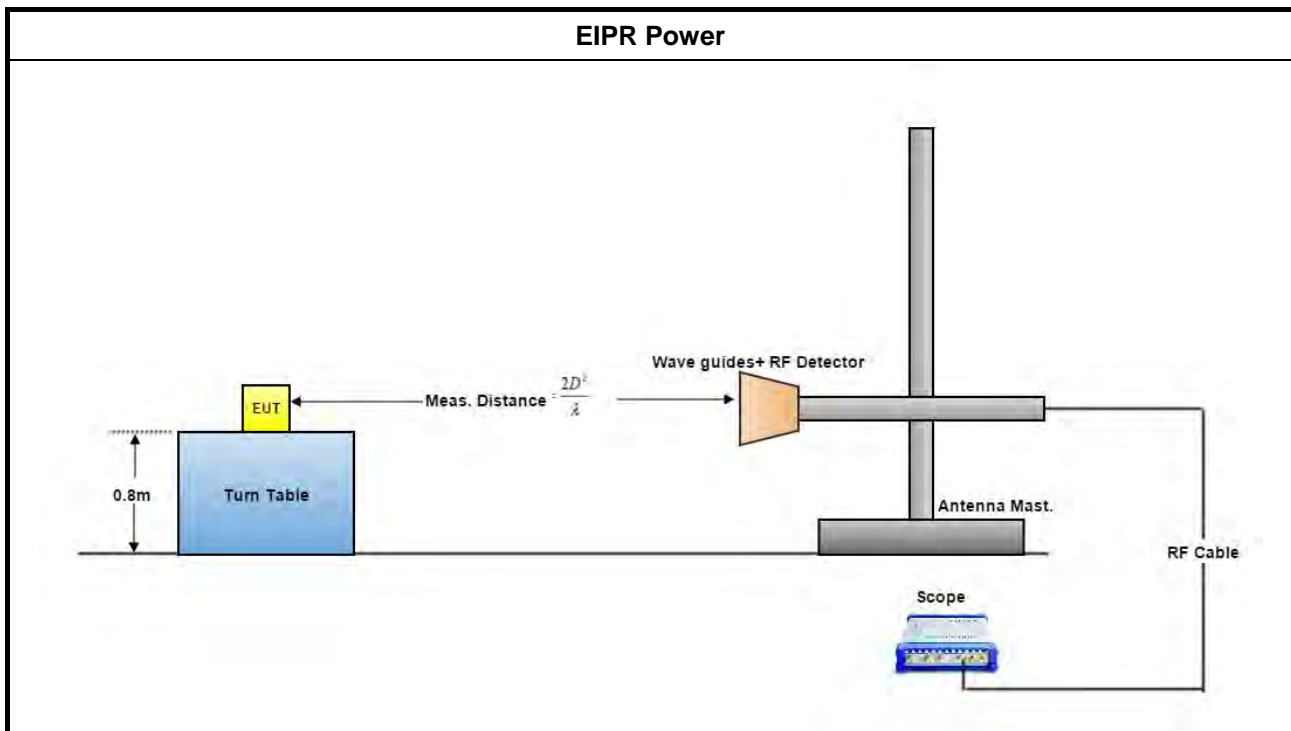

### 3.3.5 Test Result of EIRP Power

**Test Conditions** see ANSI C63.10, clause 5.11 & clause 9

**Test Setup** see ANSI C63.10, clause 9.11

NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.

**3.3.5.1 Test Result of EIRP Power**

Temp	22~24℃	Humidity	54~56%
Test Engineer	Gary Chu	Test Distance	2.00 m
Test Date	Apr. 19, 2019 ~ May 21, 2019	Test Mode	1 (802.11ad mode)

**Test Results**

Test Freq. (GHz)	Rx Gain (dBi)	DSO (mV)		Power Measured (dBm)		E <sub>Meas</sub> (dBuV/m)		EIRP (dBm)		EIRP Limit (dBm) (note 1)	
		Peak	AV	Peak	AV	Peak	AV	Peak	AV	Peak	AV
58.32	23.6	100.84	13.65	-11.51	-21.62	137.46	127.35	38.68	28.57	43	40
60.48	23.6	84.66	10.02	-12.89	-22.96	136.40	126.33	37.62	27.55	43	40
62.64	23.6	106.15	14.36	-10.82	-21.06	138.77	128.53	40.00	29.76	43	40
64.80	23.6	88.29	10.49	-12.45	-22.53	137.44	127.36	38.66	28.58	43	40

The measured power level is converted to EIRP using the Friis equation:

For radiated emissions, calculate the field strength (E) in dBμV/meter.

$$E = 126.8 - 20\log(\lambda) + P - G$$

where:

E : is the field strength of the emission at the measurement distance, in dBμV/m

P : is the power measured at the output of the test antenna, in dBm

λ: is the wavelength of the emission under investigation [300/fMHz], in m

G : is the gain of the test antenna, in dBi For radiated emissions, calculate the EIRP (dBm). If the measurement was performed in the far field, calculate the EIRP.

$$EIRP = E\text{-meas} + 20\log(d\text{-meas}) - 104.7$$

where:

EIRP : is the equivalent isotopically radiated power, in dBm

E-meas. : is the field strength of the emission at the measurement distance, in dBμV/m

d-meas. : is the measurement distance, in m

NOTE 1: For the applicable limit, see FCC 15.255 (c)

NOTE 2: The comparison method which replaces EUT with a signal generator is used to find the correct conversion factor between "DSO(mV)" & "Power Measured(dBm)".



Temp	22~24°C	Humidity	54~56%
Test Engineer	Eddie Weng	Test Distance	2.00 m
Test Date	May 16, 2019 ~ May 21, 2019	Test Mode	2 (802.11ay mode)

**Test Results**

Test Freq. (GHz)	Rx Gain (dBi)	DSO (mV)		Power Measured (dBm)		E <sub>Meas</sub> (dBuV/m)		EIRP (dBm)		EIRP Limit (dBm) (note 1)	
		Peak	AV	Peak	AV	Peak	AV	Peak	AV	Peak	AV
59.40	23.6	117.17	10.53	-10.50	-22.61	138.63	126.52	39.85	27.74	43	40
61.56	23.6	120.48	11.04	-10.26	-22.17	139.18	127.27	40.40	28.49	43	40
63.72	23.6	100.75	9.74	-11.56	-23.10	138.18	126.64	39.40	27.86	43	40

The measured power level is converted to EIRP using the Friis equation:

For radiated emissions, calculate the field strength (E) in dBuV/meter.

$$E = 126.8 - 20\log(\lambda) + P - G$$

where:

E : is the field strength of the emission at the measurement distance, in dBuV/m

P : is the power measured at the output of the test antenna, in dBm

$\lambda$ : is the wavelength of the emission under investigation [300/fMHz], in m

G : is the gain of the test antenna, in dBi For radiated emissions, calculate the EIRP (dBm). If the measurement was performed in the far field, calculate the EIRP.

$$\text{EIRP} = E\text{-meas} + 20\log(d\text{-meas}) - 104.7$$

where:

EIRP : is the equivalent isotopically radiated power, in dBm

E-meas. : is the field strength of the emission at the measurement distance, in dBuV/m

d-meas. : is the measurement distance, in m

NOTE 1: For the applicable limit, see FCC 15.255 (c)

NOTE 2: The comparison method which replaces EUT with a signal generator is used to find the correct conversion factor between "DSO(mV)" & "Power Measured(dBm)".



### 3.4 Peak Conducted Power

#### 3.4.1 Limit of Peak Conducted Power

Peak Conducted Power Limit	
6dBc Bandwidth	Peak Conducted Power (note 1)
> 100MHz	500mW
≤ 100MHz	500mW x (BW/100) (see note 2)
NOTE 1: For the applicable limit, see FCC 15.255(c)	
NOTE 2: BW= 6dB bandwidth (measured at RBW 100kHz)	

#### 3.4.2 Measuring Instruments

Refer a measuring instruments list in this test report.

#### 3.4.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.5

#### 3.4.4 Test Result of Peak Conducted Power

<b>Test Conditions</b>	see ANSI C63.10, clause 5.11 & clause 9
<b>Test Setup</b>	see ANSI C63.10, clause 9.11
NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.	

**3.4.4.1 Peak Conducted Power**

Temp	22~24℃	Humidity	54~56%			
Test Engineer	Gary Chu	Test Date	Apr. 19, 2019 ~ May 21, 2019			
Test Mode	1 (802.11ad mode)					
Test Results						
Test Freq. (GHz)	EIRP (dBm)	Max. Ant. Gain (dBi)	Peak Power (dBm) (note1)	Peak Power (mW)	6dBc BW (MHz) (note2)	Peak Power Limit (mW) (note3)
58.32	38.68	15.3	23.38	217.998	1606.40	500.00
60.48	37.62	15.3	22.32	170.624	1563.00	500.00
62.64	40.00	15.3	24.70	294.796	1584.70	500.00
64.80	38.66	15.3	23.36	216.754	1577.40	500.00
NOTE 1: Because EUT used for the integral antenna without temporary RF connector provided. Therefore peak conducted power is equal to EIRP power subtract the antenna gain.						
NOTE 2: For the 6dBc bandwidth, see test report clause 3.2.5.						
NOTE 3: For the applicable limit, see FCC 15.255(c)						
NOTE 4: For radiated emission measurements, calculate conducted transmitter output power P(cond)(dBm)						
P(cond) = EIRP - G(dBi)						
where:						
G(dBi) is gain of EUT antenna.						



Temp	22~24℃	Humidity	54~56%			
Test Engineer	Eddie Weng	Test Date	May 16, 2019 ~ May 21, 2019			
Test Mode	2 (802.11ay mode)					
Test Results						
Test Freq. (GHz)	EIRP (dBm)	Max. Ant. Gain (dBi)	Peak Power (dBm) (note1)	Peak Power (mW)	6dBc BW (MHz) (note2)	Peak Power Limit (mW) (note3)
59.40	39.85	15.3	24.55	285.358	2562.00	500.00
61.56	40.40	15.3	25.10	323.903	2258.00	500.00
63.72	39.40	15.3	24.10	257.258	2836.00	500.00
NOTE 1: Because EUT used for the integral antenna without temporary RF connector provided. Therefore peak conducted power is equal to EIRP power subtract the antenna gain.						
NOTE 2: For the 6dBc bandwidth, see test report clause 3.2.5.						
NOTE 3: For the applicable limit, see FCC 15.255(c)						
NOTE 4: For radiated emission measurements, calculate conducted transmitter output power P(cond)(dBm) P(cond) = EIRP - G(dBi) where: G(dBi) is gain of EUT antenna.						





## **3.5 Transmitter Spurious Emissions**


### **3.5.1 Limit of Transmitter Spurious Emissions**


Frequency Range	Limit
Radiated emissions below 40 GHz	FCC 15.209
Radiated emissions above 40 GHz – 200GHz	90 pW/cm <sup>2</sup> @ 3 m (Equivalent EIRP 102 µW, -9.91dBm)
NOTE 1: For the applicable limit, see FCC 15.255(d)	
NOTE 2: Spurious emissions shall not exceed the level of the fundamental emission.	


### **3.5.2 Test Procedures**

Method of measurement: Refer as ANSI C63.10-2013, clause 9.12

### 3.5.3 Test Setup

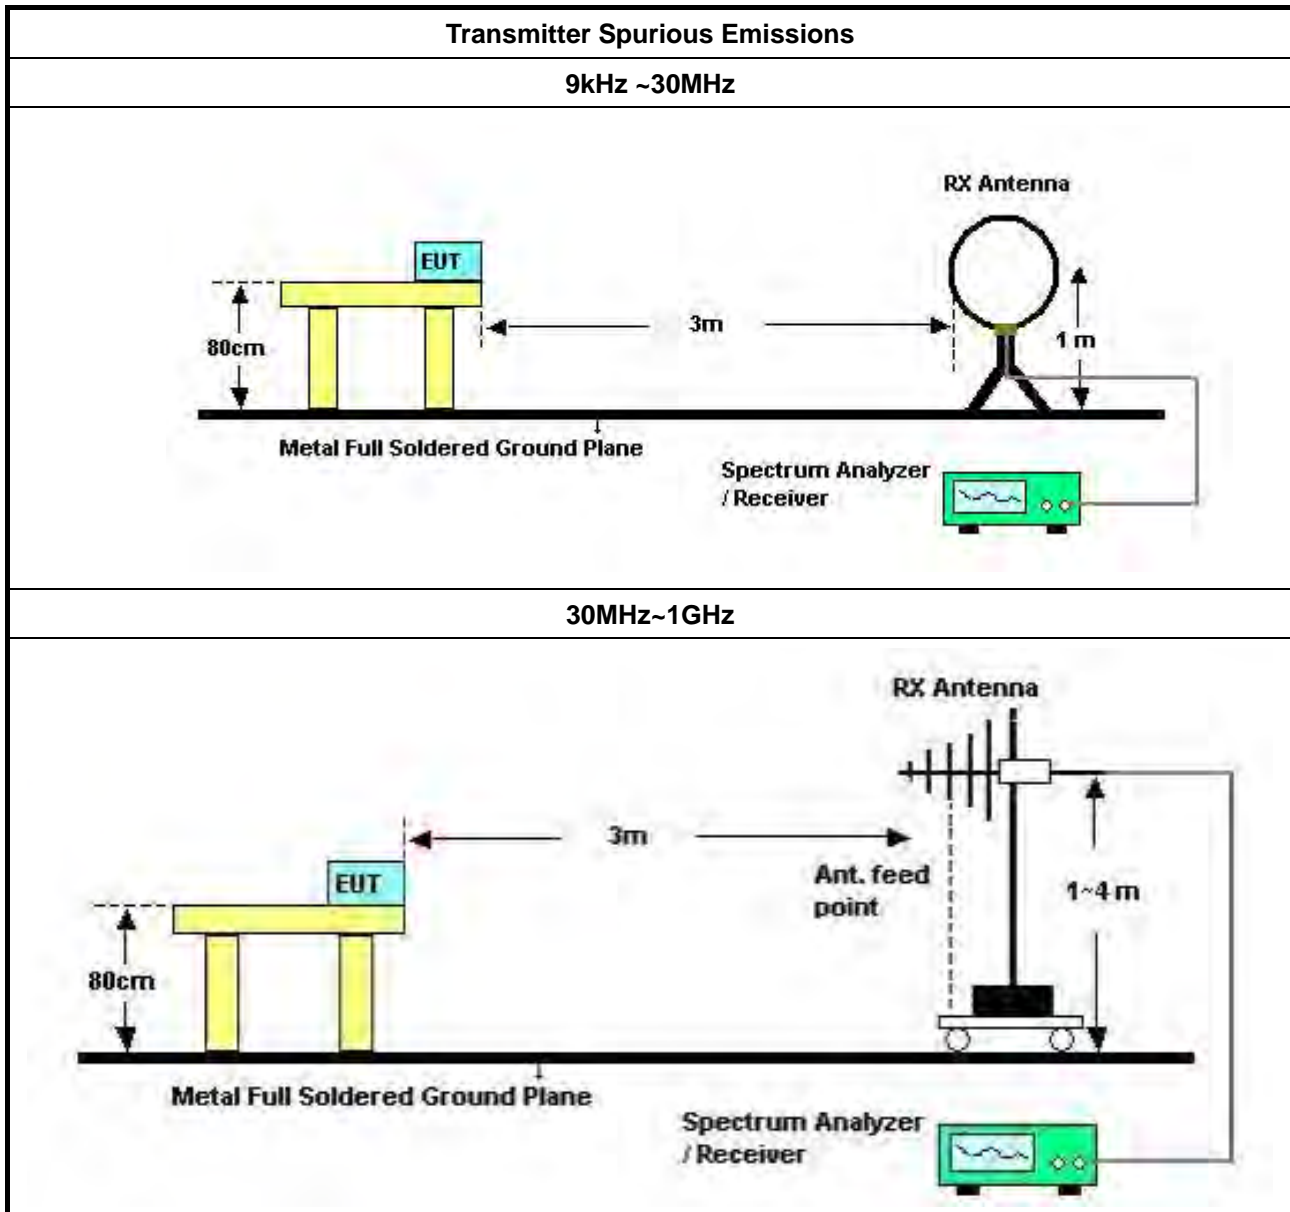

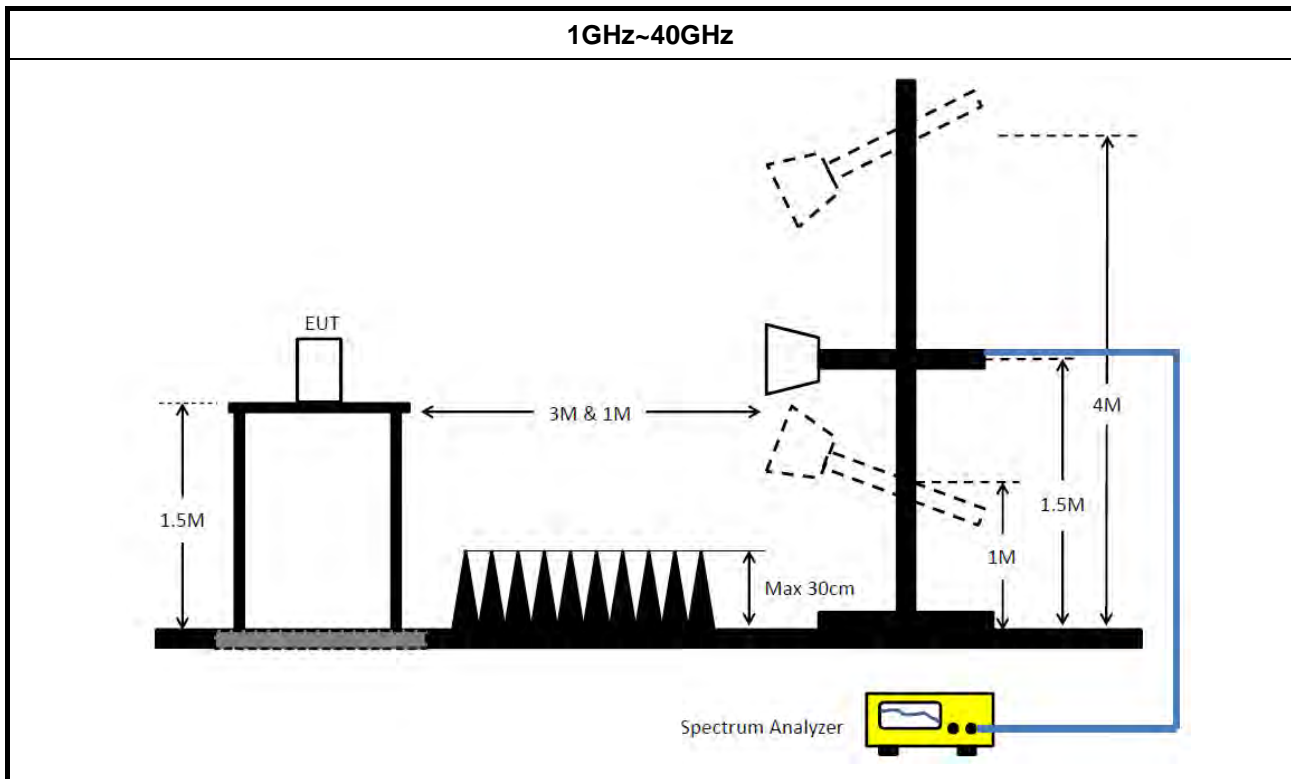

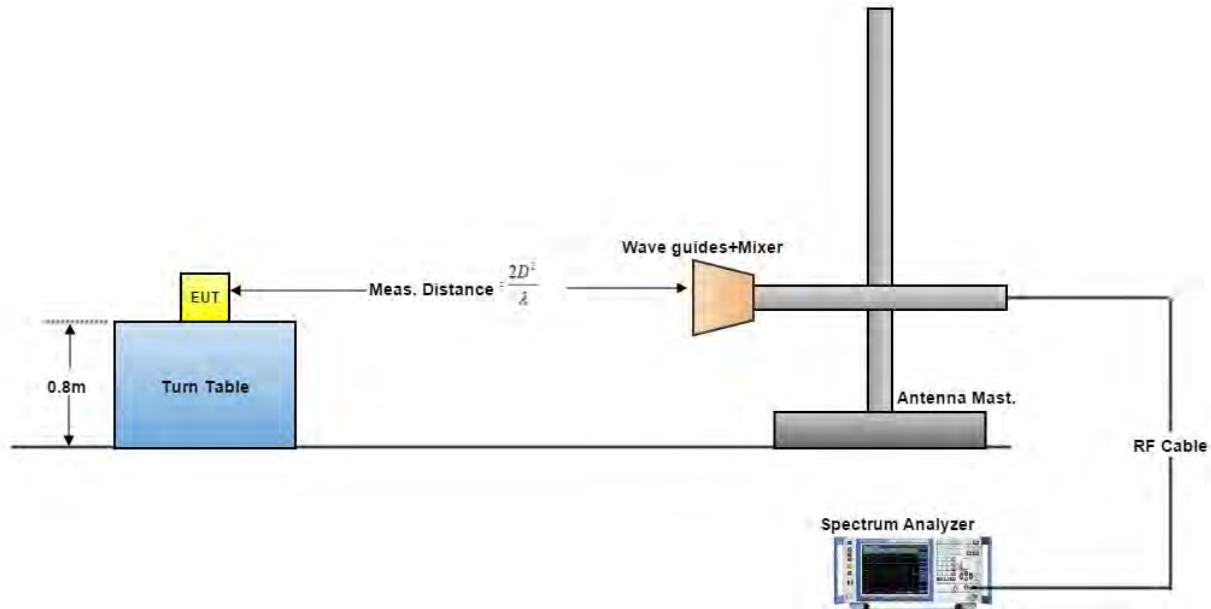**Above 40GHz**


A measuring distance of at 3 m shall be used for measurements at frequencies up to 15 GHz. For frequencies above 15 GHz, any suitable measuring distance may be used. The measurement distance is chosen up to far field distance, depending on the test system noise floor for detecting spurious emission signals. Then above 15 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from spec. distance (3 m) to measurement distance. Distance extrapolation factor =  $20 \log (\text{spec. distance [3 m]} / \text{measurement distance [N m]})$  (dB). The measurements described in ANSI C63.10, clause 7.8.6. If the emission cannot be detected at 1 m, reduce the RBW to increase system sensitivity. Note the value. If the emission still cannot be detected, move the horn closer to the EUT, noting the distance at which a measurement is made.

### 3.5.4 Test Result of Transmitter Spurious Emissions

**Test Conditions** see ANSI C63.10, clause 5.11 & clause 9

**Test Setup** see ANSI C63.10, clause 9.12 ~ 9.13

NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.

#### 3.5.4.1 Test Result of Transmitter Spurious Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

**3.5.4.2 Test Result of Transmitter Spurious Emissions**

Temp	22~24°C	Humidity	54~56%
Test Engineer	Cola Fan	Test Distance	3 m
Test Range	30 MHz – 1 GHz	Test Configuration	Normal Link


Vertical

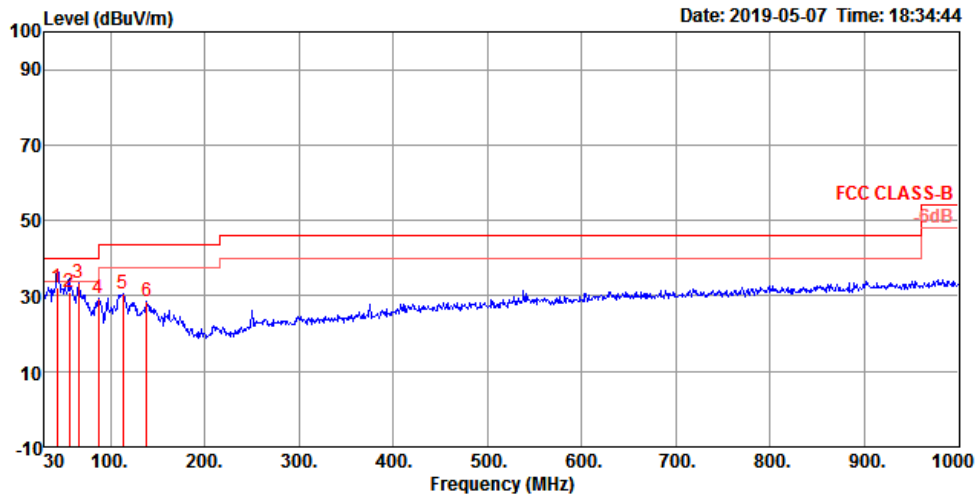

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	43.58	32.34	40.00	-7.66	47.56	0.65	16.55	32.42	100	37 QP	VERTICAL
2	56.19	31.11	40.00	-8.89	50.24	0.77	12.51	32.41	125	233 QP	VERTICAL
3	65.89	33.54	40.00	-6.46	53.06	0.84	12.04	32.40	100	182 Peak	VERTICAL
4	87.23	29.56	40.00	-10.44	46.87	0.97	14.10	32.38	125	227 Peak	VERTICAL
5	113.42	30.58	43.50	-12.92	43.72	1.10	18.12	32.36	125	186 Peak	VERTICAL
6	138.64	28.50	43.50	-15.00	42.41	1.22	17.21	32.34	100	71 Peak	VERTICAL



Horizontal

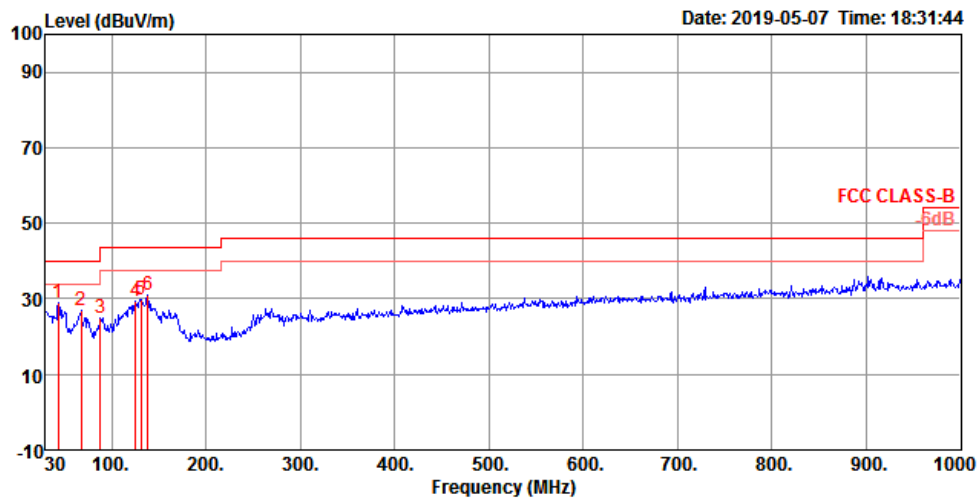


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	43.58	28.90	40.00	-11.10	44.12	0.65	16.55	32.42	150	319 Peak	HORIZONTAL
2	67.83	27.12	40.00	-12.88	46.60	0.85	12.07	32.40	200	283 Peak	HORIZONTAL
3	88.20	25.02	43.50	-18.48	42.02	0.99	14.39	32.38	200	164 Peak	HORIZONTAL
4	125.06	29.27	43.50	-14.23	42.38	1.15	18.09	32.35	200	180 Peak	HORIZONTAL
5	130.88	29.83	43.50	-13.67	43.05	1.18	17.94	32.34	200	180 Peak	HORIZONTAL
6	138.64	30.91	43.50	-12.59	44.82	1.22	17.21	32.34	200	189 Peak	HORIZONTAL



For 802.11ad mode:

Temp	22~24°C	Humidity	54~56%
Test Engineer	Welson Chen	Test Distance	3 m
Test Range	1 GHz – 18 GHz	Test Frequency (GHz)	58.32


Vertical

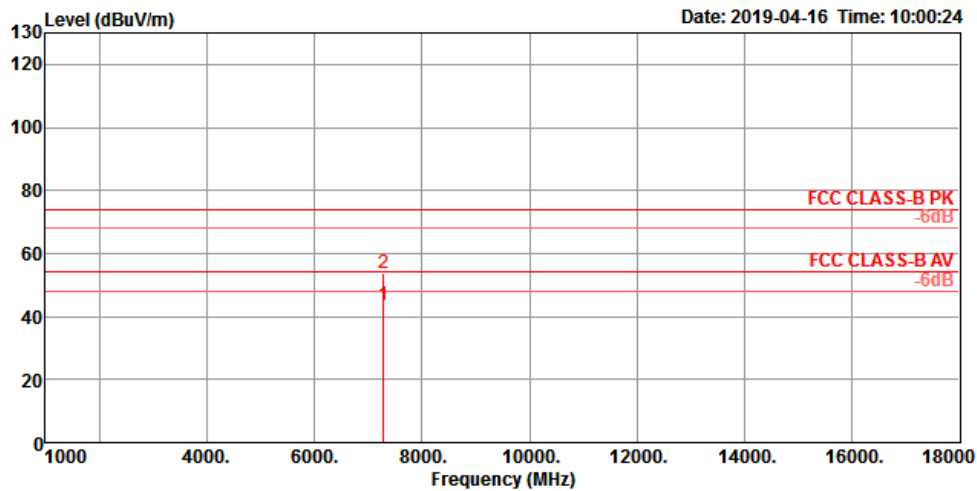

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7289.86	43.65	54.00	-10.35	31.23	8.67	37.30	33.55	194	28 Average	VERTICAL
2	7290.06	53.73	74.00	-20.27	41.31	8.67	37.30	33.55	194	28 Peak	VERTICAL



## Horizontal

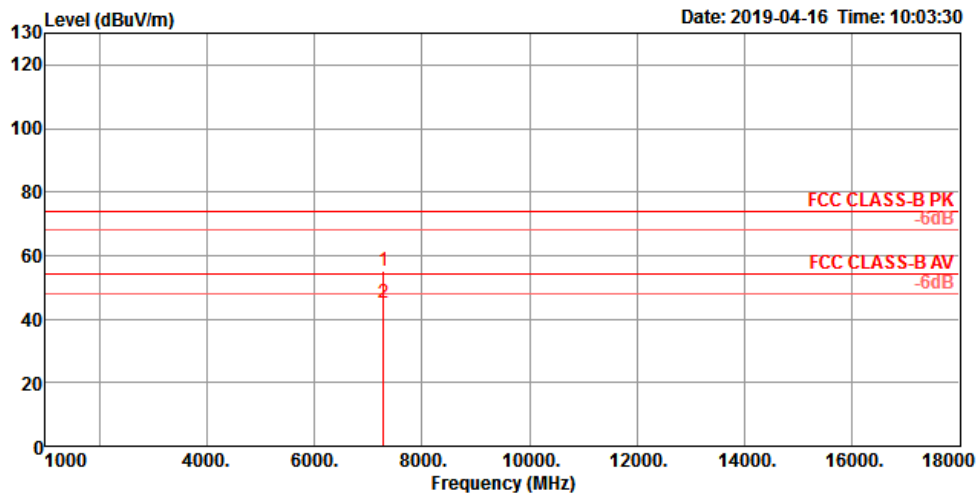


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	7289.90	55.09	74.00	-18.91	42.67	8.67	37.30	33.55	193	14	Peak	HORIZONTAL
2	7289.96	45.07	54.00	-8.93	32.65	8.67	37.30	33.55	193	14	Average	HORIZONTAL





<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Welson Chen	<b>Test Distance</b>	1 m
<b>Test Range</b>	18 GHz – 40 GHz	<b>Test Frequency (GHz)</b>	58.32


Vertical

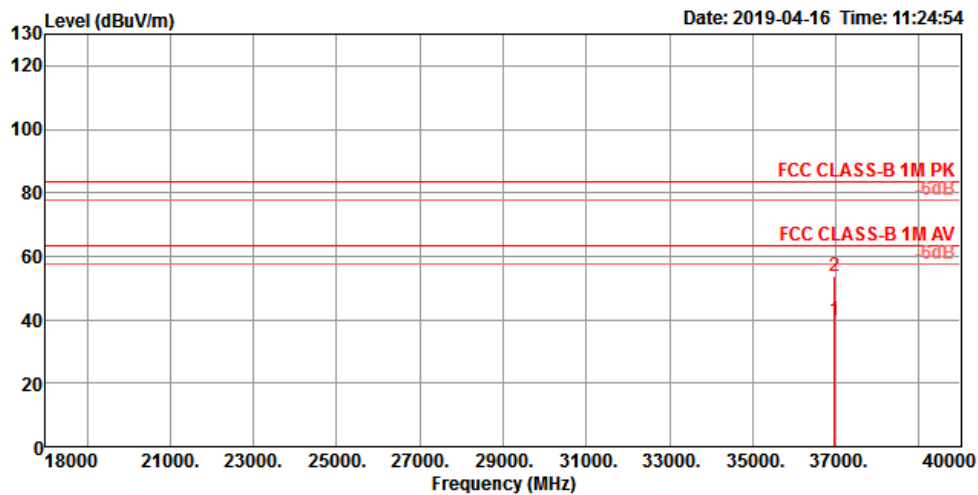

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	36975.36	40.04	63.54	-23.50	36.16	12.10	42.38	50.60	150	360	Average
2	36979.60	53.64	83.54	-29.90	49.76	12.10	42.38	50.60	150	360	Peak



## Horizontal

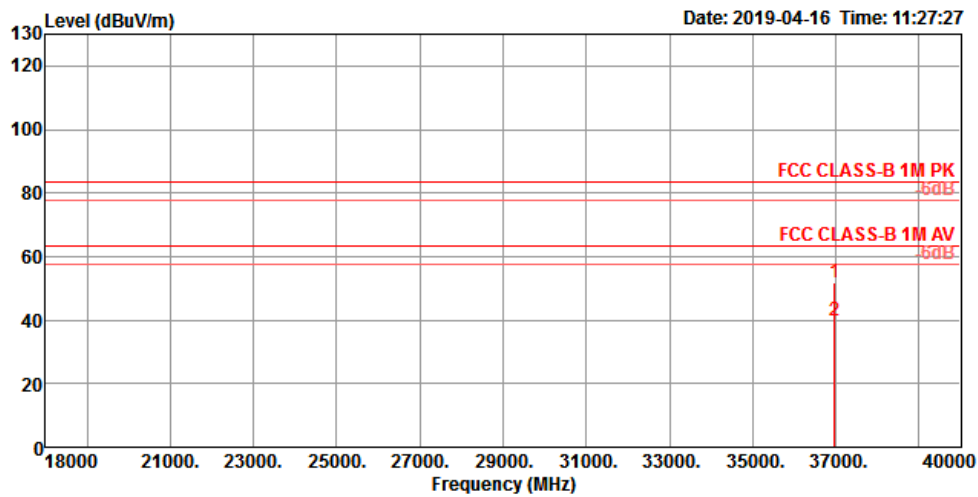


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	cm	deg	
1	36974.16	51.88	83.54	-31.66	48.02	12.10	42.36	50.60	150	0 Peak	HORIZONTAL
2	36976.42	39.85	63.54	-23.69	35.97	12.10	42.38	50.60	150	0 Average	HORIZONTAL



<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Welson Chen	<b>Test Distance</b>	3 m
<b>Test Range</b>	1 GHz – 18 GHz	<b>Test Frequency (GHz)</b>	60.48


Vertical

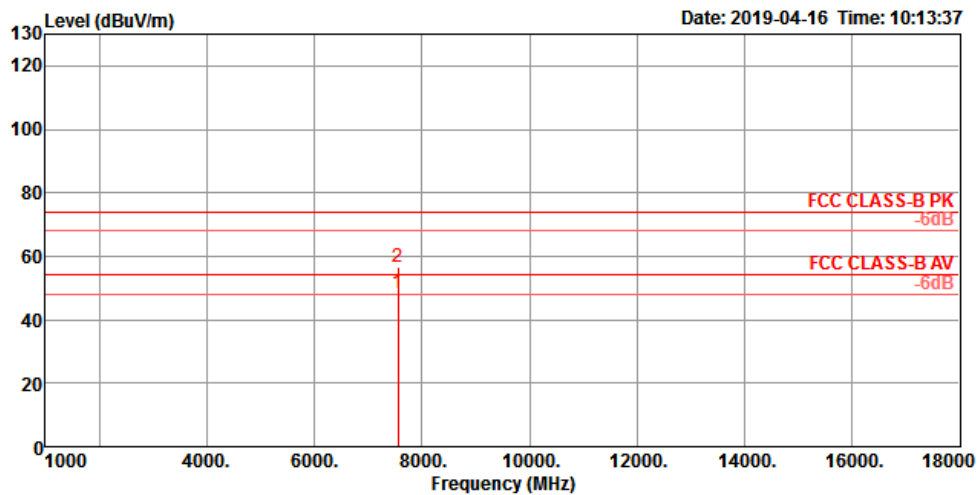

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7559.96	48.45	54.00	-5.55	35.90	8.79	37.50	33.74	300	267	Average
2	7560.07	56.44	74.00	-17.56	43.89	8.79	37.50	33.74	300	267	Peak



## Horizontal

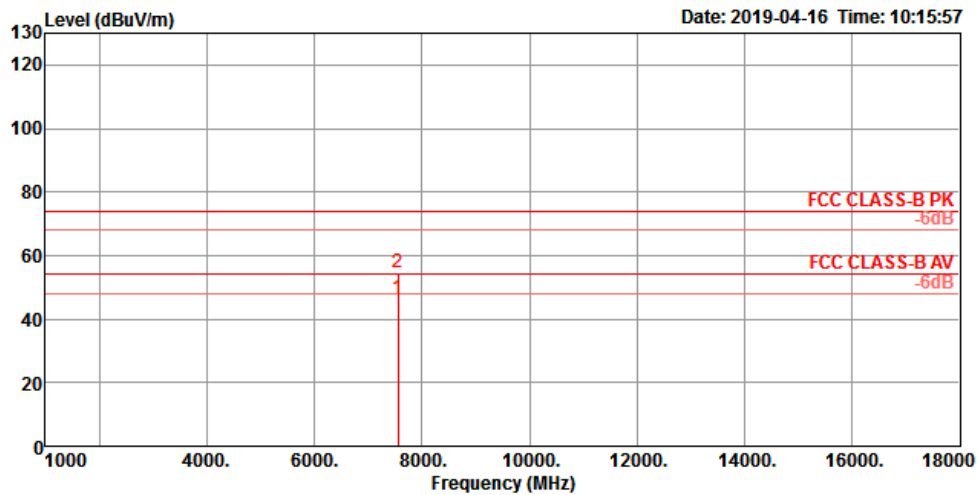


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7559.98	46.37	54.00	-7.63	33.82	8.79	37.50	33.74	192	20	Average
2	7559.98	54.92	74.00	-19.08	42.37	8.79	37.50	33.74	192	20	Peak



Temp	22~24°C	Humidity	54~56%
Test Engineer	Welson Chen	Test Distance	1 m
Test Range	18 GHz – 40 GHz	Test Frequency (GHz)	60.48


Vertical

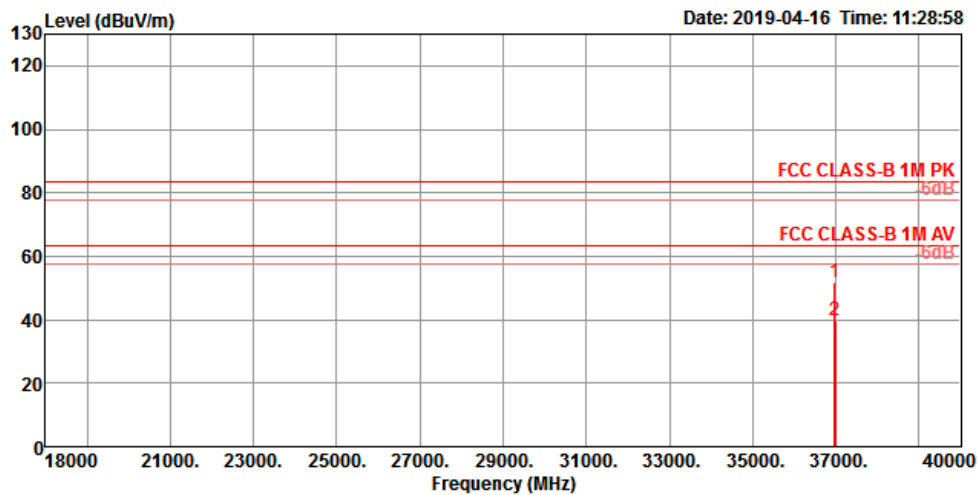

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	36980.76	51.82	83.54	-31.72	47.94	12.10	42.38	50.60	150	360 Peak	VERTICAL
2	36985.80	39.83	63.54	-23.71	35.95	12.10	42.38	50.60	150	360 Average	VERTICAL



## Horizontal

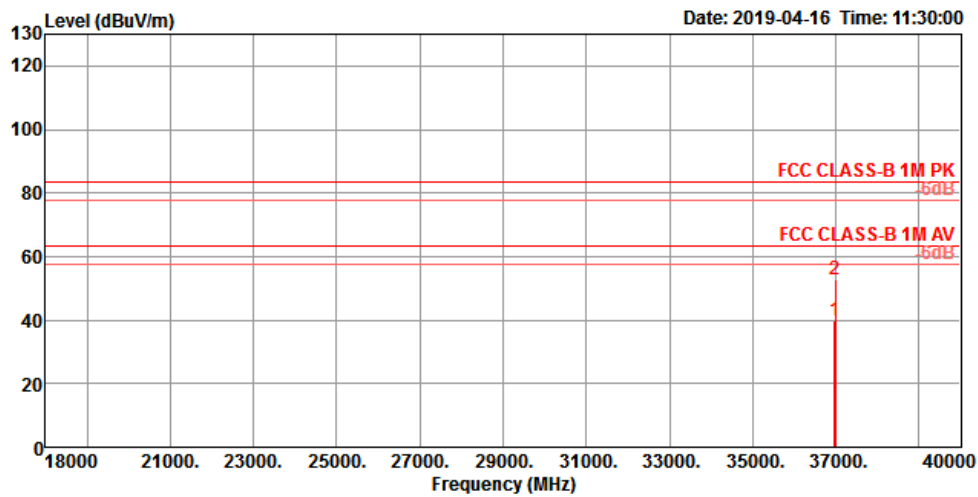


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	cm	deg	
1	36972.72	39.94	63.54	-23.60	36.08	12.10	42.36	50.60	150	0 Average	HORIZONTAL
2	36987.68	52.67	83.54	-30.87	48.79	12.10	42.38	50.60	150	0 Peak	HORIZONTAL



<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Welson Chen	<b>Test Distance</b>	3 m
<b>Test Range</b>	1 GHz – 18 GHz	<b>Test Frequency (GHz)</b>	62.64


Vertical

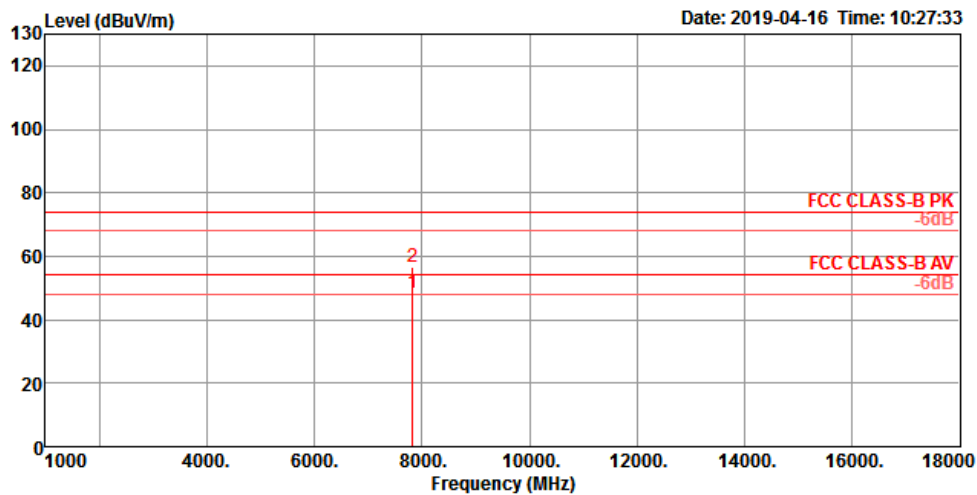

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7829.95	48.60	54.00	-5.40	36.07	9.18	37.25	33.90	292	238	Average
2	7830.03	56.81	74.00	-17.19	44.28	9.18	37.25	33.90	292	238	Peak



## Horizontal

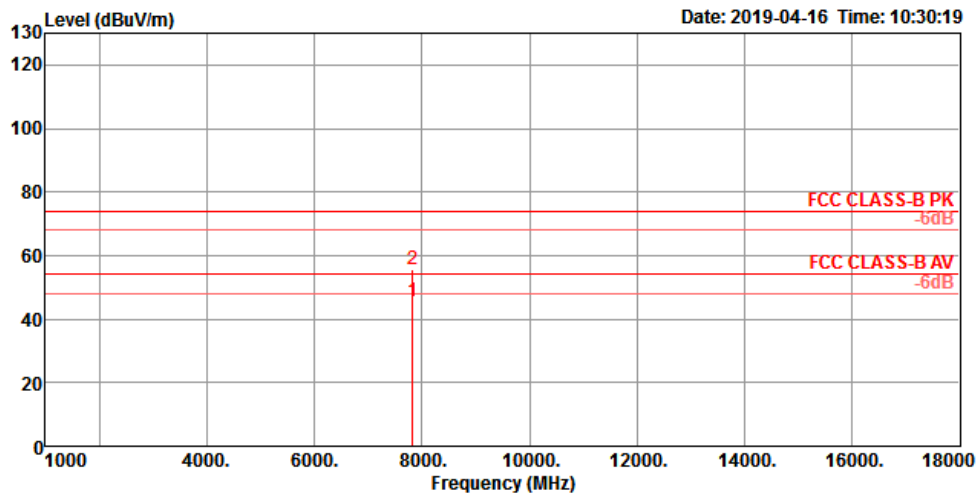


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7829.99	45.58	54.00	-8.42	33.05	9.18	37.25	33.90	250	333	Average
2	7830.21	55.85	74.00	-18.15	43.32	9.18	37.25	33.90	250	333	Peak





<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Welson Chen	<b>Test Distance</b>	1 m
<b>Test Range</b>	18 GHz – 40 GHz	<b>Test Frequency (GHz)</b>	62.64


Vertical

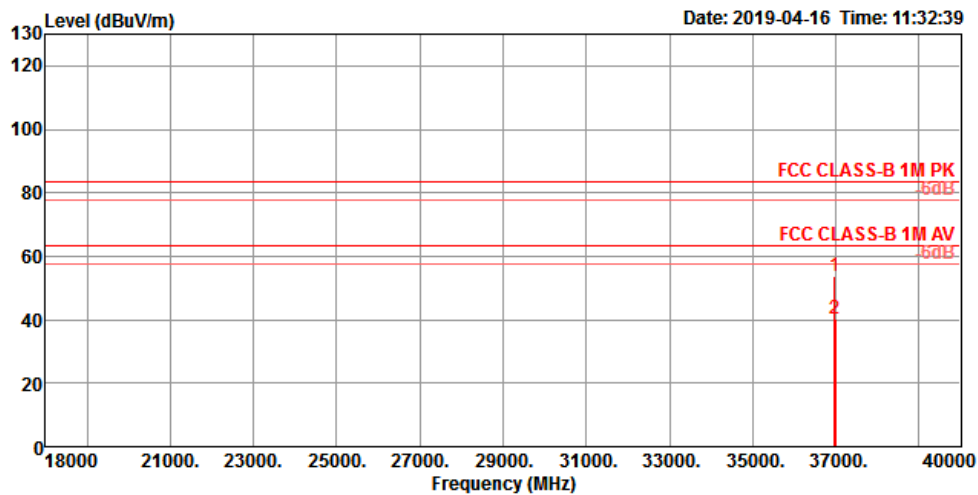

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	36971.52	53.89	83.54	-29.65	50.03	12.10	42.36	50.60	150	360 Peak	VERTICAL
2	36985.68	40.25	63.54	-23.29	36.37	12.10	42.38	50.60	150	360 Average	VERTICAL



## Horizontal

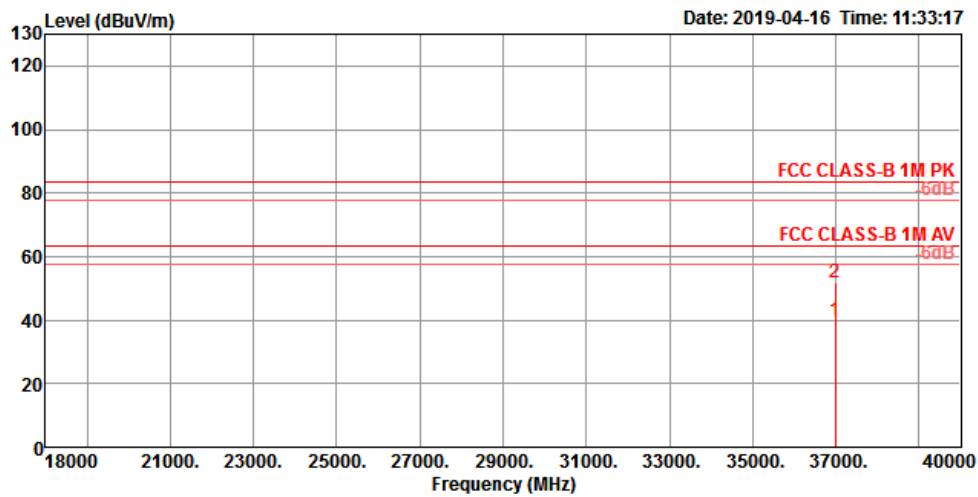


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	36985.80	39.90	63.54	-23.64	36.02	12.10	42.38	50.60	150	0 Average	HORIZONTAL
2	36985.80	51.77	83.54	-31.77	47.89	12.10	42.38	50.60	150	0 Peak	HORIZONTAL



<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Welson Chen	<b>Test Distance</b>	3 m
<b>Test Range</b>	1 GHz – 18 GHz	<b>Test Frequency (GHz)</b>	64.80


Vertical

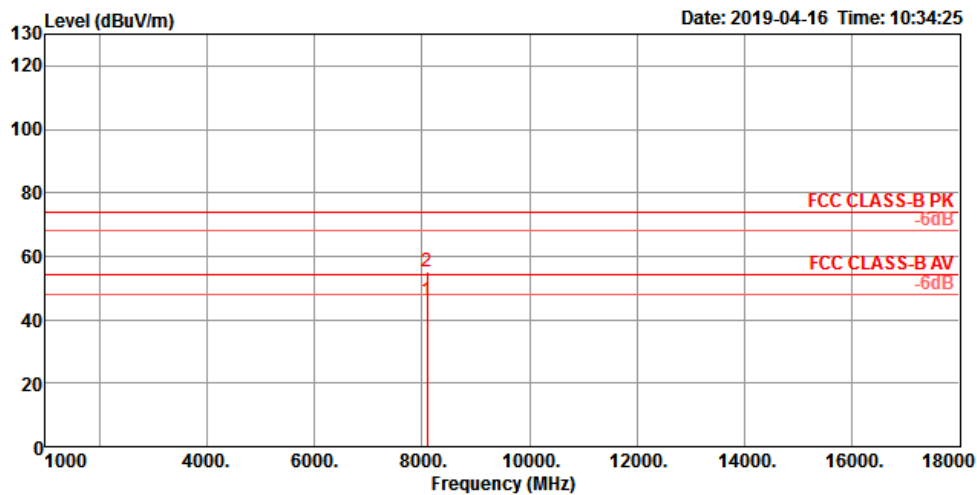

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	8100.03	46.13	54.00	-7.87	33.91	9.16	37.10	34.04	282	241	Average VERTICAL
2	8100.19	55.38	74.00	-18.62	43.16	9.16	37.10	34.04	282	241	Peak VERTICAL



## Horizontal

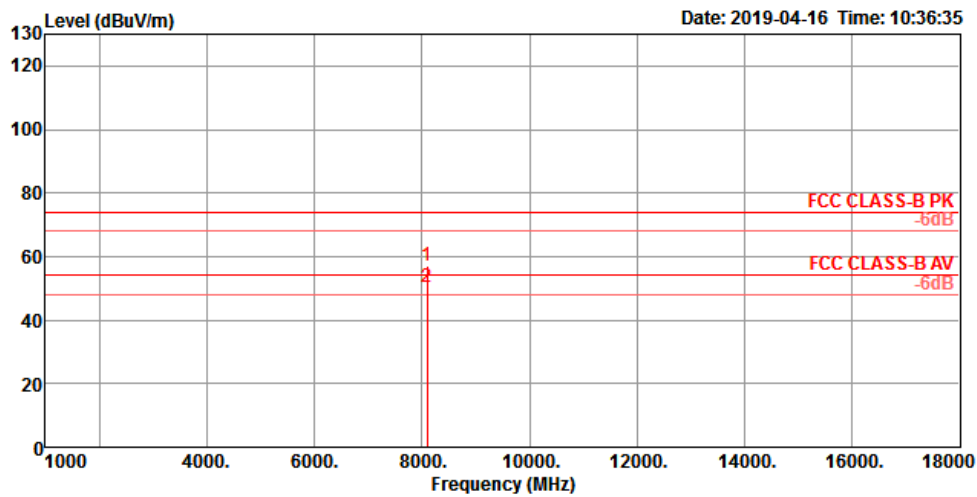


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	8099.90	56.96	74.00	-17.04	44.74	9.16	37.10	34.04	248	24 Peak	HORIZONTAL
2	8099.98	50.59	54.00	-3.41	38.37	9.16	37.10	34.04	248	24 Average	HORIZONTAL



<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Welson Chen	<b>Test Distance</b>	1 m
<b>Test Range</b>	18 GHz – 40 GHz	<b>Test Frequency (GHz)</b>	64.80


Vertical

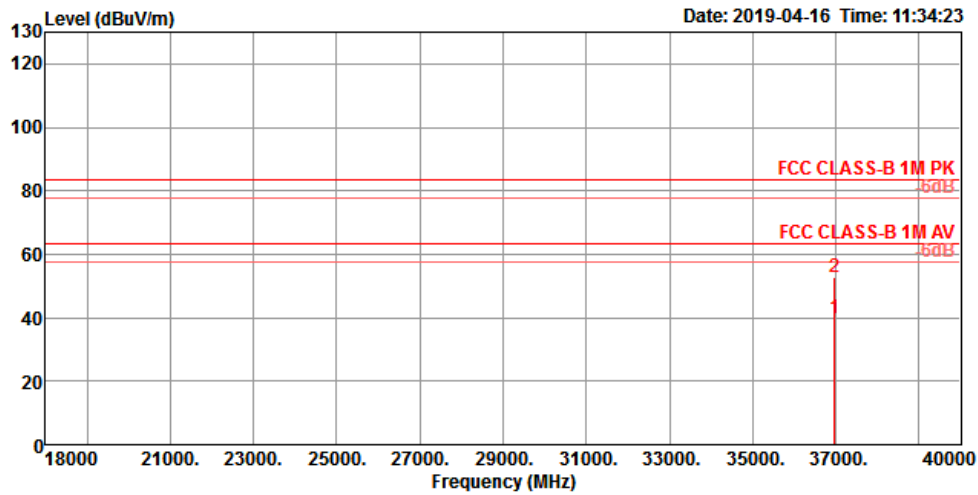

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	36978.76	39.87	63.54	-23.67	35.99	12.10	42.38	50.60	150	360	Average	VERTICAL
2	36978.88	52.61	83.54	-30.93	48.73	12.10	42.38	50.60	150	360	Peak	VERTICAL



## Horizontal

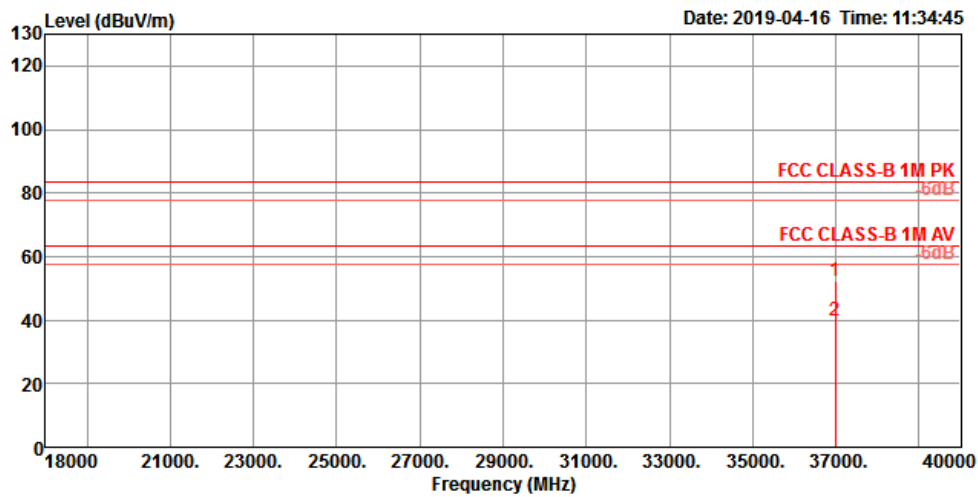


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	36982.76	52.22	83.54	-31.32	48.34	12.10	42.38	50.60	150	0 Peak	HORIZONTAL
2	36983.92	39.80	63.54	-23.74	35.92	12.10	42.38	50.60	150	0 Average	HORIZONTAL



For 802.11 ay mode:

Temp	22~24°C	Humidity	54~56%
Test Engineer	Eddie Weng	Test Distance	3 m
Test Range	1 GHz – 18 GHz	Test Frequency (GHz)	59.40


Vertical

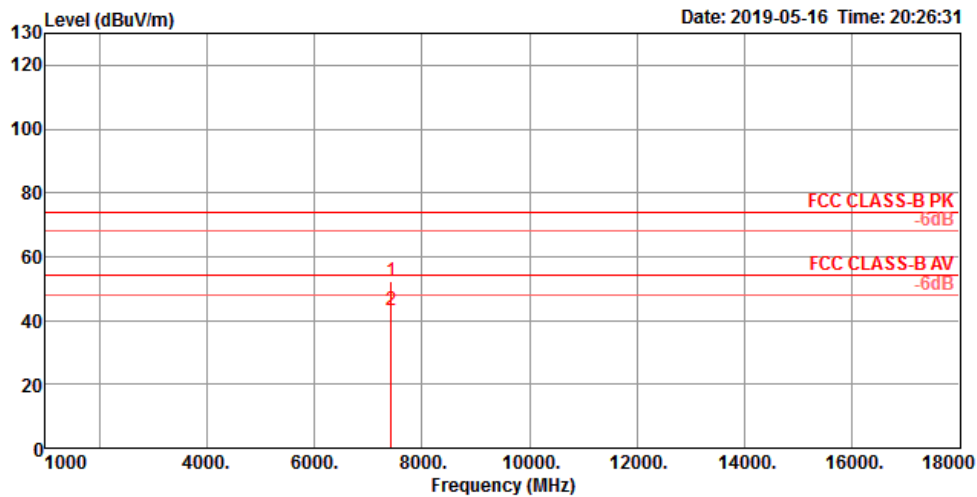

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7424.88	52.07	74.00	-21.93	44.37	6.48	36.47	35.25	188	289 Peak	VERTICAL
2	7424.98	43.37	54.00	-10.63	35.67	6.48	36.47	35.25	188	289 Average	VERTICAL



## Horizontal

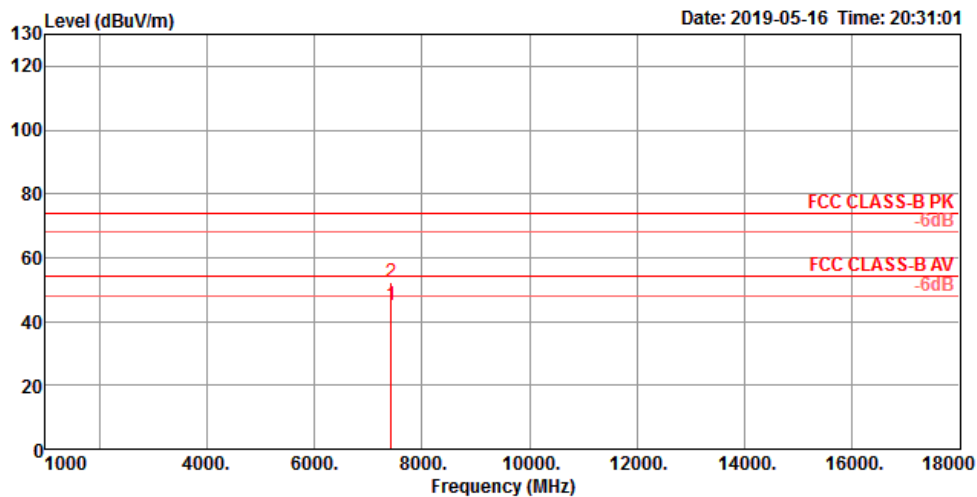


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7424.99	45.16	54.00	-8.84	37.46	6.48	36.47	35.25	146	0 Average	HORIZONTAL
2	7425.22	52.28	74.00	-21.72	44.58	6.48	36.47	35.25	146	0 Peak	HORIZONTAL





<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Eddie Weng	<b>Test Distance</b>	1 m
<b>Test Range</b>	18 GHz – 40 GHz	<b>Test Frequency (GHz)</b>	59.40


Vertical

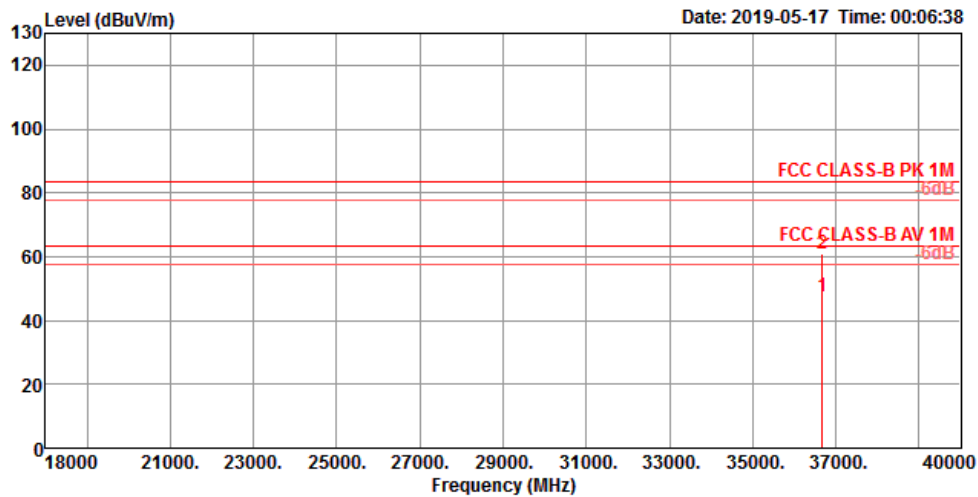

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	36681.28	47.32	63.54	-16.22	37.97	17.88	42.07	50.60	150	356 Average	VERTICAL
2	36683.76	60.86	83.54	-22.68	51.51	17.88	42.07	50.60	150	356 Peak	VERTICAL



## Horizontal

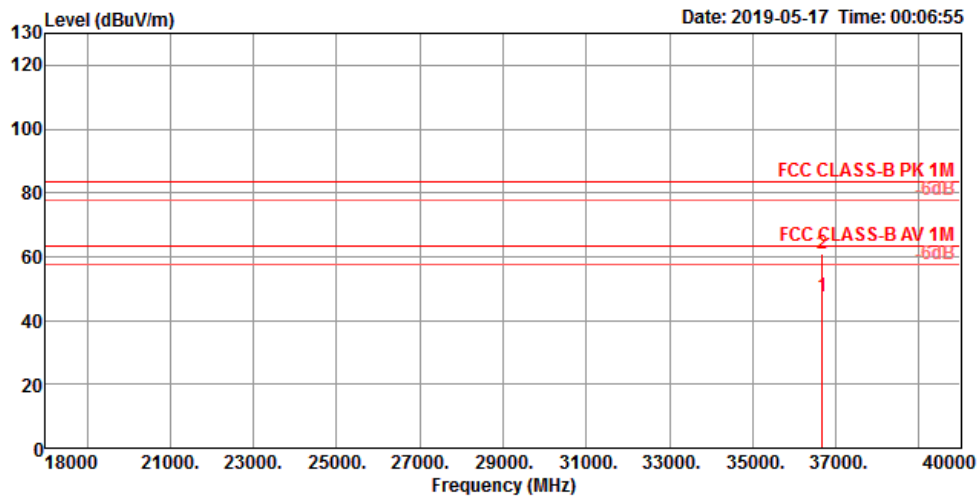


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	cm	deg	
1	36681.10	47.45	63.54	-16.09	38.10	17.88	42.07	50.60	150	307	Average
2	36681.98	60.79	83.54	-22.75	51.44	17.88	42.07	50.60	150	307	Peak



<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Eddie Weng	<b>Test Distance</b>	3 m
<b>Test Range</b>	1 GHz – 18 GHz	<b>Test Frequency (GHz)</b>	61.56


Vertical

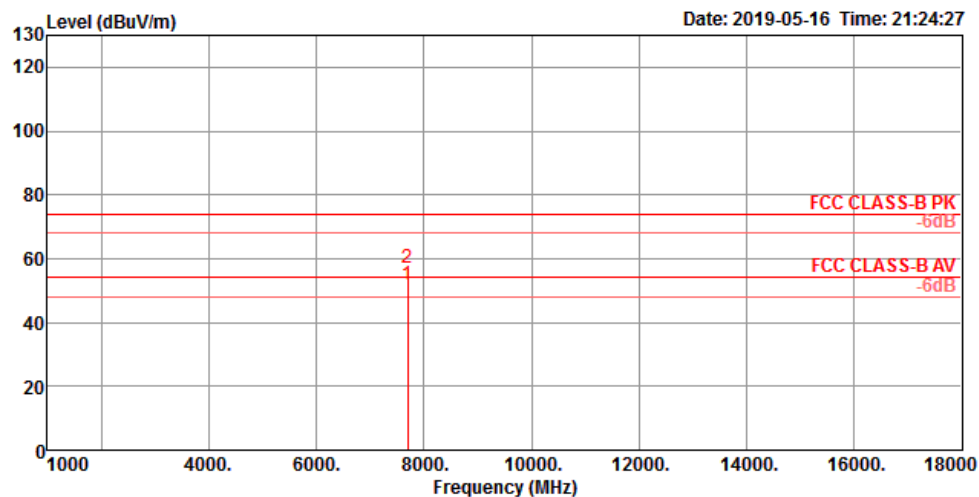

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7694.99	51.74	54.00	-2.26	43.99	6.78	36.20	35.23	247	204 Average	VERTICAL
2	7695.03	56.87	74.00	-17.13	49.12	6.78	36.20	35.23	247	204 Peak	VERTICAL



Horizontal

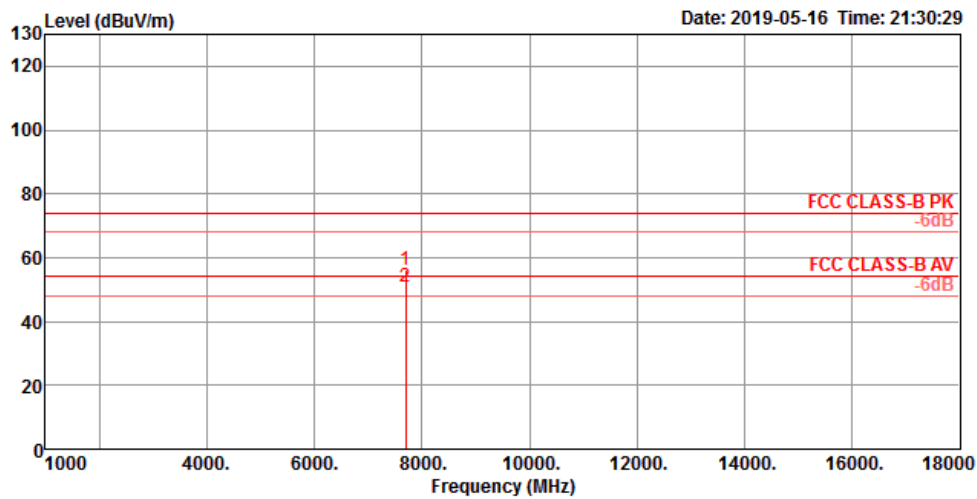


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7694.95	55.97	74.00	-18.03	48.22	6.78	36.20	35.23	209	22 Peak	HORIZONTAL
2	7694.99	50.71	54.00	-3.29	42.96	6.78	36.20	35.23	209	22 Average	HORIZONTAL



<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Eddie Weng	<b>Test Distance</b>	1 m
<b>Test Range</b>	18 GHz – 40 GHz	<b>Test Frequency (GHz)</b>	61.56


Vertical

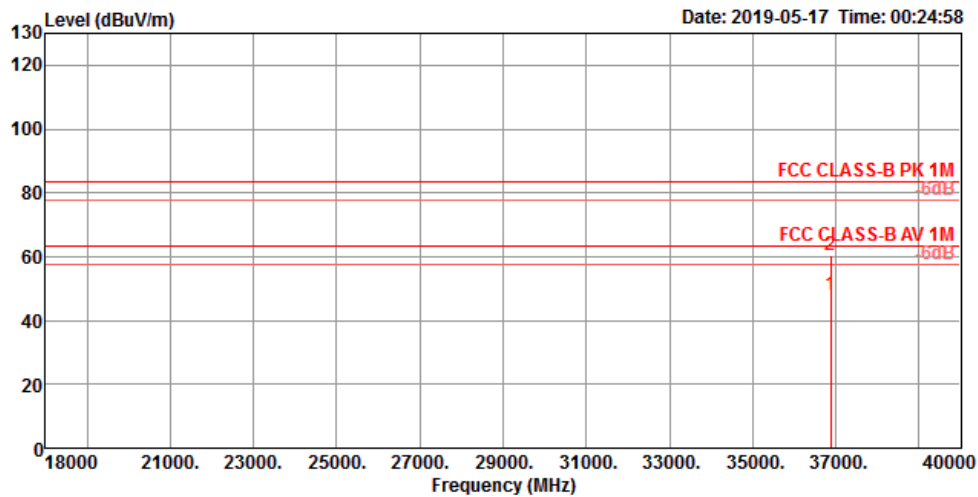

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	36874.27	48.16	63.54	-15.38	38.56	17.93	42.27	50.60	150	6 Average	VERTICAL
2	36881.21	60.25	83.54	-23.29	50.65	17.93	42.27	50.60	150	6 Peak	VERTICAL



Horizontal

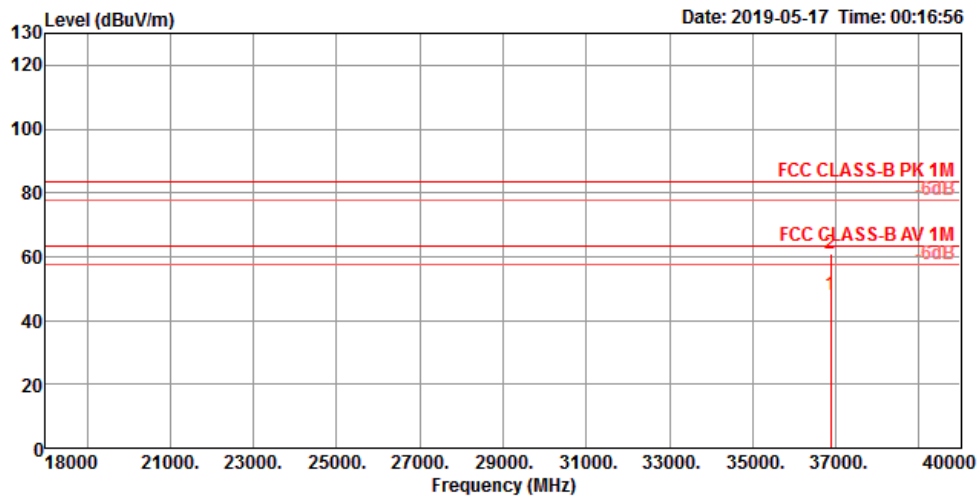


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	cm	deg	
1	36876.60	47.84	63.54	-15.70	38.24	17.93	42.27	50.60	150	102	Average
2	36886.84	61.07	83.54	-22.47	51.46	17.94	42.27	50.60	150	102	Peak



<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Eddie Weng	<b>Test Distance</b>	3 m
<b>Test Range</b>	1 GHz – 18 GHz	<b>Test Frequency (GHz)</b>	63.72


Vertical

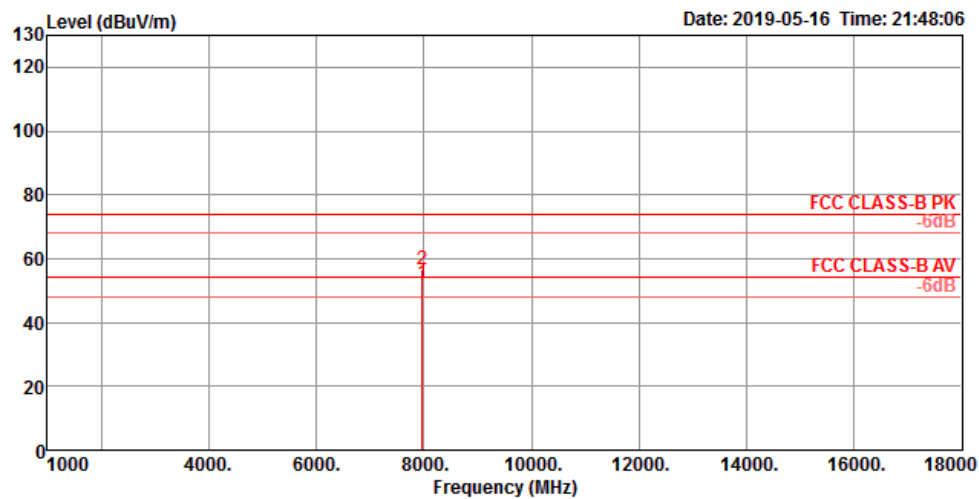

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7964.99	52.27	54.00	-1.73	43.60	6.91	37.00	35.24	174	258 Average	VERTICAL
2	7965.02	56.63	74.00	-17.37	47.96	6.91	37.00	35.24	174	258 Peak	VERTICAL



## Horizontal

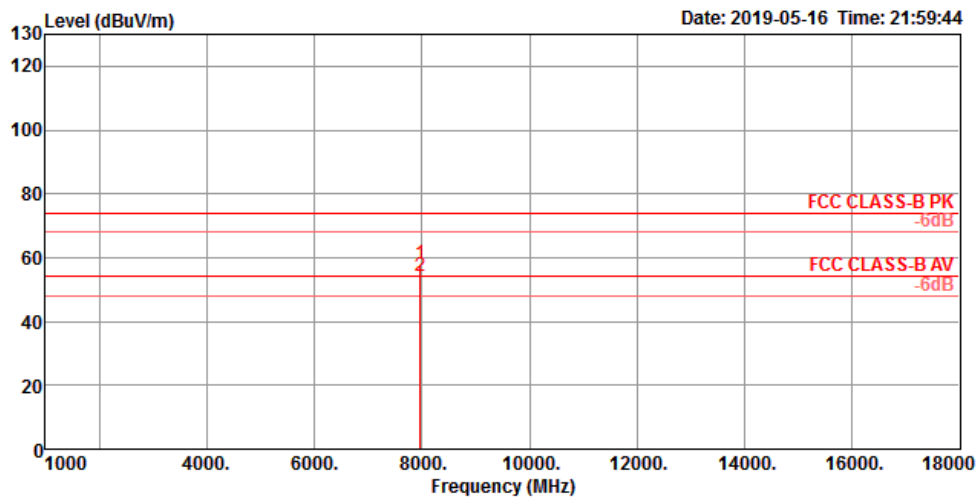


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	7964.90	57.82	74.00	-16.18	49.15	6.91	37.00	35.24	209	19 Peak	HORIZONTAL
2	7964.99	53.98	54.00	-0.02	45.31	6.91	37.00	35.24	209	19 Average	HORIZONTAL





<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Eddie Weng	<b>Test Distance</b>	1 m
<b>Test Range</b>	18 GHz – 40 GHz	<b>Test Frequency (GHz)</b>	63.72


Vertical

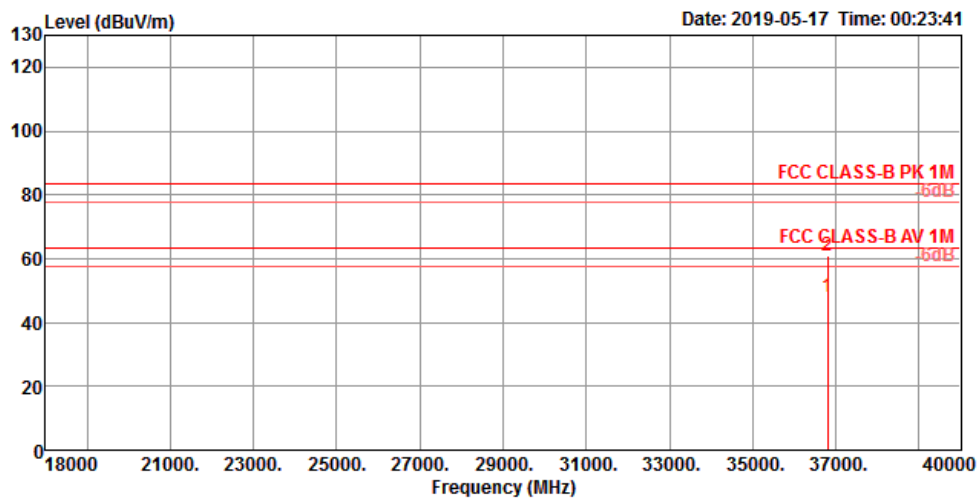

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	36806.02	48.02	63.54	-15.52	38.51	17.91	42.20	50.60	150	48 Average	VERTICAL
2	36806.90	60.78	83.54	-22.76	51.27	17.91	42.20	50.60	150	48 Peak	VERTICAL



## Horizontal

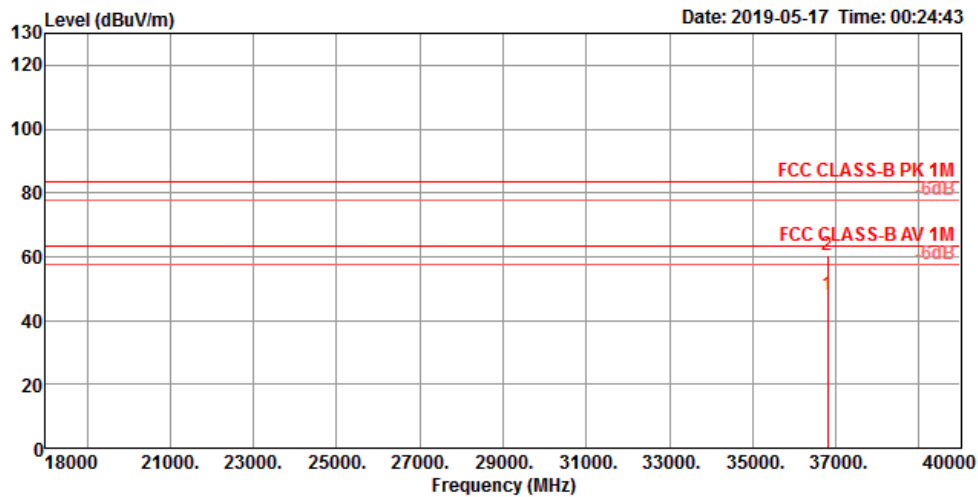

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	36807.06	47.97	63.54	-15.57	38.46	17.91	42.20	50.60	150	136	Average
2	36808.88	60.34	83.54	-23.20	50.83	17.91	42.20	50.60	150	136	Peak



For 802.11ad mode:

<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Gary Chu	<b>Test Date</b>	Apr. 19, 2019 ~ May 21, 2019
<b>Test Range</b>	40GHz – 200GHz		

<b>Test Frequency (GHz)</b>	<b>Rx Antenna Gain (dBi)</b>	<b>Measurement Distance (m)</b>	<b>Read Worse Frequency (GHz)</b>	<b>Read Level (dBm)</b>
58.32	23.6	2.00	56.61	-81.15
<b>EIRP (dBm)</b>	<b>Specification Distance (m)</b>	<b>Power Density (pW/cm<sup>2</sup>)</b>	<b>Limit (pW/cm<sup>2</sup>)</b>	<b>Test Result</b>
-31.23	3	0.6661	90.00	PASS

<b>Test Frequency (GHz)</b>	<b>Rx Antenna Gain (dBi)</b>	<b>Measurement Distance (m)</b>	<b>Read Worse Frequency (GHz)</b>	<b>Read Level (dBm)</b>
60.48	23.6	2.00	56.78	-82.12
<b>EIRP (dBm)</b>	<b>Specification Distance (m)</b>	<b>Power Density (pW/cm<sup>2</sup>)</b>	<b>Limit (pW/cm<sup>2</sup>)</b>	<b>Test Result</b>
-32.17	3	0.5360	90.00	PASS



Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
62.64	23.6	2.00	66.93	-83.56
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )	Test Result
-32.19	3	0.5346	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
64.80	23.6	2.00	66.52	-83.79
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm <sup>2</sup> )	Limit (pW/cm <sup>2</sup> )	Test Result
-32.47	3	0.5008	90.00	PASS

Note:

$EIRP = Prx - Grx + \text{Free Space Path Loss} = Prx - Grx + 20\log(4\pi d/\lambda)^2$

Which

$Prx = \text{Read Level.}$

$Grx = \text{Rx Antenna Gain.}$

A distance factor is offset and the formula is  $20\log(D1/D2)$

Which

$D1 = \text{Specification Distance}$

$D2 = \text{Measurement Distance}$



For 802.11 ay mode:

<b>Temp</b>	22~24°C	<b>Humidity</b>	54~56%
<b>Test Engineer</b>	Gary Chu	<b>Test Date</b>	May 16, 2019 ~ May 21, 2019
<b>Test Range</b>	40GHz – 200GHz		

<b>Test Frequency (GHz)</b>	<b>Rx Antenna Gain (dBi)</b>	<b>Measurement Distance (m)</b>	<b>Read Worse Frequency (GHz)</b>	<b>Read Level (dBm)</b>
59.40	23.6	2.00	56.49	-70.17
<b>EIRP (dBm)</b>	<b>Specification Distance (m)</b>	<b>Power Density (pW/cm<sup>2</sup>)</b>	<b>Limit (pW/cm<sup>2</sup>)</b>	<b>Test Result</b>
-20.27	3	8.3118	90.00	PASS

<b>Test Frequency (GHz)</b>	<b>Rx Antenna Gain (dBi)</b>	<b>Measurement Distance (m)</b>	<b>Read Worse Frequency (GHz)</b>	<b>Read Level (dBm)</b>
61.56	23.6	2.00	56.90	-81.86
<b>EIRP (dBm)</b>	<b>Specification Distance (m)</b>	<b>Power Density (pW/cm<sup>2</sup>)</b>	<b>Limit (pW/cm<sup>2</sup>)</b>	<b>Test Result</b>
-31.89	3	0.5716	90.00	PASS



<b>Test Frequency (GHz)</b>	<b>Rx Antenna Gain (dBi)</b>	<b>Measurement Distance (m)</b>	<b>Read Worse Frequency (GHz)</b>	<b>Read Level (dBm)</b>
63.72	23.6	2.00	50.19	-75.14
<b>EIRP (dBm)</b>	<b>Specification Distance (m)</b>	<b>Power Density (pW/cm^2)</b>	<b>Limit (pW/cm^2)</b>	<b>Test Result</b>
-26.27	3	2.8091	90.00	PASS

Note:

$EIRP = Prx - Grx + \text{Free Space Path Loss} = Prx - Grx + 20\log(4\pi d / \lambda)^2$

Which

$Prx = \text{Read Level.}$

$Grx = \text{Rx Antenna Gain.}$

A distance factor is offset and the formula is  $20\log(D1/D2)$

Which

$D1 = \text{Specification Distance}$

$D2 = \text{Measurement Distance}$

### 3.6 Frequency Stability

#### 3.6.1 Limit of Frequency Stability

Frequency Stability	Limit
Refer as FCC 15.255(f) and ANSI C63.10-2013, clause 9.14	within the frequency bands
Note: These measurements shall also be performed at normal and extreme test conditions.	


#### 3.6.2 Measuring Instruments

Refer a measuring instruments list in this test report.

#### 3.6.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 9.14.

#### 3.6.4 Test Setup

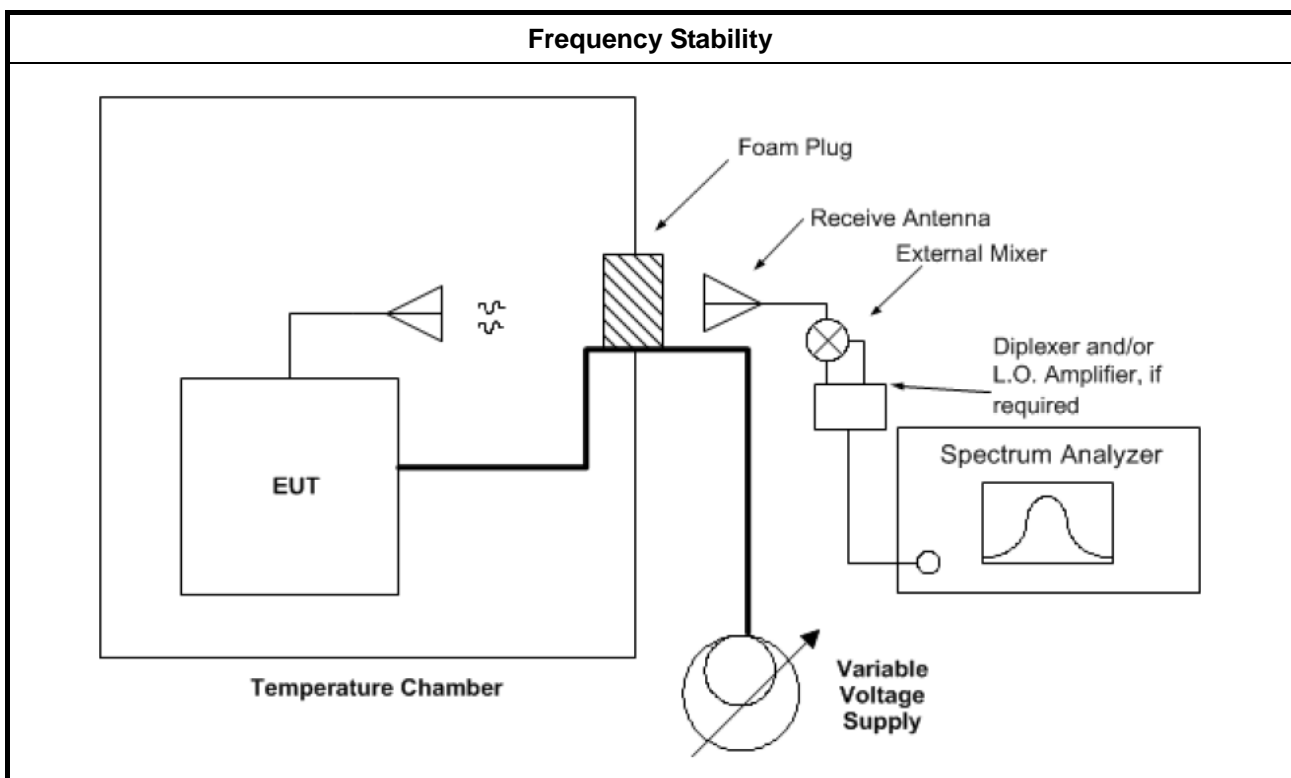



### 3.6.5 Test Result of Frequency Stability

<b>Test Conditions</b>	see ANSI C63.10, clause 5.11 & clause 9
<b>Test Setup</b>	see ANSI C63.10, clause 9.14
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	



**3.6.5.1 Frequency Stability with Respect to Ambient Temperature**

For 802.11ad mode:

Frequency Stability with Respect to Ambient Temperature			
Temp	22~24°C	Humidity	54~56%
Test Engineer	Gary Chu	Test Date	Apr. 19, 2019 ~ May 21, 2019
Test Results			
Test Temperature (°C)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
-20	60480.711	165	Within band
-10	60480.713	167	Within band
0	60480.459	-87	Within band
10	60480.413	-133	Within band
20	60480.546	Reference	Within band
30	60480.486	-60	Within band
40	60480.584	38	Within band
50	60480.743	197	Within band
60	60480.734	188	Within band
70	60480.785	239	Within band
80	60480.746	200	Within band
90	60480.649	103	Within band
100	60480.846	300	Within band
NOTE: The manufacturer's specified temperature range of -20 to 100°C.			



For 802.11 ay mode:

Frequency Stability with Respect to Ambient Temperature			
Temp	22~24°C	Humidity	54~56%
Test Engineer	Eddie Weng	Test Date	May 16, 2019 ~ May 21, 2019
Test Results			
Test Temperature (°C)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
-20	61559.537	-347	Within band
-10	61559.595	-289	Within band
0	61559.624	-260	Within band
10	61559.624	-260	Within band
20	61559.884	Reference	Within band
30	61559.638	-246	Within band
40	61559.595	-289	Within band
50	61559.537	-347	Within band
60	61559.487	-397	Within band
70	61559.494	-390	Within band
80	61559.468	-416	Within band
90	61559.551	-333	Within band
100	61559.556	-328	Within band
NOTE: The manufacturer's specified temperature range of -20 to 100°C.			

**3.6.5.2 Frequency Stability When Varying Supply Voltage****For 802.11ad mode:**

Frequency Stability When Varying Supply Voltage			
Temp	22~24°C	Humidity	54~56%
Test Engineer	Gary Chu	Test Date	Apr. 19, 2019 ~ May 21, 2019
Test Results			
Test Voltage: (Vac)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
102	60480.781	235	within band
120	60480.546	Reference	within band
138	60480.156	-390	within band
NOTE: For the applicable limit, see FCC 15.255(f).			

**For 802.11 ay mode:**

Frequency Stability When Varying Supply Voltage			
Temp	22~24°C	Humidity	54~56%
Test Engineer	Eddie Weng	Test Date	May 16, 2019 ~ May 21, 2019
Test Results			
Test Voltage: (Vac)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
102	61559.537	-347	within band
120	61559.884	Reference	within band
138	61559.662	-222	within band
NOTE: For the applicable limit, see FCC 15.255(f).			



### **3.7 Operation Restriction and Group Installation**

#### **3.7.1 Limit of Operation Restriction and Group Installation**

Item	Limit
Operation Restriction	Operation is not permitted for the following products: <ul style="list-style-type: none"><li>♦ Equipment used on aircraft or satellites. (Refer as FCC 15.255 (a))</li><li>♦ Field disturbance sensors, including vehicle radar systems, unless the field disturbance sensors are employed for fixed operation. (Refer as FCC 15.255 (a))</li></ul>
Group Installation	Operation is not permitted for the following products: <ul style="list-style-type: none"><li>♦ External phase-locking (Refer as FCC 15.255 (h))</li></ul>

#### **3.7.2 Result of Operation Restriction**

Manufacturer declares that EUT will not be used on aircraft or satellites. Then user manual will include a statement to caution EUT is not permitted for use on aircraft or satellites. EUT is a wireless video area network (WVAN) for the connection of consumer electronic (CE) audio and video devices.

#### **3.7.3 Result of Group Installation**

The frequency, amplitude and phase of the transmit signal are set within the EUT. There are no external phase-locking inputs or any other means of combining two or more units together to realize a beam-forming array.



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 28, 2019	Jan. 29, 2020	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 24, 2018	Dec. 23, 2019	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Jan. 11, 2019	Jan. 10, 2020	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	150kHz ~ 30MHz	May 22, 2018	May 21, 2019	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA with 6dB Attenuator	TESEQ & EMC	CBL6112D & N-6-06	37880 & AT-N0609	20MHz ~ 2GHz	Aug. 27, 2018	Aug. 26, 2019	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 29, 2019	Mar. 28, 2020	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Nov. 13, 2018	Nov. 12, 2019	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 28, 2018	Jun. 27, 2019	Radiation (03CH01-CB)
Pre-Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	May 23, 2018	May 22, 2019	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 08, 2019	Jan. 07, 2020	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 04, 2018	Jul. 03, 2019	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Jan. 31, 2019	Jan. 30, 2020	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS	100359	9kHz ~ 2.75GHz	Jul. 03, 2018	Jul. 02, 2019	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-16+17	N/A	30 MHz ~ 1 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16+17	N/A	1 GHz ~ 18 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#1	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G#2	N/A	18GHz ~ 40 GHz	Jul. 27, 2018	Jul. 26, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz ~ 26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz ~ 26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-08	1 GHz ~26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz ~26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz ~26.5 GHz	Oct. 08, 2018	Oct. 07, 2019	Radiation (03CH01-CB)
Mixer	RPG	RPG FSZ60	100986	40 ~ 60 GHz	Oct. 31, 2018*	Oct. 30, 2020*	Radiation (03CH01-CB)
Mixer	R&S	R&S FS-Z75	101035	50 ~ 75 GHz	Oct. 11, 2017*	Oct. 10, 2019*	Radiation (03CH01-CB)
Mixer	R&S	R&S FS-Z90	101811	60 ~ 90 GHz	Jul. 16, 2018*	Jul. 15, 2020*	Radiation (03CH01-CB)
Mixer	RPG	RPG FS-Z140	101128	90 ~ 140 GHz	Sep. 03, 2018*	Sep. 02, 2020*	Radiation (03CH01-CB)
Mixer	RPG	RPG FS-Z220	101014	140 ~ 220 GHz	Aug. 27, 2018*	Aug. 26, 2020*	Radiation (03CH01-CB)
Detector	Millitech	DET-15-RPF W0	#A18185(074)	50 ~ 75 GHz	Jan. 29, 2018*	an. 29, 2020*	Radiation (03CH01-CB)
Pico Scope	Pico	Pico Scope 6402C	CX372/002	N/A	Jul. 13, 2018	Jul. 12, 2019	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M19RH	U91113-A	40 ~ 60 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M15RH	V91113-A	50 ~ 75 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M12RH	E91113-A	60 ~ 90 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M08RH	F91113-A	90 ~ 140 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	M05RH	G91113-A	140 ~ 220 GHz	N.C.R	N.C.R	Radiation (03CH01-CB)
Temp. and Humidity Chamber	Gaint Force	GTH-408-40-CP-AR	MAA1410-011	-40~100 degree	Sep. 14, 2018	Sep. 13, 2019	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.



## 5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Radiated Emission (40GHz ~ 220GHz)	4.7 dB	Confidence levels of 95%
Temperature	0.7°C	Confidence levels of 95%