

CHANNEL	TX Channel 2	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4834.00	38.3 PK	74.0	-35.7	2.03 H	6	37.1	1.2
2	4834.00	26.7 AV	54.0	-27.3	2.03 H	6	25.5	1.2
3	7251.00	42.4 PK	74.0	-31.6	1.86 H	209	35.3	7.1
4	7251.00	32.0 AV	54.0	-22.0	1.86 H	209	24.9	7.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4834.00	37.8 PK	74.0	-36.2	1.02 V	326	36.6	1.2
2	4834.00	27.2 AV	54.0	-26.8	1.02 V	326	26.0	1.2
3	7251.00	43.1 PK	74.0	-30.9	1.96 V	285	36.0	7.1
4	7251.00	32.8 AV	54.0	-21.2	1.96 V	285	25.7	7.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	38.3 PK	74.0	-35.7	2.01 H	264	37.1	1.2
2	4874.00	25.9 AV	54.0	-28.1	2.01 H	264	24.7	1.2
3	7311.00	42.6 PK	74.0	-31.4	1.58 H	167	35.4	7.2
4	7311.00	32.1 AV	54.0	-21.9	1.58 H	167	24.9	7.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	36.9 PK	74.0	-37.1	1.40 V	344	35.7	1.2
2	4874.00	27.3 AV	54.0	-26.7	1.40 V	344	26.1	1.2
3	7311.00	43.3 PK	74.0	-30.7	1.11 V	318	36.1	7.2
4	7311.00	33.7 AV	54.0	-20.3	1.11 V	318	26.5	7.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

CHANNEL	TX Channel 10	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4914.00	36.9 PK	74.0	-37.1	1.70 H	196	35.6	1.3
2	4914.00	27.2 AV	54.0	-26.8	1.70 H	196	25.9	1.3
3	7371.00	43.3 PK	74.0	-30.7	2.57 H	306	36.1	7.2
4	7371.00	33.5 AV	54.0	-20.5	2.57 H	306	26.3	7.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4914.00	38.2 PK	74.0	-35.8	1.24 V	40	36.9	1.3
2	4914.00	26.9 AV	54.0	-27.1	1.24 V	40	25.6	1.3
3	7371.00	43.6 PK	74.0	-30.4	2.58 V	22	36.4	7.2
4	7371.00	33.2 AV	54.0	-20.8	2.58 V	22	26.0	7.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	36.9 PK	74.0	-37.1	2.13 H	164	35.6	1.3
2	4924.00	26.7 AV	54.0	-27.3	2.13 H	164	25.4	1.3
3	7386.00	42.9 PK	74.0	-31.1	1.89 H	212	35.6	7.3
4	7386.00	32.4 AV	54.0	-21.6	1.89 H	212	25.1	7.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	38.2 PK	74.0	-35.8	2.24 V	133	36.9	1.3
2	4924.00	26.7 AV	54.0	-27.3	2.24 V	133	25.4	1.3
3	7386.00	43.8 PK	74.0	-30.2	2.36 V	210	36.5	7.3
4	7386.00	32.1 AV	54.0	-21.9	2.36 V	210	24.8	7.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

CHANNEL	TX Channel 12	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4934.00	36.6 PK	74.0	-37.4	1.07 H	53	35.3	1.3
2	4934.00	26.4 AV	54.0	-27.6	1.07 H	53	25.1	1.3
3	7401.00	44.2 PK	74.0	-29.8	2.14 H	286	36.9	7.3
4	7401.00	32.4 AV	54.0	-21.6	2.14 H	286	25.1	7.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4934.00	37.1 PK	74.0	-36.9	2.65 V	106	35.8	1.3
2	4934.00	26.2 AV	54.0	-27.8	2.65 V	106	24.9	1.3
3	7401.00	44.7 PK	74.0	-29.3	1.88 V	22	37.4	7.3
4	7401.00	32.9 AV	54.0	-21.1	1.88 V	22	25.6	7.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

CHANNEL	TX Channel 13	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4944.00	38.2 PK	74.0	-35.8	1.78 H	22	36.8	1.4
2	4944.00	27.0 AV	54.0	-27.0	1.78 H	22	25.6	1.4
3	7416.00	43.1 PK	74.0	-30.9	1.61 H	90	35.8	7.3
4	7416.00	32.3 AV	54.0	-21.7	1.61 H	90	25.0	7.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4944.00	37.4 PK	74.0	-36.6	1.70 V	189	36.0	1.4
2	4944.00	26.5 AV	54.0	-27.5	1.70 V	189	25.1	1.4
3	7416.00	42.6 PK	74.0	-31.4	1.58 V	174	35.3	7.3
4	7416.00	32.2 AV	54.0	-21.8	1.58 V	174	24.9	7.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

40MHz Preamble
RU484

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4844.00	38.5 PK	74.0	-35.5	2.23 H	277	37.3	1.2
2	4844.00	26.9 AV	54.0	-27.1	2.23 H	277	25.7	1.2
3	7266.00	44.6 PK	74.0	-29.4	1.74 H	165	37.5	7.1
4	7266.00	32.9 AV	54.0	-21.1	1.74 H	165	25.8	7.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4844.00	37.1 PK	74.0	-36.9	1.59 V	262	35.9	1.2
2	4844.00	26.0 AV	54.0	-28.0	1.59 V	262	24.8	1.2
3	7266.00	42.8 PK	74.0	-31.2	1.88 V	275	35.7	7.1
4	7266.00	33.9 AV	54.0	-20.1	1.88 V	275	26.8	7.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

CHANNEL	TX Channel 4	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4854.00	37.9 PK	74.0	-36.1	1.40 H	86	36.8	1.1
2	4854.00	26.3 AV	54.0	-27.7	1.40 H	86	25.2	1.1
3	7281.00	44.5 PK	74.0	-29.5	1.98 H	121	37.3	7.2
4	7281.00	31.6 AV	54.0	-22.4	1.98 H	121	24.4	7.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4854.00	37.3 PK	74.0	-36.7	1.83 V	170	36.2	1.1
2	4854.00	27.2 AV	54.0	-26.8	1.83 V	170	26.1	1.1
3	7281.00	42.8 PK	74.0	-31.2	1.05 V	283	35.6	7.2
4	7281.00	32.5 AV	54.0	-21.5	1.05 V	283	25.3	7.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	38.2 PK	74.0	-35.8	1.10 H	351	37.0	1.2
2	4874.00	27.1 AV	54.0	-26.9	1.10 H	351	25.9	1.2
3	7311.00	43.5 PK	74.0	-30.5	2.42 H	254	36.3	7.2
4	7311.00	31.8 AV	54.0	-22.2	2.42 H	254	24.6	7.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	36.9 PK	74.0	-37.1	1.37 V	249	35.7	1.2
2	4874.00	26.6 AV	54.0	-27.4	1.37 V	249	25.4	1.2
3	7311.00	42.7 PK	74.0	-31.3	2.40 V	57	35.5	7.2
4	7311.00	32.1 AV	54.0	-21.9	2.40 V	57	24.9	7.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

CHANNEL	TX Channel 8	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4894.00	38.1 PK	74.0	-35.9	2.52 H	153	36.8	1.3
2	4894.00	27.3 AV	54.0	-26.7	2.52 H	153	26.0	1.3
3	7341.00	42.8 PK	74.0	-31.2	1.90 H	92	35.6	7.2
4	7341.00	31.9 AV	54.0	-22.1	1.90 H	92	24.7	7.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4894.00	37.8 PK	74.0	-36.2	2.15 V	328	36.5	1.3
2	4894.00	27.5 AV	54.0	-26.5	2.15 V	328	26.2	1.3
3	7341.00	44.3 PK	74.0	-29.7	1.72 V	303	37.1	7.2
4	7341.00	33.4 AV	54.0	-20.6	1.72 V	303	26.2	7.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4904.00	37.6 PK	74.0	-36.4	2.21 H	253	36.3	1.3
2	4904.00	27.1 AV	54.0	-26.9	2.21 H	253	25.8	1.3
3	7356.00	44.2 PK	74.0	-29.8	1.85 H	302	37.0	7.2
4	7356.00	32.3 AV	54.0	-21.7	1.85 H	302	25.1	7.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4904.00	37.3 PK	74.0	-36.7	2.38 V	25	36.0	1.3
2	4904.00	26.8 AV	54.0	-27.2	2.38 V	25	25.5	1.3
3	7356.00	43.0 PK	74.0	-31.0	1.12 V	83	35.8	7.2
4	7356.00	33.9 AV	54.0	-20.1	1.12 V	83	26.7	7.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

CHANNEL	TX Channel 10	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4914.00	36.9 PK	74.0	-37.1	1.35 H	3	35.6	1.3
2	4914.00	26.9 AV	54.0	-27.1	1.35 H	3	25.6	1.3
3	7371.00	44.7 PK	74.0	-29.3	2.13 H	196	37.5	7.2
4	7371.00	33.1 AV	54.0	-20.9	2.13 H	196	25.9	7.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4914.00	37.1 PK	74.0	-36.9	1.06 V	59	35.8	1.3
2	4914.00	27.5 AV	54.0	-26.5	1.06 V	59	26.2	1.3
3	7371.00	43.7 PK	74.0	-30.3	1.05 V	252	36.5	7.2
4	7371.00	32.8 AV	54.0	-21.2	1.05 V	252	25.6	7.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	37.7 PK	74.0	-36.3	2.56 H	299	36.4	1.3
2	4924.00	27.2 AV	54.0	-26.8	2.56 H	299	25.9	1.3
3	7386.00	44.4 PK	74.0	-29.6	1.25 H	350	37.1	7.3
4	7386.00	33.4 AV	54.0	-20.6	1.25 H	350	26.1	7.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	38.1 PK	74.0	-35.9	2.41 V	140	36.8	1.3
2	4924.00	26.7 AV	54.0	-27.3	2.41 V	140	25.4	1.3
3	7386.00	44.9 PK	74.0	-29.1	1.65 V	280	37.6	7.3
4	7386.00	32.1 AV	54.0	-21.9	1.65 V	280	24.8	7.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

Below 1GHz Data:


802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.10	26.4 QP	40.0	-13.6	1.00 H	117	41.0	-14.6
2	38.10	24.7 QP	40.0	-15.3	3.00 H	60	38.4	-13.7
3	62.79	32.7 QP	40.0	-7.3	3.00 H	1	46.6	-13.9
4	143.98	36.7 QP	43.5	-6.8	2.00 H	240	49.8	-13.1
5	240.02	40.0 QP	46.0	-6.0	1.00 H	357	54.2	-14.2
6	336.00	39.0 QP	46.0	-7.0	1.00 H	146	50.3	-11.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

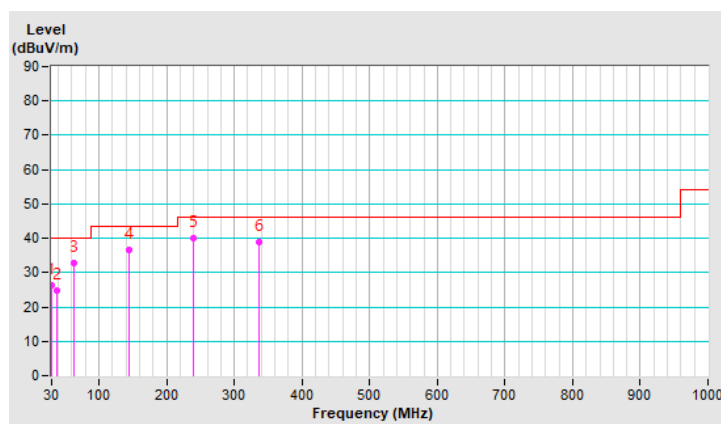


CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.20	33.0 QP	40.0	-7.0	1.00 V	360	46.7	-13.7
2	61.96	35.0 QP	40.0	-5.0	2.00 V	360	49.1	-14.1
3	62.50	35.1 QP	40.0	-4.9	2.00 V	360	49.1	-14.0
4	165.95	39.3 QP	43.5	-4.2	1.00 V	225	52.5	-13.2
5	199.13	37.8 QP	43.5	-5.7	2.00 V	165	53.4	-15.6
6	298.75	40.7 QP	46.0	-5.3	1.50 V	294	53.1	-12.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

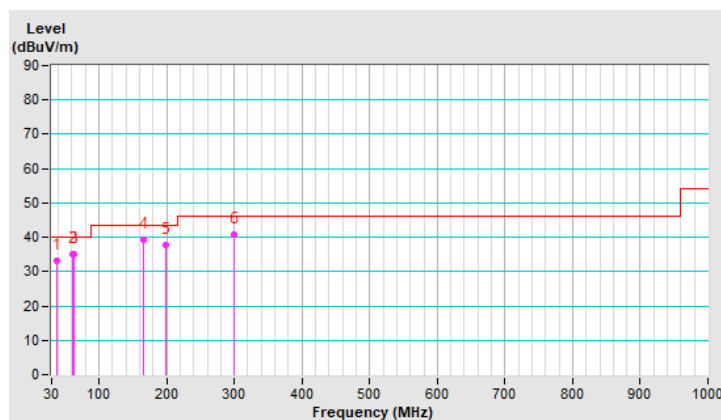

4.1.8 Test Results (Conducted Measurement)

Radiated versus Conducted Measurement	
☒ Conducted measurement	☐ Radiated measurement
<u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) <u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).	

Conducted Measurement Factor
a. The composite gain will be used when signal support the correlated signal. (Composite gain = $3.62\text{dBi} + 10\log(2) = 6.63\text{dBi}$) b. For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands. c. For the band edge the gain for the specific band may have been used. d. In restricted bands below 1000 MHz, add upper bound on ground plane reflection: For $f = 30 - 1000$ MHz, add 4.7 dB. Note: The conducted emission test was considered some factor to compute test result.

802.11b - Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1609.37 PK	53.6	74	-20.4	-51.46	-51.15	6.63	-41.66
2	1607.81 AV	43.11	54	-10.89	-61.93	-61.66	6.63	-52.15
3	4823.43 PK	54.18	74	-19.82	-50.09	-51.46	6.63	-41.08
4	4823.43 AV	44.97	54	-9.03	-59.65	-60.24	6.63	-50.29

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

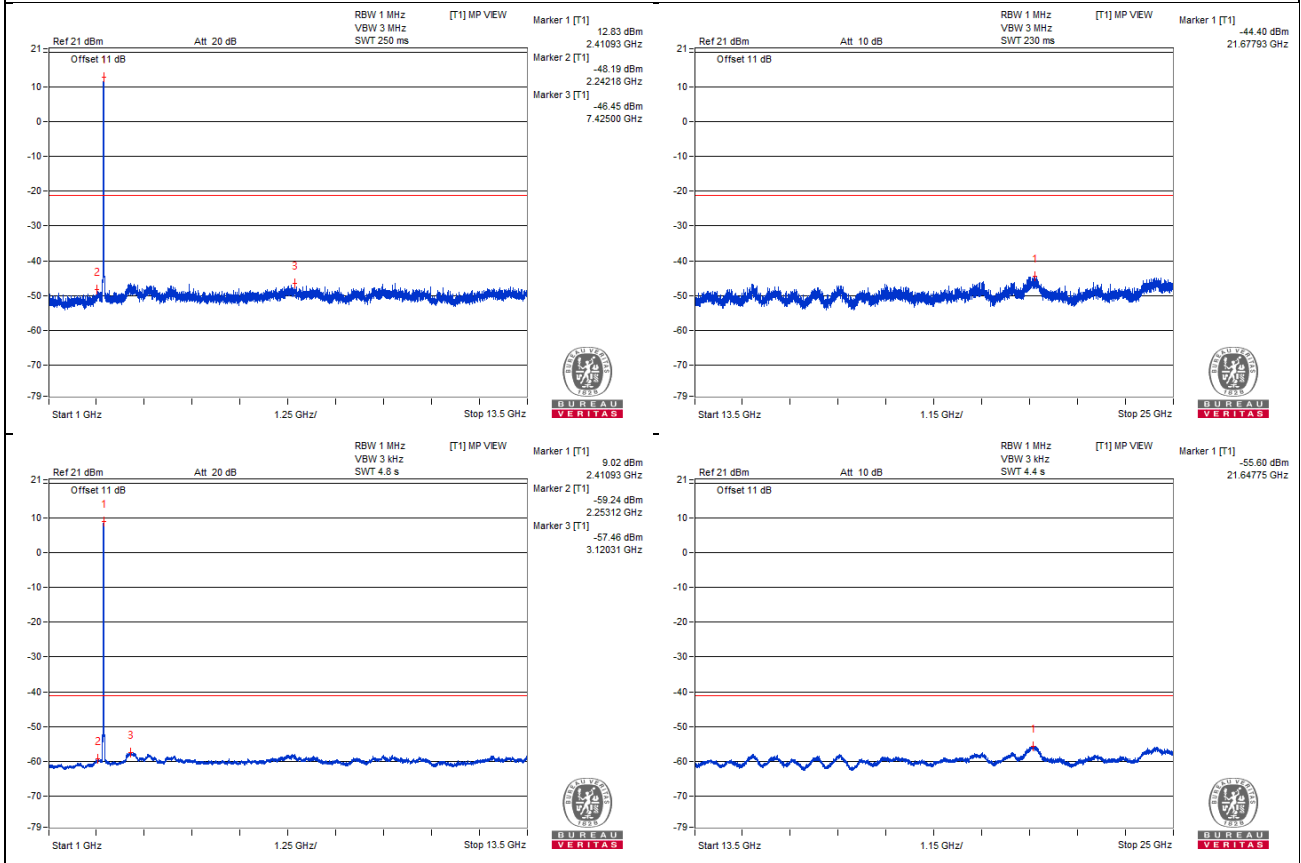

Chain 1

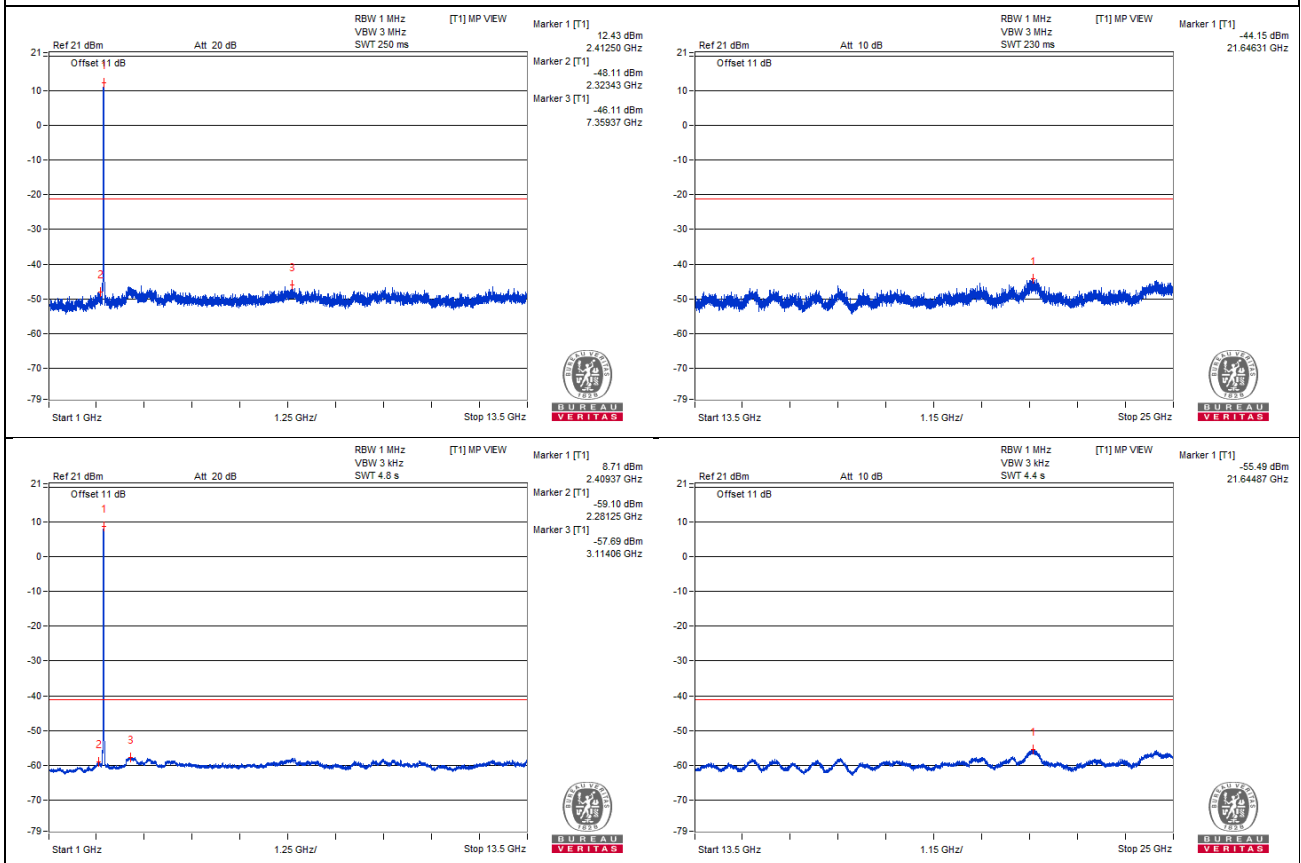

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2387.28 PK	60.39	74	-13.61	-43.57	-45.72	6.63	-34.87
2	2386.07 AV	51.79	54	-2.21	-52.02	-54.57	6.63	-43.47

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

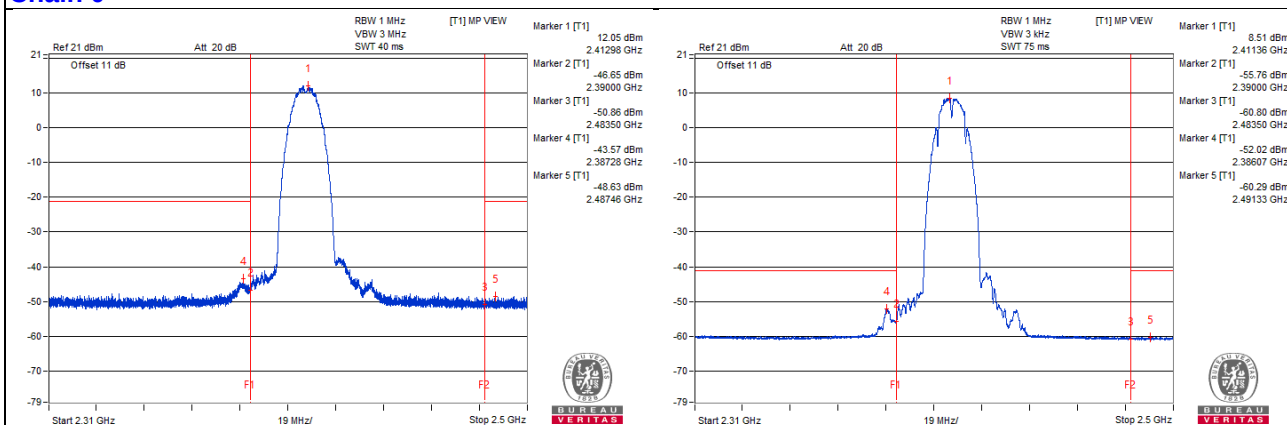

Chain 1

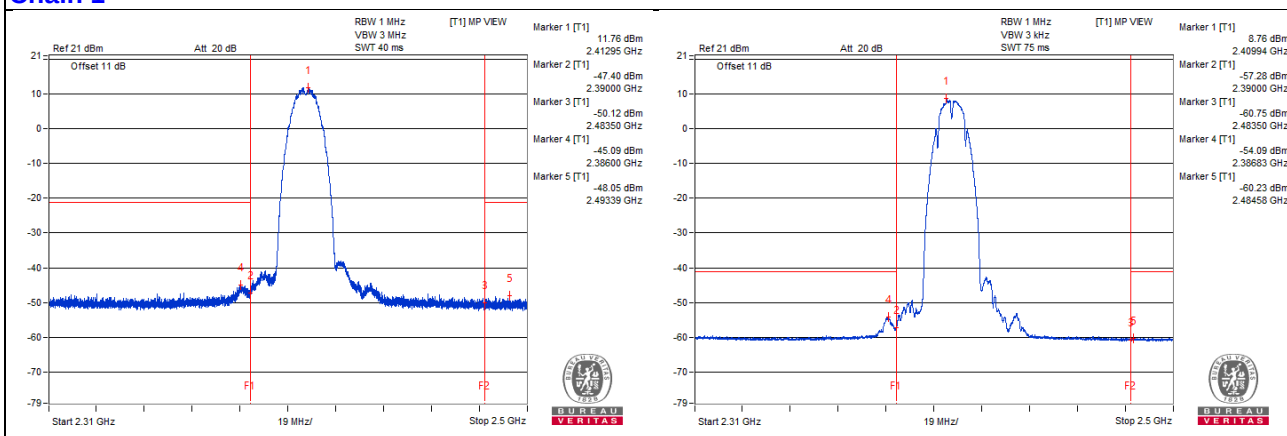

802.11b - Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1625 PK	52.61	74	-21.39	-52.88	-51.78	6.63	-42.65
2	1625 AV	43.3	54	-10.7	-61.59	-61.61	6.63	-51.96
3	4875 PK	54.17	74	-19.83	-50.06	-51.52	6.63	-41.09
4	4873.43 AV	44.76	54	-9.24	-60.07	-60.22	6.63	-50.5
5	7309.37 PK	56.59	74	-17.41	-49.54	-47.35	6.63	-38.67
6	7310.93 AV	46.36	54	-7.64	-58.28	-58.82	6.63	-48.9

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

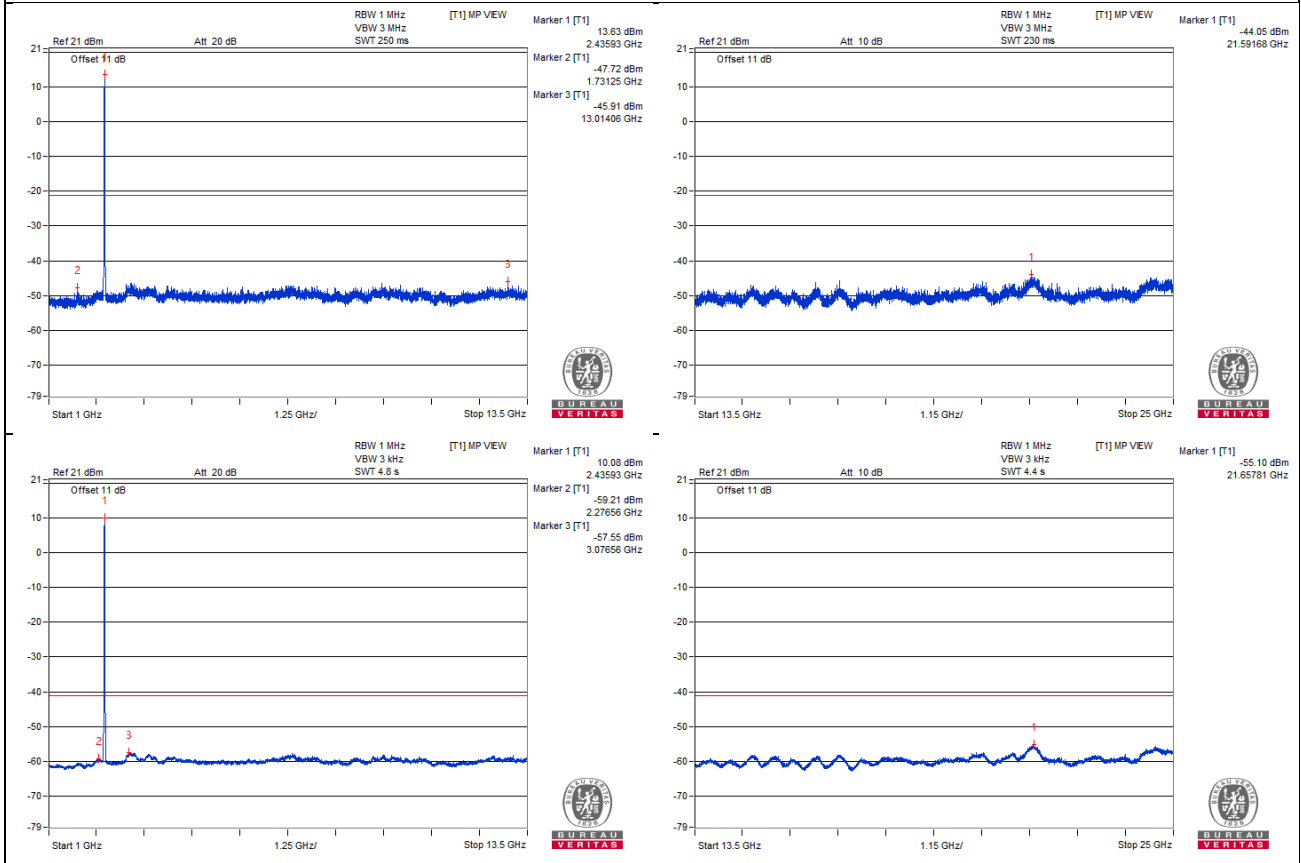

Chain 1

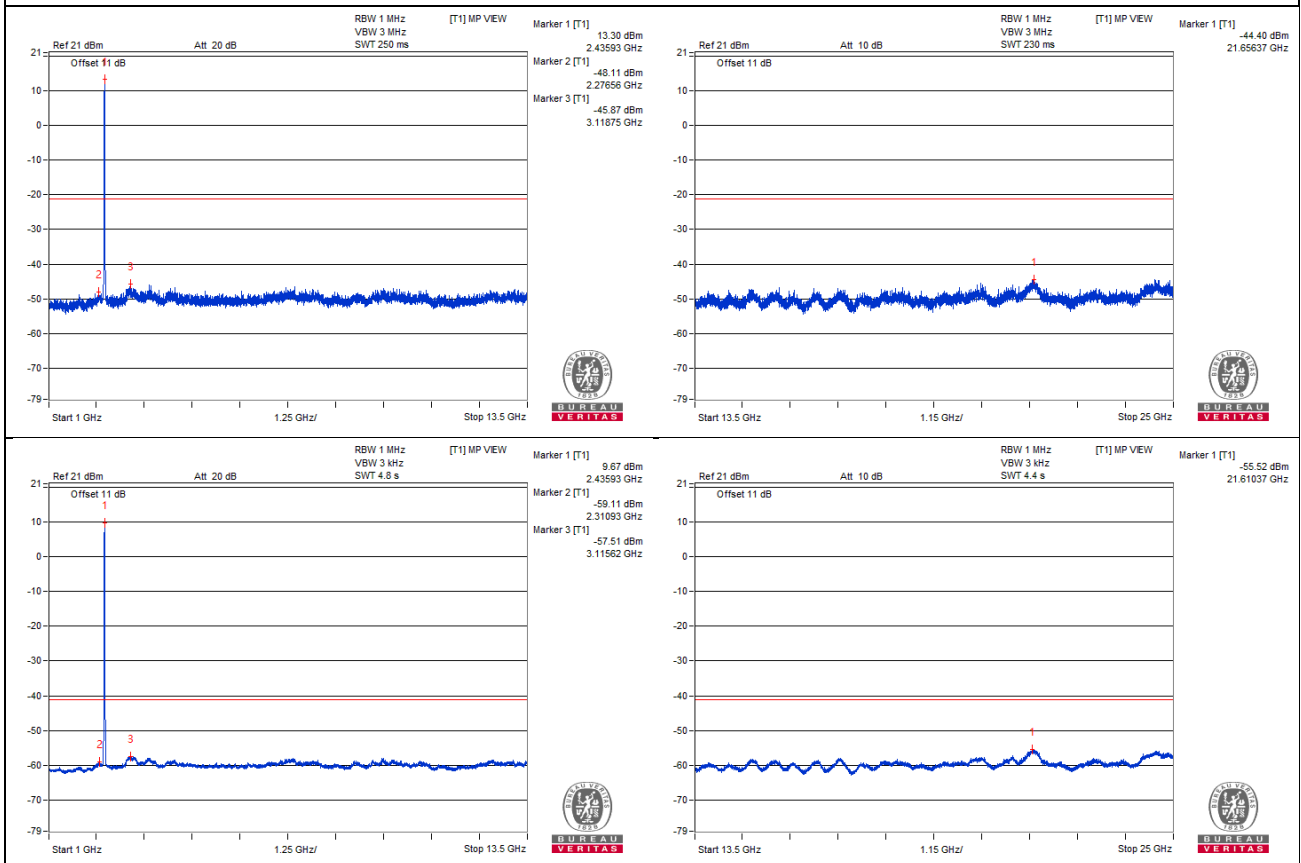

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2333.48 PK	56.49	74	-17.51	-49.81	-47.36	6.63	-38.77
2	2312.63 AV	45.17	54	-8.83	-59.79	-59.68	6.63	-50.09
3	2485.37 PK	56.54	74	-17.46	-47.94	-48.82	6.63	-38.72
4	2483.96 AV	45.25	54	-8.75	-59.3	-60.03	6.63	-50.01

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

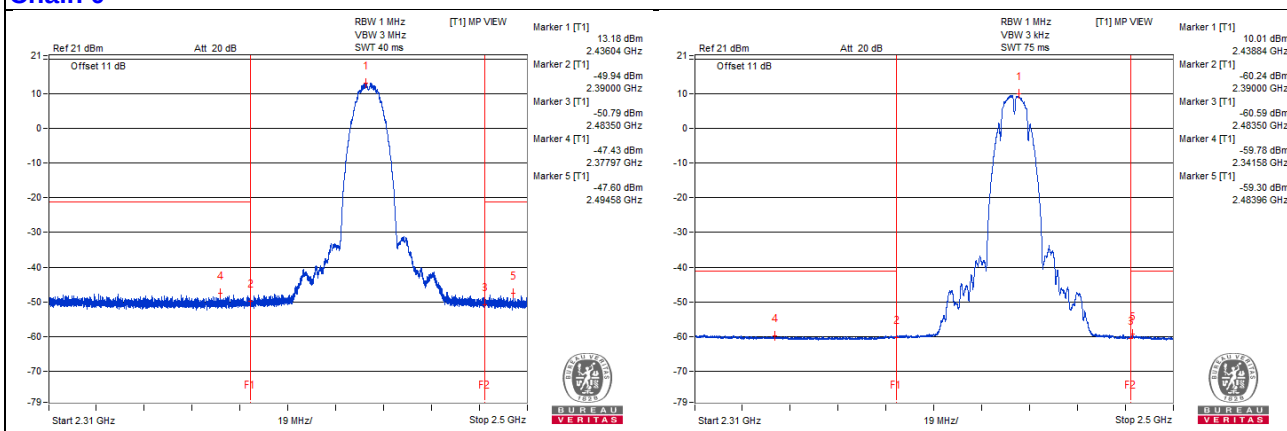

Chain 1

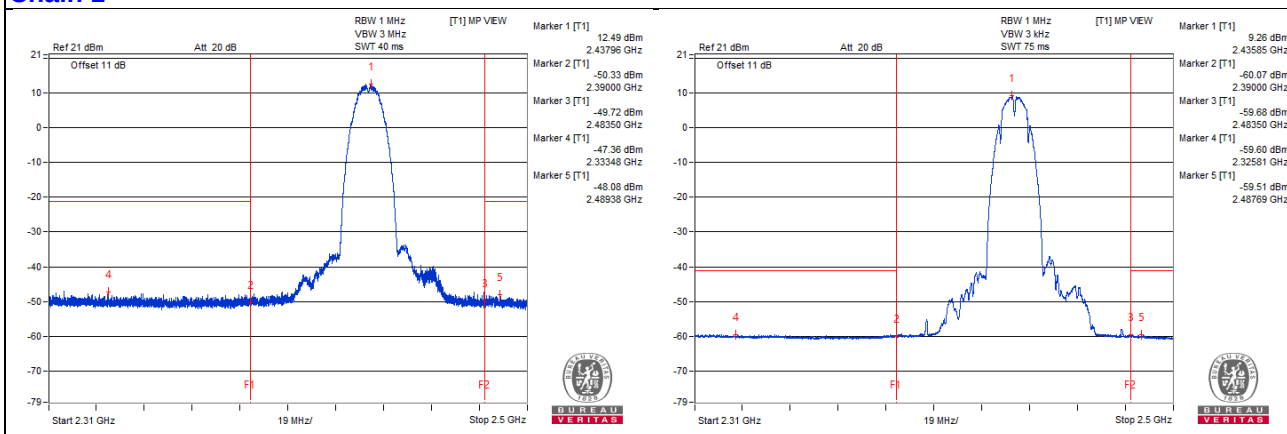

802.11b - Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4923.43 PK	54.08	74	-19.92	-50.94	-50.7	6.63	-41.18
2	4923.43 AV	44.63	54	-9.37	-60.55	-60	6.63	-50.63
3	7385.93 PK	57.21	74	-16.79	-47.19	-48.26	6.63	-38.05
4	7387.5 AV	46.08	54	-7.92	-58.85	-58.8	6.63	-49.18

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

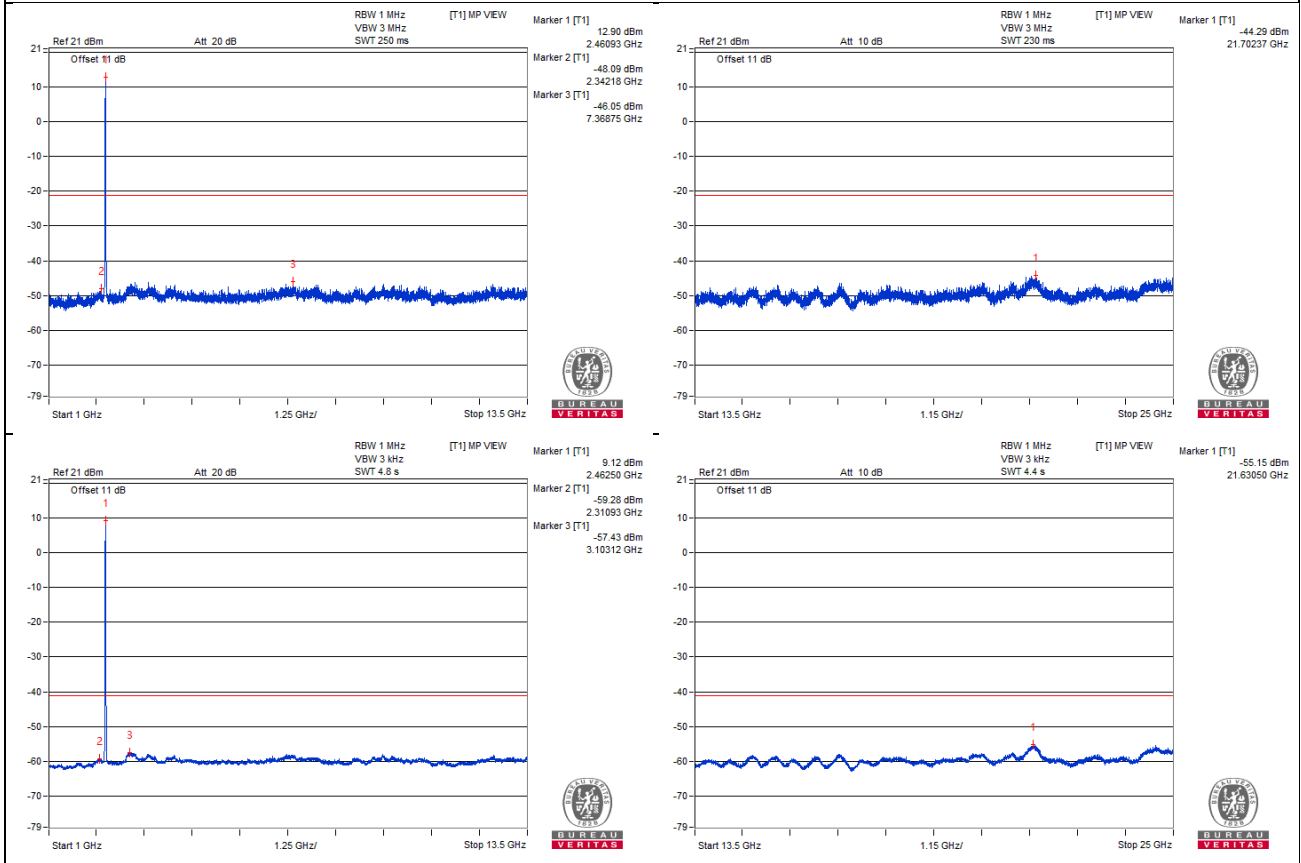

Chain 1

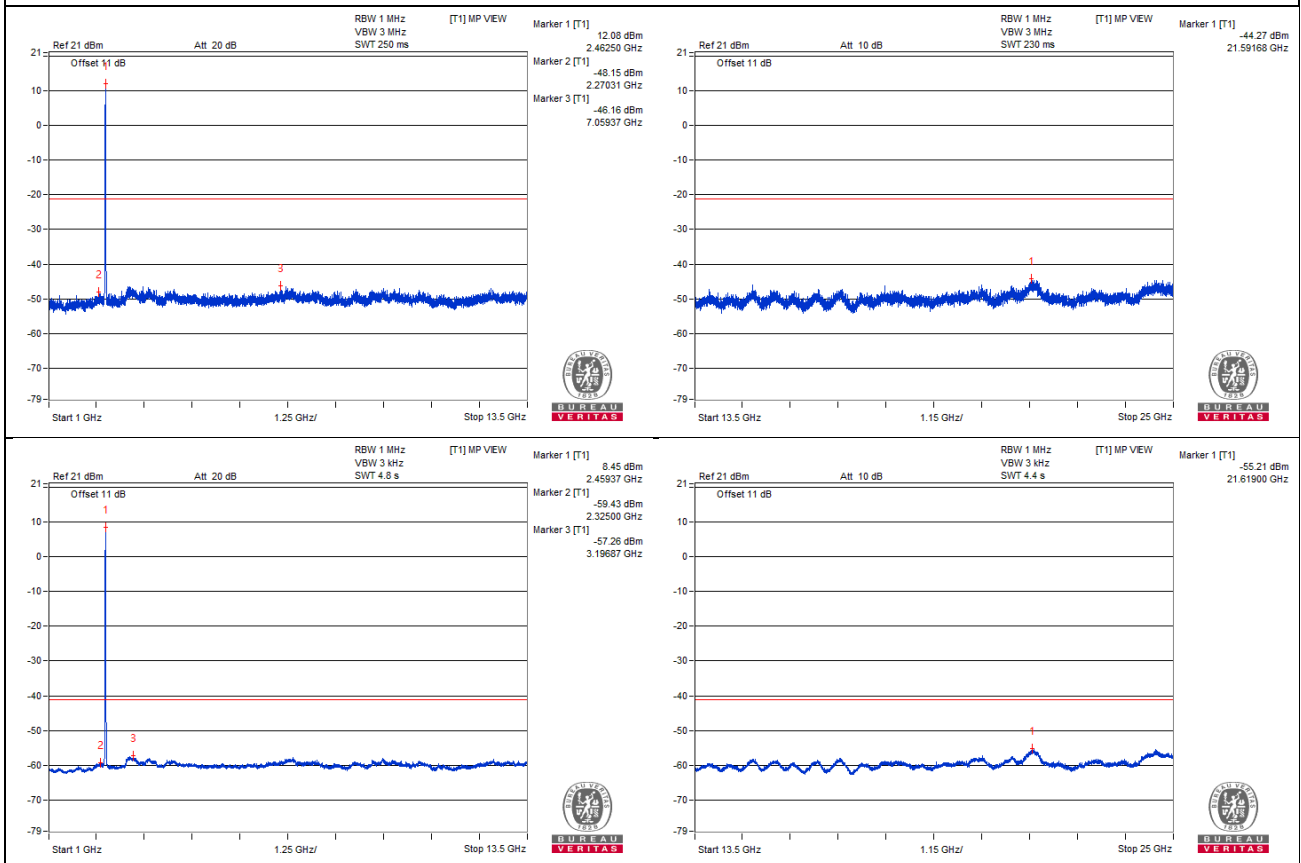

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2488.1 PK	59.77	74	-14.23	-44.47	-45.91	6.63	-35.49
2	2487.86 AV	51.71	54	-2.29	-52.22	-54.45	6.63	-43.55

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

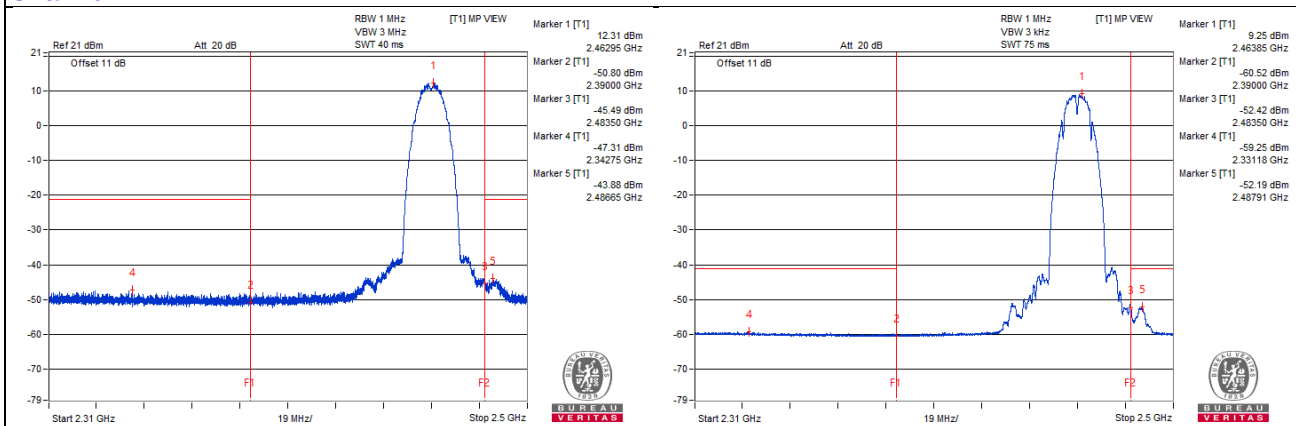

Chain 1

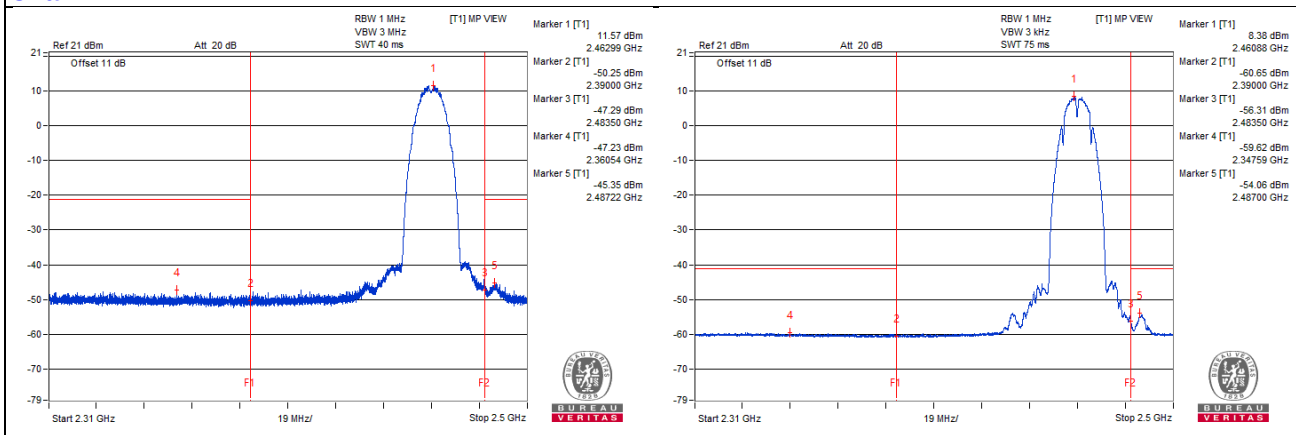

802.11b - Channel 12

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4934.37 PK	54.38	74	-19.62	-50.56	-50.49	6.63	-40.88
2	4932.81 AV	44.47	54	-9.53	-60.58	-60.28	6.63	-50.79
3	7400 PK	56.39	74	-17.61	-48.22	-48.83	6.63	-38.87
4	7401.56 AV	46.13	54	-7.87	-58.94	-58.61	6.63	-49.13

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

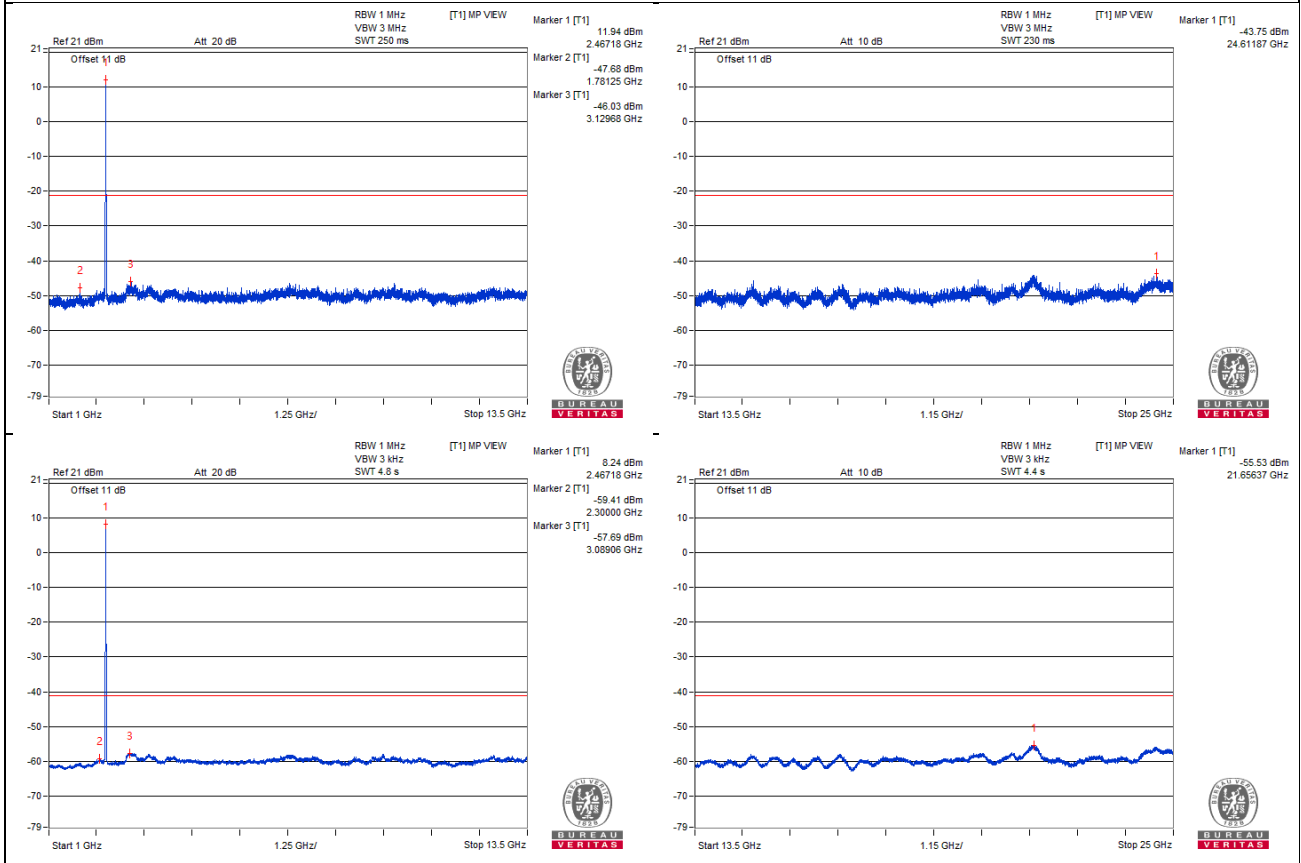

Chain 1

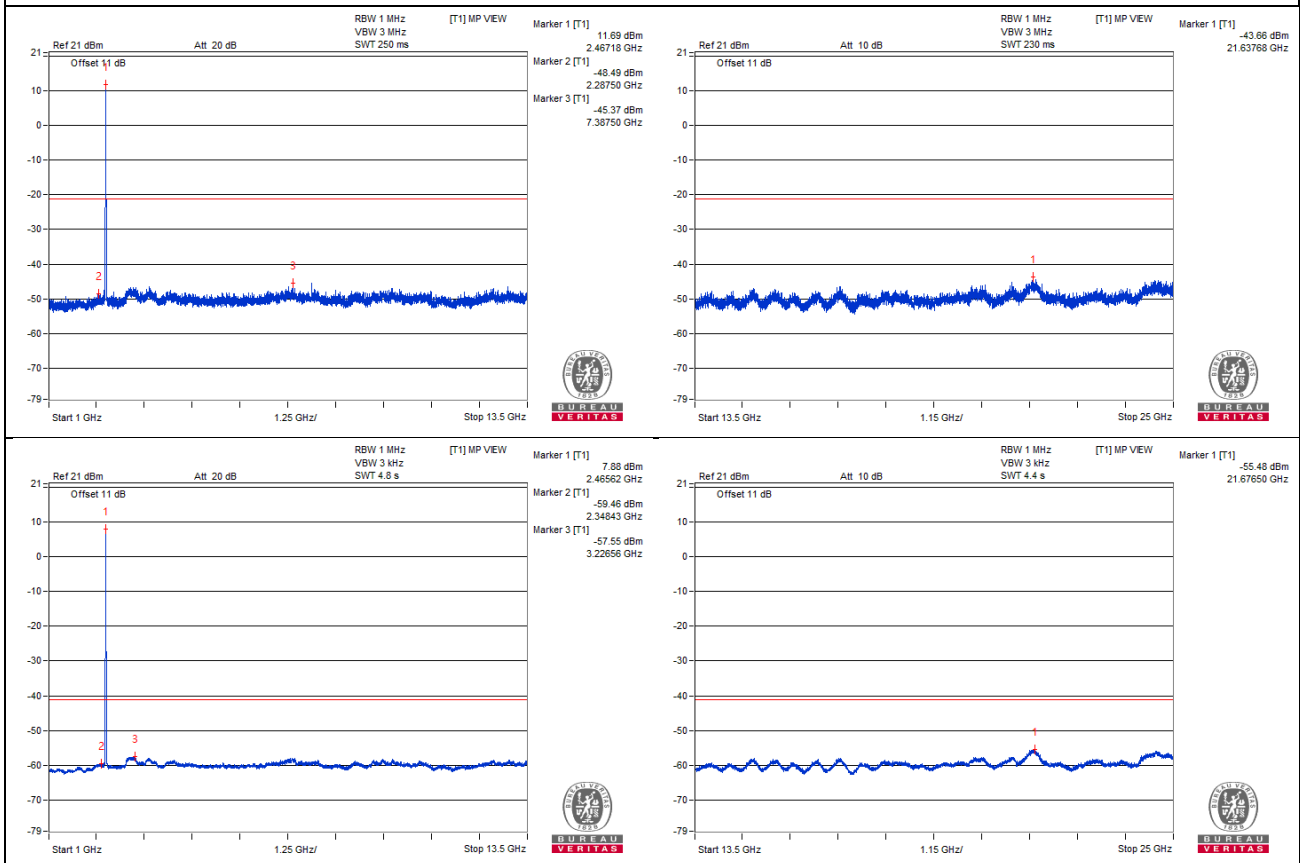

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2484.13 PK	59.58	74	-14.42	-44.86	-45.83	6.63	-35.68
2	2484.18 AV	50.25	54	-3.75	-53.48	-56.25	6.63	-45.01

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

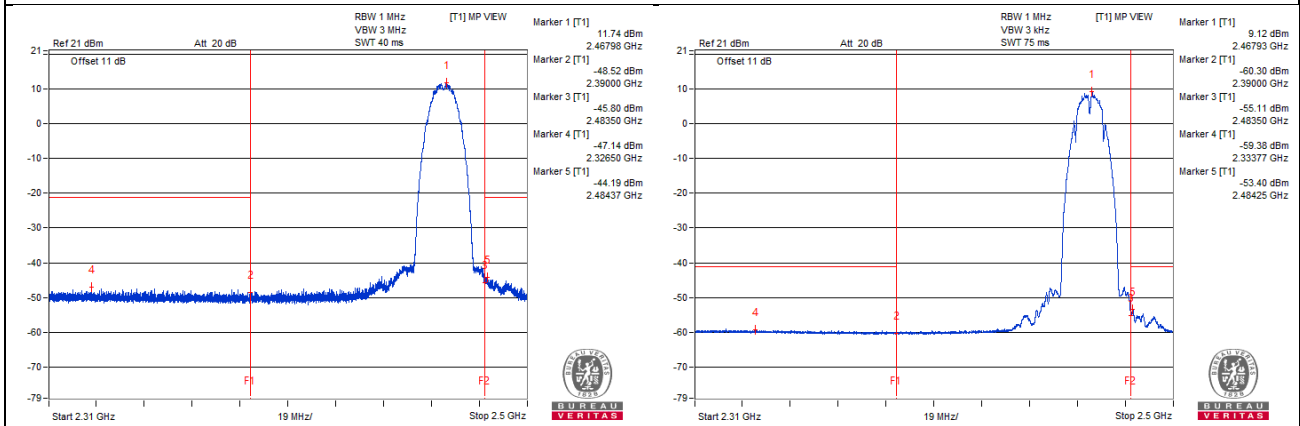

Chain 1

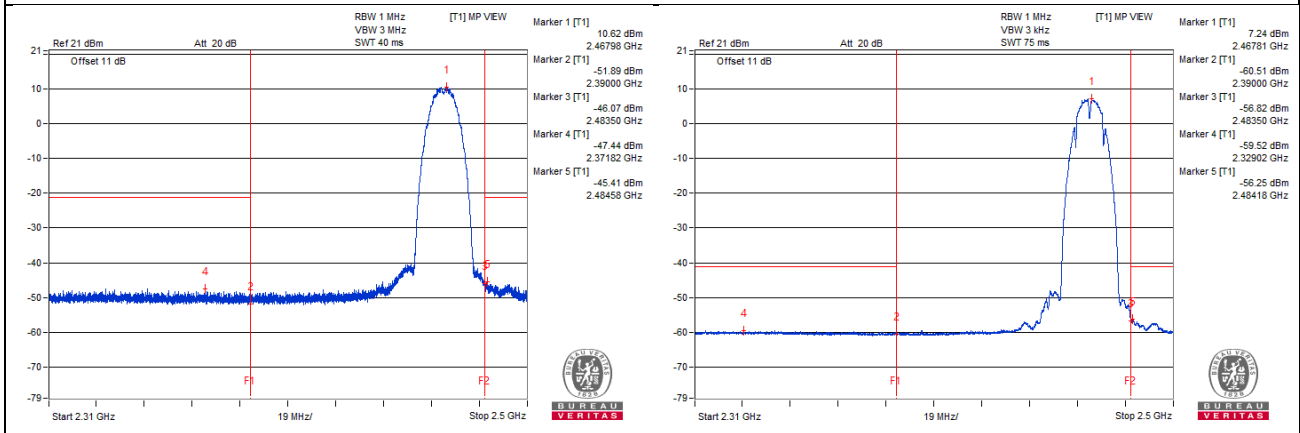

802.11b - Channel 13

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4945.31 PK	54.11	74	-19.89	-51.71	-50.03	6.63	-41.15
2	4942.18 AV	44.35	54	-9.65	-60.68	-60.42	6.63	-50.91
3	7415.62 PK	56.02	74	-17.98	-48.99	-48.77	6.63	-39.24
4	7417.18 AV	46.22	54	-7.78	-58.77	-58.6	6.63	-49.04

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

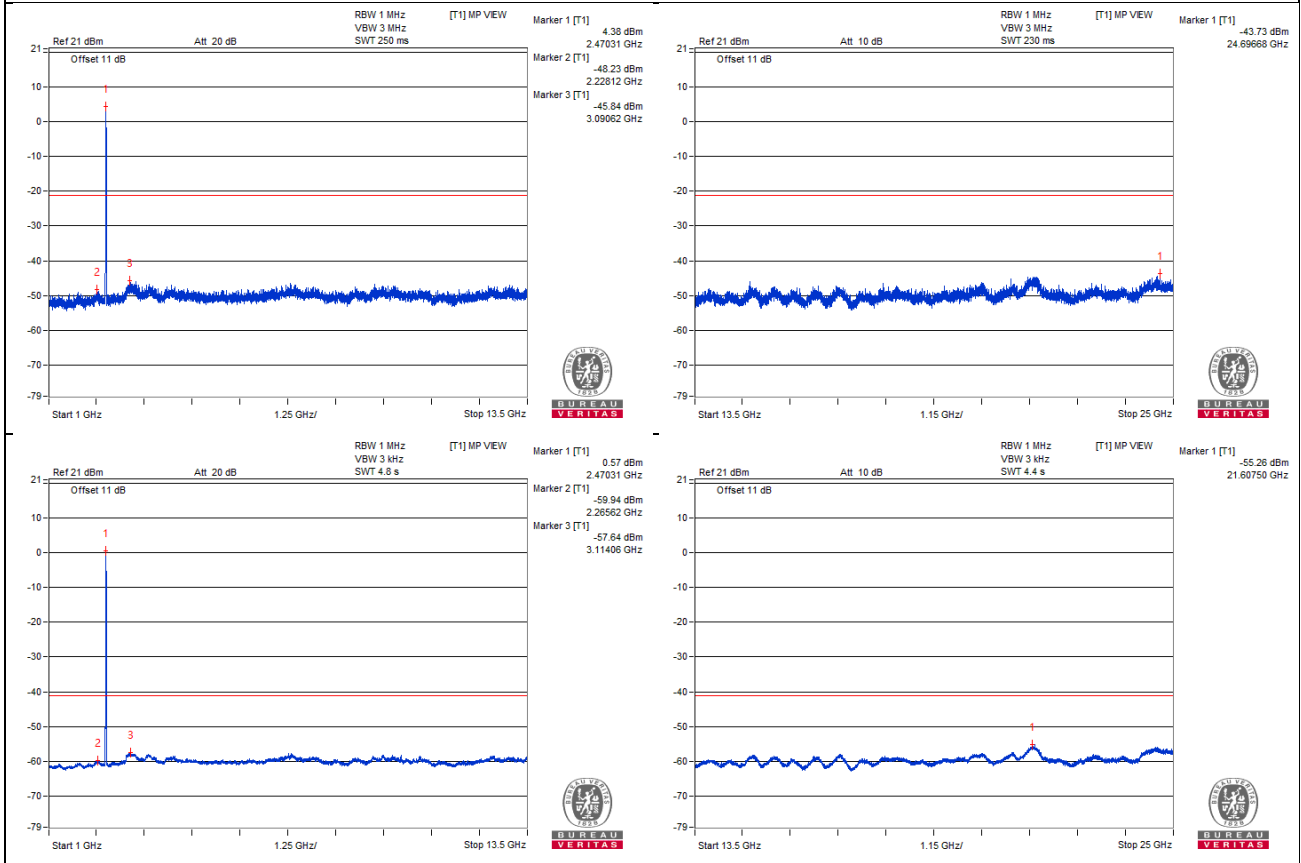

Chain 1

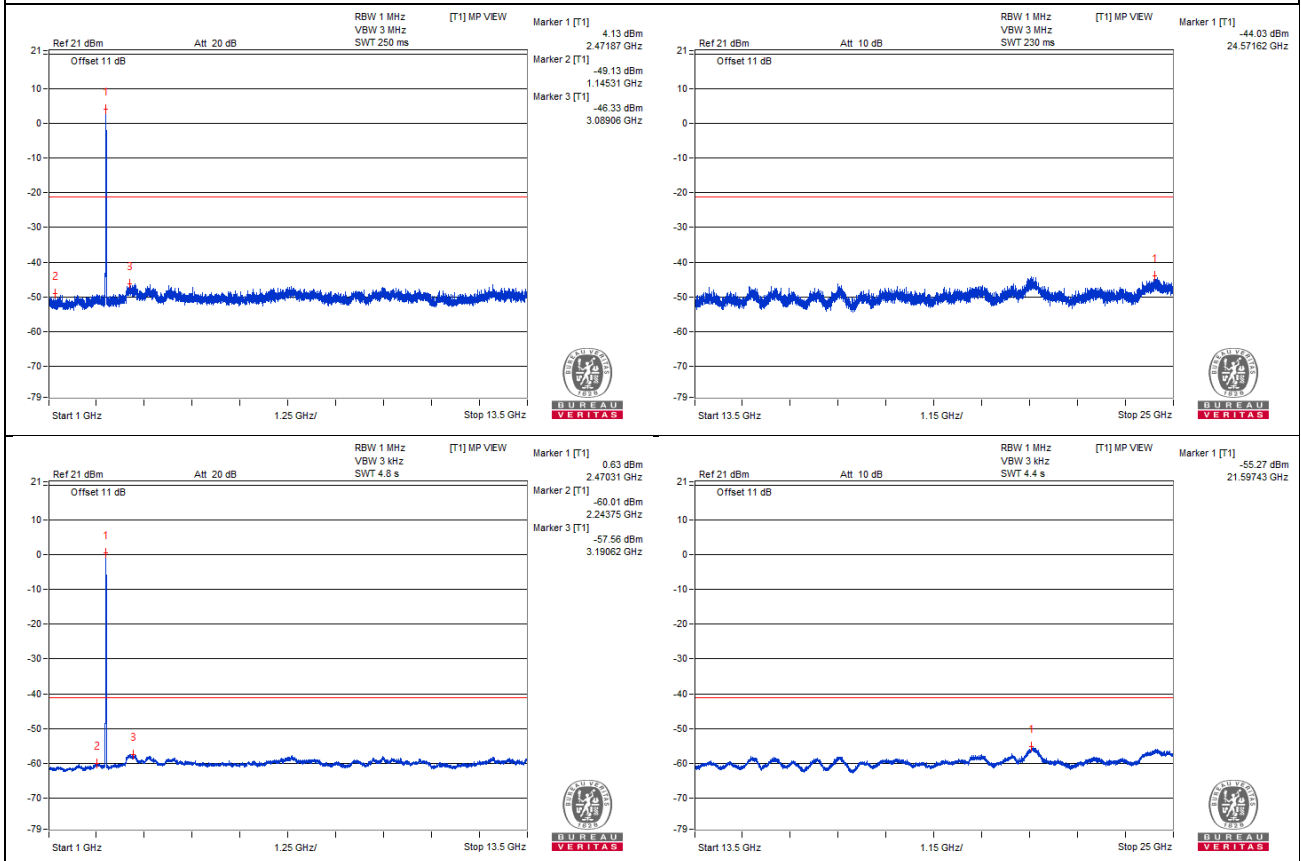

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.54 PK	61.63	74	-12.37	-43.15	-43.4	6.63	-33.63
2	2483.51 AV	51.95	54	-2.05	-53.37	-52.56	6.63	-43.31

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

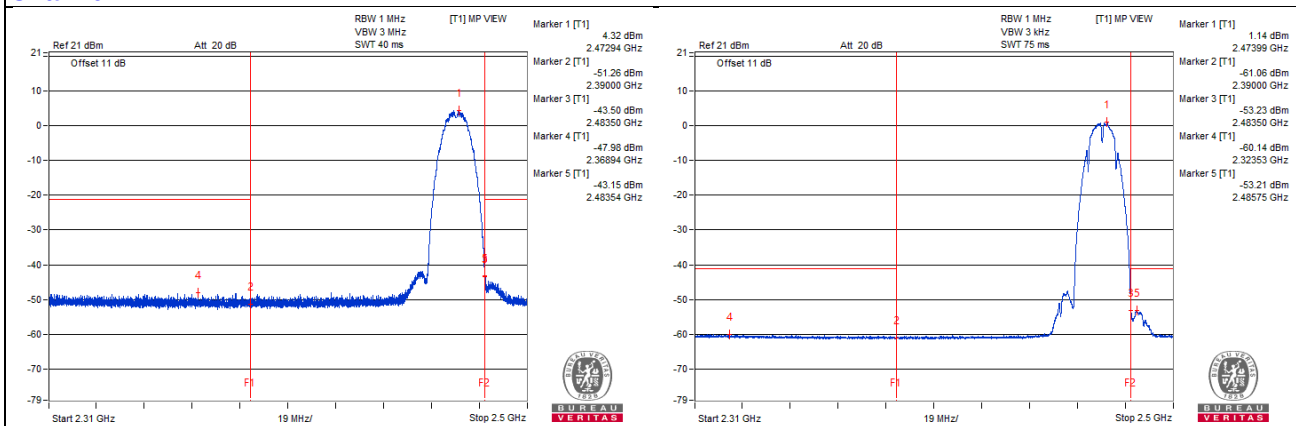

Chain 1

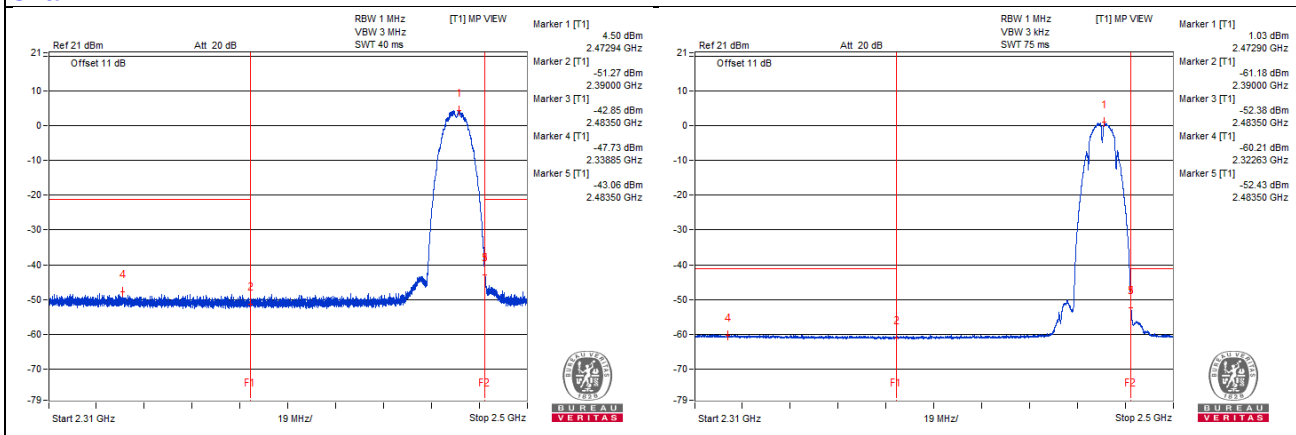

802.11g - Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1607.81 PK	52.66	74	-21.34	-51.96	-52.54	6.63	-42.6
2	1607.81 AV	42.38	54	-11.62	-62.59	-62.45	6.63	-52.88
3	4823.43 PK	54.16	74	-19.84	-50.26	-51.28	6.63	-41.1
4	4825 AV	44.01	54	-9.99	-60.93	-60.86	6.63	-51.25

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

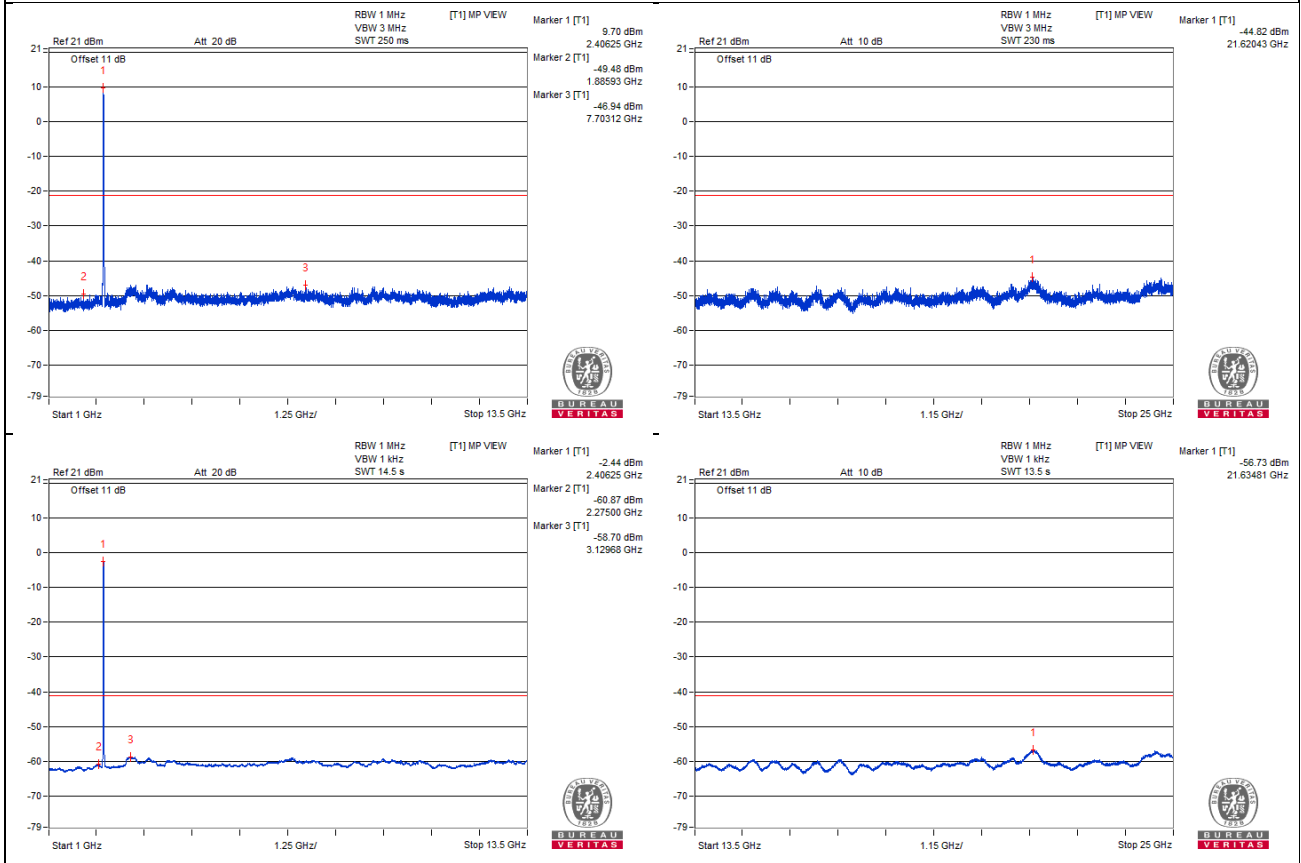

Chain 1

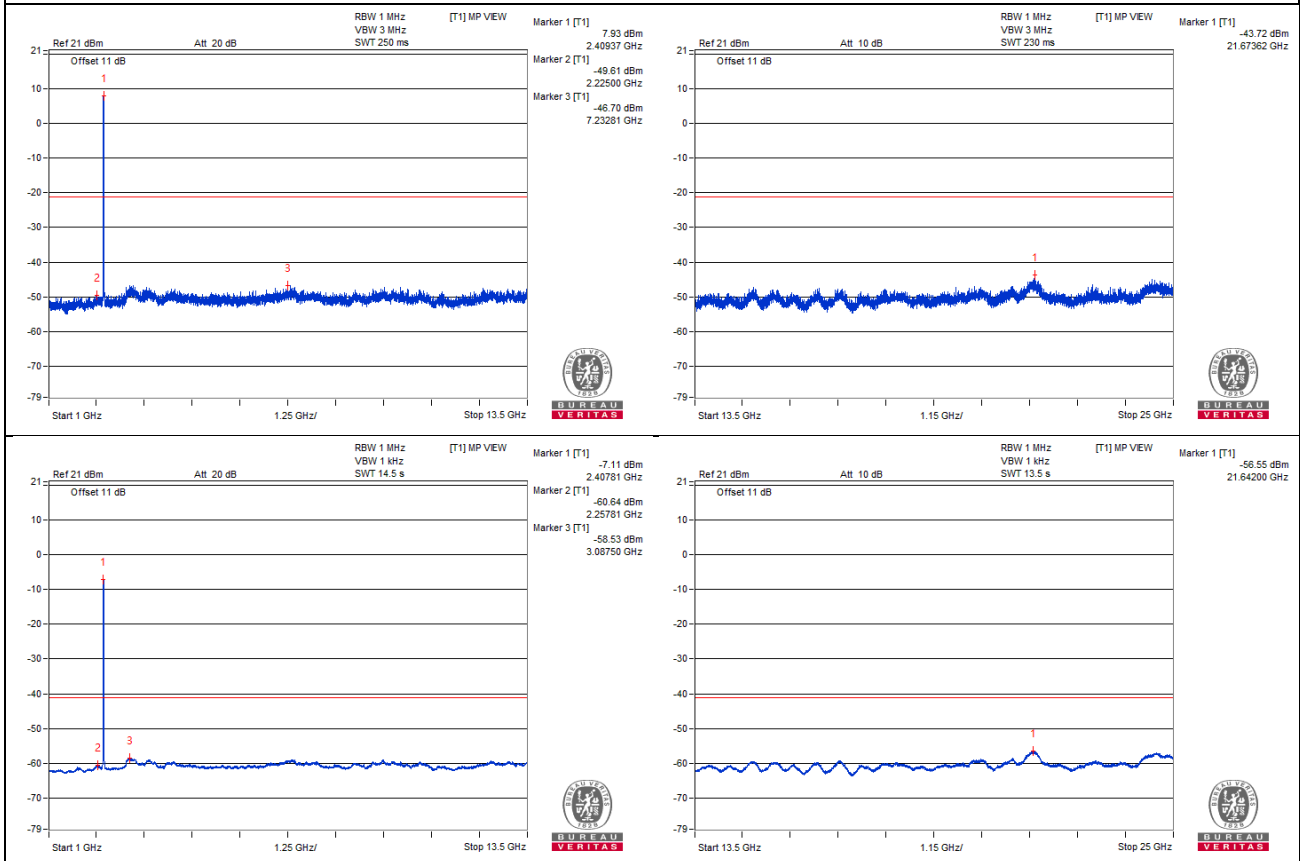

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.77 PK	71.21	74	-2.79	-34.19	-33.24	6.63	-24.05
2	2389.7 AV	48.58	54	-5.42	-56.85	-55.84	6.63	-46.68

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

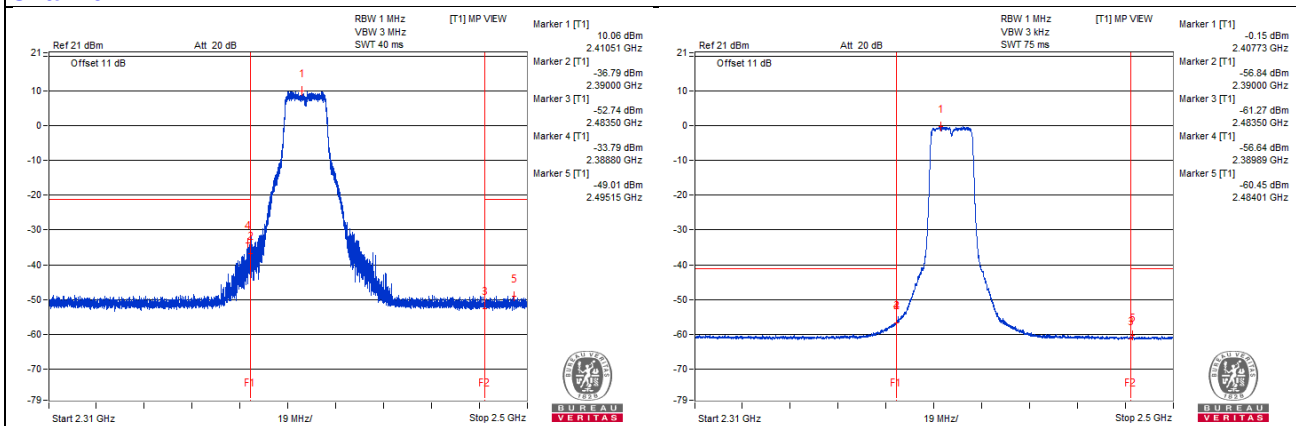

Chain 1

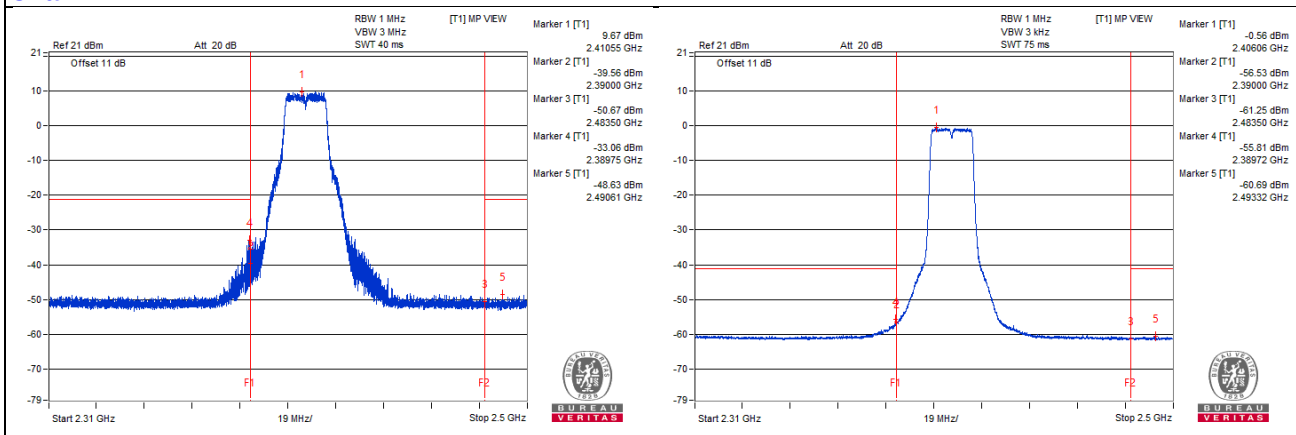

802.11g - Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1612.5 PK	52.6	74	-21.4	-52.98	-51.72	6.63	-42.66
2	1612.5 AV	42.35	54	-11.65	-62.55	-62.55	6.63	-52.91
3	4834.37 PK	54.54	74	-19.46	-51.12	-49.71	6.63	-40.72
4	4834.37 AV	43.93	54	-10.07	-60.93	-61.02	6.63	-51.33
5	7250 PK	56.05	74	-17.95	-49.98	-47.95	6.63	-39.21
6	7250 AV	45.59	54	-8.41	-59.25	-59.37	6.63	-49.67

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

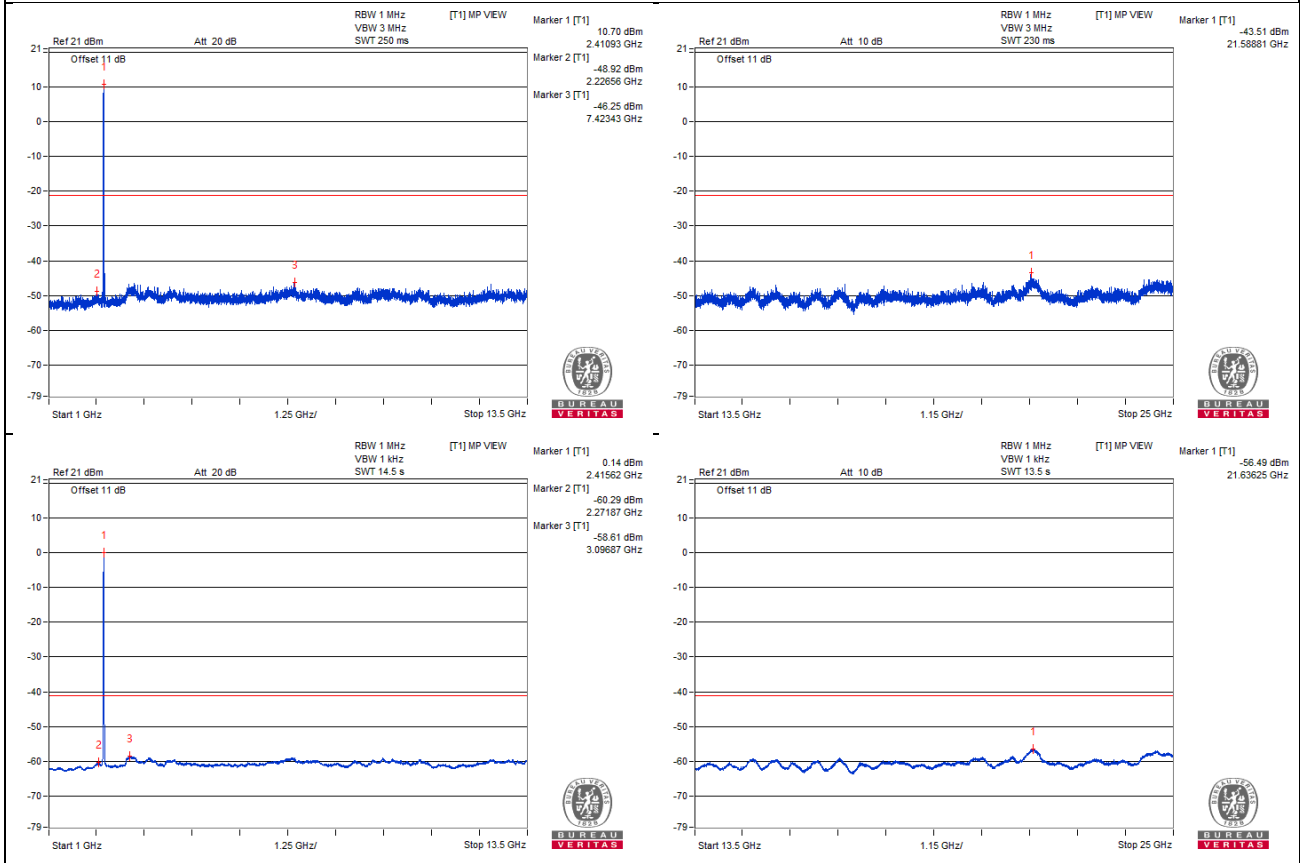

Chain 1

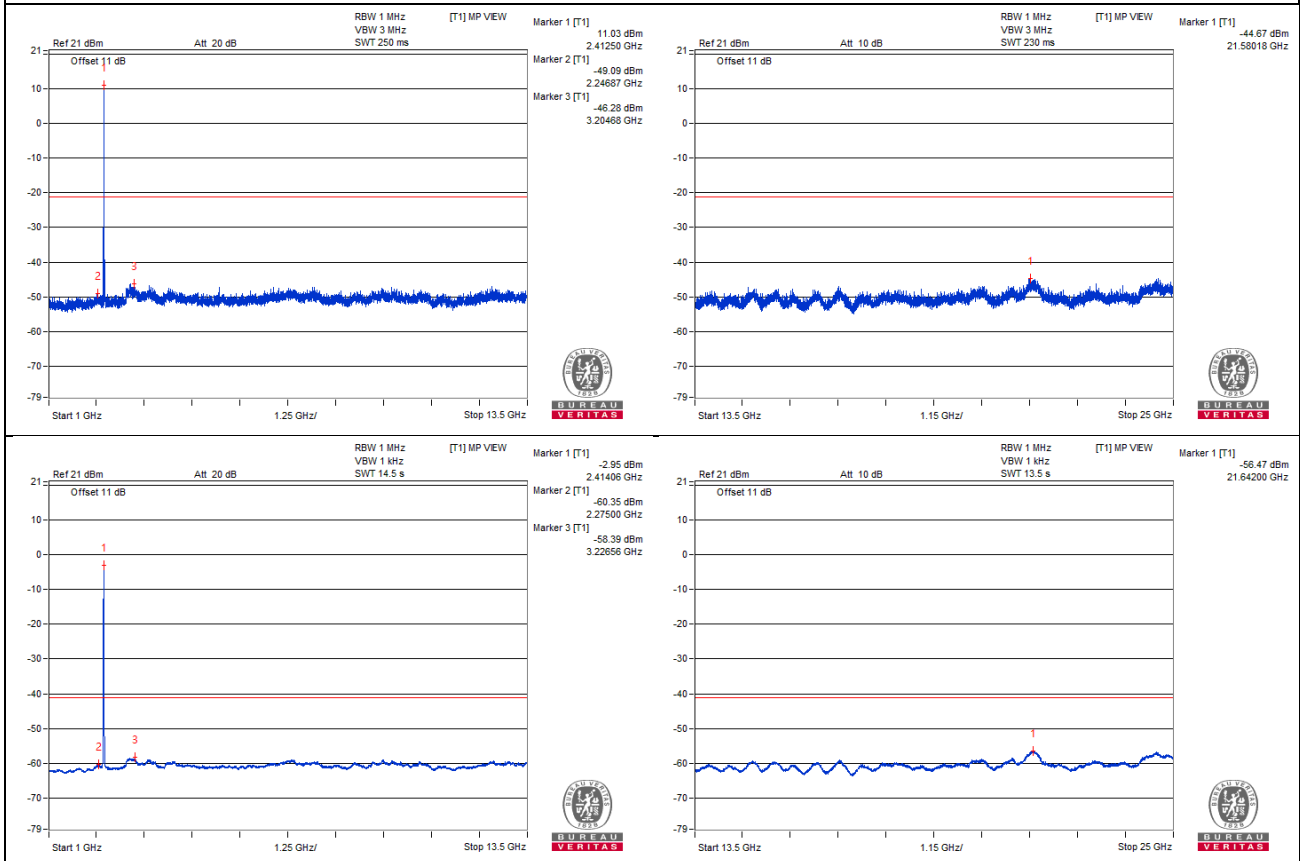

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.63 PK	70.72	74	-3.28	-33.35	-35.21	6.63	-24.54
2	2389.63 AV	51.28	54	-2.72	-53.94	-53.33	6.63	-43.98

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

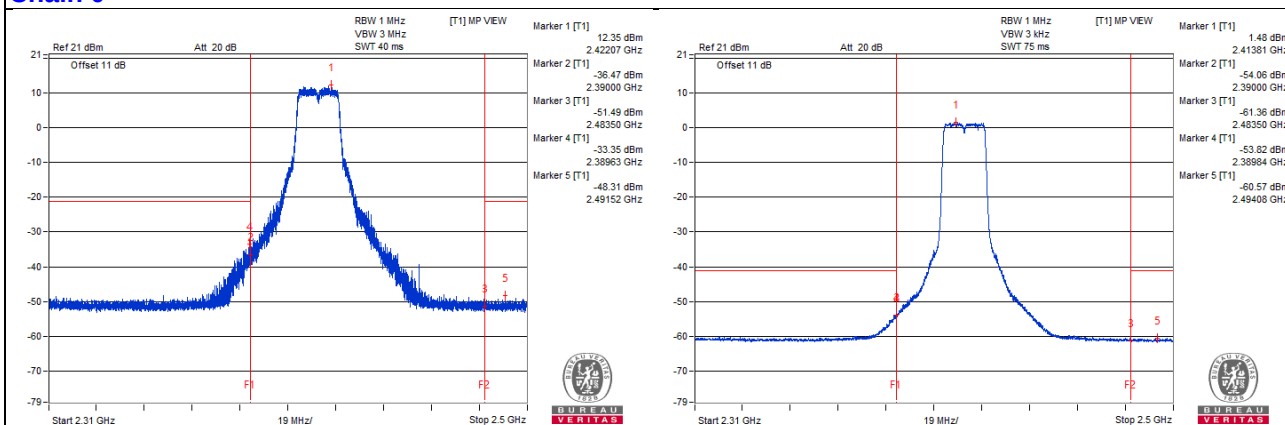

Chain 1

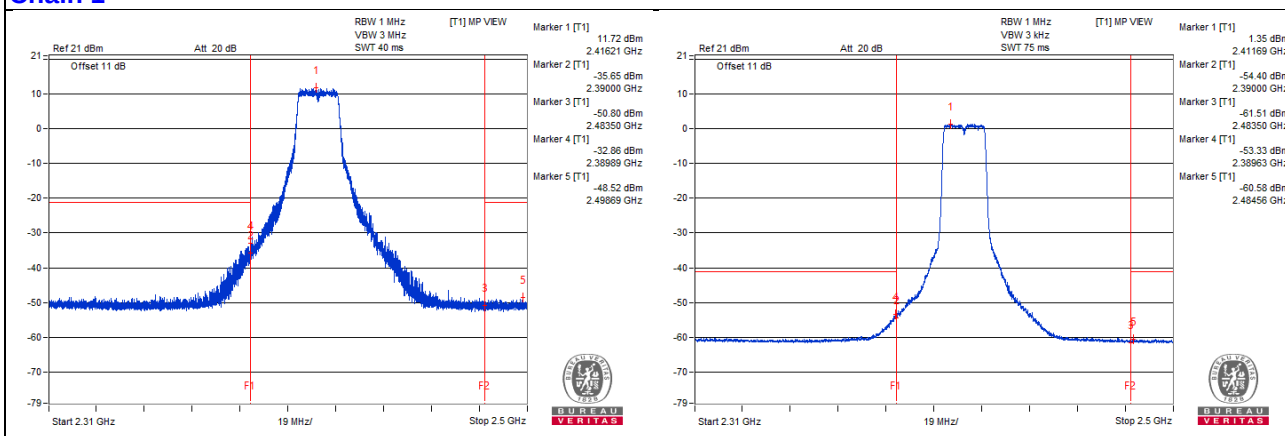

802.11g - Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1625 PK	52.55	74	-21.45	-52.8	-51.94	6.63	-42.71
2	1623.43 AV	42.5	54	-11.5	-62.63	-62.19	6.63	-52.76
3	4873.43 PK	54.34	74	-19.66	-51.07	-50.11	6.63	-40.92
4	4875 AV	43.72	54	-10.28	-61.2	-61.17	6.63	-51.54
5	7312.5 PK	55.13	74	-18.87	-49.64	-49.91	6.63	-40.13
6	7310.93 AV	45.29	54	-8.71	-59.52	-59.7	6.63	-49.97

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

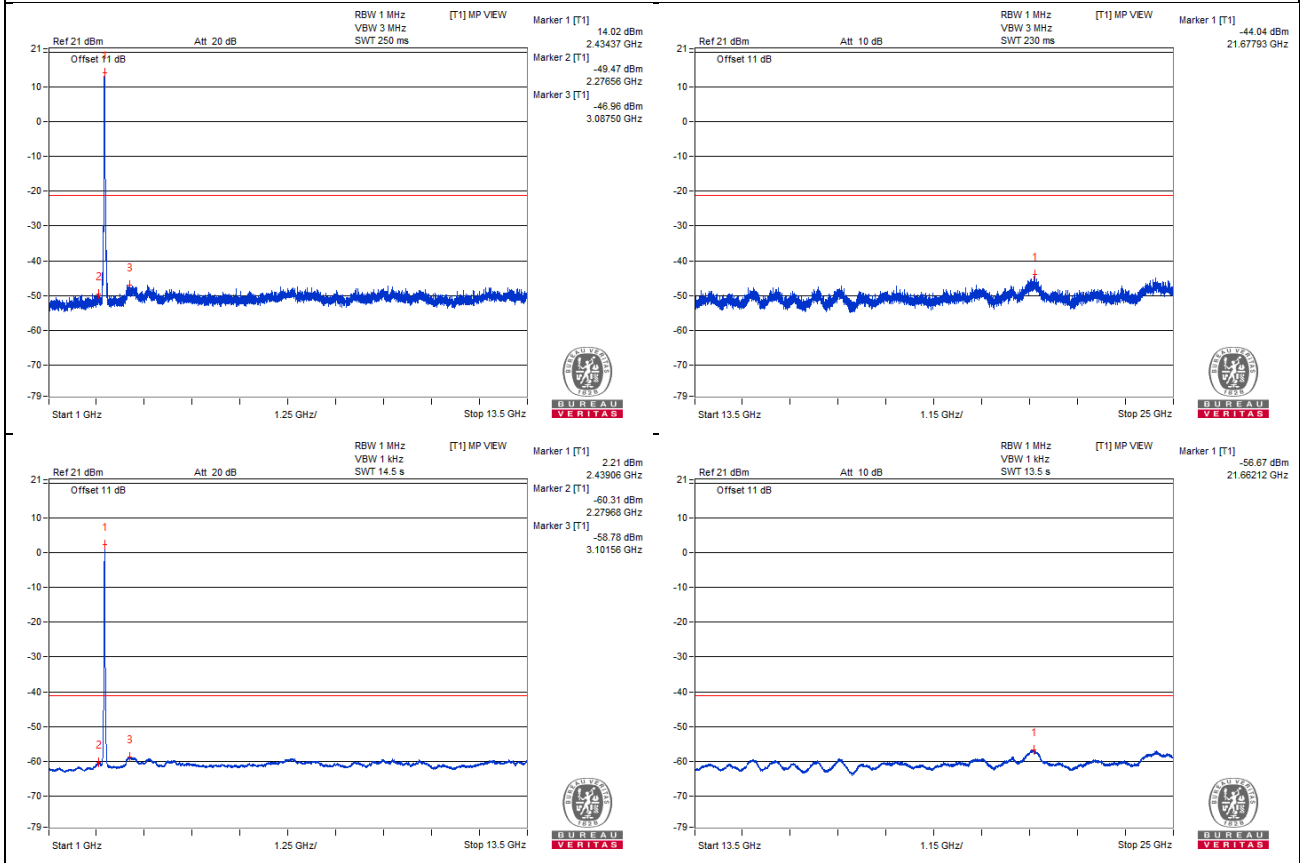

Chain 1

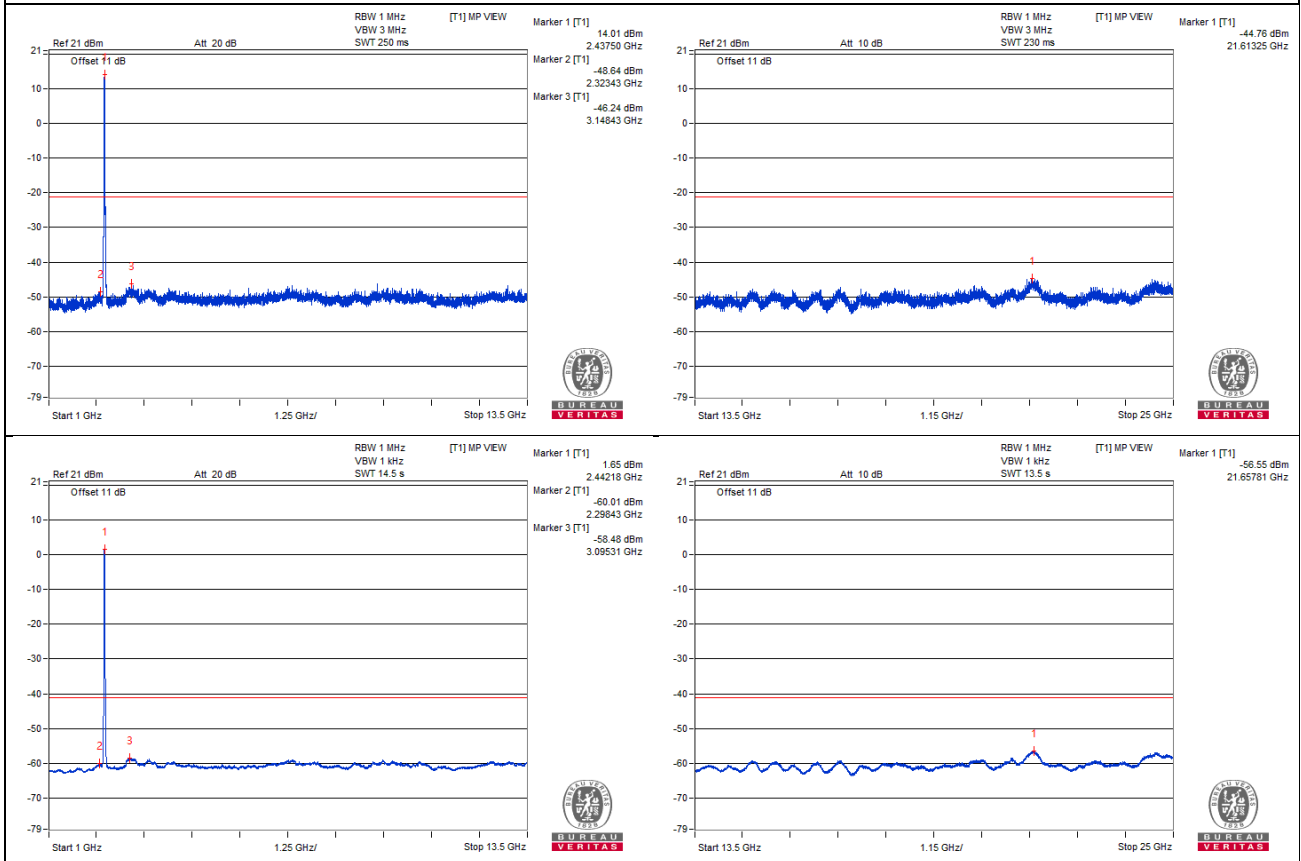

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.63 PK	62	74	-12	-42.51	-43.33	6.63	-33.26
2	2389.96 AV	46.69	54	-7.31	-57.99	-58.44	6.63	-48.57
3	2483.89 PK	61.5	74	-12.5	-43.37	-43.43	6.63	-33.76
4	2483.68 AV	46.92	54	-7.08	-57.78	-58.2	6.63	-48.34

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

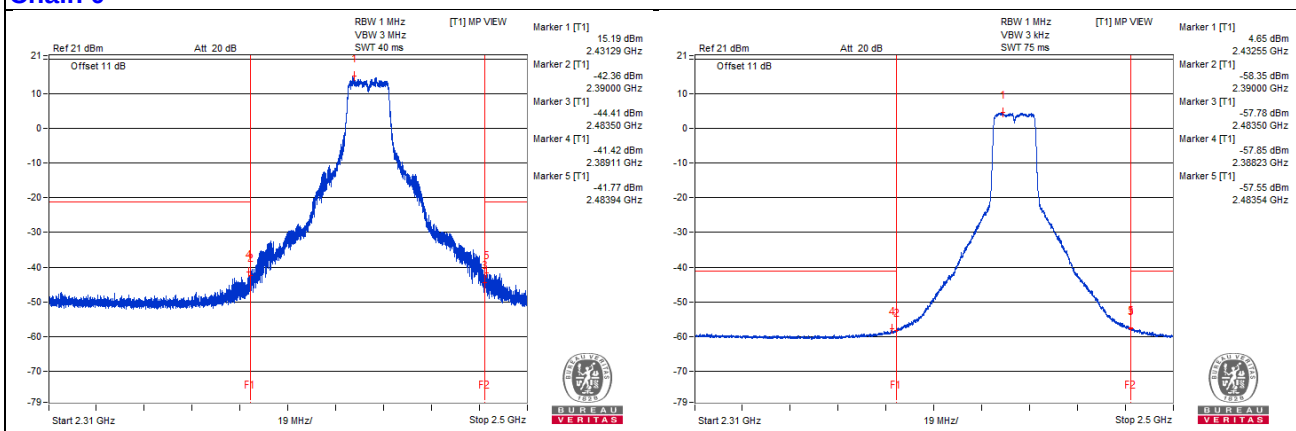

Chain 1

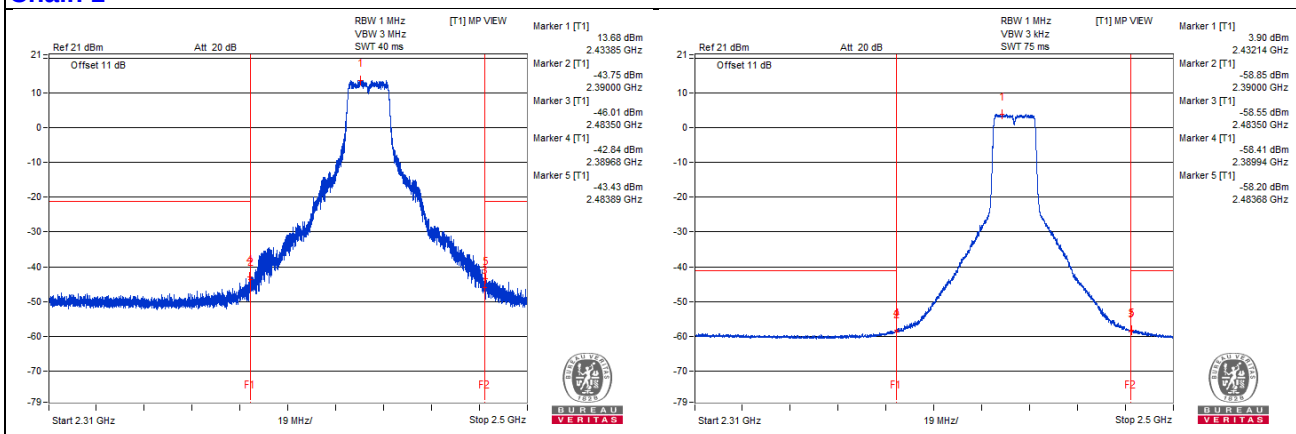

802.11g - Channel 10

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4912.5 PK	54.05	74	-19.95	-50.3	-51.49	6.63	-41.21
2	4914.06 AV	43.7	54	-10.3	-61.23	-61.18	6.63	-51.56
3	7371.87 PK	56.3	74	-17.7	-47.88	-49.46	6.63	-38.96
4	7370.31 AV	45.85	54	-8.15	-58.91	-59.2	6.63	-49.41

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

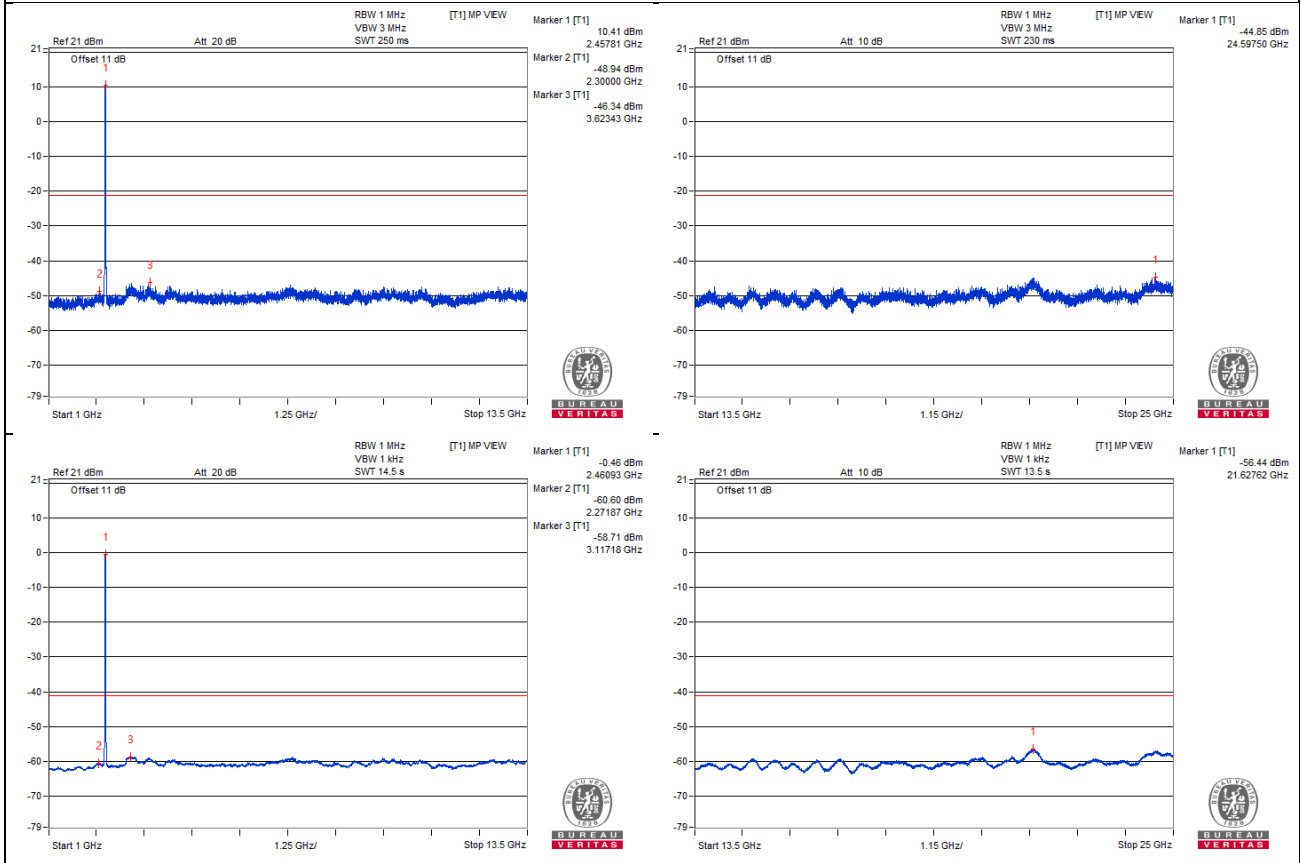

Chain 1

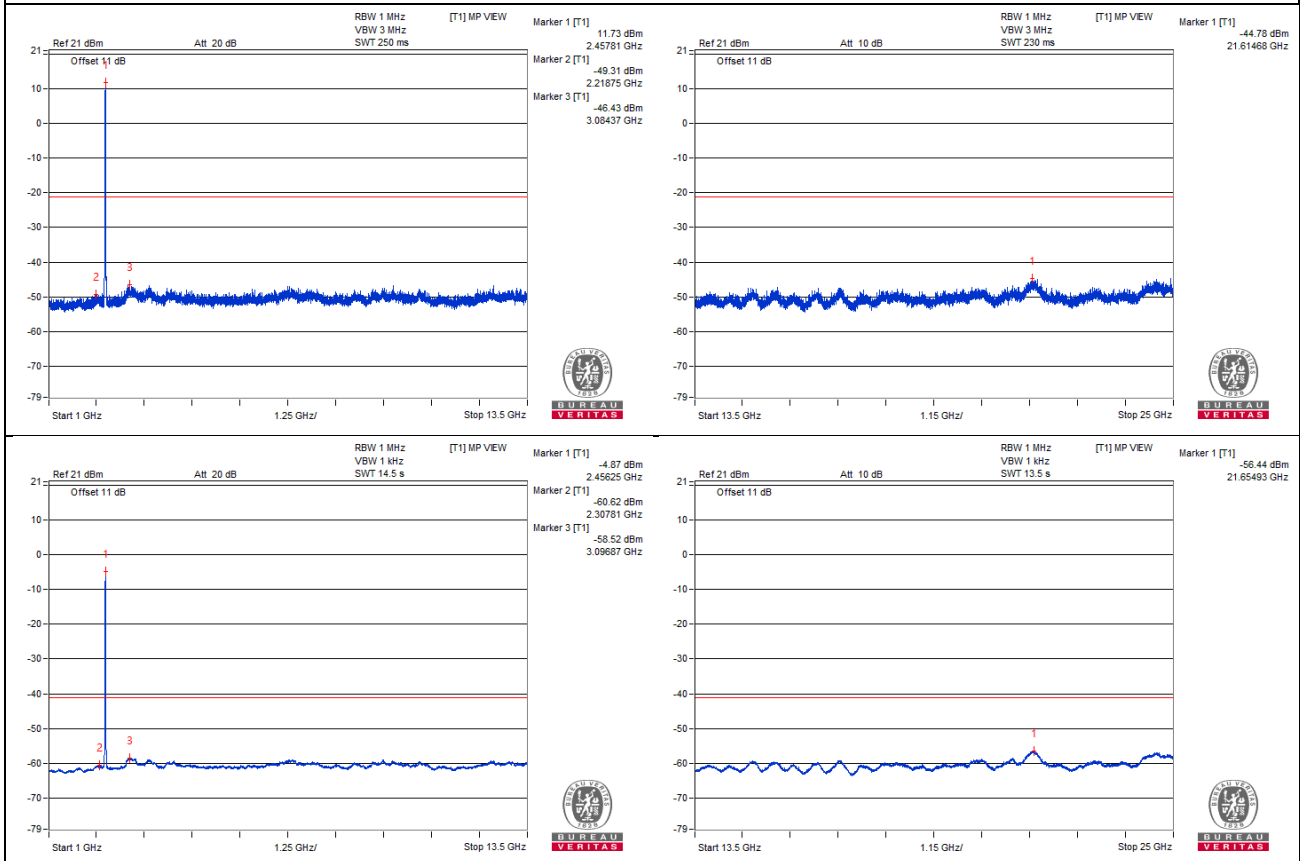

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.68 PK	70.83	74	-3.17	-35.95	-32.76	6.63	-24.43
2	2483.94 AV	51.46	54	-2.54	-53.44	-53.44	6.63	-43.8

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

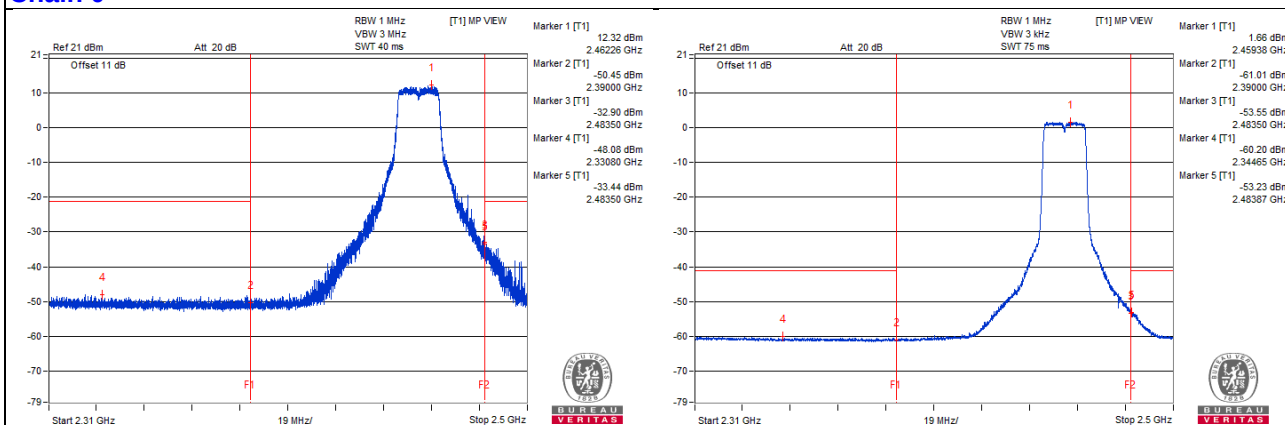

Chain 1

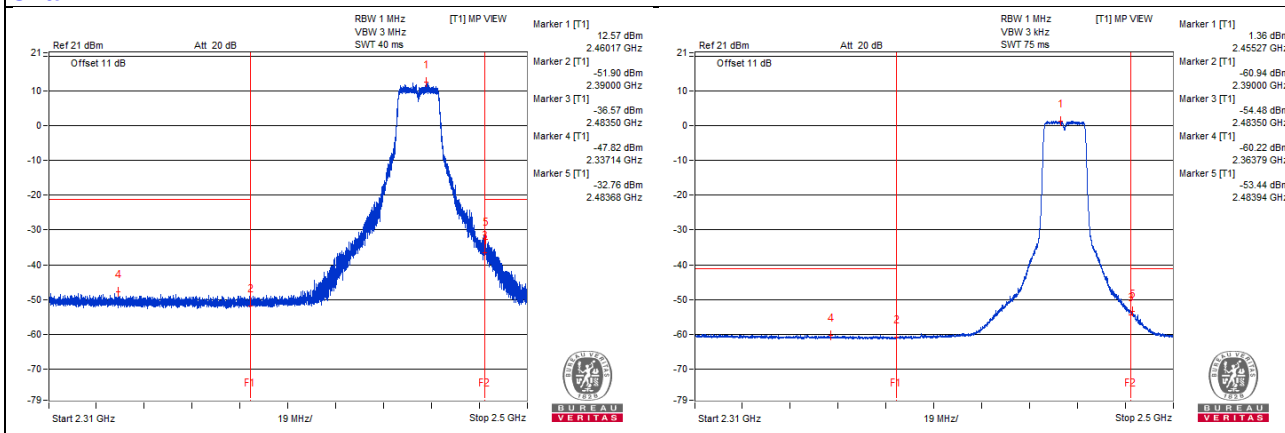

802.11g - Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4925 PK	53.83	74	-20.17	-51.55	-50.64	6.63	-41.43
2	4923.43 AV	43.53	54	-10.47	-61.43	-61.32	6.63	-51.73
3	7387.5 PK	55.92	74	-18.08	-49.15	-48.82	6.63	-39.34
4	7385.93 AV	45.43	54	-8.57	-59.6	-59.35	6.63	-49.83

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

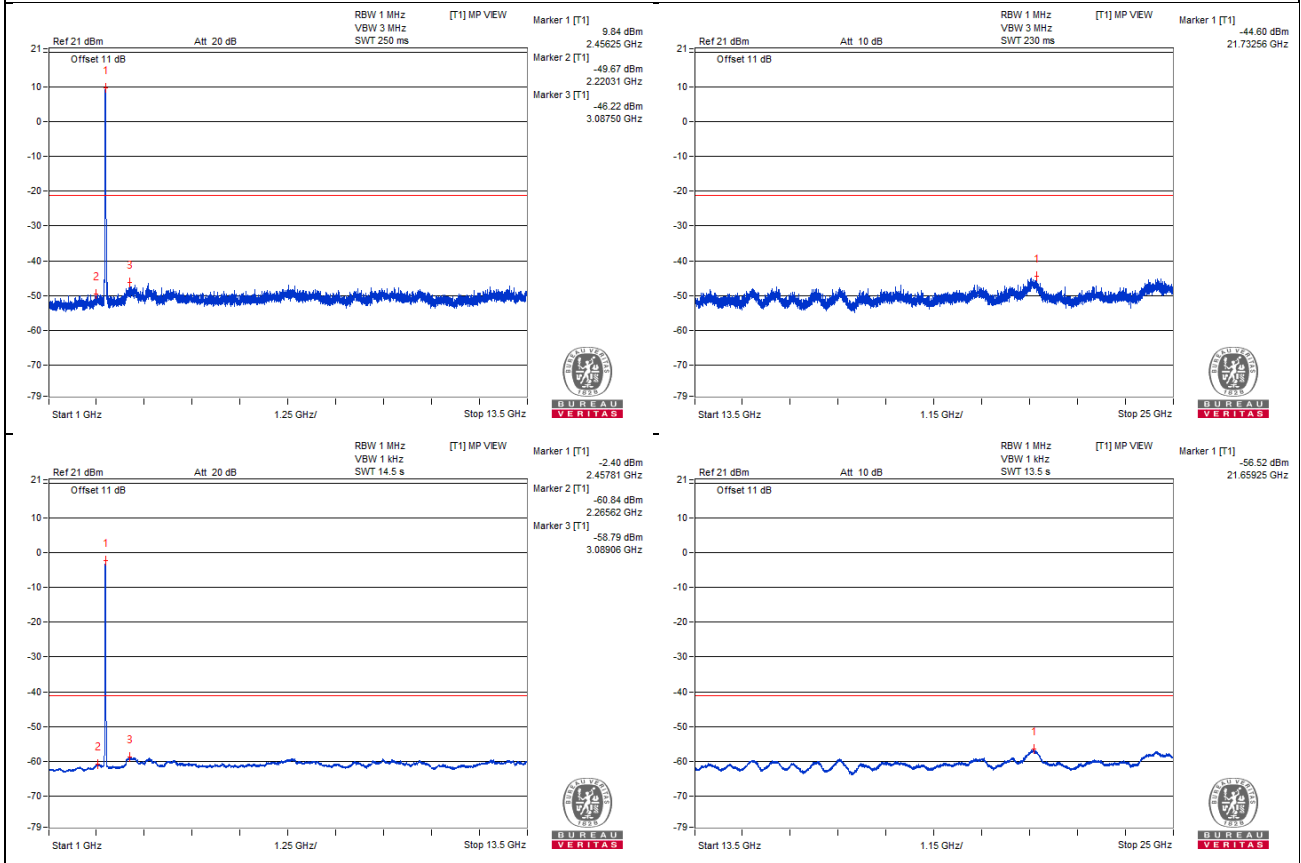

Chain 1

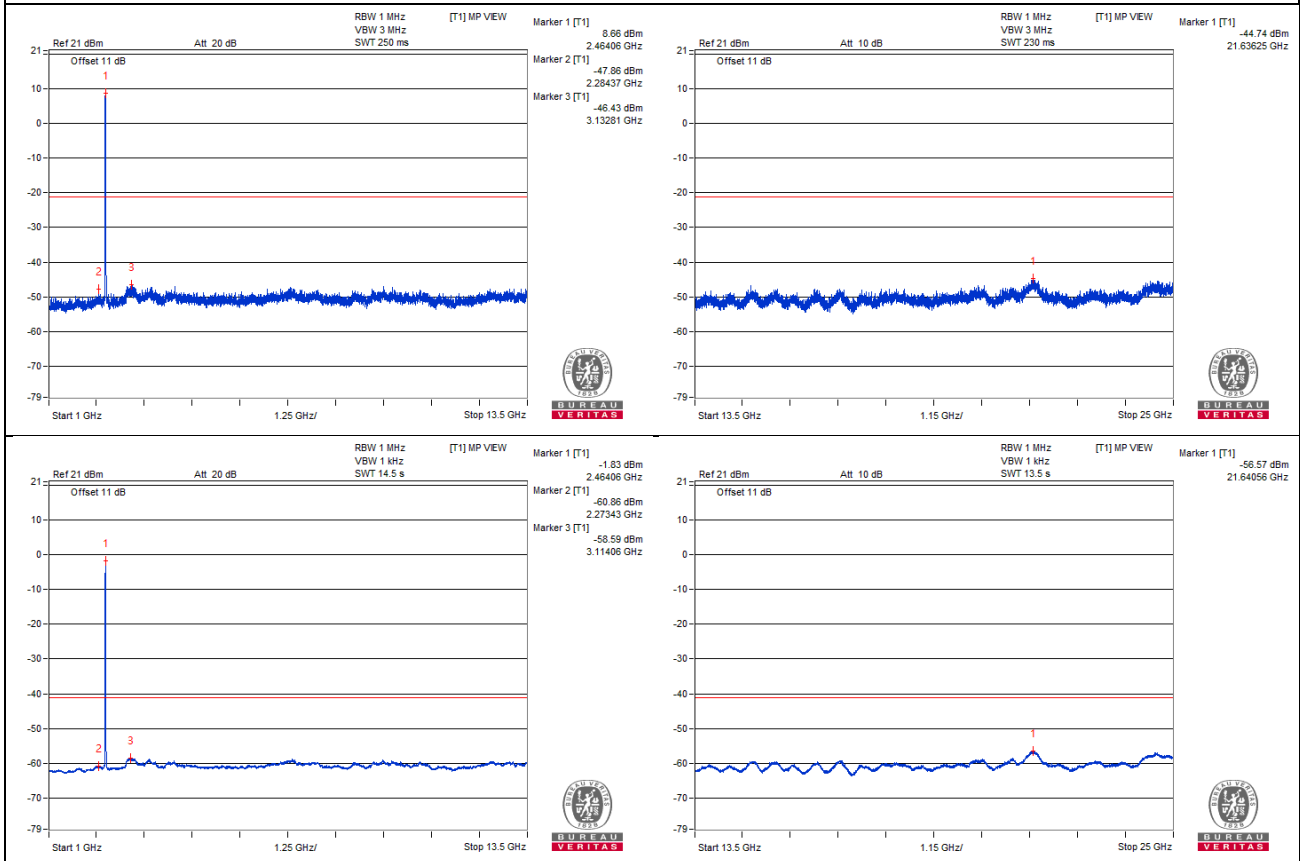

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.61 PK	71.08	74	-2.92	-32.94	-34.92	6.63	-24.18
2	2483.8 AV	49.75	54	-4.25	-54.14	-56.47	6.63	-45.51

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

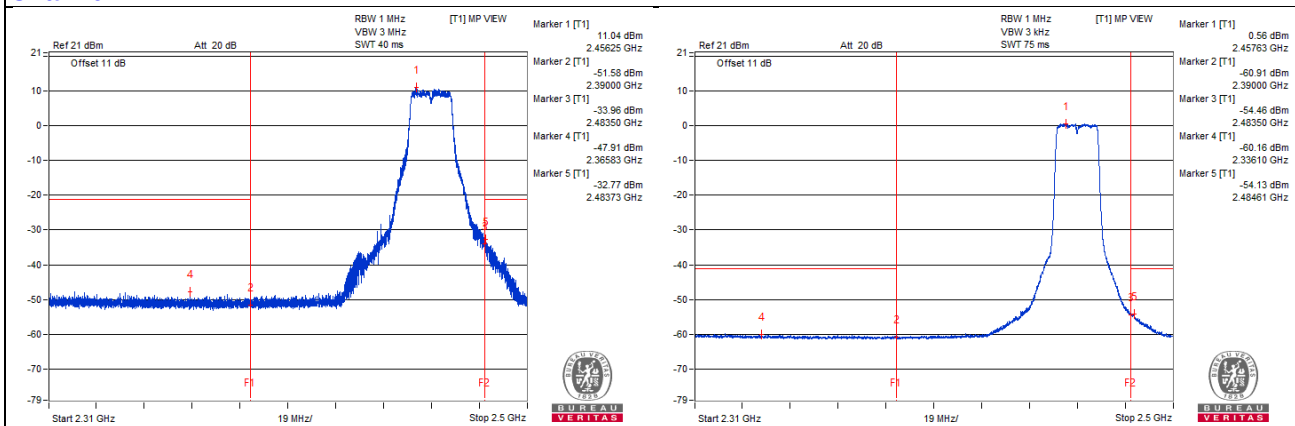

Chain 1

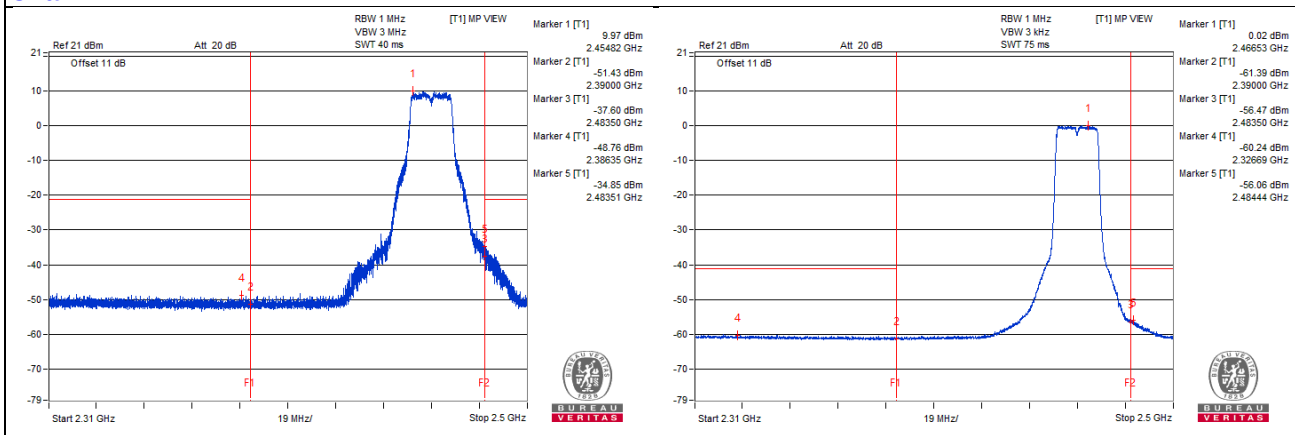

802.11g - Channel 12

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4935.93 PK	53.96	74	-20.04	-51.45	-50.48	6.63	-41.3
2	4935.93 AV	43.79	54	-10.21	-60.98	-61.25	6.63	-51.47
3	7401.56 PK	56.05	74	-17.95	-48.41	-49.34	6.63	-39.21
4	7401.56 AV	45.19	54	-8.81	-59.81	-59.61	6.63	-50.07

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

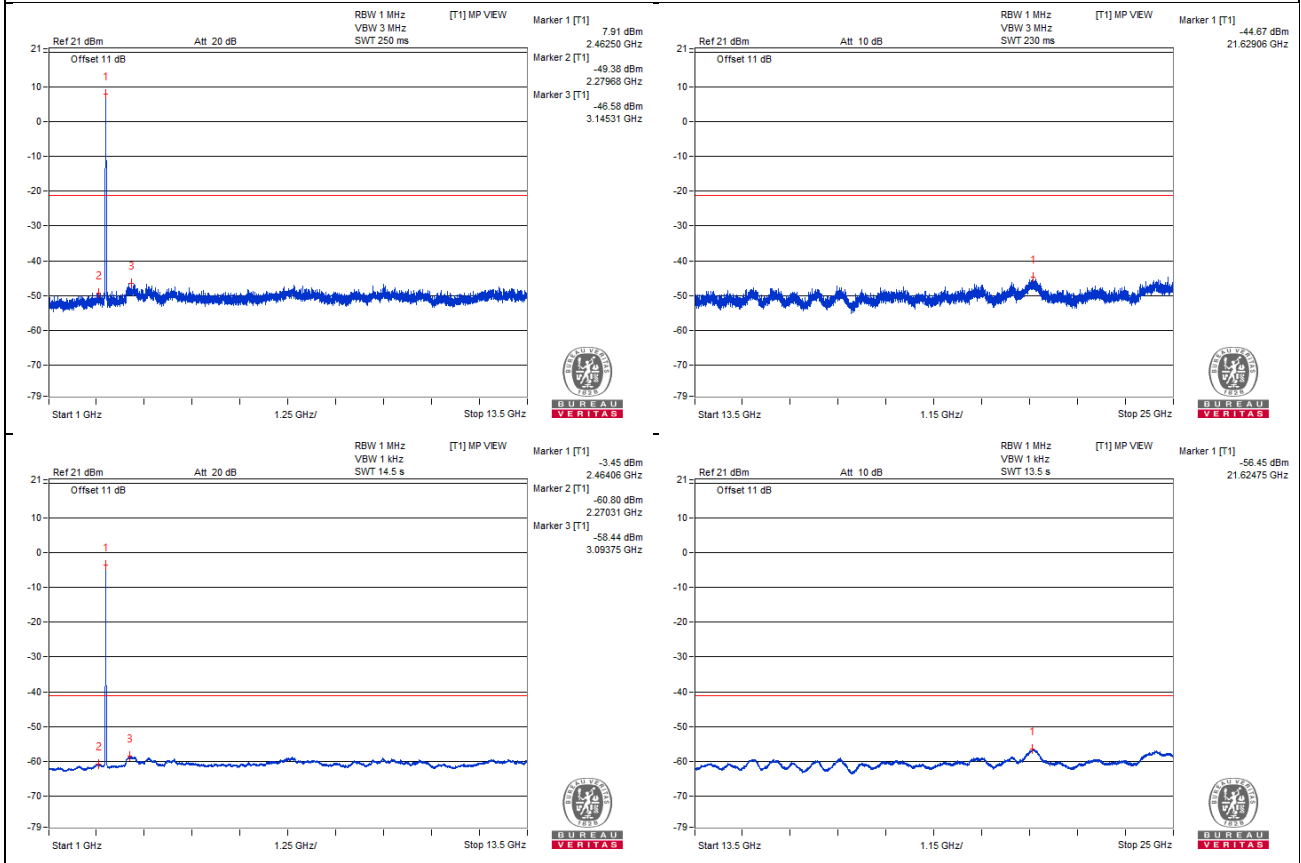

Chain 1

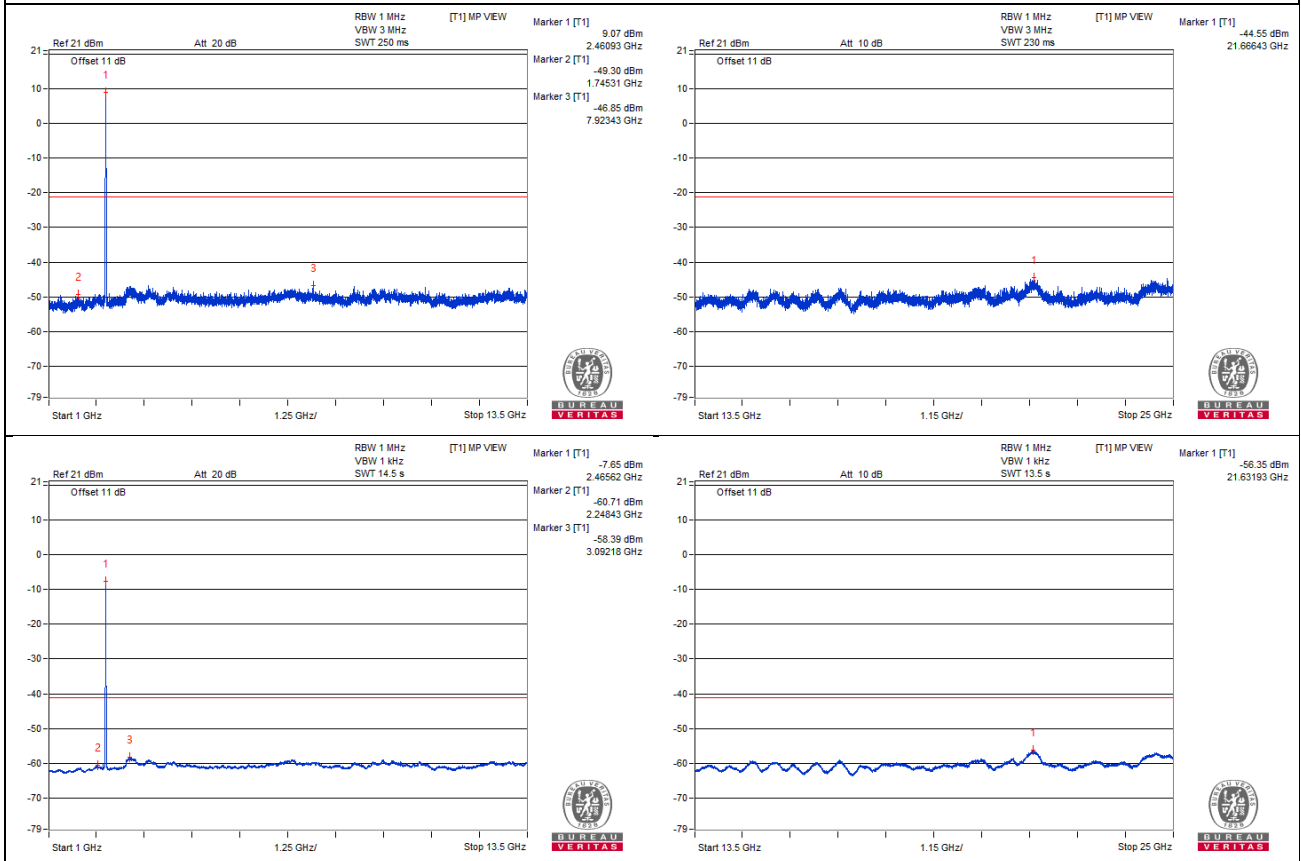

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.51 PK	71.4	74	-2.6	-31.7	-36.63	6.63	-23.86
2	2483.51 AV	51.73	54	-2.27	-53.13	-53.21	6.63	-43.53

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

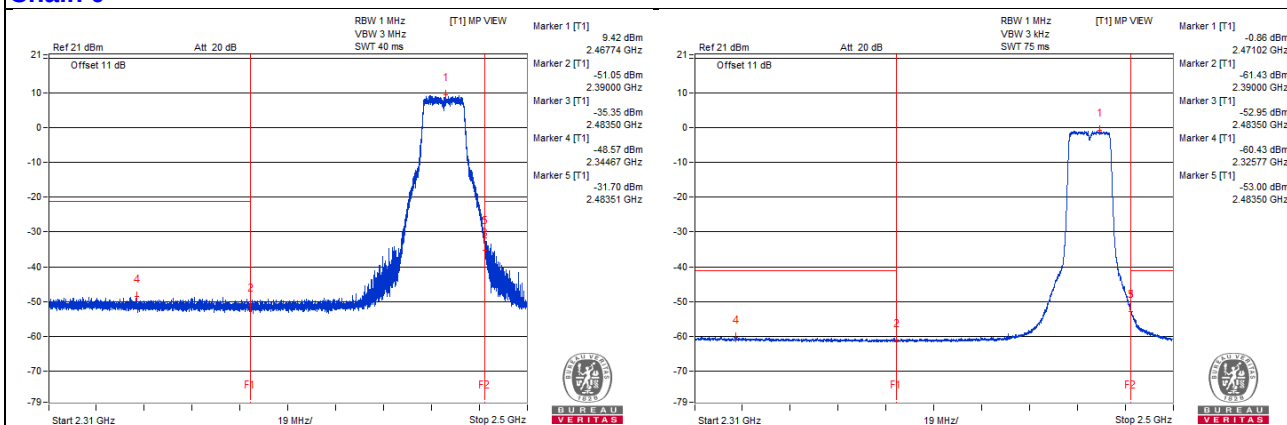

Chain 1

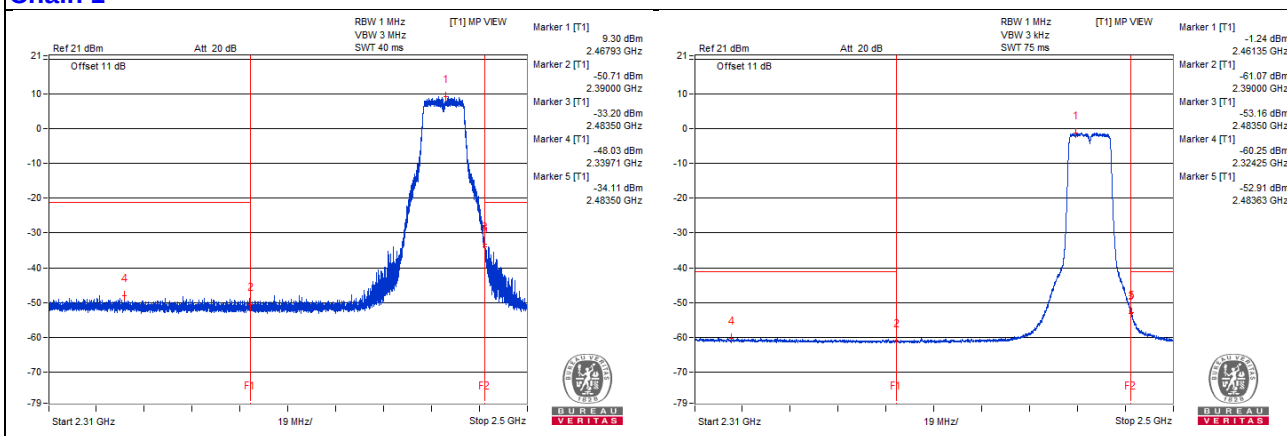

802.11g - Channel 13

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4943.75 PK	54.13	74	-19.87	-50.42	-51.16	6.63	-41.13
2	4943.75 AV	43.66	54	-10.34	-61.23	-61.26	6.63	-51.6
3	7415.62 PK	55.97	74	-18.03	-49.57	-48.37	6.63	-39.29
4	7417.18 AV	45.54	54	-8.46	-59.27	-59.45	6.63	-49.72

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

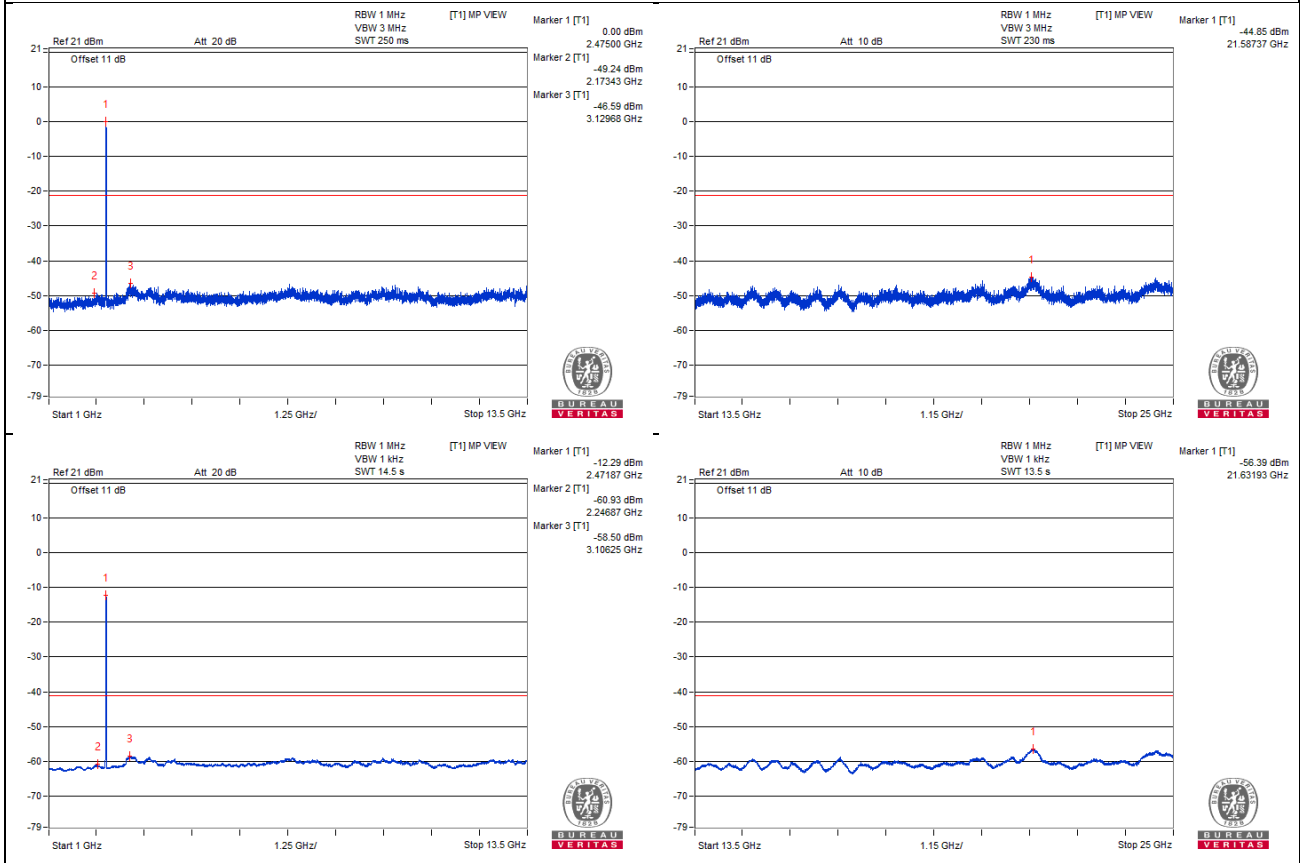

Chain 1

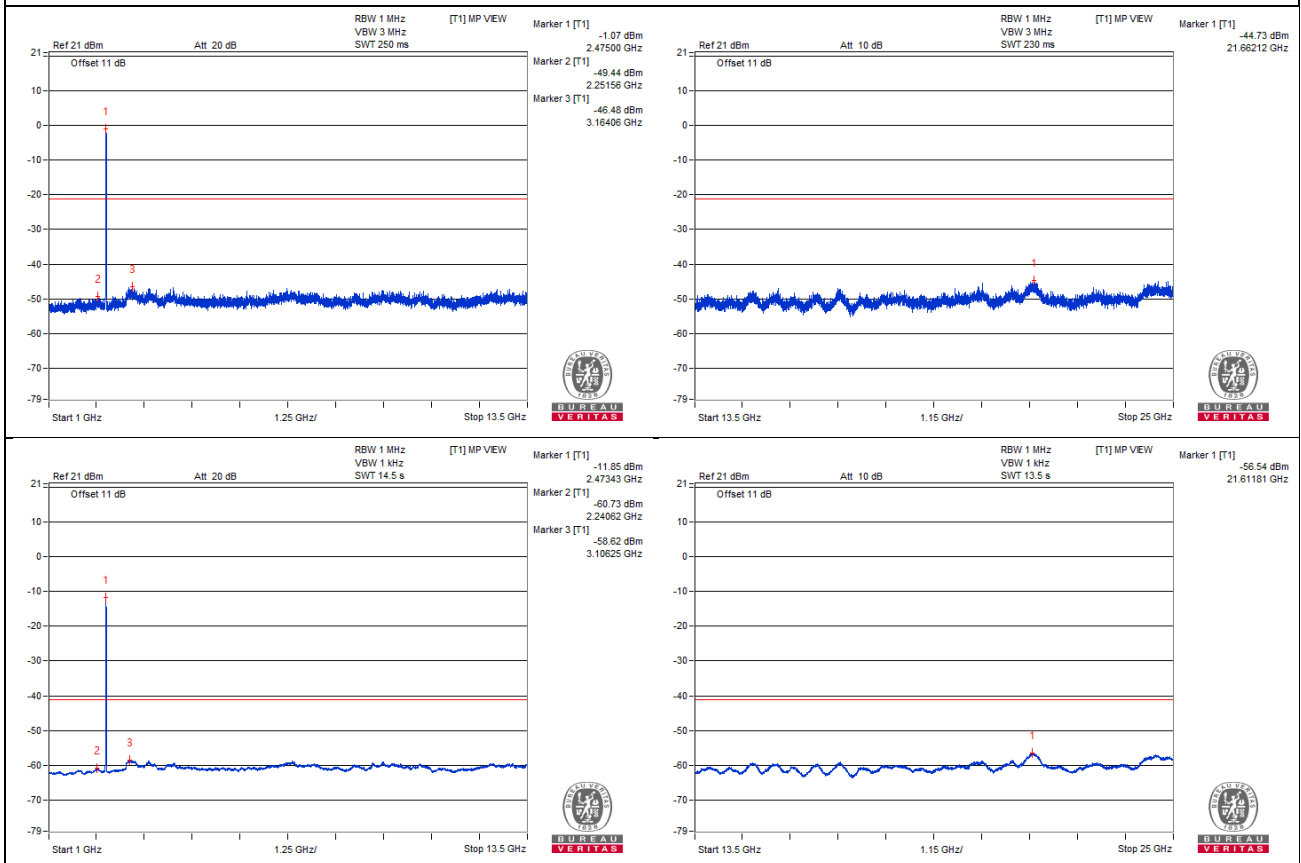

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2483.51 PK	71.49	74	-2.51	-34.51	-32.53	6.63	-23.77
2	2483.51 AV	51	54	-3	-53.85	-53.95	6.63	-44.26

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

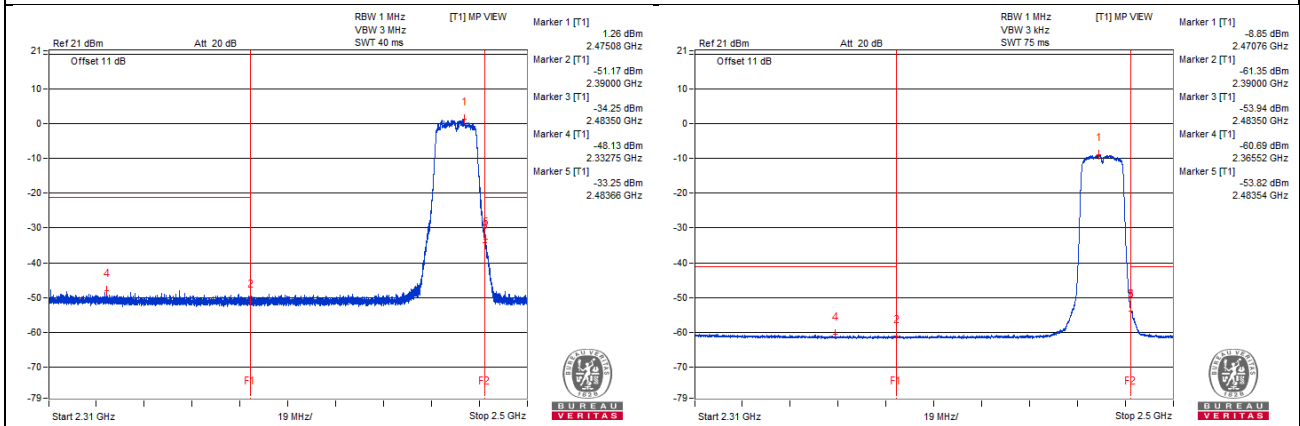

Chain 1

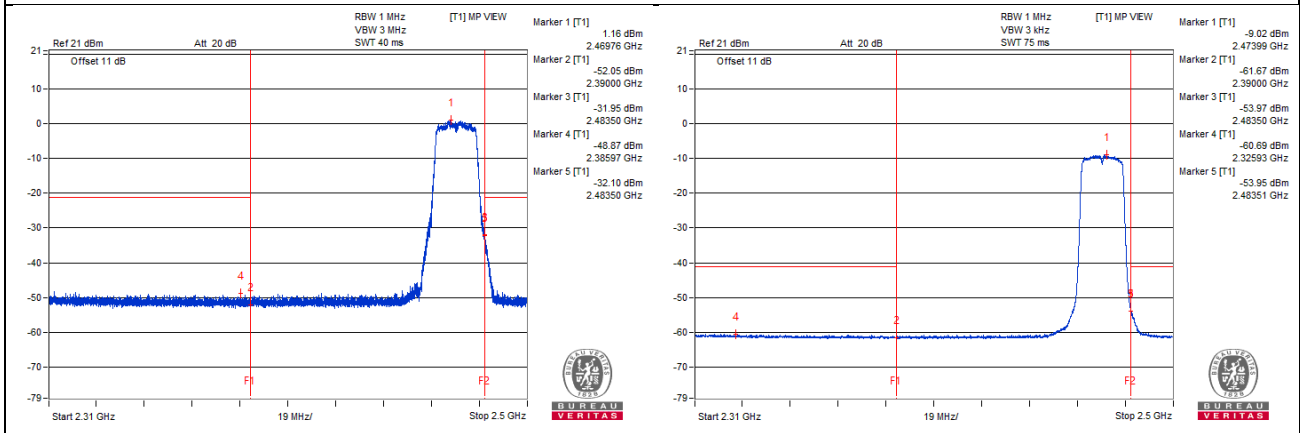

VHT20 - Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1609.37 PK	52.26	74	-21.74	-53.11	-52.21	6.63	-43
2	1609.37 AV	42.27	54	-11.73	-62.69	-62.57	6.63	-52.99
3	4825 PK	53.61	74	-20.39	-51.45	-51.14	6.63	-41.65
4	4825 AV	43.9	54	-10.1	-61.08	-60.92	6.63	-51.36

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

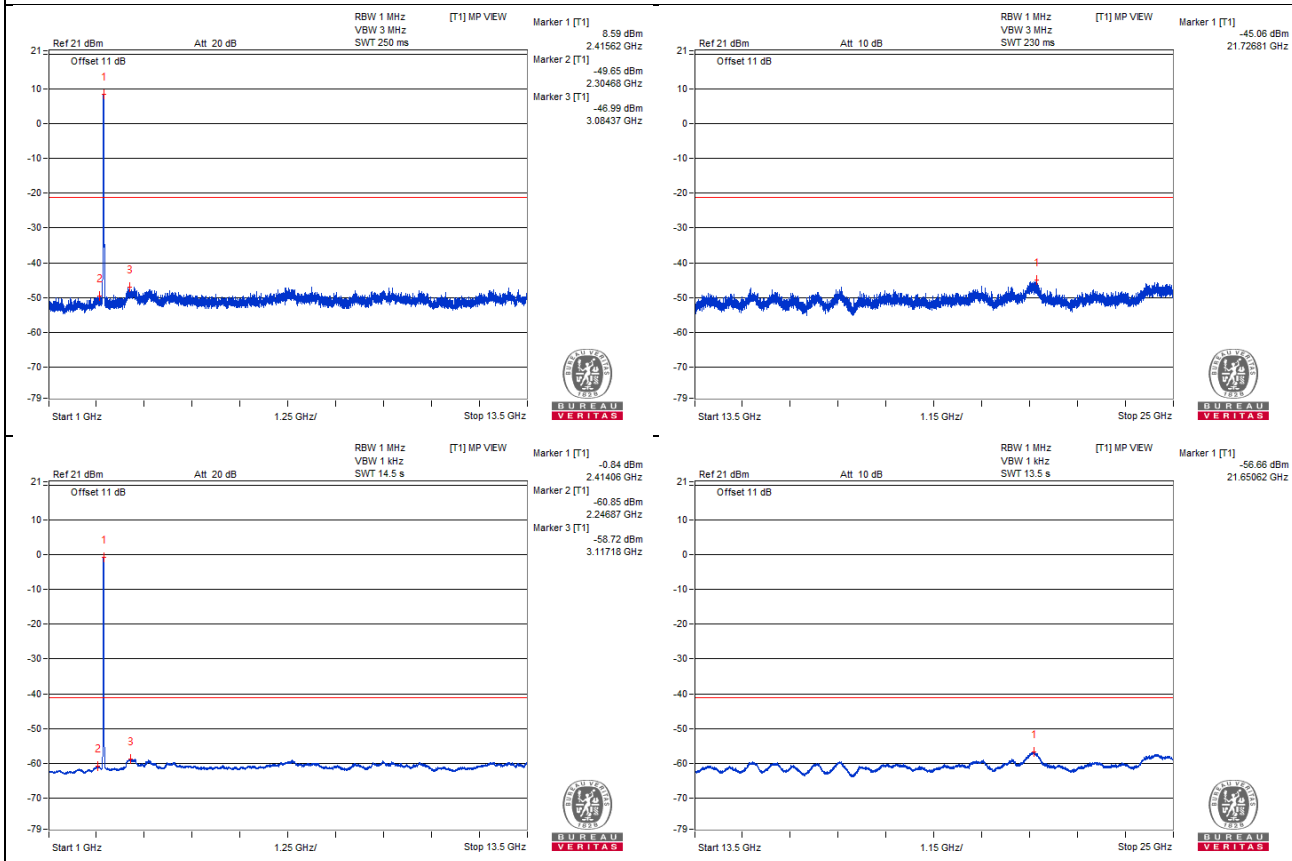

Chain 1

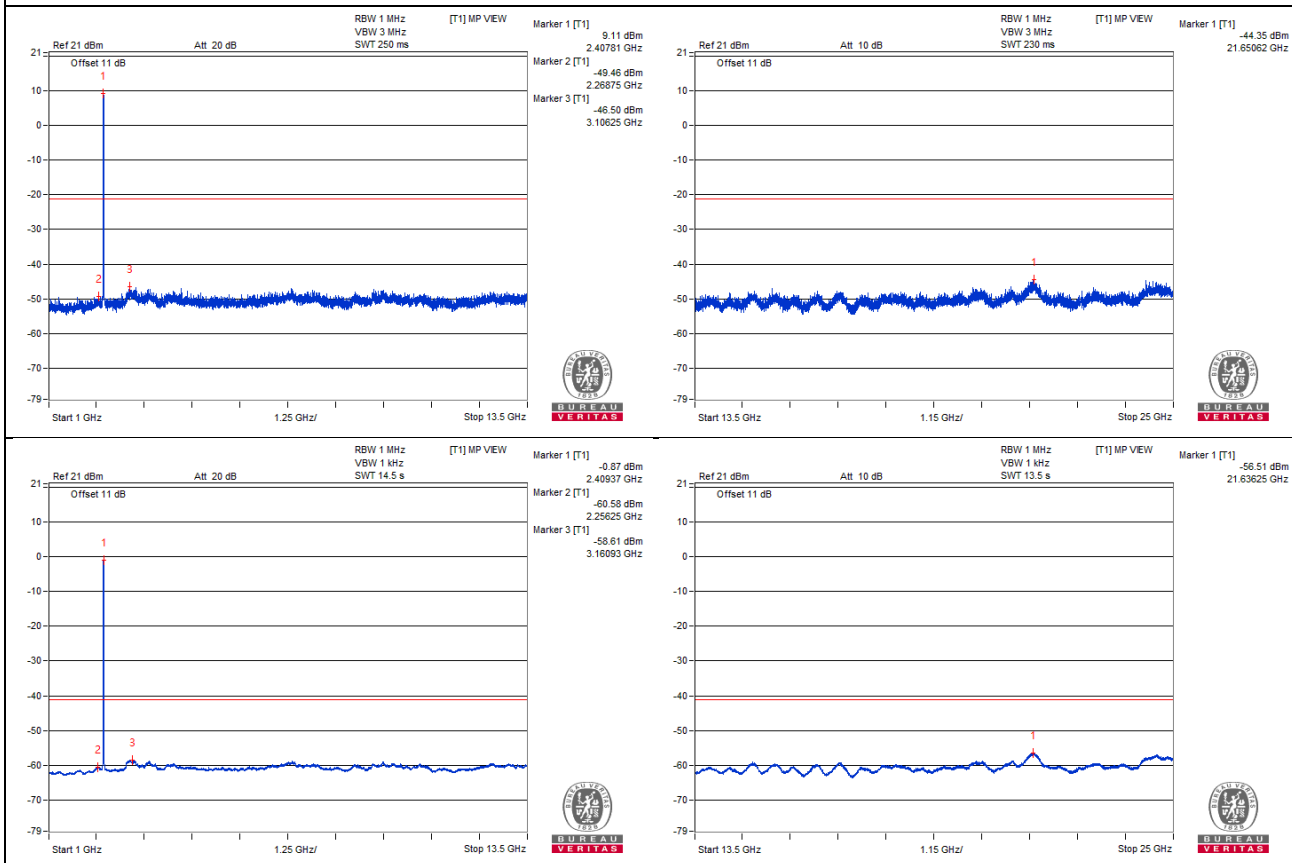

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.72 PK	71.47	74	-2.53	-34.16	-32.8	6.63	-23.79
2	2389.7 AV	47.67	54	-6.33	-56.88	-57.61	6.63	-47.59

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

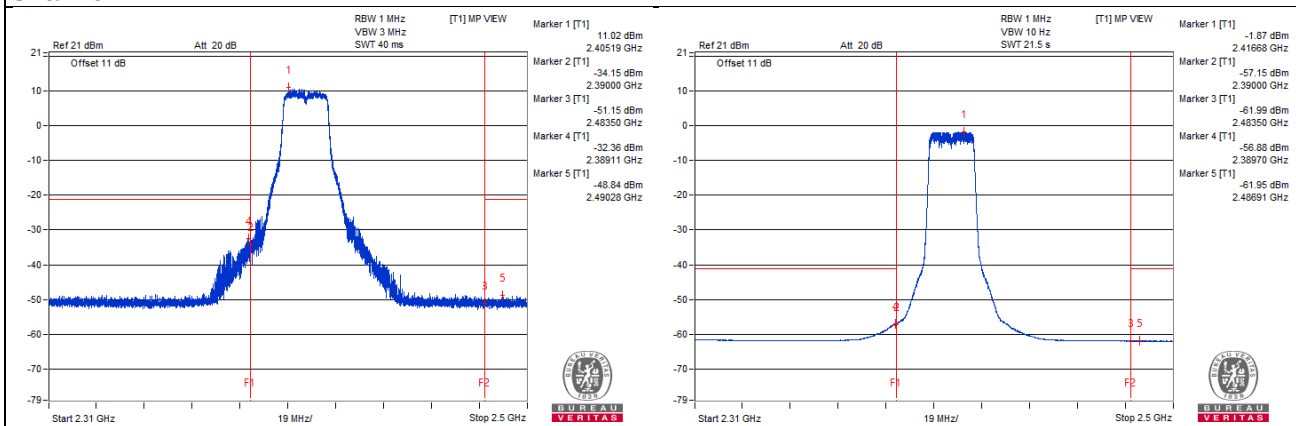

Chain 1

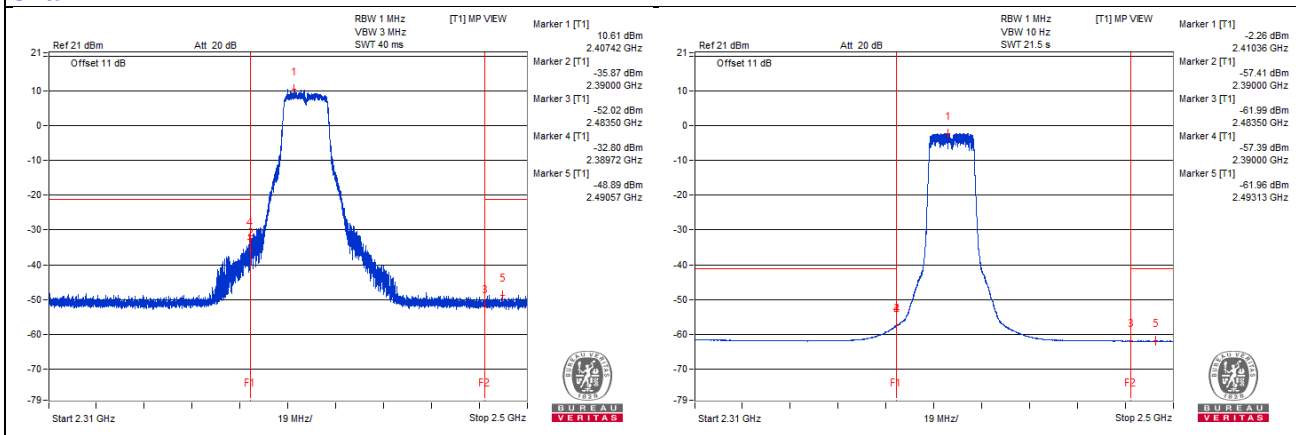

VHT20 - Channel 2

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1610.93 PK	52.34	74	-21.66	-51.98	-53.23	6.63	-42.92
2	1610.93 AV	42.5	54	-11.5	-62.32	-62.49	6.63	-52.76
3	4832.81 PK	54.69	74	-19.31	-49.82	-50.65	6.63	-40.57
4	4835.93 AV	43.91	54	-10.09	-61.18	-60.8	6.63	-51.35
5	7251.56 PK	55.84	74	-18.16	-48.89	-49.24	6.63	-39.42
6	7251.56 AV	45.47	54	-8.53	-59.51	-59.36	6.63	-49.79

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

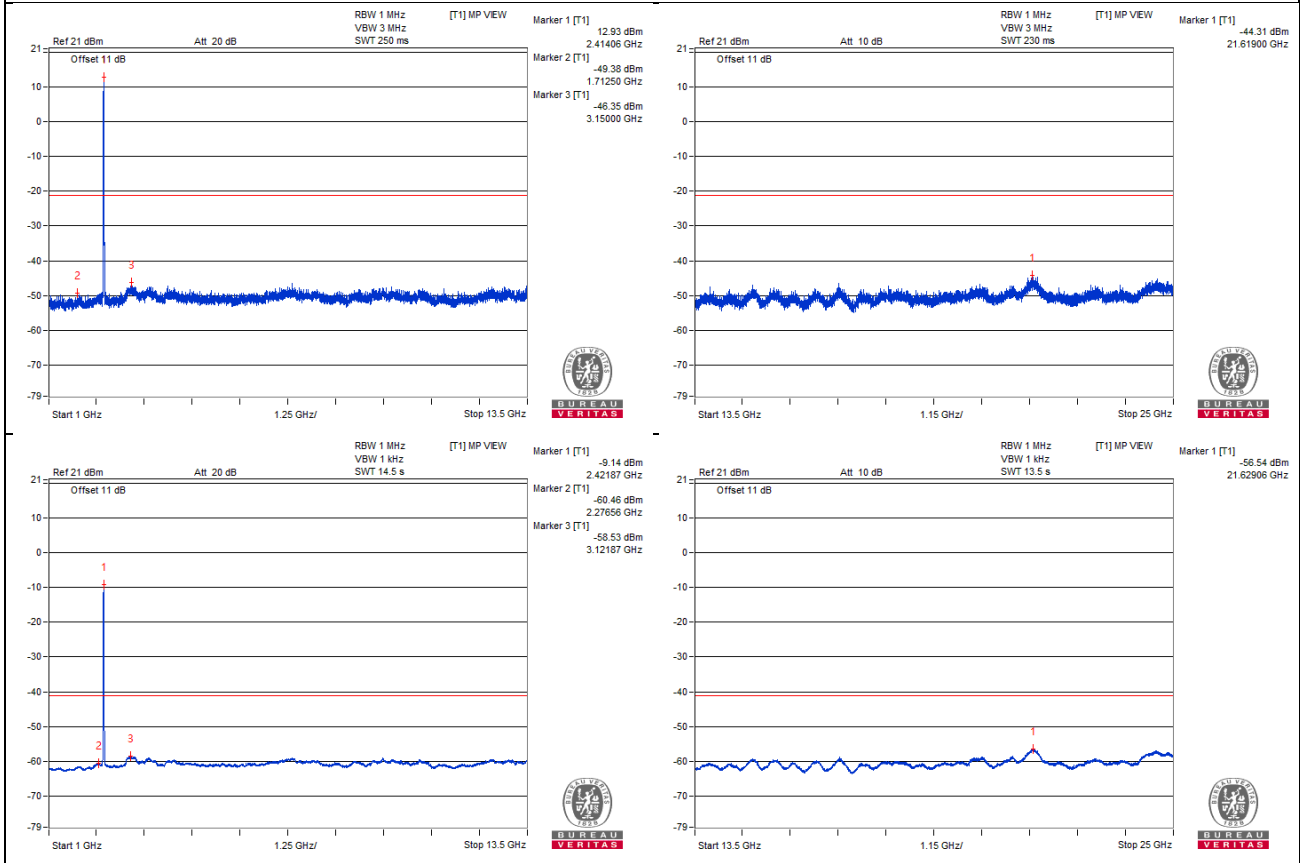

Chain 1

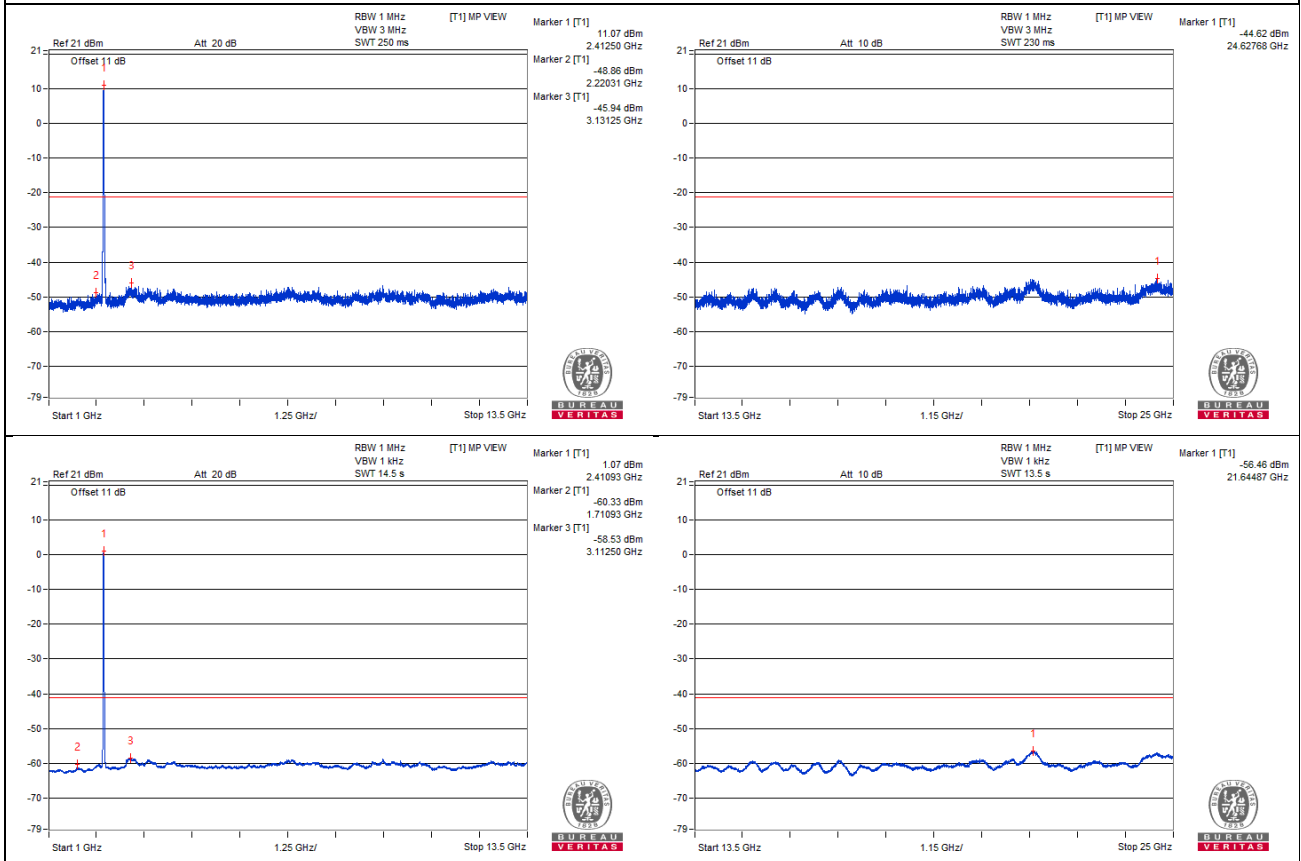

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.89 PK	71.32	74	-2.68	-32.34	-35.33	6.63	-23.94
2	2389.94 AV	51.78	54	-2.22	-52.03	-54.58	6.63	-43.48

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

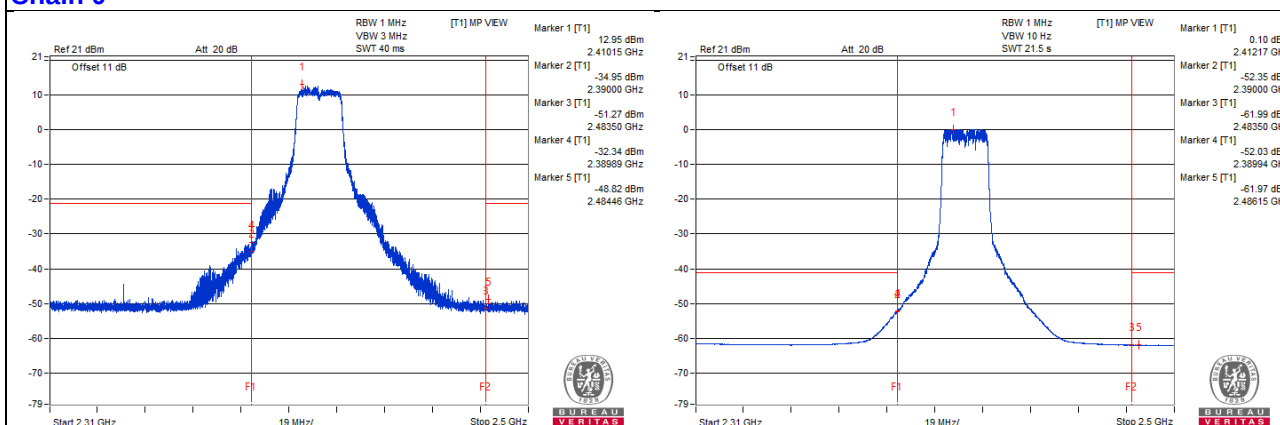

Chain 1

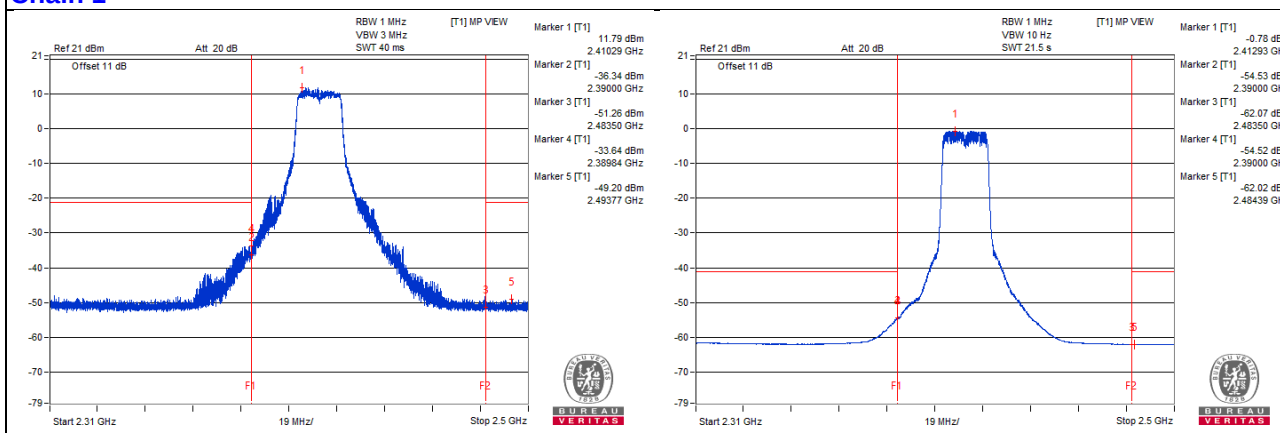

VHT20 - Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1623.43 PK	53.41	74	-20.59	-53.26	-50.24	6.63	-41.85
2	1625 AV	42.34	54	-11.66	-62.68	-62.44	6.63	-52.92
3	4873.43 PK	53.76	74	-20.24	-52.21	-50.28	6.63	-41.5
4	4875 AV	43.91	54	-10.09	-61.01	-60.97	6.63	-51.35
5	7309.37 PK	55.24	74	-18.76	-49.84	-49.48	6.63	-40.02
6	7312.5 AV	45.43	54	-8.57	-59.45	-59.5	6.63	-49.83

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

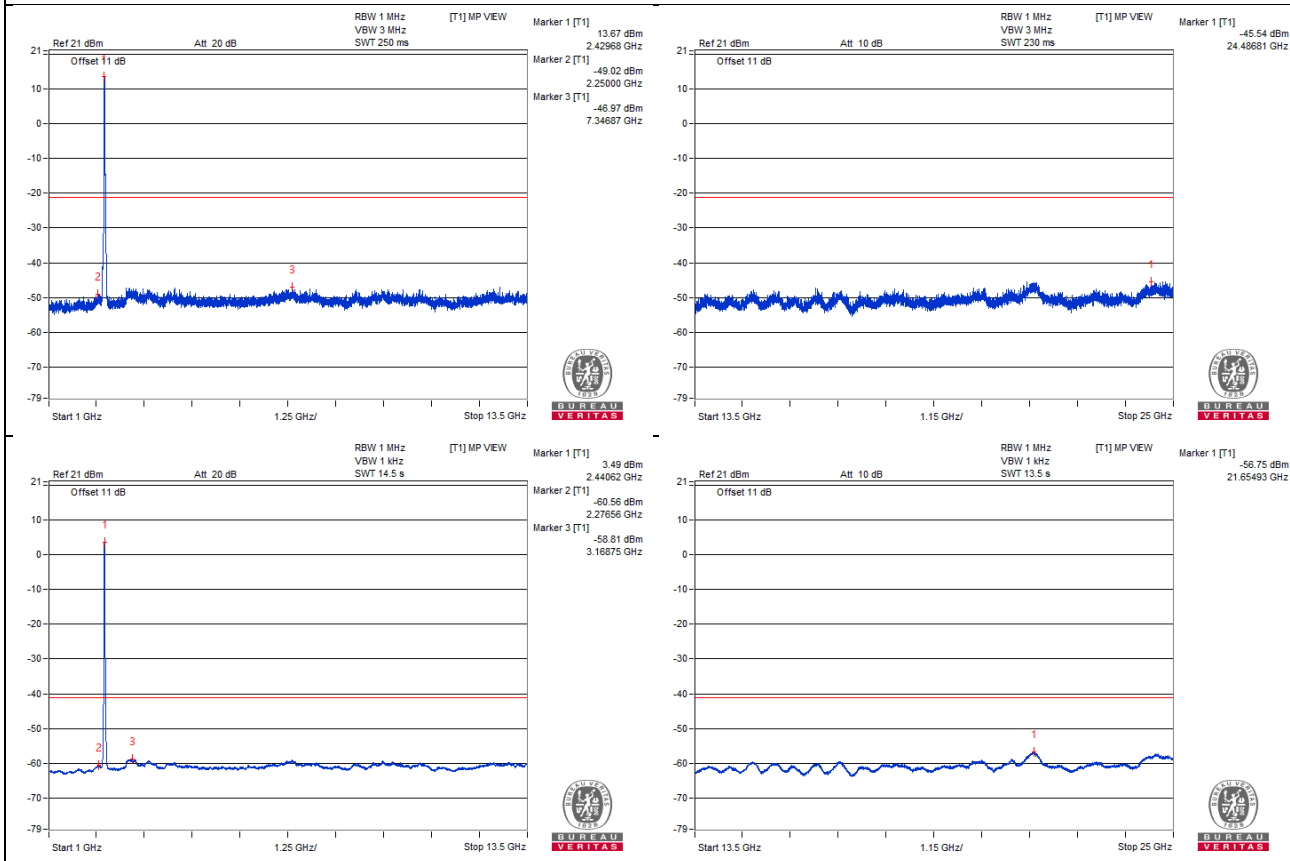

Chain 1

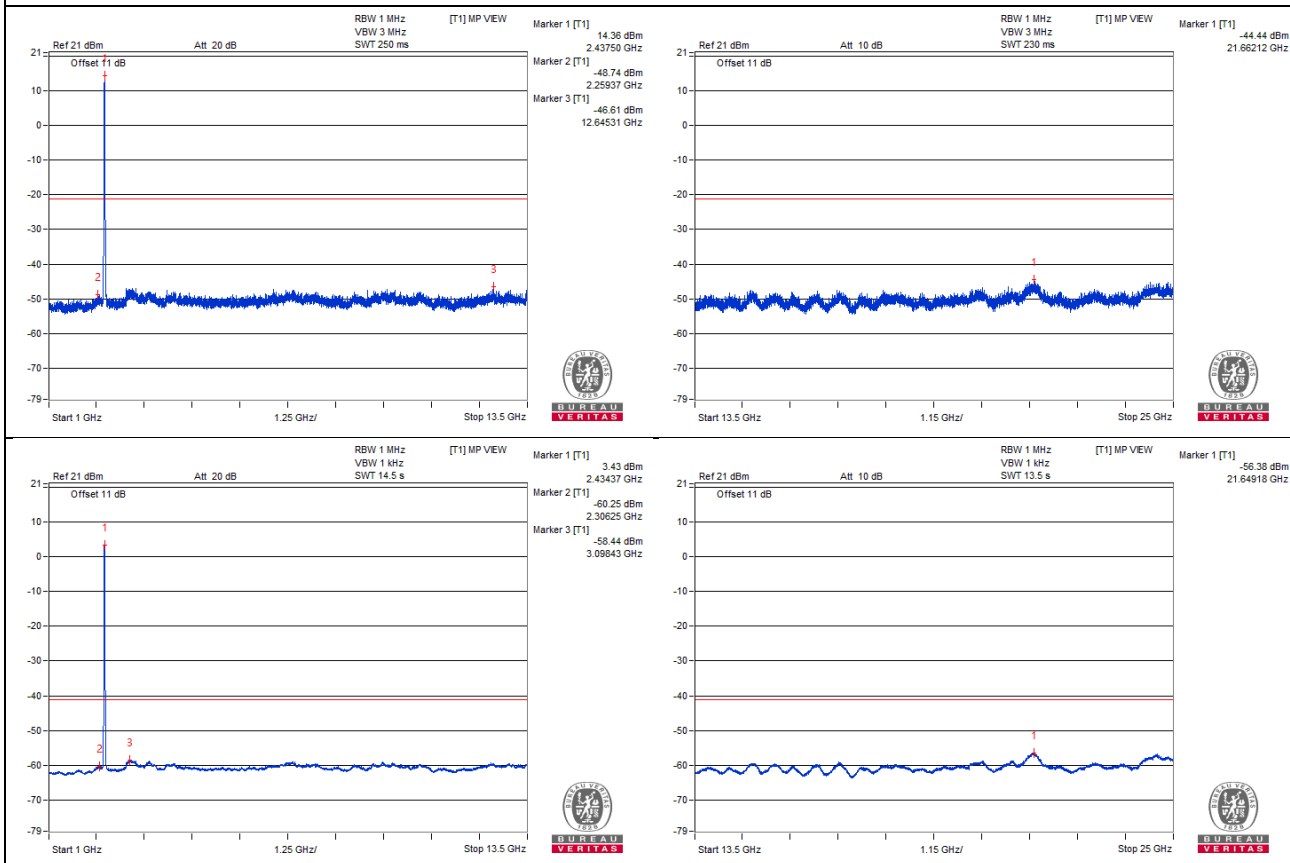

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2388.89 PK	67.24	74	-6.76	-38.32	-37.09	6.63	-28.02
2	2389.99 AV	46.42	54	-7.58	-58.18	-58.8	6.63	-48.84
3	2484.15 PK	67.05	74	-6.95	-39.11	-36.87	6.63	-28.21
4	2483.54 AV	46.76	54	-7.24	-57.78	-58.54	6.63	-48.5

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

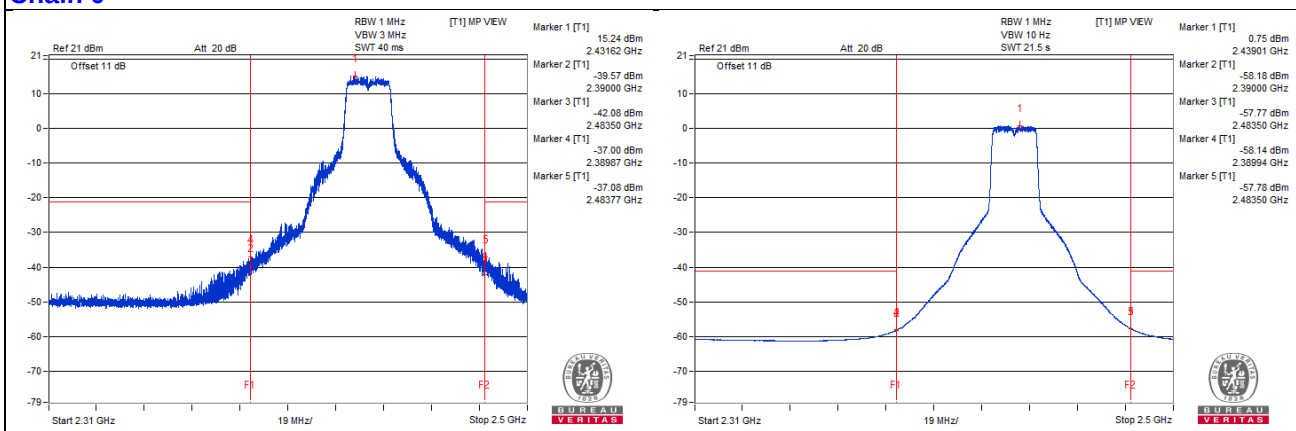

Chain 1

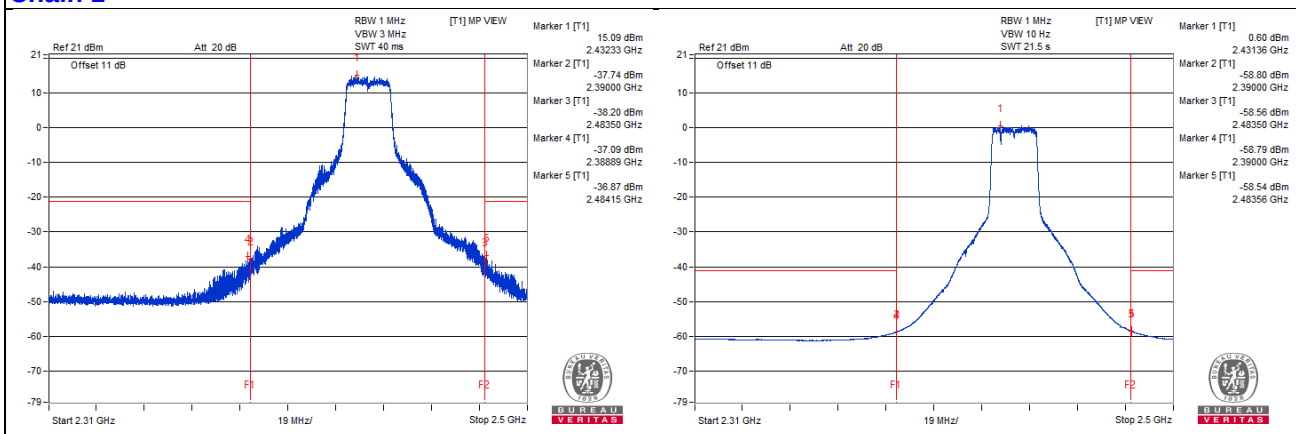

VHT20 - Channel 10

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4914.06 PK	54.75	74	-19.25	-50.76	-49.61	6.63	-40.51
2	4914.06 AV	43.77	54	-10.23	-61.15	-61.12	6.63	-51.49
3	7370.31 PK	55.4	74	-18.6	-49.34	-49.67	6.63	-39.86
4	7371.87 AV	45.83	54	-8.17	-59.14	-59.01	6.63	-49.43

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

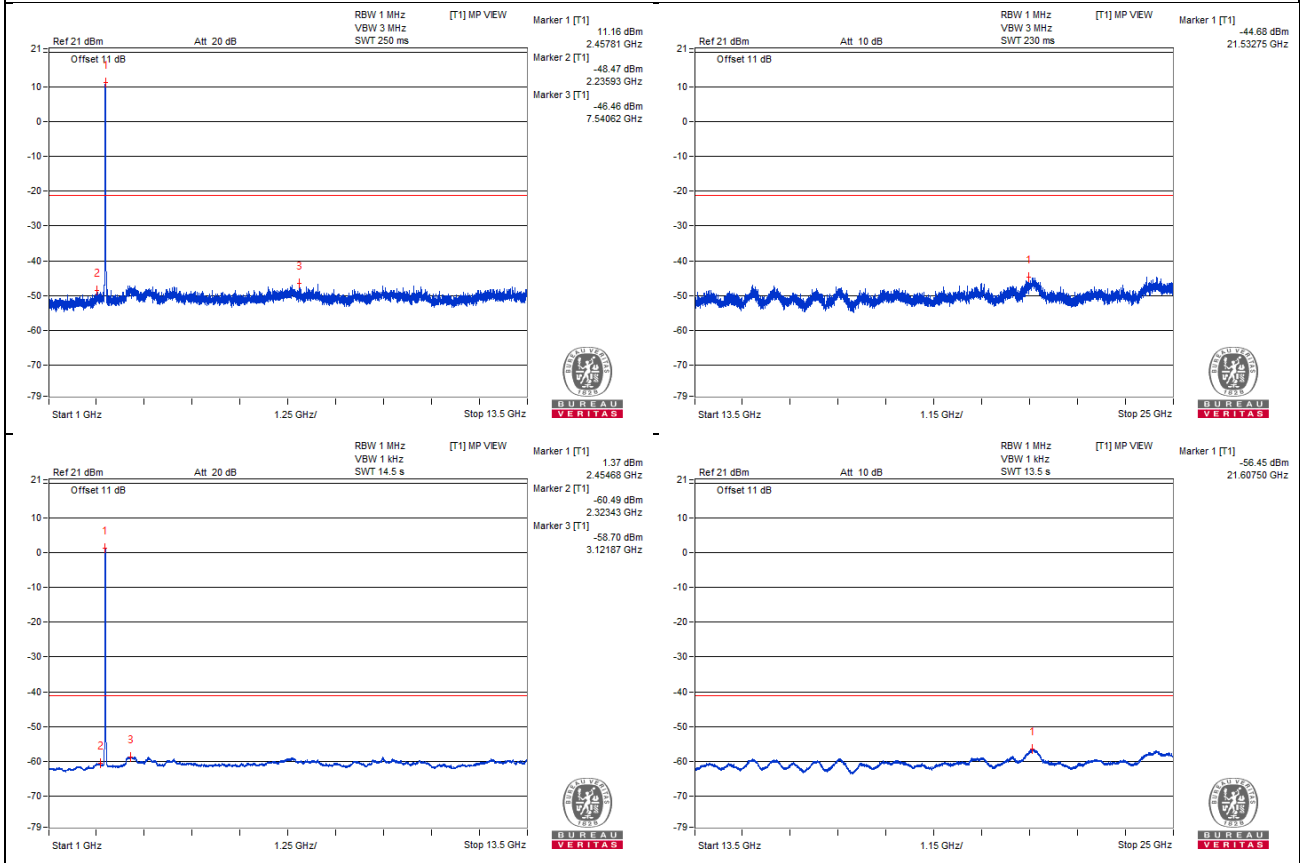

Chain 1

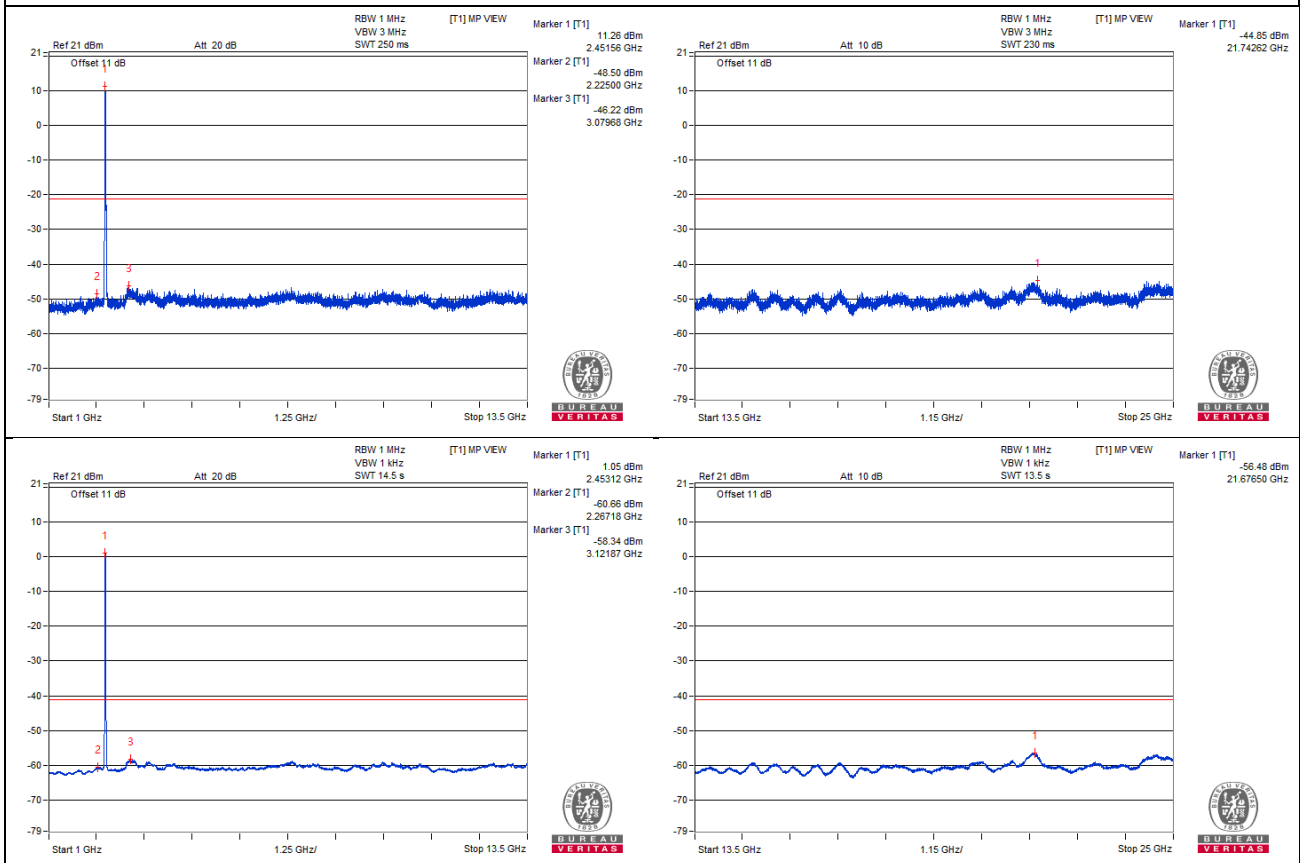

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2484.18 PK	71.08	74	-2.92	-33.42	-34.27	6.63	-24.18
2	2483.51 AV	50.7	54	-3.3	-53.49	-55.04	6.63	-44.56

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

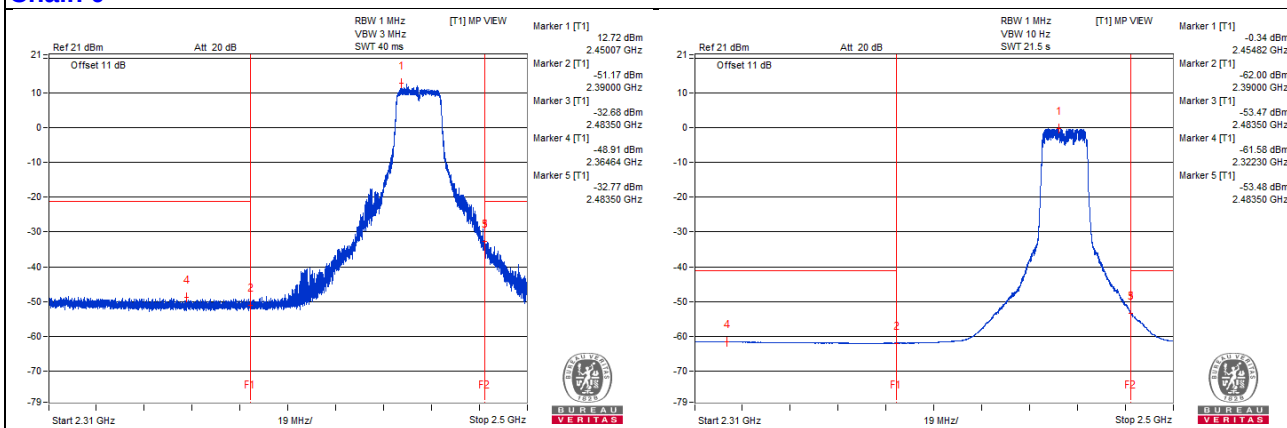

Chain 1

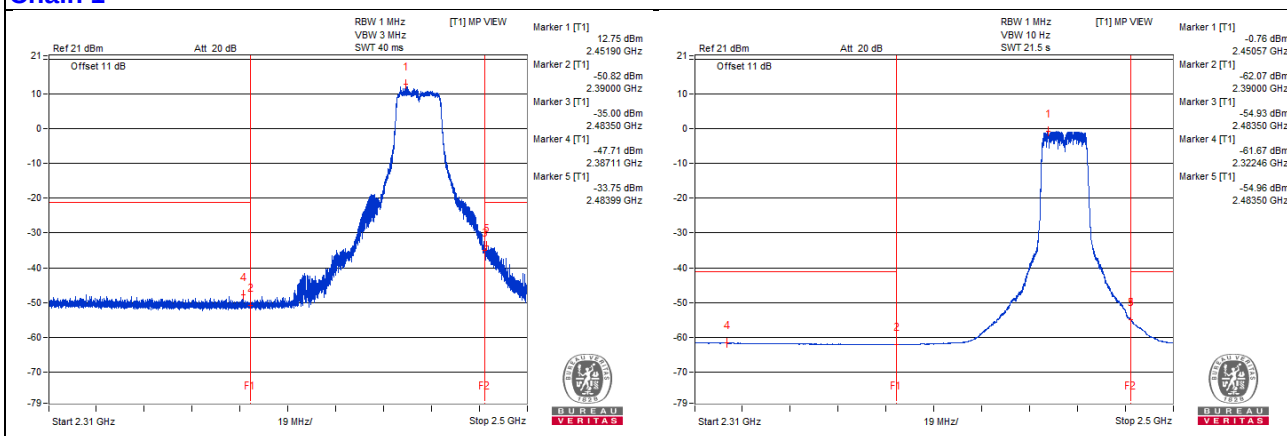

VHT20 - Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4925 PK	54.12	74	-19.88	-51.82	-49.95	6.63	-41.14
2	4925 AV	43.56	54	-10.44	-61.41	-61.28	6.63	-51.7
3	7385.93 PK	55.89	74	-18.11	-49.76	-48.37	6.63	-39.37
4	7385.93 AV	45.52	54	-8.48	-59.38	-59.39	6.63	-49.74

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

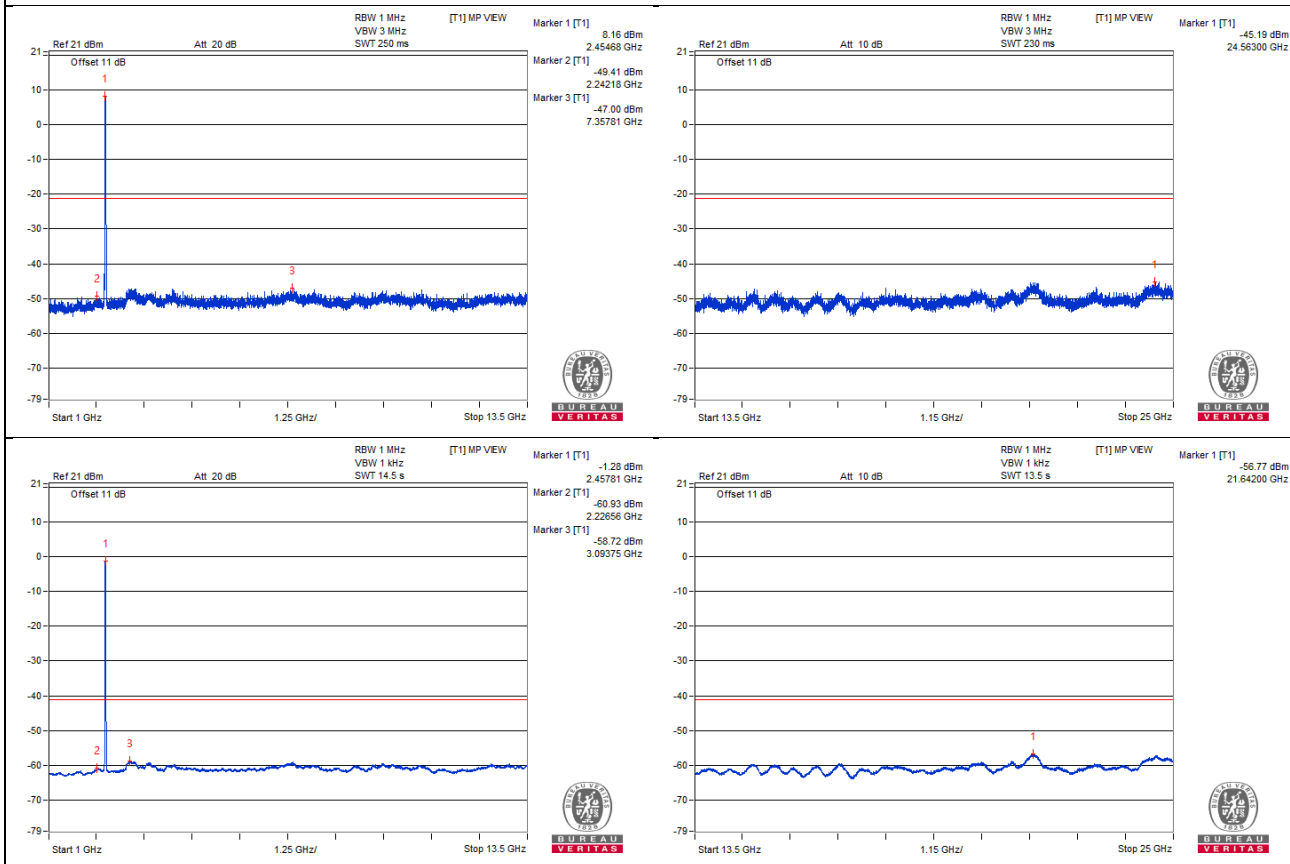

Chain 1

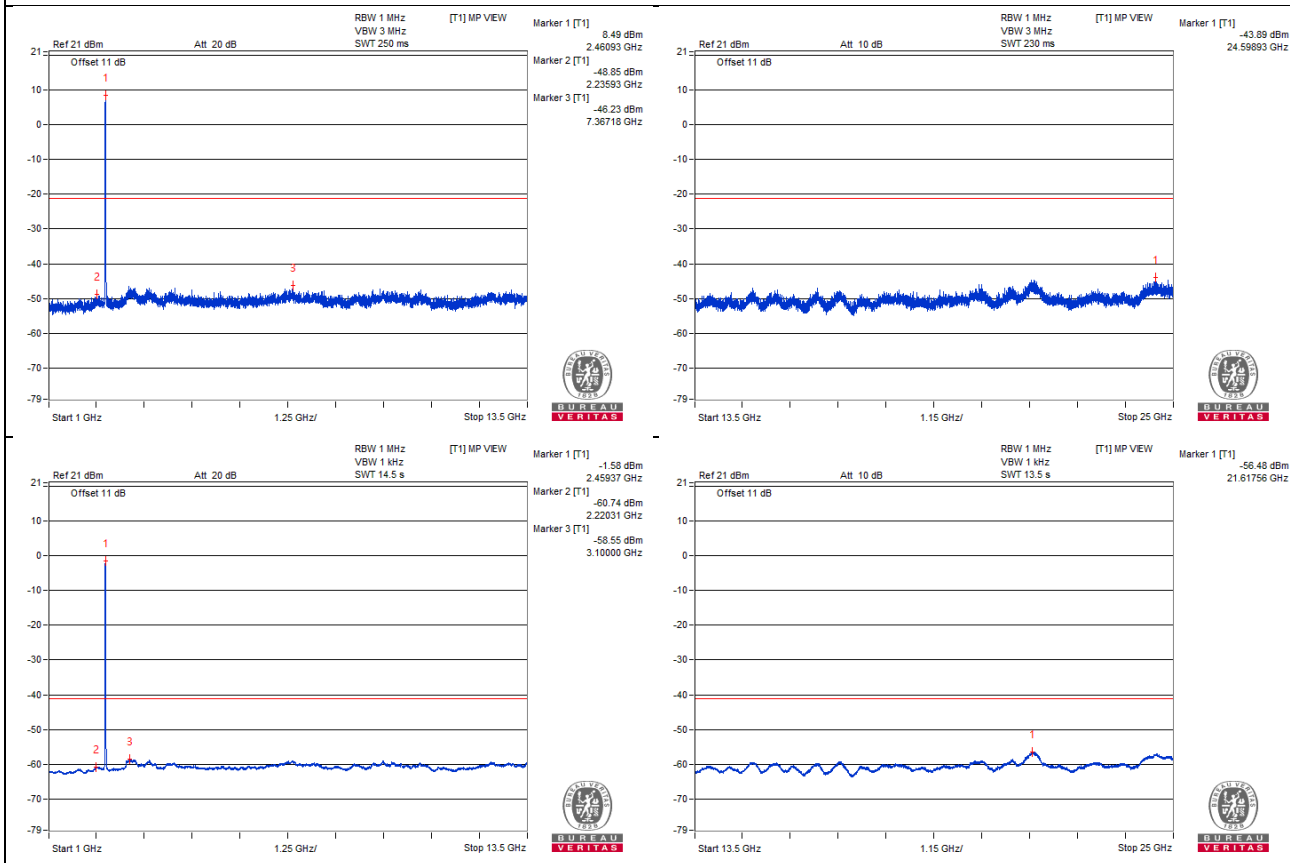

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2484.23 PK	71.09	74	-2.91	-32.77	-35.19	6.63	-24.17
2	2483.58 AV	47.03	54	-6.97	-57.25	-58.6	6.63	-48.23

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

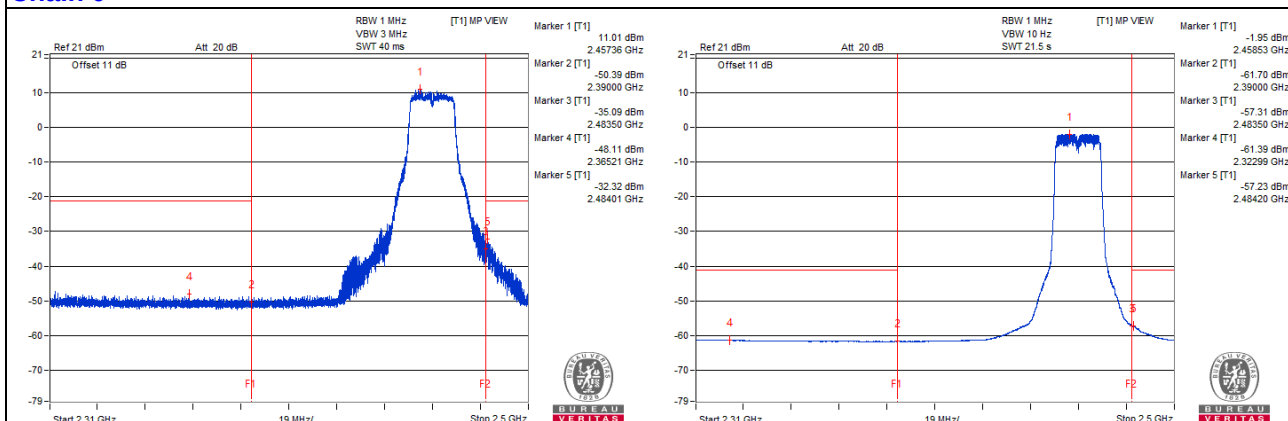

Chain 1

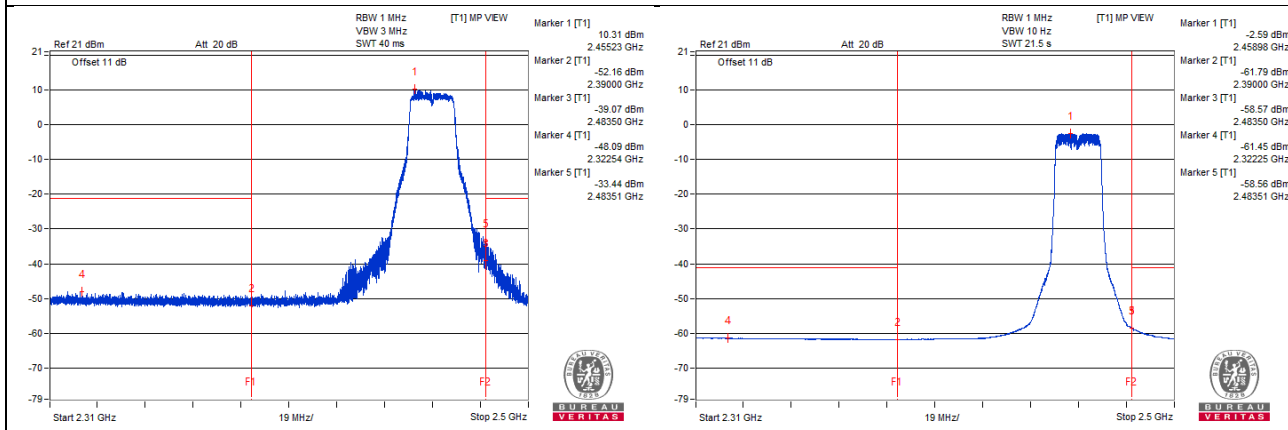

VHT20 - Channel 12

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4934.37 PK	54.67	74	-19.33	-49.5	-51.12	6.63	-40.59
2	4935.93 AV	43.63	54	-10.37	-61.29	-61.25	6.63	-51.63
3	7401.56 PK	55.38	74	-18.62	-49.72	-49.32	6.63	-39.88
4	7401.56 AV	45.3	54	-8.7	-59.62	-59.59	6.63	-49.96

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

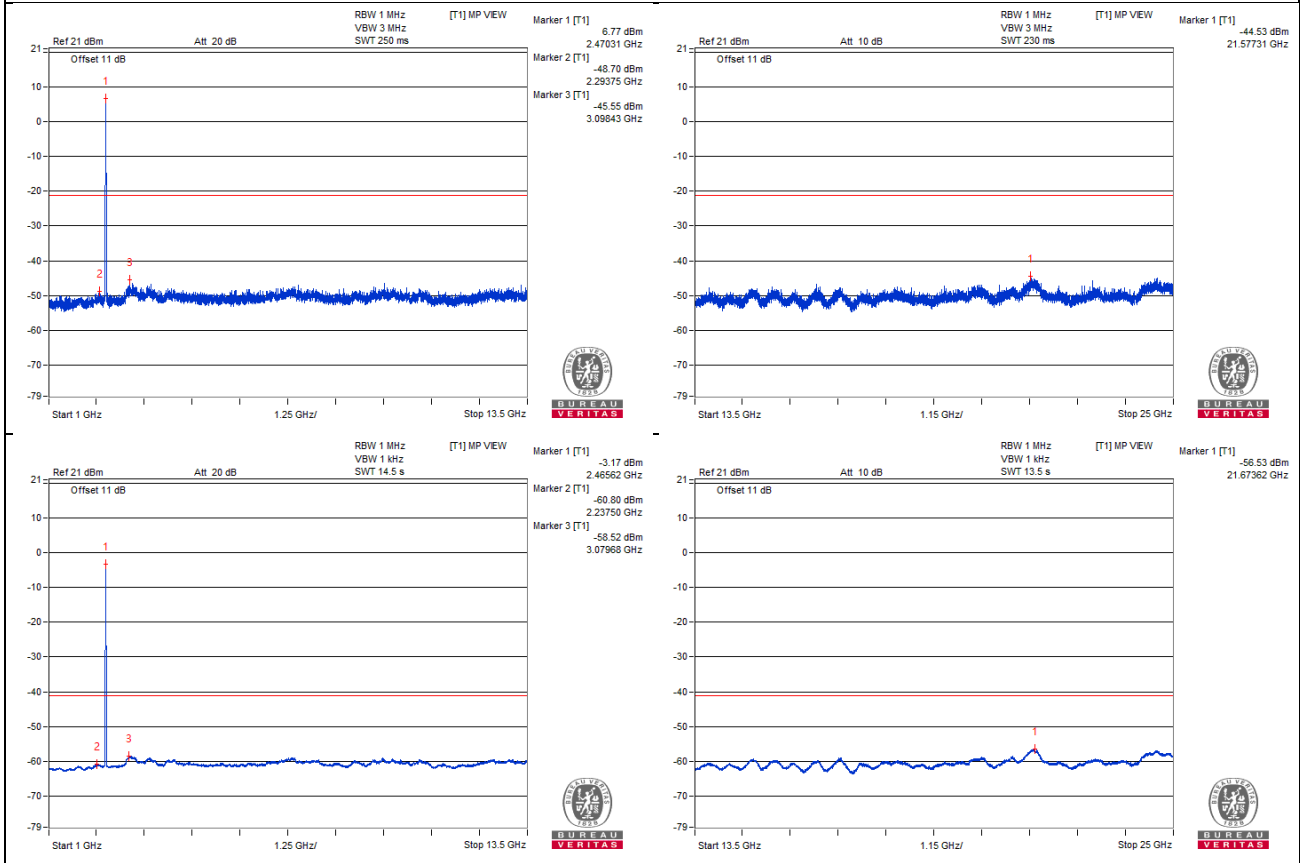

Chain 1

