


Chain 1

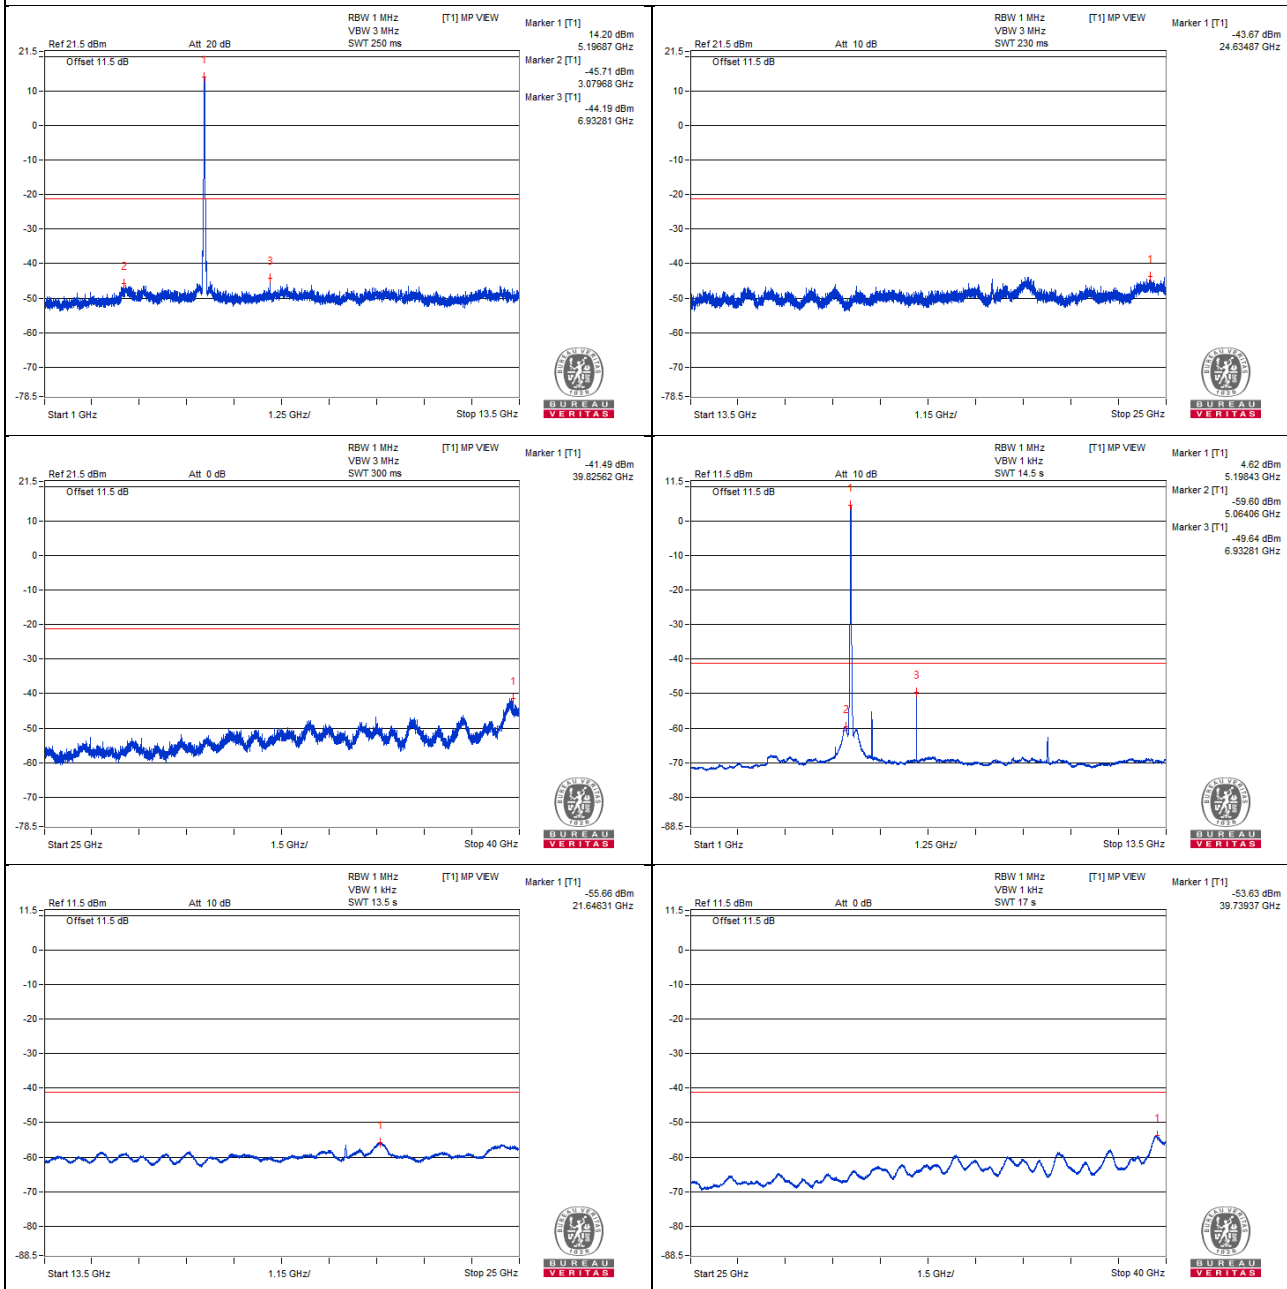

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.67 PK	65.26	74	-8.74	-40.65	-37.96	6.09	-30
2	5149.97 AV	46.81	54	-7.19	-58.07	-57.08	6.09	-48.45

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

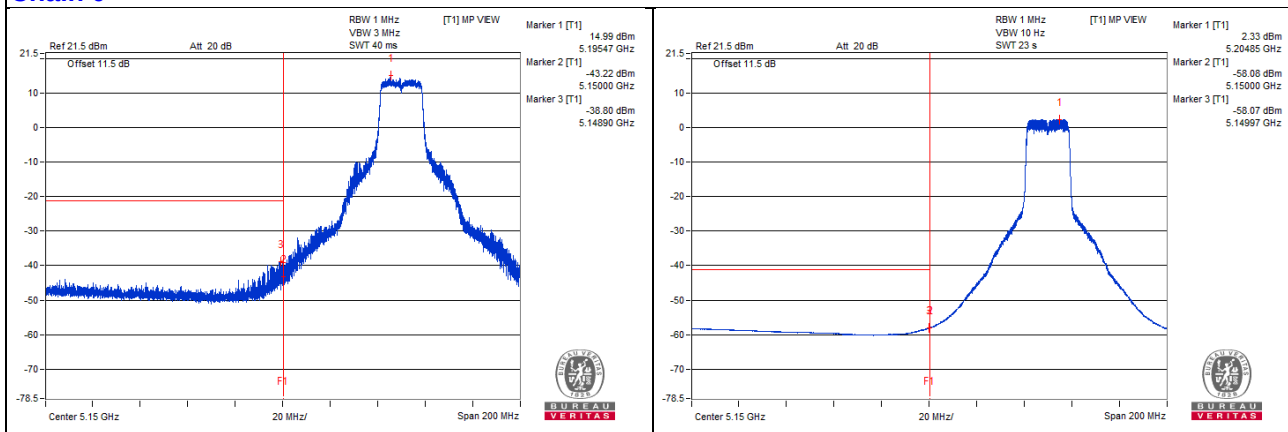

Chain 1

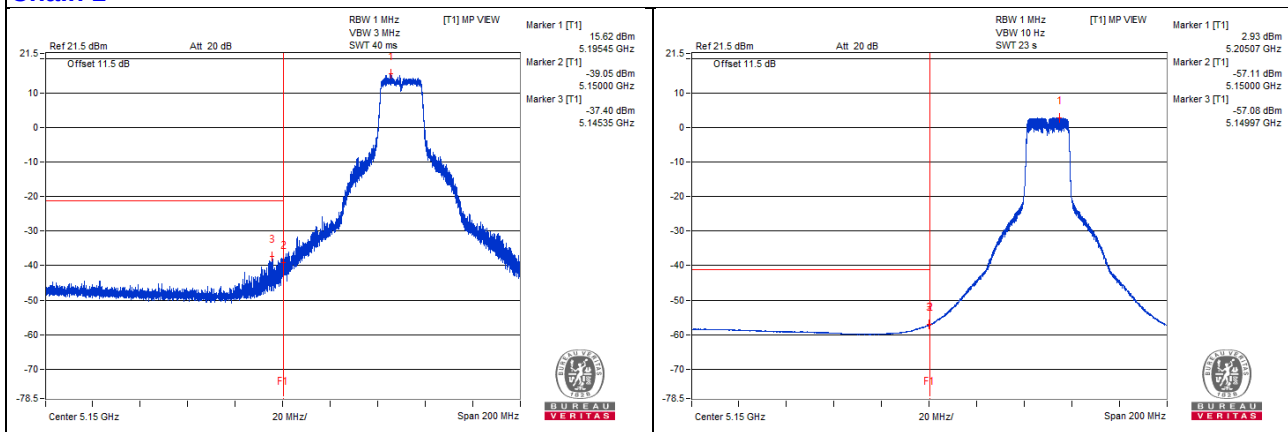

802.11ac (VHT20) - Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3485.93 PK	55.41	68.2	-12.79	-48.58	-49.36	6.09	-39.85
2	3512.5 AV	35.12	54	-18.88	-69.24	-69.25	6.09	-60.14
3	6987.5 PK	57.96	68.2	-10.24	-47.88	-45.3	6.09	-37.3
4	10479.68 PK	55.71	68.2	-12.49	-48.72	-48.58	6.09	-39.55
5	15738.18 PK	54.58	74	-19.42	-48.68	-51.27	6.09	-40.68
6	15719.5 AV	43.96	54	-10.04	-60.58	-60.23	6.09	-51.3

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

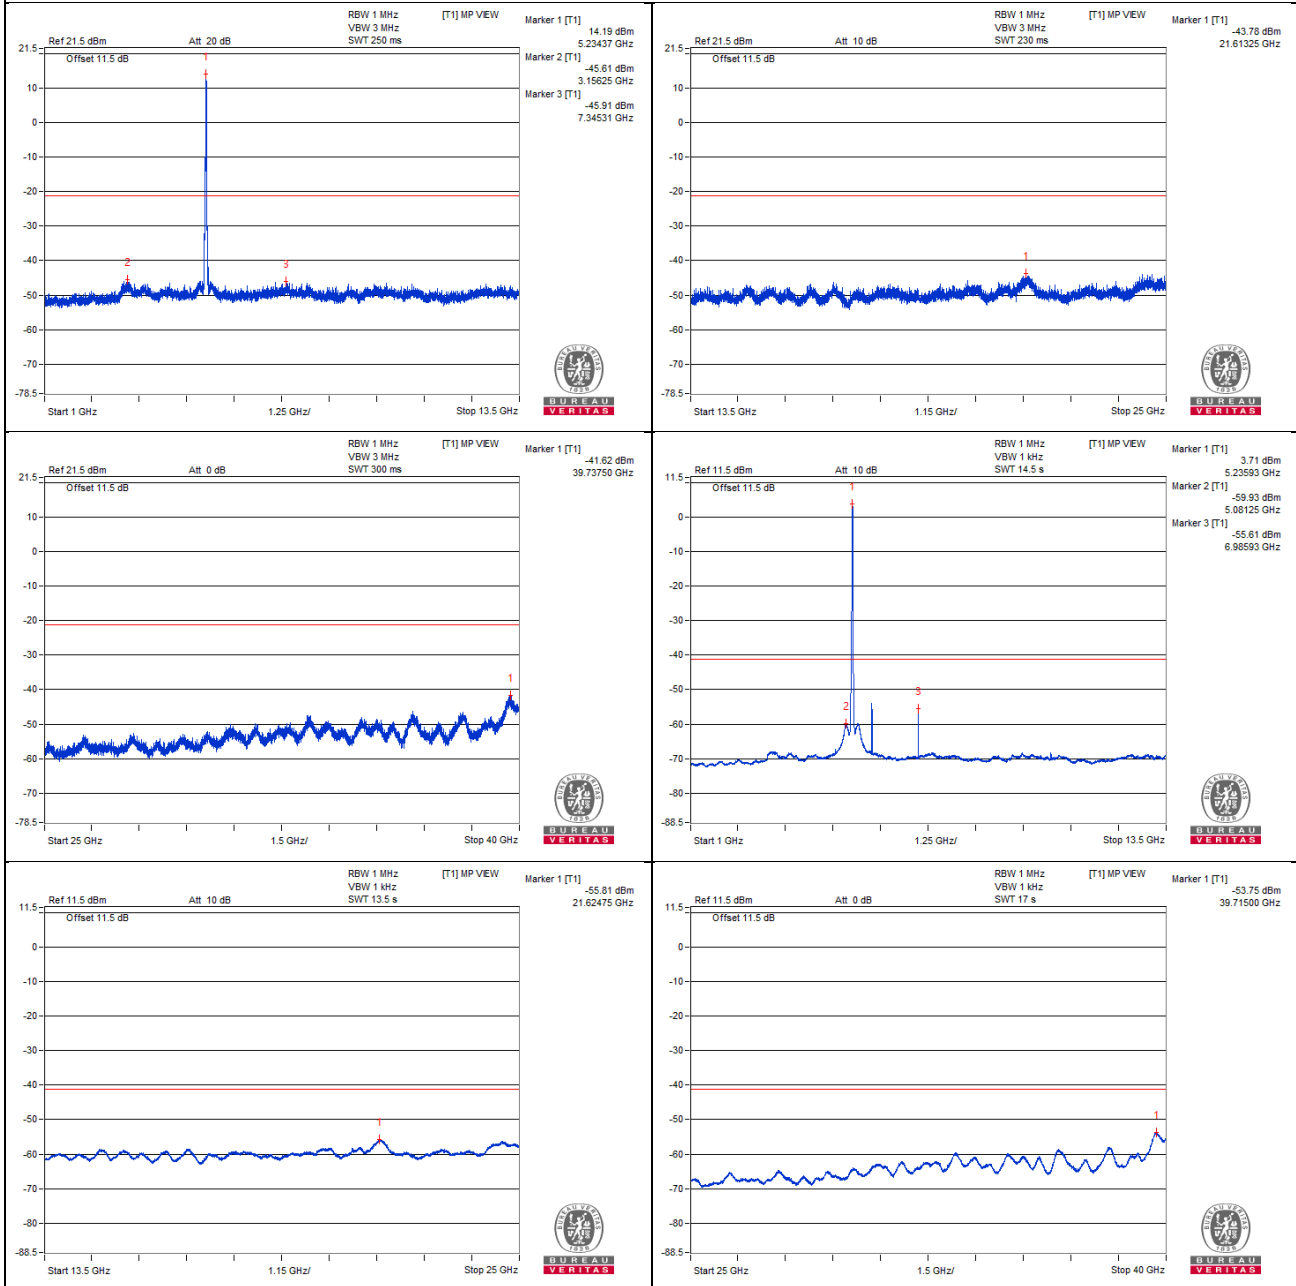

Chain 1

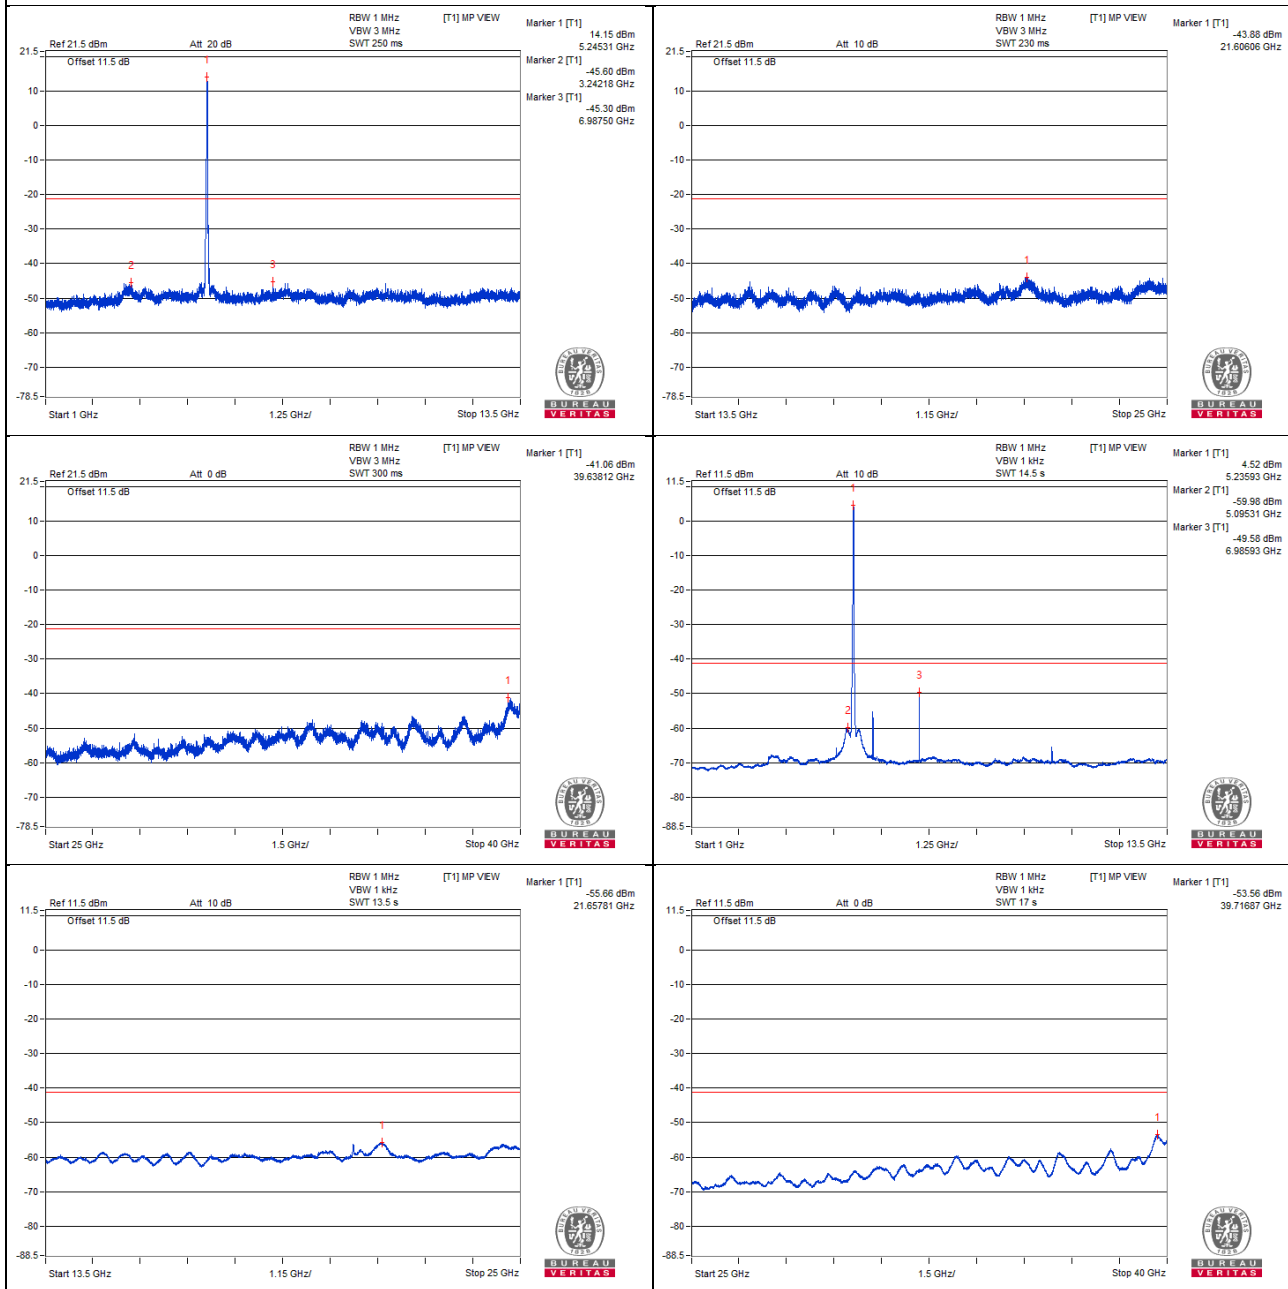

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5103.27 PK	58.85	74	-15.15	-48.64	-43.71	6.09	-36.41
2	5081.37 AV	45.71	54	-8.29	-58.59	-58.72	6.09	-49.55

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

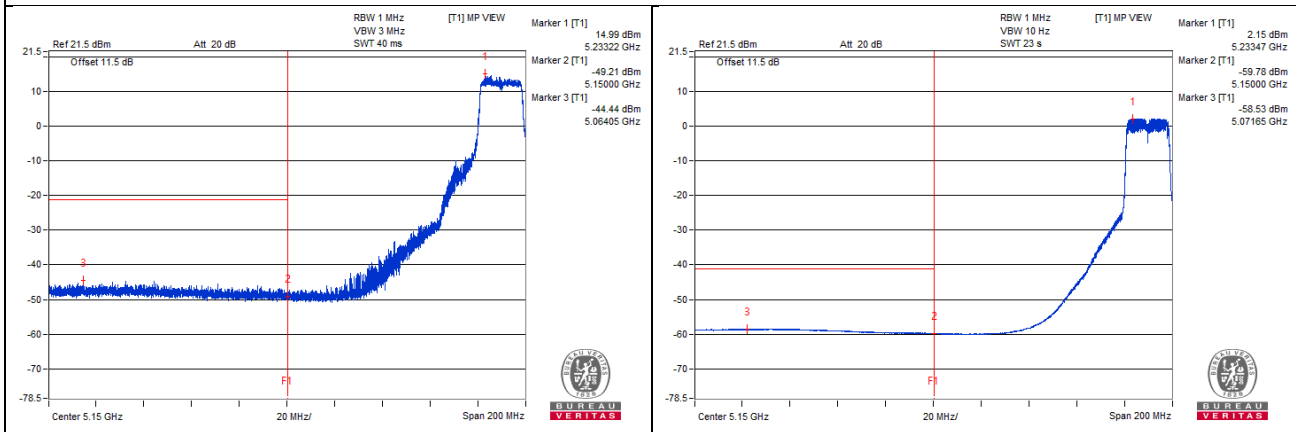

Chain 1

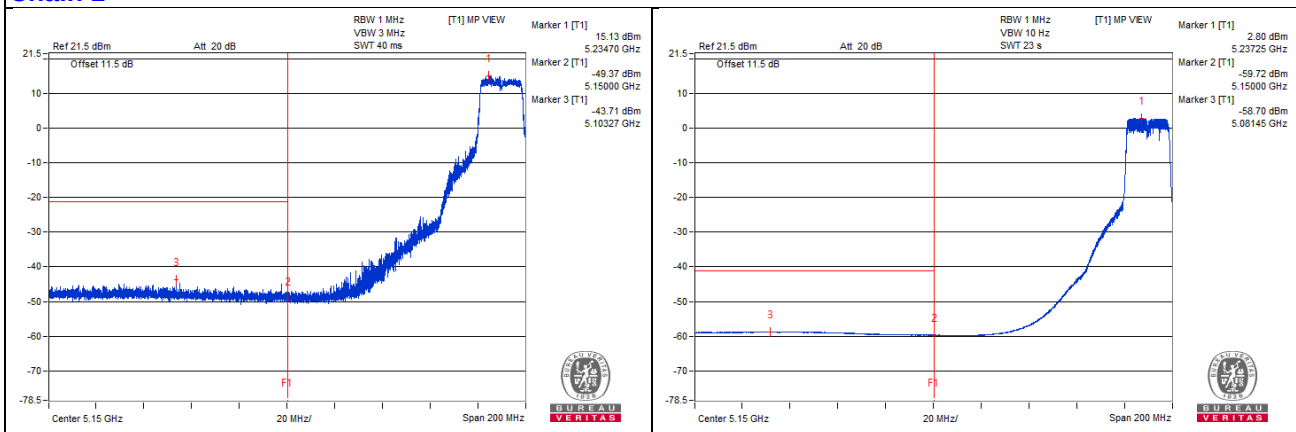

802.11ac (VHT20) - Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3521.87 PK	55.98	74	-18.02	-47.85	-48.98	6.09	-39.28
2	3526.56 AV	35.23	54	-18.77	-69.21	-69.06	6.09	-60.03
3	7014.06 PK	57.9	68.2	-10.3	-48.34	-45.16	6.09	-37.36
4	10534.37 PK	55.91	68.2	-12.29	-49.99	-47.32	6.09	-39.35
5	15771.25 PK	55.81	74	-18.19	-47.44	-50.05	6.09	-39.45
6	15787.06 AV	44.68	54	-9.32	-59.8	-59.56	6.09	-50.58

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

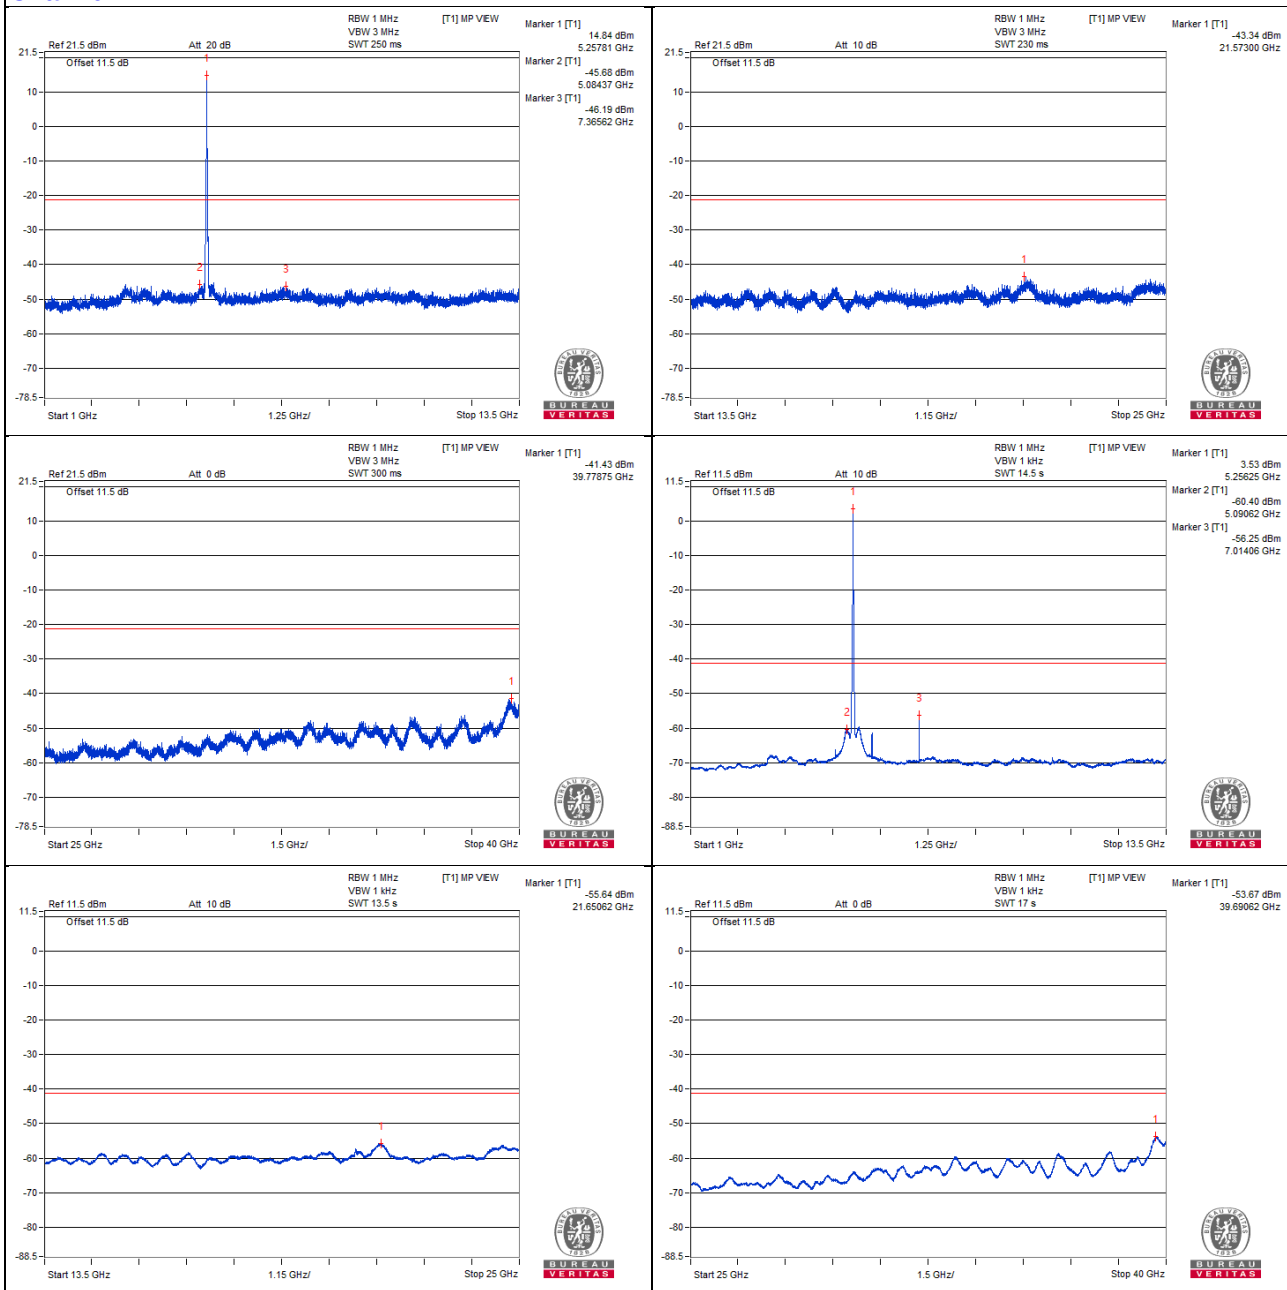

Chain 1

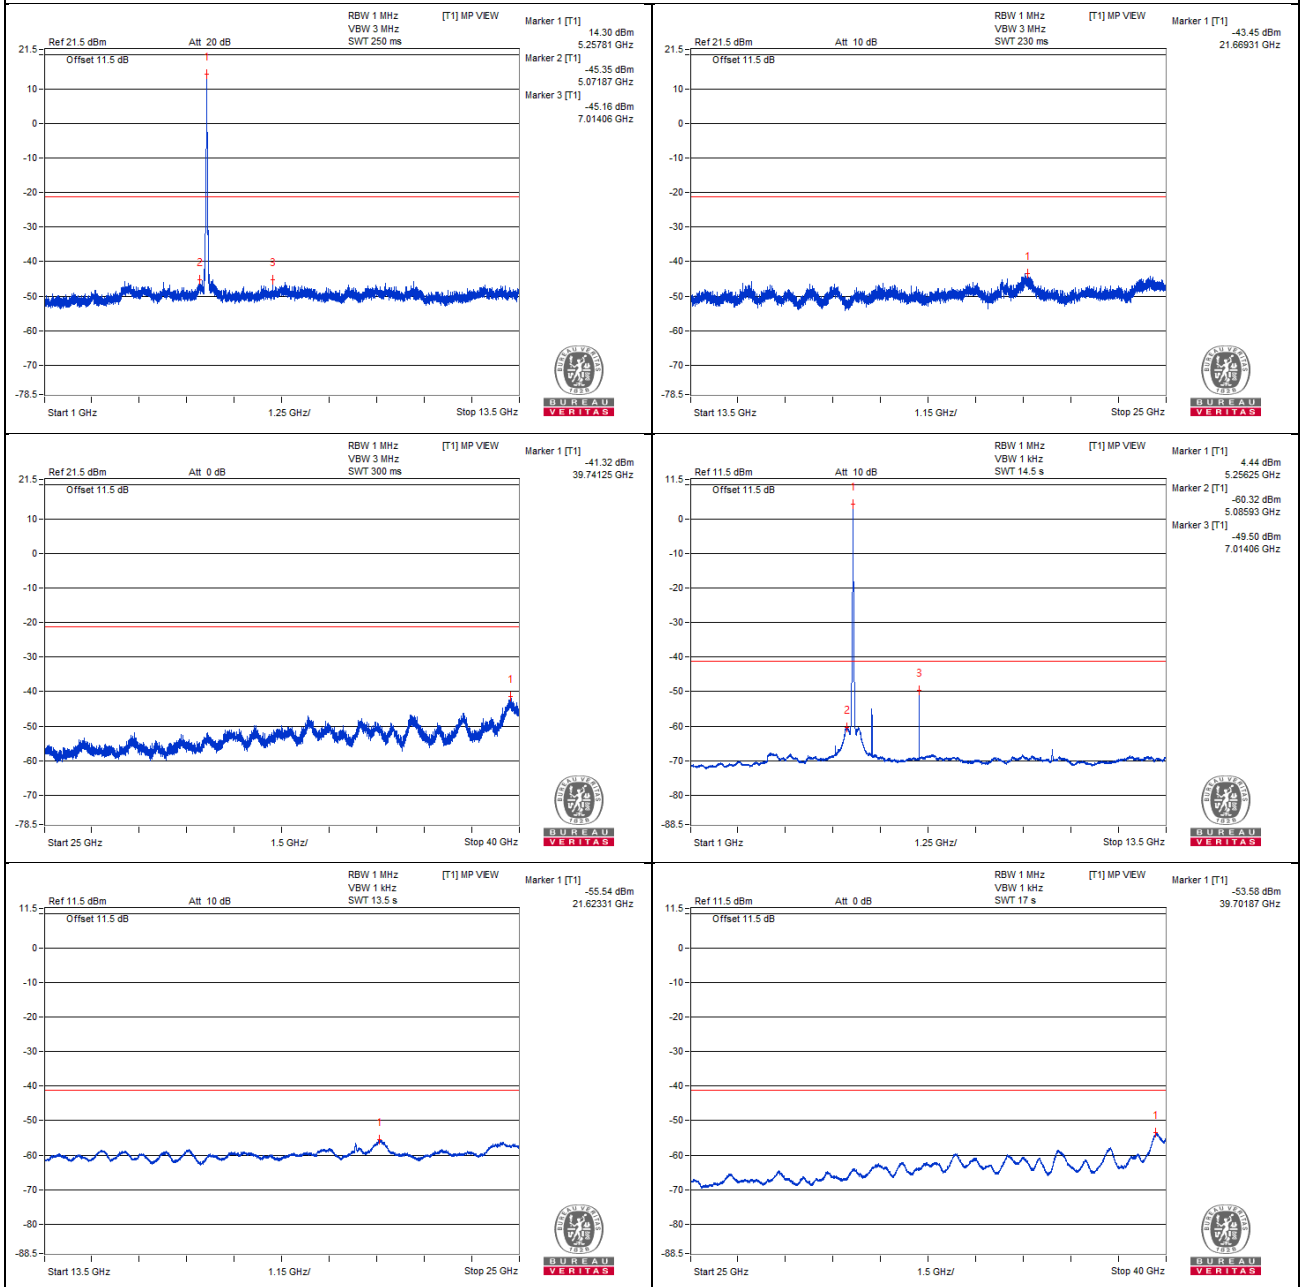

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5415.8 PK	58.71	74	-15.29	-44.33	-47.57	6.09	-36.55
2	5409.12 AV	45.8	54	-8.2	-58.05	-59.13	6.09	-49.46

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

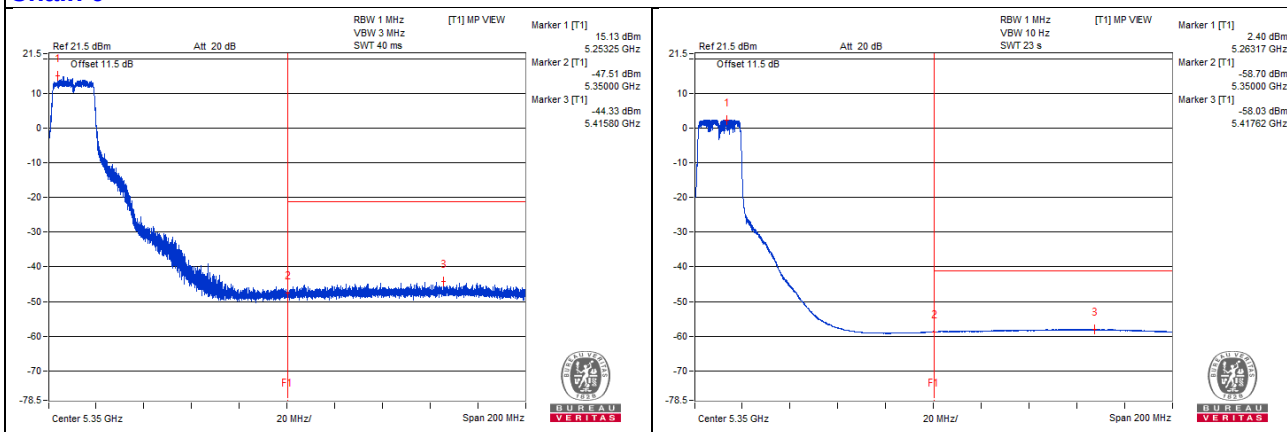

Chain 1

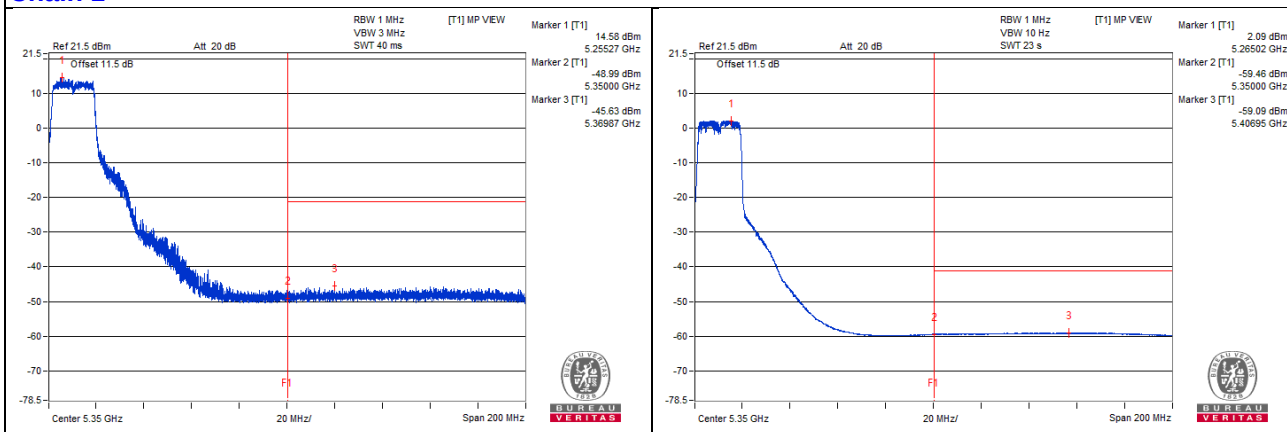

802.11ac (VHT20) - Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3551.56 PK	56.32	74	-17.68	-49.58	-46.9	6.09	-38.94
2	3545.31 AV	35.77	54	-18.23	-68.45	-68.73	6.09	-59.49
3	7067.18 PK	58.61	68.2	-9.59	-47.77	-44.38	6.09	-36.65
4	10585.93 PK	56.33	68.2	-11.87	-49.48	-46.94	6.09	-38.93
5	10600 AV	35.39	54	-18.61	-69.4	-68.58	6.09	-59.87
6	15917.87 PK	55.71	74	-18.29	-49.81	-47.74	6.09	-39.55
7	15893.43 AV	44.69	54	-9.31	-59.81	-59.54	6.09	-50.57

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

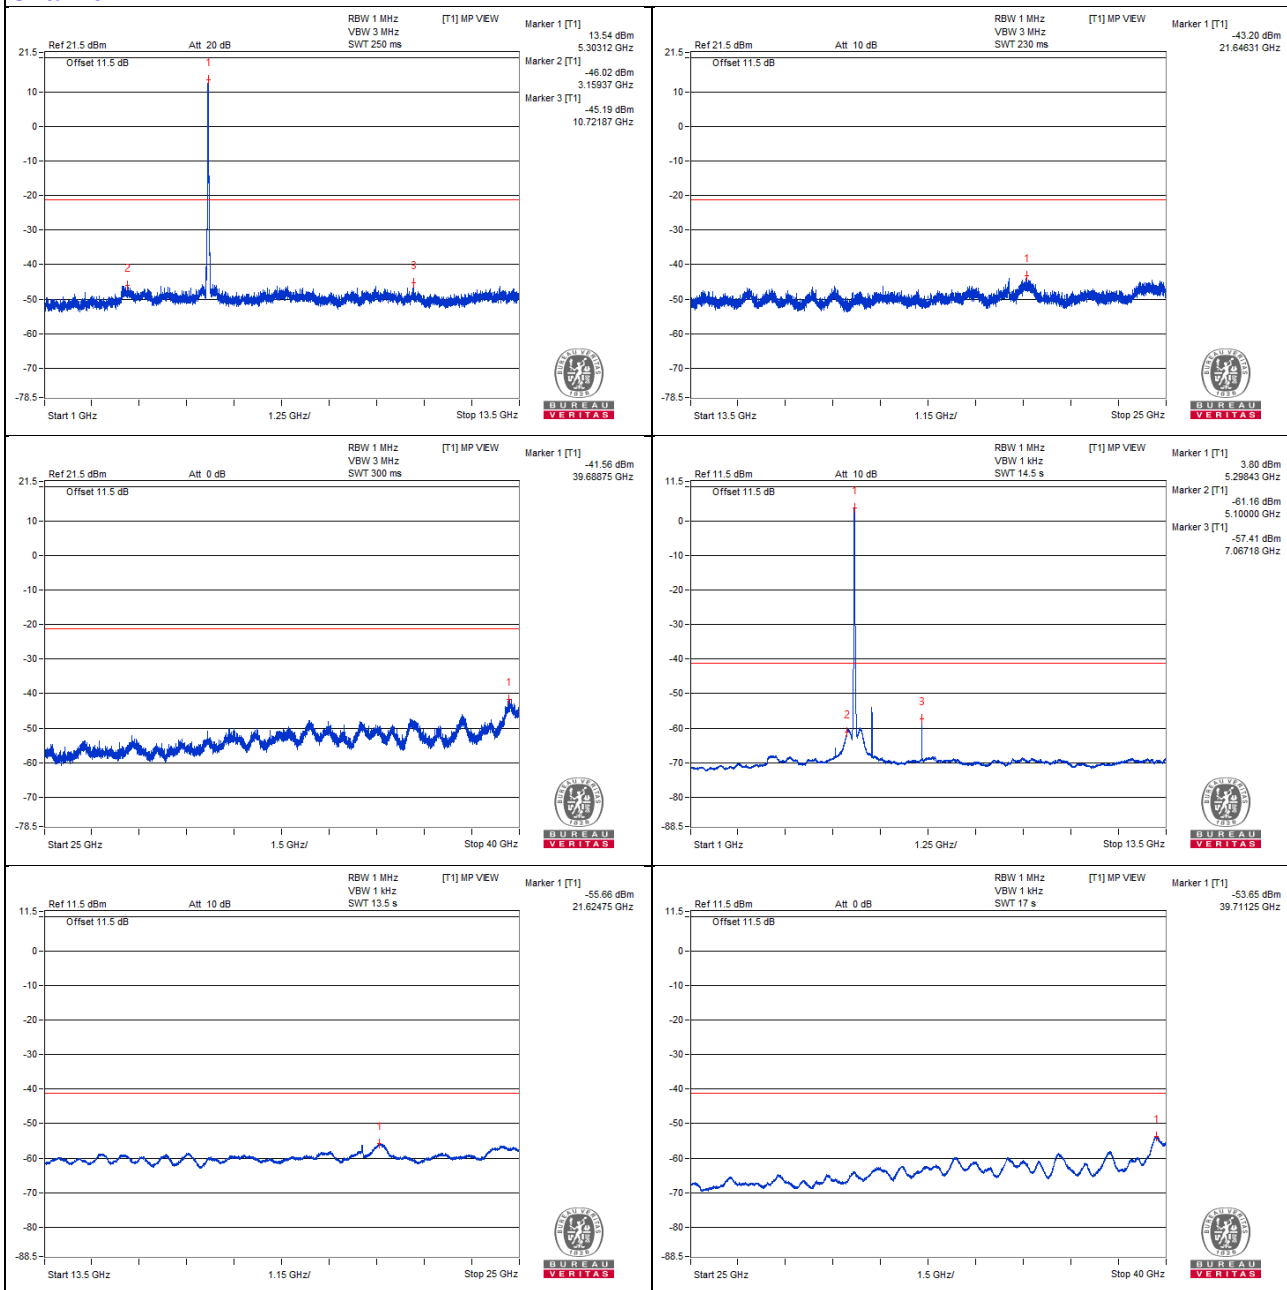

Chain 1

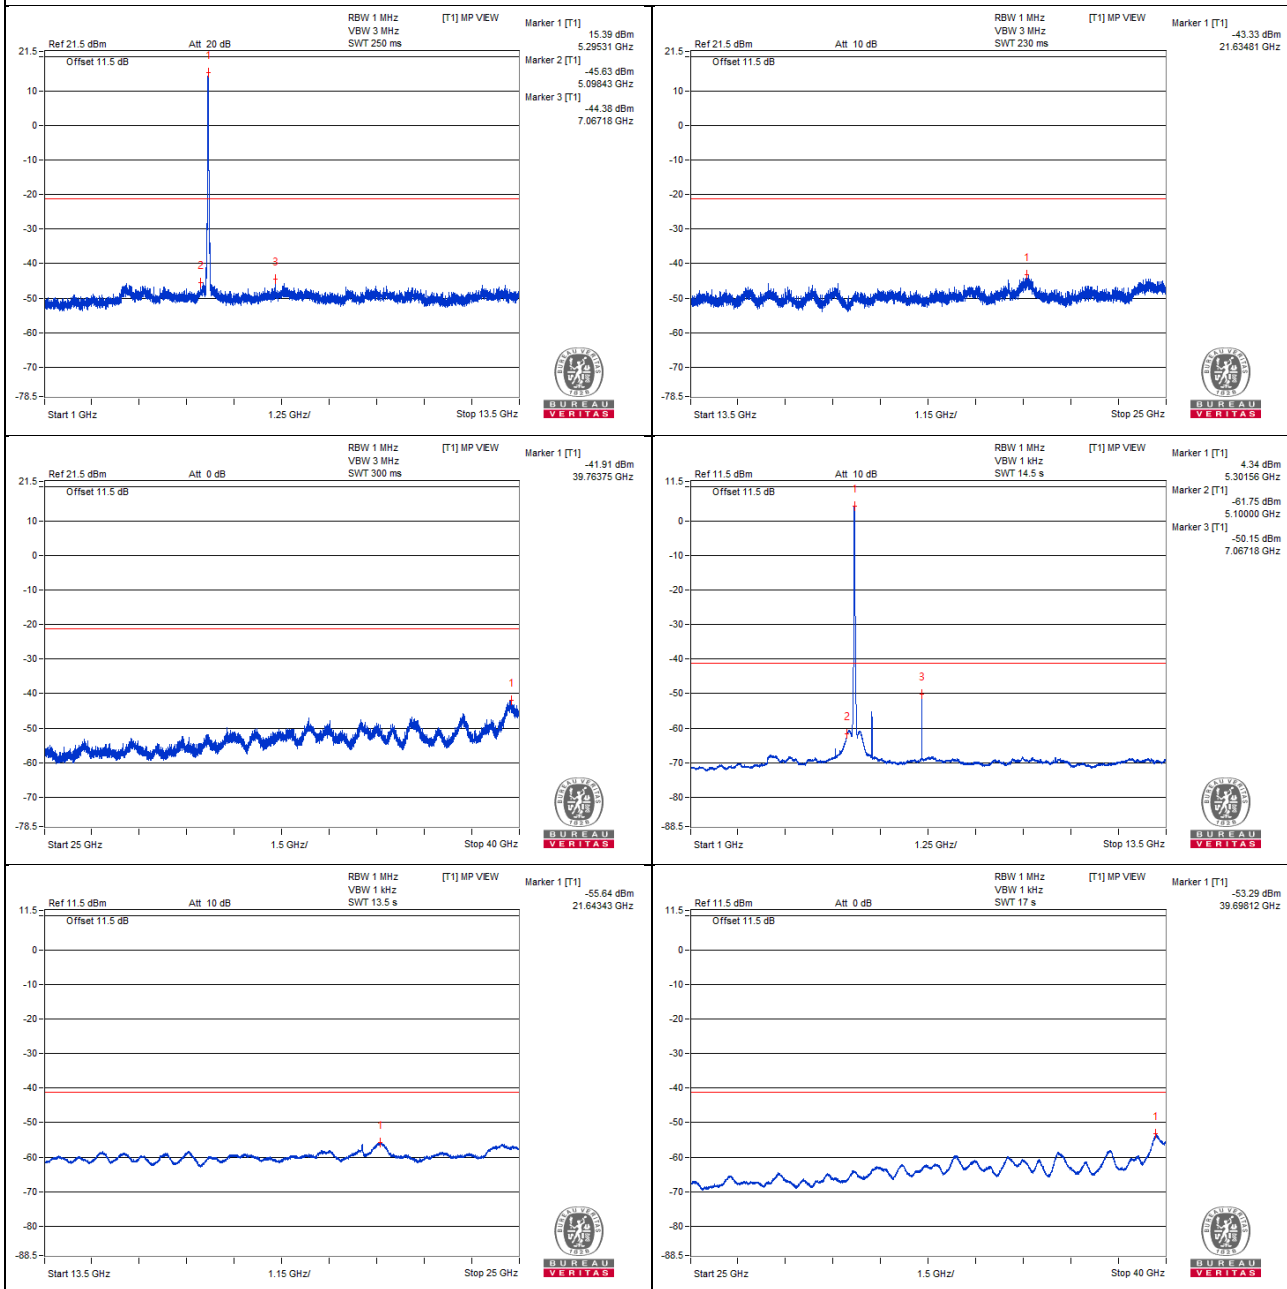

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351.87 PK	63.1	74	-10.9	-40.96	-41.58	6.09	-32.16
2	5350.02 AV	46.57	54	-7.43	-57.48	-58.12	6.09	-48.69

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

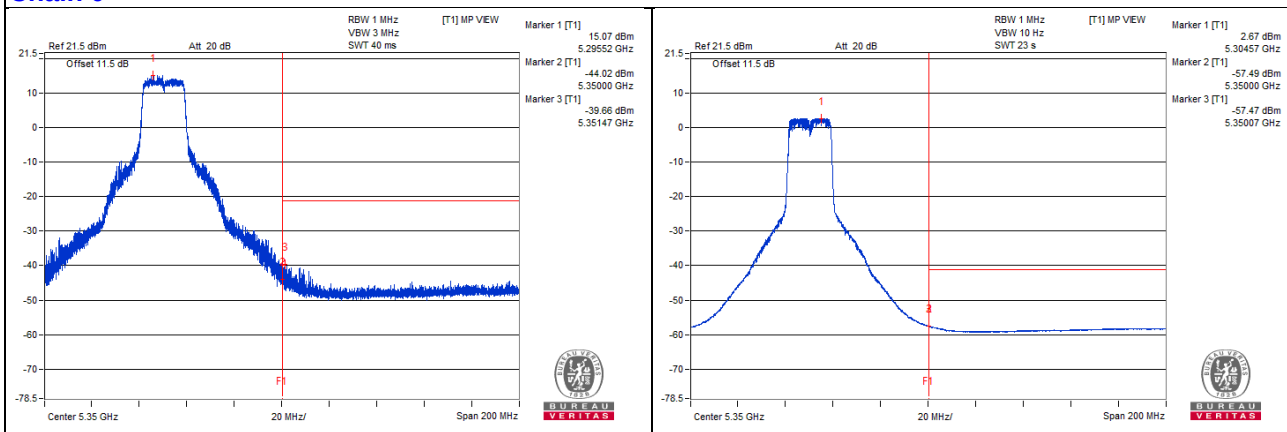

Chain 1

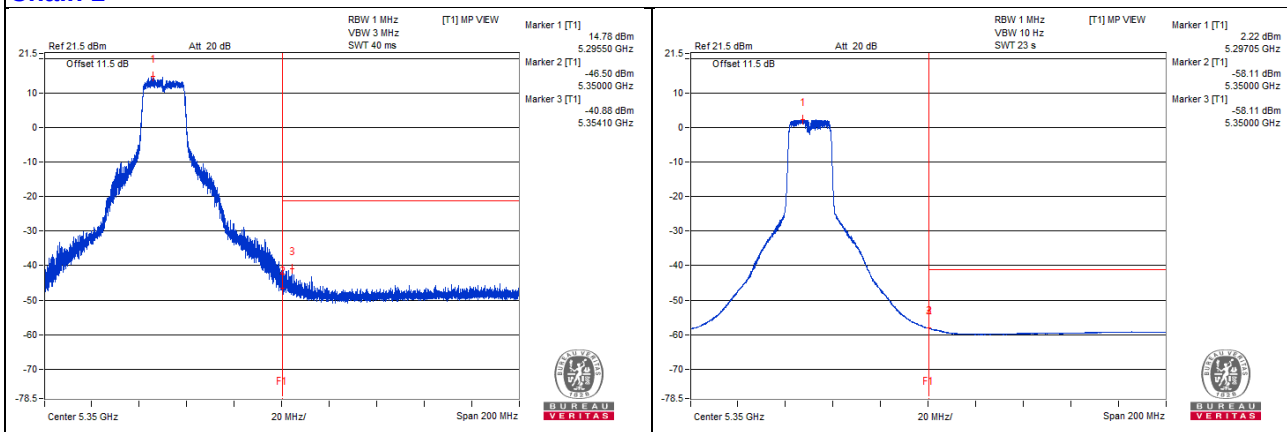

802.11ac (VHT20) - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3545.31 PK	56.54	74	-17.46	-48.52	-47.21	6.09	-38.72
2	3560.93 AV	35.76	54	-18.24	-68.78	-68.43	6.09	-59.5
3	7093.75 PK	57.37	68.2	-10.83	-49.08	-45.59	6.09	-37.89
4	10657.81 PK	55.56	74	-18.44	-48.97	-48.64	6.09	-39.7
5	10654.68 AV	34.86	54	-19.14	-69.62	-69.39	6.09	-60.4
6	15955.25 PK	55.19	74	-18.81	-48.68	-49.73	6.09	-40.07
7	15948.06 AV	43.87	54	-10.13	-60.56	-60.42	6.09	-51.39

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

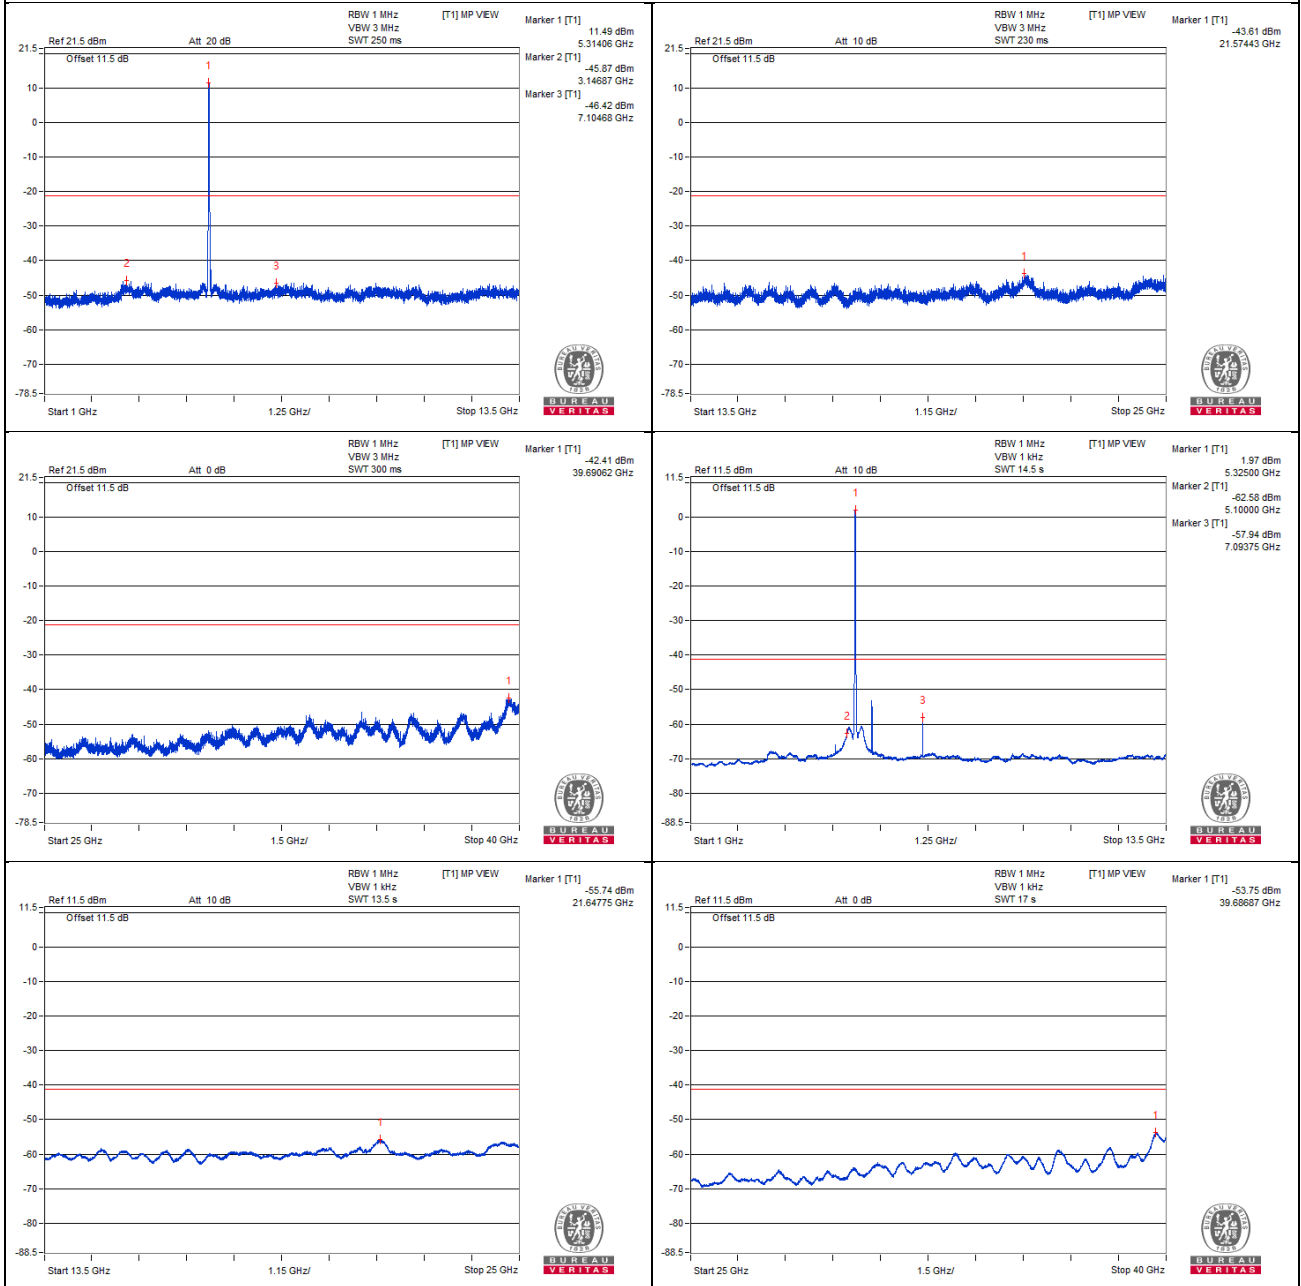

Chain 1

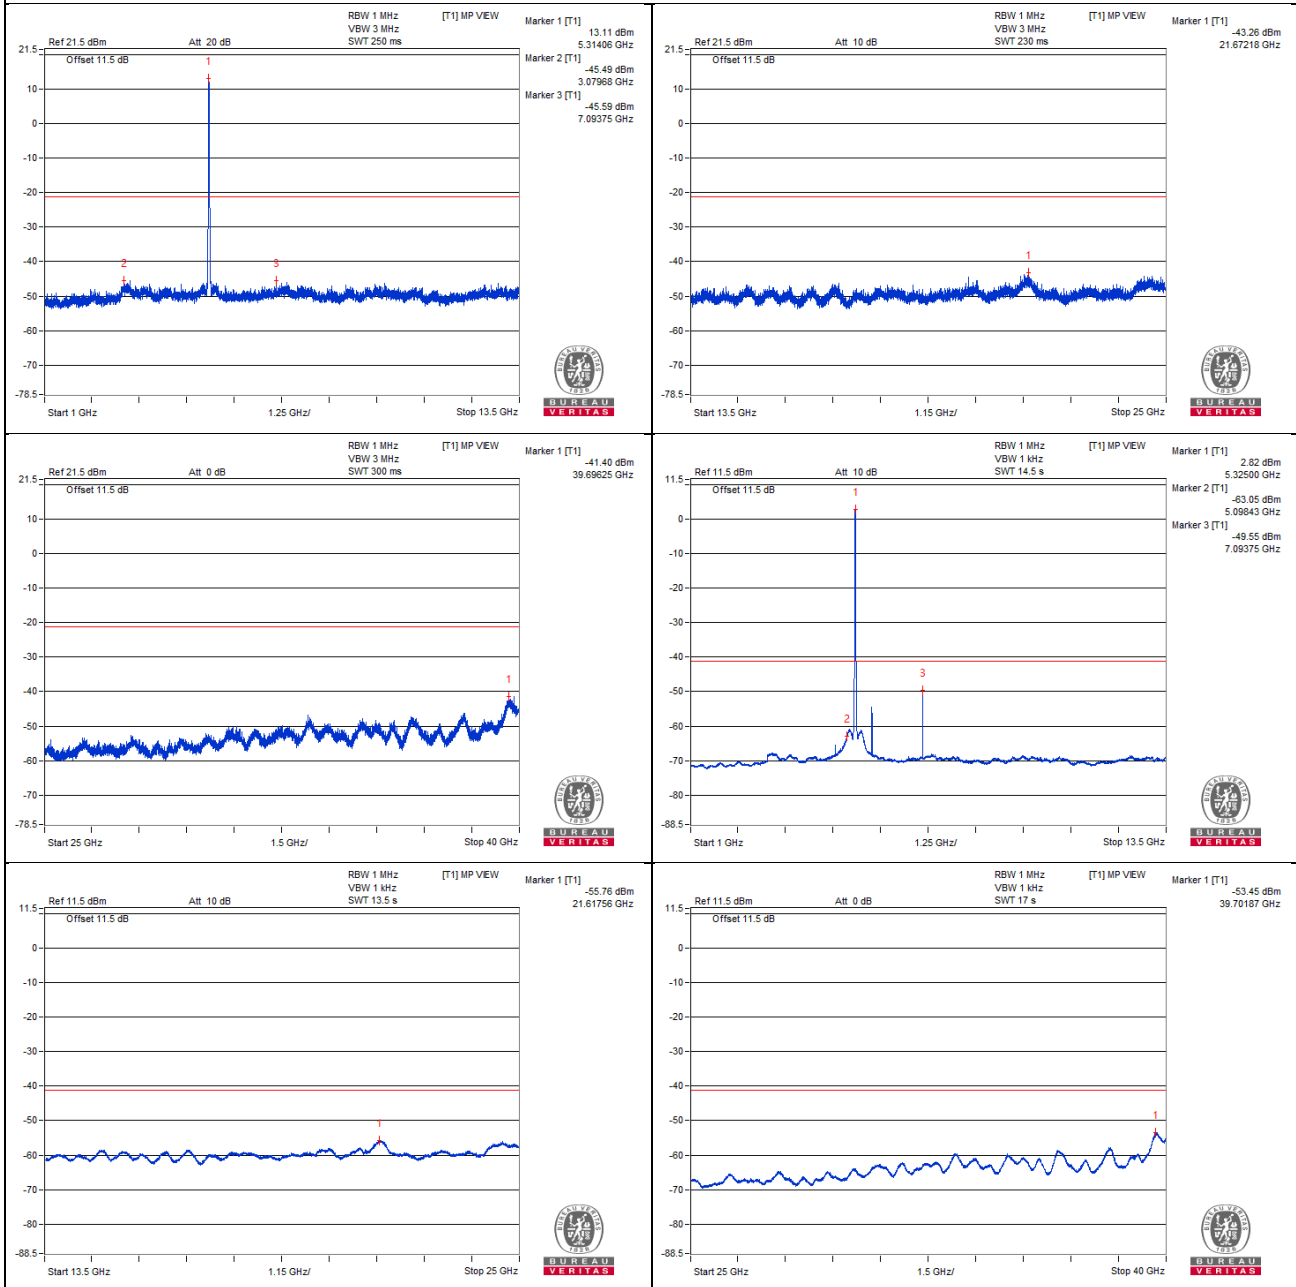

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.82 PK	73.54	74	*-0.46	-30.75	-30.89	6.09	-21.72
2	5350.15 AV	52.72	54	*-1.28	-53.07	-50.56	6.09	-42.54

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

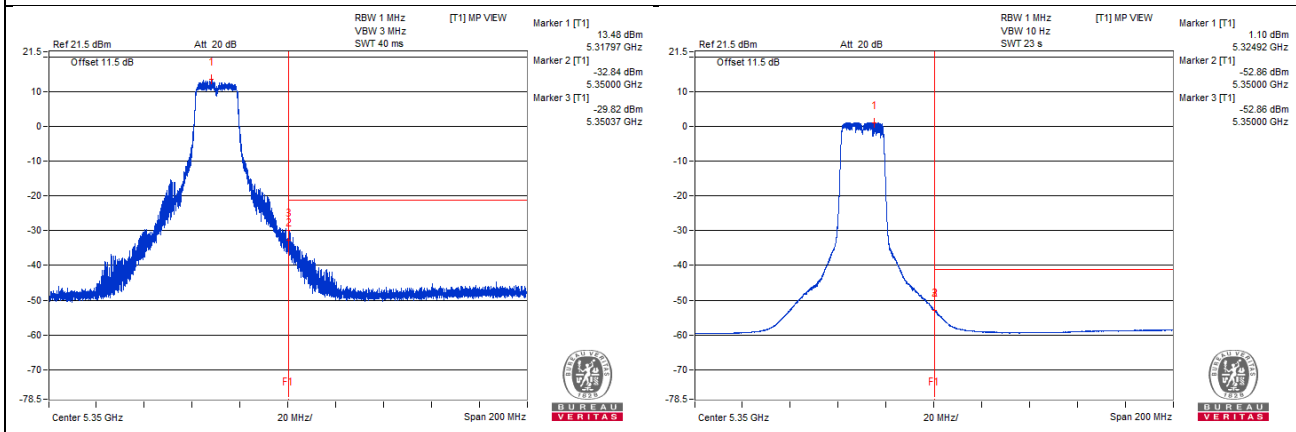

Chain 1

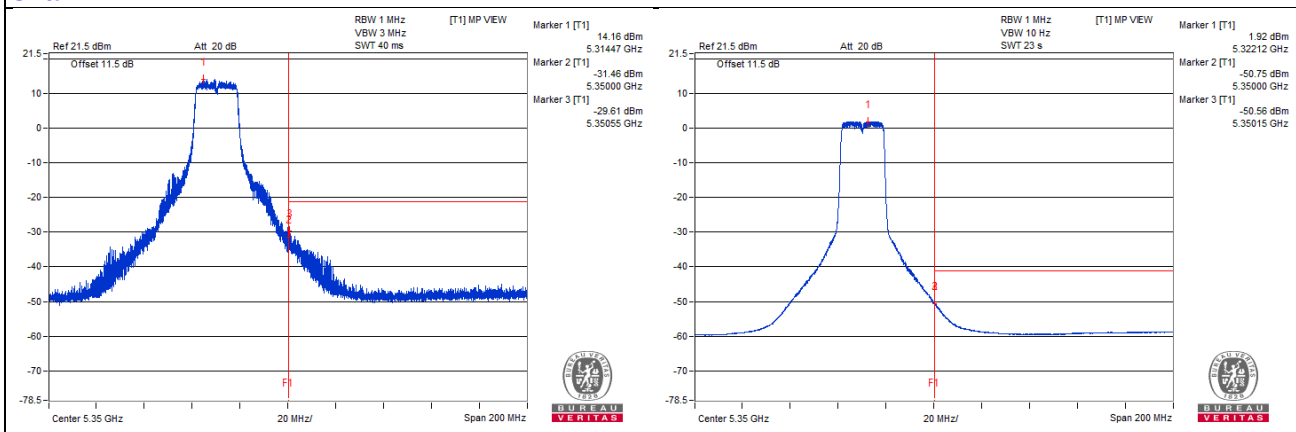

802.11ac (VHT20) - Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3653.12 PK	57.78	74	-16.22	-49.07	-47.57	7.77	-37.48
2	3646.87 AV	37.2	54	-16.8	-68.84	-68.84	7.77	-58.06
3	7332.81 PK	60.15	74	-13.85	-46.6	-45.28	7.77	-35.11
4	7332.81 AV	51.91	54	-2.09	-55.54	-53.07	7.77	-43.35
5	10985.93 PK	56.48	74	-17.52	-48.68	-50.67	7.77	-38.78
6	10981.25 AV	35.64	54	-18.36	-70.37	-70.43	7.77	-59.62
7	16492.87 PK	59.07	68.2	-9.13	-46.77	-47.17	7.77	-36.19

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

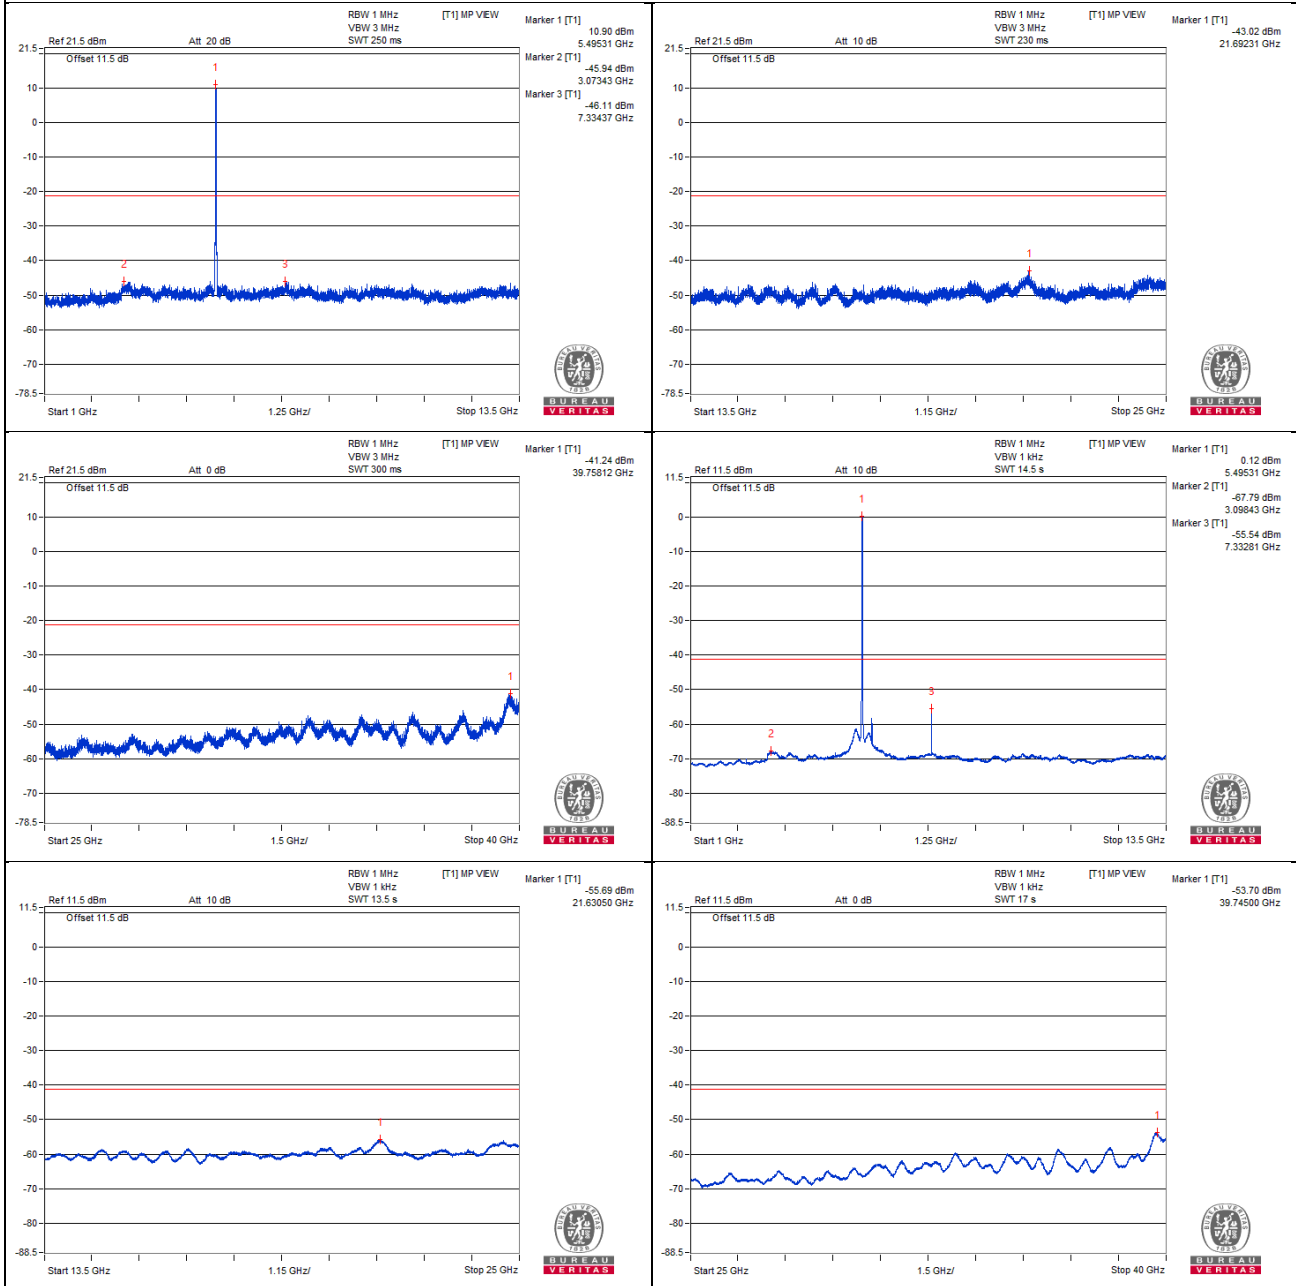

Chain 1

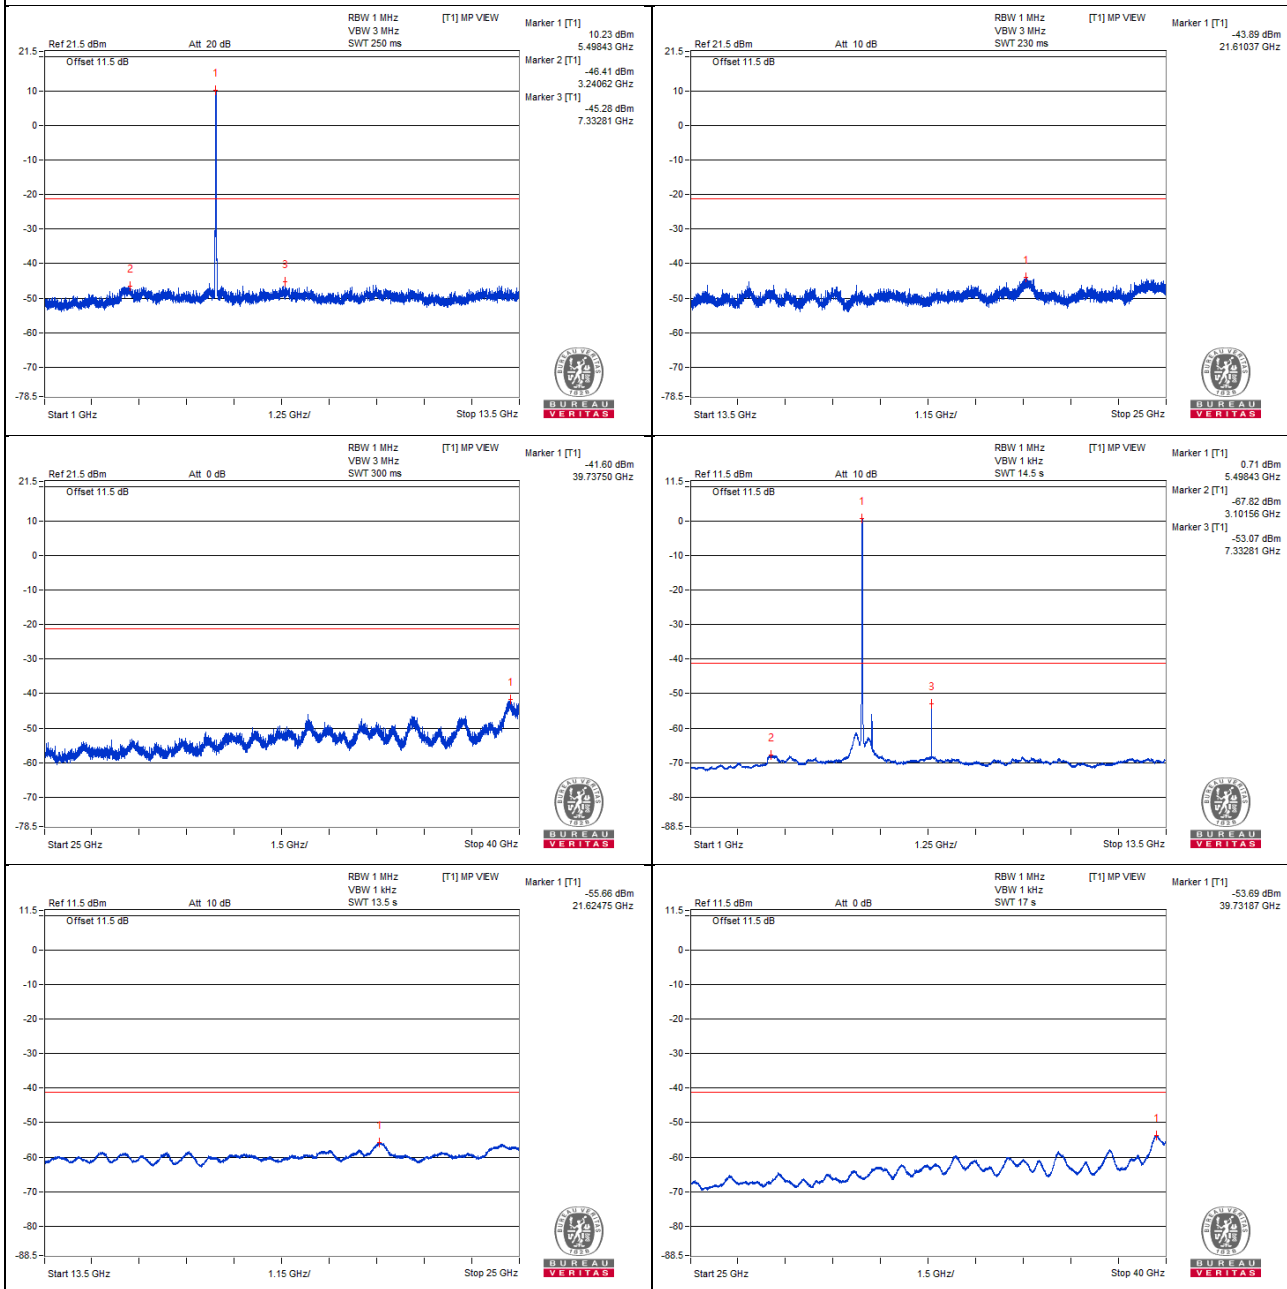

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5469.9 PK	71.15	68.2	* 2.95	-33.01	-38.3	7.77	-24.11
2	5359.53 PK	60.51	74	-13.49	-45.31	-45.76	7.77	-34.75
3	5350.21 AV	47.52	54	-6.48	-58.47	-58.57	7.77	-47.74


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

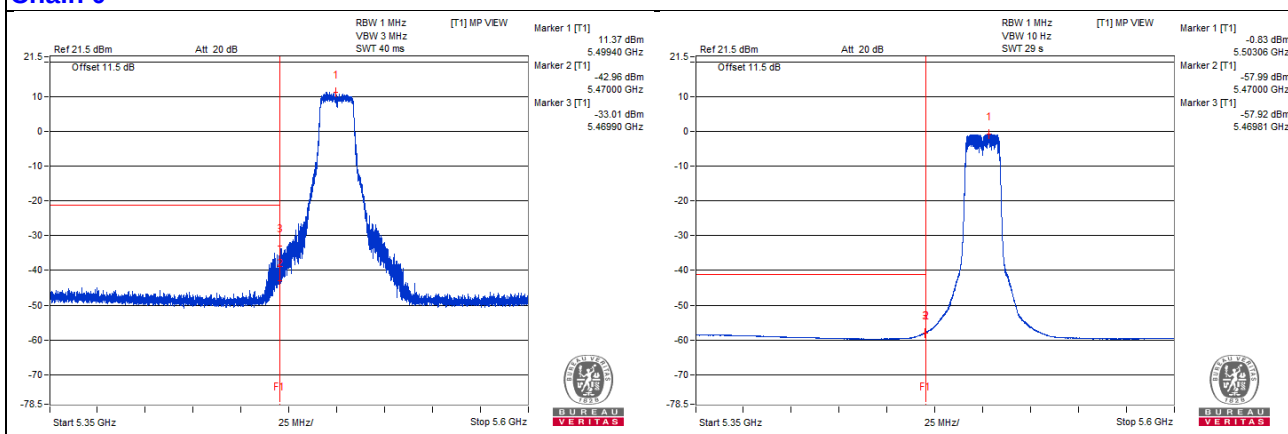

Chain 1

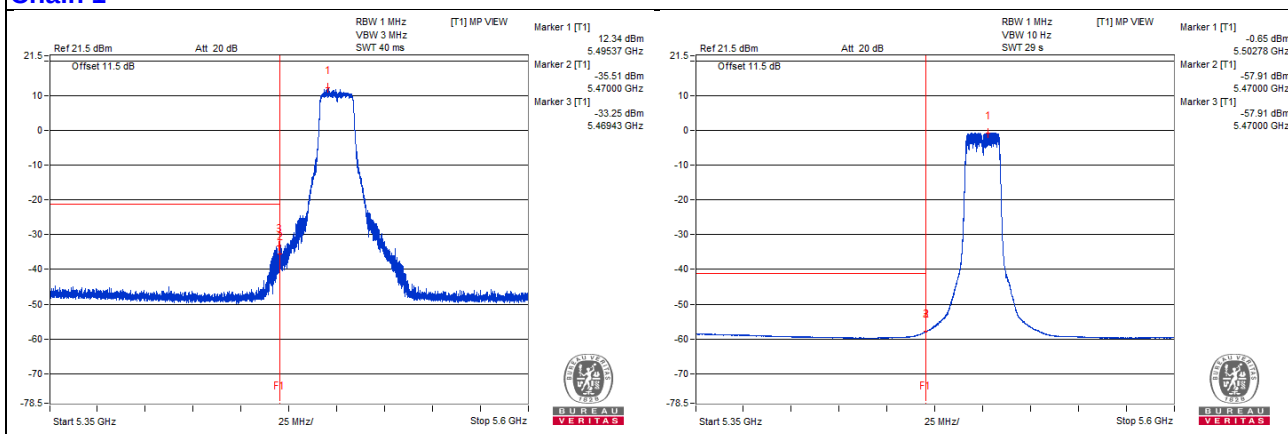

802.11ac (VHT20) - Channel 116

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3701.56 PK	57.99	74	-16.01	-48.97	-47.3	7.77	-37.27
2	3737.5 AV	36.78	54	-17.22	-69.22	-69.3	7.77	-58.48
3	7440.62 PK	59.8	74	-14.2	-46.39	-46.1	7.77	-35.46
4	7440.62 AV	49.39	54	-4.61	-59.39	-54.99	7.77	-45.87
5	11150 PK	56.06	74	-17.94	-49.62	-50.38	7.77	-39.2
6	11171.87 AV	35.8	54	-18.2	-70.08	-70.4	7.77	-59.46
7	16741.56 PK	65.65	68.2	-2.55	-38.66	-43.3	7.77	-29.61

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

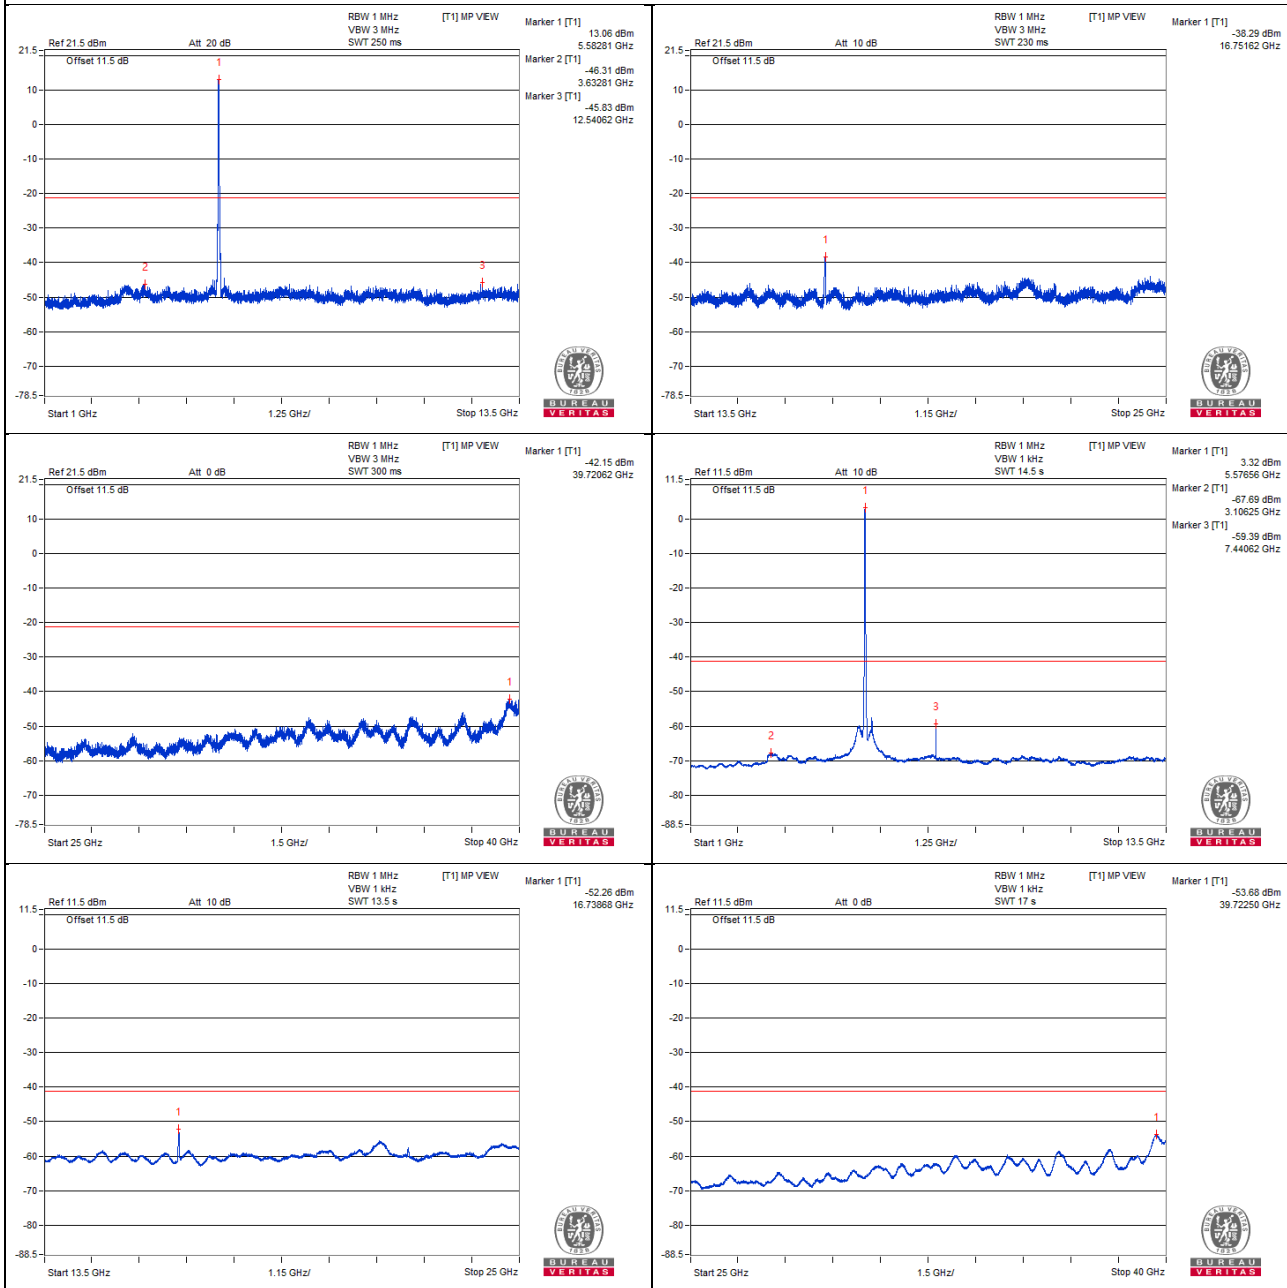

Chain 1

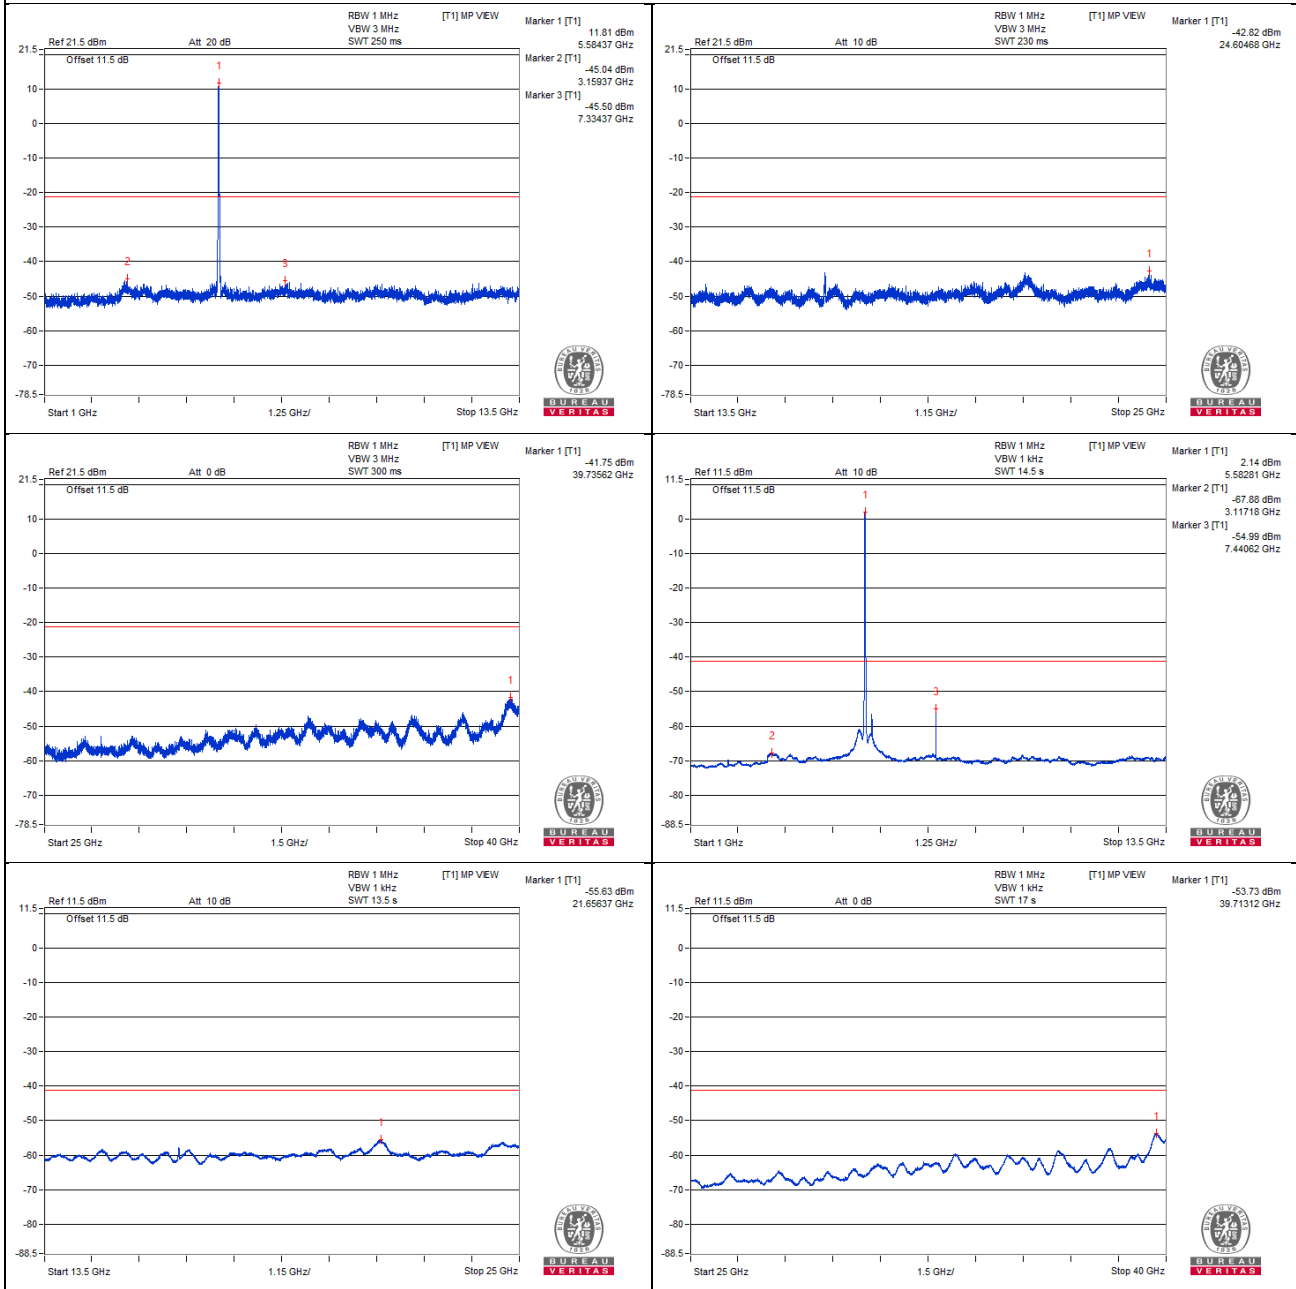

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5464.65 PK	59.23	68.2	-8.97	-47.61	-46.13	7.77	-36.03
2	5460 AV	46.99	54	-7.01	-58.67	-59.47	7.77	-48.27
3	5412.84 PK	60.19	74	-13.81	-47.85	-44.48	7.77	-35.07
4	5424.65 AV	47.46	54	-6.54	-58.12	-59.09	7.77	-47.8

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

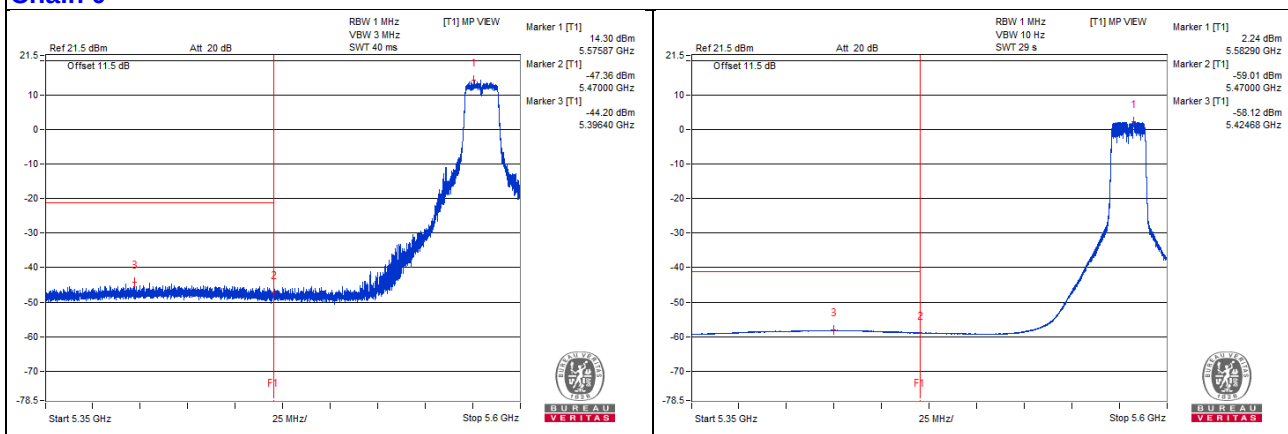

Chain 1

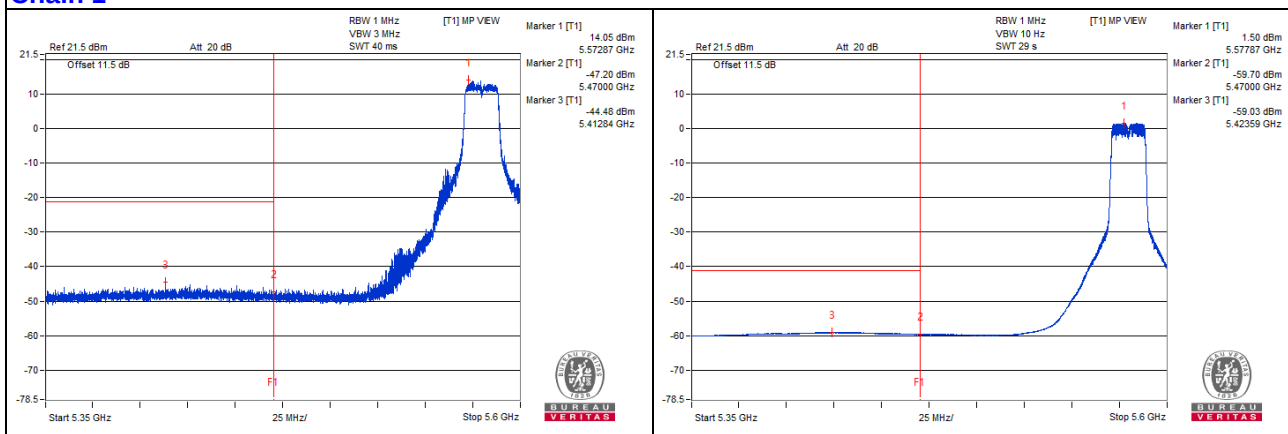

802.11ac (VHT20) - Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3789.06 PK	57.07	74	-16.93	-49.35	-48.62	7.77	-38.19
2	3782.81 AV	36.57	54	-17.43	-69.56	-69.39	7.77	-58.69
3	7592.18 PK	57.8	74	-16.2	-49.18	-47.46	7.77	-37.46
4	7600 AV	45.49	54	-8.51	-61.48	-59.78	7.77	-49.77
5	11401.56 PK	56.2	74	-17.8	-49.71	-49.97	7.77	-39.06
6	11403.12 AV	35.73	54	-18.27	-70.26	-70.37	7.77	-59.53
7	17103.81 PK	60.83	68.2	-7.37	-43.49	-48.12	7.77	-34.43

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

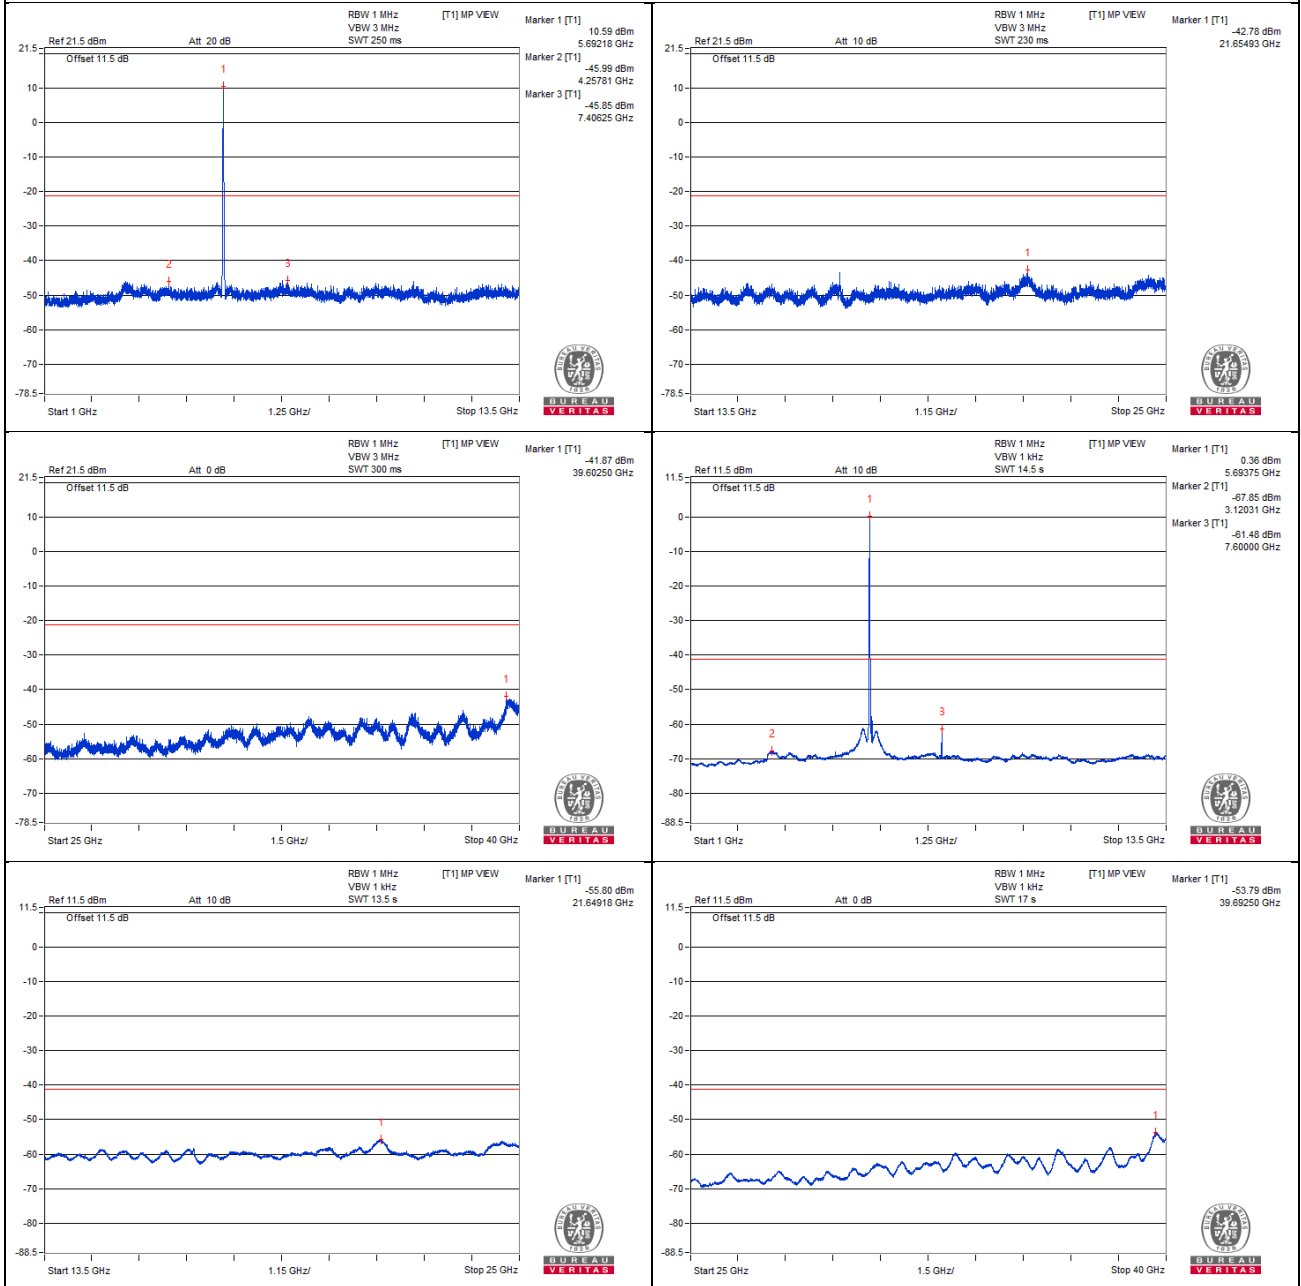

Chain 1

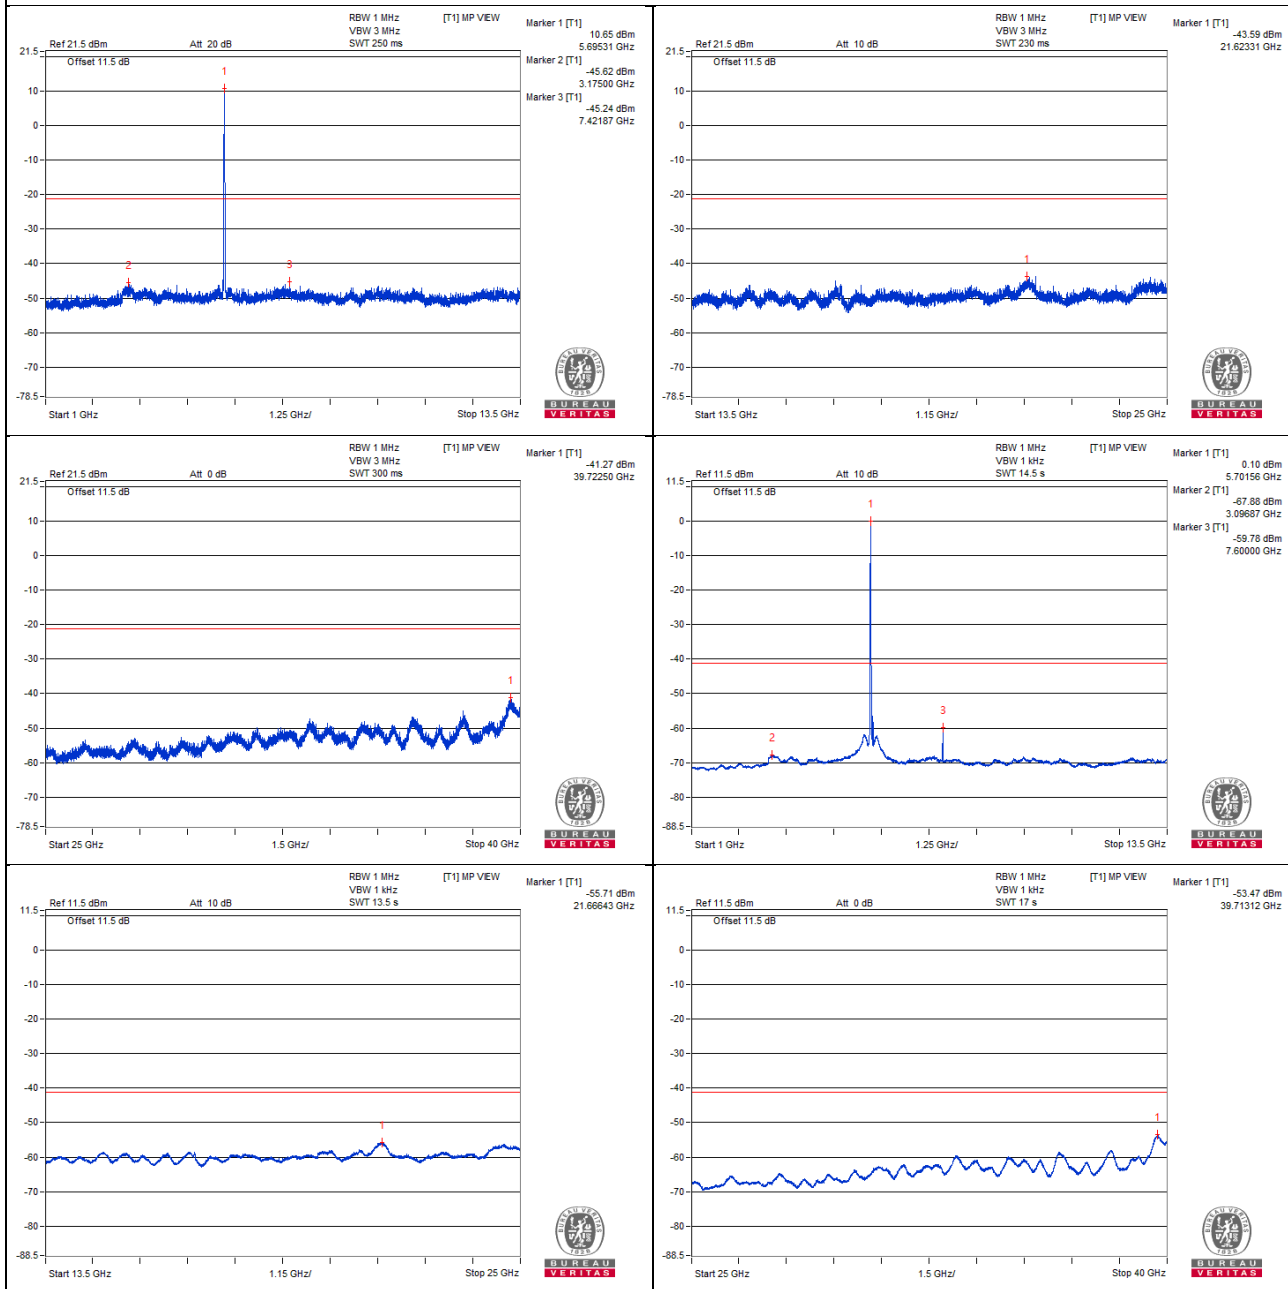

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725.02 PK	74.74	68.2	* 6.54	-31.8	-30.86	7.77	-20.52


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

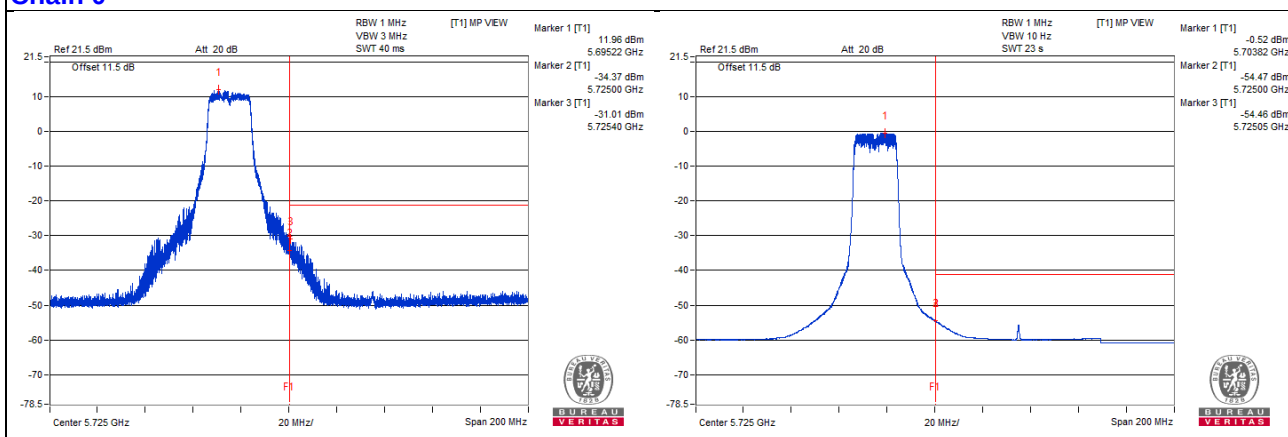

Chain 1

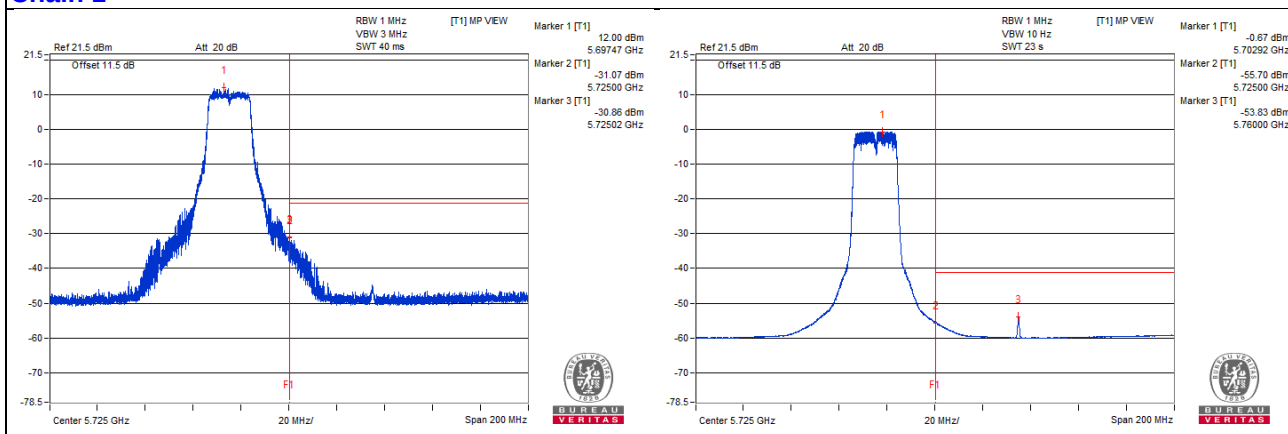

802.11ac (VHT20) - Channel 144

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3796.87 PK	57.22	74	-16.78	-49.27	-48.41	7.77	-38.04
2	3793.75 AV	36.46	54	-17.54	-69.53	-69.64	7.77	-58.8
3	7626.56 PK	57.21	74	-16.79	-49.62	-48.17	7.77	-38.05
4	7626.56 AV	44.46	54	-9.54	-62.24	-61	7.77	-50.8
5	11439.06 PK	57.2	74	-16.8	-48.55	-49.16	7.77	-38.06
6	11442.18 AV	36.08	54	-17.92	-69.8	-70.12	7.77	-59.18
7	17159.87 PK	65.66	68.2	-2.54	-41.14	-39.73	7.77	-29.6

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

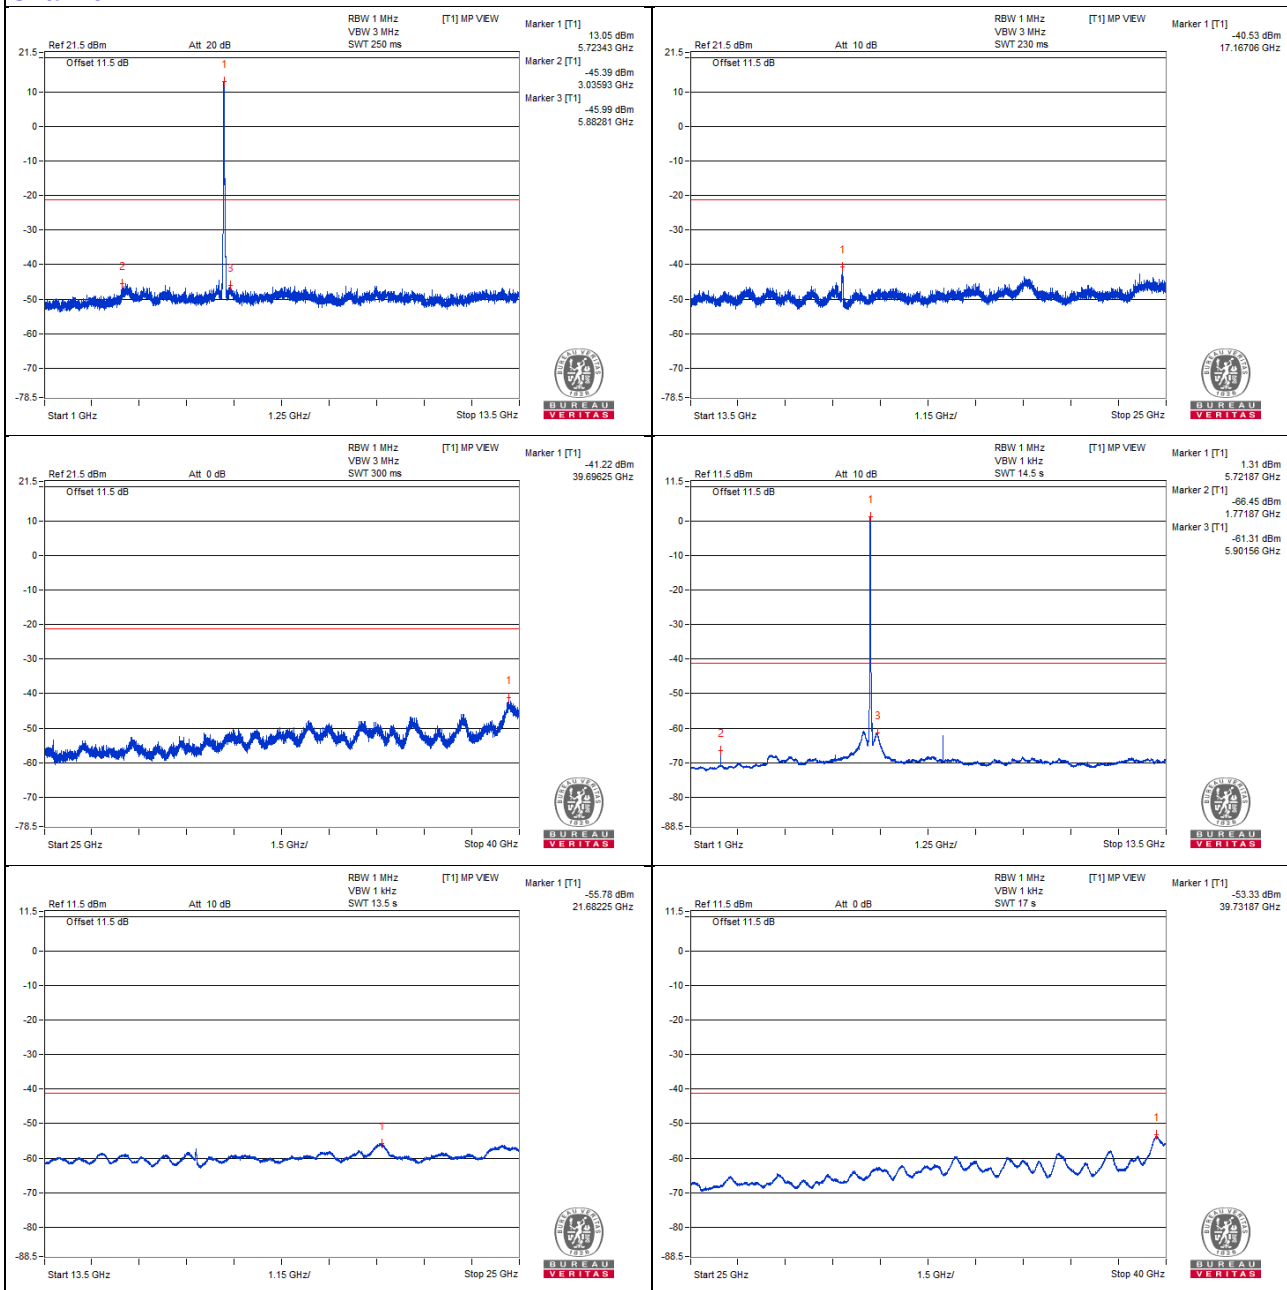

Chain 1

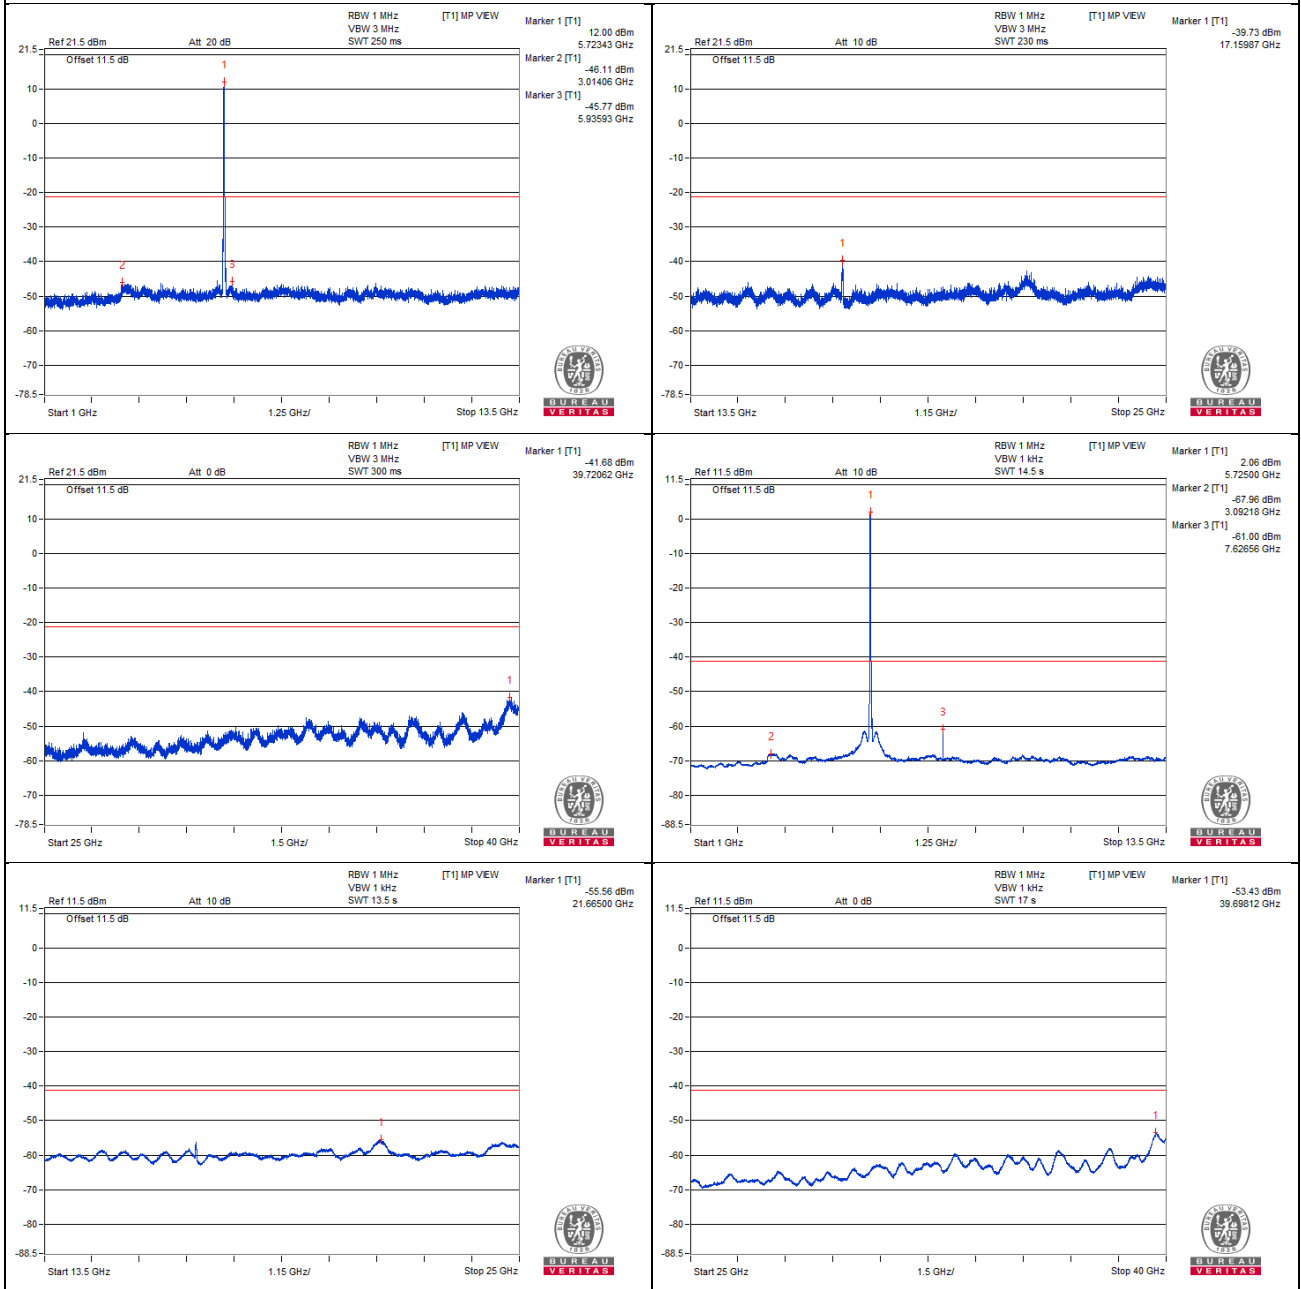

Bandedge table



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5871.73 PK	60.12	68.2	-8.08	-45.19	-46.81	7.77	-35.14

Note :



Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

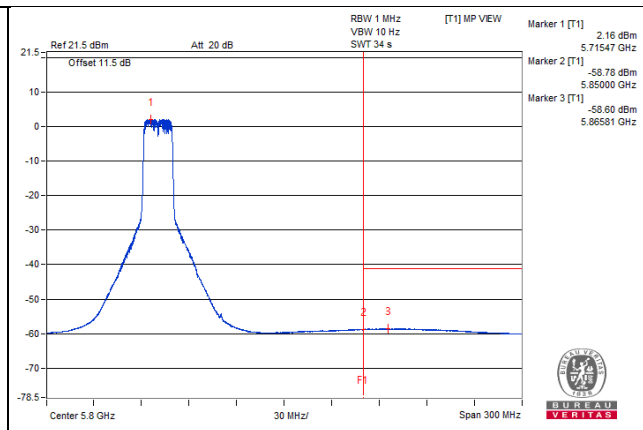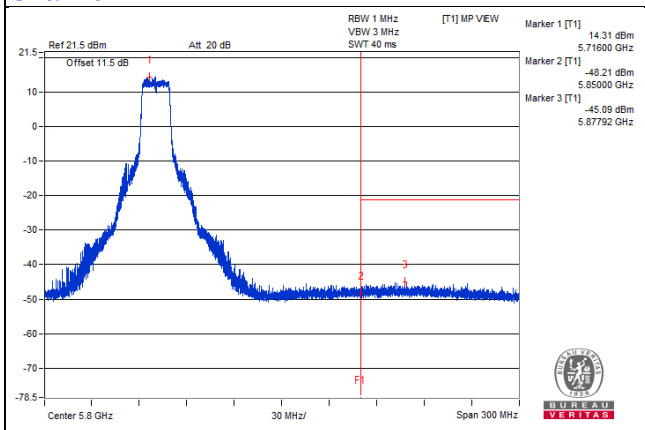

Chain 1

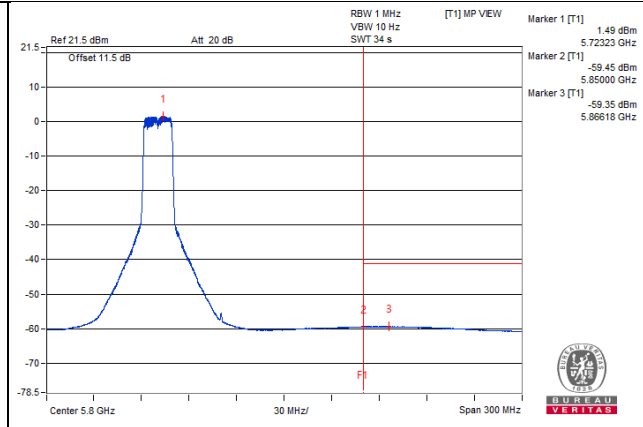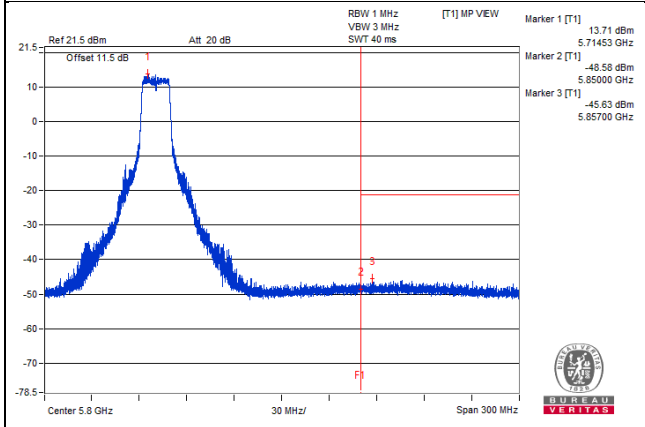

802.11ac (VHT20) – Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3821.87 PK	55.62	74	-18.38	-50.41	-50.44	7.77	-39.64
2	3820.31 AV	44.18	54	-9.82	-61.76	-61.97	7.77	-51.08
3	7664.06 PK	56.68	74	-17.32	-49.1	-49.64	7.77	-38.58
4	7659.37 AV	45.3	54	-8.7	-60.7	-60.78	7.77	-49.96
5	11492.18 PK	55.94	74	-18.06	-49.28	-51.1	7.77	-39.32
6	11492.18 AV	43.67	54	-10.33	-62.25	-62.49	7.77	-51.59
7	17228.87 PK	65.13	68.2	-3.07	-41.76	-40.2	7.77	-30.13

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

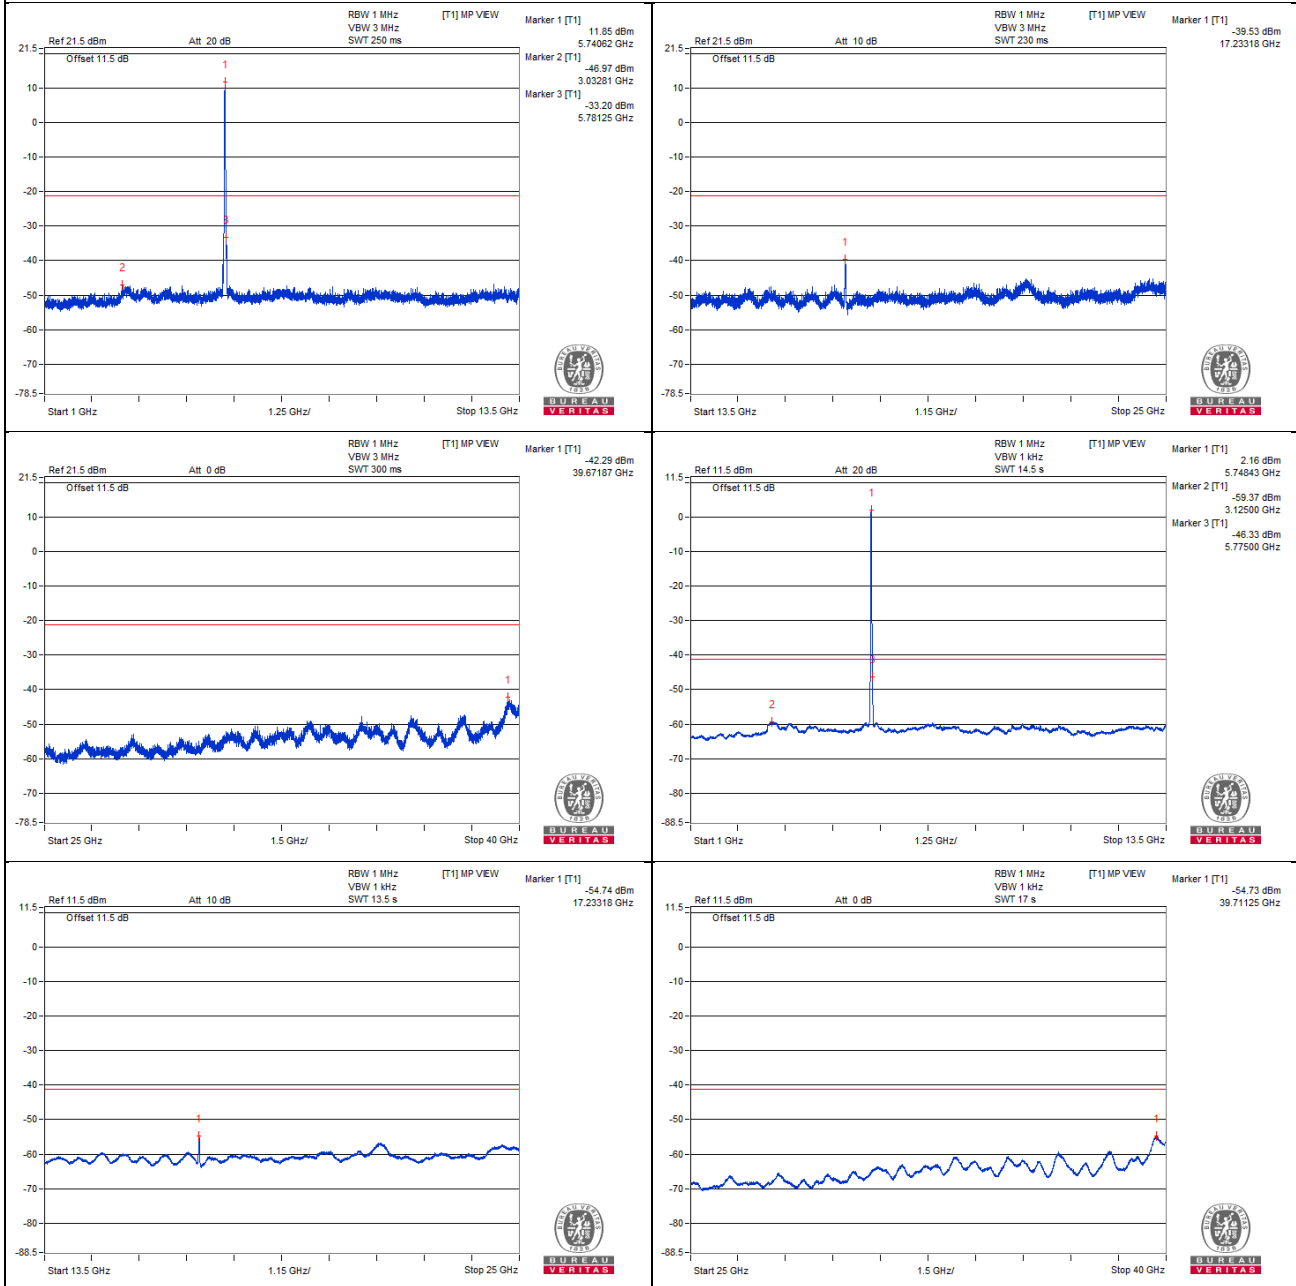


Chain 1

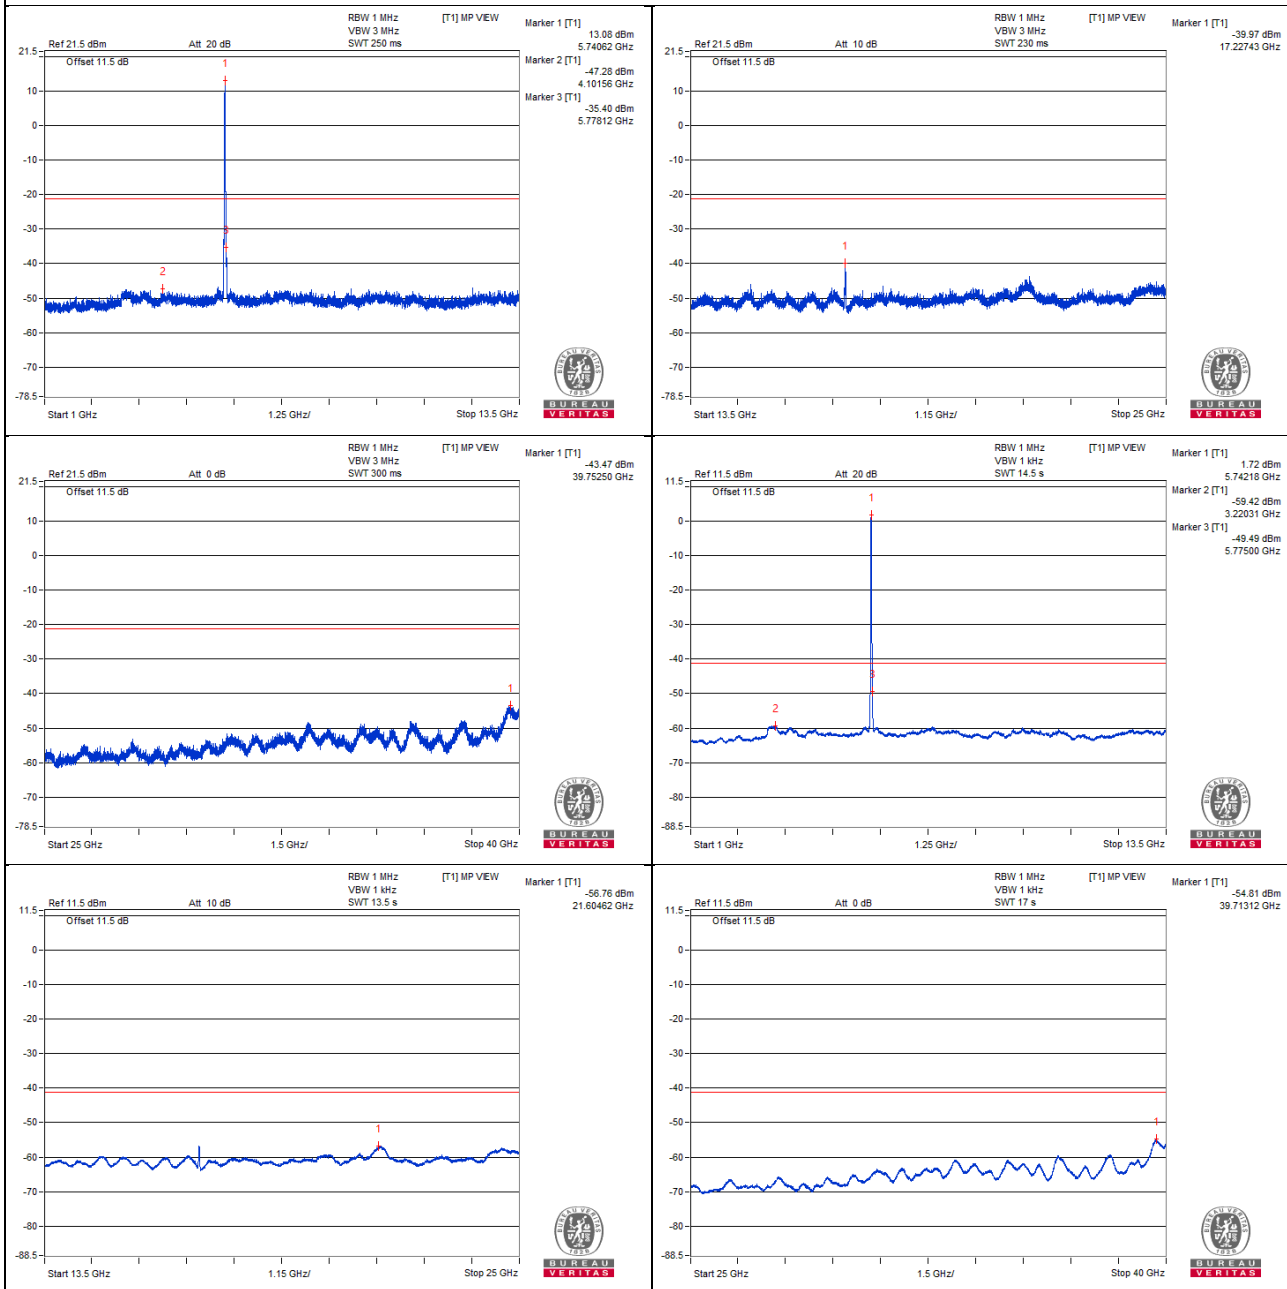


Bandedge table

Chain 0

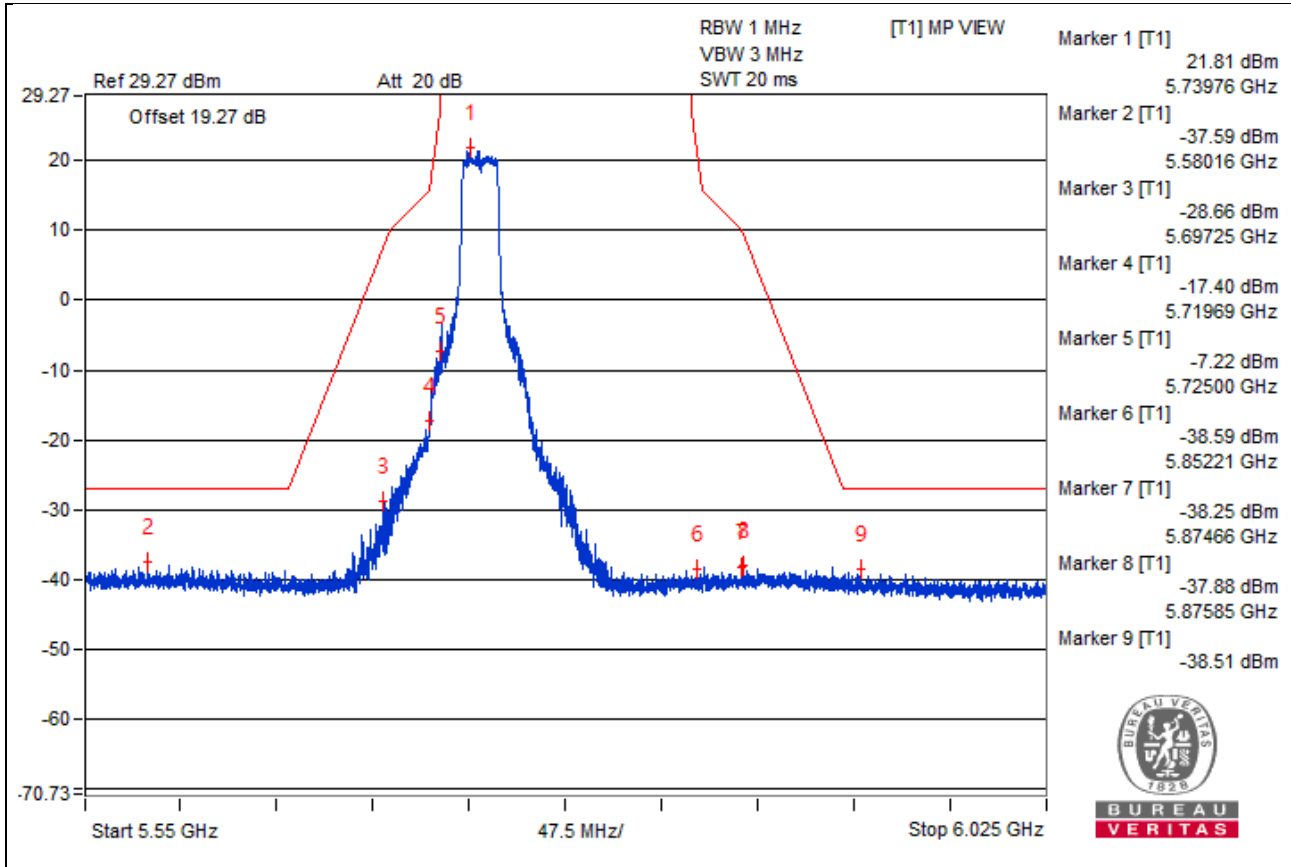

Chain 1

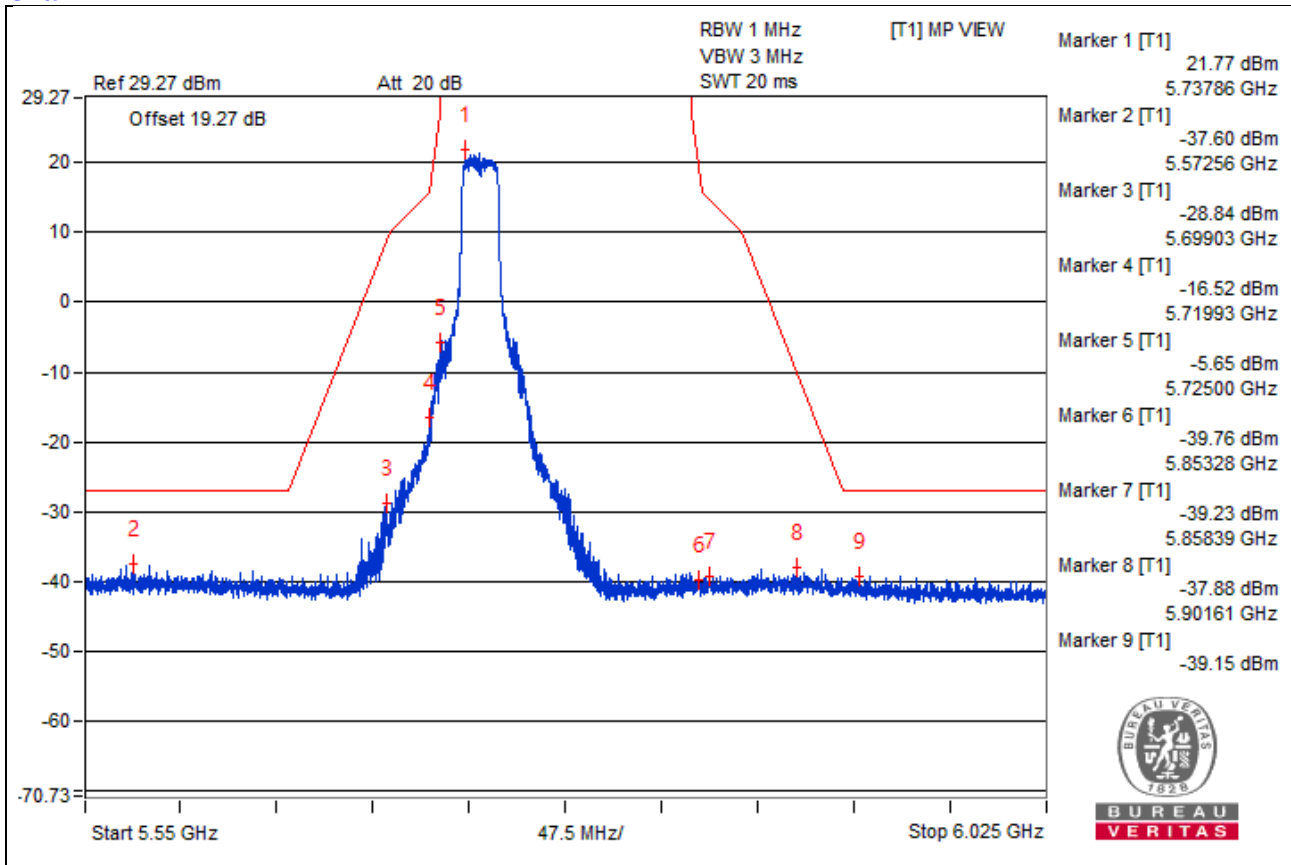

802.11ac (VHT20) – Channel 157

Conducted spurious emission table







No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3859.37 PK	56.02	74	-17.98	-49.83	-50.22	7.77	-39.24
2	3867.18 AV	44.19	54	-9.81	-61.99	-61.72	7.77	-51.07
3	7698.43 PK	57.4	74	-16.6	-48.77	-48.52	7.77	-37.86
4	7710.93 AV	45.34	54	-8.66	-60.78	-60.63	7.77	-49.92
5	11554.68 PK	55.39	74	-18.61	-51.93	-49.67	7.77	-39.87
6	11564.06 AV	43.28	54	-10.72	-62.75	-62.77	7.77	-51.98
7	17348.18 PK	65.09	68.2	-3.11	-38.92	-44.91	7.77	-30.17

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

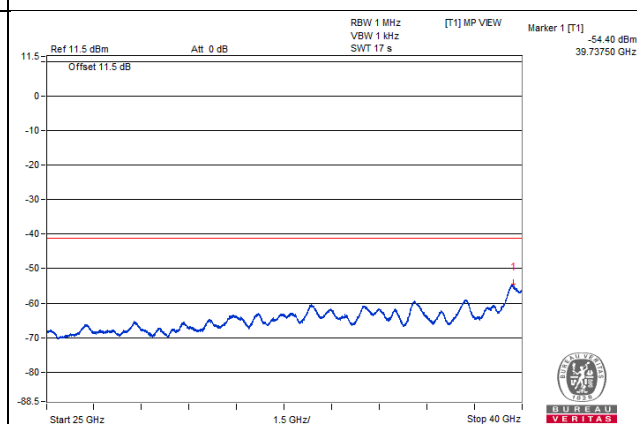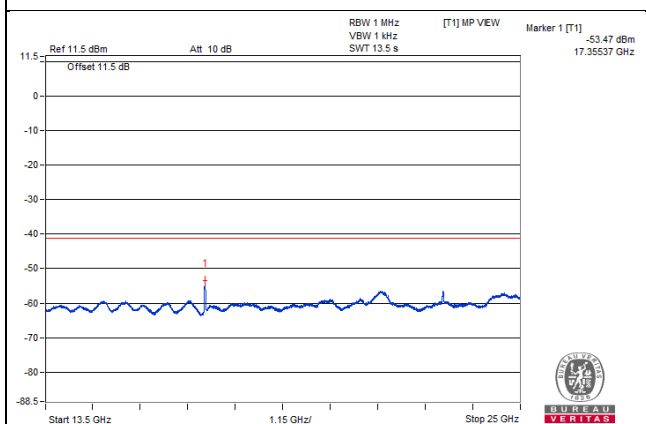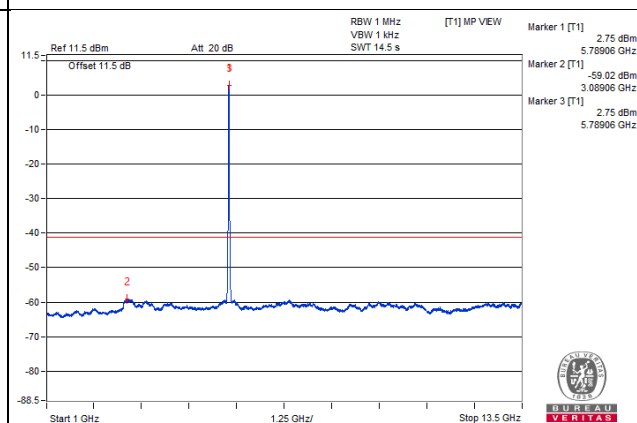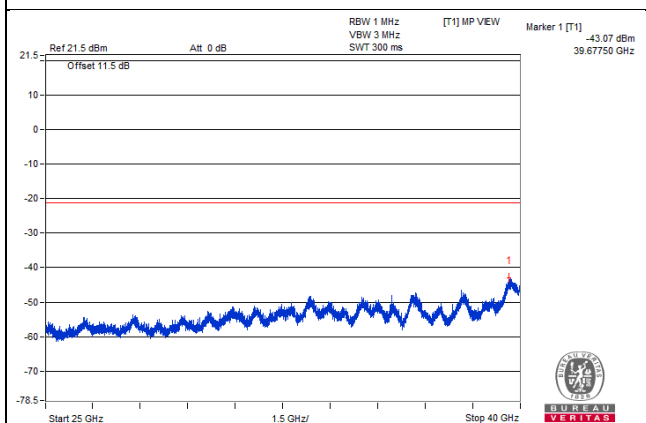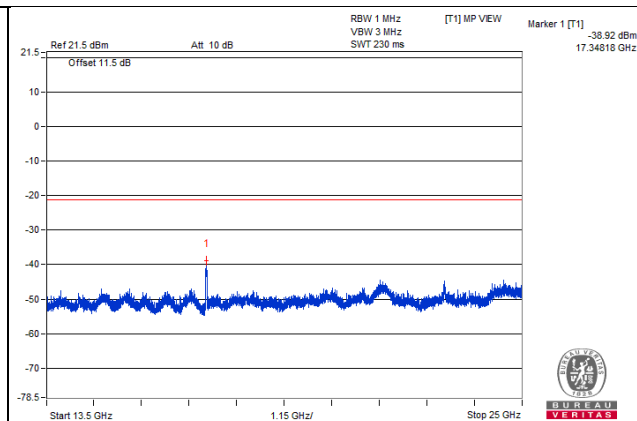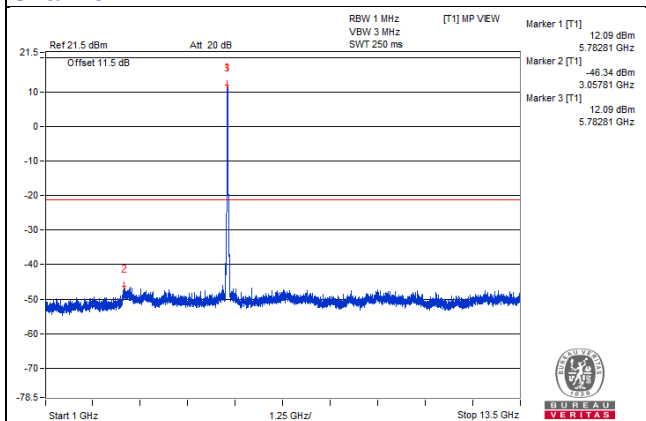


Chain 1

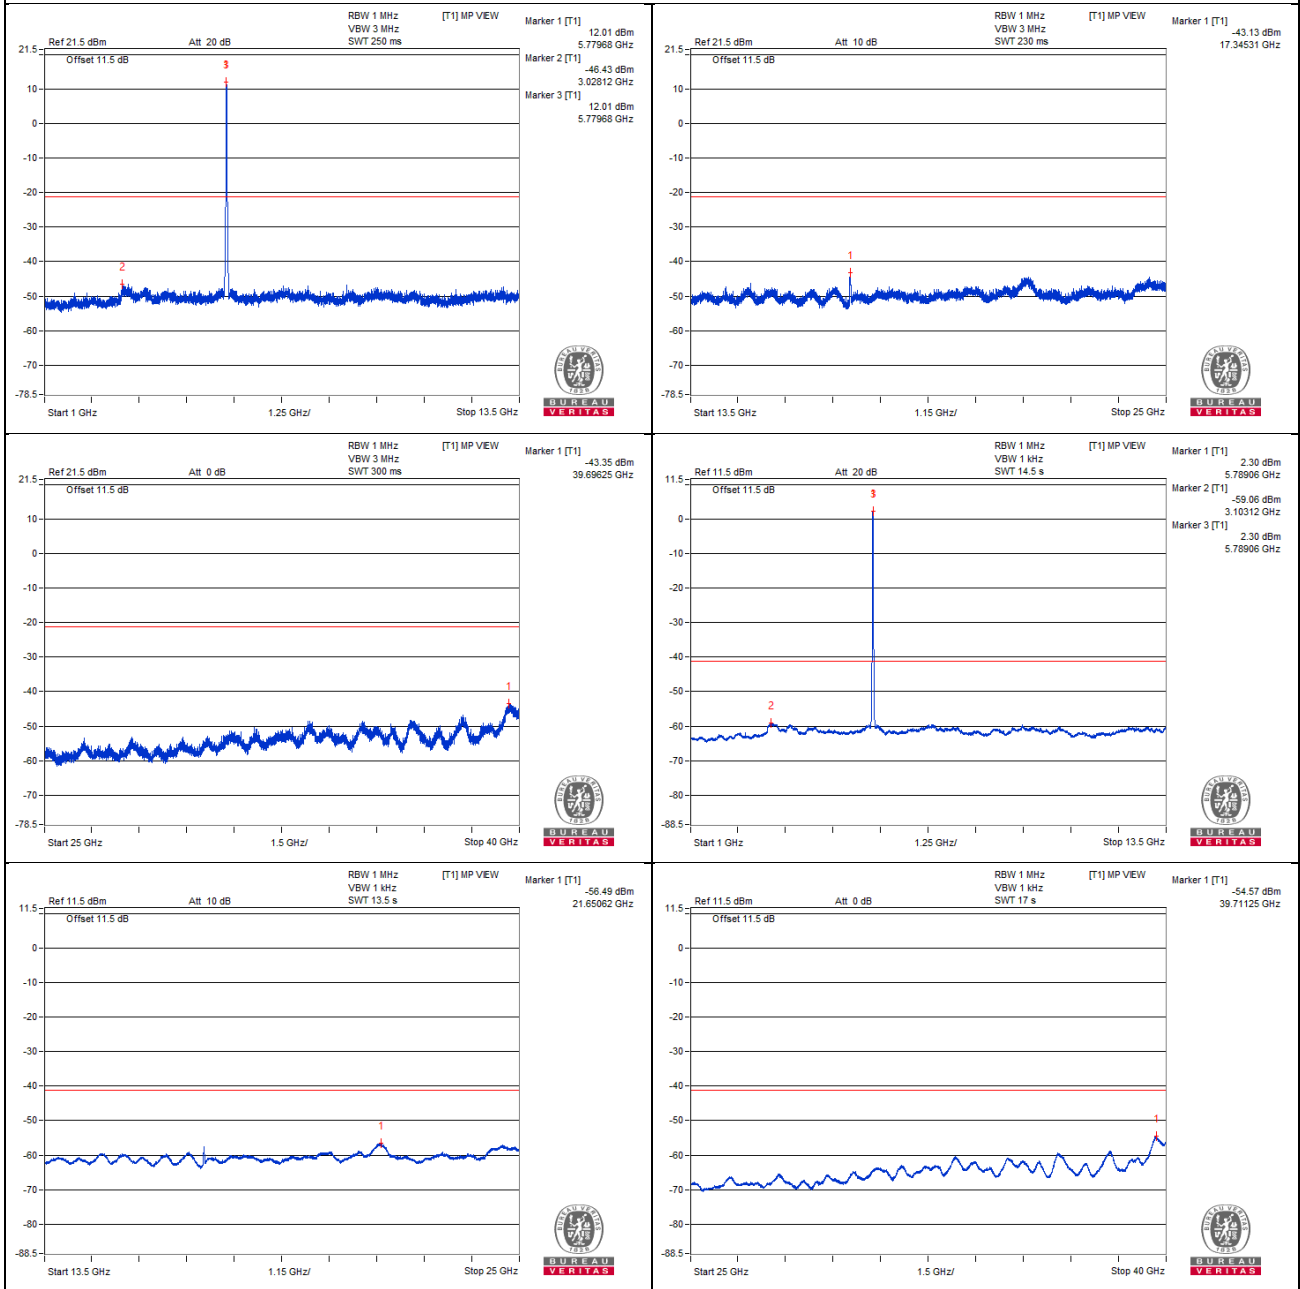


Bandedge table

Chain 0

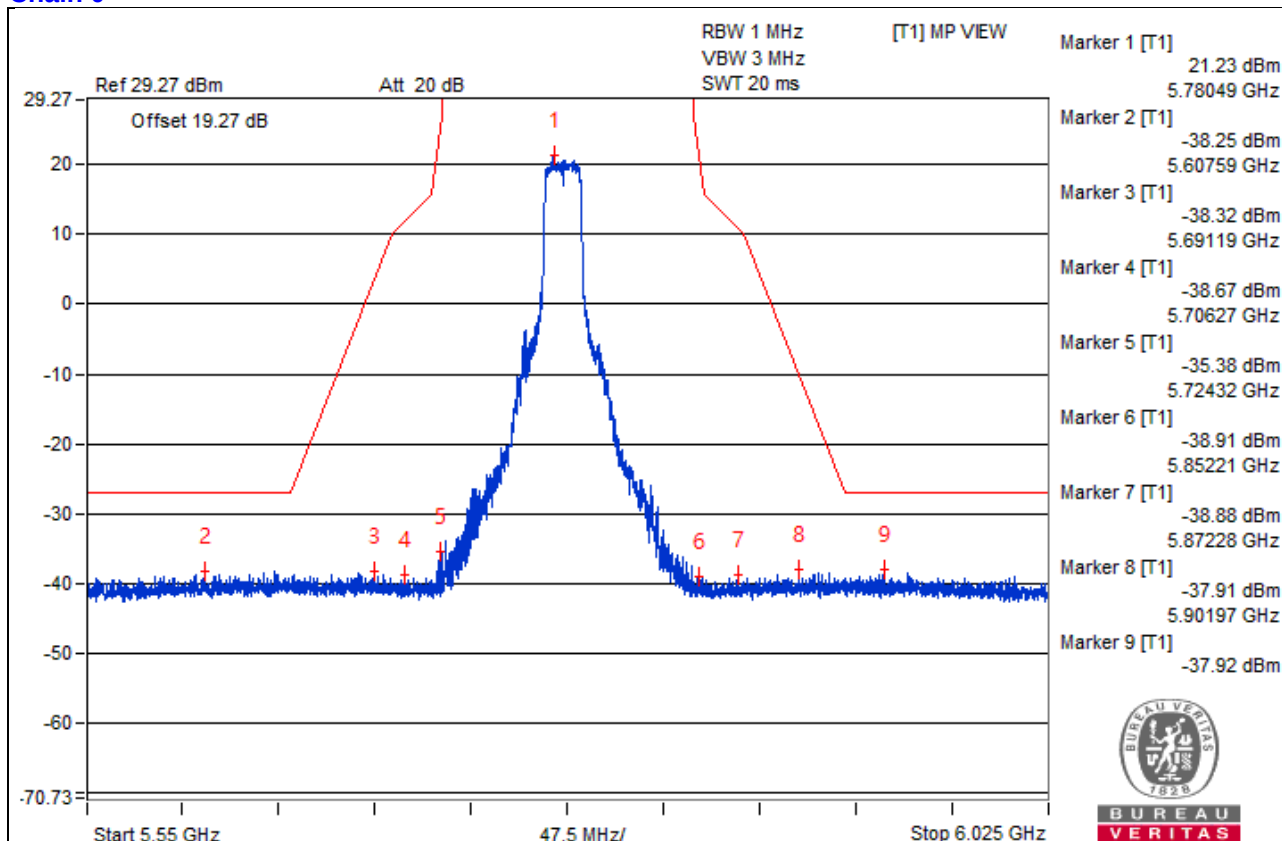

Chain 1

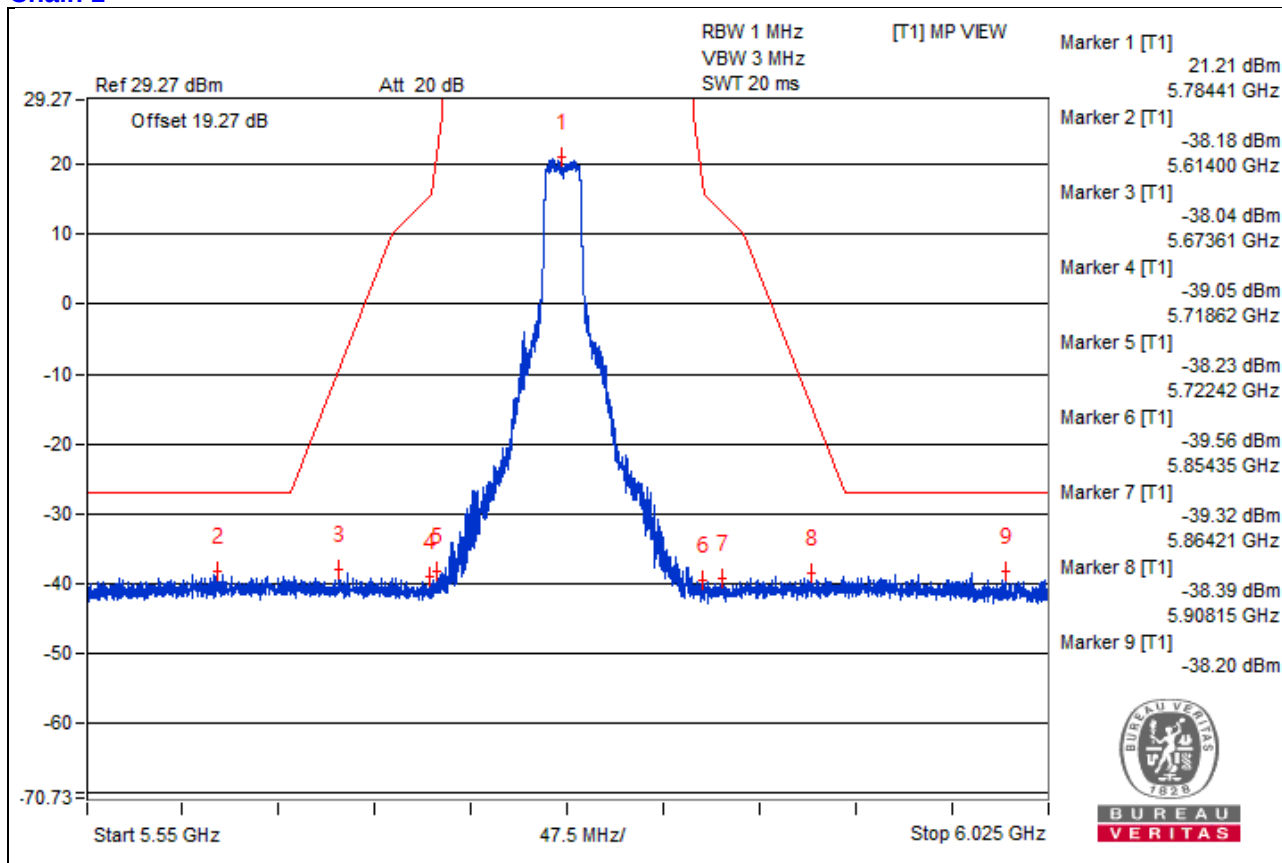

802.11ac (VHT20) – Channel 165

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3867.18 PK	55.88	74	-18.12	-50.84	-49.57	7.77	-39.38
2	3885.93 AV	44.06	54	-9.94	-61.77	-62.21	7.77	-51.2
3	7753.12 PK	56.93	68.2	-11.27	-49.35	-48.89	7.77	-38.33
4	11660.93 PK	55.53	74	-18.47	-49.86	-51.27	7.77	-39.73
5	11645.31 AV	43.46	54	-10.54	-62.59	-62.58	7.77	-51.8
6	17480.43 PK	64.69	68.2	-3.51	-39.29	-45.43	7.77	-30.57

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0




Chain 1

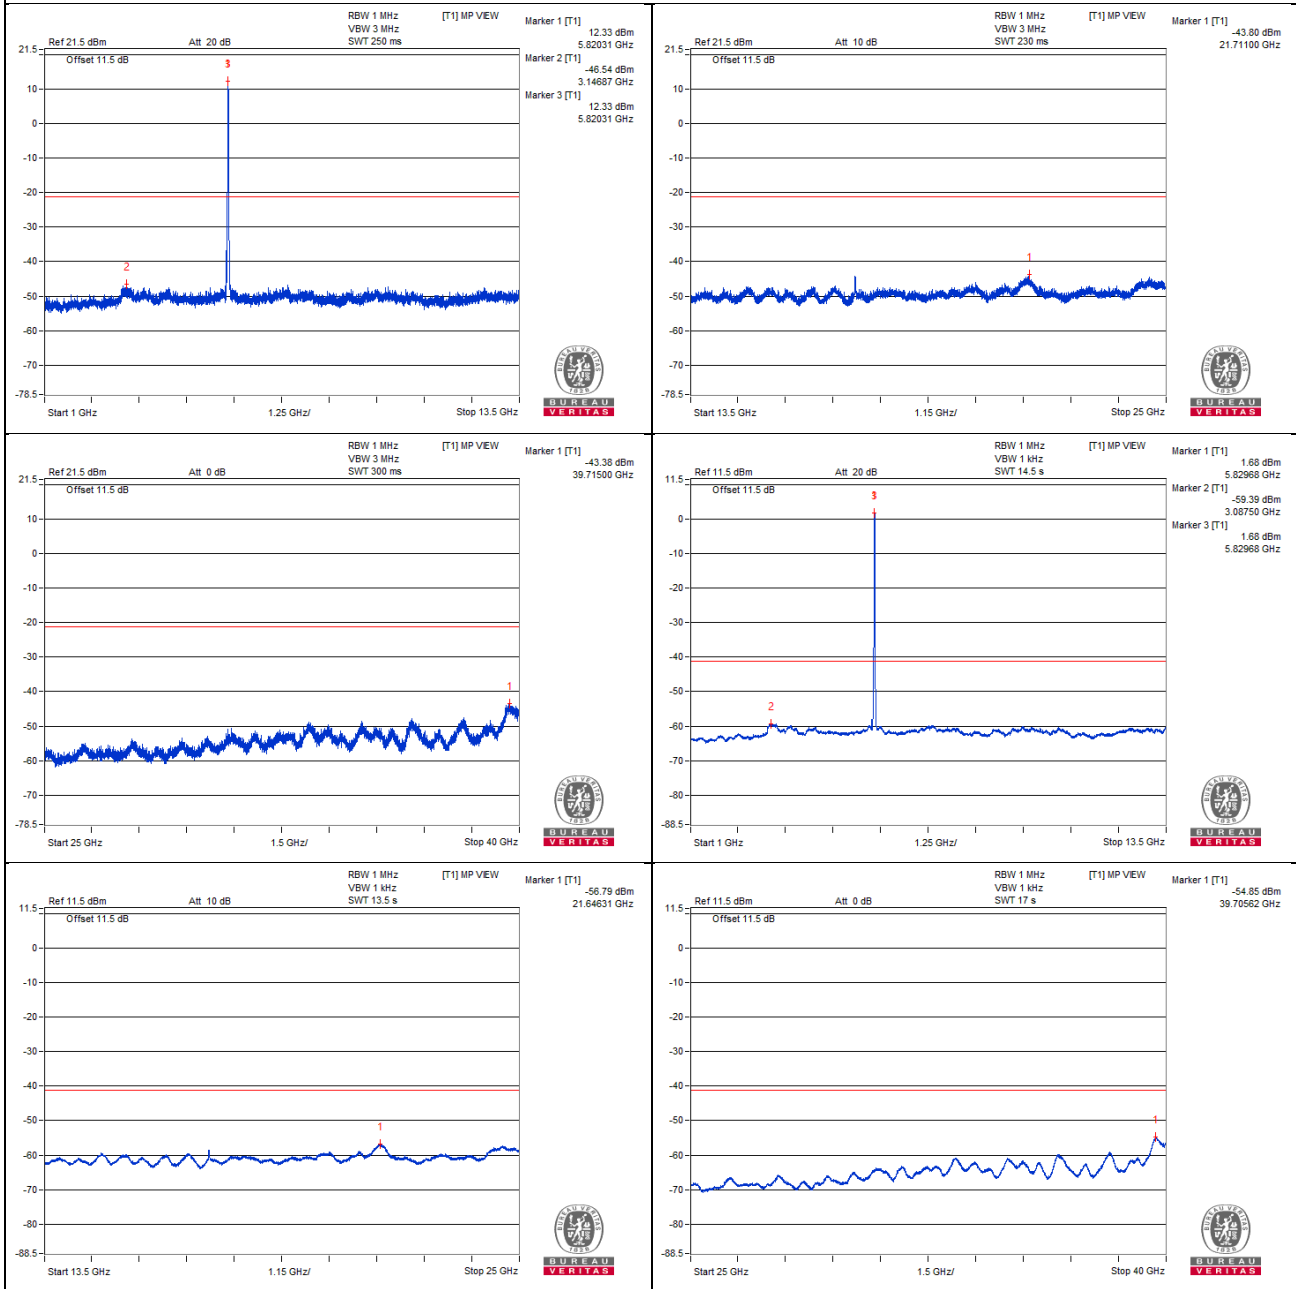


Bandedge table

Chain 0

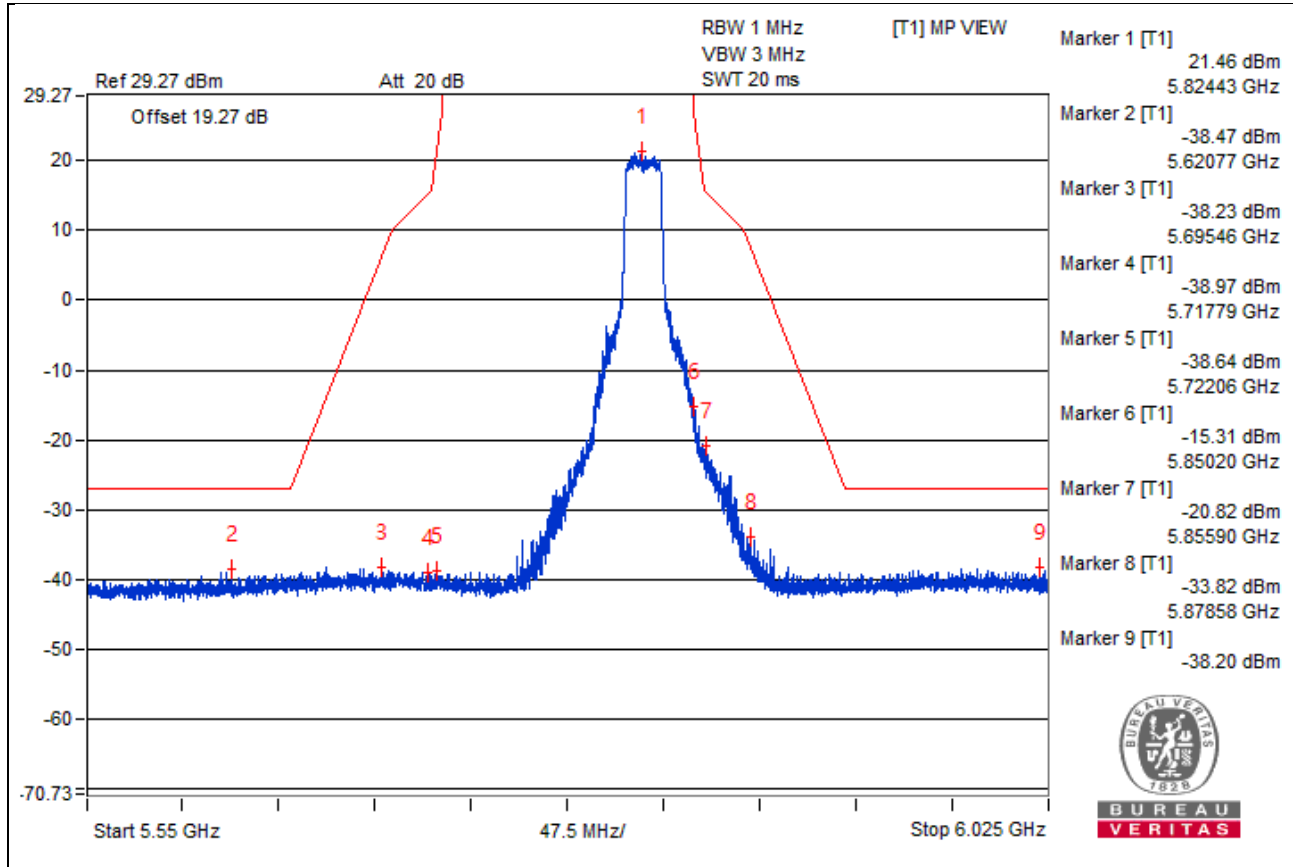

Chain 1

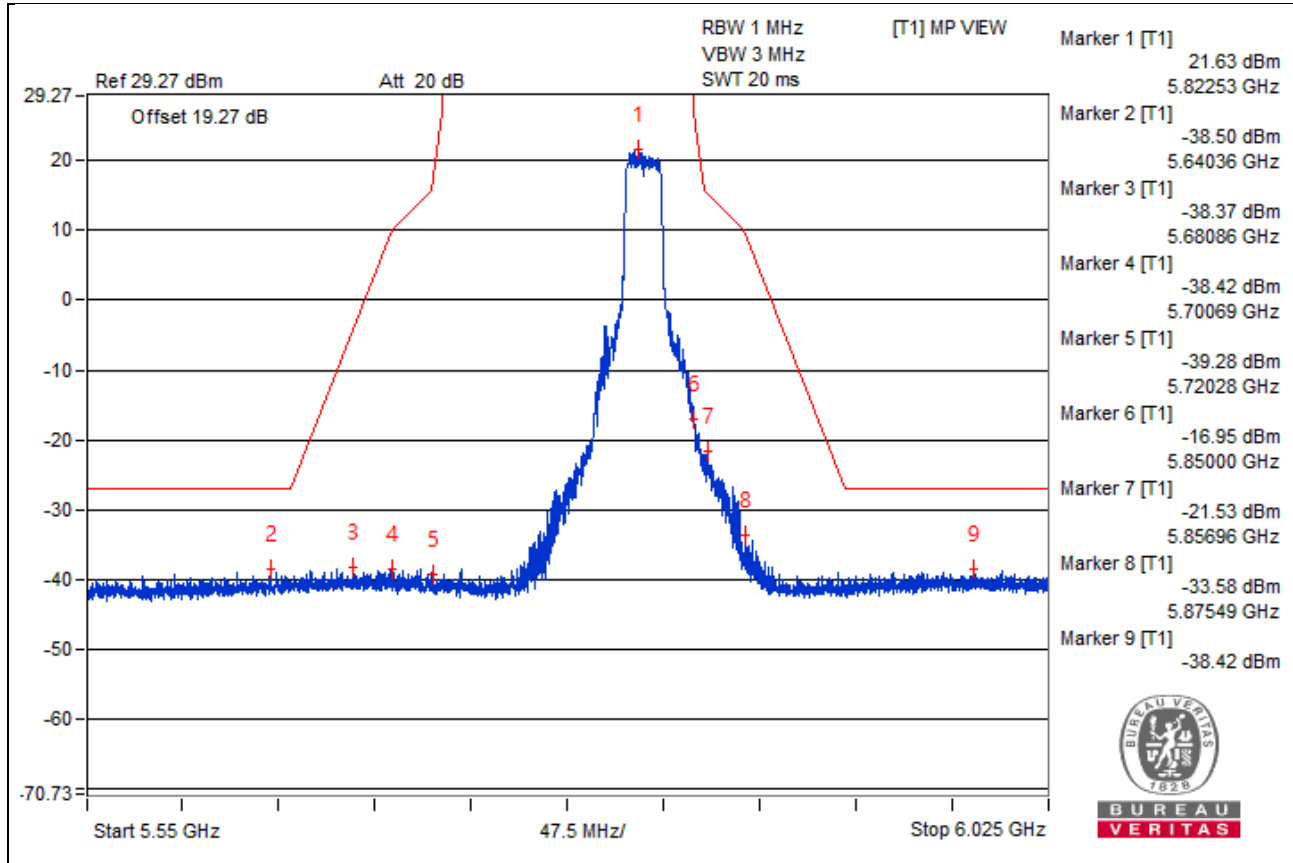

802.11ac (VHT40) - Channel 38

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3462.5 PK	55.53	68.2	-12.67	-47.71	-50.35	6.09	-39.73
2	6920.31 PK	60.1	68.2	-8.1	-46.89	-42.64	6.09	-35.16
3	10365.62 PK	55.98	68.2	-12.22	-49.13	-47.74	6.09	-39.28
4	15577.18 PK	54.89	74	-19.11	-49.32	-49.62	6.09	-40.37
5	15551.31 AV	44.13	54	-9.87	-60.27	-60.2	6.09	-51.13
6	5759.37 PK	57.7	68.2	-10.5	-48.11	-45.58	6.09	-37.56

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

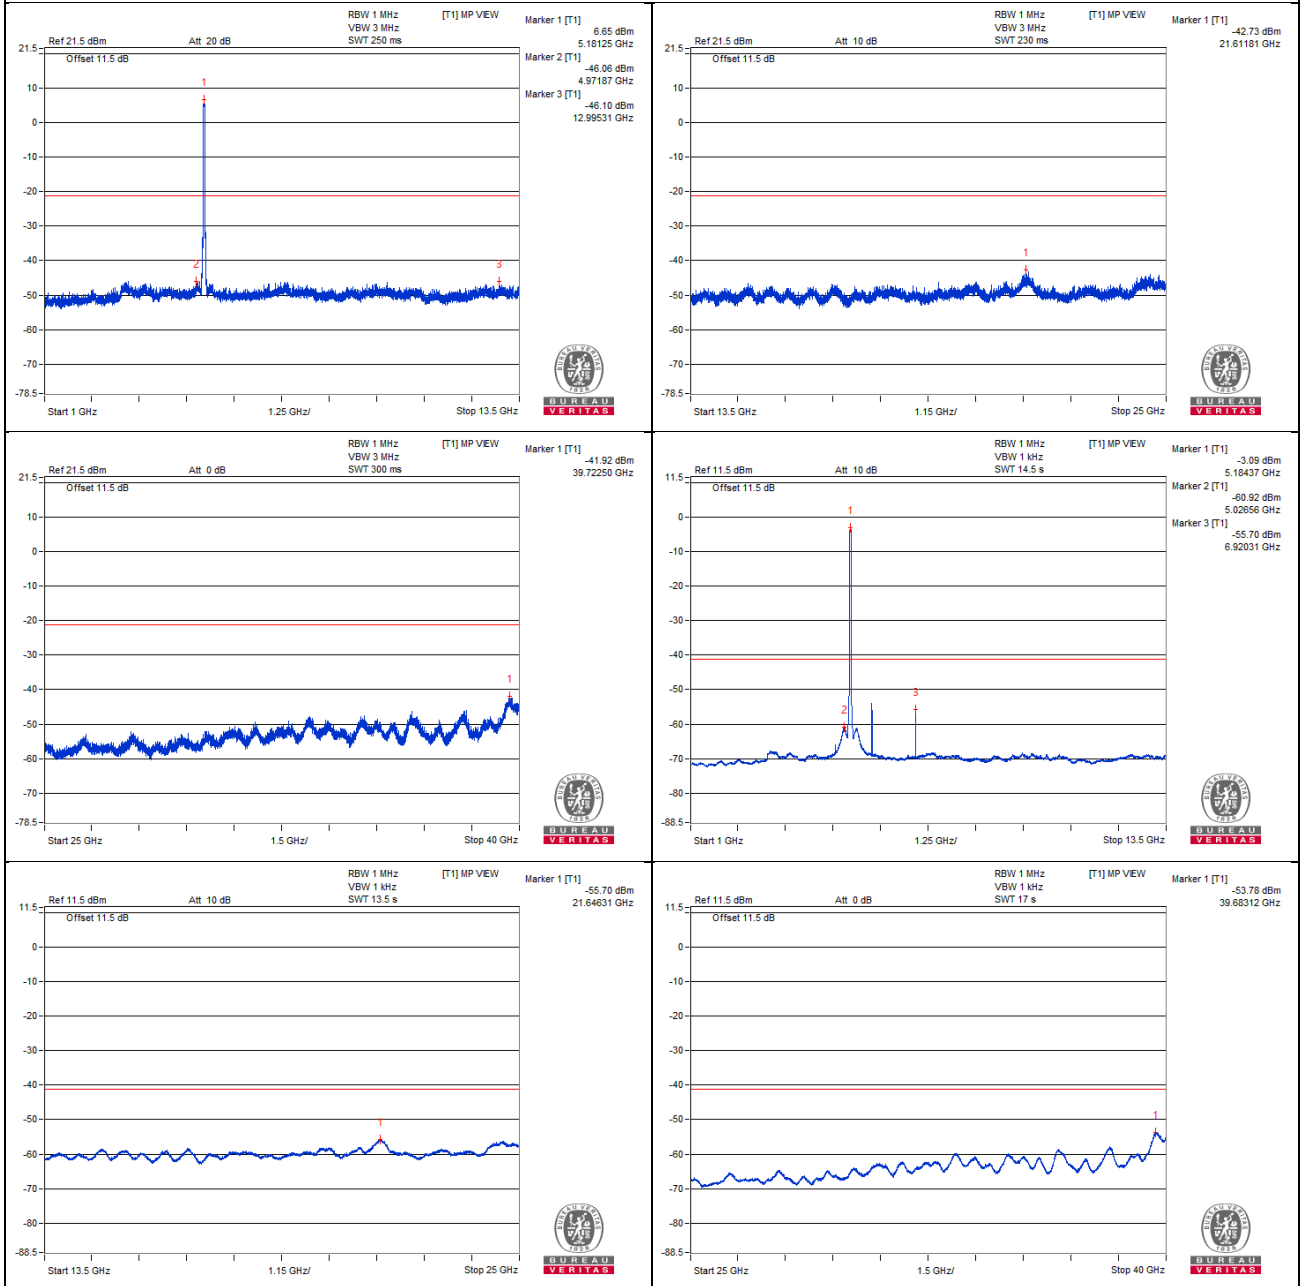

Chain 1

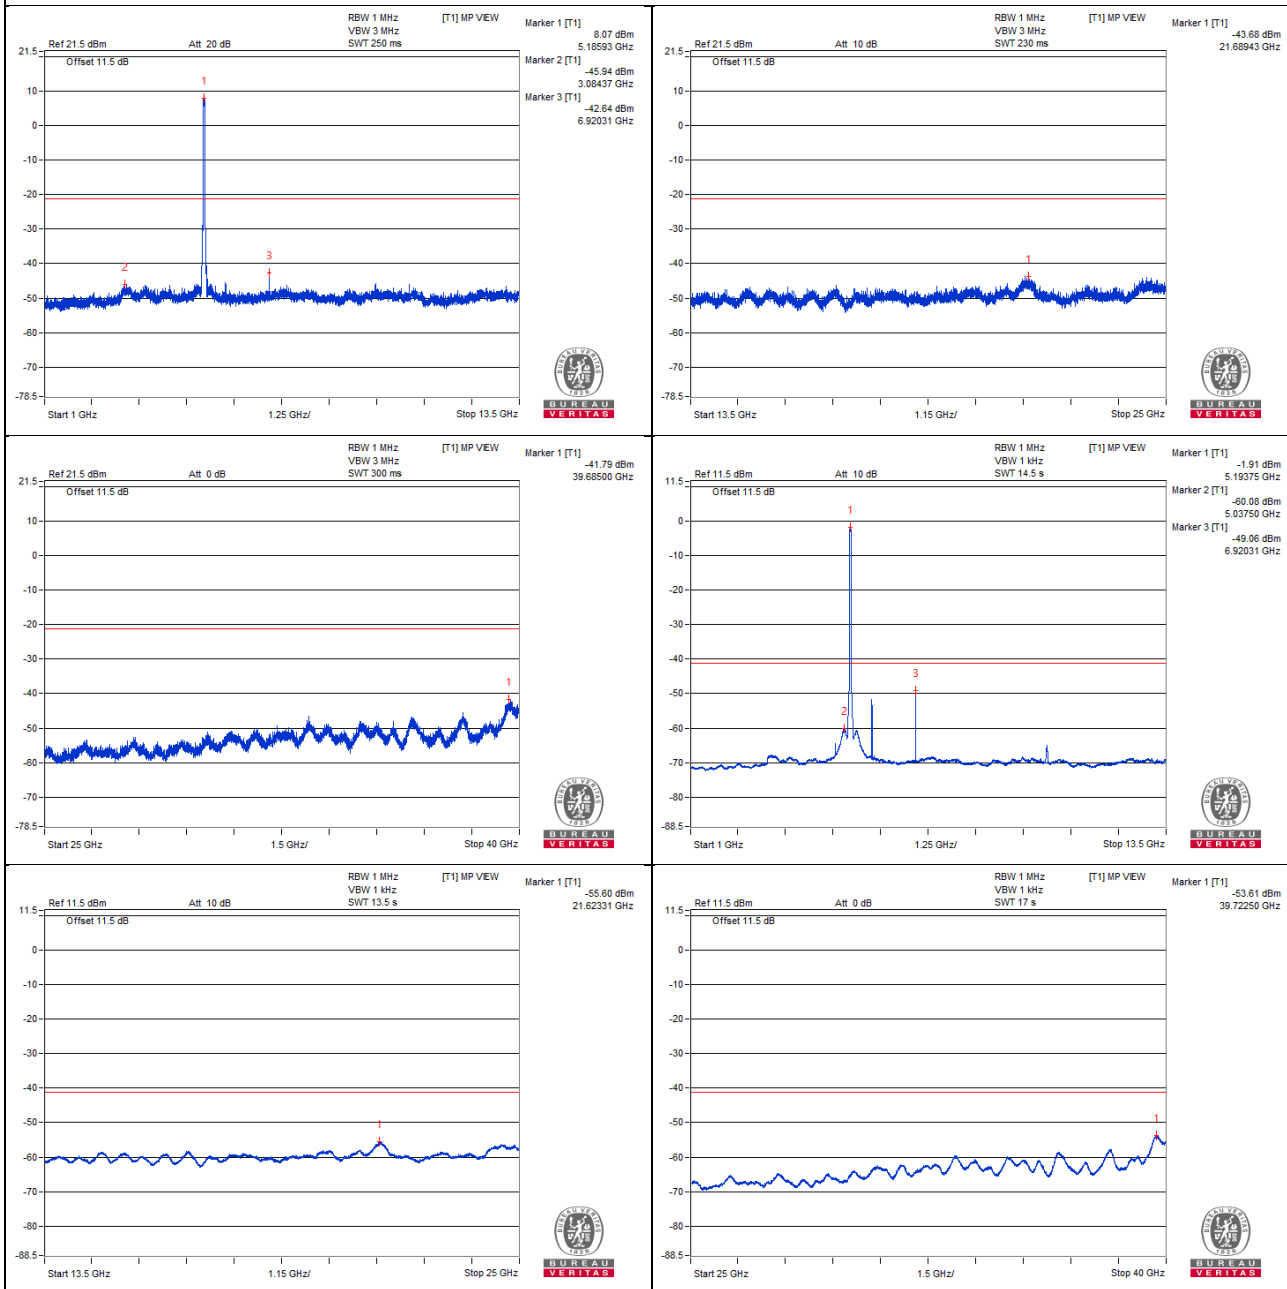

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5150 PK	72.86	74	*-1.14	-34.32	-29.81	6.09	-22.4
2	5150 AV	51.57	54	-2.43	-54.23	-51.71	6.09	-43.69

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

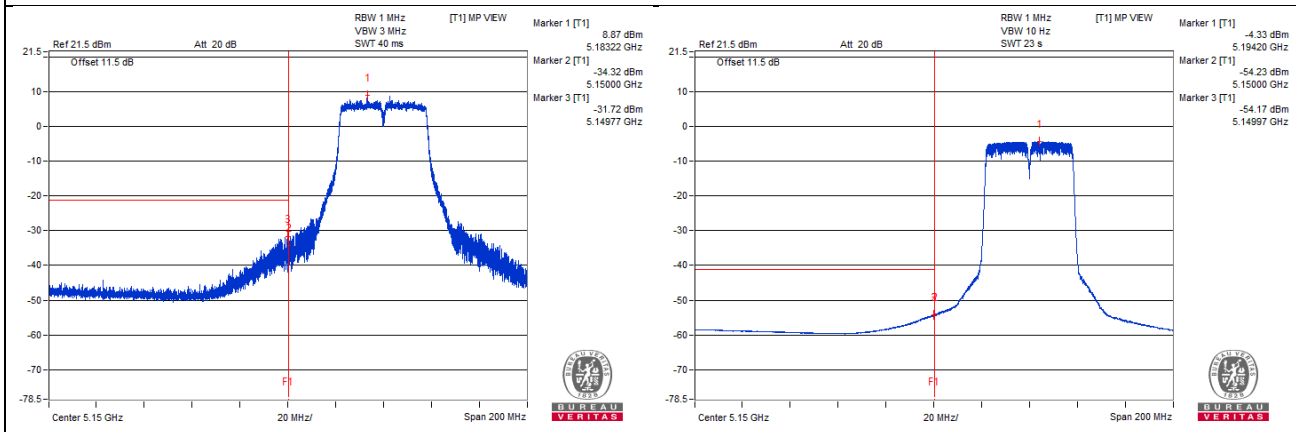

Chain 1

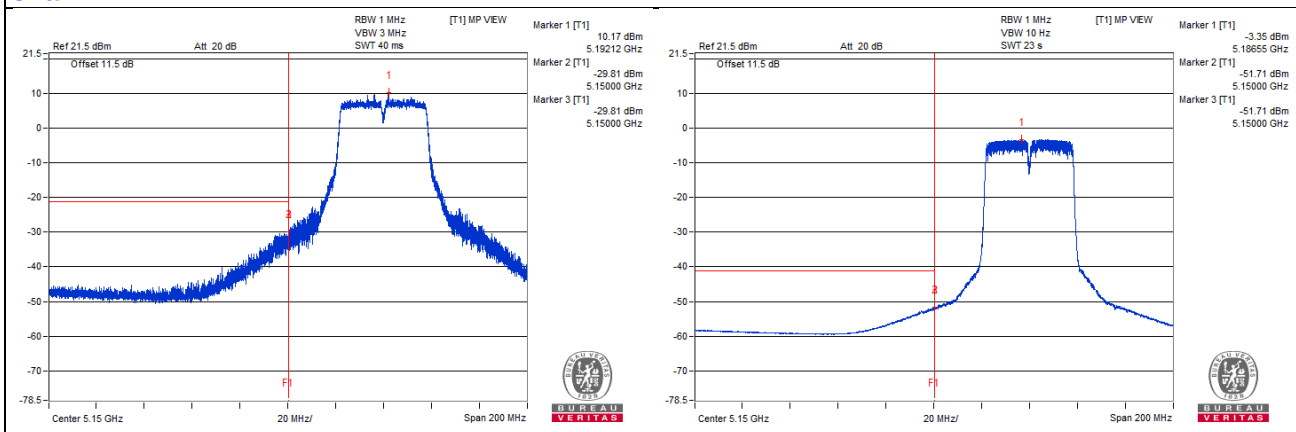

802.11ac (VHT40) - Channel 46

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3484.37 PK	55.72	68.2	-12.48	-48.07	-49.3	6.09	-39.54
2	3506.25 AV	34.88	54	-19.12	-69.52	-69.44	6.09	-60.38
3	6973.43 PK	58.15	68.2	-10.05	-48.06	-44.91	6.09	-37.11
4	10442.18 PK	54.89	68.2	-13.31	-49.54	-49.41	6.09	-40.37
5	15677.81 PK	56.22	74	-17.78	-47.14	-49.44	6.09	-39.04
6	15690.75 AV	45.07	54	-8.93	-59.24	-59.35	6.09	-50.19
7	5759.37 PK	57.94	68.2	-10.26	-46.53	-46.32	6.09	-37.32

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

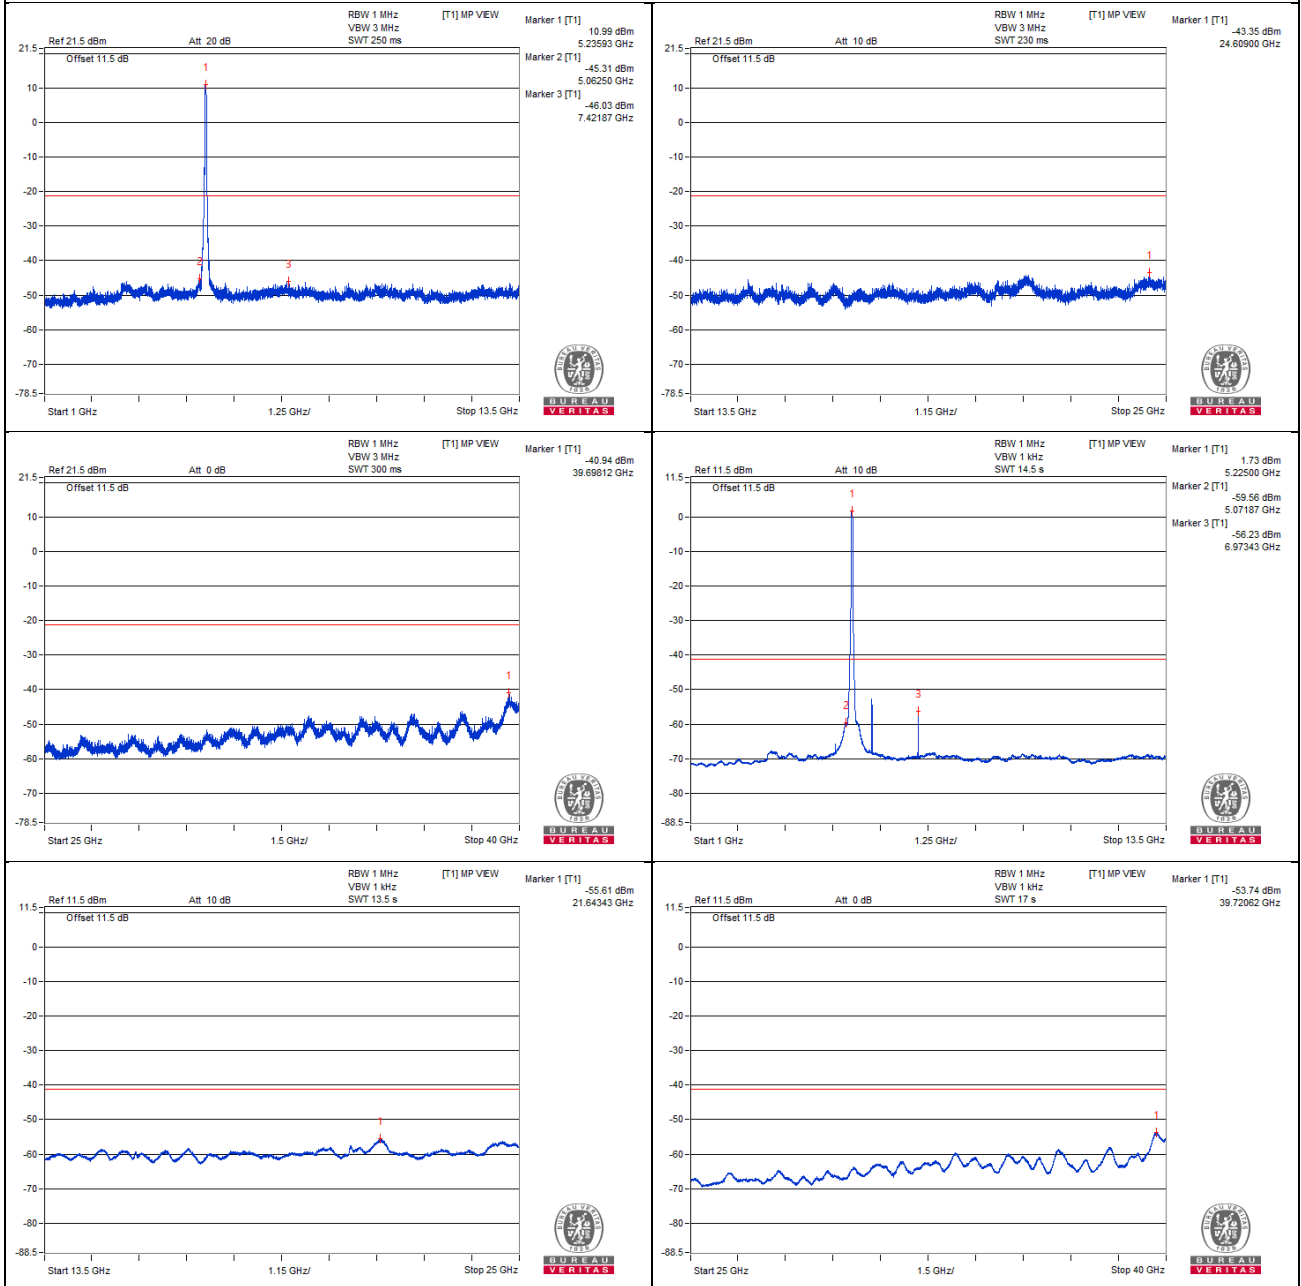

Chain 1

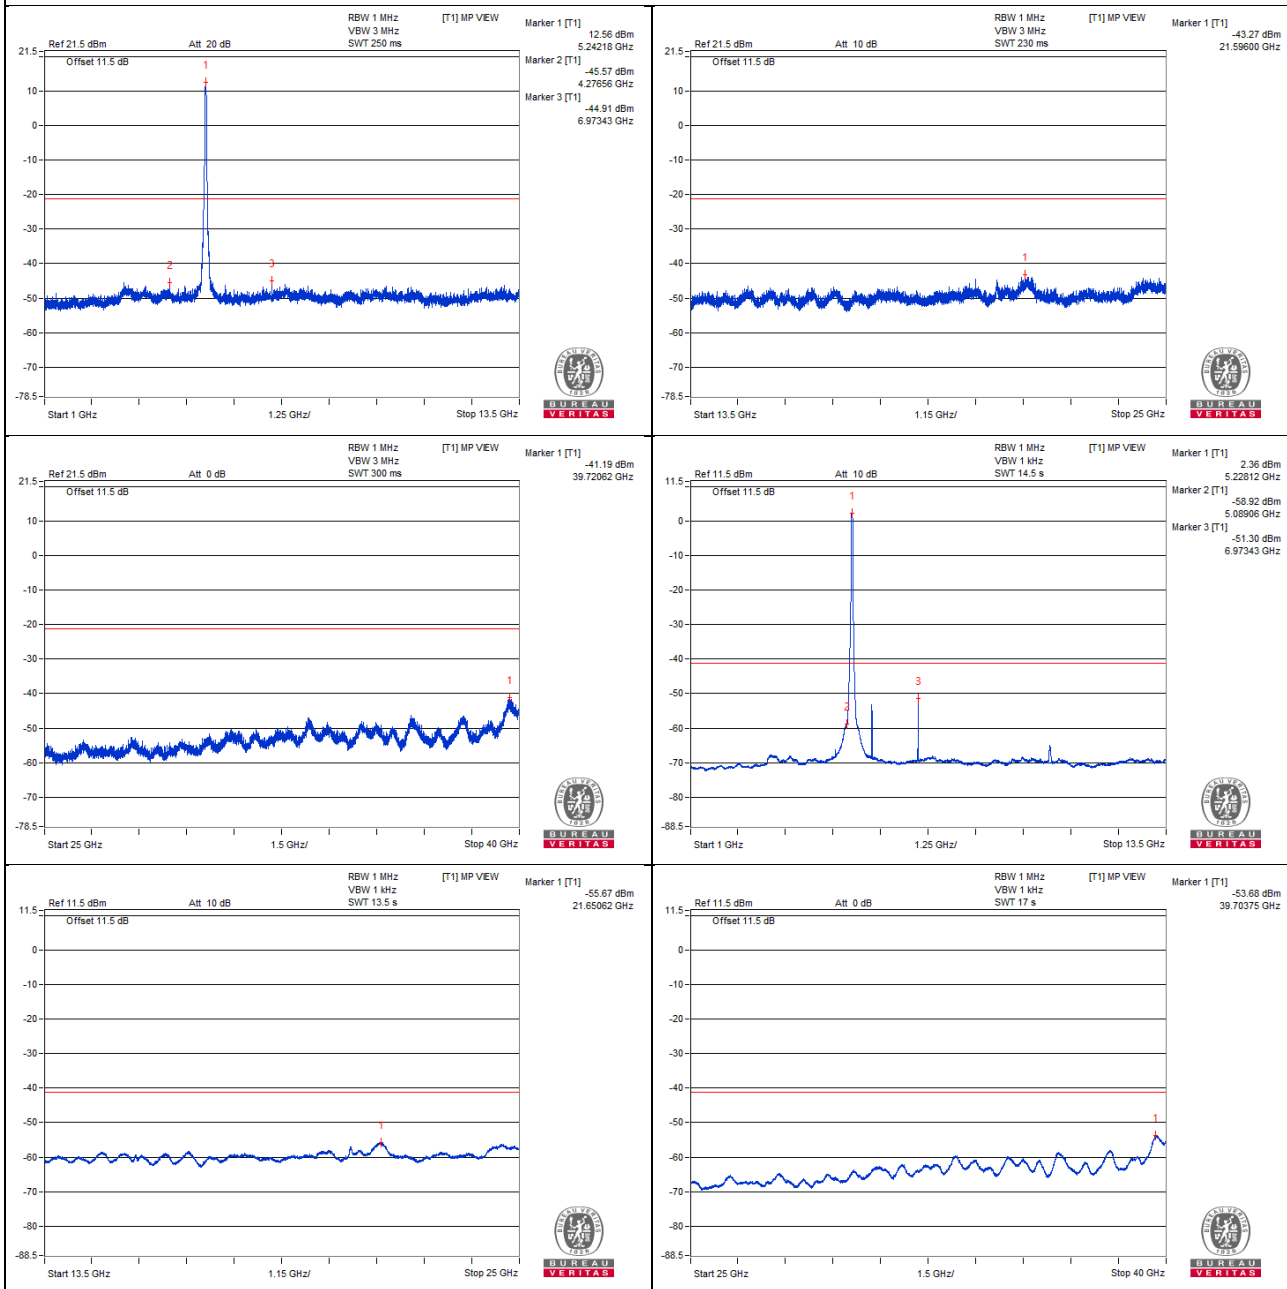

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.1 PK	68.25	74	-5.75	-35.55	-36.75	6.09	-27.01
2	5149.8 AV	51.43	54	-2.57	-52.86	-53.01	6.09	-43.83

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

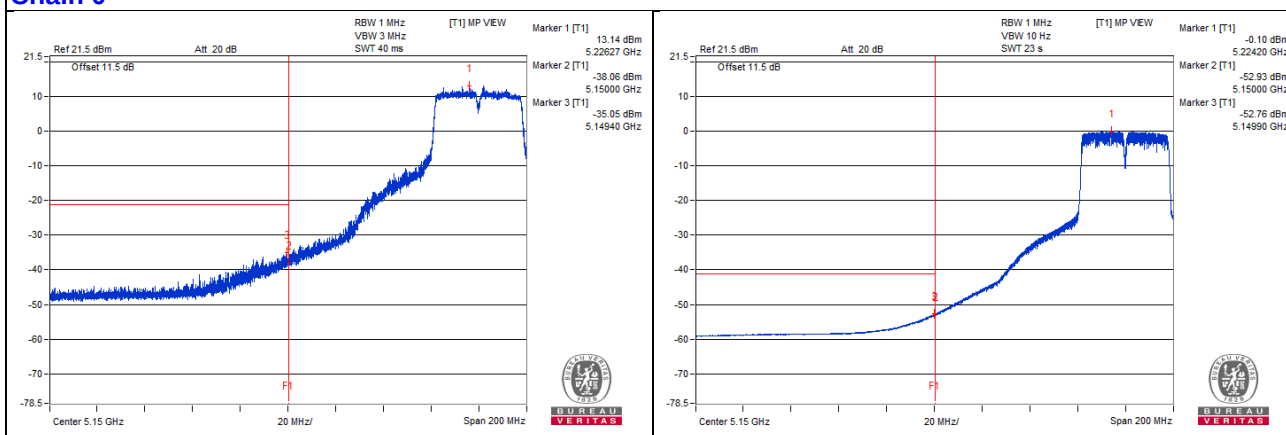

Chain 1

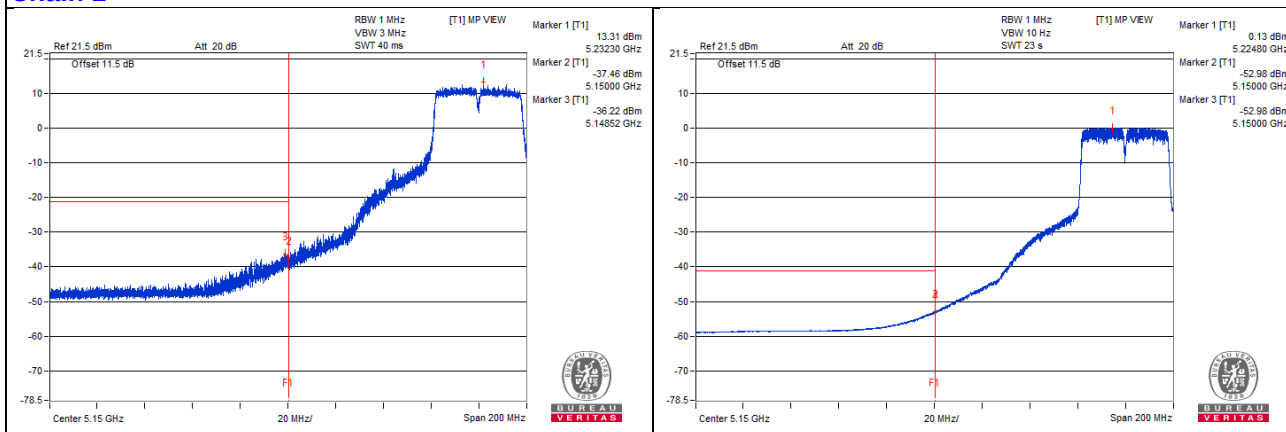

802.11ac (VHT40) - Channel 54

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3523.43 PK	55.76	74	-18.24	-48.73	-48.48	6.09	-39.5
2	3523.43 AV	35.46	54	-18.54	-68.76	-69.05	6.09	-59.8
3	7026.56 PK	57.41	68.2	-10.79	-47.85	-46.21	6.09	-37.85
4	10546.87 PK	55.63	68.2	-12.57	-48.22	-49.32	6.09	-39.63
5	15811.5 PK	56.83	74	-17.17	-46.43	-49.01	6.09	-38.43
6	15802.87 AV	45.8	54	-8.2	-58.57	-58.55	6.09	-49.46
7	5759.37 PK	57.67	68.2	-10.53	-45.77	-47.87	6.09	-37.59

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

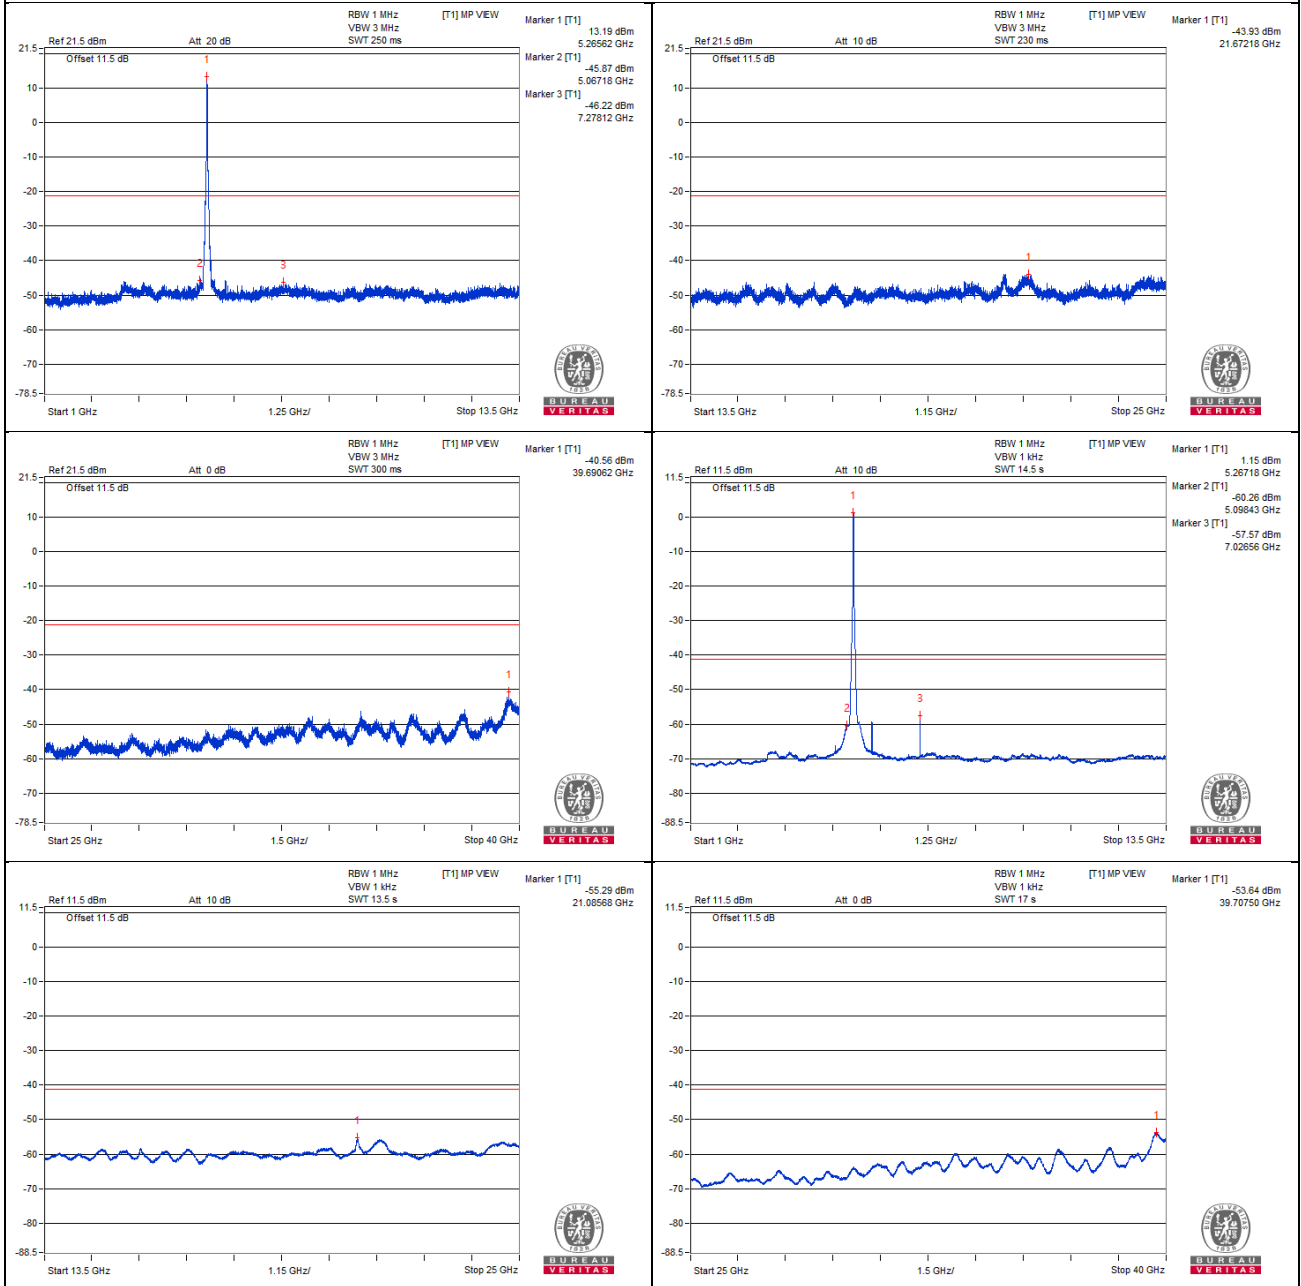

Chain 1

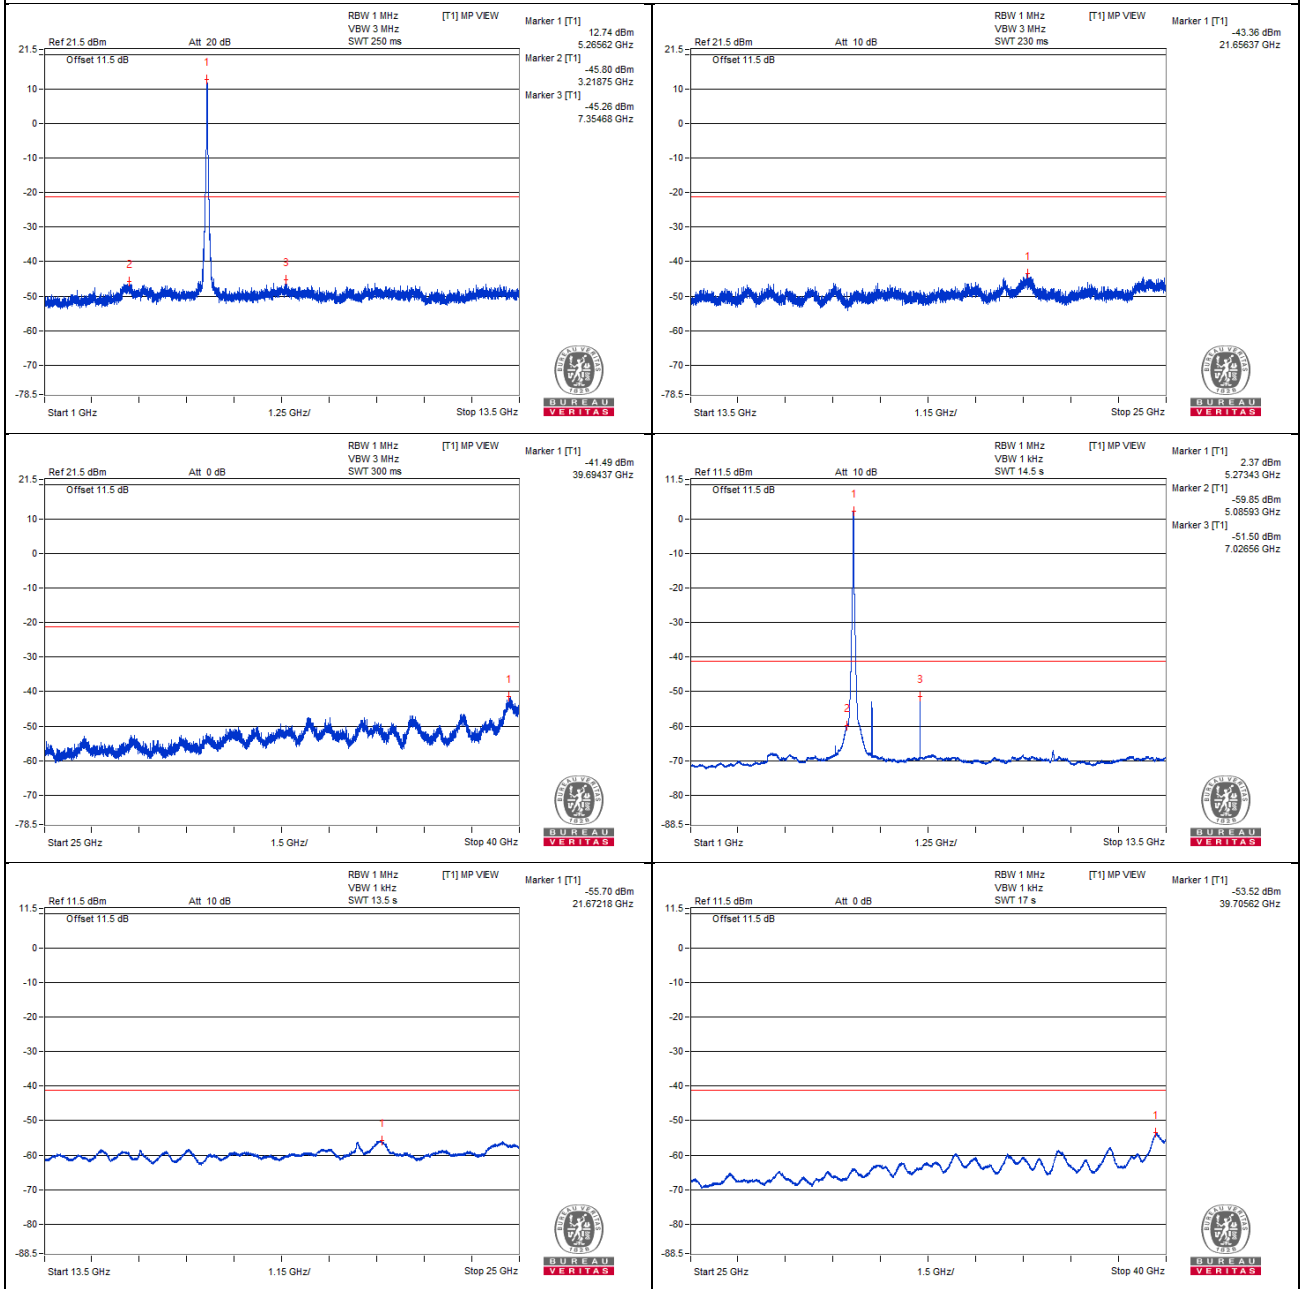

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.12 PK	69.43	74	-4.57	-35.26	-34.63	6.09	-25.83
2	5350.1 AV	51.24	54	-2.76	-52.92	-53.33	6.09	-44.02

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

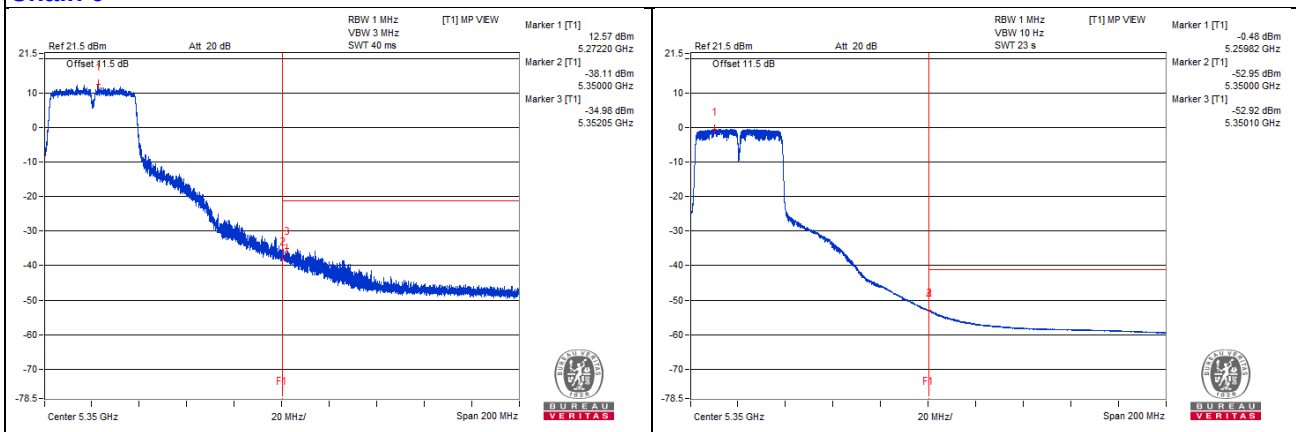

Chain 1

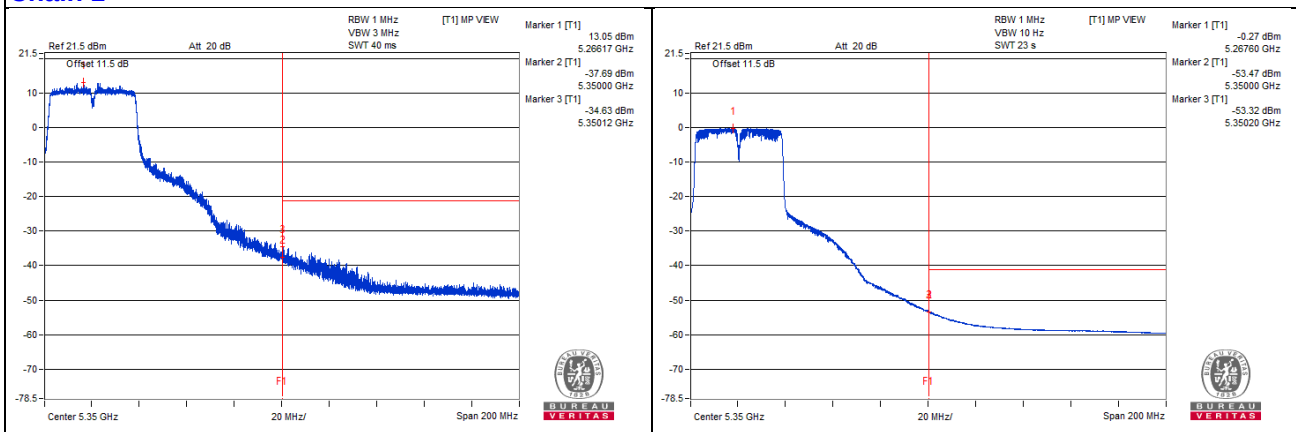

802.11ac (VHT40) - Channel 62

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3525 PK	57	74	-17	-47.82	-46.94	6.09	-38.26
2	3550 AV	35.75	54	-18.25	-68.66	-68.57	6.09	-59.51
3	7079.68 PK	57.9	68.2	-10.3	-47.97	-45.34	6.09	-37.36
4	10628.12 PK	55.75	74	-18.25	-47.76	-49.68	6.09	-39.51
5	10610.93 AV	34.86	54	-19.14	-69.53	-69.47	6.09	-60.4
6	15932.25 PK	55.69	74	-18.31	-47.63	-50.04	6.09	-39.57
7	15912.12 AV	44.04	54	-9.96	-60.2	-60.44	6.09	-51.22
8	5759.37 PK	58.17	68.2	-10.03	-45.96	-46.44	6.09	-37.09

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

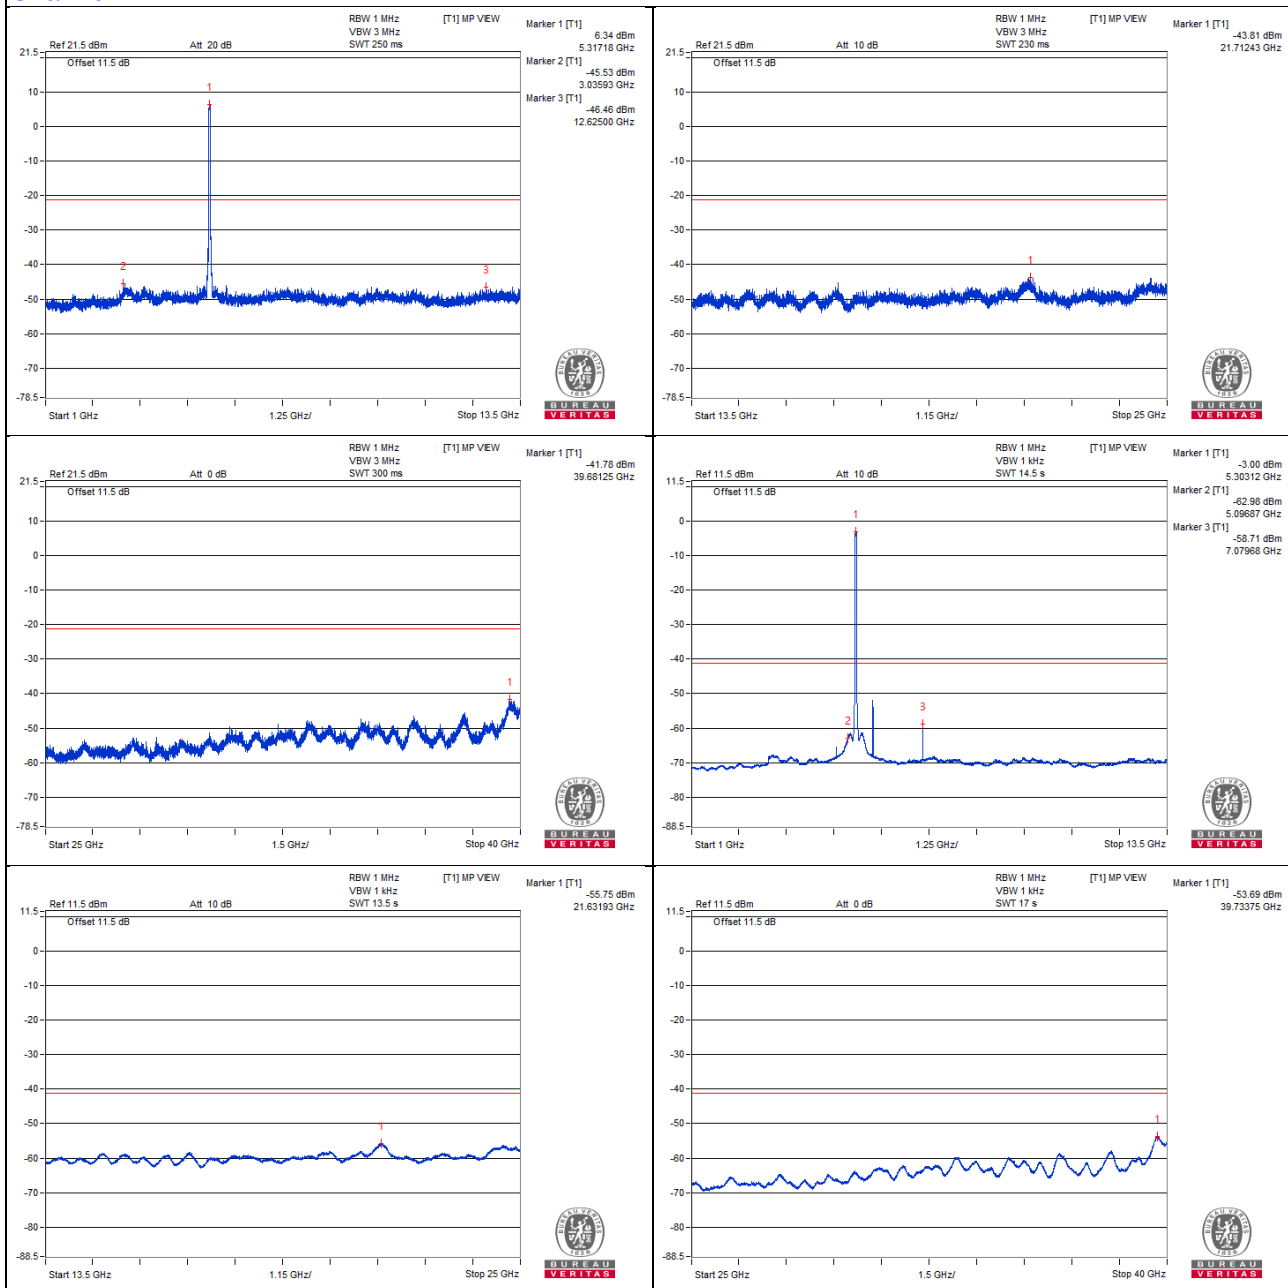

Chain 1

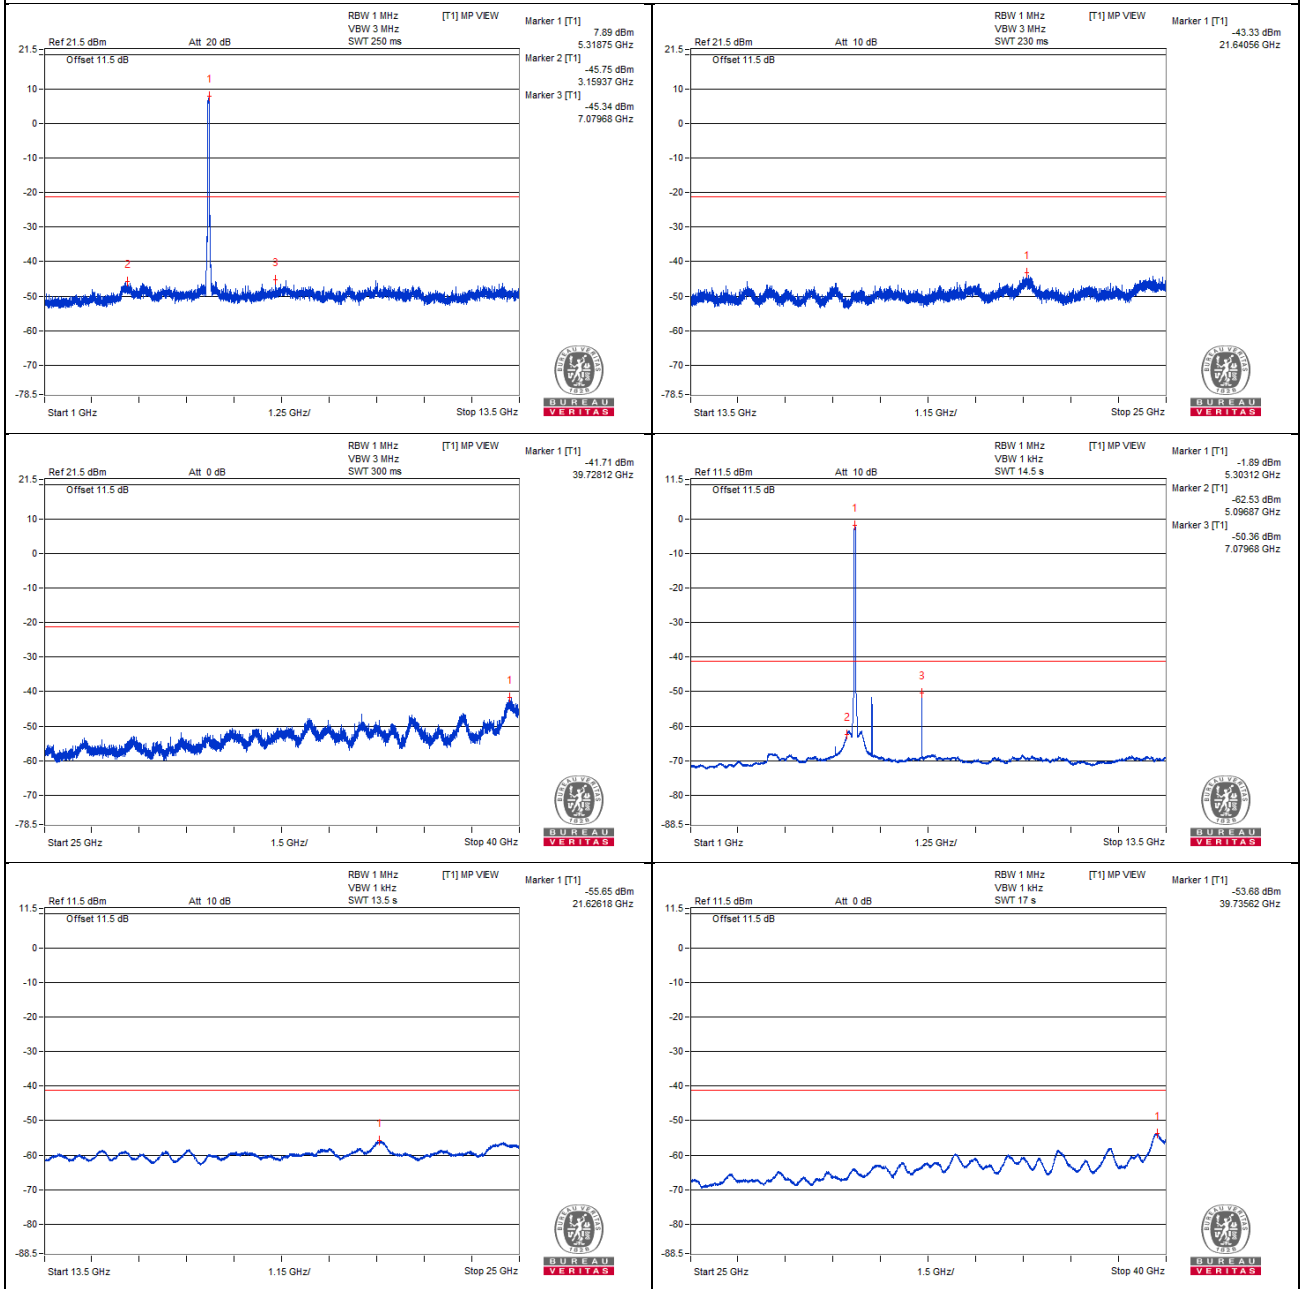

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5351.2 PK	73.69	74	*-0.31	-32.79	-29.25	6.09	-21.57
2	5350 AV	49.59	54	-4.41	-55.88	-53.88	6.09	-45.67


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

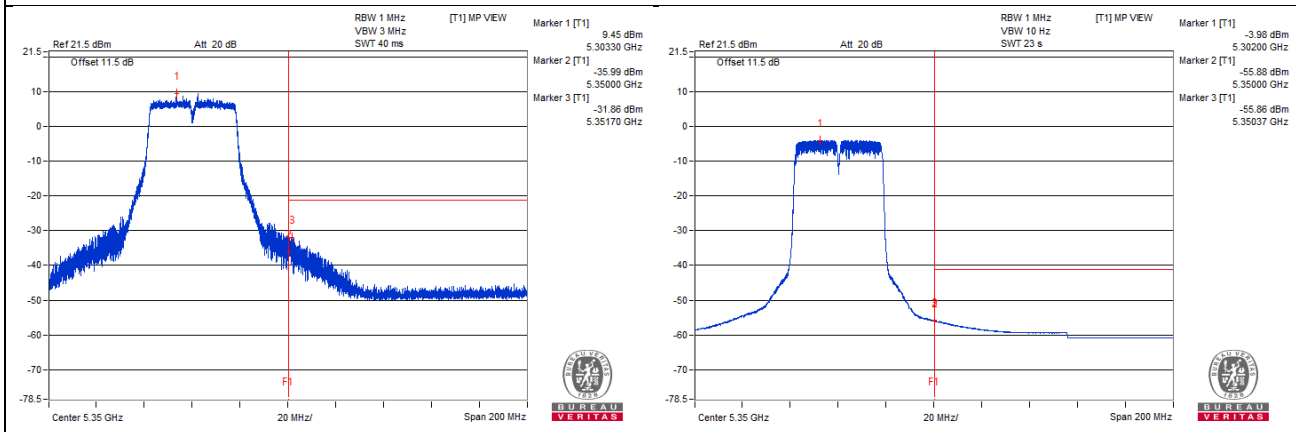

Chain 1

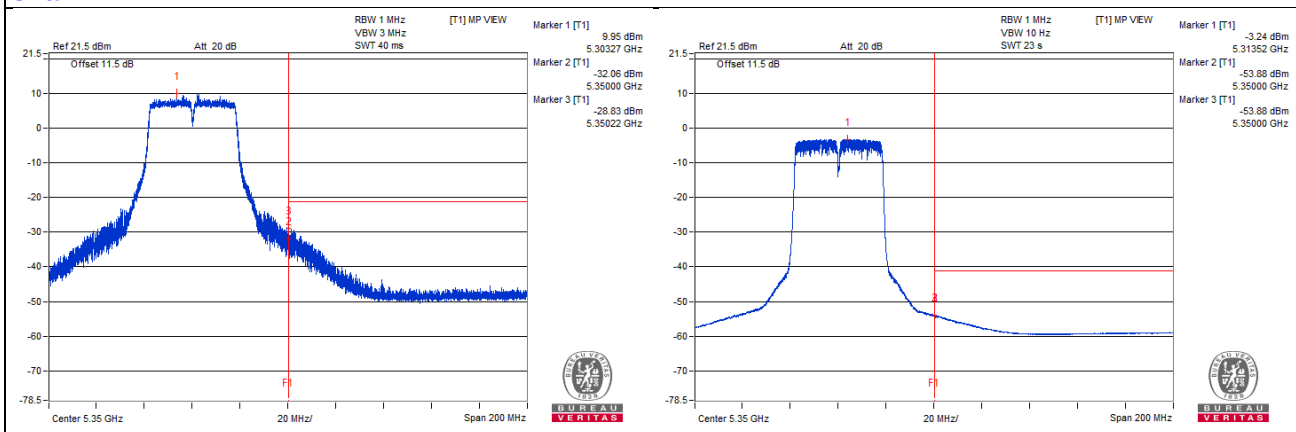

802.11ac (VHT40) - Channel 102

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3673.43 PK	57.98	74	-16.02	-47.52	-48.68	7.77	-37.28
2	3657.81 AV	37.13	54	-16.87	-68.88	-68.95	7.77	-58.13
3	7346.87 PK	59.78	74	-14.22	-46.75	-45.82	7.77	-35.48
4	7346.87 AV	51.03	54	-2.97	-57.54	-53.42	7.77	-44.23
5	11039.06 PK	56.02	74	-17.98	-50	-50.05	7.77	-39.24
6	11035.93 AV	35.28	54	-18.72	-70.86	-70.67	7.77	-59.98
7	16548.93 PK	57.39	68.2	-10.81	-49.37	-48.03	7.77	-37.87
8	5759.37 PK	57.62	68.2	-10.58	-49.55	-47.53	7.77	-37.64

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

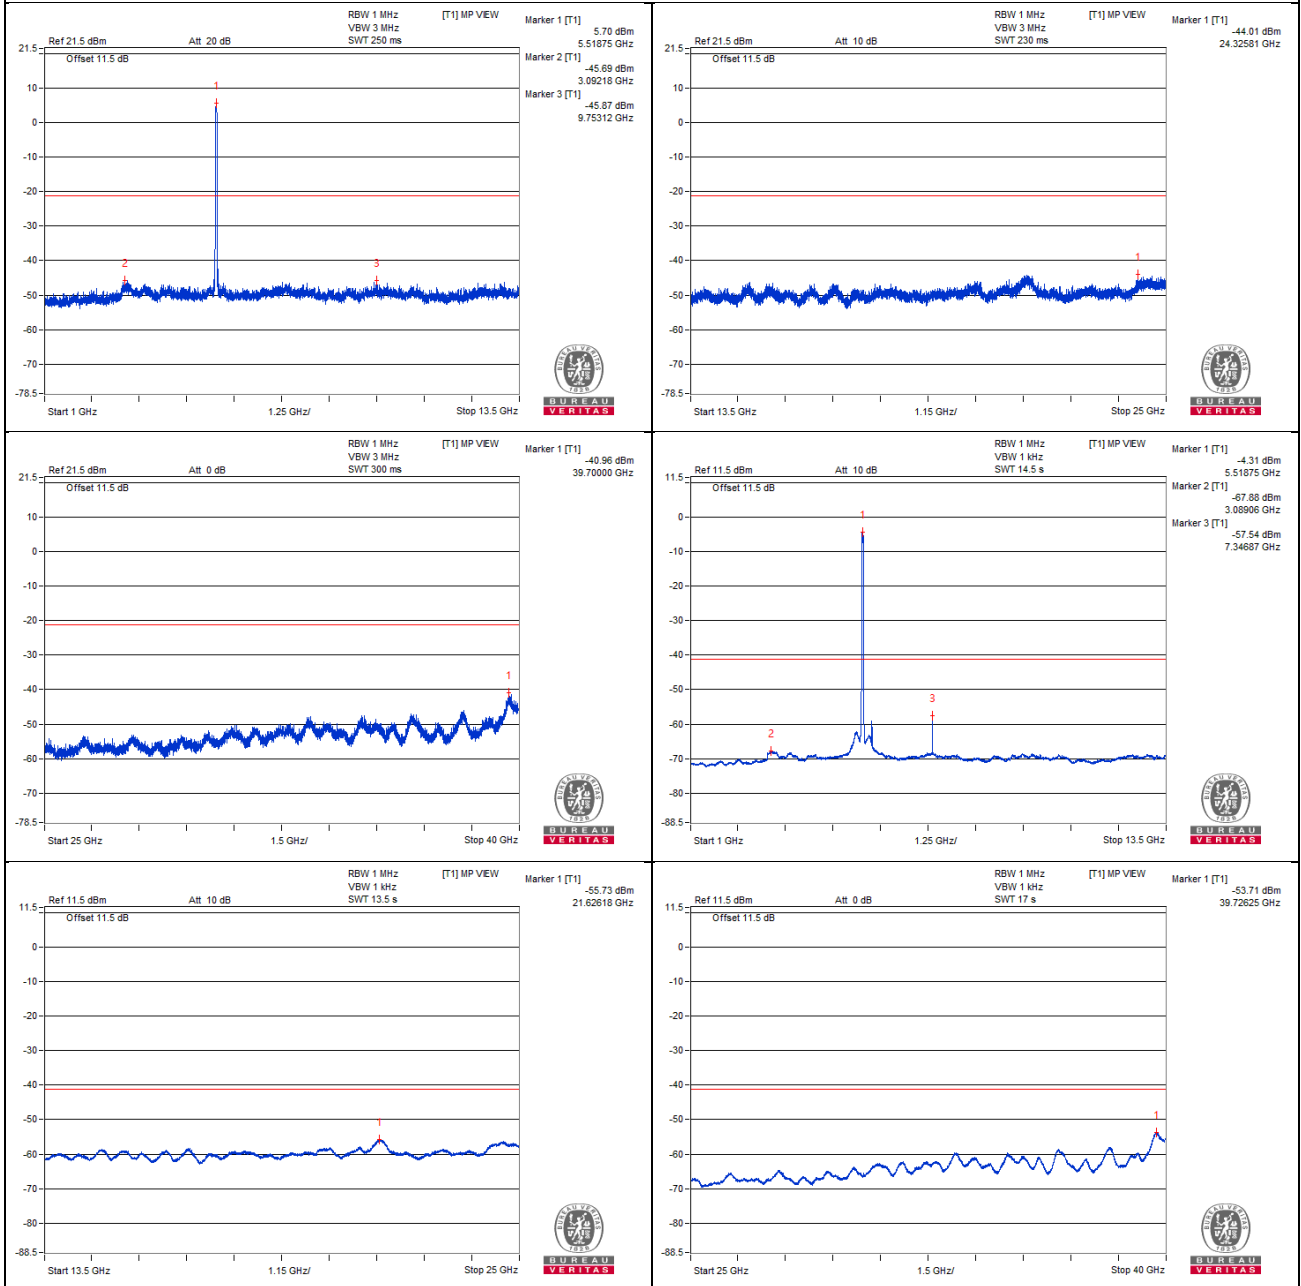

Chain 1

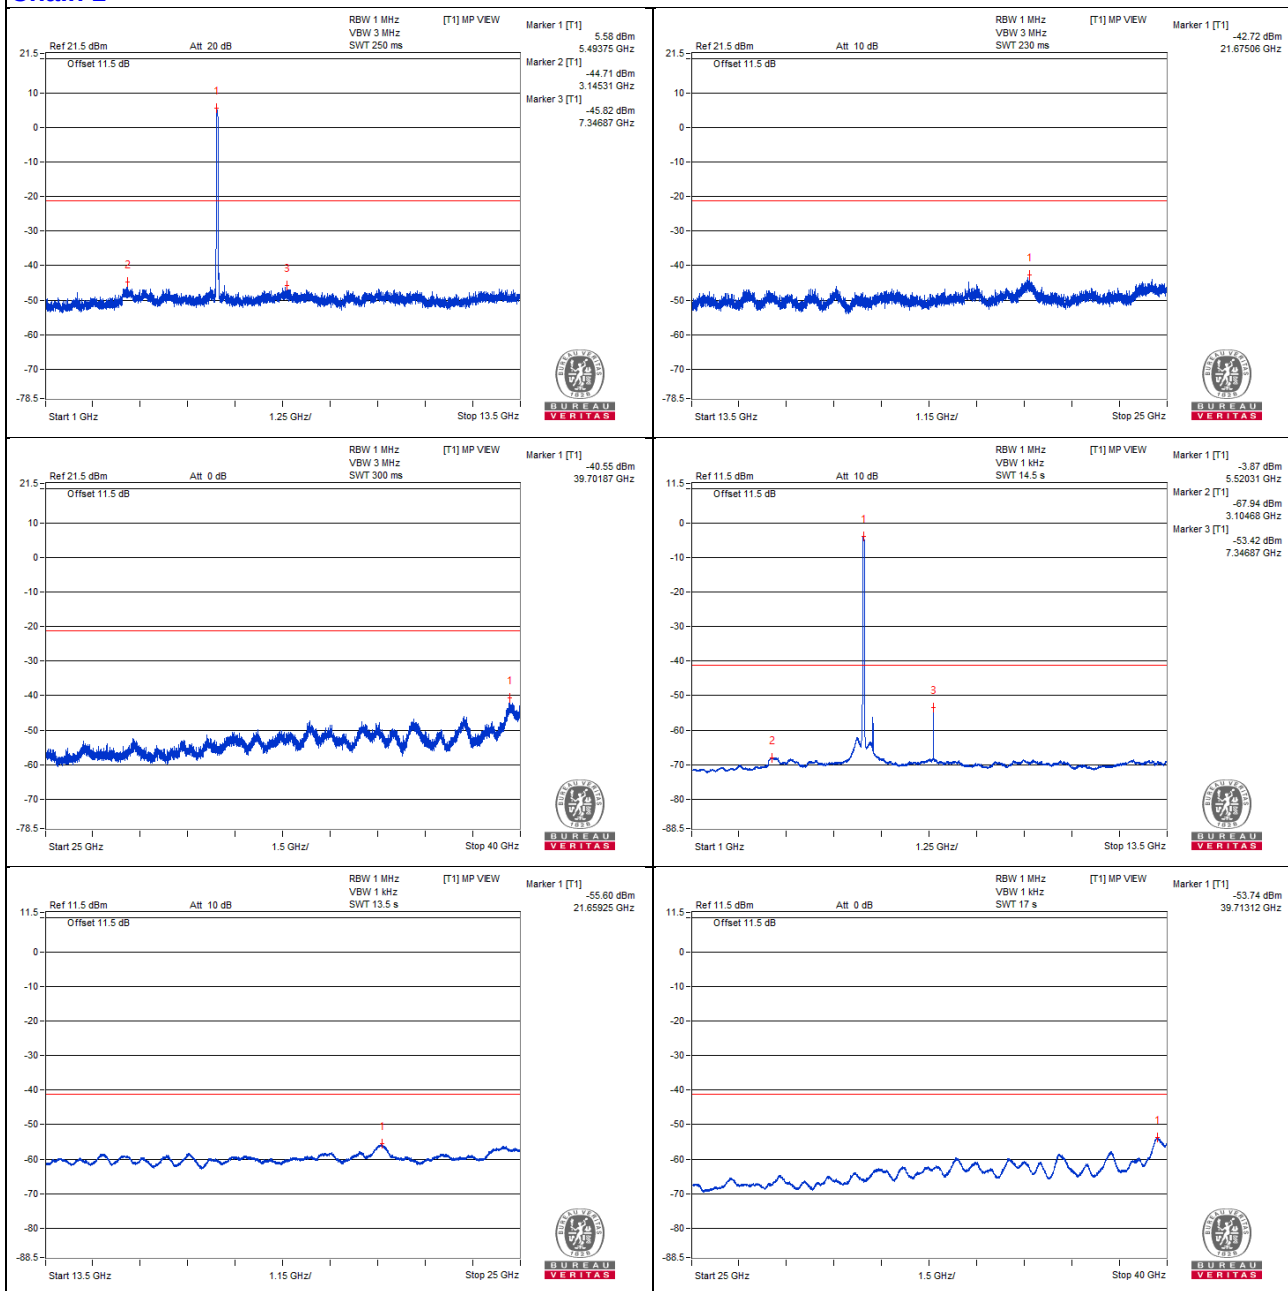

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5459.03 PK	65.67	74	-8.33	-40.03	-40.73	7.77	-29.59
2	5459.81 AV	47.23	54	-6.77	-58.52	-59.13	7.77	-48.03
3	5468.9 PK	70.67	68.2	* 2.47	-34.66	-36.21	7.77	-24.59


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

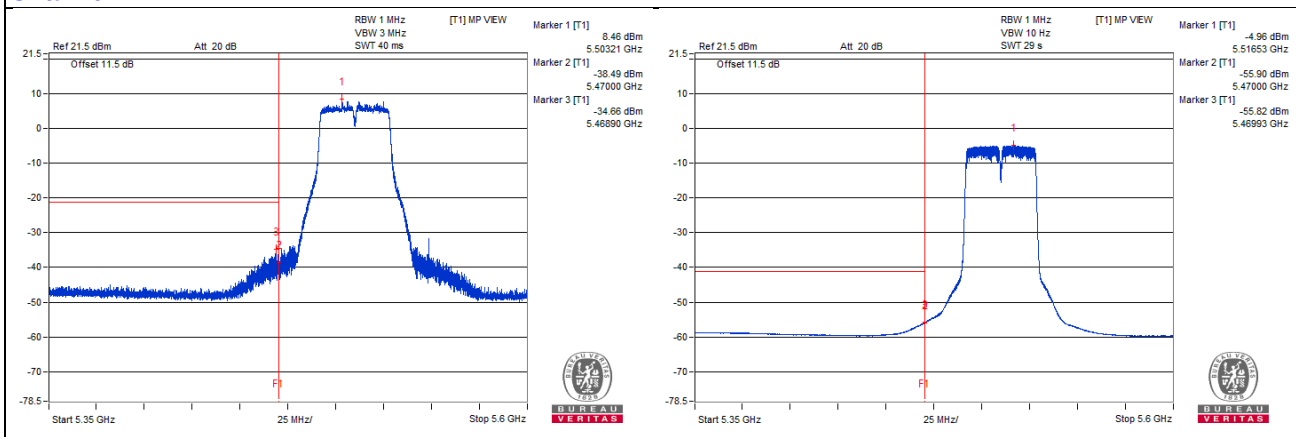

Chain 1

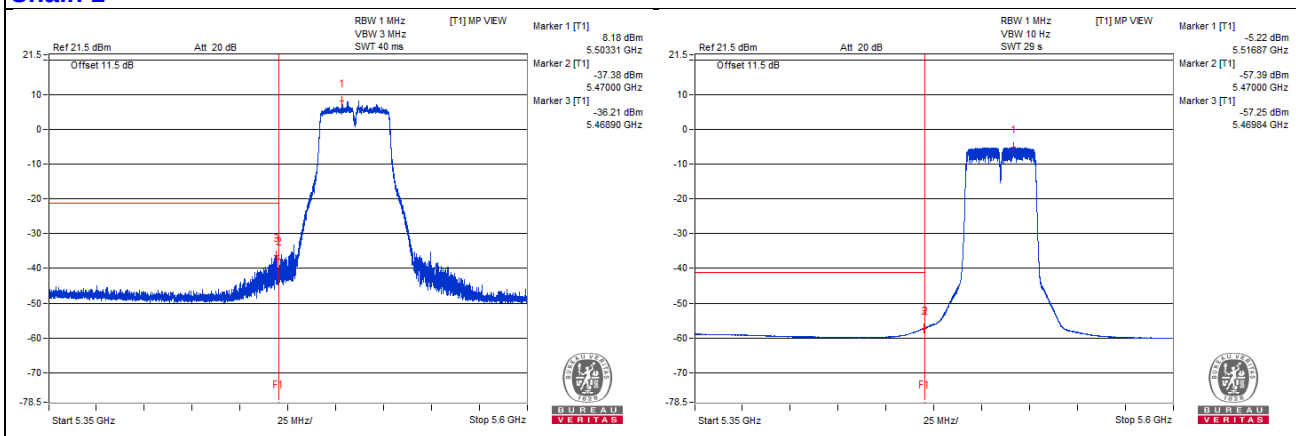

802.11ac (VHT40) - Channel 110

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3684.37 PK	57.81	74	-16.19	-47.68	-48.86	7.77	-37.45
2	3689.06 AV	36.9	54	-17.1	-69.21	-69.07	7.77	-58.36
3	7400 PK	58.85	74	-15.15	-47.55	-46.86	7.77	-36.41
4	7400 AV	48.83	54	-5.17	-57.95	-56.58	7.77	-46.43
5	11089.06 PK	55.83	74	-18.17	-50.61	-49.84	7.77	-39.43
6	11109.37 AV	35.21	54	-18.79	-70.78	-70.89	7.77	-60.05
7	16653.87 PK	64.86	68.2	-3.34	-42.54	-40.14	7.77	-30.4
8	5759.37 PK	59.55	68.2	-8.65	-46.25	-46.74	7.77	-35.71

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

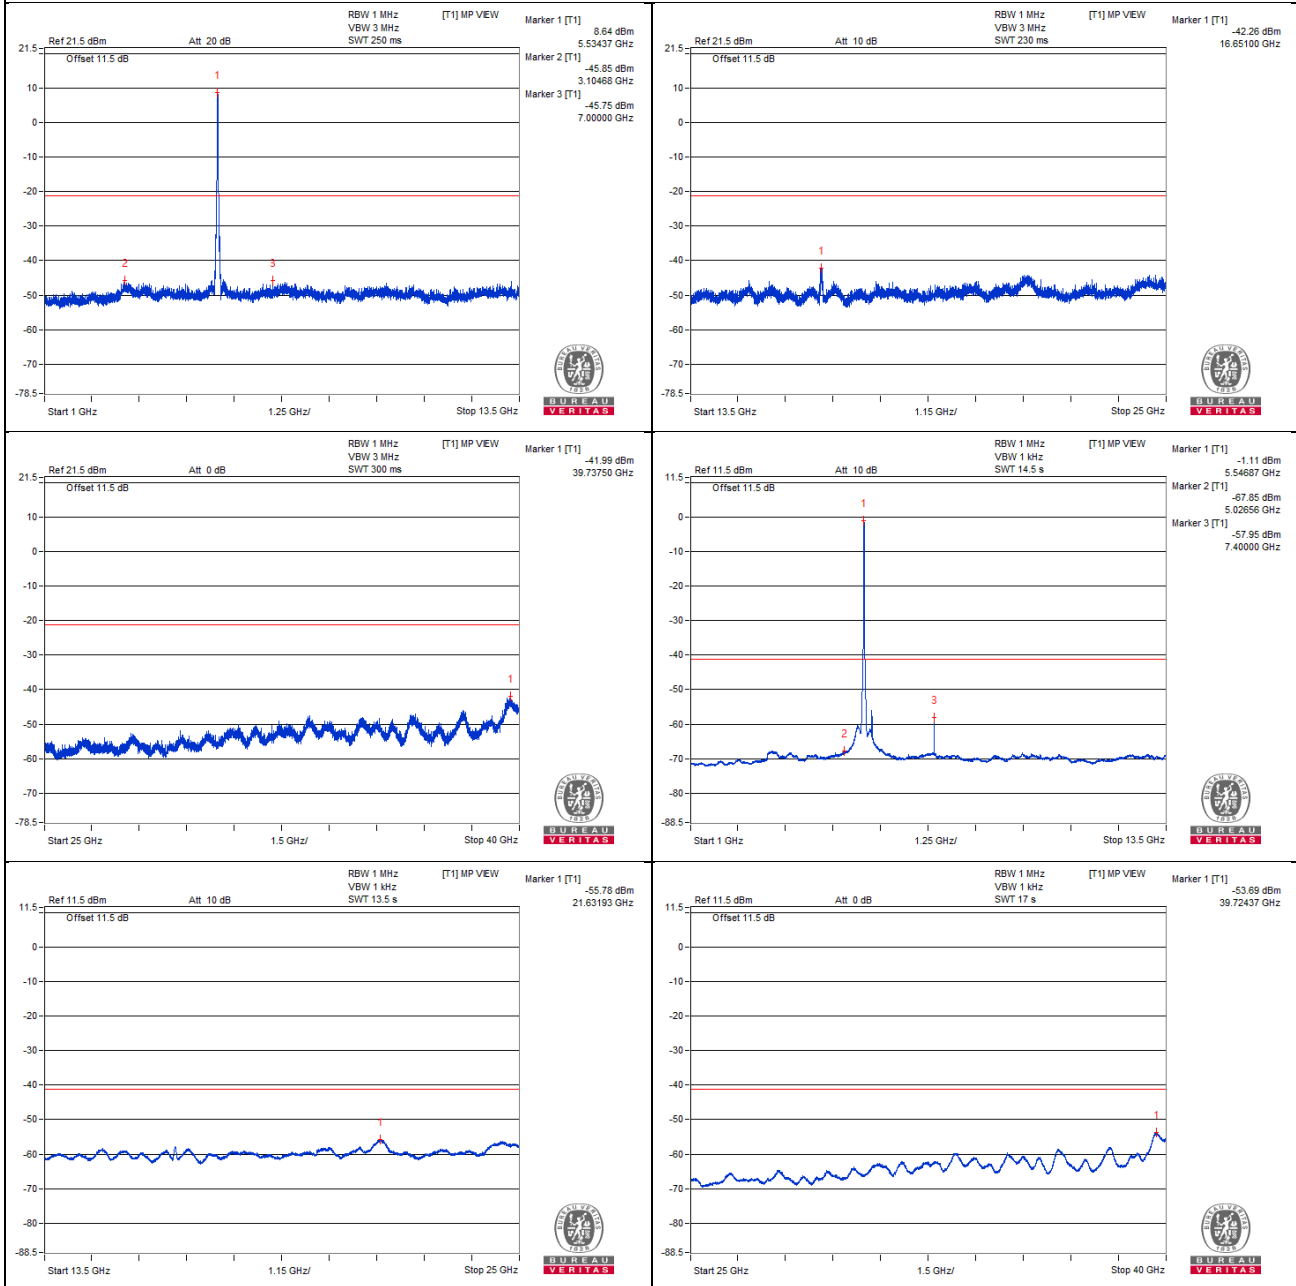

Chain 1

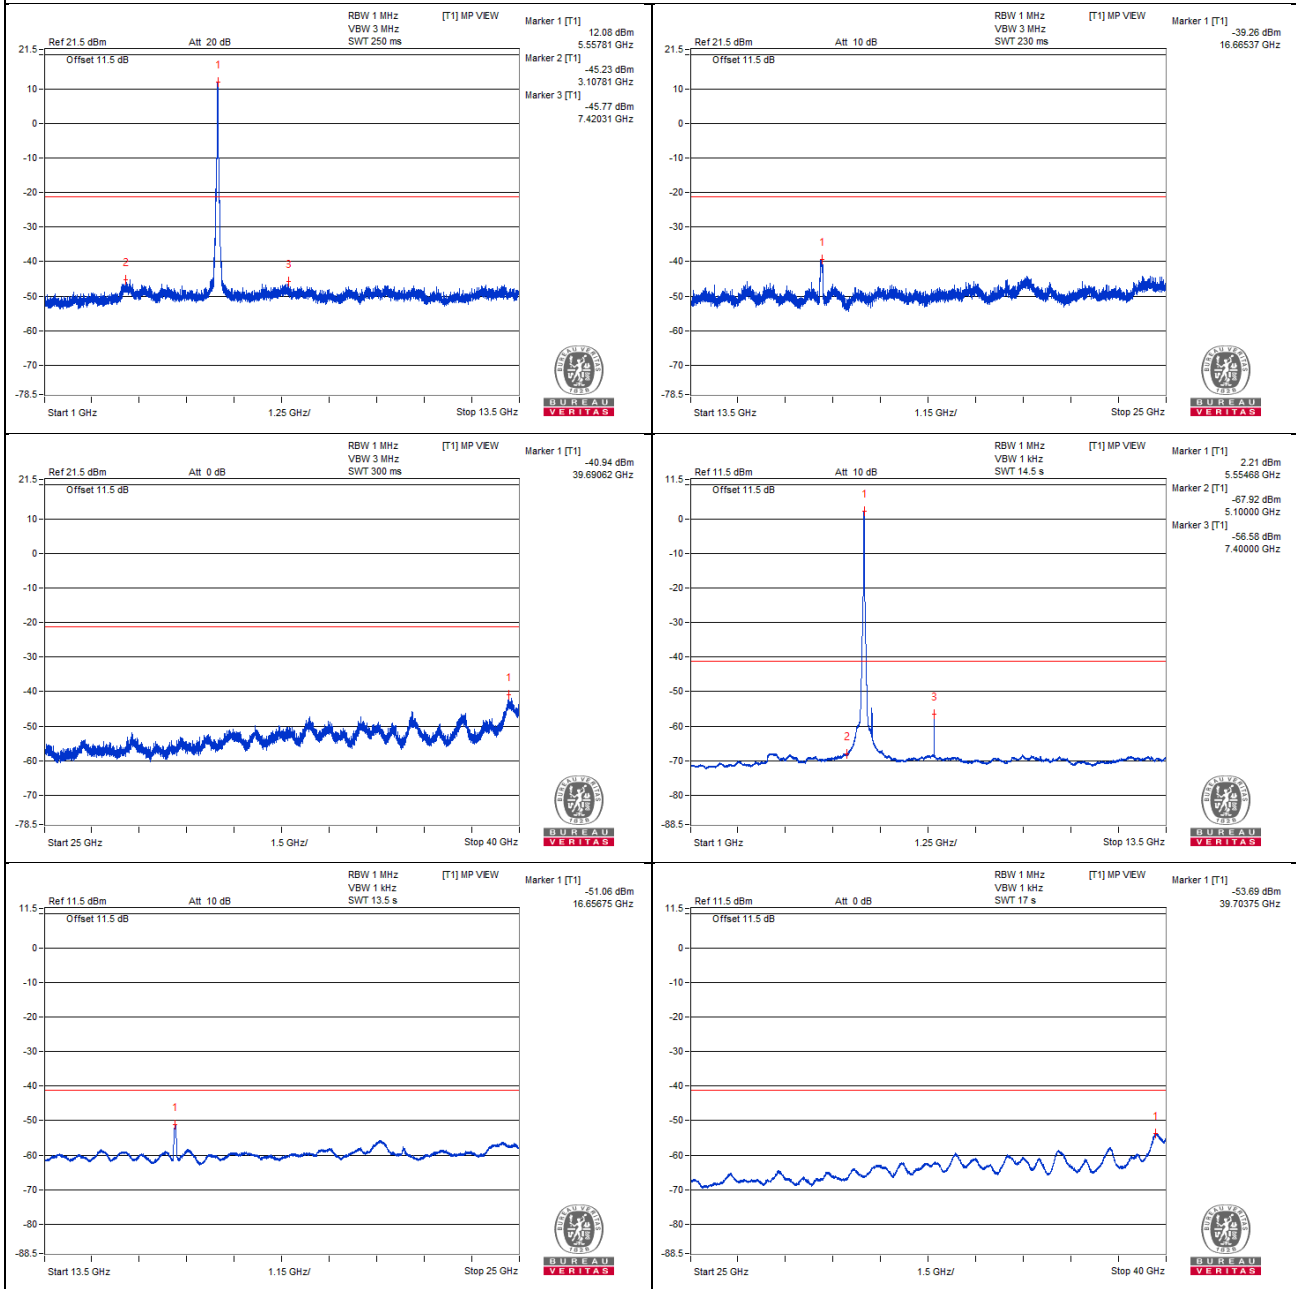

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5458.9 PK	66.44	74	-7.56	-38.63	-40.84	7.77	-28.82
2	5459.75 AV	48.5	54	-5.5	-57.38	-57.71	7.77	-46.76
3	5469.59 PK	68.29	68.2	* 0.09	-36.94	-38.74	7.77	-26.97


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

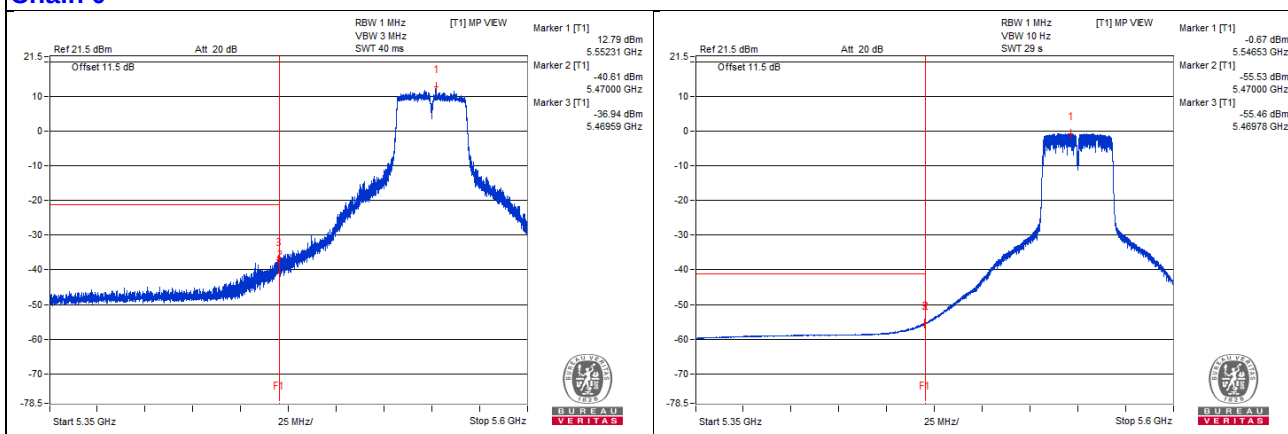

Chain 1

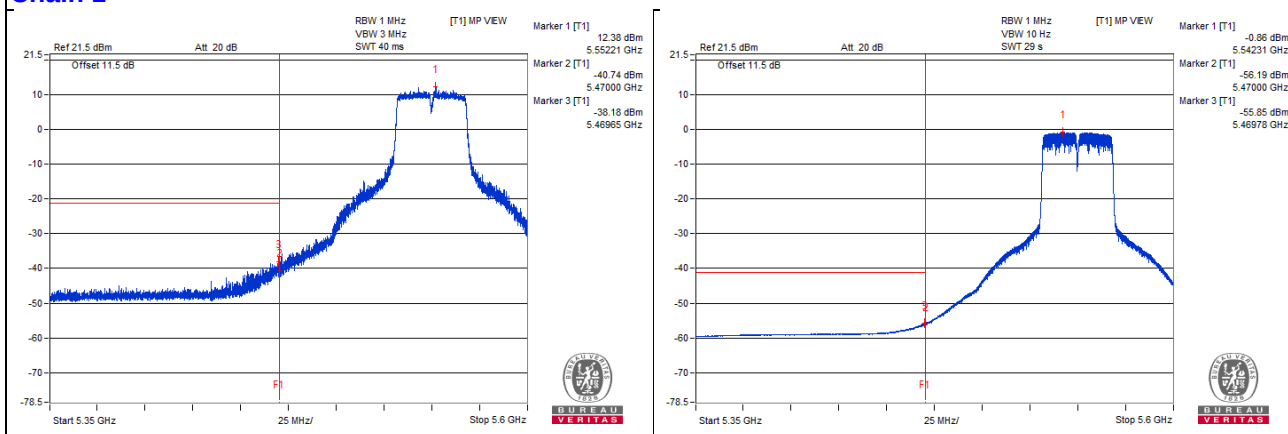

802.11ac (VHT40) - Channel 134

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3789.06 PK	57.92	74	-16.08	-48.34	-47.92	7.77	-37.34
2	3760.93 AV	36.92	54	-17.08	-69.15	-69.1	7.77	-58.34
3	7540.62 PK	58.2	74	-15.8	-48.12	-47.58	7.77	-37.06
4	7559.37 AV	45.5	54	-8.5	-61.06	-60.07	7.77	-49.76
5	11328.12 PK	57.15	74	-16.85	-50.46	-47.74	7.77	-38.11
6	11337.5 AV	36.1	54	-17.9	-70.02	-69.86	7.77	-59.16
7	17003.18 PK	64.66	68.2	-3.54	-39.73	-44.07	7.77	-30.6
8	5740.62 PK	64.18	68.2	-4.02	-42.75	-41.13	7.77	-31.08

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

