


## Chain 1

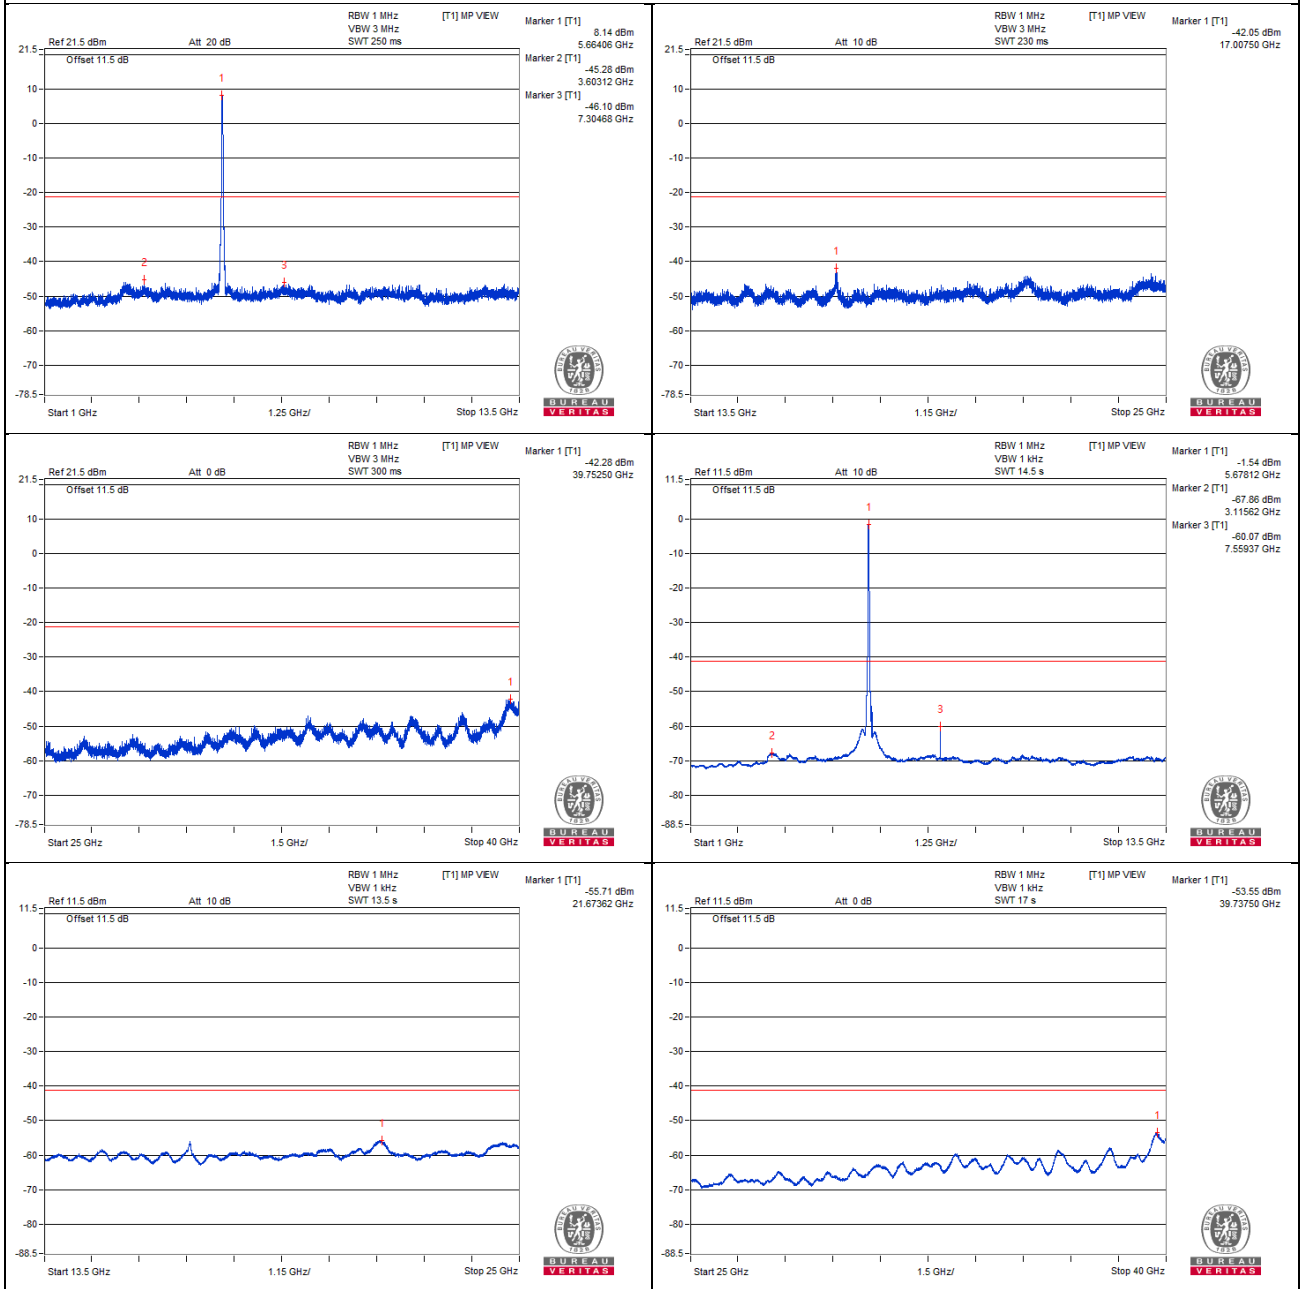

## Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5726.92 PK      | 71.29                   | 68.2           | * 3.09      | -35.04          | -34.48 | 7.77                   | -23.97           |


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement.  
(Please refer APPENDIX B)

## Chain 0

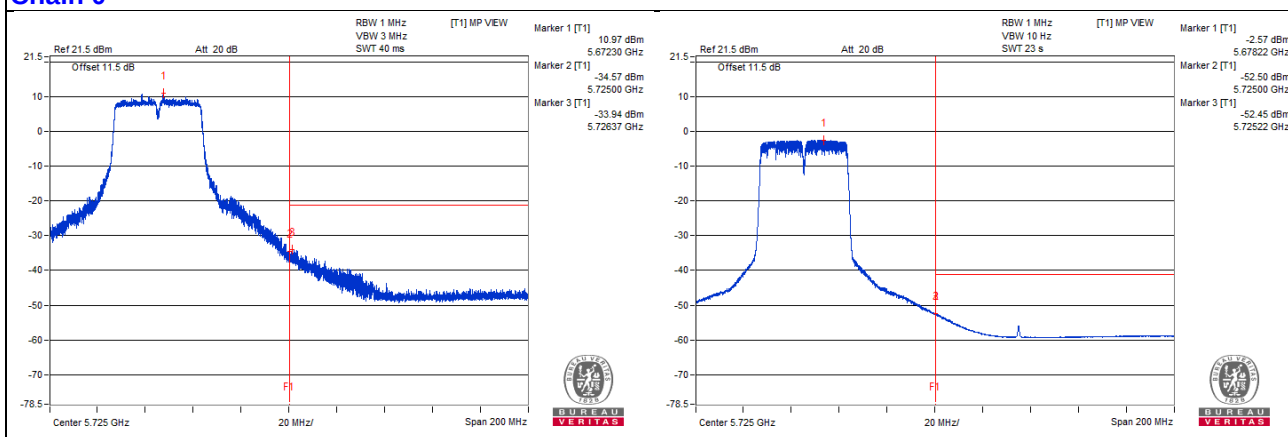

## Chain 1

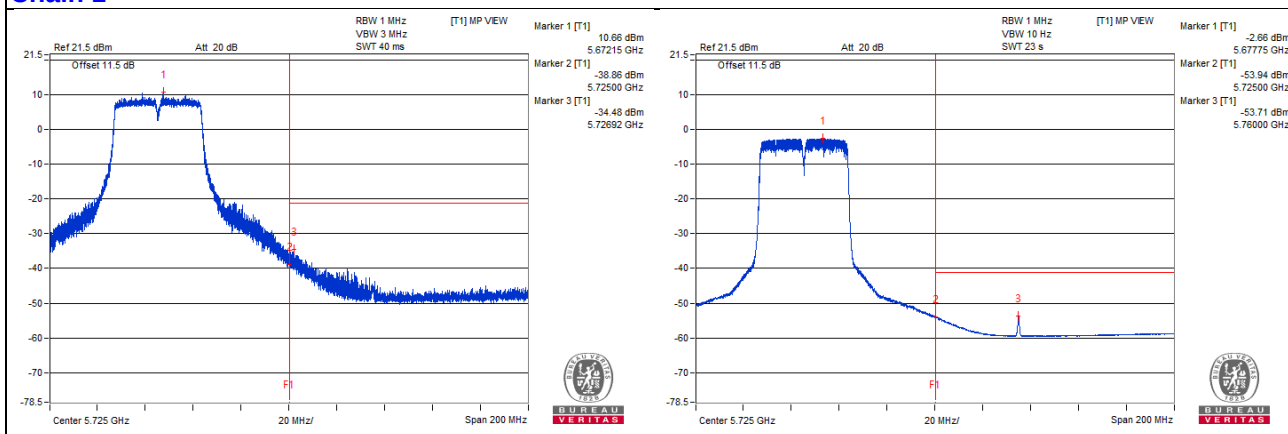

## 802.11ac (VHT40) - Channel 142

**Conducted spurious emission table**


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3800 PK         | 57.5                    | 74             | -16.5       | -48.49          | -48.59 | 7.77                   | -37.76           |
| 2   | 3790.62 AV      | 36.62                   | 54             | -17.38      | -69.32          | -69.53 | 7.77                   | -58.64           |
| 3   | 7614.06 PK      | 58.05                   | 74             | -15.95      | -46.89          | -49.47 | 7.77                   | -37.21           |
| 4   | 7614.06 AV      | 43.42                   | 54             | -10.58      | -62.39          | -62.86 | 7.77                   | -51.84           |
| 5   | 11425 PK        | 56.23                   | 74             | -17.77      | -51.7           | -48.5  | 7.77                   | -39.03           |
| 6   | 11421.87 AV     | 36.83                   | 54             | -17.17      | -69.32          | -69.1  | 7.77                   | -58.43           |
| 7   | 17132.56 PK     | 62.96                   | 68.2           | -5.24       | -43.54          | -42.67 | 7.77                   | -32.3            |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

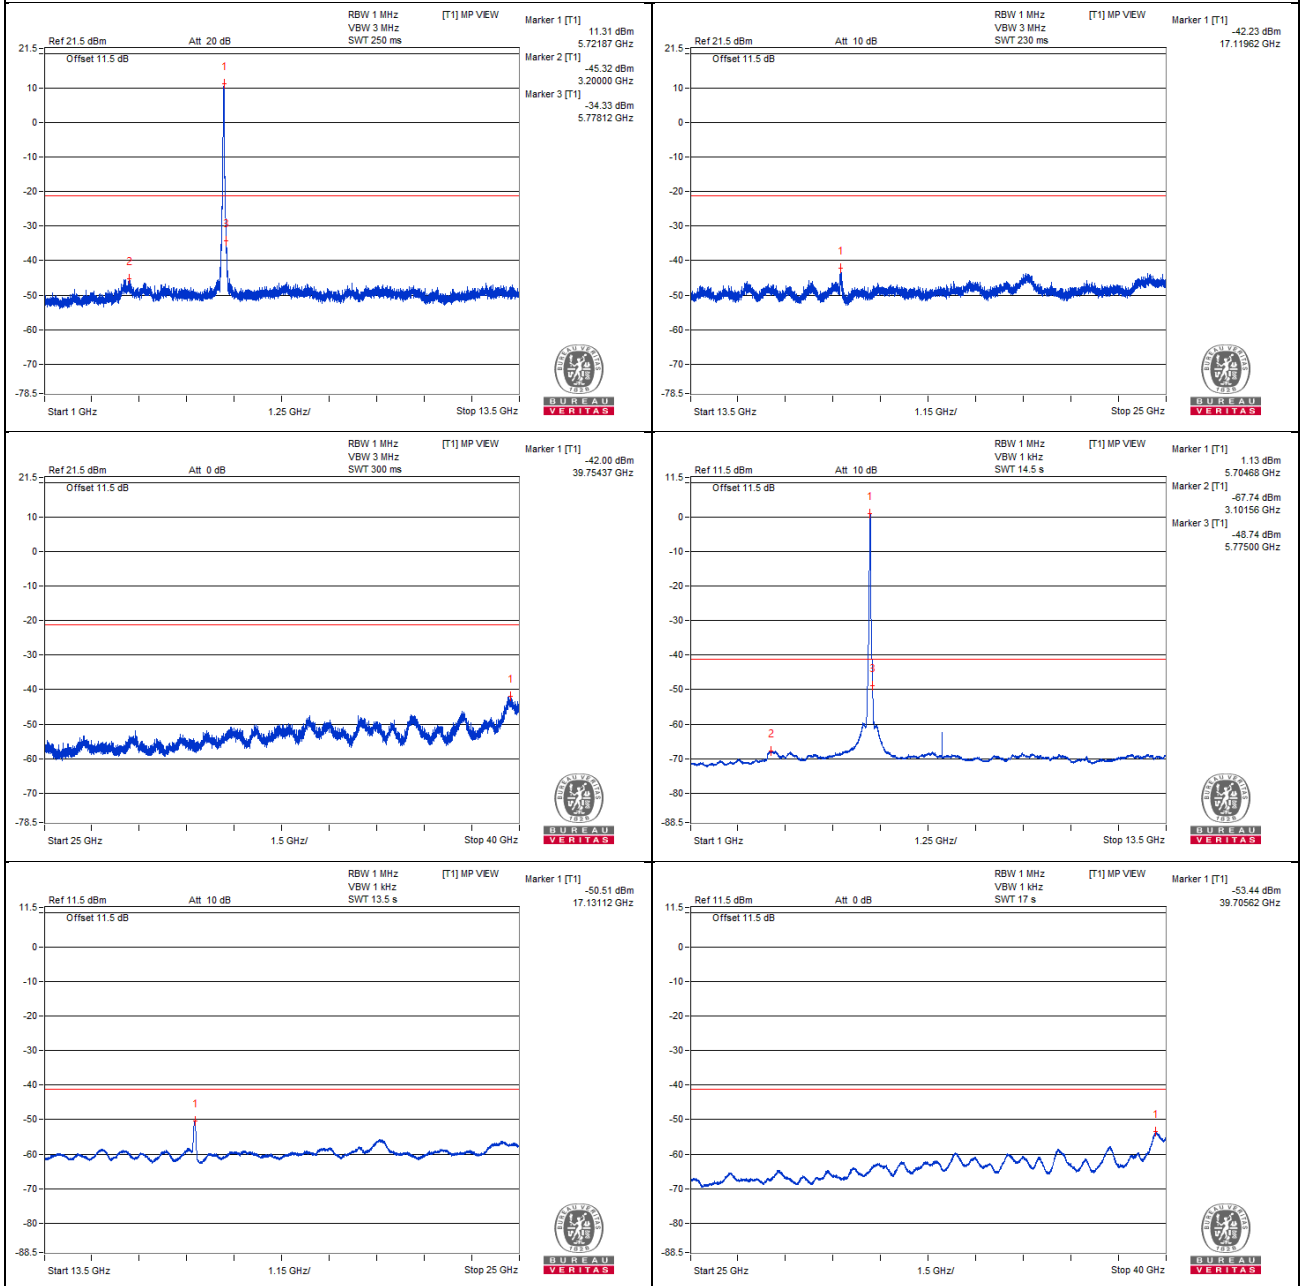

## Chain 1

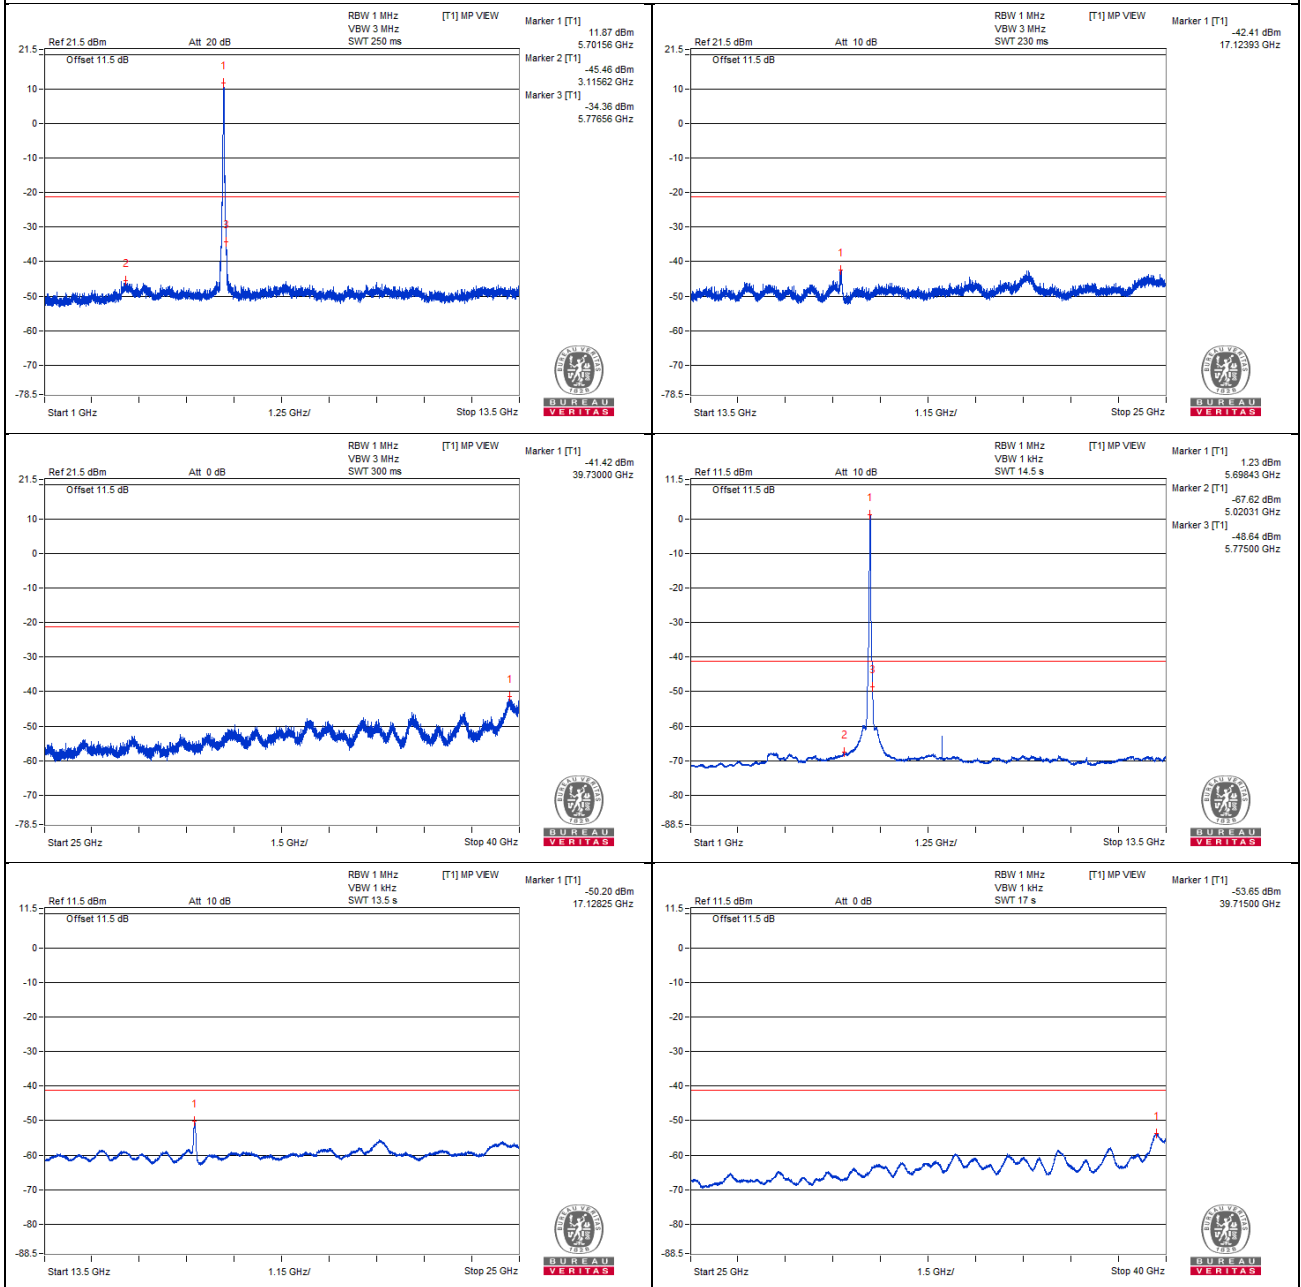

### Bandedge table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5856.25 PK      | 60.27                   | 68.2           | -7.93       | -46.11          | -45.45 | 7.77                   | -34.99           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

### Chain 0

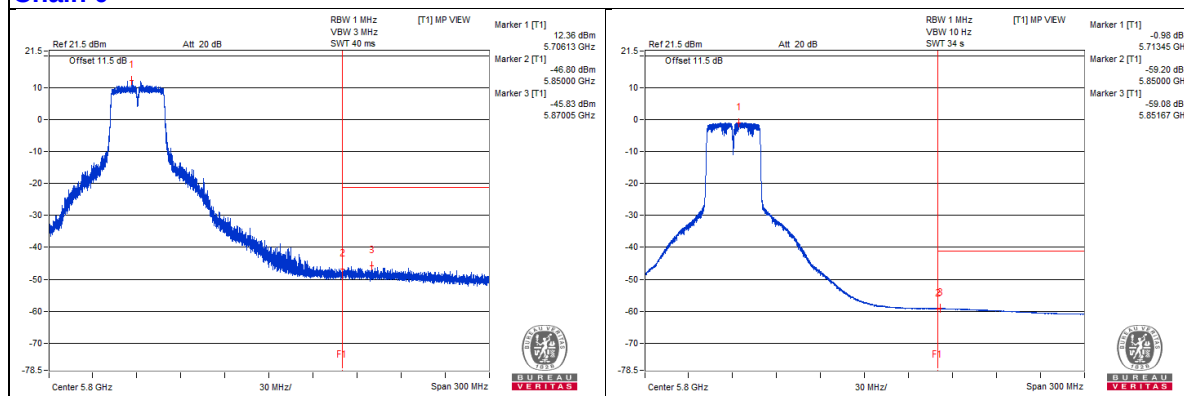

### Chain 1

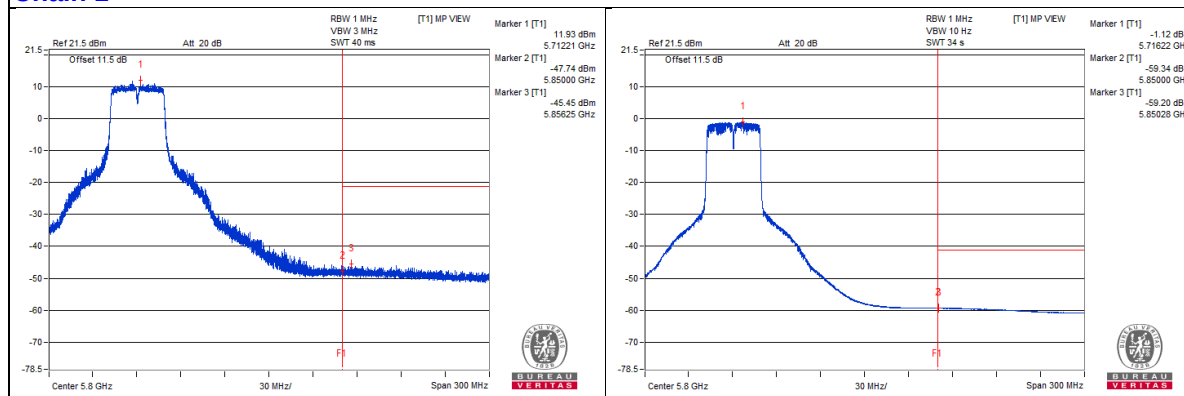

### 802.11ac (VHT40) – Channel 151

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3854.68 PK      | 55.8                    | 74             | -18.2       | -50.01          | -50.48 | 7.77                   | -39.46           |
| 2   | 3845.31 AV      | 44.16                   | 54             | -9.84       | -61.91          | -61.85 | 7.77                   | -51.1            |
| 3   | 7687.5 PK       | 56.96                   | 74             | -17.04      | -49.1           | -49.06 | 7.77                   | -38.3            |
| 4   | 7673.43 AV      | 45.25                   | 54             | -8.75       | -60.67          | -60.91 | 7.77                   | -50.01           |
| 5   | 11520.31 PK     | 55.08                   | 74             | -18.92      | -51.56          | -50.43 | 7.77                   | -40.18           |
| 6   | 11520.31 AV     | 43.56                   | 54             | -10.44      | -62.33          | -62.64 | 7.77                   | -51.7            |
| 7   | 17263.37 PK     | 64.17                   | 68.2           | -4.03       | -40.74          | -43.41 | 7.77                   | -31.09           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

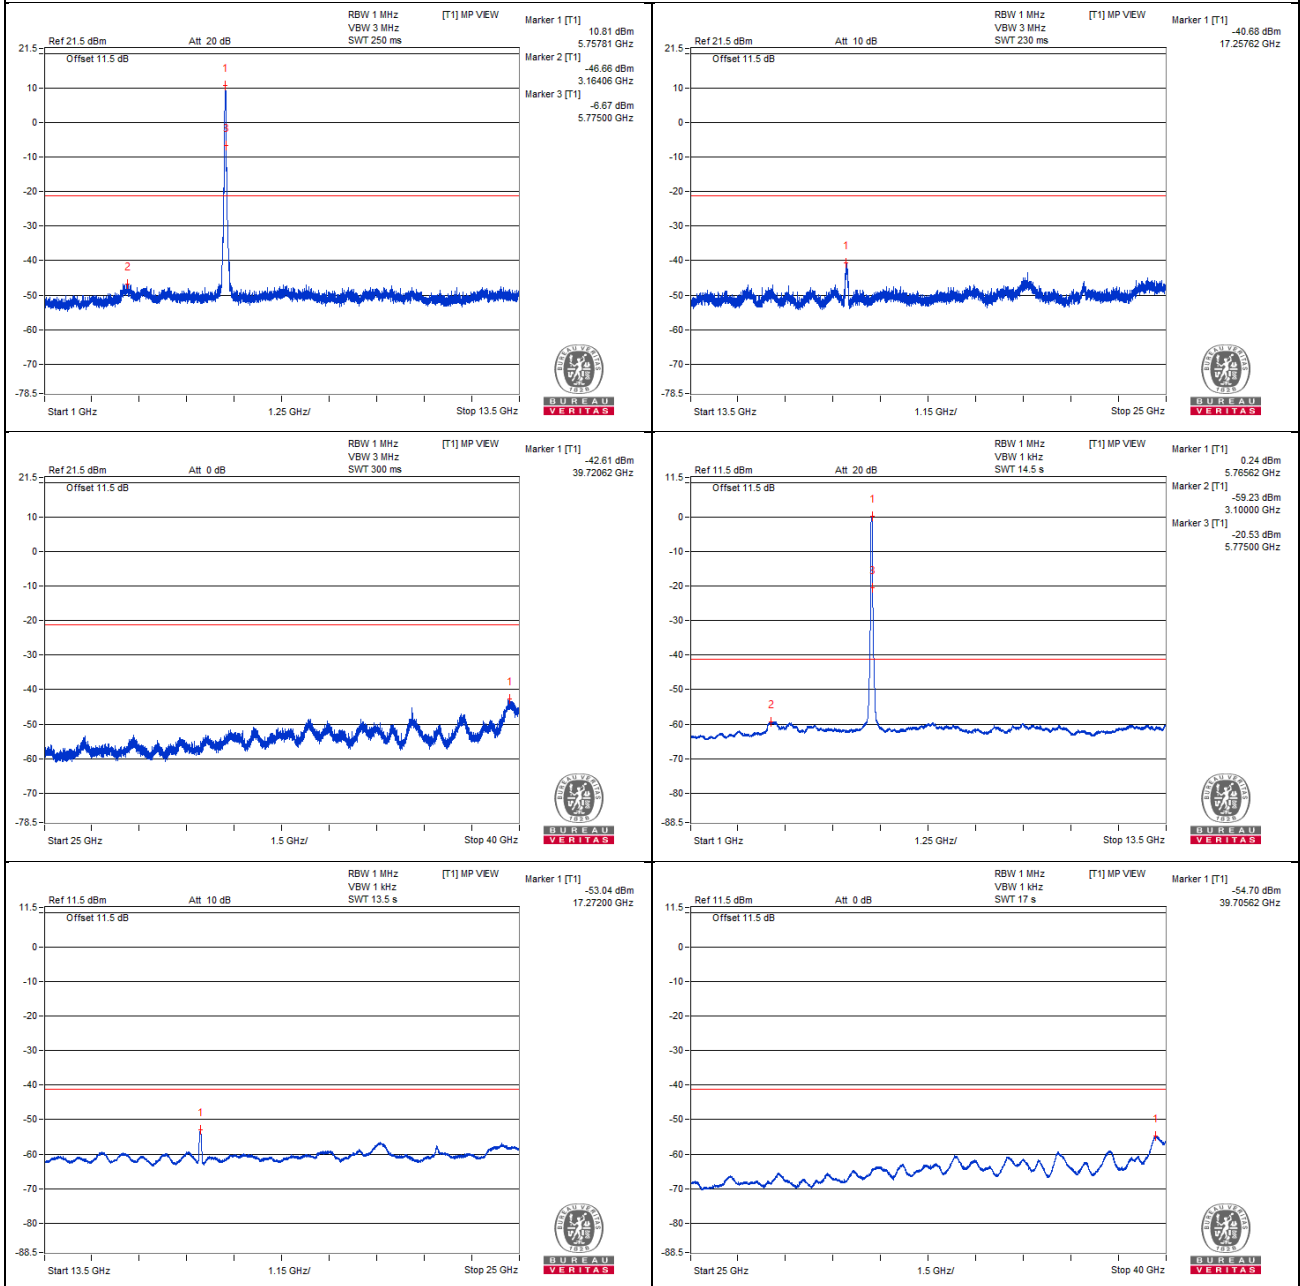


## Chain 1

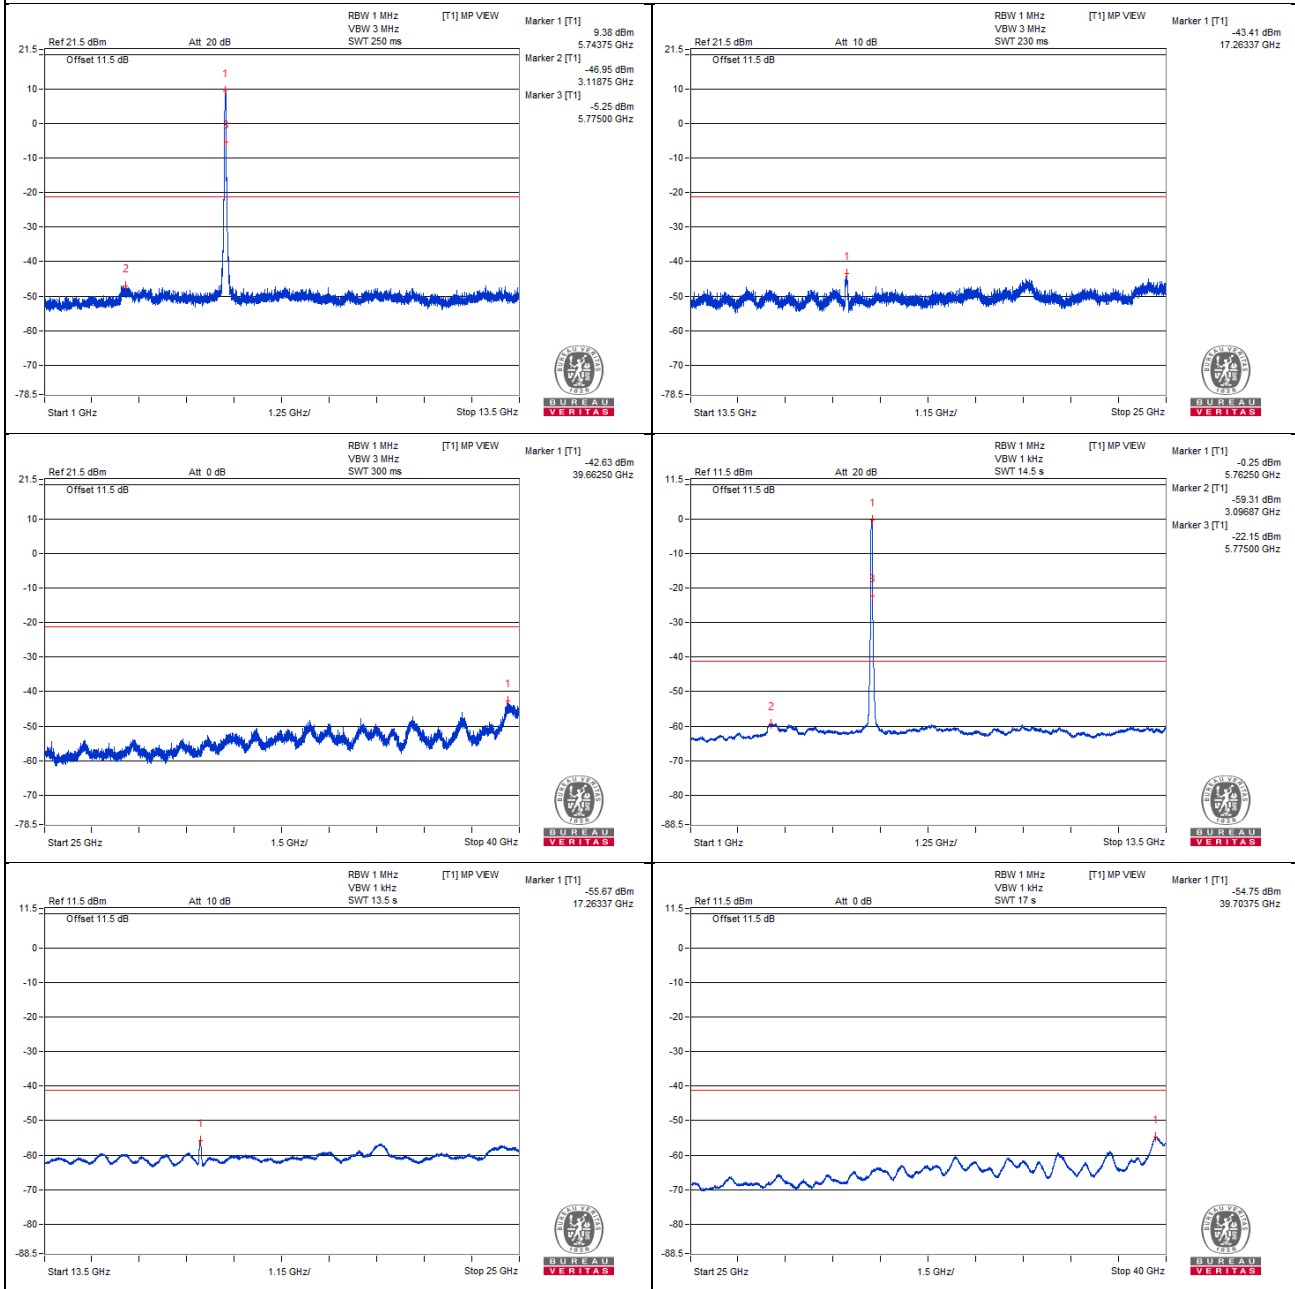


## Bandedge table

### Chain 0

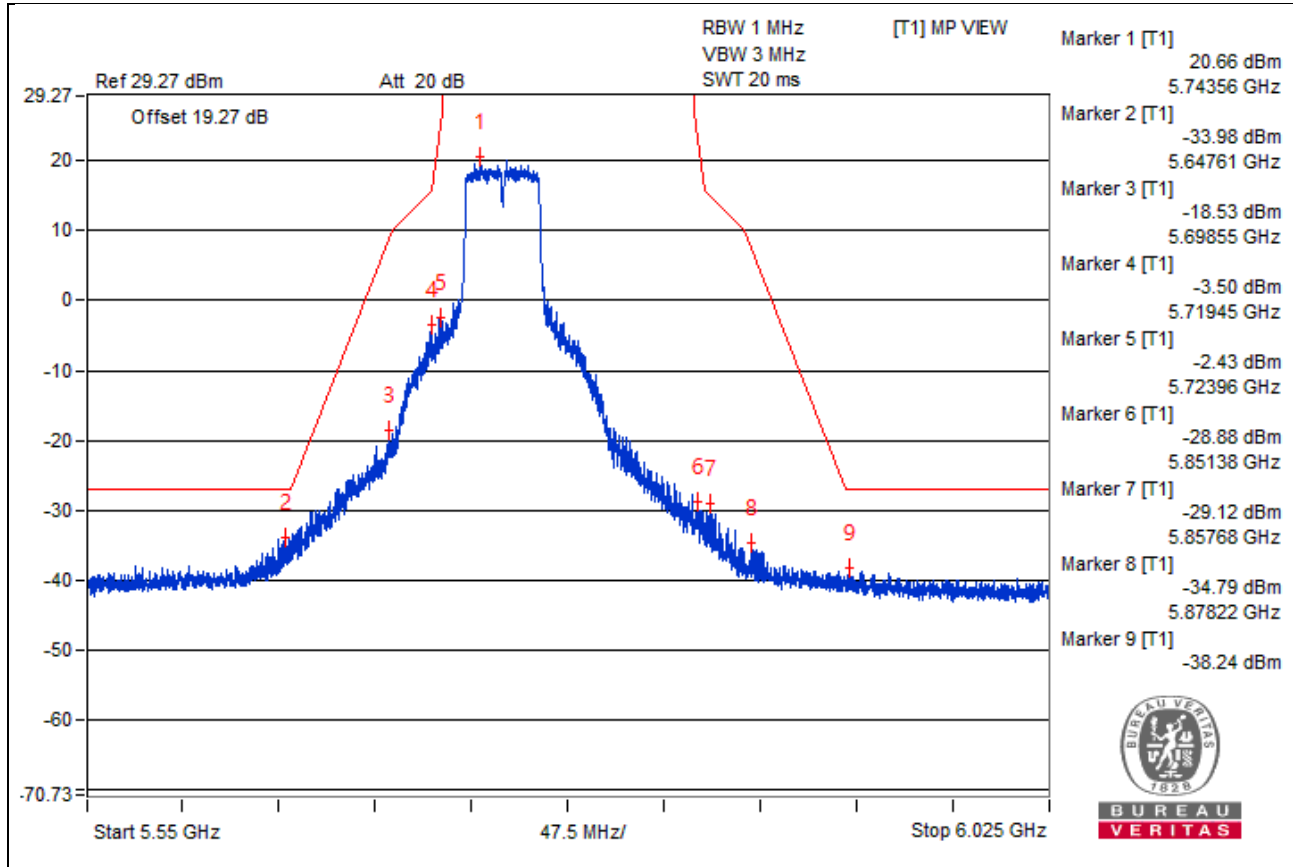

### Chain 1

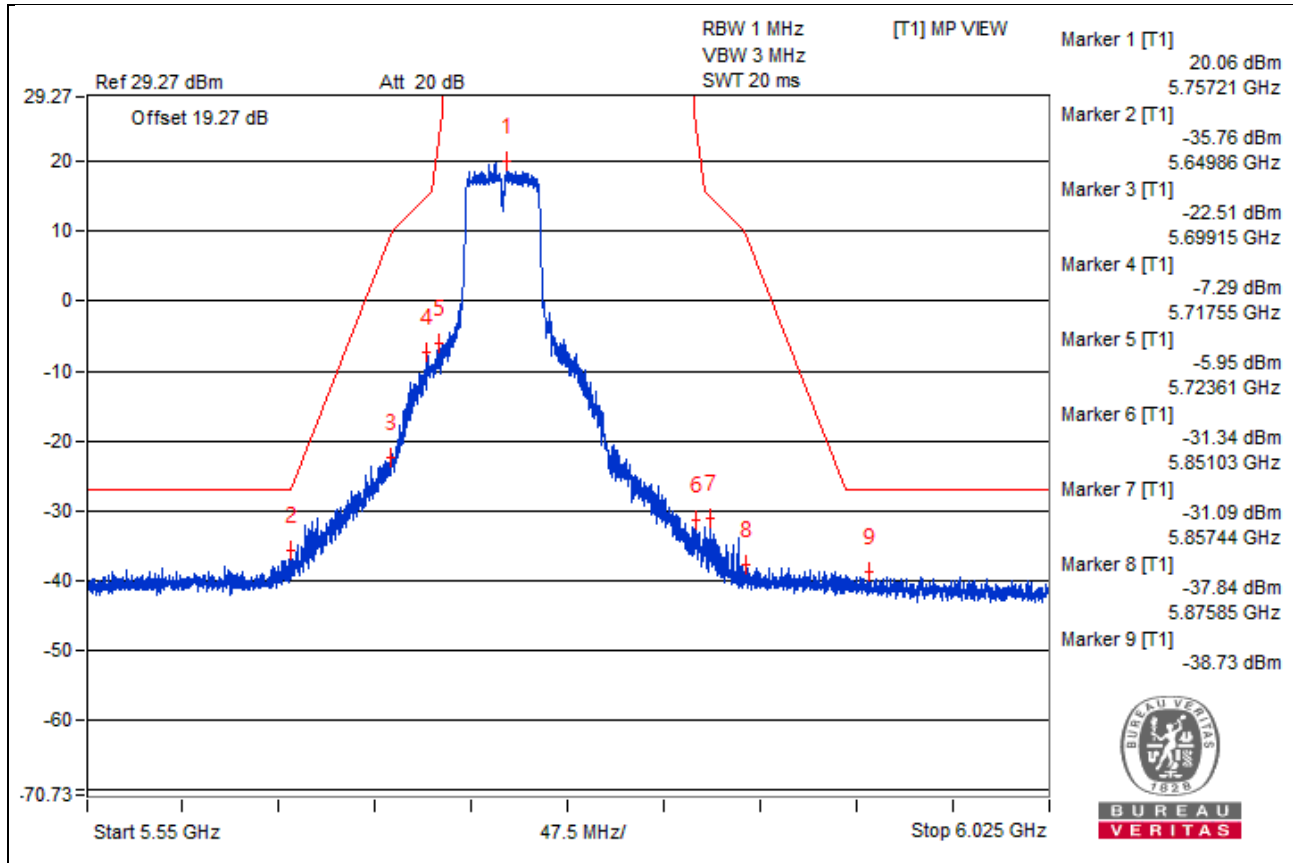

### 802.11ac (VHT40) – Channel 159

#### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3848.43 PK      | 55.68                   | 74             | -18.32      | -51.19          | -49.67 | 7.77                   | -39.58           |
| 2   | 3878.12 AV      | 44.16                   | 54             | -9.84       | -62.21          | -61.57 | 7.77                   | -51.1            |
| 3   | 7734.37 PK      | 57.07                   | 74             | -16.93      | -47.98          | -50.25 | 7.77                   | -38.19           |
| 4   | 7725 AV         | 45.34                   | 54             | -8.66       | -60.62          | -60.79 | 7.77                   | -49.92           |
| 5   | 11595.31 PK     | 55.55                   | 74             | -18.45      | -49.15          | -52.44 | 7.77                   | -39.71           |
| 6   | 11598.43 AV     | 43.29                   | 54             | -10.71      | -62.62          | -62.89 | 7.77                   | -51.97           |
| 7   | 17387 PK        | 63.5                    | 68.2           | -4.7        | -40.31          | -47.37 | 7.77                   | -31.76           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0




## Chain 1

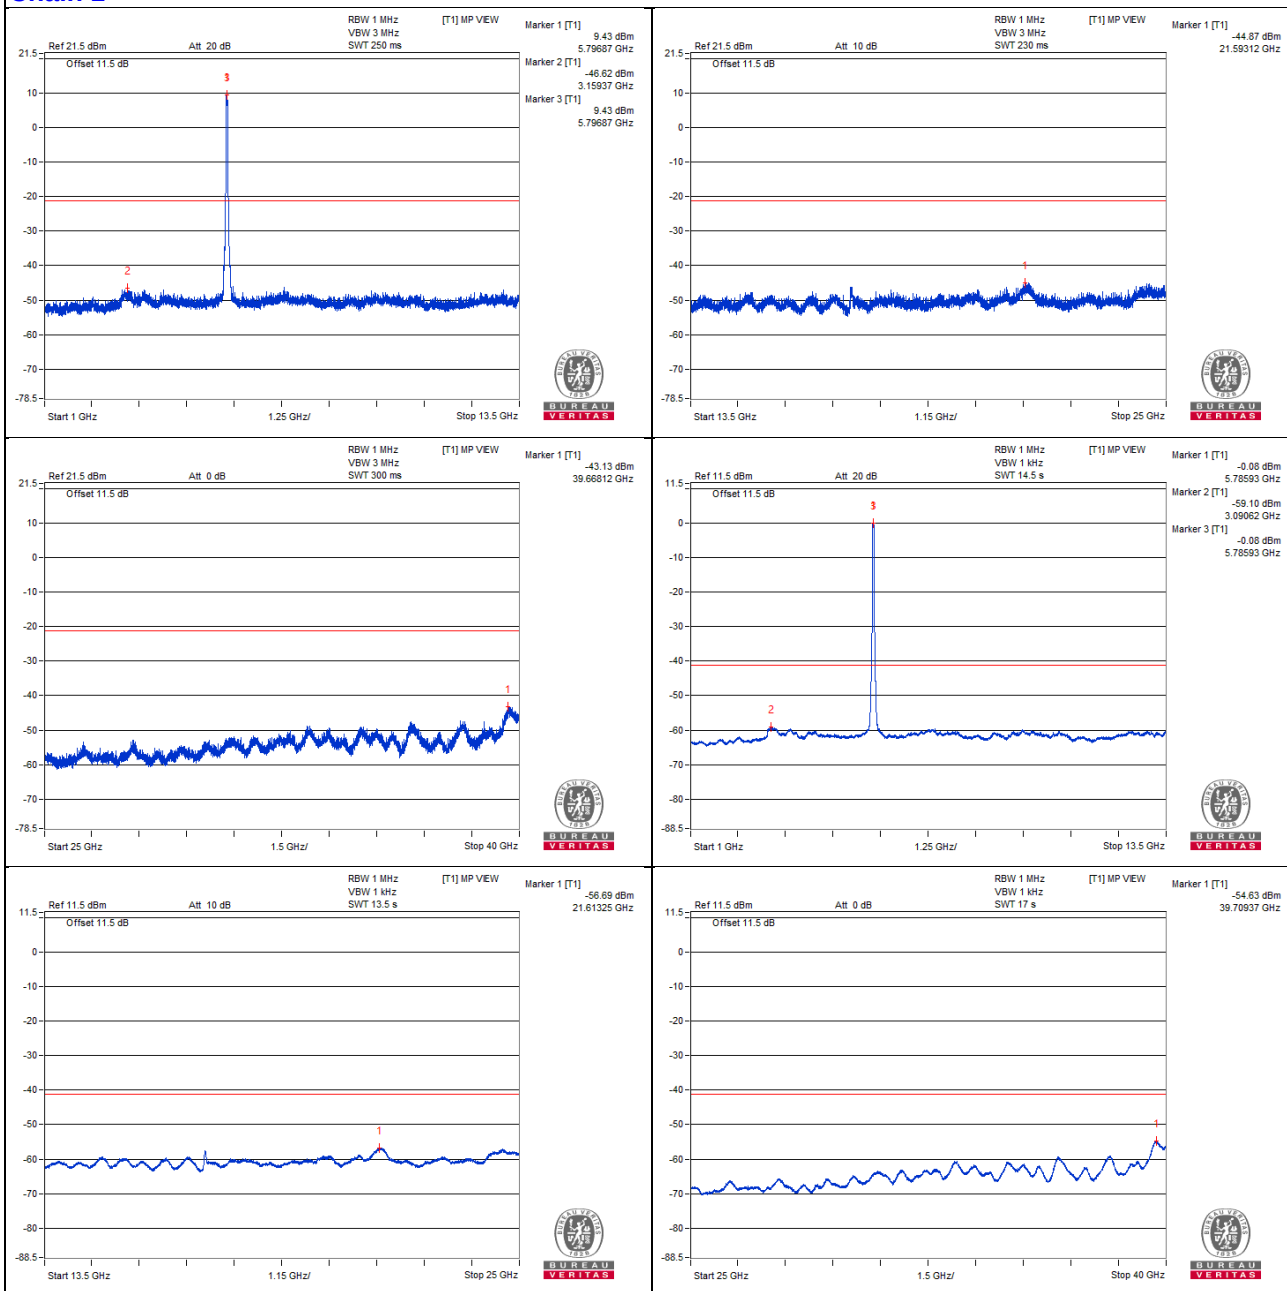


## Bandedge table

### Chain 0

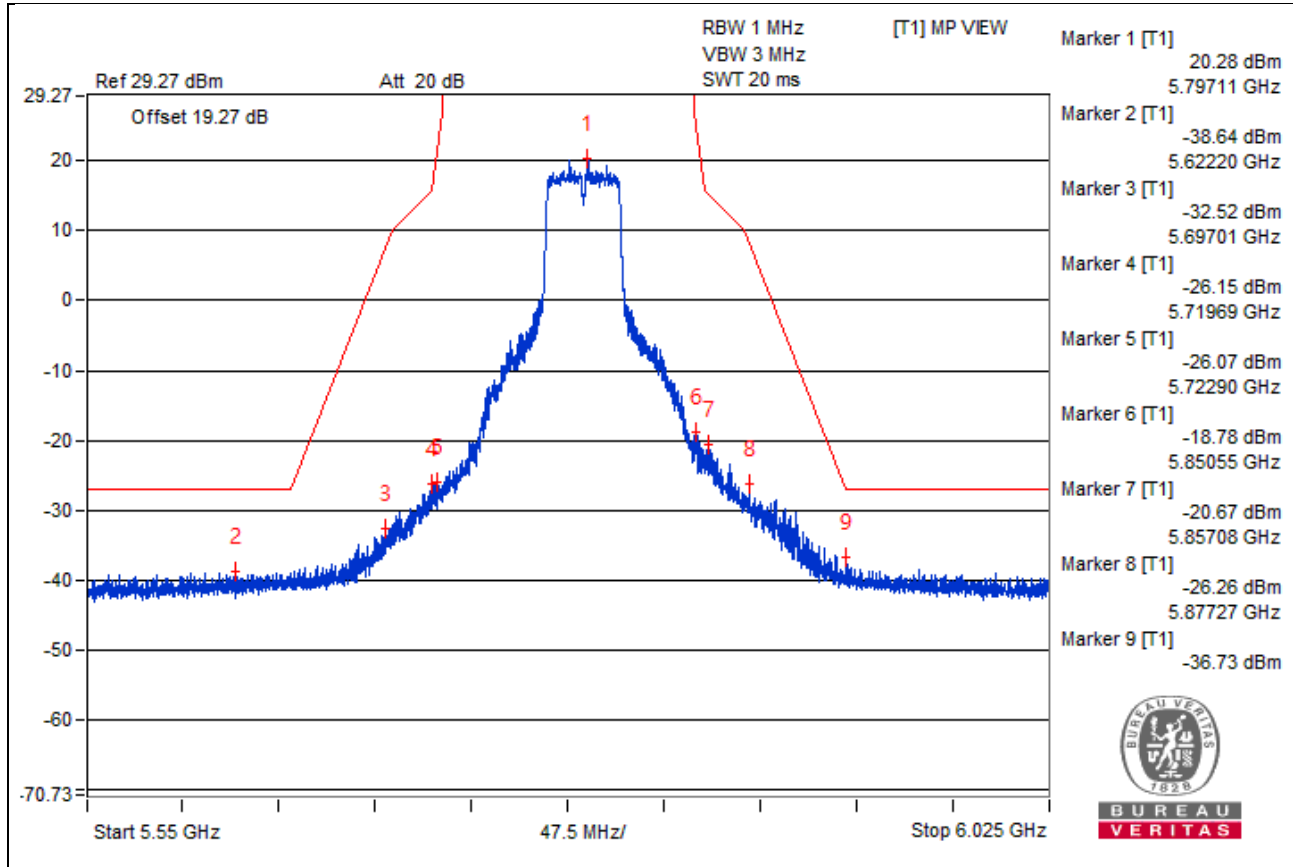

### Chain 1

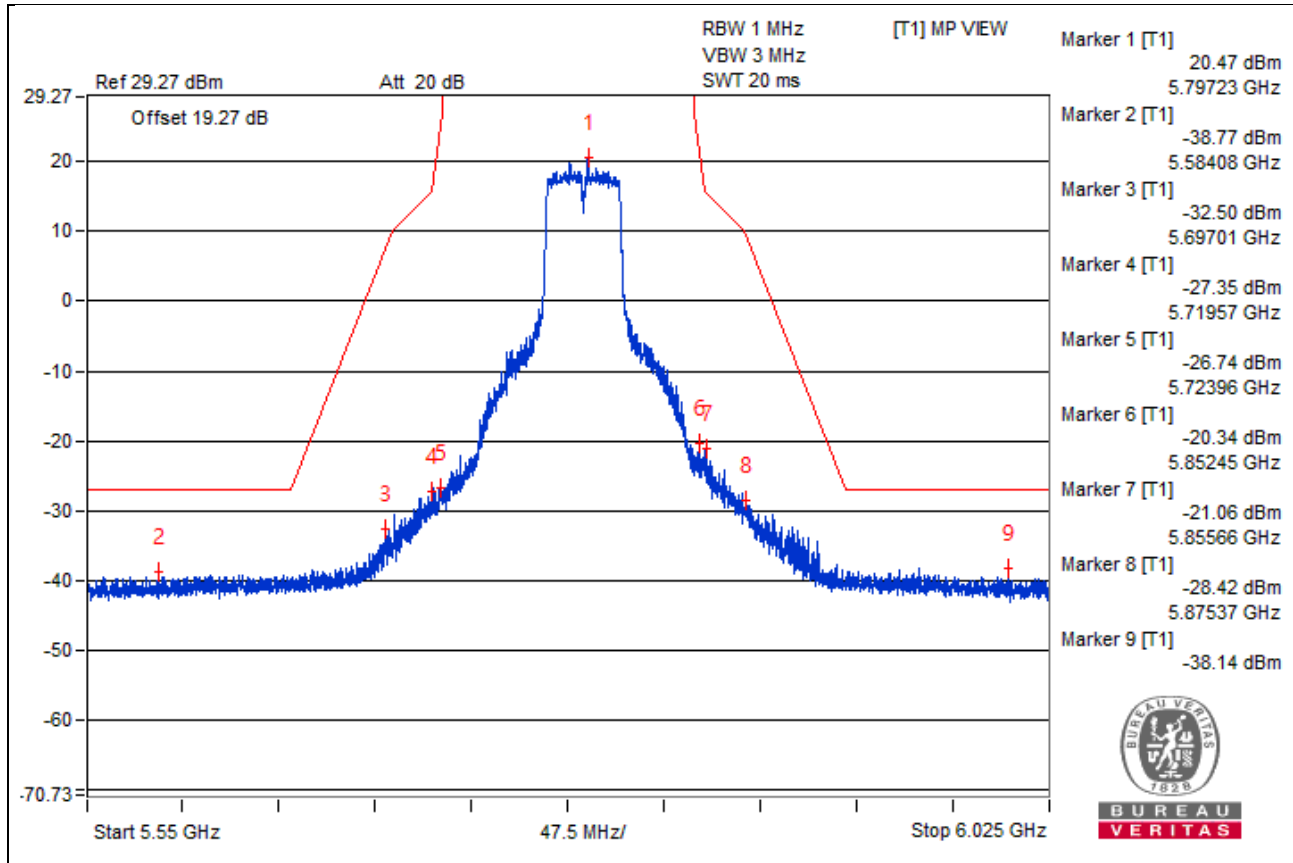

## 802.11ac (VHT80) - Channel 42

### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3457.81 PK      | 57.02                   | 68.2           | -11.18      | -48.84          | -46.23 | 6.09                   | -38.24           |
| 2   | 6946.87 PK      | 58.52                   | 68.2           | -9.68       | -48.23          | -44.31 | 6.09                   | -36.74           |
| 3   | 10420.31 PK     | 55.71                   | 68.2           | -12.49      | -48.73          | -48.58 | 6.09                   | -39.55           |
| 4   | 15649.06 PK     | 54.86                   | 74             | -19.14      | -50.49          | -48.69 | 6.09                   | -40.4            |
| 5   | 15613.12 AV     | 43.36                   | 54             | -10.64      | -61.07          | -60.93 | 6.09                   | -51.9            |
| 6   | 5759.37 PK      | 60.73                   | 68.2           | -7.47       | -43.77          | -43.49 | 6.09                   | -34.53           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

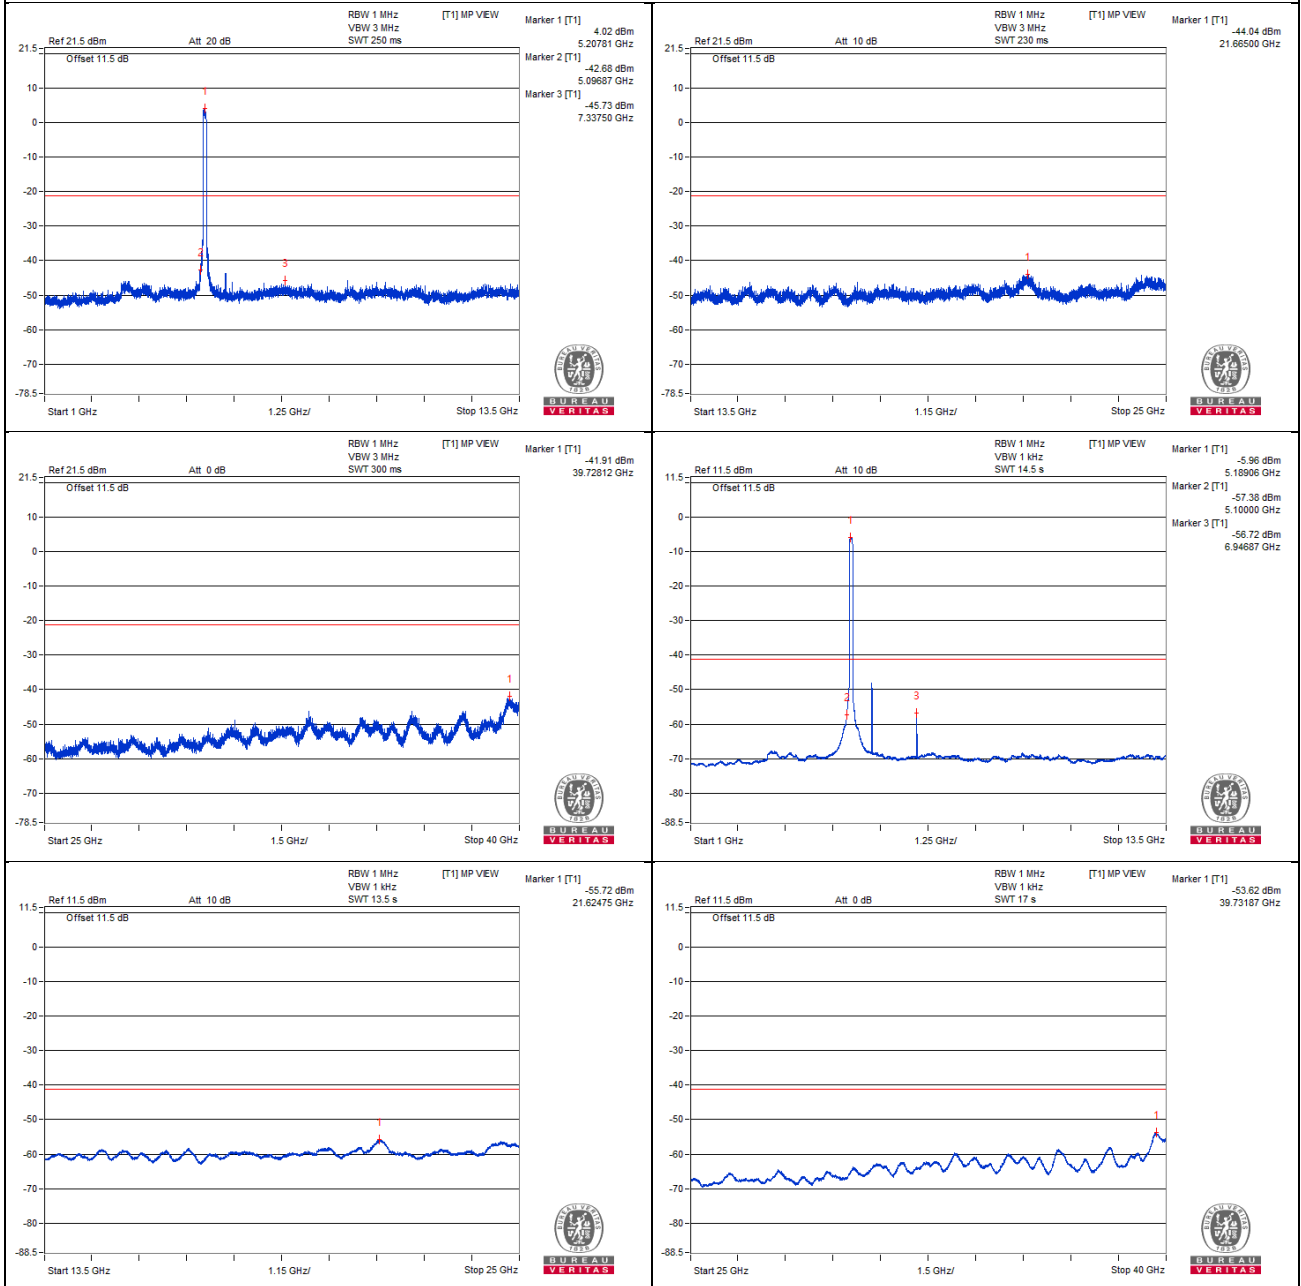

## Chain 1

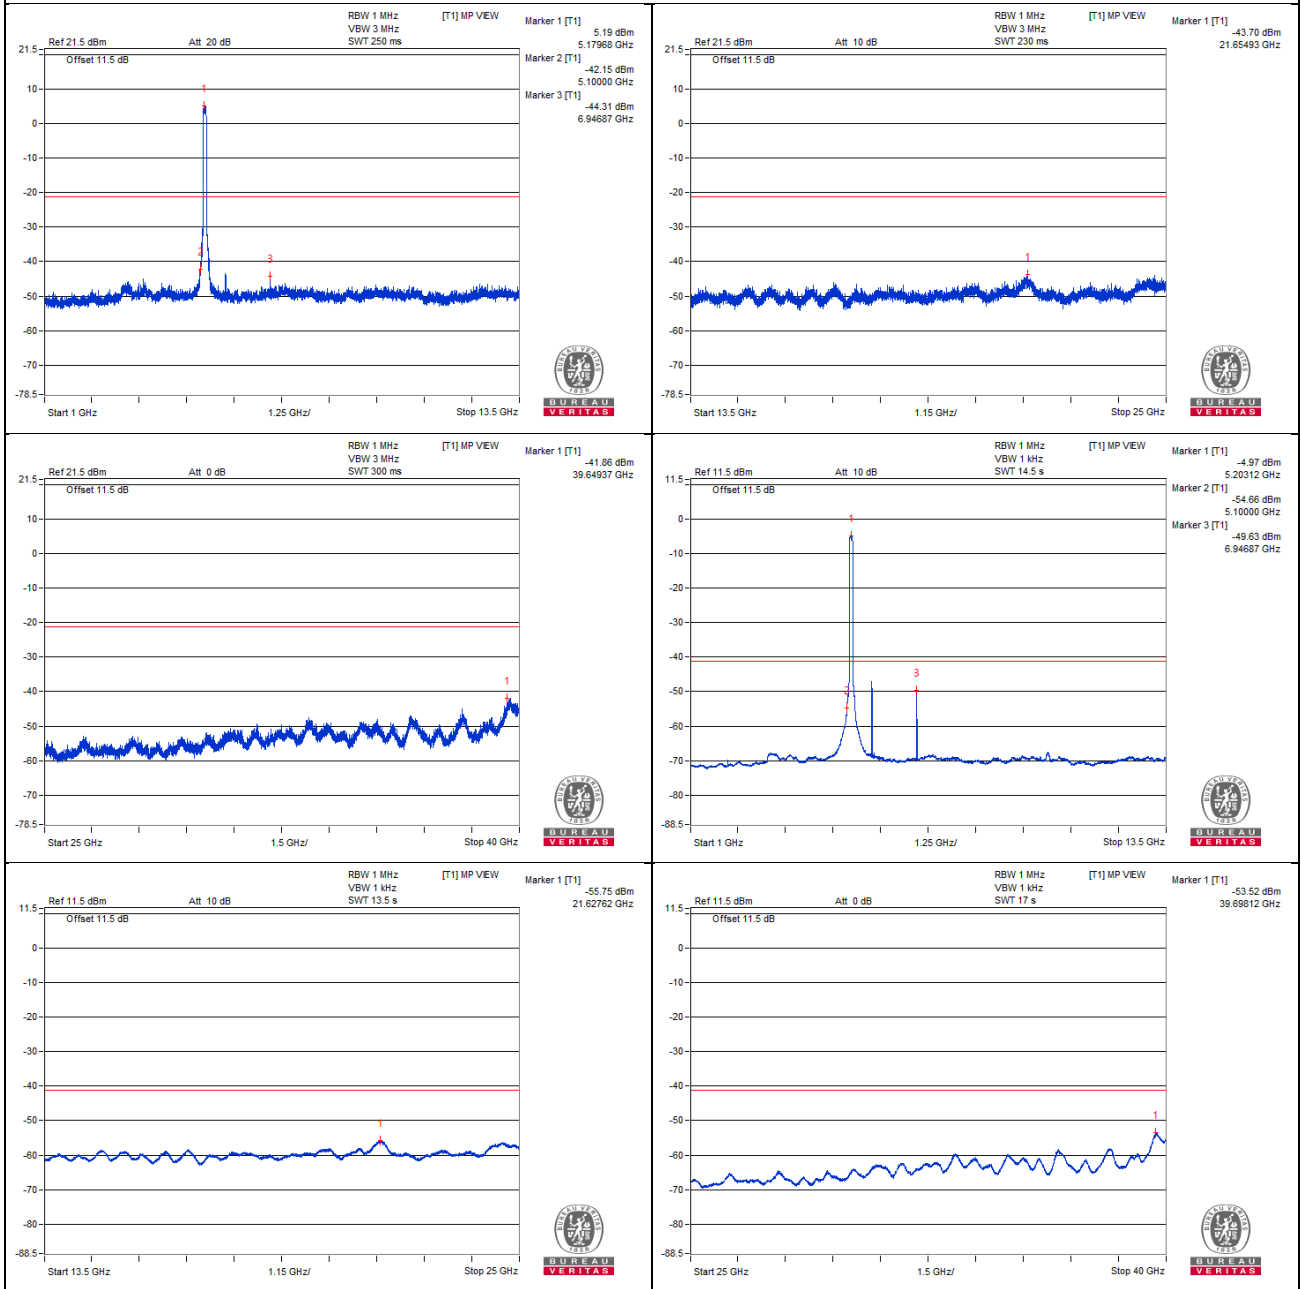

## Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5149.15 PK      | 73.05                   | 74             | *-0.95      | -31.62          | -31.03 | 6.09                   | -22.21           |
| 2   | 5149.97 AV      | 53.45                   | 54             | *-0.55      | -52.26          | -49.88 | 6.09                   | -41.81           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


\* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

## Chain 0

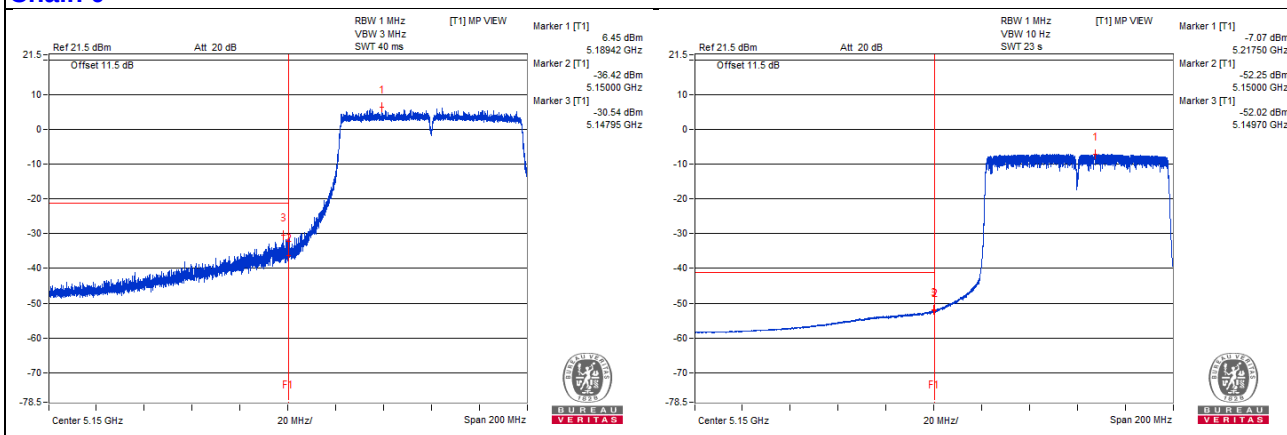

## Chain 1

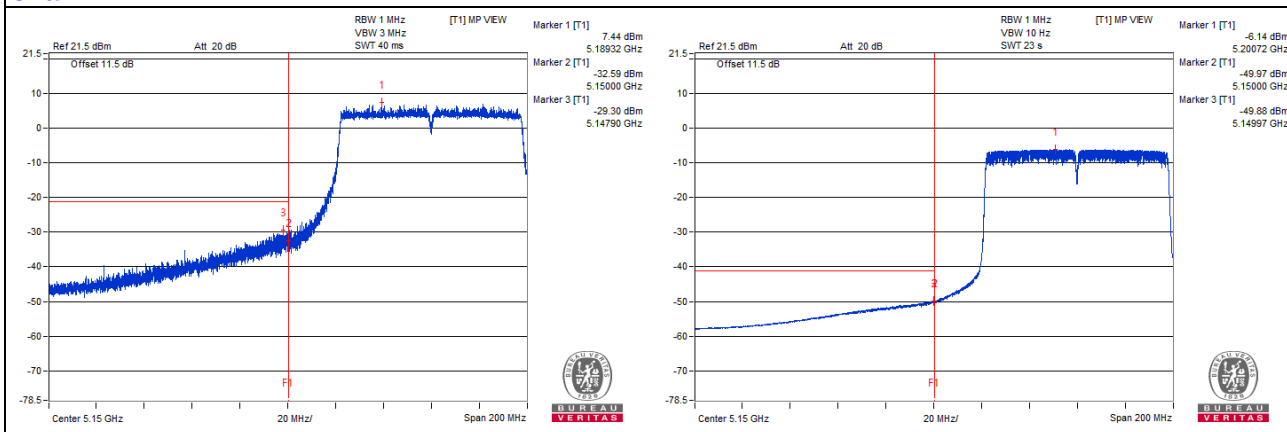

## 802.11ac (VHT80) - Channel 58

### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3534.37 PK      | 56.19                   | 74             | -17.81      | -48.24          | -48.11 | 6.09                   | -39.07           |
| 2   | 3532.81 AV      | 35.68                   | 54             | -18.32      | -68.69          | -68.68 | 6.09                   | -59.58           |
| 3   | 7053.12 PK      | 57.5                    | 68.2           | -10.7       | -49.14          | -45.37 | 6.09                   | -37.76           |
| 4   | 10598.43 PK     | 56.03                   | 68.2           | -12.17      | -48.74          | -47.96 | 6.09                   | -39.23           |
| 5   | 15850.31 PK     | 55.7                    | 74             | -18.3       | -49.05          | -48.31 | 6.09                   | -39.56           |
| 6   | 15876.18 AV     | 44.65                   | 54             | -9.35       | -59.64          | -59.79 | 6.09                   | -50.61           |
| 7   | 5759.37 PK      | 60.71                   | 68.2           | -7.49       | -43.71          | -43.59 | 6.09                   | -34.55           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

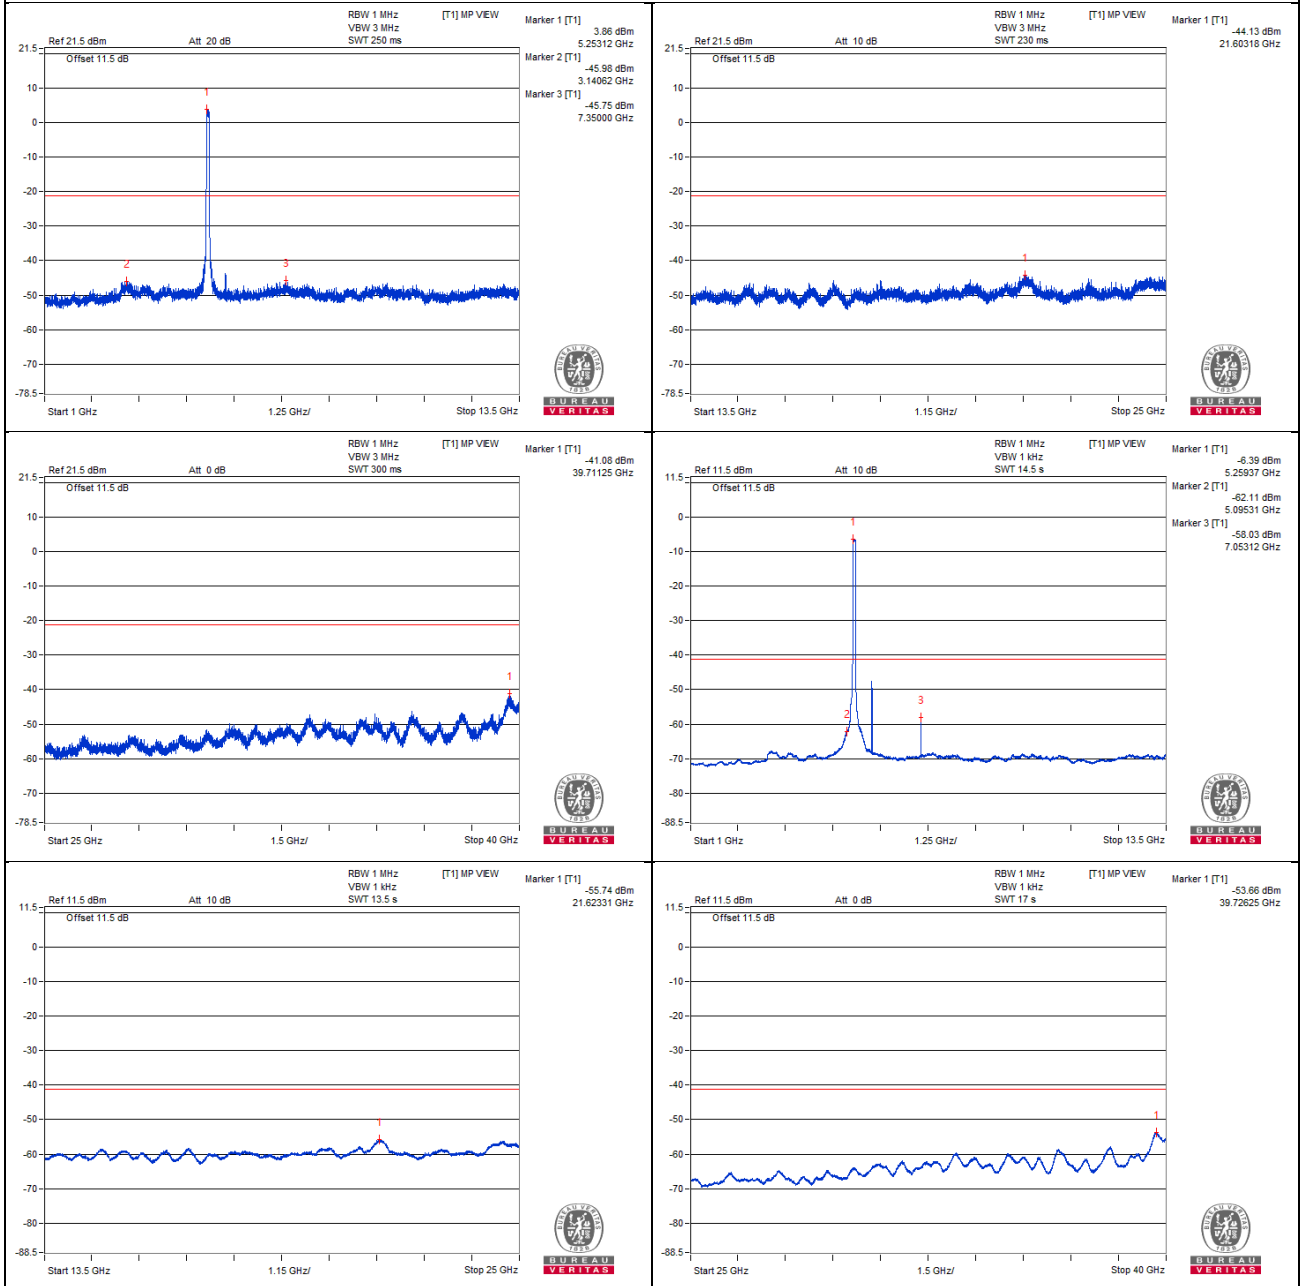

## Chain 1

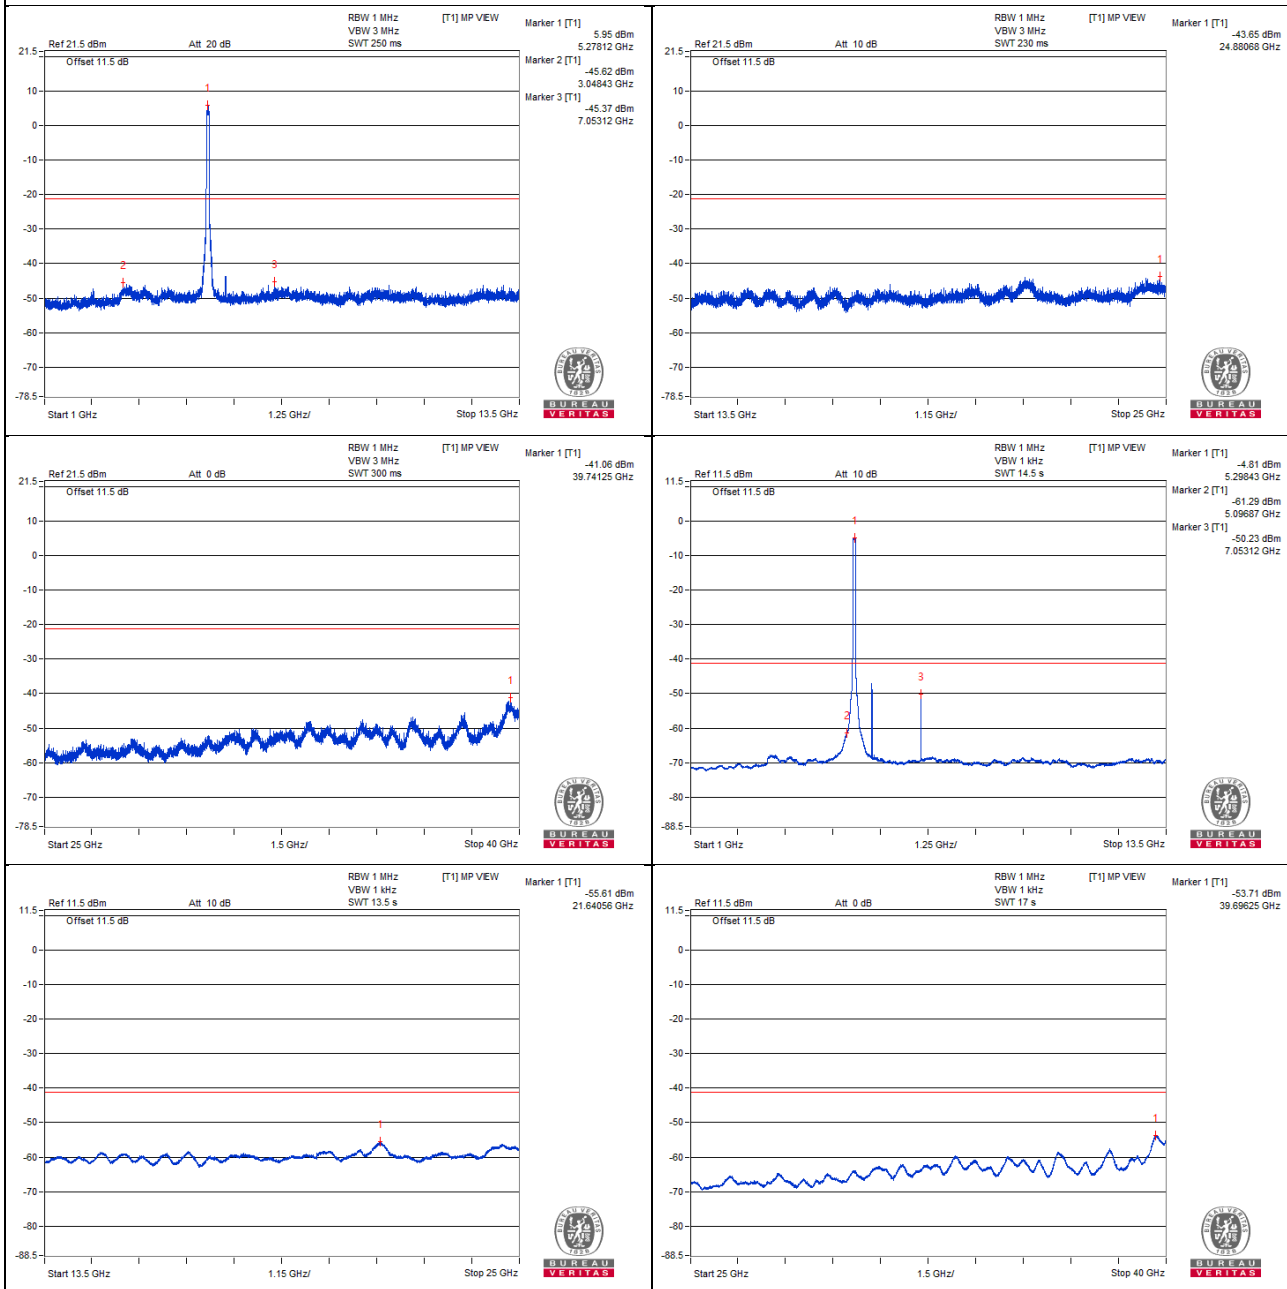

### Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5351.57 PK      | 73.77                   | 74             | *-0.23      | -36.77          | -28.14 | 6.09                   | -21.49           |
| 2   | 5350.1 AV       | 53.09                   | 54             | *-0.91      | -54.52          | -49.43 | 6.09                   | -42.17           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


\* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

### Chain 0

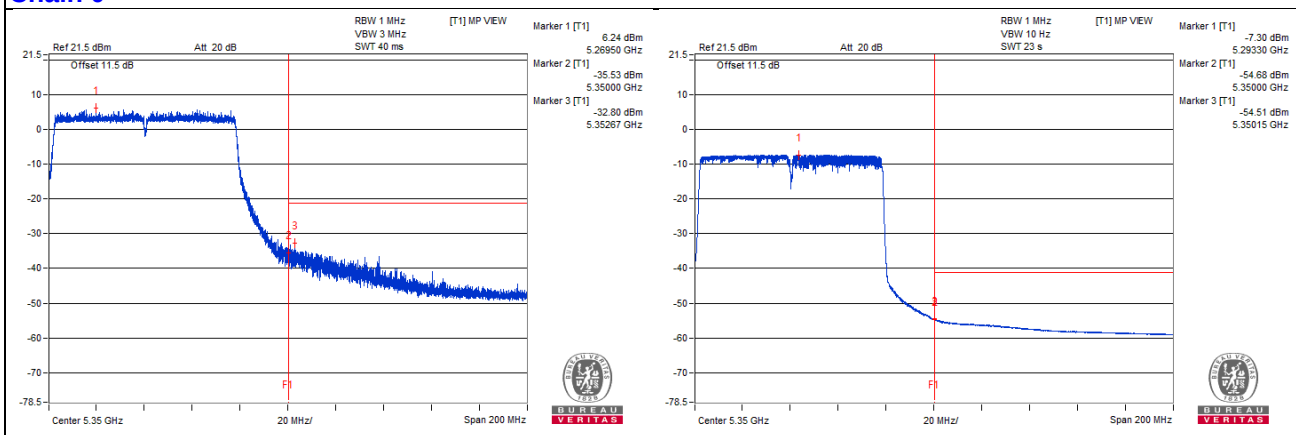

### Chain 1

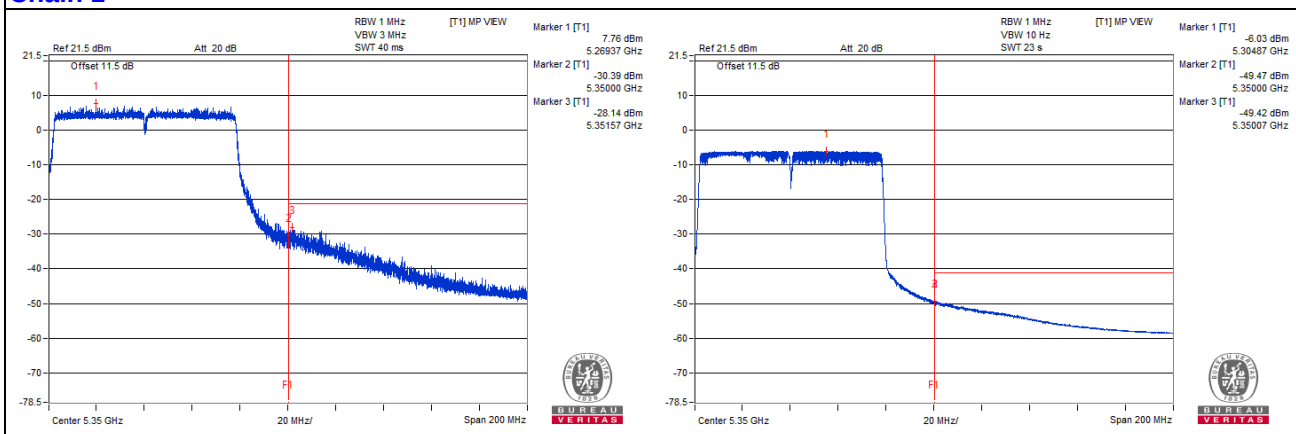

## 802.11ac (VHT80) - Channel 106

### Conducted spurious emission table







| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3684.37 PK      | 57.85                   | 74             | -16.15      | -47.89          | -48.51 | 7.77                   | -37.41           |
| 2   | 3667.18 AV      | 36.93                   | 54             | -17.07      | -69.06          | -69.17 | 7.77                   | -58.33           |
| 3   | 7373.43 PK      | 59.45                   | 74             | -14.55      | -47.21          | -46.04 | 7.77                   | -35.81           |
| 4   | 7373.43 AV      | 50.57                   | 54             | -3.43       | -56.61          | -54.57 | 7.77                   | -44.69           |
| 5   | 11051.56 PK     | 56.58                   | 74             | -17.42      | -50.11          | -48.89 | 7.77                   | -38.68           |
| 6   | 11050 AV        | 35.15                   | 54             | -18.85      | -70.75          | -71.03 | 7.77                   | -60.11           |
| 7   | 16602.12 PK     | 56.81                   | 68.2           | -11.39      | -47.46          | -52.27 | 7.77                   | -38.45           |
| 8   | 5759.37 PK      | 59.95                   | 68.2           | -8.25       | -45.61          | -46.63 | 7.77                   | -35.31           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

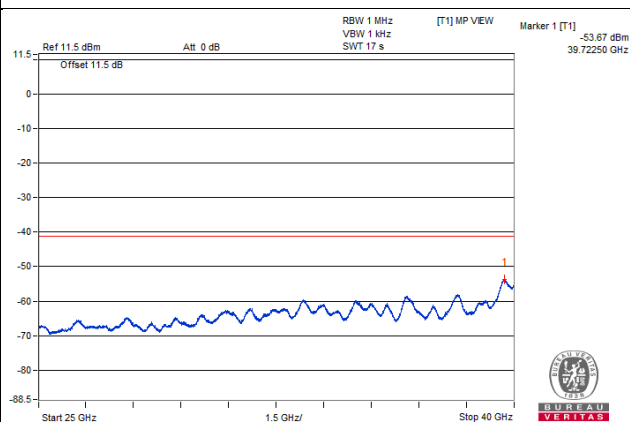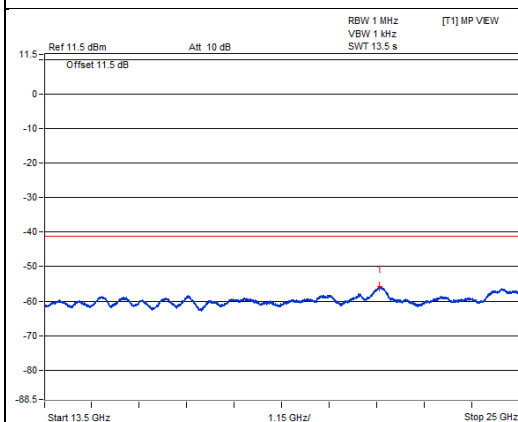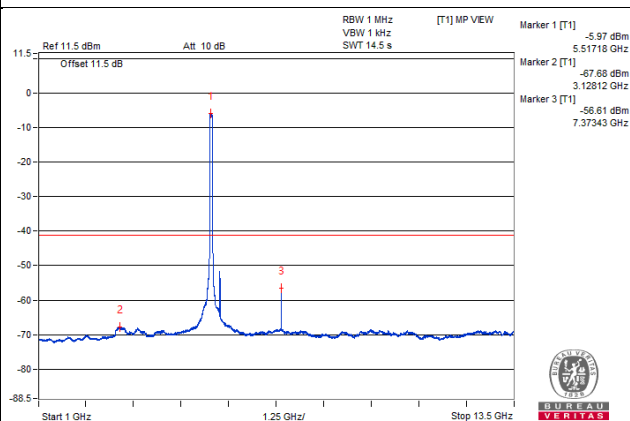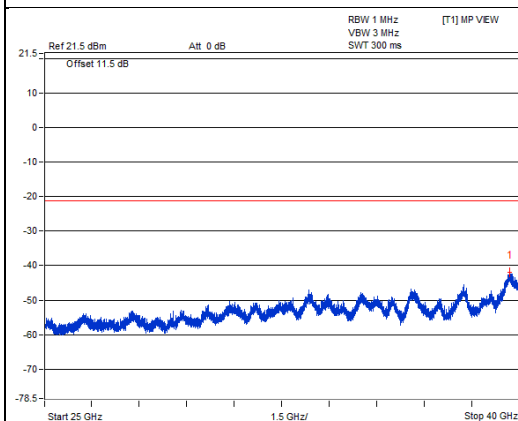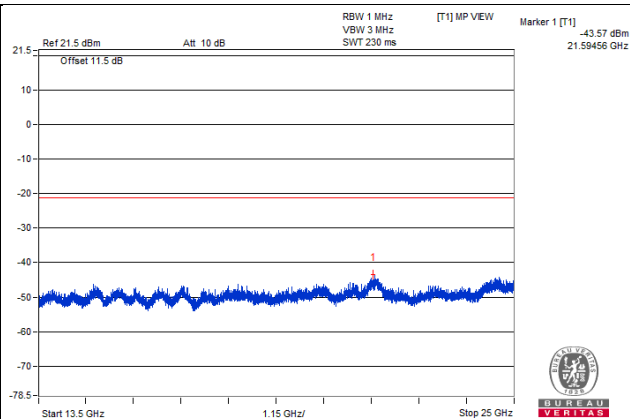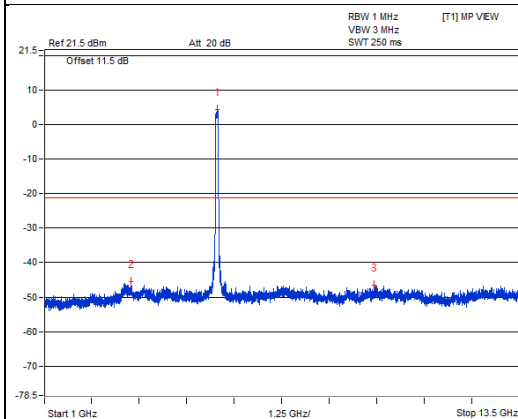

## Chain 1

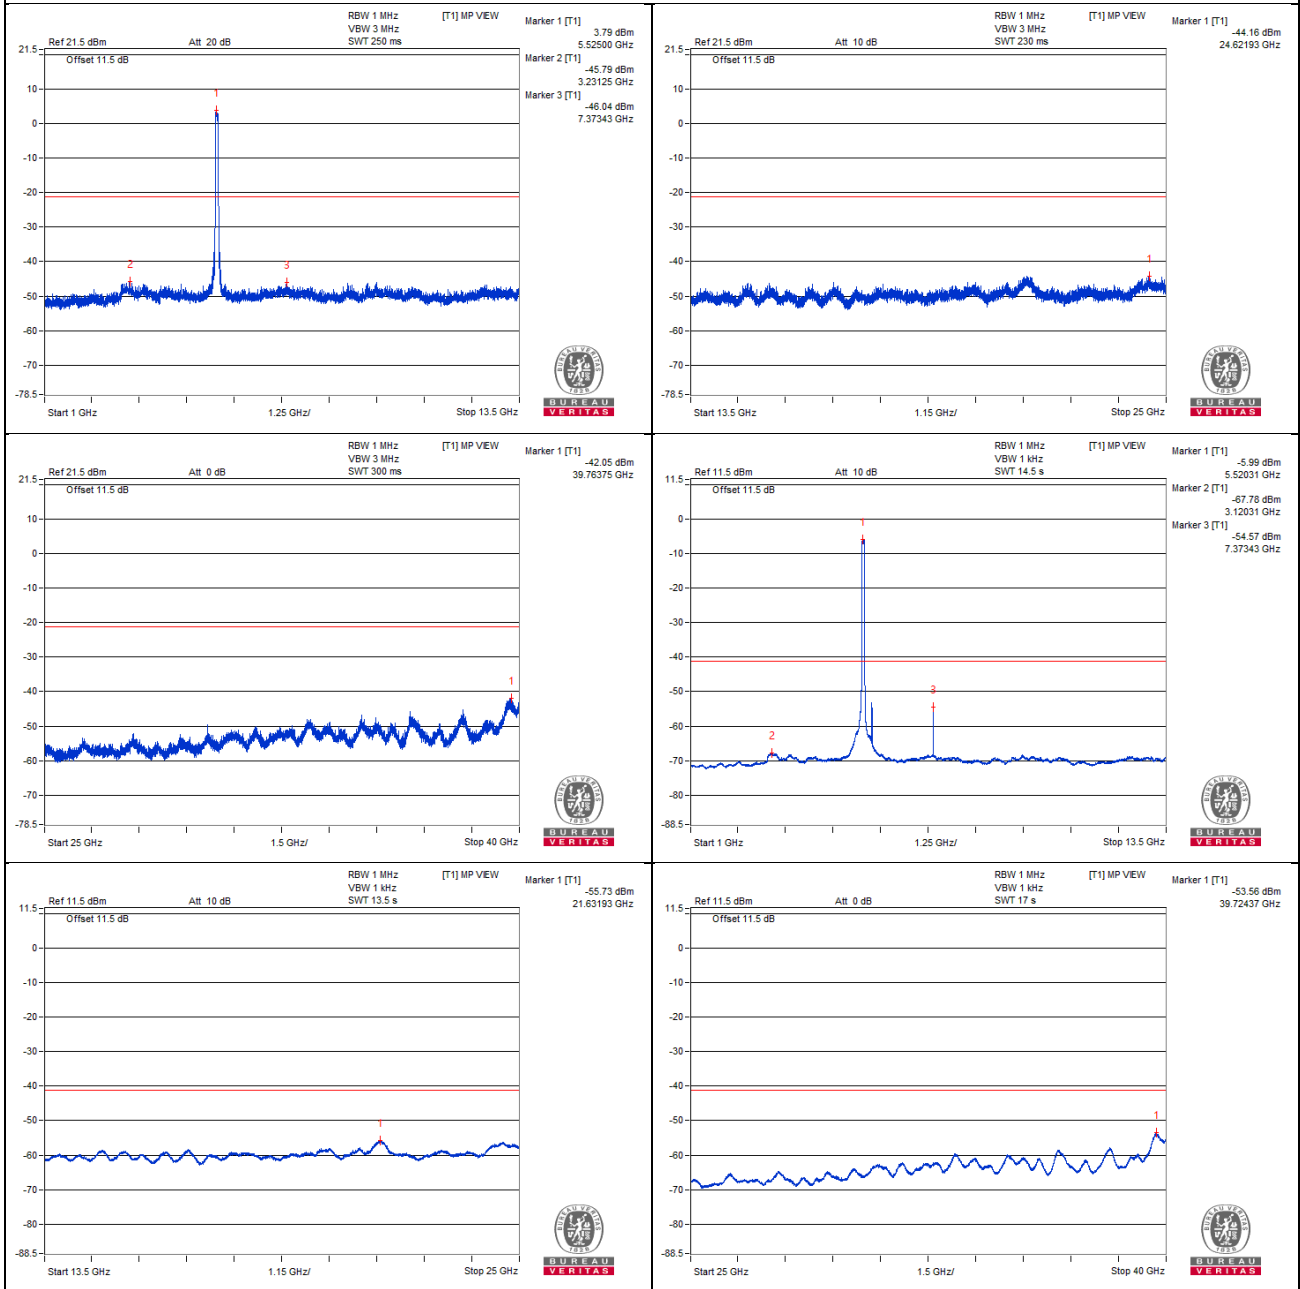

## Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5458.59 PK      | 68.93                   | 74             | -5.07       | -38.85          | -35.87 | 7.77                   | -26.33           |
| 2   | 5459.84 AV      | 51.61                   | 54             | -2.39       | -53.95          | -54.96 | 7.77                   | -43.65           |
| 3   | 5469.18 PK      | 72.56                   | 68.2           | * 4.36      | -33.41          | -33.55 | 7.77                   | -22.7            |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


\* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

## Chain 0

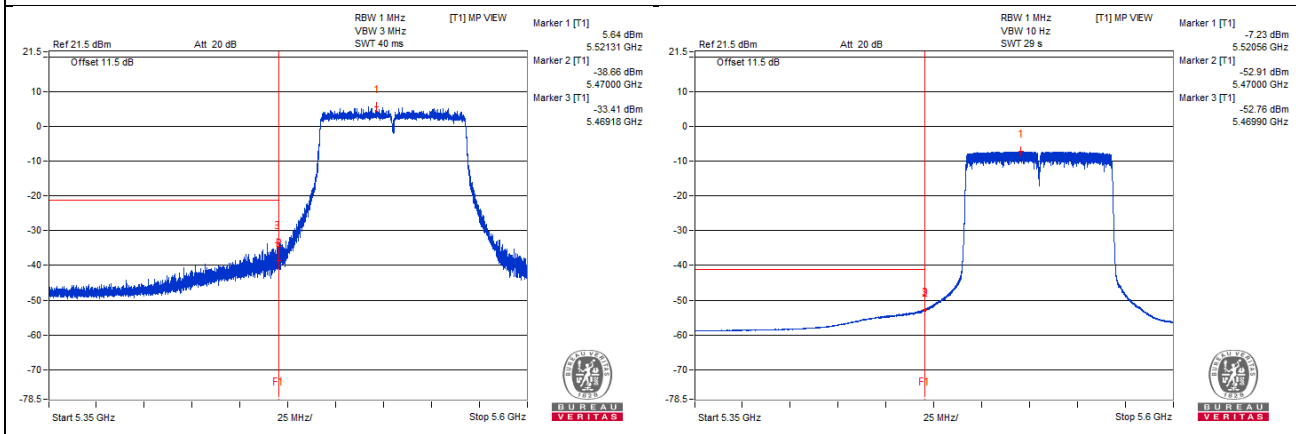

## Chain 1

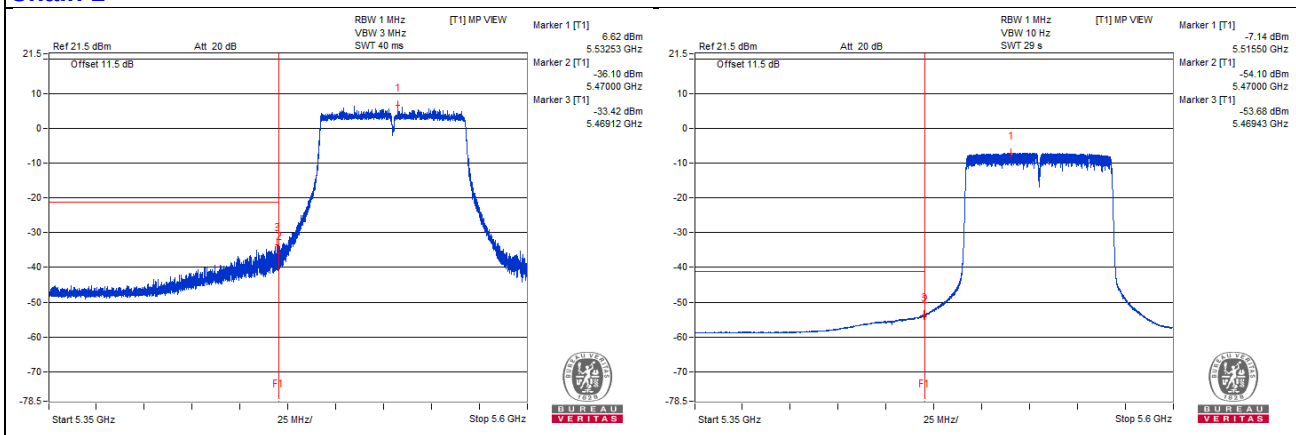

## 802.11ac (VHT80) - Channel 122

### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3731.25 PK      | 58.14                   | 74             | -15.86      | -48.92          | -47.07 | 7.77                   | -37.12           |
| 2   | 3754.68 AV      | 36.95                   | 54             | -17.05      | -69.01          | -69.18 | 7.77                   | -58.31           |
| 3   | 7479.68 PK      | 58.34                   | 74             | -15.66      | -47.32          | -48.12 | 7.77                   | -36.92           |
| 4   | 7479.68 AV      | 47.01                   | 54             | -6.99       | -59.32          | -58.75 | 7.77                   | -48.25           |
| 5   | 11214.06 PK     | 56.56                   | 74             | -17.44      | -49.38          | -49.58 | 7.77                   | -38.7            |
| 6   | 11215.62 AV     | 36.04                   | 54             | -17.96      | -69.87          | -70.13 | 7.77                   | -59.22           |
| 7   | 16836.43 PK     | 62.53                   | 68.2           | -5.67       | -42.72          | -44.47 | 7.77                   | -32.73           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

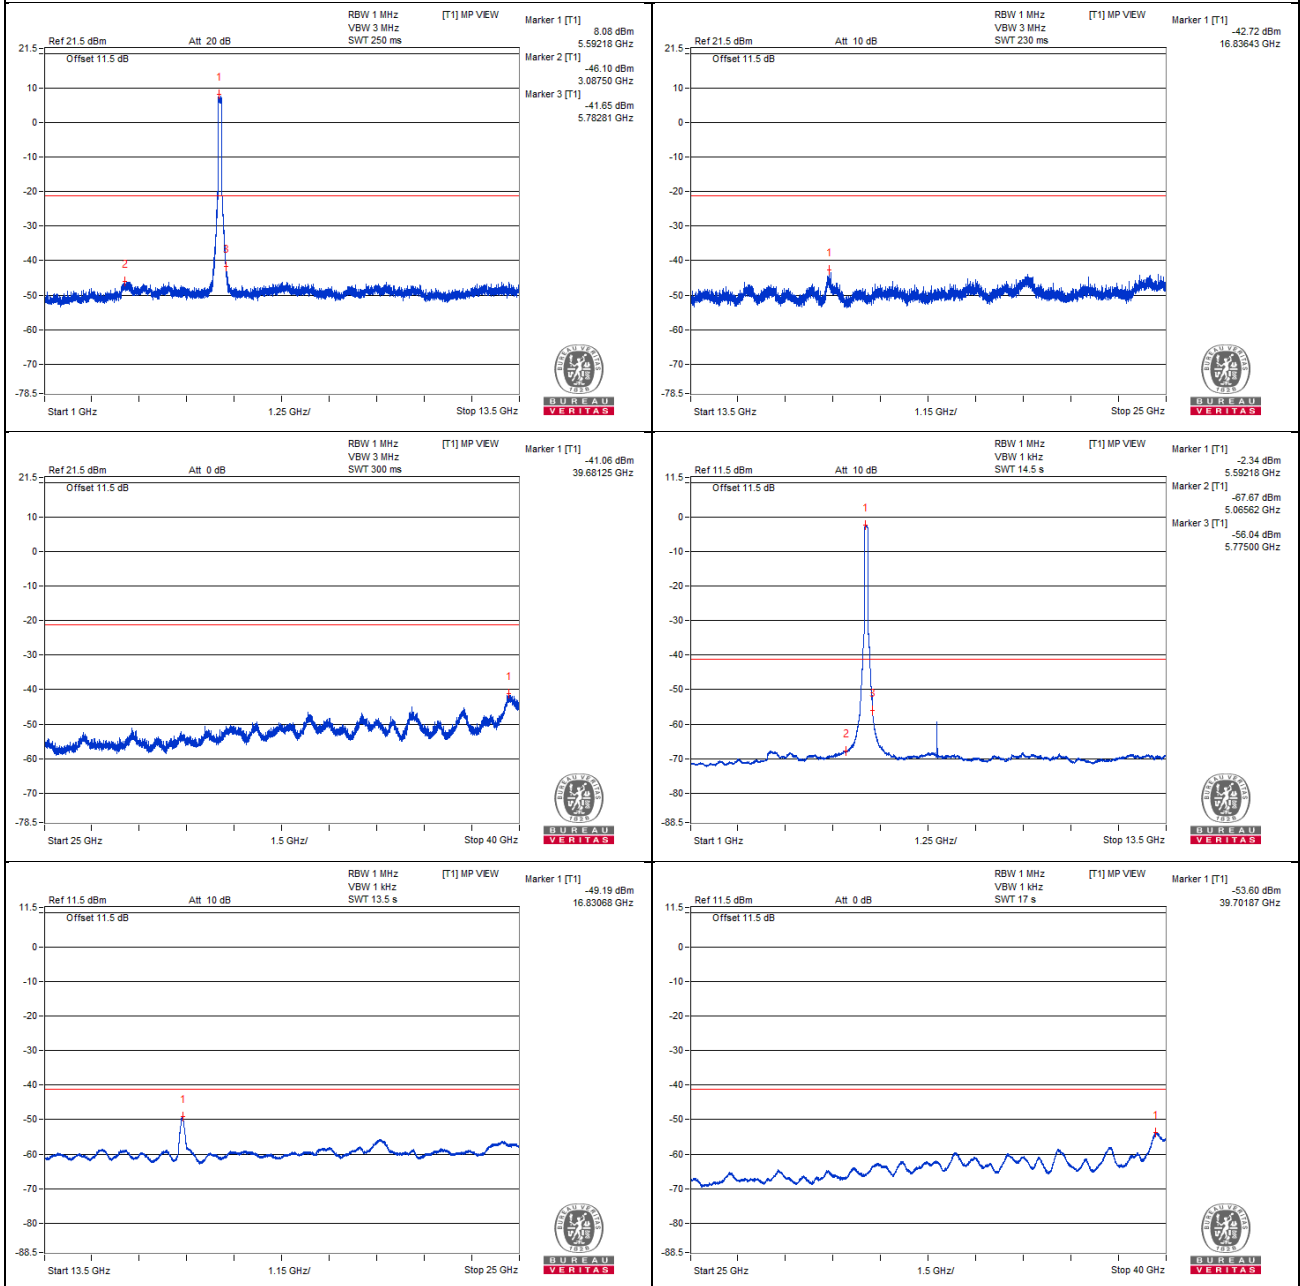

## Chain 1

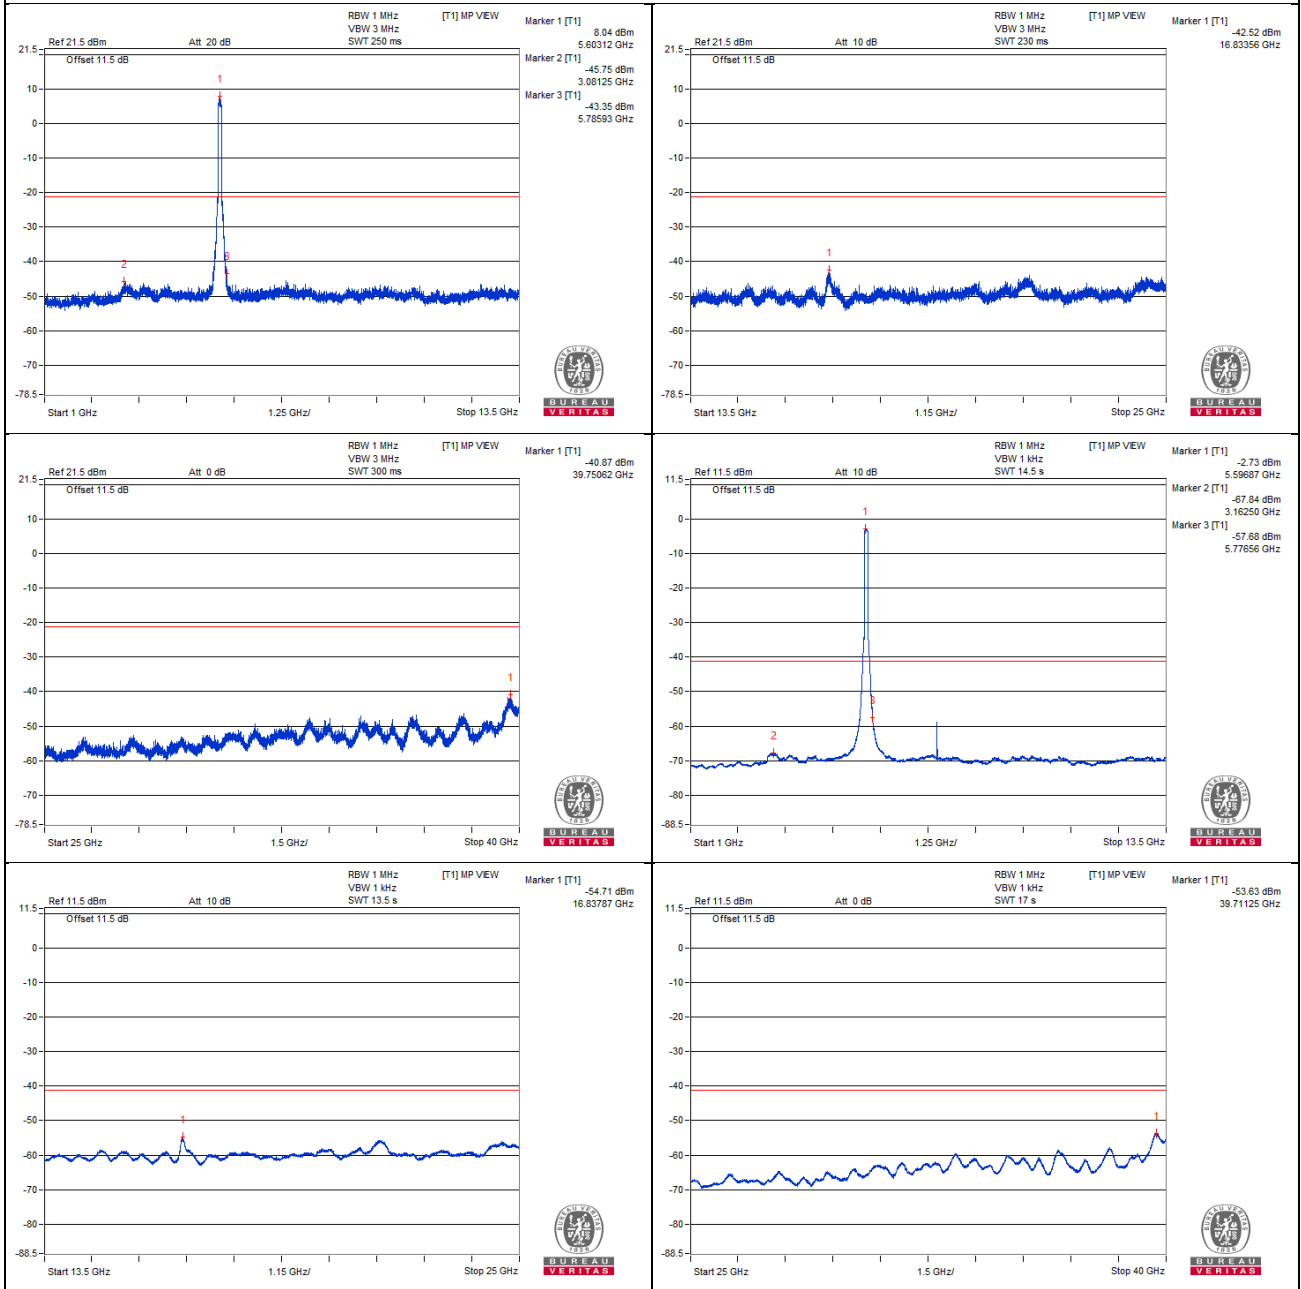

## Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5728.1 PK       | 71.94                   | 68.2           | * 3.74      | -33.47          | -34.84 | 7.77                   | -23.32           |


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement.  
(Please refer APPENDIX B)

## Chain 0

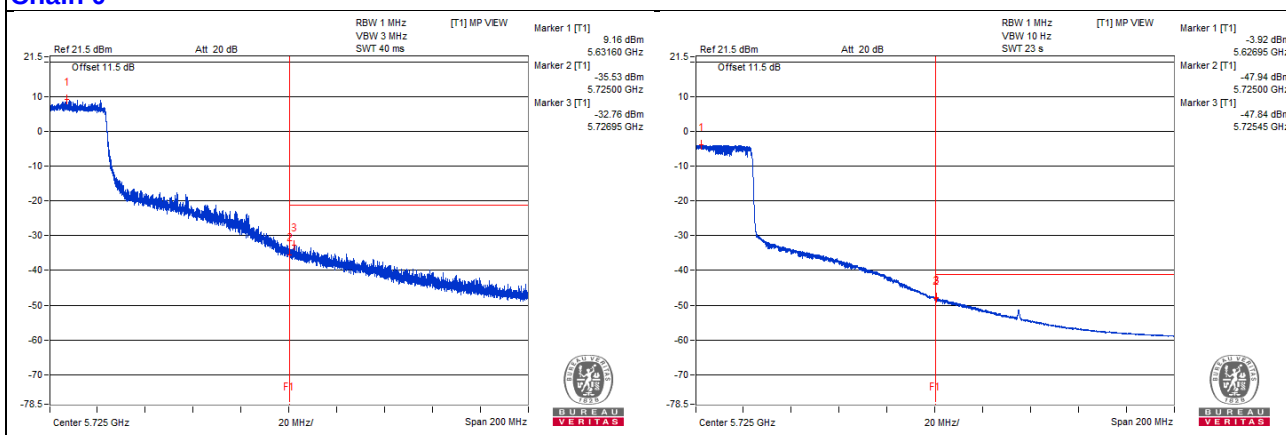

## Chain 1

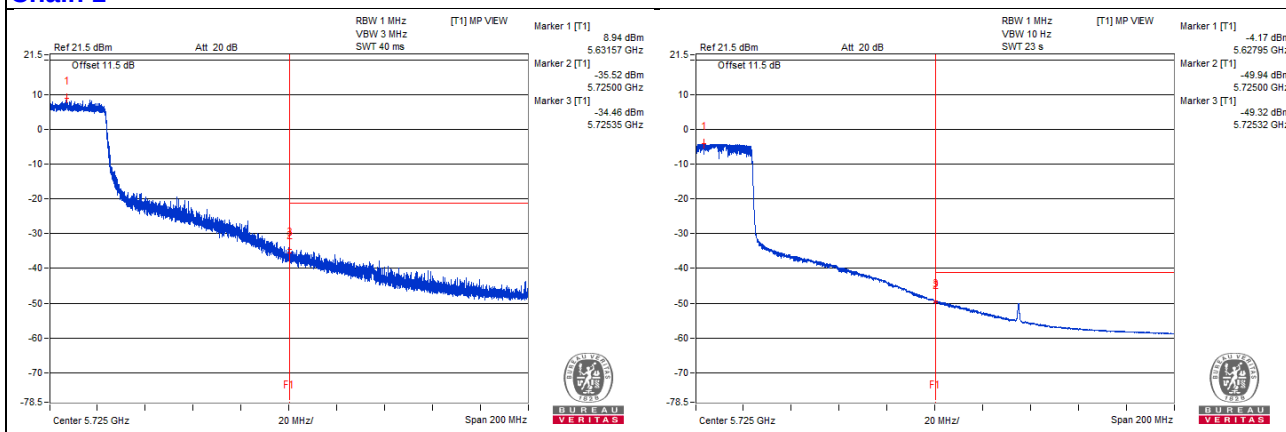

## 802.11ac (VHT80) - Channel 138

### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3812.5 PK       | 57.52                   | 74             | -16.48      | -48.38          | -48.67 | 7.77                   | -37.74           |
| 2   | 3773.43 AV      | 36.68                   | 54             | -17.32      | -69.23          | -69.49 | 7.77                   | -58.58           |
| 3   | 7587.5 PK       | 57.55                   | 74             | -16.45      | -48.62          | -48.37 | 7.77                   | -37.71           |
| 4   | 7585.93 AV      | 43.94                   | 54             | -10.06      | -62.47          | -61.76 | 7.77                   | -51.32           |
| 5   | 11385.93 PK     | 56.43                   | 74             | -17.57      | -49.48          | -49.74 | 7.77                   | -38.83           |
| 6   | 11360.93 AV     | 36.03                   | 54             | -17.97      | -69.68          | -70.36 | 7.77                   | -59.23           |
| 7   | 17060.68 PK     | 65.11                   | 68.2           | -3.09       | -40.31          | -41.65 | 7.77                   | -30.15           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

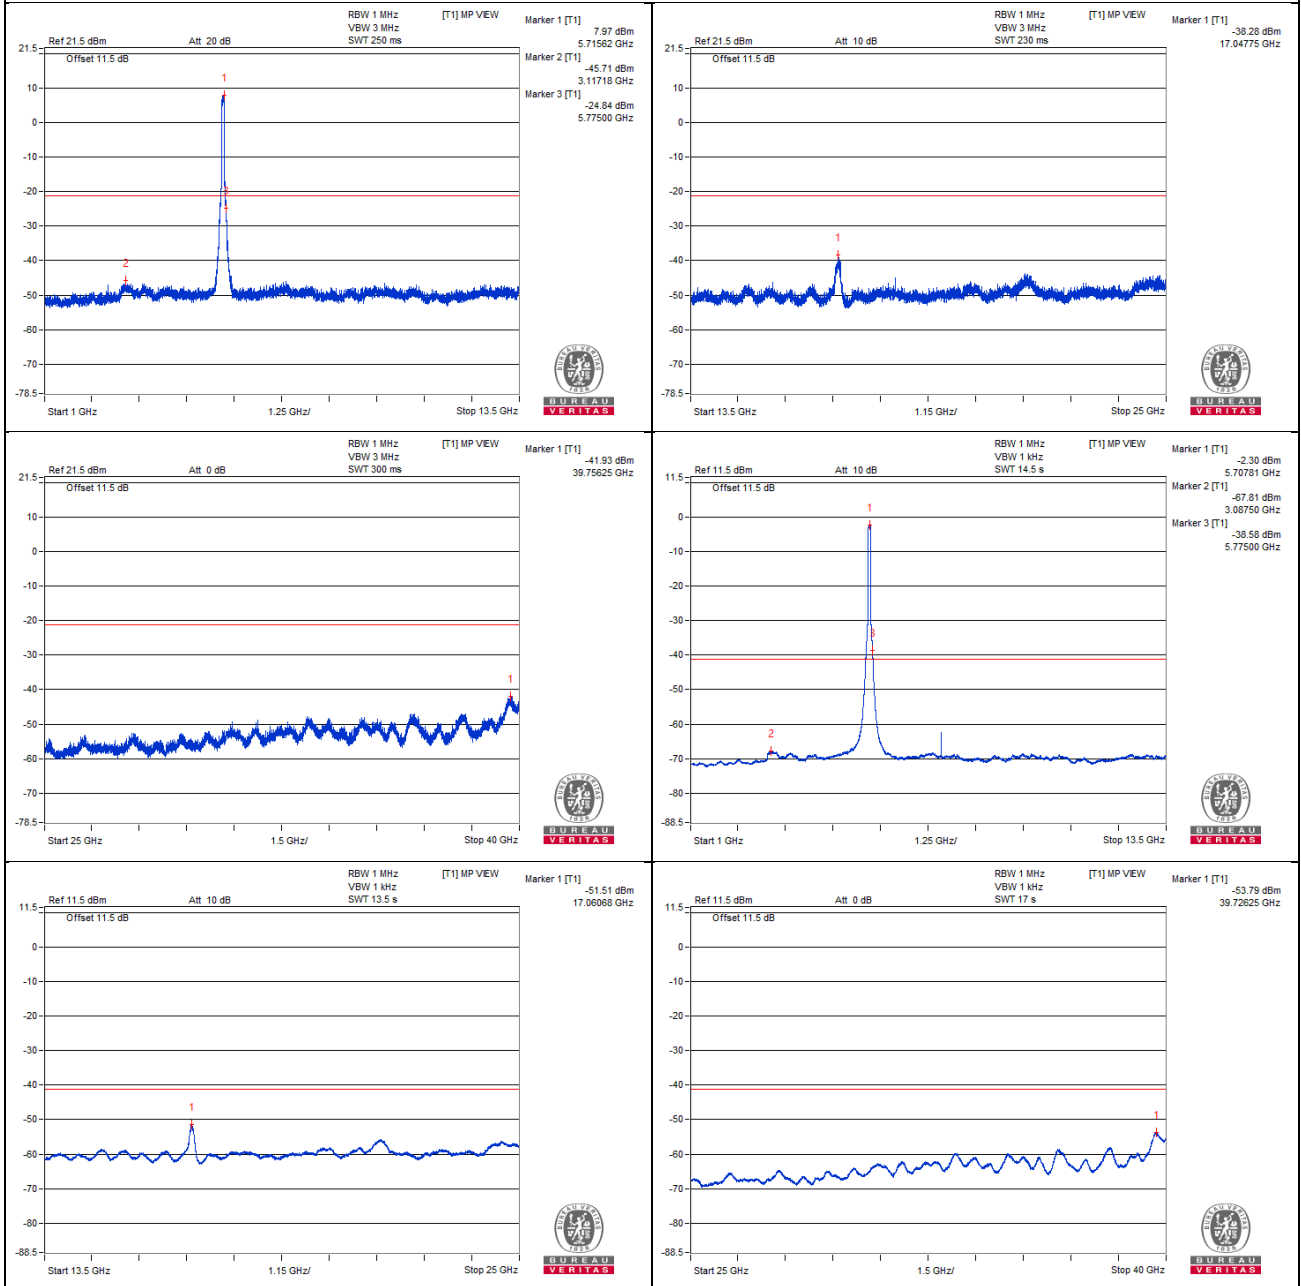

## Chain 1

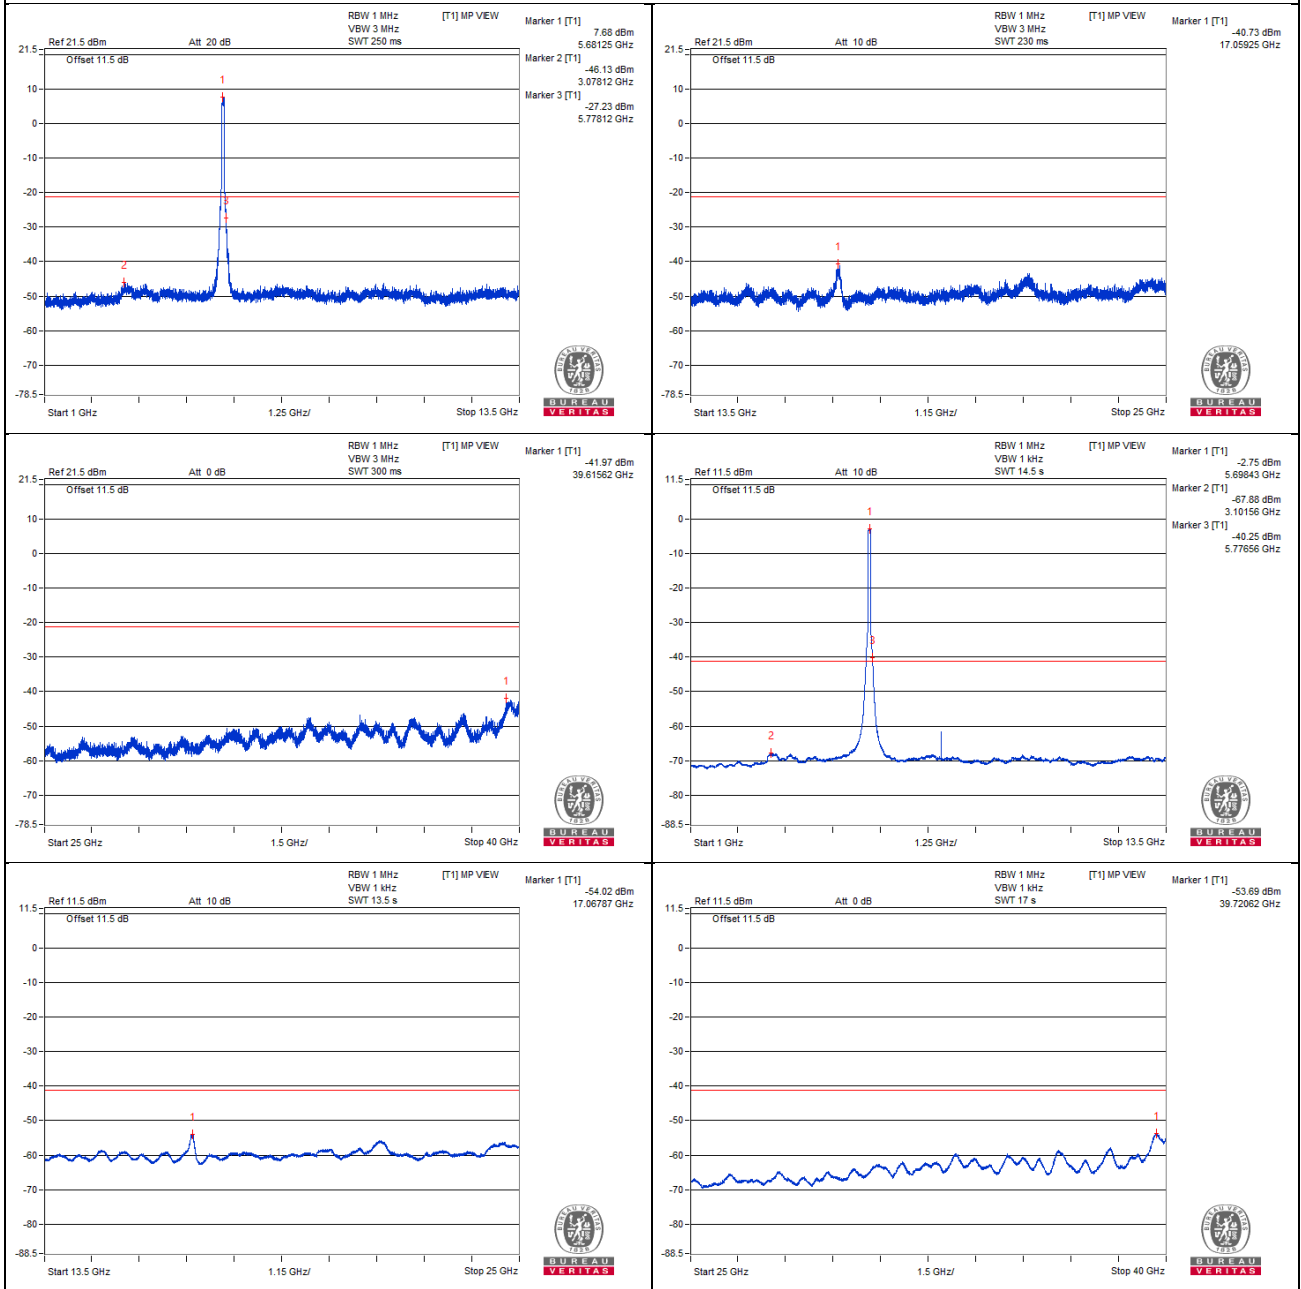

## Bandedge table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5850.51 PK      | 66.01                   | 68.2           | -2.19       | -40.45          | -39.64 | 7.77                   | -29.25           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

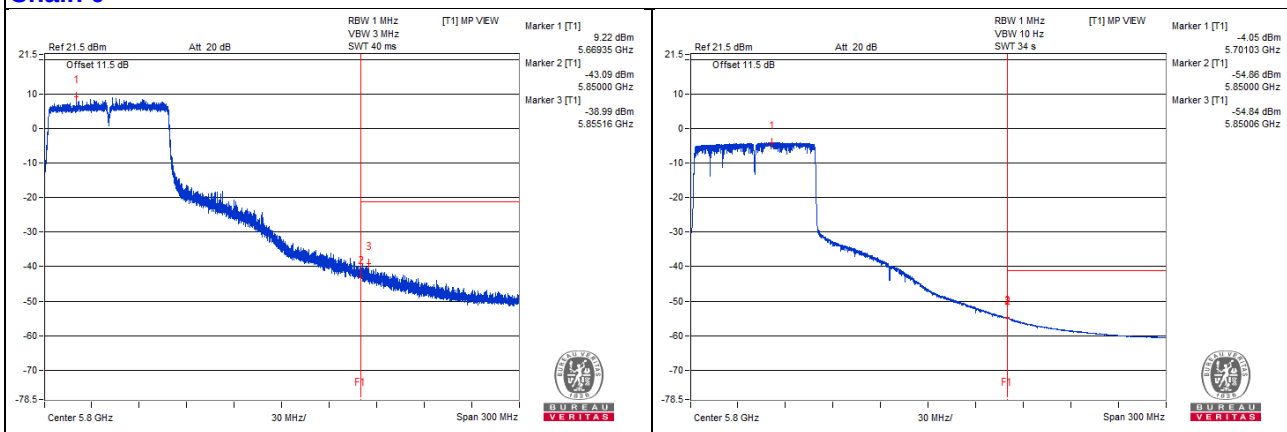

## Chain 1

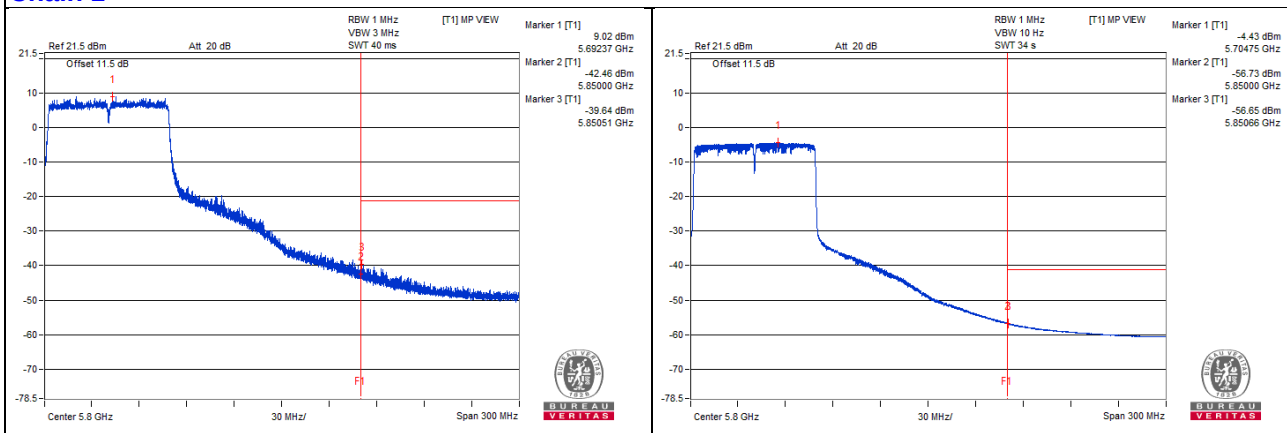

### 802.11ac (VHT80) – Channel 155

#### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3837.5 PK       | 56.34                   | 74             | -17.66      | -49.14          | -50.35 | 7.77                   | -38.92           |
| 2   | 3856.25 AV      | 44.07                   | 54             | -9.93       | -61.96          | -61.99 | 7.77                   | -51.19           |
| 3   | 7714.06 PK      | 56.39                   | 74             | -17.61      | -48.78          | -50.73 | 7.77                   | -38.87           |
| 4   | 7700 AV         | 45.64                   | 54             | -8.36       | -60.43          | -60.37 | 7.77                   | -49.62           |
| 5   | 11553.12 PK     | 54.94                   | 74             | -19.06      | -50.74          | -51.49 | 7.77                   | -40.32           |
| 6   | 11542.18 AV     | 43.3                    | 54             | -10.7       | -62.82          | -62.66 | 7.77                   | -51.96           |
| 7   | 17320.87 PK     | 57.82                   | 68.2           | -10.38      | -46.77          | -50.41 | 7.77                   | -37.44           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

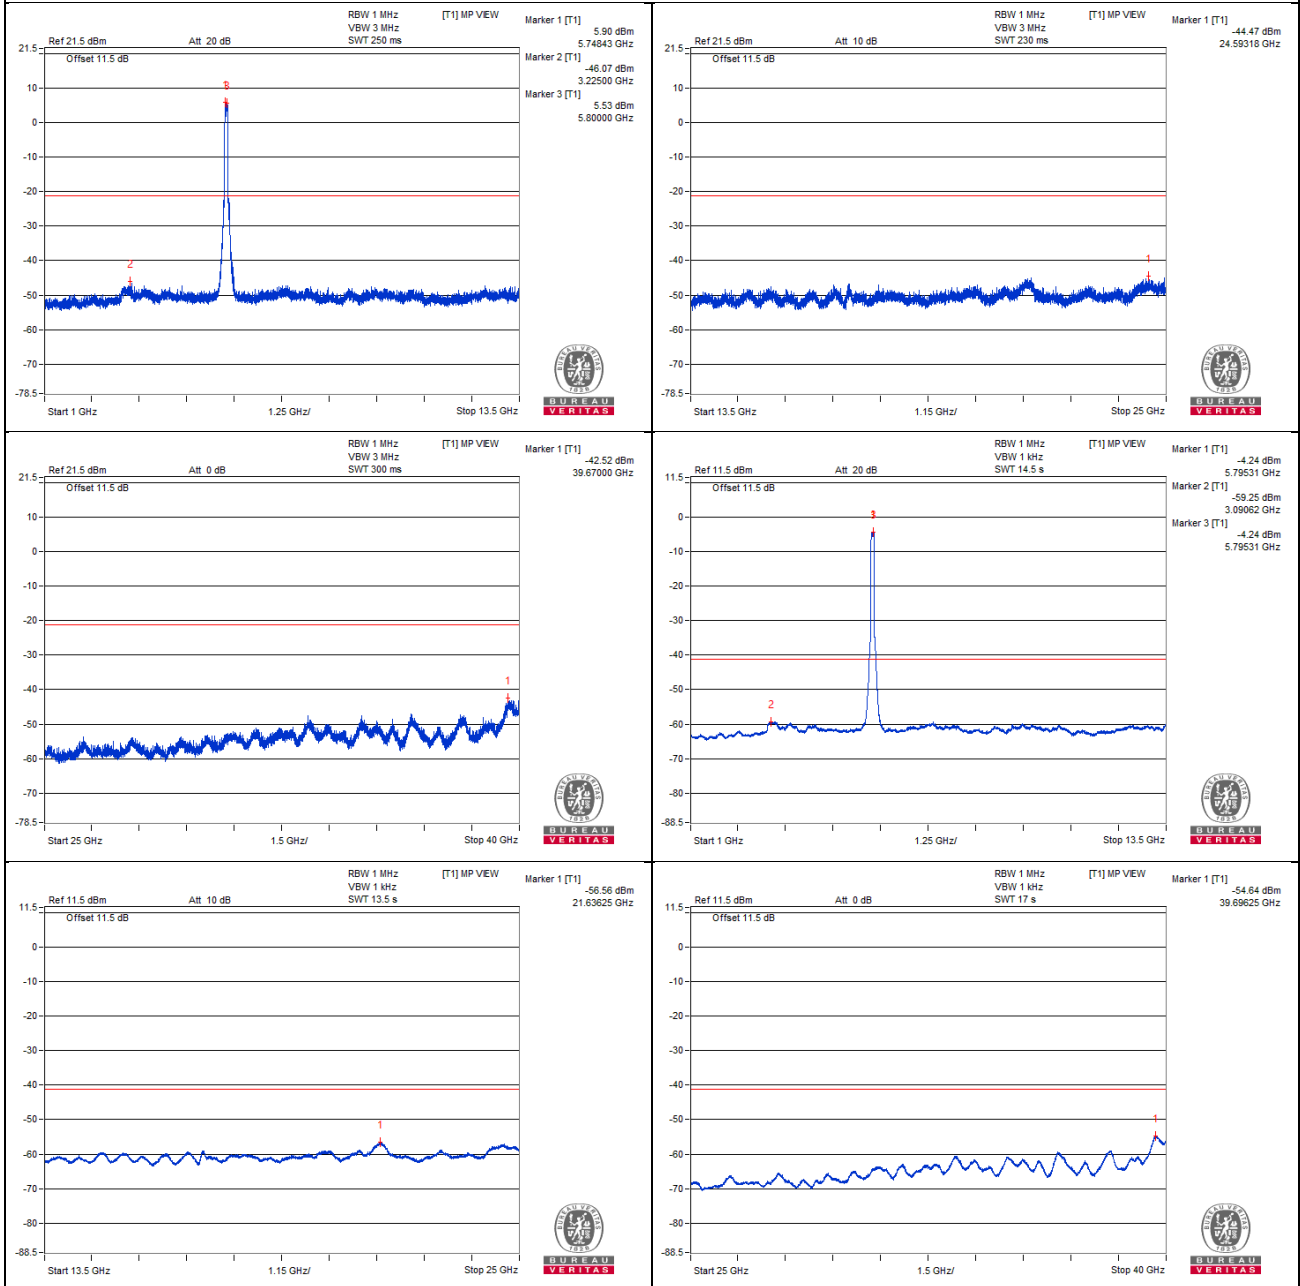


## Chain 1

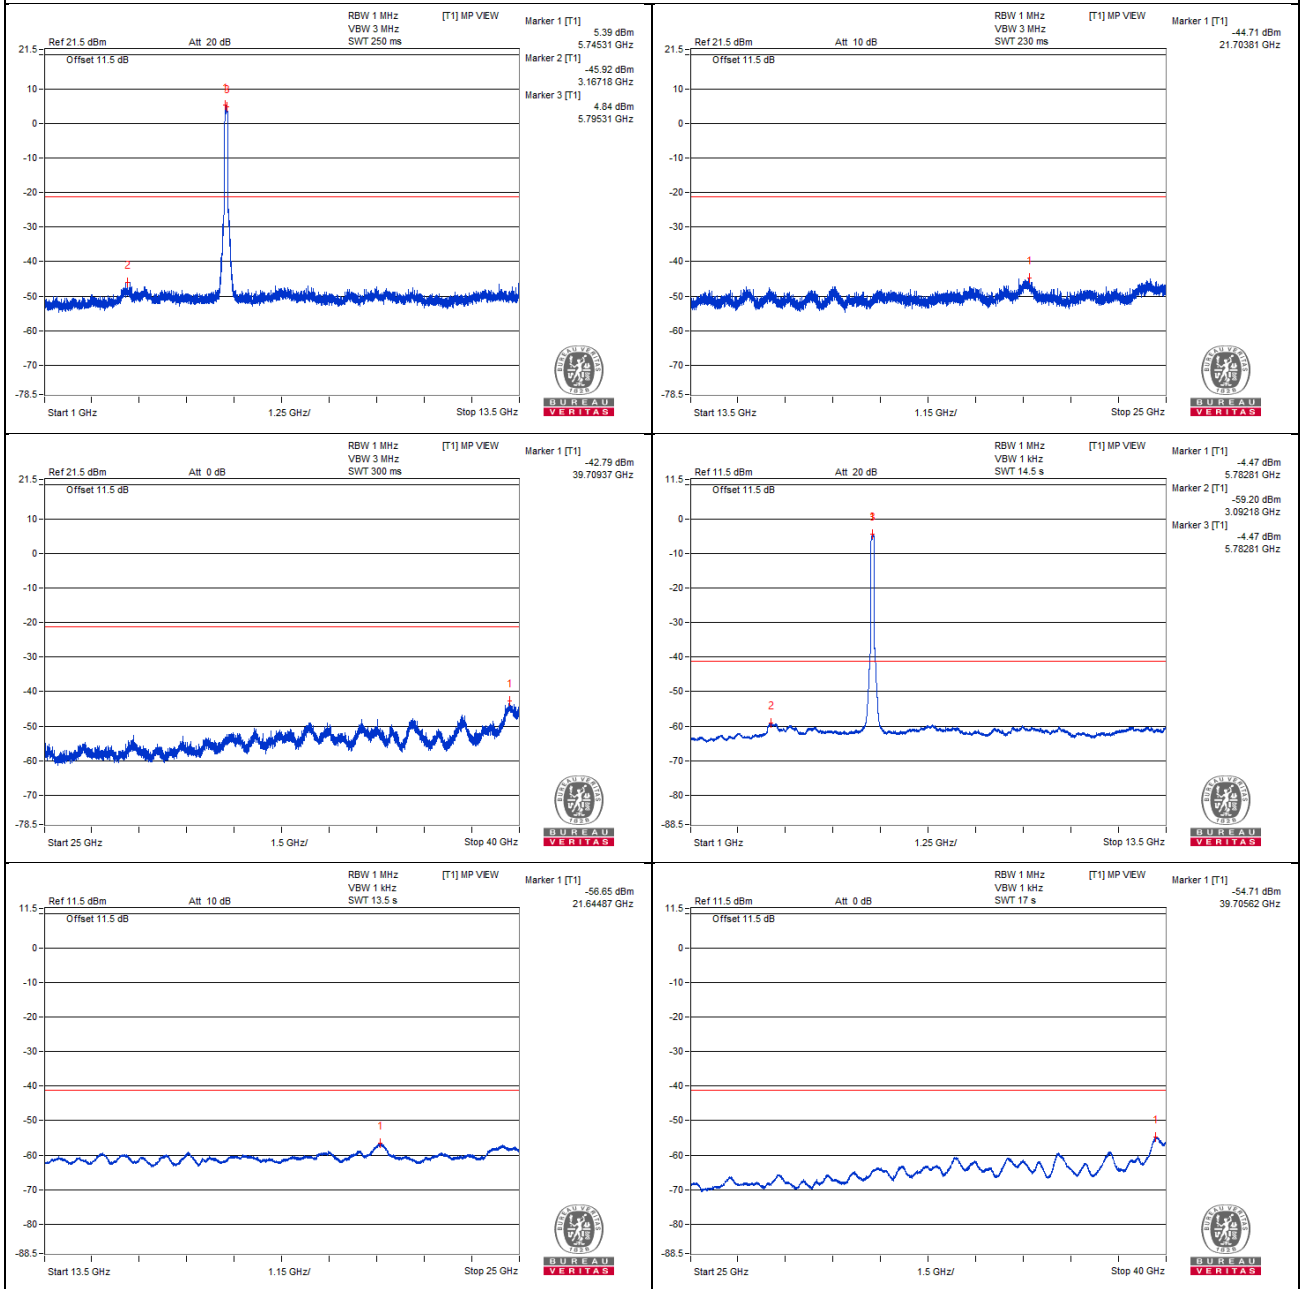


## Bandedge table

### Chain 0

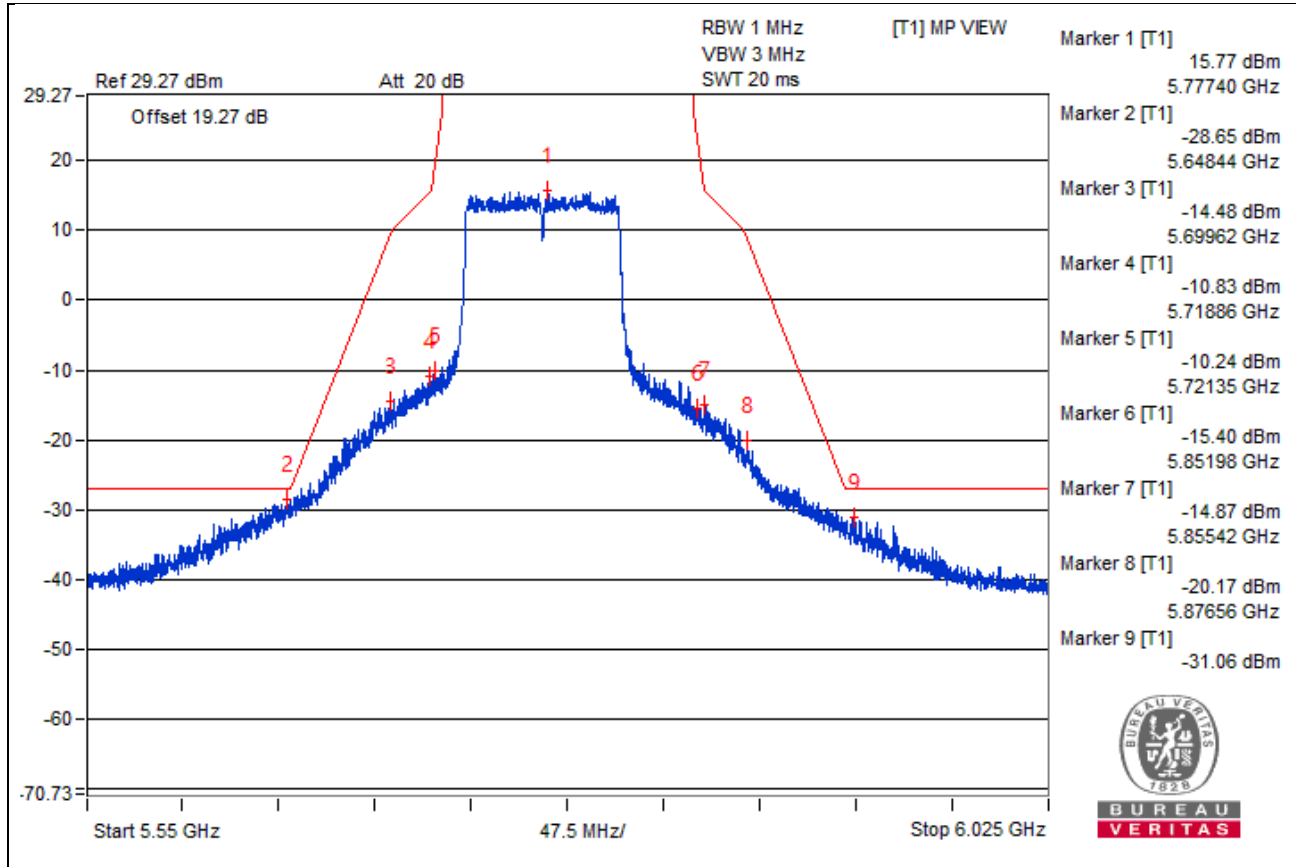

### Chain 1

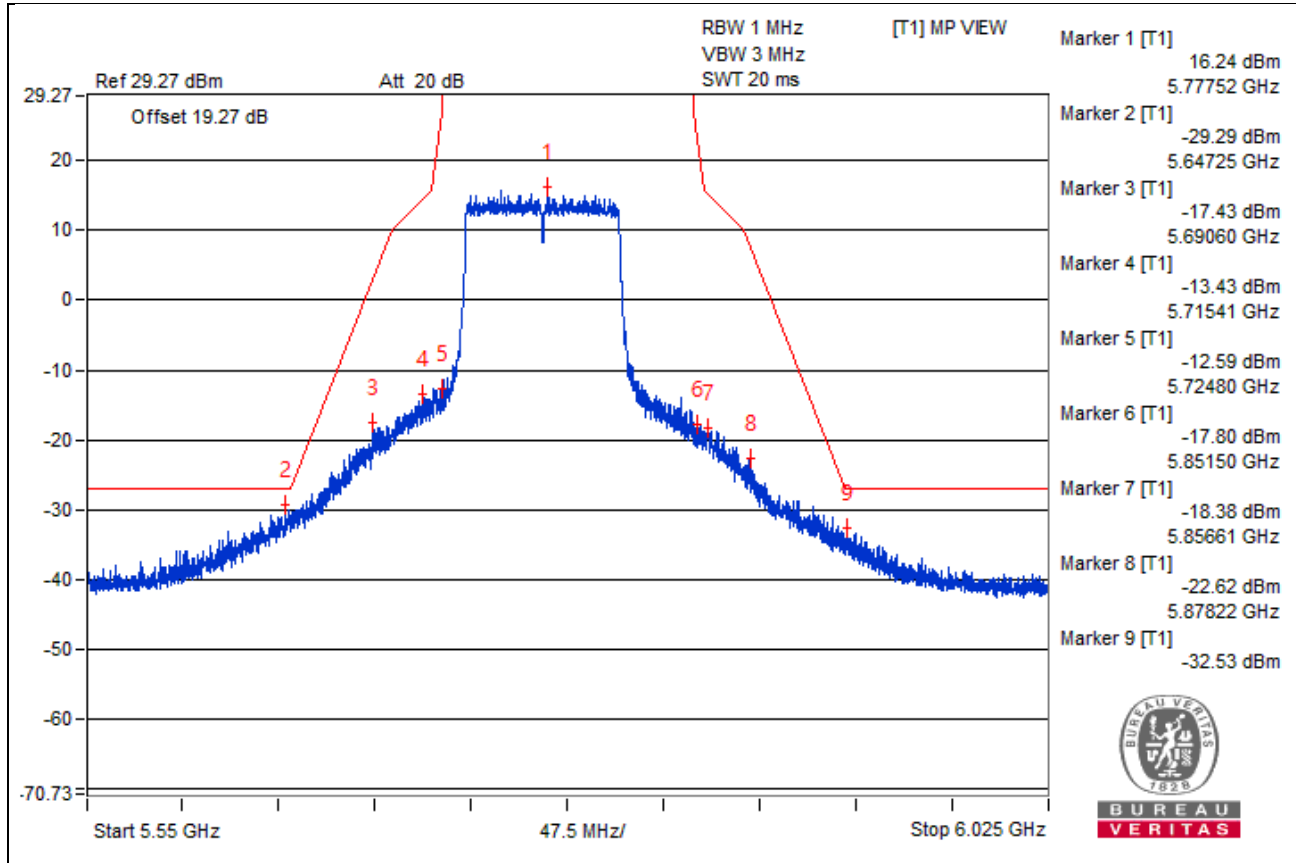

## 802.11ax (HE20) - Channel 36

### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3448.43 PK      | 55.84                   | 68.2           | -12.36      | -49.62          | -47.64 | 6.09                   | -39.42           |
| 2   | 6906.25 PK      | 57.43                   | 68.2           | -10.77      | -47.61          | -46.35 | 6.09                   | -37.83           |
| 3   | 10356.25 PK     | 56.79                   | 68.2           | -11.41      | -47.84          | -47.31 | 6.09                   | -38.47           |
| 4   | 15539.81 PK     | 59.25                   | 74             | -14.75      | -51.01          | -42.7  | 6.09                   | -36.01           |
| 5   | 15541.25 AV     | 46.08                   | 54             | -7.92       | -59.46          | -57.35 | 6.09                   | -49.18           |

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0



## Chain 1



## Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5149.52 PK      | 74.74                   | 74             | * 0.74      | -30.72          | -28.74 | 6.09                   | -20.52           |
| 2   | 5149.97 AV      | 56.05                   | 54             | * 2.05      | -50.71          | -46.77 | 6.09                   | -39.21           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


\* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

## Chain 0

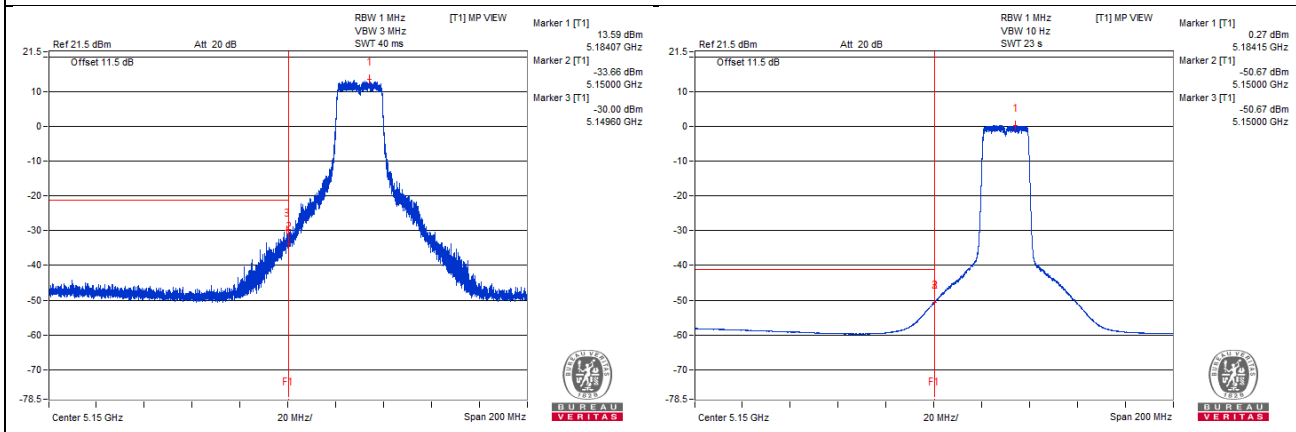

## Chain 1

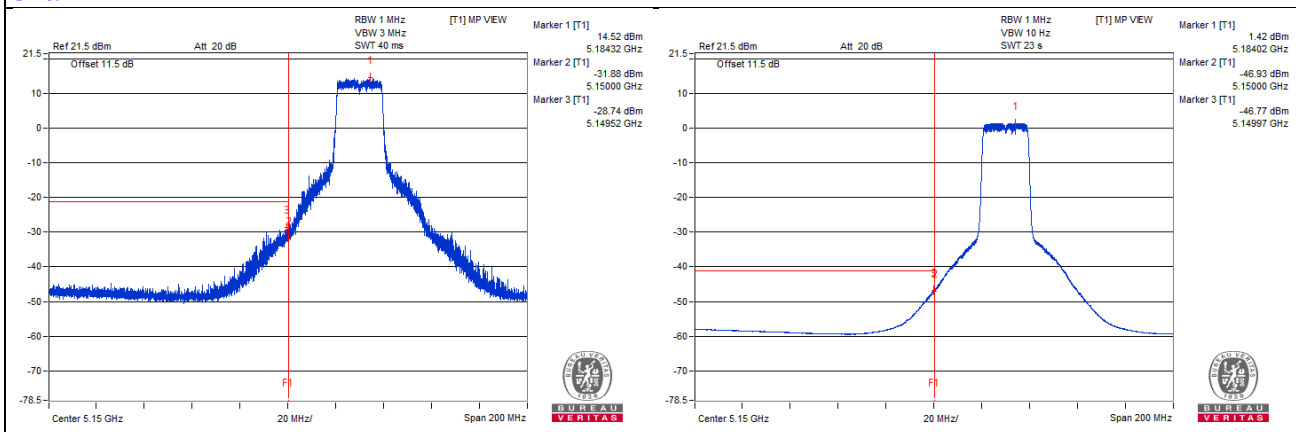

## 802.11ax (HE20) - Channel 40


### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3475 PK         | 55.2                    | 68.2           | -13         | -48.36          | -50.14 | 6.09                   | -40.06           |
| 2   | 6932.81 PK      | 57.16                   | 68.2           | -11.04      | -47.64          | -46.81 | 6.09                   | -38.1            |
| 3   | 10410.93 PK     | 55.33                   | 68.2           | -12.87      | -49.32          | -48.76 | 6.09                   | -39.93           |
| 4   | 15594.43 PK     | 61.93                   | 74             | -12.07      | -50.66          | -39.76 | 6.09                   | -33.33           |
| 5   | 15597.31 AV     | 46.81                   | 54             | -7.19       | -60             | -56    | 6.09                   | -48.45           |

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8  
 d = measurement distance in 3 meters.

## Chain 0

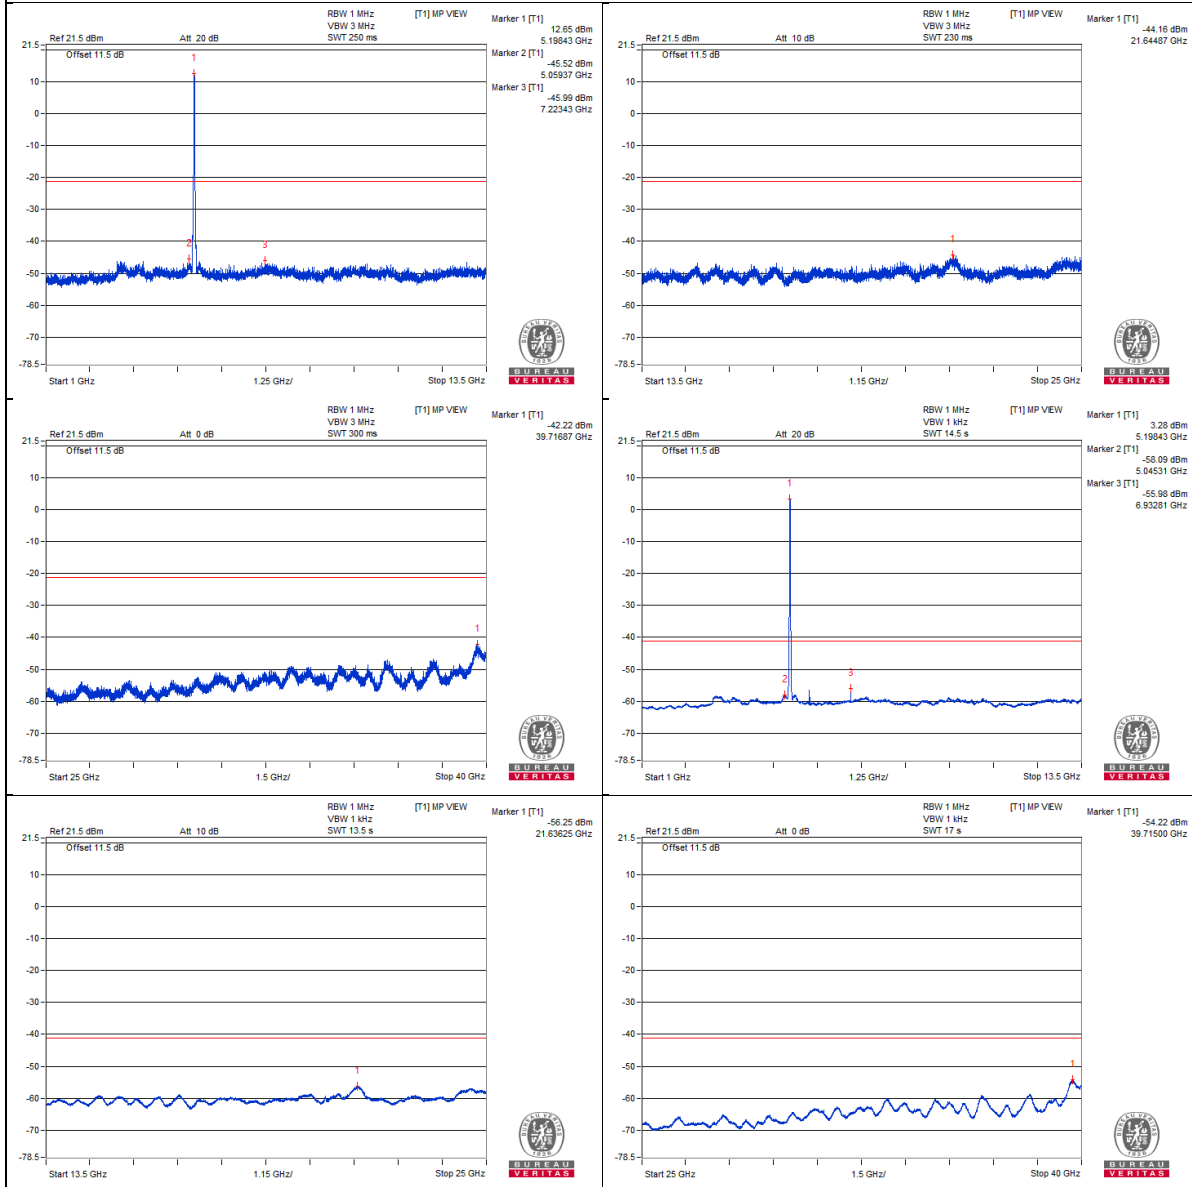

## Chain 1



## Bandedge table


| No. | Frequency (MHz) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5148.25 PK      | 68.65                   | 74             | -5.35       | -38.13          | -34.16 | 6.09                   | -26.61           |
| 2   | 5150 AV         | 47.91                   | 54             | -6.09       | -56.92          | -56.03 | 6.09                   | -47.35           |

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

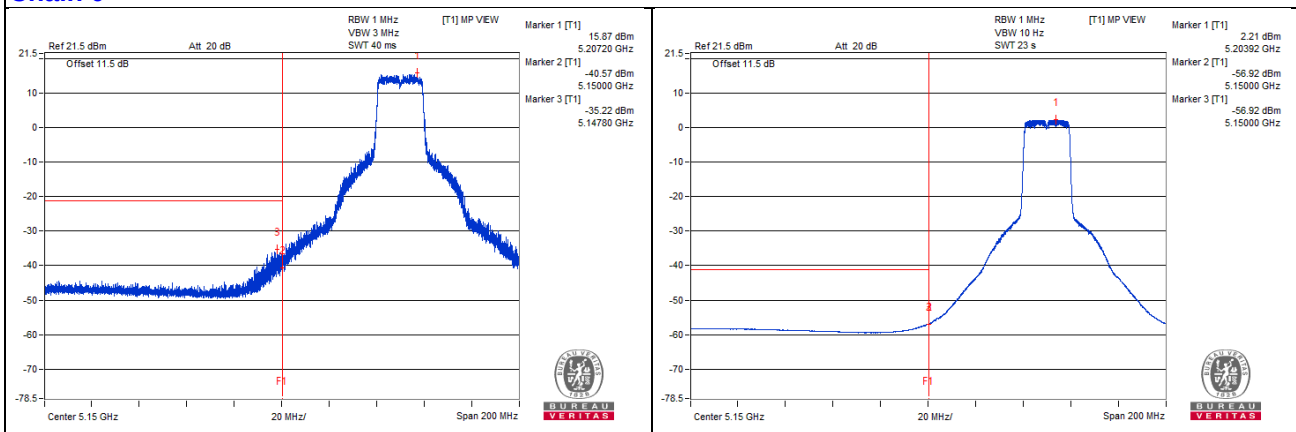

## Chain 1

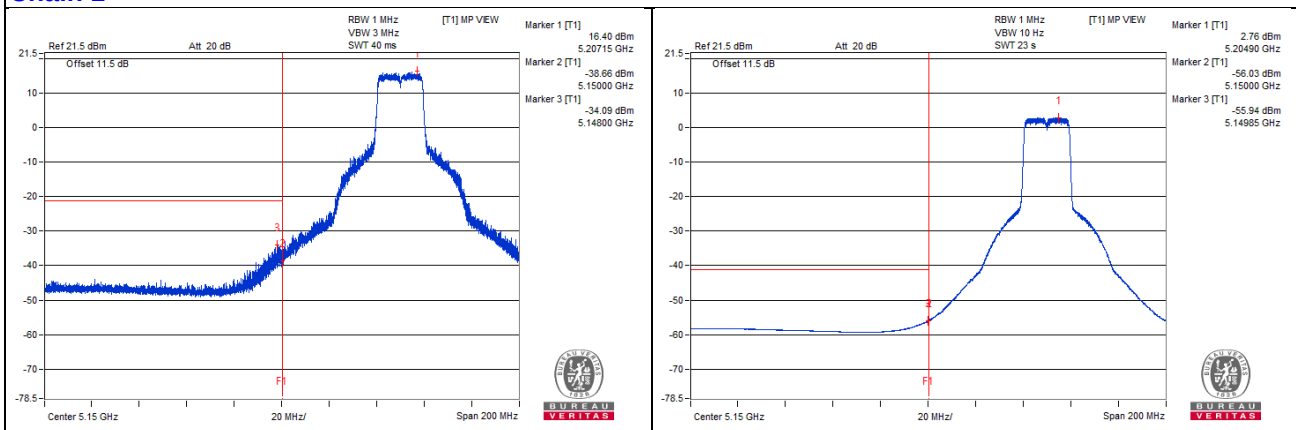

## 802.11ax (HE20) - Channel 48

### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3506.25 PK      | 55.11                   | 74             | -18.89      | -50.08          | -48.55 | 6.09                   | -40.15           |
| 2   | 3507.81 AV      | 44.66                   | 54             | -9.34       | -59.81          | -59.6  | 6.09                   | -50.6            |
| 3   | 6985.93 PK      | 57.06                   | 68.2           | -11.14      | -49.62          | -45.8  | 6.09                   | -38.2            |
| 4   | 10464.06 PK     | 54.77                   | 68.2           | -13.43      | -50.12          | -49.12 | 6.09                   | -40.49           |
| 5   | 15725.25 PK     | 58.9                    | 74             | -15.1       | -51.7           | -43    | 6.09                   | -36.36           |
| 6   | 15719.5 AV      | 46.43                   | 54             | -7.57       | -60.97          | -56.16 | 6.09                   | -48.83           |

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0



## Chain 1



### Bandedge table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5082 PK         | 59.1                    | 74             | -14.9       | -47.01          | -44.02 | 6.09                   | -36.16           |
| 2   | 5086.87 AV      | 45.86                   | 54             | -8.14       | -58.73          | -58.28 | 6.09                   | -49.4            |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

### Chain 0

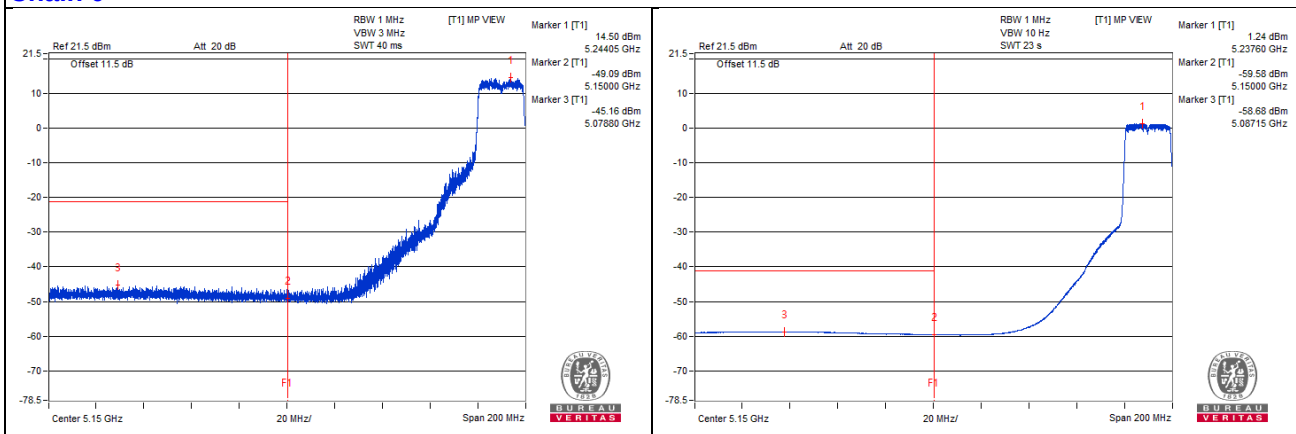

### Chain 1

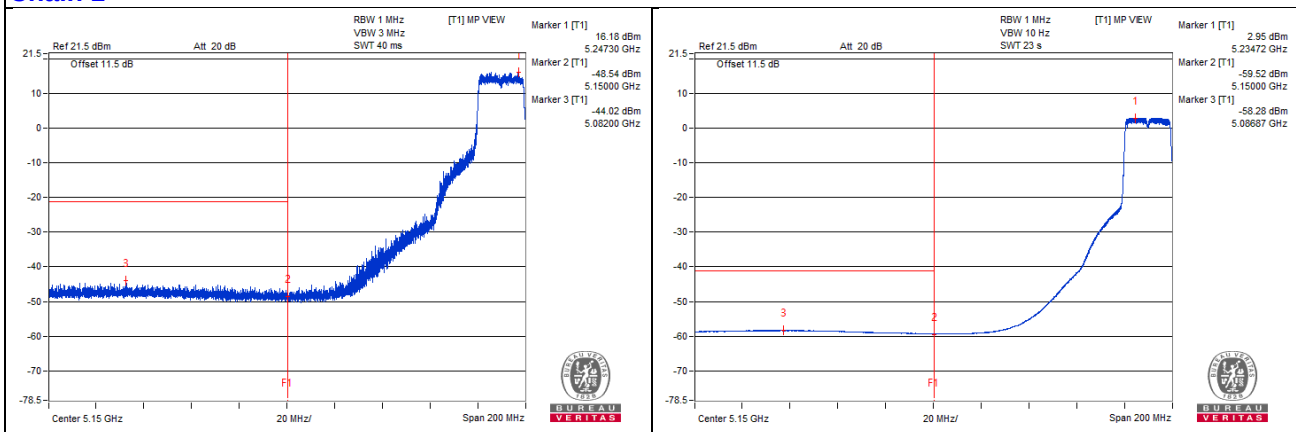

## 802.11ax (HE20) - Channel 52

### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3520.31 PK      | 56.61                   | 74             | -17.39      | -49.65          | -46.44 | 6.09                   | -38.65           |
| 2   | 3523.43 AV      | 44.96                   | 54             | -9.04       | -59.5           | -59.31 | 6.09                   | -50.3            |
| 3   | 7014.06 PK      | 57.08                   | 68.2           | -11.12      | -48.39          | -46.4  | 6.09                   | -38.18           |
| 4   | 10525 PK        | 55.29                   | 68.2           | -12.91      | -48.42          | -49.84 | 6.09                   | -39.97           |
| 5   | 15774.12 PK     | 59.68                   | 74             | -14.32      | -51.6           | -42.14 | 6.09                   | -35.58           |
| 6   | 15781.31 AV     | 46.96                   | 54             | -7.04       | -60.02          | -55.78 | 6.09                   | -48.3            |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

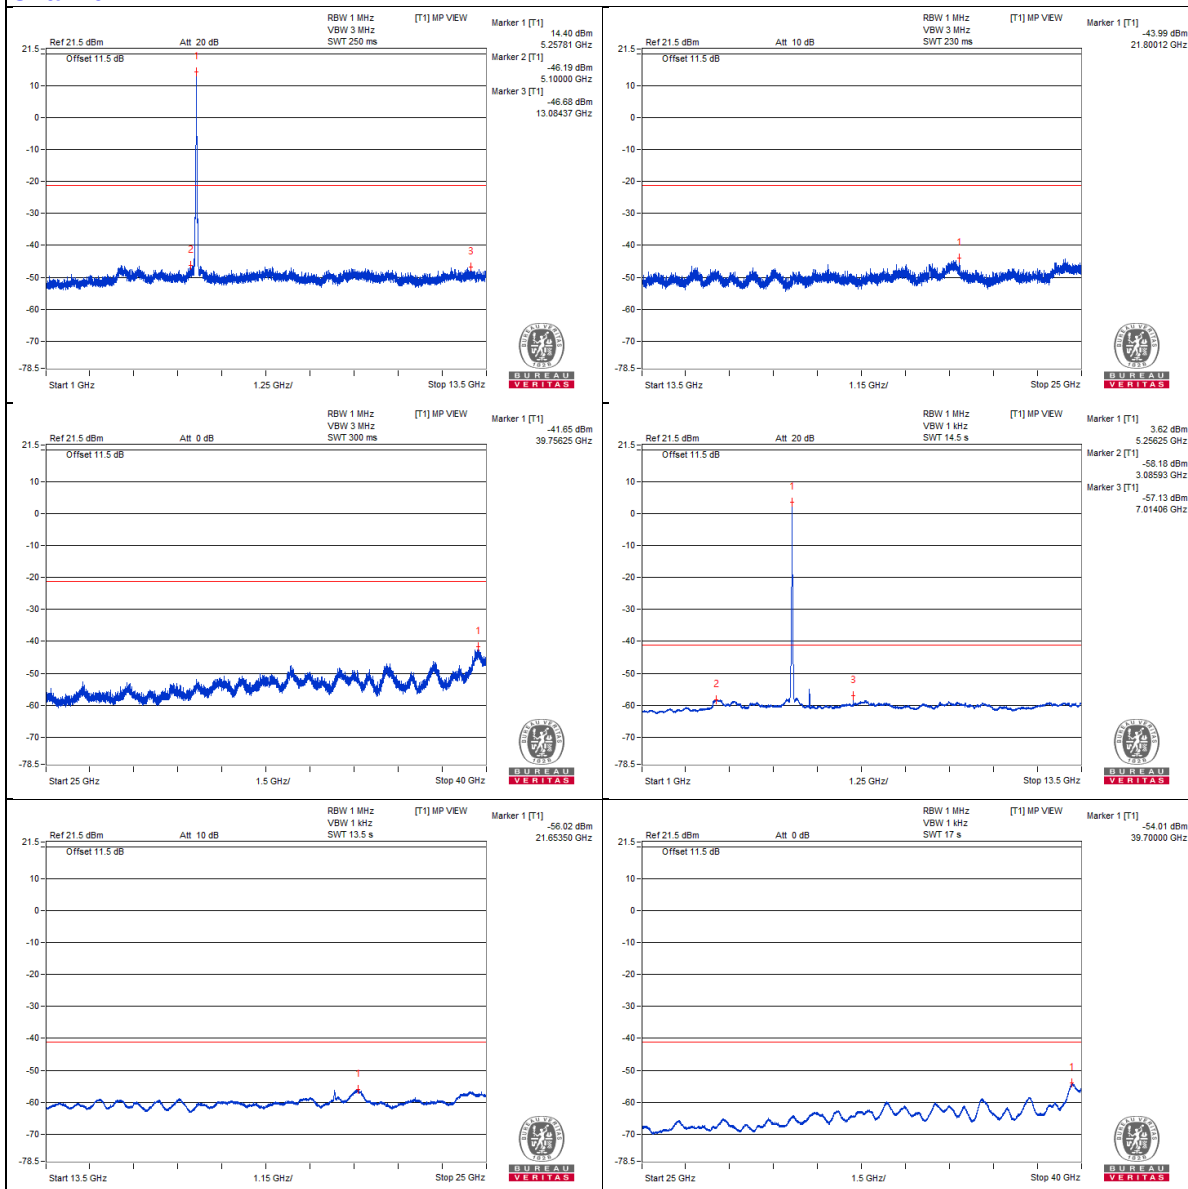

## Chain 1

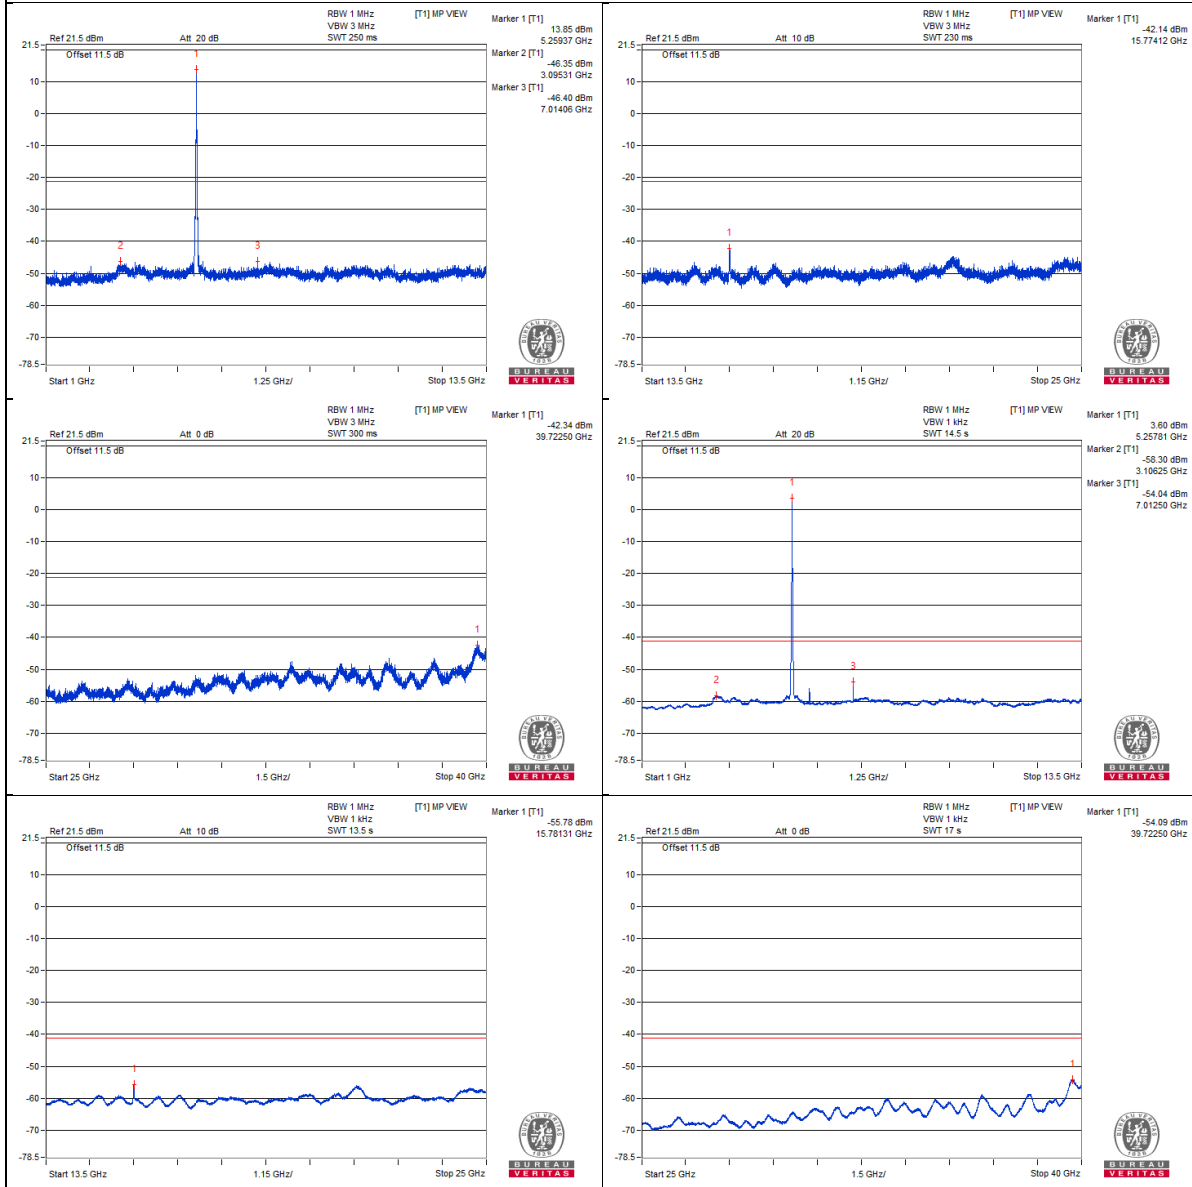

## Bandedge table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5414.57 PK      | 58.52                   | 74             | -15.48      | -46.57          | -45.22 | 6.09                   | -36.74           |
| 2   | 5380.95 AV      | 45.66                   | 54             | -8.34       | -58.87          | -58.53 | 6.09                   | -49.6            |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

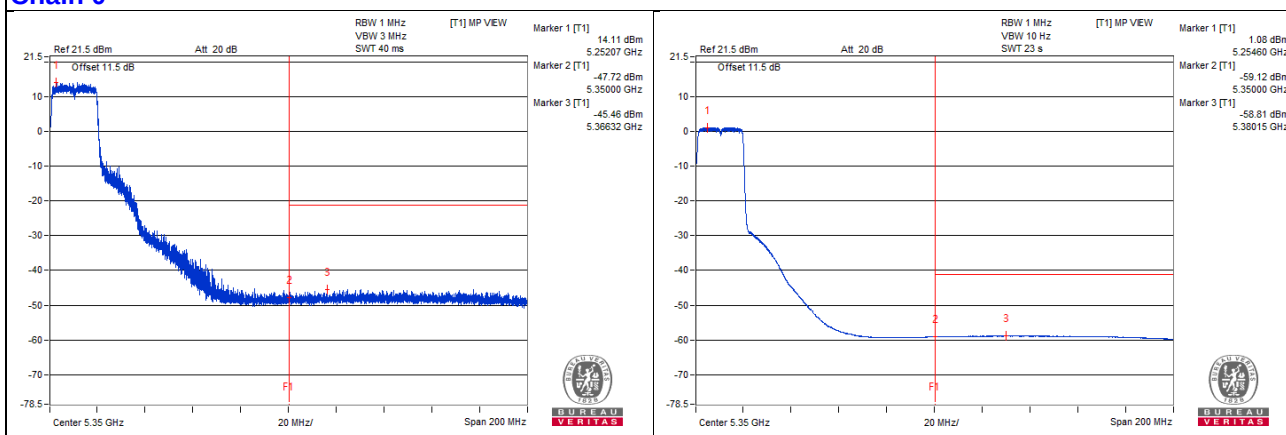

## Chain 1

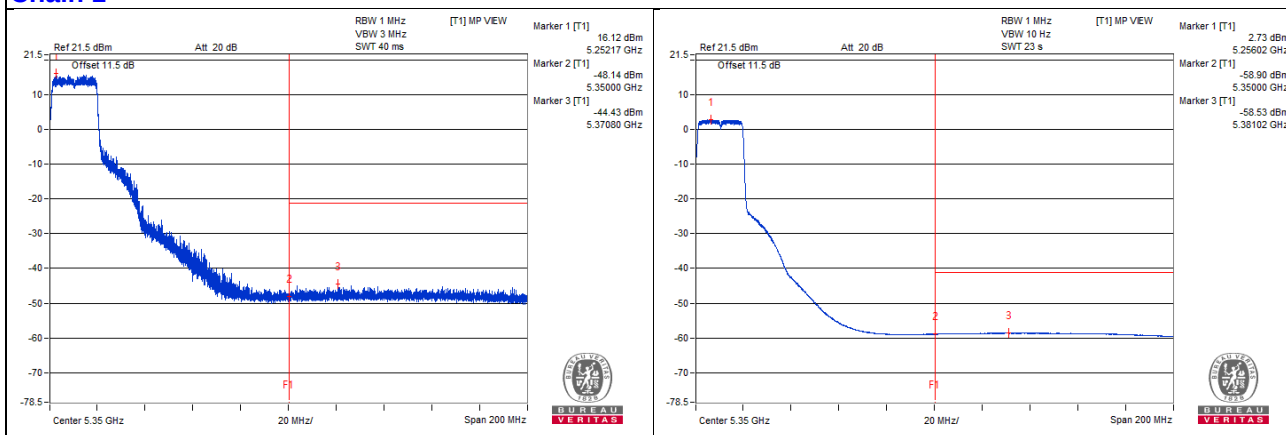

## 802.11ax (HE20) - Channel 60

### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3542.18 PK      | 56.7                    | 74             | -17.3       | -48.31          | -47.1  | 6.09                   | -38.56           |
| 2   | 3545.31 AV      | 45.33                   | 54             | -8.67       | -58.92          | -59.14 | 6.09                   | -49.93           |
| 3   | 7067.18 PK      | 57.48                   | 68.2           | -10.72      | -48.59          | -45.65 | 6.09                   | -37.78           |
| 4   | 10603.12 PK     | 55.52                   | 74             | -18.48      | -49.77          | -48.08 | 6.09                   | -39.74           |
| 5   | 10617.18 AV     | 44.34                   | 54             | -9.66       | -60.1           | -59.95 | 6.09                   | -50.92           |
| 6   | 15897.75 PK     | 59.86                   | 74             | -14.14      | -48.7           | -42.4  | 6.09                   | -35.4            |
| 7   | 15900.62 AV     | 47.01                   | 54             | -6.99       | -60.06          | -55.69 | 6.09                   | -48.25           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0



## Chain 1

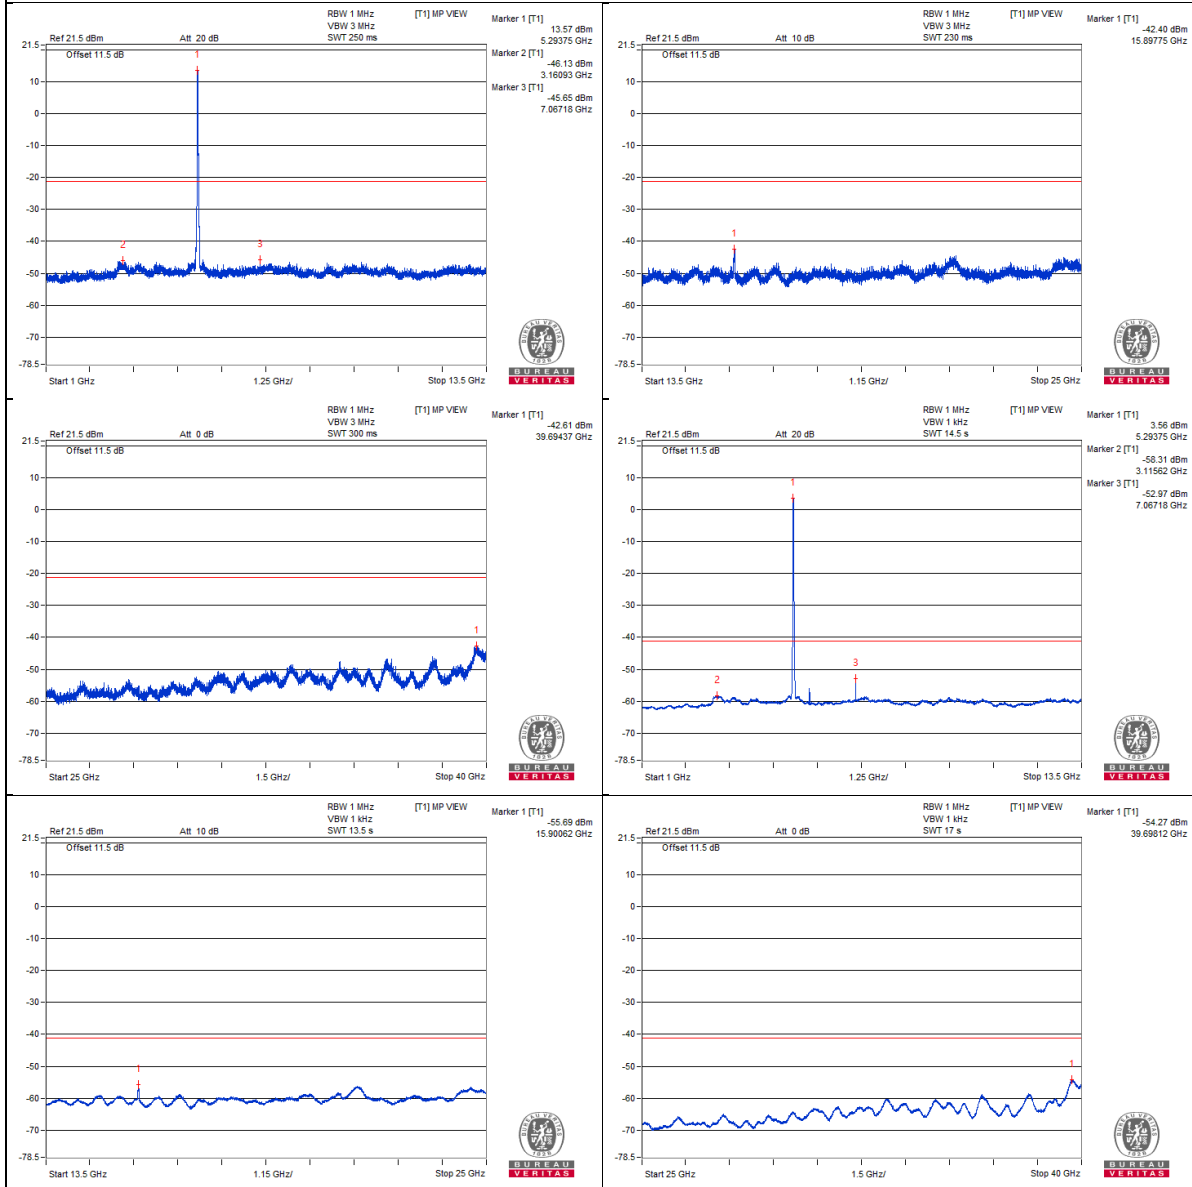

## Bandedge table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5350.67 PK      | 68.55                   | 74             | -5.45       | -36.96          | -34.9  | 6.09                   | -26.71           |
| 2   | 5350.05 AV      | 48.49                   | 54             | -5.51       | -56.82          | -55.09 | 6.09                   | -46.77           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

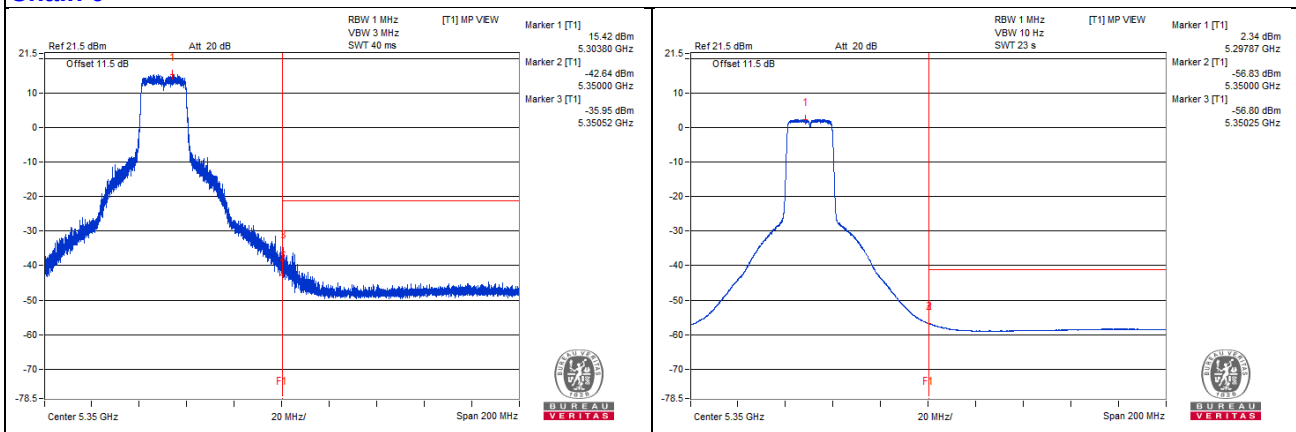

## Chain 1

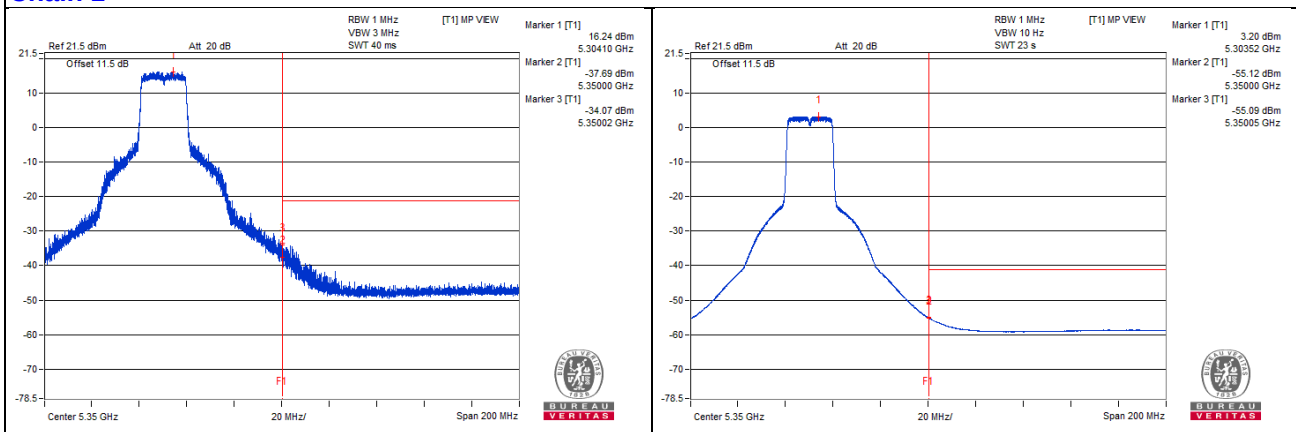

## 802.11ax (HE20) - Channel 64

### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3554.68 PK      | 56.2                    | 74             | -17.8       | -47.32          | -49.21 | 6.09                   | -39.06           |
| 2   | 3550 AV         | 45.3                    | 54             | -8.7        | -59.21          | -58.91 | 6.09                   | -49.96           |
| 3   | 7090.62 PK      | 56.33                   | 68.2           | -11.87      | -47.18          | -49.1  | 6.09                   | -38.93           |
| 4   | 10625 PK        | 55.53                   | 74             | -18.47      | -47.83          | -50.13 | 6.09                   | -39.73           |
| 5   | 10656.25 AV     | 44.44                   | 54             | -9.56       | -59.85          | -60    | 6.09                   | -50.82           |
| 6   | 15959.56 PK     | 56.59                   | 74             | -17.41      | -49.72          | -46.43 | 6.09                   | -38.67           |
| 7   | 15958.12 AV     | 44.71                   | 54             | -9.29       | -60.74          | -58.78 | 6.09                   | -50.55           |

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0



## Chain 1



## Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5350 PK         | 73.2                    | 74             | -0.8        | -32.08          | -30.41 | 6.09                   | -22.06           |
| 2   | 5350.02 AV      | 54.62                   | 54             | * 0.62      | -51.53          | -48.47 | 6.09                   | -40.64           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


\* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

## Chain 0

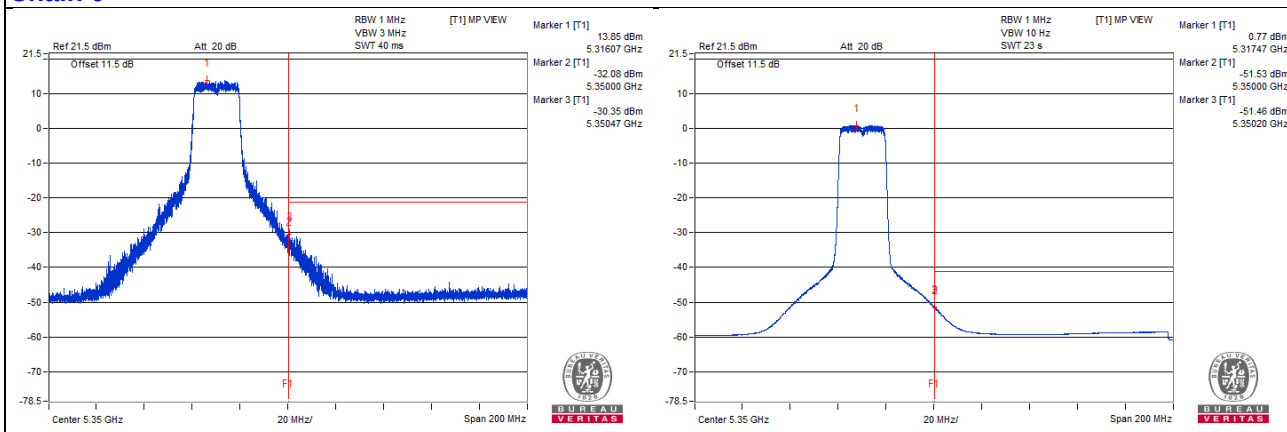

## Chain 1

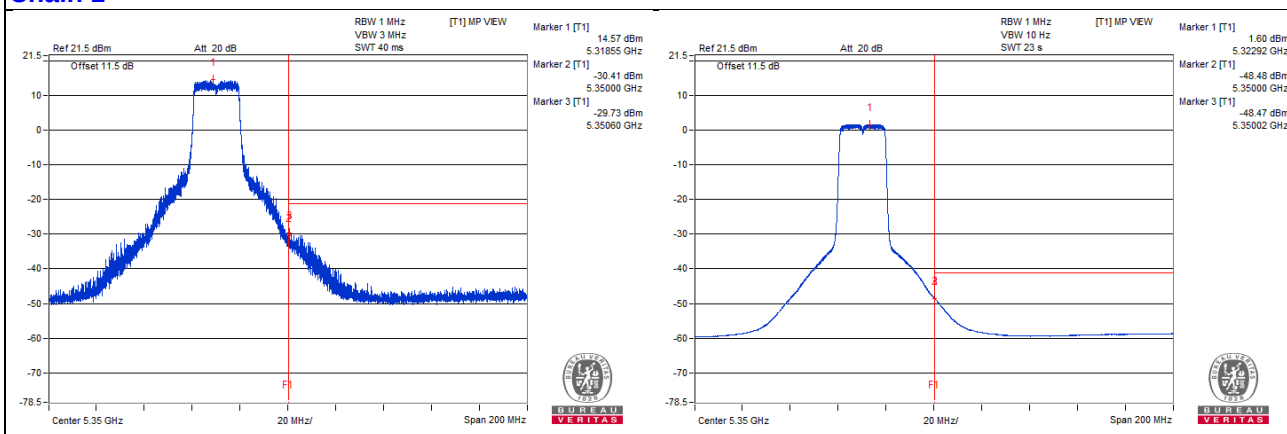

## 802.11ax (HE20) - Channel 100

### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3681.25 PK      | 57.17                   | 74             | -16.83      | -48.8           | -48.94 | 7.77                   | -38.09           |
| 2   | 3648.43 AV      | 46.76                   | 54             | -7.24       | -59.39          | -59.17 | 7.77                   | -48.5            |
| 3   | 7337.5 PK       | 59.18                   | 74             | -14.82      | -45.81          | -48.25 | 7.77                   | -36.08           |
| 4   | 7332.81 AV      | 50.88                   | 54             | -3.12       | -55.09          | -55.23 | 7.77                   | -44.38           |
| 5   | 11007.81 PK     | 56.13                   | 74             | -17.87      | -49.52          | -50.35 | 7.77                   | -39.13           |
| 6   | 10981.25 AV     | 45.3                    | 54             | -8.7        | -60.64          | -60.85 | 7.77                   | -49.96           |
| 7   | 16505.81 PK     | 57.87                   | 68.2           | -10.33      | -49.53          | -47.13 | 7.77                   | -37.39           |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

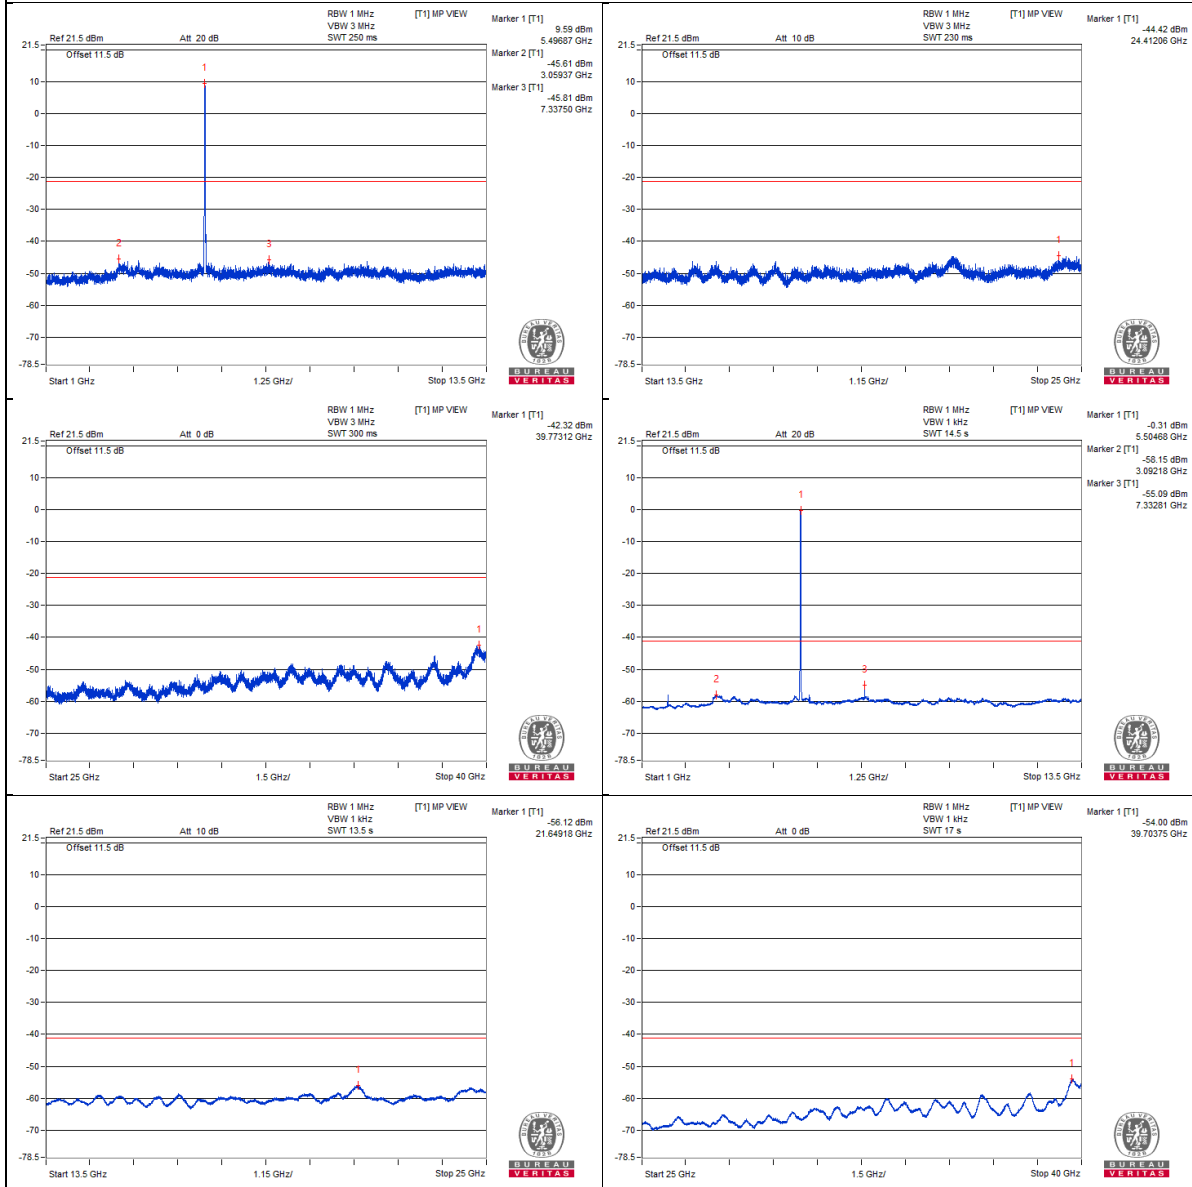

## Chain 1

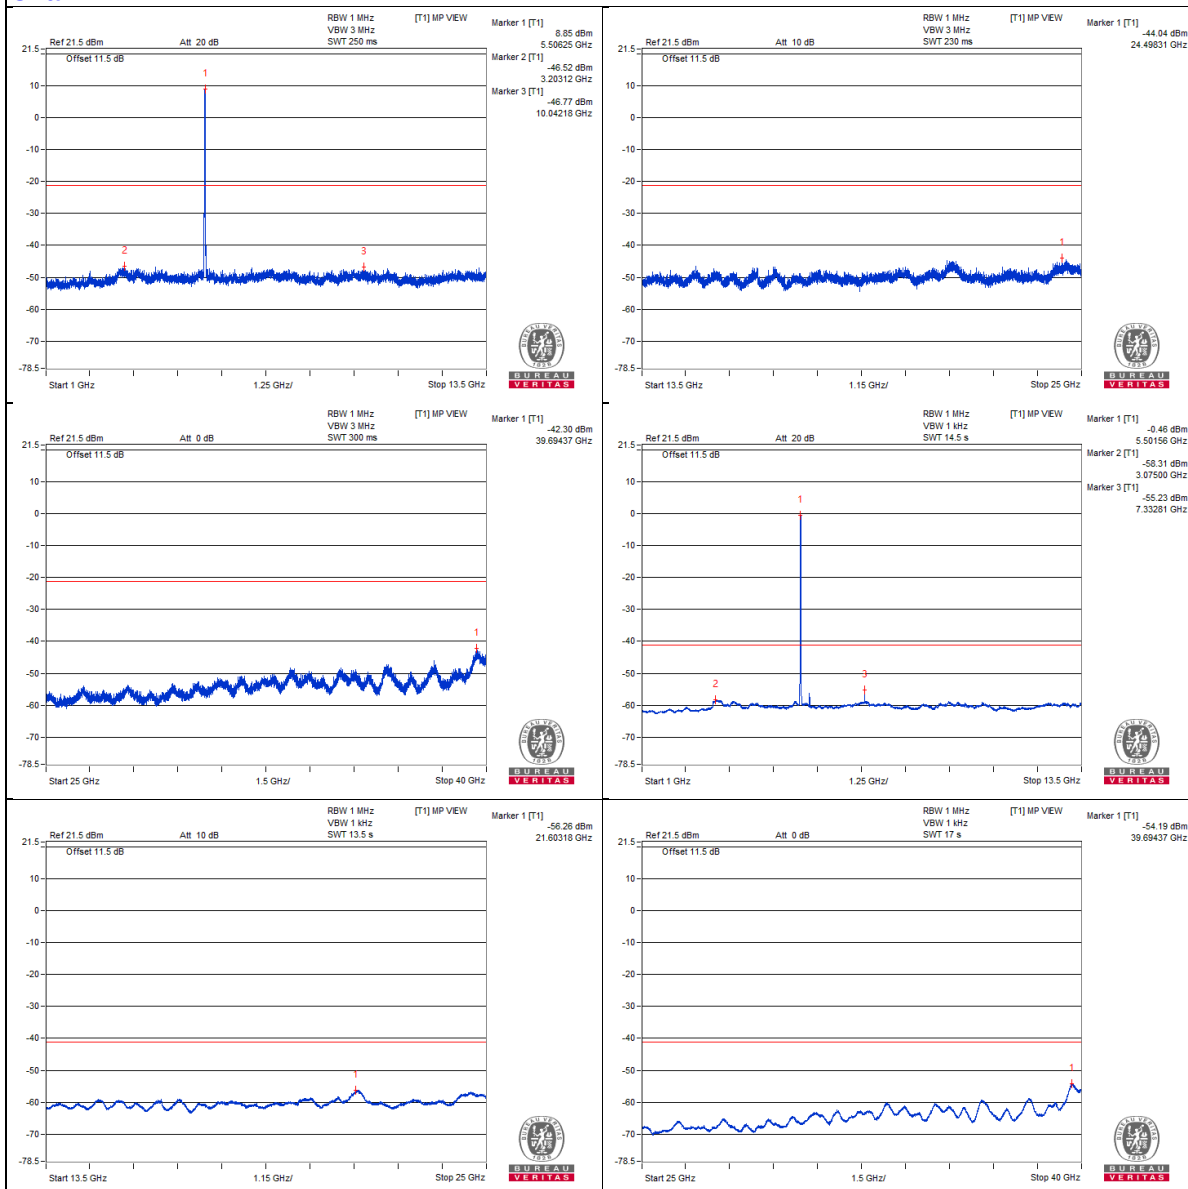

## Bandedge table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5458.46 PK      | 64.53                   | 74             | -9.47       | -41.6           | -41.43 | 7.77                   | -30.73           |
| 2   | 5351.84 AV      | 47.69                   | 54             | -6.31       | -58.34          | -58.37 | 7.77                   | -47.57           |
| 3   | 5467.96 PK      | 73.01                   | 68.2           | * 4.81      | -32             | -34.38 | 7.77                   | -22.25           |


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

\* The unwanted emission was verified and the test result was passed by radiated measurement.  
(Please refer APPENDIX B)

## Chain 0

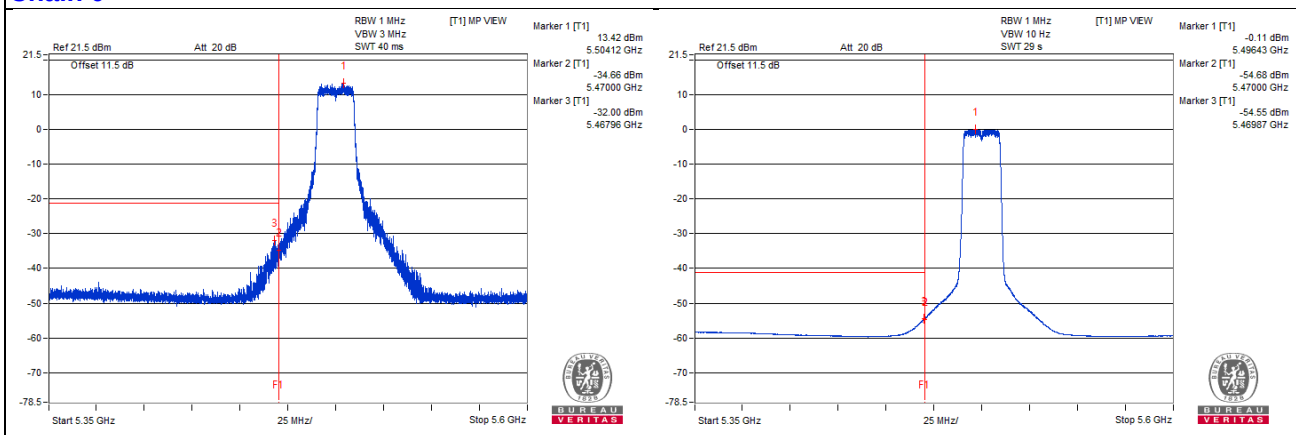

## Chain 1

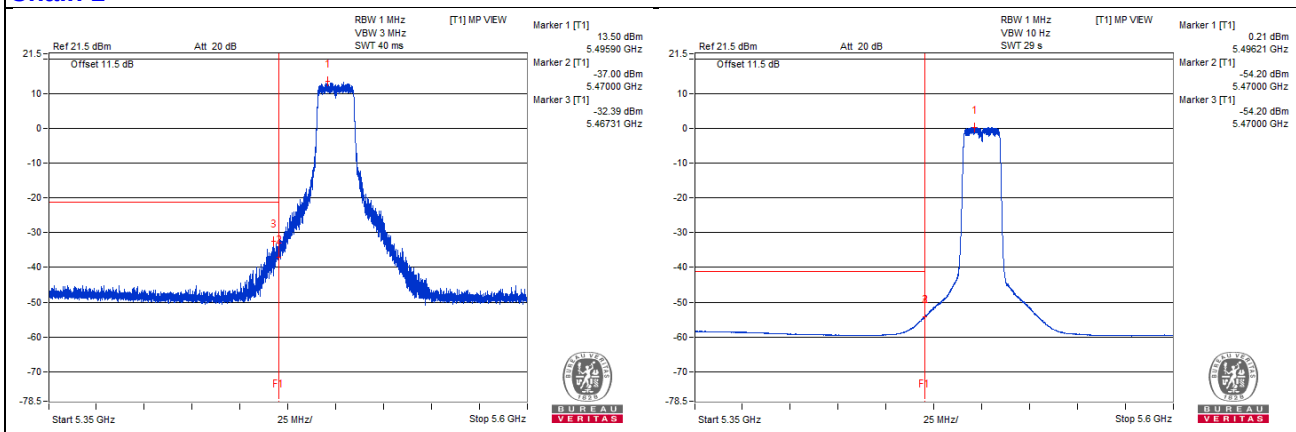

## 802.11ax (HE20) - Channel 116

### Conducted spurious emission table

| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3704.68 PK      | 58.37                   | 74             | -15.63      | -48.81          | -46.77 | 7.77                   | -36.89           |
| 2   | 3735.93 AV      | 46.49                   | 54             | -7.51       | -59.42          | -59.68 | 7.77                   | -48.77           |
| 3   | 7440.62 PK      | 58.68                   | 74             | -15.32      | -46.46          | -48.51 | 7.77                   | -36.58           |
| 4   | 7440.62 AV      | 49.11                   | 54             | -4.89       | -57.66          | -56.3  | 7.77                   | -46.15           |
| 5   | 11159.37 PK     | 56.68                   | 74             | -17.32      | -49.81          | -48.95 | 7.77                   | -38.58           |
| 6   | 11179.68 AV     | 45.21                   | 54             | -8.79       | -60.93          | -60.74 | 7.77                   | -50.05           |
| 7   | 16737.25 PK     | 65.49                   | 68.2           | -2.71       | -40.73          | -40.38 | 7.77                   | -29.77           |

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0



## Chain 1



## Bandedge table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 5436.4 PK       | 60.81                   | 74             | -13.19      | -44.02          | -46.9  | 7.77                   | -34.45           |
| 2   | 5436.78 AV      | 47.51                   | 54             | -6.49       | -58.44          | -58.62 | 7.77                   | -47.75           |
| 3   | 5463.5 PK       | 59.56                   | 68.2           | -8.64       | -45.29          | -48.12 | 7.77                   | -35.7            |

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

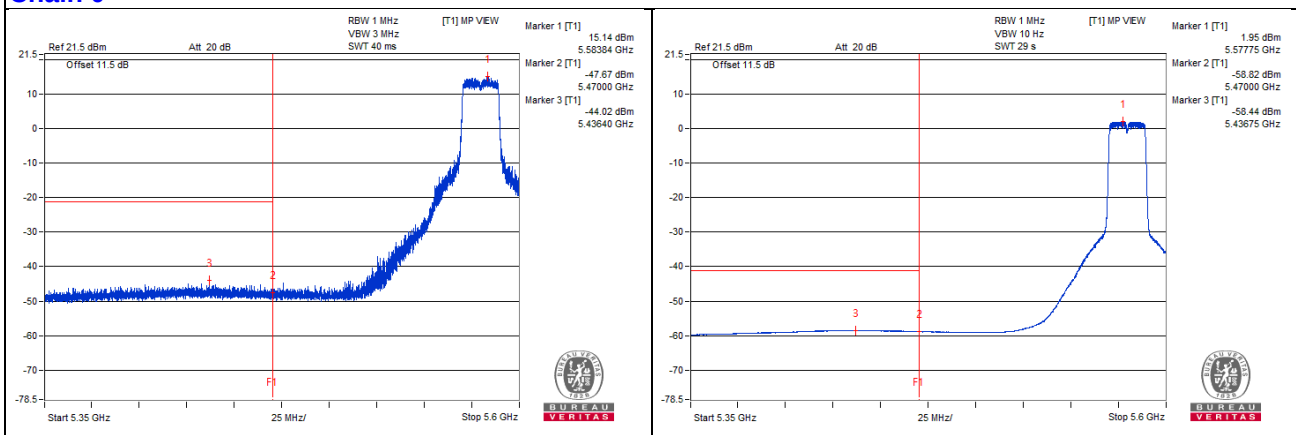

## Chain 1

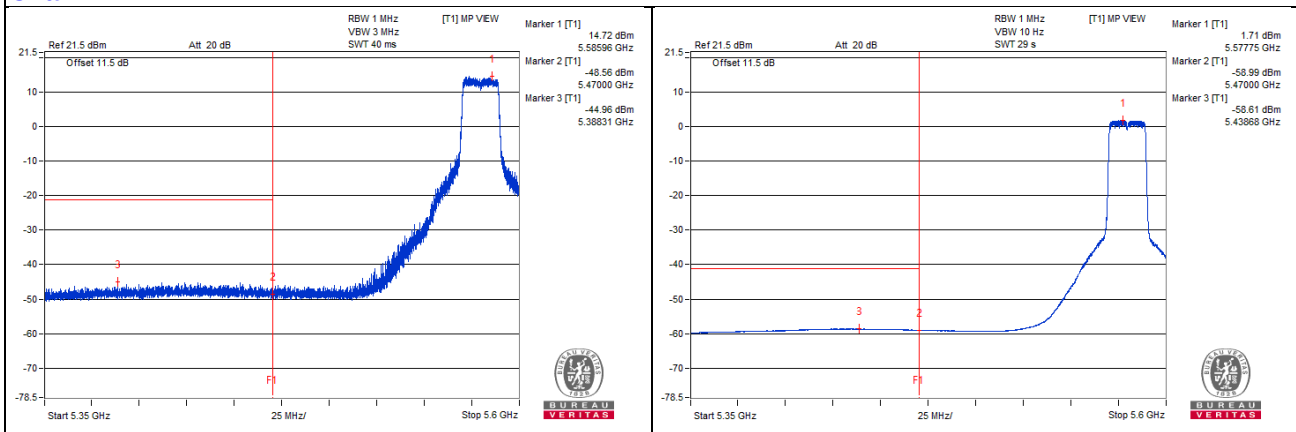

## 802.11ax (HE20) - Channel 140

### Conducted spurious emission table


| No. | Frequency (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Raw Value (dBm) |        | Correction Factor (dB) | EIRP Level (dBm) |
|-----|-----------------|-------------------------|----------------|-------------|-----------------|--------|------------------------|------------------|
|     |                 |                         |                |             | Chain0          | Chain1 |                        |                  |
| 1   | 3781.25 PK      | 56.92                   | 74             | -17.08      | -48.96          | -49.28 | 7.77                   | -38.34           |
| 2   | 3781.25 AV      | 46.24                   | 54             | -7.76       | -59.66          | -59.94 | 7.77                   | -49.02           |
| 3   | 7584.37 PK      | 57.19                   | 74             | -16.81      | -50.53          | -47.64 | 7.77                   | -38.07           |
| 4   | 7600 AV         | 46.73                   | 54             | -7.27       | -59.24          | -59.38 | 7.77                   | -48.53           |
| 5   | 11396.87 PK     | 56                      | 74             | -18         | -49.86          | -50.22 | 7.77                   | -39.26           |
| 6   | 11387.5 AV      | 45.23                   | 54             | -8.77       | -60.66          | -60.97 | 7.77                   | -50.03           |
| 7   | 17095.18 PK     | 62.46                   | 68.2           | -5.74       | -46.86          | -41.73 | 7.77                   | -32.8            |

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

## Chain 0

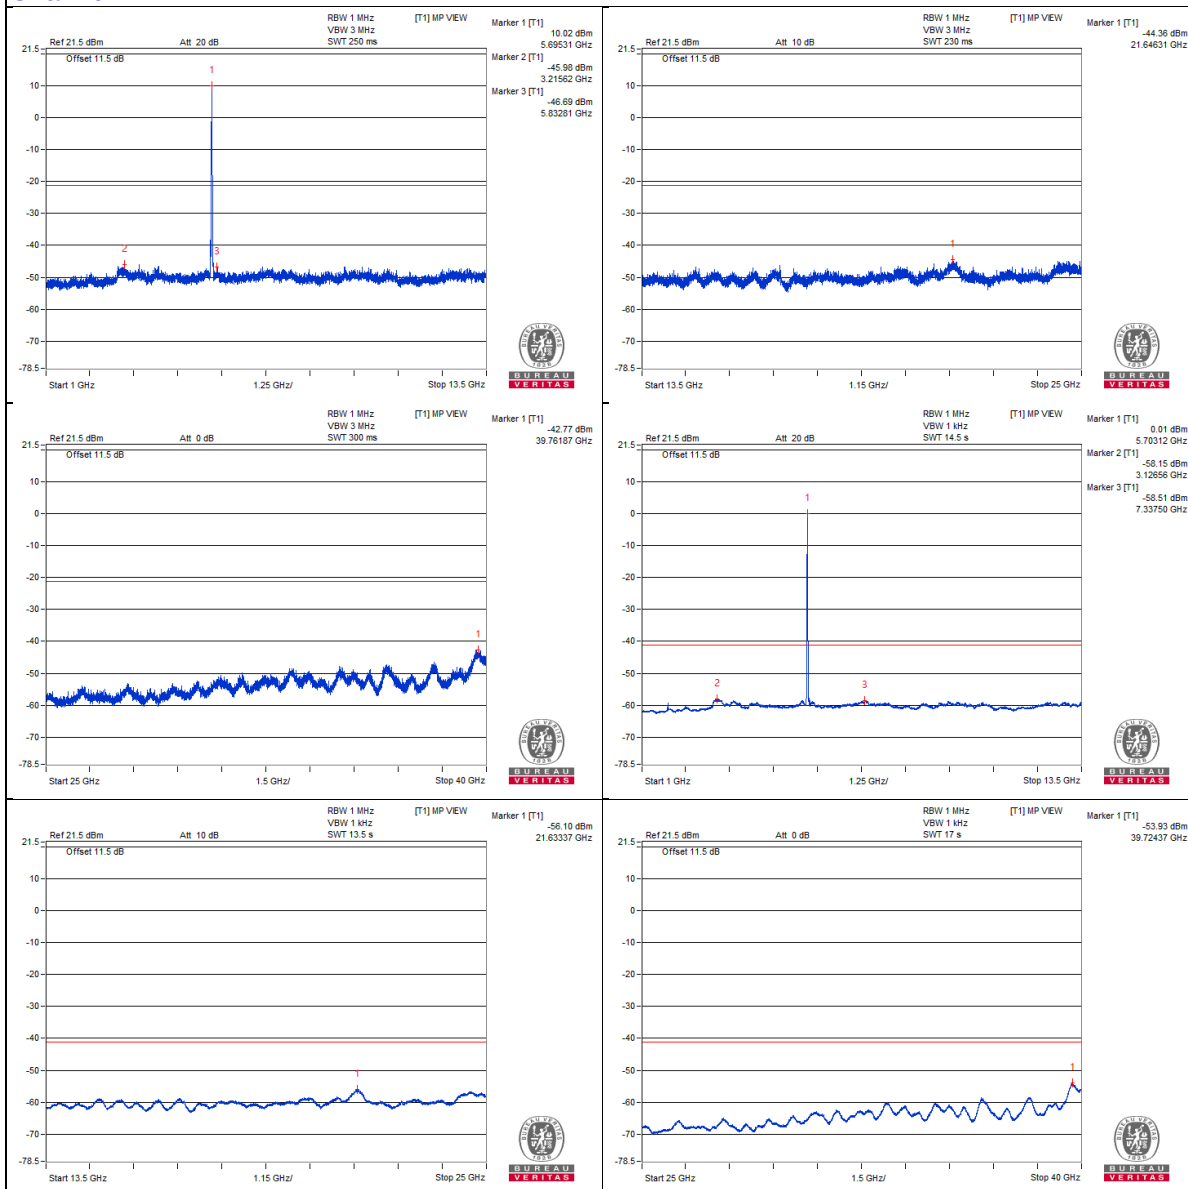

## Chain 1

