

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725.2 PK	76.88	68.2	* 8.68	-31.85	-27.51	7.77	-18.38


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

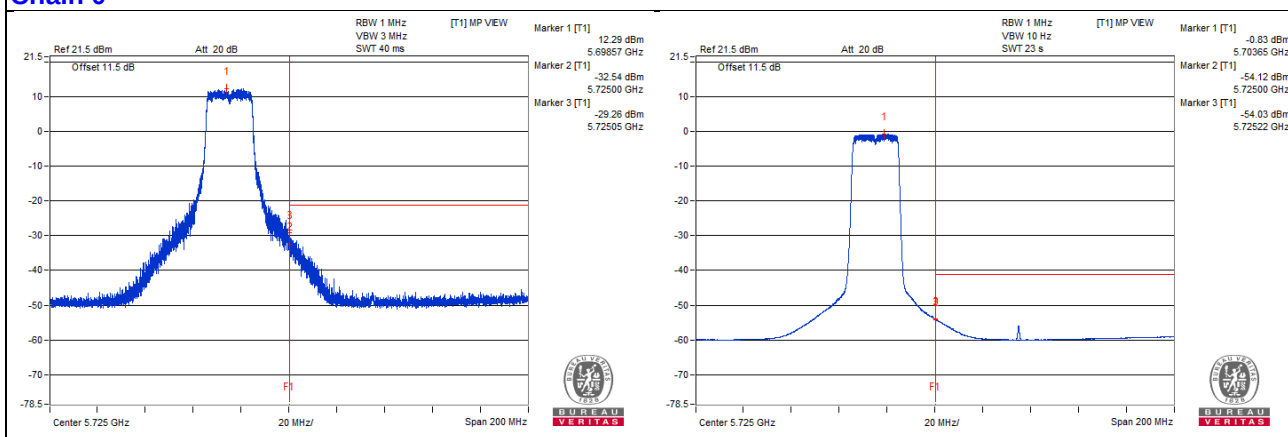

Chain 1

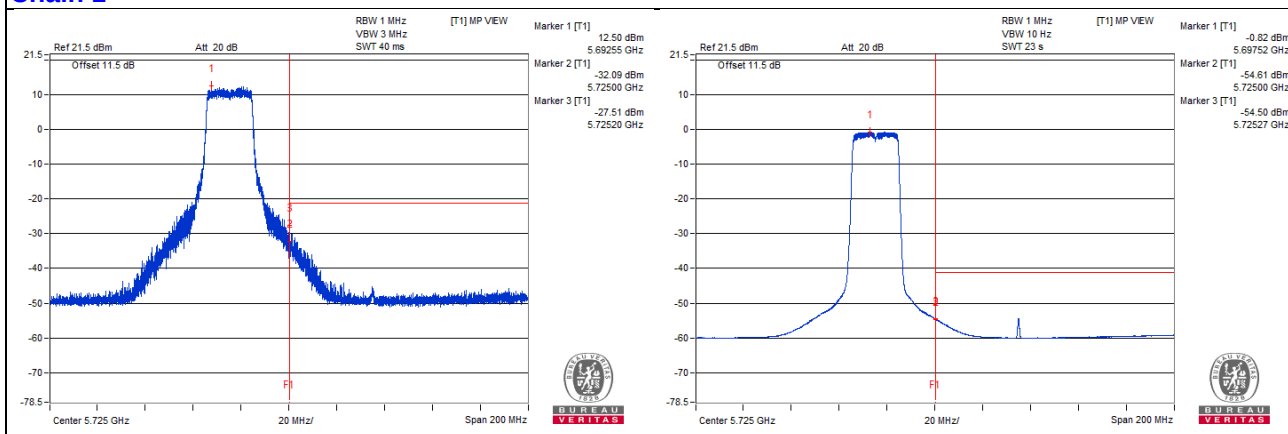

802.11ax (HE20) - Channel 144

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3798.43 PK	57.61	74	-16.39	-48.63	-48.24	7.77	-37.65
2	3796.87 AV	45.95	54	-8.05	-59.98	-60.2	7.77	-49.31
3	7635.93 PK	56.97	74	-17.03	-48.85	-49.31	7.77	-38.29
4	7626.56 AV	46.69	54	-7.31	-59.37	-59.33	7.77	-48.57
5	11440.62 PK	56.18	74	-17.82	-50.31	-49.46	7.77	-39.08
6	11439.06 AV	45.28	54	-8.72	-60.61	-60.91	7.77	-49.98
7	17154.12 PK	65.32	68.2	-2.88	-39.79	-41.91	7.77	-29.94

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0



Chain 1



Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5870.5 PK	59.89	68.2	-8.31	-47.11	-45.36	7.77	-35.37

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

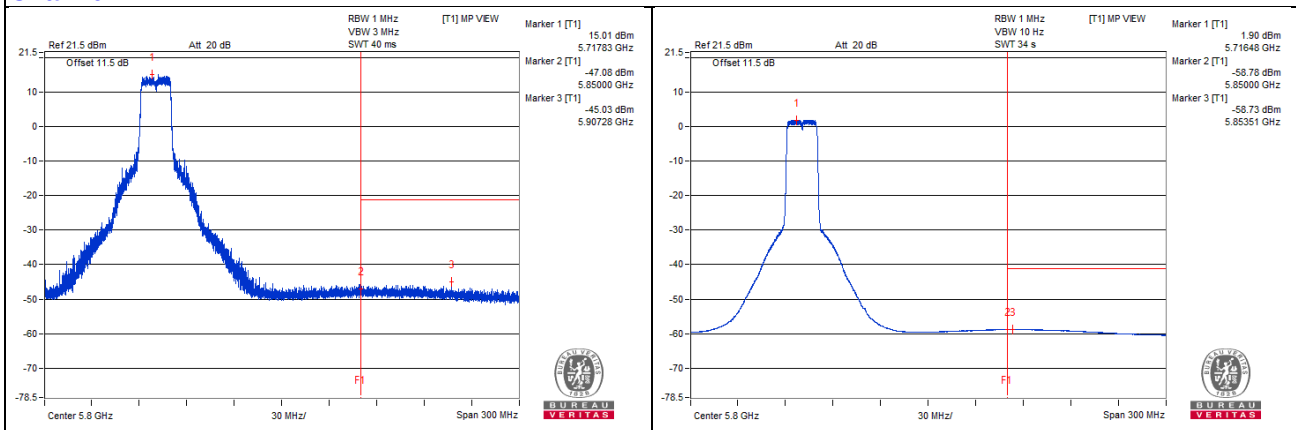

Chain 1

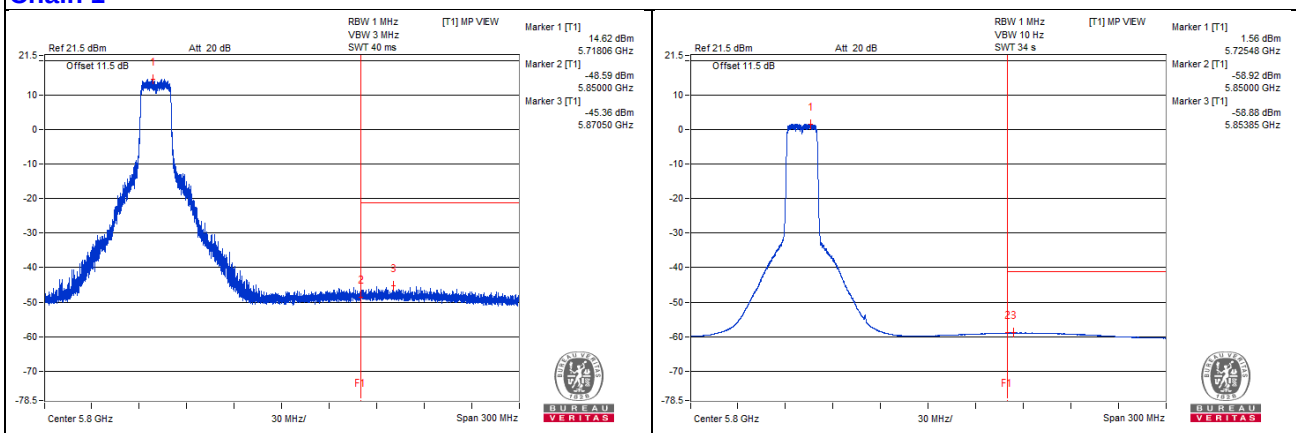

802.11ax (HE20) – Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3818.75 PK	56.13	74	-17.87	-50.7	-49.25	7.77	-39.13
2	3814.06 AV	44.23	54	-9.77	-61.8	-61.82	7.77	-51.03
3	7660.93 PK	56.69	74	-17.31	-49.04	-49.69	7.77	-38.57
4	7659.37 AV	46.83	54	-7.17	-60.71	-58.1	7.77	-48.43
5	11484.37 PK	55.4	74	-18.6	-50.02	-51.36	7.77	-39.86
6	11493.75 AV	43.83	54	-10.17	-61.82	-62.65	7.77	-51.43
7	17233.18 PK	66.1	68.2	-2.1	-38.16	-43	7.77	-29.16

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

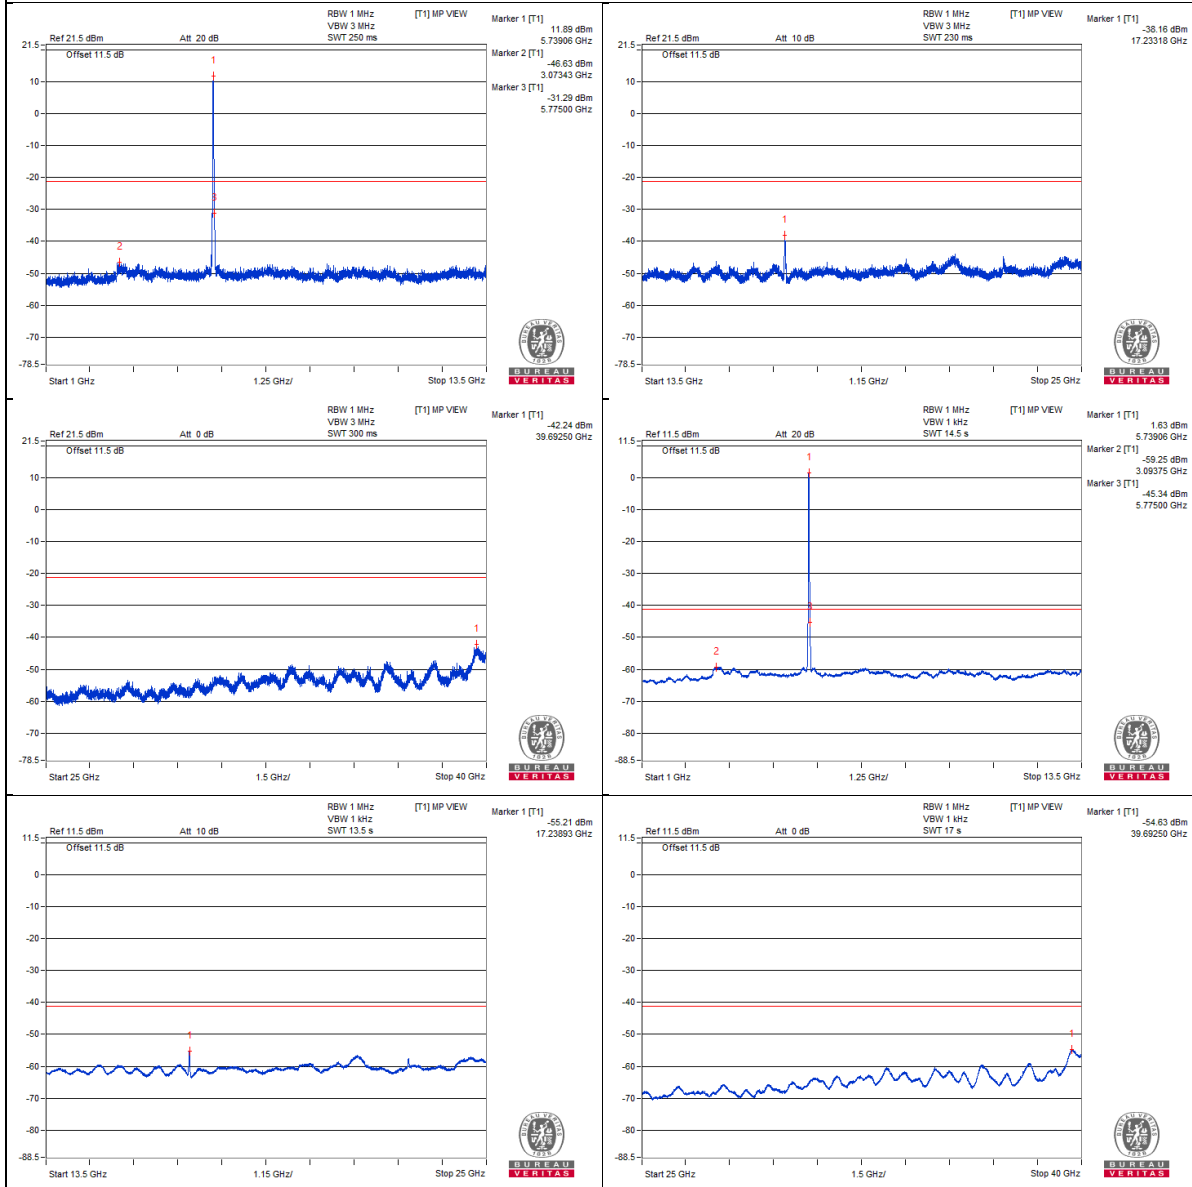


Chain 1

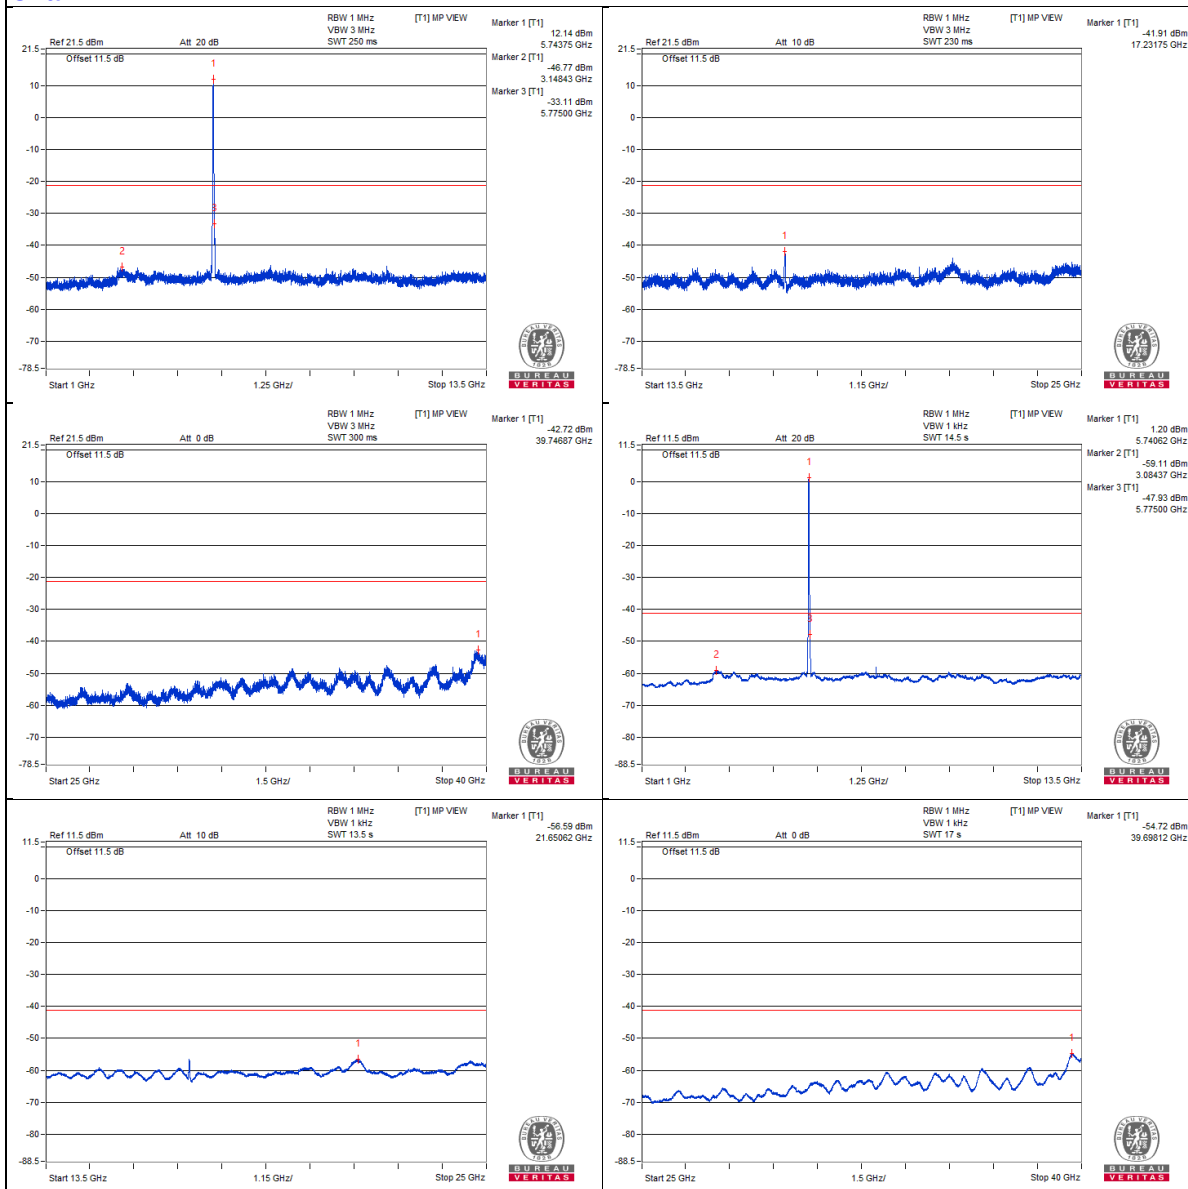


Bandedge table

Chain 0

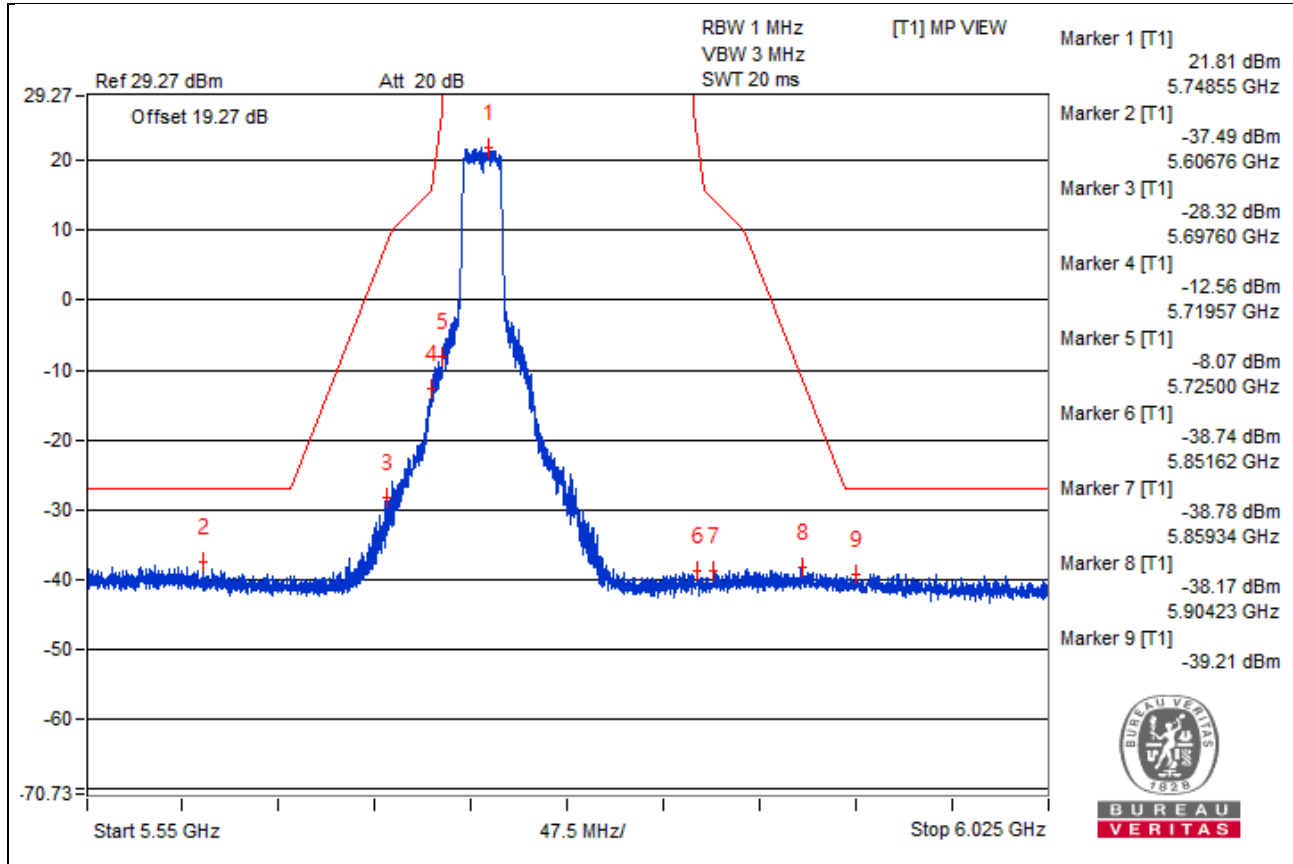

Chain 1

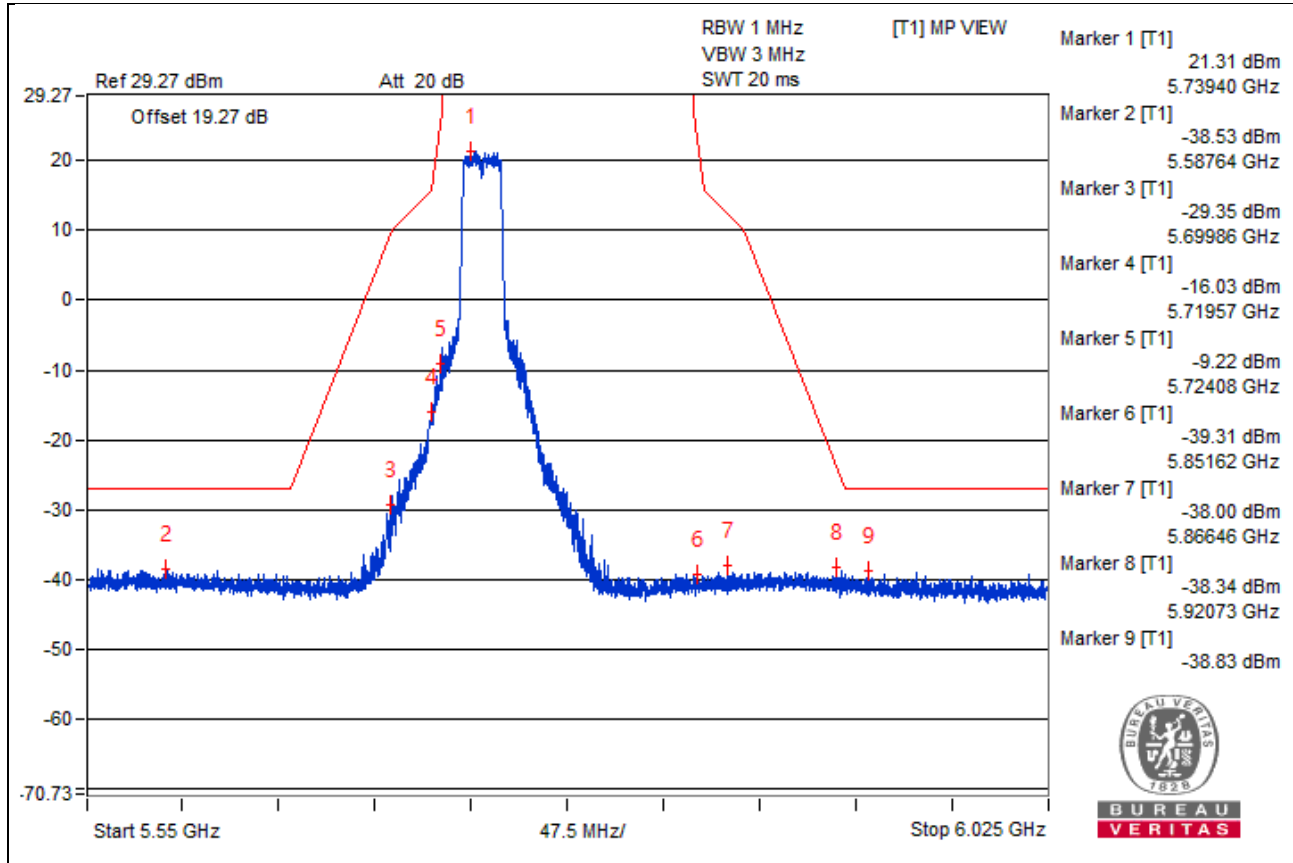

802.11ax (HE20) – Channel 157

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3848.43 PK	56.01	74	-17.99	-49.01	-51.37	7.77	-39.25
2	3862.5 AV	44.18	54	-9.82	-61.92	-61.81	7.77	-51.08
3	7712.5 PK	57.03	74	-16.97	-48.73	-49.3	7.77	-38.23
4	7714.06 AV	46.42	54	-7.58	-60.53	-58.87	7.77	-48.84
5	11576.56 PK	55.6	74	-18.4	-50.52	-50.36	7.77	-39.66
6	11570.31 AV	43.4	54	-10.6	-62.53	-62.76	7.77	-51.86
7	17349.62 PK	66	68.2	-2.2	-38.57	-42.29	7.77	-29.26

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

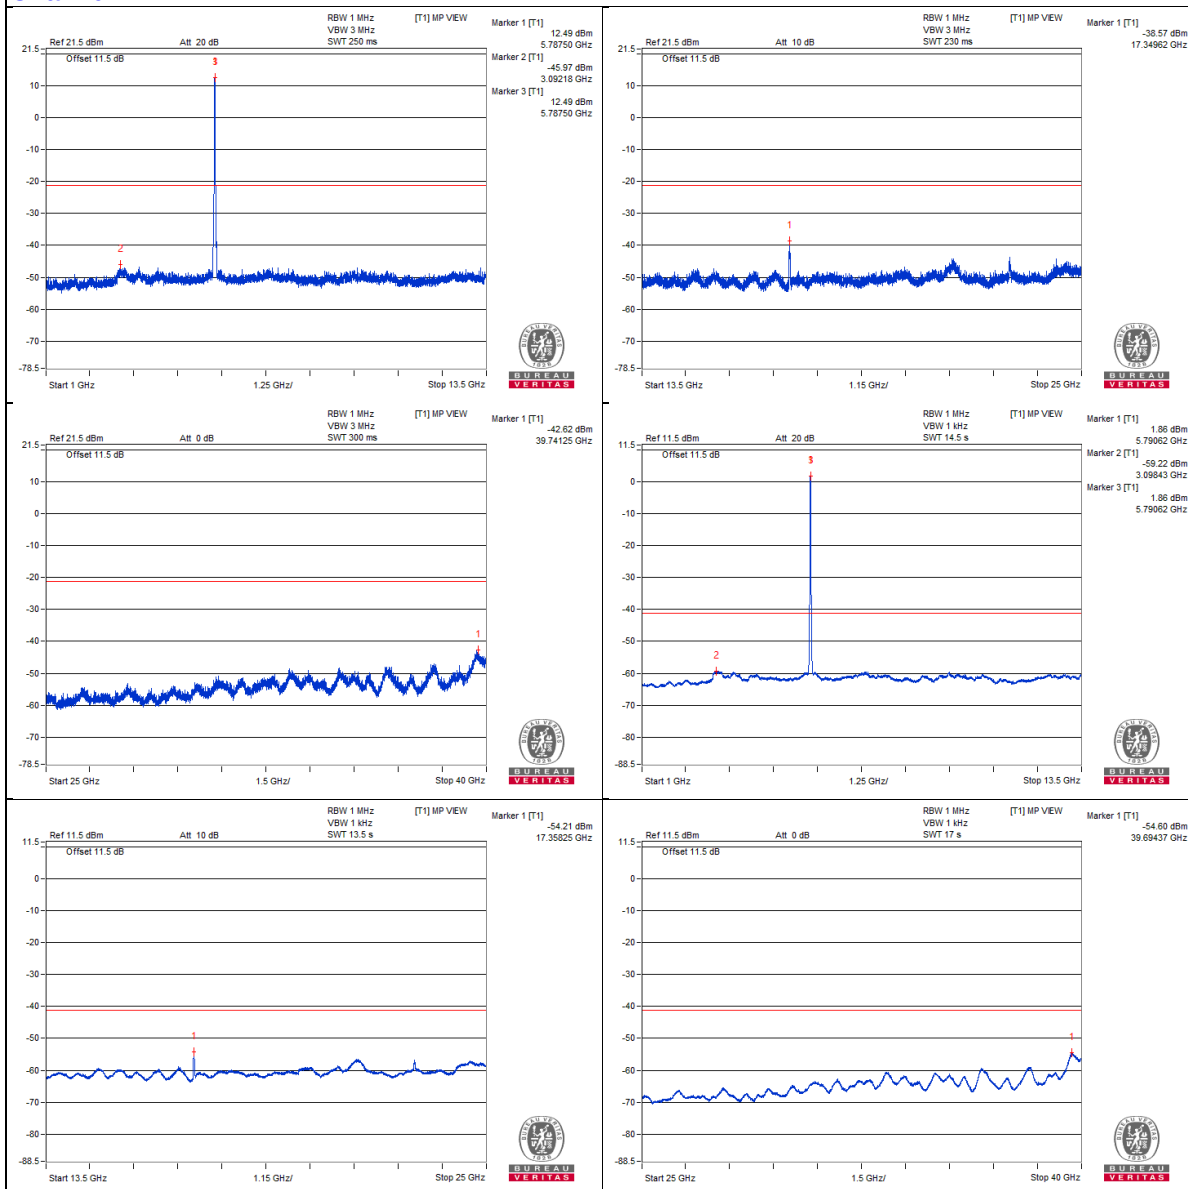


Chain 1

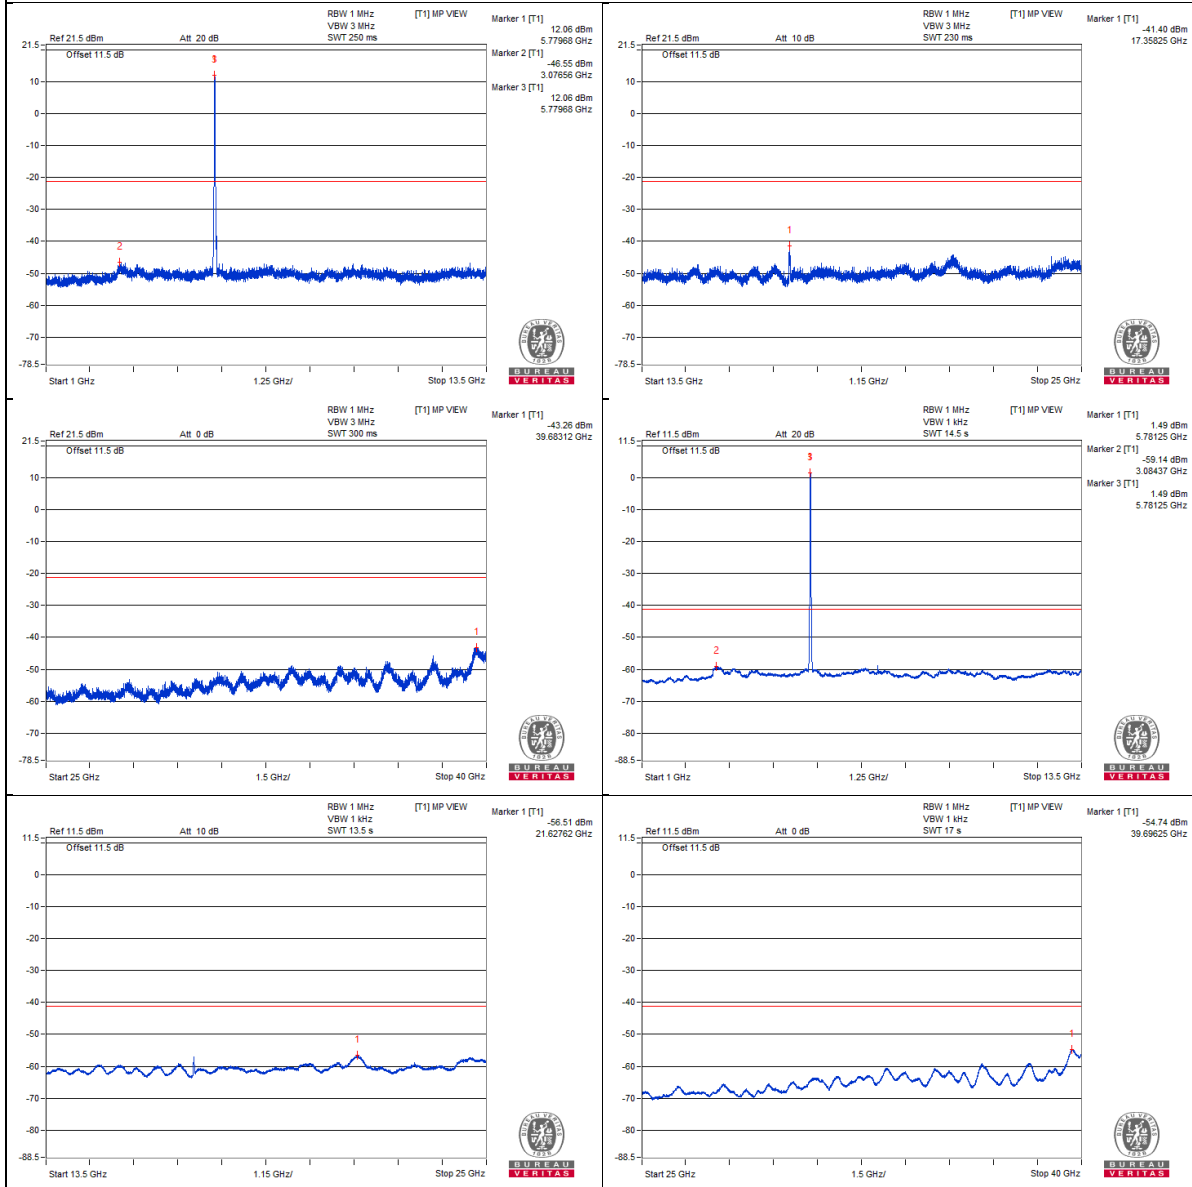


Bandedge table

Chain 0

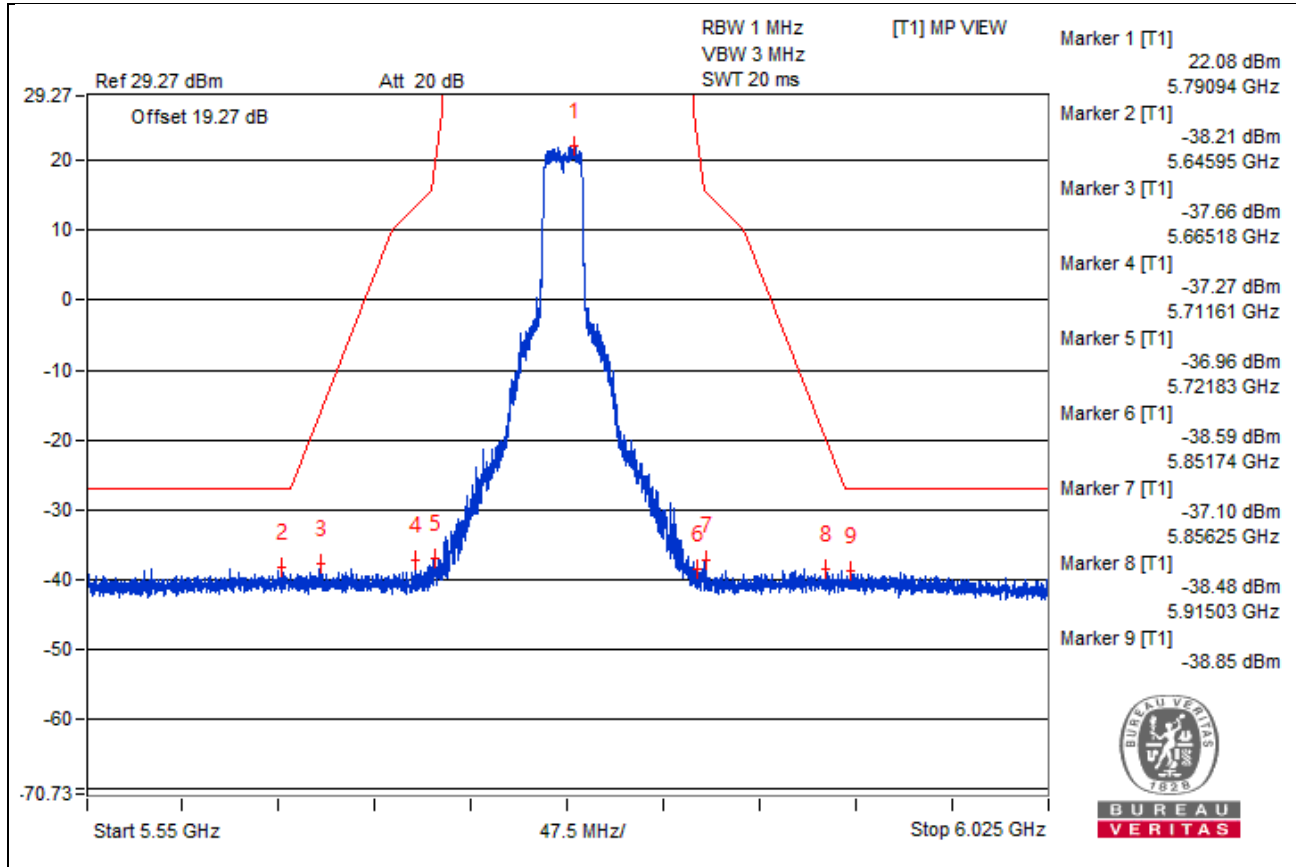

Chain 1

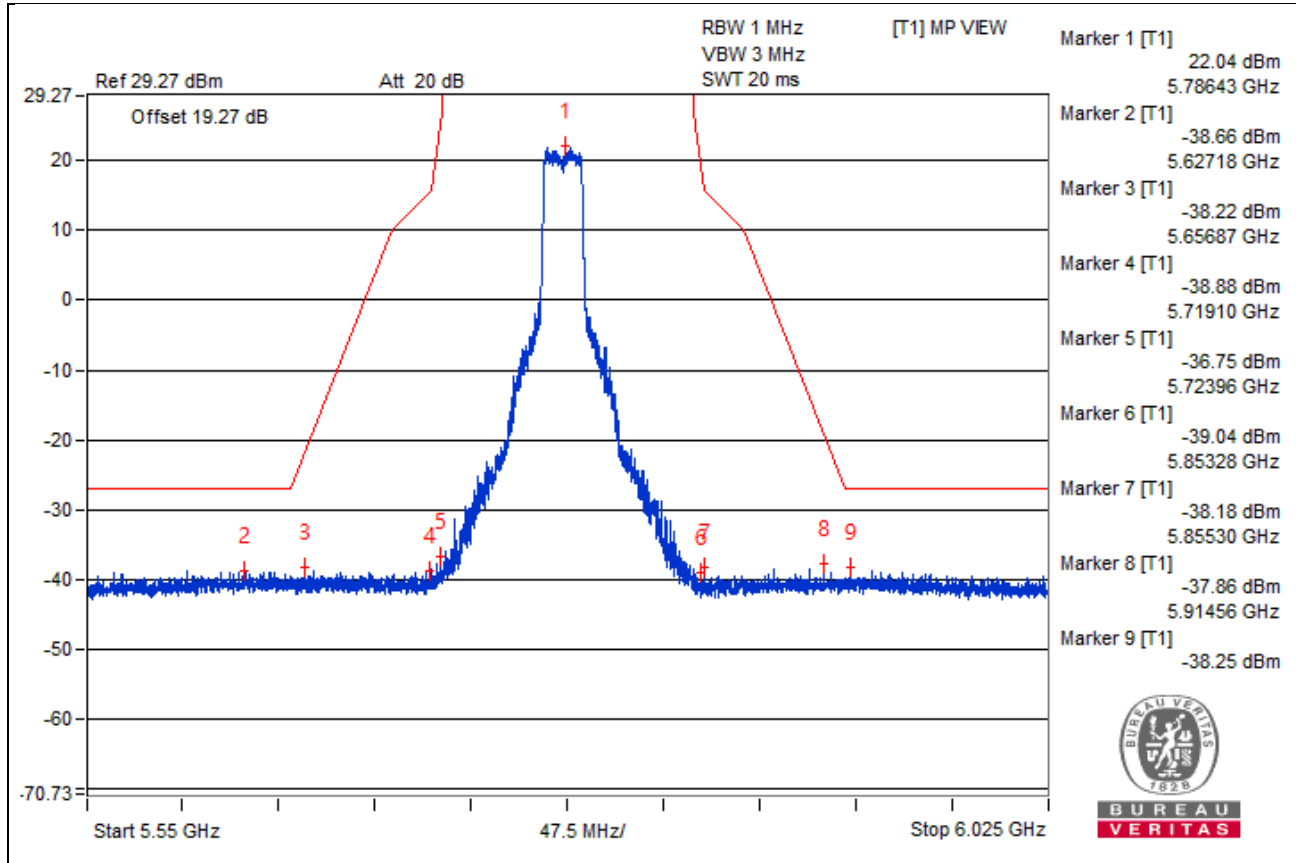

802.11ax (HE20) – Channel 165

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3873.43 PK	55.83	74	-18.17	-49.9	-50.55	7.77	-39.43
2	3895.31 AV	44.12	54	-9.88	-62.1	-61.75	7.77	-51.14
3	7756.87 PK	56.56	68.2	-11.64	-50.47	-48.67	7.77	-38.7
4	11645.31 PK	55.54	74	-18.46	-51.34	-49.79	7.77	-39.72
5	11645.31 AV	43.59	54	-10.41	-62.35	-62.56	7.77	-51.67
6	17479 PK	66.02	68.2	-2.18	-38.26	-43.01	7.77	-29.24

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

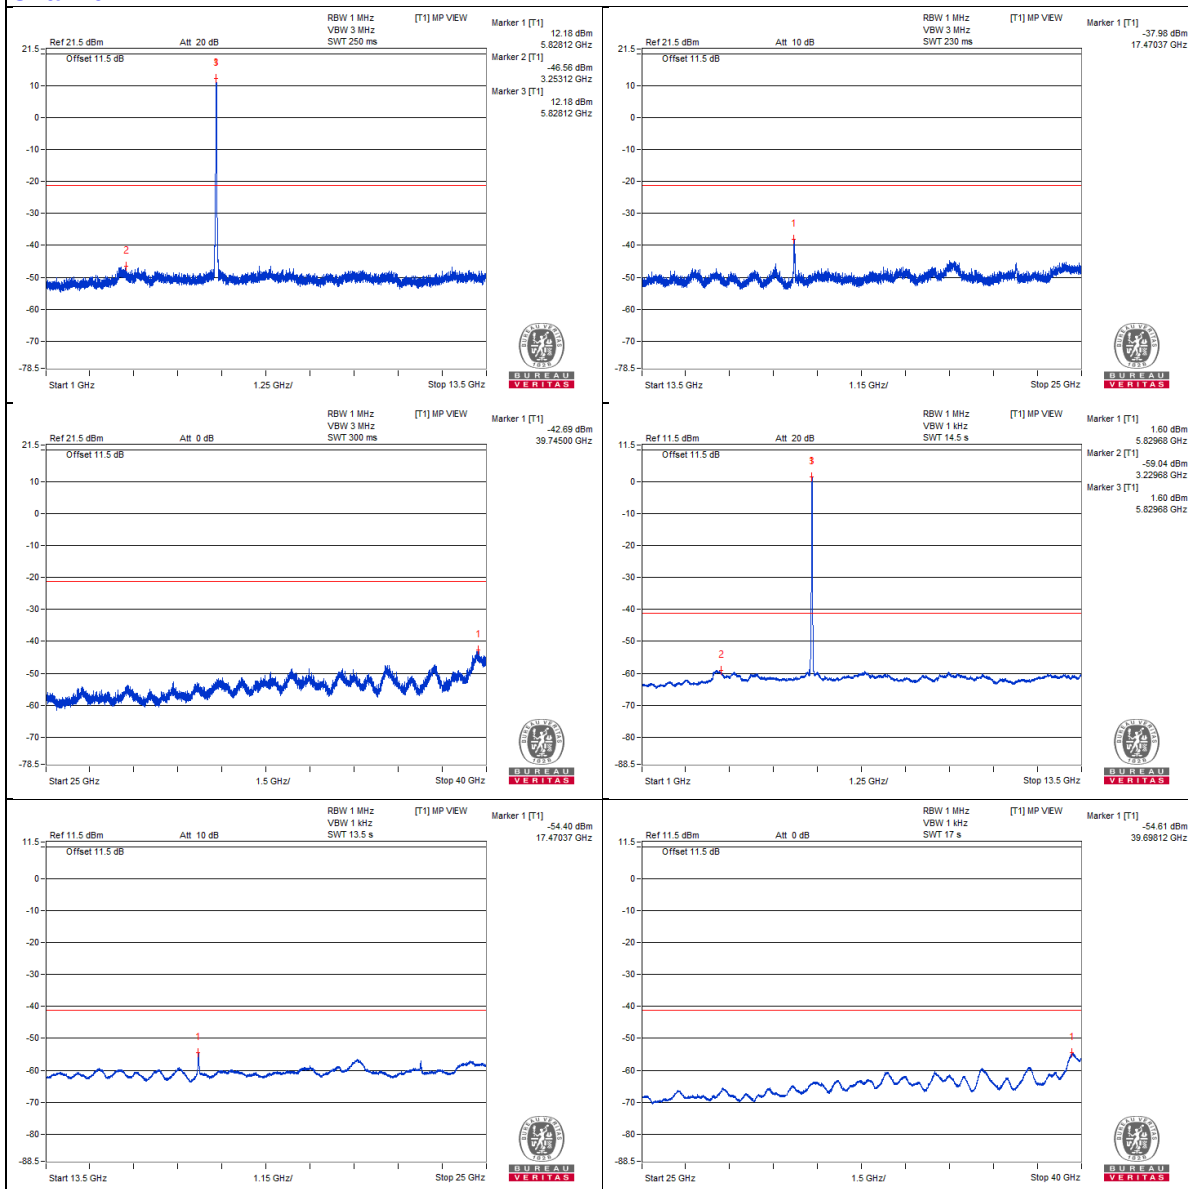


Chain 1

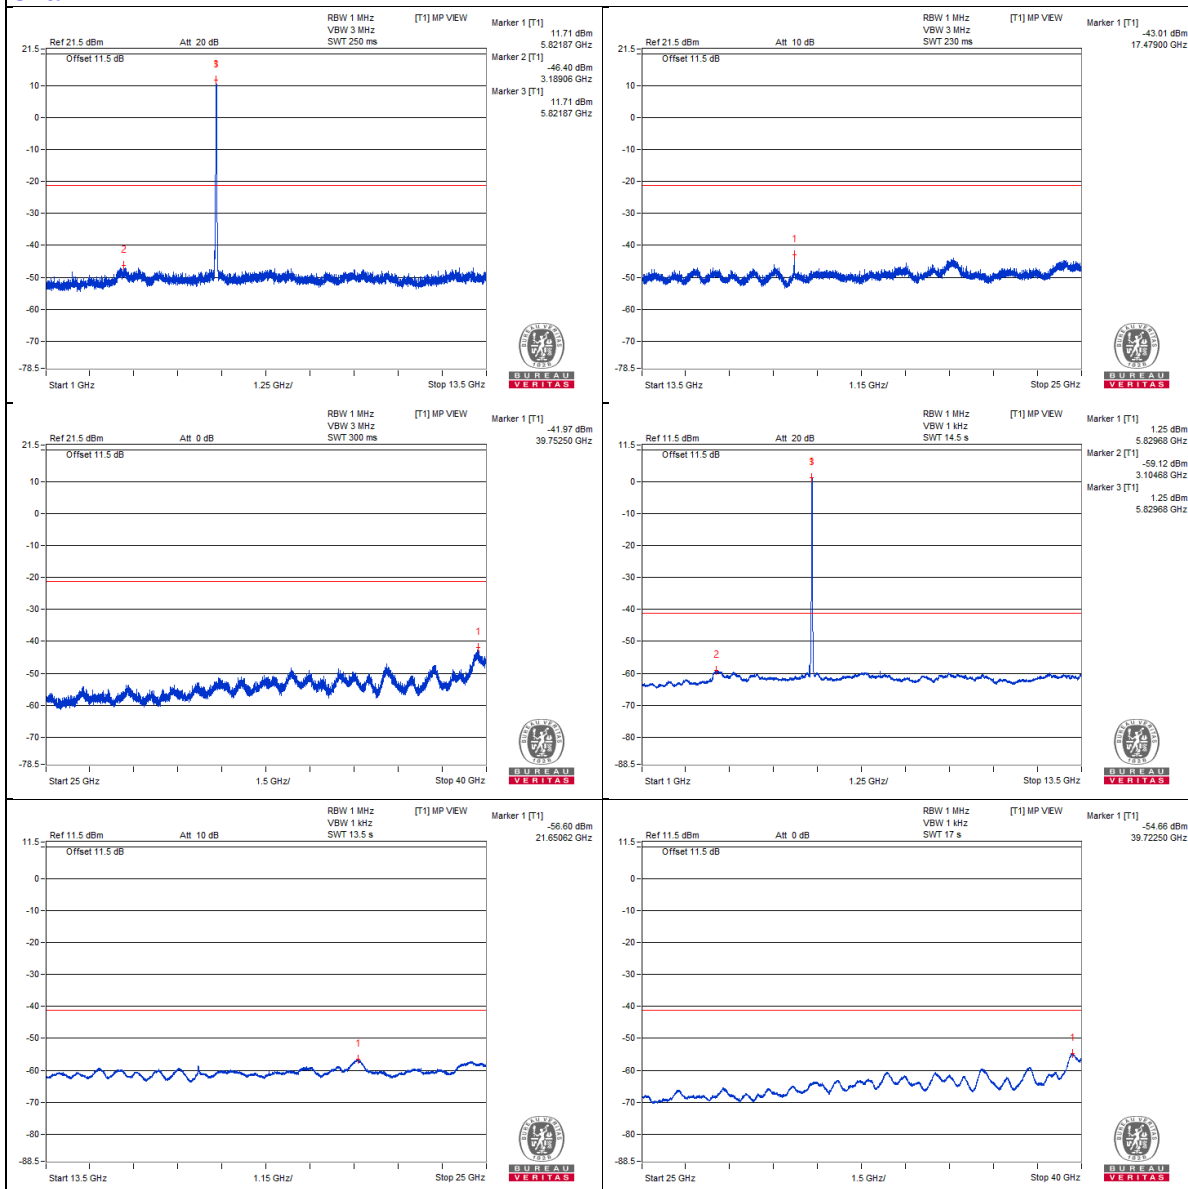


Bandedge table

Chain 0

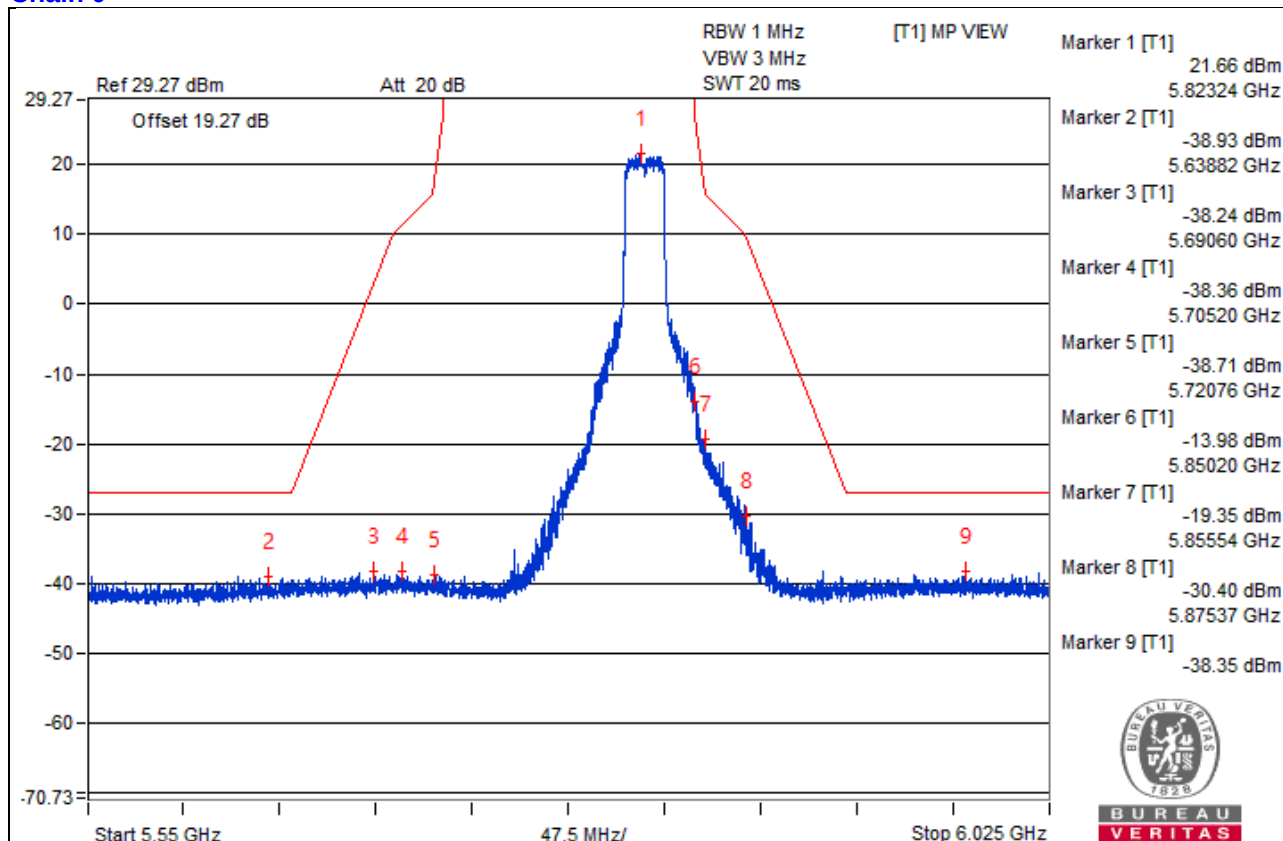

Chain 1

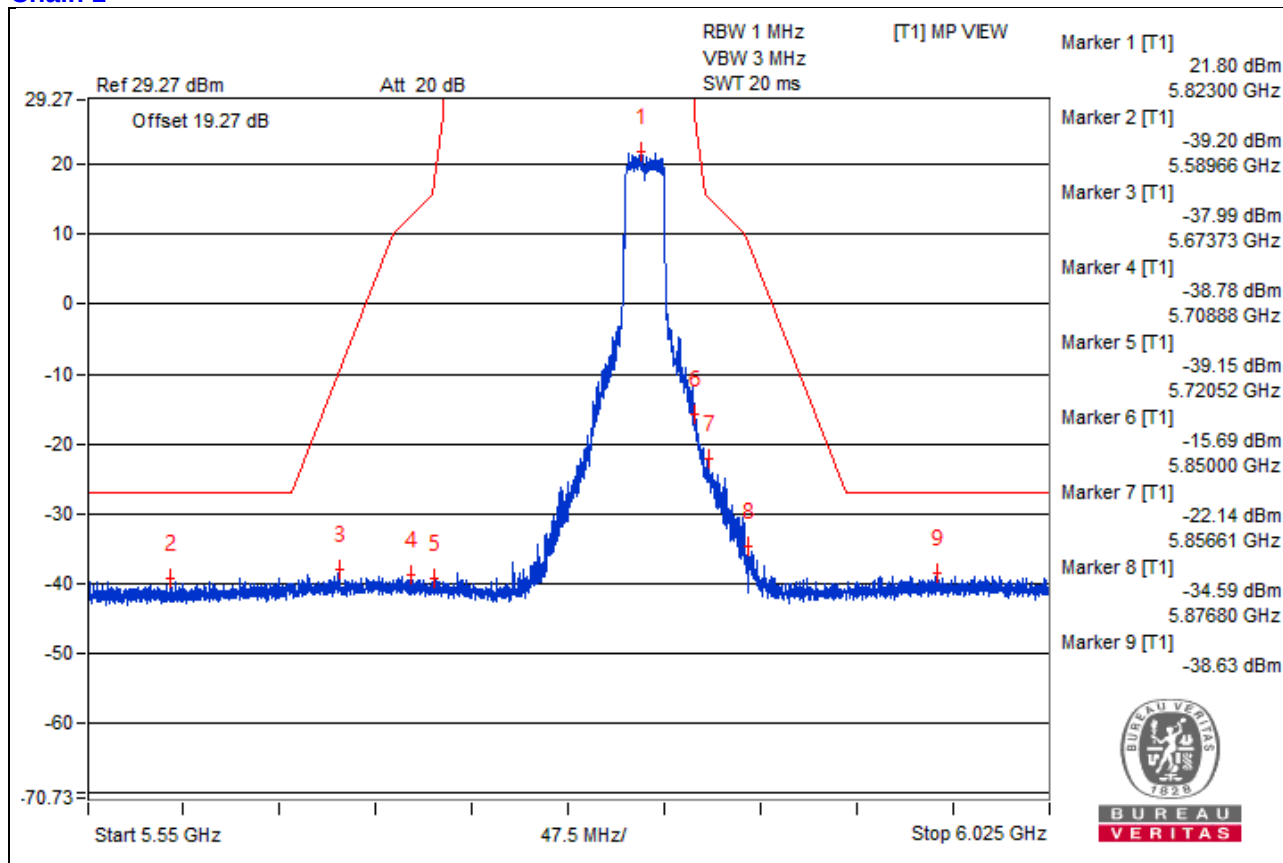

802.11ax (HE40) - Channel 38

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3478.12 PK	55.04	68.2	-13.16	-49.9	-48.81	6.09	-40.22
2	6920.31 PK	60.67	68.2	-7.53	-47.73	-41.63	6.09	-34.59
3	10376.56 PK	55.08	68.2	-13.12	-50.15	-48.55	6.09	-40.18
4	15567.12 PK	54.52	74	-19.48	-49.1	-50.74	6.09	-40.74
5	15552.75 AV	43.61	54	-10.39	-60.84	-60.67	6.09	-51.65

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

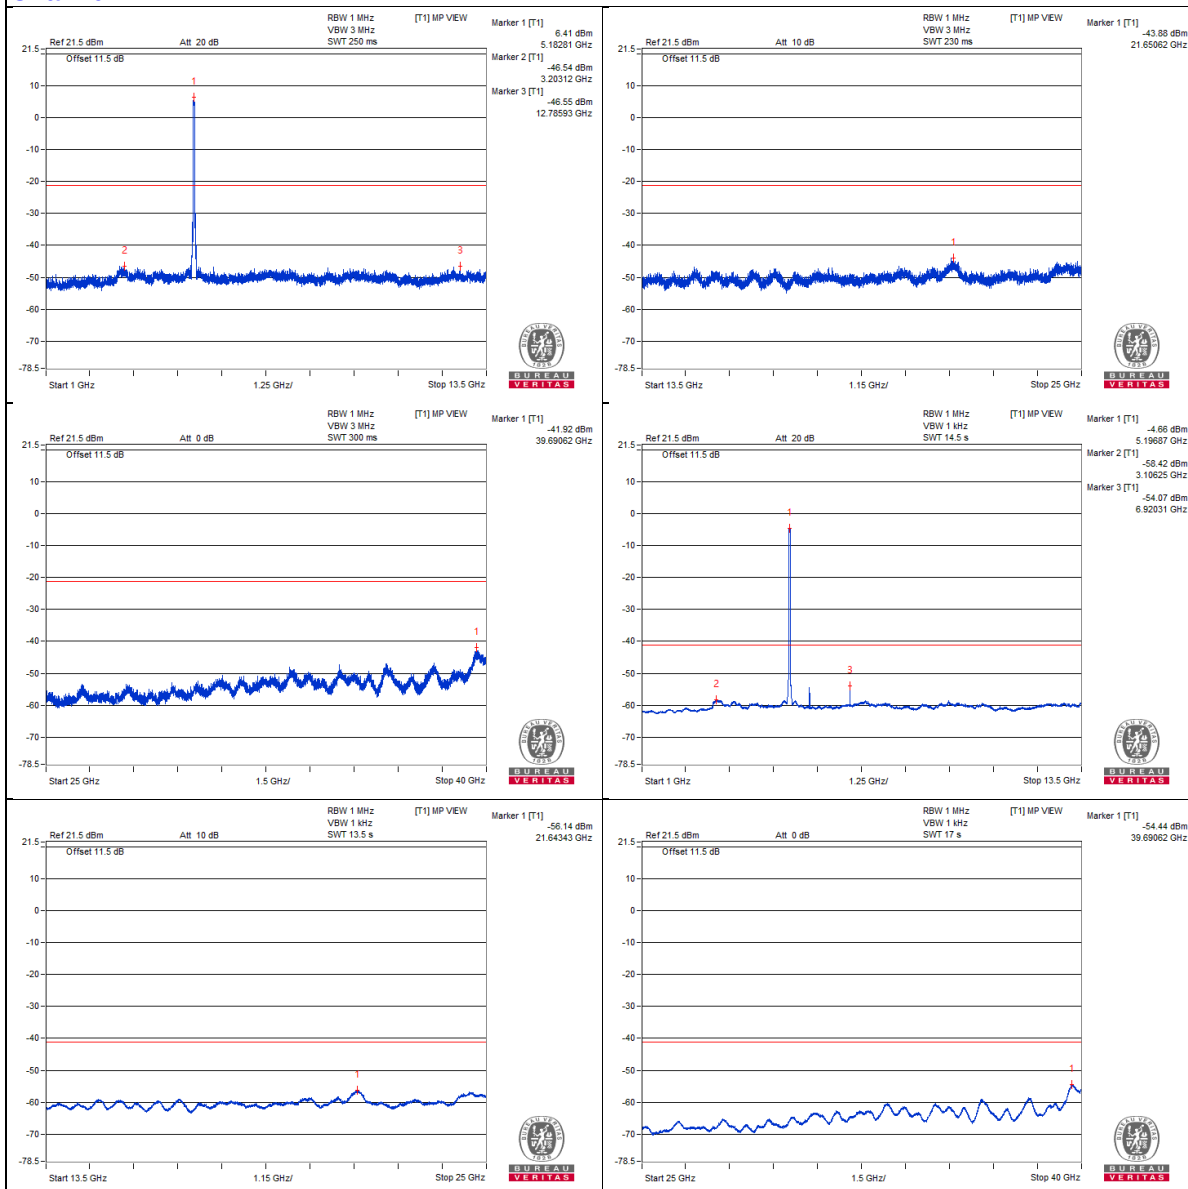

Chain 1

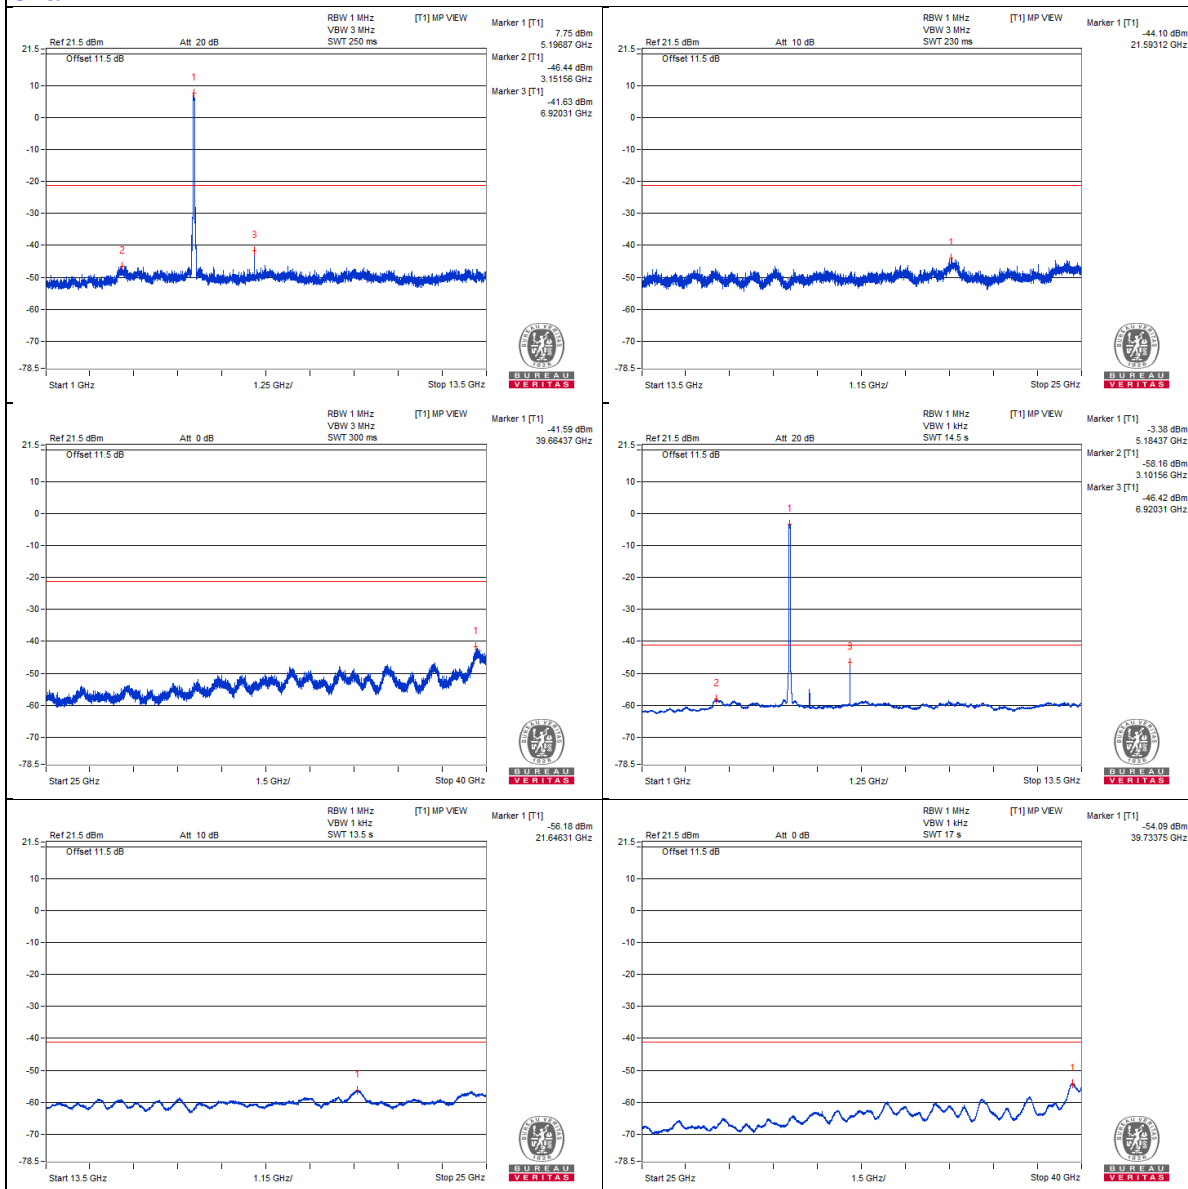

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5147.67 PK	75.49	74	* 1.49	-32.28	-26.98	6.09	-19.77
2	5150 AV	52.25	54	-1.75	-53.7	-50.95	6.09	-43.01


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

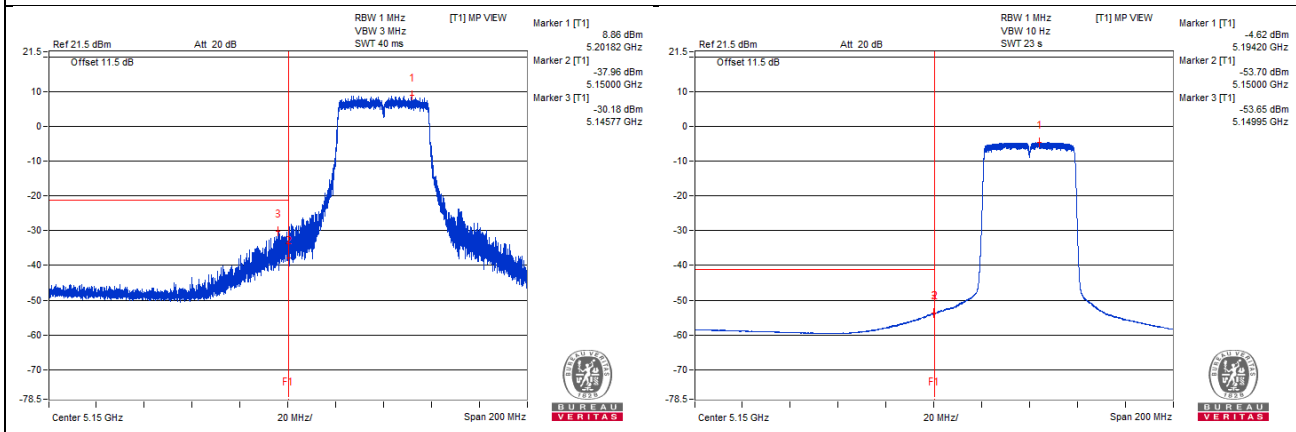

Chain 1

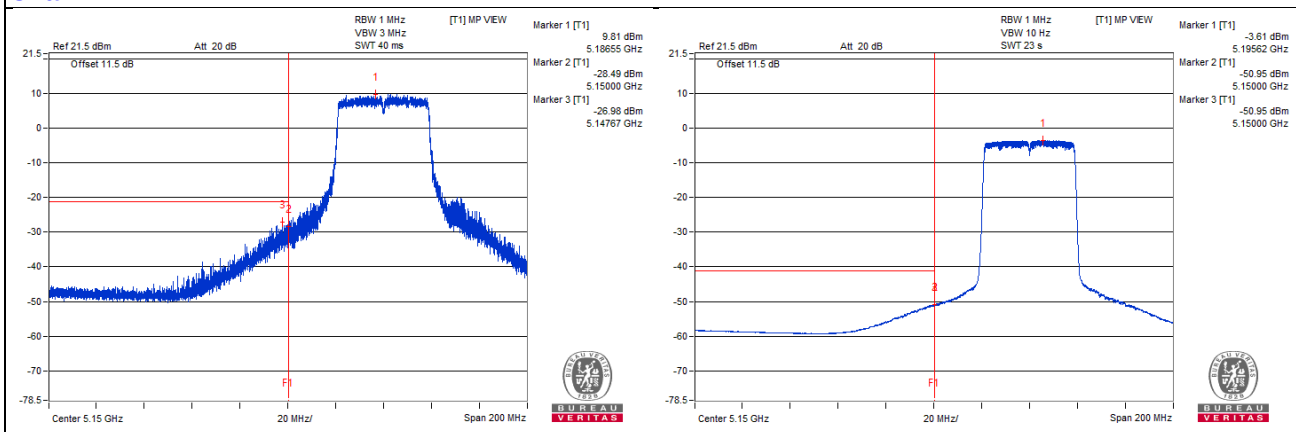

802.11ax (HE40) - Channel 46

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3504.68 PK	55.09	74	-18.91	-49.93	-48.7	6.09	-40.17
2	3504.68 AV	44.56	54	-9.44	-60.03	-59.58	6.09	-50.7
3	6973.43 PK	58.53	68.2	-9.67	-48.48	-44.19	6.09	-36.73
4	10454.68 PK	54.87	68.2	-13.33	-49.22	-49.78	6.09	-40.39
5	15696.5 PK	56.27	74	-17.73	-51.74	-46.14	6.09	-38.99
6	15690.75 AV	44.88	54	-9.12	-61.27	-58.21	6.09	-50.38

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0



Chain 1



Bandedge table



No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.67 PK	69.57	74	-4.43	-34.37	-35.25	6.09	-25.69
2	5150 AV	51.81	54	-2.19	-52.34	-52.77	6.09	-43.45

Note :



Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

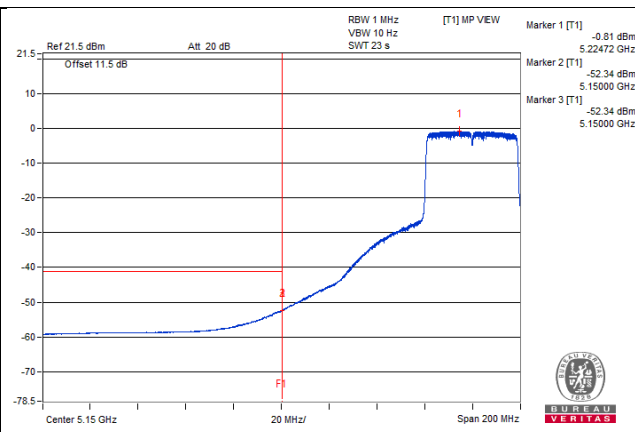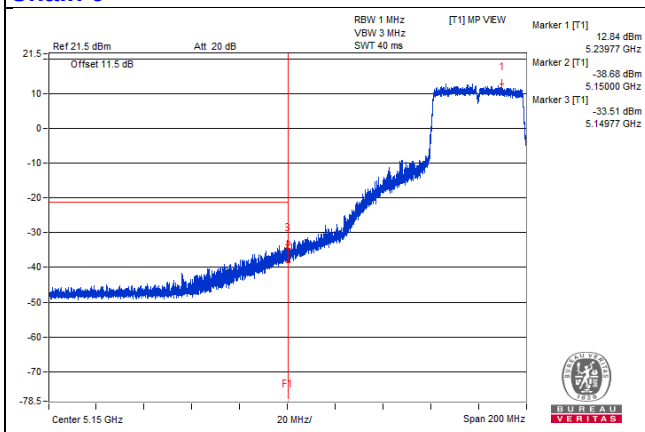

Chain 1

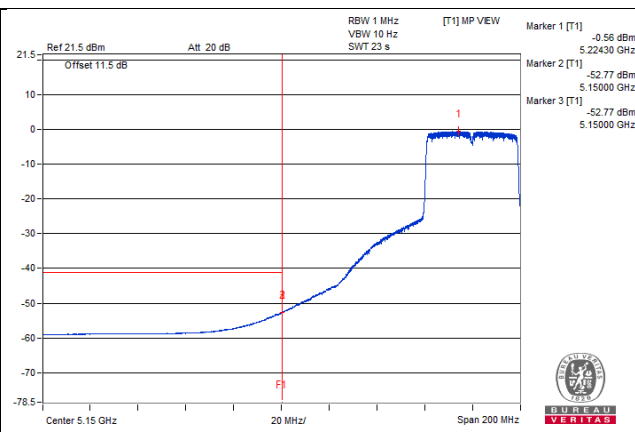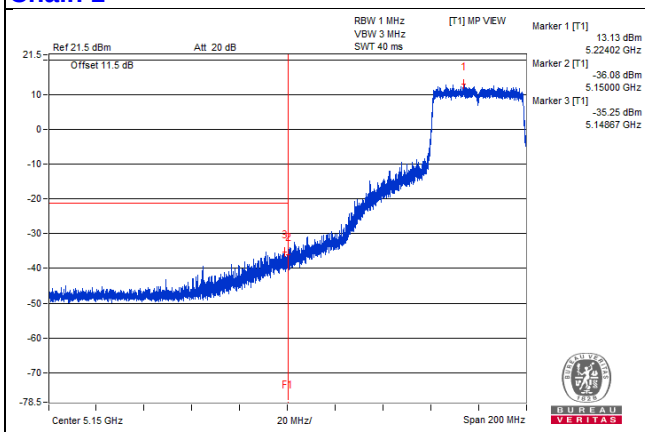

802.11ax (HE40) - Channel 54

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3532.81 PK	56.57	74	-17.43	-47.93	-47.65	6.09	-38.69
2	3518.75 AV	45.05	54	-8.95	-59.33	-59.29	6.09	-50.21
3	7026.56 PK	58	68.2	-10.2	-47.41	-45.51	6.09	-37.26
4	10543.75 PK	55.73	68.2	-12.47	-48.04	-49.32	6.09	-39.53
5	15801.43 PK	57.8	74	-16.2	-49.9	-44.7	6.09	-37.46
6	15811.5 AV	45.97	54	-8.03	-60.05	-57.2	6.09	-49.29

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0



Chain 1



Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5358.42 PK	68.57	74	-5.43	-36.51	-35.18	6.09	-26.69
2	5350.2 AV	51.02	54	-2.98	-54.47	-52.44	6.09	-44.24

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

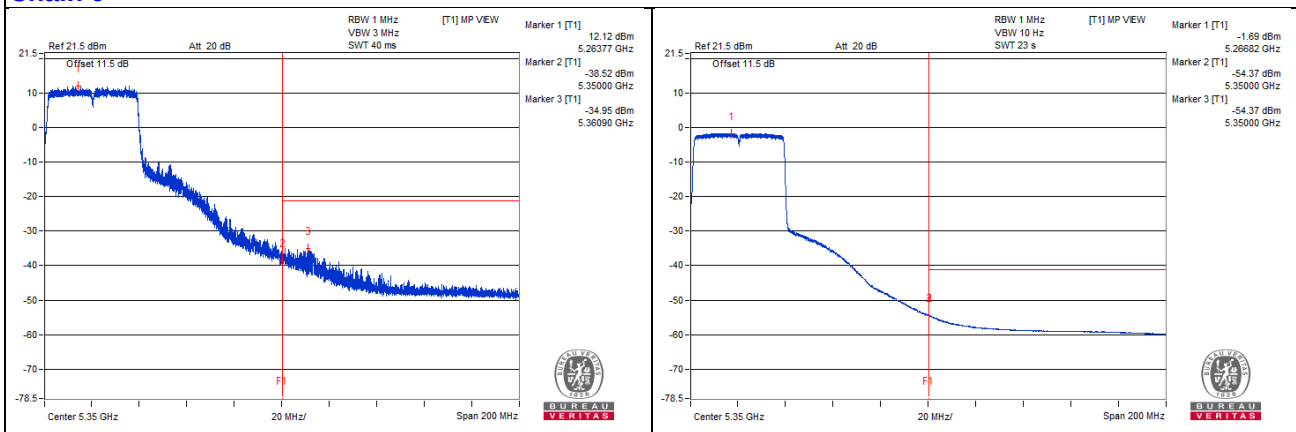

Chain 1

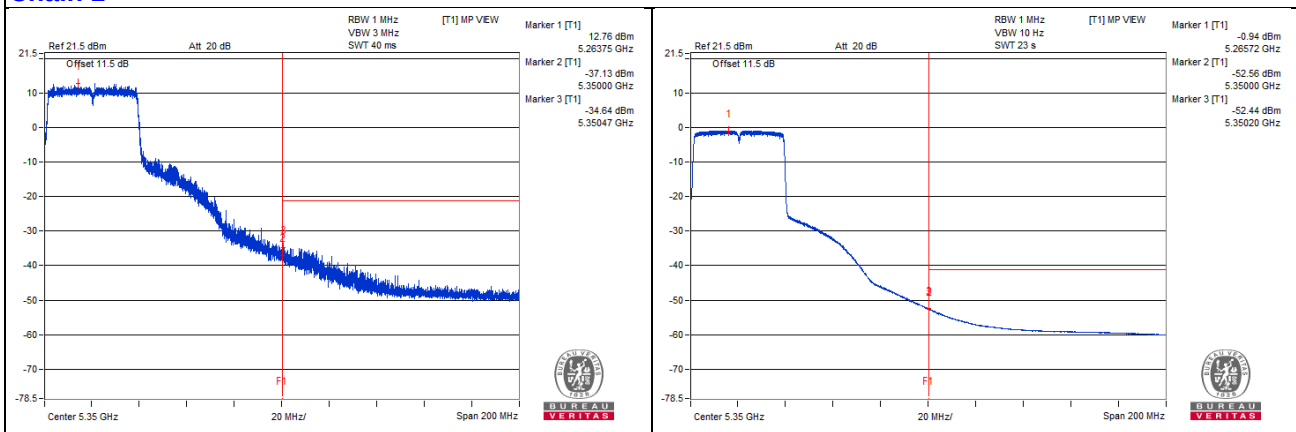

802.11ax (HE40) - Channel 62

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3543.75 PK	55.87	74	-18.13	-49.4	-47.74	6.09	-39.39
2	3553.12 AV	45.27	54	-8.73	-58.98	-59.21	6.09	-49.99
3	7079.68 PK	58.07	68.2	-10.13	-49.04	-44.62	6.09	-37.19
4	10610.93 PK	55.78	74	-18.22	-47.82	-49.5	6.09	-39.48
5	10612.5 AV	44.35	54	-9.65	-60.16	-59.86	6.09	-50.91
6	15933.68 PK	54.5	74	-19.5	-50.27	-49.49	6.09	-40.76
7	15915 AV	43.65	54	-10.35	-60.91	-60.51	6.09	-51.61

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0



Chain 1



Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5352.17 PK	76.11	74	* 2.11	-37.07	-25.53	6.09	-19.15
2	5350.1 AV	50.87	54	-3.13	-55.32	-52.21	6.09	-44.39

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

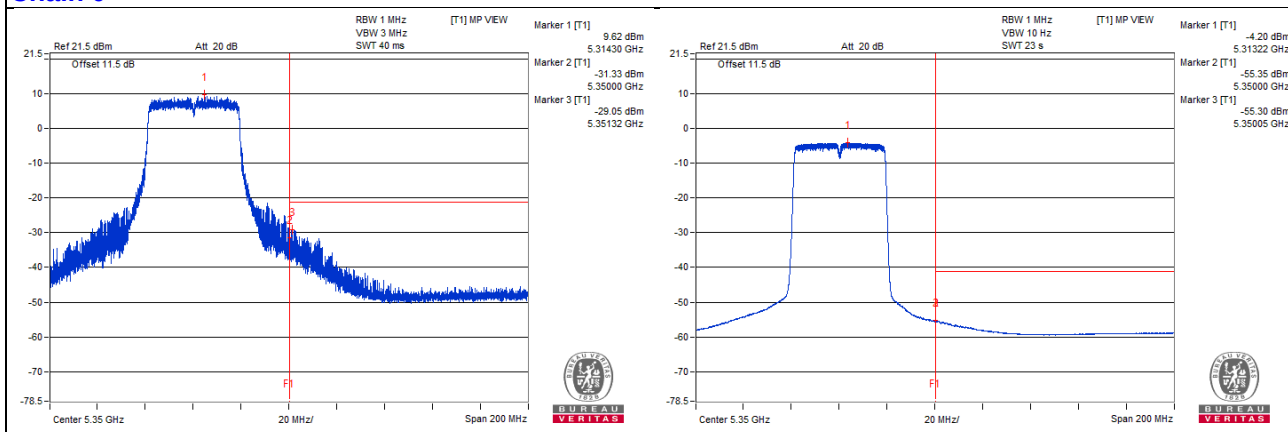

Chain 1

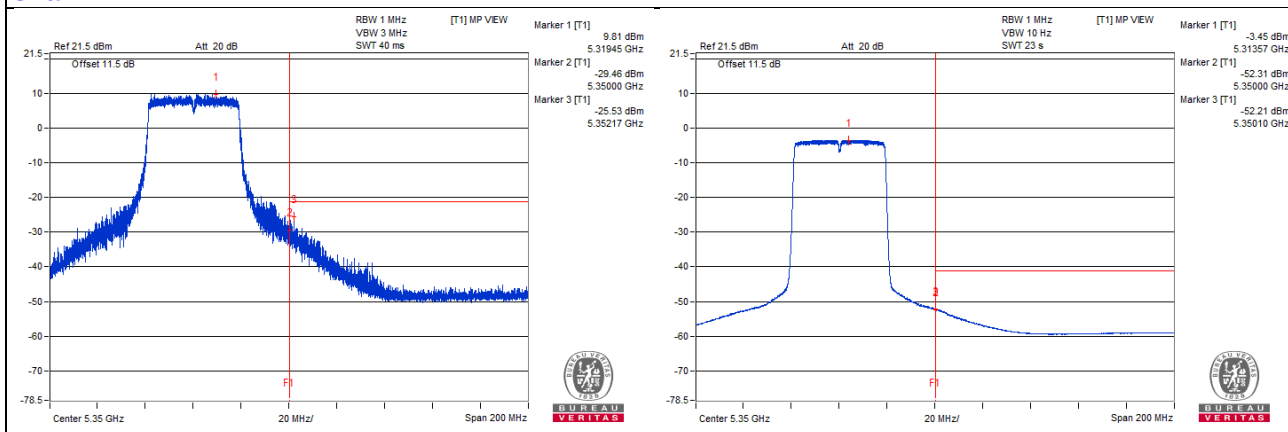

802.11ax (HE40) - Channel 102

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3656.25 PK	57.63	74	-16.37	-49.46	-47.57	7.77	-37.63
2	3656.25 AV	46.66	54	-7.34	-59.49	-59.28	7.77	-48.6
3	7346.87 PK	59.85	74	-14.15	-47.68	-45.08	7.77	-35.41
4	7346.87 AV	51.69	54	-2.31	-55.71	-53.32	7.77	-43.57
5	11006.25 PK	55.45	74	-18.55	-50.73	-50.46	7.77	-39.81
6	11000 AV	44.85	54	-9.15	-61.3	-61.08	7.77	-50.41
7	16515.87 PK	57.32	68.2	-10.88	-47.77	-49.94	7.77	-37.94

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0



Chain 1

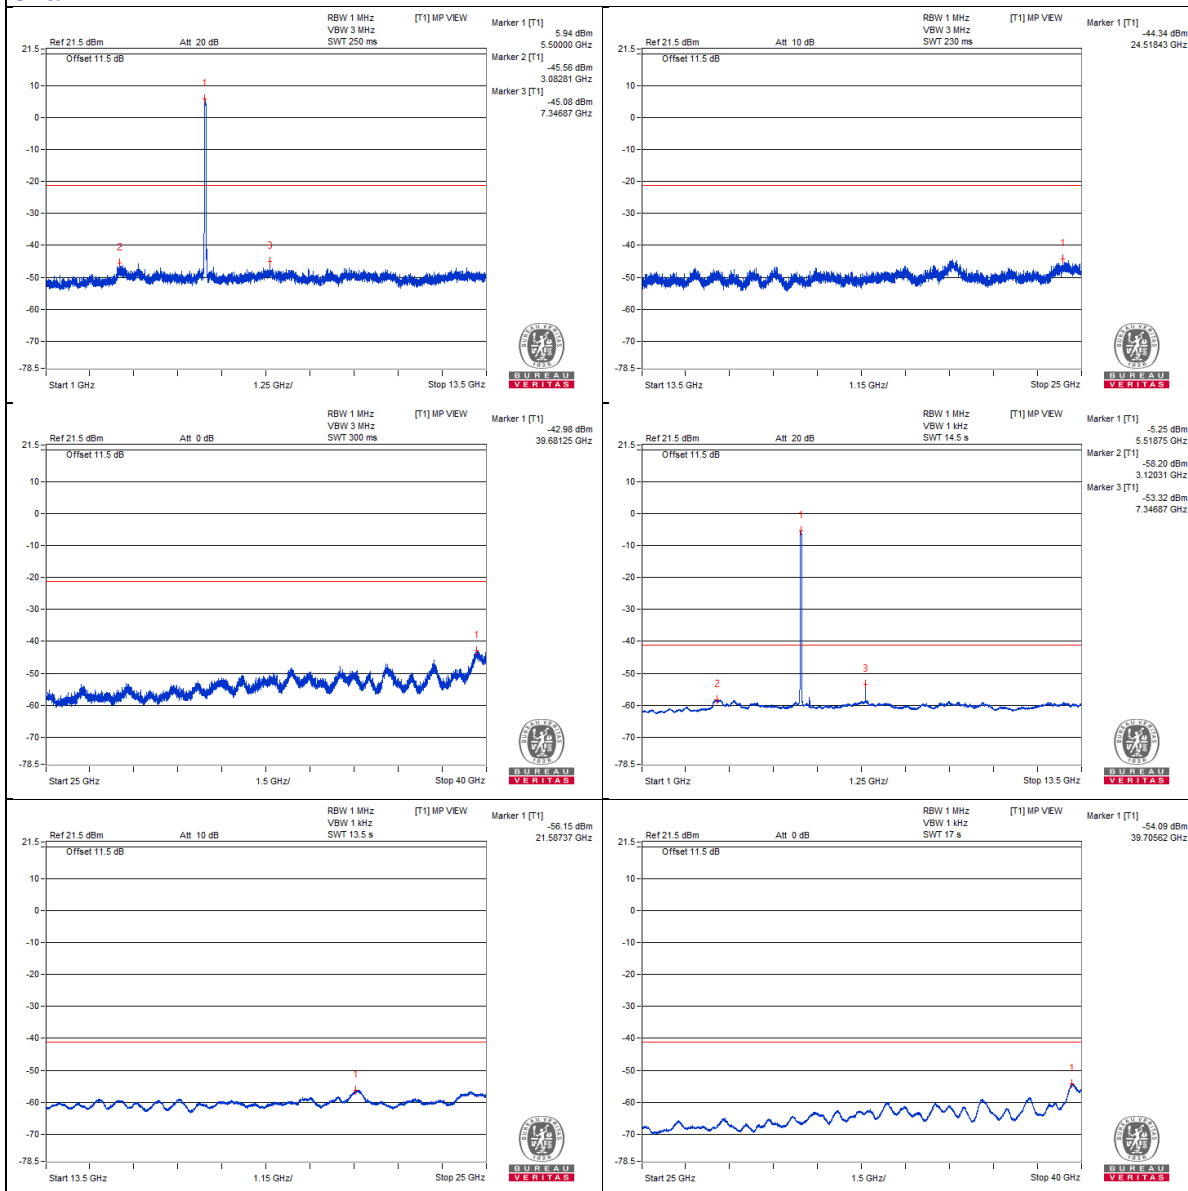

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5467.59 PK	70.7	68.2	* 2.5	-34.68	-36.12	7.77	-24.56
2	5458.75 PK	66.67	74	-7.33	-38.6	-40.3	7.77	-28.59
3	5460 AV	47.24	54	-6.76	-58.67	-58.93	7.77	-48.02


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

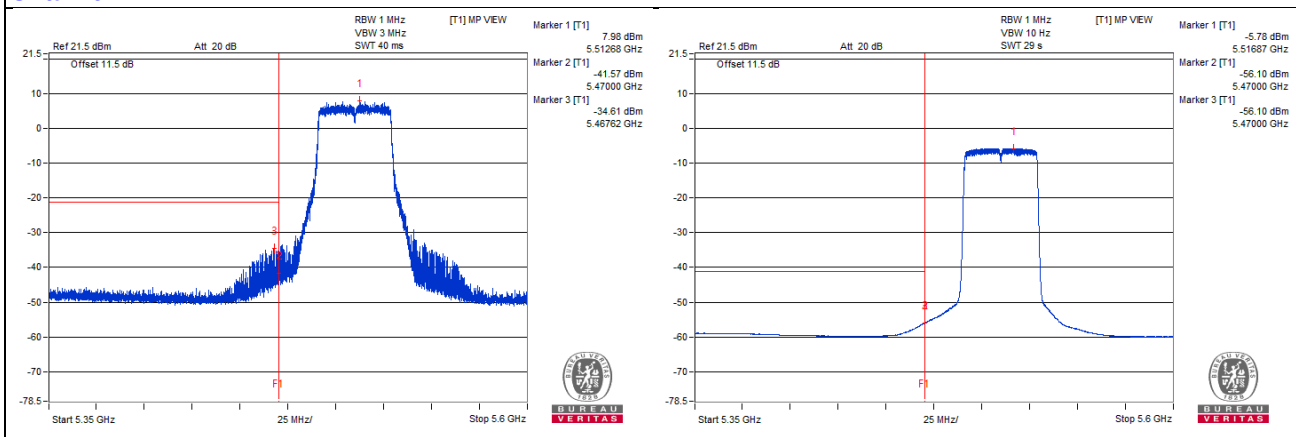

Chain 1

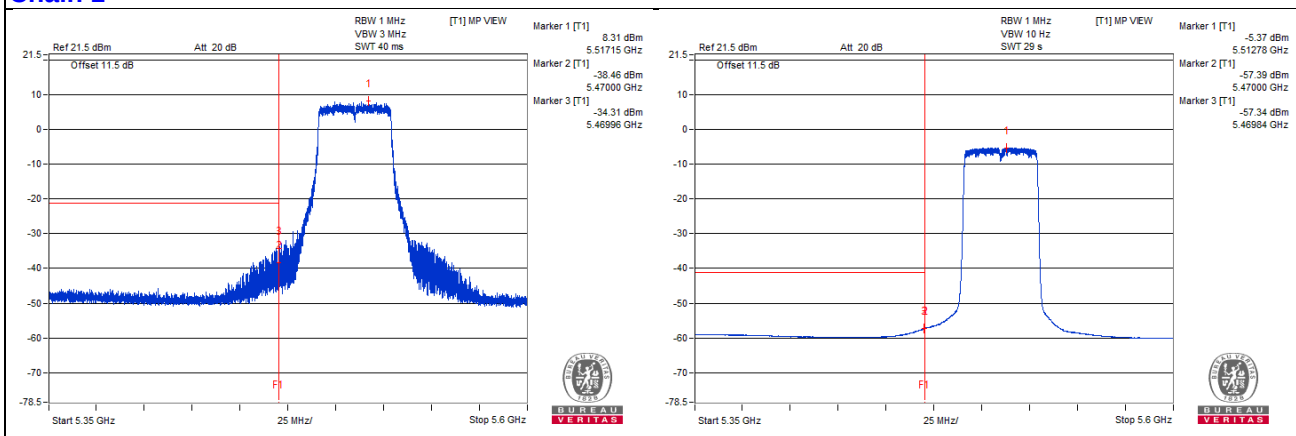

802.11ax (HE40) - Channel 110

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3684.37 PK	57.74	74	-16.26	-49.83	-47.17	7.77	-37.52
2	3685.93 AV	46.52	54	-7.48	-59.56	-59.49	7.77	-48.74
3	7400 PK	58.91	74	-15.09	-48.75	-45.95	7.77	-36.35
4	7400 AV	51.81	54	-2.19	-57.18	-52.49	7.77	-43.45
5	11082.81 PK	55.09	74	-18.91	-50.9	-51	7.77	-40.17
6	11115.62 AV	44.6	54	-9.4	-61.4	-61.48	7.77	-50.66
7	16669.68 PK	64.34	68.2	-3.86	-47.11	-39.36	7.77	-30.92

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0



Chain 1



Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5467.46 PK	70.66	68.2	* 2.46	-34.89	-35.93	7.77	-24.6
2	5459.03 PK	68.54	74	-5.46	-36.19	-39.38	7.77	-26.72
3	5459.62 AV	49.16	54	-4.84	-56.71	-57.05	7.77	-46.1


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX B)

Chain 0

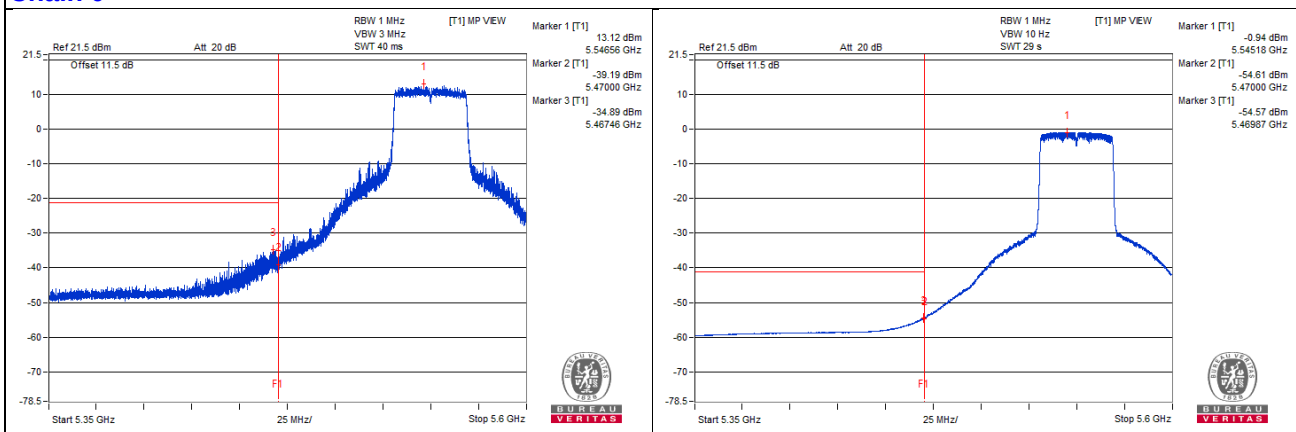

Chain 1

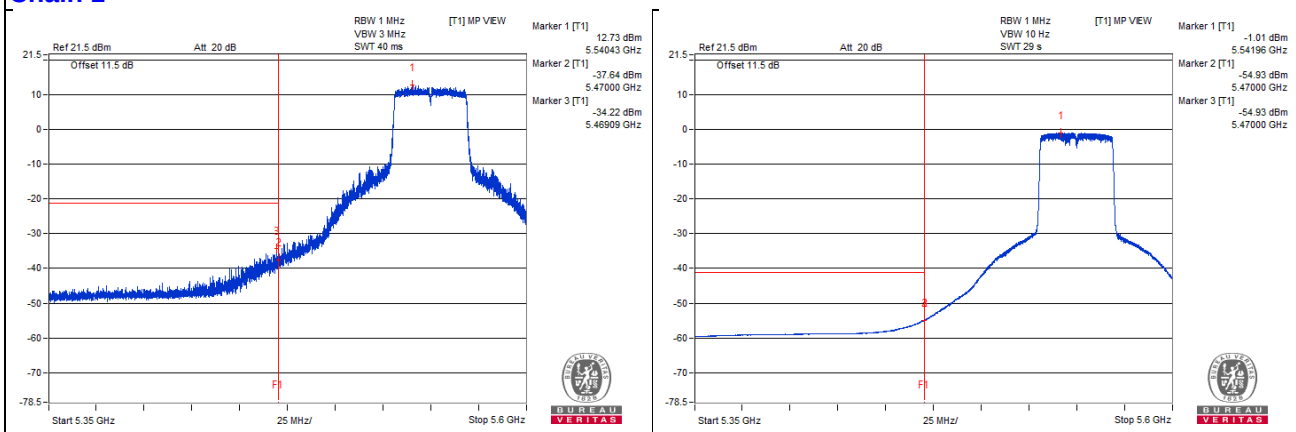

802.11ax (HE40) - Channel 134

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3773.43 PK	57.48	74	-16.52	-49.69	-47.66	7.77	-37.78
2	3767.18 AV	46.37	54	-7.63	-59.73	-59.62	7.77	-48.89
3	7560.93 PK	57.69	74	-16.31	-48.58	-48.13	7.77	-37.57
4	7559.37 AV	49.29	54	-4.71	-58.33	-55.59	7.77	-45.97
5	11329.68 PK	57.75	74	-16.25	-49.29	-47.48	7.77	-37.51
6	11346.87 AV	45.44	54	-8.56	-60.55	-60.65	7.77	-49.82
7	17003.18 PK	64.94	68.2	-3.26	-40.49	-41.8	7.77	-30.32

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

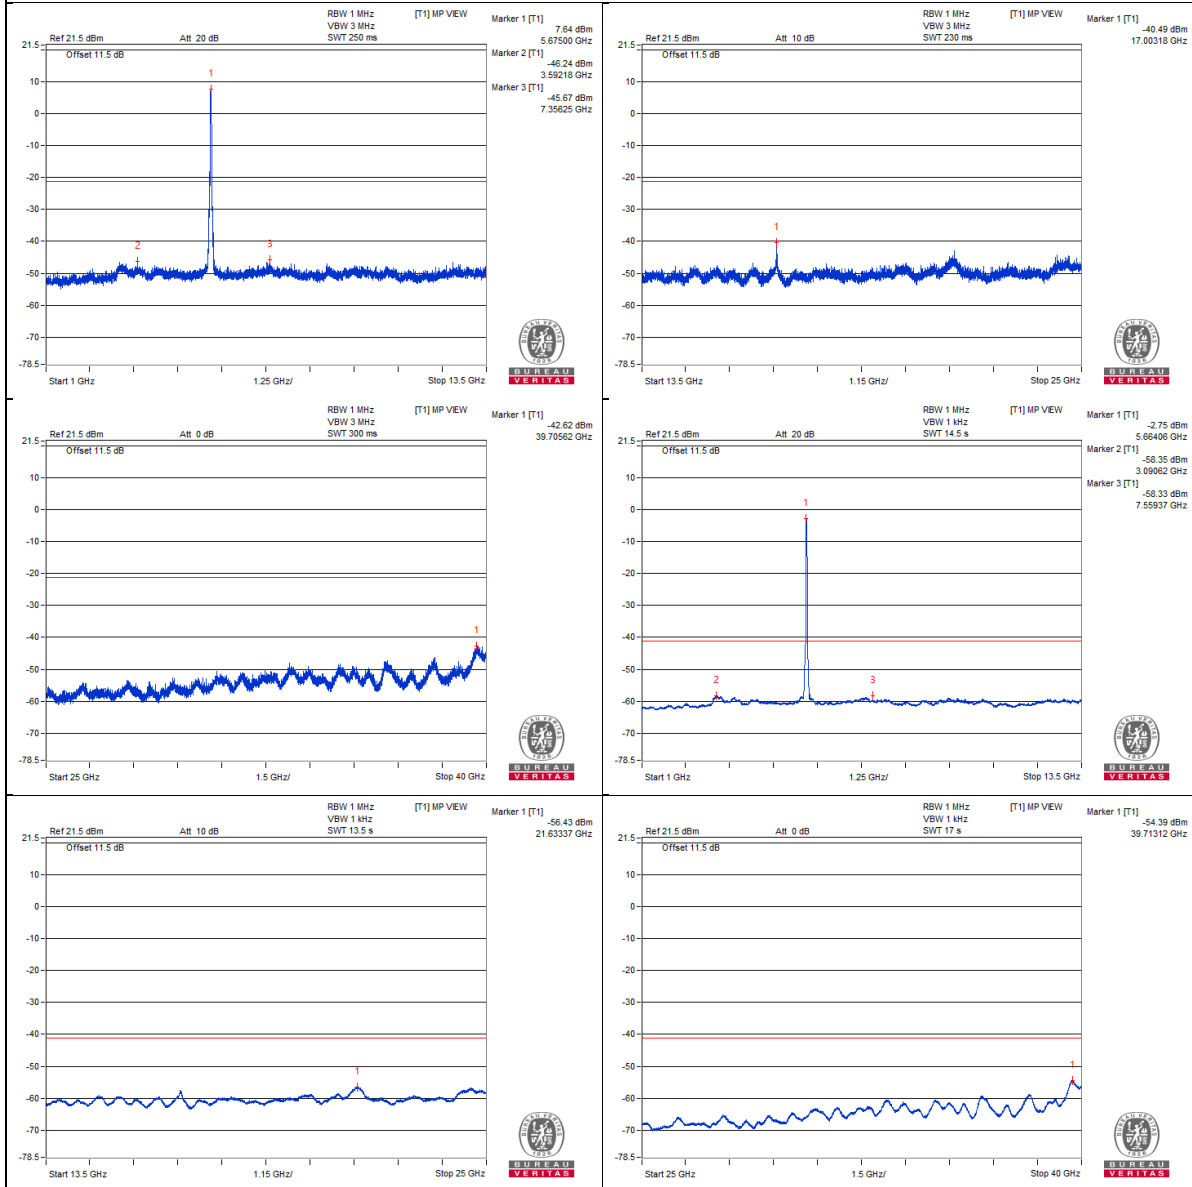

Chain 1



Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725.37 PK	72.8	68.2	* 4.6	-32.1	-34.8	7.77	-22.46

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

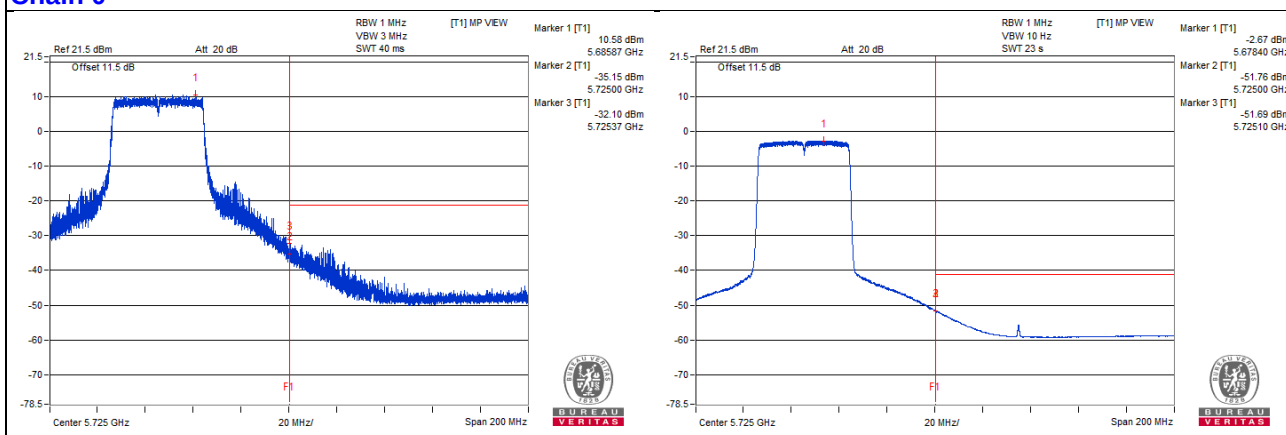

Chain 1

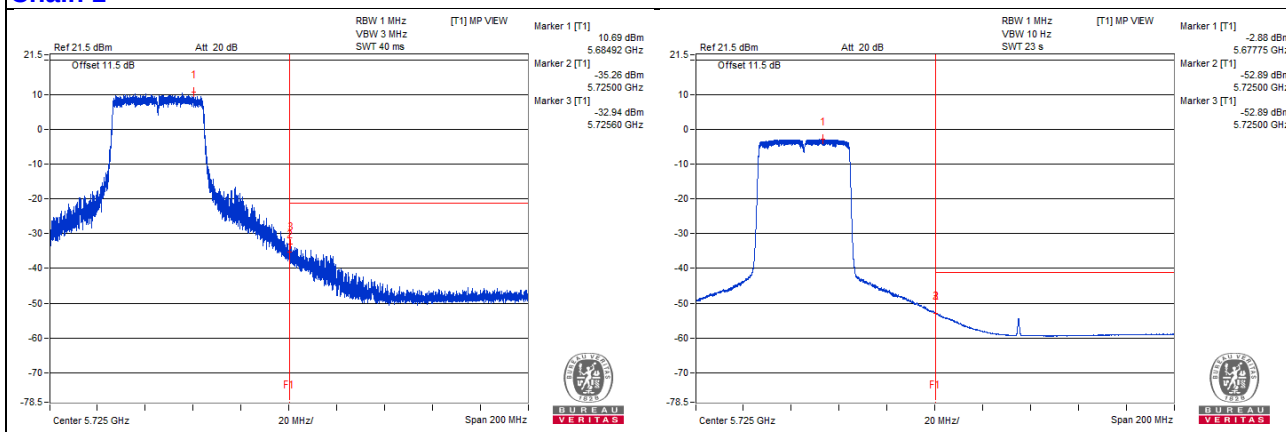

802.11ax (HE40) - Channel 142

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3823.43 PK	56.37	74	-17.63	-49.18	-50.23	7.77	-38.89
2	3787.5 AV	45.96	54	-8.04	-60.01	-60.16	7.77	-49.3
3	7612.5 PK	57.54	74	-16.46	-50.01	-47.38	7.77	-37.72
4	7614.06 AV	47.47	54	-6.53	-60.34	-57.32	7.77	-47.79
5	11426.56 PK	56.11	74	-17.89	-50.51	-49.42	7.77	-39.15
6	11435.93 AV	44.88	54	-9.12	-60.93	-61.4	7.77	-50.38
7	17144.06 PK	63.72	68.2	-4.48	-43.32	-41.5	7.77	-31.54

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0



Chain 1



Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5858.95 PK	60.23	68.2	-7.97	-45.04	-46.75	7.77	-35.03

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

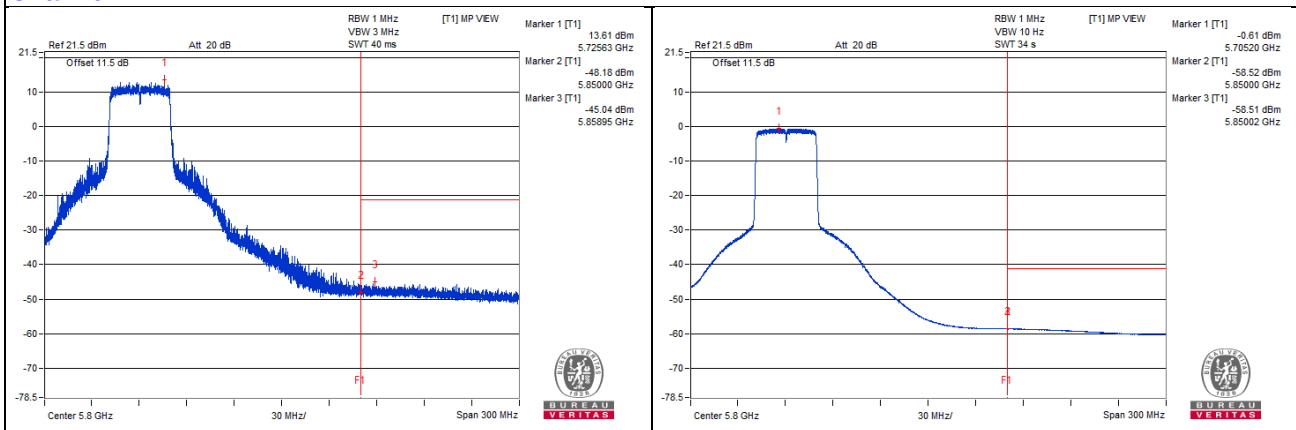

Chain 1

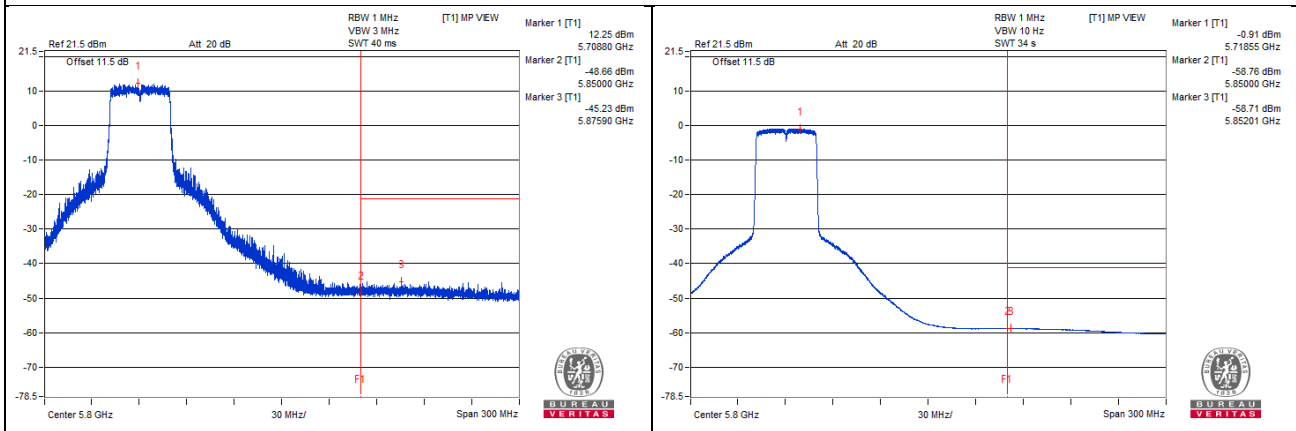

802.11ax (HE40) – Channel 151

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3831.25 PK	56.18	74	-17.82	-49.68	-50.05	7.77	-39.08
2	3835.93 AV	44.18	54	-9.82	-61.76	-61.96	7.77	-51.08
3	7673.43 PK	57.11	74	-16.89	-48.77	-49.1	7.77	-38.15
4	7673.43 AV	46.45	54	-7.55	-60.22	-59.04	7.77	-48.81
5	11498.43 PK	55.49	74	-18.51	-50.42	-50.68	7.77	-39.77
6	11490.62 AV	43.65	54	-10.35	-62.49	-62.3	7.77	-51.61
7	17249 PK	65.36	68.2	-2.84	-42.33	-39.49	7.77	-29.9

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

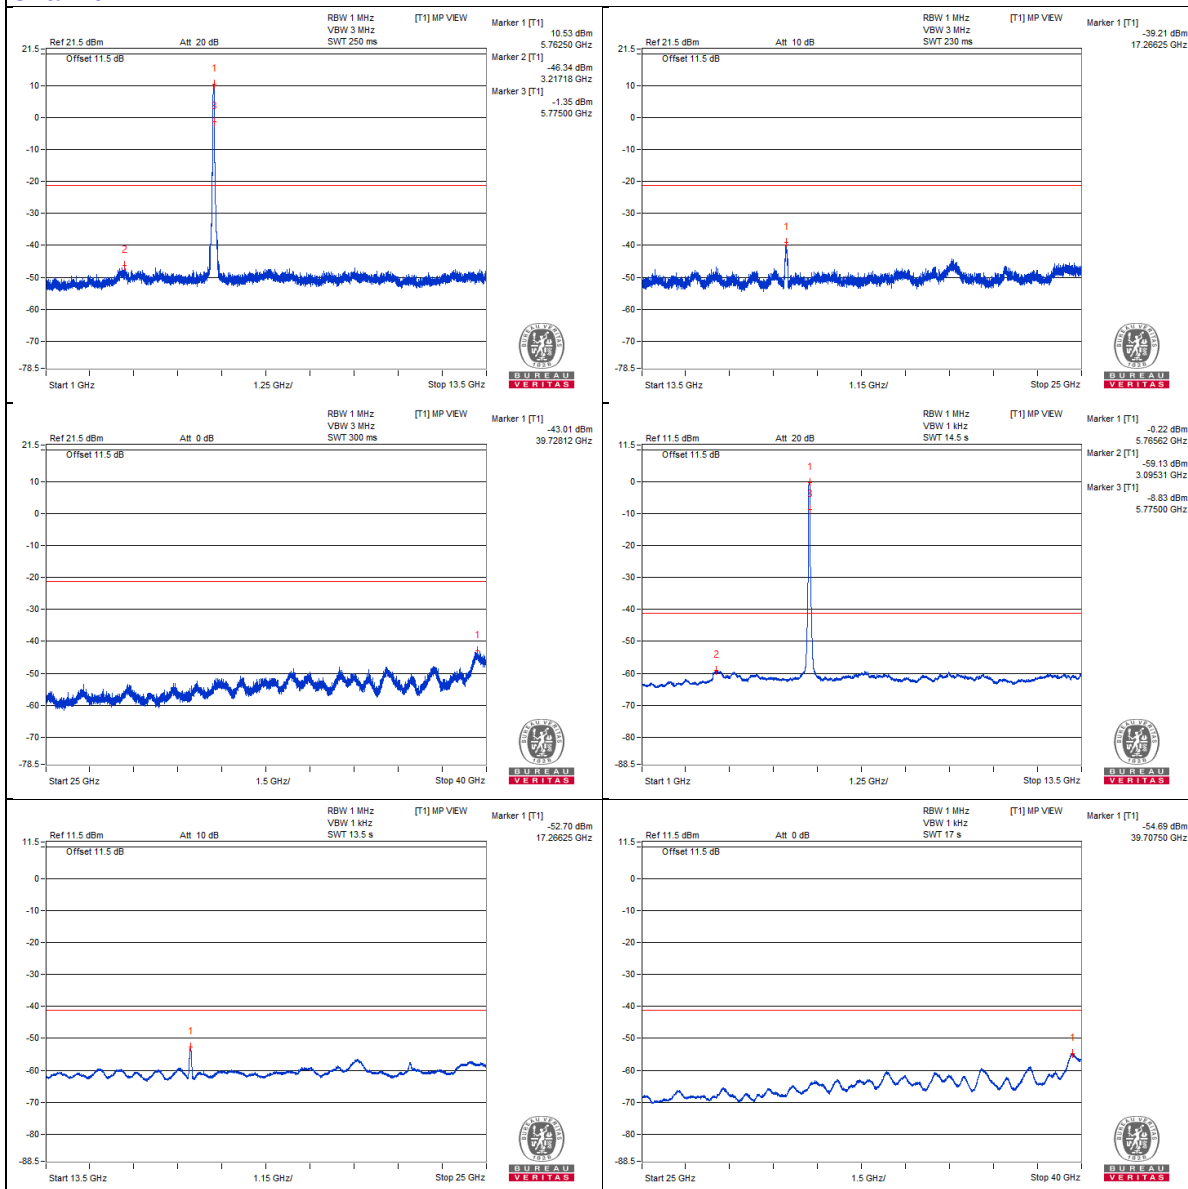


Chain 1

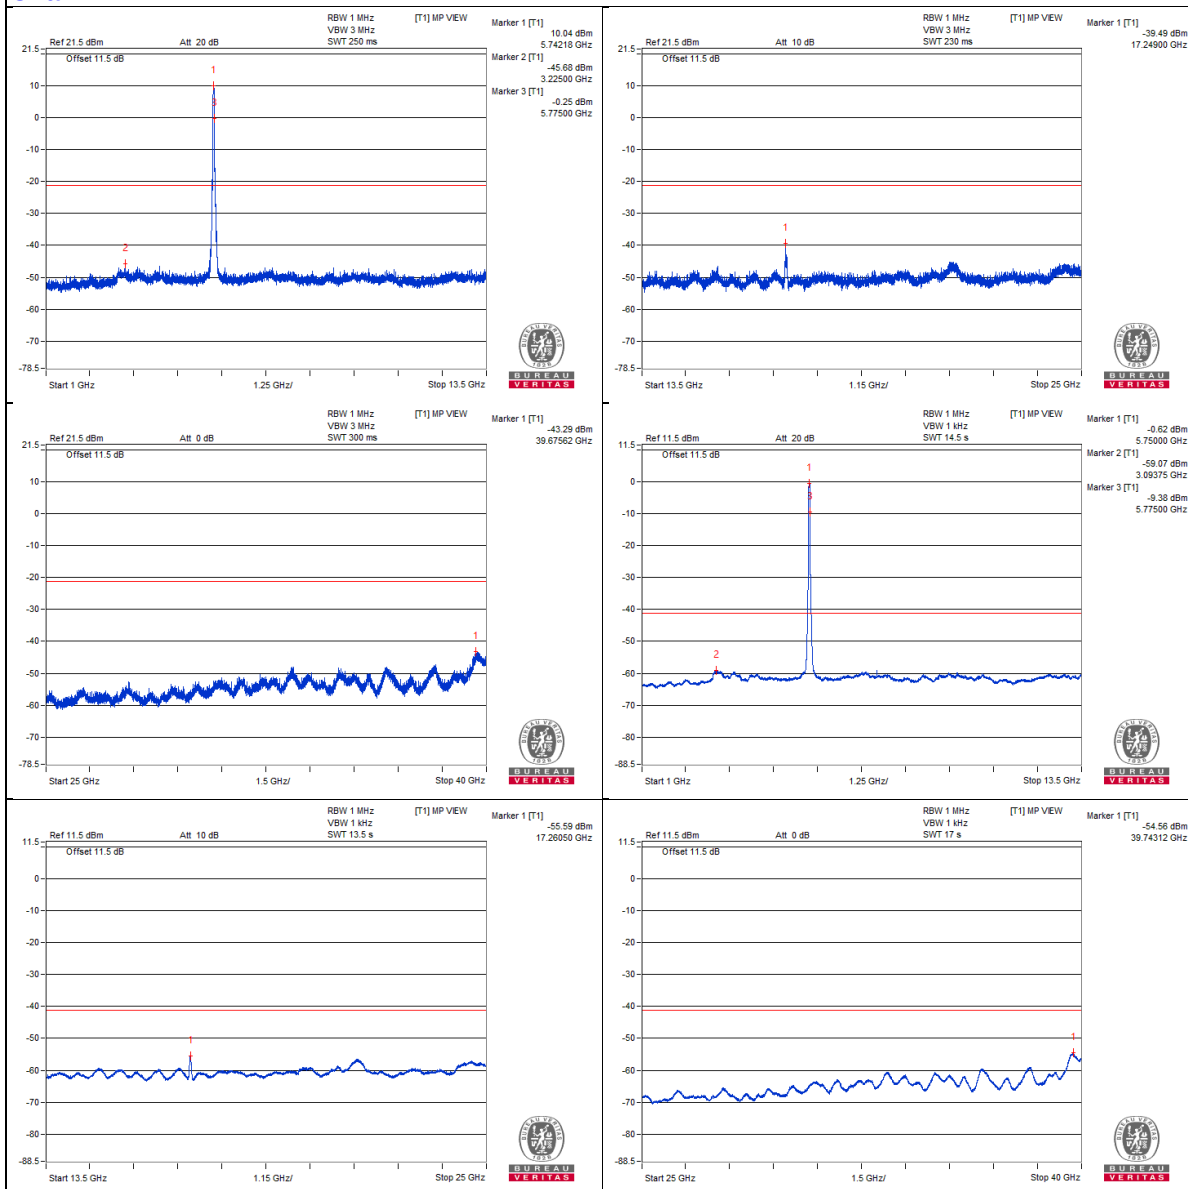


Bandedge table

Chain 0

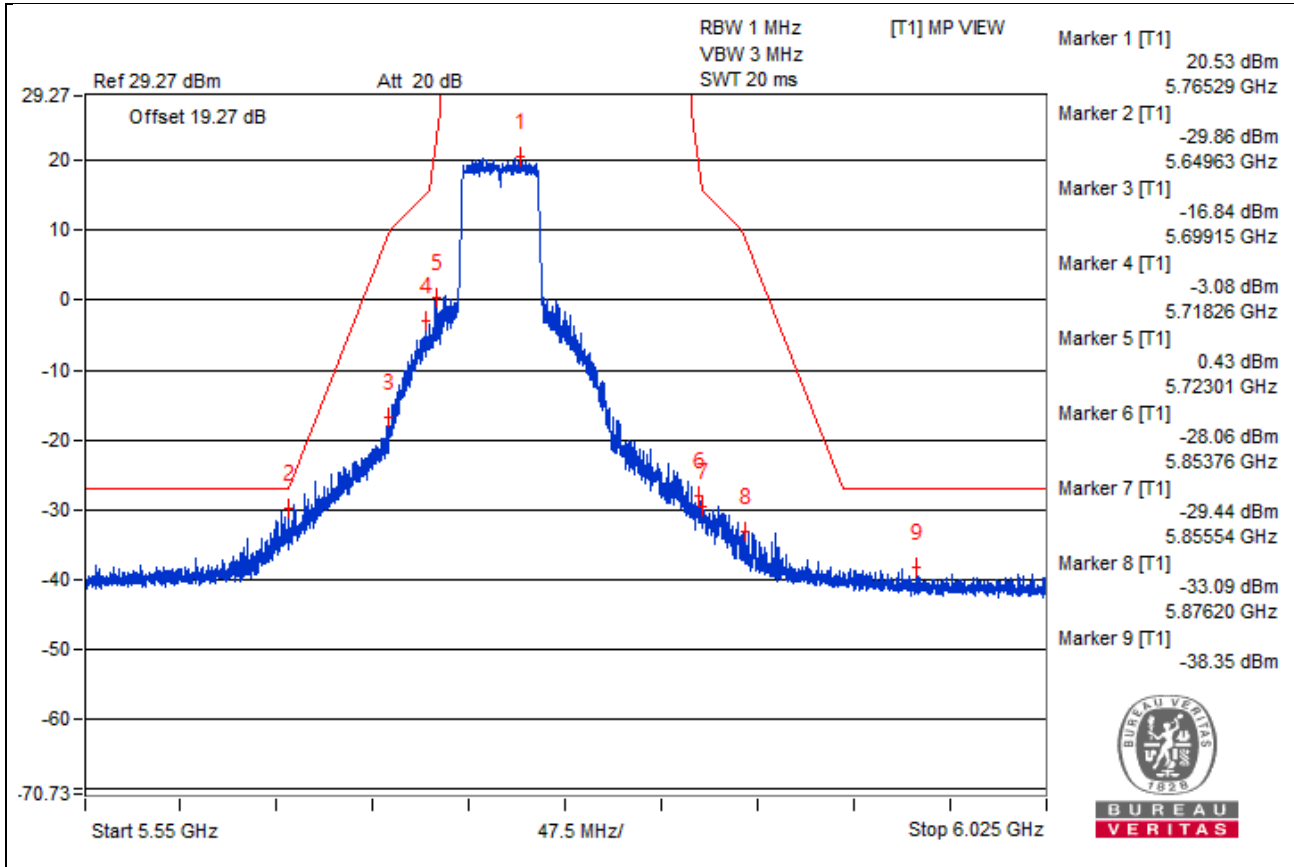

Chain 1

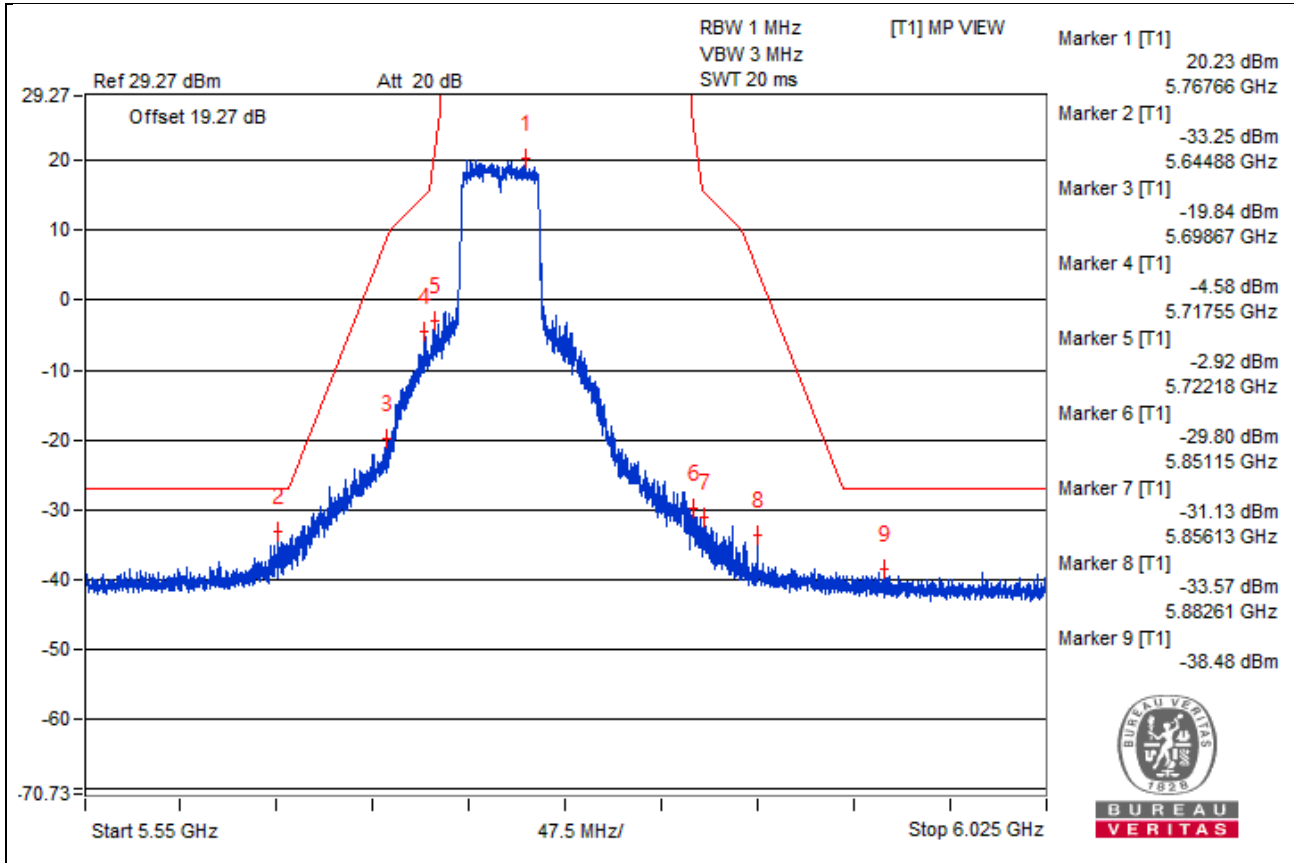

802.11ax (HE40) – Channel 159

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3873.43 PK	56.35	74	-17.65	-50.95	-48.71	7.77	-38.91
2	3881.25 AV	43.98	54	-10.02	-62.15	-61.98	7.77	-51.28
3	7726.56 PK	57.45	74	-16.55	-49.28	-47.99	7.77	-37.81
4	7726.56 AV	46.27	54	-7.73	-60.18	-59.4	7.77	-48.99
5	11570.31 PK	55.4	74	-18.6	-51.4	-49.99	7.77	-39.86
6	11592.18 AV	43.24	54	-10.76	-62.58	-63.03	7.77	-52.02
7	17389.87 PK	64.6	68.2	-3.6	-39.8	-44.1	7.77	-30.66

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

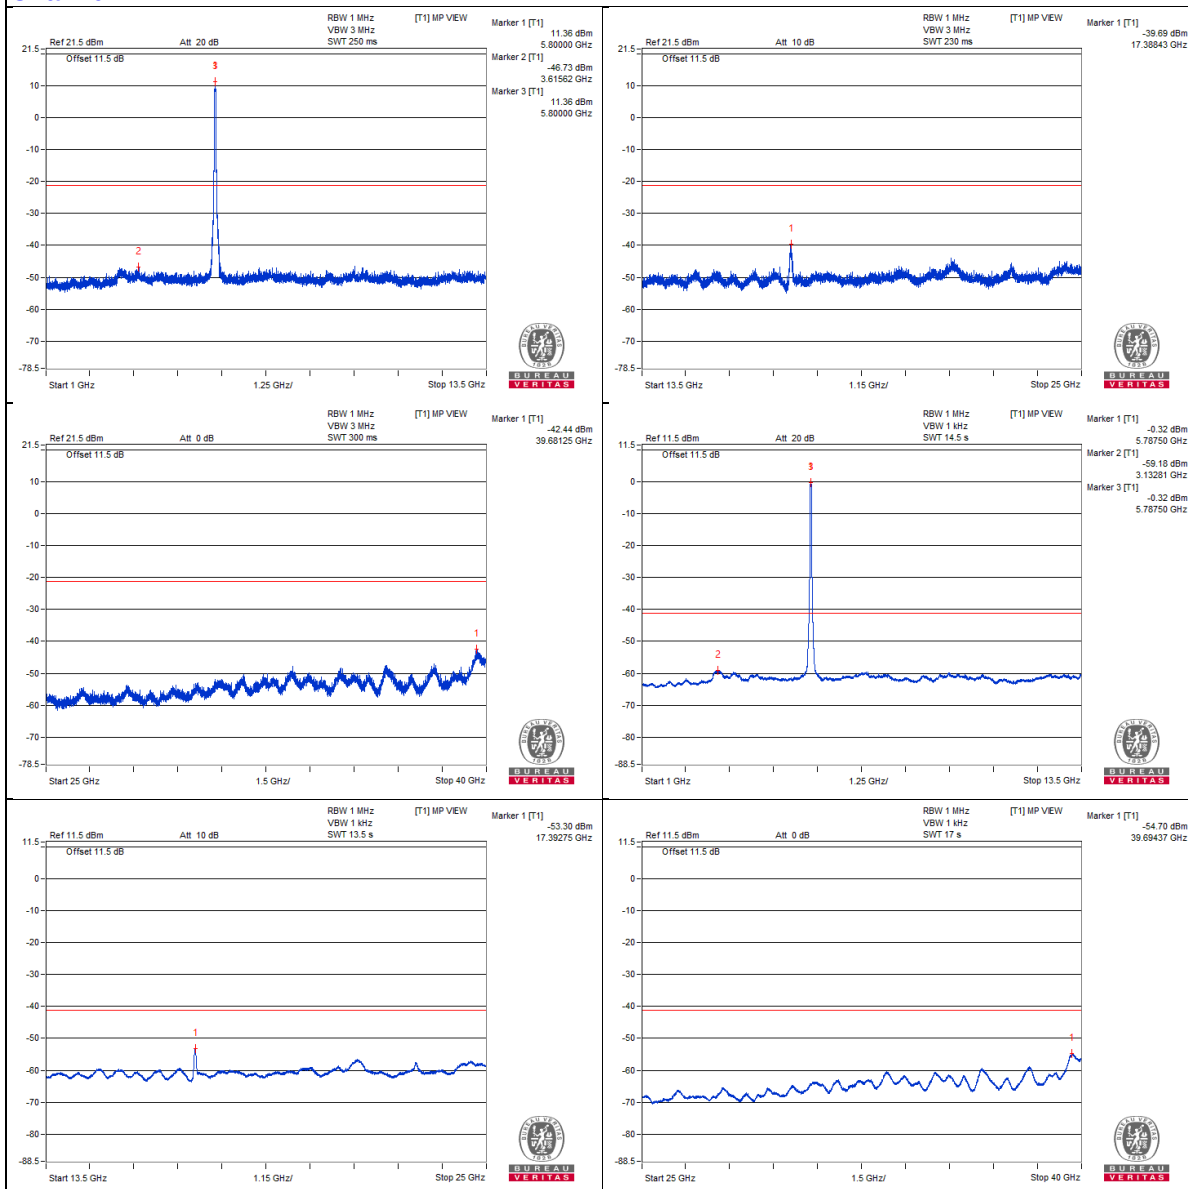


Chain 1

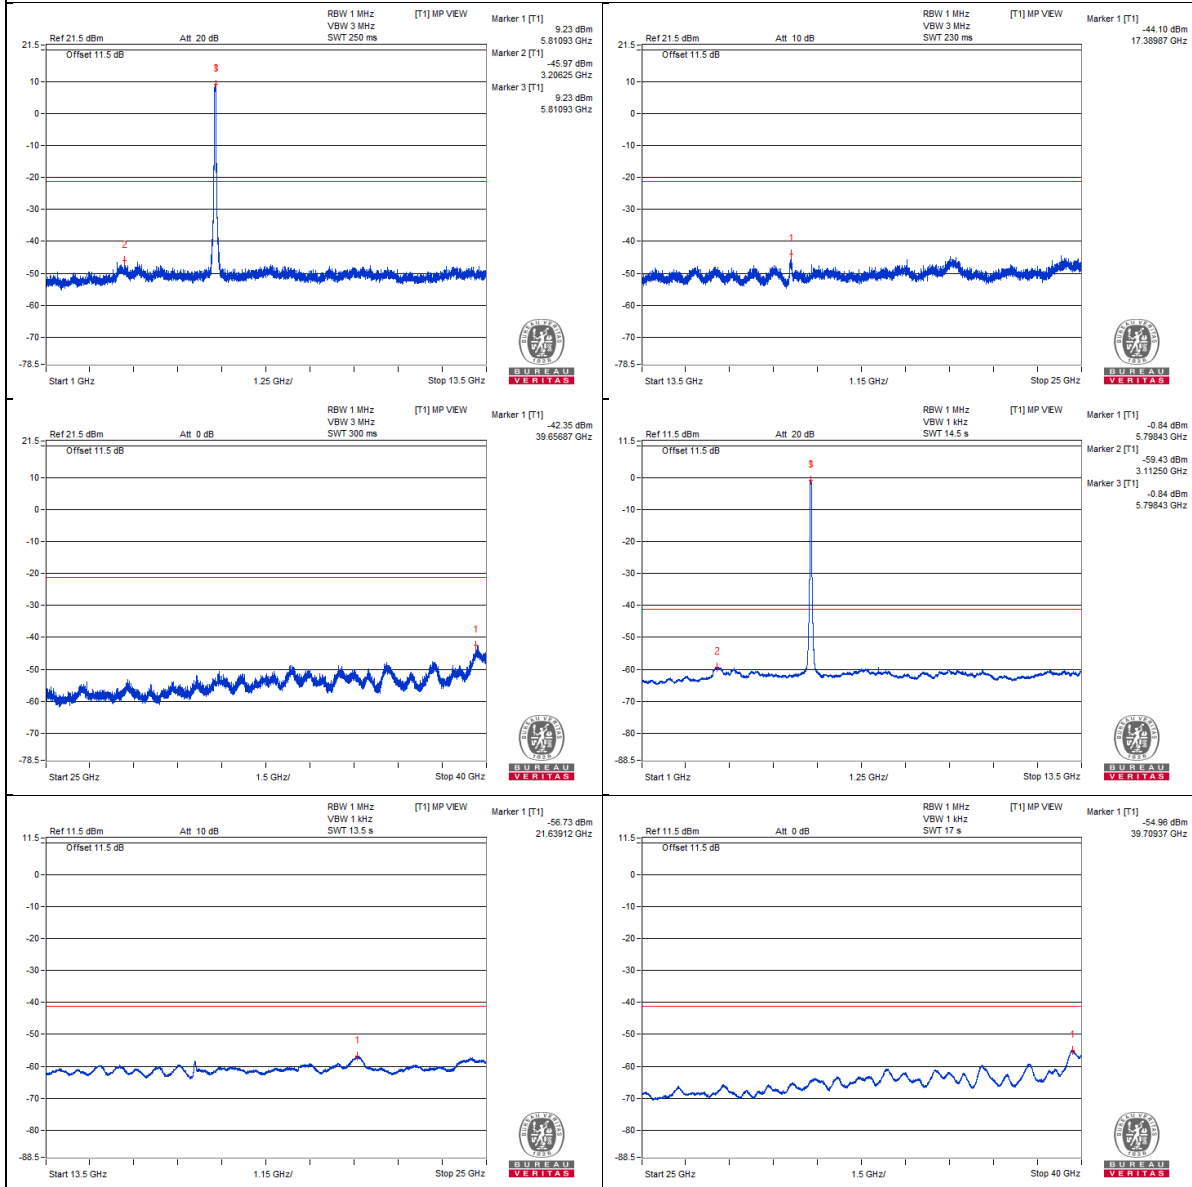


Bandedge table

Chain 0

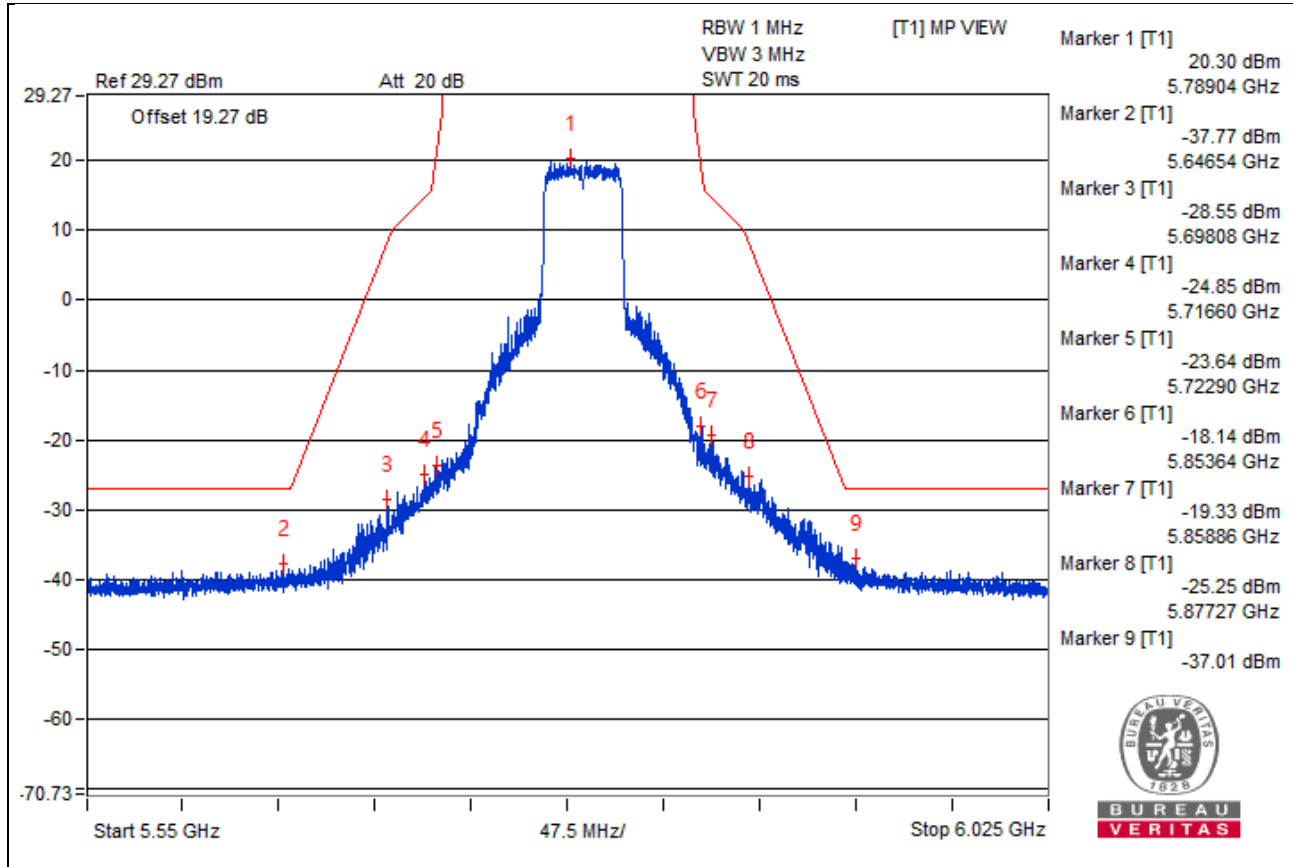

Chain 1

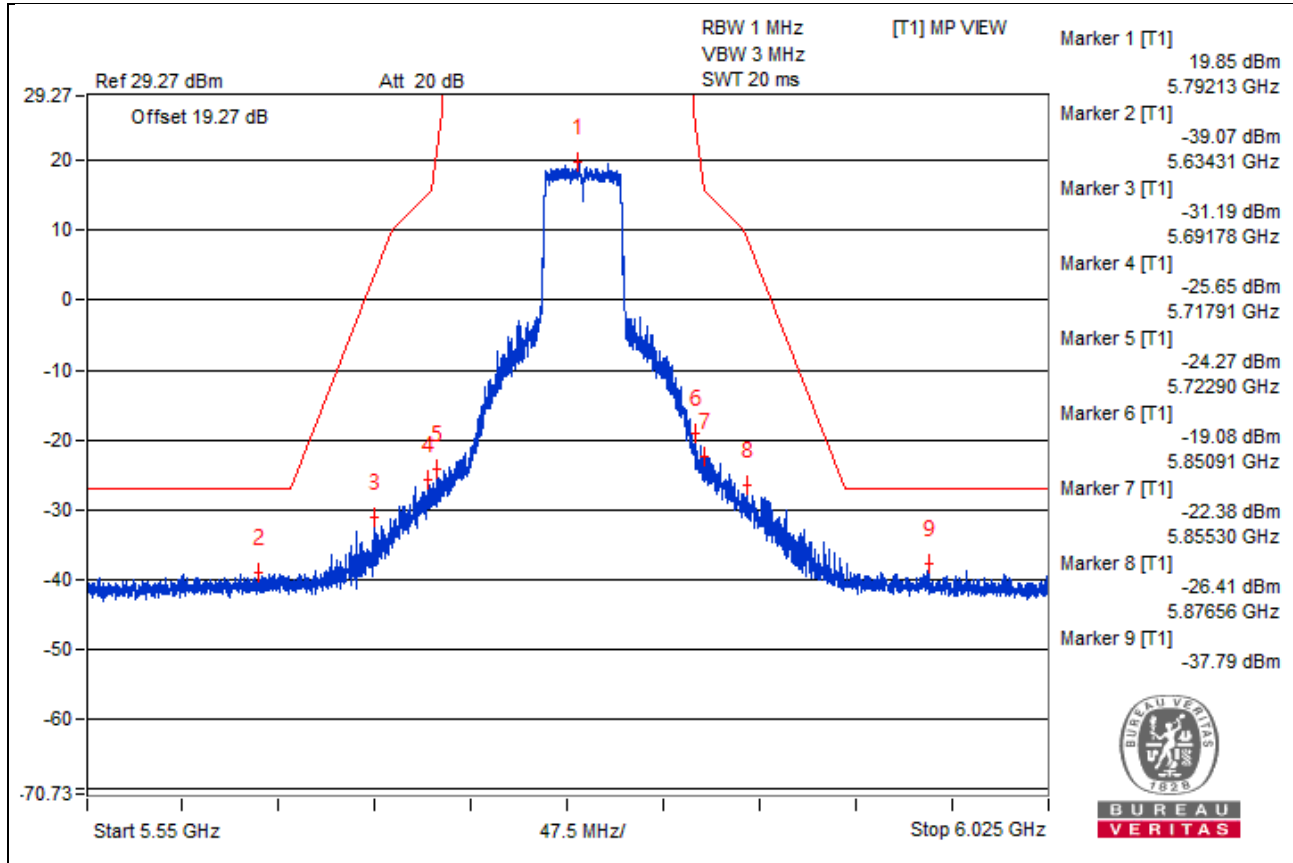

802.11ax (HE80) - Channel 42

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3468.75 PK	55.4	68.2	-12.8	-50.31	-47.94	6.09	-39.86
2	6946.87 PK	58.62	68.2	-9.58	-48.54	-44.05	6.09	-36.64
3	10425 PK	55.32	68.2	-12.88	-50.29	-48.07	6.09	-39.94
4	15616 PK	54.26	74	-19.74	-51.15	-49.25	6.09	-41
5	15620.31 AV	42.72	54	-11.28	-61.58	-61.7	6.09	-52.54

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0



Chain 1

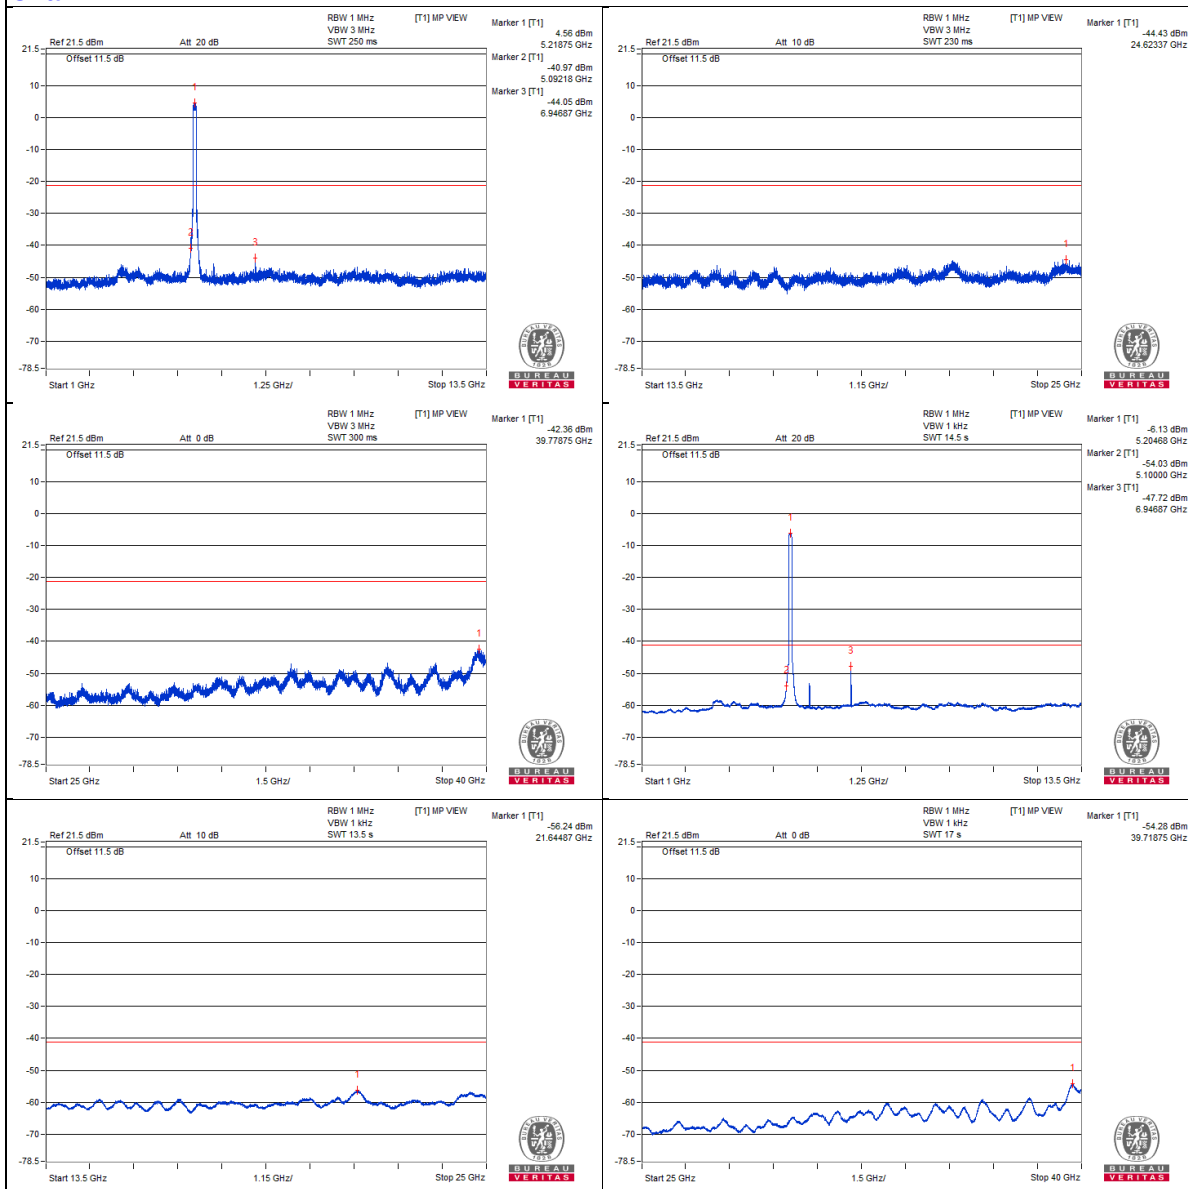

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5145.97 PK	76.21	74	* 2.21	-35.4	-25.57	6.09	-19.05
2	5150 AV	54.88	54	* 0.88	-51.7	-48.02	6.09	-40.38

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

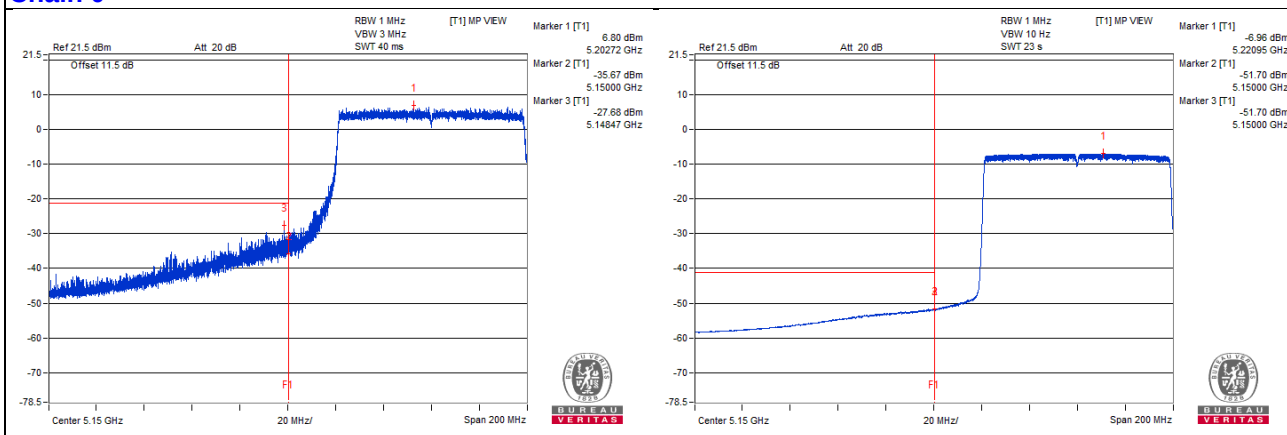

Chain 1

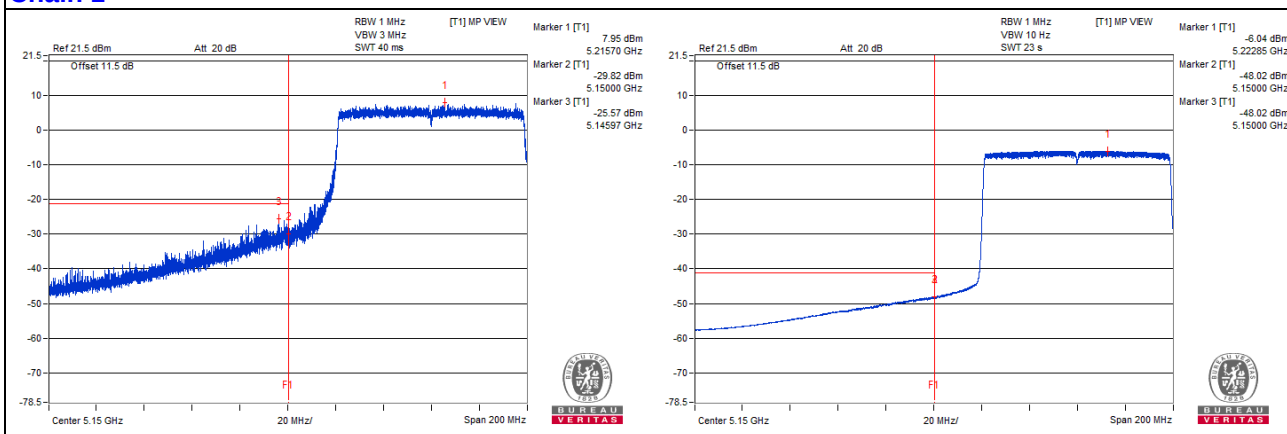

802.11ax (HE80) - Channel 58

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3535.93 PK	56.28	74	-17.72	-47.16	-49.26	6.09	-38.98
2	3545.31 AV	45	54	-9	-59.3	-59.42	6.09	-50.26
3	7053.12 PK	58.8	68.2	-9.4	-47.21	-44.37	6.09	-36.46
4	10576.56 PK	54.84	68.2	-13.36	-49.76	-49.29	6.09	-40.42
5	10600 AV	44.2	54	-9.8	-59.86	-60.48	6.09	-51.06
6	15870.43 PK	55.03	74	-18.97	-48.51	-50.33	6.09	-40.23
7	15863.25 AV	44.02	54	-9.98	-60.32	-60.36	6.09	-51.24

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

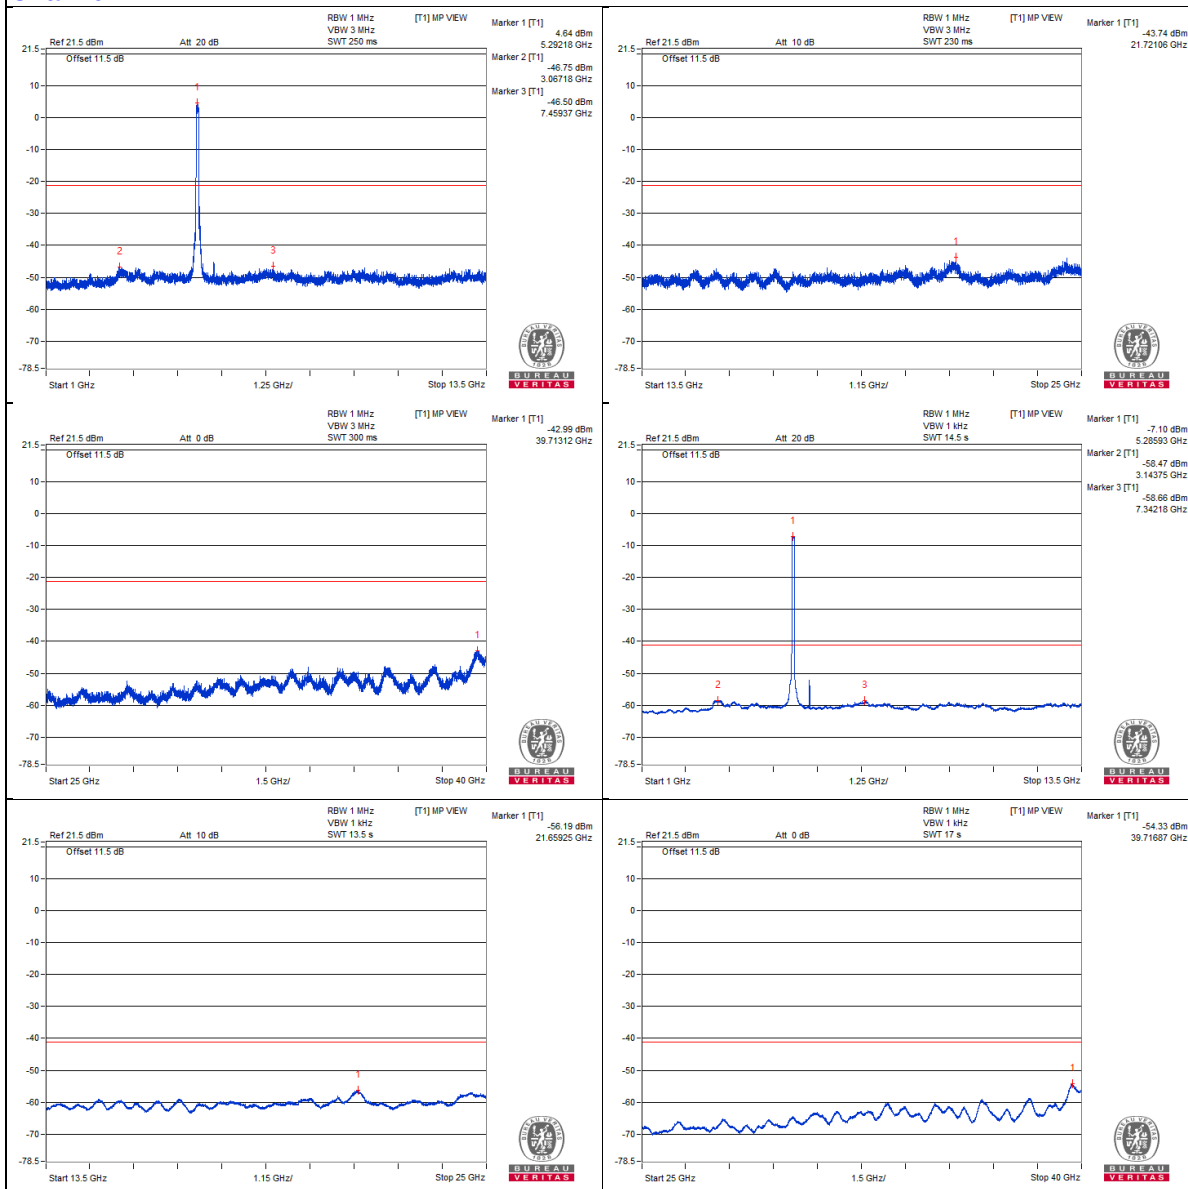

Chain 1

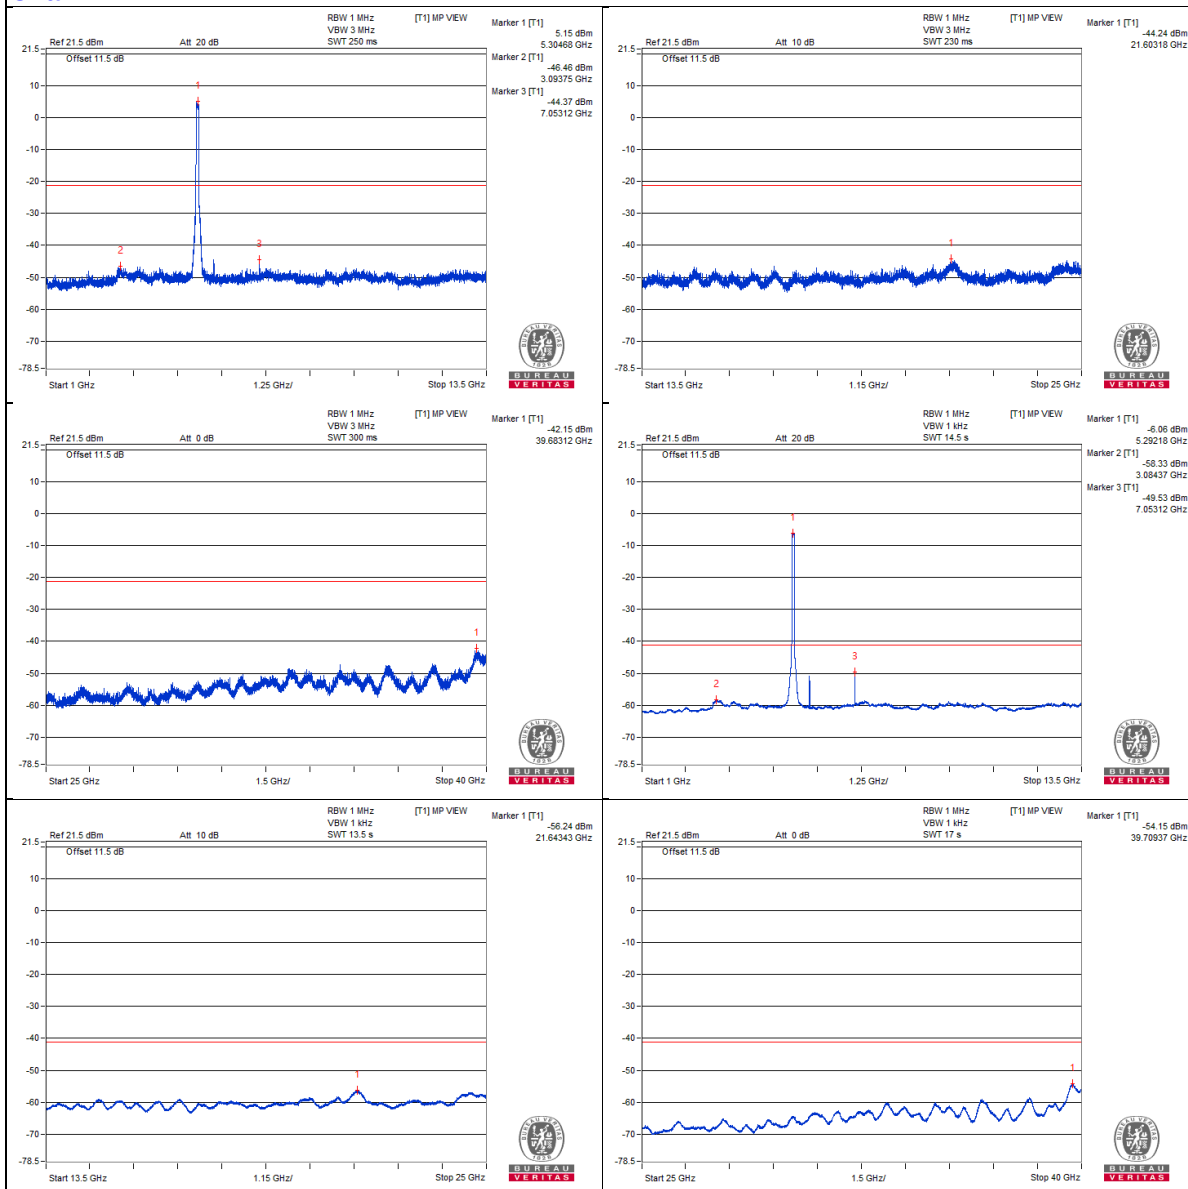

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5362.92 PK	79.3	74	* 5.3	-26.38	-24.05	6.09	-15.96
2	5350.62 AV	56.32	54	* 2.32	-53.91	-45.63	6.09	-38.94

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

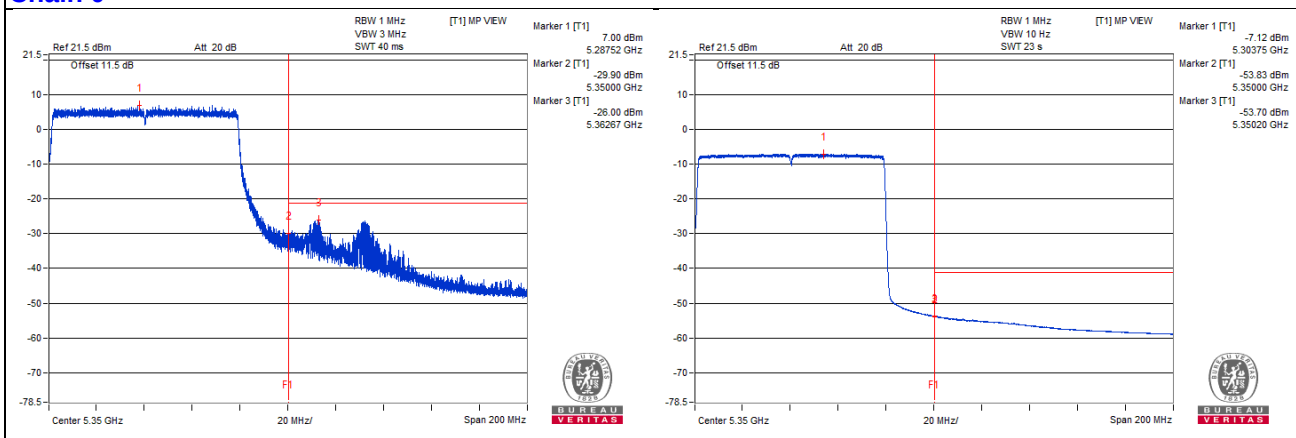

Chain 1

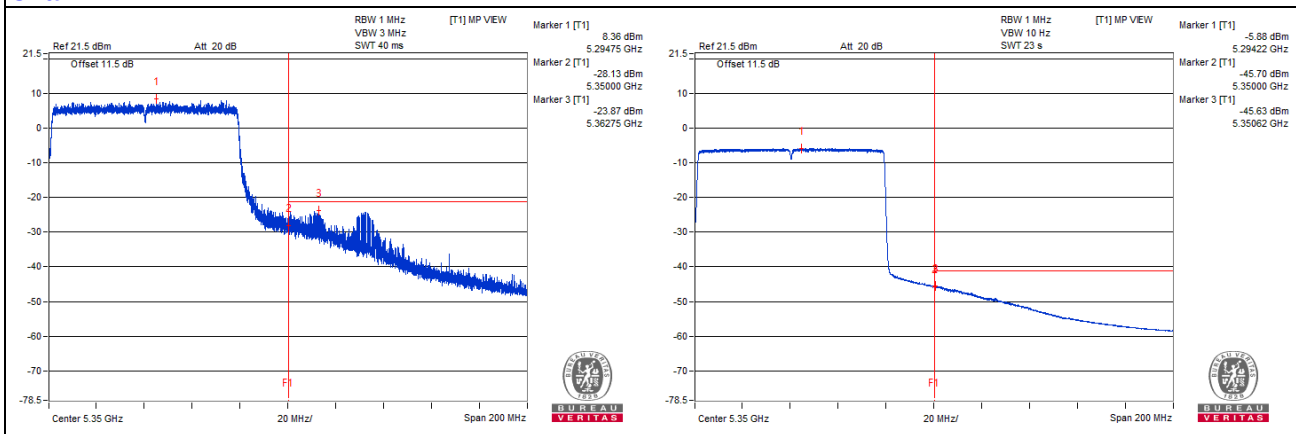

802.11ax (HE80) - Channel 106

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3667.18 PK	57.15	74	-16.85	-49.14	-48.66	7.77	-38.11
2	3670.31 AV	46.49	54	-7.51	-59.57	-59.53	7.77	-48.77
3	7373.43 PK	59.43	74	-14.57	-47.19	-46.1	7.77	-35.83
4	7373.43 AV	50.49	54	-3.51	-56.01	-55.14	7.77	-44.77
5	11050 PK	55.34	74	-18.66	-52.24	-49.57	7.77	-39.92
6	11076.56 AV	44.61	54	-9.39	-61.48	-61.38	7.77	-50.65
7	16579.12 PK	55.42	68.2	-12.78	-50.74	-50.5	7.77	-39.84

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

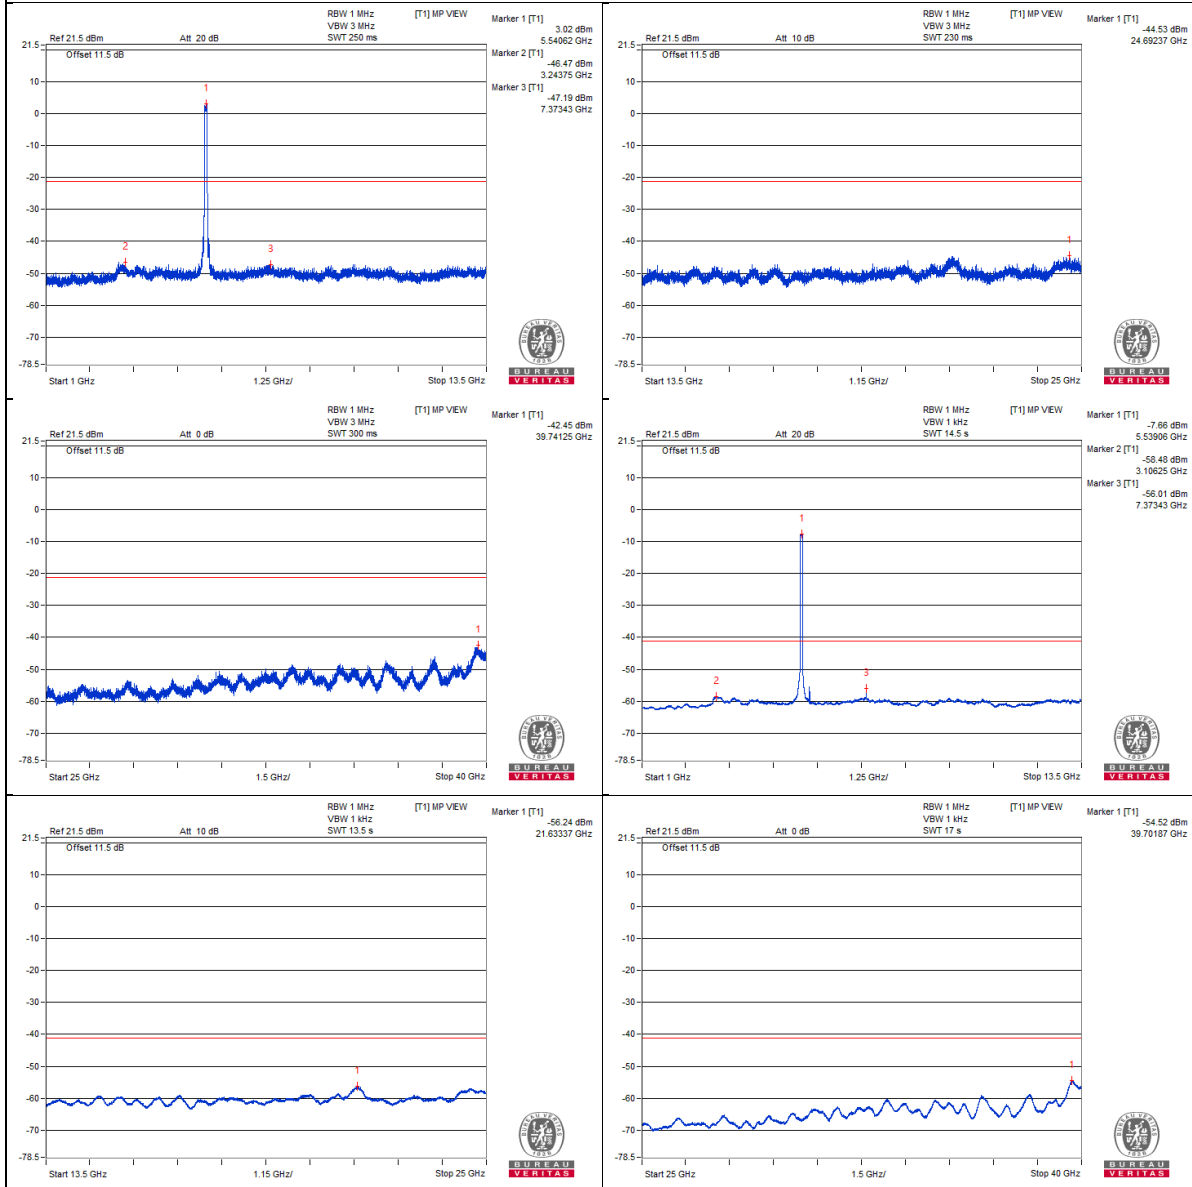

Chain 1

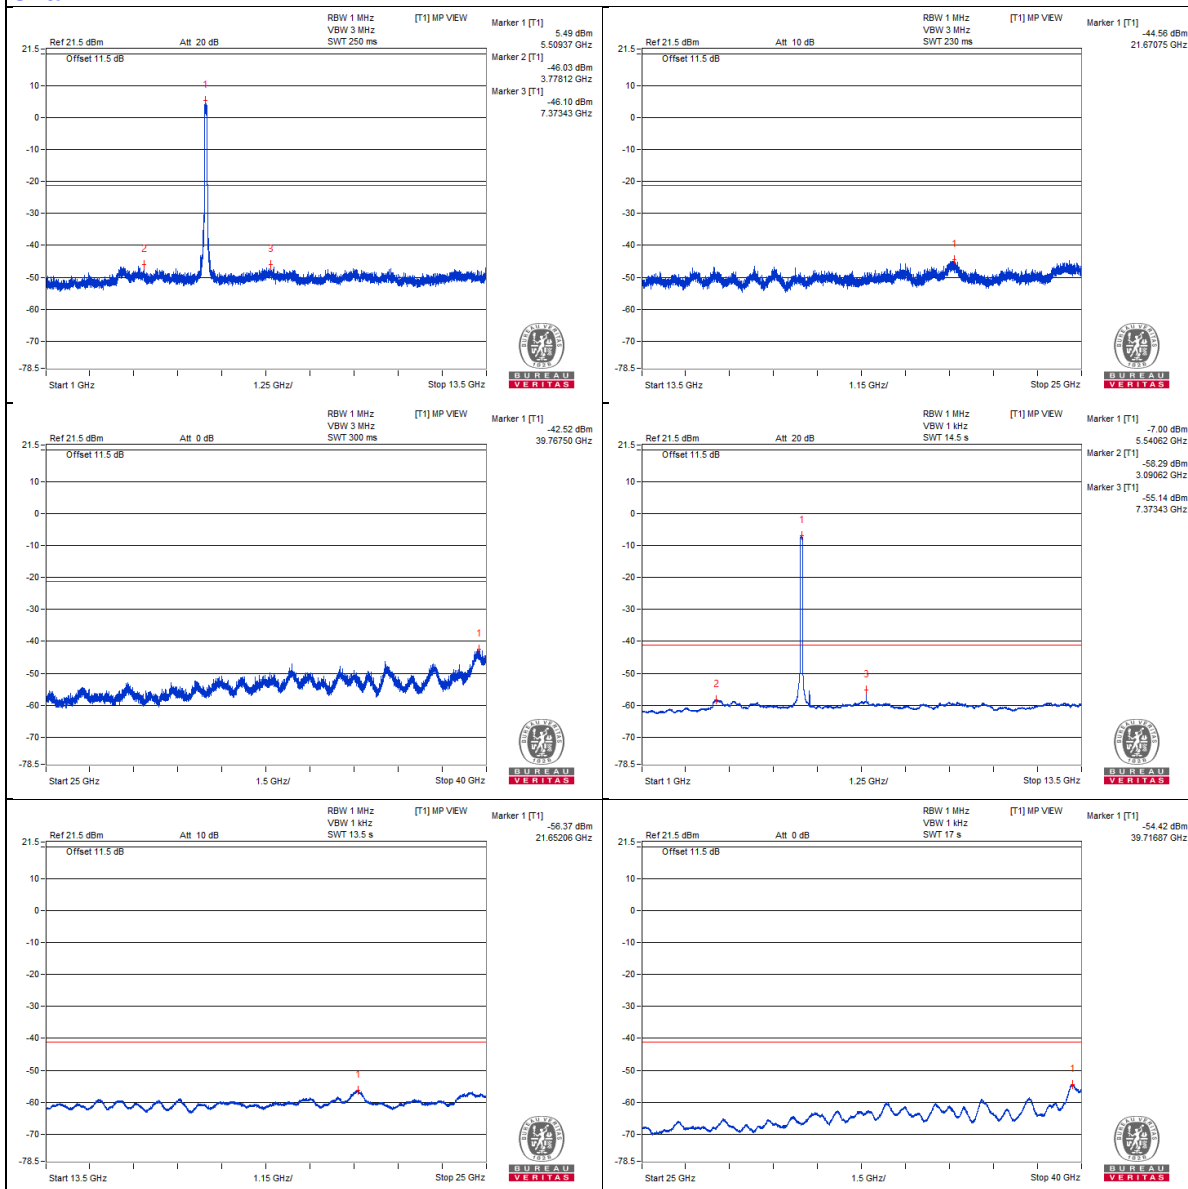

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5459.12 PK	72.88	74	-1.12	-35.65	-31.59	7.77	-22.38
2	5459.15 AV	51.48	54	-2.52	-54.02	-55.17	7.77	-43.78
3	5467.53 PK	73.26	68.2	* 5.06	-34.26	-31.68	7.77	-22

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

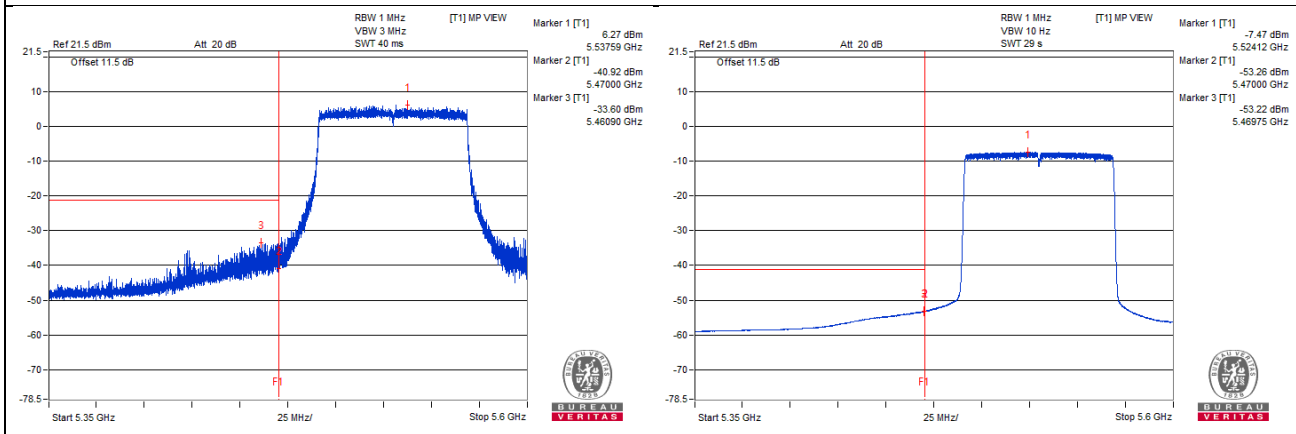

Chain 1

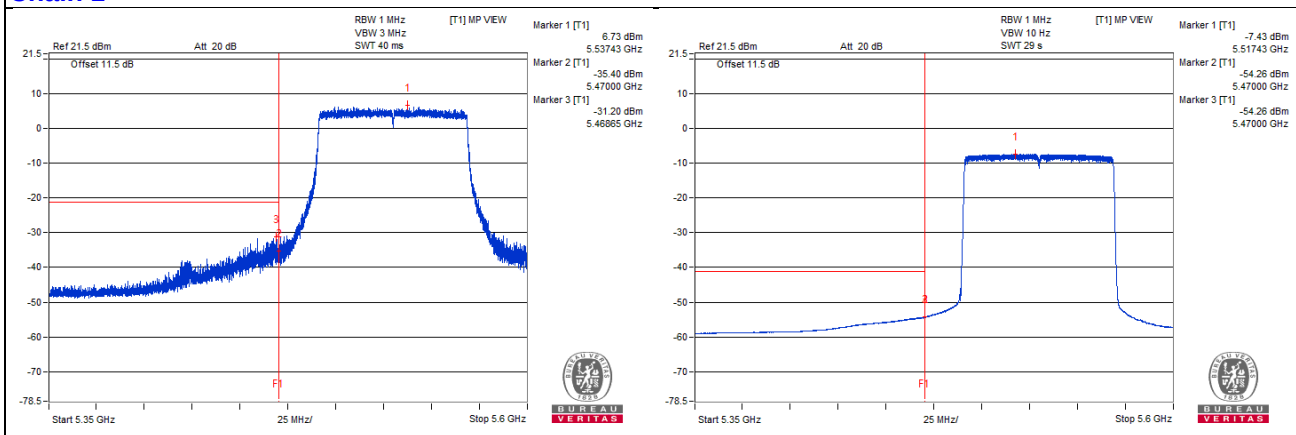

802.11ax (HE80) - Channel 122

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3735.93 PK	57.66	74	-16.34	-48.57	-48.19	7.77	-37.6
2	3734.37 AV	46.39	54	-7.61	-59.57	-59.74	7.77	-48.87
3	7479.68 PK	58.28	74	-15.72	-49.23	-46.67	7.77	-36.98
4	7479.68 AV	49.31	54	-4.69	-58.36	-55.55	7.77	-45.95
5	11200 PK	57.44	74	-16.56	-48.68	-48.52	7.77	-37.82
6	11210.93 AV	45.28	54	-8.72	-60.76	-60.76	7.77	-49.98
7	16842.18 PK	64.06	68.2	-4.14	-46.17	-39.89	7.77	-31.2

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

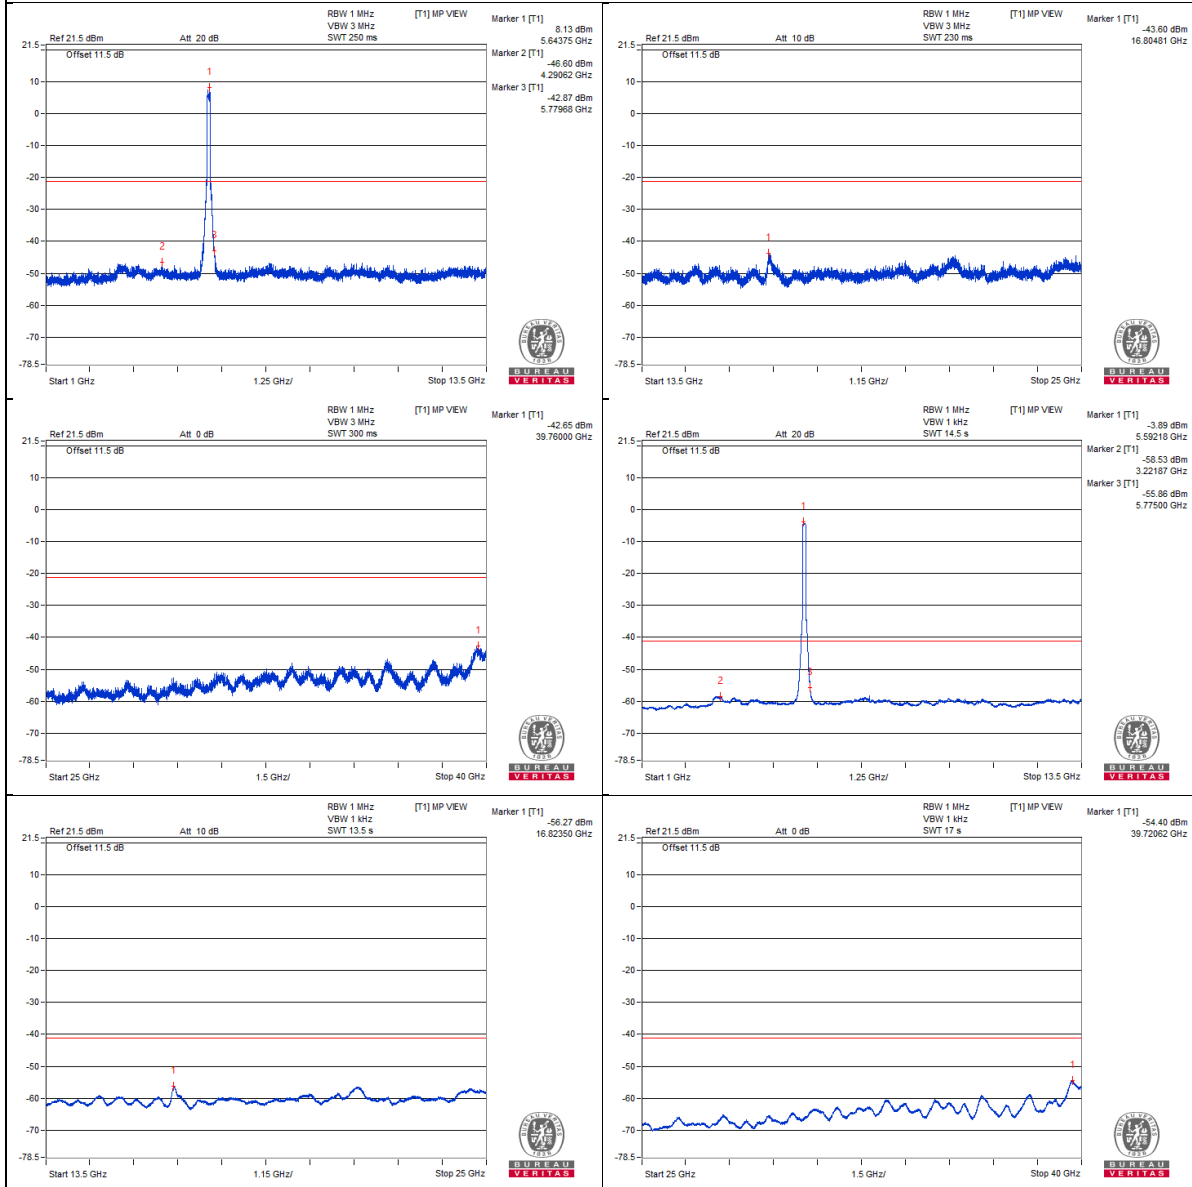

Chain 1



Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5725.07 PK	71.87	68.2	* 3.67	-32.73	-36.34	7.77	-23.39

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.


* The unwanted emission was verified and the test result was passed by radiated measurement.

(Please refer APPENDIX B)

Chain 0

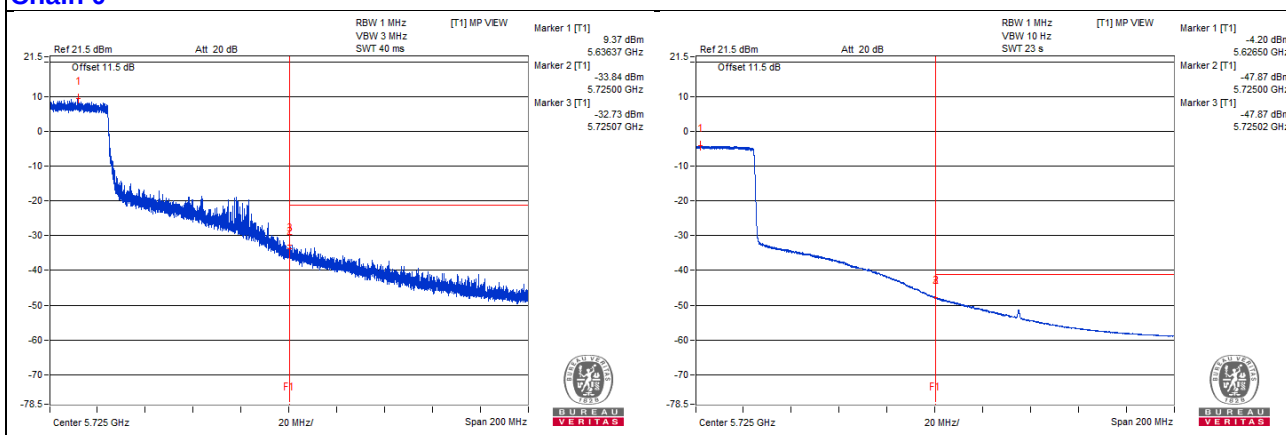

Chain 1

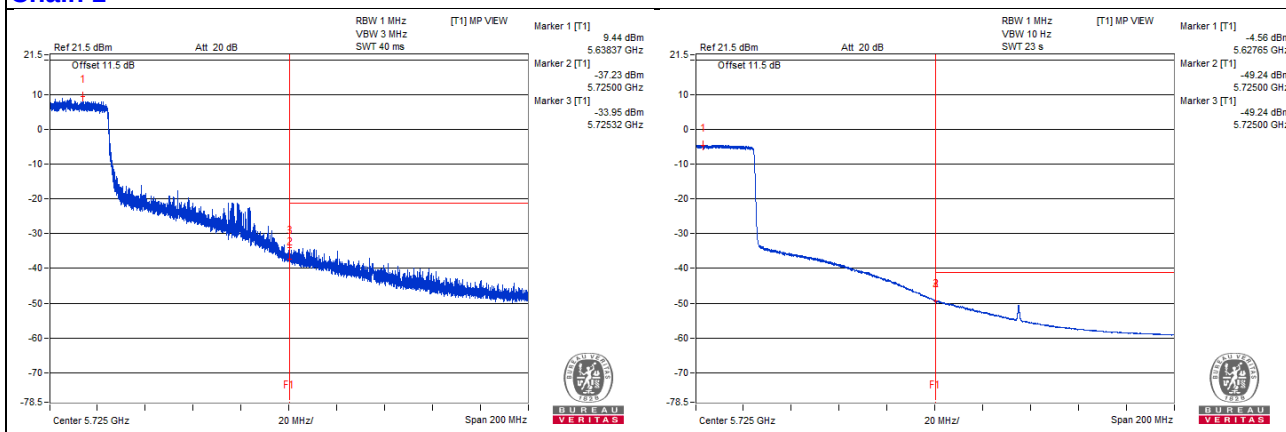

802.11ax (HE80) - Channel 138

Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3778.12 PK	57.6	74	-16.4	-48.15	-48.75	7.77	-37.66
2	3775 AV	46.32	54	-7.68	-59.58	-59.86	7.77	-48.94
3	7587.5 PK	57.37	74	-16.63	-49.62	-47.89	7.77	-37.89
4	7587.5 AV	48.67	54	-5.33	-59.09	-56.14	7.77	-46.59
5	11370.31 PK	56.38	74	-17.62	-49.36	-49.98	7.77	-38.88
6	11385.93 AV	45.25	54	-8.75	-60.62	-60.96	7.77	-50.01
7	17050.62 PK	62.54	68.2	-5.66	-45.66	-42.06	7.77	-32.72

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.