



802.11ax (HE20)

Chain 0


CH 1

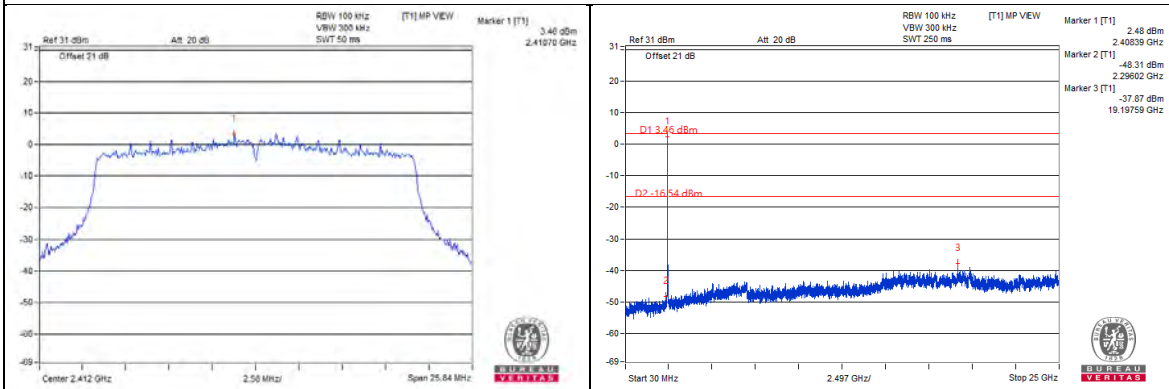


CH 2

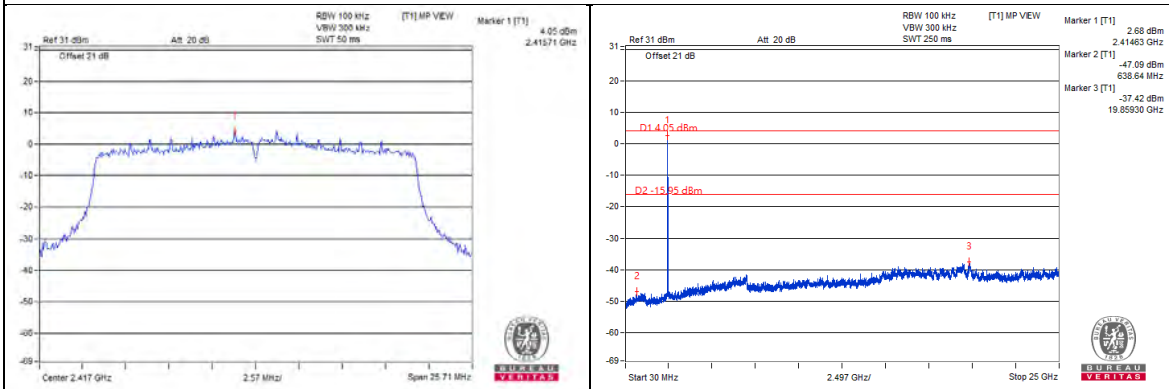


CH 6

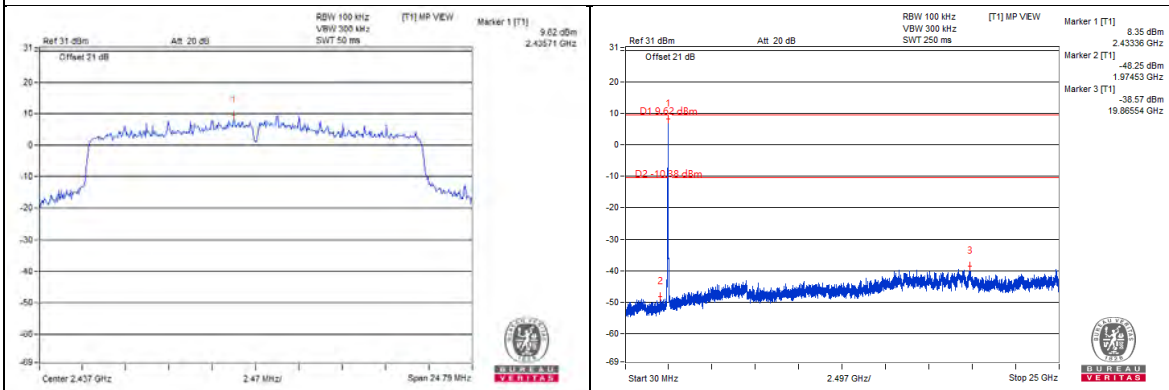


CH 10

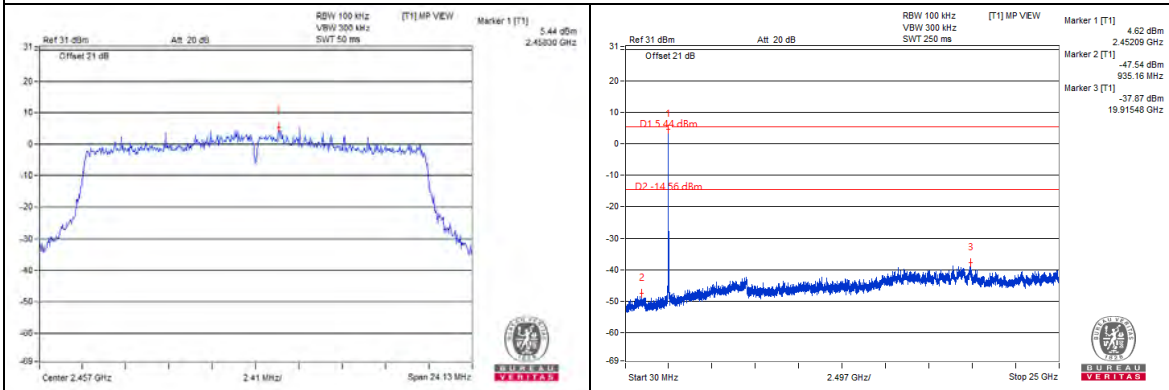


CH 11

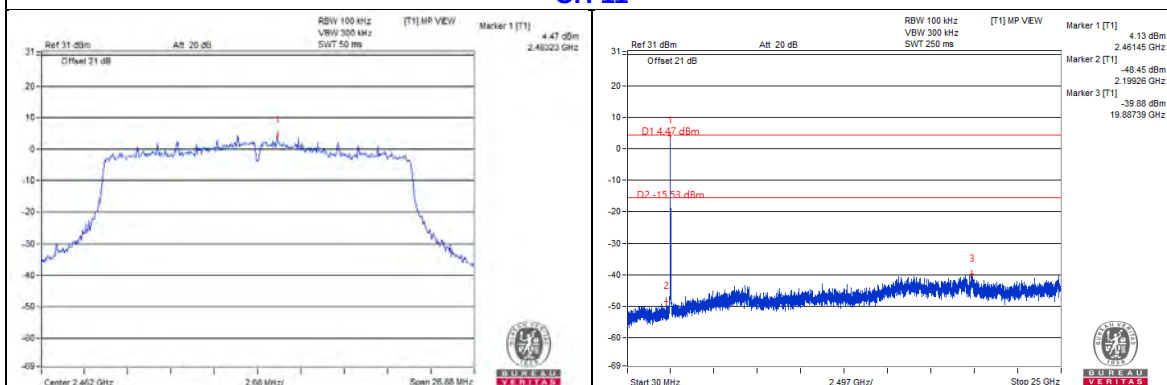


CH 12

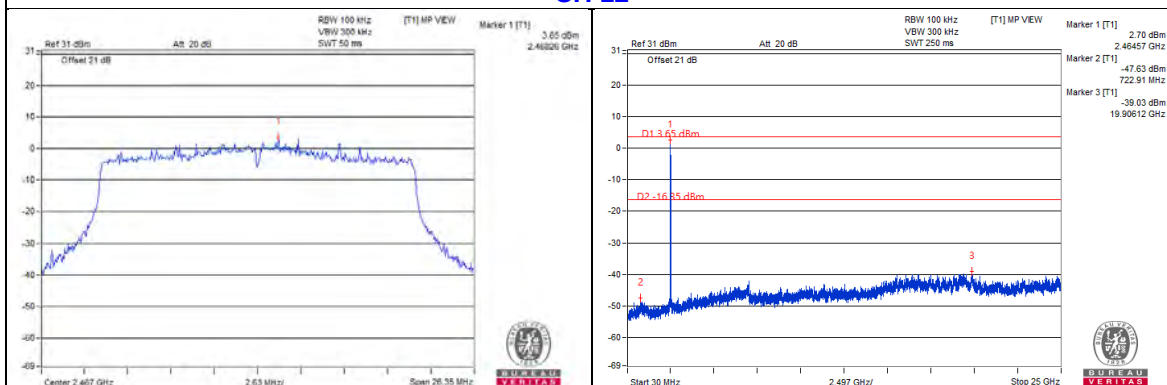


CH 13

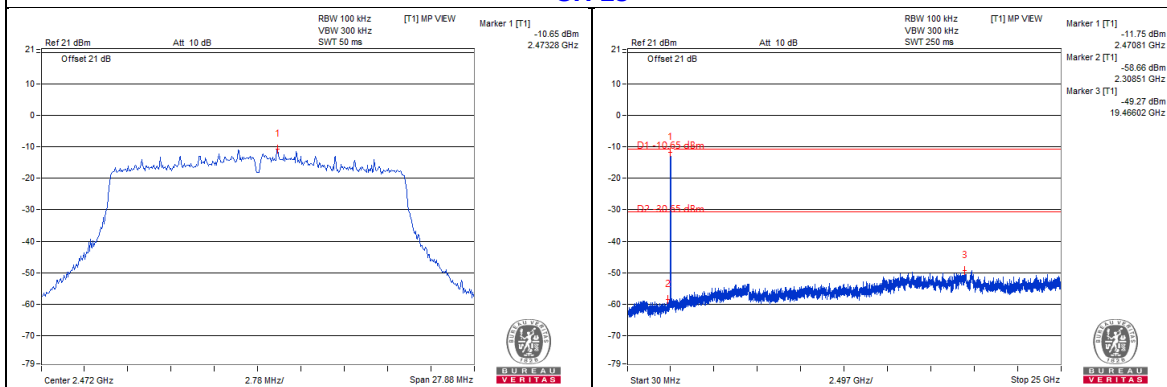


CH 1 Band edge

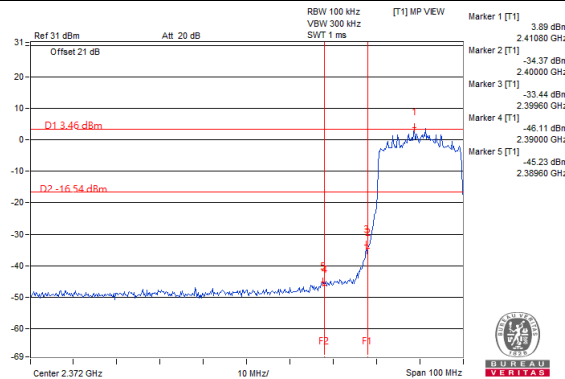


CH 2 Band edge

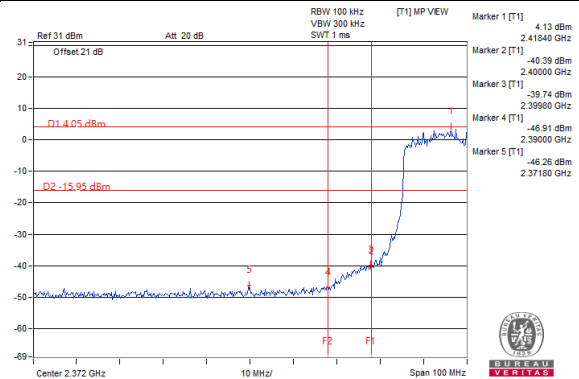


CH 10 Band edge

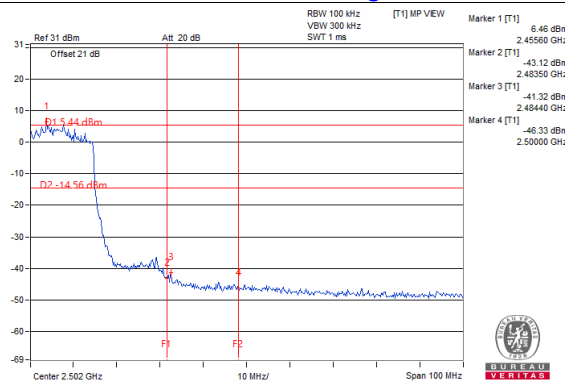


CH 11 Band edge

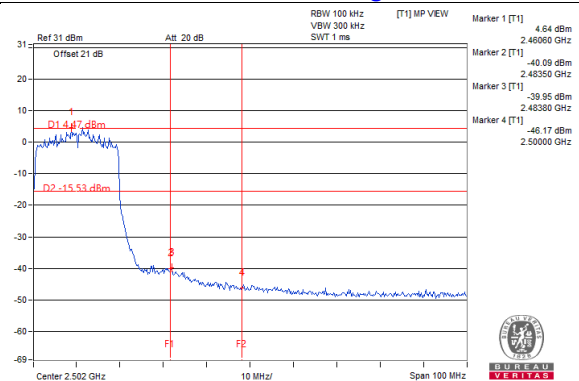

CH 12 Band edge

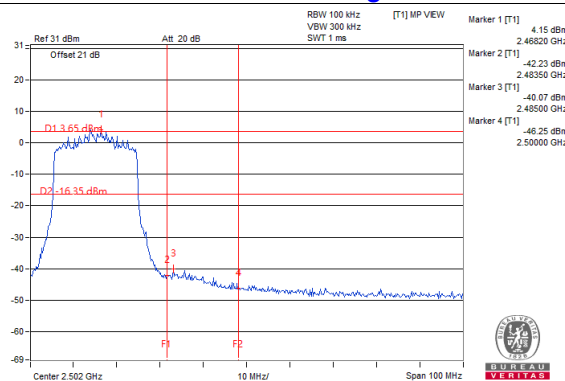


CH 13 Band edge

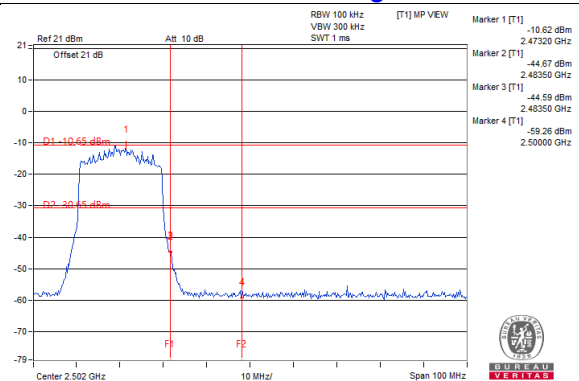


Chain 1


CH 1

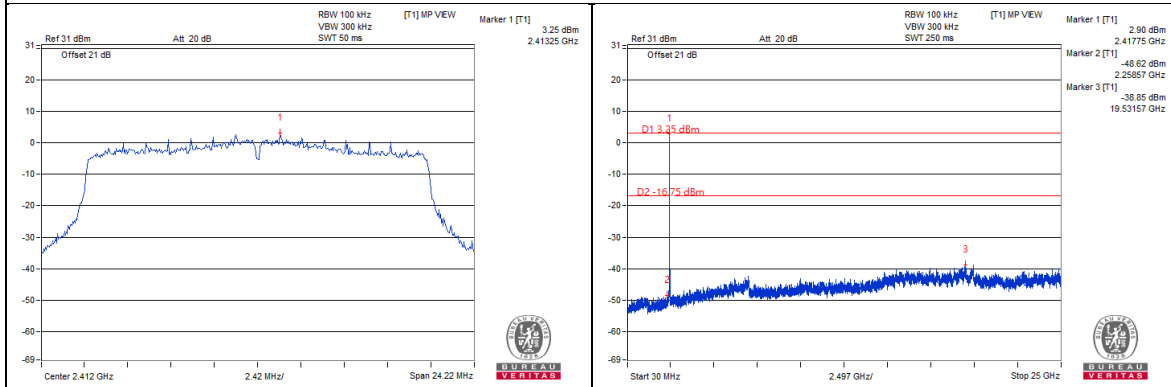


CH 2

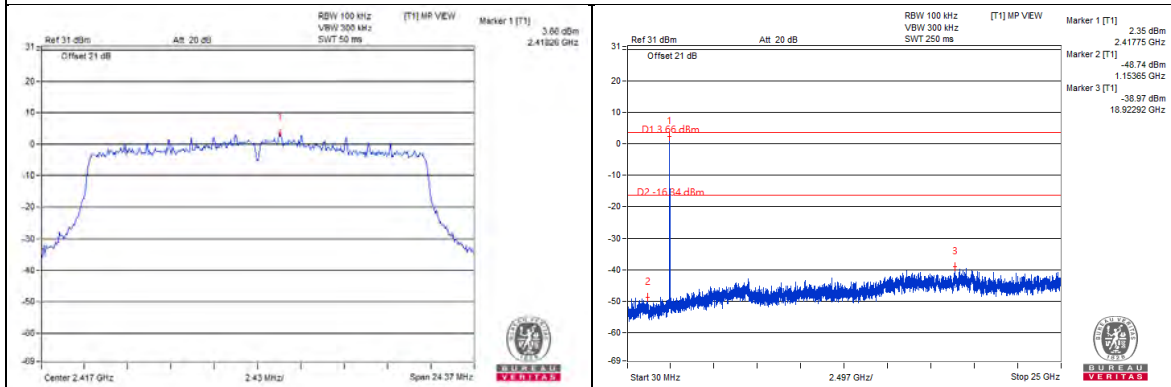


CH 6

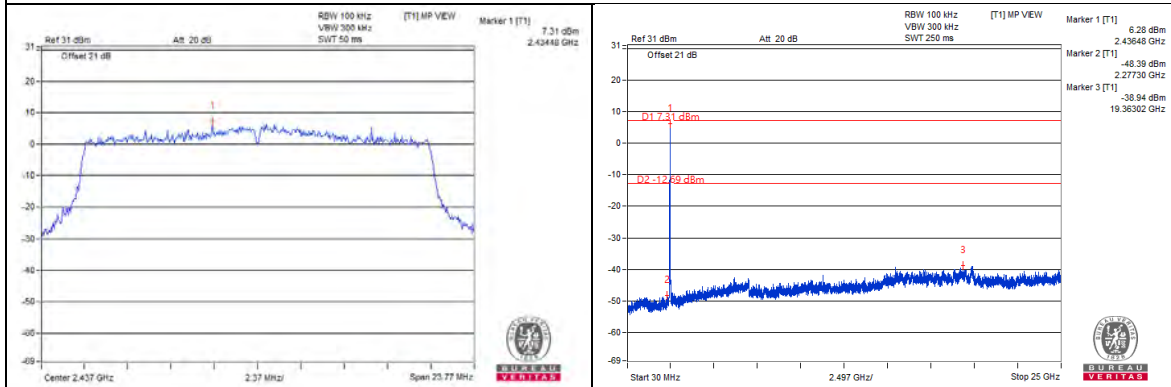


CH 10

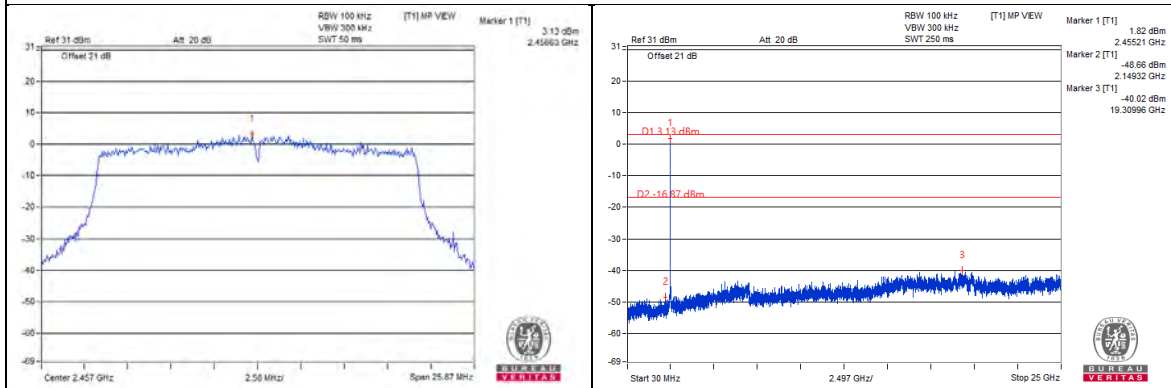


CH 11

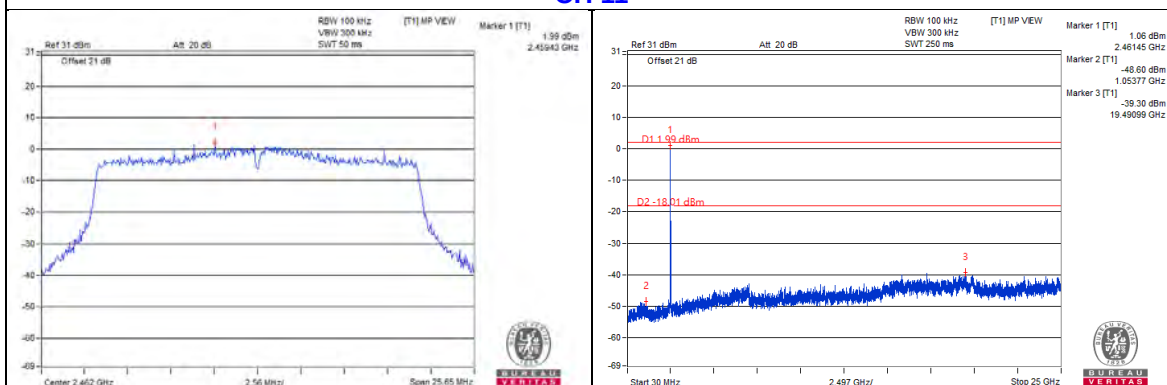


CH 12

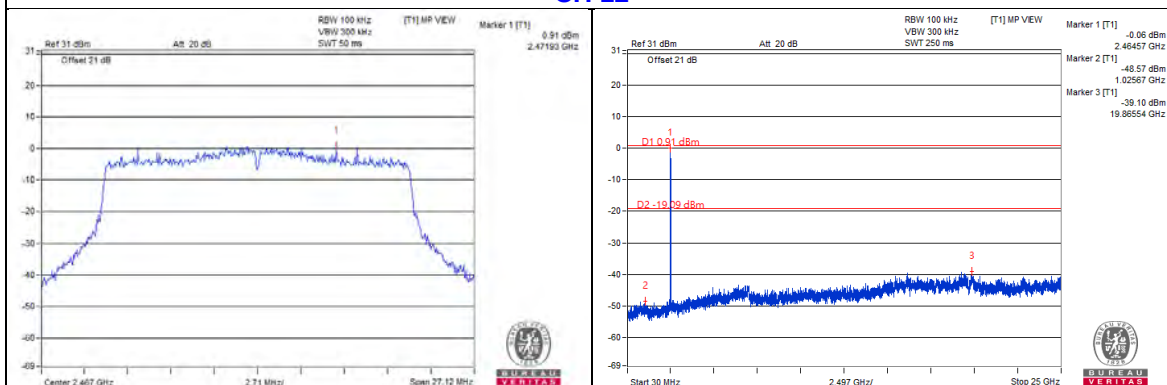


CH 13

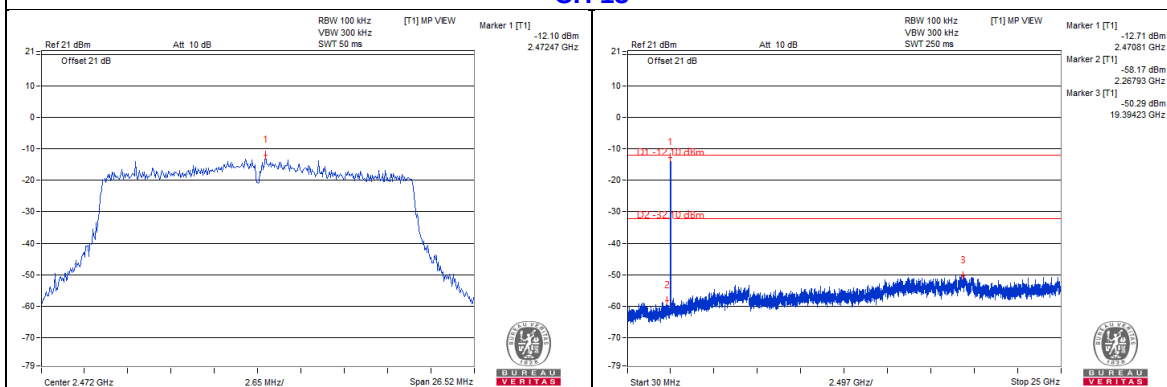


CH 1 Band edge

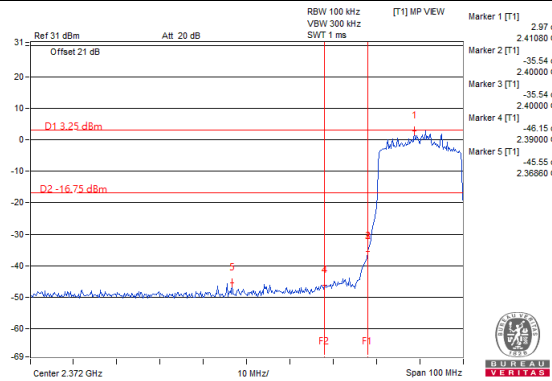


CH 2 Band edge

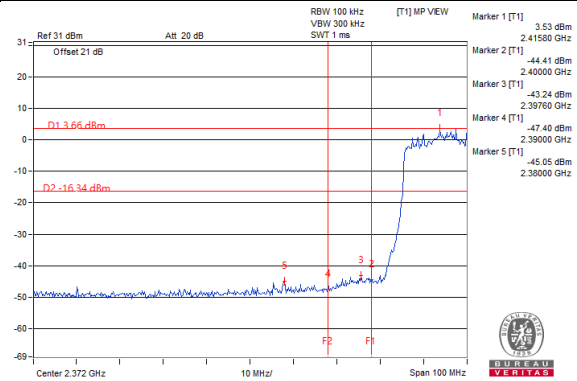


CH 10 Band edge

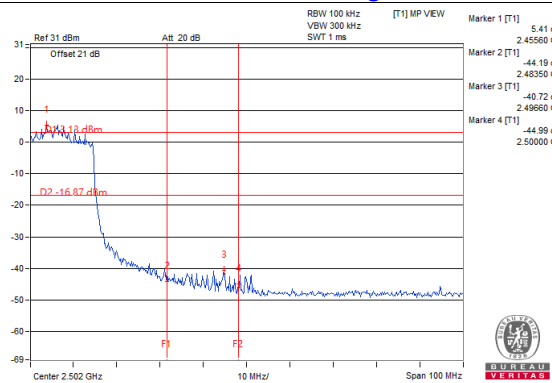


CH 11 Band edge

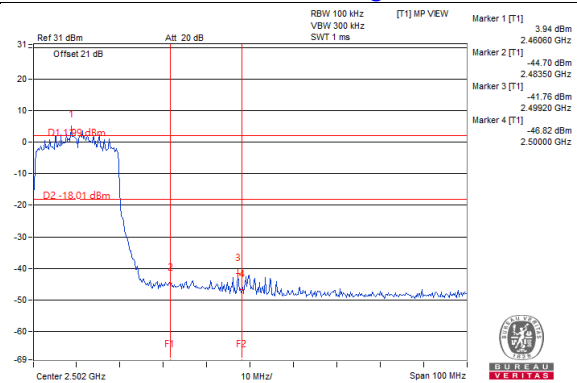

CH 12 Band edge


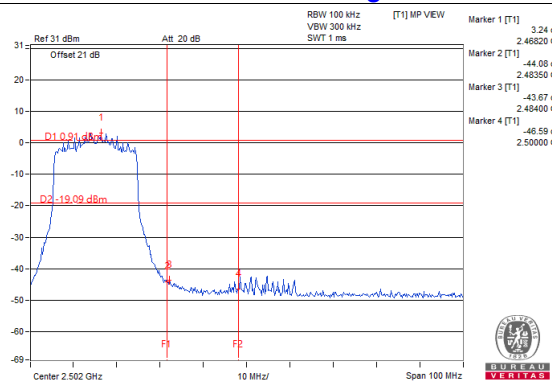


CH 13 Band edge


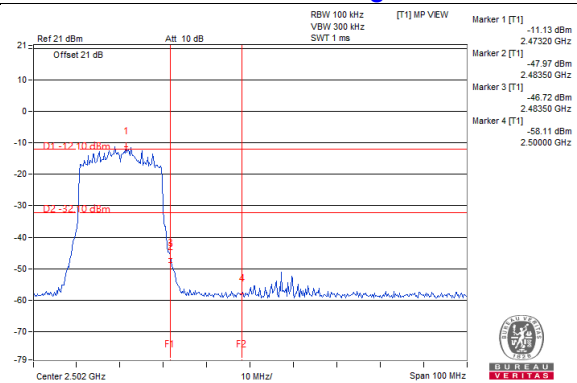


802.11ax (HE40) Chain 0



CH 3

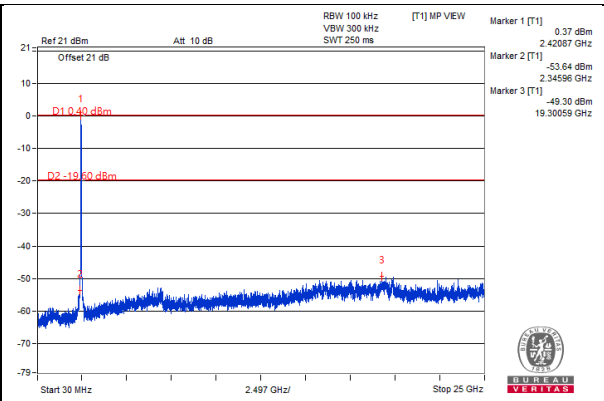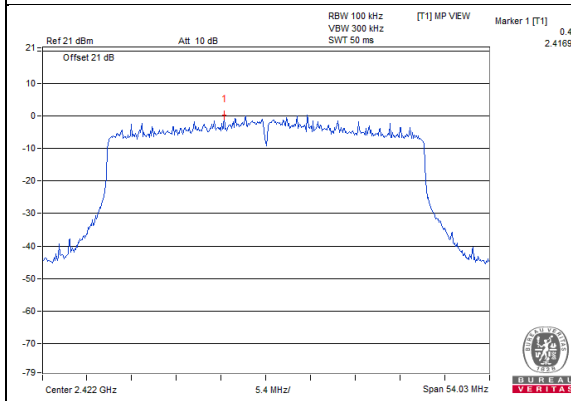



CH 4

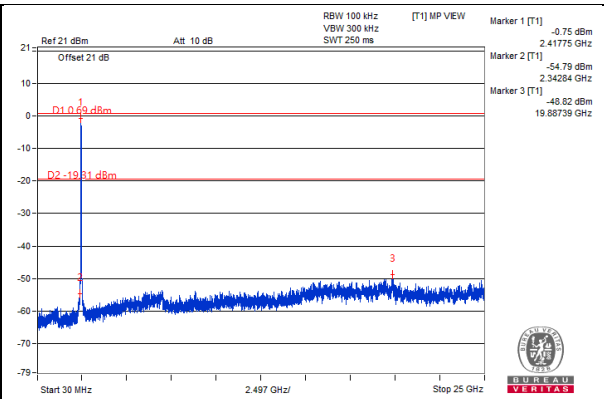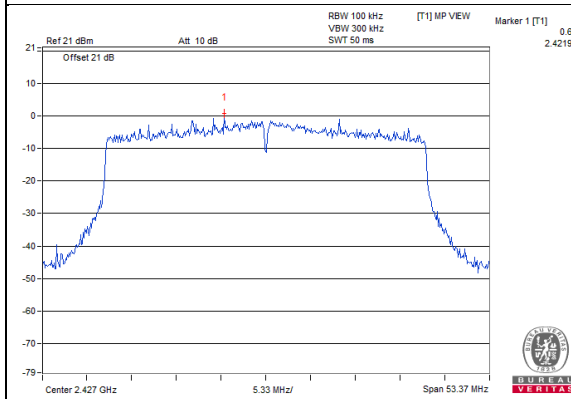


CH 6

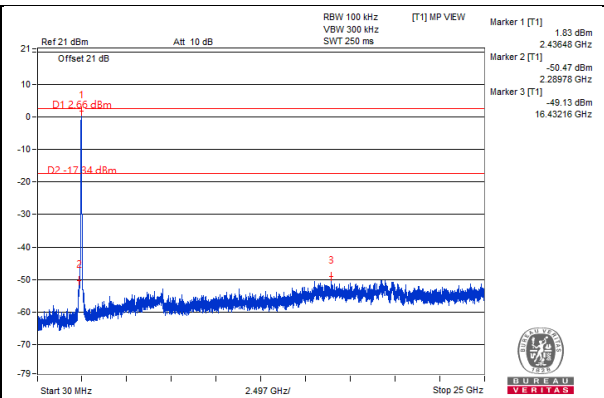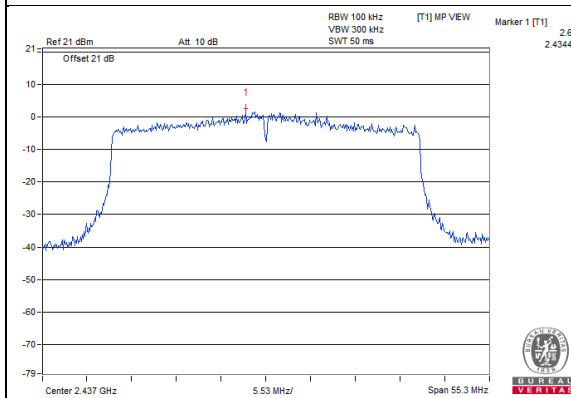


CH 8

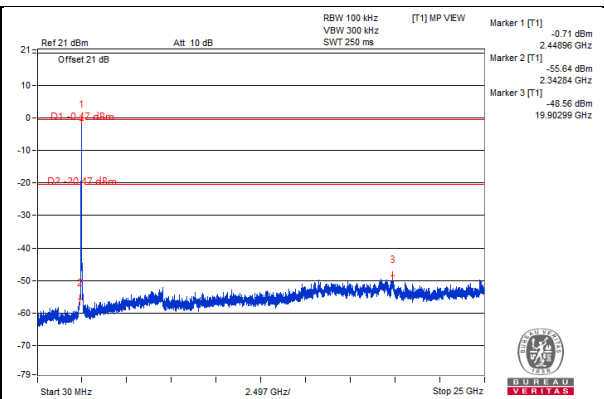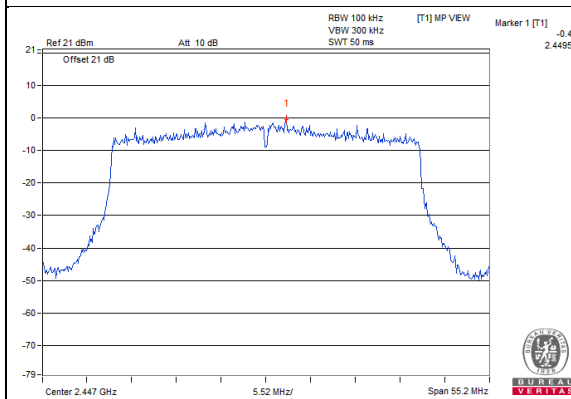


CH 9

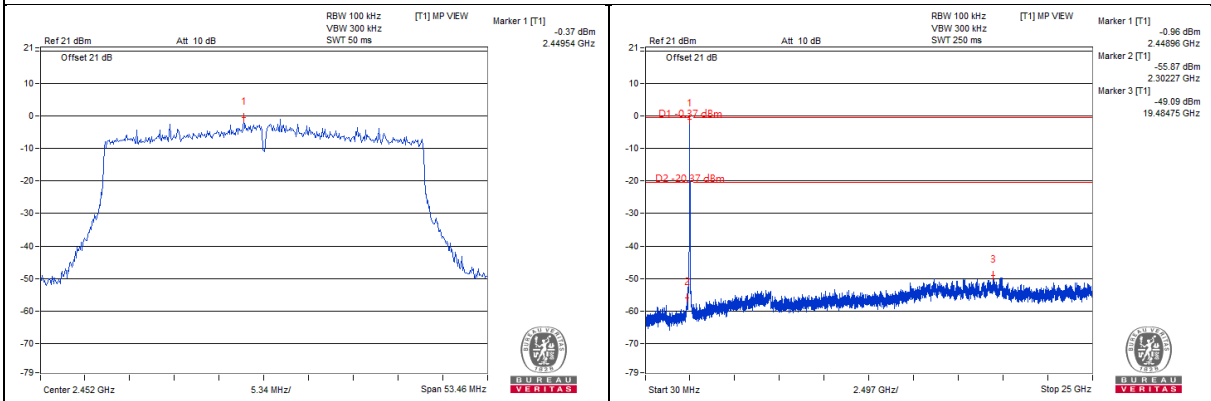


CH 10

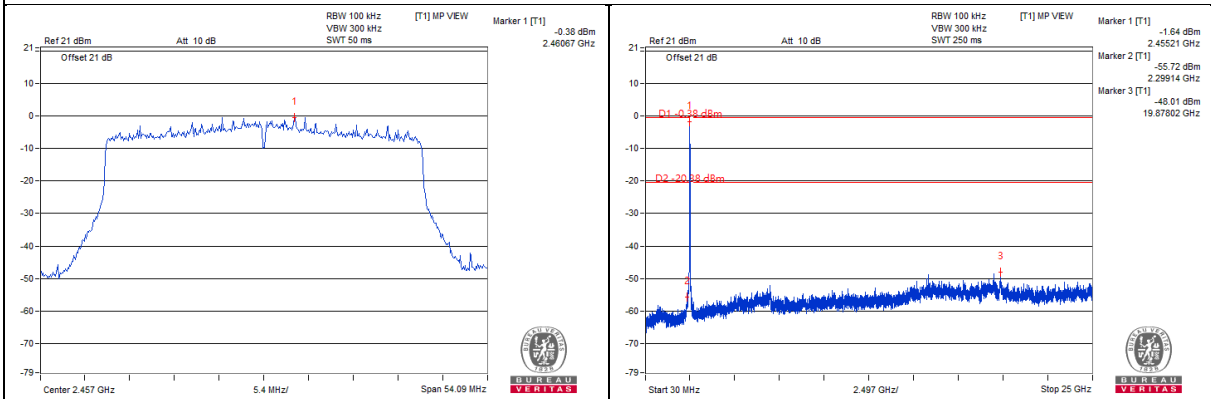


CH 11

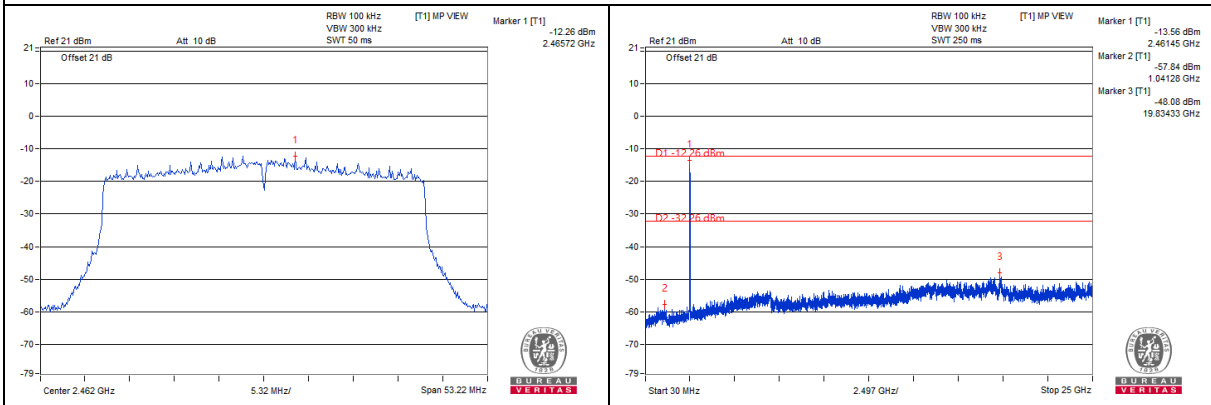


CH 3 Band edge

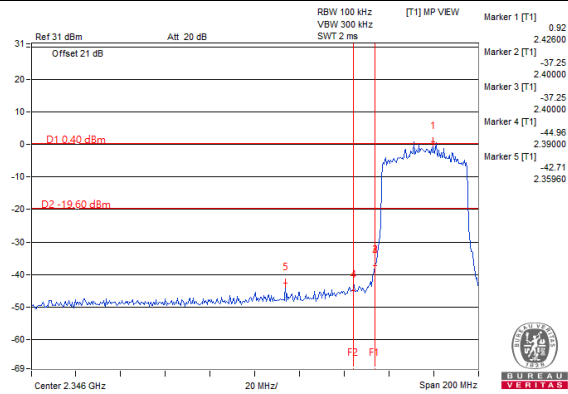


CH 4 Band edge

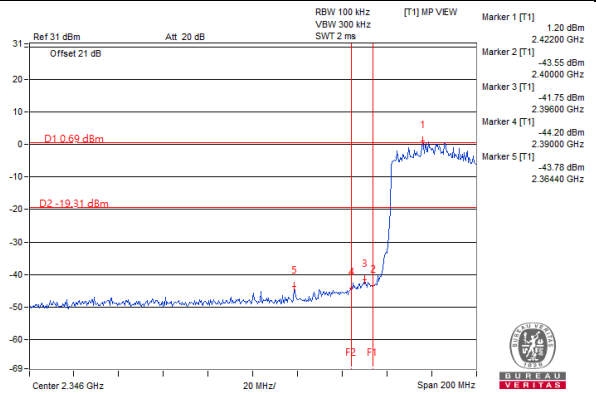


CH 8 Band edge

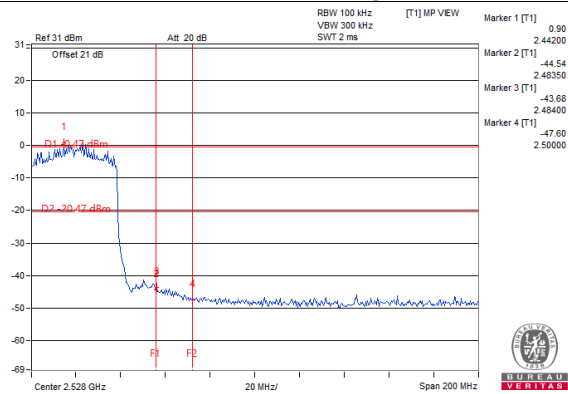


CH 9 Band edge

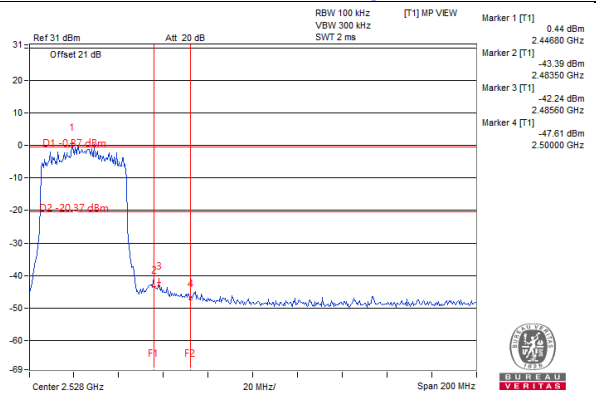

CH 10 Band edge


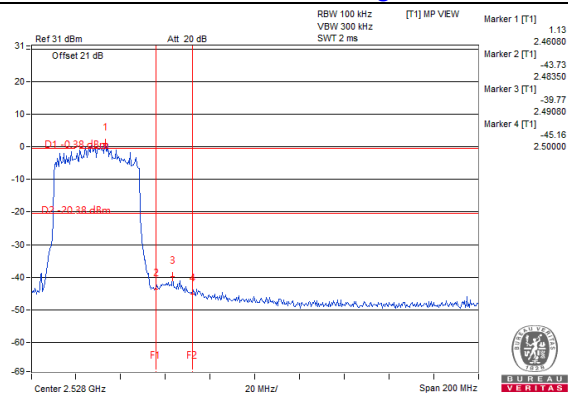


CH 11 Band edge


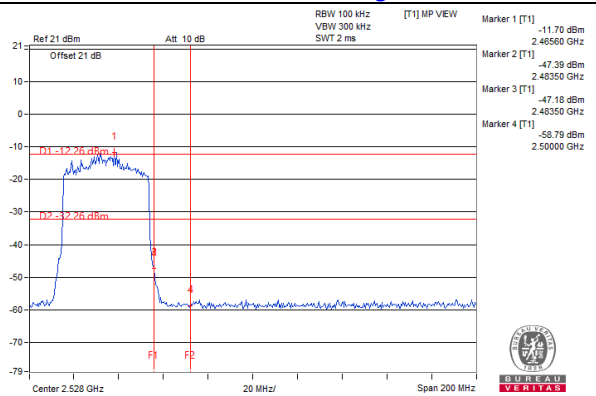


Chain 1



CH 3

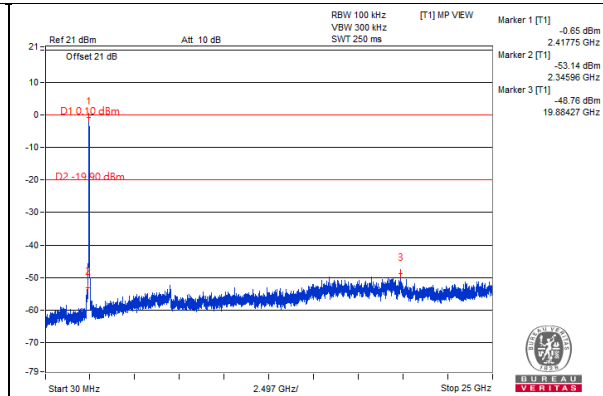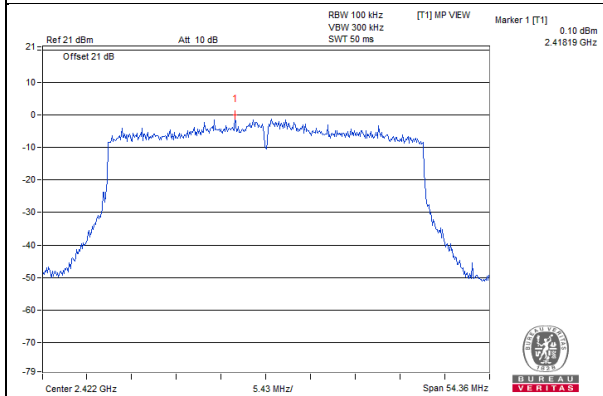



CH 4

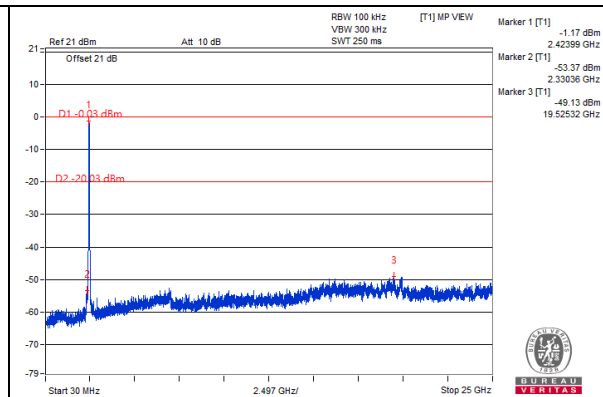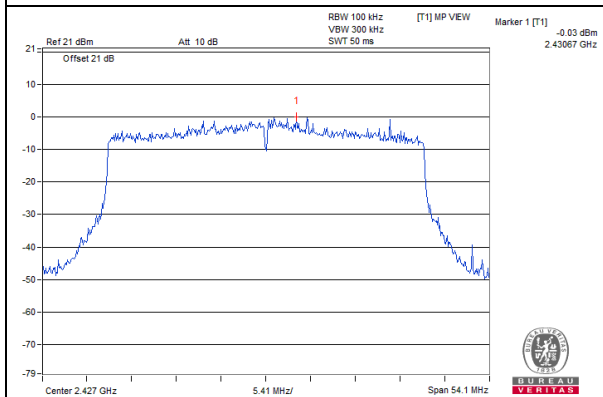



CH 6

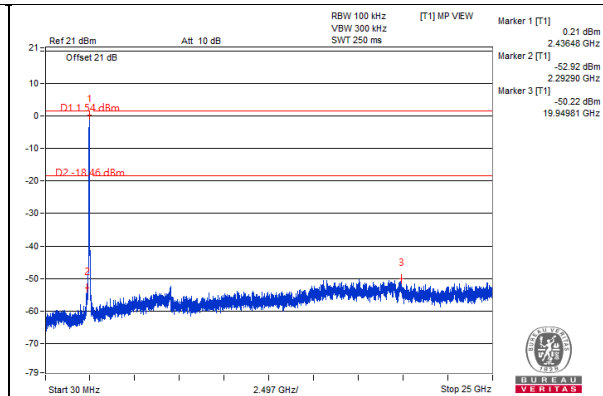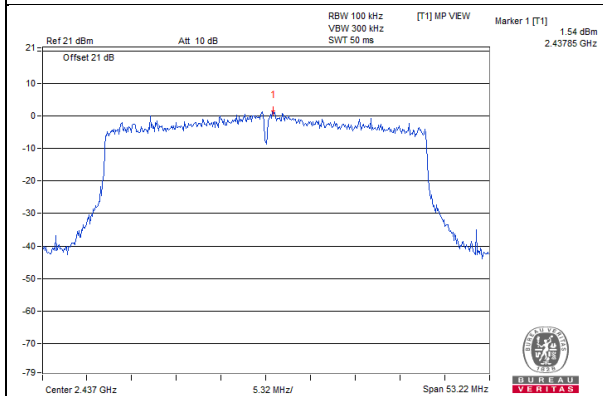



CH 8

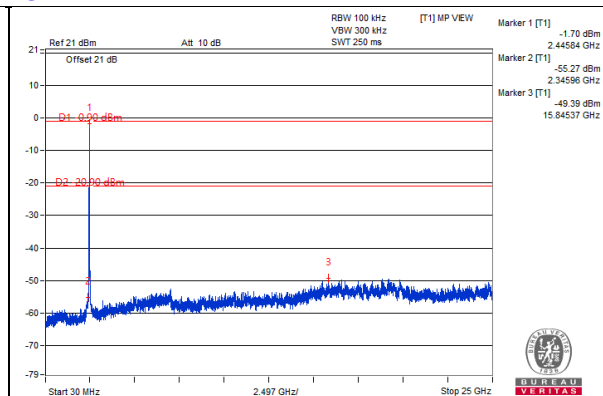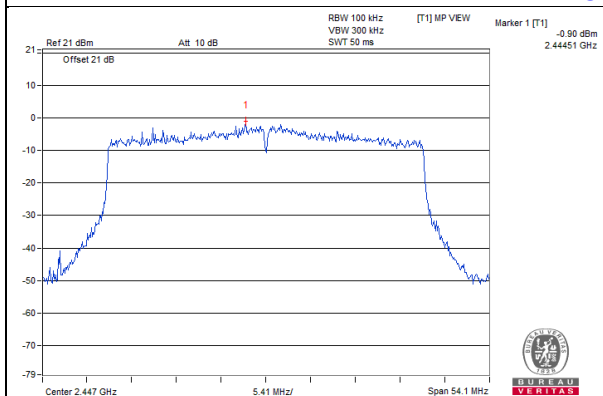



CH 9

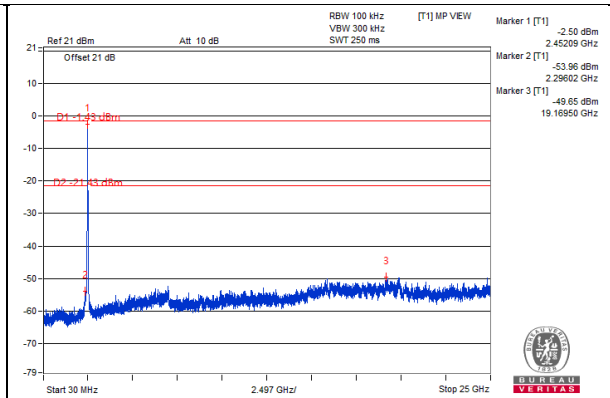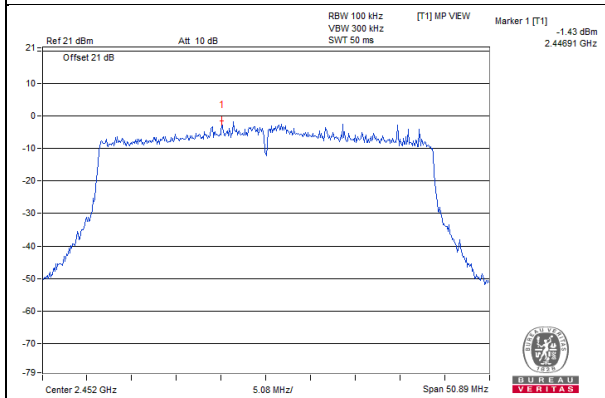


CH 10

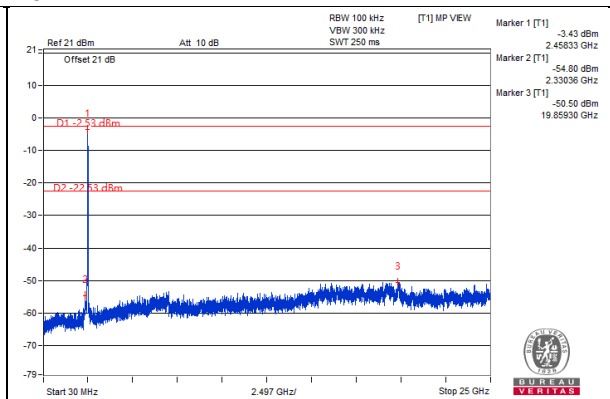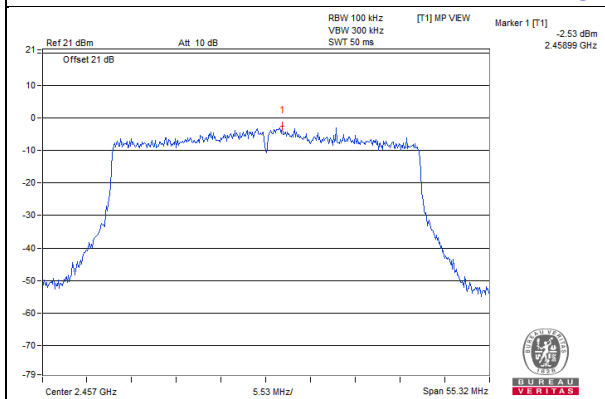


CH 11

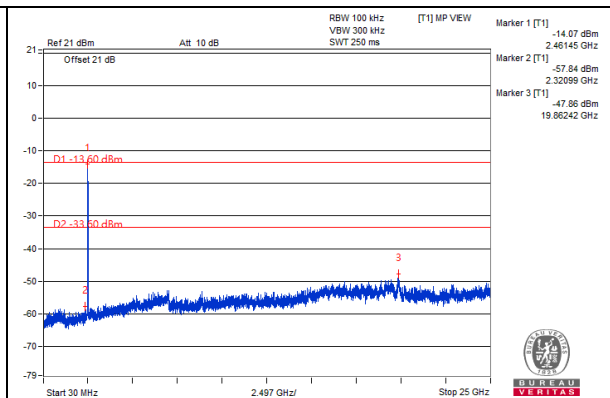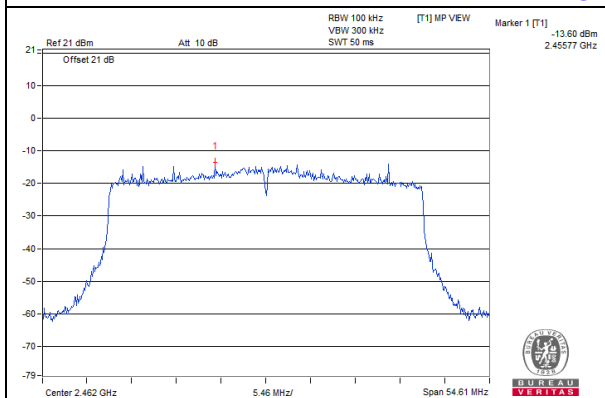


CH 3 Band edge

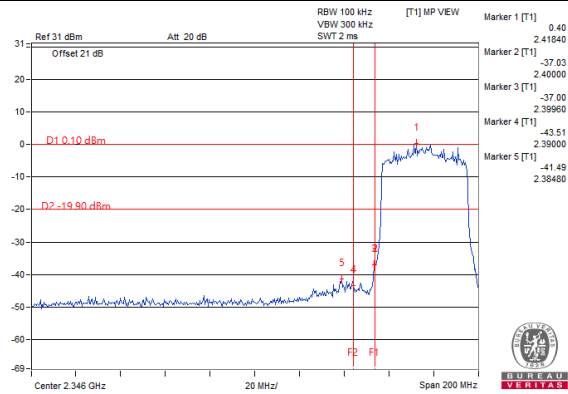


CH 4 Band edge

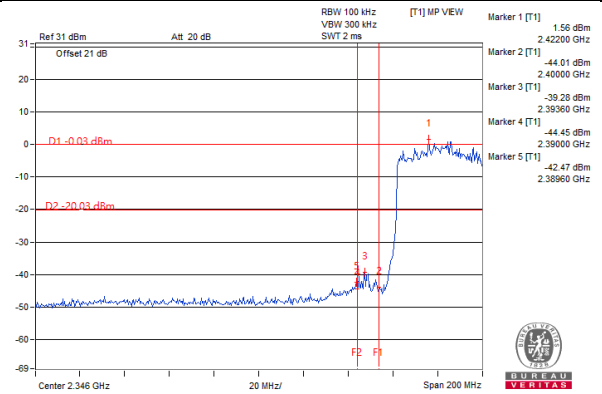


CH 8 Band edge

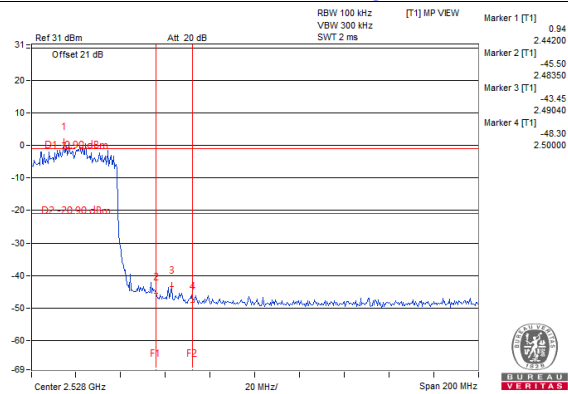


CH 9 Band edge

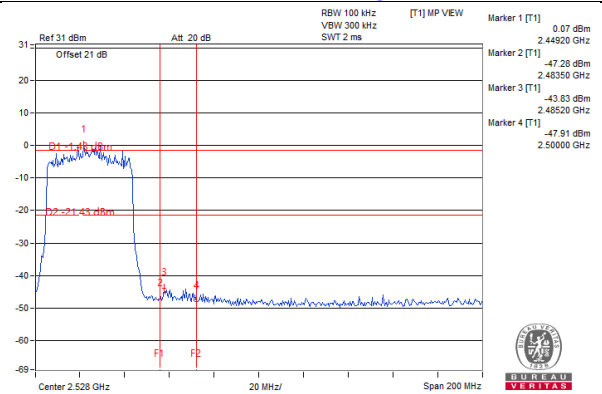

CH 10 Band edge

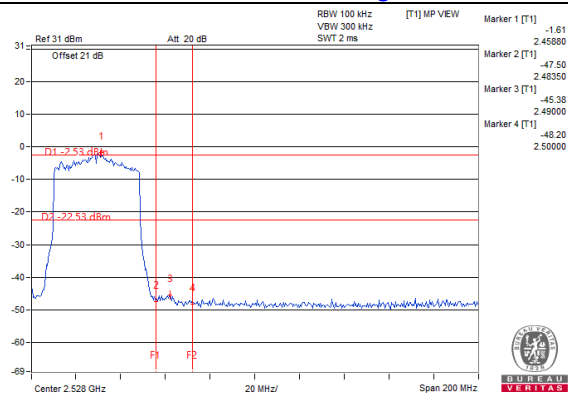


CH 11 Band edge

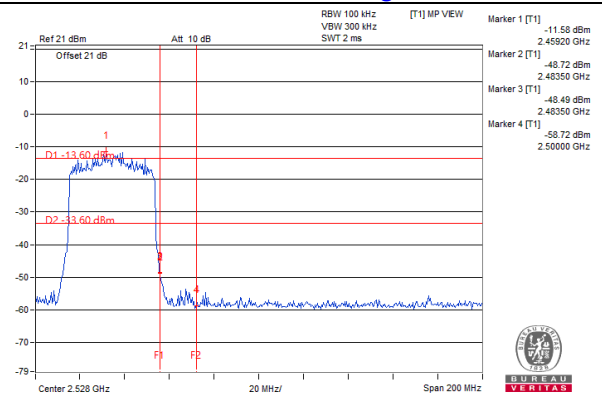


20MHz Preamble (RU26)

Chain 0


CH 1

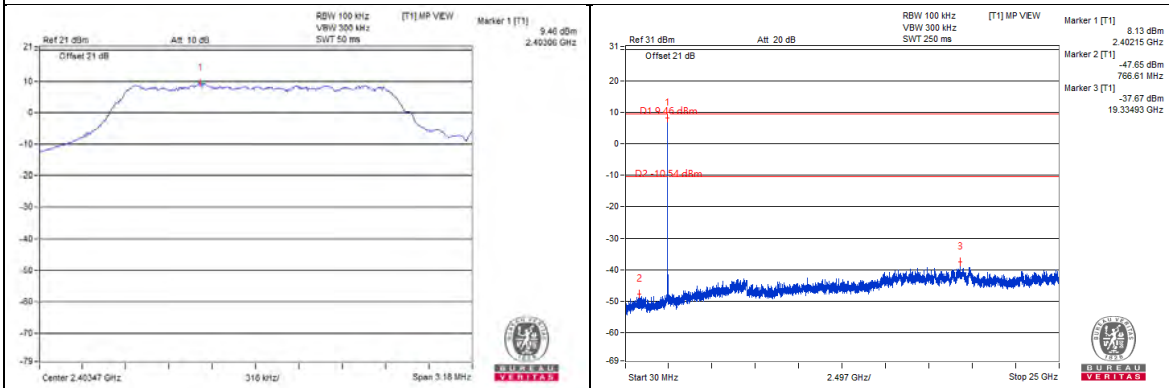


CH 2

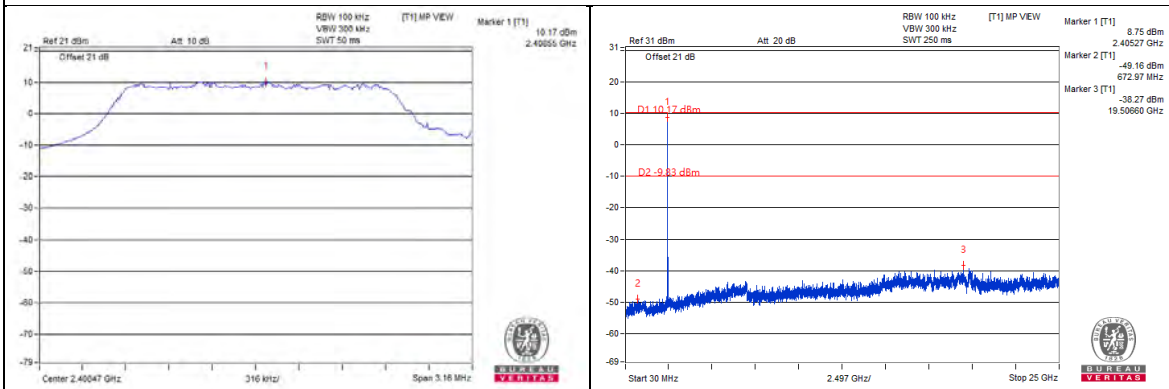


CH 6

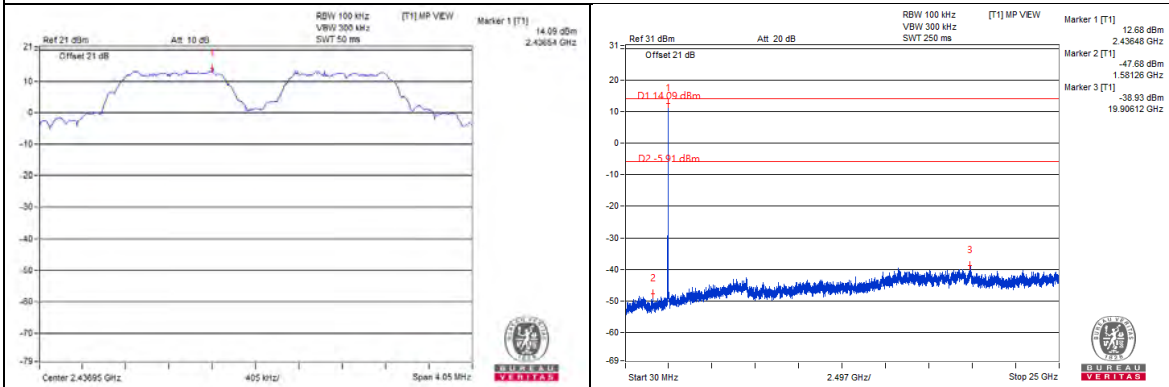


CH 10

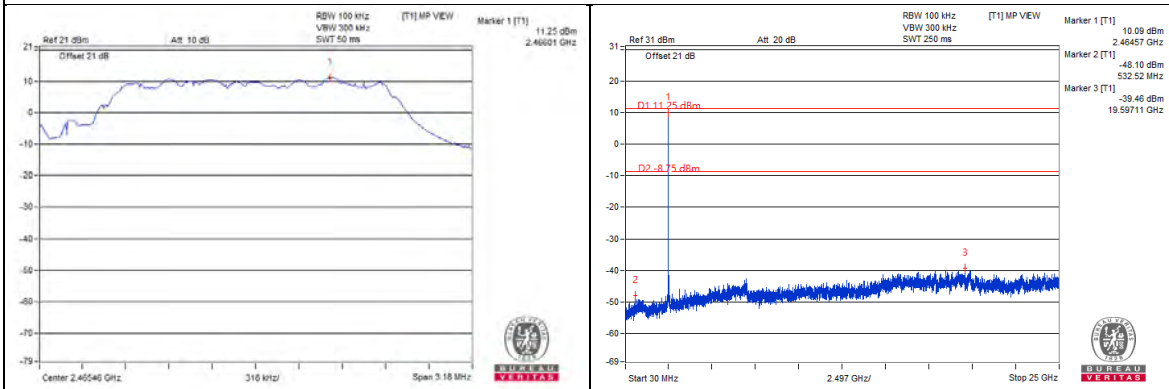


CH 11

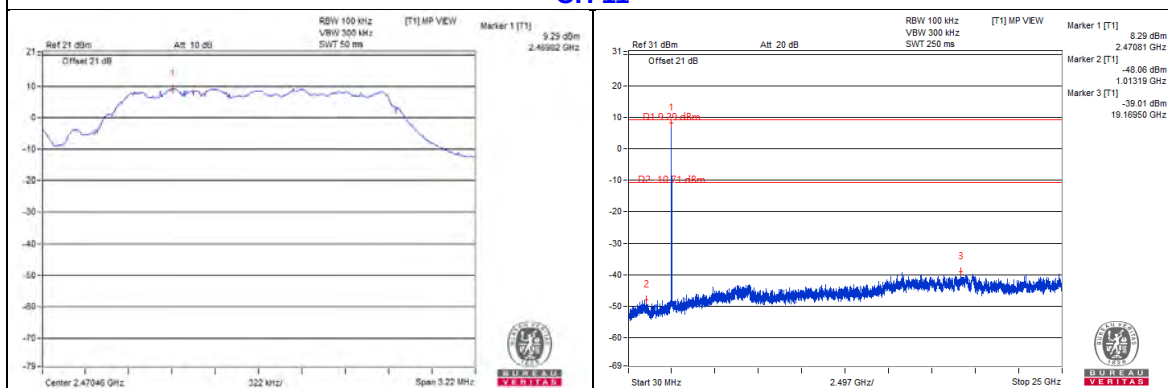


CH 12

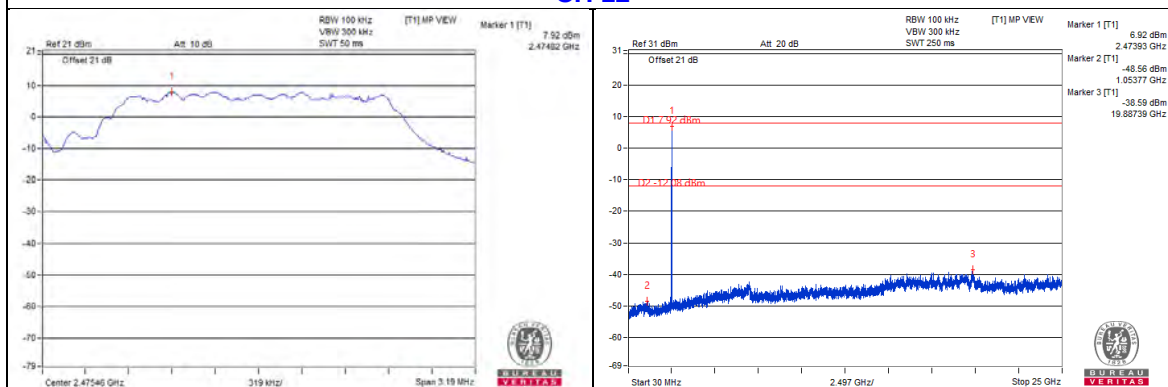


CH 13

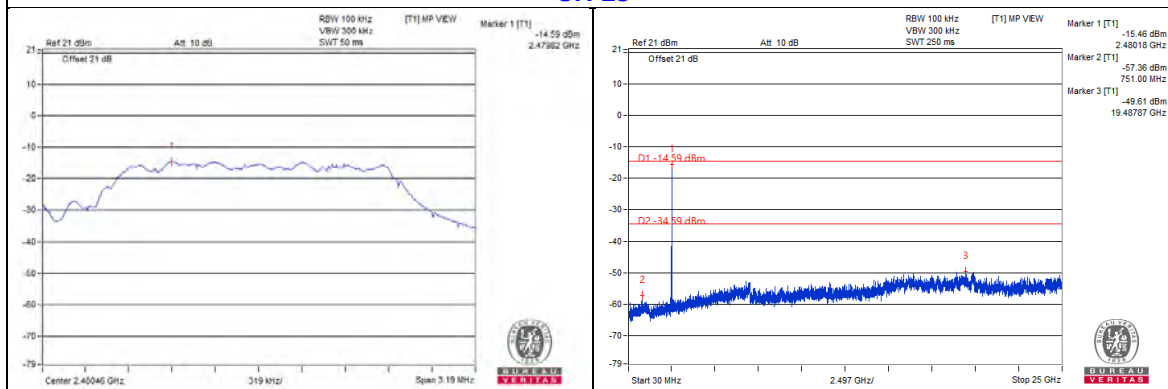


CH 1 Band edge

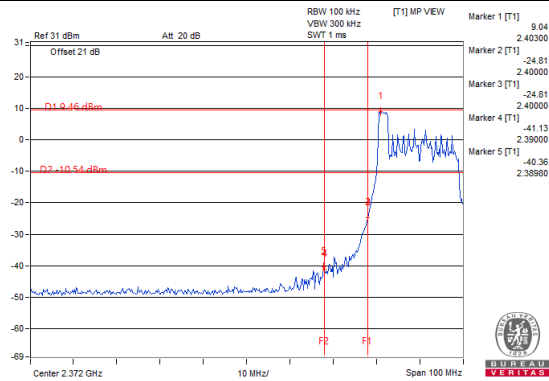


CH 2 Band edge

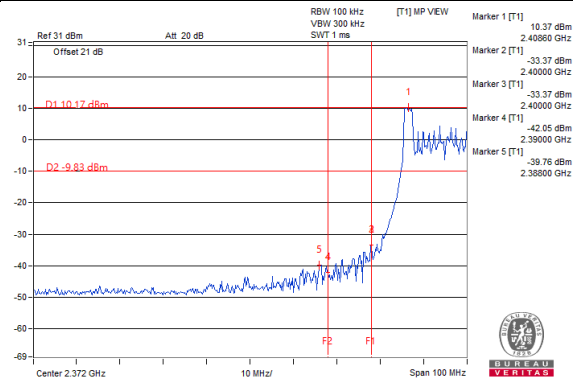


CH 10 Band edge

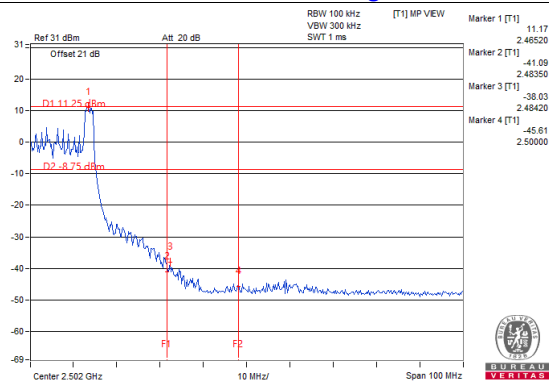


CH 11 Band edge

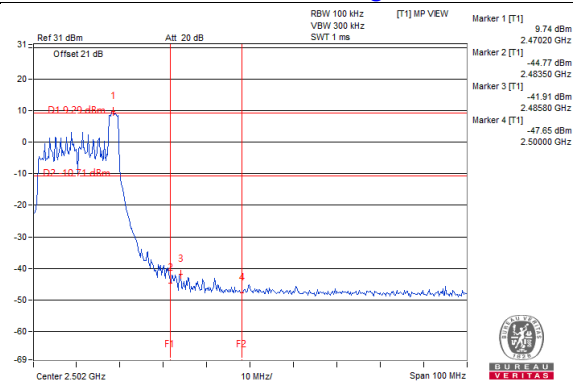

CH 12 Band edge


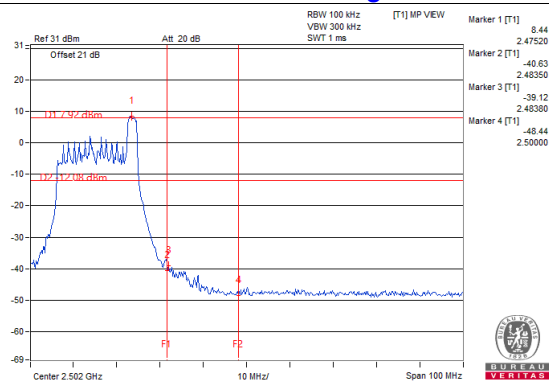


CH 13 Band edge


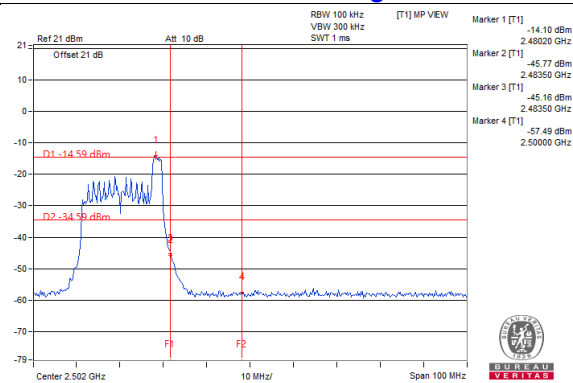


Chain 1



CH 1

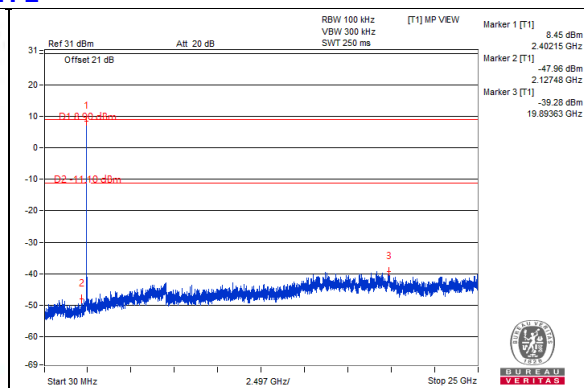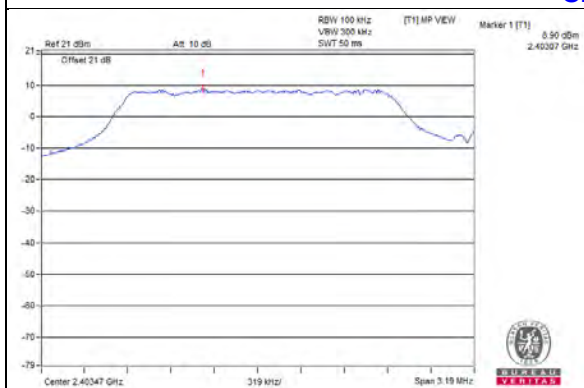



CH 2

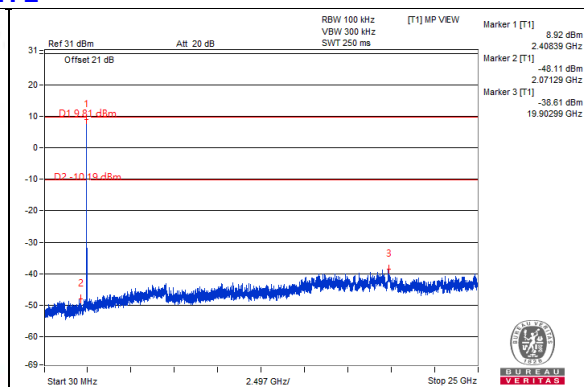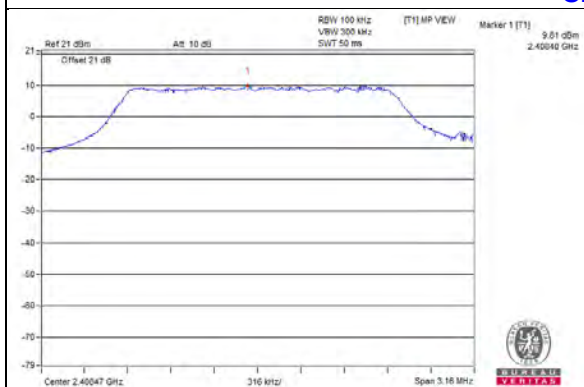


CH 6

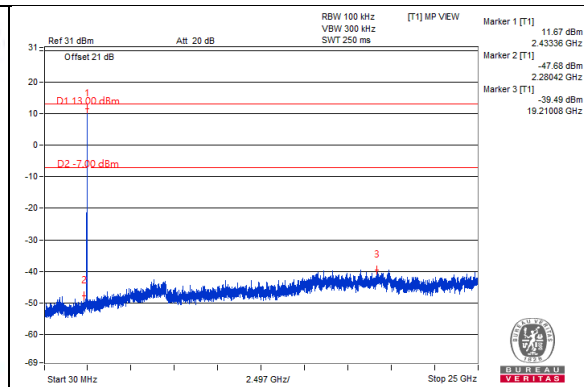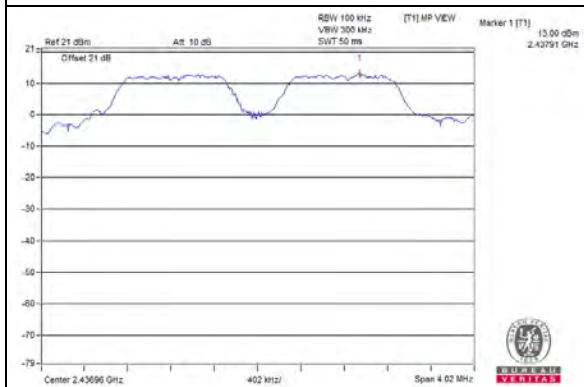


CH 10

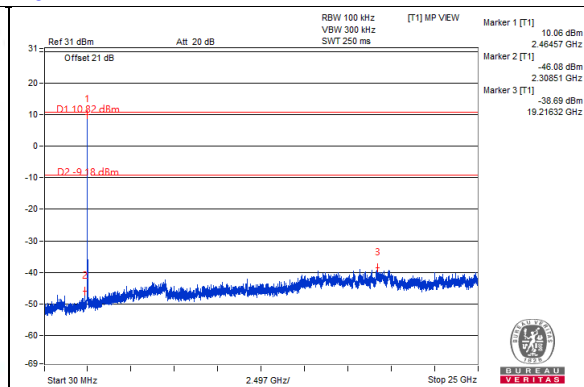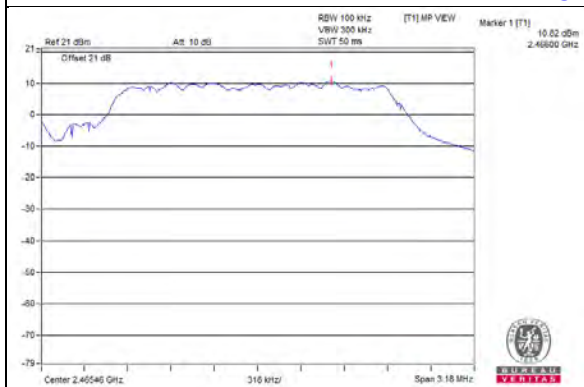


CH 11

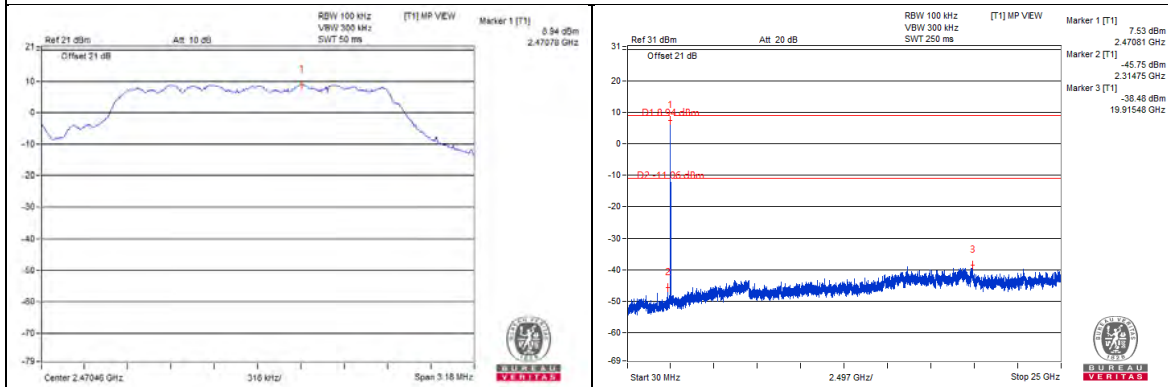


CH 12

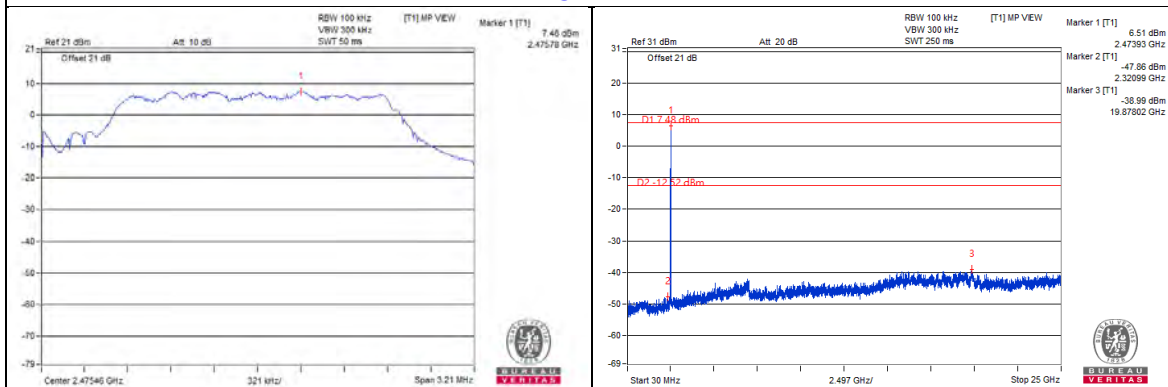


CH 13

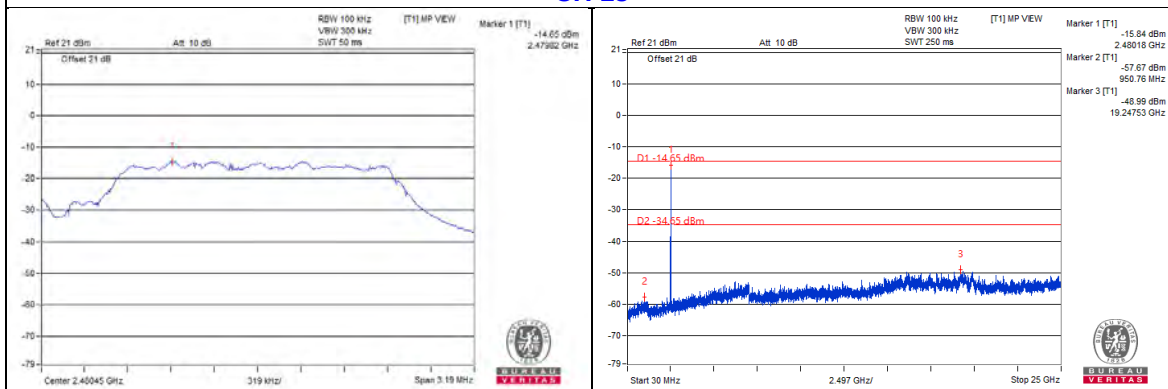


CH 1 Band edge

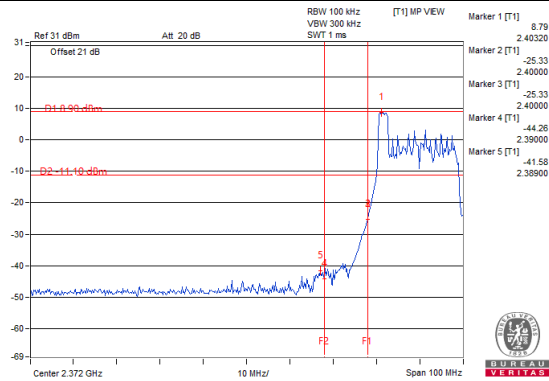


CH 2 Band edge

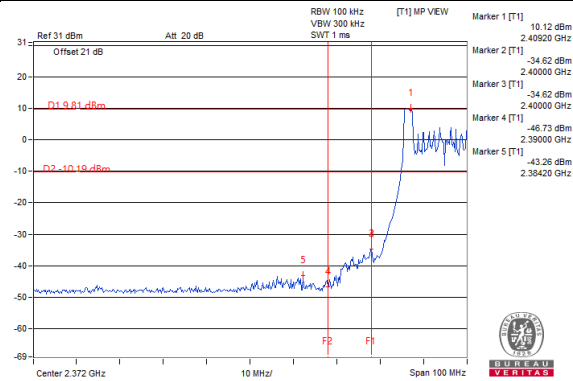


CH 10 Band edge

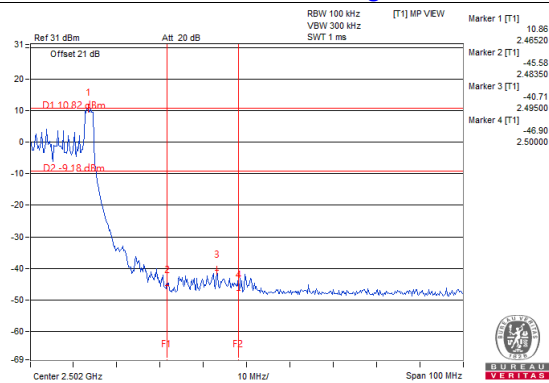


CH 11 Band edge

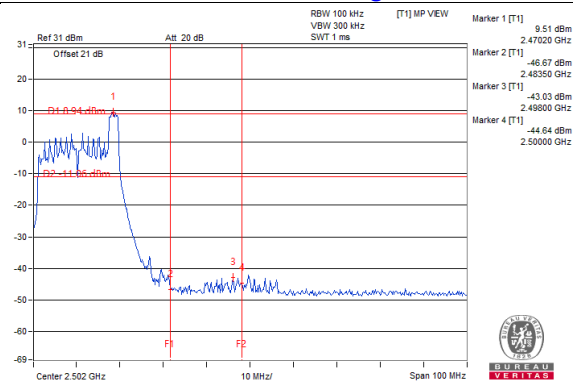

CH 12 Band edge


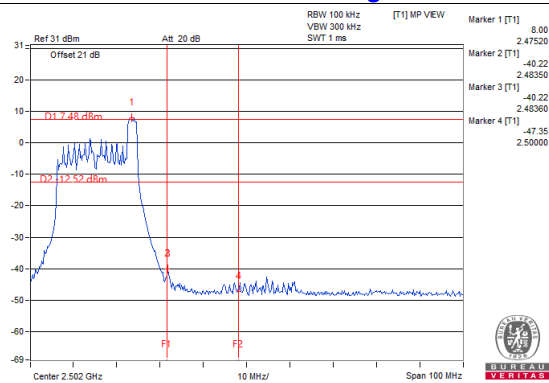


CH 13 Band edge


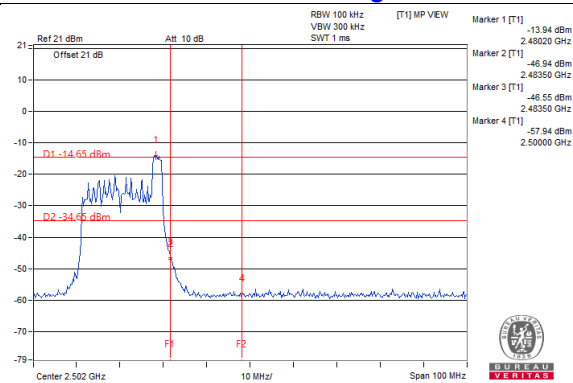


20MHz Preamble (RU52) Chain 0



CH 1

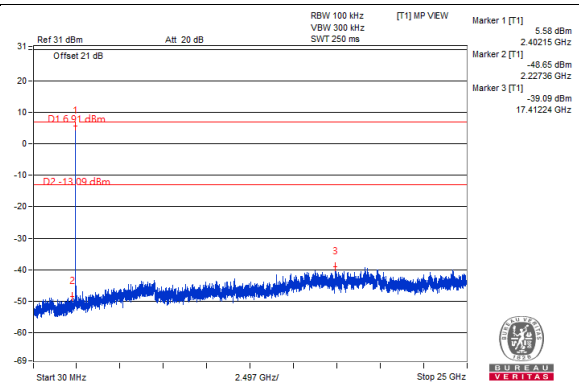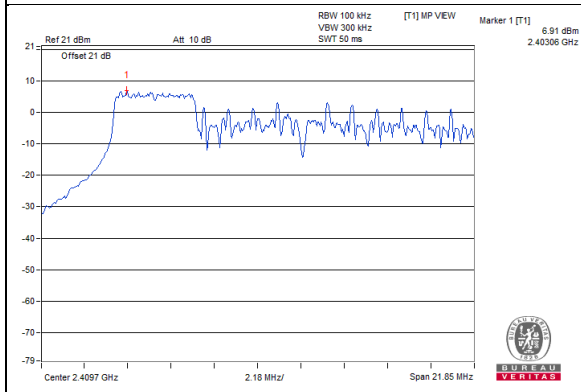



CH 2

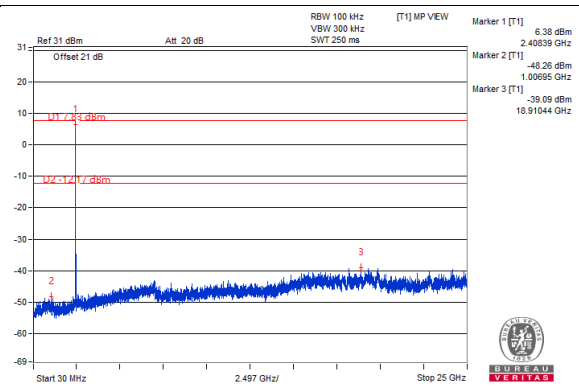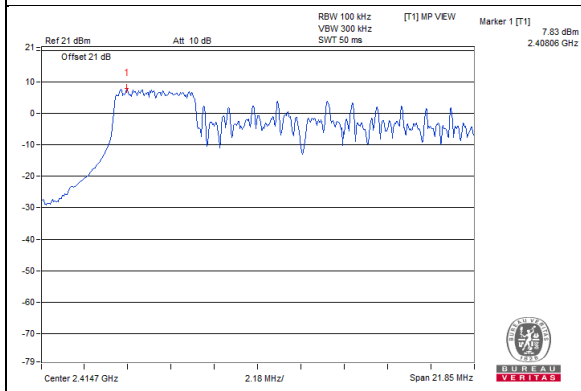


CH 6

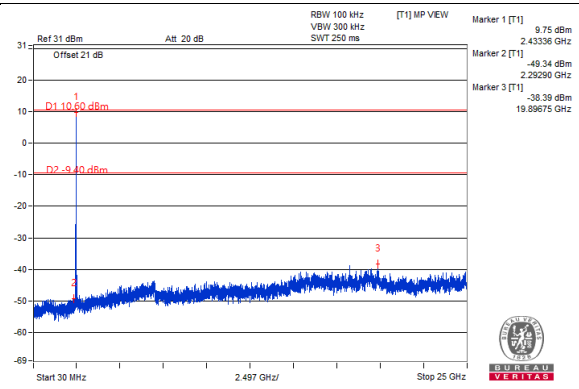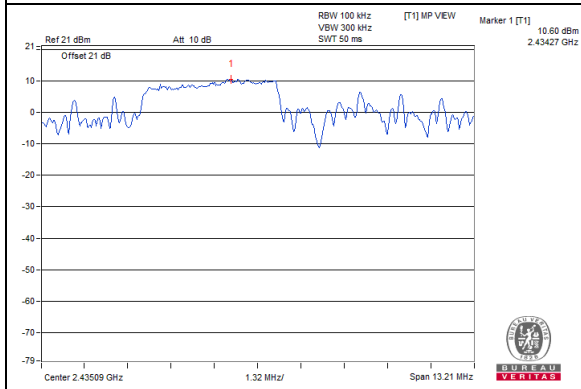


CH 10

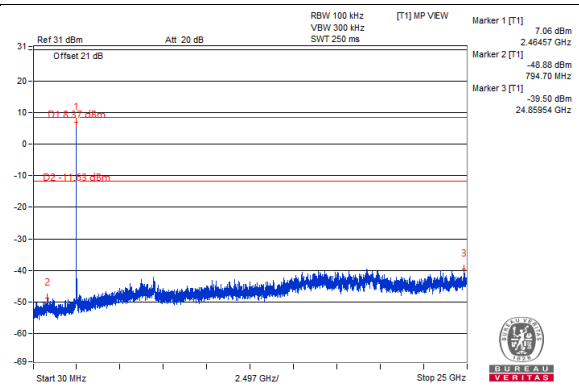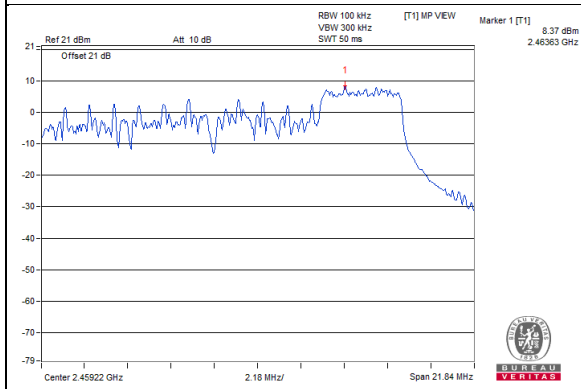


CH 11

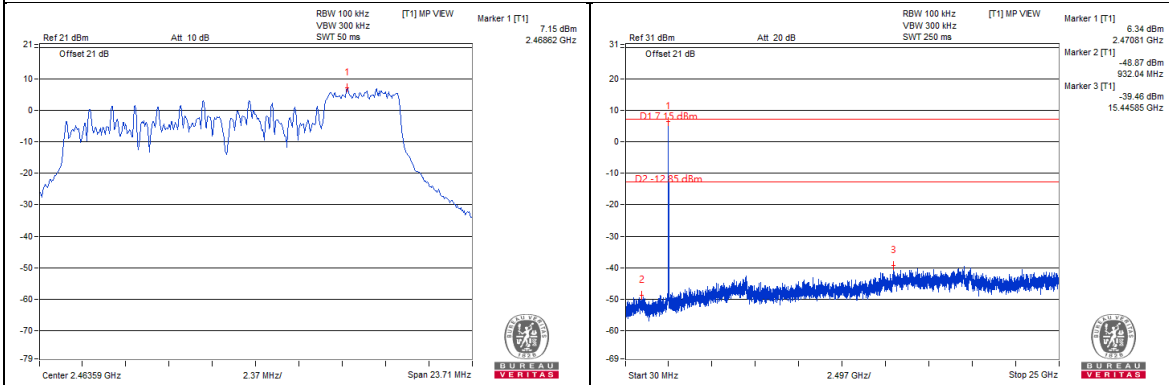


CH 12

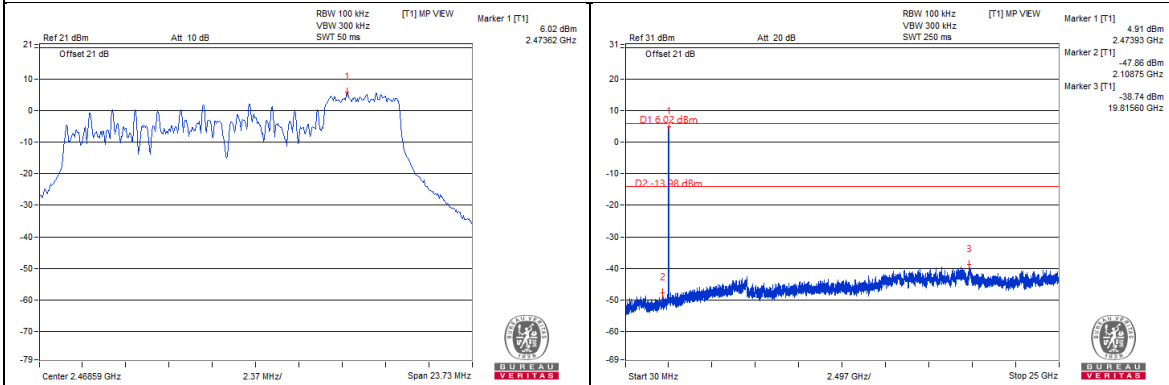


CH 13

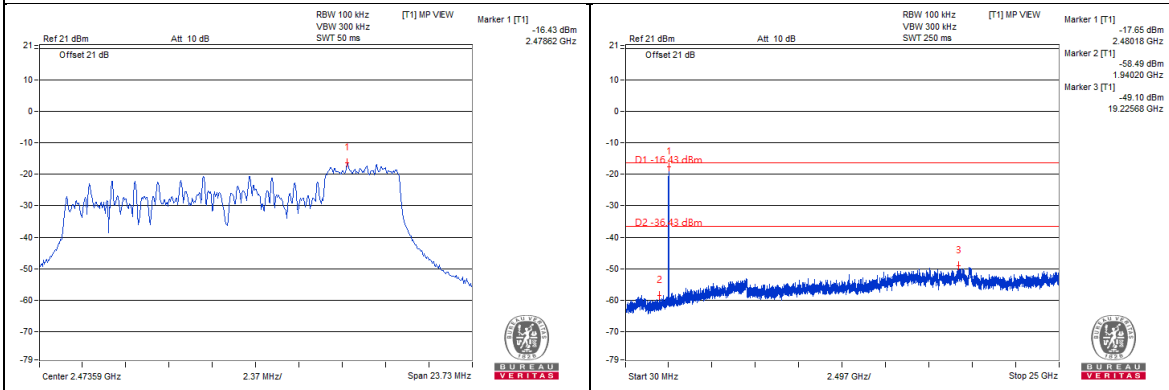


CH 1 Band edge

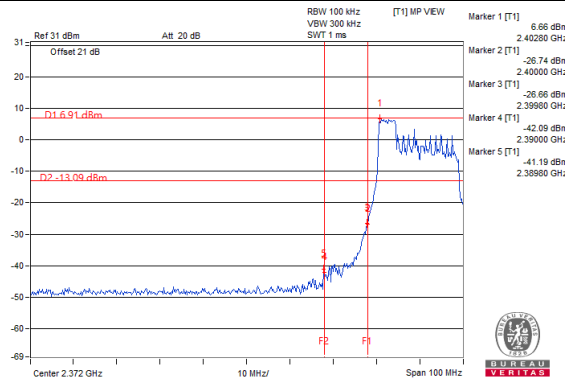


CH 2 Band edge

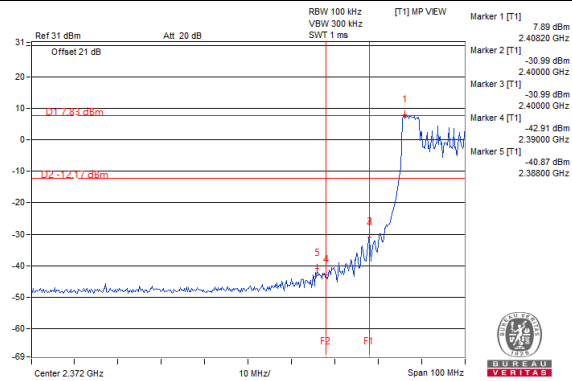


CH 10 Band edge

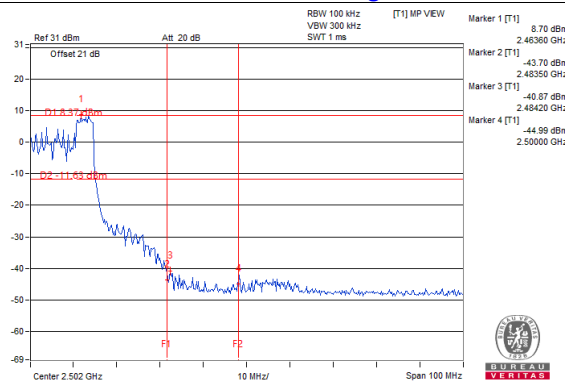


CH 11 Band edge

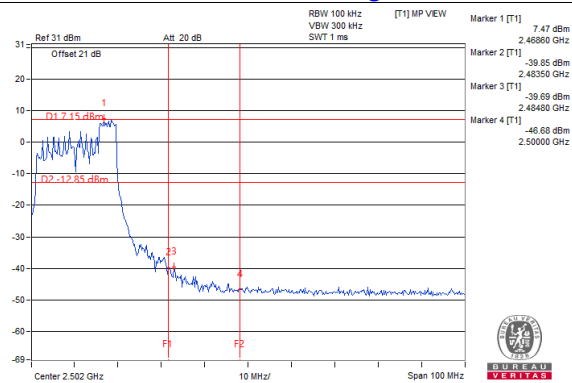

CH 12 Band edge


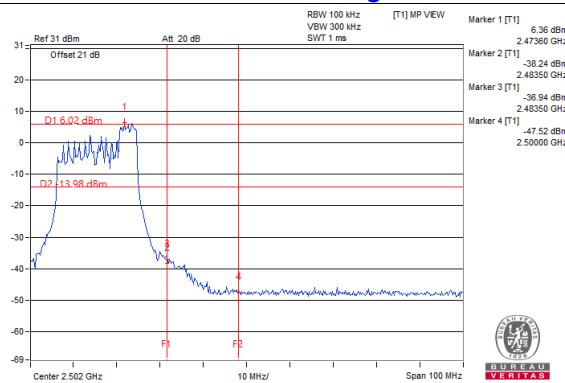


CH 13 Band edge


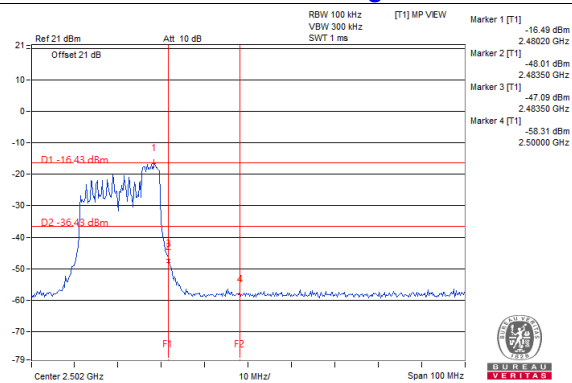


Chain 1



CH 1

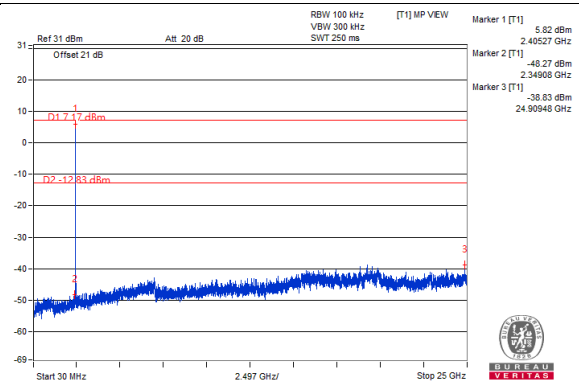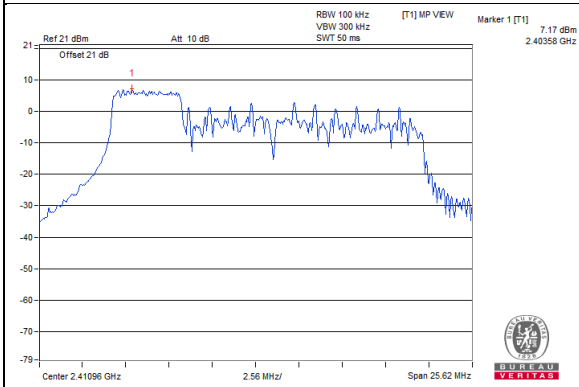



CH 2

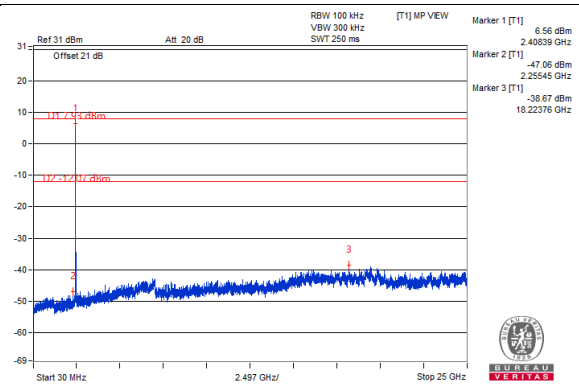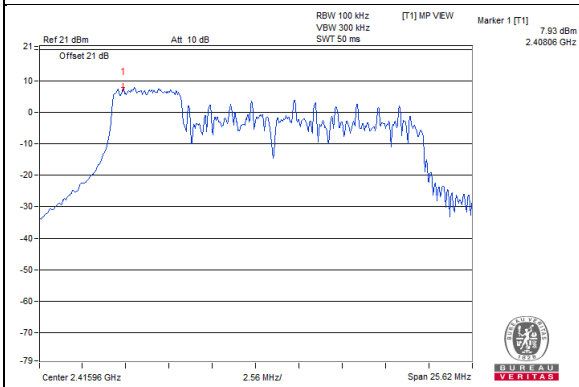


CH 6

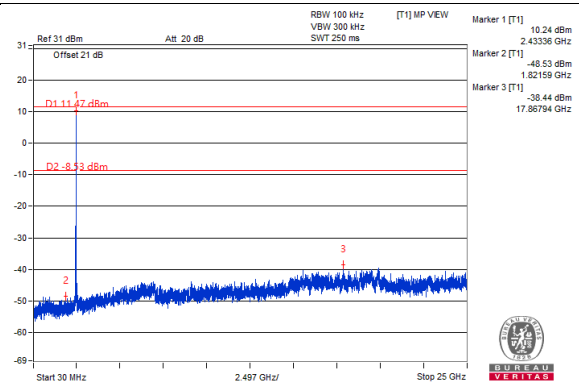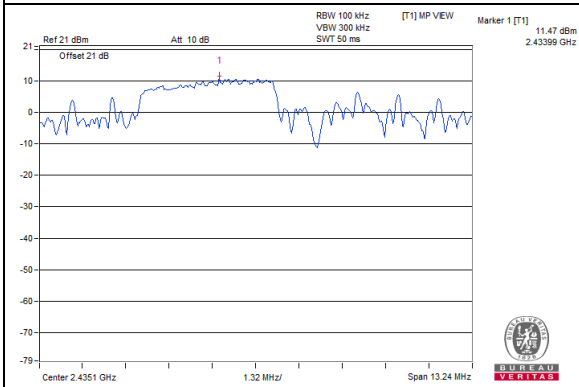


CH 10

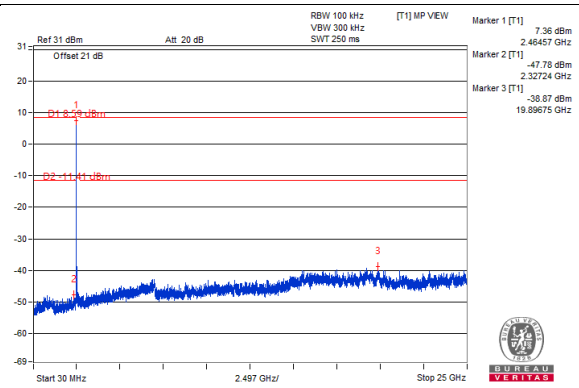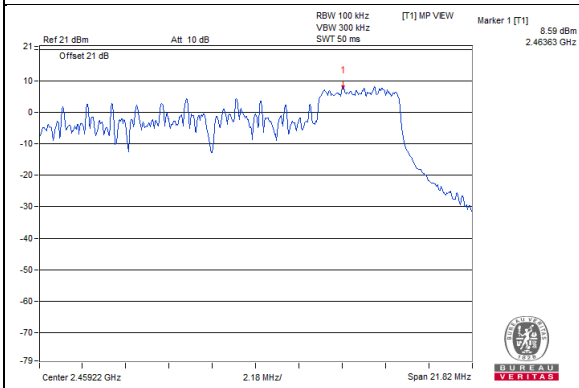


CH 11

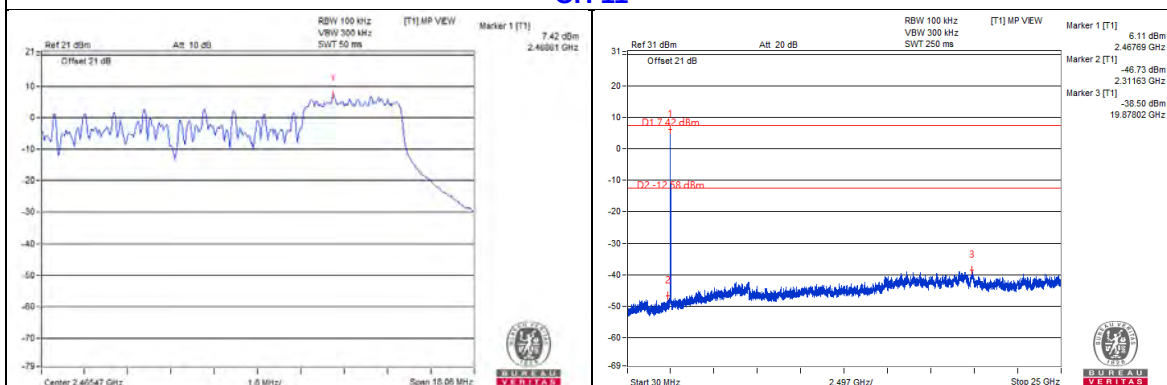


CH 12

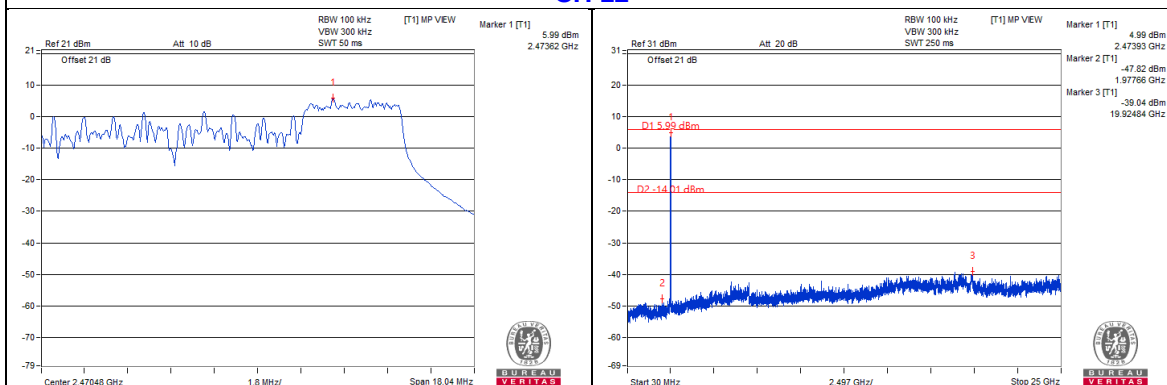


CH 13

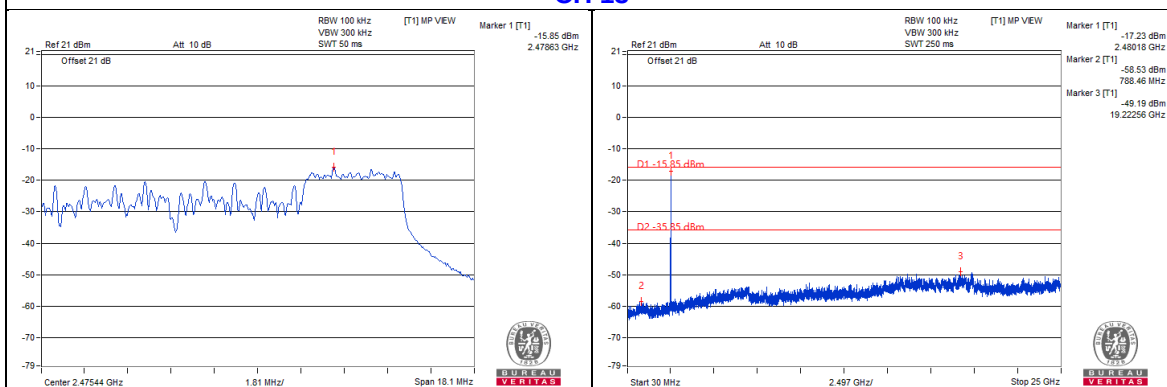


CH 1 Band edge

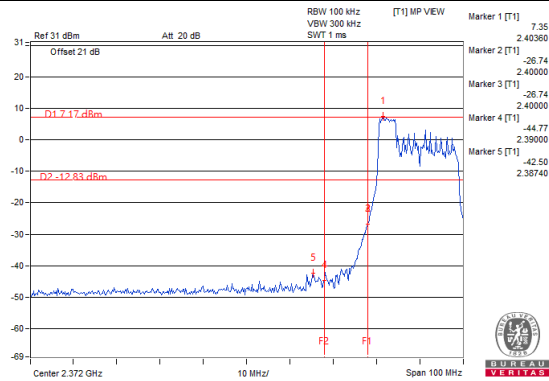


CH 2 Band edge

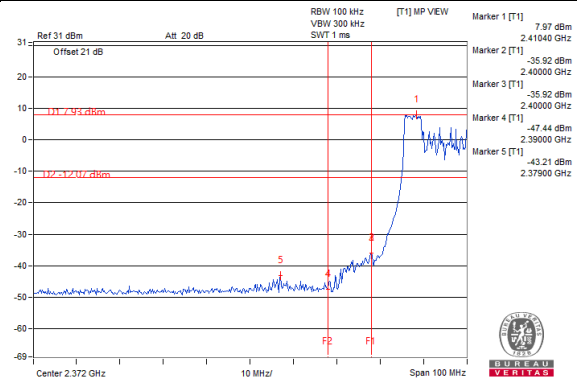


CH 10 Band edge

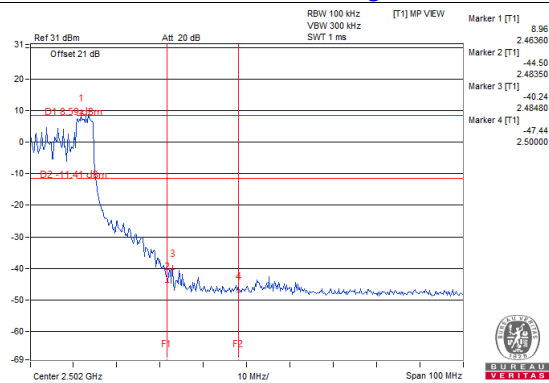


CH 11 Band edge

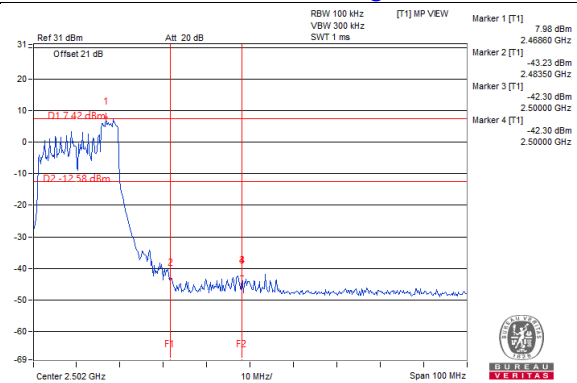

CH 12 Band edge

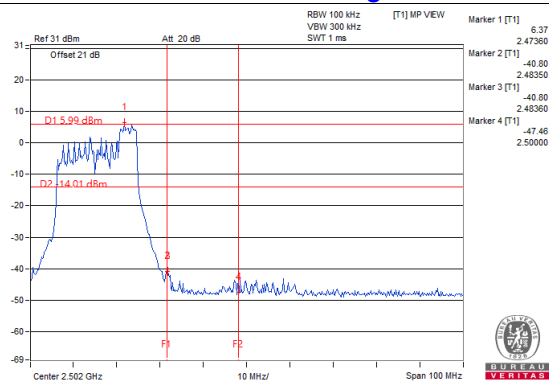


CH 13 Band edge

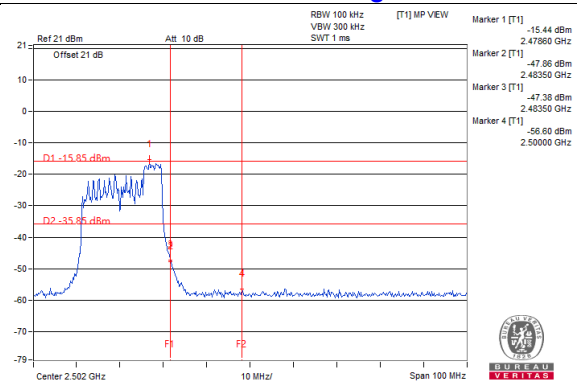


20MHz Preamble (RU106)

Chain 0


CH 1

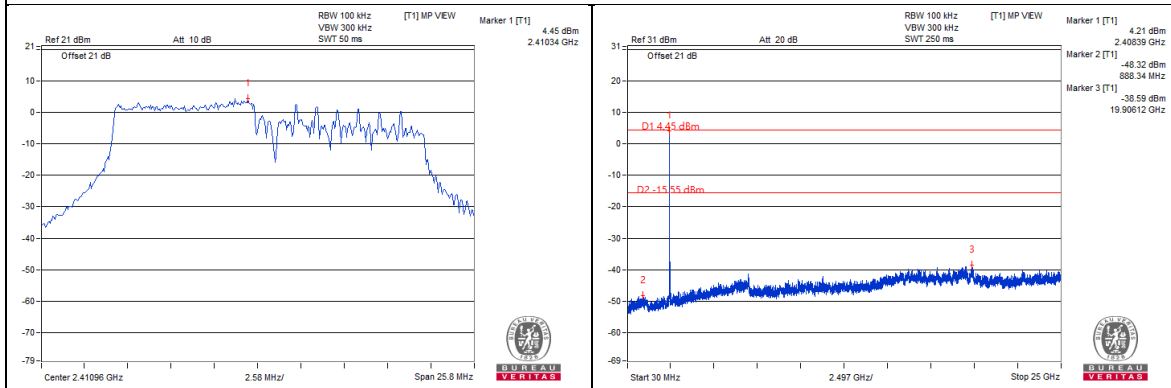


CH 2

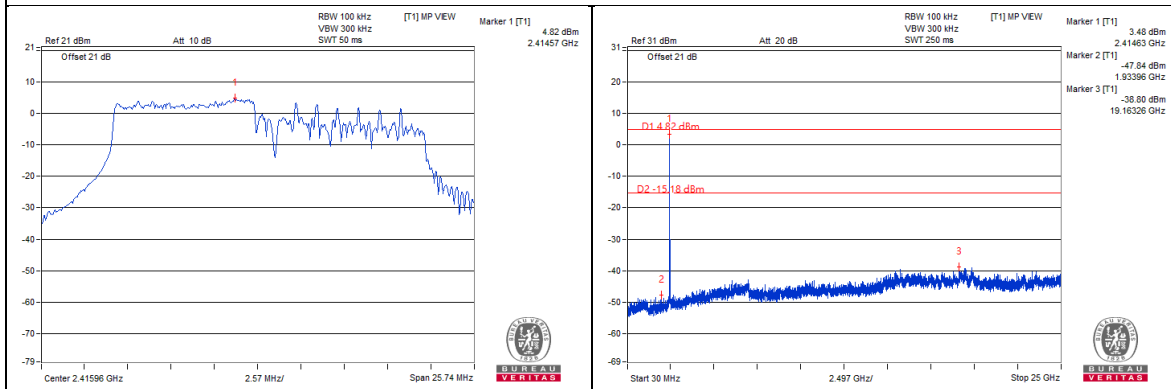


CH 6

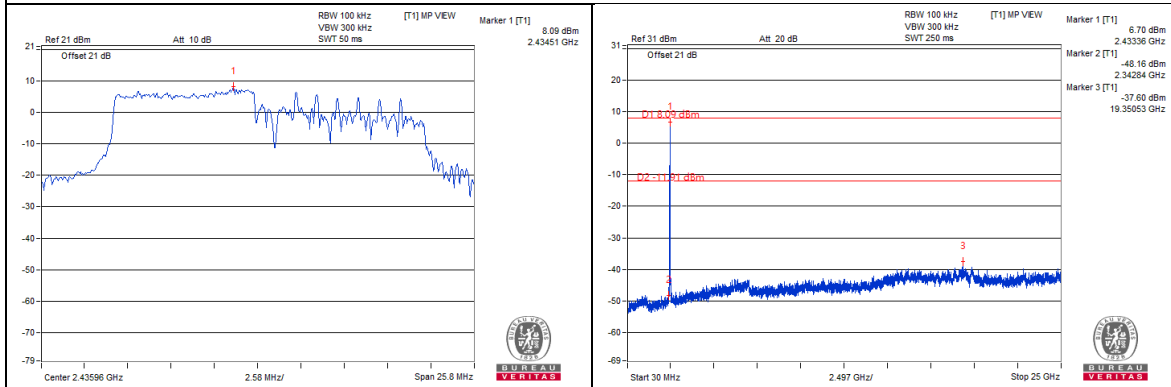


CH 10

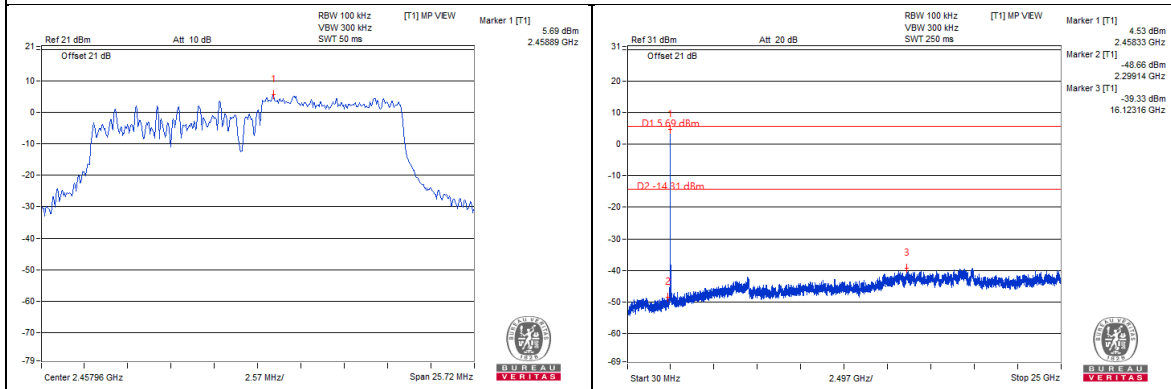


CH 11

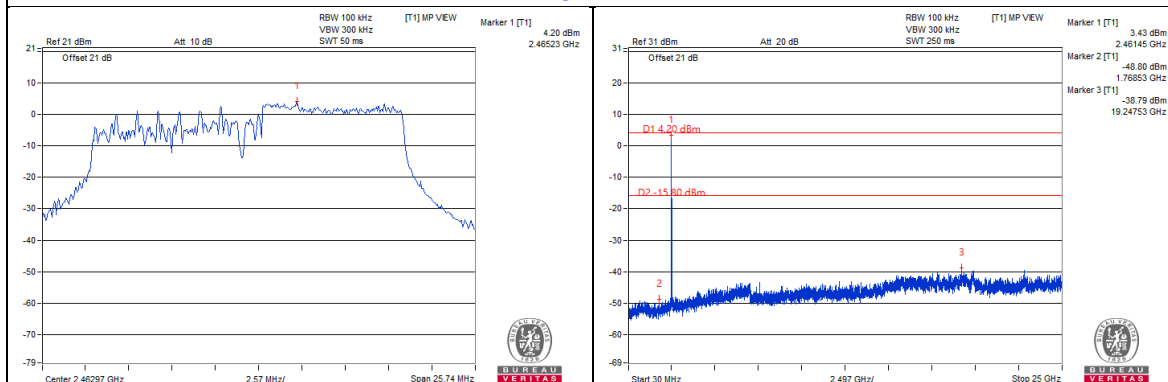


CH 12

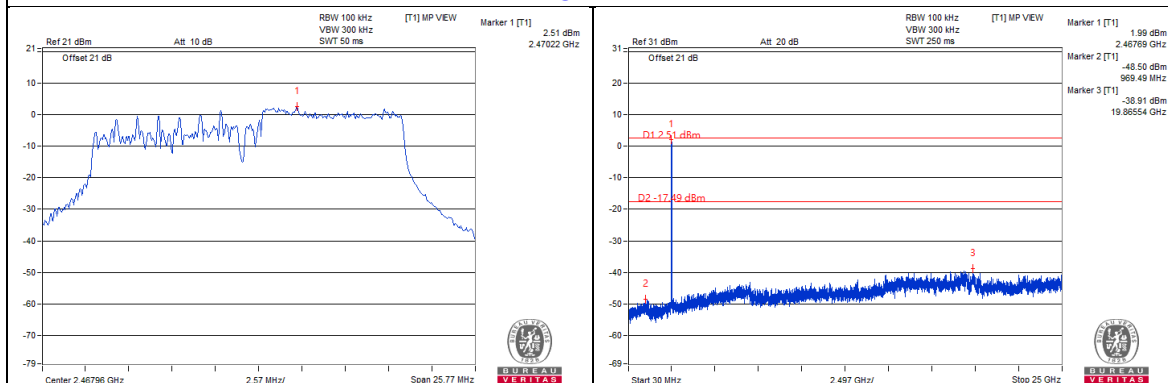


CH 13

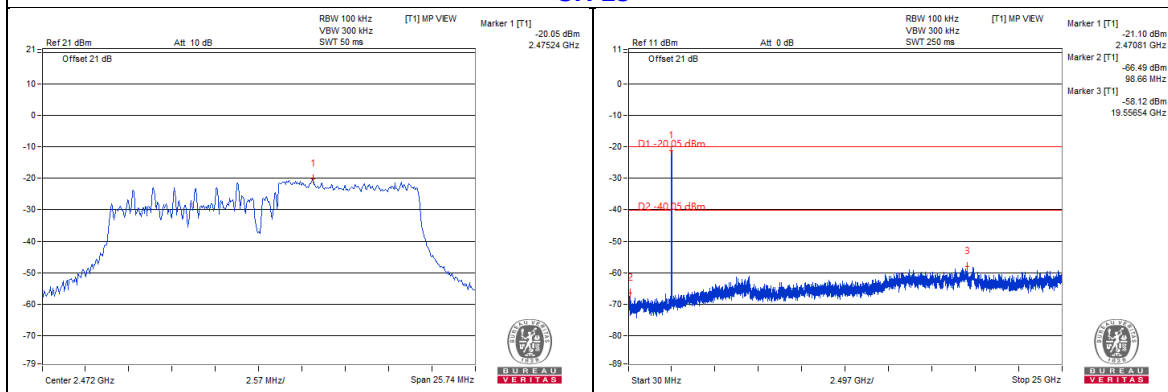


CH 1 Band edge

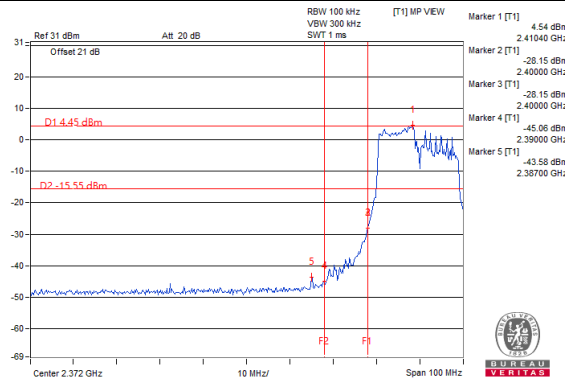


CH 2 Band edge

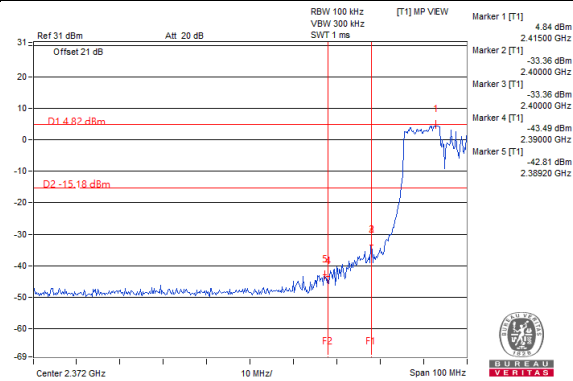


CH 10 Band edge

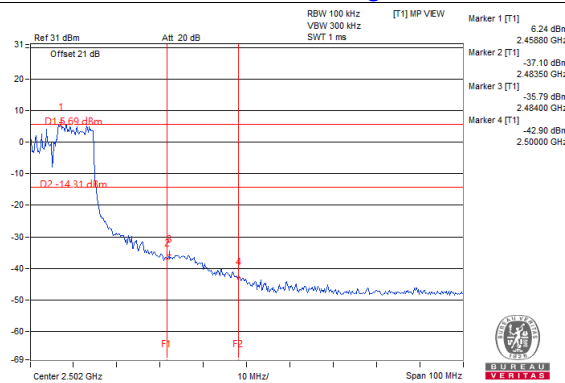


CH 11 Band edge

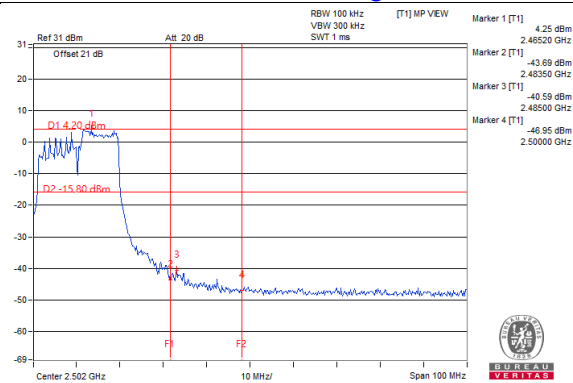

CH 12 Band edge


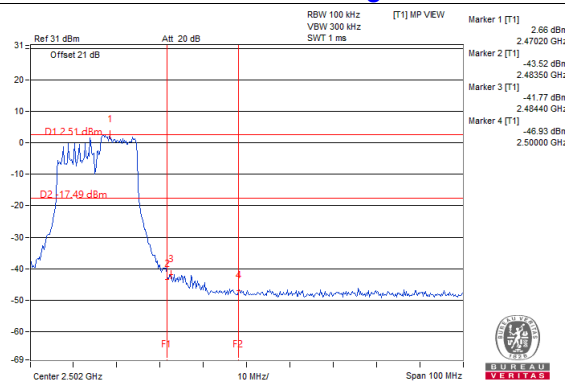


CH 13 Band edge


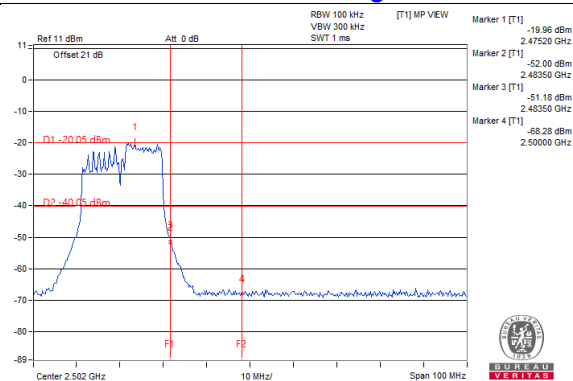


Chain 1



CH 1

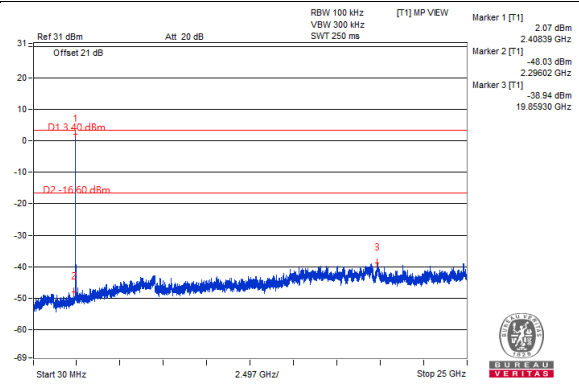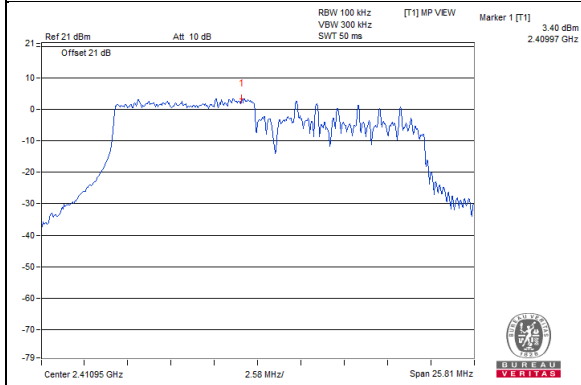



CH 2

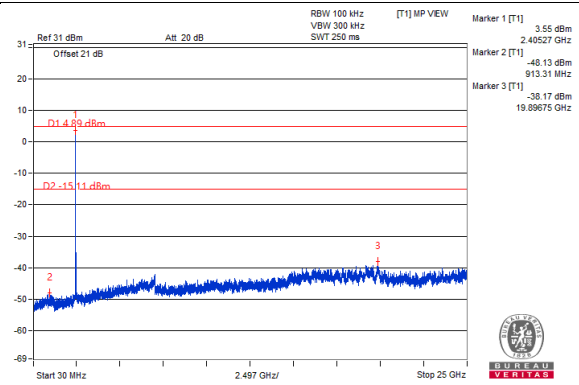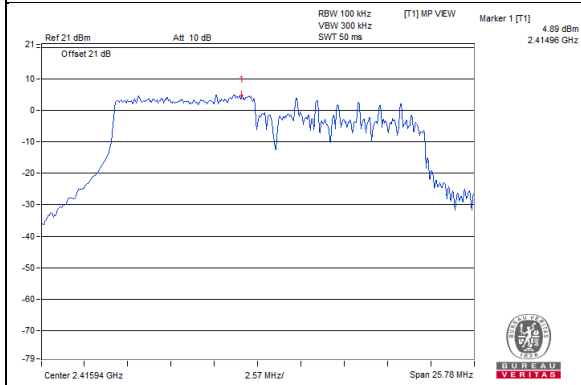


CH 6

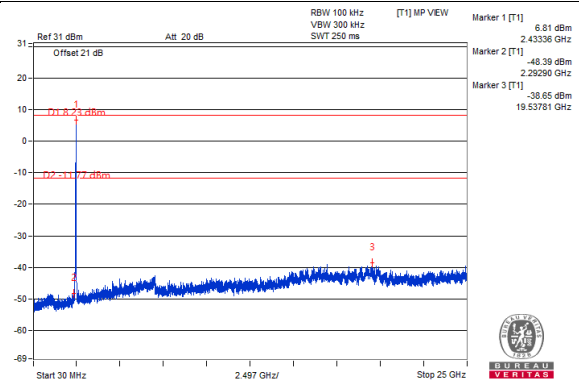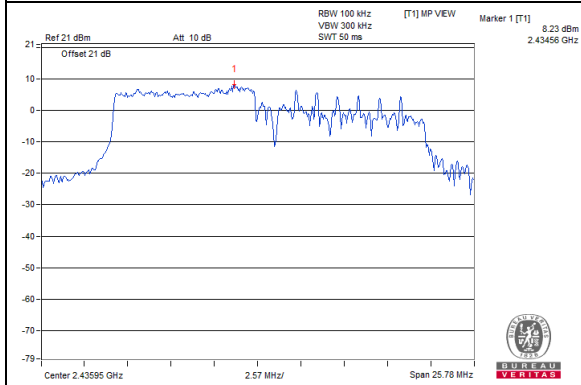


CH 10

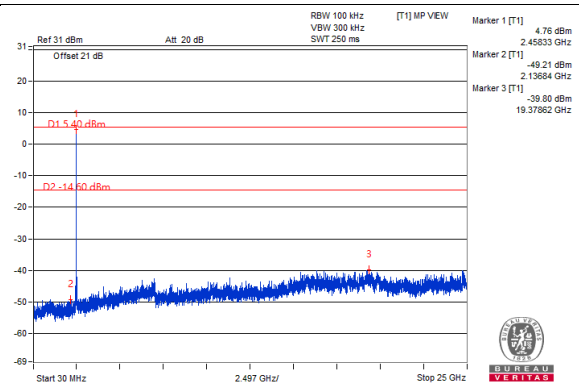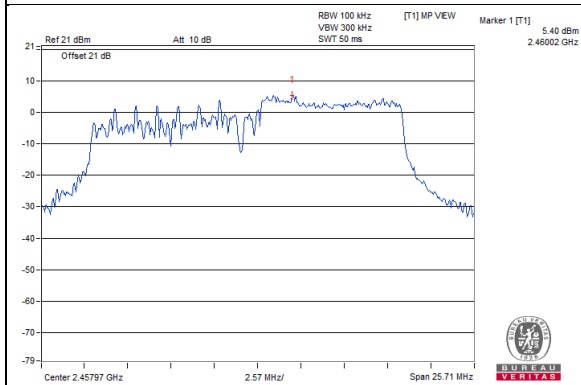


CH 11

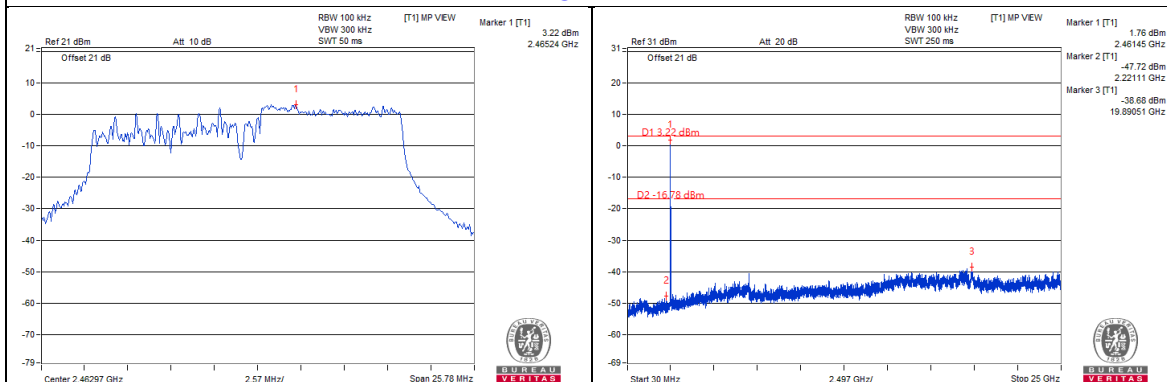


CH 12

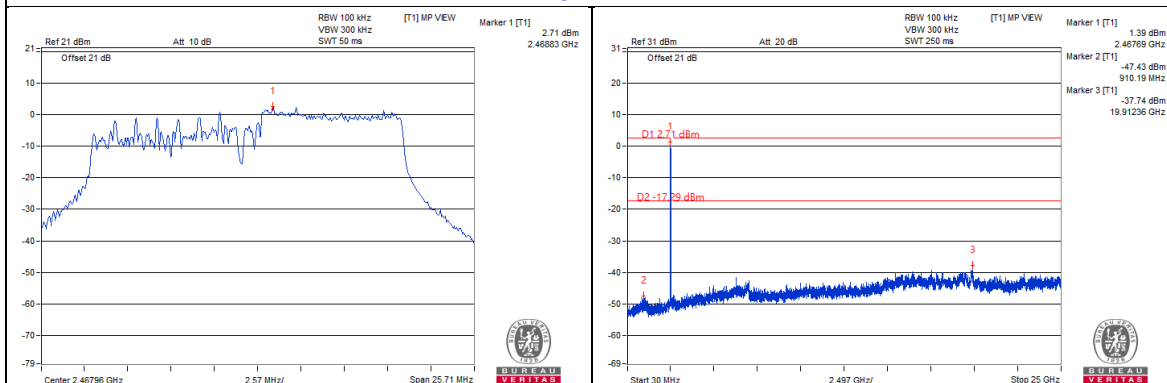


CH 13

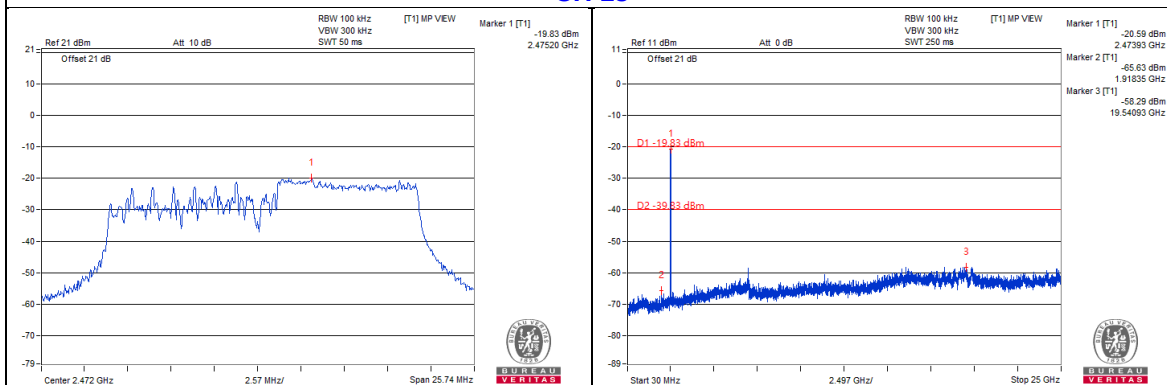


CH 1 Band edge

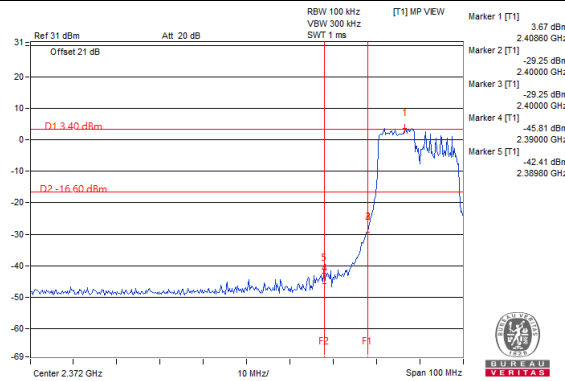


CH 2 Band edge

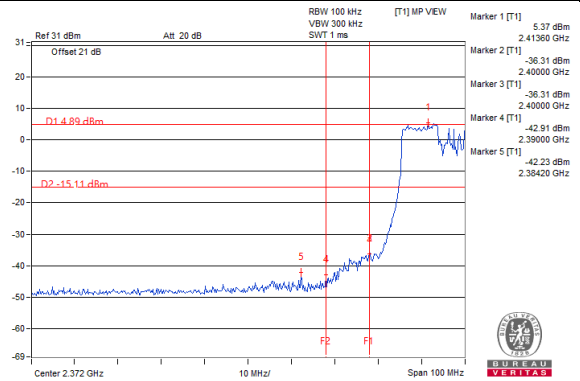


CH 10 Band edge

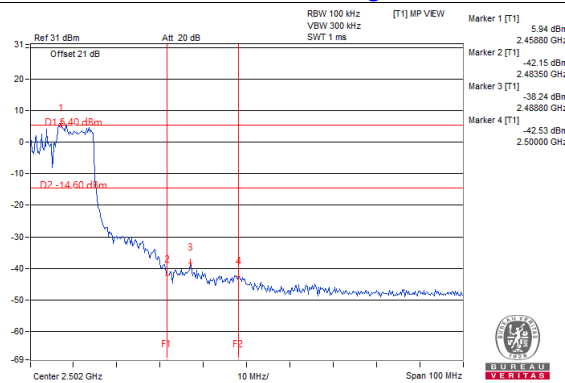


CH 11 Band edge

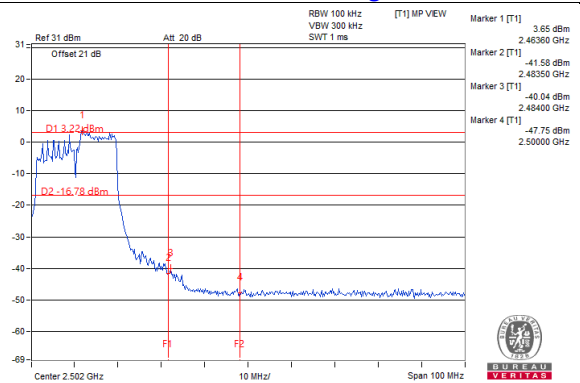

CH 12 Band edge

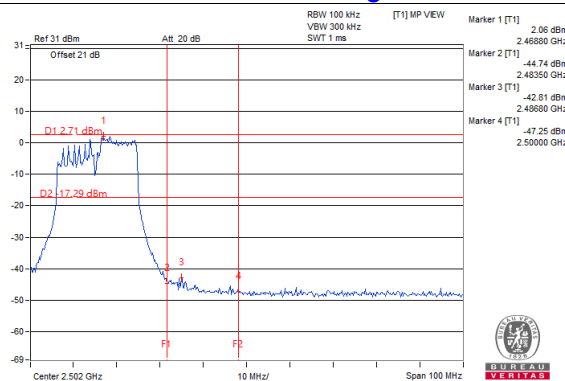


CH 13 Band edge

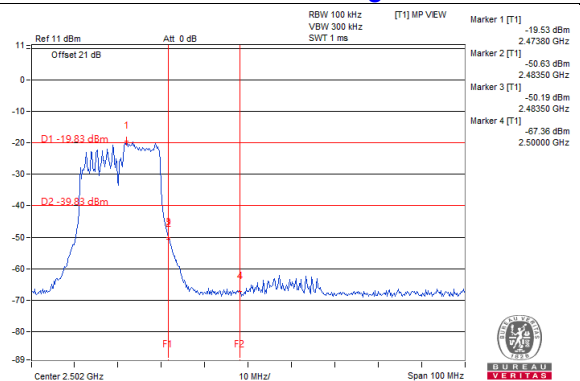


20MHz Preamble (RU242) Chain 0


CH 1

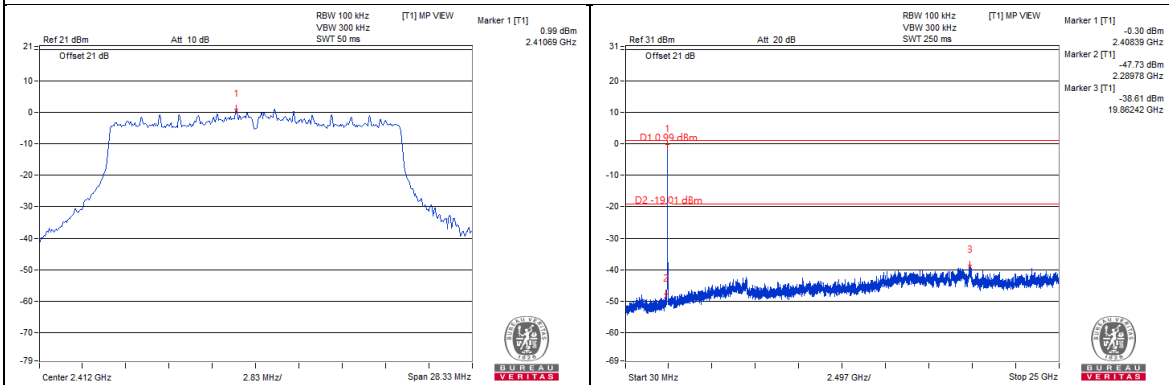


CH 2

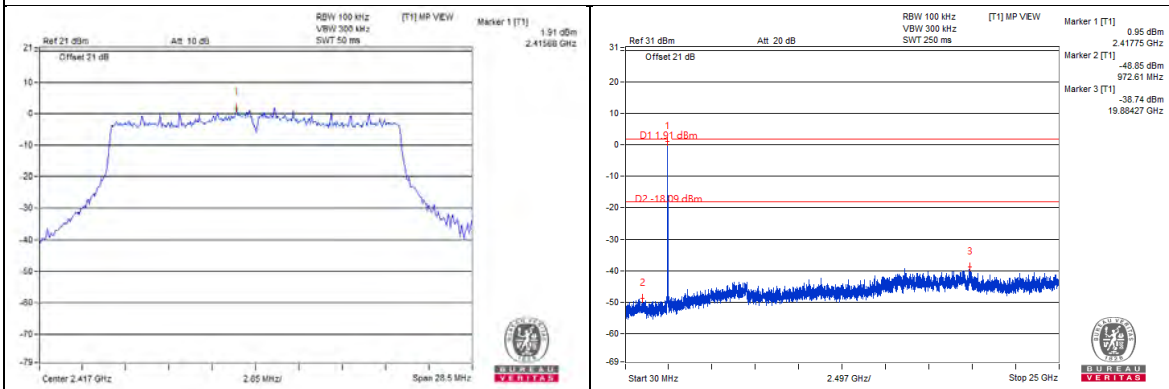


CH 6

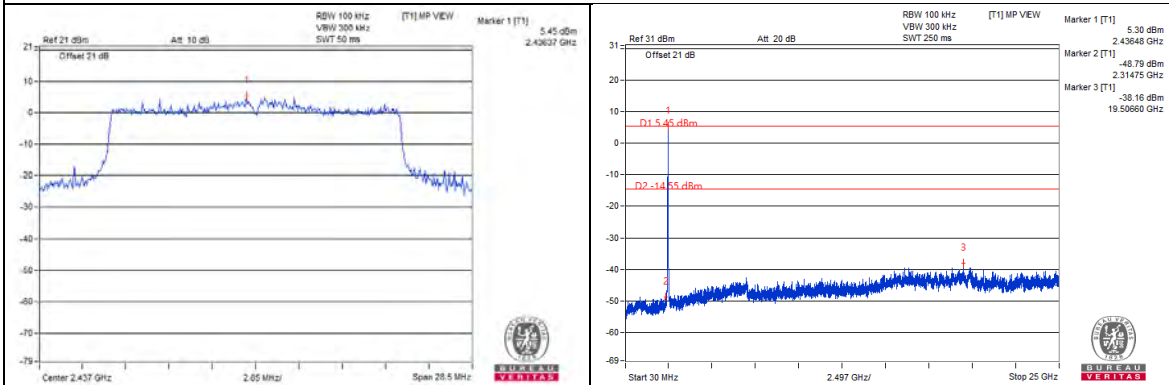


CH 10

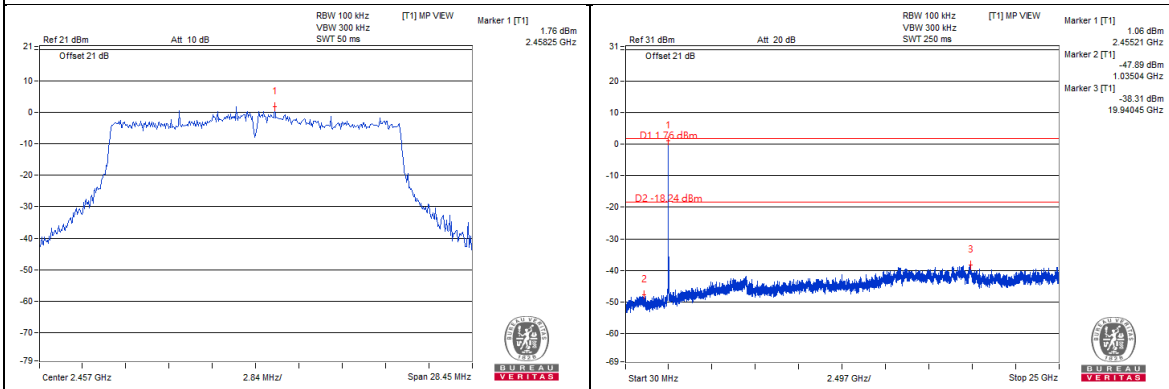


CH 11

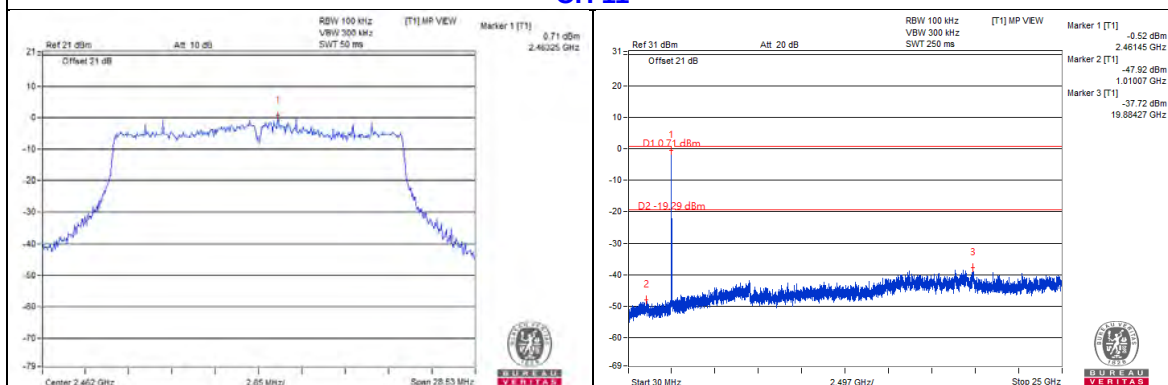


CH 12

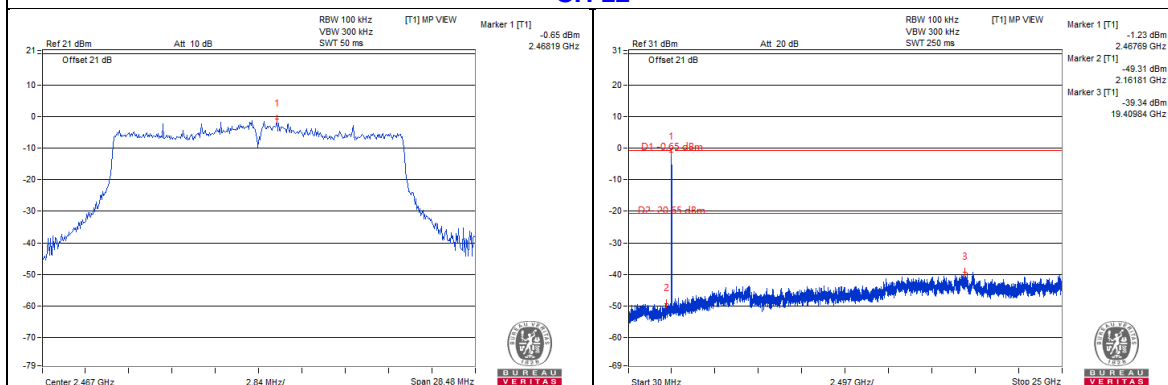


CH 13

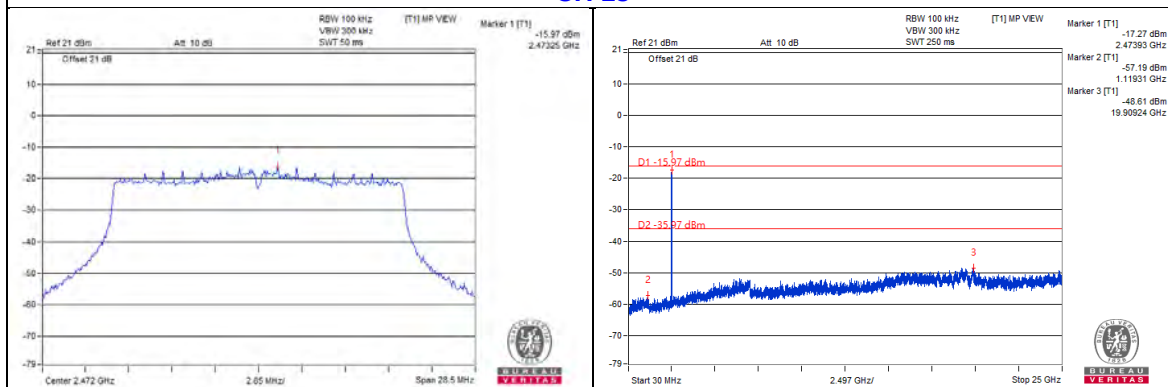


CH 1 Band edge

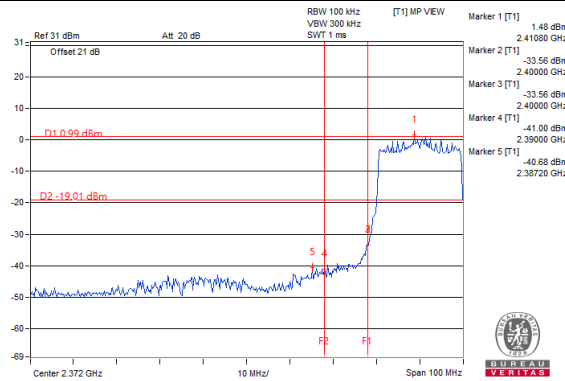


CH 2 Band edge

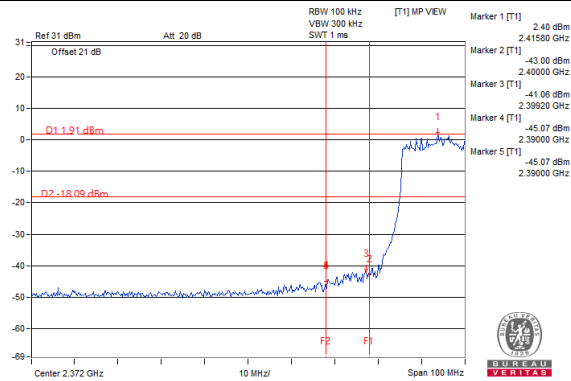


CH 10 Band edge

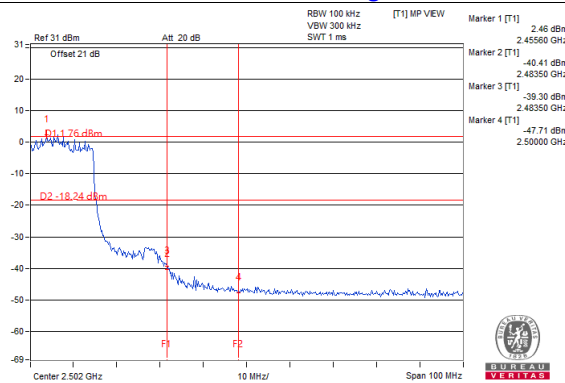


CH 11 Band edge

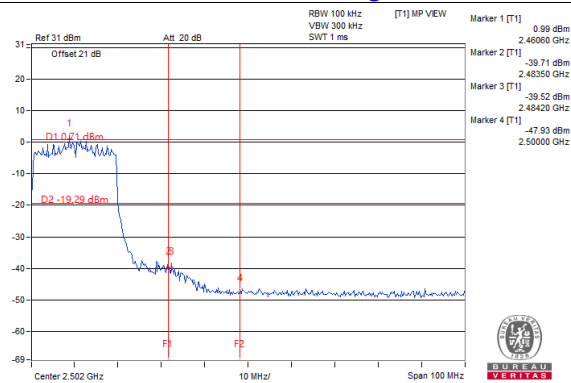

CH 12 Band edge


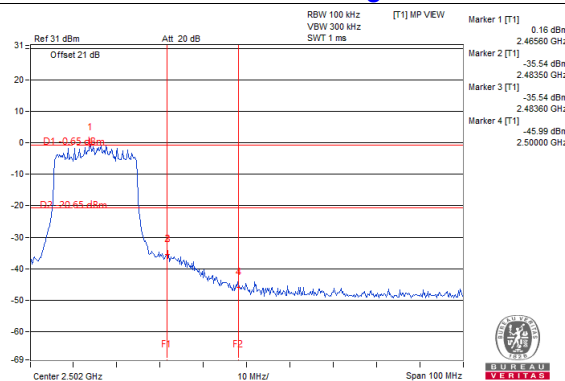


CH 13 Band edge


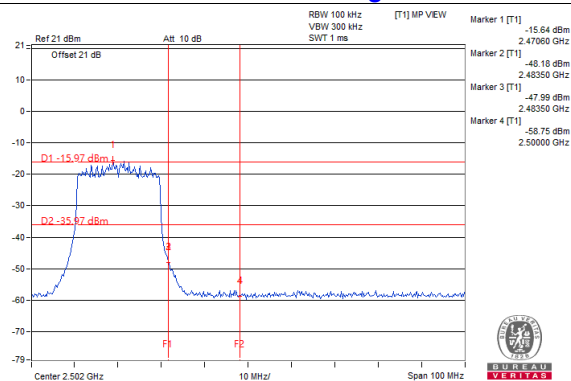


Chain 1



CH 1

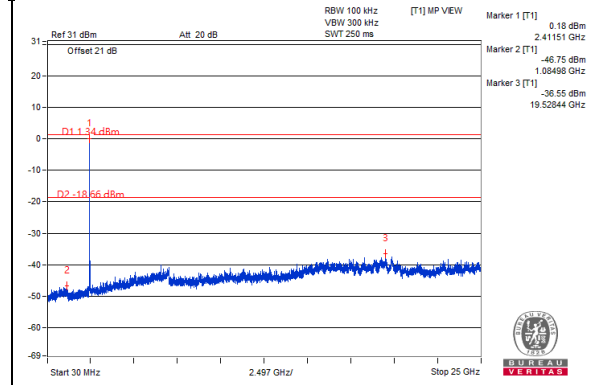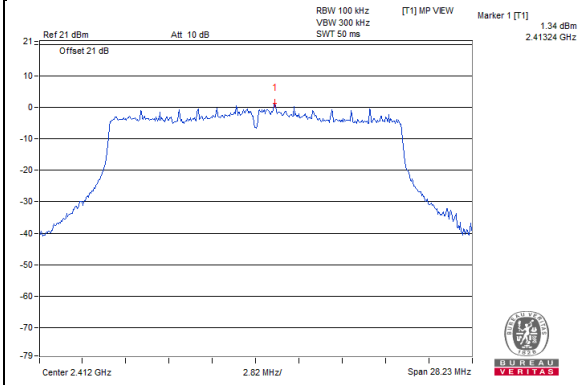



CH 2

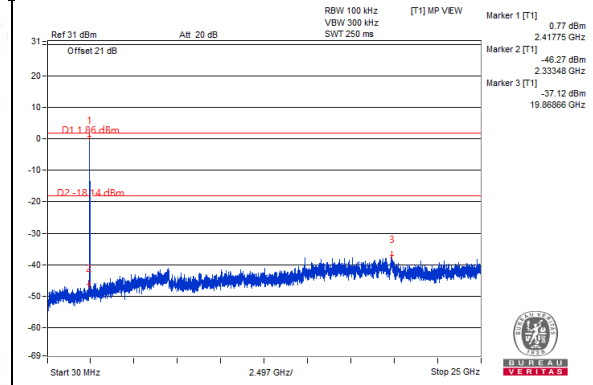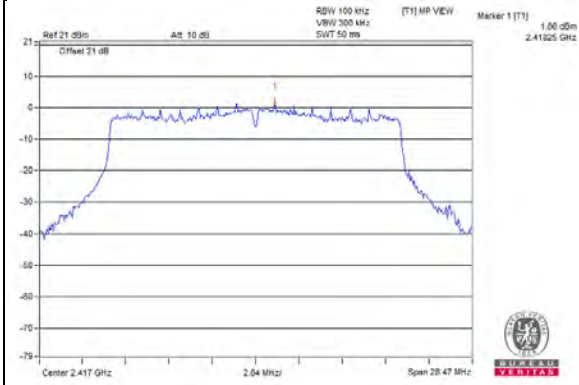


CH 6

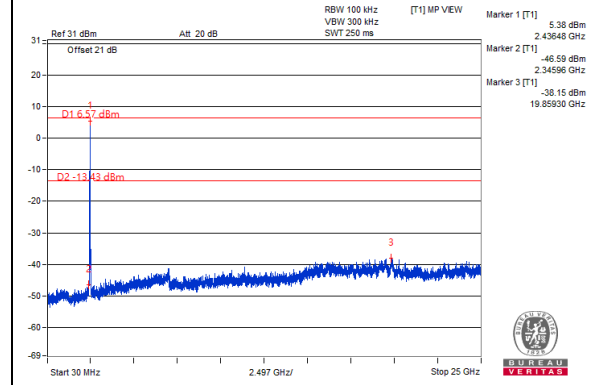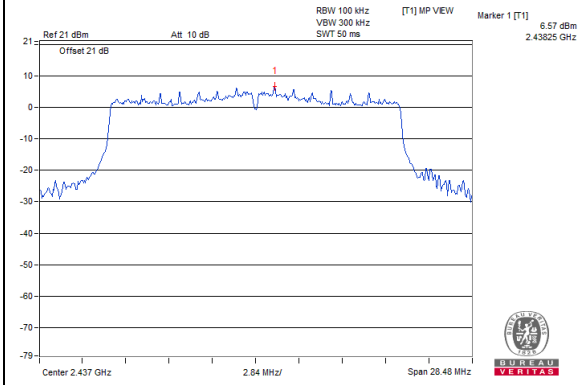


CH 10

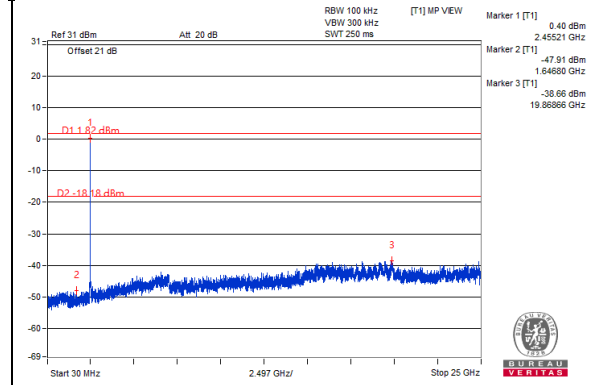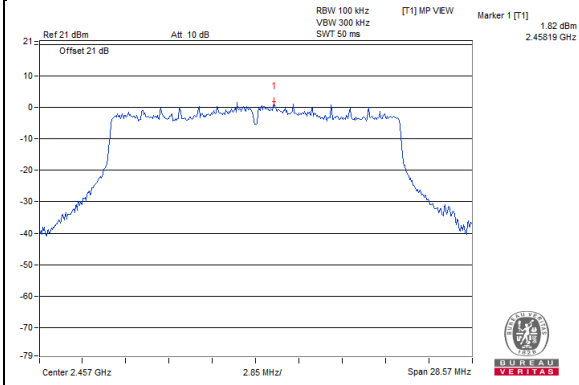


CH 11

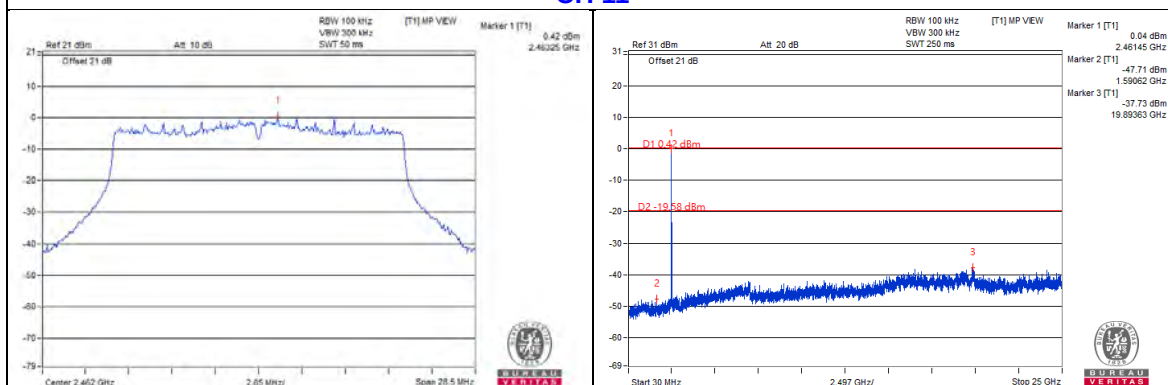


CH 12

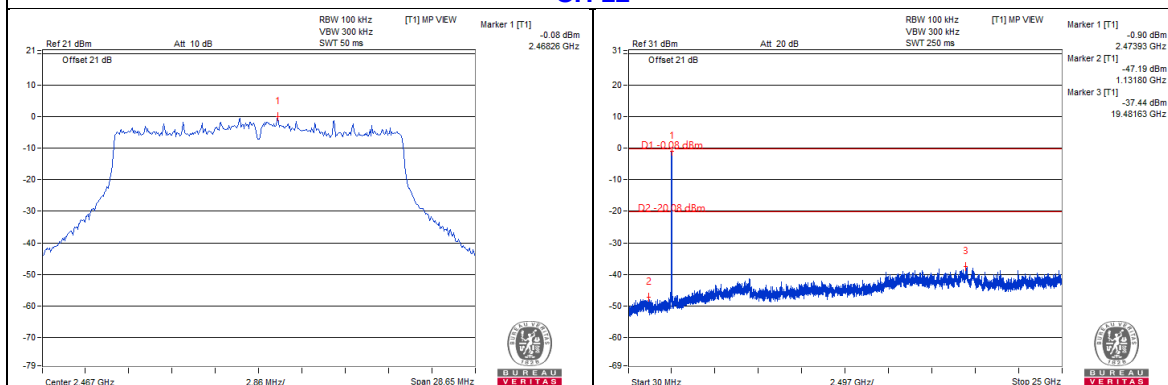


CH 13

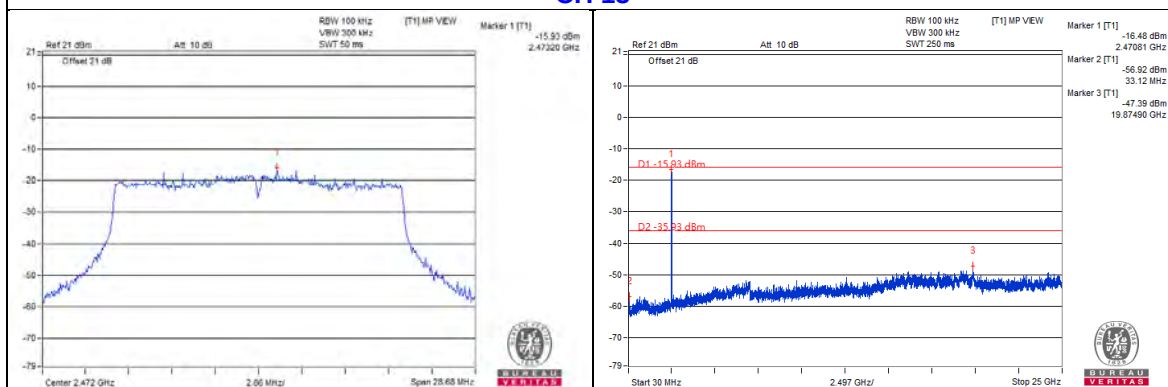


CH 1 Band edge

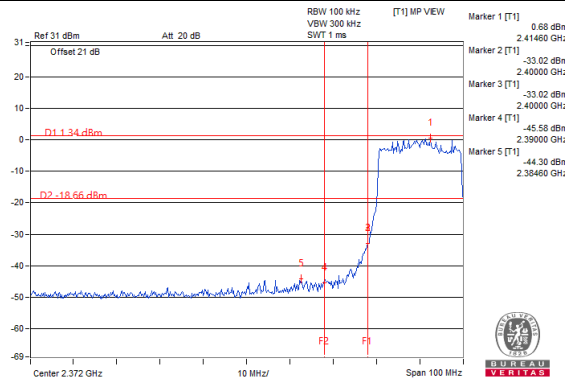


CH 2 Band edge

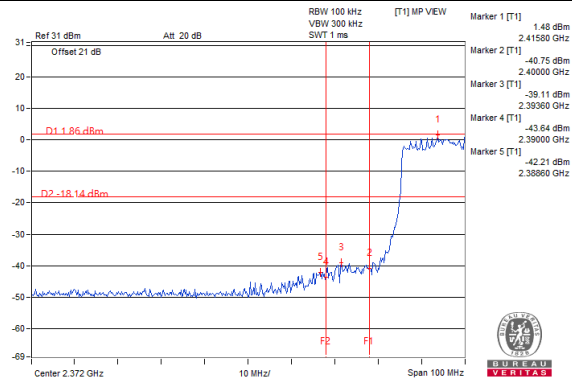


CH 10 Band edge

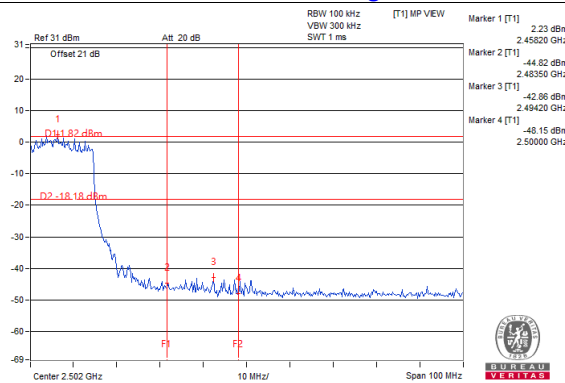


CH 11 Band edge

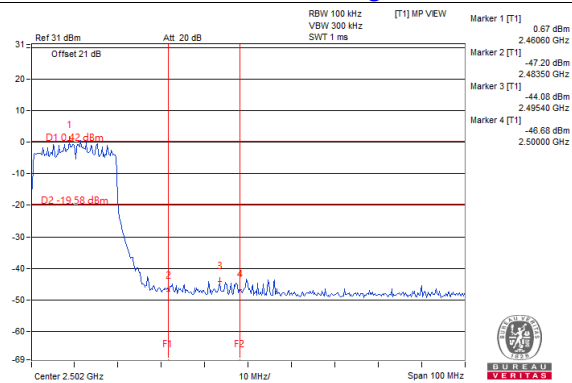

CH 12 Band edge


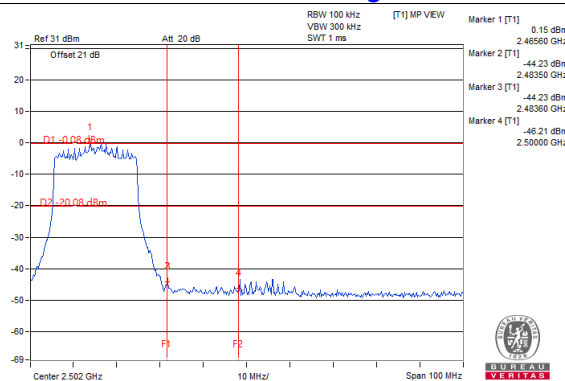


CH 13 Band edge


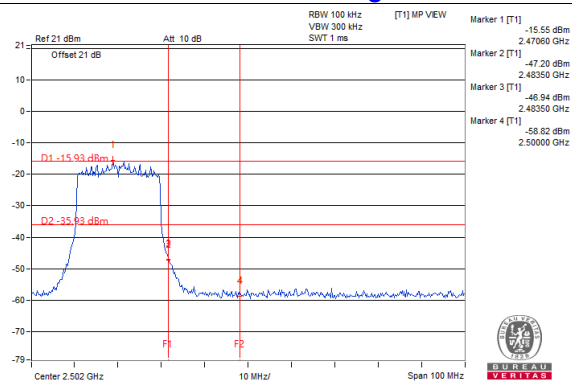


40MHz Preamble (RU484) Chain 0



CH 3

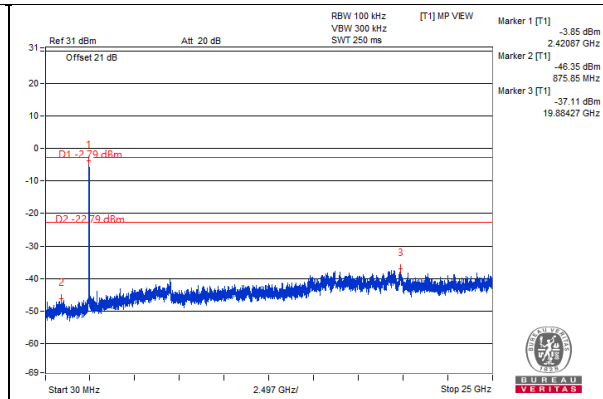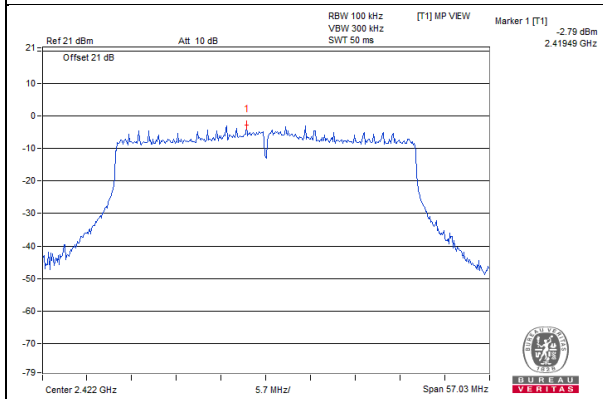



CH 4

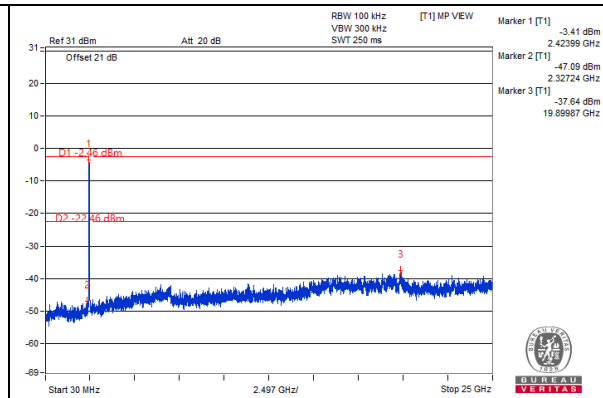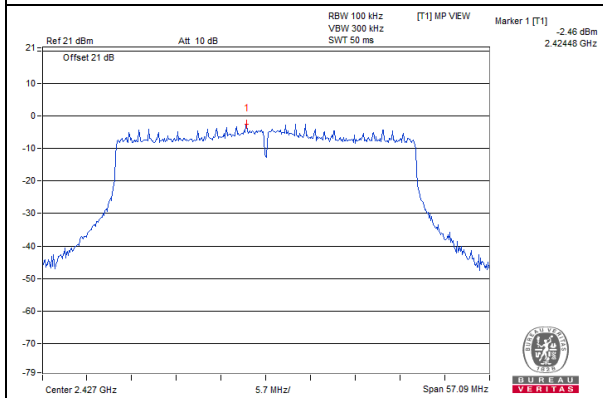


CH 6

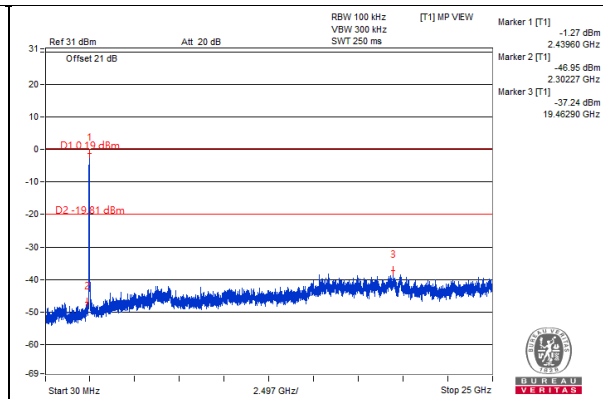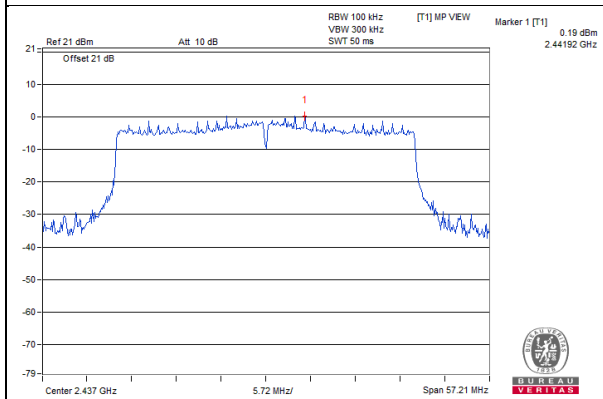


CH 8

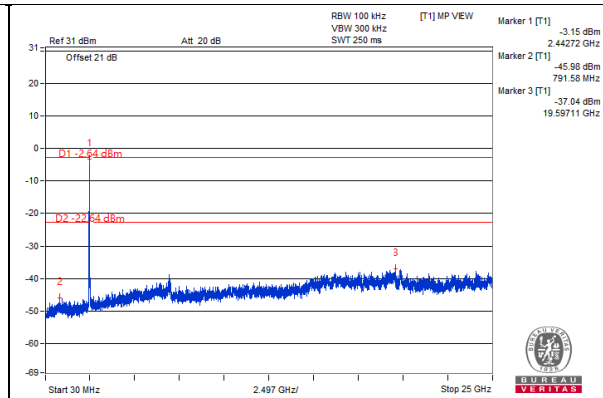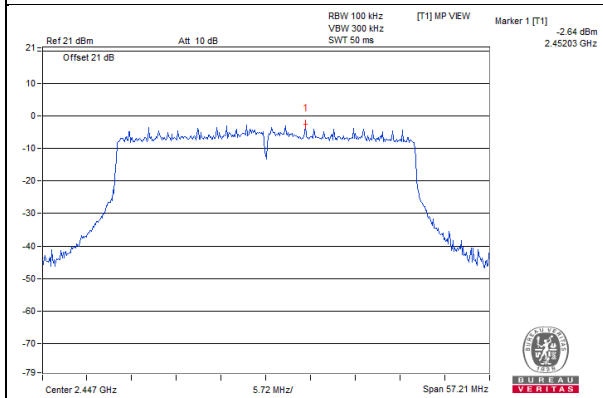


CH 9

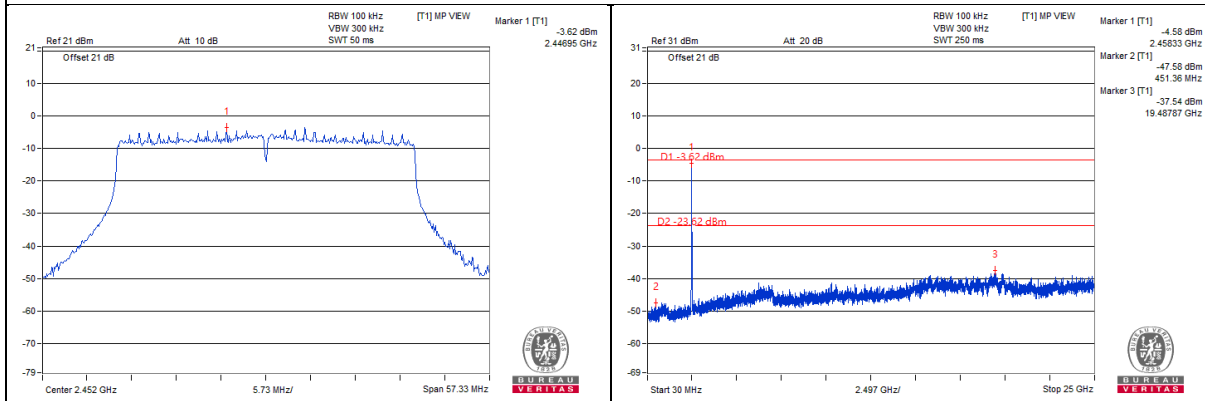


CH 10

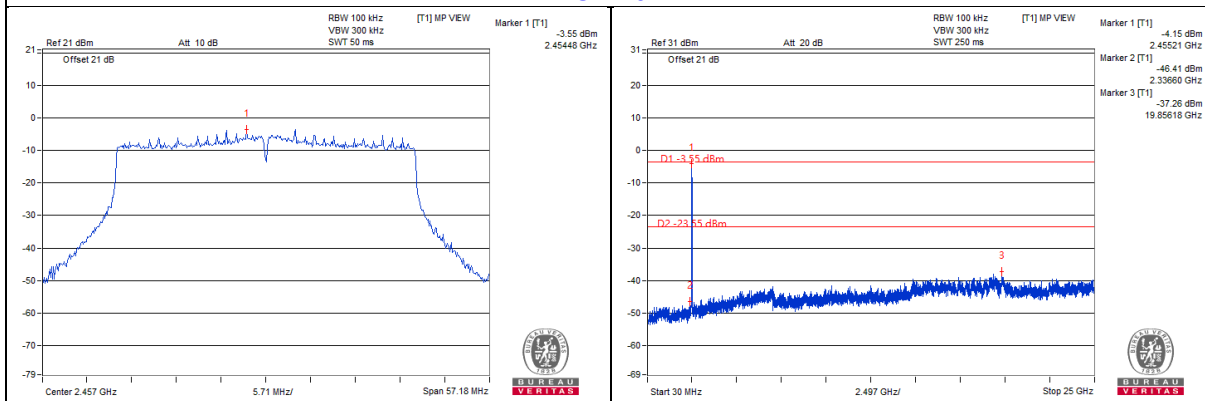


CH 11

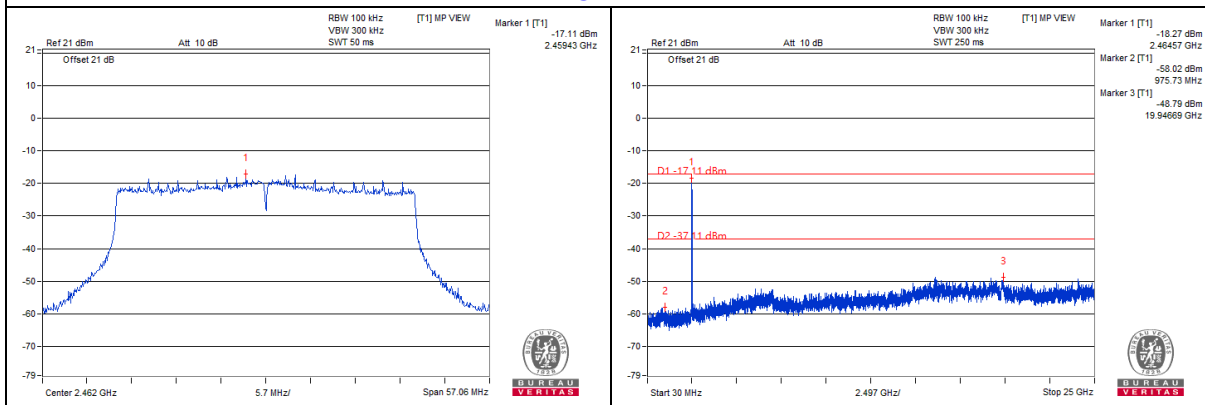


CH 3 Band edge

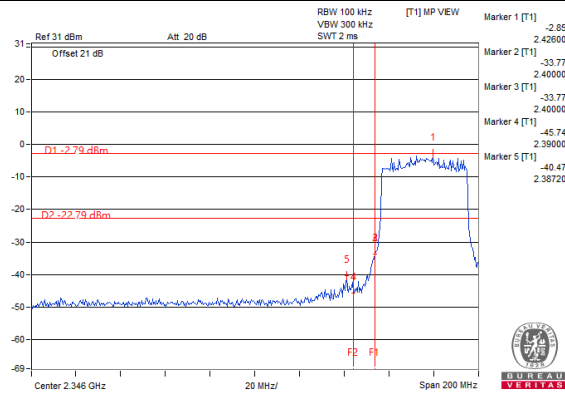


CH 4 Band edge

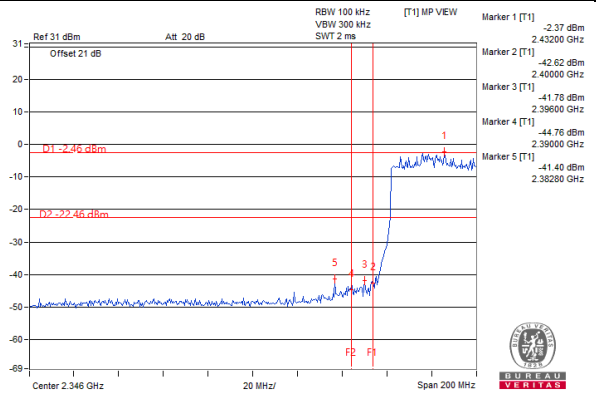


CH 8 Band edge

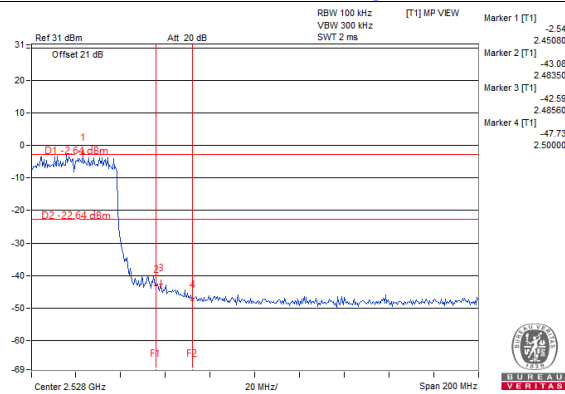


CH 9 Band edge

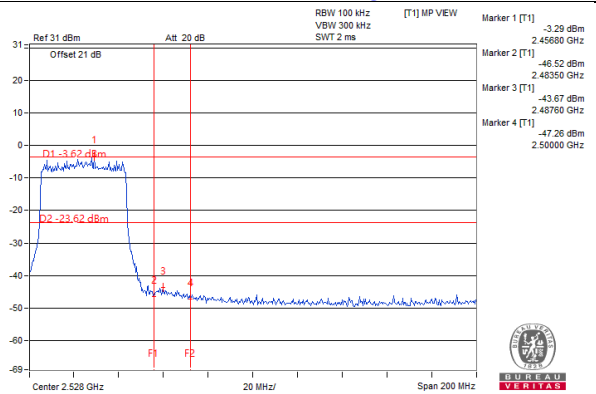

CH 10 Band edge


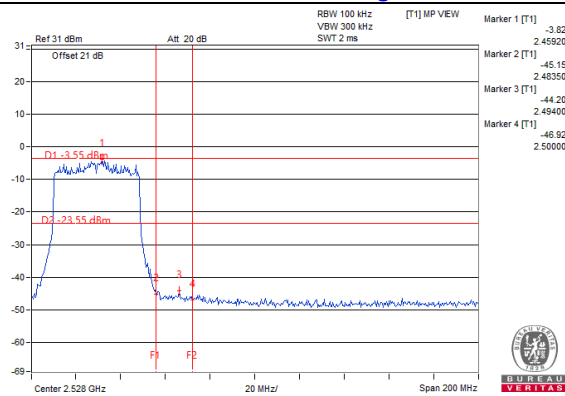


CH 11 Band edge


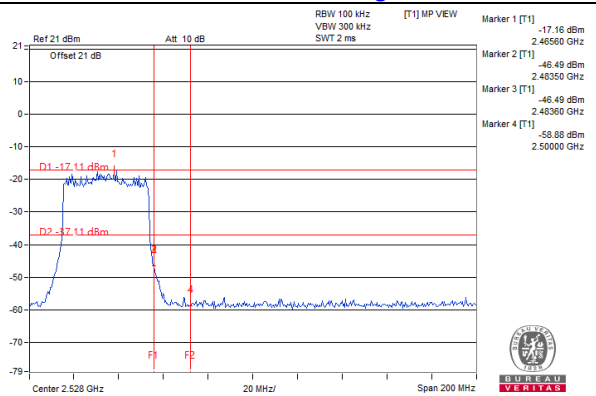


Chain 1



CH 3

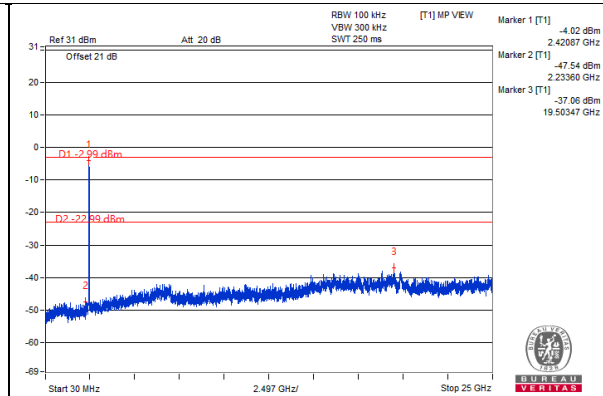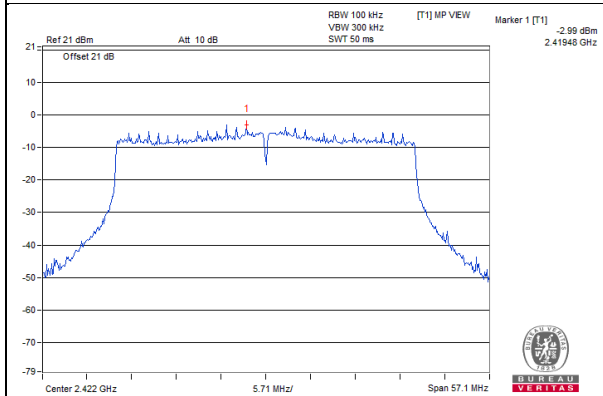



CH 4

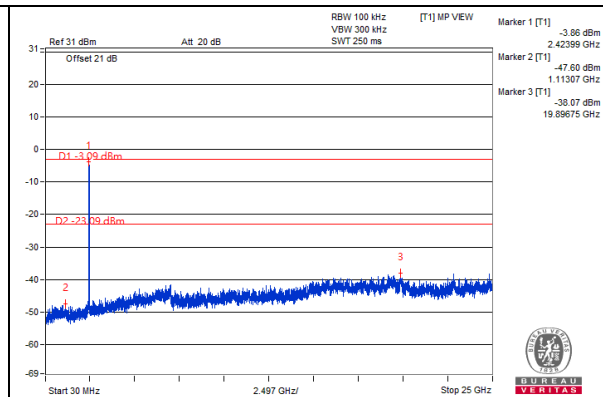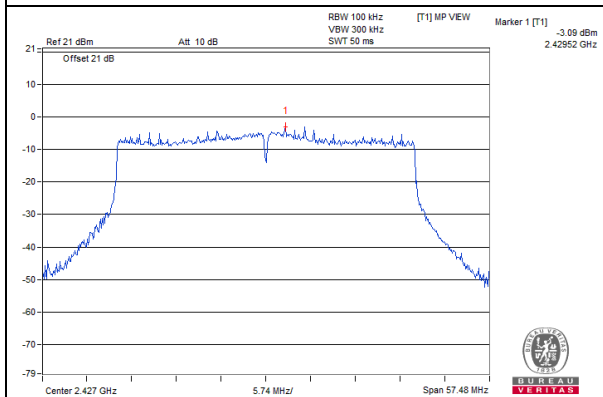



CH 6

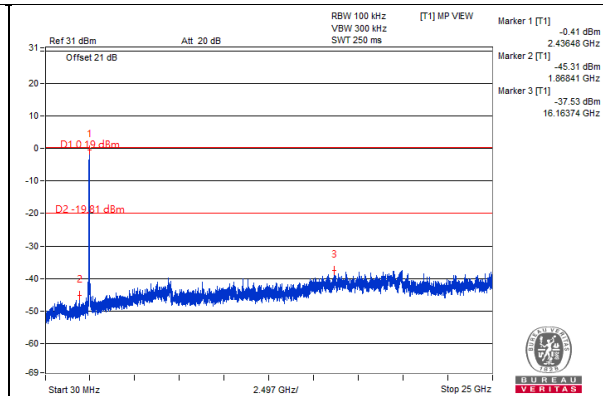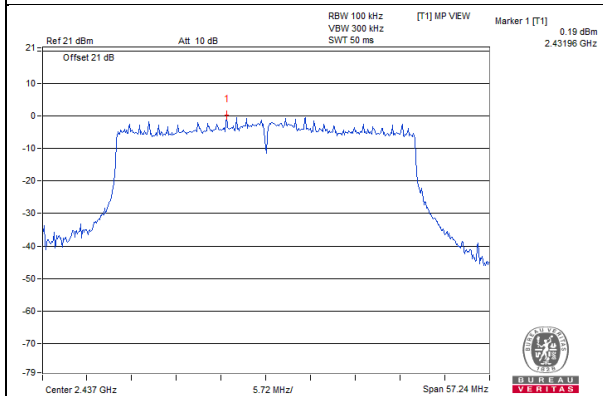



CH 8

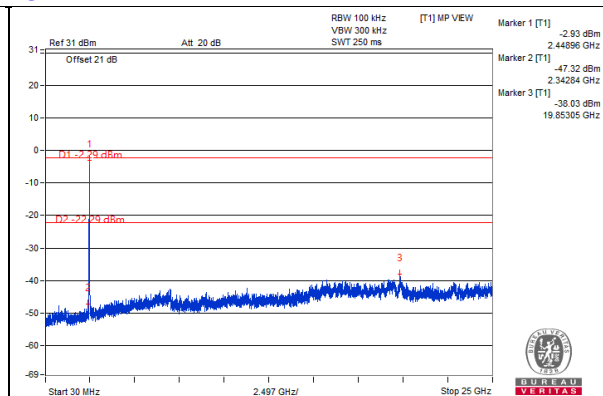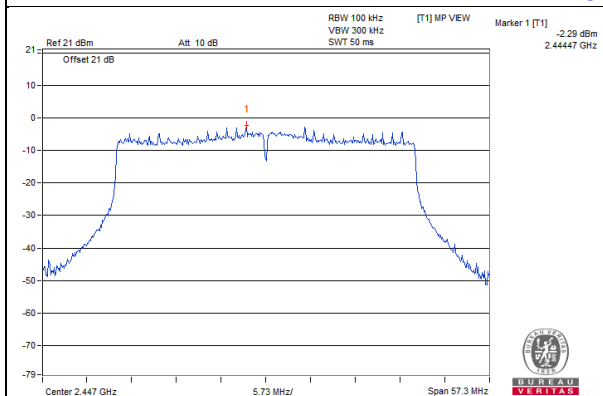



CH 9

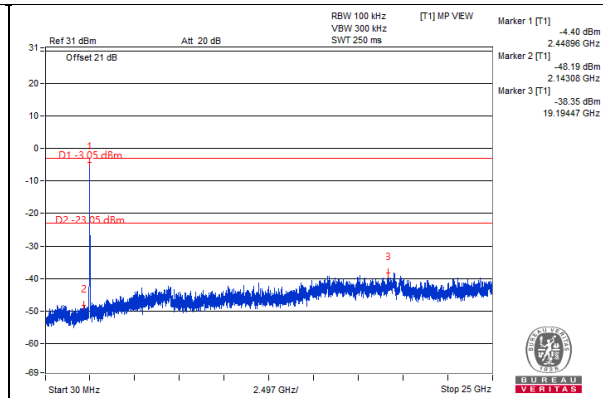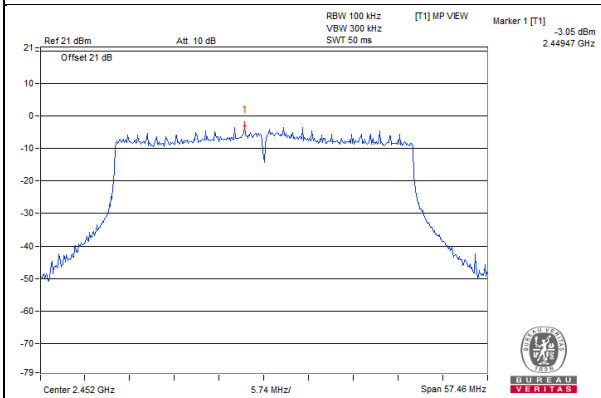


CH 10

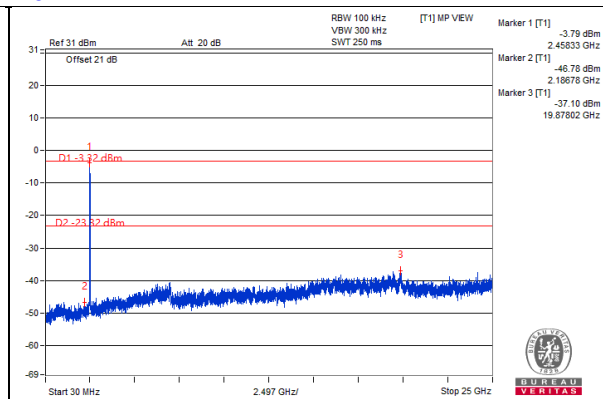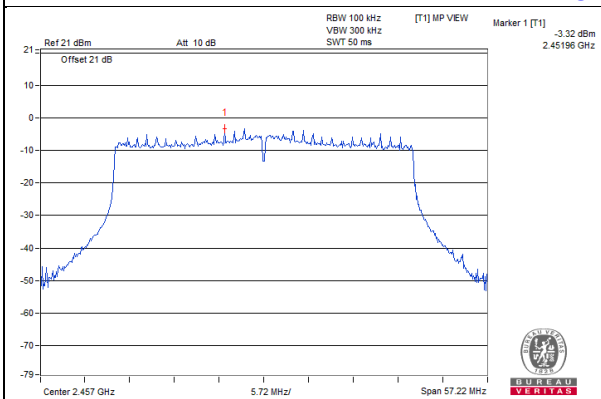


CH 11

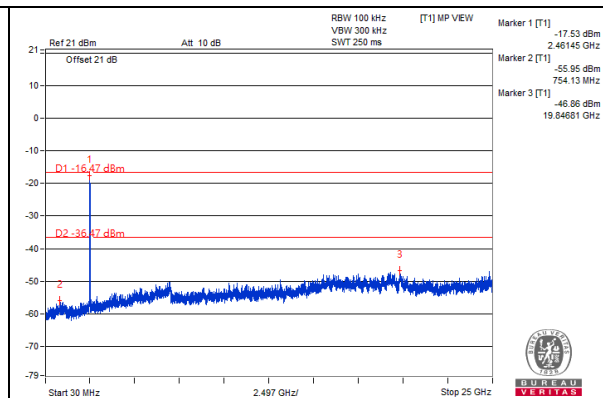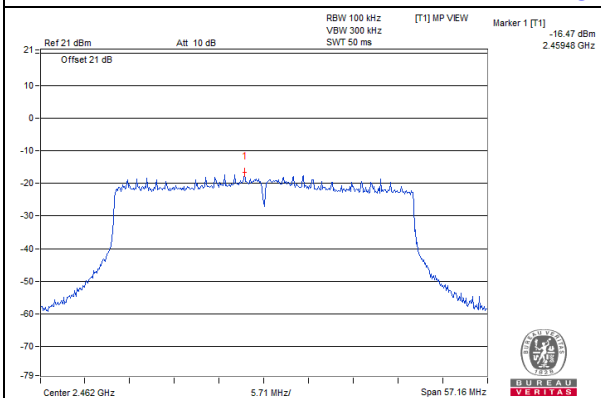


CH 3 Band edge

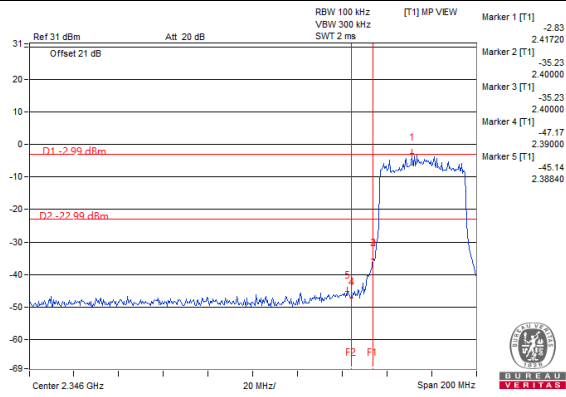


CH 4 Band edge

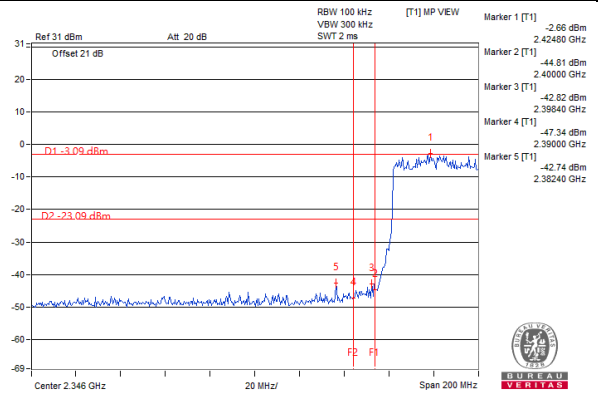


CH 8 Band edge

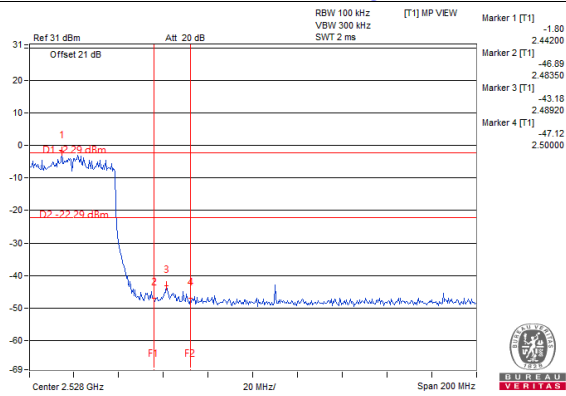


CH 9 Band edge

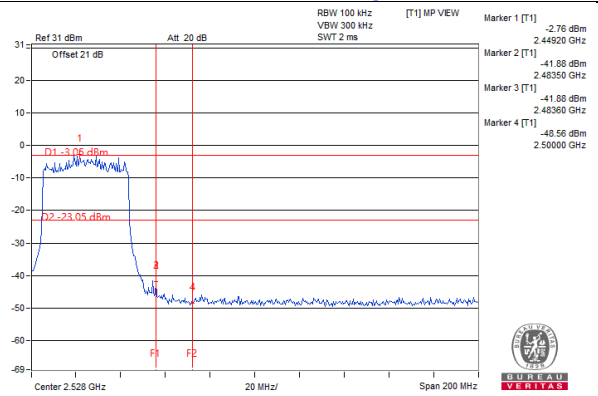

CH 10 Band edge

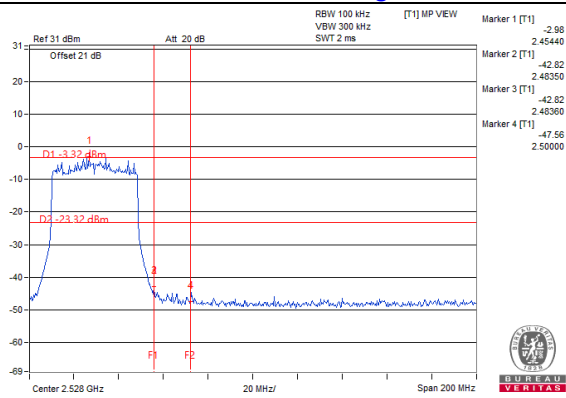

CH 11 Band edge

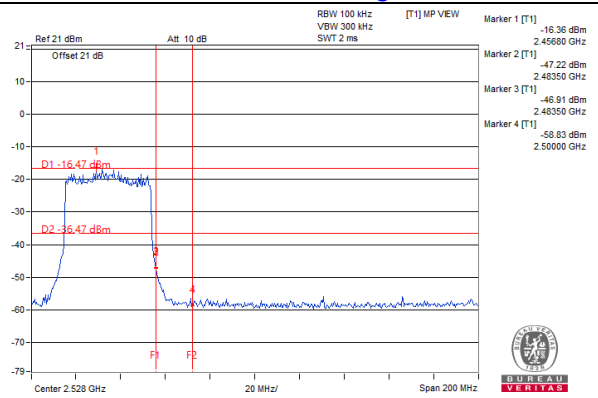

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix A – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

6 Appendix B – Radiated Emission Measurement

6.1.1 Limits of Radiated Emission Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

6.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 01, 2020	Nov. 30, 2021
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 22, 2020	Nov. 21, 2021
Pre-Amplifier EMCI	EMC 12630 SE	980638	Apr. 07, 2021	Apr. 06, 2022
RF Cable	EMC104-SM-SM-1200	160922	Dec. 25, 2020	Dec. 24, 2021
RF Cable	EMC104-SM-SM-2000	180502	Apr. 26, 2021	Apr. 25, 2022
RF Cable	EMC104-SM-SM-6000	180418	Apr. 26, 2021	Apr. 25, 2022
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 11, 2021	Jan. 10, 2022
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 22, 2020	Nov. 21, 2021
RF Cable	EMC102-KM-KM-1200	160924	Jan. 11, 2021	Jan. 10, 2022
RF Cable	EMC-KM-KM-4000	200214	Mar. 10, 2021	Mar. 09, 2022
Software	ADT_Radiated V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: May 22 to 29, 2021

6.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


Note:

1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

6.1.4 Deviation from Test Standard

No deviation

6.1.5 Test Setup

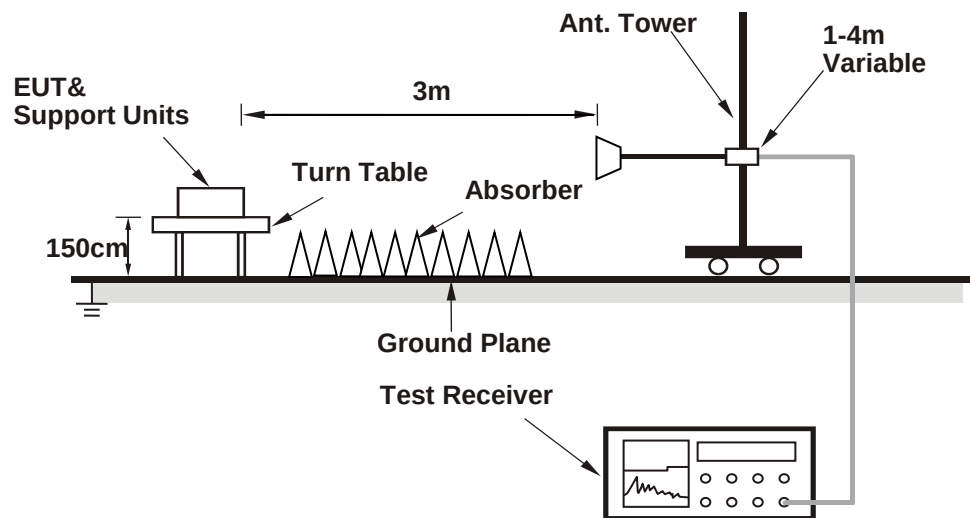

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

6.1.6 EUT Operating Conditions

Same as 4.1.6.

6.1.7 Test Results

For Antenna Set 1

The EUT's antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

Above 1GHz Data:

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.68	58.4 PK	74.0	-15.6	2.44 H	324	62.6	-4.2
2	2388.68	51.5 AV	54.0	-2.5	2.44 H	324	55.7	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.68	55.3 PK	74.0	-18.7	1.21 V	164	59.5	-4.2
2	2388.68	45.1 AV	54.0	-8.9	1.21 V	164	49.3	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.37	58.3 PK	74.0	-15.7	2.39 H	323	62.5	-4.2
2	2389.37	47.8 AV	54.0	-6.2	2.39 H	323	52.0	-4.2
3	2485.72	60.2 PK	74.0	-13.8	2.39 H	323	64.6	-4.4
4	2485.72	51.6 AV	54.0	-2.4	2.39 H	323	56.0	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.37	55.5 PK	74.0	-18.5	1.29 V	152	59.7	-4.2
2	2389.37	45.6 AV	54.0	-8.4	1.29 V	152	49.8	-4.2
3	2485.72	55.3 PK	74.0	-18.7	1.29 V	152	59.7	-4.4
4	2485.72	45.1 AV	54.0	-8.9	1.29 V	152	49.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2310.11	61.1 PK	74.0	-12.9	2.37 H	329	65.1	-4.0
2	2310.11	51.3 AV	54.0	-2.7	2.37 H	329	55.3	-4.0
3	2499.73	61.7 PK	74.0	-12.3	2.37 H	329	66.1	-4.4
4	2499.73	51.8 AV	54.0	-2.2	2.37 H	329	56.2	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2310.11	54.9 PK	74.0	-19.1	1.25 V	157	58.9	-4.0
2	2310.11	45.1 AV	54.0	-8.9	1.25 V	157	49.1	-4.0
3	2499.73	55.2 PK	74.0	-18.8	1.25 V	157	59.6	-4.4
4	2499.73	45.3 AV	54.0	-8.7	1.25 V	157	49.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2312.49	59.6 PK	74.0	-14.4	2.39 H	359	63.6	-4.0
2	2312.49	49.9 AV	54.0	-4.1	2.39 H	359	53.9	-4.0
3	2484.34	60.9 PK	74.0	-13.1	2.39 H	359	65.3	-4.4
4	2484.34	51.5 AV	54.0	-2.5	2.39 H	359	55.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2312.49	55.2 PK	74.0	-18.8	1.24 V	161	59.2	-4.0
2	2312.49	45.3 AV	54.0	-8.7	1.24 V	161	49.3	-4.0
3	2484.34	55.7 PK	74.0	-18.3	1.24 V	161	60.1	-4.4
4	2484.34	45.6 AV	54.0	-8.4	1.24 V	161	50.0	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2317.52	60.1 PK	74.0	-13.9	2.37 H	330	64.1	-4.0
2	2317.52	49.8 AV	54.0	-4.2	2.37 H	330	53.8	-4.0
3	2483.66	68.9 PK	74.0	-5.1	2.37 H	330	73.3	-4.4
4	2483.66	50.1 AV	54.0	-3.9	2.37 H	330	54.5	-4.4
5	2485.72	69.8 PK	74.0	-4.2	2.37 H	330	74.2	-4.4
6	2485.72	51.6 AV	54.0	-2.4	2.37 H	330	56.0	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2317.52	54.3 PK	74.0	-19.7	1.28 V	154	58.3	-4.0
2	2317.52	44.2 AV	54.0	-9.8	1.28 V	154	48.2	-4.0
3	2483.66	54.9 PK	74.0	-19.1	1.28 V	154	59.3	-4.4
4	2483.66	44.7 AV	54.0	-9.3	1.28 V	154	49.1	-4.4
5	2485.72	63.6 PK	74.0	-10.4	1.28 V	154	68.0	-4.4
6	2485.72	45.1 AV	54.0	-8.9	1.28 V	154	49.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	65.3 PK	74.0	-8.7	2.35 H	326	69.5	-4.2
2	2389.99	51.8 AV	54.0	-2.2	2.35 H	326	56.0	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	54.9 PK	74.0	-19.1	1.26 V	148	59.1	-4.2
2	2389.99	44.8 AV	54.0	-9.2	1.26 V	148	49.0	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.91	66.5 PK	74.0	-7.5	2.44 H	337	70.7	-4.2
2	2389.91	51.9 AV	54.0	-2.1	2.44 H	337	56.1	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.91	54.6 PK	74.0	-19.4	1.25 V	171	58.8	-4.2
2	2389.91	44.6 AV	54.0	-9.4	1.25 V	171	48.8	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	68.6 PK	74.0	-5.4	2.31 H	346	72.8	-4.2
2	2389.99	51.6 AV	54.0	-2.4	2.31 H	346	55.8	-4.2
3	2484.89	66.4 PK	74.0	-7.6	2.31 H	346	70.8	-4.4
4	2484.89	51.3 AV	54.0	-2.7	2.31 H	346	55.7	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	55.3 PK	74.0	-18.7	1.56 V	127	59.5	-4.2
2	2389.99	45.2 AV	54.0	-8.8	1.56 V	127	49.4	-4.2
3	2484.89	55.0 PK	74.0	-19.0	1.27 V	156	59.4	-4.4
4	2484.89	44.7 AV	54.0	-9.3	1.27 V	156	49.1	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2485.13	67.1 PK	74.0	-6.9	2.31 H	349	71.5	-4.4
2	2485.13	51.5 AV	54.0	-2.5	2.31 H	349	55.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2485.13	55.3 PK	74.0	-18.7	1.20 V	175	59.7	-4.4
2	2485.13	44.9 AV	54.0	-9.1	1.20 V	175	49.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	62.6 PK	74.0	-11.4	2.11 H	323	67.0	-4.4
2	2483.51	51.5 AV	54.0	-2.5	2.11 H	323	55.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	54.5 PK	74.0	-19.5	1.27 V	160	58.9	-4.4
2	2483.51	44.2 AV	54.0	-9.8	1.27 V	160	48.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.68	67.7 PK	74.0	-6.3	2.30 H	332	72.1	-4.4
2	2483.68	51.6 AV	54.0	-2.4	2.30 H	332	56.0	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.68	54.7 PK	74.0	-19.3	1.28 V	161	59.1	-4.4
2	2483.68	44.3 AV	54.0	-9.7	1.28 V	161	48.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	65.8 PK	74.0	-8.2	2.38 H	344	70.2	-4.4
2	2483.51	51.7 AV	54.0	-2.3	2.38 H	344	56.1	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	54.7 PK	74.0	-19.3	1.26 V	167	59.1	-4.4
2	2483.51	44.8 AV	54.0	-9.2	1.26 V	167	49.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	65.2 PK	74.0	-8.8	2.35 H	319	69.4	-4.2
2	2389.99	51.5 AV	54.0	-2.5	2.35 H	319	55.7	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	54.2 PK	74.0	-19.8	1.30 V	142	58.4	-4.2
2	2389.99	44.3 AV	54.0	-9.7	1.30 V	142	48.5	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 2 : 2417 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	64.8 PK	74.0	-9.2	2.30 H	326	69.0	-4.2
2	2389.99	51.6 AV	54.0	-2.4	2.30 H	326	55.8	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	53.8 PK	74.0	-20.2	1.26 V	162	58.0	-4.2
2	2389.99	43.6 AV	54.0	-10.4	1.26 V	162	47.8	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.47	62.8 PK	74.0	-11.2	2.37 H	351	67.0	-4.2
2	2387.47	51.6 AV	54.0	-2.4	2.37 H	351	55.8	-4.2
3	2483.63	62.6 PK	74.0	-11.4	2.37 H	351	67.0	-4.4
4	2483.63	49.6 AV	54.0	-4.4	2.37 H	351	54.0	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.47	55.0 PK	74.0	-19.0	1.26 V	147	59.2	-4.2
2	2387.47	45.2 AV	54.0	-8.8	1.26 V	147	49.4	-4.2
3	2483.63	54.7 PK	74.0	-19.3	1.26 V	147	59.1	-4.4
4	2483.63	44.3 AV	54.0	-9.7	1.26 V	147	48.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	63.1 PK	74.0	-10.9	2.40 H	312	67.5	-4.4
2	2483.51	51.5 AV	54.0	-2.5	2.40 H	312	55.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	54.3 PK	74.0	-19.7	1.21 V	162	58.7	-4.4
2	2483.51	45.1 AV	54.0	-8.9	1.21 V	162	49.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.56	63.9 PK	74.0	-10.1	2.39 H	331	68.3	-4.4
2	2483.56	51.5 AV	54.0	-2.5	2.39 H	331	55.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.56	55.5 PK	74.0	-18.5	1.28 V	162	59.9	-4.4
2	2483.56	45.3 AV	54.0	-8.7	1.28 V	162	49.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	67.1 PK	74.0	-6.9	2.40 H	351	71.5	-4.4
2	2483.51	51.8 AV	54.0	-2.2	2.40 H	351	56.2	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	54.3 PK	74.0	-19.7	1.24 V	141	58.7	-4.4
2	2483.51	44.3 AV	54.0	-9.7	1.24 V	141	48.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	72.5 PK	74.0	-1.5	2.36 H	332	76.9	-4.4
2	2483.51	53.3 AV	54.0	-0.7	2.36 H	332	57.7	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	56.7 PK	74.0	-17.3	1.22 V	159	61.1	-4.4
2	2483.51	47.2 AV	54.0	-6.8	1.22 V	159	51.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	61.8 PK	74.0	-12.2	2.38 H	325	66.0	-4.2
2	2389.99	51.5 AV	54.0	-2.5	2.38 H	325	55.7	-4.2
3	2483.85	59.8 PK	74.0	-14.2	2.38 H	325	64.2	-4.4
4	2483.85	49.6 AV	54.0	-4.4	2.38 H	325	54.0	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	54.0 PK	74.0	-20.0	1.24 V	151	58.2	-4.2
2	2389.99	44.5 AV	54.0	-9.5	1.24 V	151	48.7	-4.2
3	2483.85	52.3 PK	74.0	-21.7	1.24 V	151	56.7	-4.4
4	2483.85	42.1 AV	54.0	-11.9	1.24 V	151	46.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 4 : 2427 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.91	62.0 PK	74.0	-12.0	2.38 H	318	66.2	-4.2
2	2389.91	51.5 AV	54.0	-2.5	2.38 H	318	55.7	-4.2
3	2483.54	60.2 PK	74.0	-13.8	2.38 H	318	64.6	-4.4
4	2483.54	49.7 AV	54.0	-4.3	2.38 H	318	54.1	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.91	53.2 PK	74.0	-20.8	1.16 V	153	57.4	-4.2
2	2389.91	43.2 AV	54.0	-10.8	1.16 V	153	47.4	-4.2
3	2483.54	52.6 PK	74.0	-21.4	1.16 V	153	57.0	-4.4
4	2483.54	42.3 AV	54.0	-11.7	1.16 V	153	46.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.91	61.6 PK	74.0	-12.4	2.39 H	346	65.8	-4.2
2	2389.91	48.5 AV	54.0	-5.5	2.39 H	346	52.7	-4.2
3	2483.54	66.0 PK	74.0	-8.0	2.39 H	346	70.4	-4.4
4	2483.54	51.5 AV	54.0	-2.5	2.39 H	346	55.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.91	54.9 PK	74.0	-19.1	1.23 V	156	59.1	-4.2
2	2389.91	45.1 AV	54.0	-8.9	1.23 V	156	49.3	-4.2
3	2483.54	54.3 PK	74.0	-19.7	1.23 V	156	58.7	-4.4
4	2483.54	44.3 AV	54.0	-9.7	1.23 V	156	48.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 8 : 2447 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.56	66.2 PK	74.0	-7.8	2.40 H	307	70.6	-4.4
2	2483.56	51.6 AV	54.0	-2.4	2.40 H	307	56.0	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.56	55.1 PK	74.0	-18.9	1.25 V	177	59.5	-4.4
2	2483.56	44.1 AV	54.0	-9.9	1.25 V	177	48.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2484.82	64.6 PK	74.0	-9.4	2.36 H	331	69.0	-4.4
2	2484.82	51.6 AV	54.0	-2.4	2.36 H	331	56.0	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2484.82	54.6 PK	74.0	-19.4	1.26 V	150	59.0	-4.4
2	2484.82	44.7 AV	54.0	-9.3	1.26 V	150	49.1	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2488.64	63.2 PK	74.0	-10.8	2.32 H	330	67.6	-4.4
2	2488.64	51.5 AV	54.0	-2.5	2.32 H	330	55.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2488.64	54.5 PK	74.0	-19.5	1.26 V	147	58.9	-4.4
2	2488.64	44.6 AV	54.0	-9.4	1.26 V	147	49.0	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	64.2 PK	74.0	-9.8	2.36 H	330	68.6	-4.4
2	2483.51	51.6 AV	54.0	-2.4	2.36 H	330	56.0	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	54.5 PK	74.0	-19.5	1.25 V	156	58.9	-4.4
2	2483.51	44.6 AV	54.0	-9.4	1.25 V	156	49.0	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

20MHz Preamble

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.89	71.9 PK	74.0	-2.1	2.25 H	48	76.1	-4.2
2	2389.89	47.9 AV	54.0	-6.1	2.25 H	48	52.1	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.89	63.3 PK	74.0	-10.7	1.82 V	149	67.5	-4.2
2	2389.89	45.3 AV	54.0	-8.7	1.82 V	149	49.5	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 2 : 2417 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.68	71.5 PK	74.0	-2.5	2.31 H	50	75.7	-4.2
2	2368.68	48.3 AV	54.0	-5.7	2.31 H	50	52.5	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.68	62.6 PK	74.0	-11.4	1.81 V	134	66.8	-4.2
2	2368.68	44.8 AV	54.0	-9.2	1.81 V	134	49.0	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2484.49	71.5 PK	74.0	-2.5	2.20 H	60	75.9	-4.4
2	2484.49	48.0 AV	54.0	-6.0	2.20 H	60	52.4	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2484.49	62.7 PK	74.0	-11.3	1.87 V	144	67.1	-4.4
2	2484.49	45.0 AV	54.0	-9.0	1.87 V	144	49.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2312.06	68.4 PK	74.0	-5.6	2.28 H	57	72.4	-4.0
2	2312.06	50.1 AV	54.0	-3.9	2.28 H	57	54.1	-4.0
3	2489.07	71.9 PK	74.0	-2.1	2.28 H	57	76.3	-4.4
4	2489.07	48.3 AV	54.0	-5.7	2.28 H	57	52.7	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2312.06	62.9 PK	74.0	-11.1	1.83 V	151	66.9	-4.0
2	2312.06	45.1 AV	54.0	-8.9	1.83 V	151	49.1	-4.0
3	2489.07	63.5 PK	74.0	-10.5	1.83 V	151	67.9	-4.4
4	2489.07	45.2 AV	54.0	-8.8	1.83 V	151	49.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2316.50	68.8 PK	74.0	-5.2	2.30 H	63	72.8	-4.0
2	2316.50	51.5 AV	54.0	-2.5	2.30 H	63	55.5	-4.0
3	2484.37	68.7 PK	74.0	-5.3	2.30 H	63	73.1	-4.4
4	2484.37	50.5 AV	54.0	-3.5	2.30 H	63	54.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2316.50	63.1 PK	74.0	-10.9	1.80 V	155	67.1	-4.0
2	2316.50	45.1 AV	54.0	-8.9	1.80 V	155	49.1	-4.0
3	2484.37	63.9 PK	74.0	-10.1	1.80 V	155	68.3	-4.4
4	2484.37	45.8 AV	54.0	-8.2	1.80 V	155	50.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2321.68	69.0 PK	74.0	-5.0	2.26 H	45	73.0	-4.0
2	2321.68	51.6 AV	54.0	-2.4	2.26 H	45	55.6	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2321.68	62.9 PK	74.0	-11.1	1.78 V	143	66.9	-4.0
2	2321.68	44.9 AV	54.0	-9.1	1.78 V	143	48.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	71.6 PK	74.0	-2.4	2.29 H	35	76.0	-4.4
2	2483.54	48.0 AV	54.0	-6.0	2.29 H	35	52.4	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	63.3 PK	74.0	-10.7	1.84 V	137	67.7	-4.4
2	2483.54	45.3 AV	54.0	-8.7	1.84 V	137	49.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.44	69.2 PK	74.0	-4.8	2.21 H	51	73.4	-4.2
2	2389.44	51.0 AV	54.0	-3.0	2.21 H	51	55.2	-4.2
3	2389.96	68.8 PK	74.0	-5.2	2.21 H	51	73.0	-4.2
4	2389.96	51.9 AV	54.0	-2.1	2.21 H	51	56.1	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.44	62.7 PK	74.0	-11.3	1.77 V	137	66.9	-4.2
2	2389.44	45.0 AV	54.0	-9.0	1.77 V	137	49.2	-4.2
3	2389.96	62.5 PK	74.0	-11.5	1.77 V	137	66.7	-4.2
4	2389.96	44.5 AV	54.0	-9.5	1.77 V	137	48.7	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 2 : 2417 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.08	71.9 PK	74.0	-2.1	2.28 H	56	76.1	-4.2
2	2389.08	48.0 AV	54.0	-6.0	2.28 H	56	52.2	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.08	62.3 PK	74.0	-11.7	1.80 V	150	66.5	-4.2
2	2389.08	44.4 AV	54.0	-9.6	1.80 V	150	48.6	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2384.52	71.6 PK	74.0	-2.4	2.23 H	51	75.8	-4.2
2	2384.52	48.3 AV	54.0	-5.7	2.23 H	51	52.5	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2384.52	62.1 PK	74.0	-11.9	1.83 V	148	66.3	-4.2
2	2384.52	44.5 AV	54.0	-9.5	1.83 V	148	48.7	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	69.1 PK	74.0	-4.9	2.24 H	57	73.5	-4.4
2	2483.51	51.9 AV	54.0	-2.1	2.24 H	57	56.3	-4.4
3	2483.73	70.2 PK	74.0	-3.8	2.24 H	57	74.6	-4.4
4	2483.73	47.4 AV	54.0	-6.6	2.24 H	57	51.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	62.9 PK	74.0	-11.1	1.78 V	146	67.3	-4.4
2	2483.51	45.1 AV	54.0	-8.9	1.78 V	146	49.5	-4.4
3	2483.73	62.7 PK	74.0	-11.3	1.78 V	146	67.1	-4.4
4	2483.73	45.0 AV	54.0	-9.0	1.78 V	146	49.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	69.3 PK	74.0	-4.7	2.20 H	49	73.7	-4.4
2	2483.51	50.2 AV	54.0	-3.8	2.20 H	49	54.6	-4.4
3	2483.73	71.6 PK	74.0	-2.4	2.20 H	49	76.0	-4.4
4	2483.73	48.0 AV	54.0	-6.0	2.20 H	49	52.4	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	62.5 PK	74.0	-11.5	1.81 V	152	66.9	-4.4
2	2483.51	44.7 AV	54.0	-9.3	1.81 V	152	49.1	-4.4
3	2483.73	62.6 PK	74.0	-11.4	1.81 V	152	67.0	-4.4
4	2483.73	44.7 AV	54.0	-9.3	1.81 V	152	49.1	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	69.8 PK	74.0	-4.2	2.24 H	37	74.2	-4.4
2	2483.54	50.5 AV	54.0	-3.5	2.24 H	37	54.9	-4.4
3	2483.56	68.5 PK	74.0	-5.5	2.24 H	37	72.9	-4.4
4	2483.56	51.9 AV	54.0	-2.1	2.24 H	37	56.3	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	62.9 PK	74.0	-11.1	1.83 V	136	67.3	-4.4
2	2483.54	44.9 AV	54.0	-9.1	1.83 V	136	49.3	-4.4
3	2483.56	62.6 PK	74.0	-11.4	1.83 V	136	67.0	-4.4
4	2483.56	44.7 AV	54.0	-9.3	1.83 V	136	49.1	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	71.9 PK	74.0	-2.1	2.28 H	37	76.3	-4.4
2	2483.54	47.8 AV	54.0	-6.2	2.28 H	37	52.2	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	62.3 PK	74.0	-11.7	1.84 V	149	66.7	-4.4
2	2483.54	44.5 AV	54.0	-9.5	1.84 V	149	48.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

40MHz Preamble

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.94	68.9 PK	74.0	-5.1	2.29 H	34	73.1	-4.2
2	2389.94	51.8 AV	54.0	-2.2	2.29 H	34	56.0	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.94	62.7 PK	74.0	-11.3	1.77 V	157	66.9	-4.2
2	2389.94	45.0 AV	54.0	-9.0	1.77 V	157	49.2	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 4 : 2427 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	69.2 PK	74.0	-4.8	2.29 H	62	73.4	-4.2
2	2389.99	51.6 AV	54.0	-2.4	2.29 H	62	55.8	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	62.6 PK	74.0	-11.4	1.82 V	157	66.8	-4.2
2	2389.99	45.0 AV	54.0	-9.0	1.82 V	157	49.2	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.61	70.2 PK	74.0	-3.8	2.25 H	58	74.4	-4.2
2	2389.61	50.8 AV	54.0	-3.2	2.25 H	58	55.0	-4.2
3	2389.96	69.0 PK	74.0	-5.0	2.25 H	58	73.2	-4.2
4	2389.96	50.2 AV	54.0	-3.8	2.25 H	58	54.4	-4.2
5	2483.61	68.4 PK	74.0	-5.6	2.25 H	58	72.8	-4.4
6	2483.61	51.8 AV	54.0	-2.2	2.25 H	58	56.2	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.61	63.1 PK	74.0	-10.9	1.77 V	147	67.3	-4.2
2	2389.61	45.2 AV	54.0	-8.8	1.77 V	147	49.4	-4.2
3	2389.96	62.4 PK	74.0	-11.6	1.77 V	147	66.6	-4.2
4	2389.96	44.7 AV	54.0	-9.3	1.77 V	147	48.9	-4.2
5	2483.61	62.3 PK	74.0	-11.7	1.77 V	147	66.7	-4.4
6	2483.61	44.6 AV	54.0	-9.4	1.77 V	147	49.0	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 8 : 2447 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	68.8 PK	74.0	-5.2	2.26 H	37	73.2	-4.4
2	2483.54	51.7 AV	54.0	-2.3	2.26 H	37	56.1	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	62.9 PK	74.0	-11.1	1.82 V	161	67.3	-4.4
2	2483.54	45.0 AV	54.0	-9.0	1.82 V	161	49.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.77	68.9 PK	74.0	-5.1	2.27 H	38	73.3	-4.4
2	2483.77	51.8 AV	54.0	-2.2	2.27 H	38	56.2	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.77	62.9 PK	74.0	-11.1	1.84 V	152	67.3	-4.4
2	2483.77	45.0 AV	54.0	-9.0	1.84 V	152	49.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2485.63	68.4 PK	74.0	-5.6	2.24 H	62	72.8	-4.4
2	2485.63	51.7 AV	54.0	-2.3	2.24 H	62	56.1	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2485.63	62.4 PK	74.0	-11.6	1.76 V	142	66.8	-4.4
2	2485.63	44.4 AV	54.0	-9.6	1.76 V	142	48.8	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.58	71.8 PK	74.0	-2.2	2.27 H	34	76.2	-4.4
2	2483.58	47.8 AV	54.0	-6.2	2.27 H	34	52.2	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.58	62.5 PK	74.0	-11.5	1.80 V	139	66.9	-4.4
2	2483.58	44.8 AV	54.0	-9.2	1.80 V	139	49.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

For Antenna Set 3

The EUT's antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

Above 1GHz Data:

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.68	58.2 PK	74.0	-15.8	2.52 H	316	62.4	-4.2
2	2388.68	51.4 AV	54.0	-2.6	2.52 H	316	55.6	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.68	55.1 PK	74.0	-18.9	2.53 V	12	59.3	-4.2
2	2388.68	44.9 AV	54.0	-9.1	2.53 V	12	49.1	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.37	58.0 PK	74.0	-16.0	2.49 H	318	62.2	-4.2
2	2389.37	47.6 AV	54.0	-6.4	2.49 H	318	51.8	-4.2
3	2485.72	60.1 PK	74.0	-13.9	2.49 H	318	64.5	-4.4
4	2485.72	51.4 AV	54.0	-2.6	2.49 H	318	55.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.37	55.3 PK	74.0	-18.7	1.44 V	163	59.5	-4.2
2	2389.37	45.5 AV	54.0	-8.5	1.44 V	163	49.7	-4.2
3	2485.72	55.0 PK	74.0	-19.0	1.44 V	163	59.4	-4.4
4	2485.72	45.0 AV	54.0	-9.0	1.44 V	163	49.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2310.11	61.0 PK	74.0	-13.0	2.27 H	331	65.0	-4.0
2	2310.11	51.0 AV	54.0	-3.0	2.27 H	331	55.0	-4.0
3	2499.73	61.6 PK	74.0	-12.4	2.27 H	331	66.0	-4.4
4	2499.73	51.7 AV	54.0	-2.3	2.27 H	331	56.1	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2310.11	54.8 PK	74.0	-19.2	1.20 V	157	58.8	-4.0
2	2310.11	44.9 AV	54.0	-9.1	1.20 V	157	48.9	-4.0
3	2499.73	55.0 PK	74.0	-19.0	1.20 V	157	59.4	-4.4
4	2499.73	45.2 AV	54.0	-8.8	1.20 V	157	49.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2312.49	59.3 PK	74.0	-14.7	2.39 H	354	63.3	-4.0
2	2312.49	49.8 AV	54.0	-4.2	2.39 H	354	53.8	-4.0
3	2484.34	60.7 PK	74.0	-13.3	2.39 H	354	65.1	-4.4
4	2484.34	51.2 AV	54.0	-2.8	2.39 H	354	55.6	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2312.49	55.0 PK	74.0	-19.0	1.09 V	149	59.0	-4.0
2	2312.49	45.0 AV	54.0	-9.0	1.09 V	149	49.0	-4.0
3	2484.34	55.6 PK	74.0	-18.4	1.09 V	149	60.0	-4.4
4	2484.34	45.3 AV	54.0	-8.7	1.09 V	149	49.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2317.52	59.9 PK	74.0	-14.1	2.42 H	336	63.9	-4.0
2	2317.52	49.7 AV	54.0	-4.3	2.42 H	336	53.7	-4.0
3	2483.66	68.6 PK	74.0	-5.4	2.42 H	336	73.0	-4.4
4	2483.66	50.0 AV	54.0	-4.0	2.42 H	336	54.4	-4.4
5	2485.72	69.6 PK	74.0	-4.4	2.42 H	336	74.0	-4.4
6	2485.72	51.4 AV	54.0	-2.6	2.42 H	336	55.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2317.52	54.0 PK	74.0	-20.0	1.32 V	142	58.0	-4.0
2	2317.52	43.9 AV	54.0	-10.1	1.32 V	142	47.9	-4.0
3	2483.66	54.6 PK	74.0	-19.4	1.32 V	142	59.0	-4.4
4	2483.66	44.6 AV	54.0	-9.4	1.32 V	142	49.0	-4.4
5	2485.72	63.5 PK	74.0	-10.5	1.32 V	142	67.9	-4.4
6	2485.72	44.8 AV	54.0	-9.2	1.32 V	142	49.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	65.0 PK	74.0	-9.0	2.26 H	341	69.2	-4.2
2	2389.99	51.7 AV	54.0	-2.3	2.26 H	341	55.9	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	54.7 PK	74.0	-19.3	1.24 V	144	58.9	-4.2
2	2389.99	44.5 AV	54.0	-9.5	1.24 V	144	48.7	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.91	66.3 PK	74.0	-7.7	2.52 H	322	70.5	-4.2
2	2389.91	51.8 AV	54.0	-2.2	2.52 H	322	56.0	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.91	54.5 PK	74.0	-19.5	1.13 V	168	58.7	-4.2
2	2389.91	44.5 AV	54.0	-9.5	1.13 V	168	48.7	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	68.3 PK	74.0	-5.7	2.21 H	360	72.5	-4.2
2	2389.99	51.3 AV	54.0	-2.7	2.21 H	360	55.5	-4.2
3	2484.89	66.2 PK	74.0	-7.8	2.21 H	360	70.6	-4.4
4	2484.89	51.0 AV	54.0	-3.0	2.21 H	360	55.4	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	55.0 PK	74.0	-19.0	1.49 V	139	59.2	-4.2
2	2389.99	44.9 AV	54.0	-9.1	1.49 V	139	49.1	-4.2
3	2484.89	54.9 PK	74.0	-19.1	1.49 V	139	59.3	-4.4
4	2484.89	44.5 AV	54.0	-9.5	1.49 V	139	48.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2485.13	66.9 PK	74.0	-7.1	2.18 H	342	71.3	-4.4
2	2485.13	51.2 AV	54.0	-2.8	2.18 H	342	55.6	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2485.13	55.2 PK	74.0	-18.8	1.22 V	178	59.6	-4.4
2	2485.13	44.8 AV	54.0	-9.2	1.22 V	178	49.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	62.3 PK	74.0	-11.7	2.19 H	337	66.7	-4.4
2	2483.51	51.4 AV	54.0	-2.6	2.19 H	337	55.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	54.3 PK	74.0	-19.7	1.38 V	151	58.7	-4.4
2	2483.51	43.9 AV	54.0	-10.1	1.38 V	151	48.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.68	67.6 PK	74.0	-6.4	2.34 H	329	72.0	-4.4
2	2483.68	51.3 AV	54.0	-2.7	2.34 H	329	55.7	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.68	54.4 PK	74.0	-19.6	1.14 V	146	58.8	-4.4
2	2483.68	44.1 AV	54.0	-9.9	1.14 V	146	48.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	65.6 PK	74.0	-8.4	2.46 H	347	70.0	-4.4
2	2483.51	51.4 AV	54.0	-2.6	2.46 H	347	55.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	54.6 PK	74.0	-19.4	1.19 V	174	59.0	-4.4
2	2483.51	44.5 AV	54.0	-9.5	1.19 V	174	48.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	65.1 PK	74.0	-8.9	2.34 H	326	69.3	-4.2
2	2389.99	51.3 AV	54.0	-2.7	2.34 H	326	55.5	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	54.0 PK	74.0	-20.0	1.38 V	128	58.2	-4.2
2	2389.99	44.2 AV	54.0	-9.8	1.38 V	128	48.4	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 2 : 2417 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	64.7 PK	74.0	-9.3	2.38 H	319	68.9	-4.2
2	2389.99	51.5 AV	54.0	-2.5	2.38 H	319	55.7	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	53.7 PK	74.0	-20.3	1.12 V	161	57.9	-4.2
2	2389.99	43.4 AV	54.0	-10.6	1.12 V	161	47.6	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.47	62.6 PK	74.0	-11.4	2.29 H	336	66.8	-4.2
2	2387.47	51.4 AV	54.0	-2.6	2.29 H	336	55.6	-4.2
3	2483.63	62.5 PK	74.0	-11.5	2.29 H	336	66.9	-4.4
4	2483.63	49.4 AV	54.0	-4.6	2.29 H	336	53.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.47	54.7 PK	74.0	-19.3	1.37 V	159	58.9	-4.2
2	2387.47	44.9 AV	54.0	-9.1	1.37 V	159	49.1	-4.2
3	2483.63	54.5 PK	74.0	-19.5	1.37 V	159	58.9	-4.4
4	2483.63	44.0 AV	54.0	-10.0	1.37 V	159	48.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	62.9 PK	74.0	-11.1	2.48 H	321	67.3	-4.4
2	2483.51	51.4 AV	54.0	-2.6	2.48 H	321	55.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	54.2 PK	74.0	-19.8	1.10 V	175	58.6	-4.4
2	2483.51	44.9 AV	54.0	-9.1	1.10 V	175	49.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.56	63.7 PK	74.0	-10.3	2.52 H	328	68.1	-4.4
2	2483.56	51.4 AV	54.0	-2.6	2.52 H	328	55.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.56	55.2 PK	74.0	-18.8	1.31 V	162	59.6	-4.4
2	2483.56	45.2 AV	54.0	-8.8	1.31 V	162	49.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	66.9 PK	74.0	-7.1	2.36 H	347	71.3	-4.4
2	2483.51	51.5 AV	54.0	-2.5	2.36 H	347	55.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	54.0 PK	74.0	-20.0	1.16 V	142	58.4	-4.4
2	2483.51	44.1 AV	54.0	-9.9	1.16 V	142	48.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	71.6 PK	74.0	-2.4	2.46 H	337	76.0	-4.4
2	2483.51	53.1 AV	54.0	-0.9	2.46 H	337	57.5	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	55.8 PK	74.0	-18.2	1.24 V	168	60.2	-4.4
2	2483.51	45.7 AV	54.0	-8.3	1.24 V	168	50.1	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	61.5 PK	74.0	-12.5	2.52 H	320	65.7	-4.2
2	2389.99	51.4 AV	54.0	-2.6	2.52 H	320	55.6	-4.2
3	2483.85	59.6 PK	74.0	-14.4	2.52 H	320	64.0	-4.4
4	2483.85	49.4 AV	54.0	-4.6	2.52 H	320	53.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	53.7 PK	74.0	-20.3	1.24 V	158	57.9	-4.2
2	2389.99	44.2 AV	54.0	-9.8	1.24 V	158	48.4	-4.2
3	2483.85	52.0 PK	74.0	-22.0	1.24 V	158	56.4	-4.4
4	2483.85	41.8 AV	54.0	-12.2	1.24 V	158	46.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 4 : 2427 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.91	61.8 PK	74.0	-12.2	2.35 H	319	66.0	-4.2
2	2389.91	51.4 AV	54.0	-2.6	2.35 H	319	55.6	-4.2
3	2483.54	59.9 PK	74.0	-14.1	2.35 H	319	64.3	-4.4
4	2483.54	49.5 AV	54.0	-4.5	2.35 H	319	53.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.91	53.0 PK	74.0	-21.0	1.22 V	145	57.2	-4.2
2	2389.91	43.1 AV	54.0	-10.9	1.22 V	145	47.3	-4.2
3	2483.54	52.3 PK	74.0	-21.7	1.22 V	145	56.7	-4.4
4	2483.54	42.0 AV	54.0	-12.0	1.22 V	145	46.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.91	61.4 PK	74.0	-12.6	2.54 H	337	65.6	-4.2
2	2389.91	48.3 AV	54.0	-5.7	2.54 H	337	52.5	-4.2
3	2483.54	65.7 PK	74.0	-8.3	2.54 H	337	70.1	-4.4
4	2483.54	51.4 AV	54.0	-2.6	2.54 H	337	55.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.91	54.6 PK	74.0	-19.4	1.11 V	156	58.8	-4.2
2	2389.91	45.0 AV	54.0	-9.0	1.11 V	156	49.2	-4.2
3	2483.54	54.1 PK	74.0	-19.9	1.11 V	156	58.5	-4.4
4	2483.54	44.1 AV	54.0	-9.9	1.11 V	156	48.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 8 : 2447 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.56	65.9 PK	74.0	-8.1	2.40 H	308	70.3	-4.4
2	2483.56	51.3 AV	54.0	-2.7	2.40 H	308	55.7	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.56	54.8 PK	74.0	-19.2	1.35 V	165	59.2	-4.4
2	2483.56	43.9 AV	54.0	-10.1	1.35 V	165	48.3	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2484.82	64.3 PK	74.0	-9.7	2.40 H	324	68.7	-4.4
2	2484.82	51.4 AV	54.0	-2.6	2.40 H	324	55.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2484.82	54.4 PK	74.0	-19.6	1.23 V	164	58.8	-4.4
2	2484.82	44.5 AV	54.0	-9.5	1.23 V	164	48.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2488.64	63.0 PK	74.0	-11.0	2.24 H	319	67.4	-4.4
2	2488.64	51.4 AV	54.0	-2.6	2.24 H	319	55.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2488.64	54.2 PK	74.0	-19.8	1.21 V	145	58.6	-4.4
2	2488.64	44.4 AV	54.0	-9.6	1.21 V	145	48.8	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	64.1 PK	74.0	-9.9	2.23 H	325	68.5	-4.4
2	2483.51	51.4 AV	54.0	-2.6	2.23 H	325	55.8	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	54.3 PK	74.0	-19.7	1.18 V	156	58.7	-4.4
2	2483.51	44.4 AV	54.0	-9.6	1.18 V	156	48.8	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

20MHz Preamble

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.89	71.5 PK	74.0	-2.5	2.69 H	113	75.7	-4.2
2	2389.89	45.7 AV	54.0	-8.3	2.69 H	113	49.9	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.89	61.6 PK	74.0	-12.4	2.30 V	185	65.8	-4.2
2	2389.89	43.0 AV	54.0	-11.0	2.30 V	185	47.2	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 2 : 2417 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.68	71.4 PK	74.0	-2.6	2.96 H	103	75.6	-4.2
2	2368.68	48.0 AV	54.0	-6.0	2.96 H	103	52.2	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2368.68	62.3 PK	74.0	-11.7	2.23 V	174	66.5	-4.2
2	2368.68	44.7 AV	54.0	-9.3	2.23 V	174	48.9	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2484.49	71.2 PK	74.0	-2.8	2.57 H	115	75.6	-4.4
2	2484.49	47.7 AV	54.0	-6.3	2.57 H	115	52.1	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2484.49	62.5 PK	74.0	-11.5	2.22 V	199	66.9	-4.4
2	2484.49	44.8 AV	54.0	-9.2	2.22 V	199	49.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2312.06	68.3 PK	74.0	-5.7	2.66 H	103	72.3	-4.0
2	2312.06	49.9 AV	54.0	-4.1	2.66 H	103	53.9	-4.0
3	2489.07	71.6 PK	74.0	-2.4	2.66 H	103	76.0	-4.4
4	2489.07	48.0 AV	54.0	-6.0	2.66 H	103	52.4	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2312.06	62.8 PK	74.0	-11.2	2.36 V	203	66.8	-4.0
2	2312.06	44.9 AV	54.0	-9.1	2.36 V	203	48.9	-4.0
3	2489.07	63.2 PK	74.0	-10.8	2.36 V	203	67.6	-4.4
4	2489.07	45.0 AV	54.0	-9.0	2.36 V	203	49.4	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2316.50	68.5 PK	74.0	-5.5	2.77 H	107	72.5	-4.0
2	2316.50	51.3 AV	54.0	-2.7	2.77 H	107	55.3	-4.0
3	2484.37	68.5 PK	74.0	-5.5	2.77 H	107	72.9	-4.4
4	2484.37	50.3 AV	54.0	-3.7	2.77 H	107	54.7	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2316.50	63.0 PK	74.0	-11.0	2.33 V	195	67.0	-4.0
2	2316.50	45.0 AV	54.0	-9.0	2.33 V	195	49.0	-4.0
3	2484.37	63.8 PK	74.0	-10.2	2.33 V	195	68.2	-4.4
4	2484.37	45.6 AV	54.0	-8.4	2.33 V	195	50.0	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2321.68	68.8 PK	74.0	-5.2	2.84 H	86	72.8	-4.0
2	2321.68	51.4 AV	54.0	-2.6	2.84 H	86	55.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2321.68	62.7 PK	74.0	-11.3	2.38 V	186	66.7	-4.0
2	2321.68	44.6 AV	54.0	-9.4	2.38 V	186	48.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	71.3 PK	74.0	-2.7	2.72 H	86	75.7	-4.4
2	2483.54	47.7 AV	54.0	-6.3	2.72 H	86	52.1	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	63.1 PK	74.0	-10.9	2.27 V	201	67.5	-4.4
2	2483.54	45.1 AV	54.0	-8.9	2.27 V	201	49.5	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.44	69.1 PK	74.0	-4.9	2.82 H	108	73.3	-4.2
2	2389.44	50.7 AV	54.0	-3.3	2.82 H	108	54.9	-4.2
3	2389.96	68.6 PK	74.0	-5.4	2.82 H	108	72.8	-4.2
4	2389.96	51.7 AV	54.0	-2.3	2.82 H	108	55.9	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.44	62.5 PK	74.0	-11.5	2.34 V	176	66.7	-4.2
2	2389.44	44.9 AV	54.0	-9.1	2.34 V	176	49.1	-4.2
3	2389.96	62.2 PK	74.0	-11.8	2.34 V	176	66.4	-4.2
4	2389.96	44.3 AV	54.0	-9.7	2.34 V	176	48.5	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 2 : 2417 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.08	71.7 PK	74.0	-2.3	2.72 H	120	75.9	-4.2
2	2389.08	47.9 AV	54.0	-6.1	2.72 H	120	52.1	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.08	62.2 PK	74.0	-11.8	2.24 V	215	66.4	-4.2
2	2389.08	44.2 AV	54.0	-9.8	2.24 V	215	48.4	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2384.52	71.4 PK	74.0	-2.6	2.69 H	113	75.6	-4.2
2	2384.52	48.1 AV	54.0	-5.9	2.69 H	113	52.3	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2384.52	61.9 PK	74.0	-12.1	2.39 V	197	66.1	-4.2
2	2384.52	44.3 AV	54.0	-9.7	2.39 V	197	48.5	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	68.9 PK	74.0	-5.1	2.65 H	108	73.3	-4.4
2	2483.51	51.7 AV	54.0	-2.3	2.65 H	108	56.1	-4.4
3	2483.73	70.1 PK	74.0	-3.9	2.65 H	108	74.5	-4.4
4	2483.73	47.3 AV	54.0	-6.7	2.65 H	108	51.7	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	62.8 PK	74.0	-11.2	2.15 V	193	67.2	-4.4
2	2483.51	44.9 AV	54.0	-9.1	2.15 V	193	49.3	-4.4
3	2483.73	62.5 PK	74.0	-11.5	2.15 V	193	66.9	-4.4
4	2483.73	44.7 AV	54.0	-9.3	2.15 V	193	49.1	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	69.1 PK	74.0	-4.9	2.65 H	96	73.5	-4.4
2	2483.51	50.0 AV	54.0	-4.0	2.65 H	96	54.4	-4.4
3	2483.73	71.5 PK	74.0	-2.5	2.65 H	96	75.9	-4.4
4	2483.73	47.8 AV	54.0	-6.2	2.65 H	96	52.2	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.51	62.3 PK	74.0	-11.7	2.41 V	201	66.7	-4.4
2	2483.51	44.5 AV	54.0	-9.5	2.41 V	201	48.9	-4.4
3	2483.73	62.5 PK	74.0	-11.5	2.41 V	201	66.9	-4.4
4	2483.73	44.5 AV	54.0	-9.5	2.41 V	201	48.9	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	69.5 PK	74.0	-4.5	2.78 H	90	73.9	-4.4
2	2483.54	50.4 AV	54.0	-3.6	2.78 H	90	54.8	-4.4
3	2483.56	68.3 PK	74.0	-5.7	2.78 H	90	72.7	-4.4
4	2483.56	51.7 AV	54.0	-2.3	2.78 H	90	56.1	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	62.8 PK	74.0	-11.2	2.41 V	181	67.2	-4.4
2	2483.54	44.8 AV	54.0	-9.2	2.41 V	181	49.2	-4.4
3	2483.56	62.3 PK	74.0	-11.7	2.41 V	181	66.7	-4.4
4	2483.56	44.4 AV	54.0	-9.6	2.41 V	181	48.8	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	71.7 PK	74.0	-2.3	2.78 H	80	76.1	-4.4
2	2483.54	47.5 AV	54.0	-6.5	2.78 H	80	51.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	62.1 PK	74.0	-11.9	2.23 V	197	66.5	-4.4
2	2483.54	44.3 AV	54.0	-9.7	2.23 V	197	48.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

40MHz Preamble

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.94	68.7 PK	74.0	-5.3	2.93 H	83	72.9	-4.2
2	2389.94	51.5 AV	54.0	-2.5	2.93 H	83	55.7	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.94	62.6 PK	74.0	-11.4	2.39 V	208	66.8	-4.2
2	2389.94	44.8 AV	54.0	-9.2	2.39 V	208	49.0	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 4 : 2427 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	69.0 PK	74.0	-5.0	2.67 H	100	73.2	-4.2
2	2389.99	51.4 AV	54.0	-2.6	2.67 H	100	55.6	-4.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.99	62.4 PK	74.0	-11.6	2.37 V	201	66.6	-4.2
2	2389.99	44.8 AV	54.0	-9.2	2.37 V	201	49.0	-4.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.61	69.9 PK	74.0	-4.1	2.64 H	115	74.1	-4.2
2	2389.61	50.7 AV	54.0	-3.3	2.64 H	115	54.9	-4.2
3	2389.96	68.8 PK	74.0	-5.2	2.64 H	115	73.0	-4.2
4	2389.96	50.1 AV	54.0	-3.9	2.64 H	115	54.3	-4.2
5	2483.61	68.2 PK	74.0	-5.8	2.64 H	115	72.6	-4.4
6	2483.61	51.5 AV	54.0	-2.5	2.64 H	115	55.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.61	63.0 PK	74.0	-11.0	2.26 V	201	67.2	-4.2
2	2389.61	45.1 AV	54.0	-8.9	2.26 V	201	49.3	-4.2
3	2389.96	62.3 PK	74.0	-11.7	2.26 V	201	66.5	-4.2
4	2389.96	44.5 AV	54.0	-9.5	2.26 V	201	48.7	-4.2
5	2483.61	62.1 PK	74.0	-11.9	2.26 V	201	66.5	-4.4
6	2483.61	44.3 AV	54.0	-9.7	2.26 V	201	48.7	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 8 : 2447 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	68.7 PK	74.0	-5.3	2.67 H	89	73.1	-4.4
2	2483.54	51.5 AV	54.0	-2.5	2.67 H	89	55.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.54	62.6 PK	74.0	-11.4	2.33 V	201	67.0	-4.4
2	2483.54	44.8 AV	54.0	-9.2	2.33 V	201	49.2	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.77	68.7 PK	74.0	-5.3	2.90 H	102	73.1	-4.4
2	2483.77	51.6 AV	54.0	-2.4	2.90 H	102	56.0	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.77	62.7 PK	74.0	-11.3	2.34 V	202	67.1	-4.4
2	2483.77	44.7 AV	54.0	-9.3	2.34 V	202	49.1	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2485.63	68.1 PK	74.0	-5.9	2.76 H	104	72.5	-4.4
2	2485.63	51.5 AV	54.0	-2.5	2.76 H	104	55.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2485.63	62.1 PK	74.0	-11.9	2.19 V	191	66.5	-4.4
2	2485.63	44.2 AV	54.0	-9.8	2.19 V	191	48.6	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.58	71.5 PK	74.0	-2.5	2.64 H	88	75.9	-4.4
2	2483.58	47.5 AV	54.0	-6.5	2.64 H	88	51.9	-4.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2483.58	62.2 PK	74.0	-11.8	2.29 V	176	66.6	-4.4
2	2483.58	44.6 AV	54.0	-9.4	2.29 V	176	49.0	-4.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

--- END ---