

**160MHz Preamble
RU1992**

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 15 : 6025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	42.3 PK	74.0	-31.7	1.49 H	284	31.1	11.2
2	12050.00	30.3 AV	54.0	-23.7	1.49 H	284	19.1	11.2
3	18075.00	45.5 PK	74.0	-28.5	1.47 H	33	44.4	1.1
4	18075.00	33.6 AV	54.0	-20.4	1.47 H	33	32.5	1.1
5	#24100.00	49.8 PK	88.2	-38.4	2.14 H	57	52.7	-2.9
6	#24100.00	38.2 AV	68.2	-30.0	2.14 H	57	41.1	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	41.0 PK	74.0	-33.0	3.87 V	100	29.8	11.2
2	12050.00	29.4 AV	54.0	-24.6	3.87 V	100	18.2	11.2
3	18075.00	43.6 PK	74.0	-30.4	2.11 V	120	42.5	1.1
4	18075.00	31.3 AV	54.0	-22.7	2.11 V	120	30.2	1.1
5	#24100.00	46.1 PK	88.2	-42.1	2.01 V	124	49.0	-2.9
6	#24100.00	35.3 AV	68.2	-32.9	2.01 V	124	38.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 47 : 6185 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	42.1 PK	74.0	-31.9	1.53 H	289	31.7	10.4
2	12370.00	30.0 AV	54.0	-24.0	1.53 H	289	19.6	10.4
3	18555.00	45.4 PK	74.0	-28.6	1.51 H	24	52.0	-6.6
4	18555.00	33.7 AV	54.0	-20.3	1.51 H	24	40.3	-6.6
5	#24740.00	49.1 PK	88.2	-39.1	2.13 H	74	51.2	-2.1
6	#24740.00	37.6 AV	68.2	-30.6	2.13 H	74	39.7	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	41.0 PK	74.0	-33.0	3.80 V	108	30.6	10.4
2	12370.00	29.7 AV	54.0	-24.3	3.80 V	108	19.3	10.4
3	18555.00	44.6 PK	74.0	-29.4	2.20 V	102	51.2	-6.6
4	18555.00	31.9 AV	54.0	-22.1	2.20 V	102	38.5	-6.6
5	#24740.00	46.0 PK	88.2	-42.2	2.00 V	118	48.1	-2.1
6	#24740.00	35.5 AV	68.2	-32.7	2.00 V	118	37.6	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 79 : 6345 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	41.3 PK	74.0	-32.7	1.59 H	287	30.5	10.8
2	12690.00	29.5 AV	54.0	-24.5	1.59 H	287	18.7	10.8
3	19035.00	45.3 PK	74.0	-28.7	1.47 H	29	51.6	-6.3
4	19035.00	33.4 AV	54.0	-20.6	1.47 H	29	39.7	-6.3
5	#25380.00	49.6 PK	88.2	-38.6	2.14 H	62	51.2	-1.6
6	#25380.00	37.8 AV	68.2	-30.4	2.14 H	62	39.4	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	40.4 PK	74.0	-33.6	3.79 V	119	29.6	10.8
2	12690.00	29.0 AV	54.0	-25.0	3.79 V	119	18.2	10.8
3	19035.00	43.5 PK	74.0	-30.5	2.16 V	107	49.8	-6.3
4	19035.00	31.0 AV	54.0	-23.0	2.16 V	107	37.3	-6.3
5	#25380.00	46.3 PK	88.2	-41.9	2.00 V	117	47.9	-1.6
6	#25380.00	35.7 AV	68.2	-32.5	2.00 V	117	37.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 143 : 6665 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	42.2 PK	74.0	-31.8	1.54 H	278	30.2	12.0
2	13330.00	30.2 AV	54.0	-23.8	1.54 H	278	18.2	12.0
3	19995.00	44.5 PK	74.0	-29.5	1.49 H	18	50.4	-5.9
4	19995.00	33.0 AV	54.0	-21.0	1.49 H	18	38.9	-5.9
5	#26660.00	49.2 PK	88.2	-39.0	2.15 H	78	49.5	-0.3
6	#26660.00	37.6 AV	68.2	-30.6	2.15 H	78	37.9	-0.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	40.9 PK	74.0	-33.1	3.89 V	118	28.9	12.0
2	13330.00	29.7 AV	54.0	-24.3	3.89 V	118	17.7	12.0
3	19995.00	43.7 PK	74.0	-30.3	2.15 V	112	49.6	-5.9
4	19995.00	31.3 AV	54.0	-22.7	2.15 V	112	37.2	-5.9
5	#26660.00	46.1 PK	88.2	-42.1	1.98 V	126	46.4	-0.3
6	#26660.00	35.4 AV	68.2	-32.8	1.98 V	126	35.7	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Data:

RF Mode	TX 802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.56	18.2 QP	40.0	-21.8	1.50 H	218	30.7	-12.5
2	163.13	24.3 QP	43.5	-19.2	1.50 H	360	36.5	-12.2
3	306.01	24.1 QP	46.0	-21.9	1.00 H	360	34.6	-10.5
4	509.28	23.7 QP	46.0	-22.3	1.00 H	360	28.3	-4.6
5	698.84	27.2 QP	46.0	-18.8	2.00 H	24	27.6	-0.4
6	858.79	29.7 QP	46.0	-16.3	1.00 H	270	27.0	2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

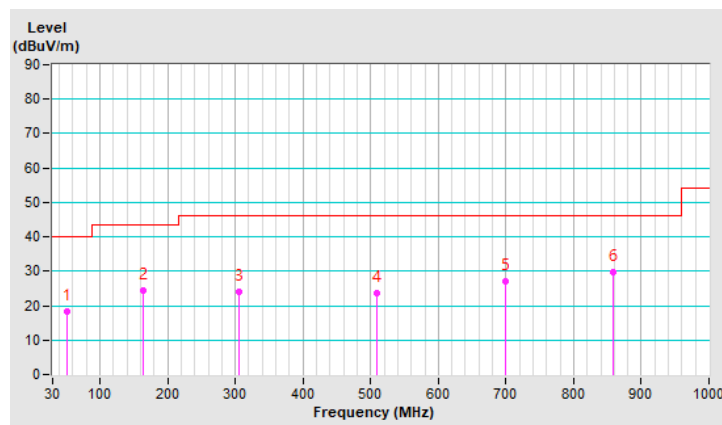


RF Mode	TX 802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	112.96	21.4 QP	43.5	-22.1	1.00 V	360	36.1	-14.7
2	226.13	16.3 QP	46.0	-29.7	1.00 V	139	31.2	-14.9
3	316.37	28.2 QP	46.0	-17.8	1.00 V	139	38.4	-10.2
4	515.65	24.3 QP	46.0	-21.7	1.00 V	277	28.8	-4.5
5	713.70	26.6 QP	46.0	-19.4	1.50 V	264	26.9	-0.3
6	872.15	29.9 QP	46.0	-16.1	1.00 V	48	26.9	3.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

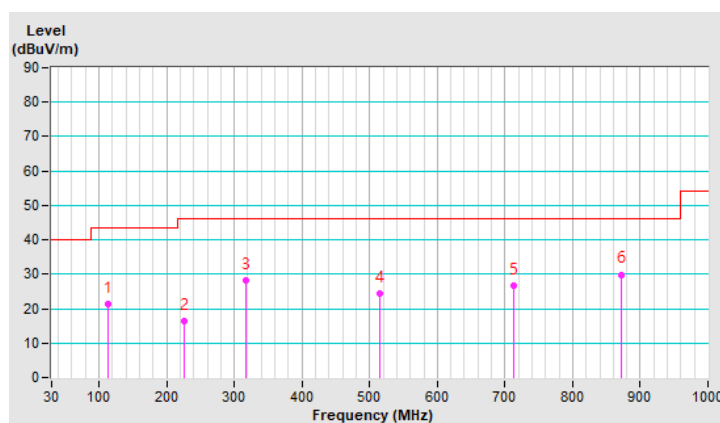

4.1.8 Test Results (Mode 2)

Radiated test was done with 50ohm terminator on antenna port.

Above 1GHz Data:

RF Mode	TX 802.11a 6G	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	39.7 PK	74.0	-34.3	1.60 H	238	28.3	11.4
2	11870.00	28.5 AV	54.0	-25.5	1.60 H	238	17.1	11.4
3	17805.00	46.3 PK	74.0	-27.7	1.72 H	53	25.6	20.7
4	17805.00	34.5 AV	54.0	-19.5	1.72 H	53	13.8	20.7
5	23740.00	48.7 PK	74.0	-25.3	2.02 H	121	70.2	-21.5
6	23740.00	37.4 AV	54.0	-16.6	2.02 H	121	58.9	-21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	38.7 PK	74.0	-35.3	1.64 V	83	25.4	13.3
2	11870.00	27.6 AV	54.0	-26.4	1.64 V	83	14.3	13.3
3	17805.00	53.6 PK	74.0	-20.4	2.16 V	88	33.4	20.2
4	17805.00	39.8 AV	54.0	-14.2	2.16 V	88	19.6	20.2
5	23740.00	45.4 PK	74.0	-28.6	2.03 V	157	48.1	-2.7
6	23740.00	34.8 AV	54.0	-19.2	2.03 V	157	37.5	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11a 6G	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	39.7 PK	74.0	-34.3	1.65 H	232	28.2	11.5
2	11910.00	28.4 AV	54.0	-25.6	1.65 H	232	16.9	11.5
3	17865.00	46.3 PK	74.0	-27.7	1.70 H	62	24.3	22.0
4	17865.00	34.3 AV	54.0	-19.7	1.70 H	62	12.3	22.0
5	23820.00	49.1 PK	74.0	-24.9	2.04 H	110	70.5	-21.4
6	23820.00	37.7 AV	54.0	-16.3	2.04 H	110	59.1	-21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	38.3 PK	74.0	-35.7	1.66 V	93	26.8	11.5
2	11910.00	27.3 AV	54.0	-26.7	1.66 V	93	15.8	11.5
3	17865.00	54.1 PK	74.0	-19.9	2.16 V	89	32.1	22.0
4	17865.00	40.1 AV	54.0	-13.9	2.16 V	89	18.1	22.0
5	23820.00	45.2 PK	74.0	-28.8	2.01 V	144	66.6	-21.4
6	23820.00	34.4 AV	54.0	-19.6	2.01 V	144	55.8	-21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11a 6G	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	39.8 PK	74.0	-34.2	1.57 H	225	29.2	10.6
2	12350.00	28.4 AV	54.0	-25.6	1.57 H	225	17.8	10.6
3	18525.00	46.1 PK	74.0	-27.9	1.73 H	45	68.9	-22.8
4	18525.00	34.3 AV	54.0	-19.7	1.73 H	45	57.1	-22.8
5	#24700.00	48.8 PK	88.2	-39.4	2.02 H	119	69.9	-21.1
6	#24700.00	37.6 AV	68.2	-30.6	2.02 H	119	58.7	-21.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	38.8 PK	74.0	-35.2	1.60 V	81	28.2	10.6
2	12350.00	27.6 AV	54.0	-26.4	1.60 V	81	17.0	10.6
3	18525.00	54.0 PK	74.0	-20.0	2.13 V	79	76.8	-22.8
4	18525.00	40.1 AV	54.0	-13.9	2.13 V	79	62.9	-22.8
5	#24700.00	45.2 PK	88.2	-43.0	2.03 V	166	66.3	-21.1
6	#24700.00	34.4 AV	68.2	-33.8	2.03 V	166	55.5	-21.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	39.4 PK	88.2	-48.8	1.54 H	251	28.6	10.8
2	#12830.00	28.2 AV	68.2	-40.0	1.54 H	251	17.4	10.8
3	19245.00	46.5 PK	74.0	-27.5	1.75 H	69	69.7	-23.2
4	19245.00	34.7 AV	54.0	-19.3	1.75 H	69	57.9	-23.2
5	#25660.00	48.5 PK	88.2	-39.7	1.99 H	131	82.6	-34.1
6	#25660.00	37.4 AV	68.2	-30.8	1.99 H	131	71.5	-34.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	38.9 PK	88.2	-49.3	1.58 V	85	28.1	10.8
2	#12830.00	27.9 AV	68.2	-40.3	1.58 V	85	17.1	10.8
3	19245.00	54.1 PK	74.0	-19.9	2.15 V	86	77.3	-23.2
4	19245.00	40.2 AV	54.0	-13.8	2.15 V	86	63.4	-23.2
5	#25660.00	45.8 PK	88.2	-42.4	1.98 V	145	79.9	-34.1
6	#25660.00	34.9 AV	68.2	-33.3	1.98 V	145	69.0	-34.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 97 : 6435 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	40.3 PK	88.2	-47.9	1.55 H	251	29.6	10.7
2	#12870.00	28.9 AV	68.2	-39.3	1.55 H	251	18.2	10.7
3	19305.00	46.5 PK	74.0	-27.5	1.68 H	43	69.6	-23.1
4	19305.00	34.7 AV	54.0	-19.3	1.68 H	43	57.8	-23.1
5	#25740.00	48.4 PK	88.2	-39.8	2.07 H	120	82.5	-34.1
6	#25740.00	37.3 AV	68.2	-30.9	2.07 H	120	71.4	-34.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	38.9 PK	88.2	-49.3	1.65 V	97	28.2	10.7
2	#12870.00	27.6 AV	68.2	-40.6	1.65 V	97	16.9	10.7
3	19305.00	54.1 PK	74.0	-19.9	2.12 V	103	77.2	-23.1
4	19305.00	40.2 AV	54.0	-13.8	2.12 V	103	63.3	-23.1
5	#25740.00	45.4 PK	88.2	-42.8	2.01 V	171	79.5	-34.1
6	#25740.00	34.9 AV	68.2	-33.3	2.01 V	171	69.0	-34.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 105 : 6475 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	40.0 PK	88.2	-48.2	1.59 H	241	29.3	10.7
2	#12950.00	28.7 AV	68.2	-39.5	1.59 H	241	18.0	10.7
3	19425.00	46.3 PK	74.0	-27.7	1.76 H	56	68.9	-22.6
4	19425.00	34.2 AV	54.0	-19.8	1.76 H	56	56.8	-22.6
5	#25900.00	48.5 PK	88.2	-39.7	1.99 H	120	82.5	-34.0
6	#25900.00	37.0 AV	68.2	-31.2	1.99 H	120	71.0	-34.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	38.5 PK	88.2	-49.7	1.69 V	98	27.8	10.7
2	#12950.00	27.7 AV	68.2	-40.5	1.69 V	98	17.0	10.7
3	19425.00	54.2 PK	74.0	-19.8	2.19 V	82	76.8	-22.6
4	19425.00	40.2 AV	54.0	-13.8	2.19 V	82	62.8	-22.6
5	#25900.00	45.2 PK	88.2	-43.0	2.07 V	164	79.2	-34.0
6	#25900.00	34.4 AV	68.2	-33.8	2.07 V	164	68.4	-34.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 113 : 6515 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	39.7 PK	88.2	-48.5	1.54 H	247	28.7	11.0
2	#13030.00	28.5 AV	68.2	-39.7	1.54 H	247	17.5	11.0
3	19545.00	46.7 PK	74.0	-27.3	1.72 H	47	69.2	-22.5
4	19545.00	34.9 AV	54.0	-19.1	1.72 H	47	57.4	-22.5
5	#26060.00	48.4 PK	88.2	-39.8	2.07 H	133	82.3	-33.9
6	#26060.00	37.2 AV	68.2	-31.0	2.07 H	133	71.1	-33.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	38.8 PK	88.2	-49.4	1.65 V	91	27.8	11.0
2	#13030.00	27.6 AV	68.2	-40.6	1.65 V	91	16.6	11.0
3	19545.00	54.1 PK	74.0	-19.9	2.21 V	73	76.6	-22.5
4	19545.00	40.0 AV	54.0	-14.0	2.21 V	73	62.5	-22.5
5	#26060.00	45.9 PK	88.2	-42.3	2.06 V	164	79.8	-33.9
6	#26060.00	35.3 AV	68.2	-32.9	2.06 V	164	69.2	-33.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	39.7 PK	88.2	-48.5	1.62 H	243	28.6	11.1
2	#13070.00	28.6 AV	68.2	-39.6	1.62 H	243	17.5	11.1
3	19605.00	46.1 PK	74.0	-27.9	1.75 H	46	68.9	-22.8
4	19605.00	34.3 AV	54.0	-19.7	1.75 H	46	57.1	-22.8
5	#26140.00	49.2 PK	88.2	-39.0	2.03 H	119	83.1	-33.9
6	#26140.00	37.7 AV	68.2	-30.5	2.03 H	119	71.6	-33.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	38.9 PK	88.2	-49.3	1.61 V	97	27.8	11.1
2	#13070.00	27.6 AV	68.2	-40.6	1.61 V	97	16.5	11.1
3	19605.00	53.5 PK	74.0	-20.5	2.20 V	103	76.3	-22.8
4	19605.00	39.7 AV	54.0	-14.3	2.20 V	103	62.5	-22.8
5	#26140.00	46.0 PK	88.2	-42.2	2.04 V	148	79.9	-33.9
6	#26140.00	35.3 AV	68.2	-32.9	2.04 V	148	69.2	-33.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	39.3 PK	74.0	-34.7	1.61 H	234	27.0	12.3
2	13390.00	28.0 AV	54.0	-26.0	1.61 H	234	15.7	12.3
3	20085.00	45.8 PK	74.0	-28.2	1.73 H	62	68.2	-22.4
4	20085.00	34.3 AV	54.0	-19.7	1.73 H	62	56.7	-22.4
5	#26780.00	48.9 PK	88.2	-39.3	2.06 H	107	48.9	0.0
6	#26780.00	37.6 AV	68.2	-30.6	2.06 H	107	37.6	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	39.2 PK	74.0	-34.8	1.68 V	97	26.9	12.3
2	13390.00	28.0 AV	54.0	-26.0	1.68 V	97	15.7	12.3
3	20085.00	53.8 PK	74.0	-20.2	2.12 V	102	76.2	-22.4
4	20085.00	39.9 AV	54.0	-14.1	2.12 V	102	62.3	-22.4
5	#26780.00	45.2 PK	88.2	-43.0	2.04 V	158	45.2	0.0
6	#26780.00	34.7 AV	68.2	-33.5	2.04 V	158	34.7	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	40.2 PK	88.2	-48.0	1.62 H	249	27.1	13.1
2	#13710.00	28.8 AV	68.2	-39.4	1.62 H	249	15.7	13.1
3	20565.00	45.8 PK	74.0	-28.2	1.71 H	51	68.4	-22.6
4	20565.00	34.2 AV	54.0	-19.8	1.71 H	51	56.8	-22.6
5	#27420.00	48.8 PK	88.2	-39.4	2.06 H	137	48.8	0.0
6	#27420.00	37.6 AV	68.2	-30.6	2.06 H	137	37.6	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	38.6 PK	88.2	-49.6	1.60 V	72	25.5	13.1
2	#13710.00	27.7 AV	68.2	-40.5	1.60 V	72	14.6	13.1
3	20565.00	53.5 PK	74.0	-20.5	2.11 V	88	76.1	-22.6
4	20565.00	39.9 AV	54.0	-14.1	2.11 V	88	62.5	-22.6
5	#27420.00	45.7 PK	88.2	-42.5	1.98 V	160	45.7	0.0
6	#27420.00	35.1 AV	68.2	-33.1	1.98 V	160	35.1	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 185 : 6875 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	40.1 PK	88.2	-48.1	1.64 H	231	26.8	13.3
2	#13750.00	28.7 AV	68.2	-39.5	1.64 H	231	15.4	13.3
3	20625.00	46.6 PK	74.0	-27.4	1.76 H	39	69.5	-22.9
4	20625.00	34.9 AV	54.0	-19.1	1.76 H	39	57.8	-22.9
5	#27500.00	48.3 PK	88.2	-39.9	2.05 H	109	48.3	0.0
6	#27500.00	37.3 AV	68.2	-30.9	2.05 H	109	37.3	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	39.1 PK	88.2	-49.1	1.63 V	96	25.8	13.3
2	#13750.00	28.0 AV	68.2	-40.2	1.63 V	96	14.7	13.3
3	20625.00	53.4 PK	74.0	-20.6	2.17 V	83	76.3	-22.9
4	20625.00	39.8 AV	54.0	-14.2	2.17 V	83	62.7	-22.9
5	#27500.00	45.0 PK	88.2	-43.2	1.98 V	154	45.0	0.0
6	#27500.00	34.5 AV	68.2	-33.7	1.98 V	154	34.5	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 209 : 6995 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	39.5 PK	88.2	-48.7	1.57 H	249	26.1	13.4
2	#13990.00	28.1 AV	68.2	-40.1	1.57 H	249	14.7	13.4
3	20985.00	45.9 PK	74.0	-28.1	1.77 H	62	68.1	-22.2
4	20985.00	34.2 AV	54.0	-19.8	1.77 H	62	56.4	-22.2
5	#27980.00	48.0 PK	88.2	-40.2	2.02 H	134	48.0	0.0
6	#27980.00	37.0 AV	68.2	-31.2	2.02 H	134	37.0	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	38.4 PK	88.2	-49.8	1.59 V	71	25.0	13.4
2	#13990.00	27.3 AV	68.2	-40.9	1.59 V	71	13.9	13.4
3	20985.00	53.6 PK	74.0	-20.4	2.20 V	98	75.8	-22.2
4	20985.00	39.7 AV	54.0	-14.3	2.20 V	98	61.9	-22.2
5	#27980.00	45.6 PK	88.2	-42.6	2.06 V	169	45.6	0.0
6	#27980.00	34.7 AV	68.2	-33.5	2.06 V	169	34.7	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 229 : 7095 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14190.00	40.1 PK	88.2	-48.1	1.64 H	229	25.7	14.4
2	#14190.00	28.9 AV	68.2	-39.3	1.64 H	229	14.5	14.4
3	21285.00	46.5 PK	74.0	-27.5	1.66 H	63	69.2	-22.7
4	21285.00	34.6 AV	54.0	-19.4	1.66 H	63	57.3	-22.7
5	#28380.00	49.0 PK	88.2	-39.2	2.01 H	132	49.0	0.0
6	#28380.00	37.5 AV	68.2	-30.7	2.01 H	132	37.5	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14190.00	39.0 PK	88.2	-49.2	1.67 V	70	24.6	14.4
2	#14190.00	27.8 AV	68.2	-40.4	1.67 V	70	13.4	14.4
3	21285.00	54.3 PK	74.0	-19.7	2.16 V	94	77.0	-22.7
4	21285.00	40.2 AV	54.0	-13.8	2.16 V	94	62.9	-22.7
5	#28380.00	45.1 PK	88.2	-43.1	2.08 V	147	45.1	0.0
6	#28380.00	34.5 AV	68.2	-33.7	2.08 V	147	34.5	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 233 : 7115 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	40.1 PK	88.2	-48.1	1.62 H	226	25.7	14.4
2	#14230.00	28.6 AV	68.2	-39.6	1.62 H	226	14.2	14.4
3	21345.00	45.9 PK	74.0	-28.1	1.75 H	48	68.5	-22.6
4	21345.00	34.0 AV	54.0	-20.0	1.75 H	48	56.6	-22.6
5	#28460.00	49.1 PK	88.2	-39.1	2.06 H	124	49.1	0.0
6	#28460.00	37.5 AV	68.2	-30.7	2.06 H	124	37.5	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	38.5 PK	88.2	-49.7	1.62 V	82	24.1	14.4
2	#14230.00	27.4 AV	68.2	-40.8	1.62 V	82	13.0	14.4
3	21345.00	54.2 PK	74.0	-19.8	2.14 V	83	76.8	-22.6
4	21345.00	40.1 AV	54.0	-13.9	2.14 V	83	62.7	-22.6
5	#28460.00	45.5 PK	88.2	-42.7	2.00 V	169	45.5	0.0
6	#28460.00	34.7 AV	68.2	-33.5	2.00 V	169	34.7	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	39.3 PK	74.0	-34.7	1.55 H	232	27.9	11.4
2	11870.00	28.4 AV	54.0	-25.6	1.55 H	232	17.0	11.4
3	17805.00	45.9 PK	74.0	-28.1	1.68 H	64	25.2	20.7
4	17805.00	34.2 AV	54.0	-19.8	1.68 H	64	13.5	20.7
5	23740.00	48.5 PK	74.0	-25.5	1.98 H	121	70.0	-21.5
6	23740.00	37.1 AV	54.0	-16.9	1.98 H	121	58.6	-21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	38.2 PK	74.0	-35.8	1.59 V	92	26.8	11.4
2	11870.00	27.4 AV	54.0	-26.6	1.59 V	92	16.0	11.4
3	17805.00	53.3 PK	74.0	-20.7	2.17 V	96	32.6	20.7
4	17805.00	39.4 AV	54.0	-14.6	2.17 V	96	18.7	20.7
5	23740.00	45.4 PK	74.0	-28.6	2.00 V	142	66.9	-21.5
6	23740.00	34.9 AV	54.0	-19.1	2.00 V	142	56.4	-21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	40.2 PK	74.0	-33.8	1.62 H	226	28.7	11.5
2	11910.00	28.8 AV	54.0	-25.2	1.62 H	226	17.3	11.5
3	17865.00	46.6 PK	74.0	-27.4	1.72 H	68	24.6	22.0
4	17865.00	34.7 AV	54.0	-19.3	1.72 H	68	12.7	22.0
5	23820.00	48.3 PK	74.0	-25.7	2.01 H	109	69.7	-21.4
6	23820.00	37.0 AV	54.0	-17.0	2.01 H	109	58.4	-21.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	38.2 PK	74.0	-35.8	1.68 V	71	26.7	11.5
2	11910.00	27.2 AV	54.0	-26.8	1.68 V	71	15.7	11.5
3	17865.00	53.4 PK	74.0	-20.6	2.12 V	75	31.4	22.0
4	17865.00	39.8 AV	54.0	-14.2	2.12 V	75	17.8	22.0
5	23820.00	45.2 PK	74.0	-28.8	2.07 V	149	66.6	-21.4
6	23820.00	34.3 AV	54.0	-19.7	2.07 V	149	55.7	-21.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE20)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	39.8 PK	74.0	-34.2	1.55 H	237	29.2	10.6
2	12350.00	28.8 AV	54.0	-25.2	1.55 H	237	18.2	10.6
3	18525.00	46.8 PK	74.0	-27.2	1.68 H	51	69.6	-22.8
4	18525.00	34.7 AV	54.0	-19.3	1.68 H	51	57.5	-22.8
5	#24700.00	48.3 PK	88.2	-39.9	1.98 H	109	69.4	-21.1
6	#24700.00	37.0 AV	68.2	-31.2	1.98 H	109	58.1	-21.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	39.1 PK	74.0	-34.9	1.68 V	87	28.5	10.6
2	12350.00	27.8 AV	54.0	-26.2	1.68 V	87	17.2	10.6
3	18525.00	54.2 PK	74.0	-19.8	2.17 V	74	77.0	-22.8
4	18525.00	40.1 AV	54.0	-13.9	2.17 V	74	62.9	-22.8
5	#24700.00	45.3 PK	88.2	-42.9	1.98 V	146	66.4	-21.1
6	#24700.00	34.5 AV	68.2	-33.7	1.98 V	146	55.6	-21.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	39.8 PK	88.2	-48.4	1.58 H	225	29.0	10.8
2	#12830.00	28.6 AV	68.2	-39.6	1.58 H	225	17.8	10.8
3	19245.00	46.9 PK	74.0	-27.1	1.77 H	67	70.1	-23.2
4	19245.00	34.8 AV	54.0	-19.2	1.77 H	67	58.0	-23.2
5	#25660.00	48.8 PK	88.2	-39.4	2.02 H	133	82.9	-34.1
6	#25660.00	37.5 AV	68.2	-30.7	2.02 H	133	71.6	-34.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	38.5 PK	88.2	-49.7	1.60 V	92	27.7	10.8
2	#12830.00	27.5 AV	68.2	-40.7	1.60 V	92	16.7	10.8
3	19245.00	53.0 PK	74.0	-21.0	2.21 V	75	76.2	-23.2
4	19245.00	39.4 AV	54.0	-14.6	2.21 V	75	62.6	-23.2
5	#25660.00	45.1 PK	88.2	-43.1	1.99 V	156	79.2	-34.1
6	#25660.00	34.6 AV	68.2	-33.6	1.99 V	156	68.7	-34.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 97 : 6435 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	39.8 PK	88.2	-48.4	1.55 H	228	29.1	10.7
2	#12870.00	28.6 AV	68.2	-39.6	1.55 H	228	17.9	10.7
3	19305.00	47.1 PK	74.0	-26.9	1.73 H	69	70.2	-23.1
4	19305.00	35.0 AV	54.0	-19.0	1.73 H	69	58.1	-23.1
5	#25740.00	48.6 PK	88.2	-39.6	2.00 H	134	82.7	-34.1
6	#25740.00	37.5 AV	68.2	-30.7	2.00 H	134	71.6	-34.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	38.9 PK	88.2	-49.3	1.70 V	76	28.2	10.7
2	#12870.00	27.9 AV	68.2	-40.3	1.70 V	76	17.2	10.7
3	19305.00	53.5 PK	74.0	-20.5	2.10 V	83	76.6	-23.1
4	19305.00	39.5 AV	54.0	-14.5	2.10 V	83	62.6	-23.1
5	#25740.00	45.8 PK	88.2	-42.4	2.09 V	167	79.9	-34.1
6	#25740.00	35.1 AV	68.2	-33.1	2.09 V	167	69.2	-34.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 105 : 6475 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	39.5 PK	88.2	-48.7	1.62 H	232	28.8	10.7
2	#12950.00	28.4 AV	68.2	-39.8	1.62 H	232	17.7	10.7
3	19425.00	46.6 PK	74.0	-27.4	1.72 H	50	69.2	-22.6
4	19425.00	34.6 AV	54.0	-19.4	1.72 H	50	57.2	-22.6
5	#25900.00	49.1 PK	88.2	-39.1	1.97 H	135	83.1	-34.0
6	#25900.00	37.6 AV	68.2	-30.6	1.97 H	135	71.6	-34.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	39.1 PK	88.2	-49.1	1.63 V	83	28.4	10.7
2	#12950.00	28.0 AV	68.2	-40.2	1.63 V	83	17.3	10.7
3	19425.00	53.3 PK	74.0	-20.7	2.18 V	82	75.9	-22.6
4	19425.00	39.4 AV	54.0	-14.6	2.18 V	82	62.0	-22.6
5	#25900.00	45.4 PK	88.2	-42.8	1.98 V	164	79.4	-34.0
6	#25900.00	34.8 AV	68.2	-33.4	1.98 V	164	68.8	-34.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 113 : 6515 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	39.4 PK	88.2	-48.8	1.60 H	235	28.4	11.0
2	#13030.00	28.3 AV	68.2	-39.9	1.60 H	235	17.3	11.0
3	19545.00	46.6 PK	74.0	-27.4	1.69 H	45	69.1	-22.5
4	19545.00	34.7 AV	54.0	-19.3	1.69 H	45	57.2	-22.5
5	#26060.00	47.9 PK	88.2	-40.3	2.06 H	116	81.8	-33.9
6	#26060.00	36.9 AV	68.2	-31.3	2.06 H	116	70.8	-33.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	39.1 PK	88.2	-49.1	1.60 V	98	28.1	11.0
2	#13030.00	27.9 AV	68.2	-40.3	1.60 V	98	16.9	11.0
3	19545.00	53.4 PK	74.0	-20.6	2.13 V	82	75.9	-22.5
4	19545.00	39.6 AV	54.0	-14.4	2.13 V	82	62.1	-22.5
5	#26060.00	45.7 PK	88.2	-42.5	2.03 V	152	79.6	-33.9
6	#26060.00	34.8 AV	68.2	-33.4	2.03 V	152	68.7	-33.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	39.4 PK	88.2	-48.8	1.54 H	238	28.3	11.1
2	#13070.00	28.4 AV	68.2	-39.8	1.54 H	238	17.3	11.1
3	19605.00	46.5 PK	74.0	-27.5	1.68 H	59	69.3	-22.8
4	19605.00	34.4 AV	54.0	-19.6	1.68 H	59	57.2	-22.8
5	#26140.00	48.5 PK	88.2	-39.7	2.04 H	127	82.4	-33.9
6	#26140.00	36.9 AV	68.2	-31.3	2.04 H	127	70.8	-33.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	38.7 PK	88.2	-49.5	1.62 V	86	27.6	11.1
2	#13070.00	27.5 AV	68.2	-40.7	1.62 V	86	16.4	11.1
3	19605.00	53.7 PK	74.0	-20.3	2.20 V	76	76.5	-22.8
4	19605.00	39.9 AV	54.0	-14.1	2.20 V	76	62.7	-22.8
5	#26140.00	45.6 PK	88.2	-42.6	1.98 V	167	79.5	-33.9
6	#26140.00	34.9 AV	68.2	-33.3	1.98 V	167	68.8	-33.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	39.3 PK	74.0	-34.7	1.59 H	241	27.0	12.3
2	13390.00	28.1 AV	54.0	-25.9	1.59 H	241	15.8	12.3
3	20085.00	46.3 PK	74.0	-27.7	1.74 H	48	68.7	-22.4
4	20085.00	34.5 AV	54.0	-19.5	1.74 H	48	56.9	-22.4
5	#26780.00	48.5 PK	88.2	-39.7	2.07 H	107	48.5	0.0
6	#26780.00	37.2 AV	68.2	-31.0	2.07 H	107	37.2	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	38.5 PK	74.0	-35.5	1.60 V	79	26.2	12.3
2	13390.00	27.4 AV	54.0	-26.6	1.60 V	79	15.1	12.3
3	20085.00	53.8 PK	74.0	-20.2	2.20 V	98	76.2	-22.4
4	20085.00	40.0 AV	54.0	-14.0	2.20 V	98	62.4	-22.4
5	#26780.00	44.7 PK	88.2	-43.5	2.00 V	150	44.7	0.0
6	#26780.00	34.3 AV	68.2	-33.9	2.00 V	150	34.3	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	39.3 PK	88.2	-48.9	1.58 H	238	26.2	13.1
2	#13710.00	28.0 AV	68.2	-40.2	1.58 H	238	14.9	13.1
3	20565.00	45.6 PK	74.0	-28.4	1.77 H	61	68.2	-22.6
4	20565.00	34.0 AV	54.0	-20.0	1.77 H	61	56.6	-22.6
5	#27420.00	48.0 PK	88.2	-40.2	2.05 H	132	48.0	0.0
6	#27420.00	37.0 AV	68.2	-31.2	2.05 H	132	37.0	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	38.2 PK	88.2	-50.0	1.65 V	82	25.1	13.1
2	#13710.00	27.4 AV	68.2	-40.8	1.65 V	82	14.3	13.1
3	20565.00	53.2 PK	74.0	-20.8	2.18 V	84	75.8	-22.6
4	20565.00	39.6 AV	54.0	-14.4	2.18 V	84	62.2	-22.6
5	#27420.00	45.9 PK	88.2	-42.3	2.00 V	149	45.9	0.0
6	#27420.00	35.1 AV	68.2	-33.1	2.00 V	149	35.1	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 185 : 6875 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	40.0 PK	88.2	-48.2	1.63 H	250	26.7	13.3
2	#13750.00	28.7 AV	68.2	-39.5	1.63 H	250	15.4	13.3
3	20625.00	46.7 PK	74.0	-27.3	1.76 H	38	69.6	-22.9
4	20625.00	34.9 AV	54.0	-19.1	1.76 H	38	57.8	-22.9
5	#27500.00	48.1 PK	88.2	-40.1	2.04 H	110	48.1	0.0
6	#27500.00	37.0 AV	68.2	-31.2	2.04 H	110	37.0	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	39.0 PK	88.2	-49.2	1.62 V	86	25.7	13.3
2	#13750.00	28.1 AV	68.2	-40.1	1.62 V	86	14.8	13.3
3	20625.00	53.1 PK	74.0	-20.9	2.15 V	77	76.0	-22.9
4	20625.00	39.6 AV	54.0	-14.4	2.15 V	77	62.5	-22.9
5	#27500.00	45.2 PK	88.2	-43.0	1.98 V	154	45.2	0.0
6	#27500.00	34.6 AV	68.2	-33.6	1.98 V	154	34.6	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 209 : 6995 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	40.0 PK	88.2	-48.2	1.64 H	239	26.6	13.4
2	#13990.00	28.5 AV	68.2	-39.7	1.64 H	239	15.1	13.4
3	20985.00	46.5 PK	74.0	-27.5	1.71 H	64	68.7	-22.2
4	20985.00	34.8 AV	54.0	-19.2	1.71 H	64	57.0	-22.2
5	#27980.00	49.2 PK	88.2	-39.0	2.01 H	126	49.2	0.0
6	#27980.00	37.9 AV	68.2	-30.3	2.01 H	126	37.9	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	39.2 PK	88.2	-49.0	1.69 V	95	25.8	13.4
2	#13990.00	28.0 AV	68.2	-40.2	1.69 V	95	14.6	13.4
3	20985.00	53.7 PK	74.0	-20.3	2.18 V	99	75.9	-22.2
4	20985.00	40.0 AV	54.0	-14.0	2.18 V	99	62.2	-22.2
5	#27980.00	45.5 PK	88.2	-42.7	1.98 V	155	45.5	0.0
6	#27980.00	35.0 AV	68.2	-33.2	1.98 V	155	35.0	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 229 : 7095 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14190.00	39.4 PK	88.2	-48.8	1.64 H	233	25.0	14.4
2	#14190.00	28.2 AV	68.2	-40.0	1.64 H	233	13.8	14.4
3	21285.00	46.4 PK	74.0	-27.6	1.75 H	39	69.1	-22.7
4	21285.00	34.7 AV	54.0	-19.3	1.75 H	39	57.4	-22.7
5	#28380.00	48.9 PK	88.2	-39.3	2.01 H	110	48.9	0.0
6	#28380.00	37.5 AV	68.2	-30.7	2.01 H	110	37.5	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14190.00	38.2 PK	88.2	-50.0	1.69 V	82	23.8	14.4
2	#14190.00	27.2 AV	68.2	-41.0	1.69 V	82	12.8	14.4
3	21285.00	53.7 PK	74.0	-20.3	2.11 V	91	76.4	-22.7
4	21285.00	39.9 AV	54.0	-14.1	2.11 V	91	62.6	-22.7
5	#28380.00	45.2 PK	88.2	-43.0	2.03 V	147	45.2	0.0
6	#28380.00	34.5 AV	68.2	-33.7	2.03 V	147	34.5	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 233 : 7115 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	39.1 PK	88.2	-49.1	1.62 H	245	24.7	14.4
2	#14230.00	28.1 AV	68.2	-40.1	1.62 H	245	13.7	14.4
3	21345.00	46.7 PK	74.0	-27.3	1.67 H	67	69.3	-22.6
4	21345.00	34.7 AV	54.0	-19.3	1.67 H	67	57.3	-22.6
5	#28460.00	48.2 PK	88.2	-40.0	2.05 H	127	48.2	0.0
6	#28460.00	36.9 AV	68.2	-31.3	2.05 H	127	36.9	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	38.8 PK	88.2	-49.4	1.61 V	94	24.4	14.4
2	#14230.00	27.4 AV	68.2	-40.8	1.61 V	94	13.0	14.4
3	21345.00	53.5 PK	74.0	-20.5	2.19 V	96	76.1	-22.6
4	21345.00	39.8 AV	54.0	-14.2	2.19 V	96	62.4	-22.6
5	#28460.00	45.8 PK	88.2	-42.4	2.07 V	168	45.8	0.0
6	#28460.00	34.9 AV	68.2	-33.3	2.07 V	168	34.9	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	40.2 PK	74.0	-33.8	1.58 H	248	28.7	11.5
2	11930.00	29.0 AV	54.0	-25.0	1.58 H	248	17.5	11.5
3	17895.00	46.9 PK	74.0	-27.1	1.71 H	43	24.3	22.6
4	17895.00	34.9 AV	54.0	-19.1	1.71 H	43	12.3	22.6
5	23860.00	49.0 PK	74.0	-25.0	2.00 H	109	70.3	-21.3
6	23860.00	37.6 AV	54.0	-16.4	2.00 H	109	58.9	-21.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	39.4 PK	74.0	-34.6	1.59 V	97	27.9	11.5
2	11930.00	28.0 AV	54.0	-26.0	1.59 V	97	16.5	11.5
3	17895.00	53.1 PK	74.0	-20.9	2.18 V	81	30.5	22.6
4	17895.00	39.4 AV	54.0	-14.6	2.18 V	81	16.8	22.6
5	23860.00	45.5 PK	74.0	-28.5	2.01 V	164	66.8	-21.3
6	23860.00	35.1 AV	54.0	-18.9	2.01 V	164	56.4	-21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE40)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	39.3 PK	74.0	-34.7	1.63 H	234	28.6	10.7
2	12330.00	28.1 AV	54.0	-25.9	1.63 H	234	17.4	10.7
3	18495.00	46.6 PK	74.0	-27.4	1.75 H	61	69.2	-22.6
4	18495.00	34.7 AV	54.0	-19.3	1.75 H	61	57.3	-22.6
5	#24660.00	49.3 PK	88.2	-38.9	2.04 H	112	70.2	-20.9
6	#24660.00	37.9 AV	68.2	-30.3	2.04 H	112	58.8	-20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	38.2 PK	74.0	-35.8	1.63 V	93	27.5	10.7
2	12330.00	27.2 AV	54.0	-26.8	1.63 V	93	16.5	10.7
3	18495.00	54.1 PK	74.0	-19.9	2.18 V	89	76.7	-22.6
4	18495.00	40.2 AV	54.0	-13.8	2.18 V	89	62.8	-22.6
5	#24660.00	46.0 PK	88.2	-42.2	2.02 V	159	66.9	-20.9
6	#24660.00	35.2 AV	68.2	-33.0	2.02 V	159	56.1	-20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	39.5 PK	88.2	-48.7	1.59 H	252	28.7	10.8
2	#12810.00	28.5 AV	68.2	-39.7	1.59 H	252	17.7	10.8
3	19215.00	46.5 PK	74.0	-27.5	1.70 H	68	69.8	-23.3
4	19215.00	34.5 AV	54.0	-19.5	1.70 H	68	57.8	-23.3
5	#25620.00	48.8 PK	88.2	-39.4	2.05 H	121	82.9	-34.1
6	#25620.00	37.8 AV	68.2	-30.4	2.05 H	121	71.9	-34.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	38.6 PK	88.2	-49.6	1.69 V	94	27.8	10.8
2	#12810.00	27.5 AV	68.2	-40.7	1.69 V	94	16.7	10.8
3	19215.00	53.4 PK	74.0	-20.6	2.13 V	92	76.7	-23.3
4	19215.00	39.5 AV	54.0	-14.5	2.13 V	92	62.8	-23.3
5	#25620.00	45.0 PK	88.2	-43.2	1.98 V	153	79.1	-34.1
6	#25620.00	34.7 AV	68.2	-33.5	1.98 V	153	68.8	-34.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 99 : 6445 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	39.3 PK	88.2	-48.9	1.63 H	229	28.6	10.7
2	#12890.00	28.4 AV	68.2	-39.8	1.63 H	229	17.7	10.7
3	19335.00	46.4 PK	74.0	-27.6	1.69 H	52	69.3	-22.9
4	19335.00	34.7 AV	54.0	-19.3	1.69 H	52	57.6	-22.9
5	#25780.00	48.9 PK	88.2	-39.3	1.97 H	109	82.9	-34.0
6	#25780.00	37.7 AV	68.2	-30.5	1.97 H	109	71.7	-34.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	38.6 PK	88.2	-49.6	1.69 V	71	27.9	10.7
2	#12890.00	27.5 AV	68.2	-40.7	1.69 V	71	16.8	10.7
3	19335.00	53.3 PK	74.0	-20.7	2.12 V	79	76.2	-22.9
4	19335.00	39.5 AV	54.0	-14.5	2.12 V	79	62.4	-22.9
5	#25780.00	45.3 PK	88.2	-42.9	1.98 V	171	79.3	-34.0
6	#25780.00	35.0 AV	68.2	-33.2	1.98 V	171	69.0	-34.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 107 : 6485 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	40.1 PK	88.2	-48.1	1.55 H	236	29.3	10.8
2	#12970.00	28.7 AV	68.2	-39.5	1.55 H	236	17.9	10.8
3	19455.00	46.7 PK	74.0	-27.3	1.71 H	44	69.2	-22.5
4	19455.00	35.0 AV	54.0	-19.0	1.71 H	44	57.5	-22.5
5	#25940.00	49.2 PK	88.2	-39.0	2.06 H	113	83.2	-34.0
6	#25940.00	37.7 AV	68.2	-30.5	2.06 H	113	71.7	-34.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	38.8 PK	88.2	-49.4	1.69 V	78	28.0	10.8
2	#12970.00	27.8 AV	68.2	-40.4	1.69 V	78	17.0	10.8
3	19455.00	53.7 PK	74.0	-20.3	2.16 V	83	76.2	-22.5
4	19455.00	39.9 AV	54.0	-14.1	2.16 V	83	62.4	-22.5
5	#25940.00	45.0 PK	88.2	-43.2	2.01 V	144	79.0	-34.0
6	#25940.00	34.3 AV	68.2	-33.9	2.01 V	144	68.3	-34.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 115 : 6525 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	39.8 PK	88.2	-48.4	1.65 H	235	28.7	11.1
2	#13050.00	28.4 AV	68.2	-39.8	1.65 H	235	17.3	11.1
3	19575.00	46.7 PK	74.0	-27.3	1.68 H	64	69.3	-22.6
4	19575.00	34.8 AV	54.0	-19.2	1.68 H	64	57.4	-22.6
5	#26100.00	48.8 PK	88.2	-39.4	2.02 H	112	82.6	-33.8
6	#26100.00	37.6 AV	68.2	-30.6	2.02 H	112	71.4	-33.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	39.2 PK	88.2	-49.0	1.61 V	93	28.1	11.1
2	#13050.00	27.9 AV	68.2	-40.3	1.61 V	93	16.8	11.1
3	19575.00	54.1 PK	74.0	-19.9	2.18 V	82	76.7	-22.6
4	19575.00	40.0 AV	54.0	-14.0	2.18 V	82	62.6	-22.6
5	#26100.00	45.2 PK	88.2	-43.0	1.99 V	161	79.0	-33.8
6	#26100.00	34.9 AV	68.2	-33.3	1.99 V	161	68.7	-33.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	39.1 PK	88.2	-49.1	1.55 H	249	27.7	11.4
2	#13130.00	28.1 AV	68.2	-40.1	1.55 H	249	16.7	11.4
3	19695.00	46.2 PK	74.0	-27.8	1.76 H	57	69.3	-23.1
4	19695.00	34.4 AV	54.0	-19.6	1.76 H	57	57.5	-23.1
5	#26260.00	49.0 PK	88.2	-39.2	2.05 H	126	83.3	-34.3
6	#26260.00	37.8 AV	68.2	-30.4	2.05 H	126	72.1	-34.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	38.5 PK	88.2	-49.7	1.58 V	91	27.1	11.4
2	#13130.00	27.5 AV	68.2	-40.7	1.58 V	91	16.1	11.4
3	19695.00	53.3 PK	74.0	-20.7	2.10 V	75	76.4	-23.1
4	19695.00	39.4 AV	54.0	-14.6	2.10 V	75	62.5	-23.1
5	#26260.00	45.2 PK	88.2	-43.0	1.97 V	156	79.5	-34.3
6	#26260.00	34.9 AV	68.2	-33.3	1.97 V	156	69.2	-34.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	39.8 PK	88.2	-48.4	1.66 H	228	27.2	12.6
2	#13450.00	28.6 AV	68.2	-39.6	1.66 H	228	16.0	12.6
3	20175.00	46.4 PK	74.0	-27.6	1.78 H	49	69.6	-23.2
4	20175.00	34.4 AV	54.0	-19.6	1.78 H	49	57.6	-23.2
5	#26900.00	48.7 PK	88.2	-39.5	1.96 H	113	48.7	0.0
6	#26900.00	37.4 AV	68.2	-30.8	1.96 H	113	37.4	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	38.5 PK	88.2	-49.7	1.63 V	91	25.9	12.6
2	#13450.00	27.6 AV	68.2	-40.6	1.63 V	91	15.0	12.6
3	20175.00	53.6 PK	74.0	-20.4	2.12 V	89	76.8	-23.2
4	20175.00	39.6 AV	54.0	-14.4	2.12 V	89	62.8	-23.2
5	#26900.00	45.1 PK	88.2	-43.1	2.01 V	162	45.1	0.0
6	#26900.00	34.4 AV	68.2	-33.8	2.01 V	162	34.4	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	39.5 PK	88.2	-48.7	1.59 H	246	26.3	13.2
2	#13690.00	28.5 AV	68.2	-39.7	1.59 H	246	15.3	13.2
3	20535.00	46.4 PK	74.0	-27.6	1.70 H	53	68.7	-22.3
4	20535.00	34.7 AV	54.0	-19.3	1.70 H	53	57.0	-22.3
5	#27380.00	48.3 PK	88.2	-39.9	2.04 H	108	48.3	0.0
6	#27380.00	37.1 AV	68.2	-31.1	2.04 H	108	37.1	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	39.3 PK	88.2	-48.9	1.66 V	69	26.1	13.2
2	#13690.00	28.1 AV	68.2	-40.1	1.66 V	69	14.9	13.2
3	20535.00	53.9 PK	74.0	-20.1	2.21 V	78	76.2	-22.3
4	20535.00	40.3 AV	54.0	-13.7	2.21 V	78	62.6	-22.3
5	#27380.00	45.2 PK	88.2	-43.0	2.04 V	156	45.2	0.0
6	#27380.00	34.4 AV	68.2	-33.8	2.04 V	156	34.4	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 187 : 6885 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	39.7 PK	88.2	-48.5	1.63 H	234	26.4	13.3
2	#13770.00	28.4 AV	68.2	-39.8	1.63 H	234	15.1	13.3
3	20655.00	46.4 PK	74.0	-27.6	1.69 H	59	69.4	-23.0
4	20655.00	34.3 AV	54.0	-19.7	1.69 H	59	57.3	-23.0
5	#27540.00	48.4 PK	88.2	-39.8	2.00 H	125	48.4	0.0
6	#27540.00	37.3 AV	68.2	-30.9	2.00 H	125	37.3	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	38.9 PK	88.2	-49.3	1.65 V	78	25.6	13.3
2	#13770.00	27.6 AV	68.2	-40.6	1.65 V	78	14.3	13.3
3	20655.00	54.4 PK	74.0	-19.6	2.21 V	73	77.4	-23.0
4	20655.00	40.3 AV	54.0	-13.7	2.21 V	73	63.3	-23.0
5	#27540.00	45.4 PK	88.2	-42.8	2.05 V	173	45.4	0.0
6	#27540.00	34.7 AV	68.2	-33.5	2.05 V	173	34.7	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 211 : 7005 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	39.8 PK	88.2	-48.4	1.64 H	228	26.3	13.5
2	#14010.00	28.8 AV	68.2	-39.4	1.64 H	228	15.3	13.5
3	21015.00	46.5 PK	74.0	-27.5	1.66 H	44	68.7	-22.2
4	21015.00	34.7 AV	54.0	-19.3	1.66 H	44	56.9	-22.2
5	#28020.00	48.8 PK	88.2	-39.4	2.06 H	107	48.8	0.0
6	#28020.00	37.2 AV	68.2	-31.0	2.06 H	107	37.2	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	39.2 PK	88.2	-49.0	1.62 V	91	25.7	13.5
2	#14010.00	28.1 AV	68.2	-40.1	1.62 V	91	14.6	13.5
3	21015.00	53.7 PK	74.0	-20.3	2.22 V	104	75.9	-22.2
4	21015.00	39.7 AV	54.0	-14.3	2.22 V	104	61.9	-22.2
5	#28020.00	45.1 PK	88.2	-43.1	1.98 V	156	45.1	0.0
6	#28020.00	34.5 AV	68.2	-33.7	1.98 V	156	34.5	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 227 : 7085 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	40.0 PK	88.2	-48.2	1.63 H	242	25.7	14.3
2	#14170.00	28.8 AV	68.2	-39.4	1.63 H	242	14.5	14.3
3	21255.00	46.6 PK	74.0	-27.4	1.69 H	57	69.1	-22.5
4	21255.00	34.7 AV	54.0	-19.3	1.69 H	57	57.2	-22.5
5	#28340.00	49.0 PK	88.2	-39.2	2.02 H	106	49.0	0.0
6	#28340.00	37.7 AV	68.2	-30.5	2.02 H	106	37.7	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	38.7 PK	88.2	-49.5	1.59 V	69	24.4	14.3
2	#14170.00	27.4 AV	68.2	-40.8	1.59 V	69	13.1	14.3
3	21255.00	53.1 PK	74.0	-20.9	2.21 V	99	75.6	-22.5
4	21255.00	39.3 AV	54.0	-14.7	2.21 V	99	61.8	-22.5
5	#28340.00	45.0 PK	88.2	-43.2	1.97 V	160	45.0	0.0
6	#28340.00	34.6 AV	68.2	-33.6	1.97 V	160	34.6	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 7 : 5985 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	40.1 PK	74.0	-33.9	1.61 H	247	28.8	11.3
2	11970.00	28.8 AV	54.0	-25.2	1.61 H	247	17.5	11.3
3	17955.00	46.4 PK	74.0	-27.6	1.67 H	62	22.0	24.4
4	17955.00	34.8 AV	54.0	-19.2	1.67 H	62	10.4	24.4
5	23940.00	49.3 PK	74.0	-24.7	1.99 H	105	70.5	-21.2
6	23940.00	37.9 AV	54.0	-16.1	1.99 H	105	59.1	-21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	39.0 PK	74.0	-35.0	1.69 V	69	27.7	11.3
2	11970.00	27.7 AV	54.0	-26.3	1.69 V	69	16.4	11.3
3	17955.00	54.2 PK	74.0	-19.8	2.11 V	89	29.8	24.4
4	17955.00	40.2 AV	54.0	-13.8	2.11 V	89	15.8	24.4
5	23940.00	44.7 PK	74.0	-29.3	2.07 V	148	65.9	-21.2
6	23940.00	34.4 AV	54.0	-19.6	2.07 V	148	55.6	-21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 802.11ax (HE80)	Channel	CH 39 : 6145 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	39.2 PK	74.0	-34.8	1.59 H	231	28.3	10.9
2	12290.00	28.2 AV	54.0	-25.8	1.59 H	231	17.3	10.9
3	18435.00	46.2 PK	74.0	-27.8	1.77 H	52	69.0	-22.8
4	18435.00	34.4 AV	54.0	-19.6	1.77 H	52	57.2	-22.8
5	#24580.00	49.2 PK	88.2	-39.0	2.02 H	120	69.9	-20.7
6	#24580.00	37.8 AV	68.2	-30.4	2.02 H	120	58.5	-20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	38.6 PK	74.0	-35.4	1.59 V	95	27.7	10.9
2	12290.00	27.6 AV	54.0	-26.4	1.59 V	95	16.7	10.9
3	18435.00	53.2 PK	74.0	-20.8	2.22 V	80	76.0	-22.8
4	18435.00	39.5 AV	54.0	-14.5	2.22 V	80	62.3	-22.8
5	#24580.00	45.3 PK	88.2	-42.9	1.99 V	155	66.0	-20.7
6	#24580.00	34.5 AV	68.2	-33.7	1.99 V	155	55.2	-20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 87 : 6385 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	39.6 PK	88.2	-48.6	1.62 H	233	28.8	10.8
2	#12770.00	28.5 AV	68.2	-39.7	1.62 H	233	17.7	10.8
3	19155.00	46.3 PK	74.0	-27.7	1.70 H	61	69.8	-23.5
4	19155.00	34.6 AV	54.0	-19.4	1.70 H	61	58.1	-23.5
5	#25540.00	48.6 PK	88.2	-39.6	2.07 H	127	82.5	-33.9
6	#25540.00	37.6 AV	68.2	-30.6	2.07 H	127	71.5	-33.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	38.3 PK	88.2	-49.9	1.62 V	87	27.5	10.8
2	#12770.00	27.1 AV	68.2	-41.1	1.62 V	87	16.3	10.8
3	19155.00	53.8 PK	74.0	-20.2	2.10 V	74	77.3	-23.5
4	19155.00	40.1 AV	54.0	-13.9	2.10 V	74	63.6	-23.5
5	#25540.00	45.3 PK	88.2	-42.9	2.01 V	163	79.2	-33.9
6	#25540.00	34.5 AV	68.2	-33.7	2.01 V	163	68.4	-33.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 103 : 6465 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	39.0 PK	88.2	-49.2	1.60 H	247	28.3	10.7
2	#12930.00	28.0 AV	68.2	-40.2	1.60 H	247	17.3	10.7
3	19395.00	46.4 PK	74.0	-27.6	1.77 H	58	69.2	-22.8
4	19395.00	34.8 AV	54.0	-19.2	1.77 H	58	57.6	-22.8
5	#25860.00	48.2 PK	88.2	-40.0	2.07 H	123	82.2	-34.0
6	#25860.00	36.9 AV	68.2	-31.3	2.07 H	123	70.9	-34.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	38.4 PK	88.2	-49.8	1.65 V	98	27.7	10.7
2	#12930.00	27.3 AV	68.2	-40.9	1.65 V	98	16.6	10.7
3	19395.00	53.5 PK	74.0	-20.5	2.21 V	75	76.3	-22.8
4	19395.00	40.0 AV	54.0	-14.0	2.21 V	75	62.8	-22.8
5	#25860.00	45.0 PK	88.2	-43.2	2.06 V	150	79.0	-34.0
6	#25860.00	34.6 AV	68.2	-33.6	2.06 V	150	68.6	-34.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 119 : 6545 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	39.9 PK	88.2	-48.3	1.62 H	242	28.6	11.3
2	#13090.00	28.5 AV	68.2	-39.7	1.62 H	242	17.2	11.3
3	19635.00	45.9 PK	74.0	-28.1	1.76 H	59	68.8	-22.9
4	19635.00	34.2 AV	54.0	-19.8	1.76 H	59	57.1	-22.9
5	#26180.00	48.8 PK	88.2	-39.4	1.99 H	113	82.8	-34.0
6	#26180.00	37.3 AV	68.2	-30.9	1.99 H	113	71.3	-34.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	38.3 PK	88.2	-49.9	1.65 V	88	27.0	11.3
2	#13090.00	27.1 AV	68.2	-41.1	1.65 V	88	15.8	11.3
3	19635.00	54.1 PK	74.0	-19.9	2.21 V	88	77.0	-22.9
4	19635.00	40.3 AV	54.0	-13.7	2.21 V	88	63.2	-22.9
5	#26180.00	45.3 PK	88.2	-42.9	2.03 V	159	79.3	-34.0
6	#26180.00	34.9 AV	68.2	-33.3	2.03 V	159	68.9	-34.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 151 : 6705 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	39.4 PK	88.2	-48.8	1.65 H	246	27.1	12.3
2	#13410.00	28.2 AV	68.2	-40.0	1.65 H	246	15.9	12.3
3	20115.00	45.6 PK	74.0	-28.4	1.71 H	44	68.1	-22.5
4	20115.00	34.0 AV	54.0	-20.0	1.71 H	44	56.5	-22.5
5	#26820.00	48.7 PK	88.2	-39.5	2.06 H	109	48.7	0.0
6	#26820.00	37.5 AV	68.2	-30.7	2.06 H	109	37.5	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	38.2 PK	88.2	-50.0	1.60 V	98	25.9	12.3
2	#13410.00	27.2 AV	68.2	-41.0	1.60 V	98	14.9	12.3
3	20115.00	53.1 PK	74.0	-20.9	2.11 V	90	75.6	-22.5
4	20115.00	39.3 AV	54.0	-14.7	2.11 V	90	61.8	-22.5
5	#26820.00	45.3 PK	88.2	-42.9	2.05 V	151	45.3	0.0
6	#26820.00	34.8 AV	68.2	-33.4	2.05 V	151	34.8	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 183 : 6865 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	40.4 PK	88.2	-47.8	1.64 H	251	27.2	13.2
2	#13730.00	28.9 AV	68.2	-39.3	1.64 H	251	15.7	13.2
3	20595.00	46.3 PK	74.0	-27.7	1.73 H	51	69.1	-22.8
4	20595.00	34.7 AV	54.0	-19.3	1.73 H	51	57.5	-22.8
5	#27460.00	48.5 PK	88.2	-39.7	2.06 H	108	48.5	0.0
6	#27460.00	37.5 AV	68.2	-30.7	2.06 H	108	37.5	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	38.2 PK	88.2	-50.0	1.58 V	89	25.0	13.2
2	#13730.00	27.1 AV	68.2	-41.1	1.58 V	89	13.9	13.2
3	20595.00	54.1 PK	74.0	-19.9	2.15 V	98	76.9	-22.8
4	20595.00	40.2 AV	54.0	-13.8	2.15 V	98	63.0	-22.8
5	#27460.00	45.3 PK	88.2	-42.9	2.03 V	170	45.3	0.0
6	#27460.00	34.7 AV	68.2	-33.5	2.03 V	170	34.7	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 199 : 6945 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	39.5 PK	88.2	-48.7	1.56 H	244	26.2	13.3
2	#13890.00	28.0 AV	68.2	-40.2	1.56 H	244	14.7	13.3
3	20835.00	46.7 PK	74.0	-27.3	1.70 H	48	69.3	-22.6
4	20835.00	34.9 AV	54.0	-19.1	1.70 H	48	57.5	-22.6
5	#27780.00	49.2 PK	88.2	-39.0	2.03 H	105	49.2	0.0
6	#27780.00	37.9 AV	68.2	-30.3	2.03 H	105	37.9	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	39.2 PK	88.2	-49.0	1.62 V	78	25.9	13.3
2	#13890.00	27.9 AV	68.2	-40.3	1.62 V	78	14.6	13.3
3	20835.00	53.9 PK	74.0	-20.1	2.14 V	100	76.5	-22.6
4	20835.00	40.1 AV	54.0	-13.9	2.14 V	100	62.7	-22.6
5	#27780.00	45.5 PK	88.2	-42.7	1.99 V	160	45.5	0.0
6	#27780.00	35.2 AV	68.2	-33.0	1.99 V	160	35.2	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 215 : 7025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	40.0 PK	88.2	-48.2	1.64 H	236	26.4	13.6
2	#14050.00	28.8 AV	68.2	-39.4	1.64 H	236	15.2	13.6
3	21075.00	45.7 PK	74.0	-28.3	1.77 H	64	67.7	-22.0
4	21075.00	34.1 AV	54.0	-19.9	1.77 H	64	56.1	-22.0
5	#28100.00	48.4 PK	88.2	-39.8	2.06 H	113	48.4	0.0
6	#28100.00	37.0 AV	68.2	-31.2	2.06 H	113	37.0	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	38.2 PK	88.2	-50.0	1.69 V	91	24.6	13.6
2	#14050.00	27.1 AV	68.2	-41.1	1.69 V	91	13.5	13.6
3	21075.00	53.4 PK	74.0	-20.6	2.15 V	78	75.4	-22.0
4	21075.00	39.8 AV	54.0	-14.2	2.15 V	78	61.8	-22.0
5	#28100.00	45.5 PK	88.2	-42.7	2.08 V	147	45.5	0.0
6	#28100.00	34.9 AV	68.2	-33.3	2.08 V	147	34.9	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	39.9 PK	74.0	-34.1	1.61 H	249	28.7	11.2
2	12050.00	28.9 AV	54.0	-25.1	1.61 H	249	17.7	11.2
3	18075.00	46.5 PK	74.0	-27.5	1.70 H	47	70.1	-23.6
4	18075.00	34.8 AV	54.0	-19.2	1.70 H	47	58.4	-23.6
5	#24100.00	48.1 PK	88.2	-40.1	2.02 H	111	69.3	-21.2
6	#24100.00	36.9 AV	68.2	-31.3	2.02 H	111	58.1	-21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	38.5 PK	74.0	-35.5	1.65 V	68	27.3	11.2
2	12050.00	27.7 AV	54.0	-26.3	1.65 V	68	16.5	11.2
3	18075.00	53.6 PK	74.0	-20.4	2.14 V	102	77.2	-23.6
4	18075.00	39.9 AV	54.0	-14.1	2.14 V	102	63.5	-23.6
5	#24100.00	45.6 PK	88.2	-42.6	2.01 V	152	66.8	-21.2
6	#24100.00	34.8 AV	68.2	-33.4	2.01 V	152	56.0	-21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	40.1 PK	74.0	-33.9	1.58 H	240	29.7	10.4
2	12370.00	28.9 AV	54.0	-25.1	1.58 H	240	18.5	10.4
3	18555.00	46.0 PK	74.0	-28.0	1.69 H	57	69.1	-23.1
4	18555.00	34.1 AV	54.0	-19.9	1.69 H	57	57.2	-23.1
5	#24740.00	48.5 PK	88.2	-39.7	2.02 H	122	69.7	-21.2
6	#24740.00	37.1 AV	68.2	-31.1	2.02 H	122	58.3	-21.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	38.6 PK	74.0	-35.4	1.59 V	89	28.2	10.4
2	12370.00	27.7 AV	54.0	-26.3	1.59 V	89	17.3	10.4
3	18555.00	53.3 PK	74.0	-20.7	2.12 V	83	76.4	-23.1
4	18555.00	39.7 AV	54.0	-14.3	2.12 V	83	62.8	-23.1
5	#24740.00	45.4 PK	88.2	-42.8	2.07 V	142	66.6	-21.2
6	#24740.00	34.6 AV	68.2	-33.6	2.07 V	142	55.8	-21.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	39.3 PK	74.0	-34.7	1.65 H	238	28.5	10.8
2	12690.00	28.1 AV	54.0	-25.9	1.65 H	238	17.3	10.8
3	19035.00	46.5 PK	74.0	-27.5	1.68 H	38	69.6	-23.1
4	19035.00	35.0 AV	54.0	-19.0	1.68 H	38	58.1	-23.1
5	#25380.00	48.3 PK	88.2	-39.9	2.08 H	121	82.0	-33.7
6	#25380.00	37.3 AV	68.2	-30.9	2.08 H	121	71.0	-33.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	39.1 PK	74.0	-34.9	1.65 V	92	28.3	10.8
2	12690.00	27.8 AV	54.0	-26.2	1.65 V	92	17.0	10.8
3	19035.00	53.8 PK	74.0	-20.2	2.11 V	76	76.9	-23.1
4	19035.00	39.7 AV	54.0	-14.3	2.11 V	76	62.8	-23.1
5	#25380.00	45.3 PK	88.2	-42.9	1.98 V	171	79.0	-33.7
6	#25380.00	34.7 AV	68.2	-33.5	1.98 V	171	68.4	-33.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 111 : 6505 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	39.7 PK	88.2	-48.5	1.66 H	225	28.7	11.0
2	#13010.00	28.3 AV	68.2	-39.9	1.66 H	225	17.3	11.0
3	19515.00	46.2 PK	74.0	-27.8	1.76 H	52	68.6	-22.4
4	19515.00	34.1 AV	54.0	-19.9	1.76 H	52	56.5	-22.4
5	#26020.00	48.7 PK	88.2	-39.5	2.06 H	128	82.7	-34.0
6	#26020.00	37.3 AV	68.2	-30.9	2.06 H	128	71.3	-34.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	38.9 PK	88.2	-49.3	1.65 V	95	27.9	11.0
2	#13010.00	27.7 AV	68.2	-40.5	1.65 V	95	16.7	11.0
3	19515.00	53.8 PK	74.0	-20.2	2.14 V	101	76.2	-22.4
4	19515.00	40.1 AV	54.0	-13.9	2.14 V	101	62.5	-22.4
5	#26020.00	45.4 PK	88.2	-42.8	2.01 V	143	79.4	-34.0
6	#26020.00	34.8 AV	68.2	-33.4	2.01 V	143	68.8	-34.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	39.9 PK	74.0	-34.1	1.56 H	241	27.9	12.0
2	13330.00	28.5 AV	54.0	-25.5	1.56 H	241	16.5	12.0
3	19995.00	46.6 PK	74.0	-27.4	1.72 H	49	68.8	-22.2
4	19995.00	34.5 AV	54.0	-19.5	1.72 H	49	56.7	-22.2
5	#26660.00	48.7 PK	88.2	-39.5	2.06 H	121	48.7	0.0
6	#26660.00	37.6 AV	68.2	-30.6	2.06 H	121	37.6	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	38.5 PK	74.0	-35.5	1.62 V	77	26.5	12.0
2	13330.00	27.6 AV	54.0	-26.4	1.62 V	77	15.6	12.0
3	19995.00	54.0 PK	74.0	-20.0	2.21 V	79	76.2	-22.2
4	19995.00	40.2 AV	54.0	-13.8	2.21 V	79	62.4	-22.2
5	#26660.00	44.8 PK	88.2	-43.4	2.05 V	142	44.8	0.0
6	#26660.00	34.5 AV	68.2	-33.7	2.05 V	142	34.5	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 175 : 6825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	39.0 PK	88.2	-49.2	1.57 H	238	25.8	13.2
2	#13650.00	28.0 AV	68.2	-40.2	1.57 H	238	14.8	13.2
3	20475.00	45.9 PK	74.0	-28.1	1.67 H	47	68.0	-22.1
4	20475.00	34.0 AV	54.0	-20.0	1.67 H	47	56.1	-22.1
5	#27300.00	48.6 PK	88.2	-39.6	2.03 H	126	48.6	0.0
6	#27300.00	37.4 AV	68.2	-30.8	2.03 H	126	37.4	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	38.3 PK	88.2	-49.9	1.62 V	98	25.1	13.2
2	#13650.00	27.3 AV	68.2	-40.9	1.62 V	98	14.1	13.2
3	20475.00	53.5 PK	74.0	-20.5	2.16 V	90	75.6	-22.1
4	20475.00	39.6 AV	54.0	-14.4	2.16 V	90	61.7	-22.1
5	#27300.00	45.8 PK	88.2	-42.4	2.02 V	152	45.8	0.0
6	#27300.00	35.2 AV	68.2	-33.0	2.02 V	152	35.2	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 207 : 6985 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	40.0 PK	88.2	-48.2	1.55 H	253	26.6	13.4
2	#13970.00	28.6 AV	68.2	-39.6	1.55 H	253	15.2	13.4
3	20955.00	46.7 PK	74.0	-27.3	1.73 H	51	69.0	-22.3
4	20955.00	35.0 AV	54.0	-19.0	1.73 H	51	57.3	-22.3
5	#27940.00	49.2 PK	88.2	-39.0	1.99 H	129	49.2	0.0
6	#27940.00	37.8 AV	68.2	-30.4	1.99 H	129	37.8	0.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	39.1 PK	88.2	-49.1	1.65 V	68	25.7	13.4
2	#13970.00	28.0 AV	68.2	-40.2	1.65 V	68	14.6	13.4
3	20955.00	53.7 PK	74.0	-20.3	2.18 V	80	76.0	-22.3
4	20955.00	39.8 AV	54.0	-14.2	2.18 V	80	62.1	-22.3
5	#27940.00	45.9 PK	88.2	-42.3	2.01 V	159	45.9	0.0
6	#27940.00	35.3 AV	68.2	-32.9	2.01 V	159	35.3	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

**20MHz Preamble
RU26**

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	41.7 PK	74.0	-32.3	1.48 H	342	30.3	11.4
2	11870.00	29.8 AV	54.0	-24.2	1.48 H	342	18.4	11.4
3	17805.00	45.2 PK	74.0	-28.8	2.64 H	241	24.7	20.5
4	17805.00	33.7 AV	54.0	-20.3	2.64 H	241	13.2	20.5
5	23740.00	49.3 PK	74.0	-24.7	2.05 H	162	52.6	-3.3
6	23740.00	37.6 AV	54.0	-16.4	2.05 H	162	40.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	44.0 PK	74.0	-30.0	3.89 V	85	32.6	11.4
2	11870.00	31.9 AV	54.0	-22.1	3.89 V	85	20.5	11.4
3	17805.00	43.9 PK	74.0	-30.1	2.30 V	117	23.4	20.5
4	17805.00	31.3 AV	54.0	-22.7	2.30 V	117	10.8	20.5
5	23740.00	45.8 PK	74.0	-28.2	1.94 V	137	49.1	-3.3
6	23740.00	34.3 AV	54.0	-19.7	1.94 V	137	37.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	42.3 PK	74.0	-31.7	1.53 H	335	30.8	11.5
2	11910.00	30.2 AV	54.0	-23.8	1.53 H	335	18.7	11.5
3	17865.00	45.3 PK	74.0	-28.7	2.70 H	239	23.7	21.6
4	17865.00	33.8 AV	54.0	-20.2	2.70 H	239	12.2	21.6
5	23820.00	48.7 PK	74.0	-25.3	2.07 H	171	52.0	-3.3
6	23820.00	37.1 AV	54.0	-16.9	2.07 H	171	40.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	44.0 PK	74.0	-30.0	3.93 V	60	32.5	11.5
2	11910.00	31.8 AV	54.0	-22.2	3.93 V	60	20.3	11.5
3	17865.00	43.7 PK	74.0	-30.3	2.34 V	124	22.1	21.6
4	17865.00	31.2 AV	54.0	-22.8	2.34 V	124	9.6	21.6
5	23820.00	46.3 PK	74.0	-27.7	1.96 V	143	49.6	-3.3
6	23820.00	34.4 AV	54.0	-19.6	1.96 V	143	37.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	41.9 PK	74.0	-32.1	1.47 H	328	31.3	10.6
2	12350.00	29.7 AV	54.0	-24.3	1.47 H	328	19.1	10.6
3	18525.00	45.9 PK	74.0	-28.1	2.59 H	249	52.5	-6.6
4	18525.00	34.2 AV	54.0	-19.8	2.59 H	249	40.8	-6.6
5	#24700.00	49.2 PK	88.2	-39.0	2.03 H	162	51.3	-2.1
6	#24700.00	37.5 AV	68.2	-30.7	2.03 H	162	39.6	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	43.5 PK	74.0	-30.5	3.96 V	64	32.9	10.6
2	12350.00	31.2 AV	54.0	-22.8	3.96 V	64	20.6	10.6
3	18525.00	43.8 PK	74.0	-30.2	2.30 V	129	50.4	-6.6
4	18525.00	30.8 AV	54.0	-23.2	2.30 V	129	37.4	-6.6
5	#24700.00	46.6 PK	88.2	-41.6	1.93 V	133	48.7	-2.1
6	#24700.00	35.0 AV	68.2	-33.2	1.93 V	133	37.1	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	41.8 PK	88.2	-46.4	1.48 H	351	31.0	10.8
2	#12830.00	30.1 AV	68.2	-38.1	1.48 H	351	19.3	10.8
3	19245.00	45.3 PK	74.0	-28.7	2.61 H	240	51.9	-6.6
4	19245.00	33.6 AV	54.0	-20.4	2.61 H	240	40.2	-6.6
5	#25660.00	49.1 PK	88.2	-39.1	1.99 H	172	50.4	-1.3
6	#25660.00	37.3 AV	68.2	-30.9	1.99 H	172	38.6	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	43.5 PK	88.2	-44.7	3.91 V	74	32.7	10.8
2	#12830.00	31.5 AV	68.2	-36.7	3.91 V	74	20.7	10.8
3	19245.00	43.4 PK	74.0	-30.6	2.28 V	121	50.0	-6.6
4	19245.00	30.9 AV	54.0	-23.1	2.28 V	121	37.5	-6.6
5	#25660.00	46.4 PK	88.2	-41.8	1.94 V	138	47.7	-1.3
6	#25660.00	35.0 AV	68.2	-33.2	1.94 V	138	36.3	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 97 : 6435 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	41.6 PK	88.2	-46.6	1.51 H	349	30.9	10.7
2	#12870.00	29.9 AV	68.2	-38.3	1.51 H	349	19.2	10.7
3	19305.00	45.6 PK	74.0	-28.4	2.64 H	254	52.1	-6.5
4	19305.00	34.2 AV	54.0	-19.8	2.64 H	254	40.7	-6.5
5	#25740.00	49.7 PK	88.2	-38.5	2.01 H	170	51.0	-1.3
6	#25740.00	37.9 AV	68.2	-30.3	2.01 H	170	39.2	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.1 PK	88.2	-45.1	3.95 V	82	32.4	10.7
2	#12870.00	31.2 AV	68.2	-37.0	3.95 V	82	20.5	10.7
3	19305.00	43.4 PK	74.0	-30.6	2.29 V	110	49.9	-6.5
4	19305.00	30.6 AV	54.0	-23.4	2.29 V	110	37.1	-6.5
5	#25740.00	46.8 PK	88.2	-41.4	2.01 V	150	48.1	-1.3
6	#25740.00	34.9 AV	68.2	-33.3	2.01 V	150	36.2	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 105 : 6475 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	42.0 PK	88.2	-46.2	1.48 H	348	31.3	10.7
2	#12950.00	30.2 AV	68.2	-38.0	1.48 H	348	19.5	10.7
3	19425.00	45.1 PK	74.0	-28.9	2.60 H	239	51.3	-6.2
4	19425.00	33.8 AV	54.0	-20.2	2.60 H	239	40.0	-6.2
5	#25900.00	49.9 PK	88.2	-38.3	2.03 H	153	51.1	-1.2
6	#25900.00	37.9 AV	68.2	-30.3	2.03 H	153	39.1	-1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	43.3 PK	88.2	-44.9	3.92 V	68	32.6	10.7
2	#12950.00	31.2 AV	68.2	-37.0	3.92 V	68	20.5	10.7
3	19425.00	44.1 PK	74.0	-29.9	2.29 V	118	50.3	-6.2
4	19425.00	31.4 AV	54.0	-22.6	2.29 V	118	37.6	-6.2
5	#25900.00	46.3 PK	88.2	-41.9	2.02 V	140	47.5	-1.2
6	#25900.00	34.4 AV	68.2	-33.8	2.02 V	140	35.6	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 113 : 6515 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	42.4 PK	88.2	-45.8	1.51 H	331	31.4	11.0
2	#13030.00	30.2 AV	68.2	-38.0	1.51 H	331	19.2	11.0
3	19545.00	44.9 PK	74.0	-29.1	2.64 H	256	51.1	-6.2
4	19545.00	33.3 AV	54.0	-20.7	2.64 H	256	39.5	-6.2
5	#26060.00	49.4 PK	88.2	-38.8	2.09 H	161	50.4	-1.0
6	#26060.00	37.9 AV	68.2	-30.3	2.09 H	161	38.9	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	43.7 PK	88.2	-44.5	3.90 V	69	32.7	11.0
2	#13030.00	31.5 AV	68.2	-36.7	3.90 V	69	20.5	11.0
3	19545.00	44.1 PK	74.0	-29.9	2.31 V	116	50.3	-6.2
4	19545.00	31.5 AV	54.0	-22.5	2.31 V	116	37.7	-6.2
5	#26060.00	46.1 PK	88.2	-42.1	2.01 V	164	47.1	-1.0
6	#26060.00	34.6 AV	68.2	-33.6	2.01 V	164	35.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	41.2 PK	88.2	-47.0	1.49 H	357	30.1	11.1
2	#13070.00	29.4 AV	68.2	-38.8	1.49 H	357	18.3	11.1
3	19605.00	45.2 PK	74.0	-28.8	2.68 H	250	51.4	-6.2
4	19605.00	33.7 AV	54.0	-20.3	2.68 H	250	39.9	-6.2
5	#26140.00	49.3 PK	88.2	-38.9	2.00 H	163	50.3	-1.0
6	#26140.00	37.8 AV	68.2	-30.4	2.00 H	163	38.8	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.4 PK	88.2	-43.8	3.86 V	54	33.3	11.1
2	#13070.00	32.0 AV	68.2	-36.2	3.86 V	54	20.9	11.1
3	19605.00	43.5 PK	74.0	-30.5	2.27 V	131	49.7	-6.2
4	19605.00	30.8 AV	54.0	-23.2	2.27 V	131	37.0	-6.2
5	#26140.00	46.5 PK	88.2	-41.7	1.97 V	143	47.5	-1.0
6	#26140.00	34.8 AV	68.2	-33.4	1.97 V	143	35.8	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	42.3 PK	74.0	-31.7	1.58 H	308	30.0	12.3
2	13390.00	29.7 AV	54.0	-24.3	1.58 H	308	17.4	12.3
3	20085.00	45.5 PK	74.0	-28.5	1.61 H	29	51.2	-5.7
4	20085.00	34.0 AV	54.0	-20.0	1.61 H	29	39.7	-5.7
5	#26780.00	48.7 PK	88.2	-39.5	1.88 H	104	49.3	-0.6
6	#26780.00	37.2 AV	68.2	-31.0	1.88 H	104	37.8	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	43.8 PK	74.0	-30.2	3.88 V	75	31.5	12.3
2	13390.00	31.6 AV	54.0	-22.4	3.88 V	75	19.3	12.3
3	20085.00	43.6 PK	74.0	-30.4	2.31 V	131	49.3	-5.7
4	20085.00	30.7 AV	54.0	-23.3	2.31 V	131	36.4	-5.7
5	#26780.00	46.1 PK	88.2	-42.1	1.93 V	134	46.7	-0.6
6	#26780.00	34.7 AV	68.2	-33.5	1.93 V	134	35.3	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	42.0 PK	88.2	-46.2	1.45 H	337	28.9	13.1
2	#13710.00	30.1 AV	68.2	-38.1	1.45 H	337	17.0	13.1
3	20565.00	45.6 PK	74.0	-28.4	2.65 H	242	50.7	-5.1
4	20565.00	33.8 AV	54.0	-20.2	2.65 H	242	38.9	-5.1
5	#27420.00	49.1 PK	88.2	-39.1	2.05 H	164	50.6	-1.5
6	#27420.00	37.7 AV	68.2	-30.5	2.05 H	164	39.2	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.3 PK	88.2	-43.9	3.86 V	64	31.2	13.1
2	#13710.00	31.9 AV	68.2	-36.3	3.86 V	64	18.8	13.1
3	20565.00	43.6 PK	74.0	-30.4	2.27 V	116	48.7	-5.1
4	20565.00	30.7 AV	54.0	-23.3	2.27 V	116	35.8	-5.1
5	#27420.00	46.0 PK	88.2	-42.2	2.01 V	149	47.5	-1.5
6	#27420.00	34.2 AV	68.2	-34.0	2.01 V	149	35.7	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 185 : 6875 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	41.4 PK	88.2	-46.8	1.52 H	344	28.1	13.3
2	#13750.00	29.7 AV	68.2	-38.5	1.52 H	344	16.4	13.3
3	20625.00	45.8 PK	74.0	-28.2	2.59 H	243	50.7	-4.9
4	20625.00	34.1 AV	54.0	-19.9	2.59 H	243	39.0	-4.9
5	#27500.00	49.9 PK	88.2	-38.3	2.09 H	158	51.3	-1.4
6	#27500.00	38.0 AV	68.2	-30.2	2.09 H	158	39.4	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	43.9 PK	88.2	-44.3	3.93 V	69	30.6	13.3
2	#13750.00	31.6 AV	68.2	-36.6	3.93 V	69	18.3	13.3
3	20625.00	43.6 PK	74.0	-30.4	2.29 V	123	48.5	-4.9
4	20625.00	31.0 AV	54.0	-23.0	2.29 V	123	35.9	-4.9
5	#27500.00	46.4 PK	88.2	-41.8	1.97 V	162	47.8	-1.4
6	#27500.00	34.6 AV	68.2	-33.6	1.97 V	162	36.0	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 209 : 6995 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	41.8 PK	88.2	-46.4	1.50 H	341	28.4	13.4
2	#13990.00	30.1 AV	68.2	-38.1	1.50 H	341	16.7	13.4
3	20985.00	45.3 PK	74.0	-28.7	2.63 H	250	49.8	-4.5
4	20985.00	33.9 AV	54.0	-20.1	2.63 H	250	38.4	-4.5
5	#27980.00	49.4 PK	88.2	-38.8	2.02 H	160	51.0	-1.6
6	#27980.00	37.5 AV	68.2	-30.7	2.02 H	160	39.1	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	43.9 PK	88.2	-44.3	3.91 V	55	30.5	13.4
2	#13990.00	31.8 AV	68.2	-36.4	3.91 V	55	18.4	13.4
3	20985.00	43.4 PK	74.0	-30.6	2.31 V	124	47.9	-4.5
4	20985.00	30.7 AV	54.0	-23.3	2.31 V	124	35.2	-4.5
5	#27980.00	45.9 PK	88.2	-42.3	1.99 V	132	47.5	-1.6
6	#27980.00	34.3 AV	68.2	-33.9	1.99 V	132	35.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 229 : 7095 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14190.00	41.9 PK	88.2	-46.3	1.46 H	335	27.5	14.4
2	#14190.00	29.9 AV	68.2	-38.3	1.46 H	335	15.5	14.4
3	21285.00	44.9 PK	74.0	-29.1	2.63 H	244	49.1	-4.2
4	21285.00	33.3 AV	54.0	-20.7	2.63 H	244	37.5	-4.2
5	#28380.00	48.6 PK	88.2	-39.6	2.07 H	154	50.3	-1.7
6	#28380.00	37.2 AV	68.2	-31.0	2.07 H	154	38.9	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14190.00	43.2 PK	88.2	-45.0	3.95 V	61	28.8	14.4
2	#14190.00	31.2 AV	68.2	-37.0	3.95 V	61	16.8	14.4
3	21285.00	43.6 PK	74.0	-30.4	2.34 V	124	47.8	-4.2
4	21285.00	30.9 AV	54.0	-23.1	2.34 V	124	35.1	-4.2
5	#28380.00	45.9 PK	88.2	-42.3	1.91 V	152	47.6	-1.7
6	#28380.00	34.2 AV	68.2	-34.0	1.91 V	152	35.9	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 233 : 7115 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	42.4 PK	88.2	-45.8	1.42 H	343	28.0	14.4
2	#14230.00	30.3 AV	68.2	-37.9	1.42 H	343	15.9	14.4
3	21345.00	45.0 PK	74.0	-29.0	2.61 H	228	49.2	-4.2
4	21345.00	33.2 AV	54.0	-20.8	2.61 H	228	37.4	-4.2
5	#28460.00	50.1 PK	88.2	-38.1	2.03 H	174	52.0	-1.9
6	#28460.00	38.1 AV	68.2	-30.1	2.03 H	174	40.0	-1.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	43.7 PK	88.2	-44.5	3.87 V	80	29.3	14.4
2	#14230.00	31.5 AV	68.2	-36.7	3.87 V	80	17.1	14.4
3	21345.00	43.6 PK	74.0	-30.4	2.26 V	121	47.8	-4.2
4	21345.00	31.0 AV	54.0	-23.0	2.26 V	121	35.2	-4.2
5	#28460.00	46.2 PK	88.2	-42.0	1.91 V	163	48.1	-1.9
6	#28460.00	34.2 AV	68.2	-34.0	1.91 V	163	36.1	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU242

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 2 : 5935 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	41.2 PK	74.0	-32.8	1.52 H	357	29.8	11.4
2	11870.00	29.5 AV	54.0	-24.5	1.52 H	357	18.1	11.4
3	17805.00	45.3 PK	74.0	-28.7	2.61 H	254	24.8	20.5
4	17805.00	33.8 AV	54.0	-20.2	2.61 H	254	13.3	20.5
5	23740.00	49.5 PK	74.0	-24.5	2.05 H	153	52.8	-3.3
6	23740.00	37.9 AV	54.0	-16.1	2.05 H	153	41.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11870.00	43.9 PK	74.0	-30.1	3.88 V	60	32.5	11.4
2	11870.00	31.3 AV	54.0	-22.7	3.88 V	60	19.9	11.4
3	17805.00	44.2 PK	74.0	-29.8	2.23 V	116	23.7	20.5
4	17805.00	31.9 AV	54.0	-22.1	2.23 V	116	11.4	20.5
5	23740.00	45.9 PK	74.0	-28.1	1.98 V	131	49.2	-3.3
6	23740.00	34.4 AV	54.0	-19.6	1.98 V	131	37.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	42.0 PK	74.0	-32.0	1.45 H	328	30.5	11.5
2	11910.00	30.2 AV	54.0	-23.8	1.45 H	328	18.7	11.5
3	17865.00	44.8 PK	74.0	-29.2	2.60 H	242	23.2	21.6
4	17865.00	33.6 AV	54.0	-20.4	2.60 H	242	12.0	21.6
5	23820.00	49.1 PK	74.0	-24.9	2.07 H	167	52.4	-3.3
6	23820.00	37.7 AV	54.0	-16.3	2.07 H	167	41.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11910.00	43.9 PK	74.0	-30.1	3.90 V	65	32.4	11.5
2	11910.00	31.7 AV	54.0	-22.3	3.90 V	65	20.2	11.5
3	17865.00	44.2 PK	74.0	-29.8	2.24 V	112	22.6	21.6
4	17865.00	31.9 AV	54.0	-22.1	2.24 V	112	10.3	21.6
5	23820.00	46.8 PK	74.0	-27.2	1.96 V	154	50.1	-3.3
6	23820.00	35.2 AV	54.0	-18.8	1.96 V	154	38.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	41.7 PK	74.0	-32.3	1.52 H	344	31.1	10.6
2	12350.00	29.6 AV	54.0	-24.4	1.52 H	344	19.0	10.6
3	18525.00	45.7 PK	74.0	-28.3	2.60 H	246	52.3	-6.6
4	18525.00	34.2 AV	54.0	-19.8	2.60 H	246	40.8	-6.6
5	#24700.00	49.0 PK	88.2	-39.2	2.08 H	157	51.1	-2.1
6	#24700.00	37.4 AV	68.2	-30.8	2.08 H	157	39.5	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12350.00	43.3 PK	74.0	-30.7	3.94 V	63	32.7	10.6
2	12350.00	31.1 AV	54.0	-22.9	3.94 V	63	20.5	10.6
3	18525.00	43.5 PK	74.0	-30.5	2.19 V	110	50.1	-6.6
4	18525.00	31.0 AV	54.0	-23.0	2.19 V	110	37.6	-6.6
5	#24700.00	46.0 PK	88.2	-42.2	2.05 V	150	48.1	-2.1
6	#24700.00	34.6 AV	68.2	-33.6	2.05 V	150	36.7	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	42.2 PK	88.2	-46.0	1.51 H	336	31.4	10.8
2	#12830.00	30.2 AV	68.2	-38.0	1.51 H	336	19.4	10.8
3	19245.00	45.3 PK	74.0	-28.7	2.60 H	238	51.9	-6.6
4	19245.00	33.9 AV	54.0	-20.1	2.60 H	238	40.5	-6.6
5	#25660.00	49.1 PK	88.2	-39.1	2.00 H	156	50.4	-1.3
6	#25660.00	37.4 AV	68.2	-30.8	2.00 H	156	38.7	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12830.00	44.4 PK	88.2	-43.8	3.92 V	76	33.6	10.8
2	#12830.00	31.7 AV	68.2	-36.5	3.92 V	76	20.9	10.8
3	19245.00	44.5 PK	74.0	-29.5	2.22 V	126	51.1	-6.6
4	19245.00	31.9 AV	54.0	-22.1	2.22 V	126	38.5	-6.6
5	#25660.00	46.0 PK	88.2	-42.2	1.98 V	147	47.3	-1.3
6	#25660.00	34.6 AV	68.2	-33.6	1.98 V	147	35.9	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 97 : 6435 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	41.2 PK	88.2	-47.0	1.47 H	332	30.5	10.7
2	#12870.00	29.4 AV	68.2	-38.8	1.47 H	332	18.7	10.7
3	19305.00	45.1 PK	74.0	-28.9	2.66 H	228	51.6	-6.5
4	19305.00	33.8 AV	54.0	-20.2	2.66 H	228	40.3	-6.5
5	#25740.00	49.0 PK	88.2	-39.2	2.08 H	159	50.3	-1.3
6	#25740.00	37.4 AV	68.2	-30.8	2.08 H	159	38.7	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12870.00	43.4 PK	88.2	-44.8	3.93 V	70	32.7	10.7
2	#12870.00	30.8 AV	68.2	-37.4	3.93 V	70	20.1	10.7
3	19305.00	43.5 PK	74.0	-30.5	2.30 V	132	50.0	-6.5
4	19305.00	31.2 AV	54.0	-22.8	2.30 V	132	37.7	-6.5
5	#25740.00	46.4 PK	88.2	-41.8	2.00 V	145	47.7	-1.3
6	#25740.00	34.7 AV	68.2	-33.5	2.00 V	145	36.0	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 105 : 6475 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	41.3 PK	88.2	-46.9	1.46 H	336	30.6	10.7
2	#12950.00	29.4 AV	68.2	-38.8	1.46 H	336	18.7	10.7
3	19425.00	45.5 PK	74.0	-28.5	2.64 H	228	51.7	-6.2
4	19425.00	33.7 AV	54.0	-20.3	2.64 H	228	39.9	-6.2
5	#25900.00	49.1 PK	88.2	-39.1	2.01 H	153	50.3	-1.2
6	#25900.00	37.3 AV	68.2	-30.9	2.01 H	153	38.5	-1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12950.00	43.4 PK	88.2	-44.8	3.89 V	66	32.7	10.7
2	#12950.00	31.2 AV	68.2	-37.0	3.89 V	66	20.5	10.7
3	19425.00	44.1 PK	74.0	-29.9	2.23 V	129	50.3	-6.2
4	19425.00	31.2 AV	54.0	-22.8	2.23 V	129	37.4	-6.2
5	#25900.00	46.3 PK	88.2	-41.9	2.05 V	130	47.5	-1.2
6	#25900.00	34.6 AV	68.2	-33.6	2.05 V	130	35.8	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 113 : 6515 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	41.7 PK	88.2	-46.5	1.44 H	345	30.7	11.0
2	#13030.00	29.9 AV	68.2	-38.3	1.44 H	345	18.9	11.0
3	19545.00	45.5 PK	74.0	-28.5	2.67 H	234	51.7	-6.2
4	19545.00	33.7 AV	54.0	-20.3	2.67 H	234	39.9	-6.2
5	#26060.00	49.6 PK	88.2	-38.6	2.00 H	176	50.6	-1.0
6	#26060.00	38.1 AV	68.2	-30.1	2.00 H	176	39.1	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13030.00	43.6 PK	88.2	-44.6	3.88 V	80	32.6	11.0
2	#13030.00	31.1 AV	68.2	-37.1	3.88 V	80	20.1	11.0
3	19545.00	44.0 PK	74.0	-30.0	2.20 V	102	50.2	-6.2
4	19545.00	31.4 AV	54.0	-22.6	2.20 V	102	37.6	-6.2
5	#26060.00	46.0 PK	88.2	-42.2	1.95 V	135	47.0	-1.0
6	#26060.00	34.4 AV	68.2	-33.8	1.95 V	135	35.4	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	42.2 PK	88.2	-46.0	1.45 H	353	31.1	11.1
2	#13070.00	30.0 AV	68.2	-38.2	1.45 H	353	18.9	11.1
3	19605.00	44.9 PK	74.0	-29.1	2.60 H	243	51.1	-6.2
4	19605.00	33.3 AV	54.0	-20.7	2.60 H	243	39.5	-6.2
5	#26140.00	48.9 PK	88.2	-39.3	2.00 H	151	49.9	-1.0
6	#26140.00	37.2 AV	68.2	-31.0	2.00 H	151	38.2	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13070.00	44.1 PK	88.2	-44.1	3.89 V	64	33.0	11.1
2	#13070.00	31.5 AV	68.2	-36.7	3.89 V	64	20.4	11.1
3	19605.00	44.1 PK	74.0	-29.9	2.23 V	110	50.3	-6.2
4	19605.00	31.7 AV	54.0	-22.3	2.23 V	110	37.9	-6.2
5	#26140.00	46.1 PK	88.2	-42.1	2.01 V	131	47.1	-1.0
6	#26140.00	34.6 AV	68.2	-33.6	2.01 V	131	35.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 149 : 6695 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	41.8 PK	74.0	-32.2	1.43 H	347	29.5	12.3
2	13390.00	29.8 AV	54.0	-24.2	1.43 H	347	17.5	12.3
3	20085.00	45.1 PK	74.0	-28.9	2.68 H	243	50.8	-5.7
4	20085.00	33.7 AV	54.0	-20.3	2.68 H	243	39.4	-5.7
5	#26780.00	49.5 PK	88.2	-38.7	2.00 H	155	50.1	-0.6
6	#26780.00	37.8 AV	68.2	-30.4	2.00 H	155	38.4	-0.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13390.00	43.3 PK	74.0	-30.7	3.85 V	61	31.0	12.3
2	13390.00	31.2 AV	54.0	-22.8	3.85 V	61	18.9	12.3
3	20085.00	44.1 PK	74.0	-29.9	2.23 V	126	49.8	-5.7
4	20085.00	31.8 AV	54.0	-22.2	2.23 V	126	37.5	-5.7
5	#26780.00	46.6 PK	88.2	-41.6	2.03 V	153	47.2	-0.6
6	#26780.00	34.8 AV	68.2	-33.4	2.03 V	153	35.4	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	42.1 PK	88.2	-46.1	1.50 H	354	29.0	13.1
2	#13710.00	29.9 AV	68.2	-38.3	1.50 H	354	16.8	13.1
3	20565.00	44.9 PK	74.0	-29.1	2.68 H	235	50.0	-5.1
4	20565.00	33.3 AV	54.0	-20.7	2.68 H	235	38.4	-5.1
5	#27420.00	49.0 PK	88.2	-39.2	2.06 H	160	50.5	-1.5
6	#27420.00	37.3 AV	68.2	-30.9	2.06 H	160	38.8	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13710.00	44.1 PK	88.2	-44.1	3.90 V	75	31.0	13.1
2	#13710.00	31.4 AV	68.2	-36.8	3.90 V	75	18.3	13.1
3	20565.00	44.3 PK	74.0	-29.7	2.25 V	120	49.4	-5.1
4	20565.00	31.9 AV	54.0	-22.1	2.25 V	120	37.0	-5.1
5	#27420.00	46.4 PK	88.2	-41.8	2.04 V	157	47.9	-1.5
6	#27420.00	34.6 AV	68.2	-33.6	2.04 V	157	36.1	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 185 : 6875 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	41.4 PK	88.2	-46.8	1.45 H	340	28.1	13.3
2	#13750.00	29.6 AV	68.2	-38.6	1.45 H	340	16.3	13.3
3	20625.00	45.0 PK	74.0	-29.0	2.63 H	241	49.9	-4.9
4	20625.00	33.7 AV	54.0	-20.3	2.63 H	241	38.6	-4.9
5	#27500.00	49.0 PK	88.2	-39.2	2.01 H	166	50.4	-1.4
6	#27500.00	37.2 AV	68.2	-31.0	2.01 H	166	38.6	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13750.00	43.7 PK	88.2	-44.5	3.86 V	81	30.4	13.3
2	#13750.00	31.1 AV	68.2	-37.1	3.86 V	81	17.8	13.3
3	20625.00	43.6 PK	74.0	-30.4	2.20 V	116	48.5	-4.9
4	20625.00	31.2 AV	54.0	-22.8	2.20 V	116	36.1	-4.9
5	#27500.00	46.4 PK	88.2	-41.8	2.06 V	129	47.8	-1.4
6	#27500.00	34.8 AV	68.2	-33.4	2.06 V	129	36.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 209 : 6995 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	41.6 PK	88.2	-46.6	1.47 H	329	28.2	13.4
2	#13990.00	30.0 AV	68.2	-38.2	1.47 H	329	16.6	13.4
3	20985.00	45.0 PK	74.0	-29.0	2.69 H	254	49.5	-4.5
4	20985.00	33.6 AV	54.0	-20.4	2.69 H	254	38.1	-4.5
5	#27980.00	48.9 PK	88.2	-39.3	2.10 H	171	50.5	-1.6
6	#27980.00	37.1 AV	68.2	-31.1	2.10 H	171	38.7	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13990.00	43.5 PK	88.2	-44.7	3.88 V	60	30.1	13.4
2	#13990.00	31.3 AV	68.2	-36.9	3.88 V	60	17.9	13.4
3	20985.00	44.3 PK	74.0	-29.7	2.22 V	130	48.8	-4.5
4	20985.00	31.9 AV	54.0	-22.1	2.22 V	130	36.4	-4.5
5	#27980.00	46.9 PK	88.2	-41.3	2.04 V	131	48.5	-1.6
6	#27980.00	35.3 AV	68.2	-32.9	2.04 V	131	36.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 229 : 7095 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14190.00	42.2 PK	88.2	-46.0	1.51 H	336	27.8	14.4
2	#14190.00	30.2 AV	68.2	-38.0	1.51 H	336	15.8	14.4
3	21285.00	45.7 PK	74.0	-28.3	2.59 H	255	49.9	-4.2
4	21285.00	33.9 AV	54.0	-20.1	2.59 H	255	38.1	-4.2
5	#28380.00	48.6 PK	88.2	-39.6	2.05 H	162	50.3	-1.7
6	#28380.00	37.1 AV	68.2	-31.1	2.05 H	162	38.8	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14190.00	44.1 PK	88.2	-44.1	3.86 V	77	29.7	14.4
2	#14190.00	31.7 AV	68.2	-36.5	3.86 V	77	17.3	14.4
3	21285.00	43.9 PK	74.0	-30.1	2.20 V	111	48.1	-4.2
4	21285.00	31.5 AV	54.0	-22.5	2.20 V	111	35.7	-4.2
5	#28380.00	46.9 PK	88.2	-41.3	1.95 V	131	48.6	-1.7
6	#28380.00	34.9 AV	68.2	-33.3	1.95 V	131	36.6	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU242)	Channel	CH 233 : 7115 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	41.3 PK	88.2	-46.9	1.51 H	347	26.9	14.4
2	#14230.00	29.7 AV	68.2	-38.5	1.51 H	347	15.3	14.4
3	21345.00	45.4 PK	74.0	-28.6	2.62 H	251	49.6	-4.2
4	21345.00	34.1 AV	54.0	-19.9	2.62 H	251	38.3	-4.2
5	#28460.00	49.3 PK	88.2	-38.9	1.99 H	151	51.2	-1.9
6	#28460.00	37.7 AV	68.2	-30.5	1.99 H	151	39.6	-1.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14230.00	43.7 PK	88.2	-44.5	3.90 V	75	29.3	14.4
2	#14230.00	31.3 AV	68.2	-36.9	3.90 V	75	16.9	14.4
3	21345.00	44.1 PK	74.0	-29.9	2.25 V	117	48.3	-4.2
4	21345.00	31.5 AV	54.0	-22.5	2.25 V	117	35.7	-4.2
5	#28460.00	46.5 PK	88.2	-41.7	2.01 V	142	48.4	-1.9
6	#28460.00	34.8 AV	68.2	-33.4	2.01 V	142	36.7	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

**40MHz Preamble
RU26**

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	42.5 PK	74.0	-31.5	1.45 H	336	31.0	11.5
2	11930.00	30.6 AV	54.0	-23.4	1.45 H	336	19.1	11.5
3	17895.00	45.1 PK	74.0	-28.9	1.56 H	17	23.0	22.1
4	17895.00	33.5 AV	54.0	-20.5	1.56 H	17	11.4	22.1
5	23860.00	49.0 PK	74.0	-25.0	1.94 H	76	52.3	-3.3
6	23860.00	37.9 AV	54.0	-16.1	1.94 H	76	41.2	-3.3

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	41.4 PK	74.0	-32.6	3.84 V	76	29.9	11.5
2	11930.00	29.7 AV	54.0	-24.3	3.84 V	76	18.2	11.5
3	17895.00	43.6 PK	74.0	-30.4	2.24 V	96	21.5	22.1
4	17895.00	31.8 AV	54.0	-22.2	2.24 V	96	9.7	22.1
5	23860.00	47.9 PK	74.0	-26.1	1.73 V	173	51.2	-3.3
6	23860.00	35.6 AV	54.0	-18.4	1.73 V	173	38.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	42.0 PK	74.0	-32.0	1.42 H	337	31.3	10.7
2	12330.00	30.2 AV	54.0	-23.8	1.42 H	337	19.5	10.7
3	18495.00	45.5 PK	74.0	-28.5	1.54 H	15	52.1	-6.6
4	18495.00	33.9 AV	54.0	-20.1	1.54 H	15	40.5	-6.6
5	#24660.00	49.4 PK	88.2	-38.8	1.97 H	87	51.5	-2.1
6	#24660.00	38.2 AV	68.2	-30.0	1.97 H	87	40.3	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	41.9 PK	74.0	-32.1	3.77 V	85	31.2	10.7
2	12330.00	29.8 AV	54.0	-24.2	3.77 V	85	19.1	10.7
3	18495.00	43.0 PK	74.0	-31.0	2.31 V	102	49.6	-6.6
4	18495.00	31.6 AV	54.0	-22.4	2.31 V	102	38.2	-6.6
5	#24660.00	46.8 PK	88.2	-41.4	1.70 V	144	48.9	-2.1
6	#24660.00	34.8 AV	68.2	-33.4	1.70 V	144	36.9	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	42.0 PK	88.2	-46.2	1.49 H	335	31.2	10.8
2	#12810.00	30.1 AV	68.2	-38.1	1.49 H	335	19.3	10.8
3	19215.00	45.1 PK	74.0	-28.9	1.56 H	11	51.6	-6.5
4	19215.00	33.4 AV	54.0	-20.6	1.56 H	11	39.9	-6.5
5	#25620.00	49.2 PK	88.2	-39.0	1.88 H	61	50.5	-1.3
6	#25620.00	38.1 AV	68.2	-30.1	1.88 H	61	39.4	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	40.9 PK	88.2	-47.3	3.87 V	76	30.1	10.8
2	#12810.00	29.0 AV	68.2	-39.2	3.87 V	76	18.2	10.8
3	19215.00	43.0 PK	74.0	-31.0	2.25 V	97	49.5	-6.5
4	19215.00	31.6 AV	54.0	-22.4	2.25 V	97	38.1	-6.5
5	#25620.00	47.5 PK	88.2	-40.7	1.78 V	157	48.8	-1.3
6	#25620.00	35.3 AV	68.2	-32.9	1.78 V	157	36.6	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 99 : 6445 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	42.1 PK	88.2	-46.1	1.43 H	343	31.4	10.7
2	#12890.00	30.4 AV	68.2	-37.8	1.43 H	343	19.7	10.7
3	19335.00	45.1 PK	74.0	-28.9	1.52 H	13	51.6	-6.5
4	19335.00	33.6 AV	54.0	-20.4	1.52 H	13	40.1	-6.5
5	#25780.00	48.5 PK	88.2	-39.7	1.89 H	87	49.7	-1.2
6	#25780.00	37.5 AV	68.2	-30.7	1.89 H	87	38.7	-1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	41.7 PK	88.2	-46.5	3.85 V	72	31.0	10.7
2	#12890.00	29.9 AV	68.2	-38.3	3.85 V	72	19.2	10.7
3	19335.00	43.5 PK	74.0	-30.5	2.25 V	113	50.0	-6.5
4	19335.00	32.1 AV	54.0	-21.9	2.25 V	113	38.6	-6.5
5	#25780.00	47.4 PK	88.2	-40.8	1.75 V	161	48.6	-1.2
6	#25780.00	35.1 AV	68.2	-33.1	1.75 V	161	36.3	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 107 : 6485 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	42.3 PK	88.2	-45.9	1.46 H	327	31.5	10.8
2	#12970.00	30.4 AV	68.2	-37.8	1.46 H	327	19.6	10.8
3	19455.00	44.6 PK	74.0	-29.4	1.59 H	23	50.8	-6.2
4	19455.00	33.3 AV	54.0	-20.7	1.59 H	23	39.5	-6.2
5	#25940.00	48.6 PK	88.2	-39.6	1.95 H	75	49.7	-1.1
6	#25940.00	37.8 AV	68.2	-30.4	1.95 H	75	38.9	-1.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	41.6 PK	88.2	-46.6	3.85 V	70	30.8	10.8
2	#12970.00	29.9 AV	68.2	-38.3	3.85 V	70	19.1	10.8
3	19455.00	43.7 PK	74.0	-30.3	2.25 V	107	49.9	-6.2
4	19455.00	32.1 AV	54.0	-21.9	2.25 V	107	38.3	-6.2
5	#25940.00	47.5 PK	88.2	-40.7	1.79 V	170	48.6	-1.1
6	#25940.00	35.6 AV	68.2	-32.6	1.79 V	170	36.7	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 115 : 6525 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	42.6 PK	88.2	-45.6	1.41 H	338	31.5	11.1
2	#13050.00	30.6 AV	68.2	-37.6	1.41 H	338	19.5	11.1
3	19575.00	44.9 PK	74.0	-29.1	1.59 H	19	51.2	-6.3
4	19575.00	33.4 AV	54.0	-20.6	1.59 H	19	39.7	-6.3
5	#26100.00	48.5 PK	88.2	-39.7	1.95 H	77	49.5	-1.0
6	#26100.00	37.5 AV	68.2	-30.7	1.95 H	77	38.5	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	41.1 PK	88.2	-47.1	3.79 V	86	30.0	11.1
2	#13050.00	29.4 AV	68.2	-38.8	3.79 V	86	18.3	11.1
3	19575.00	43.5 PK	74.0	-30.5	2.31 V	103	49.8	-6.3
4	19575.00	32.2 AV	54.0	-21.8	2.31 V	103	38.5	-6.3
5	#26100.00	47.8 PK	88.2	-40.4	1.70 V	170	48.8	-1.0
6	#26100.00	35.7 AV	68.2	-32.5	1.70 V	170	36.7	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	42.1 PK	88.2	-46.1	1.47 H	324	30.7	11.4
2	#13130.00	30.3 AV	68.2	-37.9	1.47 H	324	18.9	11.4
3	19695.00	45.2 PK	74.0	-28.8	1.51 H	31	51.4	-6.2
4	19695.00	33.8 AV	54.0	-20.2	1.51 H	31	40.0	-6.2
5	#26260.00	49.0 PK	88.2	-39.2	1.99 H	84	50.0	-1.0
6	#26260.00	38.0 AV	68.2	-30.2	1.99 H	84	39.0	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	41.1 PK	88.2	-47.1	3.76 V	93	29.7	11.4
2	#13130.00	29.3 AV	68.2	-38.9	3.76 V	93	17.9	11.4
3	19695.00	43.7 PK	74.0	-30.3	2.23 V	108	49.9	-6.2
4	19695.00	32.2 AV	54.0	-21.8	2.23 V	108	38.4	-6.2
5	#26260.00	47.0 PK	88.2	-41.2	1.73 V	167	48.0	-1.0
6	#26260.00	35.0 AV	68.2	-33.2	1.73 V	167	36.0	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	42.3 PK	88.2	-45.9	1.47 H	321	29.7	12.6
2	#13450.00	30.3 AV	68.2	-37.9	1.47 H	321	17.7	12.6
3	20175.00	45.3 PK	74.0	-28.7	1.61 H	16	50.7	-5.4
4	20175.00	33.4 AV	54.0	-20.6	1.61 H	16	38.8	-5.4
5	#26900.00	48.8 PK	88.2	-39.4	1.89 H	78	49.8	-1.0
6	#26900.00	38.0 AV	68.2	-30.2	1.89 H	78	39.0	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	41.1 PK	88.2	-47.1	3.77 V	99	28.5	12.6
2	#13450.00	29.5 AV	68.2	-38.7	3.77 V	99	16.9	12.6
3	20175.00	43.3 PK	74.0	-30.7	2.30 V	94	48.7	-5.4
4	20175.00	31.9 AV	54.0	-22.1	2.30 V	94	37.3	-5.4
5	#26900.00	47.1 PK	88.2	-41.1	1.75 V	156	48.1	-1.0
6	#26900.00	35.2 AV	68.2	-33.0	1.75 V	156	36.2	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	42.5 PK	88.2	-45.7	1.43 H	325	29.3	13.2
2	#13690.00	30.7 AV	68.2	-37.5	1.43 H	325	17.5	13.2
3	20535.00	45.6 PK	74.0	-28.4	1.60 H	3	50.8	-5.2
4	20535.00	33.8 AV	54.0	-20.2	1.60 H	3	39.0	-5.2
5	#27380.00	48.5 PK	88.2	-39.7	1.96 H	65	49.9	-1.4
6	#27380.00	37.5 AV	68.2	-30.7	1.96 H	65	38.9	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	41.2 PK	88.2	-47.0	3.84 V	87	28.0	13.2
2	#13690.00	29.5 AV	68.2	-38.7	3.84 V	87	16.3	13.2
3	20535.00	42.8 PK	74.0	-31.2	2.30 V	116	48.0	-5.2
4	20535.00	31.6 AV	54.0	-22.4	2.30 V	116	36.8	-5.2
5	#27380.00	47.0 PK	88.2	-41.2	1.80 V	146	48.4	-1.4
6	#27380.00	34.8 AV	68.2	-33.4	1.80 V	146	36.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 187 : 6885 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	42.4 PK	88.2	-45.8	1.50 H	321	29.1	13.3
2	#13770.00	30.7 AV	68.2	-37.5	1.50 H	321	17.4	13.3
3	20655.00	45.1 PK	74.0	-28.9	1.58 H	11	50.0	-4.9
4	20655.00	33.7 AV	54.0	-20.3	1.58 H	11	38.6	-4.9
5	#27540.00	49.3 PK	88.2	-38.9	1.93 H	66	50.8	-1.5
6	#27540.00	38.3 AV	68.2	-29.9	1.93 H	66	39.8	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	41.1 PK	88.2	-47.1	3.79 V	87	27.8	13.3
2	#13770.00	29.4 AV	68.2	-38.8	3.79 V	87	16.1	13.3
3	20655.00	43.7 PK	74.0	-30.3	2.22 V	87	48.6	-4.9
4	20655.00	32.1 AV	54.0	-21.9	2.22 V	87	37.0	-4.9
5	#27540.00	47.7 PK	88.2	-40.5	1.78 V	147	49.2	-1.5
6	#27540.00	35.4 AV	68.2	-32.8	1.78 V	147	36.9	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 211 : 7005 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	42.1 PK	88.2	-46.1	1.43 H	334	28.6	13.5
2	#14010.00	30.2 AV	68.2	-38.0	1.43 H	334	16.7	13.5
3	21015.00	44.6 PK	74.0	-29.4	1.50 H	1	49.1	-4.5
4	21015.00	33.1 AV	54.0	-20.9	1.50 H	1	37.6	-4.5
5	#28020.00	49.6 PK	88.2	-38.6	1.99 H	81	51.3	-1.7
6	#28020.00	38.3 AV	68.2	-29.9	1.99 H	81	40.0	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	41.1 PK	88.2	-47.1	3.80 V	75	27.6	13.5
2	#14010.00	29.4 AV	68.2	-38.8	3.80 V	75	15.9	13.5
3	21015.00	43.4 PK	74.0	-30.6	2.25 V	112	47.9	-4.5
4	21015.00	31.9 AV	54.0	-22.1	2.25 V	112	36.4	-4.5
5	#28020.00	47.8 PK	88.2	-40.4	1.73 V	161	49.5	-1.7
6	#28020.00	35.5 AV	68.2	-32.7	1.73 V	161	37.2	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU26)	Channel	CH 219 : 7045 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14090.00	42.7 PK	88.2	-45.5	1.47 H	351	28.9	13.8
2	#14090.00	30.7 AV	68.2	-37.5	1.47 H	351	16.9	13.8
3	21135.00	44.8 PK	74.0	-29.2	1.51 H	19	49.2	-4.4
4	21135.00	33.1 AV	54.0	-20.9	1.51 H	19	37.5	-4.4
5	#28180.00	48.8 PK	88.2	-39.4	1.90 H	88	50.7	-1.9
6	#28180.00	37.9 AV	68.2	-30.3	1.90 H	88	39.8	-1.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14090.00	40.8 PK	88.2	-47.4	3.82 V	87	27.0	13.8
2	#14090.00	29.1 AV	68.2	-39.1	3.82 V	87	15.3	13.8
3	21135.00	43.6 PK	74.0	-30.4	2.22 V	92	48.0	-4.4
4	21135.00	32.2 AV	54.0	-21.8	2.22 V	92	36.6	-4.4
5	#28180.00	47.1 PK	88.2	-41.1	1.74 V	146	49.0	-1.9
6	#28180.00	35.0 AV	68.2	-33.2	1.74 V	146	36.9	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RU484

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 3 : 5965 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	43.1 PK	74.0	-30.9	1.46 H	351	31.6	11.5
2	11930.00	30.9 AV	54.0	-23.1	1.46 H	351	19.4	11.5
3	17895.00	45.2 PK	74.0	-28.8	1.60 H	19	23.1	22.1
4	17895.00	33.5 AV	54.0	-20.5	1.60 H	19	11.4	22.1
5	23860.00	49.0 PK	74.0	-25.0	1.95 H	81	52.3	-3.3
6	23860.00	37.6 AV	54.0	-16.4	1.95 H	81	40.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11930.00	41.2 PK	74.0	-32.8	3.84 V	98	29.7	11.5
2	11930.00	29.1 AV	54.0	-24.9	3.84 V	98	17.6	11.5
3	17895.00	43.5 PK	74.0	-30.5	2.32 V	112	21.4	22.1
4	17895.00	31.8 AV	54.0	-22.2	2.32 V	112	9.7	22.1
5	23860.00	47.2 PK	74.0	-26.8	1.70 V	145	50.5	-3.3
6	23860.00	34.9 AV	54.0	-19.1	1.70 V	145	38.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 43 : 6165 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	42.2 PK	74.0	-31.8	1.40 H	339	31.5	10.7
2	12330.00	30.2 AV	54.0	-23.8	1.40 H	339	19.5	10.7
3	18495.00	45.2 PK	74.0	-28.8	1.51 H	2	51.8	-6.6
4	18495.00	33.9 AV	54.0	-20.1	1.51 H	2	40.5	-6.6
5	#24660.00	49.3 PK	88.2	-38.9	1.95 H	88	51.4	-2.1
6	#24660.00	38.0 AV	68.2	-30.2	1.95 H	88	40.1	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12330.00	40.7 PK	74.0	-33.3	3.79 V	75	30.0	10.7
2	12330.00	29.1 AV	54.0	-24.9	3.79 V	75	18.4	10.7
3	18495.00	43.4 PK	74.0	-30.6	2.27 V	100	50.0	-6.6
4	18495.00	32.1 AV	54.0	-21.9	2.27 V	100	38.7	-6.6
5	#24660.00	47.7 PK	88.2	-40.5	1.74 V	163	49.8	-2.1
6	#24660.00	35.4 AV	68.2	-32.8	1.74 V	163	37.5	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 91 : 6405 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	43.0 PK	88.2	-45.2	1.42 H	327	32.2	10.8
2	#12810.00	31.0 AV	68.2	-37.2	1.42 H	327	20.2	10.8
3	19215.00	45.5 PK	74.0	-28.5	1.51 H	17	52.0	-6.5
4	19215.00	33.8 AV	54.0	-20.2	1.51 H	17	40.3	-6.5
5	#25620.00	48.4 PK	88.2	-39.8	1.94 H	65	49.7	-1.3
6	#25620.00	37.6 AV	68.2	-30.6	1.94 H	65	38.9	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12810.00	41.2 PK	88.2	-47.0	3.83 V	89	30.4	10.8
2	#12810.00	29.7 AV	68.2	-38.5	3.83 V	89	18.9	10.8
3	19215.00	43.3 PK	74.0	-30.7	2.28 V	106	49.8	-6.5
4	19215.00	32.0 AV	54.0	-22.0	2.28 V	106	38.5	-6.5
5	#25620.00	48.1 PK	88.2	-40.1	1.79 V	167	49.4	-1.3
6	#25620.00	35.8 AV	68.2	-32.4	1.79 V	167	37.1	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 99 : 6445 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	42.7 PK	88.2	-45.5	1.43 H	342	32.0	10.7
2	#12890.00	30.6 AV	68.2	-37.6	1.43 H	342	19.9	10.7
3	19335.00	44.6 PK	74.0	-29.4	1.58 H	23	51.1	-6.5
4	19335.00	33.0 AV	54.0	-21.0	1.58 H	23	39.5	-6.5
5	#25780.00	49.5 PK	88.2	-38.7	1.96 H	89	50.7	-1.2
6	#25780.00	38.4 AV	68.2	-29.8	1.96 H	89	39.6	-1.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12890.00	41.1 PK	88.2	-47.1	3.78 V	85	30.4	10.7
2	#12890.00	29.2 AV	68.2	-39.0	3.78 V	85	18.5	10.7
3	19335.00	43.7 PK	74.0	-30.3	2.32 V	88	50.2	-6.5
4	19335.00	32.0 AV	54.0	-22.0	2.32 V	88	38.5	-6.5
5	#25780.00	47.8 PK	88.2	-40.4	1.81 V	156	49.0	-1.2
6	#25780.00	35.7 AV	68.2	-32.5	1.81 V	156	36.9	-1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 107 : 6485 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	42.8 PK	88.2	-45.4	1.40 H	328	32.0	10.8
2	#12970.00	30.9 AV	68.2	-37.3	1.40 H	328	20.1	10.8
3	19455.00	44.7 PK	74.0	-29.3	1.55 H	17	50.9	-6.2
4	19455.00	33.3 AV	54.0	-20.7	1.55 H	17	39.5	-6.2
5	#25940.00	48.6 PK	88.2	-39.6	1.92 H	61	49.7	-1.1
6	#25940.00	37.4 AV	68.2	-30.8	1.92 H	61	38.5	-1.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12970.00	41.8 PK	88.2	-46.4	3.78 V	87	31.0	10.8
2	#12970.00	29.8 AV	68.2	-38.4	3.78 V	87	19.0	10.8
3	19455.00	43.0 PK	74.0	-31.0	2.27 V	106	49.2	-6.2
4	19455.00	31.7 AV	54.0	-22.3	2.27 V	106	37.9	-6.2
5	#25940.00	47.1 PK	88.2	-41.1	1.72 V	151	48.2	-1.1
6	#25940.00	35.0 AV	68.2	-33.2	1.72 V	151	36.1	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 115 : 6525 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	42.6 PK	88.2	-45.6	1.42 H	345	31.5	11.1
2	#13050.00	30.8 AV	68.2	-37.4	1.42 H	345	19.7	11.1
3	19575.00	45.6 PK	74.0	-28.4	1.53 H	7	51.9	-6.3
4	19575.00	33.8 AV	54.0	-20.2	1.53 H	7	40.1	-6.3
5	#26100.00	49.7 PK	88.2	-38.5	1.94 H	91	50.7	-1.0
6	#26100.00	38.4 AV	68.2	-29.8	1.94 H	91	39.4	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13050.00	41.2 PK	88.2	-47.0	3.84 V	76	30.1	11.1
2	#13050.00	29.6 AV	68.2	-38.6	3.84 V	76	18.5	11.1
3	19575.00	42.5 PK	74.0	-31.5	2.22 V	96	48.8	-6.3
4	19575.00	31.3 AV	54.0	-22.7	2.22 V	96	37.6	-6.3
5	#26100.00	47.0 PK	88.2	-41.2	1.72 V	146	48.0	-1.0
6	#26100.00	35.1 AV	68.2	-33.1	1.72 V	146	36.1	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 123 : 6565 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	42.3 PK	88.2	-45.9	1.40 H	335	30.9	11.4
2	#13130.00	30.2 AV	68.2	-38.0	1.40 H	335	18.8	11.4
3	19695.00	45.3 PK	74.0	-28.7	1.52 H	19	51.5	-6.2
4	19695.00	33.7 AV	54.0	-20.3	1.52 H	19	39.9	-6.2
5	#26260.00	49.2 PK	88.2	-39.0	1.99 H	82	50.2	-1.0
6	#26260.00	38.4 AV	68.2	-29.8	1.99 H	82	39.4	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13130.00	40.9 PK	88.2	-47.3	3.85 V	80	29.5	11.4
2	#13130.00	29.4 AV	68.2	-38.8	3.85 V	80	18.0	11.4
3	19695.00	42.8 PK	74.0	-31.2	2.31 V	112	49.0	-6.2
4	19695.00	31.3 AV	54.0	-22.7	2.31 V	112	37.5	-6.2
5	#26260.00	47.8 PK	88.2	-40.4	1.71 V	147	48.8	-1.0
6	#26260.00	35.8 AV	68.2	-32.4	1.71 V	147	36.8	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 155 : 6725 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	42.5 PK	88.2	-45.7	1.42 H	327	29.9	12.6
2	#13450.00	30.4 AV	68.2	-37.8	1.42 H	327	17.8	12.6
3	20175.00	45.4 PK	74.0	-28.6	1.56 H	24	50.8	-5.4
4	20175.00	33.8 AV	54.0	-20.2	1.56 H	24	39.2	-5.4
5	#26900.00	48.8 PK	88.2	-39.4	1.95 H	87	49.8	-1.0
6	#26900.00	37.7 AV	68.2	-30.5	1.95 H	87	38.7	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13450.00	41.5 PK	88.2	-46.7	3.79 V	87	28.9	12.6
2	#13450.00	29.8 AV	68.2	-38.4	3.79 V	87	17.2	12.6
3	20175.00	43.1 PK	74.0	-30.9	2.25 V	93	48.5	-5.4
4	20175.00	31.7 AV	54.0	-22.3	2.25 V	93	37.1	-5.4
5	#26900.00	47.4 PK	88.2	-40.8	1.75 V	143	48.4	-1.0
6	#26900.00	35.4 AV	68.2	-32.8	1.75 V	143	36.4	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 179 : 6845 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	43.1 PK	88.2	-45.1	1.50 H	333	29.9	13.2
2	#13690.00	30.9 AV	68.2	-37.3	1.50 H	333	17.7	13.2
3	20535.00	45.3 PK	74.0	-28.7	1.53 H	30	50.5	-5.2
4	20535.00	33.8 AV	54.0	-20.2	1.53 H	30	39.0	-5.2
5	#27380.00	48.8 PK	88.2	-39.4	1.99 H	77	50.2	-1.4
6	#27380.00	37.8 AV	68.2	-30.4	1.99 H	77	39.2	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13690.00	41.6 PK	88.2	-46.6	3.80 V	80	28.4	13.2
2	#13690.00	29.6 AV	68.2	-38.6	3.80 V	80	16.4	13.2
3	20535.00	43.6 PK	74.0	-30.4	2.28 V	99	48.8	-5.2
4	20535.00	31.9 AV	54.0	-22.1	2.28 V	99	37.1	-5.2
5	#27380.00	47.4 PK	88.2	-40.8	1.73 V	147	48.8	-1.4
6	#27380.00	34.9 AV	68.2	-33.3	1.73 V	147	36.3	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 187 : 6885 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	42.7 PK	88.2	-45.5	1.46 H	340	29.4	13.3
2	#13770.00	30.8 AV	68.2	-37.4	1.46 H	340	17.5	13.3
3	20655.00	44.9 PK	74.0	-29.1	1.60 H	4	49.8	-4.9
4	20655.00	33.5 AV	54.0	-20.5	1.60 H	4	38.4	-4.9
5	#27540.00	48.8 PK	88.2	-39.4	1.90 H	92	50.3	-1.5
6	#27540.00	37.6 AV	68.2	-30.6	1.90 H	92	39.1	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13770.00	41.8 PK	88.2	-46.4	3.87 V	83	28.5	13.3
2	#13770.00	29.8 AV	68.2	-38.4	3.87 V	83	16.5	13.3
3	20655.00	43.4 PK	74.0	-30.6	2.33 V	117	48.3	-4.9
4	20655.00	31.7 AV	54.0	-22.3	2.33 V	117	36.6	-4.9
5	#27540.00	47.5 PK	88.2	-40.7	1.76 V	166	49.0	-1.5
6	#27540.00	35.2 AV	68.2	-33.0	1.76 V	166	36.7	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 211 : 7005 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	42.4 PK	88.2	-45.8	1.42 H	324	28.9	13.5
2	#14010.00	30.3 AV	68.2	-37.9	1.42 H	324	16.8	13.5
3	21015.00	45.4 PK	74.0	-28.6	1.61 H	4	49.9	-4.5
4	21015.00	34.0 AV	54.0	-20.0	1.61 H	4	38.5	-4.5
5	#28020.00	48.5 PK	88.2	-39.7	1.98 H	90	50.2	-1.7
6	#28020.00	37.7 AV	68.2	-30.5	1.98 H	90	39.4	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14010.00	41.7 PK	88.2	-46.5	3.82 V	89	28.2	13.5
2	#14010.00	29.8 AV	68.2	-38.4	3.82 V	89	16.3	13.5
3	21015.00	43.2 PK	74.0	-30.8	2.30 V	115	47.7	-4.5
4	21015.00	31.9 AV	54.0	-22.1	2.30 V	115	36.4	-4.5
5	#28020.00	47.3 PK	88.2	-40.9	1.78 V	168	49.0	-1.7
6	#28020.00	35.2 AV	68.2	-33.0	1.78 V	168	36.9	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 40MHz Preamble 802.11ax (RU484)	Channel	CH 227 : 7085 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	42.6 PK	88.2	-45.6	1.42 H	321	28.3	14.3
2	#14170.00	30.5 AV	68.2	-37.7	1.42 H	321	16.2	14.3
3	21255.00	45.4 PK	74.0	-28.6	1.55 H	6	49.7	-4.3
4	21255.00	33.6 AV	54.0	-20.4	1.55 H	6	37.9	-4.3
5	#28340.00	48.6 PK	88.2	-39.6	1.99 H	73	50.2	-1.6
6	#28340.00	37.6 AV	68.2	-30.6	1.99 H	73	39.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14170.00	41.3 PK	88.2	-46.9	3.82 V	85	27.0	14.3
2	#14170.00	29.5 AV	68.2	-38.7	3.82 V	85	15.2	14.3
3	21255.00	43.2 PK	74.0	-30.8	2.27 V	102	47.5	-4.3
4	21255.00	31.7 AV	54.0	-22.3	2.27 V	102	36.0	-4.3
5	#28340.00	47.5 PK	88.2	-40.7	1.75 V	159	49.1	-1.6
6	#28340.00	35.3 AV	68.2	-32.9	1.75 V	159	36.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

**80Mz Preamble
RU996**

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 7 : 5985 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	41.6 PK	74.0	-32.4	1.55 H	286	30.3	11.3
2	11970.00	29.6 AV	54.0	-24.4	1.55 H	286	18.3	11.3
3	17955.00	45.6 PK	74.0	-28.4	1.58 H	28	22.0	23.6
4	17955.00	33.8 AV	54.0	-20.2	1.58 H	28	10.2	23.6
5	23940.00	49.4 PK	74.0	-24.6	2.09 H	48	52.5	-3.1
6	23940.00	37.7 AV	54.0	-16.3	2.09 H	48	40.8	-3.1

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11970.00	40.9 PK	74.0	-33.1	3.85 V	101	29.6	11.3
2	11970.00	29.4 AV	54.0	-24.6	3.85 V	101	18.1	11.3
3	17955.00	44.6 PK	74.0	-29.4	2.14 V	108	21.0	23.6
4	17955.00	31.9 AV	54.0	-22.1	2.14 V	108	8.3	23.6
5	23940.00	46.2 PK	74.0	-27.8	1.96 V	146	49.3	-3.1
6	23940.00	35.7 AV	54.0	-18.3	1.96 V	146	38.8	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 39 : 6145 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	41.7 PK	74.0	-32.3	1.46 H	280	30.8	10.9
2	12290.00	29.8 AV	54.0	-24.2	1.46 H	280	18.9	10.9
3	18435.00	45.8 PK	74.0	-28.2	1.50 H	37	52.4	-6.6
4	18435.00	34.0 AV	54.0	-20.0	1.50 H	37	40.6	-6.6
5	#24580.00	49.6 PK	88.2	-38.6	2.17 H	48	51.9	-2.3
6	#24580.00	38.0 AV	68.2	-30.2	2.17 H	48	40.3	-2.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12290.00	40.7 PK	74.0	-33.3	3.84 V	105	29.8	10.9
2	12290.00	29.3 AV	54.0	-24.7	3.84 V	105	18.4	10.9
3	18435.00	45.3 PK	74.0	-28.7	2.20 V	102	51.9	-6.6
4	18435.00	32.3 AV	54.0	-21.7	2.20 V	102	38.9	-6.6
5	#24580.00	46.2 PK	88.2	-42.0	1.94 V	134	48.5	-2.3
6	#24580.00	35.9 AV	68.2	-32.3	1.94 V	134	38.2	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 87 : 6385 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	41.8 PK	88.2	-46.4	1.54 H	279	31.0	10.8
2	#12770.00	29.9 AV	68.2	-38.3	1.54 H	279	19.1	10.8
3	19155.00	45.7 PK	74.0	-28.3	1.50 H	30	52.2	-6.5
4	19155.00	33.9 AV	54.0	-20.1	1.50 H	30	40.4	-6.5
5	#25540.00	49.8 PK	88.2	-38.4	2.09 H	52	51.2	-1.4
6	#25540.00	38.2 AV	68.2	-30.0	2.09 H	52	39.6	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12770.00	40.9 PK	88.2	-47.3	3.82 V	111	30.1	10.8
2	#12770.00	29.3 AV	68.2	-38.9	3.82 V	111	18.5	10.8
3	19155.00	44.3 PK	74.0	-29.7	2.09 V	99	50.8	-6.5
4	19155.00	31.5 AV	54.0	-22.5	2.09 V	99	38.0	-6.5
5	#25540.00	45.6 PK	88.2	-42.6	1.93 V	140	47.0	-1.4
6	#25540.00	35.2 AV	68.2	-33.0	1.93 V	140	36.6	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 103 : 6465 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	40.6 PK	88.2	-47.6	1.47 H	274	29.9	10.7
2	#12930.00	29.2 AV	68.2	-39.0	1.47 H	274	18.5	10.7
3	19395.00	45.5 PK	74.0	-28.5	1.57 H	57	51.7	-6.2
4	19395.00	34.0 AV	54.0	-20.0	1.57 H	57	40.2	-6.2
5	#25860.00	49.2 PK	88.2	-39.0	2.17 H	51	50.5	-1.3
6	#25860.00	37.7 AV	68.2	-30.5	2.17 H	51	39.0	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#12930.00	40.6 PK	88.2	-47.6	3.87 V	92	29.9	10.7
2	#12930.00	29.1 AV	68.2	-39.1	3.87 V	92	18.4	10.7
3	19395.00	44.8 PK	74.0	-29.2	2.10 V	107	51.0	-6.2
4	19395.00	32.2 AV	54.0	-21.8	2.10 V	107	38.4	-6.2
5	#25860.00	46.6 PK	88.2	-41.6	2.02 V	149	47.9	-1.3
6	#25860.00	36.0 AV	68.2	-32.2	2.02 V	149	37.3	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 119 : 6545 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	41.5 PK	88.2	-46.7	1.46 H	286	30.2	11.3
2	#13090.00	29.5 AV	68.2	-38.7	1.46 H	286	18.2	11.3
3	19635.00	45.4 PK	74.0	-28.6	1.60 H	46	51.7	-6.3
4	19635.00	33.8 AV	54.0	-20.2	1.60 H	46	40.1	-6.3
5	#26180.00	49.4 PK	88.2	-38.8	2.14 H	49	50.4	-1.0
6	#26180.00	37.6 AV	68.2	-30.6	2.14 H	49	38.6	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13090.00	40.4 PK	88.2	-47.8	3.90 V	113	29.1	11.3
2	#13090.00	29.0 AV	68.2	-39.2	3.90 V	113	17.7	11.3
3	19635.00	44.1 PK	74.0	-29.9	2.16 V	114	50.4	-6.3
4	19635.00	31.6 AV	54.0	-22.4	2.16 V	114	37.9	-6.3
5	#26180.00	46.0 PK	88.2	-42.2	1.95 V	137	47.0	-1.0
6	#26180.00	35.7 AV	68.2	-32.5	1.95 V	137	36.7	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 151 : 6705 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	41.4 PK	88.2	-46.8	1.51 H	278	29.1	12.3
2	#13410.00	29.8 AV	68.2	-38.4	1.51 H	278	17.5	12.3
3	20115.00	45.3 PK	74.0	-28.7	1.49 H	58	50.8	-5.5
4	20115.00	33.6 AV	54.0	-20.4	1.49 H	58	39.1	-5.5
5	#26820.00	49.4 PK	88.2	-38.8	2.17 H	66	50.2	-0.8
6	#26820.00	37.4 AV	68.2	-30.8	2.17 H	66	38.2	-0.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13410.00	40.7 PK	88.2	-47.5	3.84 V	110	28.4	12.3
2	#13410.00	29.2 AV	68.2	-39.0	3.84 V	110	16.9	12.3
3	20115.00	44.4 PK	74.0	-29.6	2.18 V	108	49.9	-5.5
4	20115.00	31.8 AV	54.0	-22.2	2.18 V	108	37.3	-5.5
5	#26820.00	45.9 PK	88.2	-42.3	1.93 V	143	46.7	-0.8
6	#26820.00	35.7 AV	68.2	-32.5	1.93 V	143	36.5	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 183 : 6865 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7460.00	49.2 PK	74.0	-24.8	2.15 H	46	42.5	6.7
2	7460.00	37.8 AV	54.0	-16.2	2.15 H	46	31.1	6.7
3	#13730.00	41.2 PK	88.2	-47.0	1.50 H	295	28.0	13.2
4	#13730.00	29.4 AV	68.2	-38.8	1.50 H	295	16.2	13.2
5	20595.00	45.0 PK	74.0	-29.0	1.49 H	59	49.9	-4.9
6	20595.00	33.4 AV	54.0	-20.6	1.49 H	59	38.3	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13730.00	40.4 PK	88.2	-47.8	3.81 V	115	27.2	13.2
2	#13730.00	29.1 AV	68.2	-39.1	3.81 V	115	15.9	13.2
3	20595.00	44.5 PK	74.0	-29.5	2.09 V	108	49.4	-4.9
4	20595.00	31.9 AV	54.0	-22.1	2.09 V	108	36.8	-4.9
5	#27460.00	45.6 PK	88.2	-42.6	1.93 V	160	47.1	-1.5
6	#27460.00	35.3 AV	68.2	-32.9	1.93 V	160	36.8	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 199 : 6945 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	41.3 PK	88.2	-46.9	1.47 H	287	28.0	13.3
2	#13890.00	29.6 AV	68.2	-38.6	1.47 H	287	16.3	13.3
3	20835.00	45.8 PK	74.0	-28.2	1.58 H	30	50.6	-4.8
4	20835.00	34.3 AV	54.0	-19.7	1.58 H	30	39.1	-4.8
5	#27780.00	49.1 PK	88.2	-39.1	2.18 H	46	50.8	-1.7
6	#27780.00	37.7 AV	68.2	-30.5	2.18 H	46	39.4	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13890.00	41.1 PK	88.2	-47.1	3.91 V	86	27.8	13.3
2	#13890.00	29.8 AV	68.2	-38.4	3.91 V	86	16.5	13.3
3	20835.00	44.5 PK	74.0	-29.5	2.11 V	93	49.3	-4.8
4	20835.00	31.9 AV	54.0	-22.1	2.11 V	93	36.7	-4.8
5	#27780.00	46.0 PK	88.2	-42.2	1.99 V	132	47.7	-1.7
6	#27780.00	35.6 AV	68.2	-32.6	1.99 V	132	37.3	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 80MHz Preamble 802.11ax (RU996)	Channel	CH 215 : 7025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#14050.00	41.2 PK	88.2	-47.0	1.47 H	284	27.6	13.6
2	#14050.00	29.3 AV	68.2	-38.9	1.47 H	284	15.7	13.6
3	21075.00	45.2 PK	74.0	-28.8	1.55 H	55	49.6	-4.4
4	21075.00	33.6 AV	54.0	-20.4	1.55 H	55	38.0	-4.4
5	#28100.00	49.2 PK	88.2	-39.0	2.16 H	57	50.9	-1.7
6	#28100.00	37.8 AV	68.2	-30.4	2.16 H	57	39.5	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1075.00	44.9 PK	74.0	-29.1	2.13 V	97	53.3	-8.4
2	1075.00	32.2 AV	54.0	-21.8	2.13 V	97	40.6	-8.4
3	#14050.00	40.6 PK	88.2	-47.6	3.90 V	86	27.0	13.6
4	#14050.00	29.1 AV	68.2	-39.1	3.90 V	86	15.5	13.6
5	#28100.00	46.3 PK	88.2	-41.9	1.98 V	148	48.0	-1.7
6	#28100.00	35.7 AV	68.2	-32.5	1.98 V	148	37.4	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

**160MHz Preamble
RU1992**

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 15 : 6025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	41.7 PK	74.0	-32.3	1.56 H	268	30.5	11.2
2	12050.00	29.7 AV	54.0	-24.3	1.56 H	268	18.5	11.2
3	18075.00	45.3 PK	74.0	-28.7	1.49 H	58	44.2	1.1
4	18075.00	33.8 AV	54.0	-20.2	1.49 H	58	32.7	1.1
5	#24100.00	49.4 PK	88.2	-38.8	2.10 H	64	52.3	-2.9
6	#24100.00	37.7 AV	68.2	-30.5	2.10 H	64	40.6	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12050.00	41.2 PK	74.0	-32.8	3.86 V	95	30.0	11.2
2	12050.00	29.6 AV	54.0	-24.4	3.86 V	95	18.4	11.2
3	18075.00	44.2 PK	74.0	-29.8	2.17 V	103	43.1	1.1
4	18075.00	31.4 AV	54.0	-22.6	2.17 V	103	30.3	1.1
5	#24100.00	46.3 PK	88.2	-41.9	1.92 V	136	49.2	-2.9
6	#24100.00	35.9 AV	68.2	-32.3	1.92 V	136	38.8	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 47 : 6185 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12370.00	41.3 PK	74.0	-32.7	1.57 H	274	30.9	10.4
2	12370.00	29.5 AV	54.0	-24.5	1.57 H	274	19.1	10.4
3	18555.00	45.4 PK	74.0	-28.6	1.59 H	38	52.0	-6.6
4	18555.00	34.0 AV	54.0	-20.0	1.59 H	38	40.6	-6.6
5	#24740.00	49.5 PK	88.2	-38.7	2.13 H	52	51.6	-2.1
6	#24740.00	37.6 AV	68.2	-30.6	2.13 H	52	39.7	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4740.00	45.8 PK	74.0	-28.2	2.00 V	139	45.9	-0.1
2	4740.00	35.5 AV	54.0	-18.5	2.00 V	139	35.6	-0.1
3	12370.00	40.7 PK	74.0	-33.3	3.82 V	105	30.3	10.4
4	12370.00	29.2 AV	54.0	-24.8	3.82 V	105	18.8	10.4
5	18555.00	44.4 PK	74.0	-29.6	2.20 V	106	51.0	-6.6
6	18555.00	31.6 AV	54.0	-22.4	2.20 V	106	38.2	-6.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 79 : 6345 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	41.0 PK	74.0	-33.0	1.54 H	270	30.2	10.8
2	12690.00	29.6 AV	54.0	-24.4	1.54 H	270	18.8	10.8
3	19035.00	45.5 PK	74.0	-28.5	1.57 H	48	51.8	-6.3
4	19035.00	33.9 AV	54.0	-20.1	1.57 H	48	40.2	-6.3
5	#25380.00	49.1 PK	88.2	-39.1	2.14 H	62	50.7	-1.6
6	#25380.00	37.6 AV	68.2	-30.6	2.14 H	62	39.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	12690.00	40.5 PK	74.0	-33.5	3.88 V	104	29.7	10.8
2	12690.00	29.2 AV	54.0	-24.8	3.88 V	104	18.4	10.8
3	19035.00	45.3 PK	74.0	-28.7	2.12 V	92	51.6	-6.3
4	19035.00	32.3 AV	54.0	-21.7	2.12 V	92	38.6	-6.3
5	#25380.00	46.0 PK	88.2	-42.2	1.96 V	149	47.6	-1.6
6	#25380.00	35.7 AV	68.2	-32.5	1.96 V	149	37.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 111 : 6505 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	41.6 PK	88.2	-46.6	1.51 H	276	30.6	11.0
2	#13010.00	29.7 AV	68.2	-38.5	1.51 H	276	18.7	11.0
3	19515.00	45.7 PK	74.0	-28.3	1.59 H	35	52.0	-6.3
4	19515.00	33.9 AV	54.0	-20.1	1.59 H	35	40.2	-6.3
5	#26020.00	49.2 PK	88.2	-39.0	2.18 H	66	50.2	-1.0
6	#26020.00	37.5 AV	68.2	-30.7	2.18 H	66	38.5	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13010.00	41.1 PK	88.2	-47.1	3.82 V	109	30.1	11.0
2	#13010.00	29.8 AV	68.2	-38.4	3.82 V	109	18.8	11.0
3	19515.00	44.0 PK	74.0	-30.0	2.13 V	121	50.3	-6.3
4	19515.00	31.5 AV	54.0	-22.5	2.13 V	121	37.8	-6.3
5	#26020.00	46.4 PK	88.2	-41.8	1.92 V	152	47.4	-1.0
6	#26020.00	35.7 AV	68.2	-32.5	1.92 V	152	36.7	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 143 : 6665 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	41.3 PK	74.0	-32.7	1.48 H	282	29.3	12.0
2	13330.00	29.7 AV	54.0	-24.3	1.48 H	282	17.7	12.0
3	19995.00	45.3 PK	74.0	-28.7	1.52 H	28	51.2	-5.9
4	19995.00	33.8 AV	54.0	-20.2	1.52 H	28	39.7	-5.9
5	#26660.00	49.3 PK	88.2	-38.9	2.13 H	39	49.6	-0.3
6	#26660.00	37.3 AV	68.2	-30.9	2.13 H	39	37.6	-0.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	13330.00	40.6 PK	74.0	-33.4	3.82 V	98	28.6	12.0
2	13330.00	28.9 AV	54.0	-25.1	3.82 V	98	16.9	12.0
3	19995.00	44.6 PK	74.0	-29.4	2.16 V	113	50.5	-5.9
4	19995.00	32.0 AV	54.0	-22.0	2.16 V	113	37.9	-5.9
5	#26660.00	46.5 PK	88.2	-41.7	1.97 V	140	46.8	-0.3
6	#26660.00	36.1 AV	68.2	-32.1	1.97 V	140	36.4	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 175 : 6825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	41.2 PK	88.2	-47.0	1.52 H	284	27.8	13.4
2	#13970.00	29.5 AV	68.2	-38.7	1.52 H	284	16.1	13.4
3	20955.00	45.4 PK	74.0	-28.6	1.54 H	43	49.9	-4.5
4	20955.00	33.8 AV	54.0	-20.2	1.54 H	43	38.3	-4.5
5	#27940.00	49.4 PK	88.2	-38.8	2.13 H	54	51.0	-1.6
6	#27940.00	37.7 AV	68.2	-30.5	2.13 H	54	39.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13650.00	41.3 PK	88.2	-46.9	3.88 V	115	28.1	13.2
2	#13650.00	29.5 AV	68.2	-38.7	3.88 V	115	16.3	13.2
3	20475.00	44.6 PK	74.0	-29.4	2.18 V	105	49.9	-5.3
4	20475.00	32.0 AV	54.0	-22.0	2.18 V	105	37.3	-5.3
5	#27300.00	46.8 PK	88.2	-41.4	2.01 V	155	48.2	-1.4
6	#27300.00	36.1 AV	68.2	-32.1	2.01 V	155	37.5	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 160MHz Preamble 802.11ax (RU1992)	Channel	CH 207 : 6985 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	41.2 PK	88.2	-47.0	1.52 H	284	27.8	13.4
2	#13970.00	29.5 AV	68.2	-38.7	1.52 H	284	16.1	13.4
3	20955.00	45.4 PK	74.0	-28.6	1.54 H	43	49.9	-4.5
4	20955.00	33.8 AV	54.0	-20.2	1.54 H	43	38.3	-4.5
5	#27940.00	49.4 PK	88.2	-38.8	2.13 H	54	51.0	-1.6
6	#27940.00	37.7 AV	68.2	-30.5	2.13 H	54	39.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#13970.00	41.5 PK	88.2	-46.7	3.90 V	96	28.1	13.4
2	#13970.00	29.7 AV	68.2	-38.5	3.90 V	96	16.3	13.4
3	20955.00	45.1 PK	74.0	-28.9	2.18 V	99	49.6	-4.5
4	20955.00	32.3 AV	54.0	-21.7	2.18 V	99	36.8	-4.5
5	#27940.00	46.6 PK	88.2	-41.6	1.96 V	146	48.2	-1.6
6	#27940.00	36.1 AV	68.2	-32.1	1.96 V	146	37.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.