

Report No.: FG042002E



FCC RADIO TEST REPORT

FCC ID : J9CQSIP7180

Equipment : 7c Modular Platform

Brand Name : Qualcomm Model Name : QSIP7180

Applicant : Qualcomm Technologies, Inc.

5775 Morehouse Dr.San Diego, CA

92121-1714 (USA)

Manufacturer : Qualcomm Technologies, Inc.

5775 Morehouse Dr.San Diego, CA

92121-1714 (USA)

Standard : FCC 47 CFR Part 2, and 90(S)

The product was received on Apr. 20, 2020 and testing was started from May 28, 2020 and completed on Aug. 25, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

TEL: 886-3-327-3456 Page Number : 1 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

Table of Contents

Report No. : FG042002E

His	tory c	of this test report	3
		y of Test Result	
1	Gene	eral Description	5
	1.1	Feature of Equipment Under Test	5
	1.2	Modification of EUT	
	1.3	Testing Site	
	1.4	Applied Standards	
2	Test	Configuration of Equipment Under Test	7
	2.1	Test Mode	7
	2.2	Connection Diagram of Test System	8
	2.3	Support Unit used in test configuration and system	8
	2.4	Measurement Results Explanation Example	8
	2.5	Frequency List of Low/Middle/High Channels	g
3	Conc	ducted Test Items	10
	3.1	Measuring Instruments	10
	3.2	Conducted Output Power Measurement and ERP Measurement	11
	3.3	Peak-to-Average Ratio	
	3.4	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.5	Emissions Mask Measurement	14
	3.6	Emissions Mask – Out Of Band Emissions Measurement	15
	3.7	Frequency Stability Measurement	16
	3.8	Field Strength of Spurious Radiation Measurement	17
4	List	of Measuring Equipment	20
5	Unce	ertainty of Evaluation	22
Ар	pendi	x A. Test Results of Conducted Test	
Аp	pendi	x B. Test Results of ERP and Radiated Test	
Αn	pendi	x C. Test Setup Photographs	

TEL: 886-3-327-3456 Page Number : 2 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

History of this test report

Report No. : FG042002E

Report No.	Version	Description	Issued Date
FG042002E	01	Initial issue of report	Sep. 17, 2020

TEL: 886-3-327-3456 Page Number : 3 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

Summary of Test Result

Report No.: FG042002E

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046 §90.635	Conducted Output Power and Effective Radiated Power	Pass	-
3.3	-	Peak-to-Average Ratio	Reporting only	-
3.4	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	-
3.5	§2.1051 §90.691	Emission masks – In-band emissions	Pass	-
3.6	§2.1051 §90.691	Emission masks – Out of band emissions	Pass	-
3.7	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	Pass	-
3.8	3.8 §2.1053 Field Strength of Spurious		Pass	Under limit 38.41 dB at 1632.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Amy Chen

TEL: 886-3-327-3456 Page Number : 4 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

1 General Description

1.1 Feature of Equipment Under Test

WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac and GNSS

Product Feature							
	WWAN: WCDMA Band 1: 5.0 dBi WCDMA Band 8: 0.8 dBi LTE Band 1: 5.0 dBi						
Antenna Type	LTE Band 1: 5.0 dBi LTE Band 3: 5.8 dBi LTE Band 7: 5.4 dBi LTE Band 8: 0.8 dBi						
	LTE Band 20: 1.7 dBi LTE Band 28 : 0.9 dBi LTE Band 34 : 3.8 dBi						
	LTE Band 38 : 5.2 dBi LTE Band 40 : 5.5 dBi						

Report No.: FG042002E

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Site

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory					
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978					
Test Site No.	Sporton Site No.					
rest site No.	TH05-HY					
Test Engineer	Bryant Liu					
Temperature	22~24 ℃					
Relative Humidity	51~55%					

TEL: 886-3-327-3456 Page Number : 5 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory						
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855						
Test Site No.	Sporton Site No.						
rest site No.	03CH12-HY						
Test Engineer	Jack Cheng, Lance Chiang, and Chuan Chu						
Temperature	22.6~26.2°ℂ						
Relative Humidity	55.7~67.8%						

Report No.: FG042002E

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007

1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 90
- ANSI / TIA-603-E
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- FCC KDB 414788 D01 Radiated Test Site v01r01
- Interim Guidance for Equipment Authorization of Devices with Channel Bandwidths Combined Across Two Contiguous Service Rule Allocations OET/Lab/EACB, June 6, 2013

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
- 3. The TAF code is not including all the FCC KDB listed without accreditation.

TEL: 886-3-327-3456 Page Number : 6 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level.

For radiated measurement, pre-scanned in two degrees (0° or 90°). The worst cases (degree 90) were recorded in this report.


Report No.: FG042002E

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Conducted	David	Bandwidth (MHz)					Modulation			RB#			Test Channel			
Test Cases	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	Н
Max. Output Power	26	٧	٧	٧	v	v	ı	v	v	v	٧	v	V	V	٧	v
Peak-to-Average Ratio	26				v		-	v	v	v	٧		V		٧	
26dB and 99% Bandwidth	26	V	v	v	v	v	-	v	v	v			v	v	v	v
Emission masks In-band emissions	26	٧	٧	٧	v	v	-	v	v	v	٧		v	v		v
Emission masks – Out of band emissions	26	٧	٧	٧	v	v	-	v	v	v	>			v	>	v
Frequency Stability	26	-	-		v	v	-	v					v	v	v	
E.R.P.	26					V	ı	٧	v	v	>			V		
Radiated Spurious Emission 26 Worst Case							V	٧	v							
Remark	 The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies. 					ИНz.										

TEL: 886-3-327-3456 Page Number : 7 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

2.2 Connection Diagram of Test System

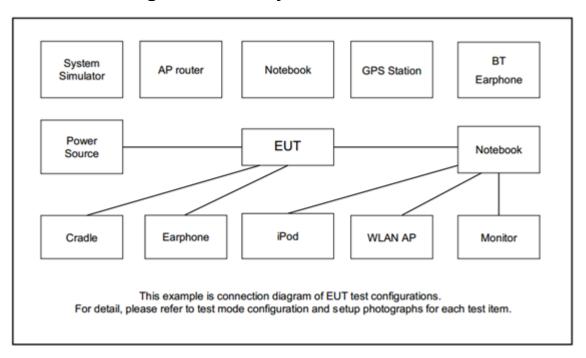

Report No.: FG042002E

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$

$$= 4.2 + 10 = 14.2 (dB)$$

TEL: 886-3-327-3456 Page Number : 8 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List								
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest				
15	Channel	26765	-	-				
15	Frequency	821.5	-	-				
40	Channel	-	26740	-				
10	Frequency	-	819	-				
5	Channel	26715	26740	26765				
5	Frequency	816.5	819	821.5				
2	Channel	26705	26740	26775				
3	Frequency	815.5	819	822.5				
1.4	Channel	26697	26740	26783				
1.4	Frequency	814.7	819	823.3				

Report No.: FG042002E

TEL: 886-3-327-3456 Page Number : 9 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.


3.1.1 Test Setup

3.1.2 Conducted Output Power




Report No.: FG042002E

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, Emissions Mask – Out Of Band Emissions, and Conducted Spurious Emission

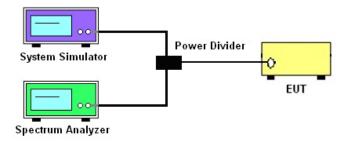

3.1.4 Frequency Stability

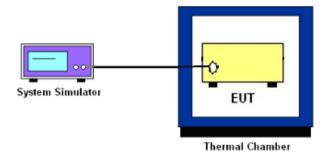

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

TEL: 886-3-327-3456 Page Number : 10 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

3.2 Conducted Output Power Measurement and ERP Measurement

3.2.1 Description of the Conducted Output Power Measurement and ERP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

Report No.: FG042002E

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 26.

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

TEL: 886-3-327-3456 Page Number : 11 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Reporting only

3.3.2 Test Procedures

- 1. The EUT was connected to spectrum and system simulator via a power divider.
- 2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.

Report No.: FG042002E

- 3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 4. Record the deviation as Peak to Average Ratio.

TEL: 886-3-327-3456 Page Number : 12 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

Report No.: FG042002E

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.4.2 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

TEL: 886-3-327-3456 Page Number : 13 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

3.5 Emissions Mask Measurement

3.5.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a)

Report No.: FG042002E

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 $\log_{10}(f/6.1)$ decibels or 50 + 10 $\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.5.2 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- 3. Set RBW and VBW 3 times of RBW to make the measurement with the spectrum analyzer's, and according to KDB 971168 D02 Misc Rev Approve License Devices v02r01 standards, set RBW = 300 Hz to make offsets less than 37.5 kHz from a channel edge, RBW = 100 kHz to make offsets greater than 37.5 kHz, that is allowed.
- 4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

TEL: 886-3-327-3456 Page Number : 14 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

3.6 Emissions Mask - Out Of Band Emissions Measurement

3.6.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

Report No.: FG042002E

3.6.2 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. For testing below 1GHz, make the measurement with the spectrum analyzer's RBW = 100 kHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. For testing above 1GHz, make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 8. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 15 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Report No.: FG042002E

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- 2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the base station.
- The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 Page Number : 16 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

3.8 Field Strength of Spurious Radiation Measurement

3.8.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

Report No.: FG042002E

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43+10log₁₀(P[Watts]) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


3.8.2 Test Procedures

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. For testing below 1GHz, make the measurement with the spectrum analyzer's RBW = 100 kHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. For testing above 1GHz, make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12. ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 Page Number : 17 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020


3.8.3 Test Setup

For radiated emissions below 30MHz

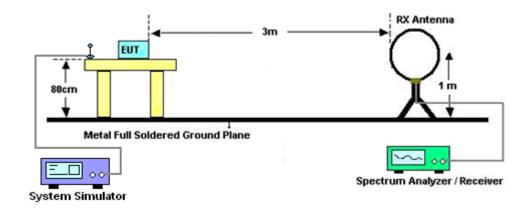


Report No.: FG042002E

For radiated test from 30MHz to 1GHz

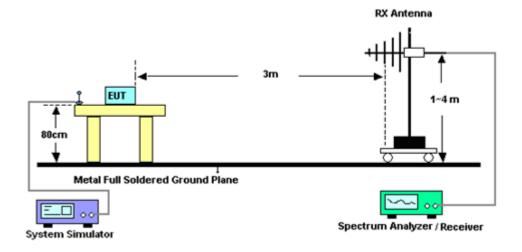

TEL: 886-3-327-3456 Page Number : 18 of 22
FAX: 886-3-328-4978 : Sep. 17, 2020

For radiated test above 1GHz

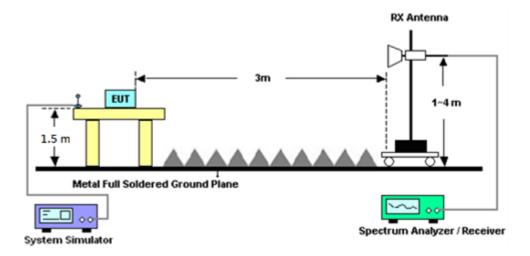

Report No.: FG042002E

3.8.4 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

TEL: 886-3-327-3456 Page Number : 19 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Dec. 26, 2019	May 28, 2020~ Aug. 14, 2020	Dec. 25, 2020	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D0 1N-06	37059 & 01	30MHz~1GHz	Oct. 12, 2019	May 28, 2020~ Aug. 14, 2020	Oct. 11, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-132 8	1GHz~18GHz	Nov. 14, 2019	May 28, 2020~ Aug. 14, 2020	Nov. 13, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz~40GHz	Dec. 10, 2019	May 28, 2020~ Aug. 14, 2020	Dec. 09, 2020	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 25, 2020	May 28, 2020~ Aug. 14, 2020	Mar. 24, 2021	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A0237 5	1GHz~26.5GHz	Mar. 26, 2020	May 28, 2020~ Aug. 14, 2020	Mar. 25, 2021	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA0118-55- 303K	171000180 0054002	1GHz~18GHz	Feb. 07, 2020	May 28, 2020~ Aug. 14, 2020	Feb. 06, 2021	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 13, 2019	May 28, 2020~ Aug. 14, 2020	Dec. 12, 2020	Radiation (03CH12-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	103738	10Hz~30GHz	May 14, 2020	May 28, 2020~ Aug. 14, 2020	May 13, 2021	Radiation (03CH12-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101756	10Hz~40GHz	Dec. 24, 2019	May 28, 2020~ Aug. 14, 2020	Dec. 23, 2020	Radiation (03CH12-HY)
Base Station	Anritsu	MT8821C	620143281 6	GSM / GPRS /WCDMA / LTE FDD/TDD with 44) /LTE-3CC DLCA,2CC ULCA	May 05, 2020	May 28, 2020~ Aug. 14, 2020	May 04, 2021	Radiation (03CH12-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	122990	GSM / GPRS / WCDMA	Dec. 09, 2019	May 28, 2020~ Aug. 14, 2020	Dec. 08, 2020	Radiation (03CH12-HY)
Signal Generator	Rohde & Schwarz	SMB100A	101107	100kHz~40GHz	Aug. 27, 2019	May 28, 2020~ Aug. 14, 2020	Aug. 26, 2020	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200- 12SS	SN2	1.2GHz Low Pass Filter	Mar. 21, 2020	May 28, 2020~ Aug. 14, 2020	Mar. 20, 2021	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-27 00-3000-180 00-60ST	SN2	3GHz High Pass Filter	Jul. 15, 2019	May 28, 2020~ Jul. 13, 2020	Jul. 14, 2020	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-27 00-3000-180 00-60ST	SN2	3GHz High Pass Filter	Jul. 14, 2020	Jul. 14, 2020~ Aug. 14, 2020	Jul. 13, 2021	Radiation (03CH12-HY)
Filter	Wainwright	WHKX8-587 2.5-6750-18 000-40ST	SN2	6.75GHz High Pass Filter	Mar. 18, 2020	May 28, 2020~ Aug. 14, 2020	Mar. 17, 2021	Radiation (03CH12-HY)
Notch Filter	Wainwright	WRCT/800/9 60-0.2/40-8S SK	SN11	GSM 850	Aug. 22, 2019	May 28, 2020~ Aug. 14, 2020	Aug. 21, 2020	Radiation (03CH12-HY)
Notch Filter	Wainwright	WRCD1700/ 2000-0.2/40- 10SSK	SN37	DCS 1900	Aug. 22, 2019	May 28, 2020~ Aug. 14, 2020	Aug. 21, 2020	Radiation (03CH12-HY)

Report No. : FG042002E

TEL: 886-3-327-3456 Page Number : 20 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Notch Filter	Wainwright	WRCT700/9 15-20/40-8S SK	SN1	700-915	Mar. 06, 2020	May 28, 2020~ Aug. 14, 2020	Mar. 05, 2021	Radiation (03CH12-HY)
Notch Filter	Wainwright	WRCG1710/ 1755-1690/1 775-45/7SS	SN2	AWS Band	Nov. 05, 2019	May 28, 2020~ Aug. 14, 2020	Nov. 04, 2020	Radiation (03CH12-HY)
Notch Filter	Wainwright	WTRCT10-2 200-2700-10 0-170-40SS K	SN2	N/A	May 26, 2020	May 28, 2020~ Aug. 14, 2020	May 25, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 12, 2019	May 28, 2020~ Aug. 14, 2020	Dec. 11, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 25, 2020	May 28, 2020~ Aug. 14, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz~40GHz	Feb. 25, 2020	May 28, 2020~ Aug. 14, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	May 28, 2020~ Aug. 14, 2020	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500 -B	N/A	1m~4m	N/A	May 28, 2020~ Aug. 14, 2020	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	May 28, 2020~ Aug. 14, 2020	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	May 28, 2020~ Aug. 14, 2020	N/A	Radiation (03CH12-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 15, 2019	May 23, 2020~ Aug. 24, 2020	Nov. 14, 2020	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40°C~90°C	Sep. 02, 2019	May 23, 2020~ Aug. 24, 2020	Sep. 01, 2020	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 09, 2019	May 23, 2020~ Aug. 24, 2020	Oct. 08, 2020	Conducted (TH05-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#A	1-18GHz	Jan. 13, 2020	May 23, 2020~ Aug. 24, 2020	Jan. 12, 2021	Conducted (TH05-HY)
Base Station	Anritsu	MT8820C	6201026480	-	Dec. 27, 2019	Jul. 19, 2020~ Aug. 25, 2020	Dec. 26, 2020	Conducted (TH05-HY)
Base Station	Anritsu	MT8821C	6201664755		Jul. 16, 2020	Jul. 19, 2020~ Aug. 25, 2020	Jul. 15, 2021	Conducted (TH05-HY)

Report No. : FG042002E

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3.24
Confidence of 95% (U = 2Uc(y))	3.24

Report No.: FG042002E

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of	3.62
Confidence of 95% (U = 2Uc(y))	3.02

<u>Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)</u>

Measuring Uncertainty for a Level of	4.06
Confidence of 95% (U = 2Uc(y))	4.00

TEL: 886-3-327-3456 Page Number : 22 of 22 FAX: 886-3-328-4978 Issued Date : Sep. 17, 2020

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 26 Maximum Average Power [dBm]								
BW [MHz] RB Size RB Offset Mod Lowest Middle Highest								
15	1	0		23.41	-	-		
15	1	37		23.24	-	-		
15	1	74		23.24	-	-		
15	36	0	QPSK	22.27	-	-		
15	36	20		22.35	-	-		
15	36	39		22.29	-	-		
15	75	0		22.35	-	-		
15	1	0		22.63	-	-		
15	1	37		22.52	-	-		
15	1	74		22.59	-	-		
15	36	0	16-QAM	21.40	-	-		
15	36	20		21.51	-	-		
15	36	39		21.40	-	-		
15	75	0		21.46	-	-		
15	1	0		21.62	-	-		
15	1	37		21.53	-	-		
15	1	74		21.52	-	-		
15	36	0	64-QAM	20.46	-	-		
15	36	20		20.51	-	-		
15	36	39		20.45	-	-		
15	75	0		20.51	-	-		
10	1	0		-	23.24	-		
10	1	25		-	23.16	-		
10	1	49		-	23.10	-		
10	25	0	QPSK	-	22.24	-		
10	25	12		-	22.21	-		
10	25	25		-	22.16	-		
10	50	0		-	22.20	-		
10	1	0		-	22.56	-		
10	1	25		-	22.53	-		
10	1	49		-	22.42	-		
10	25	0	16-QAM	-	21.33	-		
10	25	12		-	21.31	-		
10	25	25		-	21.27	-		
10	50	0		-	21.31	-		
10	1	0		-	21.54	-		
10	1	25		-	21.52	-		
10	1	49		-	21.44	-		
10	25	0	64-QAM	-	20.36	-		
10	25	12		-	20.33	-		
10	25	25		-	20.28	-		
10	50	0		-	20.31	-		





LTE Band 26 Maximum Average Power [dBm] BW [MHz] **RB Size RB Offset** Mod Lowest Middle Highest 23.18 23.37 0 23.01 1 12 23.31 23.15 22.96 5 5 1 24 23.31 23.13 22.90 12 5 0 **QPSK** 22.40 22.19 22.01 5 12 7 22.43 22.21 22.01 5 12 13 22.39 22.16 21.98 25 5 0 22.38 22.16 21.98 5 1 0 22.65 22.52 22.35 5 1 12 22.68 22.51 22.28 5 1 24 22.64 22.47 22.17 5 12 0 16-QAM 21.51 21.32 21.13 7 12 5 21.54 21.34 21.13 5 12 13 21.49 21.30 21.08 5 25 0 21.49 21.26 21.09 5 1 0 21.65 21.48 21.30 1 12 5 21.64 21.43 21.24 24 5 1 21.59 21.39 21.16 5 12 0 64-QAM 20.57 20.39 20.21 5 12 7 20.60 20.39 20.20 12 5 13 20.55 20.36 20.15 5 25 0 20.51 20.32 20.11 3 1 0 23.36 23.13 22.94 3 1 8 23.34 23.14 22.92 3 1 14 23.33 23.11 22.89 3 8 0 QPSK 22.38 22.20 21.99 3 8 4 22.42 22.21 22.01 3 8 7 22.38 22.17 21.95 0 3 15 22.40 22.18 22.00 3 1 0 22.64 22.51 22.26 1 22.24 3 8 22.67 22.51 3 1 14 22.65 22.45 22.14 3 8 0 16-QAM 21.54 21.14 21.34 3 8 4 21.56 21.37 21.16 3 8 7 21.52 21.31 21.10 0 21.30 3 15 21.51 21.13 0 21.47 21.25 3 1 21.60 3 1 8 21.60 21.46 21.21 3 1 14 21.59 21.44 21.17 3 8 0 64-QAM 20.57 20.36 20.15 8 4 3 20.60 20.40 20.17 7 3 8 20.57 20.37 20.13 3 15 0 20.51 20.29 20.10

Report No.: FG042002E

LTE Band 26 Maximum Average Power [dBm]								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest		
1.4	1	0		23.25	23.08	22.88		
1.4	1	3		23.34	23.15	22.94		
1.4	1	5		23.27	23.05	22.84		
1.4	3	0	QPSK	23.35	23.11	22.89		
1.4	3	1		23.37	23.14	22.94		
1.4	3	3		23.34	23.12	22.89		
1.4	6	0		22.36	22.11	21.93		
1.4	1	0		22.60	22.43	22.15		
1.4	1	3		22.65	22.49	22.20		
1.4	1	5		22.58	22.44	22.11		
1.4	3	0	16-QAM	22.38	22.20	21.93		
1.4	3	1		22.42	22.24	21.97		
1.4	3	3		22.39	22.19	21.89		
1.4	6	0		21.52	21.29	21.07		
1.4	1	0		21.59	21.38	21.13		
1.4	1	3		21.63	21.43	21.17		
1.4	1	5		21.54	21.36	21.06		
1.4	3	0	64-QAM	21.56	21.38	21.12		
1.4	3	1		21.58	21.42	21.15		
1.4	3	3		21.57	21.38	21.13		
1.4	6	0		20.45	20.23	20.02		

Report No. : FG042002E




LTE Band 26

Peak-to-Average Ratio


Mode					
Mod.	QP	SK	160	Limit: 13dB	
RB Size	1RB Full RB		1RB	Full RB	Result
Lowest CH	-	-	-	-	
Middle CH	3.19	4.41	4.38	5.62	PASS
Highest CH	-	-	-	-	
Mode					
Mod.	64C	AM			Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	-	-	-	-	
Middle CH	5.51	6.20	-	-	PASS
Highest CH	-	-	-	-]

Report No. :FG042002E

TEL: 886-3-327-3456 Page Number : A26S-1 of 45

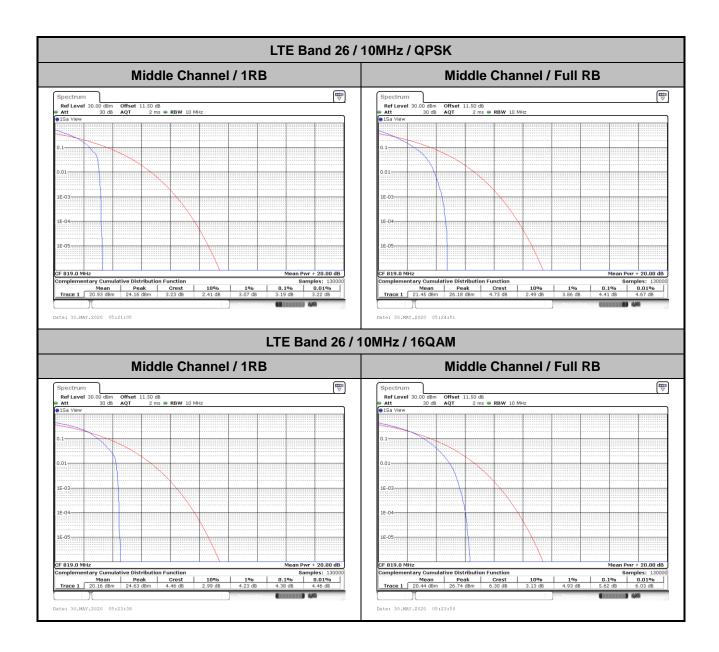

TEL: 886-3-327-3456 Page Number : A26S-2 of 45

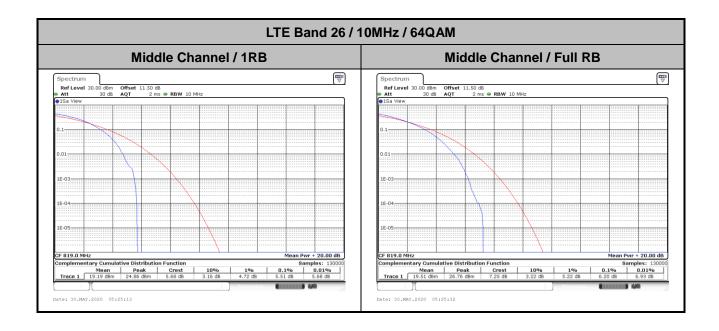

TEL: 886-3-327-3456 Page Number : A26S-3 of 45


Report No. :FG042002E

26dB Bandwidth

Mode	LTE Band 26 : 26dB BW(MHz)											
BW	1.4MHz 3MHz				5MHz 10MI		IHz 15N		ИHz	201	20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.21	1.22	3.02	3.01	4.93	4.79	-	-	14.30	14.36	-	-
Middle CH	1.23	1.22	2.99	3.02	4.97	4.82	9.77	9.75	-	-	-	-
Highest CH	1.23	1.23	3.03	3.06	4.84	4.86	-	-	-	-	-	-
Mode					LTE Ba	and 26 :	26dB BV	V(MHz)				
BW	1.4MHz 3MHz		lHz	5MHz 10MHz		ЛHz	15MHz		20MHz			
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.22	-	3.06	-	5.00	-	-	-	14.12	-	-	-
Middle CH	1.24	-	2.99	-	4.86	-	9.77	-	-	-	-	-
Highest CH	1.23	-	3.03	-	4.83	-	-	-	-	-	-	-


TEL: 886-3-327-3456 Page Number : A26S-4 of 45



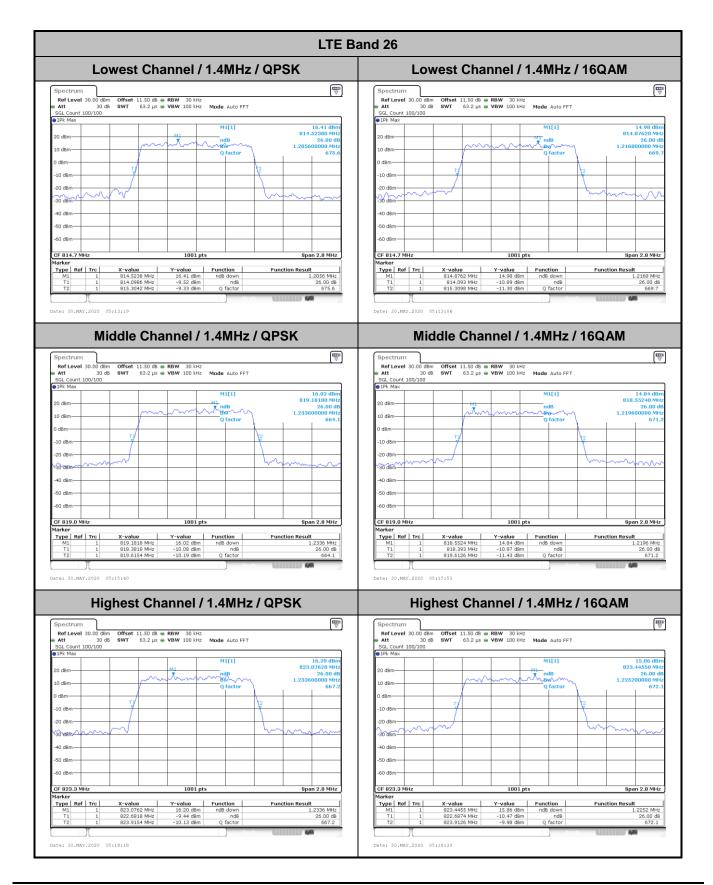


TEL: 886-3-327-3456 Page Number : A26S-5 of 45



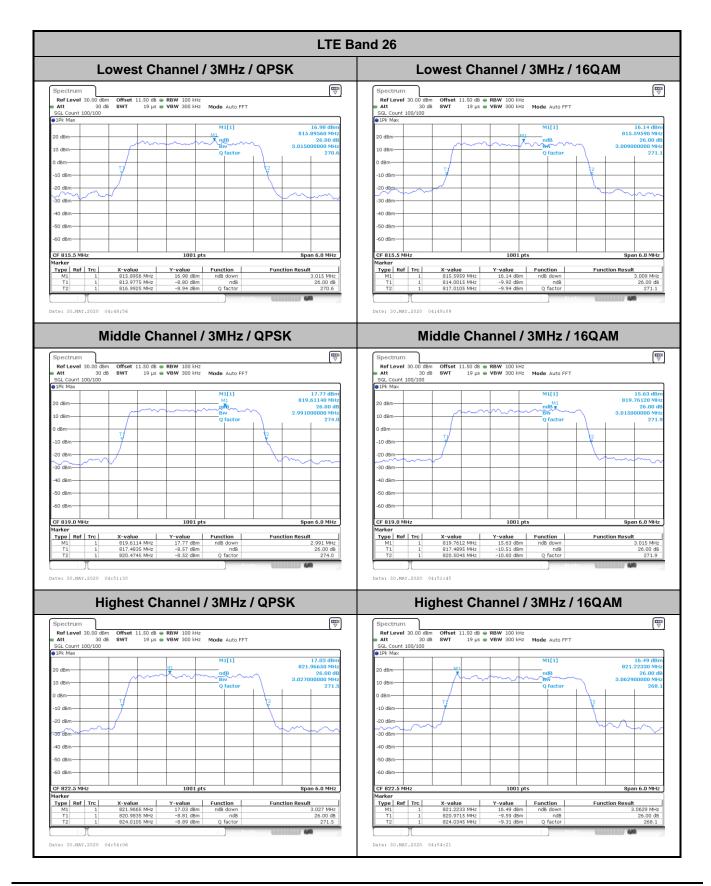


TEL: 886-3-327-3456 Page Number : A26S-6 of 45



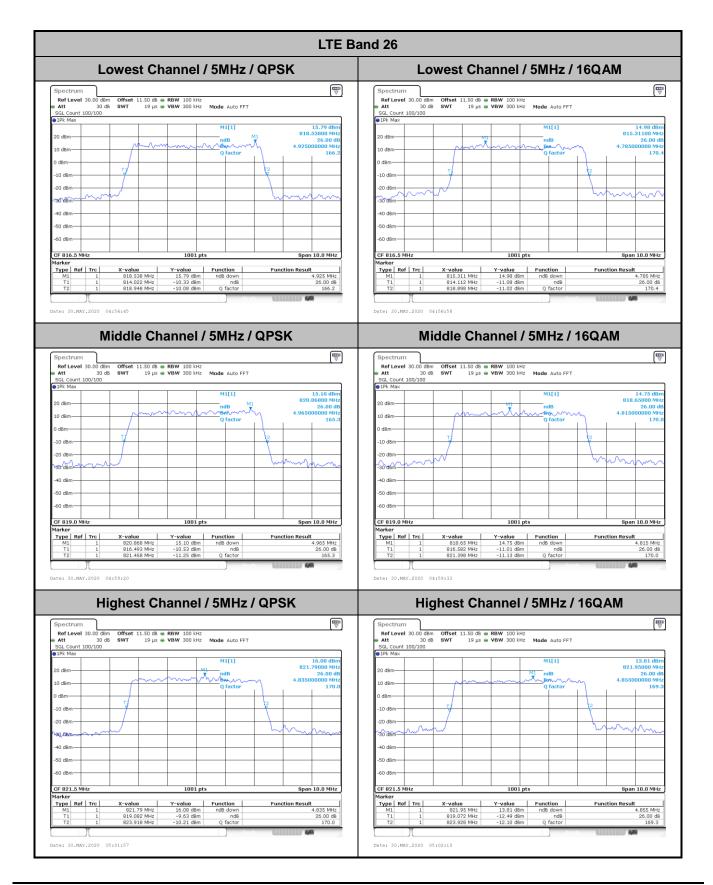


TEL: 886-3-327-3456 Page Number : A26S-7 of 45

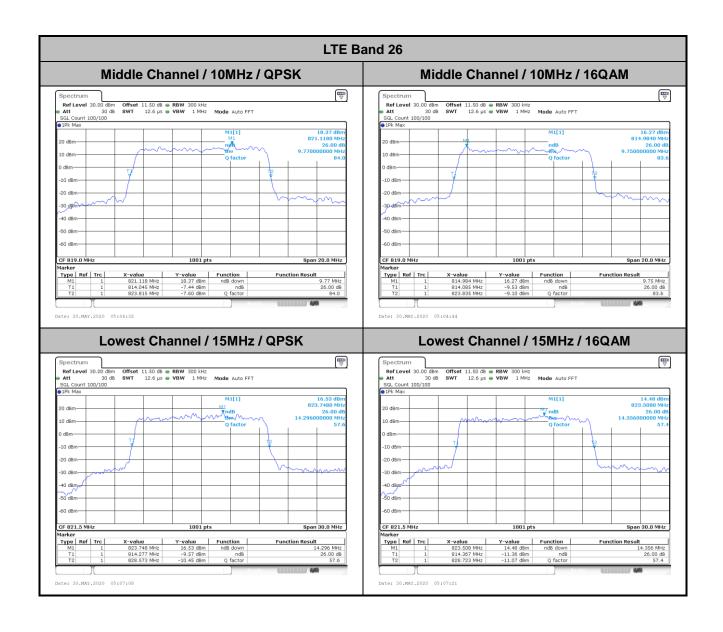


TEL: 886-3-327-3456 Page Number: A26S-8 of 45



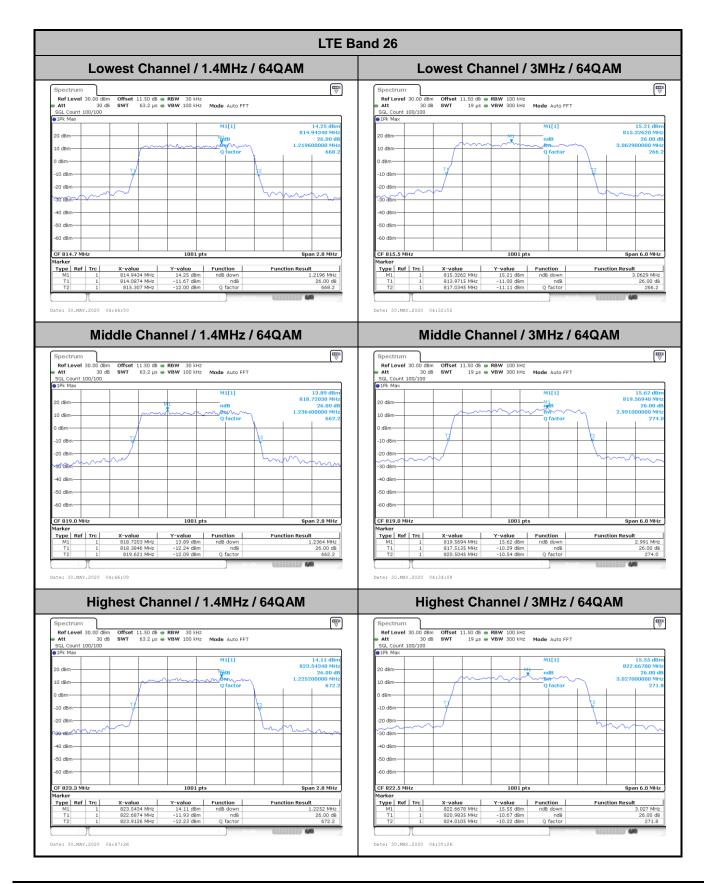


TEL: 886-3-327-3456 Page Number : A26S-9 of 45

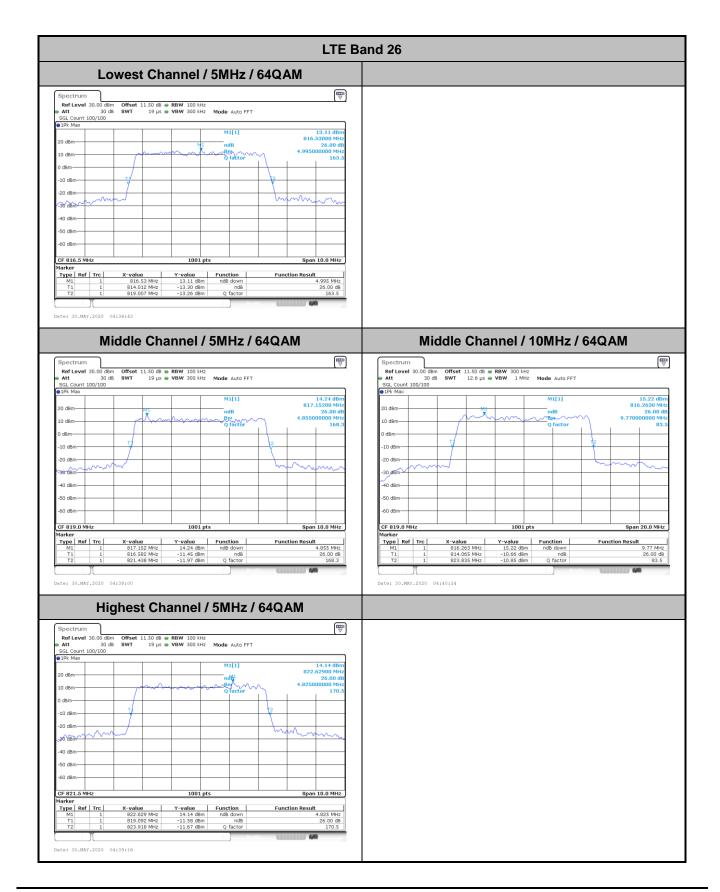

TEL: 886-3-327-3456 Page Number : A26S-10 of 45



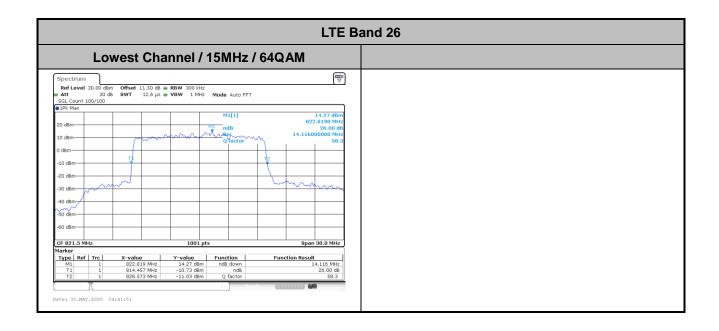

TEL: 886-3-327-3456 Page Number: A26S-11 of 45


Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.08	2.72	2.72	4.49	4.50	-	-	13.34	13.37	-	-
Middle CH	1.09	1.10	2.72	2.72	4.49	4.49	9.03	9.05	-	-	-	-
Highest CH	1.08	1.09	2.71	2.73	4.47	4.47	-	-	-	-	-	-
Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.09	-	2.73	-	4.49	-	-	-	13.34	-	-	-
Middle CH	1.09	-	2.73	-	4.51	-	9.07	-	-	-	-	-
Highest CH	1.09	-	2.73	-	4.49	-	ı	-	ı	-	ı	-

Report No. :FG042002E


TEL: 886-3-327-3456 Page Number : A26S-12 of 45



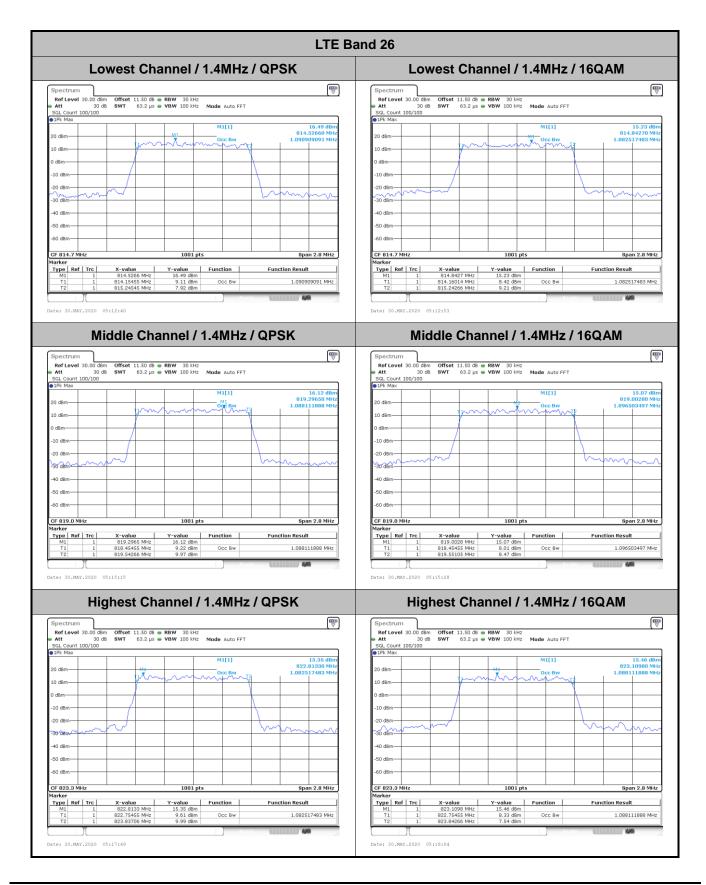


TEL: 886-3-327-3456 Page Number : A26S-13 of 45




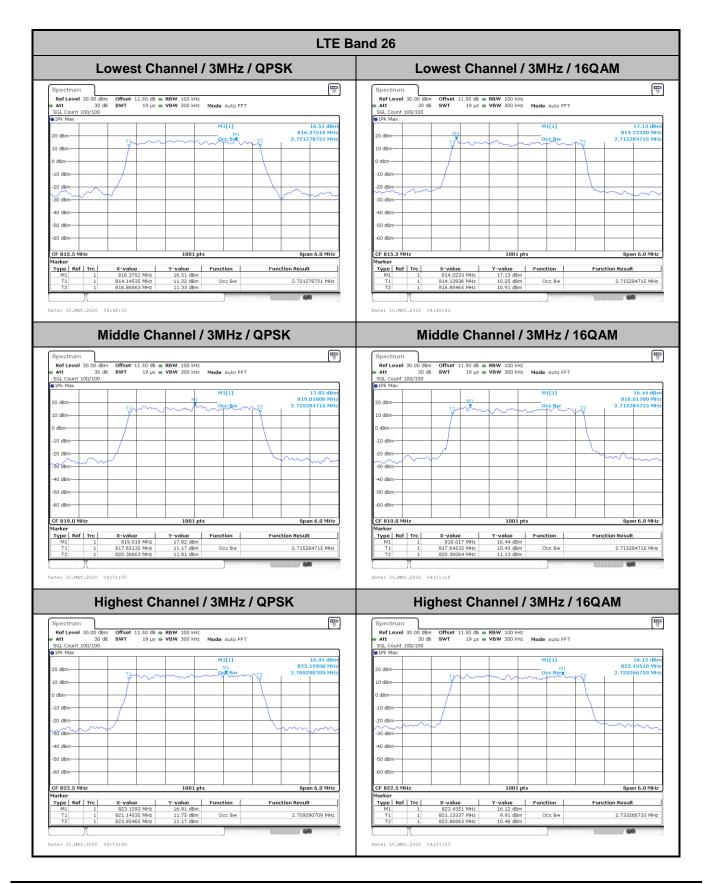


TEL: 886-3-327-3456 Page Number : A26S-14 of 45

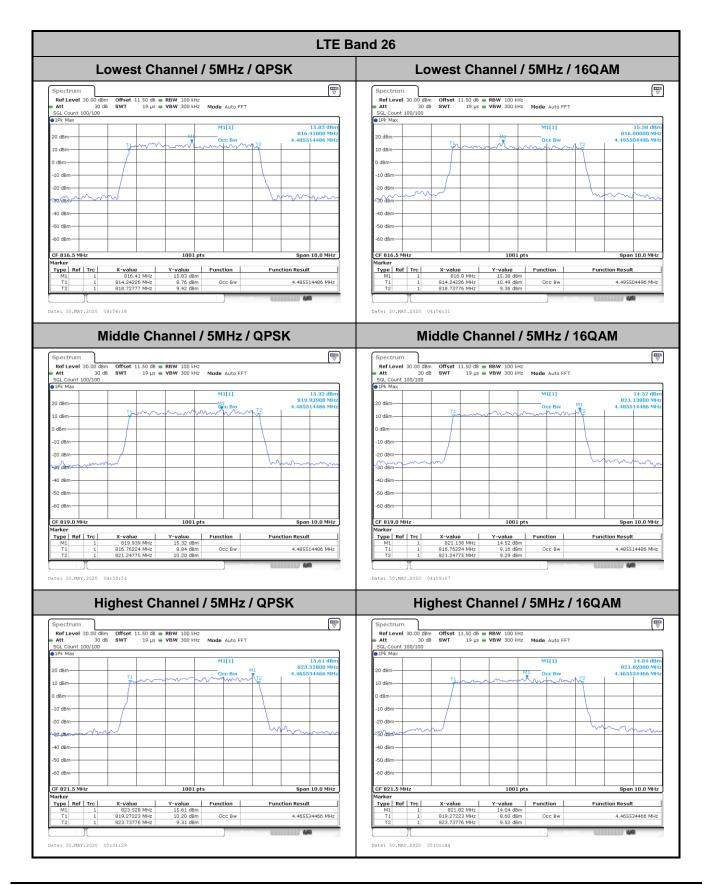


TEL: 886-3-327-3456 Page Number : A26S-15 of 45

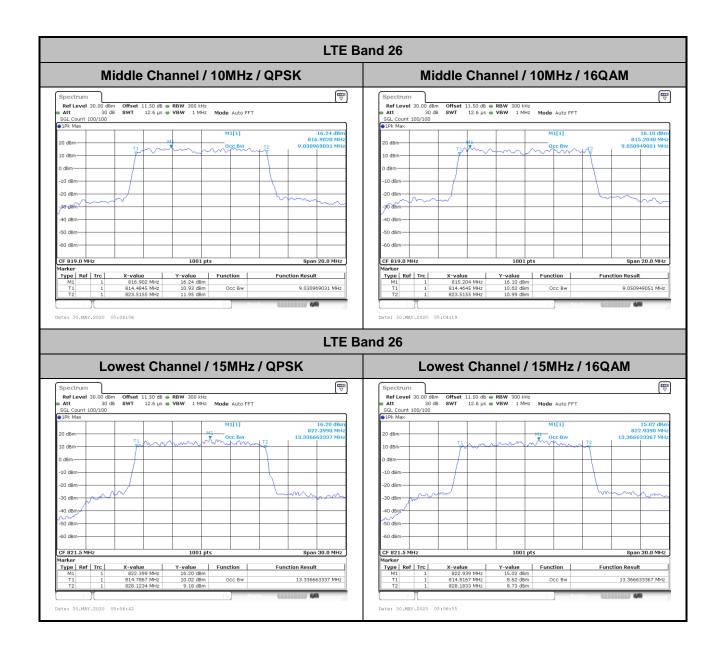


TEL: 886-3-327-3456 Page Number : A26S-16 of 45

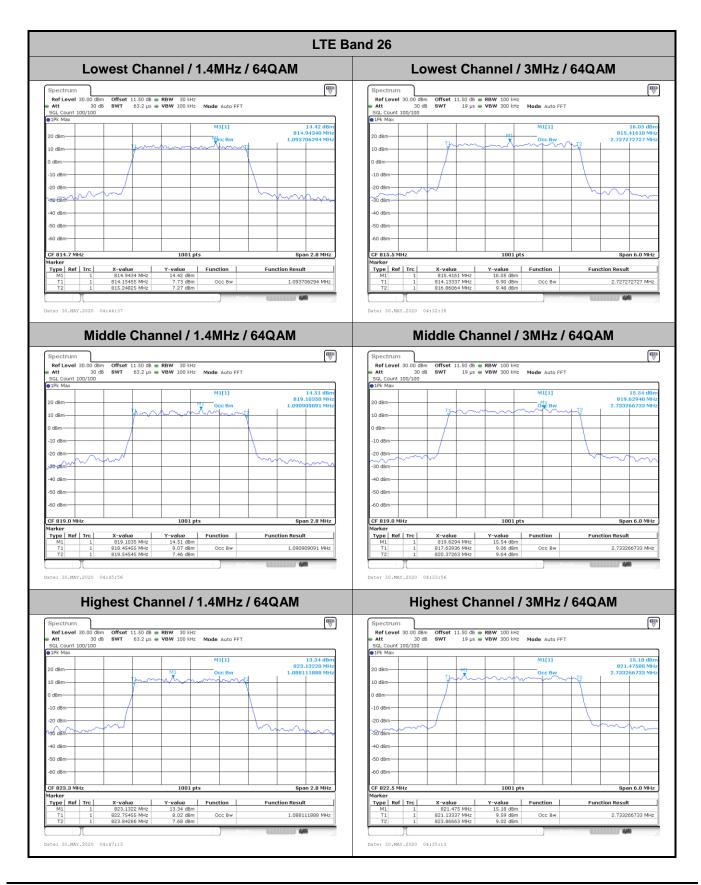

TEL: 886-3-327-3456 Page Number : A26S-17 of 45

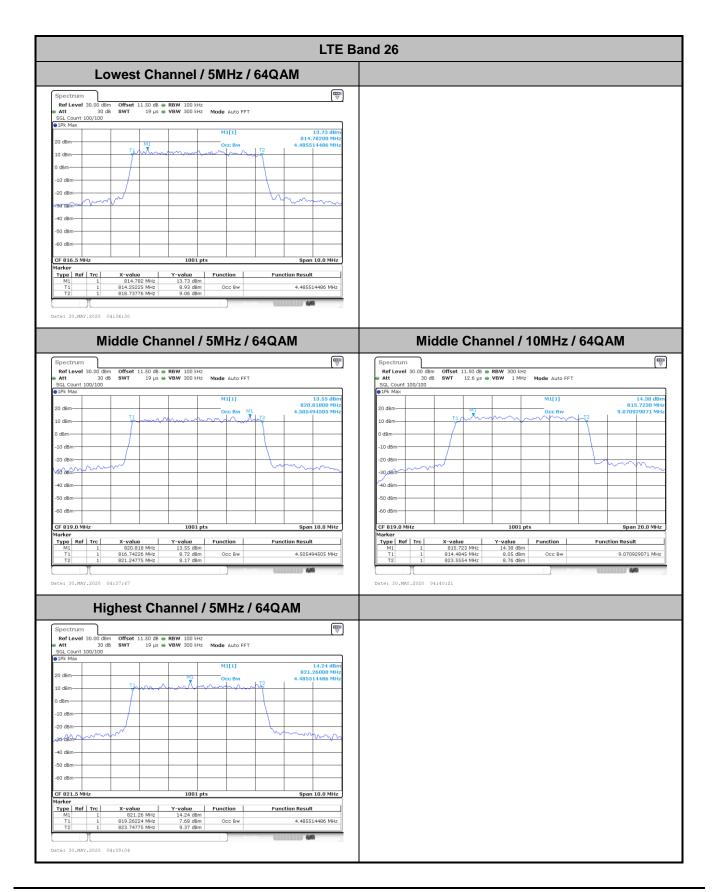


TEL: 886-3-327-3456 Page Number : A26S-18 of 45

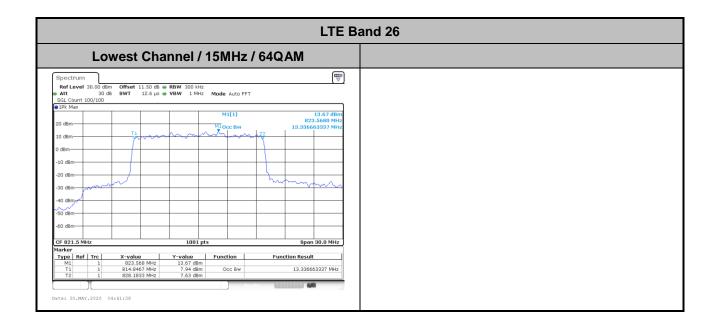

TEL: 886-3-327-3456 Page Number : A26S-19 of 45


Report No.:FG042002E

Emission masks – In-band emissions

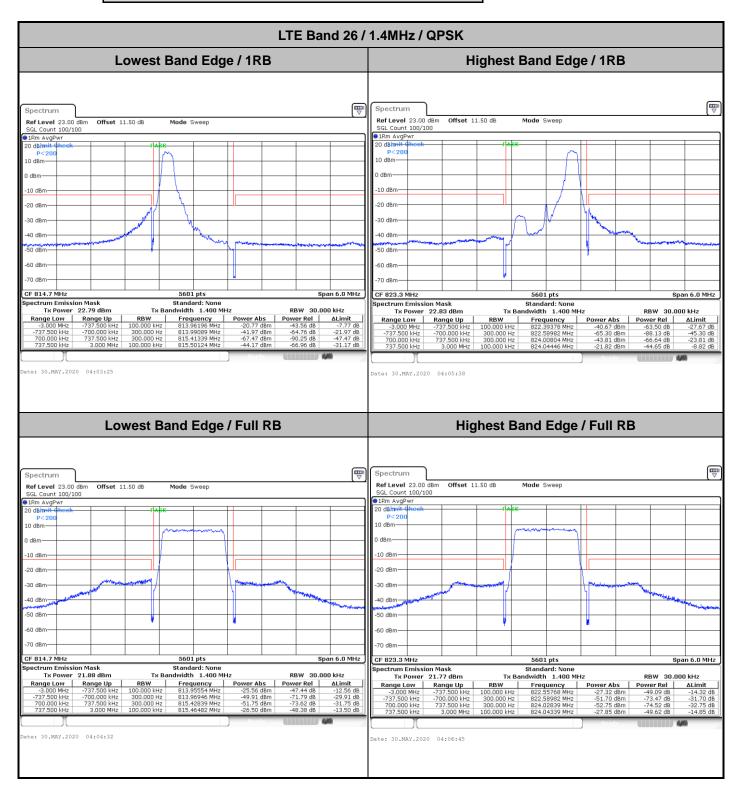


TEL: 886-3-327-3456 Page Number: A26S-20 of 45

Report No.:FG042002E

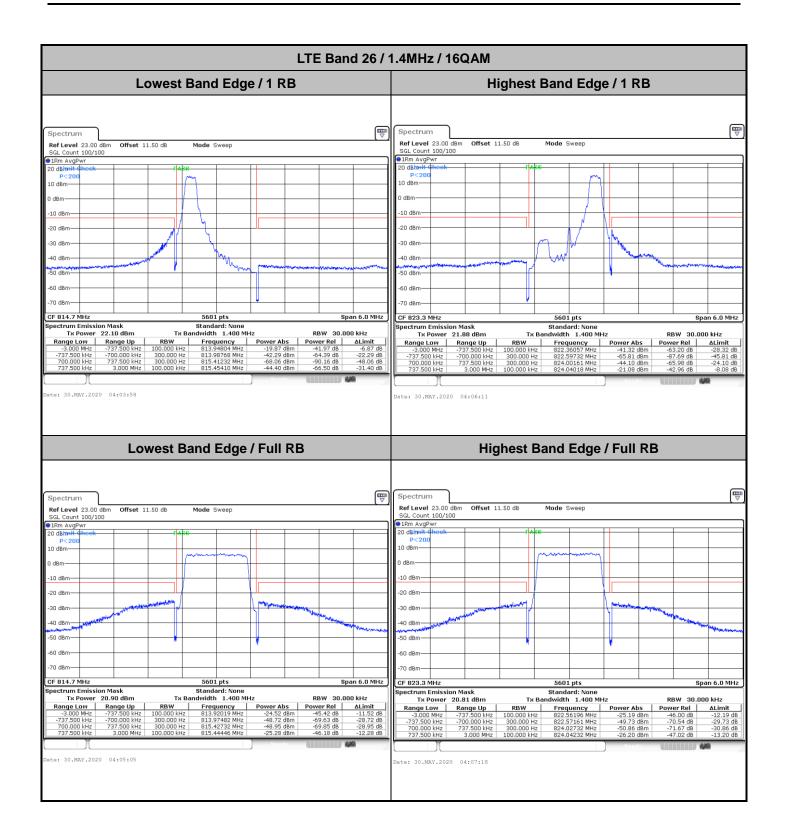



TEL: 886-3-327-3456 Page Number: A26S-21 of 45



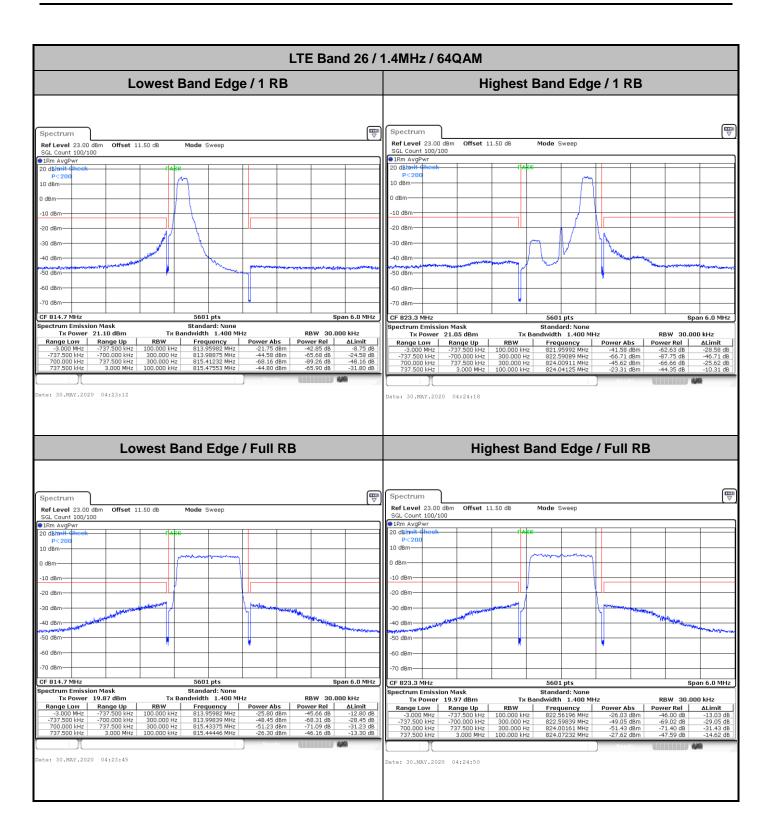


TEL: 886-3-327-3456 Page Number : A26S-22 of 45



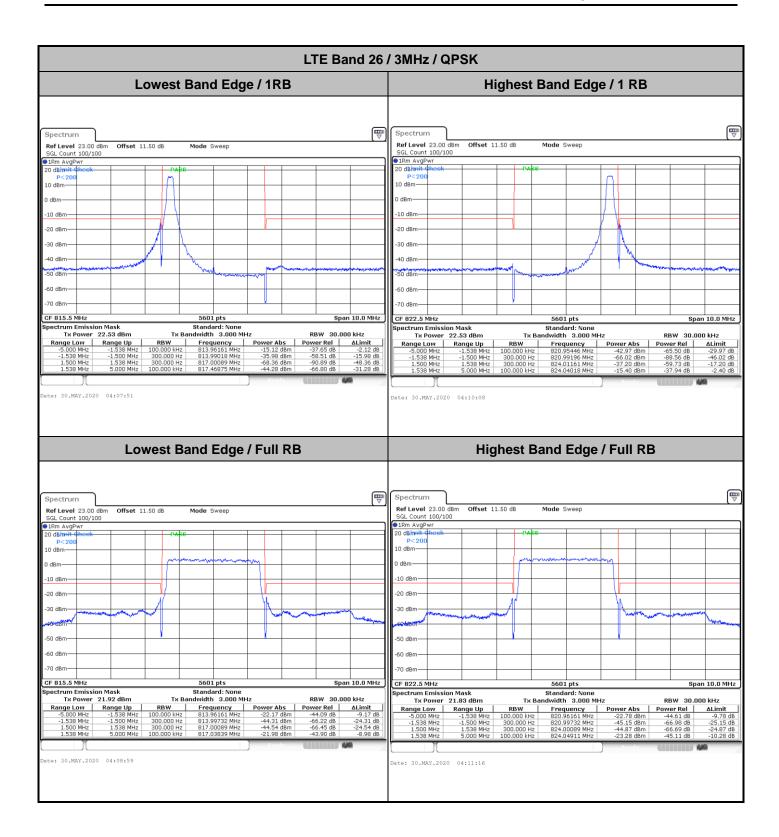



TEL: 886-3-327-3456 Page Number : A26S-23 of 45

Report No.:FG042002E

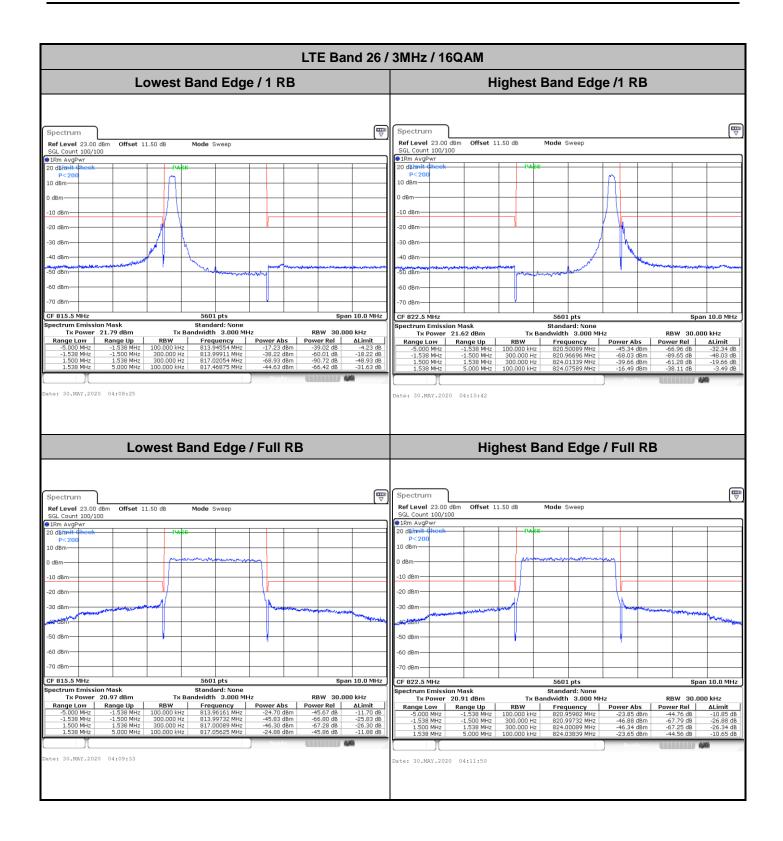


TEL: 886-3-327-3456 Page Number: A26S-24 of 45



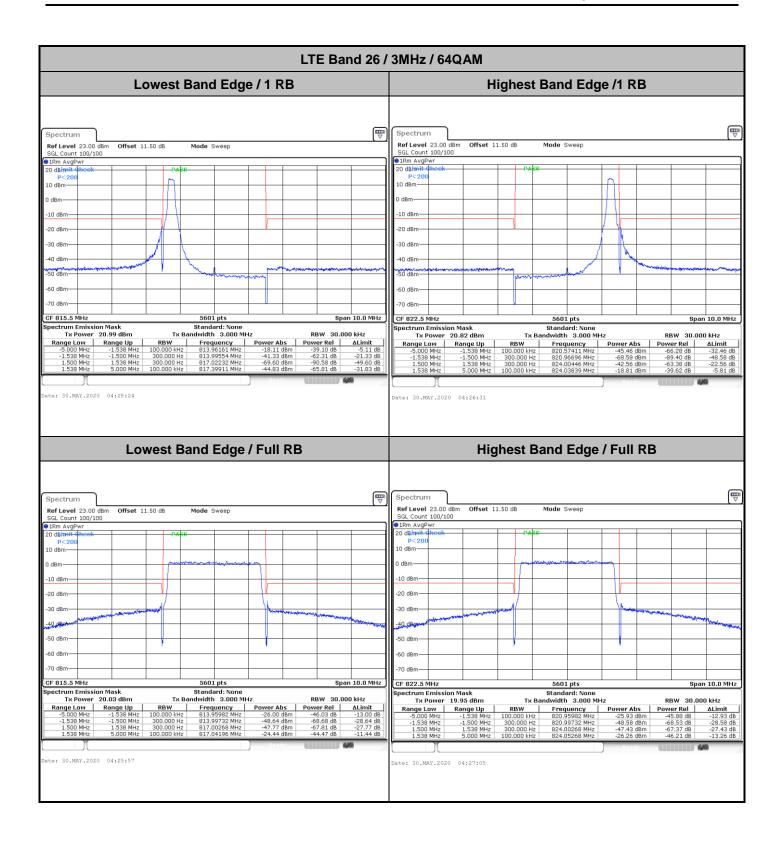

TEL: 886-3-327-3456 Page Number : A26S-25 of 45

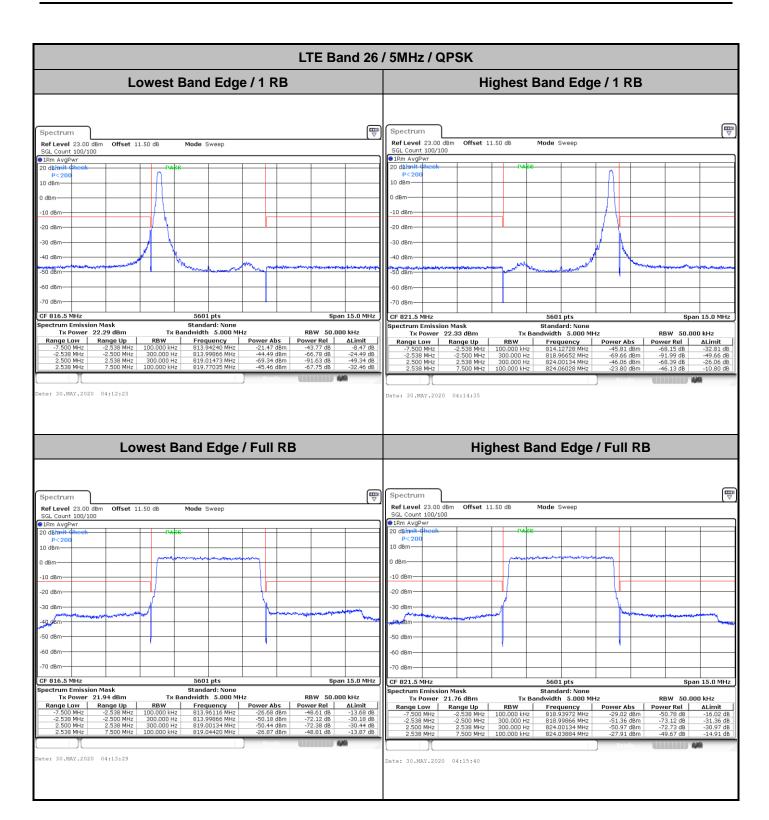

TEL: 886-3-327-3456 Page Number : A26S-26 of 45