


FCC ID LABEL & LOCATION


LABELING REQUIREMENTS PER §2.925

The label(s) shall be permanently affixed at a conspicuous location on the device.

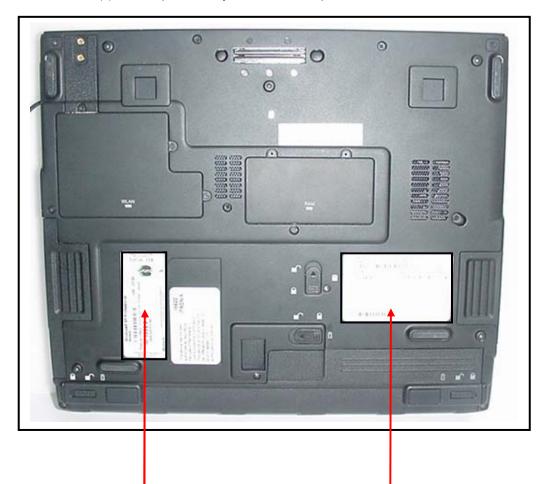


SEE NEXT PAGE(S) FOR PART 15(B) DoC LABEL

SEE NEXT PAGE(S) FOR FCC ID LABEL(S)

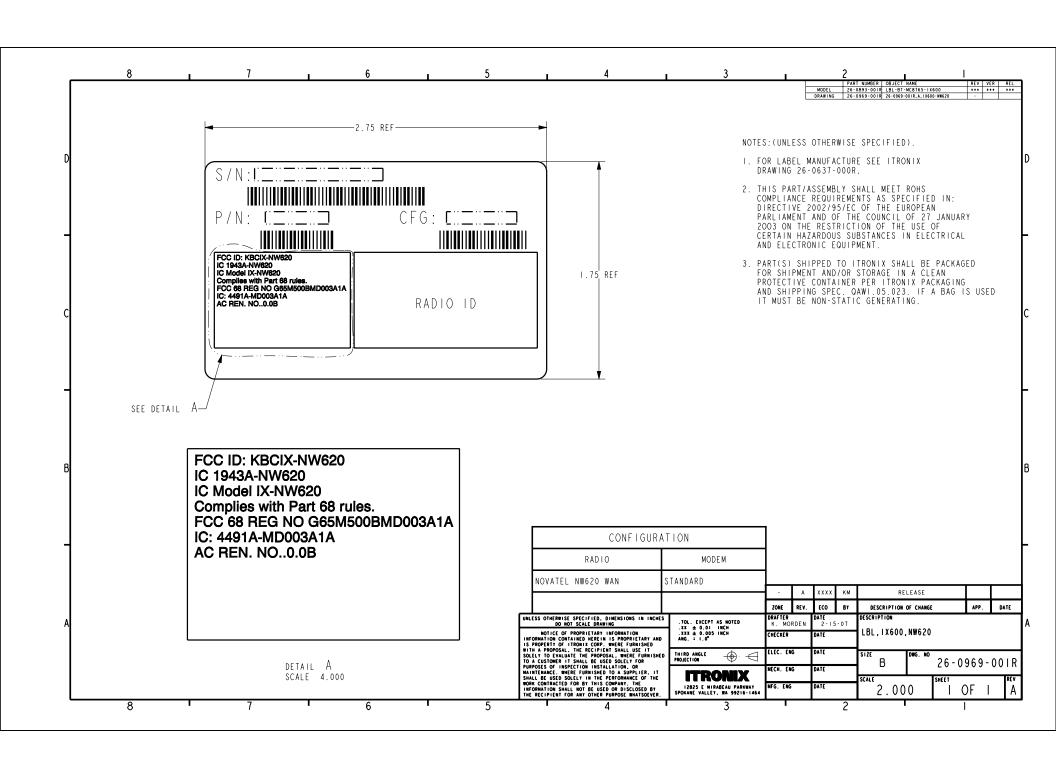

LABEL

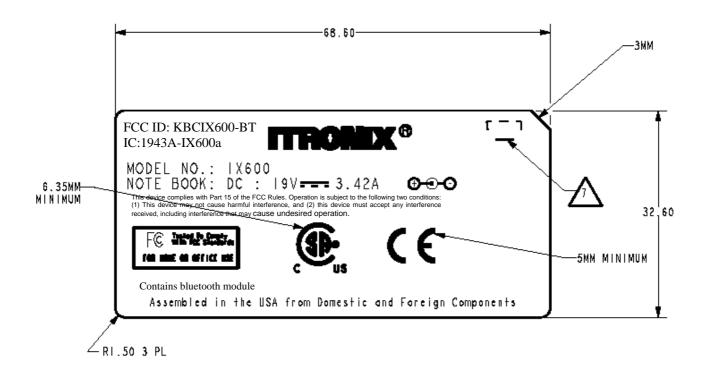

NOTES: (UNLESS OTHERWISE SPECIFIED).

- I. MATERIAL: PC, THK. = 0.127mm(MATTED) + 0.05mm (ADHESIVE)
 WITH MATTED TEXTURE.
- 2. MATERIAL MUST BE UL AND CSA APPROVED.
- 3. PRINT ON BACK SURFACE.
- 4. ADHESIVE: SPEC REFER TO ES-811RO5, SONY 303 OF TOYO DESTROMR OR EQUIV.
- COLOR: TEXT TO BE PMS 2C (COOL GRAY). BACKGROUND TO BE ACS-M.
- 6. PRINTING TOLERANCE OF DIMENSIONS TO BE +/-0.30mm.



UL/CSA RECOGNIZED LOGO.

- ALL PART(S) TO BE CLEAN AND FREE FROM CONTAMINANTS
 TO MEET QUALITY APPEARANCE SPECIFICATION QE3-001.
- ALL UNSPECIFIED GEOMETRY SHALL MATCH ITRONIX SUPPLIED DATABASE GENERATED FROM MODEL WHICH MATCHES THIS DRAWING. TOLERANCE UNSPECIFIED DIMENSIONS SHALL BE PER TABLE
- IO. PART(S) SHIPPED TO ITRONIX SHALL BE PACKAGED FOR SHIPMENT AND/OR STORAGE IN A CLEAN, PROTECTIVE CONTAINER PER ITRONIX PACKAGING AND SHIPPING SPEC. QE3-002. IF A BAG IS USED IT MUST BE NON-STATIC GENERATING.



		model of poration	
MODEL NO.: LNINJA(ITRONIX) UNIT : mm PART NAME: SPEC LBL SCALE: 1 : 1			
AW NO.: 40.47M35.001 SHEET 1 OF 1			
1. MATERIAL: POLYCARBONATE(PC), T=0.127mm(MATTED)+0.05mm(ADHESIVE), WITH MATTED TEXTURE	REV	DESCRIPTION	SIGN DATE

2.THE MATERIAL MUST BE APPROVED BY UL, CSA.

3. FINISH: PRINT ON BACK SURFACE

4. ADHESIVE: SPEC REFER TO ES-811-R05, SONY 303 OR TOYO DF2700MR OR EQUIV

5. PRINT COLOR: LETTERS -----PANTONE COOL GRAY 2C

BACKGROUND--- ACS-M

6.PRINTING TOLERANCE OF DIMENSION ARE +0.3/-0.3mm

DRAWN:	NNP100 Dora Chang 6/1/2005 REVIEWED:	APPROVED: BOYAN MS	(or mor
		6/1	12005