

## Test Report

# IW-6300H Series Access Point

Cisco Industrial Wireless Hazardous Location Access Point

FCC ID: LDKESW6300

IC ID: 2461D-ESW6300

**5150-5250 MHz**

Inside Antennas, 5dBi Gain (>30 degree 5Ghz Antenna Gain)(-5 dBi)

Against the following Specifications:


CFR47 Part 15.407



Cisco Systems

170 West Tasman Drive

San Jose, CA 95134

	
<b>Author:</b> Julian Land <b>Tested By:</b> Julian Land	<b>Approved By:</b> Adam Walb <b>Title:</b> MGR. IoT Compliance <b>Revision:</b> 1.0

This report replaces any previously entered test report under EDCS – **18429890**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 11644122.

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

<b>SECTION 1: OVERVIEW .....</b>	<b>3</b>
<b>SECTION 2: ASSESSMENT INFORMATION .....</b>	<b>4</b>
2.1 GENERAL .....	4
2.2 DATE OF TESTING.....	6
2.3 REPORT ISSUE DATE .....	6
2.4 TESTING FACILITIES .....	6
2.5 EQUIPMENT ASSESSED (EUT).....	6
2.6 EUT DESCRIPTION .....	7
<b>SECTION 3: RESULT SUMMARY .....</b>	<b>10</b>
3.1 RESULTS SUMMARY TABLE .....	10
<b>SECTION 4: SAMPLE DETAILS.....</b>	<b>14</b>
4.1 SAMPLE DETAILS .....	14
4.2 SYSTEM DETAILS .....	14
4.3 MODE OF OPERATION DETAILS.....	14
<b>APPENDIX A: EMISSION TEST RESULTS .....</b>	<b>15</b>
CONDUCTED TEST SETUP DIAGRAM.....	15
TARGET MAXIMUM CHANNEL POWER .....	15
A.1 DUTY CYCLE .....	16
A.2 99% AND 26DB BANDWIDTH .....	19
A.3 MAXIMUM CONDUCTED OUTPUT POWER .....	23
A.4 POWER SPECTRAL DENSITY .....	30
A.5 CONDUCTED SPURIOUS EMISSIONS.....	35
A.6 CONDUCTED BAND EDGE .....	44
<b>APPENDIX B: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST.ERROR! BOOKMARK NOT DEFINED.</b>	
<b>APPENDIX C: ABBREVIATION KEY AND DEFINITIONS .....</b>	<b>50</b>
<b>APPENDIX D: PHOTOGRAPHS OF TEST SETUPS .....</b>	<b>52</b>
<b>APPENDIX E: SOFTWARE USED TO PERFORM TESTING .....</b>	<b>55</b>
<b>APPENDIX F: TEST PROCEDURES .....</b>	<b>56</b>
<b>APPENDIX G: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01) .....</b>	<b>57</b>

## **Section 1: Overview**

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

<b>Specifications:</b>
CFR47 Part 15.407

## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%
- e) All AC testing was performed at one or more of the following supply voltages:

110V 60 Hz (+/-20%)
---------------------

### Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

## Measurement Uncertainty Values

voltage and power measurements	$\pm 2$ dB
conducted EIRP measurements	$\pm 1.4$ dB
radiated measurements	$\pm 3.2$ dB
frequency measurements	$\pm 2.4 \cdot 10^{-7}$
temperature measurements	$\pm 0.54^\circ$
humidity measurements	$\pm 2.3\%$
DC and low frequency measurements	$\pm 2.5\%$

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

**This report must not be reproduced except in full, without written approval of Cisco Systems.**

**2.2 Date of testing**

04-Nov-19 - 04-Nov-19

**2.3 Report Issue Date**

11/1/2019

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

**2.4 Testing facilities**

This assessment was performed by:

**Testing Laboratory**

Cisco Systems, Inc.  
125 West Tasman Drive (Building P)  
San Jose, CA 95134  
USA

**Headquarters**

Cisco Systems, Inc.,  
170 West Tasman Drive  
San Jose, CA 95134,  
USA

**Registration Numbers for Industry Canada**

<b>Cisco System Site</b>	<b>Address</b>	<b>Site Identifier</b>
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1
Building 7, 5m Chamber	425 E. Tasman Drive San Jose, California 95134	Company #: 2461N-3

**Test Engineers**

Julian Land

**2.5 Equipment Assessed (EUT)**

IW-6300H

## 2.6 EUT Description

The radio supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

802.11a - Non HT20, Two Antennas, 6 to 54 Mbps, 1ss

802.11a - Non HT20 Beam Forming, Two Antennas, 6 to 54 Mbps, 1ss

802.11n/ac - HT/VHT20, One Antenna, M0 to M7, 1ss

802.11n/ac - HT/VHT20, Two Antennas, M0 to M7, 1ss

802.11n/ac - HT/VHT20, Two Antennas, M8 to M15, 2ss

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M0 to M7, 1ss

802.11n/ac - HT/VHT20 Beam Forming, Two Antennas, M8 to M15, 2ss

802.11n/ac - HT/VHT20 STBC, Two Antennas, M0 to M7, 2ss

802.11a - Non HT40, One Antenna, 6 to 54 Mbps, 1ss

802.11a - Non HT40, Two Antennas, 6 to 54 Mbps, 1ss

802.11n/ac - HT/VHT40, One Antenna, M0 to M7, 1ss

802.11n/ac - HT/VHT40, Two Antennas, M0 to M7, 1ss

802.11n/ac - HT/VHT40, Two Antennas, M8 to M15, 2ss

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M0 to M7, 1ss

802.11n/ac - HT/VHT40 Beam Forming, Two Antennas, M8 to M15, 2ss

802.11n/ac - HT/VHT40 STBC, Two Antennas, M0 to M7, 2ss

802.11a - Non HT80, One Antenna, 6 to 54 Mbps, 1ss

802.11a - Non HT80, Two Antennas, 6 to 54 Mbps, 1ss

802.11ac - VHT80, One Antenna, M0 to M9 1ss

802.11ac - VHT80, Two Antennas, M0 to M9 1ss

802.11ac - VHT80, Two Antennas, M0 to M9 2ss

802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M9 1ss

802.11ac - VHT80 Beam Forming, Two Antennas, M0 to M9 2ss

802.11ac - VHT80 STBC, Two Antennas, M0 to M9 2ss

802.11a - Non HT20, One Antenna, 6 to 54 Mbps, 1ss

### **Model / PID Differences**

IW-6300H-AC-x-K9, IW-6300H-DC-x-K9, IW-6300-DCW-x-K9 and ESW-6300-CON-x-K9, all have the same identical components, electronics circuitries, PCB layout and enclosure.

The only differences are listed as below:

IW-6300H-AC-x-K9  
IW-6300H-DC-x-K9  
IW-6300-DCW-x-K9  
ESW-6300-CON-x-K9

Where “x” can be replaced with another letter to indicate country domain.

Domain letters: A, B, C, D, E, F, H, I, L, M, N, Q, R, S, T, Z

Where “AC” is Alternating Current (AC power supply)

Where “DC” is Direct Current (DC power supply), 54V native input

Where “DCW” is Direct Current; wide range 10-36VDC

Where “K9” is encryption software.



The following antennas are supported by this product series.

The data included in this report represent the worst case data for all antennas.

Frequency	Part Number	Antenna Type	Antenna Gain (dBi)	>30 degree 5 GHz Antenna Gain (dBi)
<b>2.4 GHz</b>	AIR-ANT2450V-N	Single Band Omni	<b>5</b>	<b>NA</b>
	AIR-ANT2450V-N-HZ	Single Band Omni, Hazloc	<b>5</b>	<b>NA</b>
	AIR-ANT2480V-N	Single Band Omni	<b>8</b>	<b>NA</b>
	AIR-ANT2450HG-N	Horizontal Polarized Omni	<b>5</b>	<b>NA</b>
	AIR-ANT2450VG-N	Vertical Polarized Omni	<b>5</b>	<b>NA</b>
	AIR-ANT2413P2M-N	Single Band, Dual Polarized Directional Patch	<b>13</b>	<b>NA</b>
<b>5 GHz</b>	AIR-ANT5180V-N	Single Band Omni	<b>8</b>	<b>-3</b>
	AIR-ANT5150HG-N	Horizontal Polarized Omni	<b>5</b>	<b>-5</b>
	AIR-ANT5150VG-N	Vertical Polarized Omni	<b>5</b>	<b>-6</b>
	AIR-ANT5114P2M-N	Single Band, Dual Polarized Directional Patch	<b>13</b>	<b>5</b>
<b>2.4/5 GHz</b>	AIR-ANT2547V-N=	Dual-band Omni	<b>4 / 7</b>	<b>-6</b>
	AIR-ANT2547VG-N=	Dual-band Omni, Gray	<b>4 / 7</b>	<b>-6</b>
	AIR-ANT2547V-N-HZ=	Dual-band Omni, Hazloc	<b>4 / 7</b>	<b>-6</b>
	AIR-ANT2568VG-N	Dual-band Omni	<b>6 / 8</b>	<b>3</b>
	AIR-ANT2588P3M-N=	Dual-band/Dual Polarized Directional, Patch	<b>8 / 8</b>	<b>1</b>
	AIR-ANT2513P4M-N	Dual-band Polarization Diverse Patch Array	<b>13 / 13</b>	<b>-5</b>

### Section 3: Result Summary

#### 3.1 Results Summary Table

##### Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407	<p><b>99% &amp; 26 dB Bandwidth:</b></p> <p>The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW.</p> <p>The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.</p>	Pass

FCC 15.407	<p><b>Output Power:</b> (1) For the band 5.15-5.25 GHz.</p> <p>(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. ... If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power ... shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p> <p>(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. ... If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. ... Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p> <p>(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	Pass
------------	--	------

FCC 15.407	<p><b>Power Spectral Density</b></p> <p>(i) For an outdoor access point operating in the band 5.15-5.25 GHz...the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p> <p>(ii) For an indoor access point operating in the band 5.15-5.25 GHz... the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz ...the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the ... maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p> <p>(iv) For mobile and portable client devices in the 5.15-5.25 GHz band...the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used... the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	Pass
FCC 15.407	<p><b>Conducted Spurious Emissions / Band-Edge:</b></p> <p>For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.</p>	Pass
FCC 15.407 FCC 15.209 FCC 15.205	<p><b>Restricted band:</b></p> <p>Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a)</p>	Pass

**Radiated Emissions (General requirements)**

<b>Basic Standard</b>	<b>Technical Requirements / Details</b>	<b>Result</b>
FCC 15.209 FCC 15.205	<b>TX Spurious Emissions:</b> Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the field strength limits table in this section.	Pass
FCC 15.207	<b>AC Conducted Emissions:</b> Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.	Pass

## Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

### 4.1 Sample Details

Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	IW-6300H-DC-B-K9	Cisco Systems, Inc.	11	9.1.8.1	9.0.5.5-W8964	FOC23241G16
S02	FSP150-AWAN3	FSP Group Inc.	-	-	-	H00000063

### 4.2 System Details

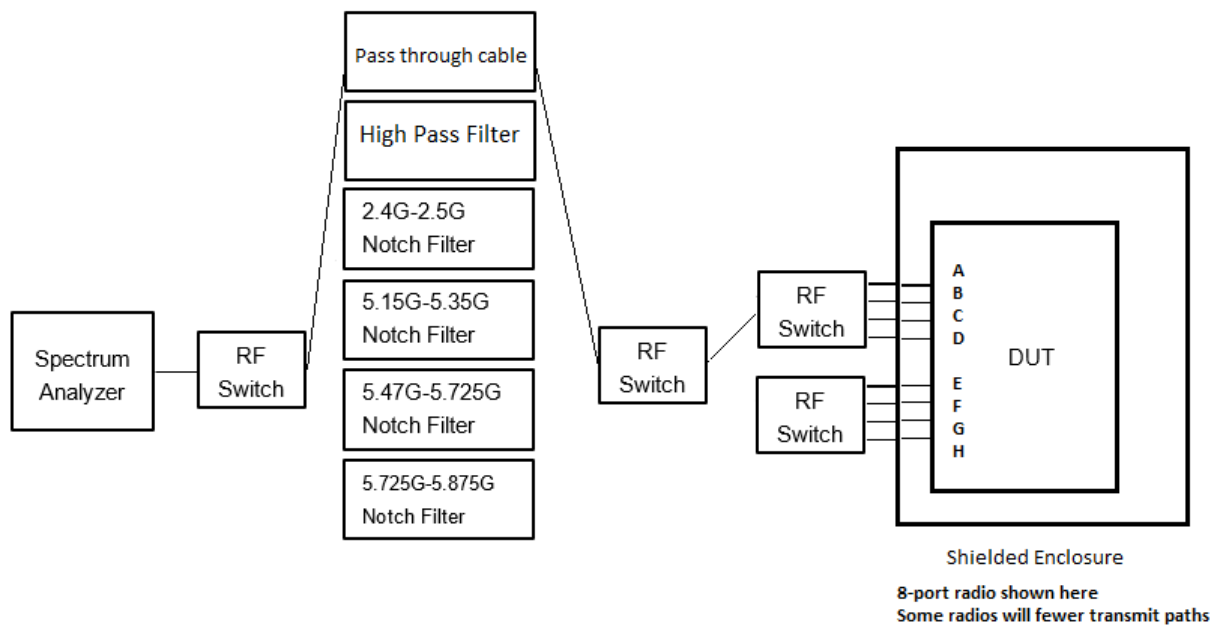
System #	Description	Samples
1	EUT and Power Supply	S01, S02

### 4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuous Transmitting	Continuous Transmitting ≥98% duty cycle

## Appendix A: Emission Test Results

### Conducted Test Setup Diagram



### Target Maximum Channel Power

The following table details the maximum supported Total Channel Power for all operating modes.

Operating Mode	Maximum Channel Power (dBm)		
	Frequency (MHz)		
	5180	5220	5240
Non HT20, 6 to 54 Mbps	22	24	23
Non HT20 Beam Forming, 6 to 54 Mbps	18	21	21
HT/VHT20, M0 to M15	21	23	23
HT/VHT20 Beam Forming, M0 to M15	21	23	23
HT/VHT20 STBC, M0 to M7	21	23	23
	5190	5230	
Non HT40, 6 to 54 Mbps	19	22	
HT/VHT40, M0 to M15	18	23	
HT/VHT40 Beam Forming, M0 to M15	18	23	
HT/VHT40 STBC, M0 to M7	18	23	
	5210		
Non HT80, 6 to 54 Mbps	15		
VHT80, M0 to M9, M0 to M9 1-2ss	16		
VHT80 Beam Forming, M0 to M9, M0 to M9 1-2ss	16		
VHT80 STBC, M0 to M9 1ss	16		

## A.1 Duty Cycle

### Duty Cycle Test Requirement

From KDB 789033 D02 General UNII Test Procedures New Rules v02r01

#### B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

1. All measurements are to be performed with the EUT transmitting at 100 percent duty cycle at its maximum power control level; however, if 100 percent duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration,  $T$ , are required for each tested mode of operation.

### Duty Cycle Test Method

From KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

#### B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW  $\geq$  EBW if possible; otherwise, set RBW to the largest available value. Set VBW  $\geq$  RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$ , where  $T$  is defined in section II.B.1.a), and the number of sweep points across duration  $T$  exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

### Duty Cycle Test Information

<b>Tested By :</b> Julian Land	<b>Date of testing:</b> 04-Nov-19 - 04-Nov-19
<b>Test Result : PASS</b>	

#### Test Equipment

See Appendix B for list of test equipment

#### Samples, Systems, and Modes

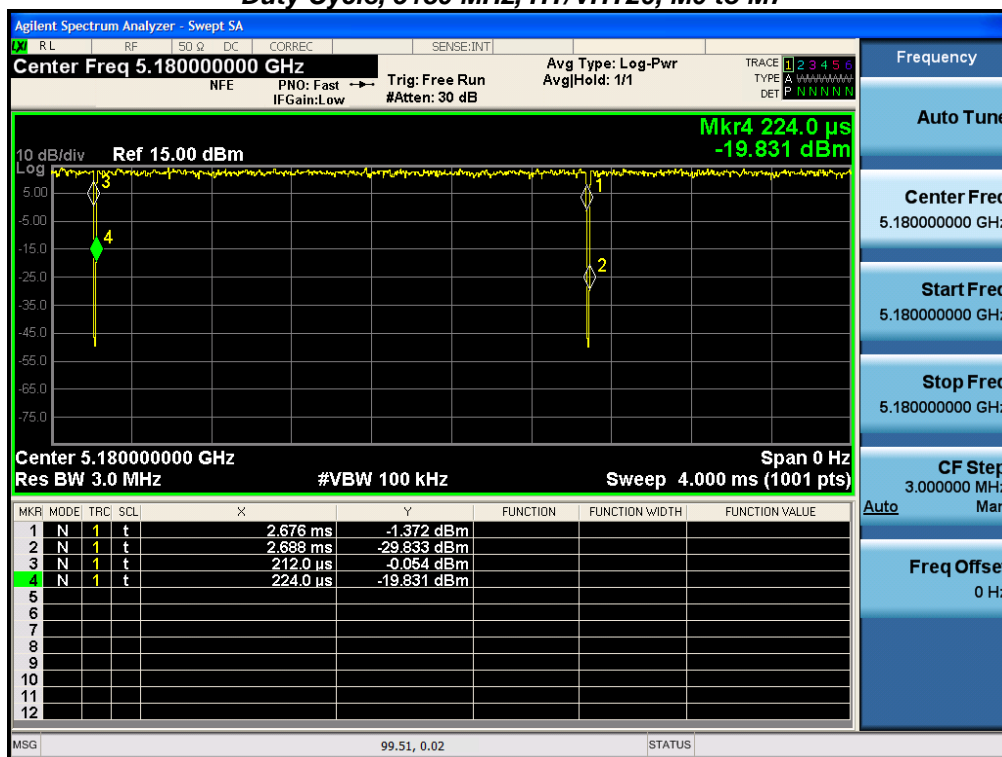
System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>



### Duty Cycle Data Table

Duty Cycle table and screen captures are shown below for power/psd modes.

Frequency	Mode	Data Rate	Duty Cycle correction (dB)
5180	Non HT20, 6 to 54 Mbps	6	0.0
	HT/VHT20, M0 to M15	m0	0.0
5190	Non HT40, 6 to 54 Mbps	6	0.0
	HT/VHT40, M0 to M15	m0	0.1
5210	Non HT80, 6 to 54 Mbps	6	0.0
	VHT80, M0 to M9, M0 to M9 1-2ss	m0x1	0.1
5220	Non HT20, 6 to 54 Mbps	6	0.0
	HT/VHT20, M0 to M15	m0	0.0
5230	Non HT40, 6 to 54 Mbps	6	0.0
	HT/VHT40, M0 to M15	m0	0.1
5240	Non HT20, 6 to 54 Mbps	6	0.0
	HT/VHT20, M0 to M15	m0	0.0

**Duty Cycle, 5180 MHz, HT/VHT20, M0 to M7**

## A.2 99% and 26dB Bandwidth

### 99% and 26dB Bandwidth Test Requirement

For the FCC:

There is no requirement for the value of bandwidth.

Power measurements are made using the 99% Bandwidth as the integration bandwidth.

### 99% and 26dB Bandwidth Test Procedure

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

#### Ref. KDB 789033 Section D. 99 Percent Occupied Bandwidth

##### 99% BW

##### Test Parameters

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 \cdot$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).

#### Ref KDB 789033 in Section C. Measurement Bandwidth, Section 1

##### 26 BW

##### Test parameters

X dB BW = -26dB (using the OBW function of the spectrum analyzer)

##### Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

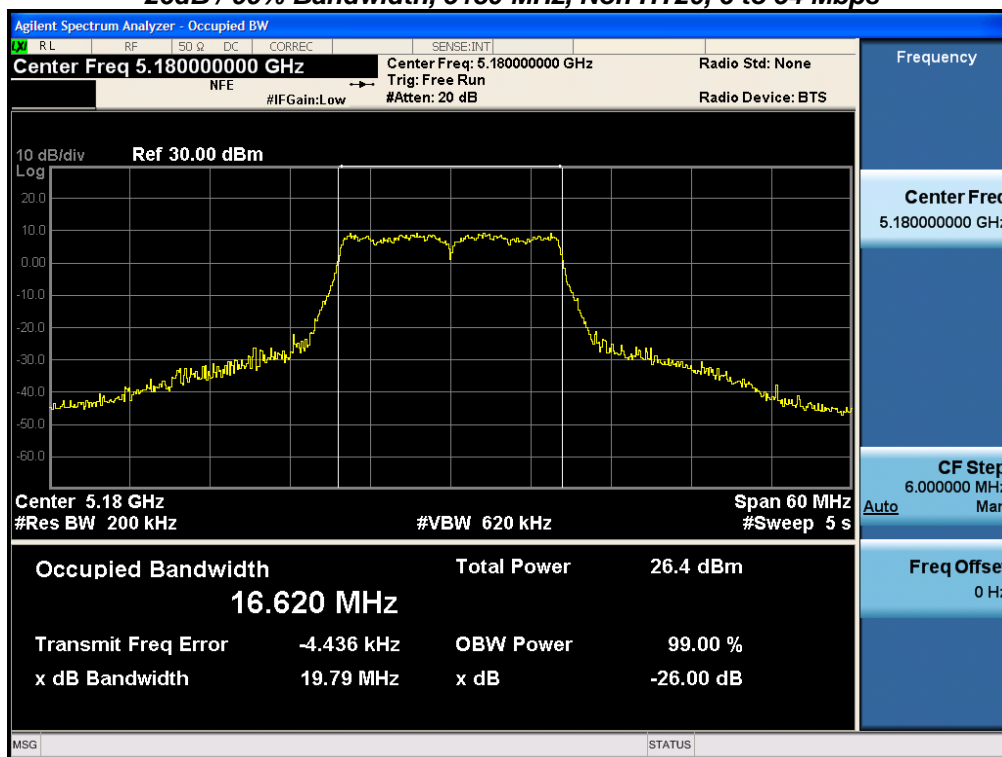
<b>Tested By :</b> Julian Land	<b>Date of testing:</b> 04-Nov-19 - 04-Nov-19
<b>Test Result : PASS</b>	

**Test Equipment**

See Appendix B for list of test equipment

## 99% and 26dB Bandwidth Table

Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5180	Non HT20, 6 to 54 Mbps	6	19.8	16.620
	HT/VHT20, M0 to M15	m0	20.1	17.640
5190	Non HT40, 6 to 54 Mbps	6	41.0	36.410
	HT/VHT40, M0 to M15	m0	40.8	36.189
5210	Non HT80, 6 to 54 Mbps	6	82.0	76.303
	VHT80, M0 to M9, M0 to M9 1-2ss	m0x1	82.3	76.428
5220	Non HT20, 6 to 54 Mbps	6	19.8	16.630
	HT/VHT20, M0 to M15	m0	20.6	17.646
5230	Non HT40, 6 to 54 Mbps	6	42.1	36.466
	HT/VHT40, M0 to M15	m0	41.3	36.200
5240	Non HT20, 6 to 54 Mbps	6	19.8	16.632
	HT/VHT20, M0 to M15	m0	20.2	17.655

**26dB / 99% Bandwidth, 5180 MHz, Non HT20, 6 to 54 Mbps**

## A.3 Maximum Conducted Output Power

### Maximum Conducted Output Power Test Requirement

#### 15.407 General technical requirements, (a) *Power limits: (1) For the band 5.15-5.25 GHz.*

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. ....If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. ....If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. ...Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Maximum Conducted Output Power Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01  
ANSI C63.10: 2013

#### Maximum Conducted Output Power Test Procedure

1. Set the radio in the continuous transmitting mode at full power
2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges.
3. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01  
2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2

**Maximum Conducted Output Power****Test parameters**

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- (i) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section II.B.
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz.
- (iv) Set VBW  $\geq$  3 MHz.
- (v) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run”.
- (ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth)

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

**Samples, Systems, and Modes**

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

**Tested By :**

Julian Land

**Date of testing:**

04-Nov-19 - 04-Nov-19

**Test Result : PASS****Test Equipment**

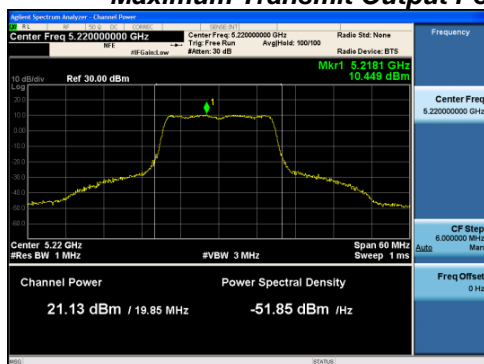
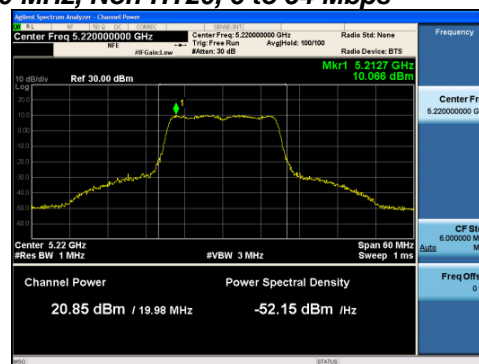
See Appendix B for list of test equipment



## Maximum Output Power

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Duty Cycle Correction (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	5	20.2		0.0	20.2	30.0	9.78
	Non HT20, 6 to 54 Mbps	2	5	18.9	18.4	0.0	21.7	30.0	8.31
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	15.4	14.8	0.0	18.1	28.0	9.85
	HT/VHT20, M0 to M7	1	5	19.1		0.0	19.1	30.0	10.88
	HT/VHT20, M0 to M7	2	5	17.8	17.3	0.0	20.6	30.0	9.41
	HT/VHT20, M8 to M15	2	5	17.8	17.3	0.0	20.6	30.0	9.41
	HT/VHT20 Beam Forming, M0 to M7	2	8	14.5	14.1	0.0	17.3	28.0	10.66
	HT/VHT20 Beam Forming, M8 to M15	2	5	17.8	17.3	0.0	20.6	30.0	9.41
	HT/VHT20 STBC, M0 to M7	2	5	17.8	17.3	0.0	20.6	30.0	9.41
5190	Non HT40, 6 to 54 Mbps	1	5	17.9		0.0	17.9	30.0	12.08
	Non HT40, 6 to 54 Mbps	2	5	16.1	15.6	0.0	18.9	30.0	11.11
	HT/VHT40, M0 to M7	1	5	15.9		0.1	16.0	30.0	14.05
	HT/VHT40, M0 to M7	2	5	14.9	14.5	0.1	17.8	30.0	12.23
	HT/VHT40, M8 to M15	2	5	14.9	14.5	0.1	17.8	30.0	12.23
	HT/VHT40 Beam Forming, M0 to M7	2	8	12.7	12.3	0.1	15.6	28.0	12.43
	HT/VHT40 Beam Forming, M8 to M15	2	5	14.9	14.5	0.1	17.8	30.0	12.23
	HT/VHT40 STBC, M0 to M7	2	5	14.9	14.5	0.1	17.8	30.0	12.23
5210	Non HT80, 6 to 54 Mbps	1	5	12.6		0.0	12.6	30.0	17.37
	Non HT80, 6 to 54 Mbps	2	5	11.7	11.9	0.0	14.8	30.0	15.16
	VHT80, M0 to M9 1ss	1	5	14.1		0.1	14.2	30.0	15.79
	VHT80, M0 to M9 1ss	2	5	13.1	13.4	0.1	16.4	30.0	13.63
	VHT80, M0 to M9 2ss	2	5	13.1	13.4	0.1	16.4	30.0	13.63
	VHT80 Beam Forming, M0 to M9 1ss	2	8	11.2	11.4	0.1	14.4	28.0	13.58
	VHT80 Beam Forming, M0 to M9 2ss	2	5	13.1	13.4	0.1	16.4	30.0	13.63
	VHT80 STBC, M0 to M9 1ss	2	5	13.1	13.4	0.1	16.4	30.0	13.63
5220	Non HT20, 6 to 54 Mbps	1	5	21.1		0.0	21.1	30.0	8.88
	<b>Non HT20, 6 to 54 Mbps</b>	<b>2</b>	<b>5</b>	<b>21.1</b>	<b>20.9</b>	<b>0.0</b>	<b>24.0</b>	<b>30.0</b>	<b>5.96</b>
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	18.3	18.3	0.0	21.3	28.0	6.66

	HT/VHT20, M0 to M7	1	5	21.3		0.0	21.3	30.0	8.68
	HT/VHT20, M0 to M7	2	5	20.0	19.8	0.0	22.9	30.0	7.07
	HT/VHT20, M8 to M15	2	5	20.0	19.8	0.0	22.9	30.0	7.07
	HT/VHT20 Beam Forming, M0 to M7	2	8	18.5	18.5	0.0	21.5	28.0	6.47
	HT/VHT20 Beam Forming, M8 to M15	2	5	20.0	19.8	0.0	22.9	30.0	7.07
	HT/VHT20 STBC, M0 to M7	2	5	20.0	19.8	0.0	22.9	30.0	7.07
5230	Non HT40, 6 to 54 Mbps	1	5	22.4		0.0	22.4	30.0	7.58
	Non HT40, 6 to 54 Mbps	2	5	18.8	19.1	0.0	22.0	30.0	8.01
	HT/VHT40, M0 to M7	1	5	21.6		0.1	21.7	30.0	8.35
	HT/VHT40, M0 to M7	2	5	20.1	19.2	0.1	22.7	30.0	7.27
	HT/VHT40, M8 to M15	2	5	20.1	19.2	0.1	22.7	30.0	7.27
	HT/VHT40 Beam Forming, M0 to M7	2	8	17.4	17.9	0.1	20.7	28.0	7.28
	HT/VHT40 Beam Forming, M8 to M15	2	5	20.1	19.2	0.1	22.7	30.0	7.27
	HT/VHT40 STBC, M0 to M7	2	5	20.1	19.2	0.1	22.7	30.0	7.27
5240	Non HT20, 6 to 54 Mbps	1	5	21.3		0.0	21.3	30.0	8.68
	Non HT20, 6 to 54 Mbps	2	5	20.1	20.0	0.0	23.1	30.0	6.91
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	17.3	17.9	0.0	20.6	28.0	7.35
	HT/VHT20, M0 to M7	1	5	21.5		0.0	21.5	30.0	8.48
	HT/VHT20, M0 to M7	2	5	20.3	20.2	0.0	23.3	30.0	6.72
	HT/VHT20, M8 to M15	2	5	20.3	20.2	0.0	23.3	30.0	6.72
	HT/VHT20 Beam Forming, M0 to M7	2	8	17.4	18.0	0.0	20.7	28.0	7.26
	HT/VHT20 Beam Forming, M8 to M15	2	5	20.3	20.2	0.0	23.3	30.0	6.72
	HT/VHT20 STBC, M0 to M7	2	5	20.3	20.2	0.0	23.3	30.0	6.72

**Maximum Transmit Output Power, 5220 MHz, Non HT20, 6 to 54 Mbps****Antenna A****Antenna B**

## Maximum Transmit Power &gt;30 degrees

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Duty Cycle (dB)	Total Radiated Channel Power (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	-5	20.2		0.0	15.2	21.0	5.78
	Non HT20, 6 to 54 Mbps	2	-5	18.9	18.4	0.0	16.7	21.0	4.31
	Non HT20 Beam Forming, 6 to 54 Mbps	2	-2	15.4	14.8	0.0	16.1	21.0	4.85
	HT/VHT20, M0 to M7	1	-5	19.1		0.0	14.1	21.0	6.88
	HT/VHT20, M0 to M7	2	-5	17.8	17.3	0.0	15.6	21.0	5.41
	HT/VHT20, M8 to M15	2	-5	17.8	17.3	0.0	15.6	21.0	5.41
	HT/VHT20 Beam Forming, M0 to M7	2	-2	14.5	14.1	0.0	15.3	21.0	5.66
	HT/VHT20 Beam Forming, M8 to M15	2	-5	17.8	17.3	0.0	15.6	21.0	5.41
	HT/VHT20 STBC, M0 to M7	2	-5	17.8	17.3	0.0	15.6	21.0	5.41
5190	Non HT40, 6 to 54 Mbps	1	-5	17.9		0.0	12.9	21.0	8.08
	Non HT40, 6 to 54 Mbps	2	-5	16.1	15.6	0.0	13.9	21.0	7.11
	HT/VHT40, M0 to M7	1	-5	15.9		0.1	11.0	21.0	10.05
	HT/VHT40, M0 to M7	2	-5	14.9	14.5	0.1	12.8	21.0	8.23
	HT/VHT40, M8 to M15	2	-5	14.9	14.5	0.1	12.8	21.0	8.23
	HT/VHT40 Beam Forming, M0 to M7	2	-2	12.7	12.3	0.1	13.6	21.0	7.43
	HT/VHT40 Beam Forming, M8 to M15	2	-5	14.9	14.5	0.1	12.8	21.0	8.23
	HT/VHT40 STBC, M0 to M7	2	-5	14.9	14.5	0.1	12.8	21.0	8.23
5210	Non HT80, 6 to 54 Mbps	1	-5	12.6		0.0	7.6	21.0	13.37
	Non HT80, 6 to 54 Mbps	2	-5	11.7	11.9	0.0	9.8	21.0	11.16
	VHT80, M0 to M9 1ss	1	-5	14.1		0.1	9.2	21.0	11.79
	VHT80, M0 to M9 1ss	2	-5	13.1	13.4	0.1	11.4	21.0	9.63
	VHT80, M0 to M9 2ss	2	-5	13.1	13.4	0.1	11.4	21.0	9.63
	VHT80 Beam Forming, M0 to M9 1ss	2	-2	11.2	11.4	0.1	12.4	21.0	8.58

	VHT80 Beam Forming, M0 to M9 2ss	2	-5	13.1	13.4	0.1	11.4	21.0	9.63
	VHT80 STBC, M0 to M9 1ss	2	-5	13.1	13.4	0.1	11.4	21.0	9.63

5220	Non HT20, 6 to 54 Mbps	1	-5	21.1		0.0	16.1	21.0	4.88
	Non HT20, 6 to 54 Mbps	2	-5	21.1	20.9	0.0	19.0	21.0	1.96
	Non HT20 Beam Forming, 6 to 54 Mbps	2	-2	18.3	18.3	0.0	19.3	21.0	1.66
	HT/VHT20, M0 to M7	1	-5	21.3		0.0	16.3	21.0	4.68
	HT/VHT20, M0 to M7	2	-5	20.0	19.8	0.0	17.9	21.0	3.07
	HT/VHT20, M8 to M15	2	-5	20.0	19.8	0.0	17.9	21.0	3.07
	HT/VHT20 Beam Forming, M0 to M7	2	-2	18.5	18.5	0.0	19.5	21.0	1.47
	HT/VHT20 Beam Forming, M8 to M15	2	-5	20.0	19.8	0.0	17.9	21.0	3.07
	HT/VHT20 STBC, M0 to M7	2	-5	20.0	19.8	0.0	17.9	21.0	3.07

5230	Non HT40, 6 to 54 Mbps	1	-5	22.4		0.0	17.4	21.0	3.58
	Non HT40, 6 to 54 Mbps	2	-5	18.8	19.1	0.0	17.0	21.0	4.01
	HT/VHT40, M0 to M7	1	-5	21.6		0.1	16.7	21.0	4.35
	HT/VHT40, M0 to M7	2	-5	20.1	19.2	0.1	17.7	21.0	3.27
	HT/VHT40, M8 to M15	2	-5	20.1	19.2	0.1	17.7	21.0	3.27
	HT/VHT40 Beam Forming, M0 to M7	2	-2	17.4	17.9	0.1	18.7	21.0	2.28
	HT/VHT40 Beam Forming, M8 to M15	2	-5	20.1	19.2	0.1	17.7	21.0	3.27
	HT/VHT40 STBC, M0 to M7	2	-5	20.1	19.2	0.1	17.7	21.0	3.27

5240	Non HT20, 6 to 54 Mbps	1	-5	21.3		0.0	16.3	21.0	4.68
	Non HT20, 6 to 54 Mbps	2	-5	20.1	20.0	0.0	18.1	21.0	2.91
	Non HT20 Beam Forming, 6 to 54 Mbps	2	-2	17.3	17.9	0.0	18.6	21.0	2.35
	HT/VHT20, M0 to M7	1	-5	21.5		0.0	16.5	21.0	4.48
	HT/VHT20, M0 to M7	2	-5	20.3	20.2	0.0	18.3	21.0	2.72
	HT/VHT20, M8 to M15	2	-5	20.3	20.2	0.0	18.3	21.0	2.72
	HT/VHT20 Beam Forming, M0 to M7	2	-2	17.4	18.0	0.0	18.7	21.0	2.26
	HT/VHT20 Beam Forming, M8 to M15	2	-5	20.3	20.2	0.0	18.3	21.0	2.72
	HT/VHT20 STBC, M0 to M7	2	-5	20.3	20.2	0.0	18.3	21.0	2.72

## A.4 Power Spectral Density

### Power Spectral Density Test Requirement

#### 15.407 General technical requirements, (a) *Power limits: (1) For the band 5.15-5.25 GHz.*

(i) For an outdoor access point operating in the band 5.15-5.25 GHz ... the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz... the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz...the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, .... the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Power Spectral Density Test Procedure

#### Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

##### F. Maximum Power Spectral Density (PSD)

Power Spectral Density Test Procedure
<p>The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission.</p> <ol style="list-style-type: none"> <li>1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)</li> <li>2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.</li> <li>3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add <math>10 \log(1/x)</math>, where <math>x</math> is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.</li> </ol>

4. The result is the Maximum PSD over 1 MHz reference bandwidth.

**Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

**2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2**

**Power Spectral Density**

**Test parameters**

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

(i) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section II.B.

(ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(iii) Set RBW = 1 MHz.

(iv) Set VBW  $\geq$  3 MHz.

(v) Number of points in sweep  $\geq$  2 Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(vi) Sweep time = auto.

(vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(viii) Do not use sweep triggering. Allow the sweep to “free run”.

(ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.

(x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth)

**F. Maximum Power Spectral Density (PSD)**

2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.

3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the peak of the spectrum.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

**Samples, Systems, and Modes**

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

**Tested By :**

Julian Land

**Date of testing:**

04-Nov-19 - 04-Nov-19

**Test Result : PASS**

**Test Equipment**

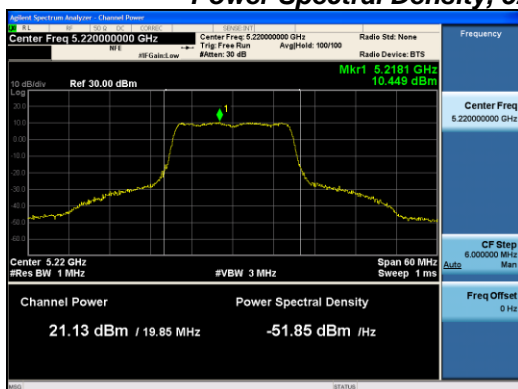
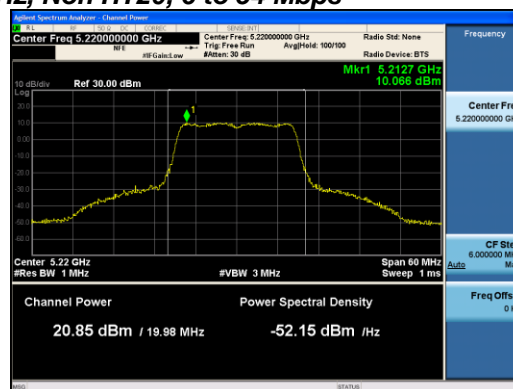
See Appendix B for list of test equipment

## Power Spectral Density

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Duty Cycle Correction (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	5	9.4		0.0	9.4	17.0	7.58
	Non HT20, 6 to 54 Mbps	2	8	8.3	7.8	0.0	11.1	15.0	3.91
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	4.6	4.4	0.0	7.5	15.0	7.46
	HT/VHT20, M0 to M7	1	5	8.0		0.0	8.0	17.0	8.98
	HT/VHT20, M0 to M7	2	8	6.8	6.5	0.0	9.7	15.0	5.32
	HT/VHT20, M8 to M15	2	5	6.8	6.5	0.0	9.7	17.0	7.32
	HT/VHT20 Beam Forming, M0 to M7	2	8	3.5	3.2	0.0	6.4	15.0	8.62
	HT/VHT20 Beam Forming, M8 to M15	2	5	6.8	6.5	0.0	9.7	17.0	7.32
	HT/VHT20 STBC, M0 to M7	2	5	6.8	6.5	0.0	9.7	17.0	7.32
5190	Non HT40, 6 to 54 Mbps	1	5	4.4		0.0	4.4	17.0	12.58
	Non HT40, 6 to 54 Mbps	2	8	2.3	2.1	0.0	5.2	15.0	9.76
	HT/VHT40, M0 to M7	1	5	2.1		0.1	2.2	17.0	14.85
	HT/VHT40, M0 to M7	2	8	1.0	0.8	0.1	4.0	15.0	11.04
	HT/VHT40, M8 to M15	2	5	1.0	0.8	0.1	4.0	17.0	13.04
	HT/VHT40 Beam Forming, M0 to M7	2	8	-1.1	-1.6	0.1	1.7	15.0	13.28
	HT/VHT40 Beam Forming, M8 to M15	2	5	1.0	0.8	0.1	4.0	17.0	13.04
	HT/VHT40 STBC, M0 to M7	2	5	1.0	0.8	0.1	4.0	17.0	13.04
5210	Non HT80, 6 to 54 Mbps	1	5	-4.2		0.0	-4.2	17.0	21.17
	Non HT80, 6 to 54 Mbps	2	8	-5.3	-4.8	0.0	-2.0	15.0	17.01
	VHT80, M0 to M9 1ss	1	5	-3.2		0.1	-3.1	17.0	20.09
	VHT80, M0 to M9 1ss	2	8	-4.4	-3.8	0.1	-1.0	15.0	15.97
	VHT80, M0 to M9 2ss	2	5	-4.4	-3.8	0.1	-1.0	17.0	17.97
	VHT80 Beam Forming, M0 to M9 1ss	2	8	-6.4	-5.5	0.1	-2.8	15.0	17.81
	VHT80 Beam Forming, M0 to M9 2ss	2	5	-4.4	-3.8	0.1	-1.0	17.0	17.97
	VHT80 STBC, M0 to M9 1ss	2	5	-4.4	-3.8	0.1	-1.0	17.0	17.97



5220	Non HT20, 6 to 54 Mbps	1	5	10.4		0.0	10.4	17.0	6.58
	<b>Non HT20, 6 to 54 Mbps</b>	<b>2</b>	<b>8</b>	<b>10.4</b>	<b>10.1</b>	<b>0.0</b>	<b>13.3</b>	<b>15.0</b>	<b>1.71</b>
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	7.8	7.9	0.0	10.9	15.0	4.11
	HT/VHT20, M0 to M7	1	5	10.7		0.0	10.7	17.0	6.28
	HT/VHT20, M0 to M7	2	8	9.0	8.6	0.0	11.8	15.0	3.16
	HT/VHT20, M8 to M15	2	5	9.0	8.6	0.0	11.8	17.0	5.16
	HT/VHT20 Beam Forming, M0 to M7	2	8	7.8	7.6	0.0	10.7	15.0	4.27
	HT/VHT20 Beam Forming, M8 to M15	2	5	9.0	8.6	0.0	11.8	17.0	5.16
	HT/VHT20 STBC, M0 to M7	2	5	9.0	8.6	0.0	11.8	17.0	5.16
5230	Non HT40, 6 to 54 Mbps	1	5	8.9		0.0	8.9	17.0	8.08
	Non HT40, 6 to 54 Mbps	2	8	5.2	5.6	0.0	8.4	15.0	6.56
	HT/VHT40, M0 to M7	1	5	7.9		0.1	8.0	17.0	9.05
	HT/VHT40, M0 to M7	2	8	6.5	5.4	0.1	9.0	15.0	5.95
	HT/VHT40, M8 to M15	2	5	6.5	5.4	0.1	9.0	17.0	7.95
	HT/VHT40 Beam Forming, M0 to M7	2	8	3.8	4.3	0.1	7.1	15.0	7.88
	HT/VHT40 Beam Forming, M8 to M15	2	5	6.5	5.4	0.1	9.0	17.0	7.95
	HT/VHT40 STBC, M0 to M7	2	5	6.5	5.4	0.1	9.0	17.0	7.95
5240	Non HT20, 6 to 54 Mbps	1	5	10.4		0.0	10.4	17.0	6.58
	Non HT20, 6 to 54 Mbps	2	8	9.4	9.3	0.0	12.4	15.0	2.61
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	7.2	7.2	0.0	10.2	15.0	4.76
	HT/VHT20, M0 to M7	1	5	10.4		0.0	10.4	17.0	6.58
	HT/VHT20, M0 to M7	2	8	9.5	9.3	0.0	12.4	15.0	2.57
	HT/VHT20, M8 to M15	2	5	9.5	9.3	0.0	12.4	17.0	4.57
	HT/VHT20 Beam Forming, M0 to M7	2	8	6.4	7.0	0.0	9.7	15.0	5.26
	HT/VHT20 Beam Forming, M8 to M15	2	5	9.5	9.3	0.0	12.4	17.0	4.57
	HT/VHT20 STBC, M0 to M7	2	5	9.5	9.3	0.0	12.4	17.0	4.57

**Power Spectral Density, 5220 MHz, Non HT20, 6 to 54 Mbps****Antenna A****Antenna B**

## A.5 Conducted Spurious Emissions

### Conducted Spurious Emissions Test Requirement

**15.407(b) Undesirable emission limits.** Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

### KDB 789033 D02 General UNII Test Procedures New Rules v02r01

#### 2. Unwanted Emissions that fall Outside of the Restricted Bands

- a) For all measurements, follow the requirements in II.G.3. *“General Requirements for Unwanted Emissions Measurements.”*
- b) At frequencies below 1000 MHz, use the procedure described in II.G.4. *“Procedure for Unwanted Emissions Measurements Below 1000 MHz.”*
- c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in II.G.5., *“Procedure for Unwanted Emissions Measurements Above 1000 MHz.”*
- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.<sup>3</sup>

### Conducted Spurious Emissions Test Procedure

#### KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Ref. ANSI C63.10: 2013

#### Conducted Spurious Emissions

##### Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Use the peak marker function to determine the maximum spurs amplitude level.
5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured

results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. (see ANSI C63.10:2013 section 14.3.2.2)

6. Capture graphs and record pertinent measurement data.

**Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)**

**KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)**

### Conducted Spurious Emissions

Test parameters

#### Peak

RBW = 1 MHz

VBW  $\geq$  3 MHz

Sweep = Auto

Detector = Peak

Trace = Max Hold.

#### Average

RBW = 1 MHz

VBW  $\geq$  3 MHz

Sweep = Auto

Detector = RMS

Power Averaging

Add the max antenna gain + ground reflection factor (4.7 dB for frequencies between 30 MHz and 1000 MHz, and 0 dB for frequencies > 1000 MHz).

### Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

**Tested By :**

Julian Land

**Date of testing:**

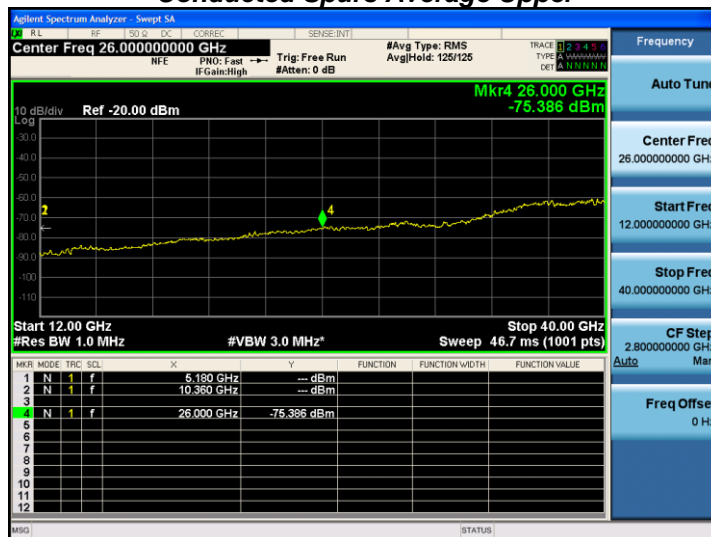
04-Nov-19 - 04-Nov-19

**Test Result : PASS**

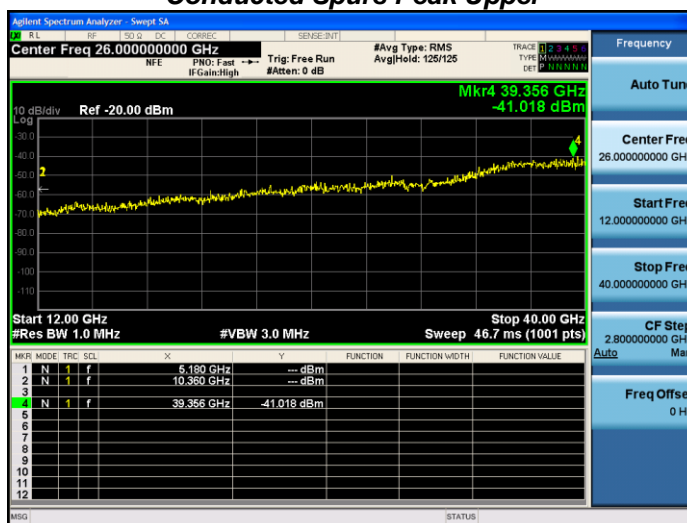
### Test Equipment

See Appendix B for list of test equipment

### Conducted Spurs Average Upper



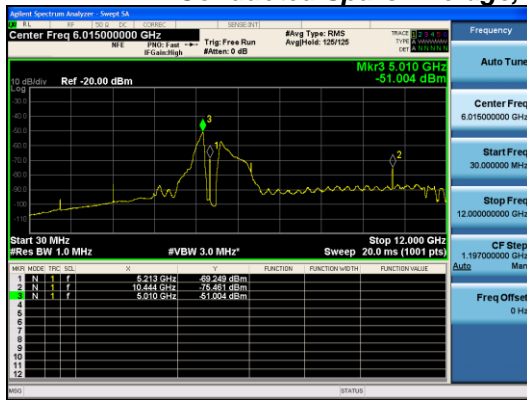
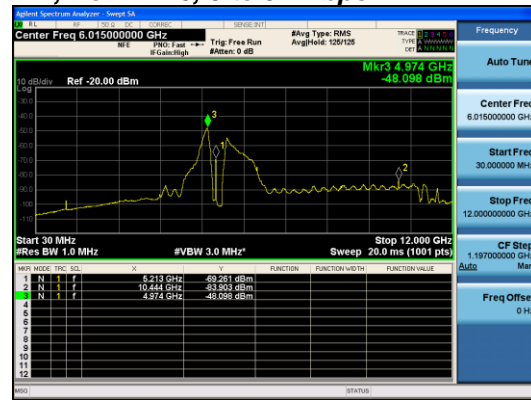
### Conducted Spurs Peak Upper



Conducted Spurious Emissions Average Table

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Duty Cycle Correction (dB)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	5	-55.1		0.0	-50.1	-41.25	8.83
	Non HT20, 6 to 54 Mbps	2	5	-55.5	-51.9	0.0	-45.3	-41.25	4.05
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-56.4	-53.3	0.0	-43.5	-41.25	2.29
	HT/VHT20, M0 to M7	1	5	-55.2		0.0	-50.2	-41.25	8.93
	HT/VHT20, M0 to M7	2	5	-55.7	-52.4	0.0	-45.7	-41.25	4.46
	HT/VHT20, M8 to M15	2	5	-55.7	-52.4	0.0	-45.7	-41.25	4.46
	HT/VHT20 Beam Forming, M0 to M7	2	8	-60.6	-53.4	0.0	-44.6	-41.25	3.37
	HT/VHT20 Beam Forming, M8 to M15	2	5	-55.7	-52.4	0.0	-45.7	-41.25	4.46
	HT/VHT20 STBC, M0 to M7	2	5	-55.7	-52.4	0.0	-45.7	-41.25	4.46
5190	Non HT40, 6 to 54 Mbps	1	5	-55.2		0.0	-50.2	-41.25	8.93
	Non HT40, 6 to 54 Mbps	2	5	-55.6	-52.5	0.0	-45.7	-41.25	4.49
	HT/VHT40, M0 to M7	1	5	-55.7		0.1	-50.6	-41.25	9.40
	HT/VHT40, M0 to M7	2	5	-60.3	-52.9	0.1	-47.1	-41.25	5.87
	HT/VHT40, M8 to M15	2	5	-60.3	-52.9	0.1	-47.1	-41.25	5.87
	HT/VHT40 Beam Forming, M0 to M7	2	8	-60.9	-57.3	0.1	-47.7	-41.25	6.43
	HT/VHT40 Beam Forming, M8 to M15	2	5	-60.3	-52.9	0.1	-47.1	-41.25	5.87
	HT/VHT40 STBC, M0 to M7	2	5	-60.3	-52.9	0.1	-47.1	-41.25	5.87
5210	Non HT80, 6 to 54 Mbps	1	5	-55.7		0.0	-50.7	-41.25	9.42
	Non HT80, 6 to 54 Mbps	2	5	-55.8	-53.6	0.0	-46.5	-41.25	5.28
	VHT80, M0 to M9 1ss	1	5	-60.3		0.1	-55.2	-41.25	13.94
	VHT80, M0 to M9 1ss	2	5	-60.5	-56.8	0.1	-50.1	-41.25	8.90
	VHT80, M0 to M9 2ss	2	5	-60.5	-56.8	0.1	-50.1	-41.25	8.90
	VHT80 Beam Forming, M0 to M9 1ss	2	8	-61.1	-57.7	0.1	-48.0	-41.25	6.70
	VHT80 Beam Forming, M0 to M9 2ss	2	5	-60.5	-56.8	0.1	-50.1	-41.25	8.90
	VHT80 STBC, M0 to M9 1ss	2	5	-60.5	-56.8	0.1	-50.1	-41.25	8.90

5220	Non HT20, 6 to 54 Mbps	1	5	-51.0		0.0	-46.0	-41.25	4.73
	<b>Non HT20, 6 to 54 Mbps</b>	<b>2</b>	<b>5</b>	<b>-51.0</b>	<b>-48.1</b>	<b>0.0</b>	<b>-41.3</b>	<b>-41.25</b>	<b>0.03</b>
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-55.0	-51.5	0.0	-41.9	-41.25	0.62
	HT/VHT20, M0 to M7	1	5	-51.0		0.0	-46.0	-41.25	4.73
	HT/VHT20, M0 to M7	2	5	-51.4	-48.2	0.0	-41.5	-41.25	0.23
	HT/VHT20, M8 to M15	2	5	-51.4	-48.2	0.0	-41.5	-41.25	0.23
	HT/VHT20 Beam Forming, M0 to M7	2	8	-55.0	-51.3	0.0	-41.7	-41.25	0.49
	HT/VHT20 Beam Forming, M8 to M15	2	5	-51.4	-48.2	0.0	-41.5	-41.25	0.23
	HT/VHT20 STBC, M0 to M7	2	5	-51.4	-48.2	0.0	-41.5	-41.25	0.23
5230	Non HT40, 6 to 54 Mbps	1	5	-50.4		0.0	-45.4	-41.25	4.13
	Non HT40, 6 to 54 Mbps	2	5	-51.0	-48.3	0.0	-41.4	-41.25	0.16
	HT/VHT40, M0 to M7	1	5	-50.5		0.1	-45.4	-41.25	4.20
	HT/VHT40, M0 to M7	2	5	-53.9	-48.3	0.1	-42.2	-41.25	0.94
	HT/VHT40, M8 to M15	2	5	-53.9	-48.3	0.1	-42.2	-41.25	0.94
	HT/VHT40 Beam Forming, M0 to M7	2	8	-54.8	-51.5	0.1	-41.8	-41.25	0.53
	HT/VHT40 Beam Forming, M8 to M15	2	5	-53.9	-48.3	0.1	-42.2	-41.25	0.94
	HT/VHT40 STBC, M0 to M7	2	5	-53.9	-48.3	0.1	-42.2	-41.25	0.94
5240	Non HT20, 6 to 54 Mbps	1	5	-50.6		0.0	-45.6	-41.25	4.33
	Non HT20, 6 to 54 Mbps	2	5	-50.9	-48.2	0.0	-41.3	-41.25	0.06
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-55.0	-51.8	0.0	-42.1	-41.25	0.83
	HT/VHT20, M0 to M7	1	5	-50.8		0.0	-45.8	-41.25	4.53
	HT/VHT20, M0 to M7	2	5	-51.0	-48.3	0.0	-41.4	-41.25	0.16
	HT/VHT20, M8 to M15	2	5	-51.0	-48.3	0.0	-41.4	-41.25	0.16
	HT/VHT20 Beam Forming, M0 to M7	2	8	-55.1	-51.6	0.0	-42.0	-41.25	0.72
	HT/VHT20 Beam Forming, M8 to M15	2	5	-51.0	-48.3	0.0	-41.4	-41.25	0.16
	HT/VHT20 STBC, M0 to M7	2	5	-51.0	-48.3	0.0	-41.4	-41.25	0.16

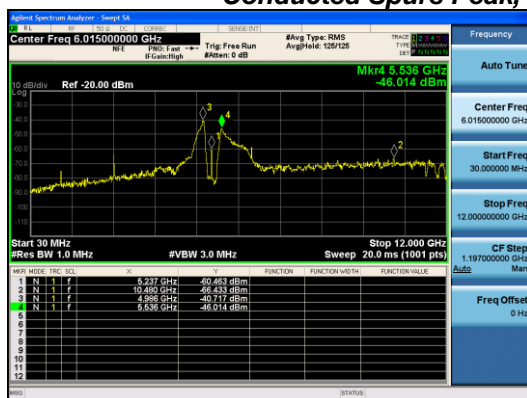
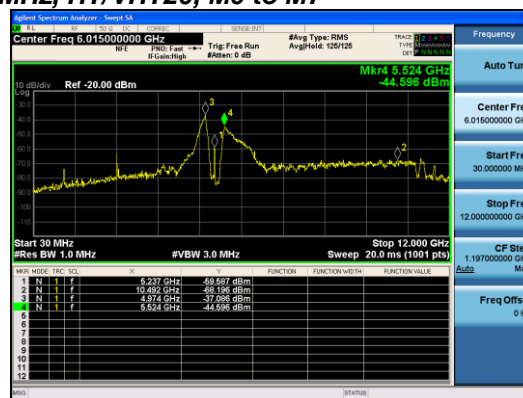
**Conducted Spurs Average, 5220 MHz, Non HT20, 6 to 54 Mbps****Antenna A****Antenna B**



## Conducted Spurious Emissions Peak Table

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Spur Power (dBm)	Tx 2 Spur Power (dBm)	Tx 3 Spur Power (dBm)	Total Conducted Spur (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	5	-43.9		0.0	-38.9	-21.25	17.63
	Non HT20, 6 to 54 Mbps	2	5	-44.2	-41.3	0.0	-34.5	-21.25	13.23
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-46.4	-43.5	0.0	-33.7	-21.25	12.43
	HT/VHT20, M0 to M7	1	5	-44.4		0.0	-39.4	-21.25	18.13
	HT/VHT20, M0 to M7	2	5	-44.9	-40.7	0.0	-34.3	-21.25	13.03
	HT/VHT20, M8 to M15	2	5	-44.9	-40.7	0.0	-34.3	-21.25	13.03
	HT/VHT20 Beam Forming, M0 to M7	2	8	-50.1	-42.4	0.0	-33.7	-21.25	12.45
	HT/VHT20 Beam Forming, M8 to M15	2	5	-44.9	-40.7	0.0	-34.3	-21.25	13.03
	HT/VHT20 STBC, M0 to M7	2	5	-44.9	-40.7	0.0	-34.3	-21.25	13.03
5190	Non HT40, 6 to 54 Mbps	1	5	-45.2		0.0	-40.2	-21.25	18.93
	Non HT40, 6 to 54 Mbps	2	5	-44.6	-42.3	0.0	-35.3	-21.25	14.01
	HT/VHT40, M0 to M7	1	5	-45.0		0.1	-39.9	-21.25	18.70
	HT/VHT40, M0 to M7	2	5	-49.1	-42.1	0.1	-36.3	-21.25	15.01
	HT/VHT40, M8 to M15	2	5	-49.1	-42.1	0.1	-36.3	-21.25	15.01
	HT/VHT40 Beam Forming, M0 to M7	2	8	-50.7	-47.2	0.1	-37.5	-21.25	16.30
	HT/VHT40 Beam Forming, M8 to M15	2	5	-49.1	-42.1	0.1	-36.3	-21.25	15.01
	HT/VHT40 STBC, M0 to M7	2	5	-49.1	-42.1	0.1	-36.3	-21.25	15.01
5210	Non HT80, 6 to 54 Mbps	1	5	-45.6		0.0	-40.6	-21.25	19.32
	Non HT80, 6 to 54 Mbps	2	5	-45.8	-42.4	0.0	-35.7	-21.25	14.49
	VHT80, M0 to M9 1ss	1	5	-49.6		0.1	-44.5	-21.25	23.24
	VHT80, M0 to M9 1ss	2	5	-49.5	-46.2	0.1	-39.4	-21.25	18.17
	VHT80, M0 to M9 2ss	2	5	-49.5	-46.2	0.1	-39.4	-21.25	18.17
	VHT80 Beam Forming, M0 to M9 1ss	2	8	-51.0	-46.7	0.1	-37.2	-21.25	15.97
	VHT80 Beam Forming, M0 to M9 2ss	2	5	-49.5	-46.2	0.1	-39.4	-21.25	18.17
	VHT80 STBC, M0 to M9 1ss	2	5	-49.5	-46.2	0.1	-39.4	-21.25	18.17
5230	Non HT20, 6 to 54 Mbps	1	5	-40.7		0.0	-35.7	-21.25	14.43
	Non HT20, 6 to 54 Mbps	2	5	-40.7	-37.9	0.0	-31.0	-21.25	9.79

	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-45.1	-41.2	0.0	-31.7	-21.25	10.44
	HT/VHT20, M0 to M7	1	5	-40.8		0.0	-35.8	-21.25	14.53
	HT/VHT20, M0 to M7	2	5	-41.6	-37.8	0.0	-31.3	-21.25	10.02
	HT/VHT20, M8 to M15	2	5	-41.6	-37.8	0.0	-31.3	-21.25	10.02
	HT/VHT20 Beam Forming, M0 to M7	2	8	-44.9	-40.8	0.0	-31.4	-21.25	10.10
	HT/VHT20 Beam Forming, M8 to M15	2	5	-41.6	-37.8	0.0	-31.3	-21.25	10.02
	HT/VHT20 STBC, M0 to M7	2	5	-41.6	-37.8	0.0	-31.3	-21.25	10.02
5230	Non HT40, 6 to 54 Mbps	1	5	-40.0		0.0	-35.0	-21.25	13.73
	Non HT40, 6 to 54 Mbps	2	5	-39.9	-38.3	0.0	-31.0	-21.25	9.74
	HT/VHT40, M0 to M7	1	5	-40.8		0.1	-35.7	-21.25	14.50
	HT/VHT40, M0 to M7	2	5	-42.7	-38.3	0.1	-31.9	-21.25	10.65
	HT/VHT40, M8 to M15	2	5	-42.7	-38.3	0.1	-31.9	-21.25	10.65
	HT/VHT40 Beam Forming, M0 to M7	2	8	-44.1	-41.2	0.1	-31.4	-21.25	10.10
	HT/VHT40 Beam Forming, M8 to M15	2	5	-42.7	-38.3	0.1	-31.9	-21.25	10.65
	HT/VHT40 STBC, M0 to M7	2	5	-42.7	-38.3	0.1	-31.9	-21.25	10.65
5240	Non HT20, 6 to 54 Mbps	1	5	-40.1		0.0	-35.1	-21.25	13.83
	Non HT20, 6 to 54 Mbps	2	5	-40.1	-37.9	0.0	-30.8	-21.25	9.58
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-45.0	-40.3	0.0	-31.0	-21.25	9.76
	HT/VHT20, M0 to M7	1	5	-40.1		0.0	-35.1	-21.25	13.83
	<b>HT/VHT20, M0 to M7</b>	<b>2</b>	<b>5</b>	<b>-40.7</b>	<b>-37.1</b>	<b>0.0</b>	<b>-30.5</b>	<b>-21.25</b>	<b>9.26</b>
	HT/VHT20, M8 to M15	2	5	-40.7	-37.1	0.0	-30.5	-21.25	9.26
	HT/VHT20 Beam Forming, M0 to M7	2	8	-45.0	-41.4	0.0	-31.8	-21.25	10.56
	HT/VHT20 Beam Forming, M8 to M15	2	5	-40.7	-37.1	0.0	-30.5	-21.25	9.26
	HT/VHT20 STBC, M0 to M7	2	5	-40.7	-37.1	0.0	-30.5	-21.25	9.26

**Conducted Spurs Peak, 5240 MHz, HT/VHT20, M0 to M7****Antenna A****Antenna B**

## A.6 Conducted Band Edge

### Conducted Band Edge Test Requirement

**15.407(b) Undesirable emission limits.** Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

#### KDB 789033 D02 General UNII Test Procedures New Rules v02r01

##### 2. Unwanted Emissions that fall Outside of the Restricted Bands

- a) For all measurements, follow the requirements in II.G.3. *“General Requirements for Unwanted Emissions Measurements.”*
- b) At frequencies below 1000 MHz, use the procedure described in II.G.4. *“Procedure for Unwanted Emissions Measurements Below 1000 MHz.”*
- c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in II.G.5., *“Procedure for Unwanted Emissions Measurements Above 1000 MHz.”*
- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

### Conducted Band Edge Test Procedure

#### KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Ref. ANSI C63.10: 2013

##### Conducted Spurious Emissions

###### Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Use the peak marker function to determine the maximum spurs amplitude level.
5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the

measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. (see ANSI C63.10:2013 section 14.3.2.2)

6. Capture graphs and record pertinent measurement data.

**Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)**

**KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)**

### Conducted Spurious Emissions

Test parameters

#### Peak

RBW = 1 MHz

VBW  $\geq$  3 MHz

Sweep = Auto

Detector = Peak

Trace = Max Hold.

#### Average

RBW = 1 MHz

VBW  $\geq$  3 MHz

Sweep = Auto

Detector = RMS

Power Averaging

### Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Support	S02	<input type="checkbox"/>	<input checked="" type="checkbox"/>

**Tested By :**

Julian Land

**Date of testing:**

04-Nov-19 - 04-Nov-19

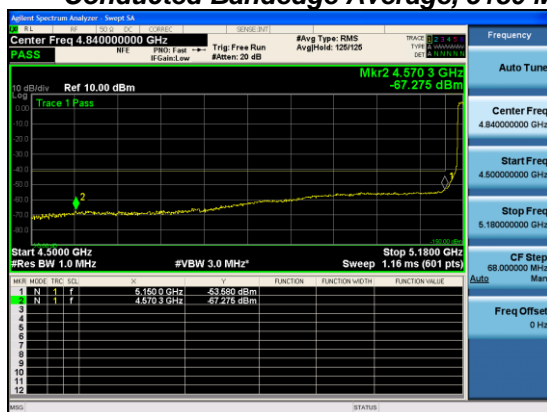
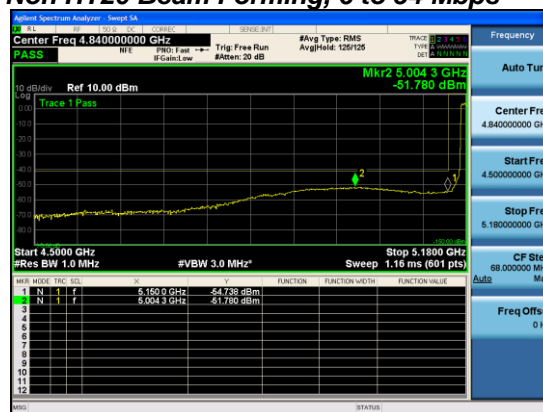
**Test Result : PASS**

### Test Equipment

See Appendix B for list of test equipment

## Conducted Bandedge Average Table

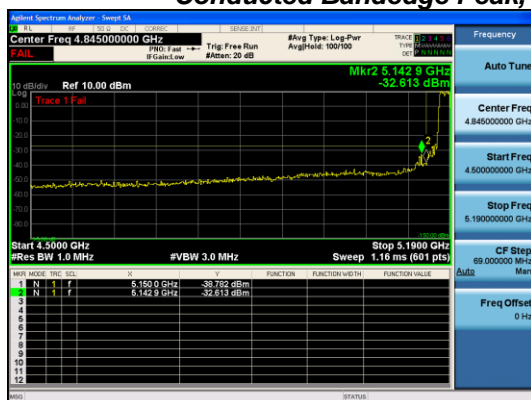
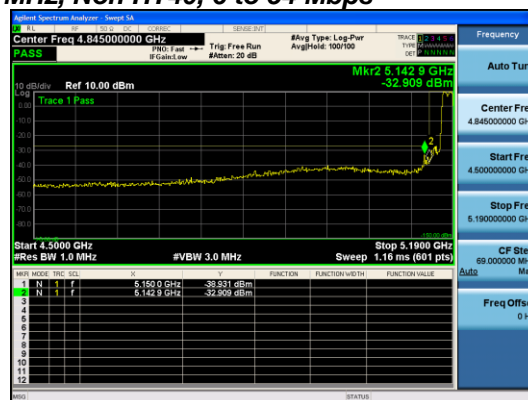
Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Duty Cycle Correction (dB)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	5	-47.3		0.0	-42.3	-41.25	1.03
	Non HT20, 6 to 54 Mbps	2	5	-49.2	-50.6	0.0	-41.8	-41.25	0.56
	<b>Non HT20 Beam Forming, 6 to 54 Mbps</b>	<b>2</b>	<b>8</b>	<b>-53.6</b>	<b>-51.8</b>	<b>0.0</b>	<b>-41.6</b>	<b>-41.25</b>	<b>0.32</b>
	HT/VHT20, M0 to M7	1	5	-47.8		0.0	-42.8	-41.25	1.53
	HT/VHT20, M0 to M7	2	5	-49.8	-51.1	0.0	-42.4	-41.25	1.12
	HT/VHT20, M8 to M15	2	5	-49.8	-51.1	0.0	-42.4	-41.25	1.12
	HT/VHT20 Beam Forming, M0 to M7	2	8	-56.4	-51.9	0.0	-42.6	-41.25	1.31
	HT/VHT20 Beam Forming, M8 to M15	2	5	-49.8	-51.1	0.0	-42.4	-41.25	1.12
	HT/VHT20 STBC, M0 to M7	2	5	-49.8	-51.1	0.0	-42.4	-41.25	1.12
5190	Non HT40, 6 to 54 Mbps	1	5	-46.7		0.0	-41.7	-41.25	0.43
	Non HT40, 6 to 54 Mbps	2	5	-50.2	-50.1	0.0	-42.1	-41.25	0.86
	HT/VHT40, M0 to M7	1	5	-47.3		0.1	-42.2	-41.25	1.00
	HT/VHT40, M0 to M7	2	5	-49.1	-51.1	0.1	-41.9	-41.25	0.68
	HT/VHT40, M8 to M15	2	5	-49.1	-51.1	0.1	-41.9	-41.25	0.68
	HT/VHT40 Beam Forming, M0 to M7	2	8	-52.5	-56.3	0.1	-42.9	-41.25	1.69
	HT/VHT40 Beam Forming, M8 to M15	2	5	-49.1	-51.1	0.1	-41.9	-41.25	0.68
	HT/VHT40 STBC, M0 to M7	2	5	-49.1	-51.1	0.1	-41.9	-41.25	0.68
5210	Non HT80, 6 to 54 Mbps	1	5	-47.7		0.0	-42.7	-41.25	1.42
	Non HT80, 6 to 54 Mbps	2	5	-49.6	-51.3	0.0	-42.3	-41.25	1.08
	VHT80, M0 to M9 1ss	1	5	-47.7		0.1	-42.6	-41.25	1.34
	VHT80, M0 to M9 1ss	2	5	-49.5	-51.2	0.1	-42.1	-41.25	0.90
	VHT80, M0 to M9 2ss	2	5	-49.5	-51.2	0.1	-42.1	-41.25	0.90
	VHT80 Beam Forming, M0 to M9 1ss	2	8	-53.5	-54.5	0.1	-42.9	-41.25	1.60
	VHT80 Beam Forming, M0 to M9 2ss	2	5	-49.5	-51.2	0.1	-42.1	-41.25	0.90
	VHT80 STBC, M0 to M9 1ss	2	5	-49.5	-51.2	0.1	-42.1	-41.25	0.90

**Conducted Bandedge Average, 5180 MHz, Non HT20 Beam Forming, 6 to 54 Mbps****Antenna A****Antenna B**

## Conducted Bandedge Peak Table

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	5	-36.8		-31.8	-21.25	10.53
	Non HT20, 6 to 54 Mbps	2	5	-38.0	-39.7	-30.7	-21.25	9.48
	Non HT20 Beam Forming, 6 to 54 Mbps	2	8	-42.8	-40.6	-30.5	-21.25	9.28
	HT/VHT20, M0 to M7	1	5	-35.6		-30.6	-21.25	9.33
	HT/VHT20, M0 to M7	2	5	-40.2	-39.3	-31.7	-21.25	10.45
	HT/VHT20, M8 to M15	2	5	-40.2	-39.3	-31.7	-21.25	10.45
	HT/VHT20 Beam Forming, M0 to M7	2	8	-42.1	-41.0	-30.5	-21.25	9.23
	HT/VHT20 Beam Forming, M8 to M15	2	5	-40.2	-39.3	-31.7	-21.25	10.45
	HT/VHT20 STBC, M0 to M7	2	5	-40.2	-39.3	-31.7	-21.25	10.45
5190	Non HT40, 6 to 54 Mbps	1	5	-31.0		-26.0	-21.25	4.73
	<b>Non HT40, 6 to 54 Mbps</b>	<b>2</b>	<b>5</b>	<b>-32.6</b>	<b>-32.9</b>	<b>-24.7</b>	<b>-21.25</b>	<b>3.46</b>
	HT/VHT40, M0 to M7	1	5	-38.2		-33.1	-21.25	11.90
	HT/VHT40, M0 to M7	2	5	-40.0	-34.2	-28.1	-21.25	6.89
	HT/VHT40, M8 to M15	2	5	-40.0	-34.2	-28.1	-21.25	6.89
	HT/VHT40 Beam Forming, M0 to M7	2	8	-37.9	-40.3	-27.9	-21.25	6.63
	HT/VHT40 Beam Forming, M8 to M15	2	5	-40.0	-34.2	-28.1	-21.25	6.89
	HT/VHT40 STBC, M0 to M7	2	5	-40.0	-34.2	-28.1	-21.25	6.89
5210	Non HT80, 6 to 54 Mbps	1	5	-37.8		-32.8	-21.25	11.52
	Non HT80, 6 to 54 Mbps	2	5	-38.5	-40.3	-31.3	-21.25	10.02
	VHT80, M0 to M9 1ss	1	5	-38.1		-33.0	-21.25	11.74
	VHT80, M0 to M9 1ss	2	5	-40.1	-41.3	-32.5	-21.25	11.29
	VHT80, M0 to M9 2ss	2	5	-40.1	-41.3	-32.5	-21.25	11.29
	VHT80 Beam Forming, M0 to M9 1ss	2	8	-39.2	-40.4	-28.6	-21.25	7.39
	VHT80 Beam Forming, M0 to M9 2ss	2	5	-40.1	-41.3	-32.5	-21.25	11.29
	VHT80 STBC, M0 to M9 1ss	2	5	-40.1	-41.3	-32.5	-21.25	11.29



**Conducted Bandedge Peak, 5190 MHz, Non HT40, 6 to 54 Mbps****Antenna A****Antenna B**

**Appendix B: List of Test Equipment Used to perform the test**

Equip#	Manufacturer/ Model	Description	Last Cal	Next Due
<b>RF Conducted at output antenna port</b>				
7329	OMEGA/CT485B	Chart Recorder	18 Feb. 2019	18 Feb. 2020
49516	Keysight (Agilent/HP) / N9030A	PXA Signal Analyzer, 3Hz to 50GHz	29 Nov. 2019	29 Nov. 2019
55097	Nattional Instruments / PXI-1042	Chassis PXI	Cal Not Required	Cal Not Required
56089	National Instruments / PXI-2796	40GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use
56328	Pasternack / PE5019-1	Torque Wrench	13 Feb. 2019	13 Feb. 2020
57233	Nattional Instruments / PXI-8115	Embedded Controller	Cal Not Required	Cal Not Required
57253	National Instruments / PXI-2796	40GHz Dual 6x1 Multiplexer (SP6T)	Verify Before Use	Verify Before Use
57254	National Instruments / PXI-2799	Switch 1x1	Verify Before Use	Verify Before Use
57479	CISCO / ATIL	Automation Test Insertion Loss System	Verify Before Use	Verify Before Use

## Appendix C: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1x10 <sup>3</sup> )
EN	European Norm	MHz	MegaHertz (1x10 <sup>6</sup> )
IEC	International Electro technical Commission	GHz	Gigahertz (1x10 <sup>9</sup> )
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1x10 <sup>3</sup> )
L1	Line 1	μV	Microvolt (1x10 <sup>-6</sup> )
L2	Line2	A	Amp
L3	Line 3	μA	Micro Amp (1x10 <sup>-6</sup> )
DC	Direct Current	mS	Milli Second (1x10 <sup>-3</sup> )
RAW	Uncorrected measurement value, as indicated by the measuring device	μS	Micro Second (1x10 <sup>-6</sup> )
RF	Radio Frequency	μS	Micro Second (1x10 <sup>-6</sup> )
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

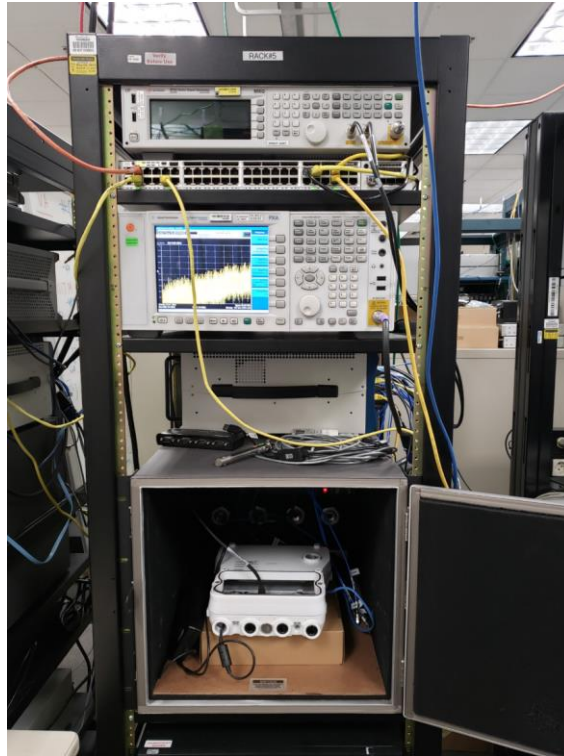
## Appendix D: Photographs of Test Setups

### Title: EUT Pictures





**Title: Radio Conducted Test Setup**



## **Appendix E: Software Used to Perform Testing**

EMIsoft Vasona, version 6.024

## Appendix F: Test Procedures

Measurements were made in accordance with

- KDB 789033 - D02 General UNII Test Procedures New Rules v02r01
- KDB 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

FCC 5GHz Test Procedures	EDCS # 1445048
FCC 5GHz RSE Test Procedures	EDCS # 1511600



## **Appendix G:        Scope of Accreditation (A2LA certificate number 1178-01)**

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>