



#29_GSM850_GSM Voice_Right Cheek_Ch251**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_121009 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.907 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

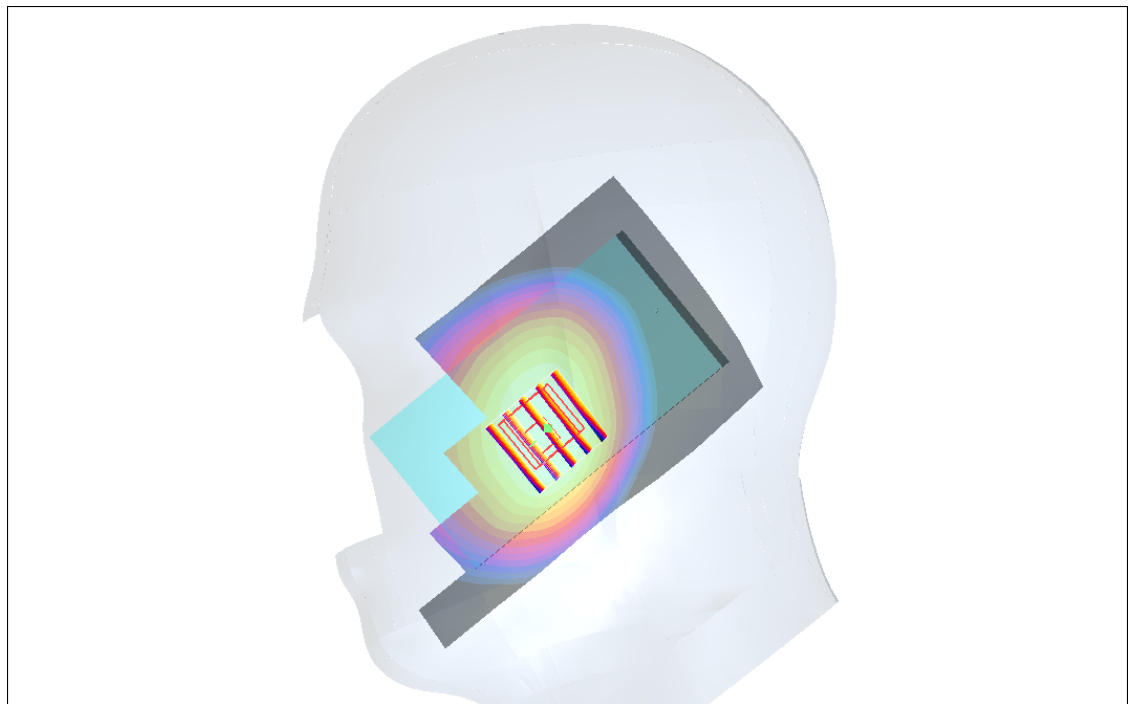Ch251/Area Scan (51x81x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$ Maximum value of SAR (interpolated) = 0.706 mW/g **Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.5 V/m ; Power Drift = -0.191 dB Peak SAR (extrapolated) = 0.796 W/kg **SAR(1 g) = 0.646 mW/g ; SAR(10 g) = 0.496 mW/g** Maximum value of SAR (measured) = 0.681 mW/g 0 dB = 0.681 mW/g



#30_GSM850_GSM Voice_Right Tilted_Ch251**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_121009 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.907 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

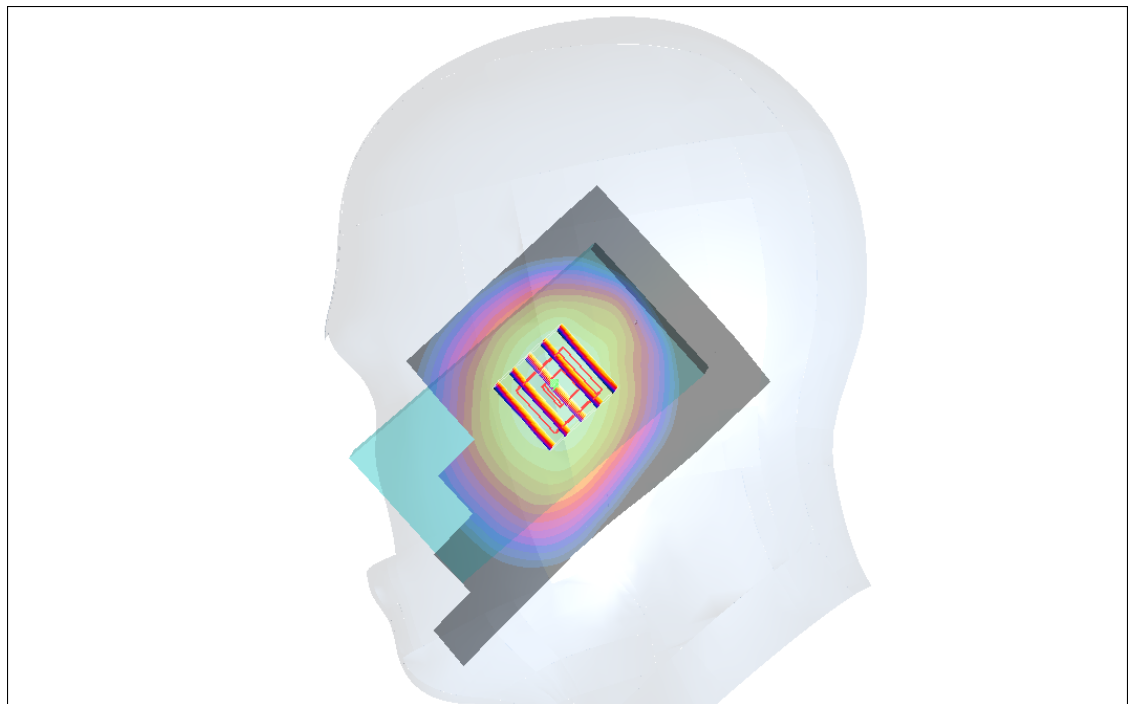Ch251/Area Scan (51x81x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$ Maximum value of SAR (interpolated) = 0.456 mW/g **Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 16.4 V/m ; Power Drift = -0.017 dB Peak SAR (extrapolated) = 0.502 W/kg **SAR(1 g) = 0.429 mW/g ; SAR(10 g) = 0.332 mW/g** Maximum value of SAR (measured) = 0.454 mW/g 0 dB = 0.454 mW/g


#31_GSM850_GSM Voice_Left Cheek_Ch251**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_121009 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.907 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

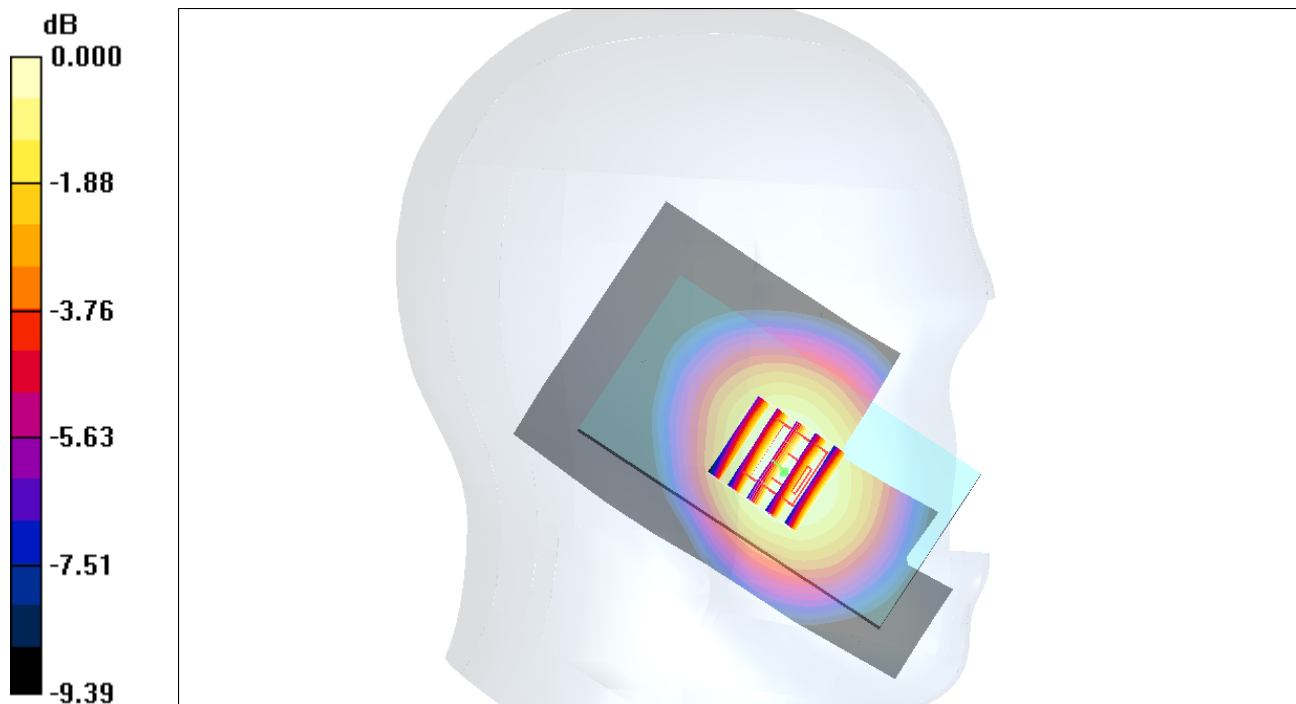Ch251/Area Scan (51x81x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$ Maximum value of SAR (interpolated) = 0.829 mW/g **Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.79 V/m ; Power Drift = -0.104 dB Peak SAR (extrapolated) = 0.966 W/kg **SAR(1 g) = 0.72 mW/g ; SAR(10 g) = 0.585 mW/g** Maximum value of SAR (measured) = 0.814 mW/g 0 dB = 0.814 mW/g


#31_GSM850_GSM Voice_Left Cheek_Ch251_2D**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_121009 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.907 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

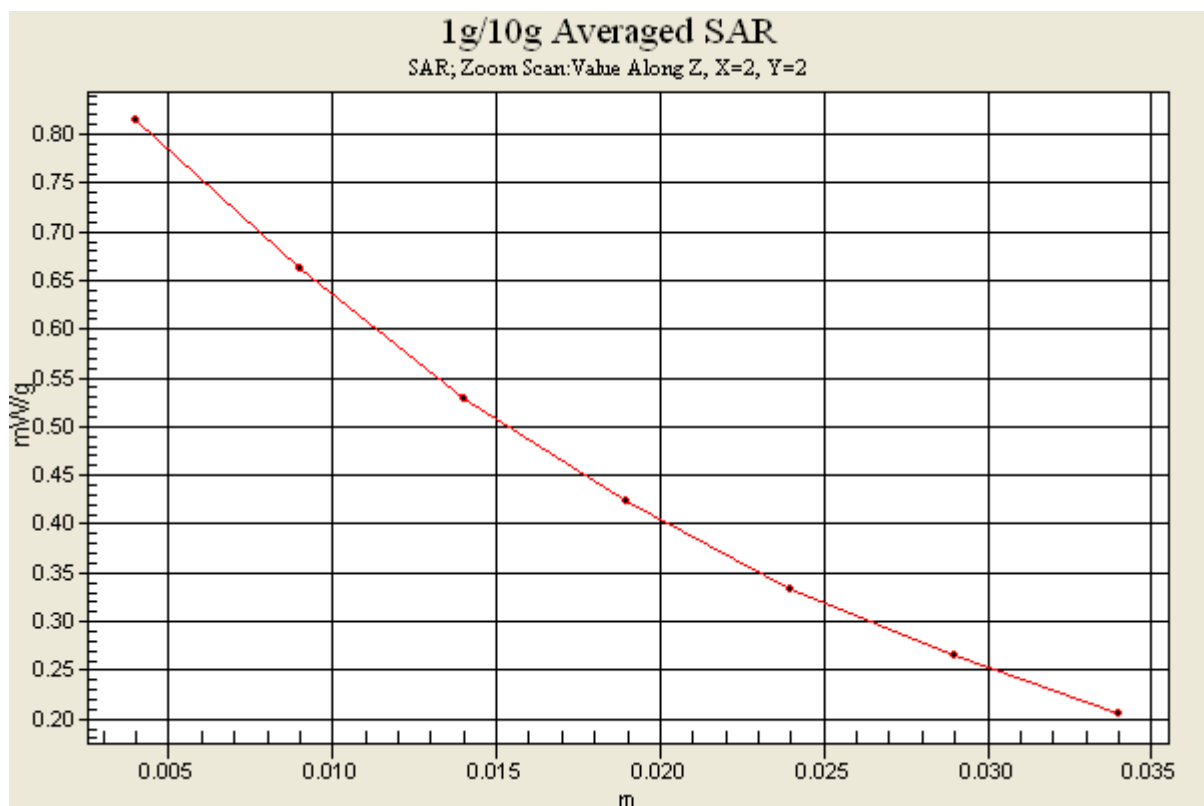Ch251/Area Scan (51x81x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$ Maximum value of SAR (interpolated) = 0.829 mW/g **Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.79 V/m ; Power Drift = -0.104 dB Peak SAR (extrapolated) = 0.966 W/kg **SAR(1 g) = 0.72 mW/g ; SAR(10 g) = 0.585 mW/g** Maximum value of SAR (measured) = 0.814 mW/g 


#32_GSM850_GSM Voice_Left Tilted_Ch251**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_850_121009 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.907 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

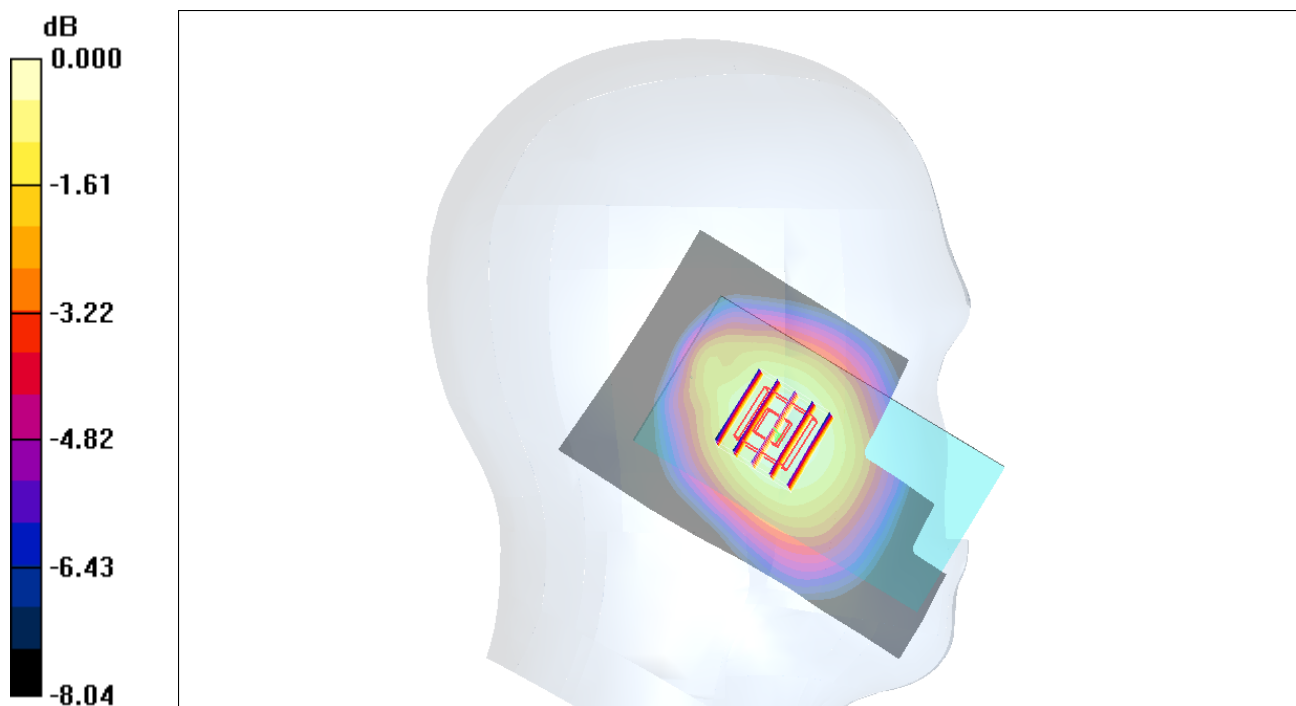Ch251/Area Scan (51x81x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$ Maximum value of SAR (interpolated) = 0.424 mW/g **Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.0 V/m ; Power Drift = 0.069 dB Peak SAR (extrapolated) = 0.460 W/kg **SAR(1 g) = 0.400 mW/g ; SAR(10 g) = 0.315 mW/g** Maximum value of SAR (measured) = 0.418 mW/g 0 dB = 0.418 mW/g

#25_GSM1900_GSM Voice_Right Cheek_Ch810**DUT: 232306-04**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.06, 5.06, 5.06); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.512 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.33 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.658 W/kg

SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.273 mW/g

Maximum value of SAR (measured) = 0.476 mW/g

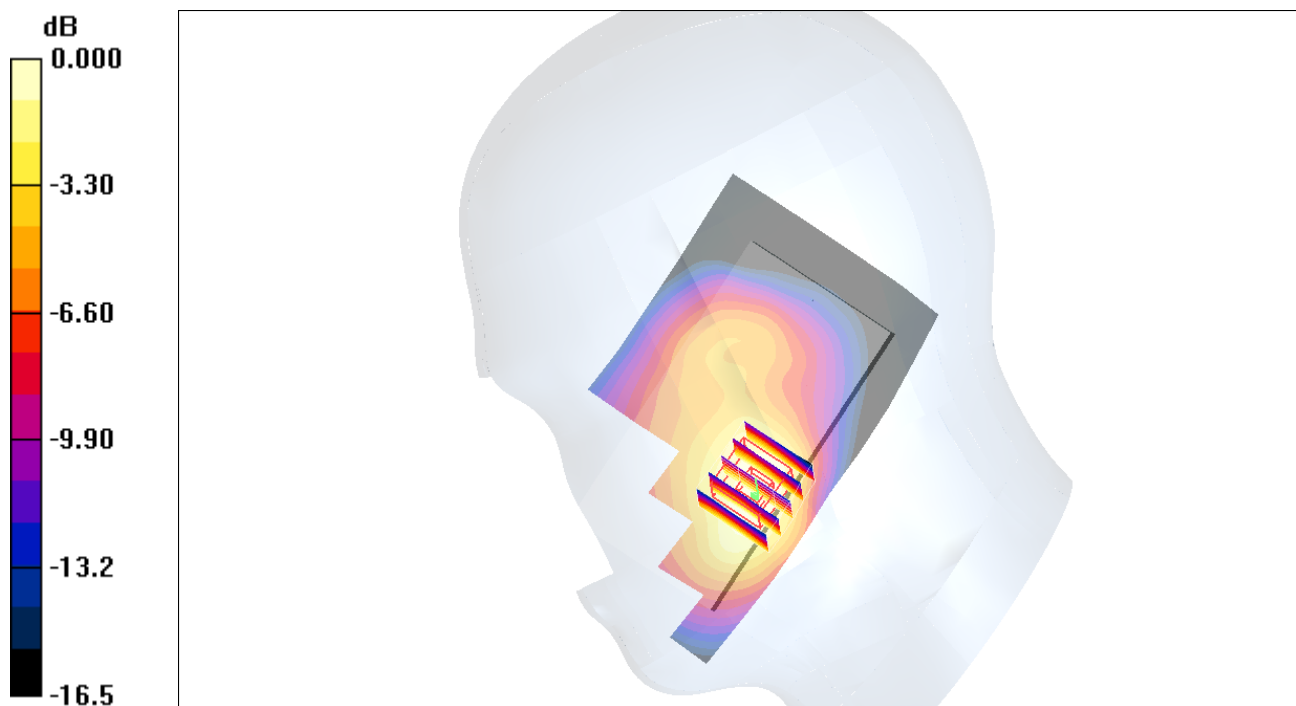

0 dB = 0.476mW/g

#25_GSM1900_GSM Voice_Right Cheek_Ch810_2D**DUT: 232306-04**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.06, 5.06, 5.06); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.512 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.33 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.658 W/kg

SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.273 mW/g

Maximum value of SAR (measured) = 0.476 mW/g

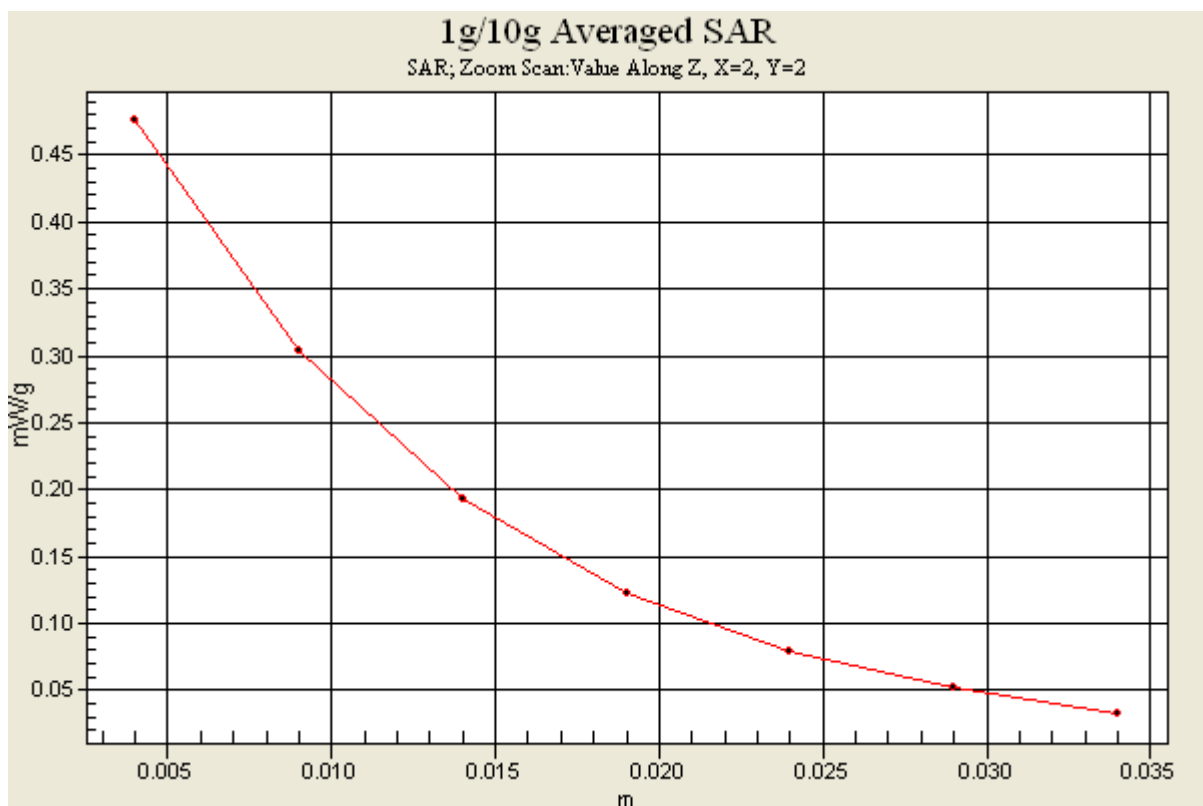

#26_GSM1900_GSM Voice_Right Tilted_Ch810**DUT: 232306-04**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.06, 5.06, 5.06); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.239 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.144 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.186 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.199 mW/g

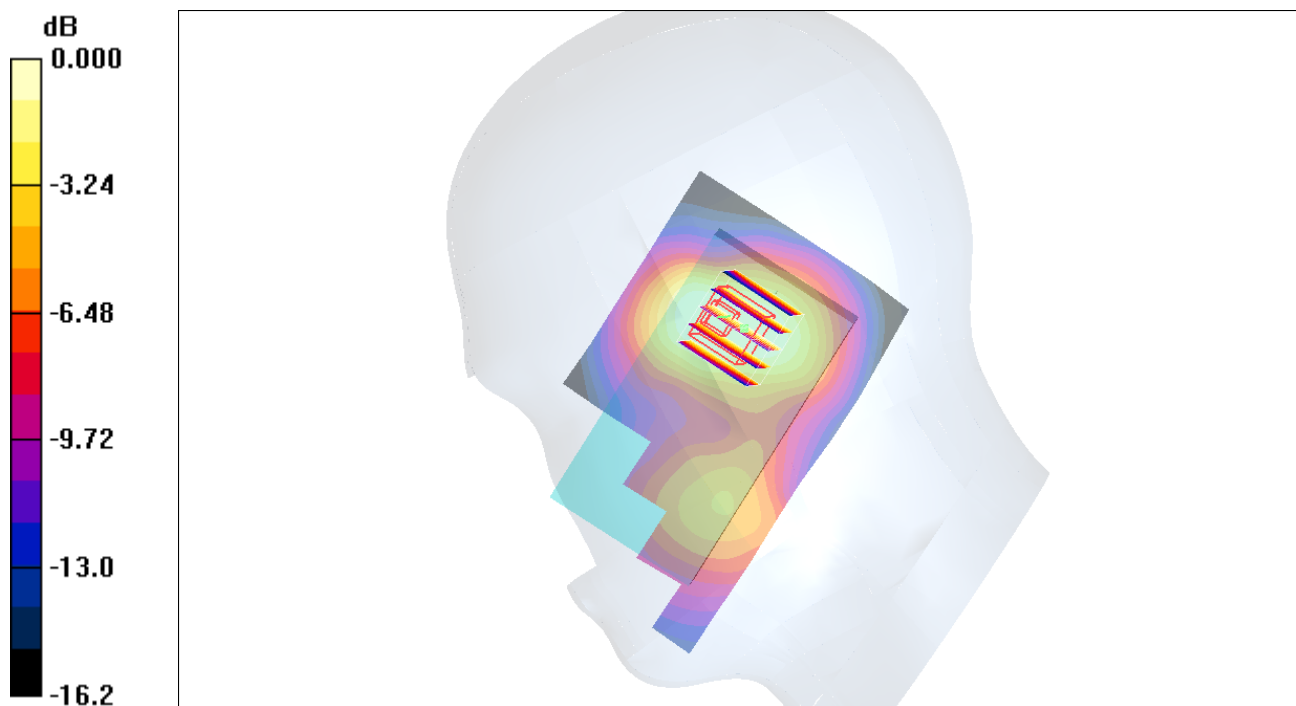

0 dB = 0.199mW/g

#27_GSM1900_GSM Voice_Left Cheek_Ch810**DUT: 232306-04**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.06, 5.06, 5.06); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.217 mW/g

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.93 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.233 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.254 mW/g



Ch810/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.93 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.212 mW/g

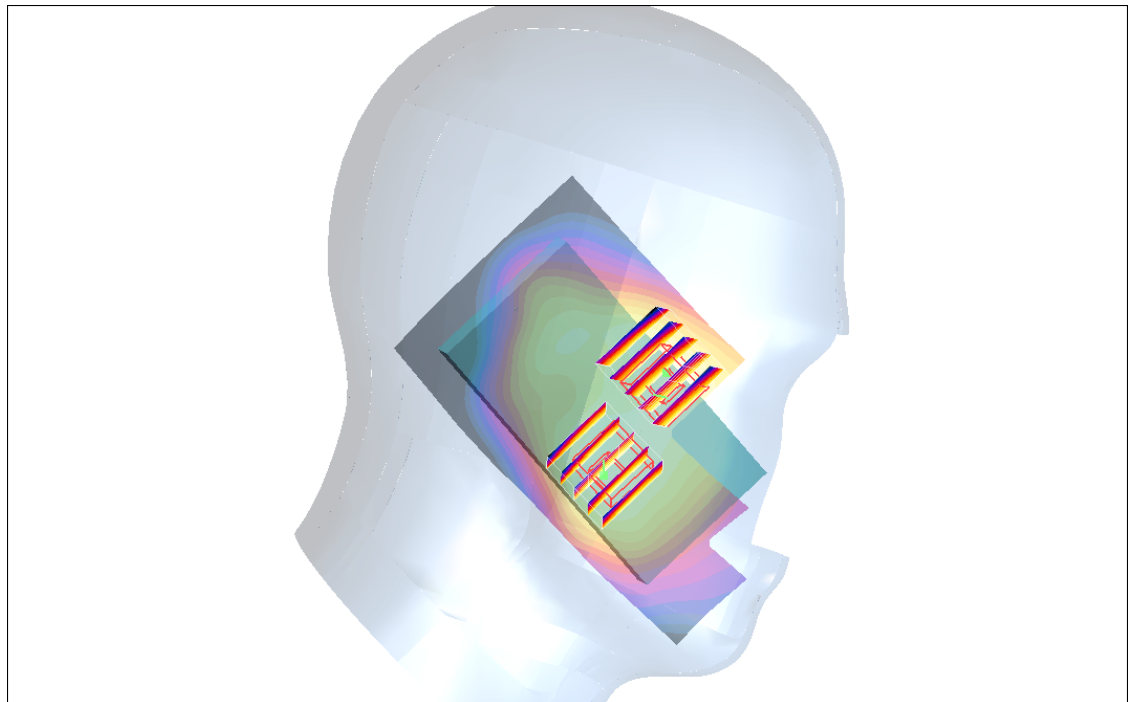

0 dB = 0.212mW/g

#28_GSM1900_GSM Voice_Left Tilted_Ch810**DUT: 232306-04**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.06, 5.06, 5.06); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.261 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.108 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.250 mW/g

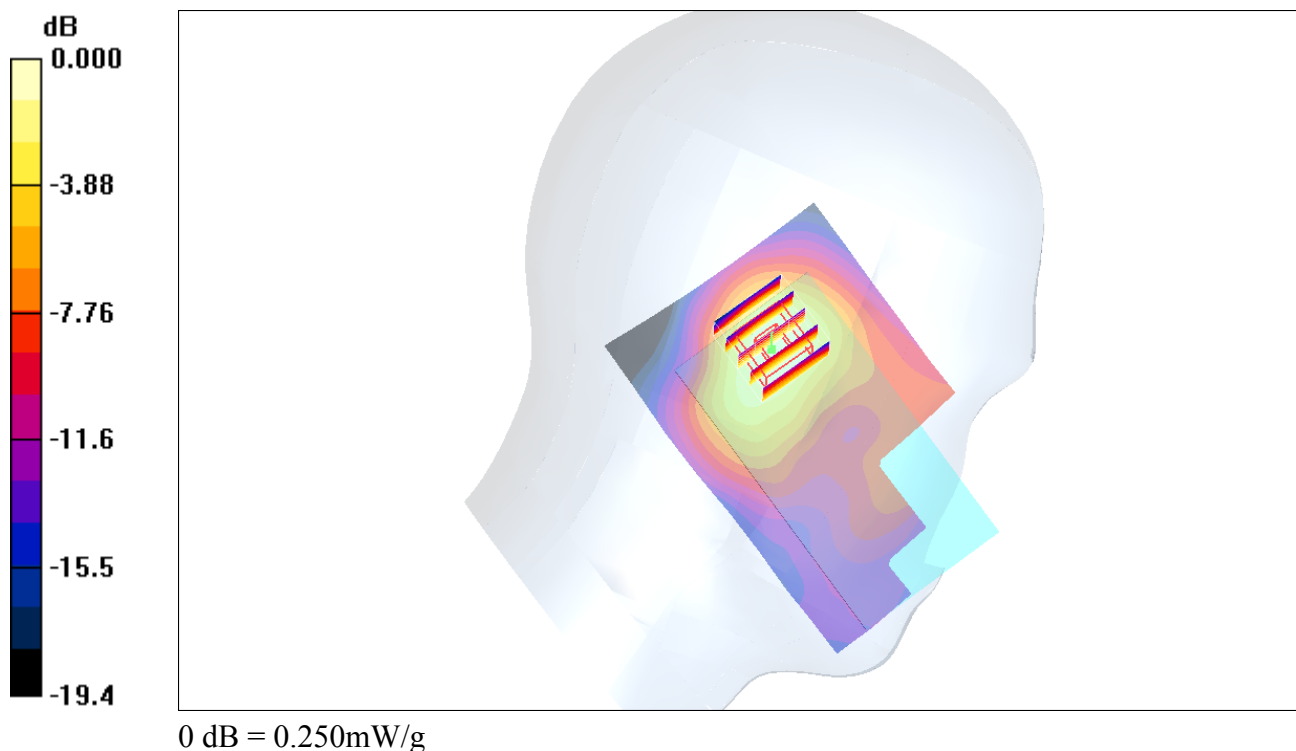

#33_WCDMA V_RMC12.2K_Right Cheek_Ch4132**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_121009 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4132/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.547 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.91 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.395 mW/g

Maximum value of SAR (measured) = 0.543 mW/g

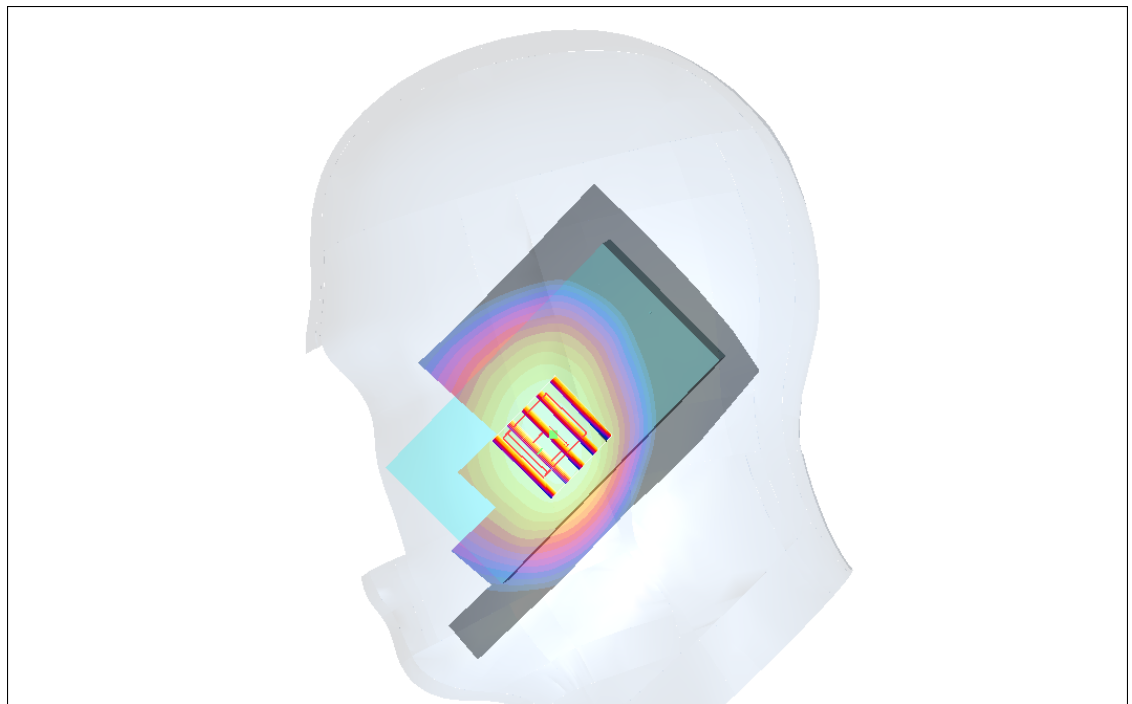

0 dB = 0.543mW/g

#41_WCDMA V_RMC12.2K_Right Cheek_Ch4182**DUT: 232306-04**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_121009 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4182/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.686 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.130 dB

Peak SAR (extrapolated) = 0.743 W/kg

SAR(1 g) = 0.610 mW/g; SAR(10 g) = 0.469 mW/g

Maximum value of SAR (measured) = 0.644 mW/g

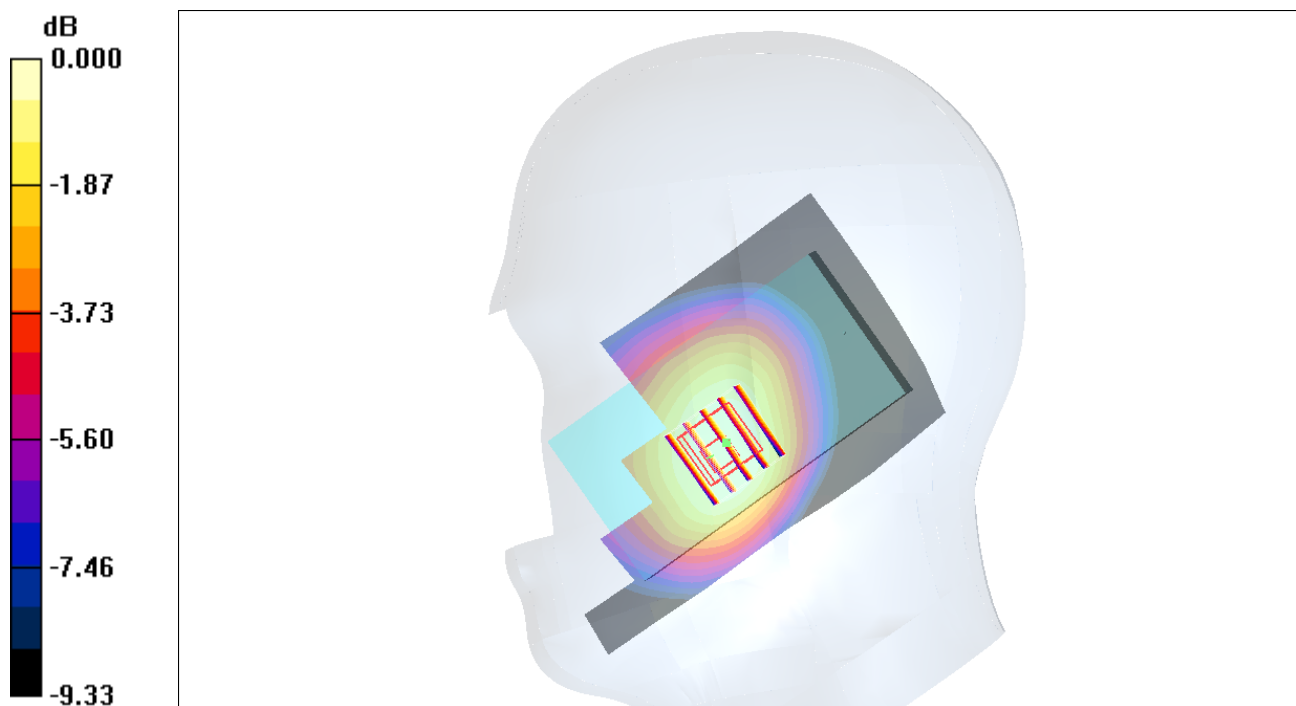

0 dB = 0.644mW/g



#42_WCDMA V_RMC12.2K_Right Cheek_Ch4233**DUT: 232306-04**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL_850_121009 Medium parameters used: $f = 847 \text{ MHz}$; $\sigma = 0.906 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

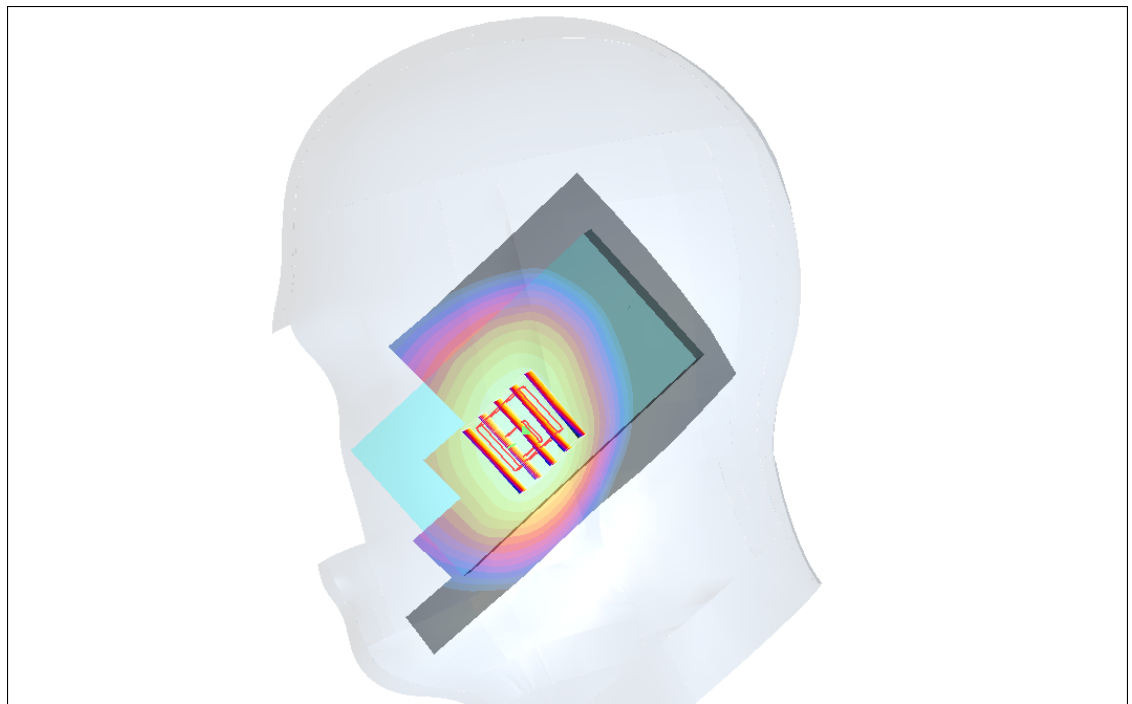Ch4233/Area Scan (51x81x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$ Maximum value of SAR (interpolated) = 0.761 mW/g **Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.4 V/m ; Power Drift = -0.109 dB Peak SAR (extrapolated) = 0.850 W/kg **SAR(1 g) = 0.695 mW/g ; SAR(10 g) = 0.534 mW/g** Maximum value of SAR (measured) = 0.736 mW/g 0 dB = 0.736 mW/g

#42_WCDMA V_RMC12.2K_Right Cheek_Ch4233_2D**DUT: 232306-04**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL_850_121009 Medium parameters used: $f = 847$ MHz; $\sigma = 0.906$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4233/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.761 mW/g


Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.109 dB

Peak SAR (extrapolated) = 0.850 W/kg

SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.534 mW/g

Maximum value of SAR (measured) = 0.736 mW/g

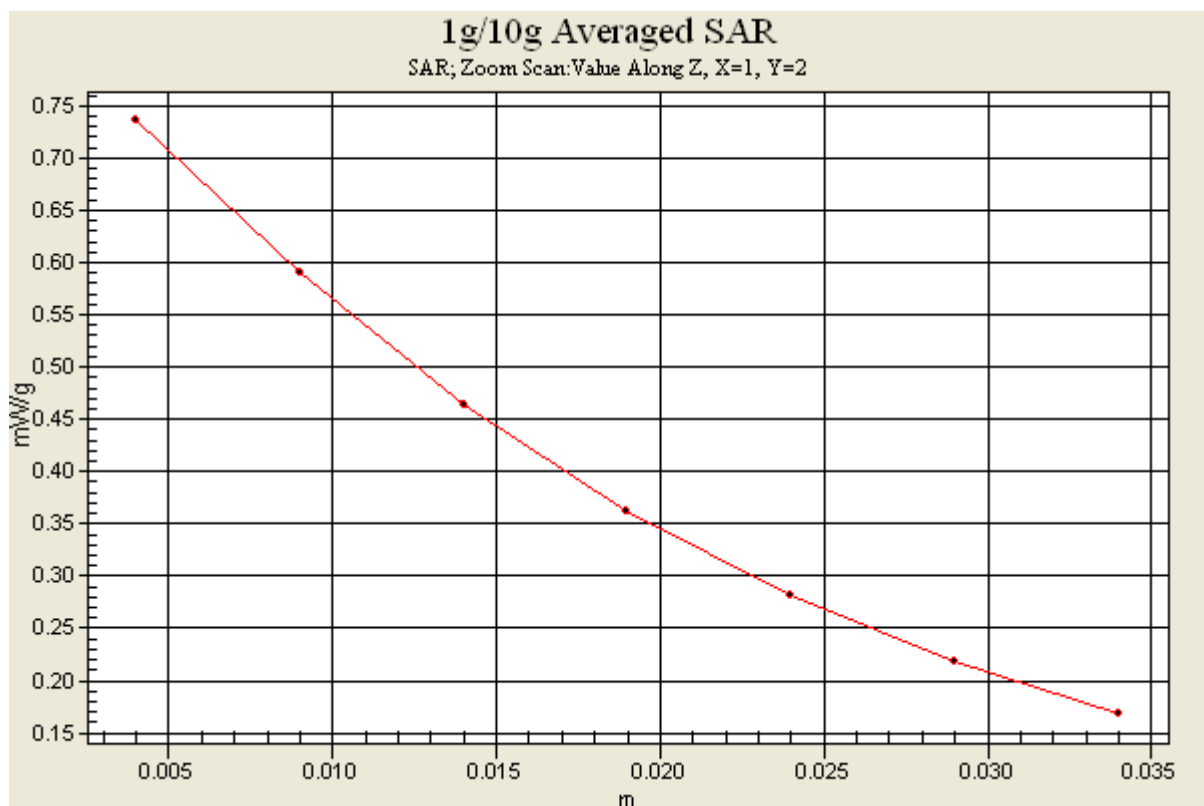

#86_WCDMA V_RMC12.2K_Right Tilted_Ch4132**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_121101 Medium parameters used : $f = 826.4$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 43.073$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Ch4132/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.374 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.673 V/m; Power Drift = -0.147 dB

Peak SAR (extrapolated) = 0.408 mW/g

SAR(1 g) = 0.354 mW/g; SAR(10 g) = 0.275 mW/g

Maximum value of SAR (measured) = 0.374 mW/g

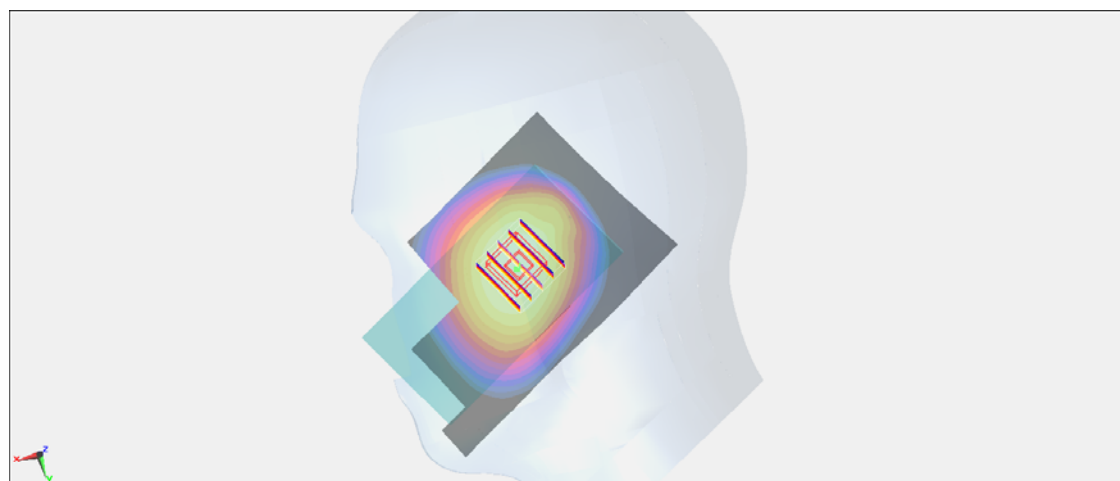

0 dB = 0.374 mW/g = -8.54 dB mW/g

#87_WCDMA V_RMC12.2K_Left Cheek_Ch4132**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_121101 Medium parameters used : $f = 826.4$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 43.073$; ρ $= 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Ch4132/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.597 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.665 V/m; Power Drift = 0.125 dB

Peak SAR (extrapolated) = 0.689 mW/g

SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.451 mW/g

Maximum value of SAR (measured) = 0.622 mW/g

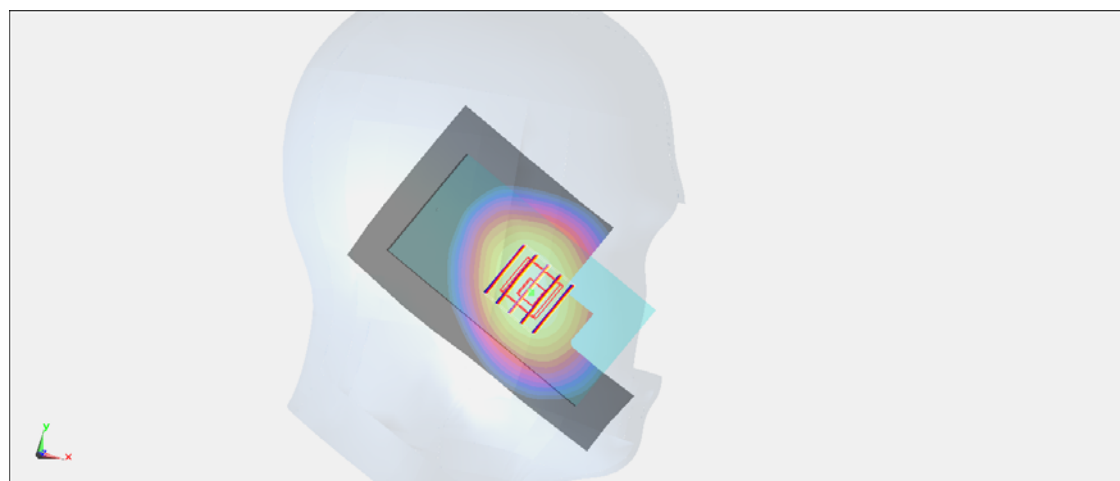

0 dB = 0.622 mW/g = -4.12 dB mW/g

#88_WCDMA V_RMC12.2K_Left Tilted_Ch4132**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL_850_121101 Medium parameters used : $f = 826.4$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 43.073$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.12, 6.12, 6.12); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: SAM RIGHT; Type: SAM; Serial: 1719
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Ch4132/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.346 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.492 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.373 mW/g

SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.256 mW/g

Maximum value of SAR (measured) = 0.342 mW/g

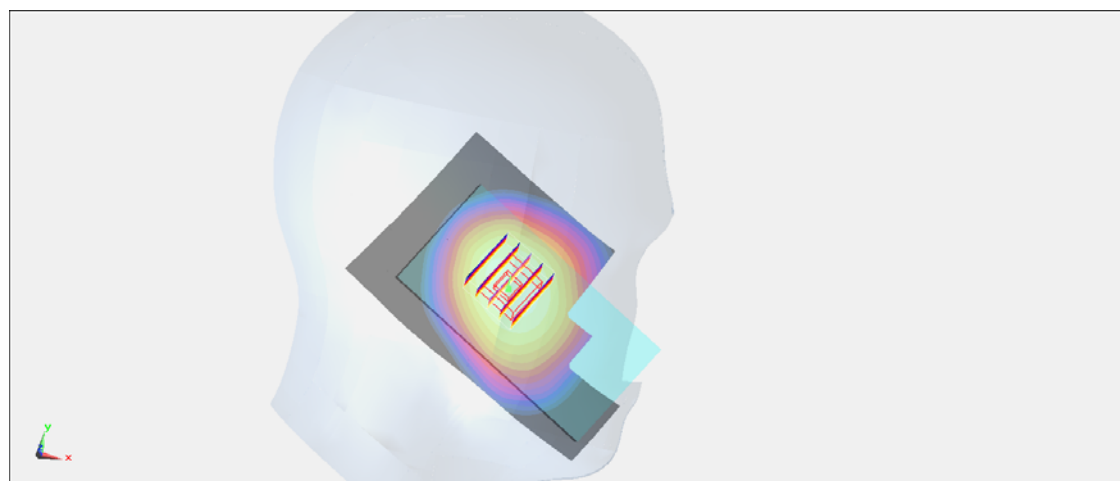

0 dB = 0.342 mW/g = -9.32 dB mW/g

#89_WCDMA II_RMC12.2K_Right Cheek_Ch9262**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_1211101 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.387$ mho/m; $\epsilon_r =$

39.559; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.06, 5.06, 5.06); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: SAM LEFT; Type: QD000P40CD; Serial: TP:1718
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Ch9262/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.14 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.424 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 1.428 mW/g

SAR(1 g) = 0.982 mW/g; SAR(10 g) = 0.605 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

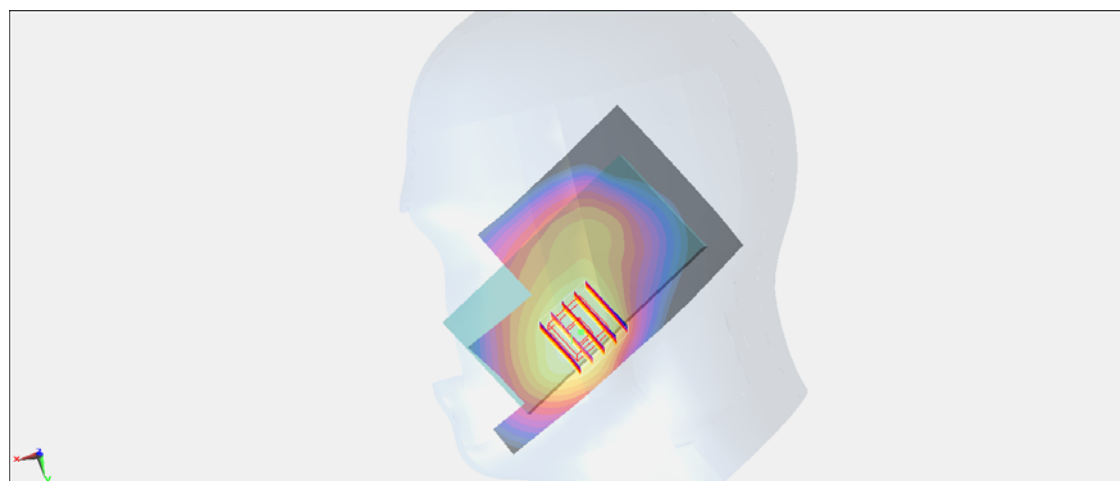

0 dB = 1.06 mW/g = 0.51 dB mW/g

#89_WCDMA II_RMC12.2K_Right Cheek_Ch9262_2D**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_1211101 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.387$ mho/m; $\epsilon_r =$ 39.559 ; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.06, 5.06, 5.06); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: SAM LEFT; Type: QD000P40CD; Serial: TP:1718
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Ch9262/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.14 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.424 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 1.428 mW/g

SAR(1 g) = 0.982 mW/g; SAR(10 g) = 0.605 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

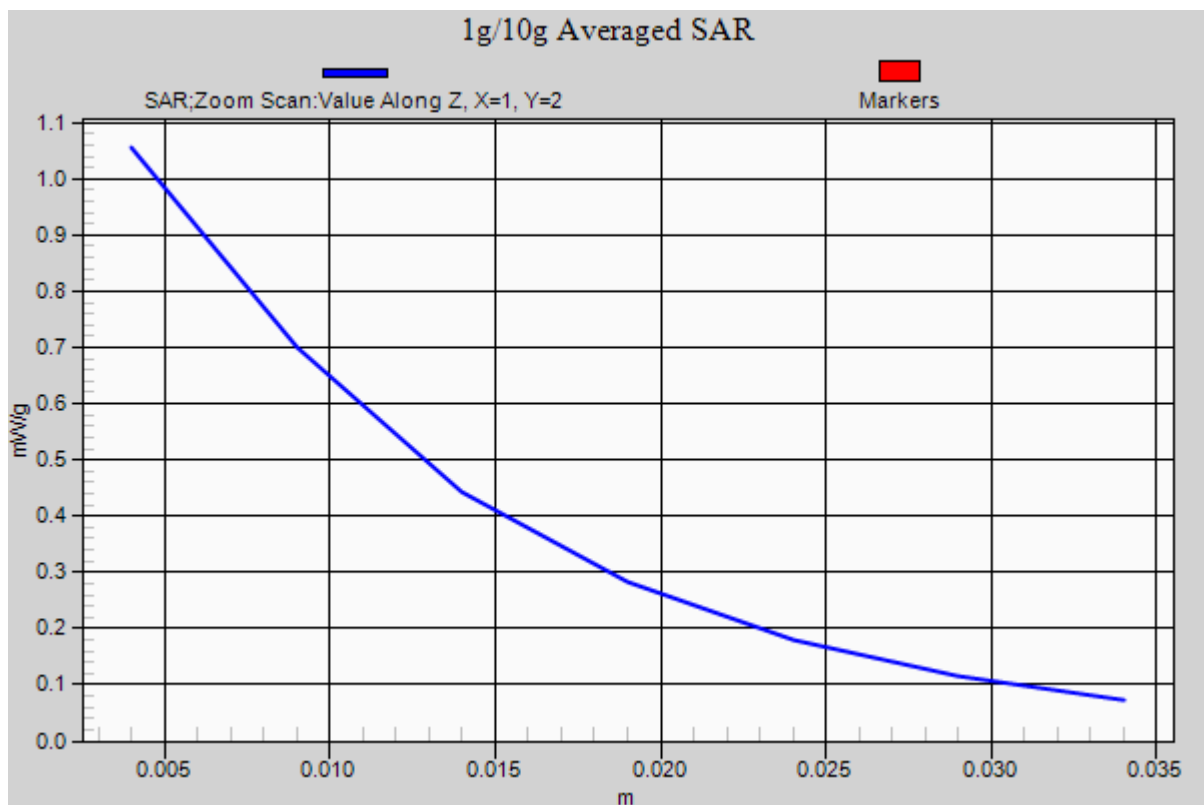

#92_WCDMA II_RMC12.2K_Right Cheek_Ch9400**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_1211101 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ mho/m; $\epsilon_r = 39.447$; ρ $= 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.06, 5.06, 5.06); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: SAM LEFT; Type: QD000P40CD; Serial: TP:1718
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Ch9400/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.964 mW/g



Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.654 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 1.220 mW/g

SAR(1 g) = 0.842 mW/g; SAR(10 g) = 0.513 mW/g

Maximum value of SAR (measured) = 0.923 mW/g

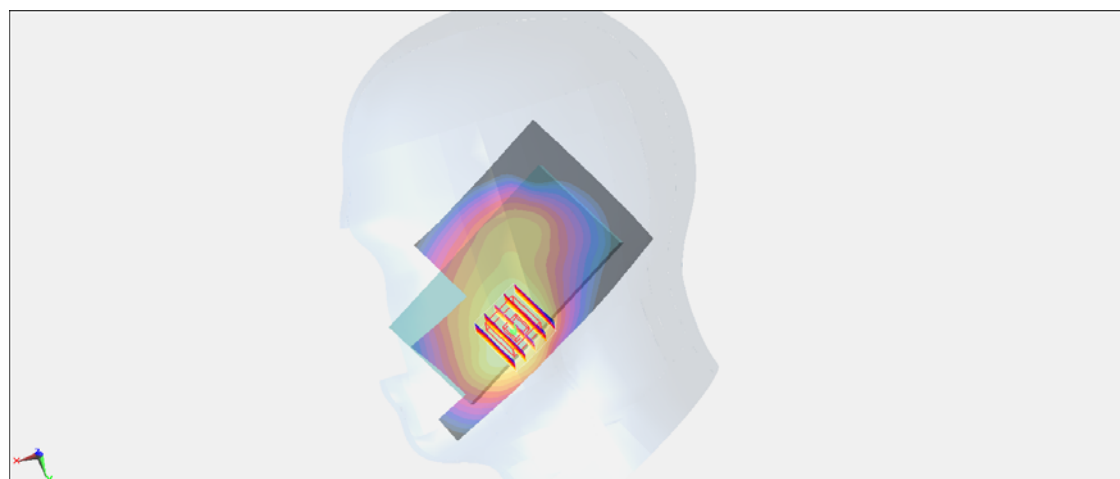

0 dB = 0.923 mW/g = -0.70 dB mW/g

#93_WCDMA II_RMC12.2K_Right Cheek_Ch9538**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL_1900_1211101 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.294$; ρ $= 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.06, 5.06, 5.06); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: SAM LEFT; Type: QD000P40CD; Serial: TP:1718
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Ch9538/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.879 mW/g



Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.411 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 1.143 mW/g

SAR(1 g) = 0.782 mW/g; SAR(10 g) = 0.473 mW/g

Maximum value of SAR (measured) = 0.858 mW/g

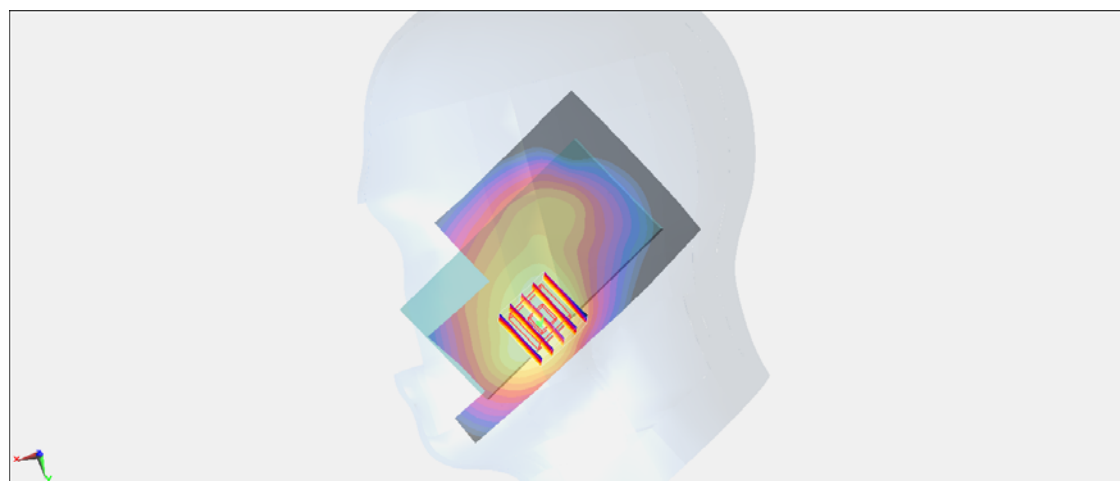

0 dB = 0.858 mW/g = -1.33 dB mW/g

#90_WCDMA II_RMC12.2K_Right Tilted_Ch9262**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_1211101 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.387$ mho/m; $\epsilon_r =$

39.559; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.06, 5.06, 5.06); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: SAM LEFT; Type: QD000P40CD; Serial: TP:1718
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Ch9262/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.458 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.651 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.496 mW/g

SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.247 mW/g

Maximum value of SAR (measured) = 0.392 mW/g

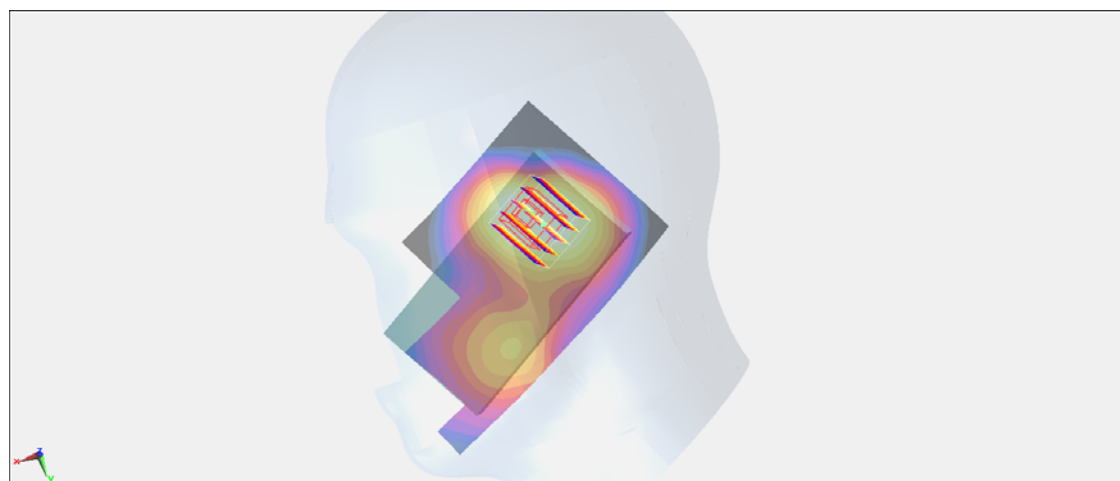

0 dB = 0.392 mW/g = -8.13 dB mW/g

#12_WCDMA II_RMC12.2K_Left Cheek_Ch9262**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121008 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.06, 5.06, 5.06); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Left; Type: SAM; Serial: TP-1150
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.367 mW/g

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.43 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.482 W/kg

SAR(1 g) = 0.343 mW/g; SAR(10 g) = 0.216 mW/g

Maximum value of SAR (measured) = 0.379 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.43 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.340 mW/g

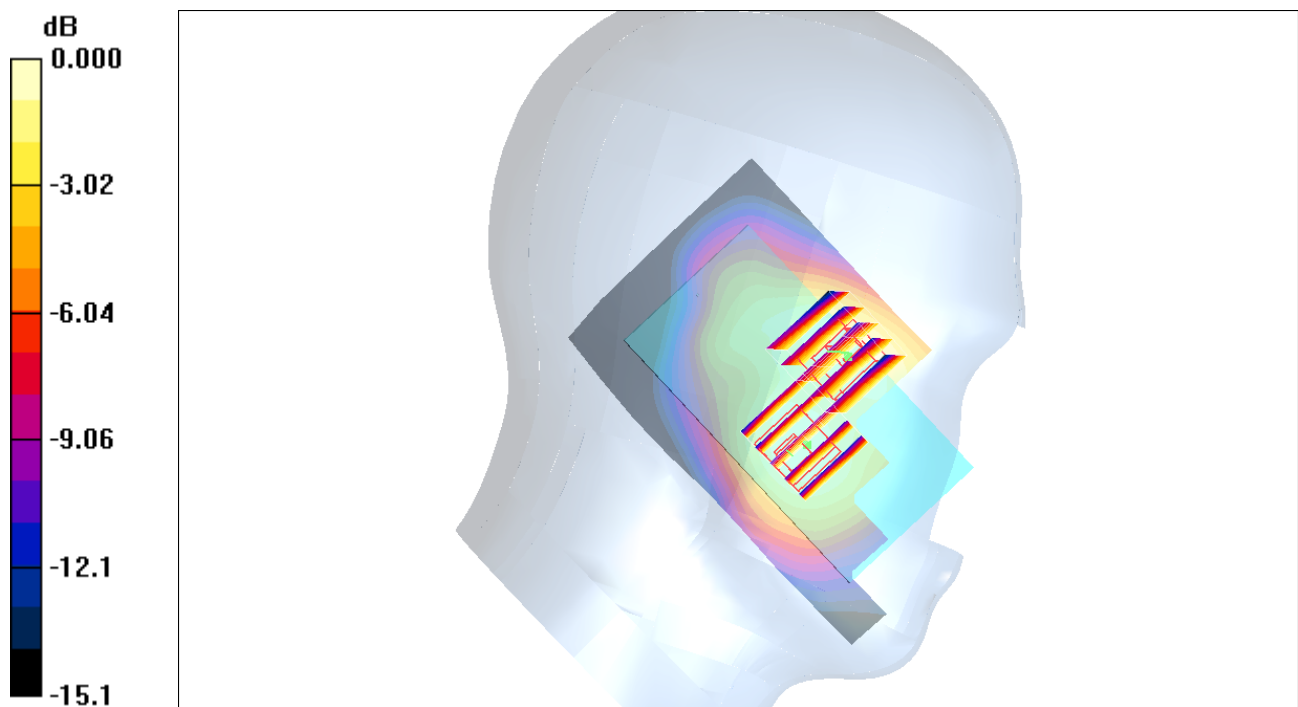

0 dB = 0.340mW/g

#91_WCDMA II_RMC12.2K_Left Tilted_Ch9262**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_1211101 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.387$ mho/m; $\epsilon_r =$

39.559 ; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.06, 5.06, 5.06); Calibrated: 2012/5/29;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2012/6/6
- Phantom: SAM LEFT; Type: QD000P40CD; Serial: TP:1718
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Ch9262/Area Scan (51x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.442 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.220 V/m; Power Drift = -0.142 dB

Peak SAR (extrapolated) = 0.500 mW/g

SAR(1 g) = 0.364 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.389 mW/g

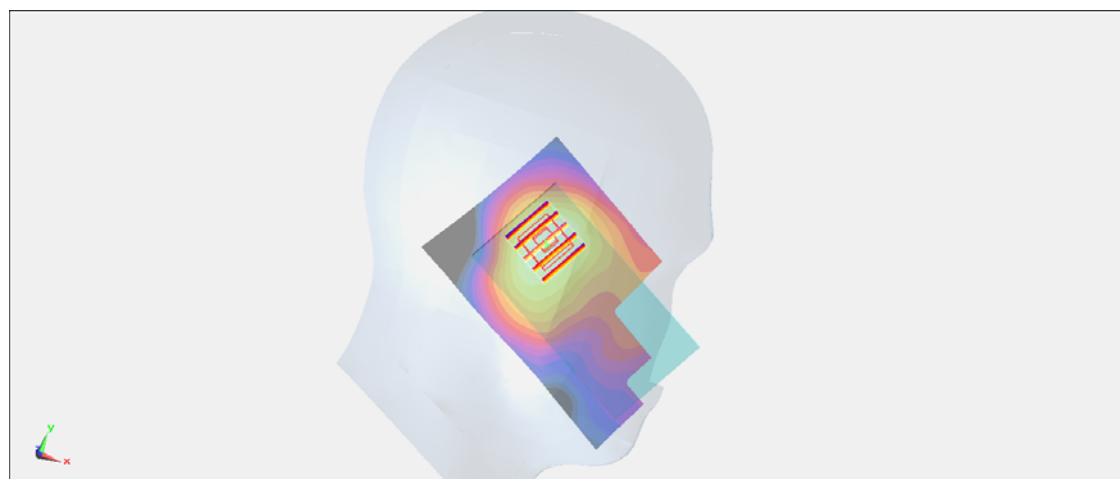

0 dB = 0.389 mW/g = -8.20 dB mW/g

#08_WLAN2.4G_802.11b_Right Cheek_Ch1**DUT: 232306-04**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3305; ConvF(4.55, 4.55, 4.55); Calibrated: 2012/9/12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2012/6/12
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.440 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = 0.108 dB

Peak SAR (extrapolated) = 0.738 W/kg

SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.421 mW/g

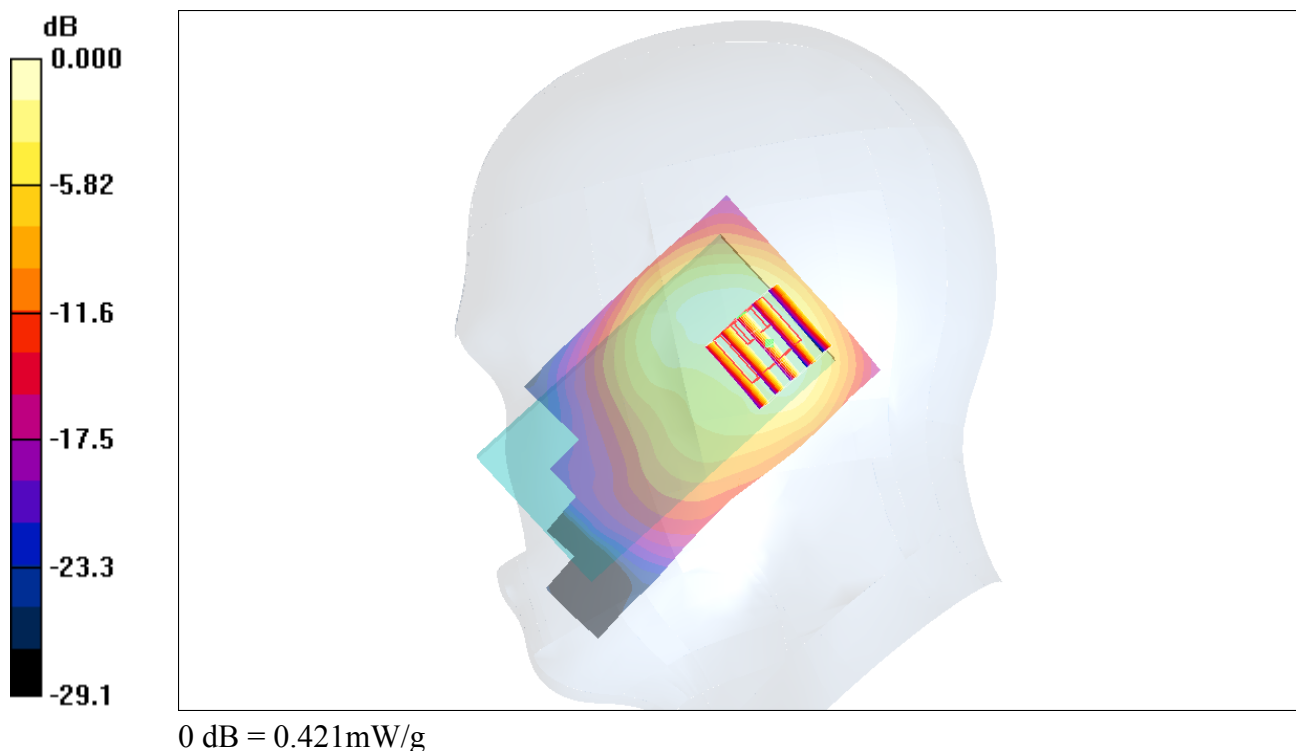



#09_WLAN2.4G_802.11b_Right Tilted_Ch1**DUT: 232306-04**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121005 Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.8 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : 22.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: ES3DV3 - SN3305; ConvF(4.55, 4.55, 4.55); Calibrated: 2012/9/12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2012/6/12
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

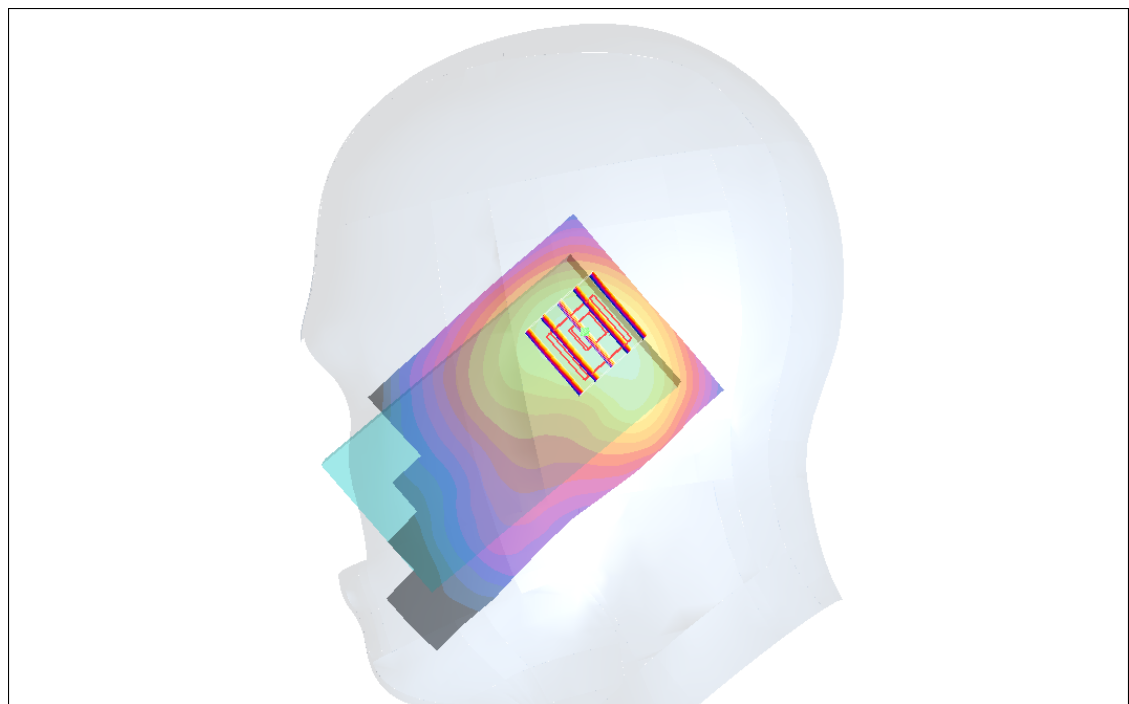Ch1/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (interpolated) = 0.390 mW/g **Ch1/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 14.6 V/m ; Power Drift = 0.110 dB Peak SAR (extrapolated) = 0.697 W/kg **SAR(1 g) = 0.364 mW/g ; SAR(10 g) = 0.192 mW/g** Maximum value of SAR (measured) = 0.400 mW/g 0 dB = 0.400 mW/g

#10_WLAN2.4G_802.11b_Left Cheek_Ch1**DUT: 232306-04**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3305; ConvF(4.55, 4.55, 4.55); Calibrated: 2012/9/12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2012/6/12
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.842 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.737 mW/g; SAR(10 g) = 0.353 mW/g

Maximum value of SAR (measured) = 0.777 mW/g

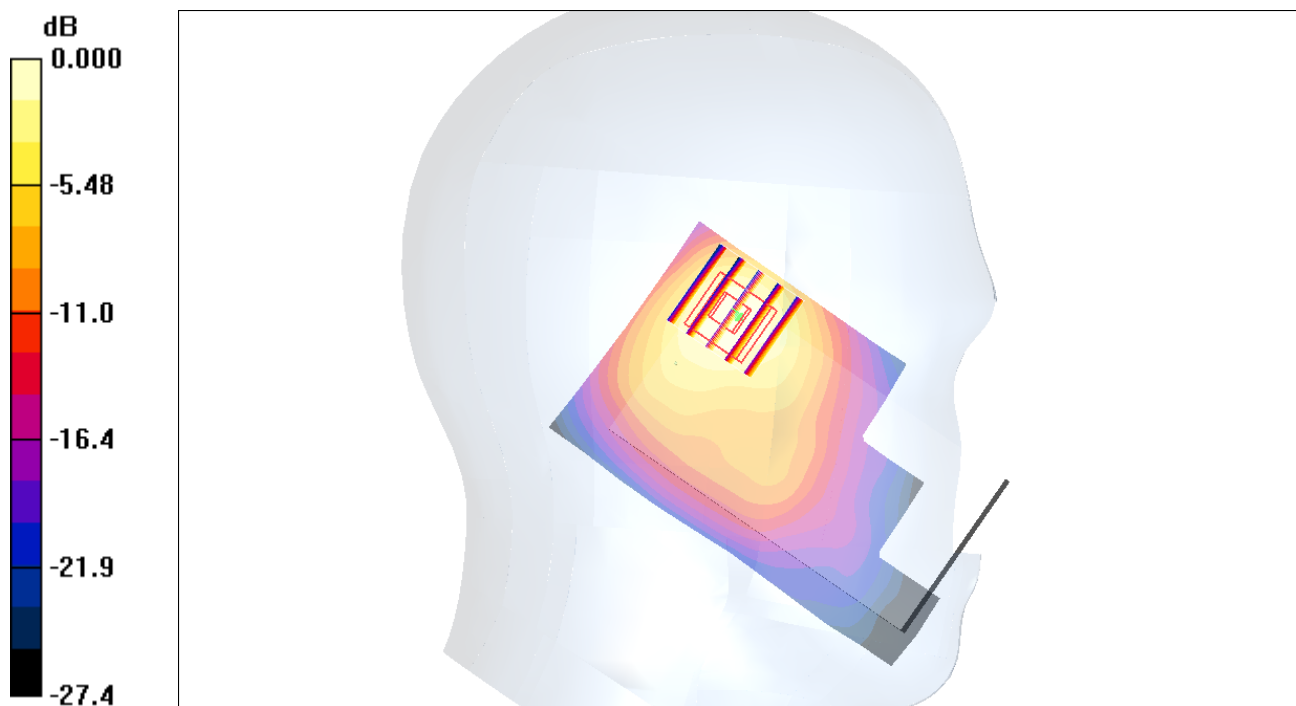

0 dB = 0.777mW/g

#10_WLAN2.4G_802.11b_Left Cheek_Ch1_2D**DUT: 232306-04**

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3305; ConvF(4.55, 4.55, 4.55); Calibrated: 2012/9/12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2012/6/12
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.842 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.737 mW/g; SAR(10 g) = 0.353 mW/g

Maximum value of SAR (measured) = 0.777 mW/g

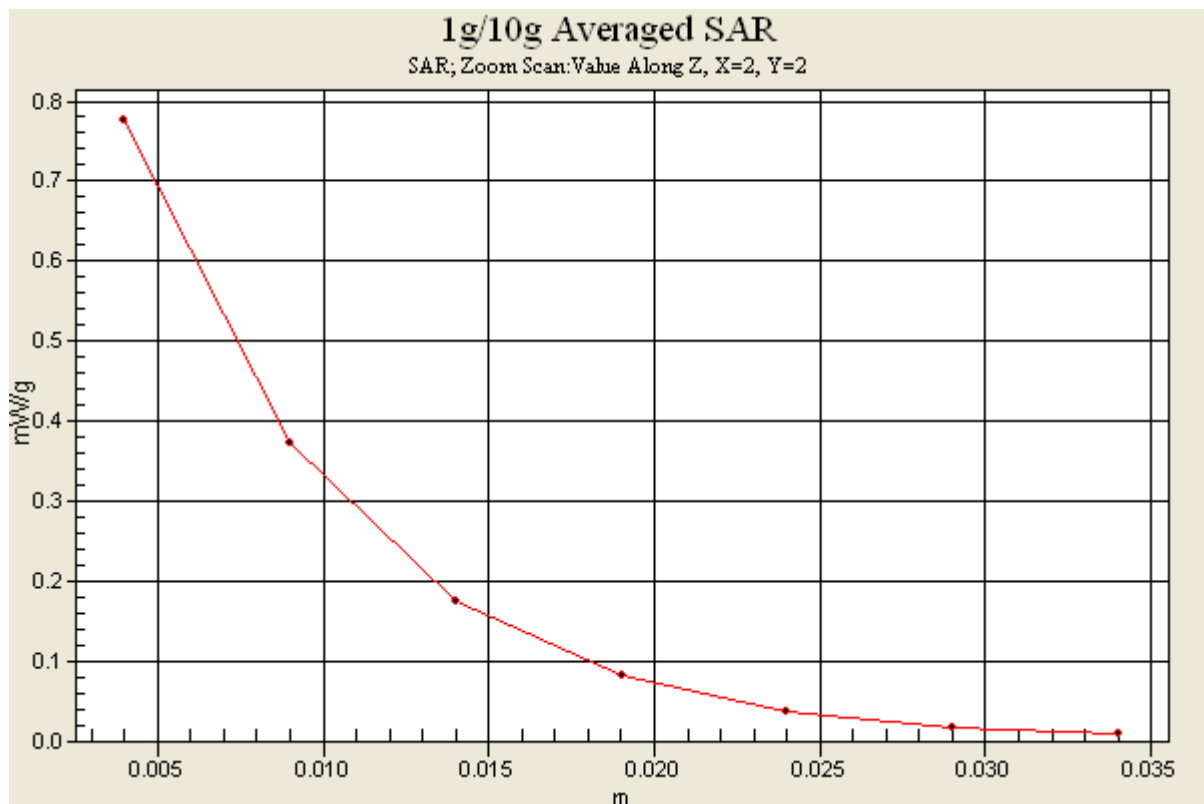

#11_WLAN2.4G_802.11b_Left Tilted_Ch1**DUT: 232306-04**

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3305; ConvF(4.55, 4.55, 4.55); Calibrated: 2012/9/12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2012/6/12
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.564 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.0 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.504 mW/g; SAR(10 g) = 0.238 mW/g

Maximum value of SAR (measured) = 0.552 mW/g

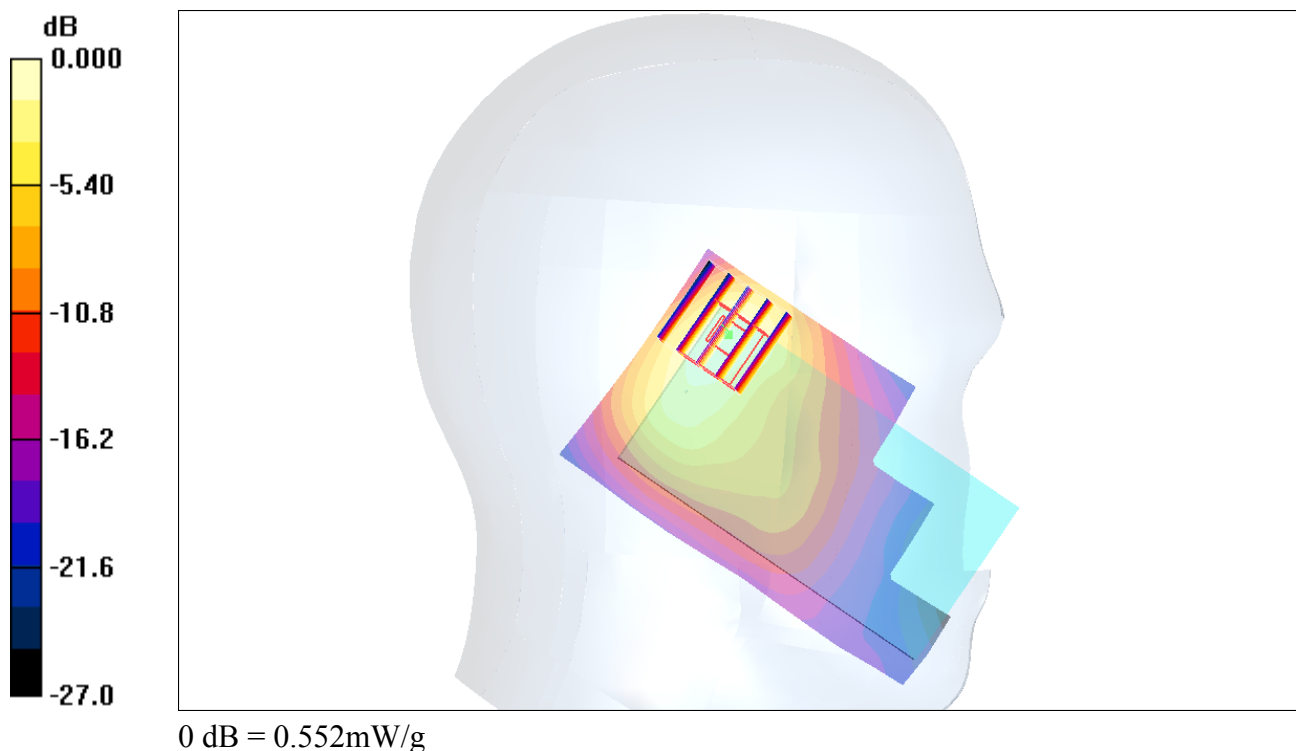

#70_WLAN5G_802.11a_Right Cheek_Ch44**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used : $f = 5220$ MHz; $\sigma = 4.827$ mho/m; $\epsilon_r = 35.44$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.55, 4.55, 4.55); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch44/Area Scan (101x161x1): Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.273 W/kg



Ch44/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.648 V/m; Power Drift = 0.149 dB

Peak SAR (extrapolated) = 0.610 mW/g

SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.071 mW/g

Maximum value of SAR (measured) = 0.377 W/kg

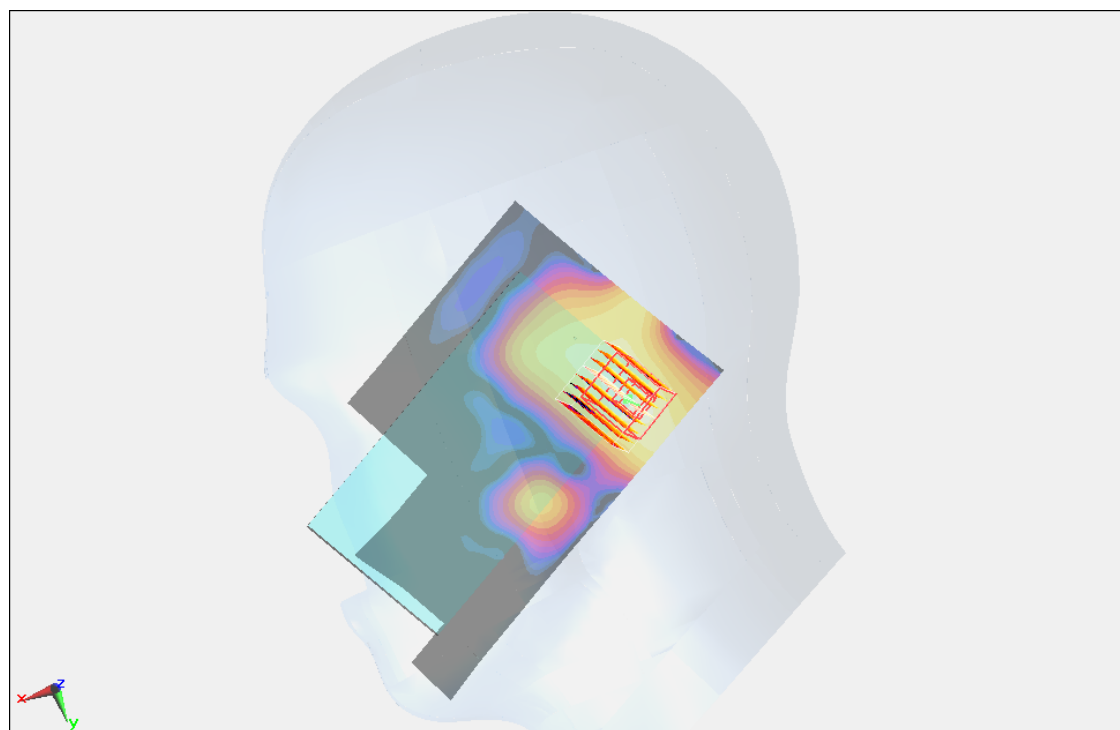

0 dB = 0.377 W/kg = -8.47 dB W/kg

#71_WLAN5G_802.11a_Right Tilted_Ch44**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used : $f = 5220$ MHz; $\sigma = 4.827$ mho/m; $\epsilon_r = 35.44$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.55, 4.55, 4.55); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch44/Area Scan (101x161x1): Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.270 W/kg


Ch44/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.025 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.561 mW/g

SAR(1 g) = 0.190 mW/g; SAR(10 g) = 0.061 mW/g

Maximum value of SAR (measured) = 0.349 W/kg



0 dB = 0.349 W/kg = -9.14 dB W/kg

#72_WLAN5G_802.11a_Left Cheek_Ch44**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5220$ MHz; $\sigma = 4.827$ mho/m; $\epsilon_r = 35.44$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.7°C ; Liquid Temperature : 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.55, 4.55, 4.55); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch44/Area Scan (101x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.506 W/kg



Ch44/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 3.132 V/m ; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.166 mW/g

SAR(1 g) = 0.370 mW/g ; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.690 W/kg

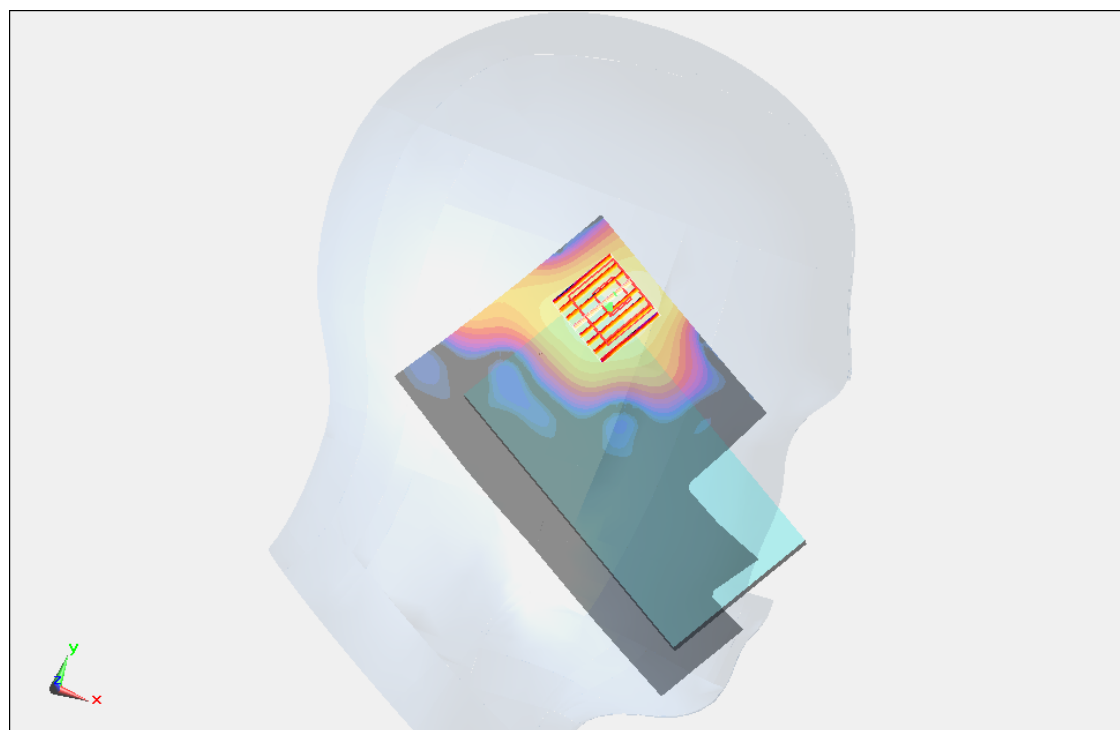

0 dB = 0.690 W/kg = -3.22 dB W/kg

#72_WLAN5G_802.11a_Left Cheek_Ch44_2D**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5220$ MHz; $\sigma = 4.827$ mho/m; $\epsilon_r = 35.44$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.7°C ; Liquid Temperature : 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.55, 4.55, 4.55); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch44/Area Scan (101x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.506 W/kg


Ch44/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 3.132 V/m ; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.166 mW/g

SAR(1 g) = 0.370 mW/g ; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.690 W/kg

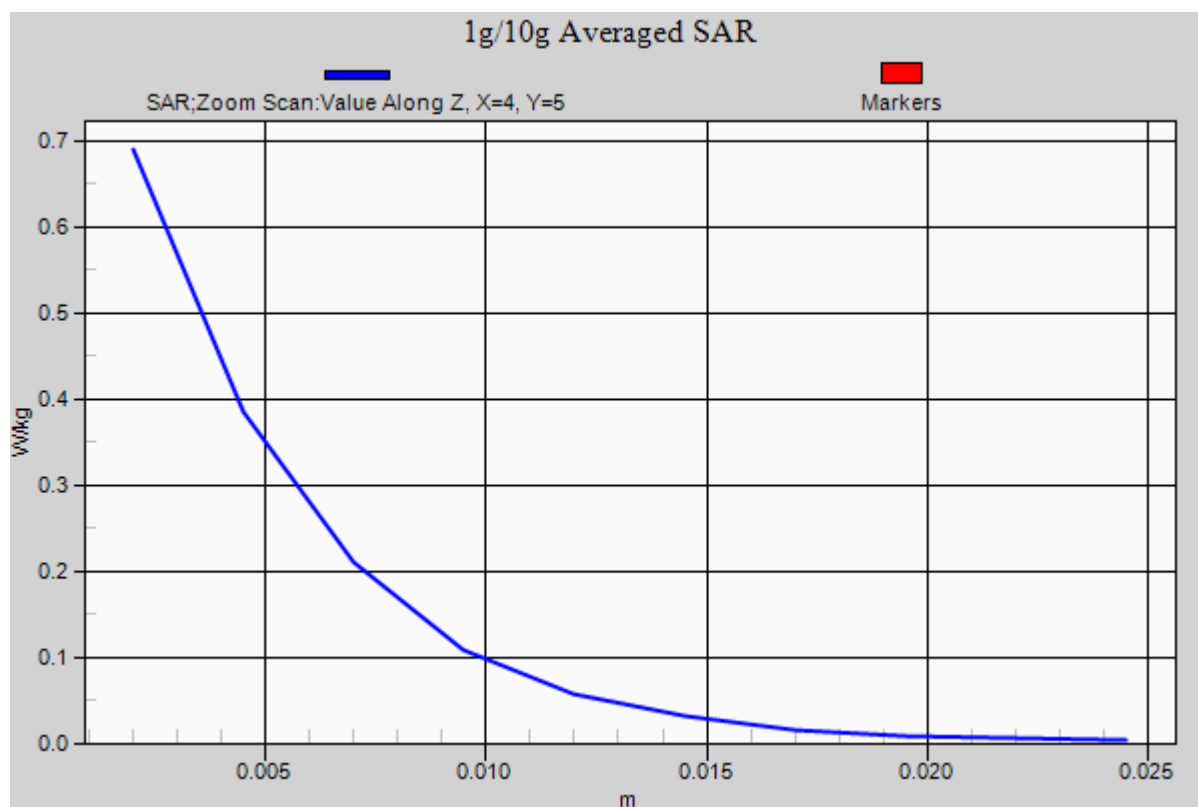

#73_WLAN5G_802.11a_Left Tilted_Ch44**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5220$ MHz; $\sigma = 4.827$ mho/m; $\epsilon_r = 35.44$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.7°C ; Liquid Temperature : 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.55, 4.55, 4.55); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch44/Area Scan (101x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.337 W/kg



Ch44/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 3.476 V/m ; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.101 mW/g

SAR(1 g) = 0.358 mW/g ; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.651 W/kg

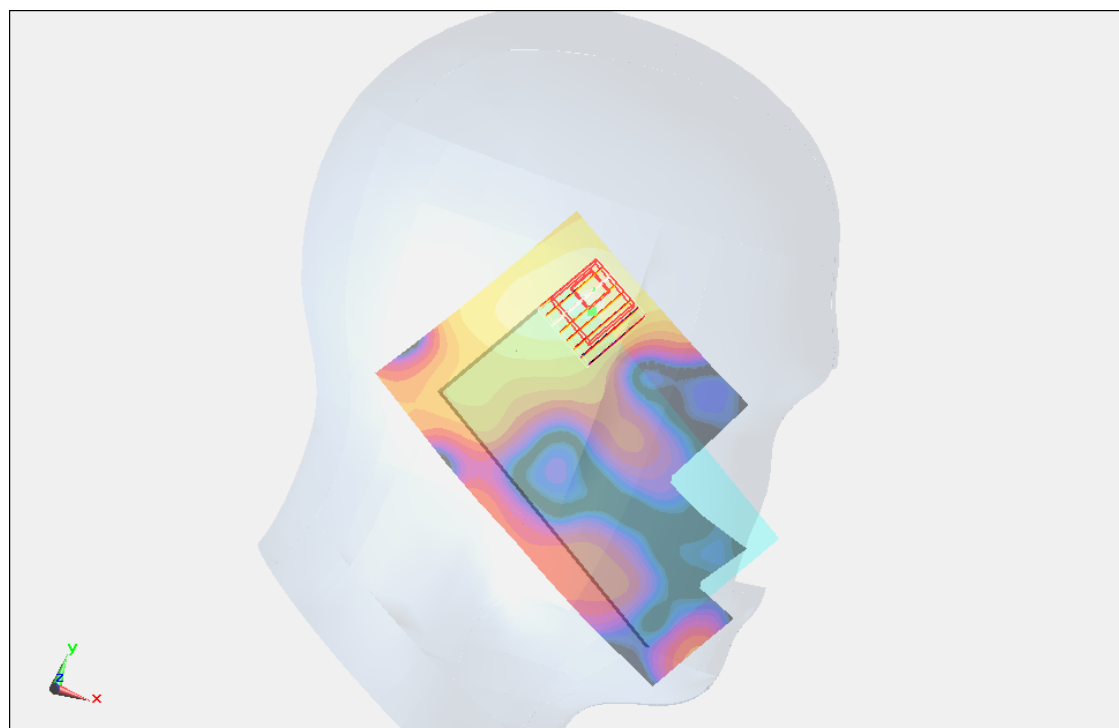

0 dB = 0.651 W/kg = -3.73 dB W/kg



#74_WLAN5G_802.11a_Right Cheek_Ch60**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.91$ mho/m; $\epsilon_r = 35.337$; $\rho =$ 1000 kg/m^3 Ambient Temperature : 22.7°C ; Liquid Temperature : 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.39, 4.39, 4.39); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

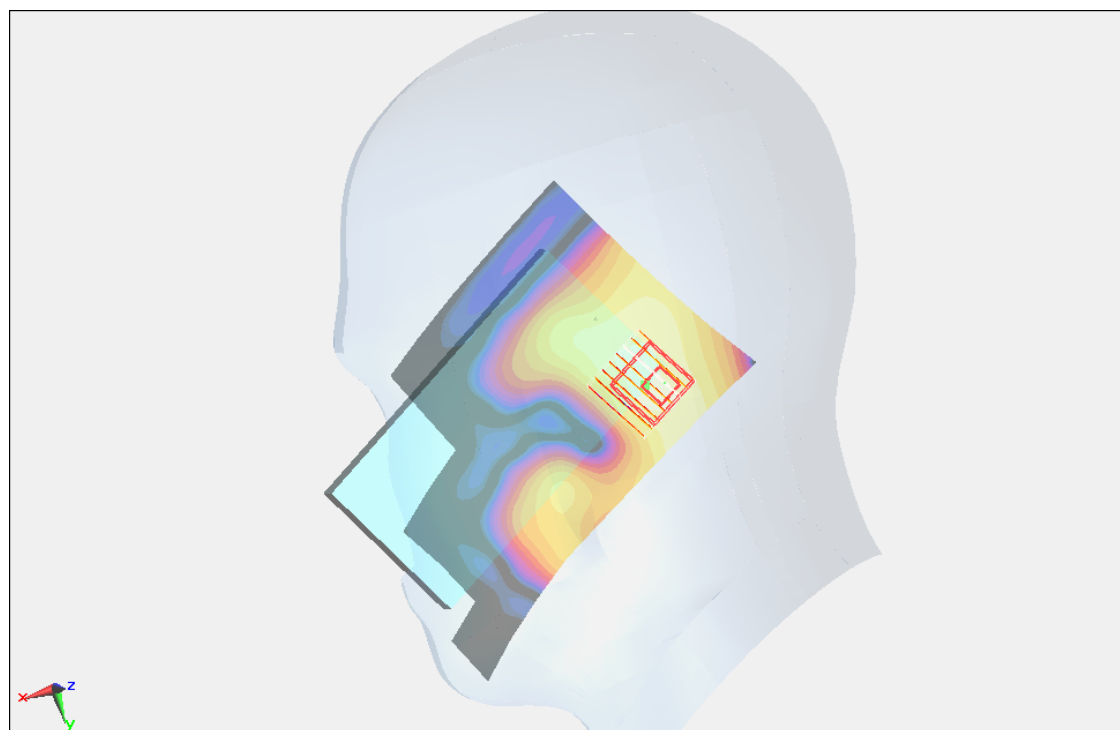Ch60/Area Scan (101x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mmMaximum value of SAR (interpolated) = 0.294 W/kg **Ch60/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mmReference Value = 1.662 V/m ; Power Drift = 0.17 dB Peak SAR (extrapolated) = 0.879 mW/g **SAR(1 g) = 0.235 mW/g ; SAR(10 g) = 0.077 mW/g** Maximum value of SAR (measured) = 0.429 W/kg  $0 \text{ dB} = 0.429 \text{ W/kg} = -7.35 \text{ dB W/kg}$



#75_WLAN5G_802.11a_Right Tilted_Ch60**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.91$ mho/m; $\epsilon_r = 35.337$; $\rho =$ 1000 kg/m^3 Ambient Temperature : 22.7°C ; Liquid Temperature : 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.39, 4.39, 4.39); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

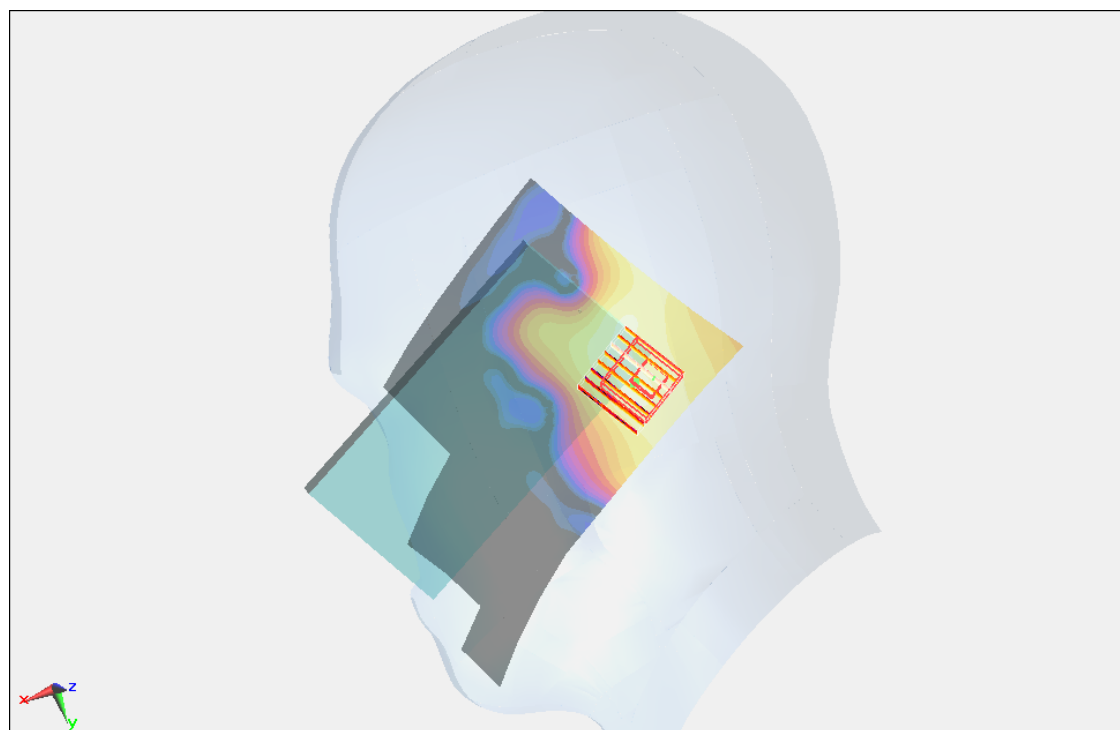Ch60/Area Scan (101x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mmMaximum value of SAR (interpolated) = 0.244 W/kg **Ch60/Zoom Scan (8x8x10)/Cube 0:** Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mmReference Value = 2.183 V/m ; Power Drift = -0.18 dB Peak SAR (extrapolated) = 0.654 mW/g **SAR(1 g) = 0.214 mW/g ; SAR(10 g) = 0.068 mW/g** Maximum value of SAR (measured) = 0.399 W/kg  $0 \text{ dB} = 0.399 \text{ W/kg} = -7.98 \text{ dB W/kg}$

#76_WLAN5G_802.11a_Left Cheek_Ch60**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.91$ mho/m; $\epsilon_r = 35.337$; $\rho =$

1000 kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.39, 4.39, 4.39); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch60/Area Scan (101x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.448 W/kg



Ch60/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 3.626 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.457 mW/g

SAR(1 g) = 0.448 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.843 W/kg

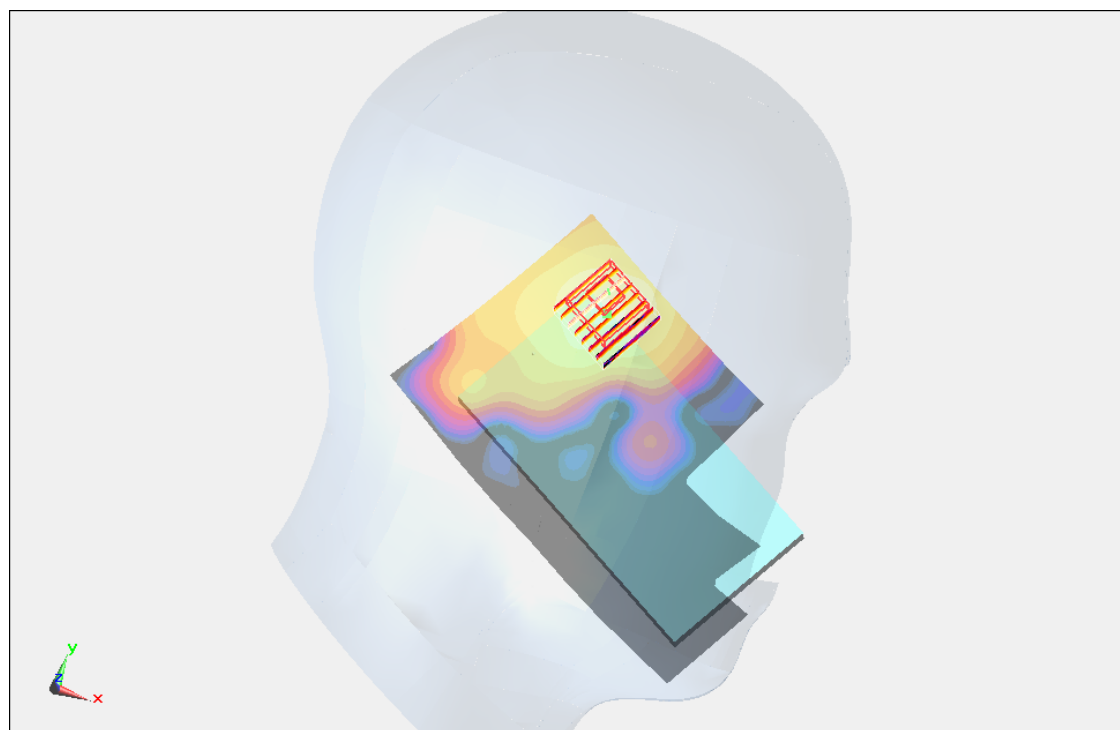

0 dB = 0.843 W/kg = -1.48 dB W/kg

#76_WLAN5G_802.11a_Left Cheek_Ch60_2D**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.91$ mho/m; $\epsilon_r = 35.337$; $\rho =$ 1000 kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.39, 4.39, 4.39); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch60/Area Scan (101x161x1): Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.448 W/kg


Ch60/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.626 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.457 mW/g

SAR(1 g) = 0.448 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.843 W/kg

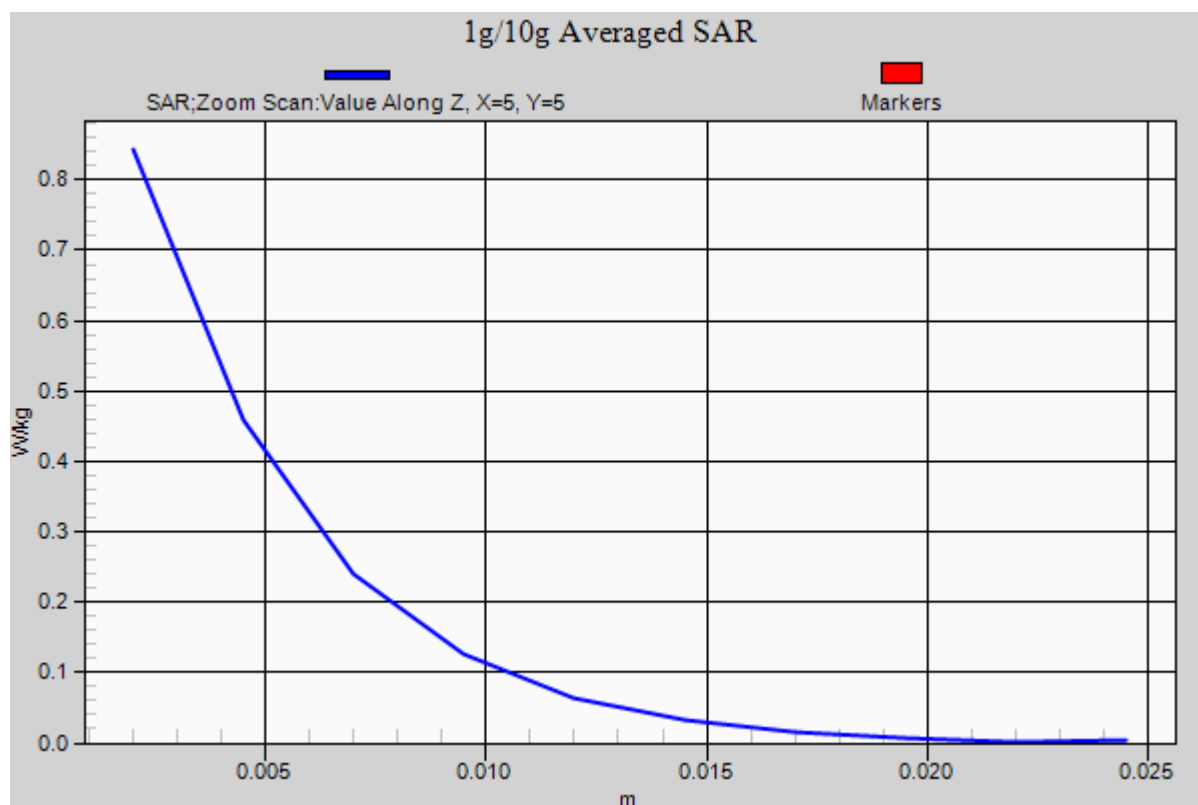

#77_WLAN5G_802.11a_Left Tilted_Ch60**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.91$ mho/m; $\epsilon_r = 35.337$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.7°C ; Liquid Temperature : 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.39, 4.39, 4.39); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch60/Area Scan (101x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.347 W/kg



Ch60/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 3.900 V/m ; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.264 mW/g

SAR(1 g) = 0.393 mW/g ; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.744 W/kg

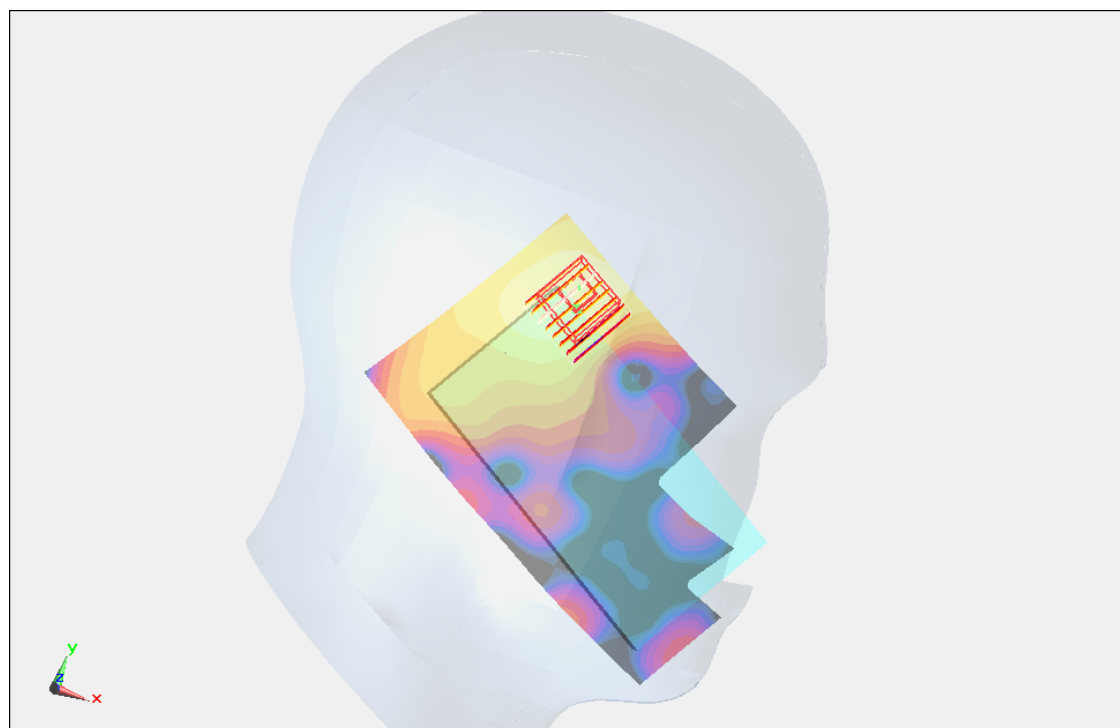

0 dB = 0.744 W/kg = -2.57 dB W/kg

#78_WLAN5G_802.11a_Right Cheek_Ch108**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.154$ mho/m; $\epsilon_r = 34.86$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.7°C ; Liquid Temperature : 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.07, 4.07, 4.07); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch108/Area Scan (101x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.182 W/kg



Ch108/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 2.757 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.336 mW/g

SAR(1 g) = 0.114 mW/g ; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.211 W/kg

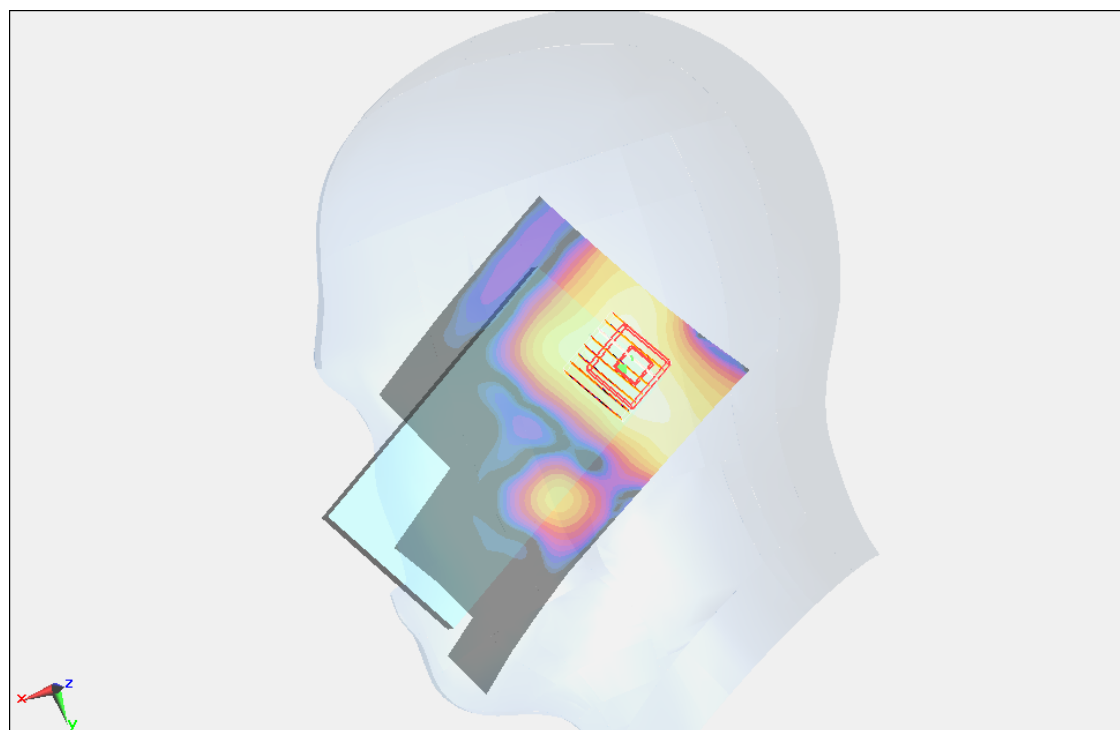

0 dB = 0.211 W/kg = -13.51 dB W/kg

#79_WLAN5G_802.11a_Right Tilted_Ch108**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.154$ mho/m; $\epsilon_r = 34.86$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.7°C ; Liquid Temperature : 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.07, 4.07, 4.07); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch108/Area Scan (101x161x1): Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 0.177 W/kg



Ch108/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.883 V/m ; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.738 mW/g

SAR(1 g) = 0.111 mW/g ; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.204 W/kg

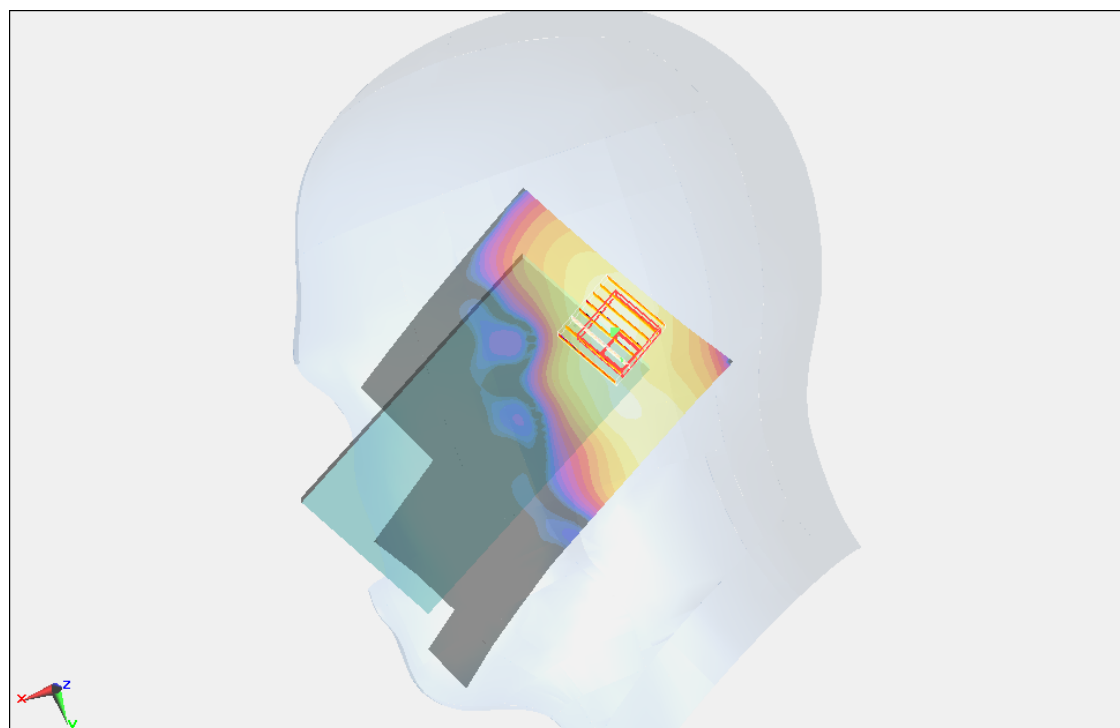

0 dB = 0.204 W/kg = -13.81 dB W/kg

#80_WLAN5G_802.11a_Left Cheek_Ch108**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.154$ mho/m; $\epsilon_r = 34.86$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.7°C ; Liquid Temperature : 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.07, 4.07, 4.07); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch108/Area Scan (101x161x1): Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 0.373 W/kg



Ch108/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 2.456 V/m ; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.714 mW/g

SAR(1 g) = 0.195 mW/g ; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.417 W/kg

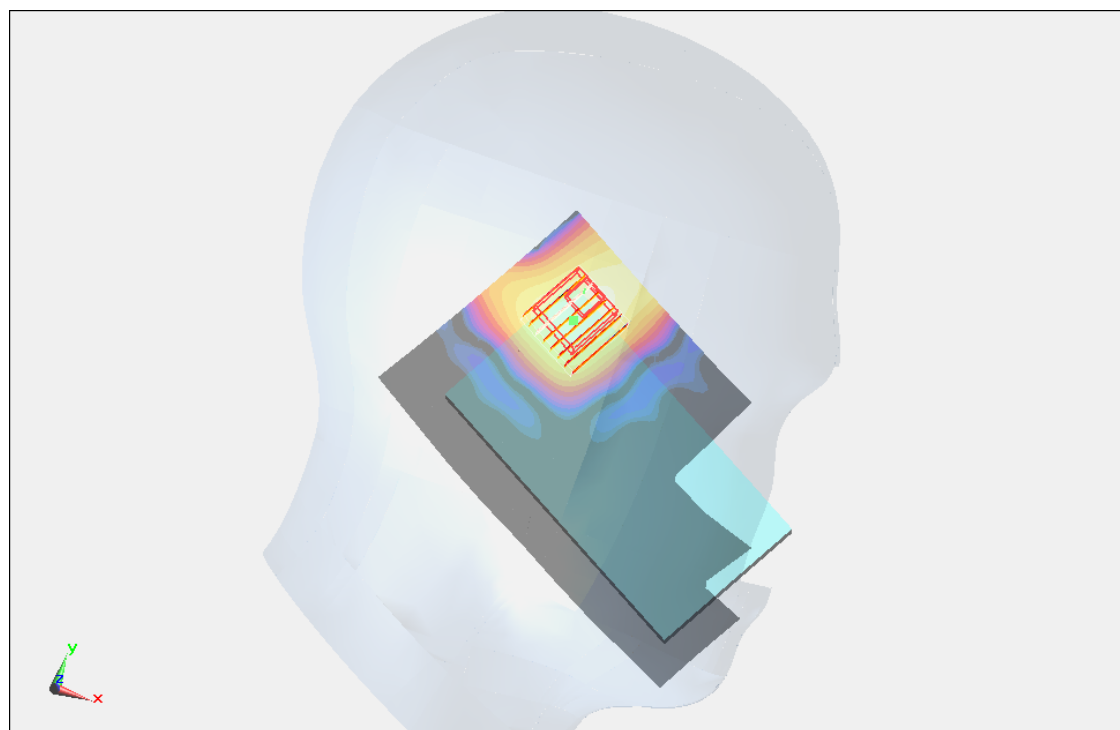

0 dB = 0.417 W/kg = -7.60 dB W/kg

#80_WLAN5G_802.11a_Left Cheek_Ch108_2D**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.154$ mho/m; $\epsilon_r = 34.86$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.7°C ; Liquid Temperature : 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.07, 4.07, 4.07); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch108/Area Scan (101x161x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.373 W/kg


Ch108/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2.5$ mm

Reference Value = 2.456 V/m ; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.714 mW/g

SAR(1 g) = 0.195 mW/g ; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.417 W/kg

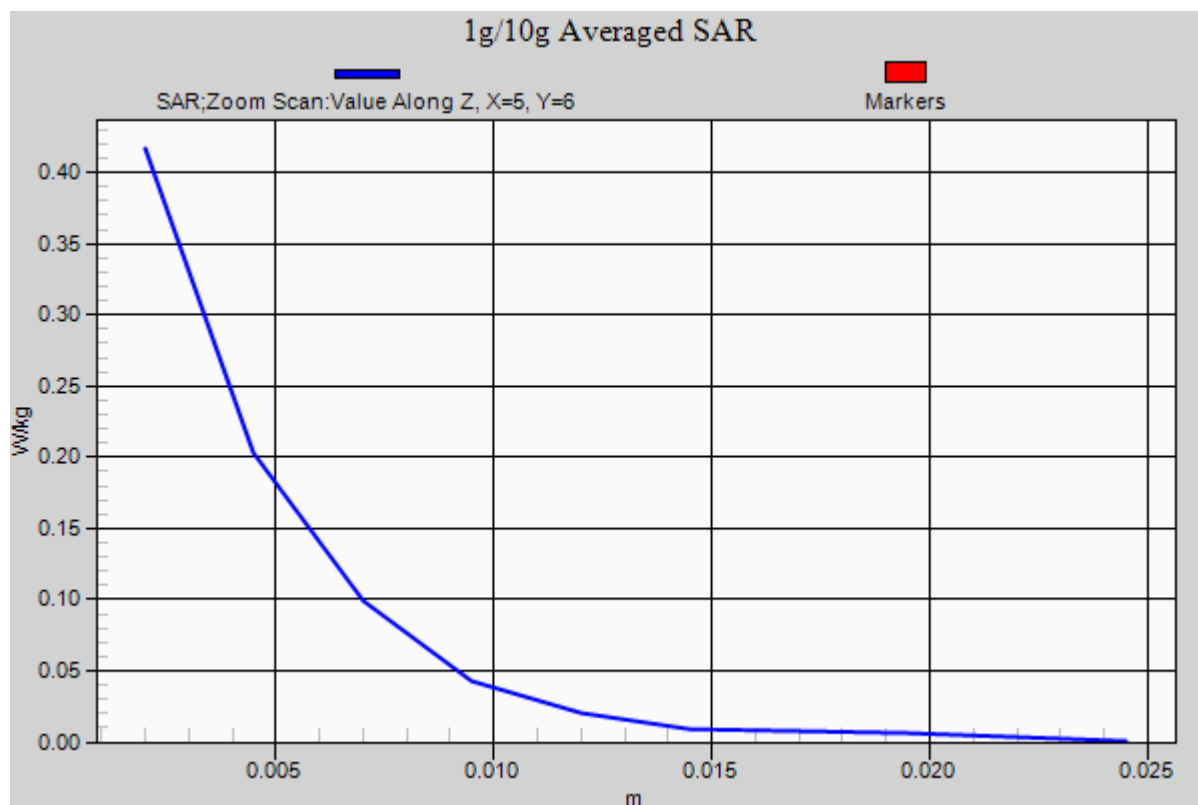

#81_WLAN5G_802.11a_Left Tilted_Ch108**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.154$ mho/m; $\epsilon_r = 34.86$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.7°C ; Liquid Temperature : 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.07, 4.07, 4.07); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch108/Area Scan (101x161x1): Measurement grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 0.306 W/kg



Ch108/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 3.053 V/m ; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.045 mW/g

SAR(1 g) = 0.148 mW/g ; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.323 W/kg

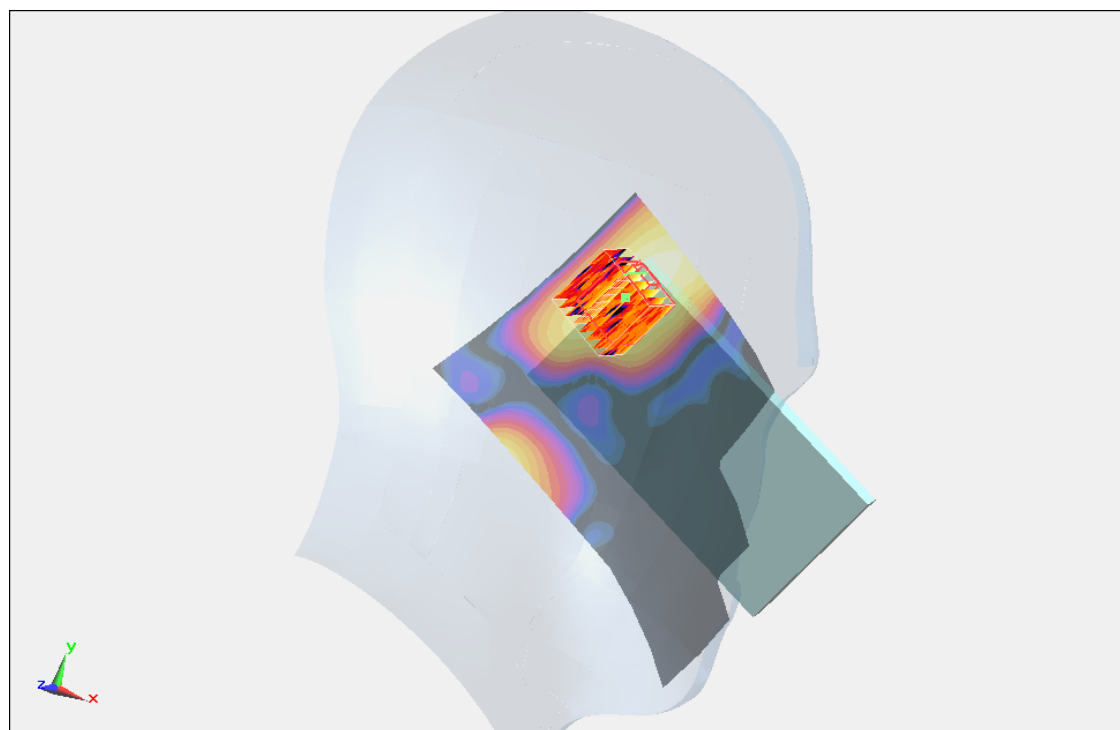

0 dB = 0.323 W/kg = -9.82 dB W/kg

#82_WLAN5G_802.11a_Right Cheek_Ch149**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.369$ mho/m; $\epsilon_r = 34.496$; $\rho =$ 1000 kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.72, 3.72, 3.72); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch149/Area Scan (101x161x1): Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0185 W/kg



Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.149 mW/g

SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00352 mW/g

Maximum value of SAR (measured) = 0.0263 W/kg

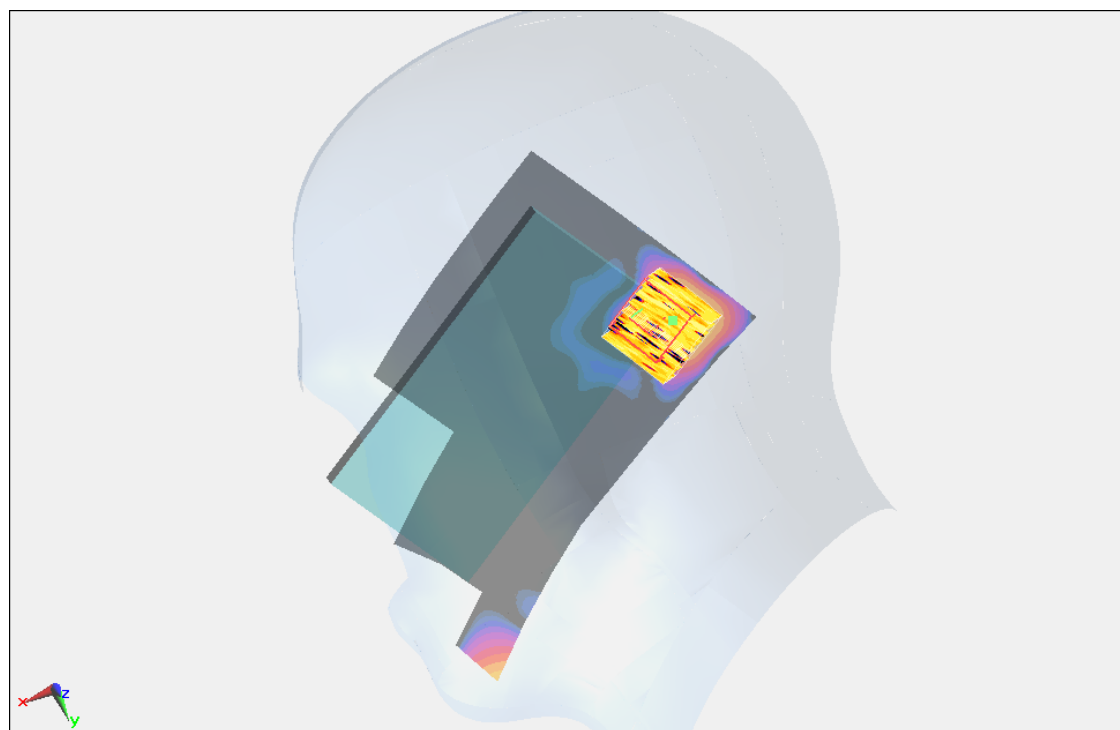

0 dB = 0.0263 W/kg = -31.60 dB W/kg

#83_WLAN5G_802.11a_Right Tilted_Ch149**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.369$ mho/m; $\epsilon_r = 34.496$; $\rho =$

1000 kg/m^3

Ambient Temperature : 22.7°C ; Liquid Temperature : 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.72, 3.72, 3.72); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch149/Area Scan (101x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.0176 W/kg


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.141 mW/g

SAR(1 g) = 0.0106 mW/g ; SAR(10 g) = 0.00333 mW/g

Maximum value of SAR (measured) = 0.0249 W/kg



$0 \text{ dB} = 0.0249 \text{ W/kg} = -32.08 \text{ dB W/kg}$

#84_WLAN5G_802.11a_Left Cheek_Ch149**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.369$ mho/m; $\epsilon_r = 34.496$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C ; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.72, 3.72, 3.72); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch149/Area Scan (101x161x1): Measurement grid: dx=10 mm, dy=10 mm
Maximum value of SAR (interpolated) = 0.0326 W/kg

Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 0 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.113 mW/g
SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.0058 mW/g
Maximum value of SAR (measured) = 0.0602 W/kg



0 dB = 0.0602 W/kg = -24.41 dB W/kg

#84_WLAN5G_802.11a_Left Cheek_Ch149_2D**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.369$ mho/m; $\epsilon_r = 34.496$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.72, 3.72, 3.72); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch149/Area Scan (101x161x1): Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0326 W/kg


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.113 mW/g

SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.0058 mW/g

Maximum value of SAR (measured) = 0.0602 W/kg

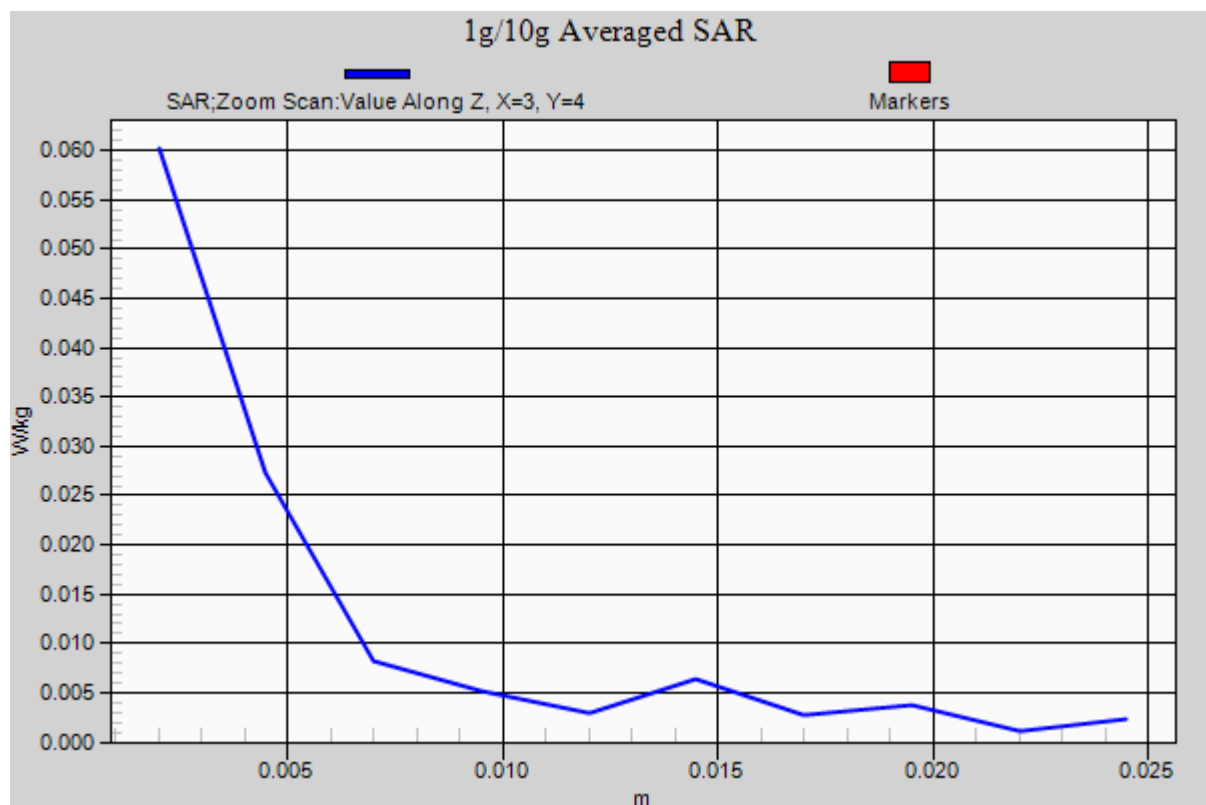

#85_WLAN5G_802.11a_Left Tilted_Ch149**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: HSL_5G_121011 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.369$ mho/m; $\epsilon_r = 34.496$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.72, 3.72, 3.72); Calibrated: 2012/6/21;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Right; Type: QD000P40CD; Serial: TP:1644
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch149/Area Scan (101x161x1): Measurement grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0192 W/kg

Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.186 mW/g

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00325 mW/g

Maximum value of SAR (measured) = 0.0518 W/kg



#34_GSM850_GPRS (2 Tx slots)_Front_1cm_Ch251**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_121009 Medium parameters used: $f = 849$ MHz; $\sigma = 0.975$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.706 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 0.663 mW/g; SAR(10 g) = 0.450 mW/g

Maximum value of SAR (measured) = 0.708 mW/g

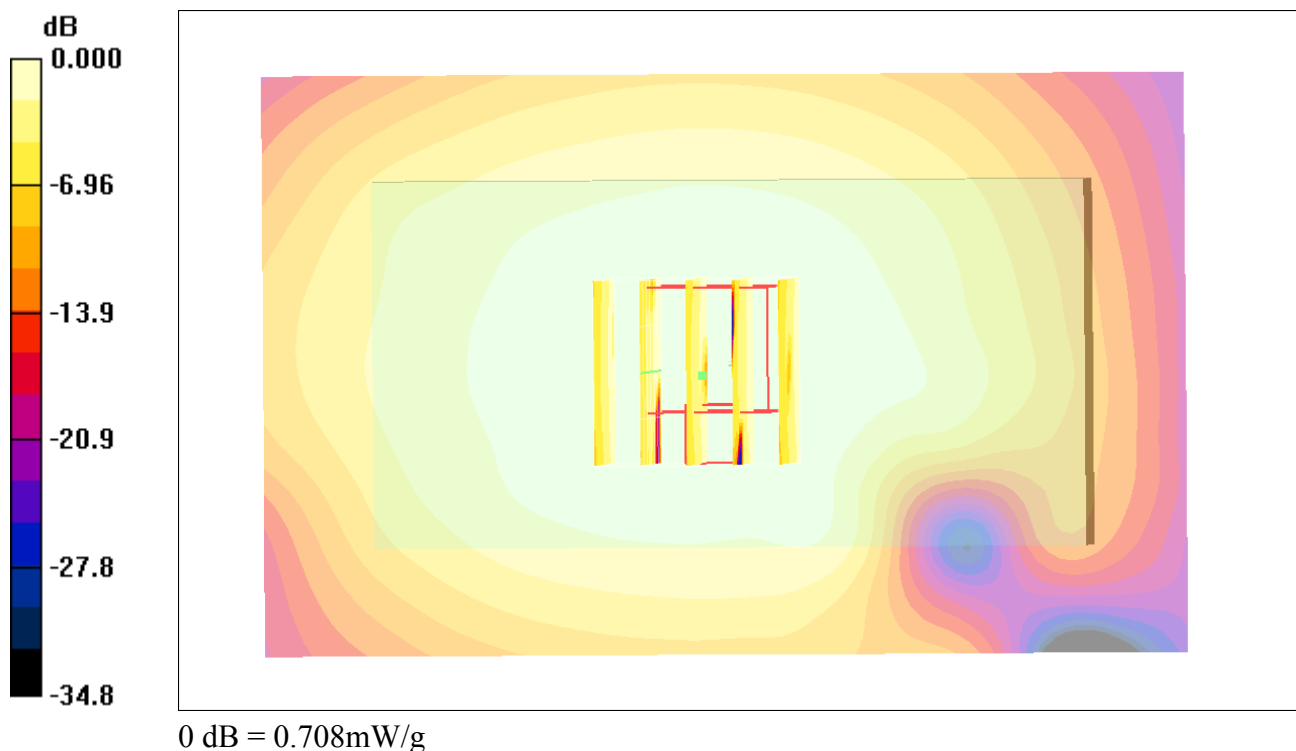

#35_GSM850_GPRS (2 Tx slots)_Back_1cm_Ch251**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_121009 Medium parameters used: $f = 849$ MHz; $\sigma = 0.975$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.721 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.845 W/kg

SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.538 mW/g

Maximum value of SAR (measured) = 0.726 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.459 mW/g; SAR(10 g) = 0.311 mW/g

Maximum value of SAR (measured) = 0.553 mW/g

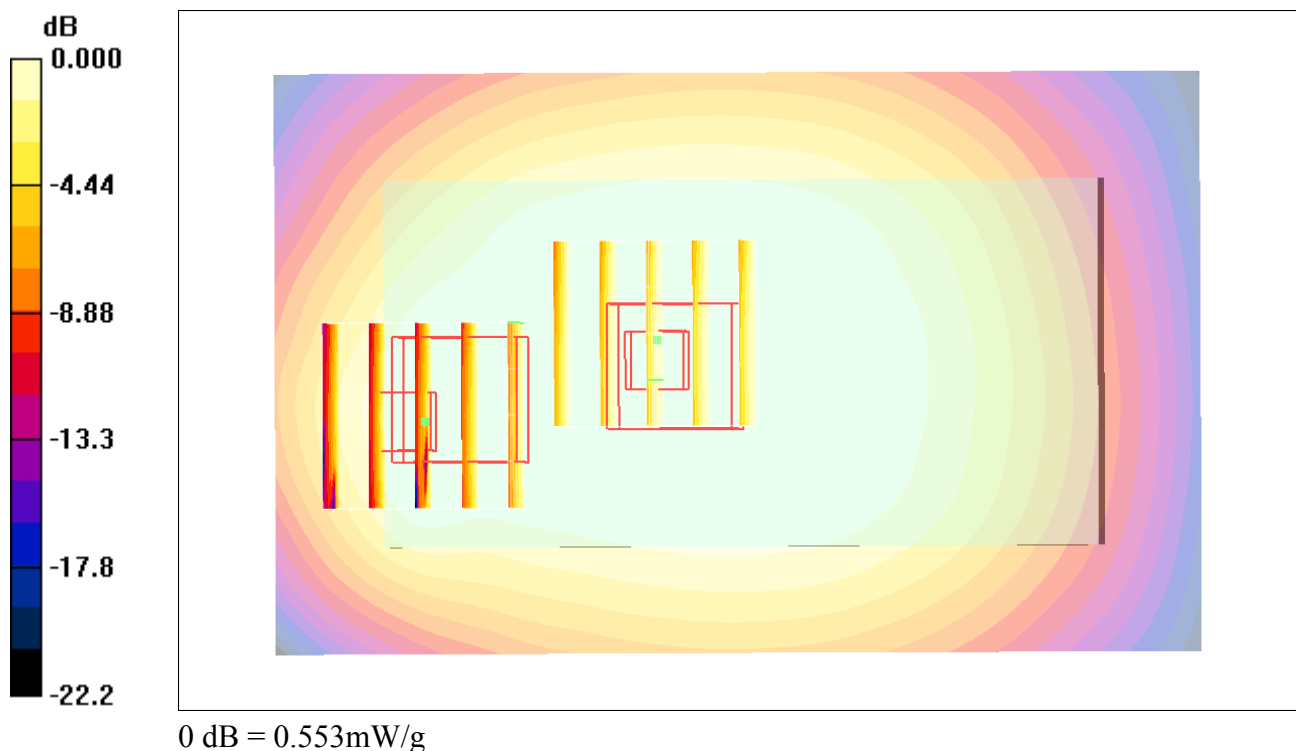

#35_GSM850_GPRS (2 Tx slots)_Back_1cm_Ch251_2D**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_121009 Medium parameters used: $f = 849$ MHz; $\sigma = 0.975$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.721 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.845 W/kg

SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.538 mW/g

Maximum value of SAR (measured) = 0.726 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.459 mW/g; SAR(10 g) = 0.311 mW/g

Maximum value of SAR (measured) = 0.553 mW/g

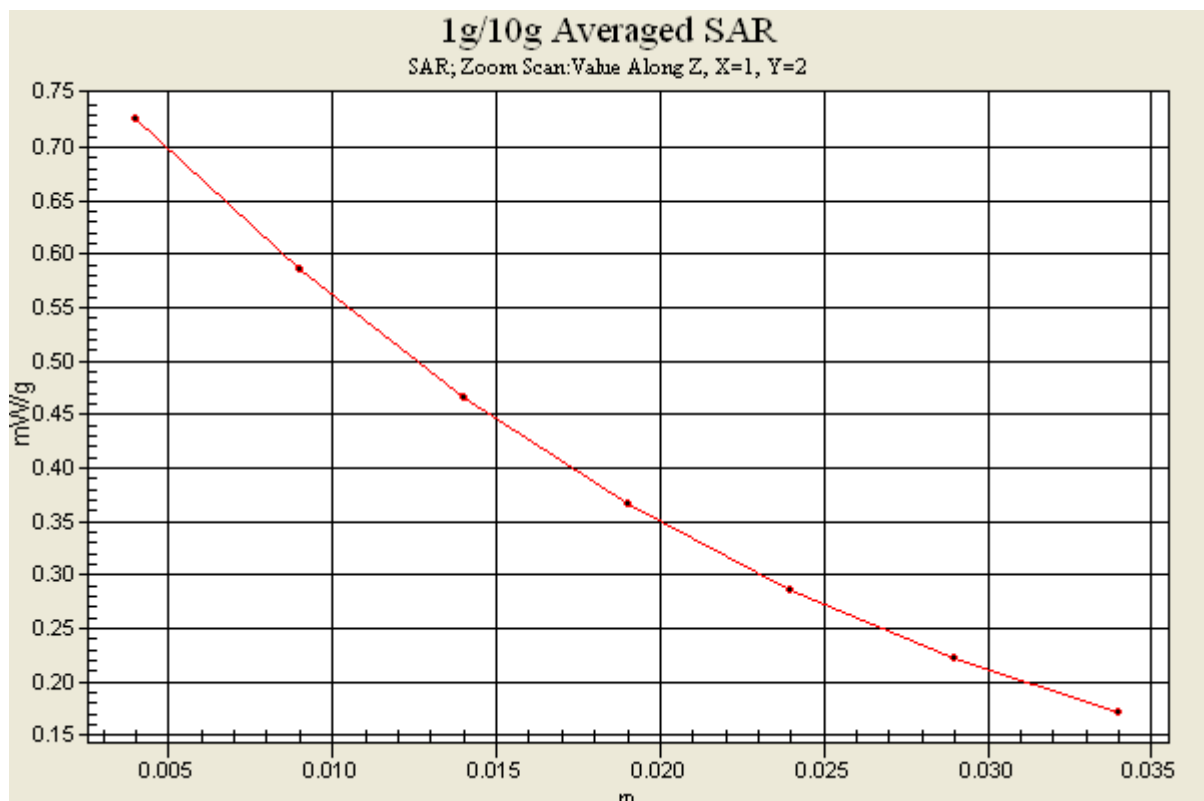

#36_GSM850_GPRS (2 Tx slots)_Left Side_1cm_Ch251**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_121009 Medium parameters used: $f = 849$ MHz; $\sigma = 0.975$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.677 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 0.848 W/kg

SAR(1 g) = 0.630 mW/g; SAR(10 g) = 0.440 mW/g

Maximum value of SAR (measured) = 0.671 mW/g

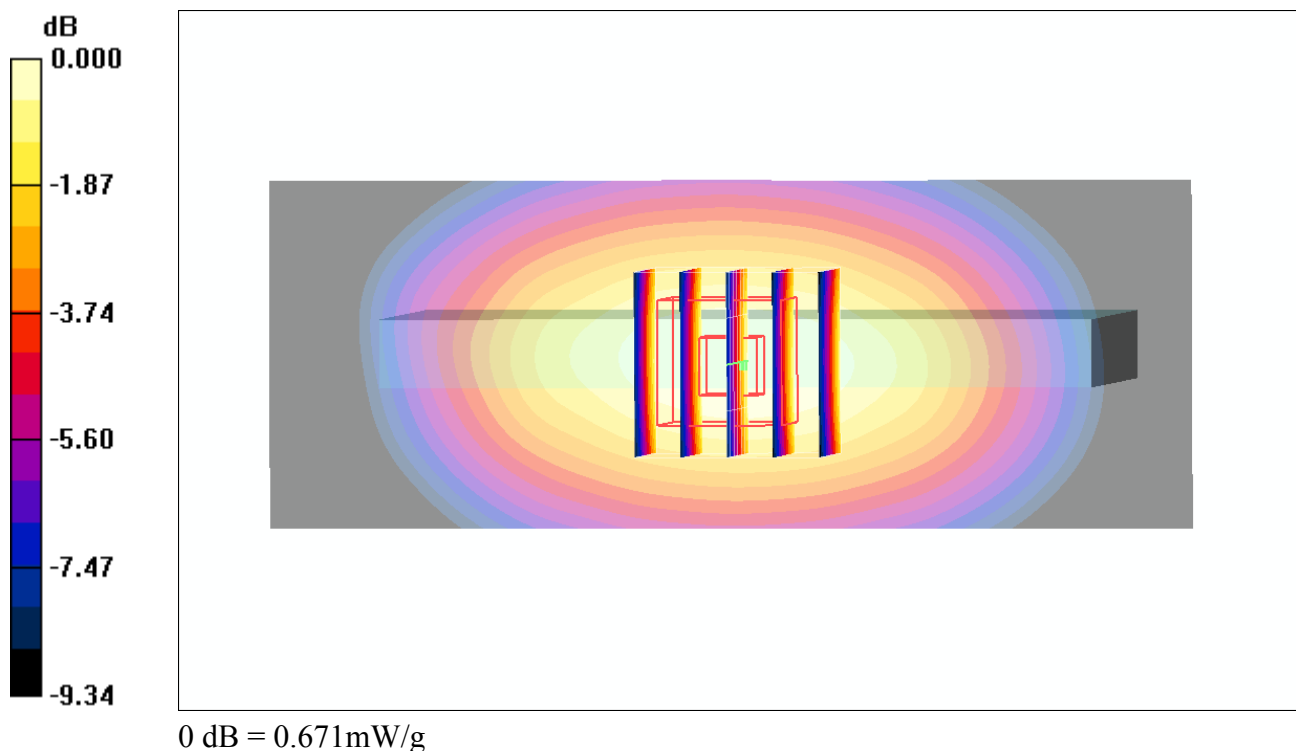

#37_GSM850_GPRS (2 Tx slots)_Right Side_1cm_Ch251**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_121009 Medium parameters used: $f = 849$ MHz; $\sigma = 0.975$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.606 mW/g



Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.0 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.775 W/kg

SAR(1 g) = 0.571 mW/g; SAR(10 g) = 0.397 mW/g

Maximum value of SAR (measured) = 0.612 mW/g

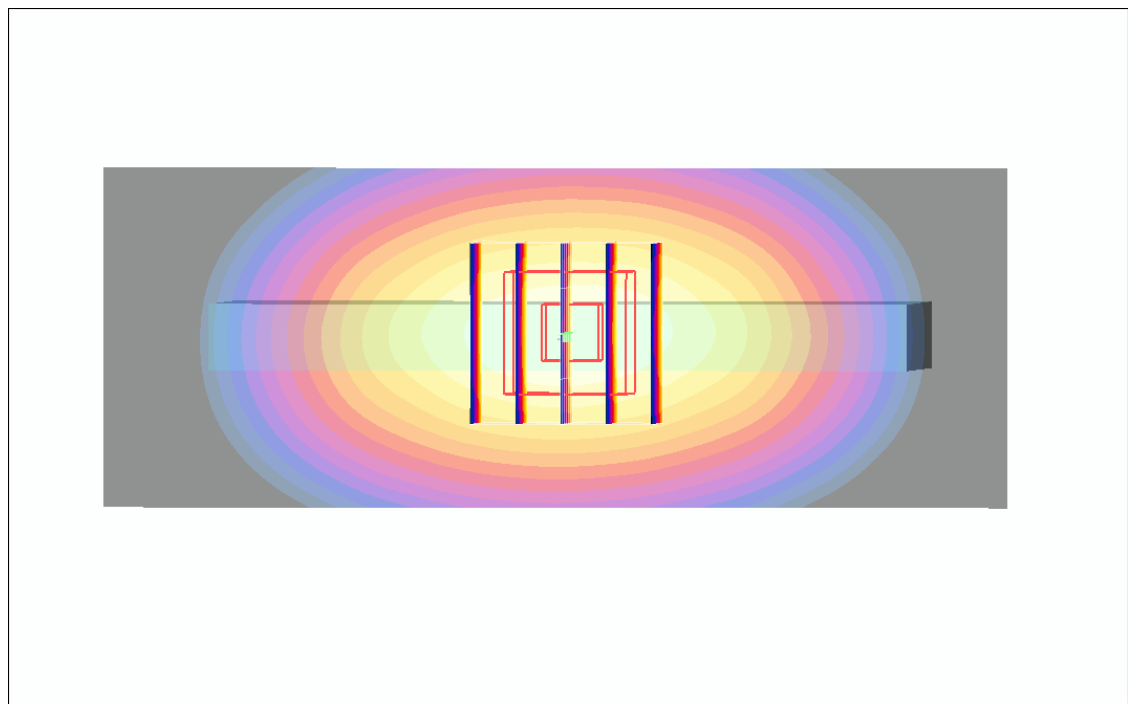

0 dB = 0.612mW/g

#38_GSM850_GPRS (2 Tx slots)_Top Side_1cm_Ch251**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_121009 Medium parameters used: $f = 849$ MHz; $\sigma = 0.975$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (31x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.027 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.68 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.042 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.027 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.68 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.032 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.021 mW/g

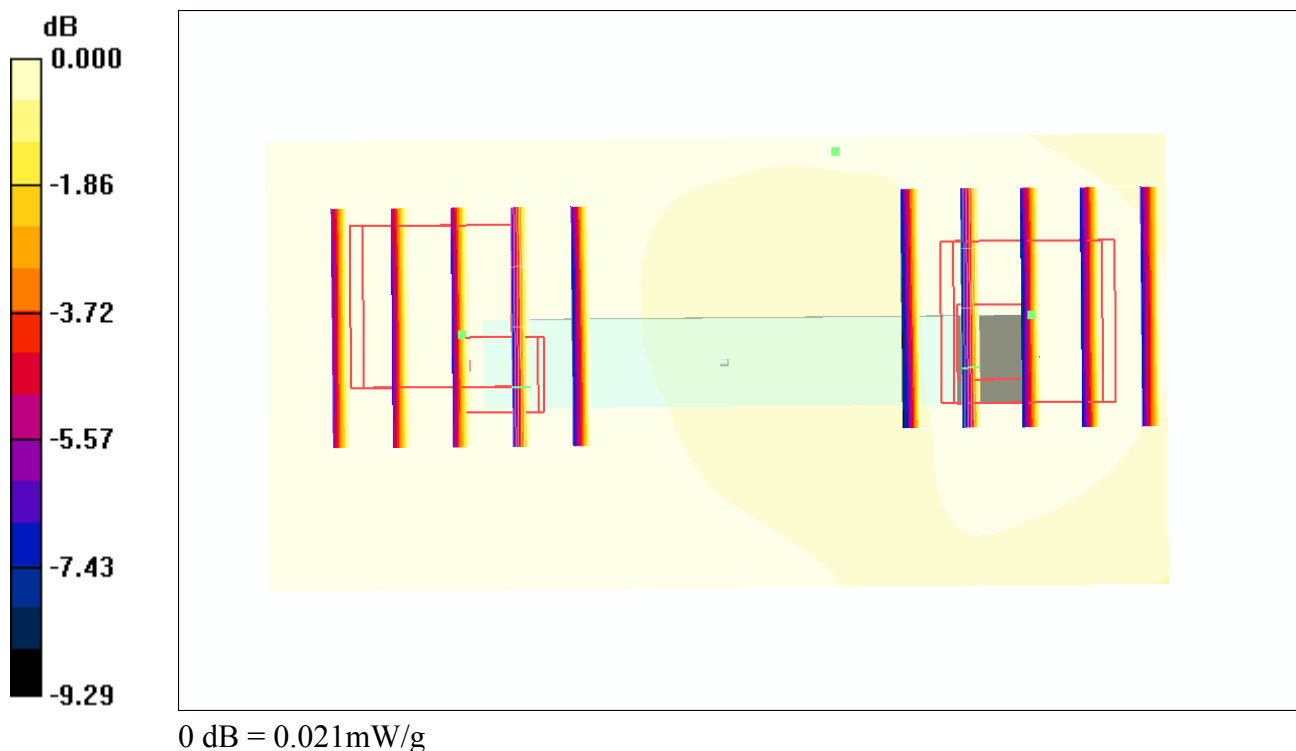

#39_GSM850_GPRS (2 Tx slots)_Bottom Side_1cm_Ch251**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_121009 Medium parameters used: $f = 849$ MHz; $\sigma = 0.975$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (31x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.251 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = 0.180 dB

Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.210 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.232 mW/g

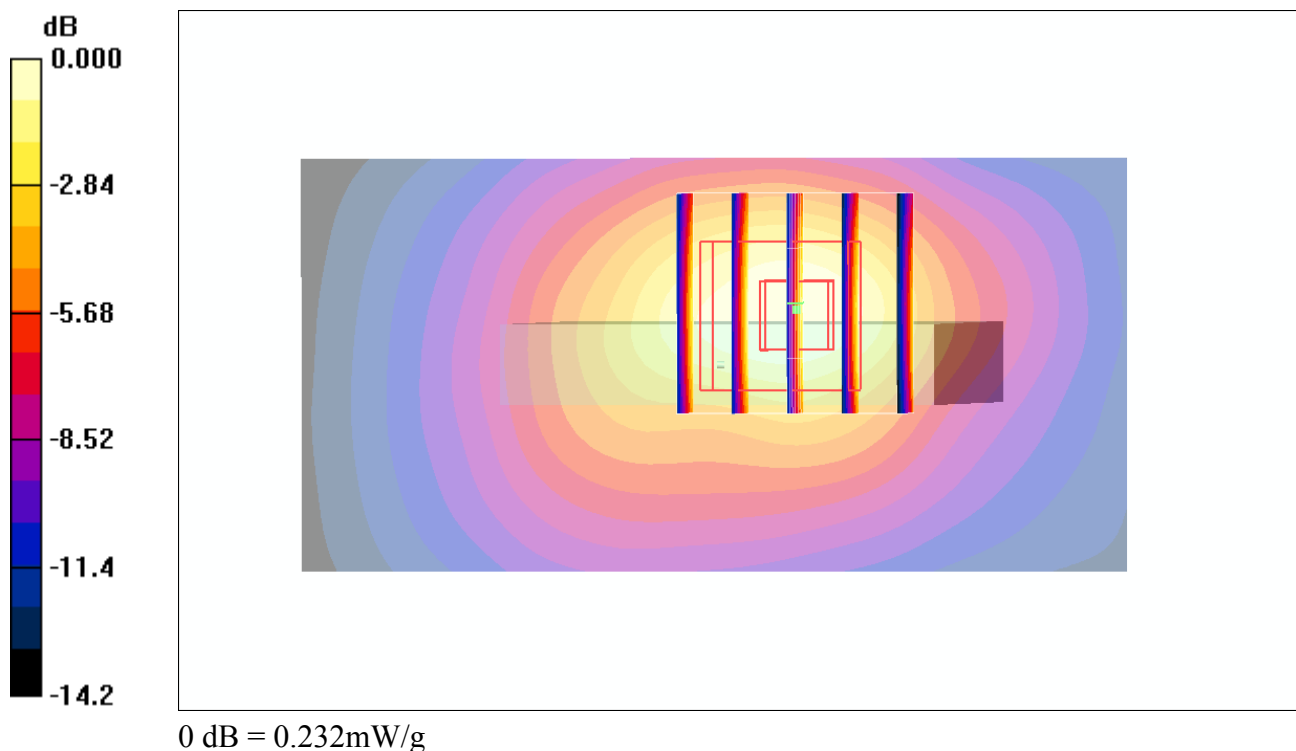

#34_GSM850_GPRS (2 Tx slots)_Front_1cm_Ch251**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_121009 Medium parameters used: $f = 849$ MHz; $\sigma = 0.975$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.706 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 0.663 mW/g; SAR(10 g) = 0.450 mW/g

Maximum value of SAR (measured) = 0.708 mW/g

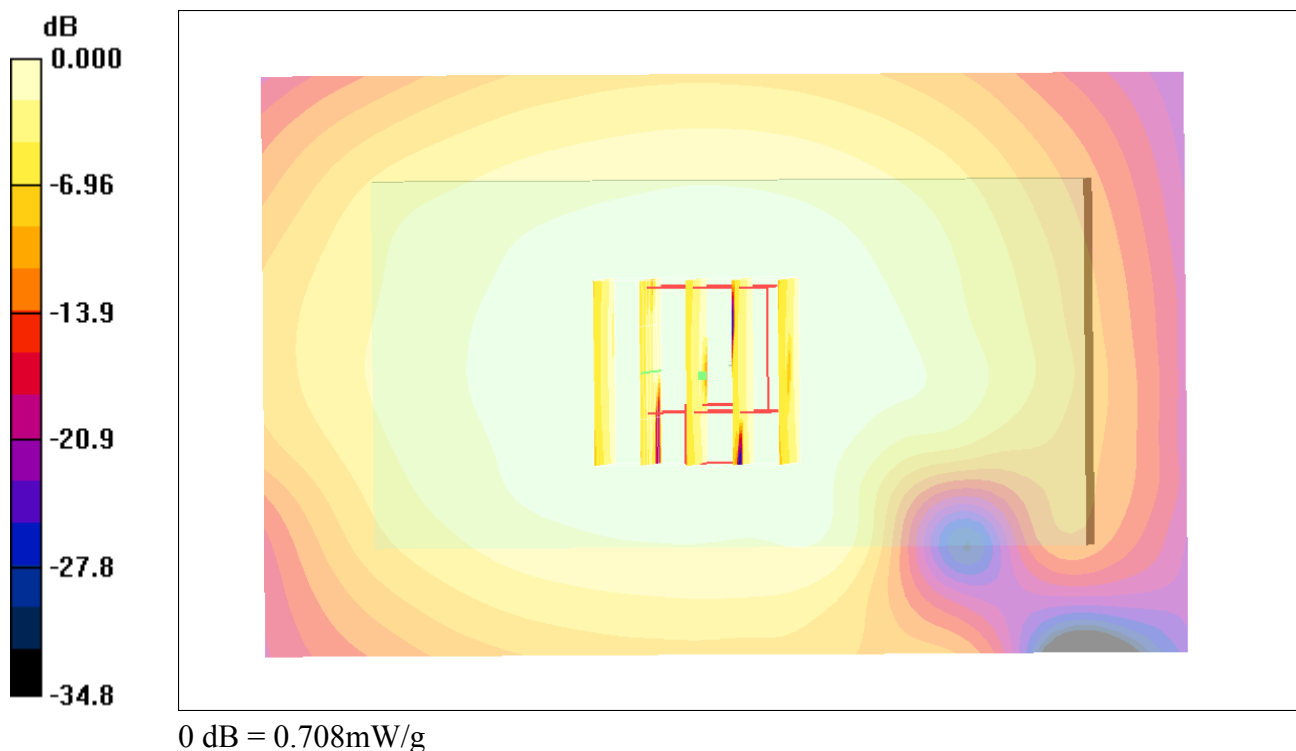

#35_GSM850_GPRS (2 Tx slots)_Back_1cm_Ch251**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850_121009 Medium parameters used: $f = 849$ MHz; $\sigma = 0.975$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.721 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.845 W/kg

SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.538 mW/g

Maximum value of SAR (measured) = 0.726 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.459 mW/g; SAR(10 g) = 0.311 mW/g

Maximum value of SAR (measured) = 0.553 mW/g

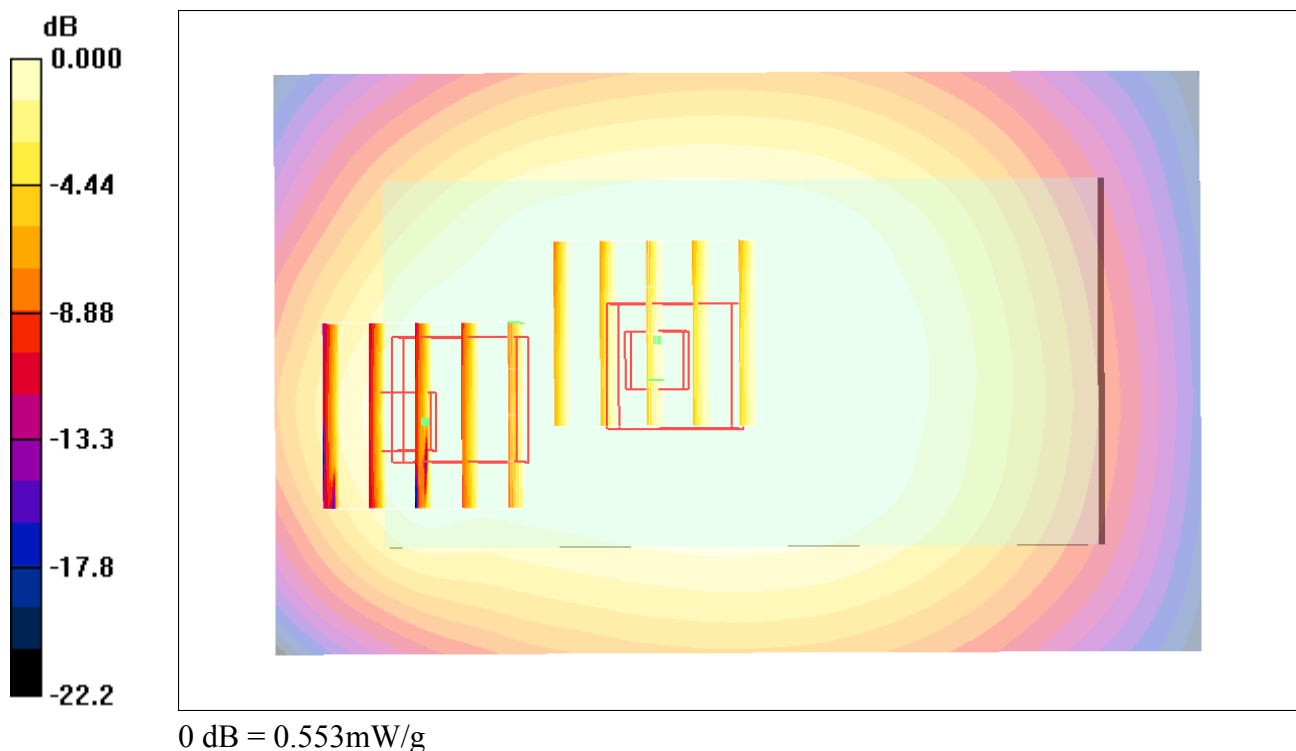

#40_GSM850_GSM Voice_Back_1cm_Ch251;Headset**DUT: 232306-04**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_850_121009 Medium parameters used: $f = 849$ MHz; $\sigma = 0.975$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch251/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.728 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.6 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.960 W/kg

SAR(1 g) = 0.555 mW/g; SAR(10 g) = 0.338 mW/g

Maximum value of SAR (measured) = 0.583 mW/g



Ch251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.6 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.764 W/kg

SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.409 mW/g

Maximum value of SAR (measured) = 0.577 mW/g

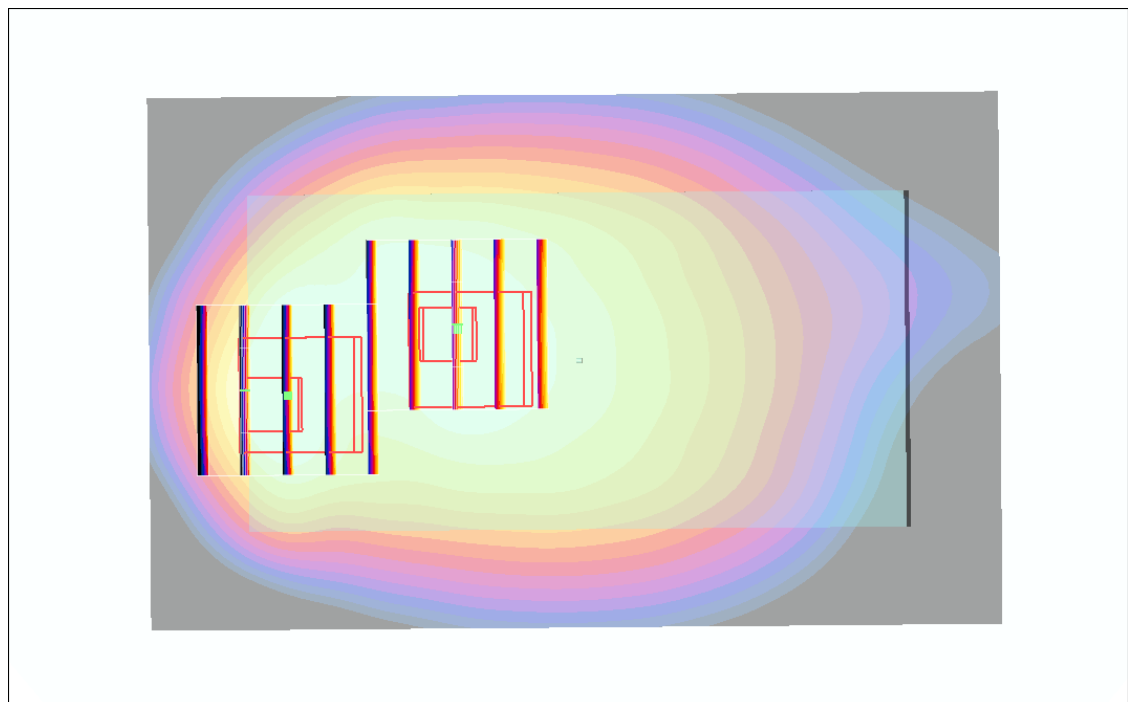

0 dB = 0.577mW/g

#18_GSM1900_GPRS (2 Tx slots)_Front_1cm_Ch810**DUT: 232306-04**

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: MSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.389 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.15 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.347 mW/g

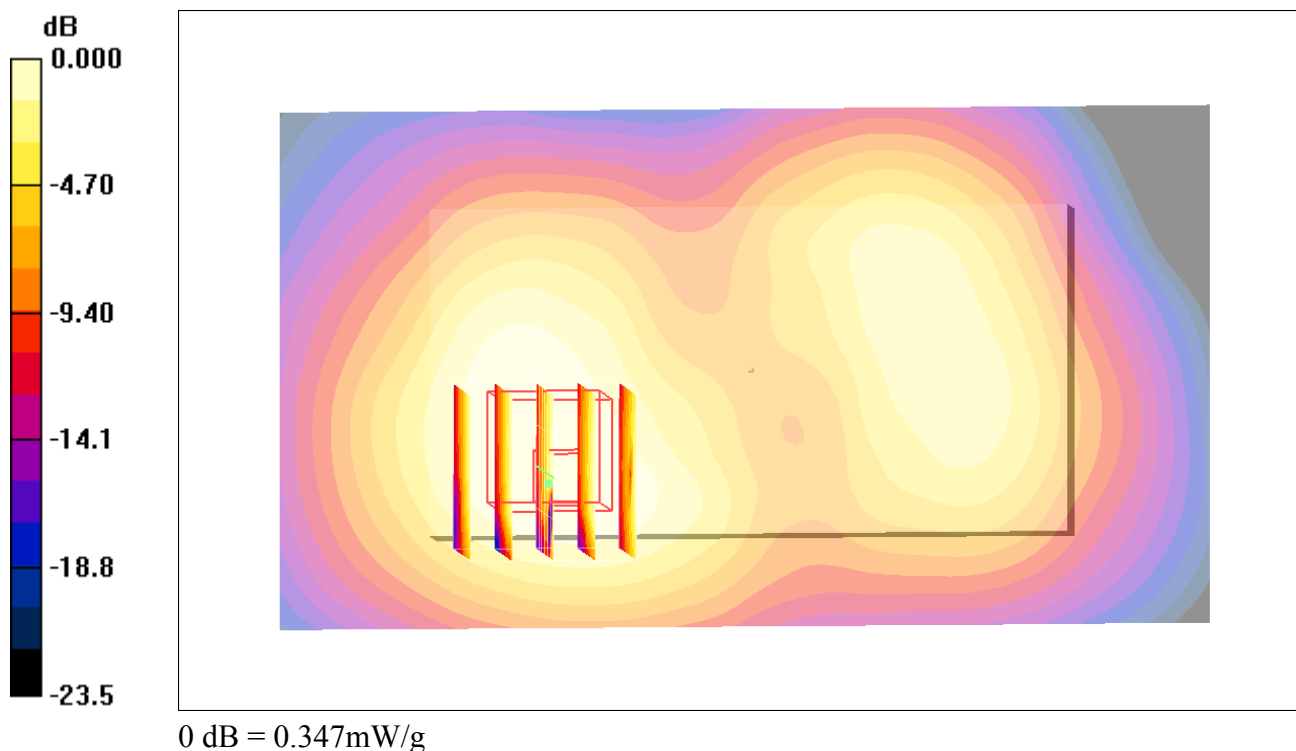

#19_GSM1900_GPRS (2 Tx slots)_Back_1cm_Ch810**DUT: 232306-04**

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: MSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.453 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.01 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.400 mW/g; SAR(10 g) = 0.244 mW/g

Maximum value of SAR (measured) = 0.435 mW/g

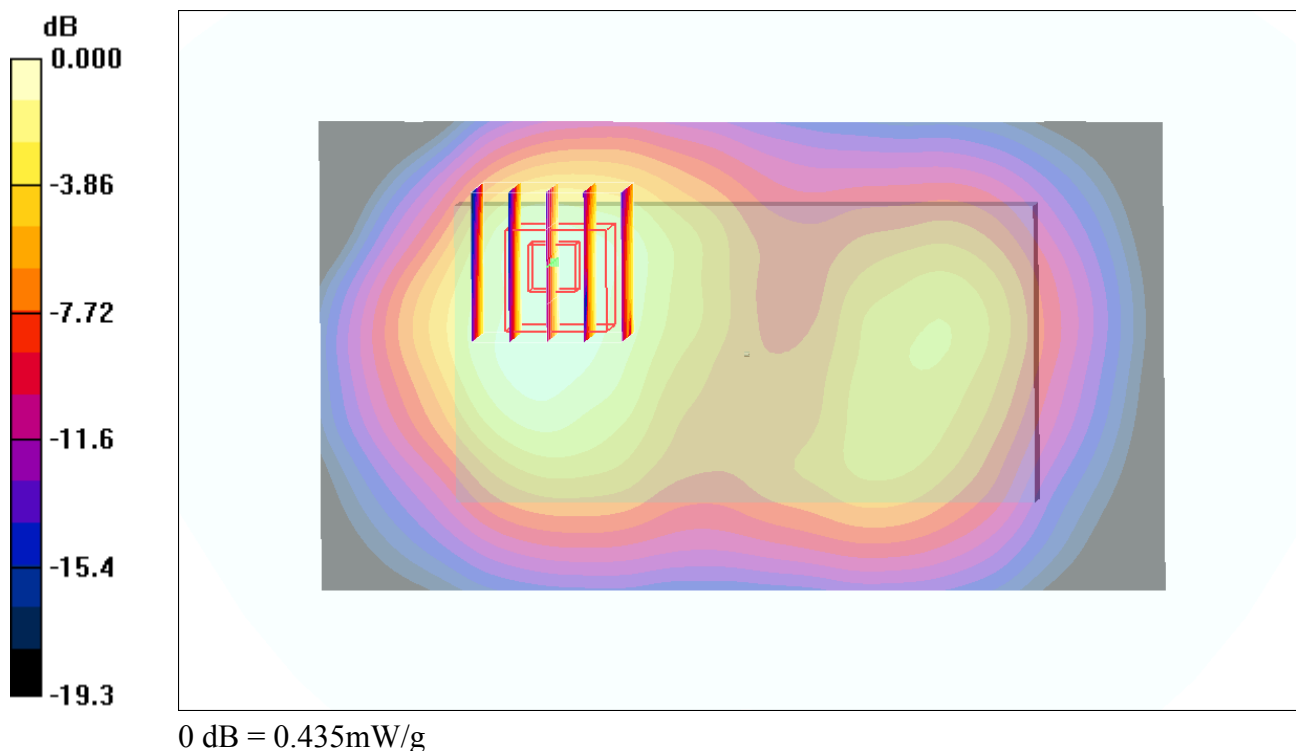

#20_GSM1900_GPRS (2 Tx slots)_Left Side_1cm_Ch810**DUT: 232306-04**

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: MSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (31x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.096 mW/g

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.10 V/m; Power Drift = 0.176 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.097 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.10 V/m; Power Drift = 0.176 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.079 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.086 mW/g

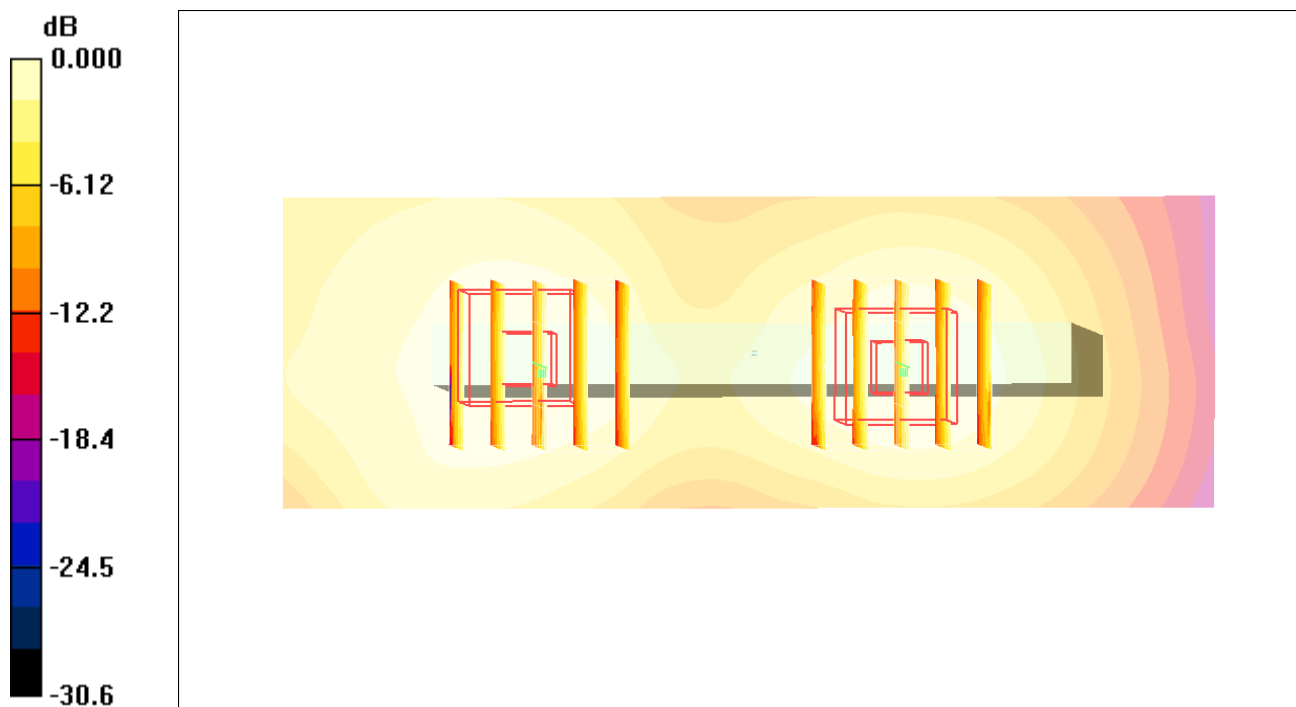

0 dB = 0.086mW/g

#21_GSM1900_GPRS (2 Tx slots)_Right Side_1cm_Ch810**DUT: 232306-04**

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: MSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (31x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.307 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.83 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.282 mW/g

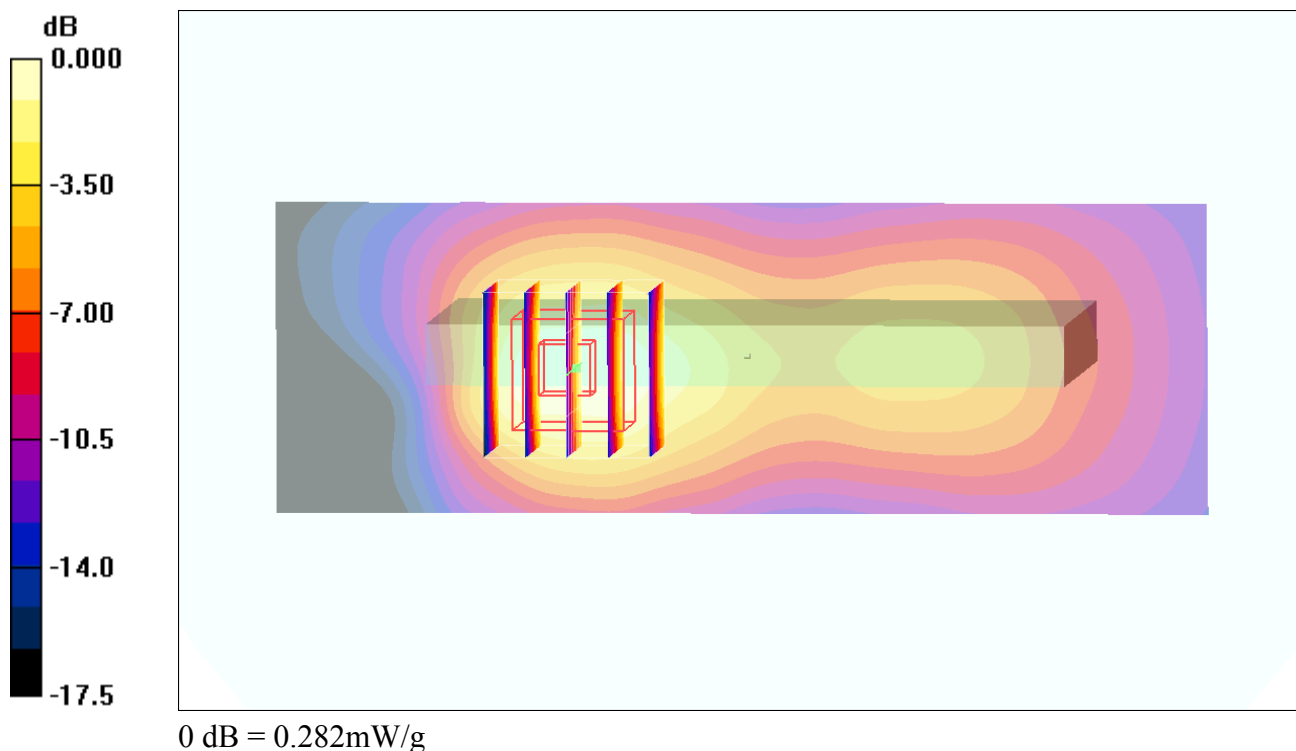

#22_GSM1900_GPRS (2 Tx slots)_Top Side_1cm_Ch810**DUT: 232306-04**

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: MSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (31x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.045 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.10 V/m; Power Drift = 0.153 dB

Peak SAR (extrapolated) = 0.087 W/kg

SAR(1 g) = 0.044 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.047 mW/g

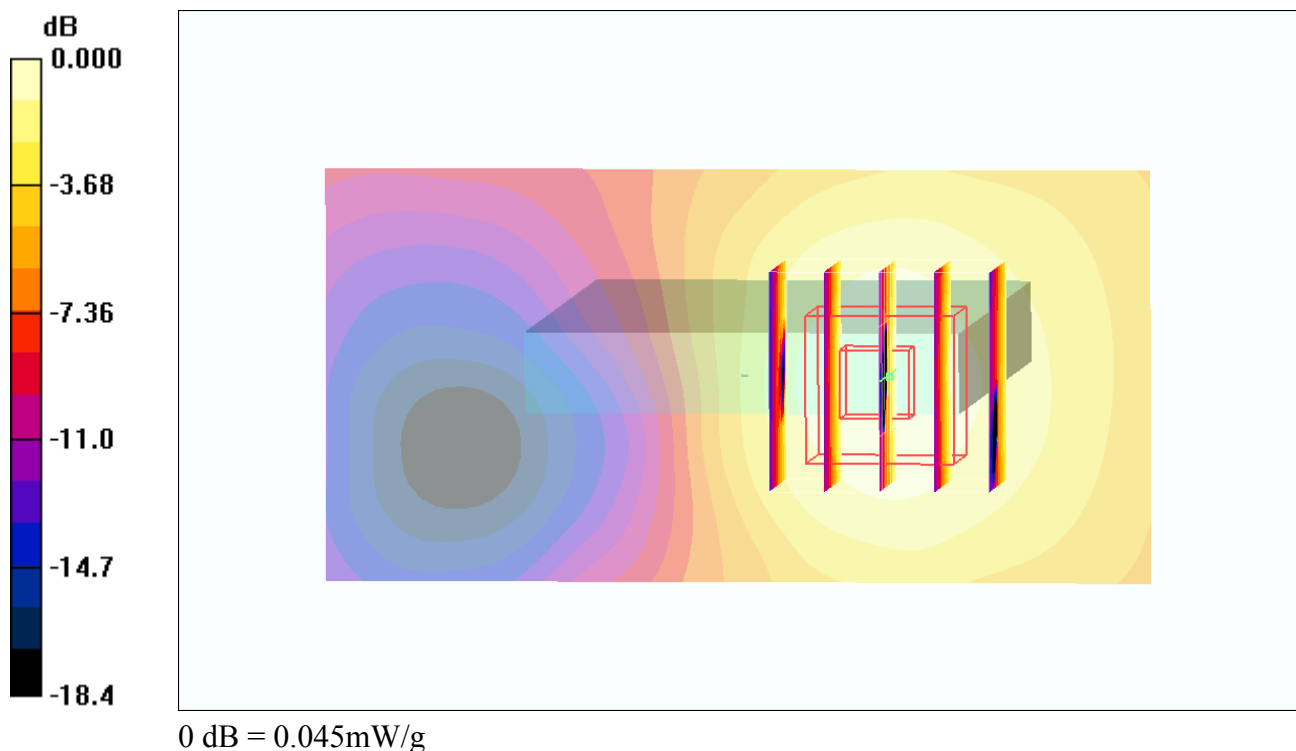

#23_GSM1900_GPRS (2 Tx slots)_Bottom Side_1cm_Ch810**DUT: 232306-04**

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: MSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (31x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.209 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.227 mW/g

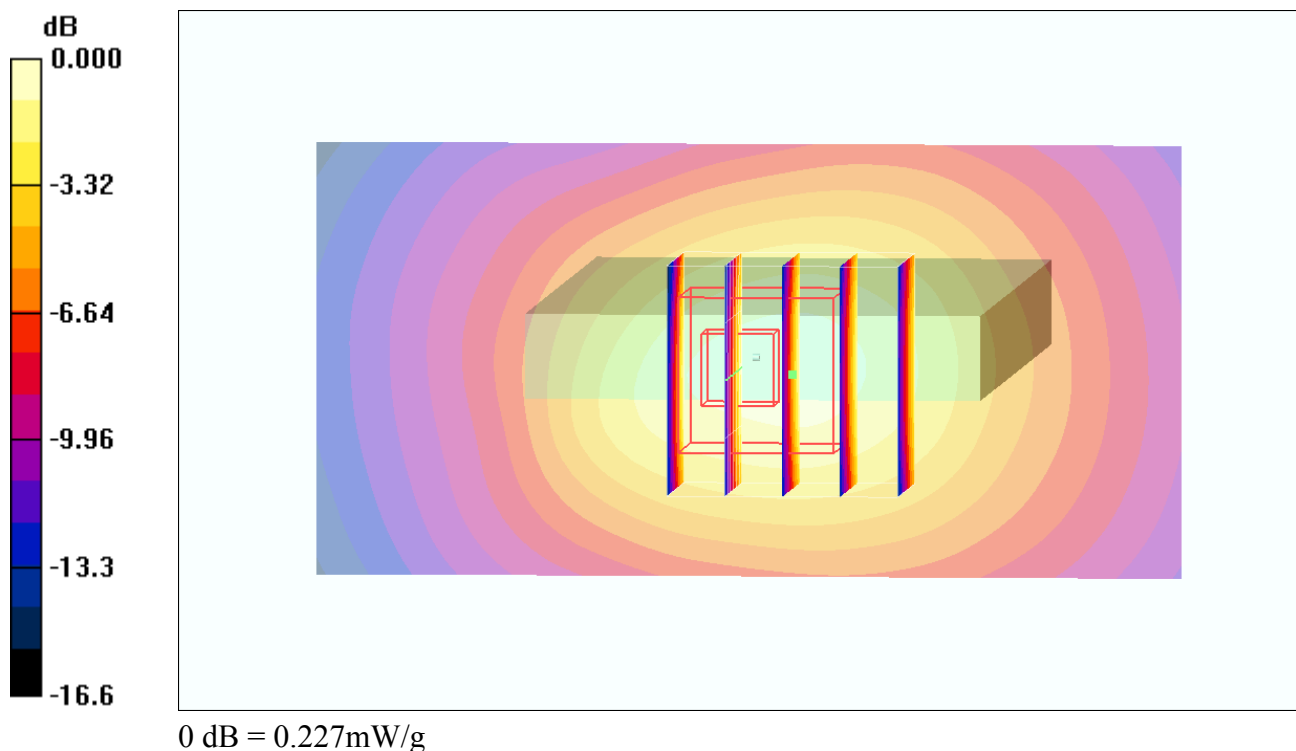

#18_GSM1900_GPRS (2 Tx slots)_Front_1cm_Ch810**DUT: 232306-04**

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: MSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.389 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.15 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.347 mW/g

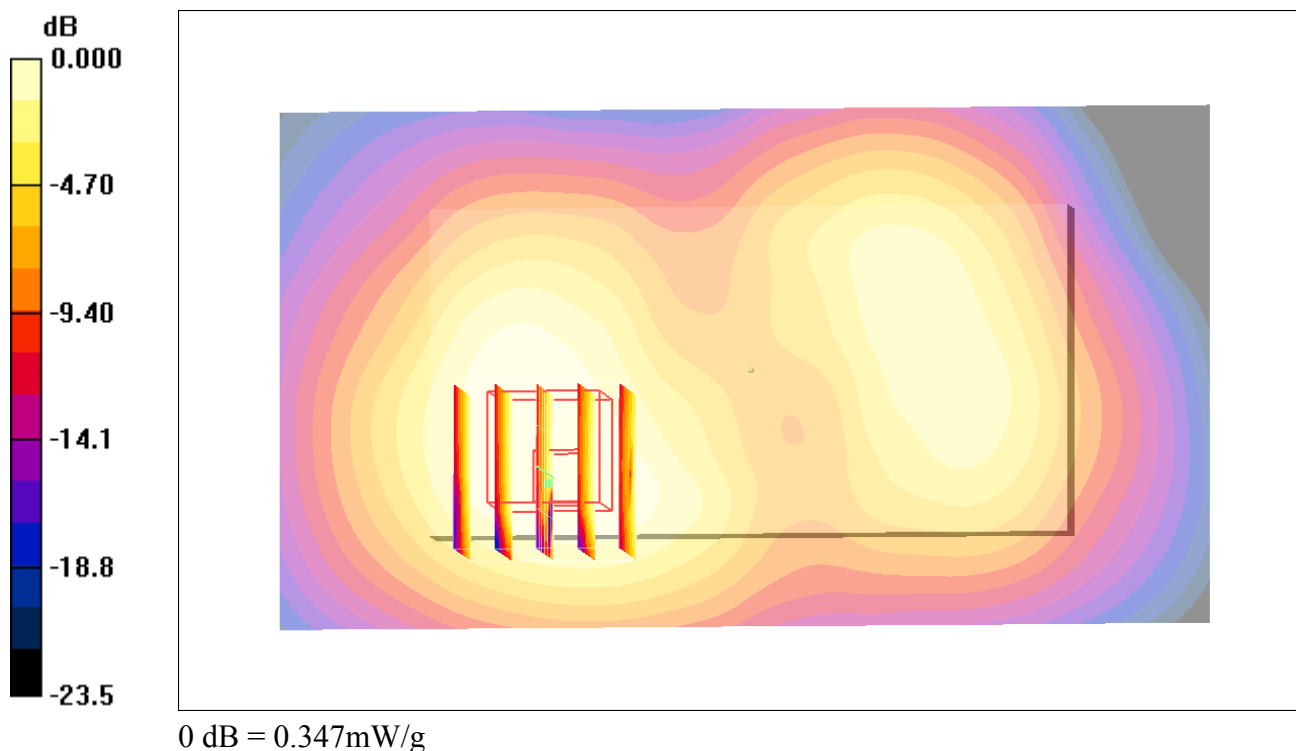

#19_GSM1900_GPRS (2 Tx slots)_Back_1cm_Ch810**DUT: 232306-04**

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: MSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.453 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.01 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.400 mW/g; SAR(10 g) = 0.244 mW/g

Maximum value of SAR (measured) = 0.435 mW/g

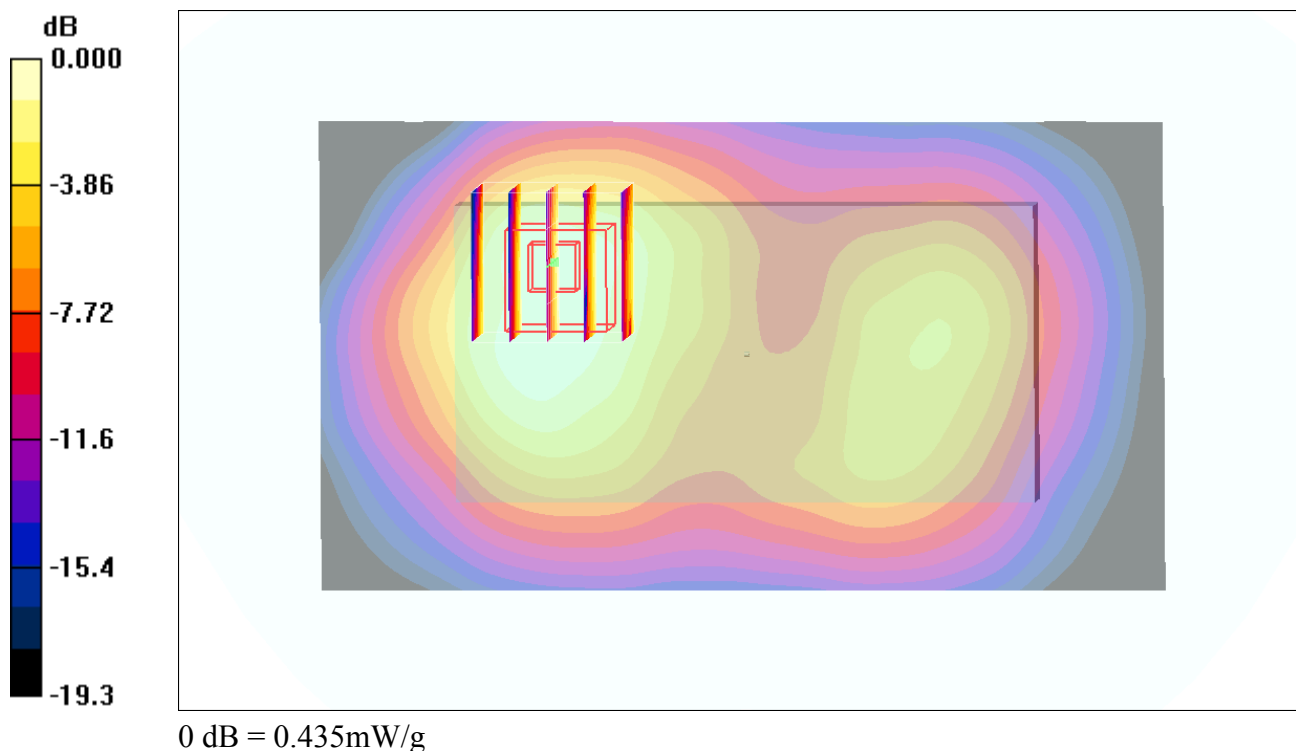

#24_GSM1900_GSM Voice_Back_1cm_Ch810;Headset**DUT: 232306-04**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.515 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.25 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.438 mW/g; SAR(10 g) = 0.263 mW/g

Maximum value of SAR (measured) = 0.485 mW/g

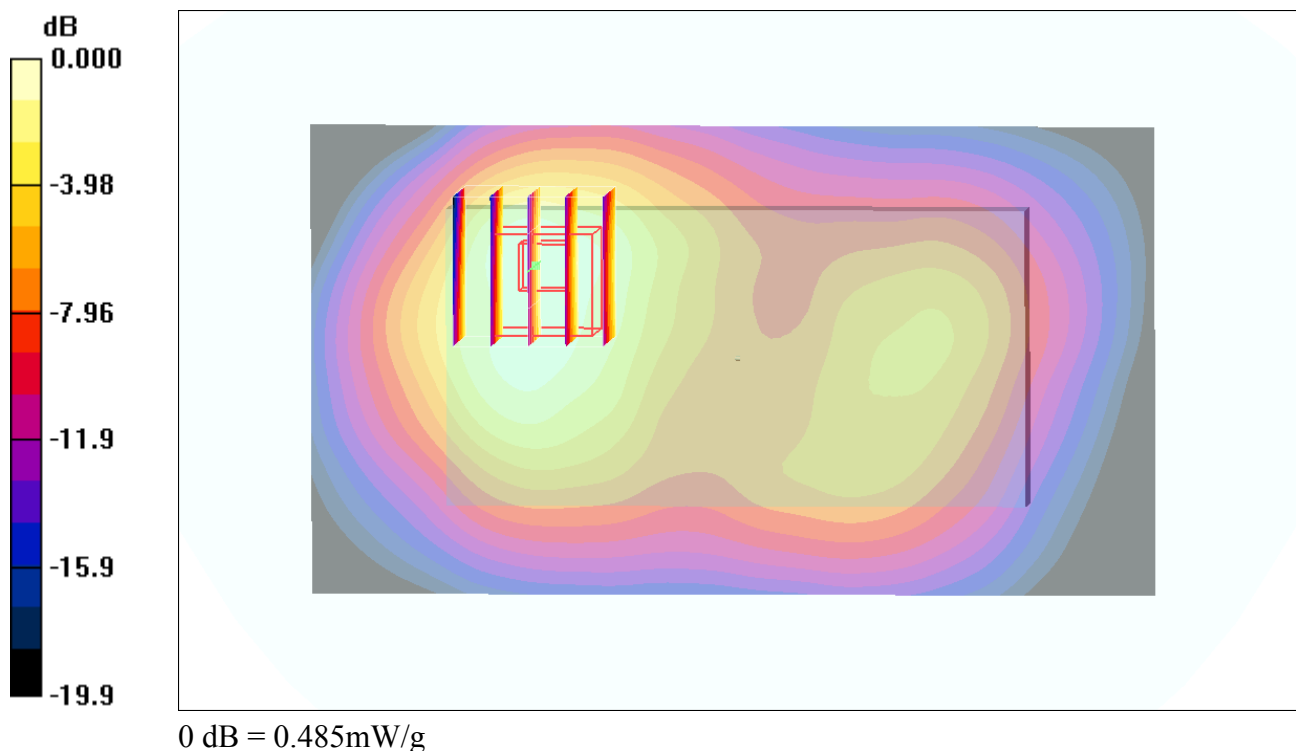

#24_GSM1900_GSM Voice_Back_1cm_Ch810;Headset_2D**DUT: 232306-04**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_121008 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch810/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.515 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.25 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.438 mW/g; SAR(10 g) = 0.263 mW/g

Maximum value of SAR (measured) = 0.485 mW/g

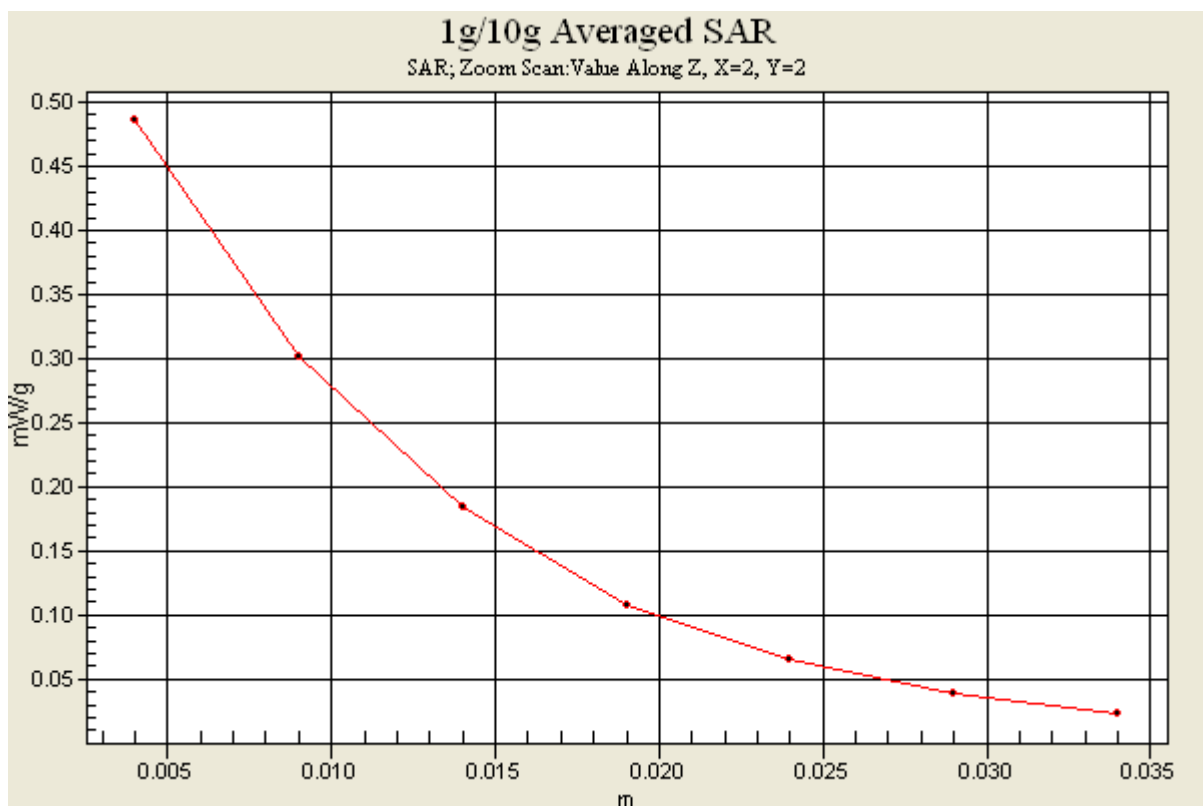

#102_WCDMA V_RMC12.2K_Front_1cm_Ch4132**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121102 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.955$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.16, 6.16, 6.16); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4132/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.567 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = 0.162 dB

Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.546 mW/g; SAR(10 g) = 0.428 mW/g

Maximum value of SAR (measured) = 0.567 mW/g

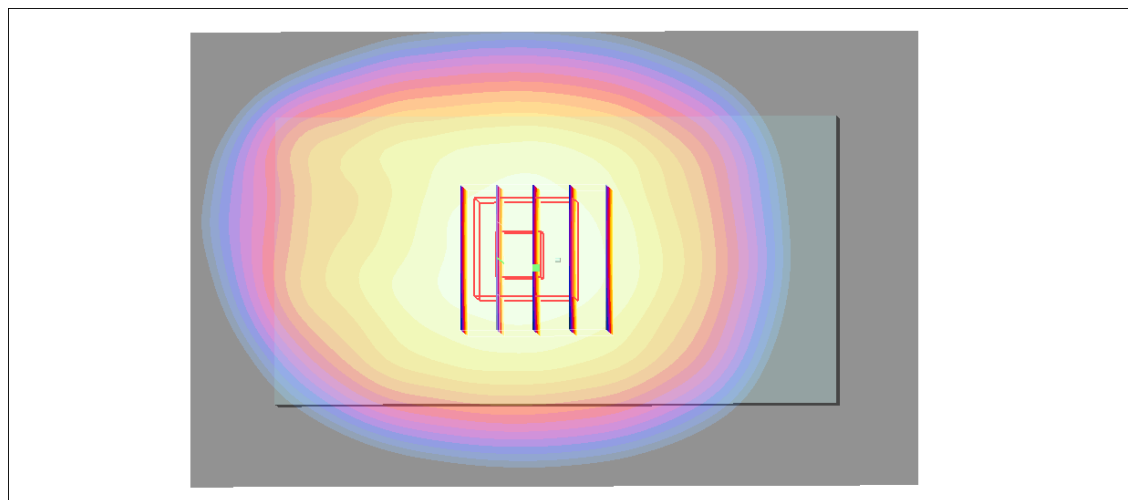

0 dB = 0.567mW/g

#43_WCDMA V_RMC12.2K_Back_1cm_Ch4132**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121009 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4132/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.734 mW/g

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = 0.187 dB

Peak SAR (extrapolated) = 0.877 W/kg

SAR(1 g) = 0.730 mW/g; SAR(10 g) = 0.565 mW/g

Maximum value of SAR (measured) = 0.762 mW/g


Ch4132/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = 0.187 dB

Peak SAR (extrapolated) = 0.786 W/kg

SAR(1 g) = 0.465 mW/g; SAR(10 g) = 0.316 mW/g

Maximum value of SAR (measured) = 0.536 mW/g

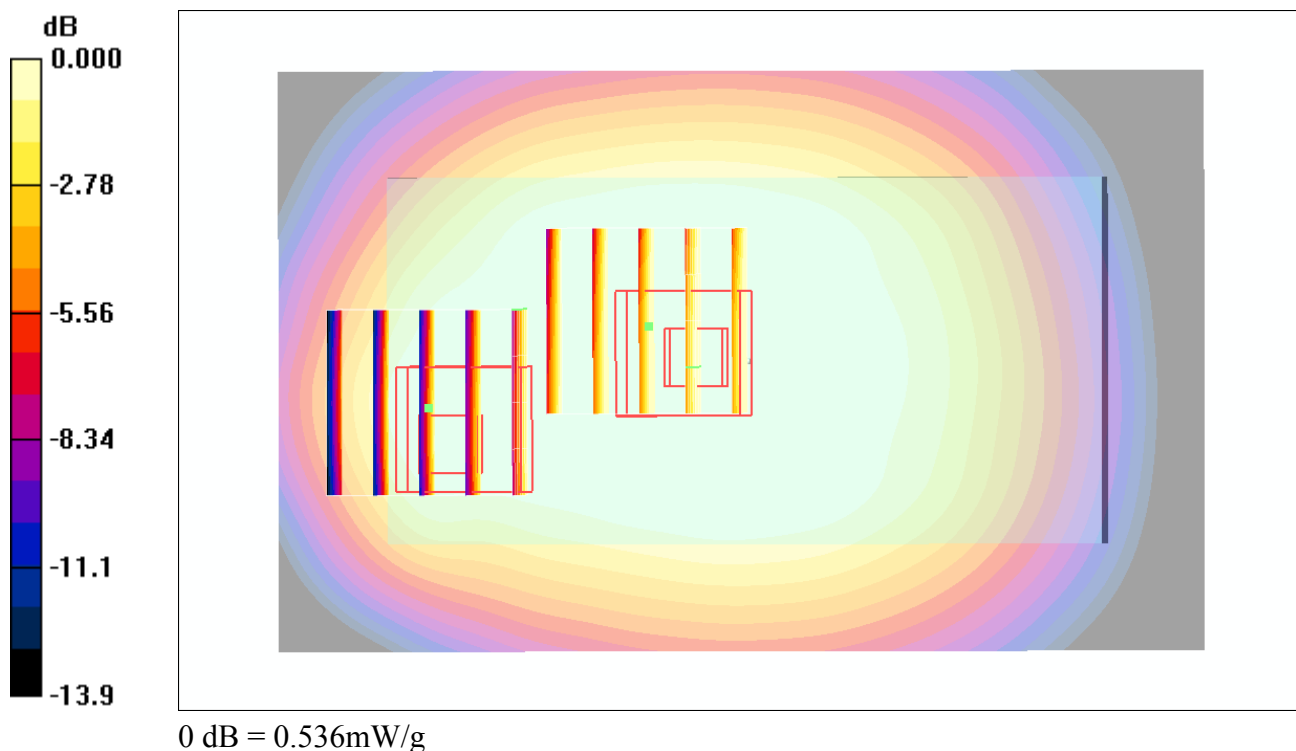

#43_WCDMA V_RMC12.2K_Back_1cm_Ch4132_2D**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121009 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4132/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.734 mW/g

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = 0.187 dB

Peak SAR (extrapolated) = 0.877 W/kg

SAR(1 g) = 0.730 mW/g; SAR(10 g) = 0.565 mW/g

Maximum value of SAR (measured) = 0.762 mW/g


Ch4132/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = 0.187 dB

Peak SAR (extrapolated) = 0.786 W/kg

SAR(1 g) = 0.465 mW/g; SAR(10 g) = 0.316 mW/g

Maximum value of SAR (measured) = 0.536 mW/g

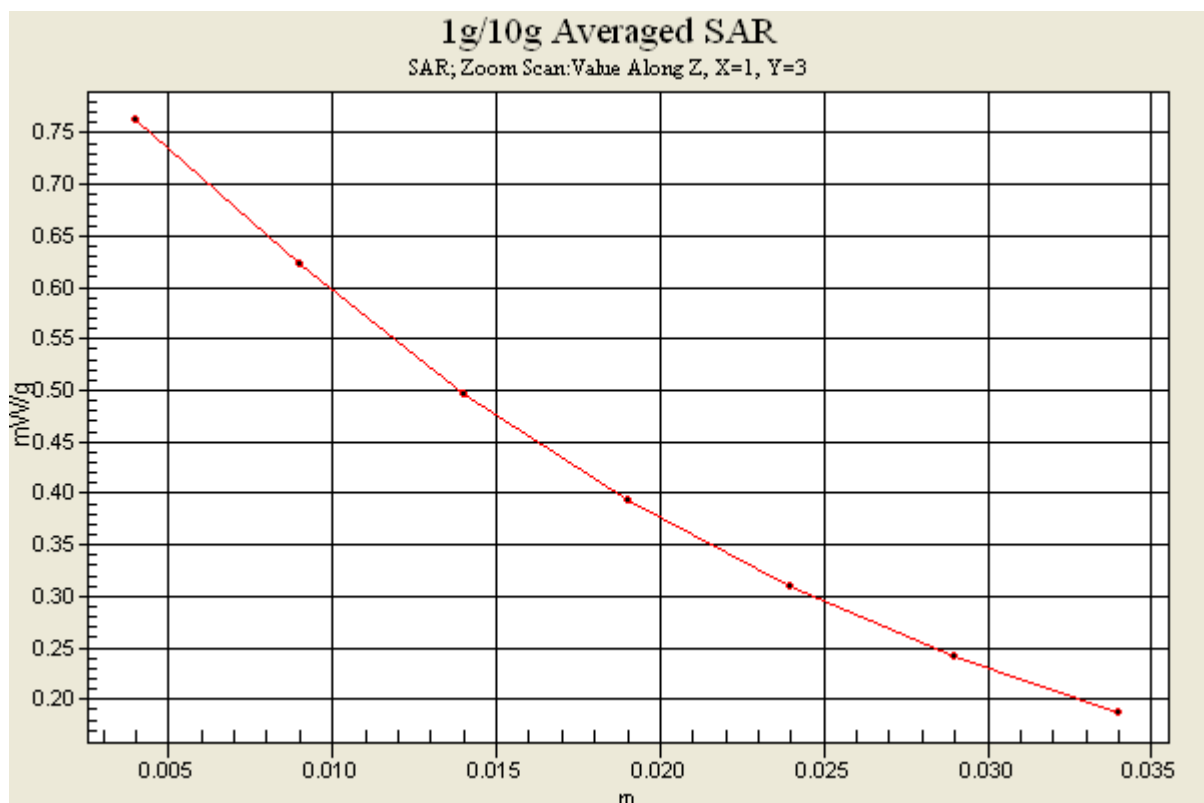

#103_WCDMA V_RMC12.2K_Left Side_1cm_Ch4132**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121102 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.955$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.16, 6.16, 6.16); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4132/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.621 mW/g


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.9 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 0.806 W/kg

SAR(1 g) = 0.594 mW/g; SAR(10 g) = 0.414 mW/g

Maximum value of SAR (measured) = 0.635 mW/g

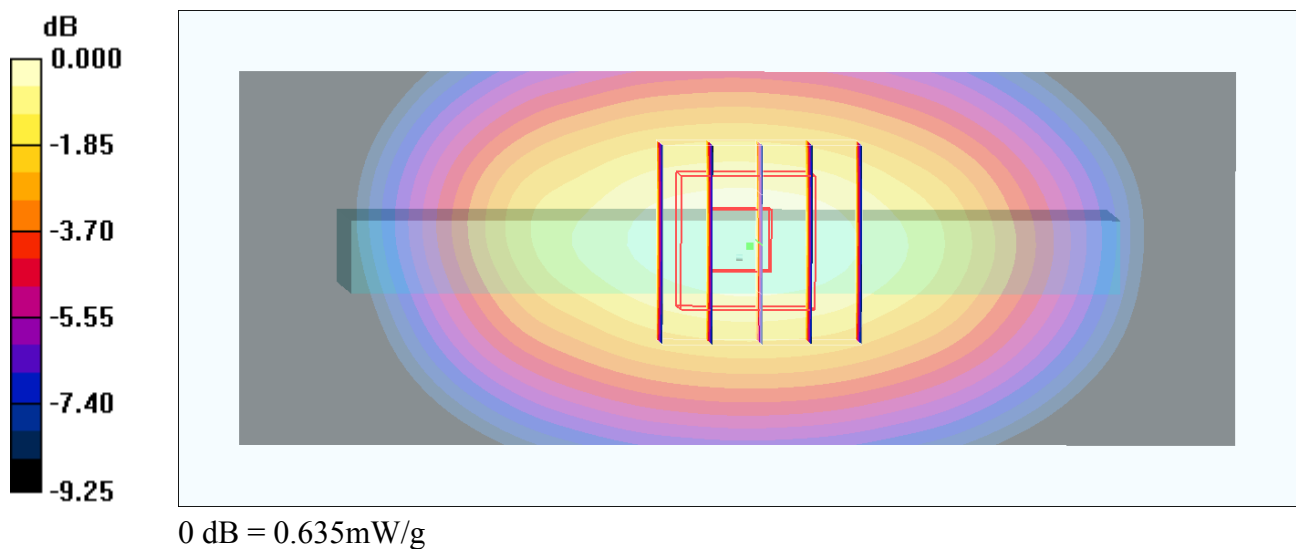

#104_WCDMA V_RMC12.2K_Right Side_1cm_Ch4132**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121102 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.955$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.16, 6.16, 6.16); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4132/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.504 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.2 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.478 mW/g; SAR(10 g) = 0.332 mW/g

Maximum value of SAR (measured) = 0.511 mW/g

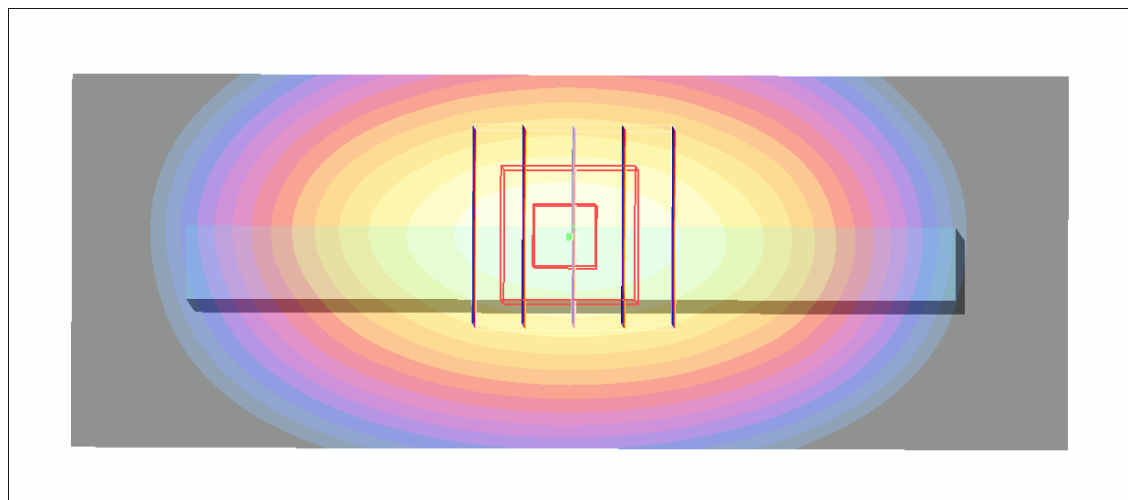

0 dB = 0.511mW/g

#105_WCDMA V_RMC12.2K_Top Side_1cm_Ch4132**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121102 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.955$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.16, 6.16, 6.16); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4132/Area Scan (51x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.021 mW/g

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.84 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.026 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.021 mW/g


Ch4132/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.84 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.022 W/kg

SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.017 mW/g

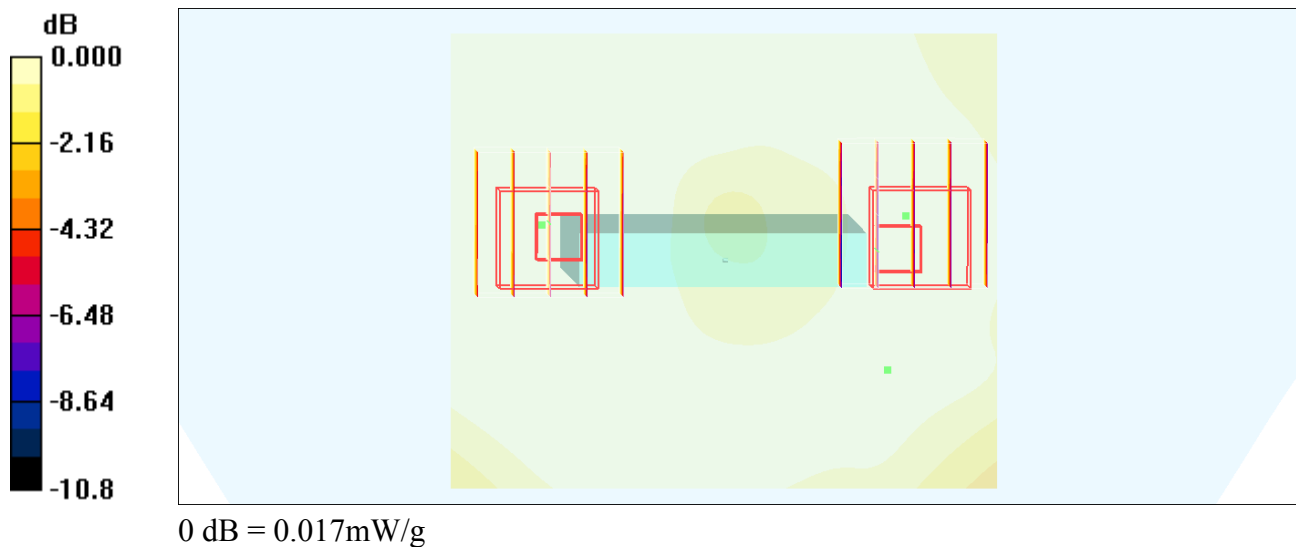

#106_WCDMA V_RMC12.2K_Bottom Side_1cm_Ch4132**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121102 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.955$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.16, 6.16, 6.16); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4132/Area Scan (51x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.121 mW/g


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.74 V/m; Power Drift = 0.146 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.158 mW/g

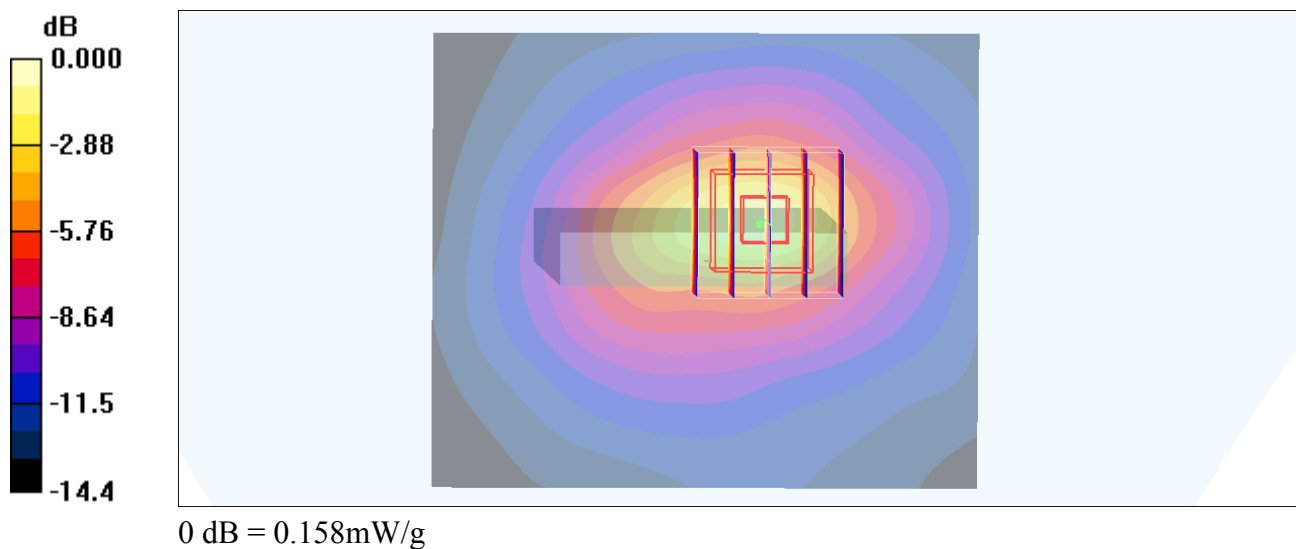

#102_WCDMA V_RMC12.2K_Front_1cm_Ch4132**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121102 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.955$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.16, 6.16, 6.16); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4132/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.567 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = 0.162 dB

Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.546 mW/g; SAR(10 g) = 0.428 mW/g

Maximum value of SAR (measured) = 0.567 mW/g

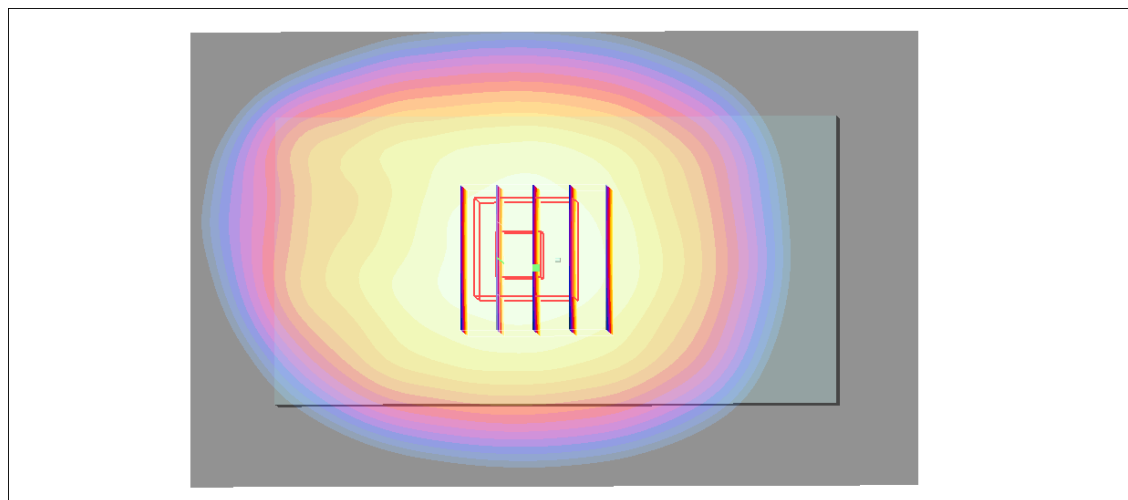

0 dB = 0.567mW/g

#43_WCDMA V_RMC12.2K_Back_1cm_Ch4132**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121009 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(6.08, 6.08, 6.08); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4132/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.734 mW/g

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = 0.187 dB

Peak SAR (extrapolated) = 0.877 W/kg

SAR(1 g) = 0.730 mW/g; SAR(10 g) = 0.565 mW/g

Maximum value of SAR (measured) = 0.762 mW/g


Ch4132/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = 0.187 dB

Peak SAR (extrapolated) = 0.786 W/kg

SAR(1 g) = 0.465 mW/g; SAR(10 g) = 0.316 mW/g

Maximum value of SAR (measured) = 0.536 mW/g

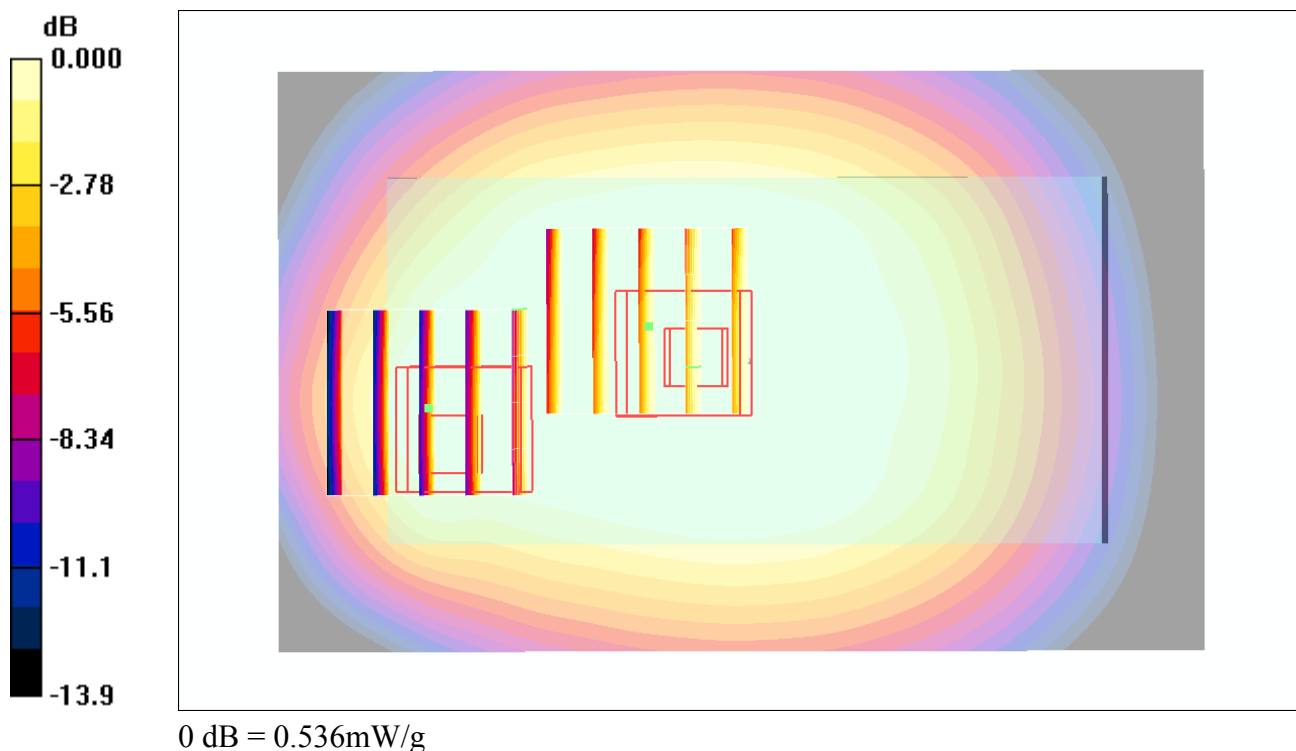

#107_WCDMA V_RMC12.2K_Back_1cm_Ch4132;Headset**DUT: 232306-04**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_121102 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.955$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(6.16, 6.16, 6.16); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch4132/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.847 mW/g

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.709 mW/g; SAR(10 g) = 0.403 mW/g

Maximum value of SAR (measured) = 0.805 mW/g



Ch4132/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.569 mW/g; SAR(10 g) = 0.442 mW/g

Maximum value of SAR (measured) = 0.597 mW/g

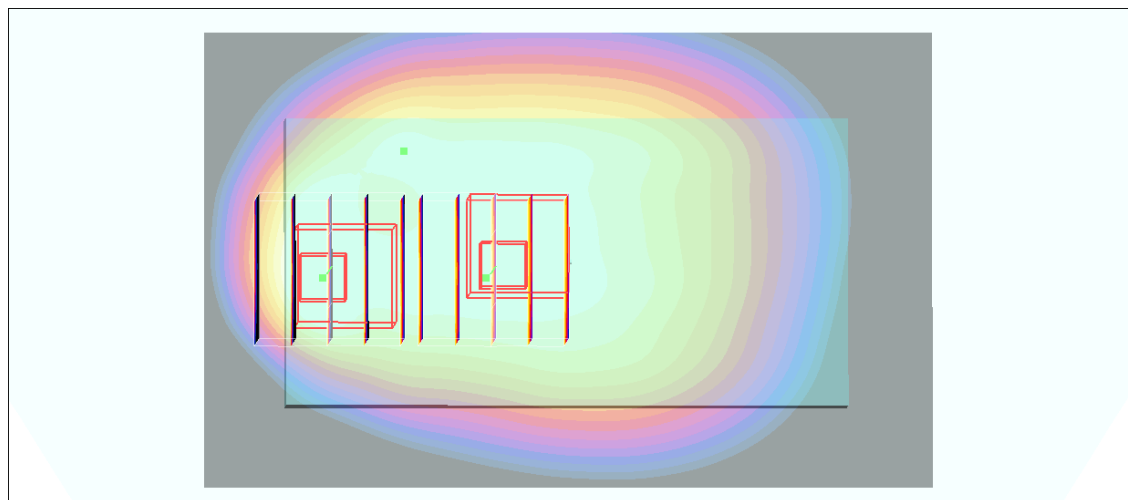

0 dB = 0.597mW/g

#94_WCDMA II_RMC12.2K_Front_1cm_Ch9262**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121102 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.67, 4.67, 4.67); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.631 mW/g

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.68 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.592 mW/g; SAR(10 g) = 0.376 mW/g

Maximum value of SAR (measured) = 0.626 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.68 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 0.550 W/kg

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.250 mW/g

Maximum value of SAR (measured) = 0.397 mW/g

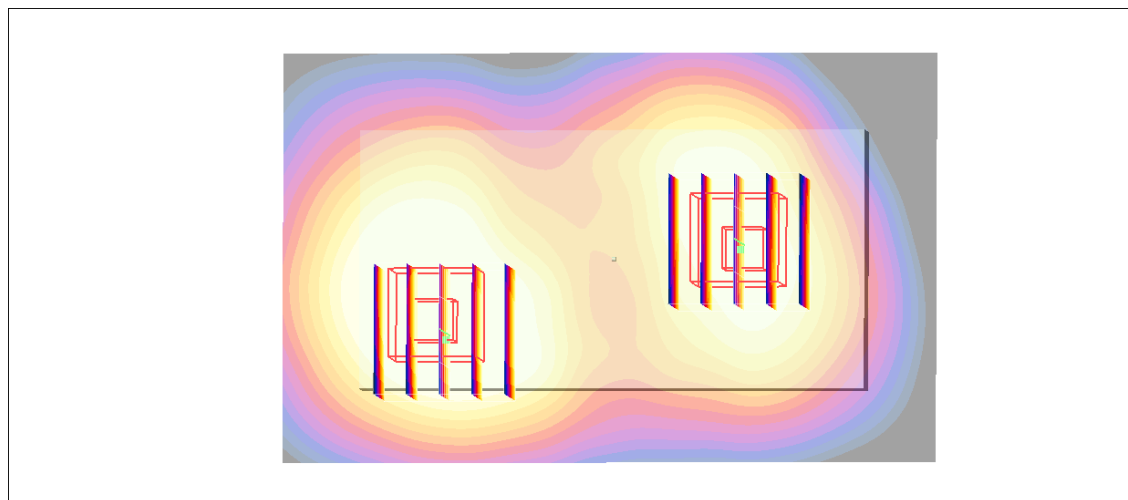

0 dB = 0.397mW/g

#15_WCDMA II_RMC12.2K_Back_1cm_Ch9262**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121008 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.02 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.527 mW/g

Maximum value of SAR (measured) = 0.972 mW/g

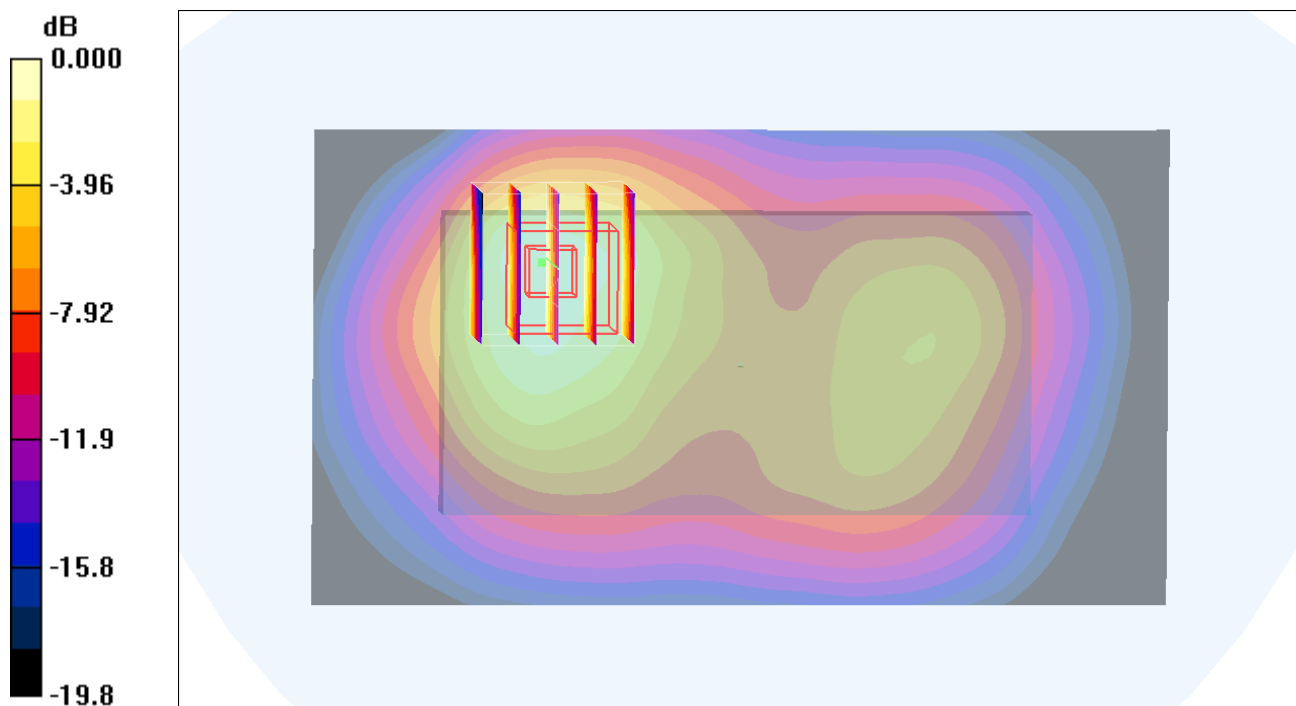

0 dB = 0.972mW/g

#15_WCDMA II_RMC12.2K_Back_1cm_Ch9262_2D**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121008 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.02 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.527 mW/g

Maximum value of SAR (measured) = 0.972 mW/g

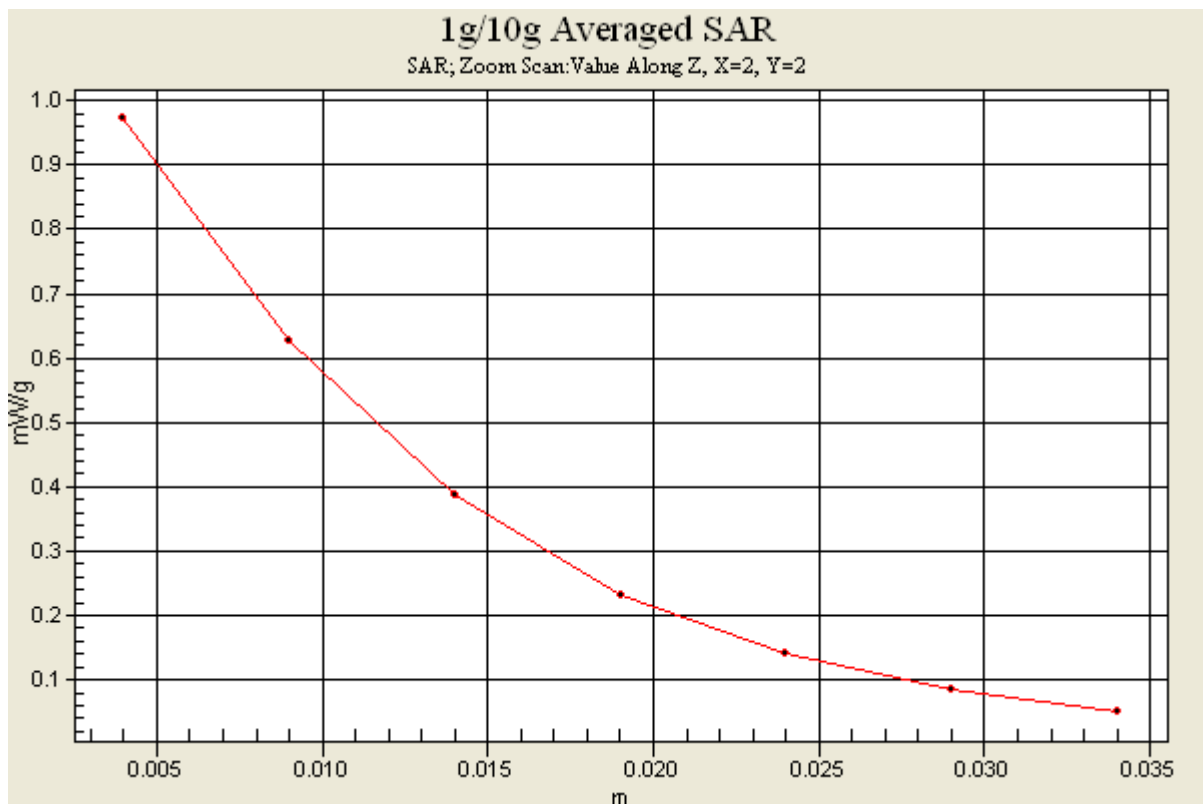

#16_WCDMA II_RMC12.2K_Back_1cm_Ch9400**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121008 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.04 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.879 mW/g; SAR(10 g) = 0.524 mW/g

Maximum value of SAR (measured) = 0.971 mW/g

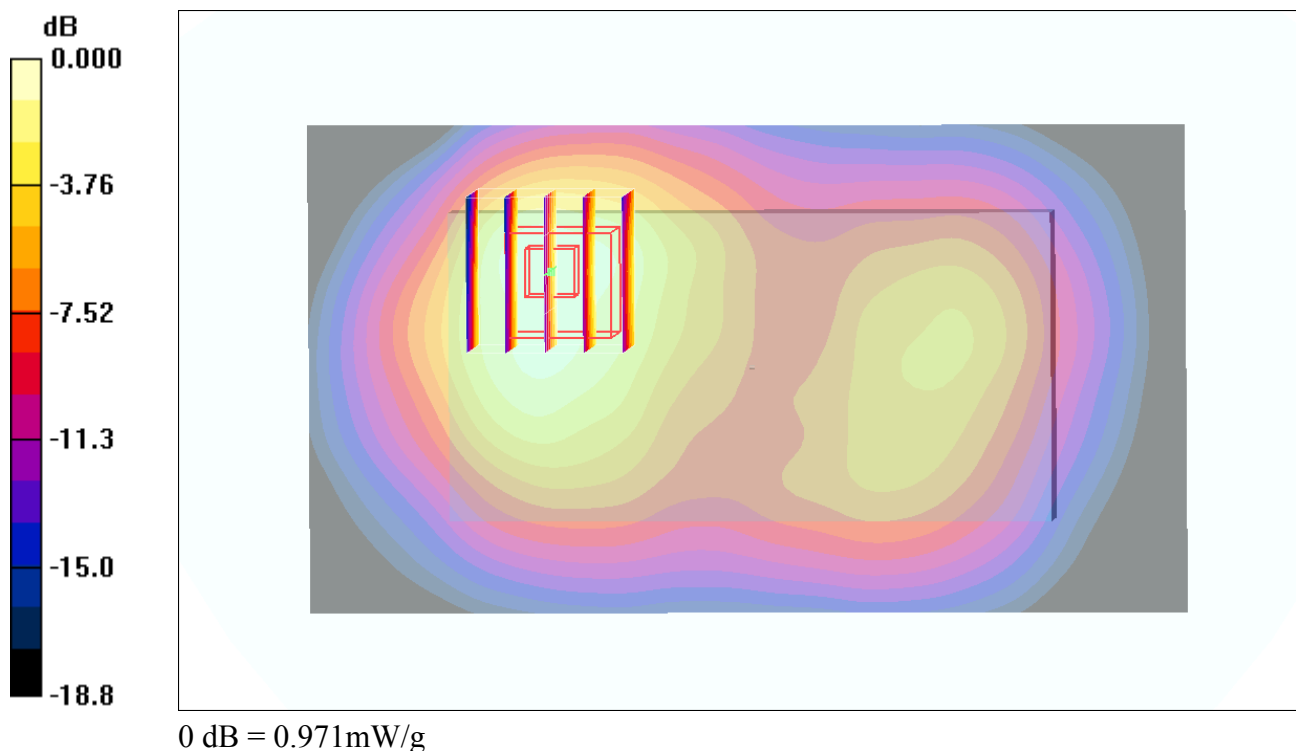

#17_WCDMA II_RMC12.2K_Back_1cm_Ch9538**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121008 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9538/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.902 mW/g


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.66 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.756 mW/g; SAR(10 g) = 0.458 mW/g

Maximum value of SAR (measured) = 0.837 mW/g

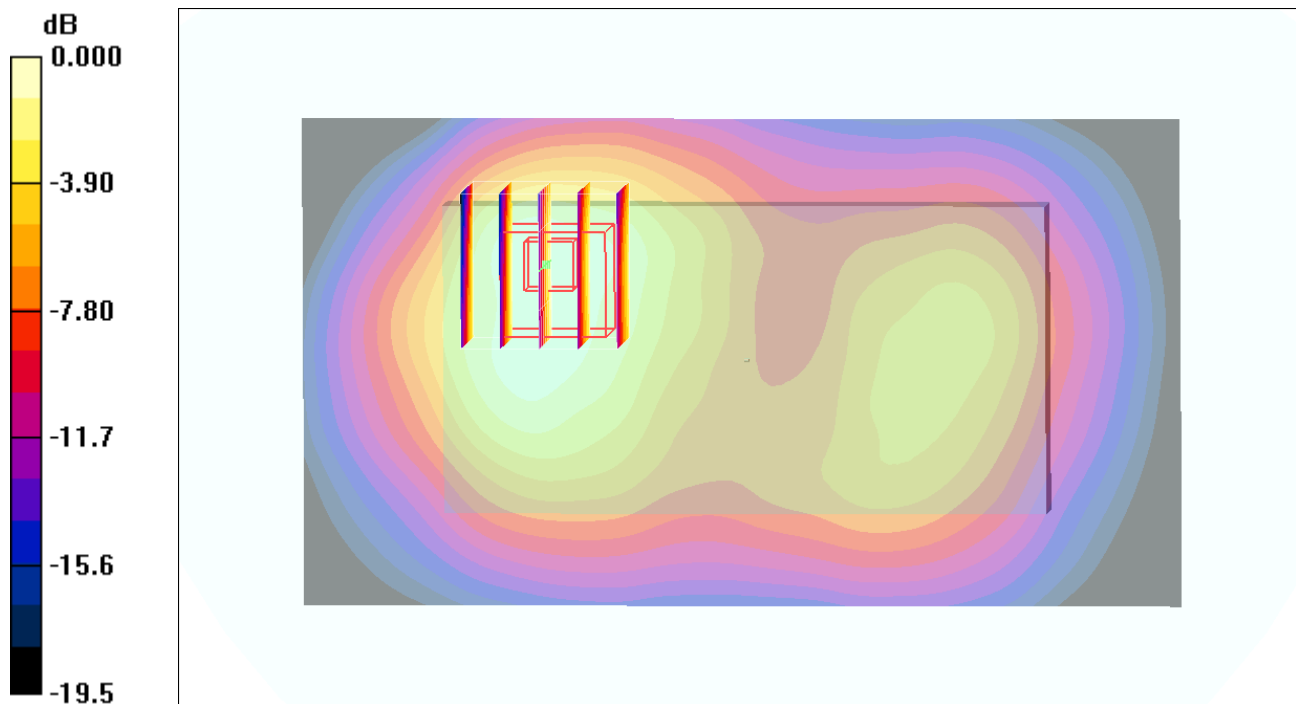

0 dB = 0.837mW/g

#95_WCDMA II_RMC12.2K_Left Side_1cm_Ch9262**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121027 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.67, 4.67, 4.67); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.190 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.00 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (measured) = 0.189 mW/g

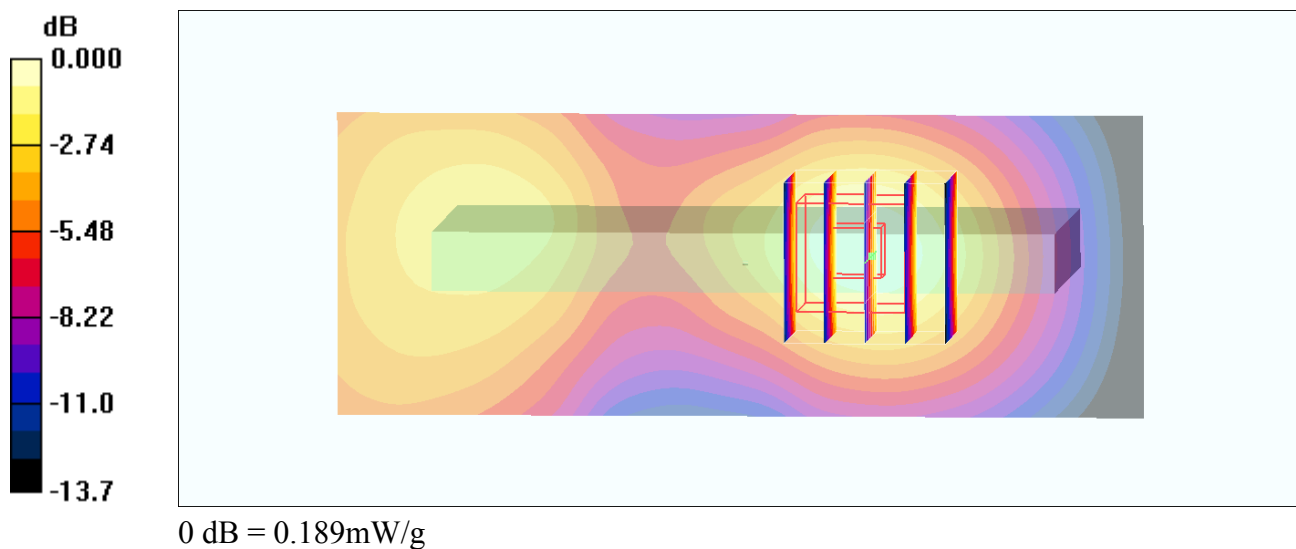

#96_WCDMA II_RMC12.2K_Right Side_1cm_Ch9262**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121027 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.67, 4.67, 4.67); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (31x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.736 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.685 mW/g; SAR(10 g) = 0.394 mW/g

Maximum value of SAR (measured) = 0.729 mW/g

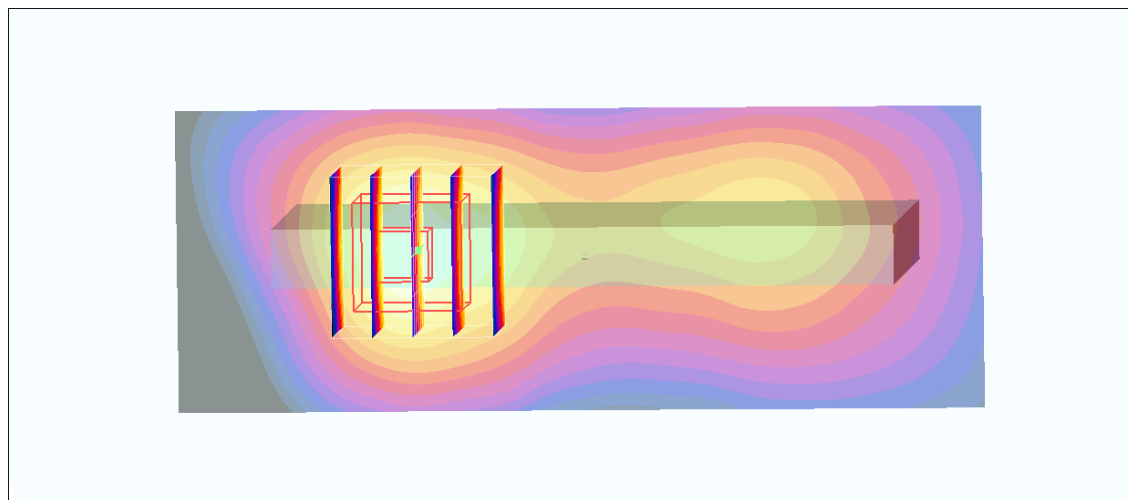

0 dB = 0.729mW/g

#97_WCDMA II_RMC12.2K_Top Side_1cm_Ch9262**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121027 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.67, 4.67, 4.67); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (31x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.097 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.21 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.095 mW/g

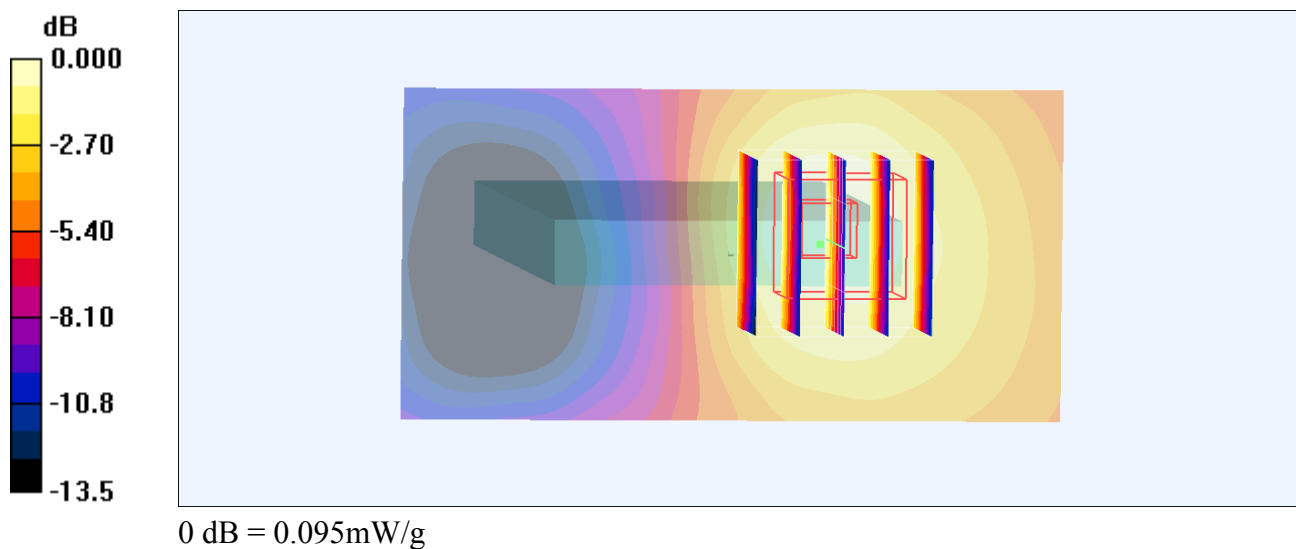

#98_WCDMA II_RMC12.2K_Bottom Side_1cm_Ch9262**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121027 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.67, 4.67, 4.67); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (31x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.503 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.809 W/kg

SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.283 mW/g

Maximum value of SAR (measured) = 0.530 mW/g

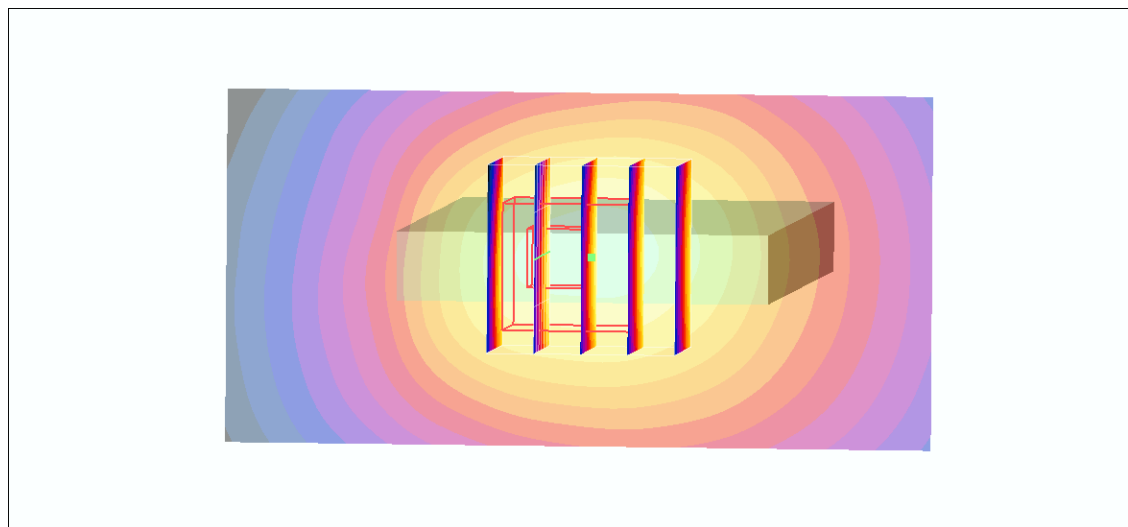

0 dB = 0.530mW/g

#94_WCDMA II_RMC12.2K_Front_1cm_Ch9262**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121102 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.67, 4.67, 4.67); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.631 mW/g

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.68 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.592 mW/g; SAR(10 g) = 0.376 mW/g

Maximum value of SAR (measured) = 0.626 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.68 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 0.550 W/kg

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.250 mW/g

Maximum value of SAR (measured) = 0.397 mW/g

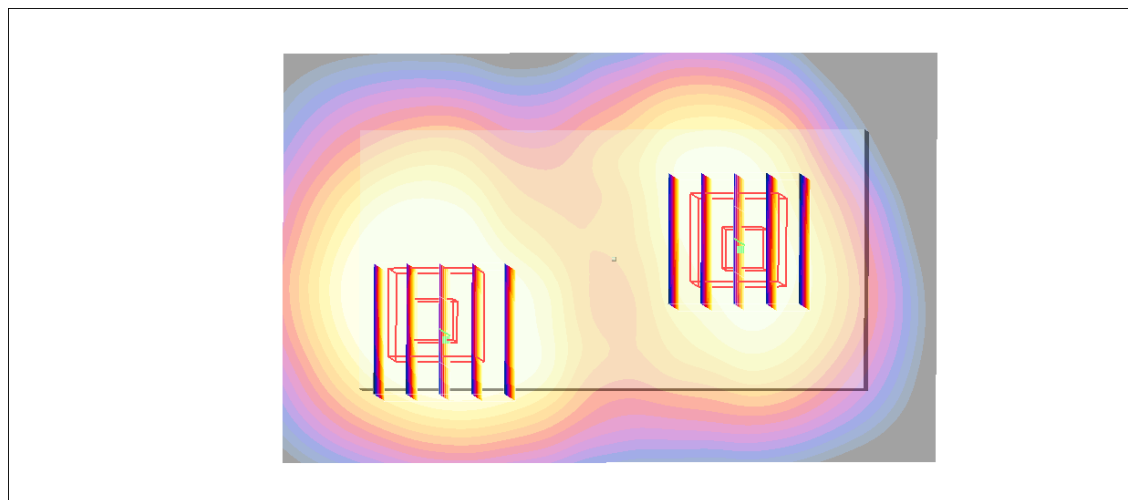

0 dB = 0.397mW/g

#15_WCDMA II_RMC12.2K_Back_1cm_Ch9262**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121008 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.02 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.895 mW/g; SAR(10 g) = 0.527 mW/g

Maximum value of SAR (measured) = 0.972 mW/g

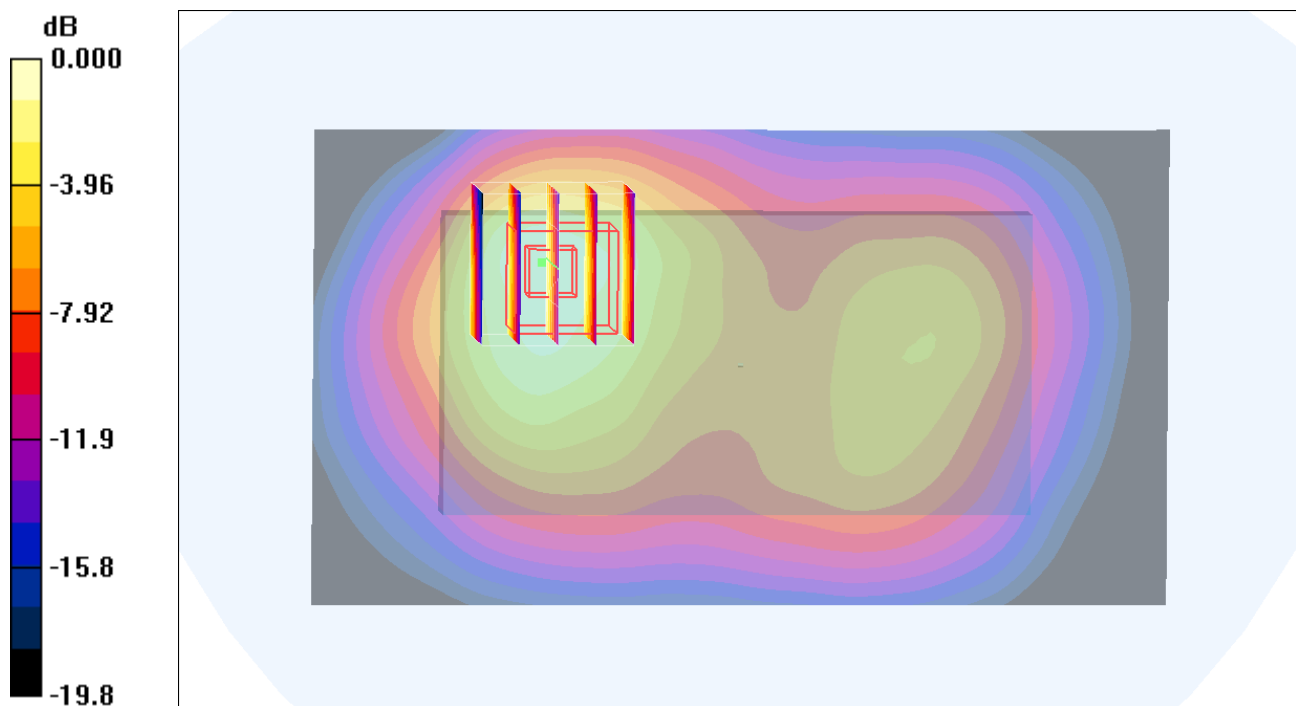

0 dB = 0.972mW/g

#16_WCDMA II_RMC12.2K_Back_1cm_Ch9400**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121008 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.04 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.879 mW/g; SAR(10 g) = 0.524 mW/g

Maximum value of SAR (measured) = 0.971 mW/g

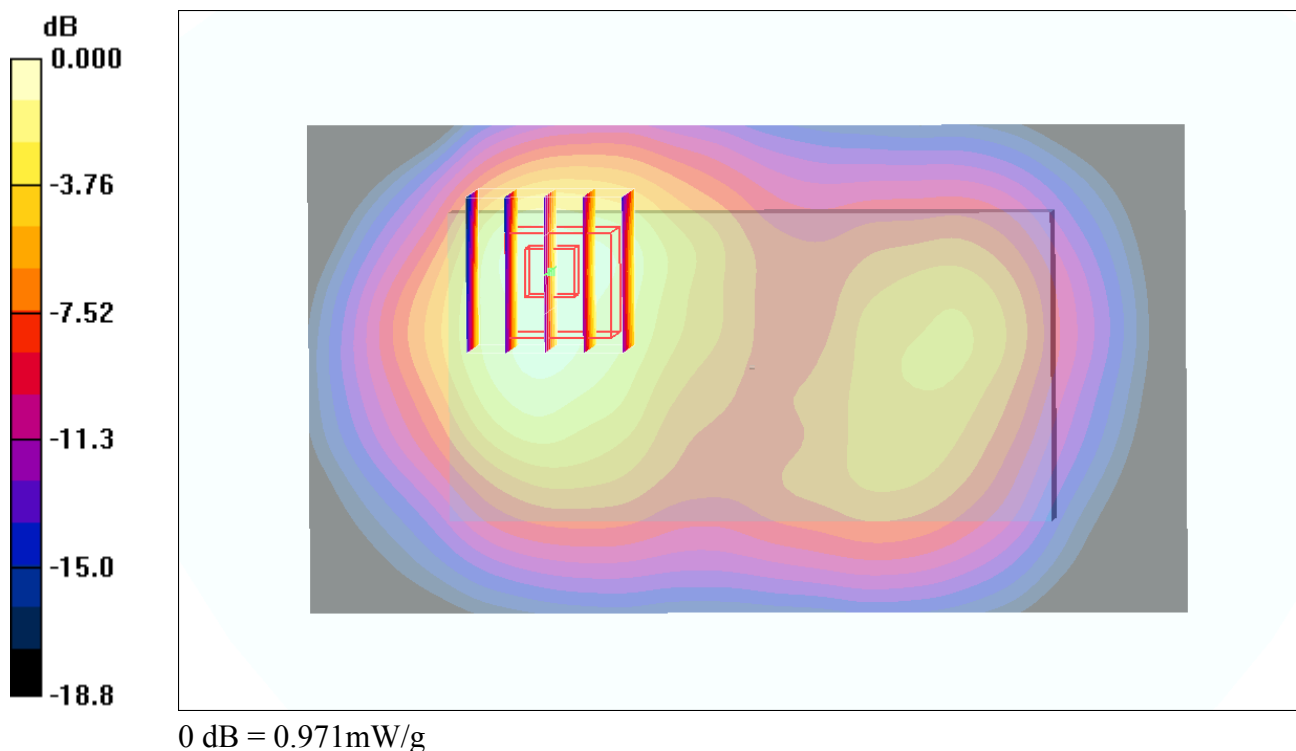

#17_WCDMA II_RMC12.2K_Back_1cm_Ch9538**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121008 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.58, 4.58, 4.58); Calibrated: 2012/5/29
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9538/Area Scan (51x91x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.902 mW/g


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.66 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.756 mW/g; SAR(10 g) = 0.458 mW/g

Maximum value of SAR (measured) = 0.837 mW/g

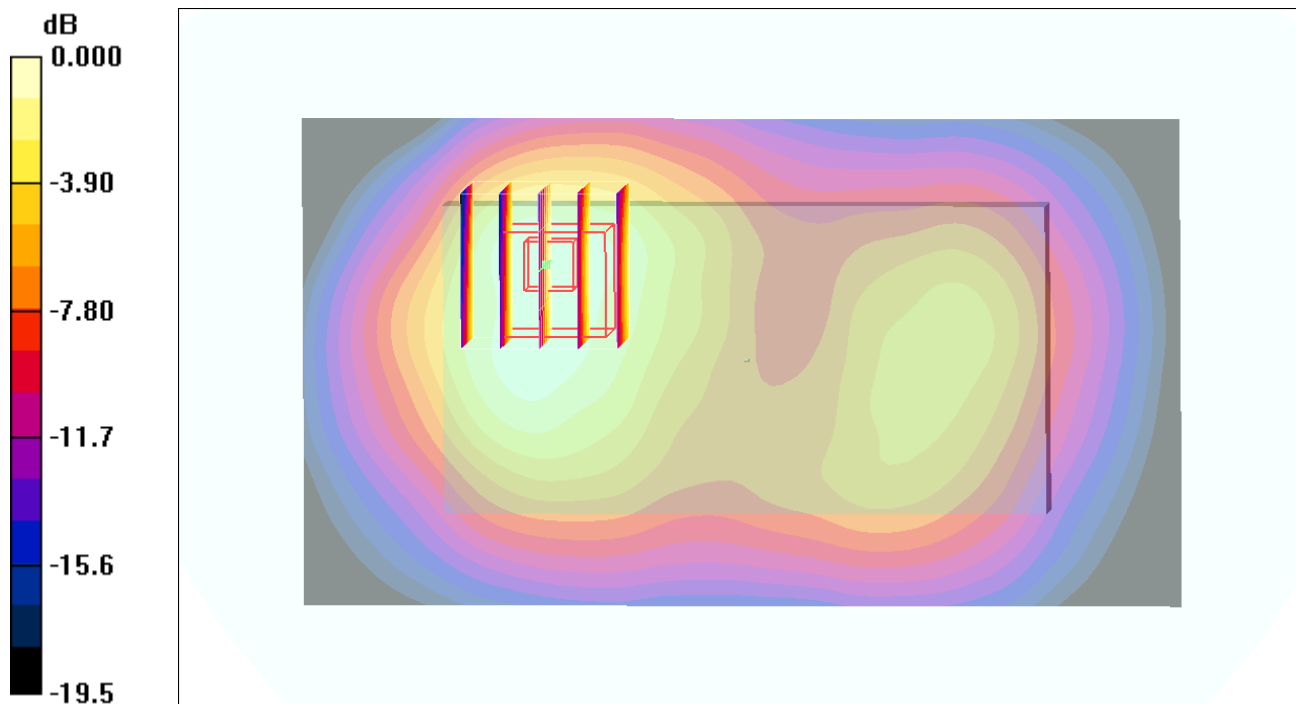

0 dB = 0.837mW/g

#99_WCDMA II_RMC12.2K_Back_1cm_Ch9262;Headset**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121102 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.8$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.67, 4.67, 4.67); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9262/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 1.03 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.68 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.886 mW/g; SAR(10 g) = 0.521 mW/g

Maximum value of SAR (measured) = 0.967 mW/g

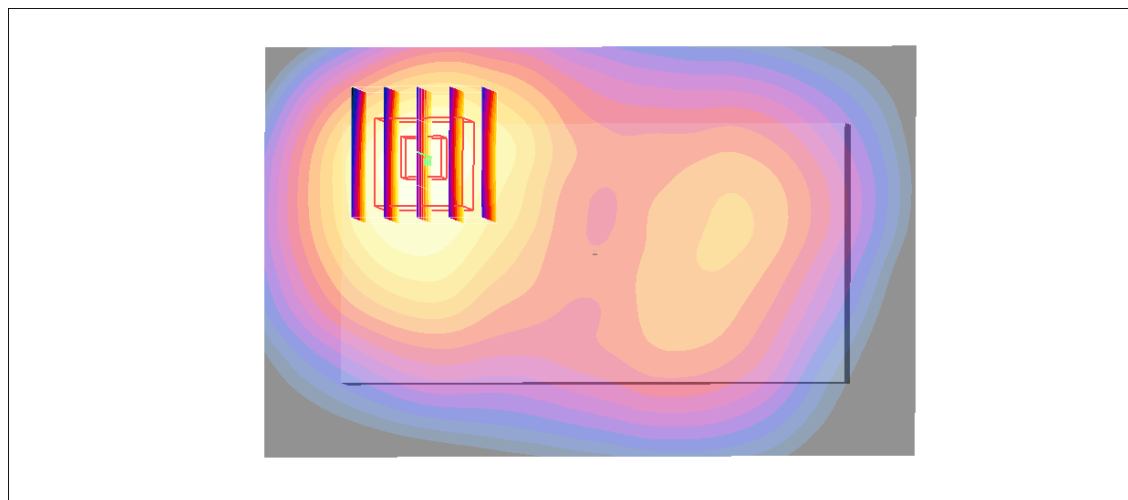

0 dB = 0.967mW/g

#100_WCDMA II_RMC12.2K_Back_1cm_Ch9400;Headset**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121102 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.67, 4.67, 4.67); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9400/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.897 mW/g



Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.43 V/m; Power Drift = 0.110 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.774 mW/g; SAR(10 g) = 0.460 mW/g

Maximum value of SAR (measured) = 0.847 mW/g

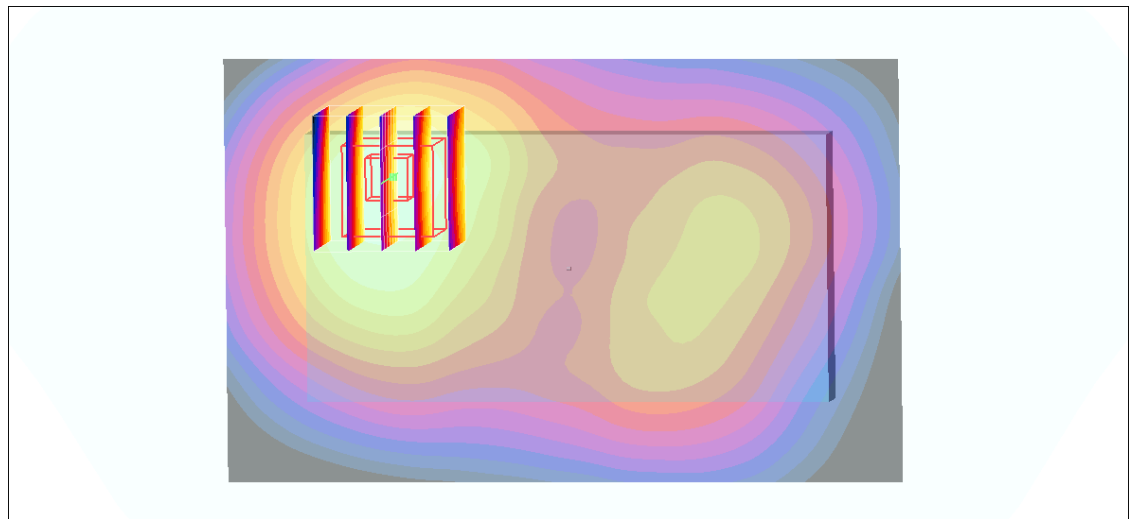

0 dB = 0.847mW/g

#101_WCDMA II_RMC12.2K_Back_1cm_Ch9538;Headset**DUT: 232306-04**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121102 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.67, 4.67, 4.67); Calibrated: 2012/9/28
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2012/4/23
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch9538/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.842 mW/g


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.66 V/m; Power Drift = 0.069 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.687 mW/g; SAR(10 g) = 0.417 mW/g

Maximum value of SAR (measured) = 0.744 mW/g

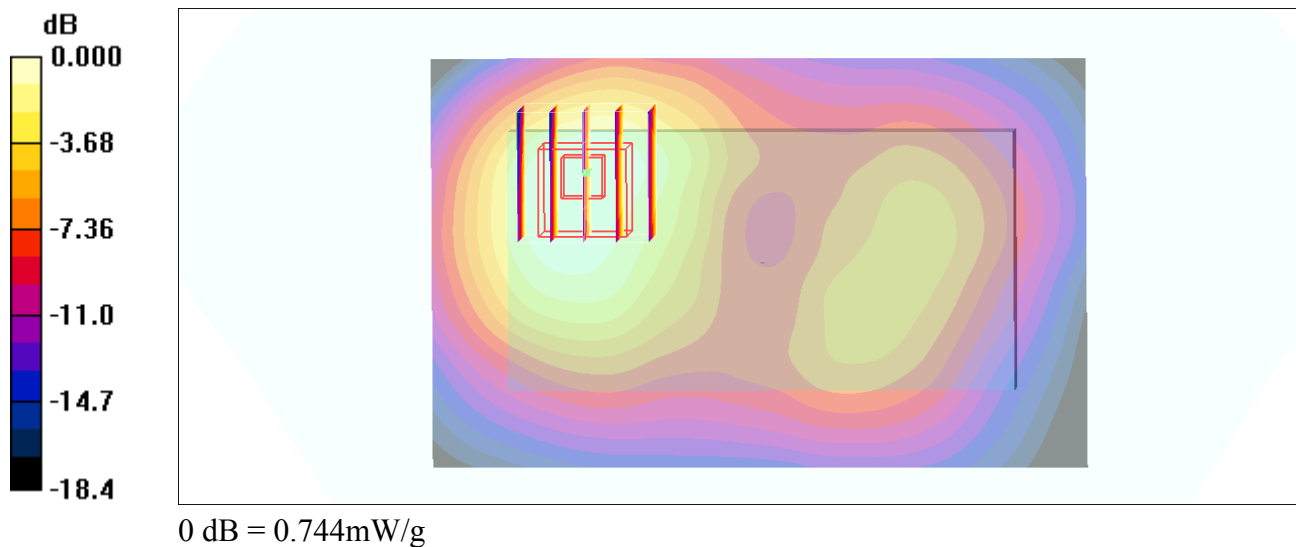

#01_WLAN2.4G_802.11b_Front_1cm_Ch1**DUT: 232306-04**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.915$ mho/m; $\epsilon_r = 52.896$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.43, 6.43, 6.43); Calibrated: 2012/6/21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch2412/Area Scan (51x81x1): Measurement grid: dx=20 mm, dy=20 mm

Maximum value of SAR (interpolated) = 0.127 W/kg

Ch2412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.026 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.244 mW/g

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.132 W/kg


Ch2412/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.026 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.187 mW/g

SAR(1 g) = 0.106 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.114 W/kg

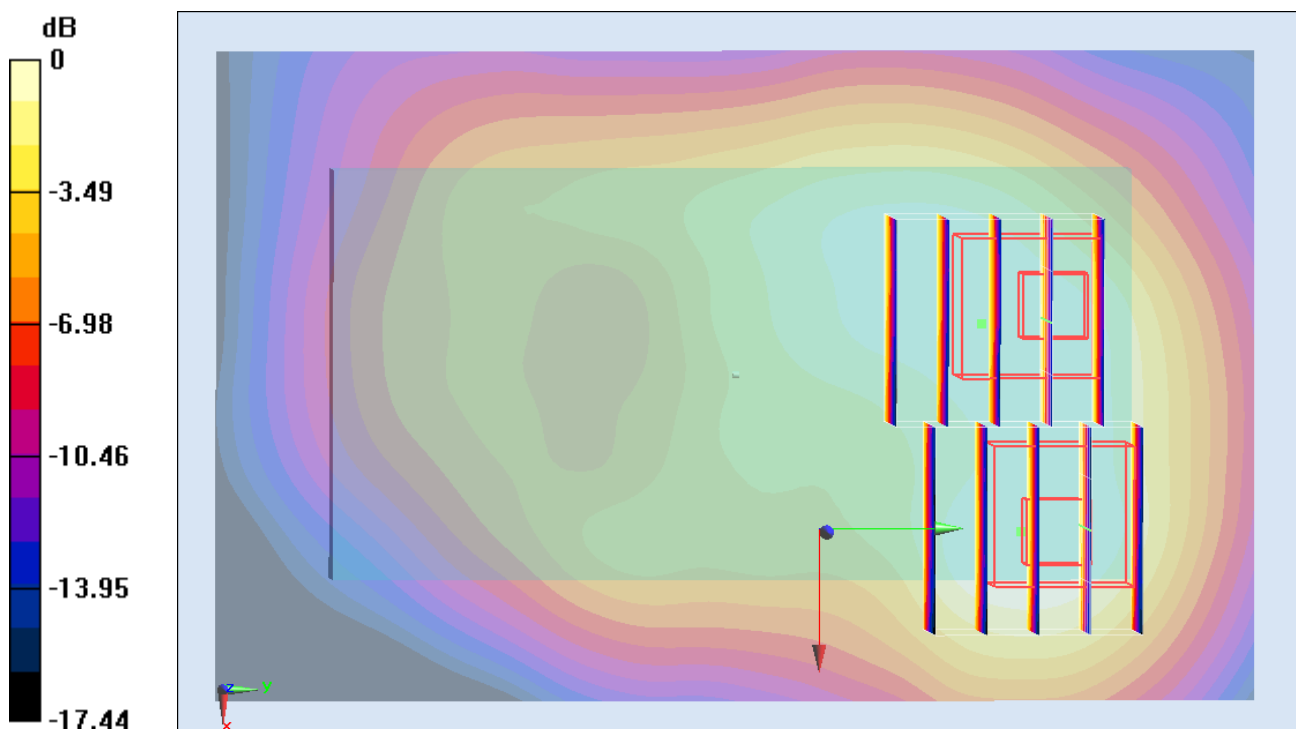

0 dB = 0.114 W/kg = -18.86 dB W/kg

#02_WLAN2.4G_802.11b_Back_1cm_Ch1**DUT: 232306-04**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.915$ mho/m; $\epsilon_r = 52.896$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.43, 6.43, 6.43); Calibrated: 2012/6/21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch2412/Area Scan (51x81x1): Measurement grid: dx=20 mm, dy=20 mm

Maximum value of SAR (interpolated) = 0.160 W/kg

Ch2412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.422 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.281 mW/g

SAR(1 g) = 0.139 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.152 W/kg


Ch2412/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.422 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.203 mW/g

SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.126 W/kg

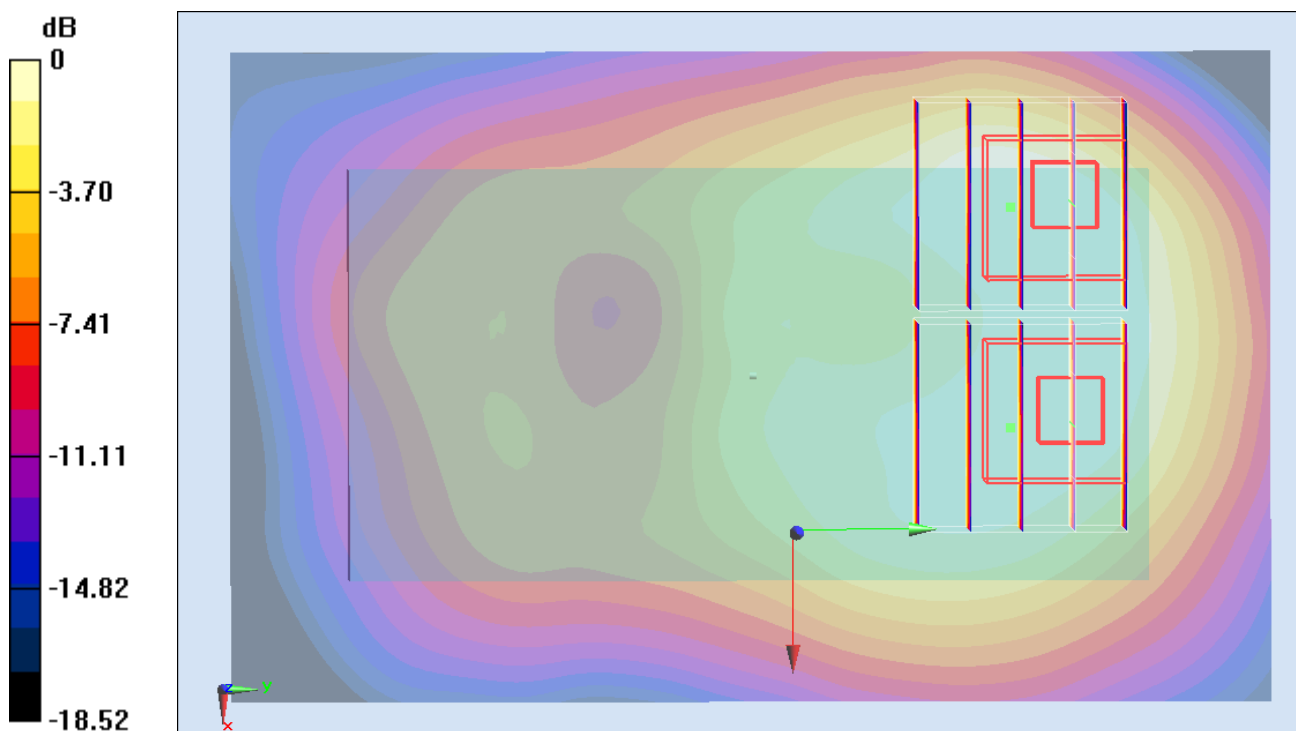

0 dB = 0.126 W/kg = -17.99 dB W/kg

#03_WLAN2.4G_802.11b_Left Side_1cm_Ch1**DUT: 232306-04**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.915$ mho/m; $\epsilon_r = 52.896$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.43, 6.43, 6.43); Calibrated: 2012/6/21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch2412/Area Scan (31x81x1): Measurement grid: dx=20 mm, dy=20 mm

Maximum value of SAR (interpolated) = 0.0418 W/kg



Ch2412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.229 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.087 mW/g

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.0499 W/kg

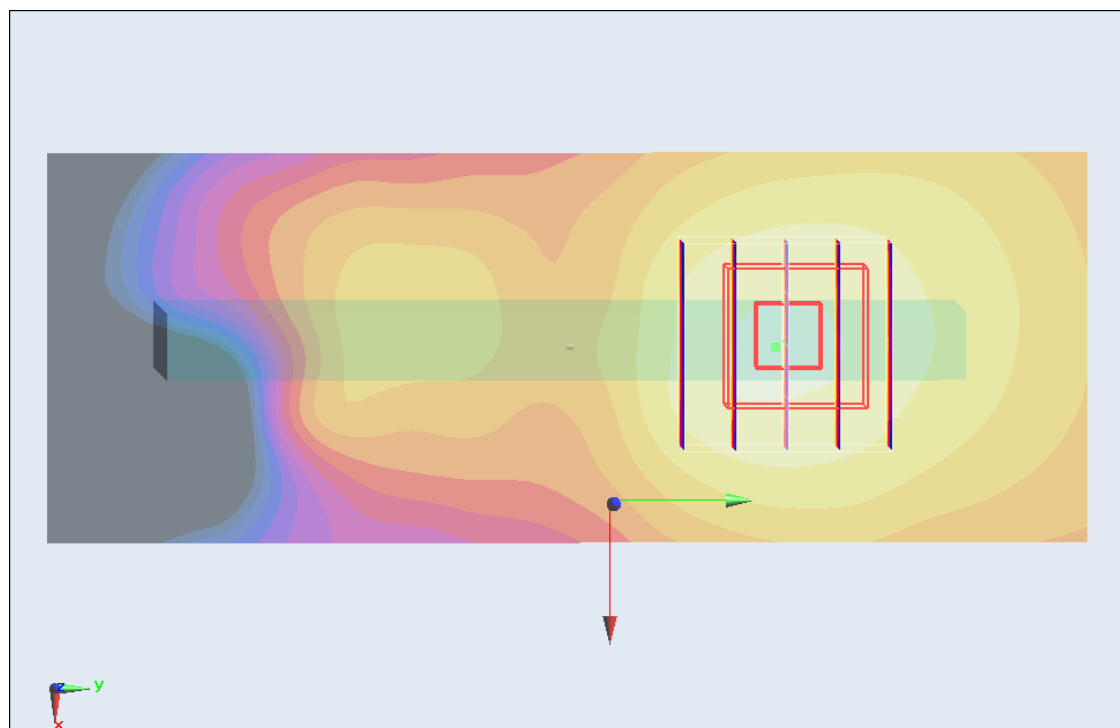

0 dB = 0.0499 W/kg = -26.04 dB W/kg

#04_WLAN2.4G_802.11b_Right Side_1cm_Ch1**DUT: 232306-04**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.915$ mho/m; $\epsilon_r = 52.896$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.43, 6.43, 6.43); Calibrated: 2012/6/21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch2412/Area Scan (31x81x1): Measurement grid: dx=20 mm, dy=20 mm

Maximum value of SAR (interpolated) = 0.180 W/kg



Ch2412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.432 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.349 mW/g

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.187 W/kg

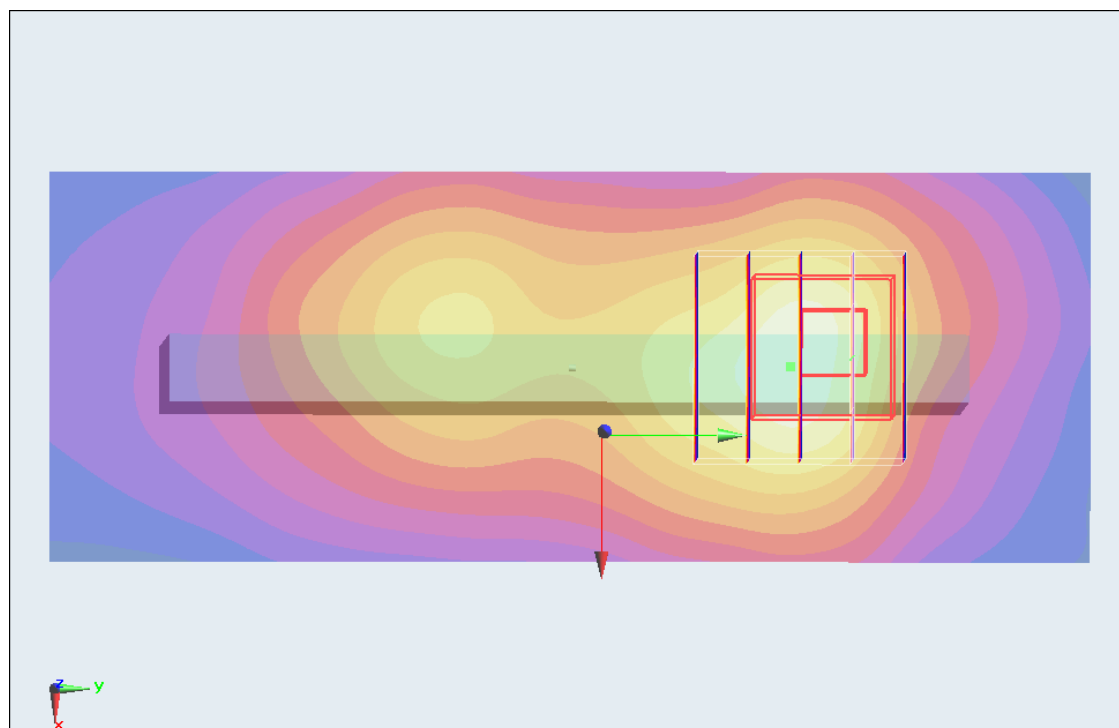

0 dB = 0.187 W/kg = -14.56 dB W/kg

#05_WLAN2.4G_802.11b_Top Side_1cm_Ch1**DUT: 232306-04**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.915$ mho/m; $\epsilon_r = 52.896$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.43, 6.43, 6.43); Calibrated: 2012/6/21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch2412/Area Scan (31x51x1): Measurement grid: dx=20 mm, dy=20 mm

Maximum value of SAR (interpolated) = 0.127 W/kg



Ch2412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.882 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.213 mW/g

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.126 W/kg

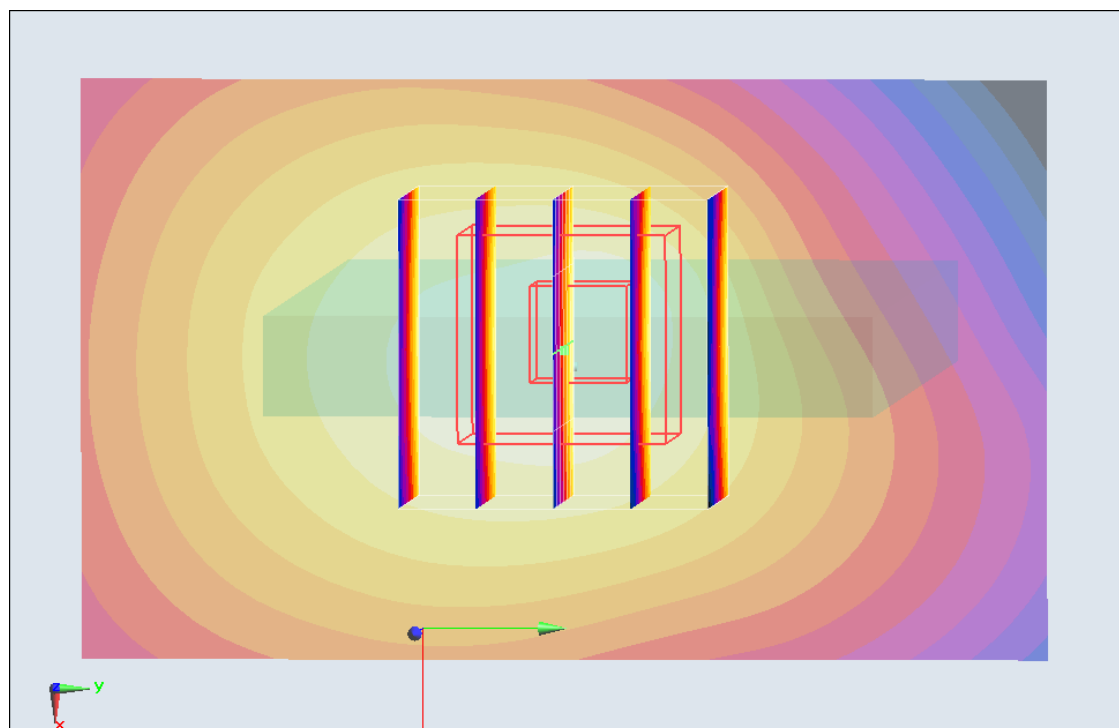

0 dB = 0.126 W/kg = -17.99 dB W/kg

#06_WLAN2.4G_802.11b_Bottom Side_1cm_Ch1**DUT: 232306-04**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.915$ mho/m; $\epsilon_r = 52.896$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.7 °C ; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.43, 6.43, 6.43); Calibrated: 2012/6/21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch2412/Area Scan (31x51x1): Measurement grid: dx=20 mm, dy=20 mm

Maximum value of SAR (interpolated) = 0.0144 W/kg


Ch2412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.471 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.022 mW/g

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.0075 mW/g

Maximum value of SAR (measured) = 0.0139 W/kg

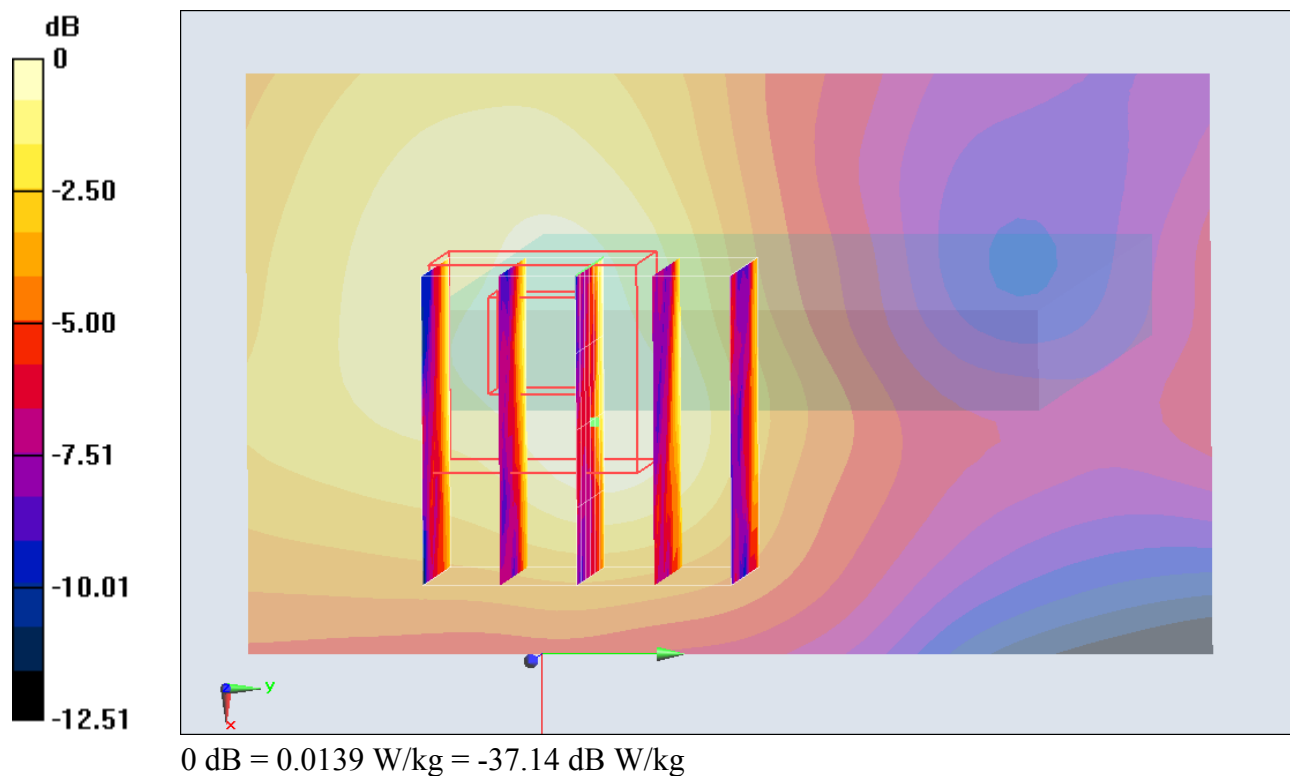

#01_WLAN2.4G_802.11b_Front_1cm_Ch1**DUT: 232306-04**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.915$ mho/m; $\epsilon_r = 52.896$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.43, 6.43, 6.43); Calibrated: 2012/6/21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch2412/Area Scan (51x81x1): Measurement grid: dx=20 mm, dy=20 mm

Maximum value of SAR (interpolated) = 0.127 W/kg

Ch2412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.026 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.244 mW/g

SAR(1 g) = 0.124 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.132 W/kg


Ch2412/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.026 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.187 mW/g

SAR(1 g) = 0.106 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.114 W/kg

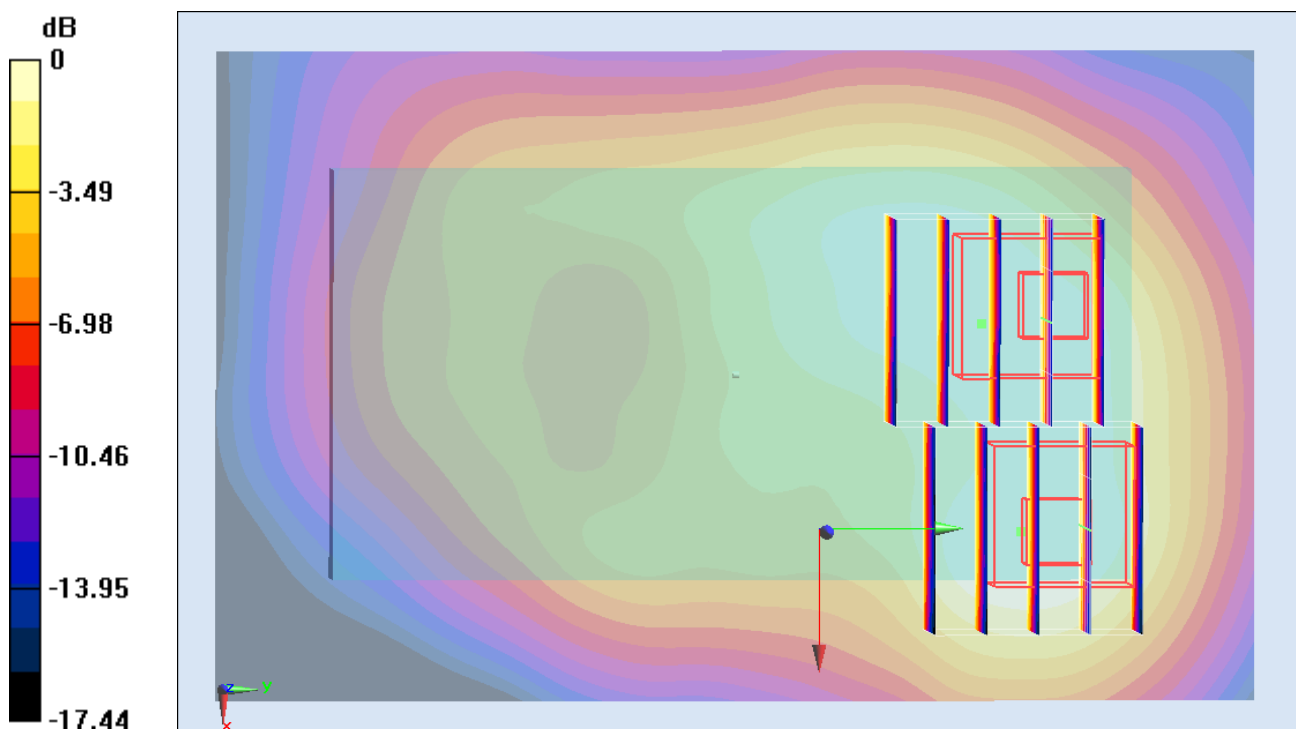

0 dB = 0.114 W/kg = -18.86 dB W/kg

#02_WLAN2.4G_802.11b_Back_1cm_Ch1**DUT: 232306-04**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.915$ mho/m; $\epsilon_r = 52.896$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.43, 6.43, 6.43); Calibrated: 2012/6/21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch2412/Area Scan (51x81x1): Measurement grid: dx=20 mm, dy=20 mm

Maximum value of SAR (interpolated) = 0.160 W/kg

Ch2412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.422 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.281 mW/g

SAR(1 g) = 0.139 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.152 W/kg


Ch2412/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.422 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.203 mW/g

SAR(1 g) = 0.117 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.126 W/kg

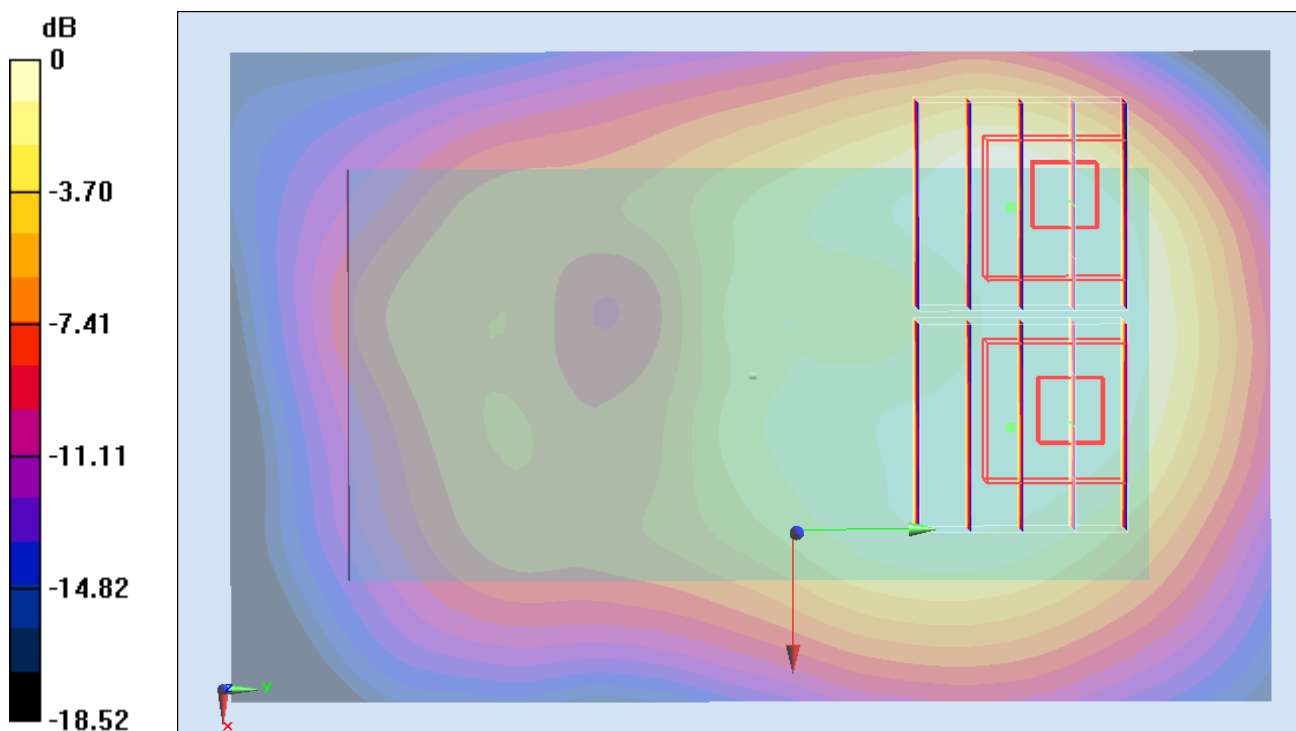

0 dB = 0.126 W/kg = -17.99 dB W/kg

#07_WLAN2.4G_802.11b_Back_1cm_Ch1;Headset**DUT: 232306-04**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.915$ mho/m; $\epsilon_r = 52.896$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.7 °C ; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.43, 6.43, 6.43); Calibrated: 2012/6/21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch2412/Area Scan (51x81x1): Measurement grid: dx=20 mm, dy=20 mm

Maximum value of SAR (interpolated) = 0.207 W/kg


Ch2412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.412 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.366 mW/g

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.195 W/kg

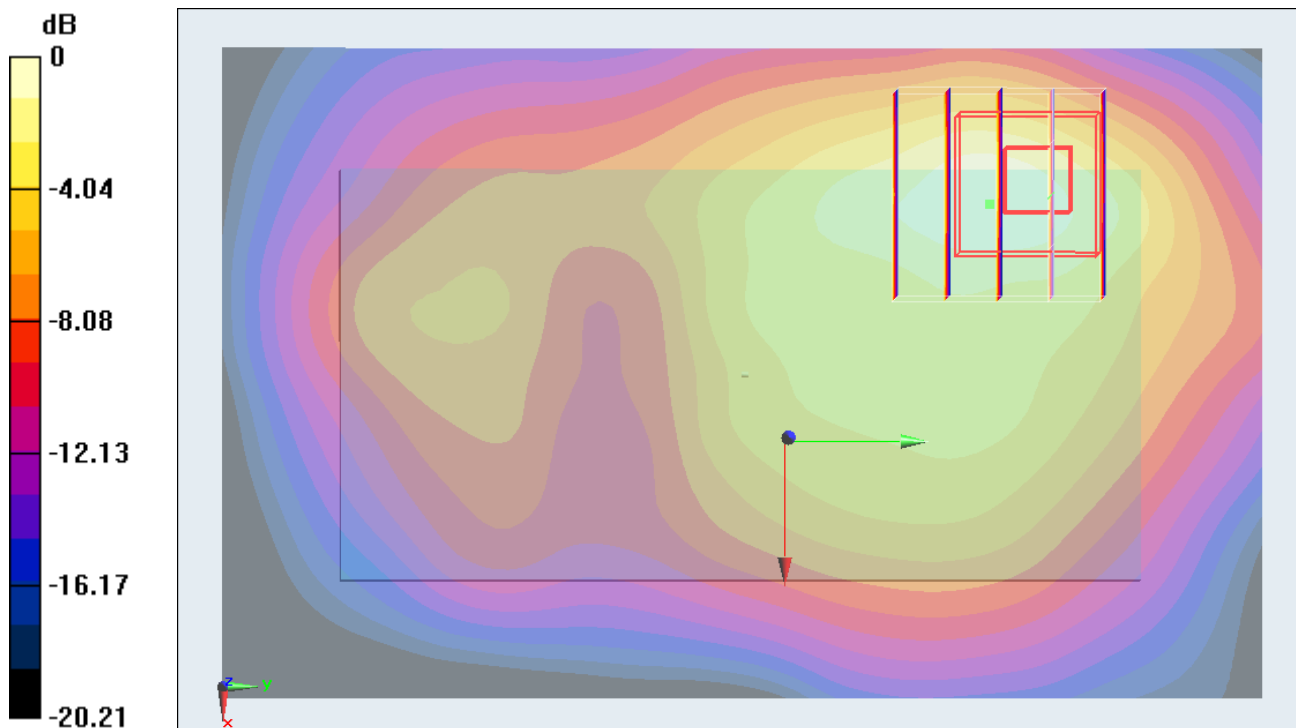

#07_WLAN2.4G_802.11b_Back_1cm_Ch1;Headset_2D**DUT: 232306-04**

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.915$ mho/m; $\epsilon_r = 52.896$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.7 °C ; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(6.43, 6.43, 6.43); Calibrated: 2012/6/21;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: SAM Left; Type: QD000P40CD; Serial: TP:1542
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

Ch2412/Area Scan (51x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.207 mW/g


Ch2412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.412 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.366 mW/g

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.195 mW/g

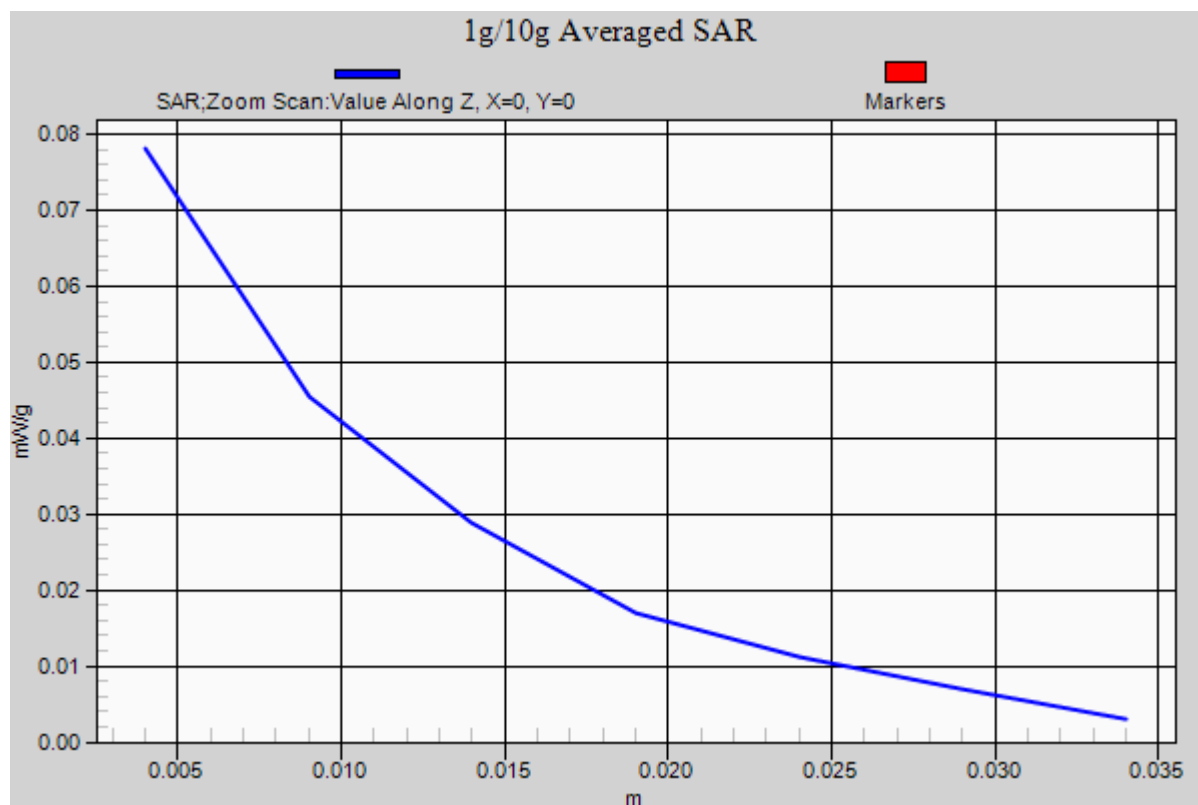

#46_WLAN5G_802.11a_Front_1cm_Ch44

DUT: 232306-04

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.32 \text{ mho/m}$; $\epsilon_r = 48.7$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.5°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch44/Area Scan (121x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.207 mW/g


Ch44/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.105 mW/g ; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.200 mW/g

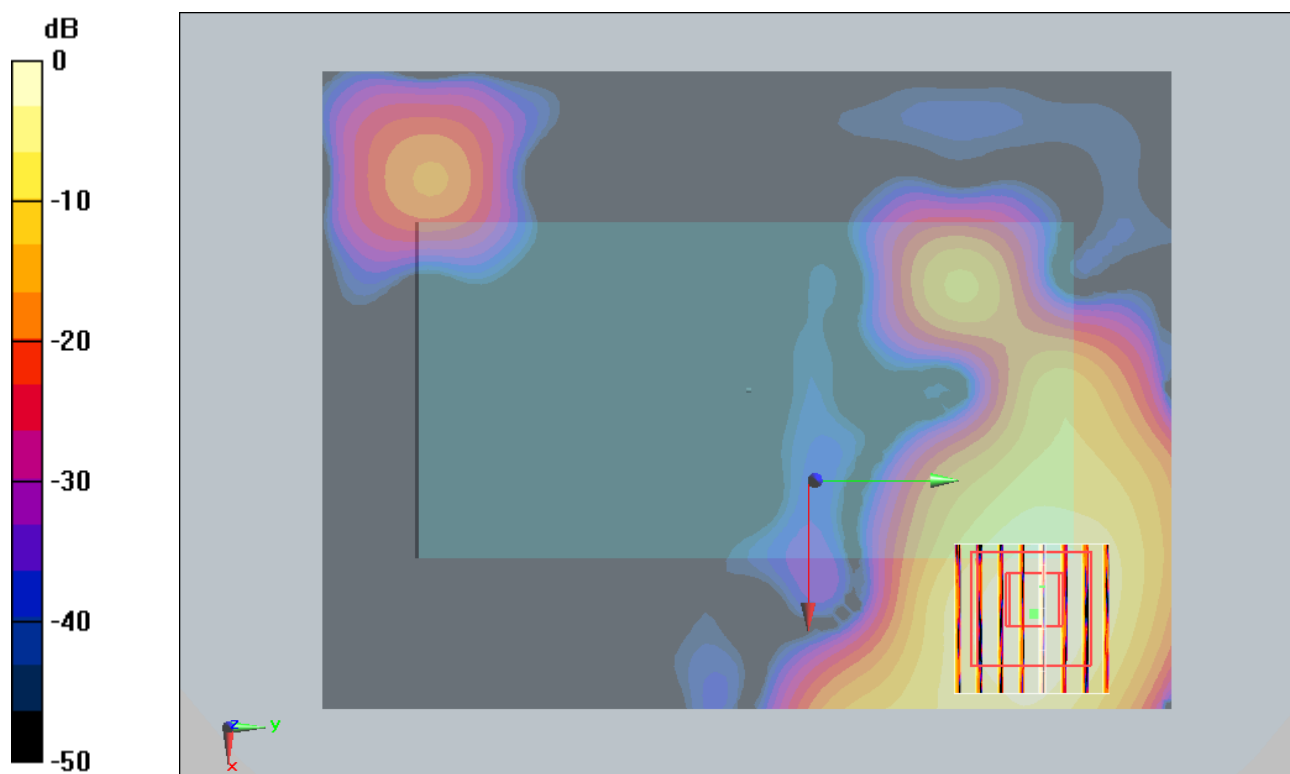

0 dB = 0.200mW/g

#47_WLAN5G_802.11a_Back_1cm_Ch44

DUT: 232306-04

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.32 \text{ mho/m}$; $\epsilon_r = 48.7$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.5°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch44/Area Scan (121x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.987 mW/g


Ch44/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 1.94 V/m ; Power Drift = 0.122 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 0.528 mW/g ; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 1 mW/g

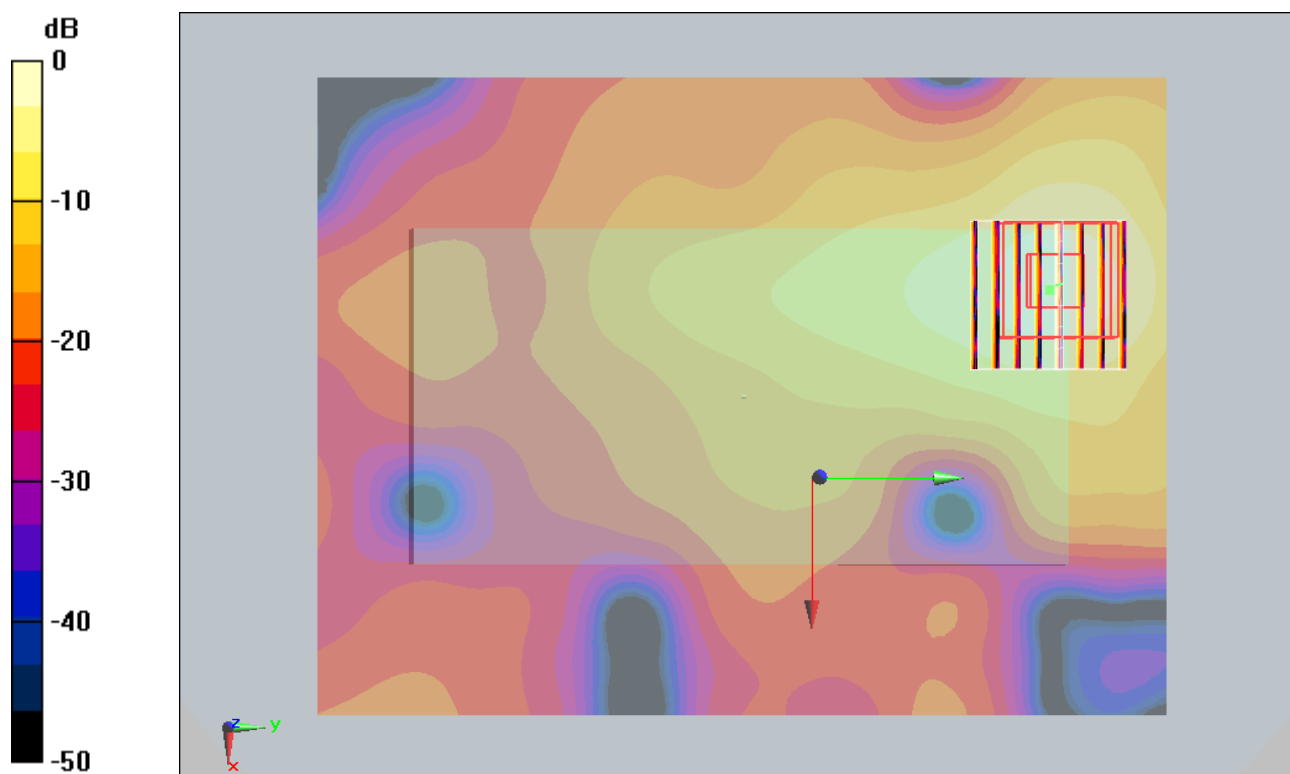

0 dB = 1mW/g

#48_WLAN5G_802.11a_Back_1cm_Headset_Ch44

DUT: 232306-04

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5220 \text{ MHz}$; $\sigma = 5.32 \text{ mho/m}$; $\epsilon_r = 48.7$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.5°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch44/Area Scan (121x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.04 mW/g


Ch44/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 1.98 V/m ; Power Drift = 0.124 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.545 mW/g ; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 1.05 mW/g

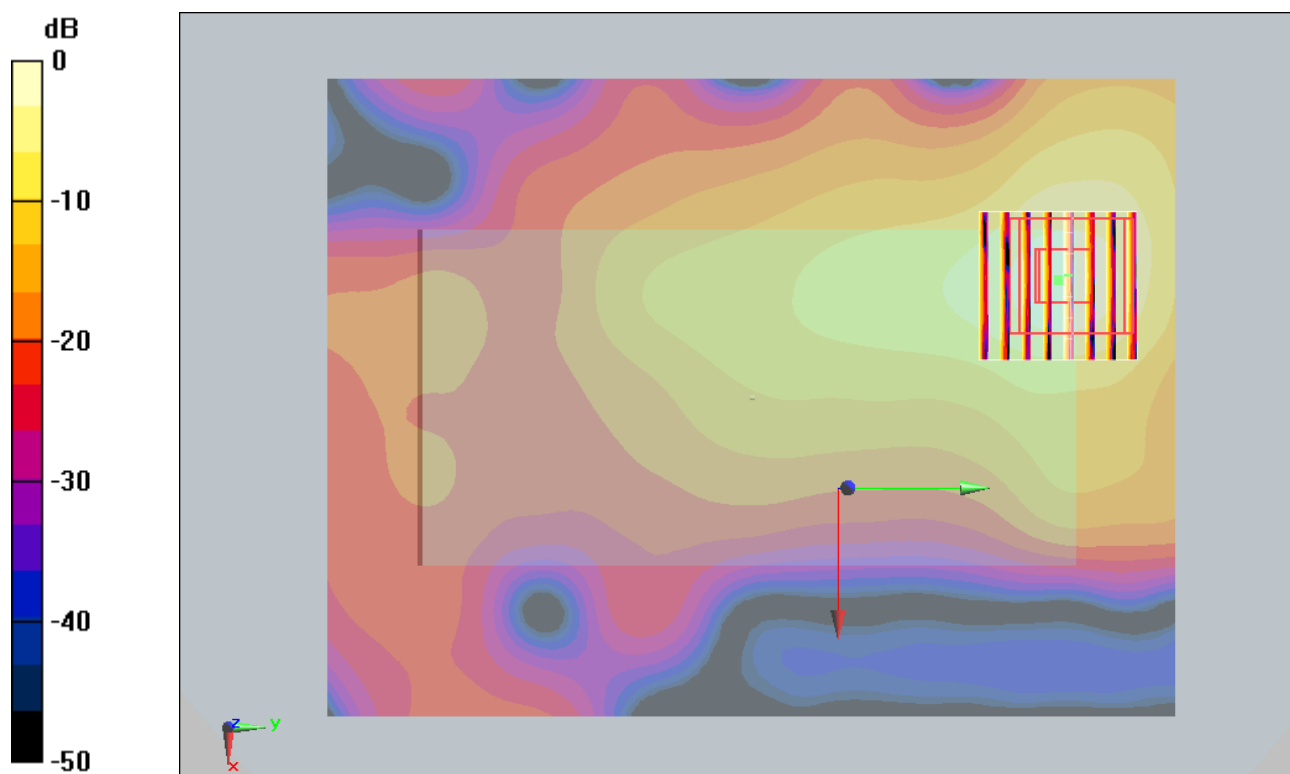

0 dB = 1.05mW/g

#48_WLAN5G_802.11a_Back_1cm_Headset_Ch44_2D**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5220$ MHz; $\sigma = 5.32$ mho/m; $\epsilon_r = 48.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch44/Area Scan (121x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.04 mW/g


Ch44/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.98 V/m; Power Drift = 0.124 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.545 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 1.05 mW/g

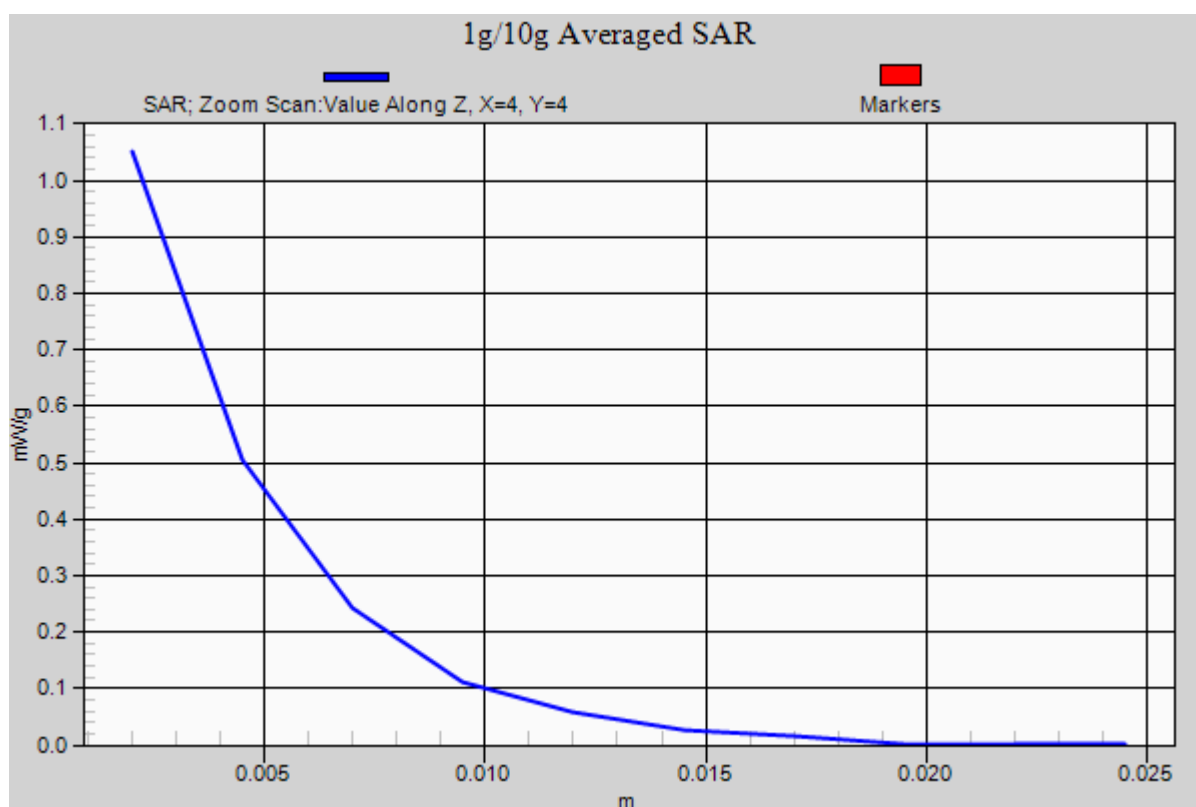

#49_WLAN5G_802.11a_Front_1cm_Ch60

DUT: 232306-04

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 5.43 \text{ mho/m}$; $\epsilon_r = 48.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.5°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch60/Area Scan (121x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.235 mW/g


Ch60/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.099 mW/g ; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.192 mW/g

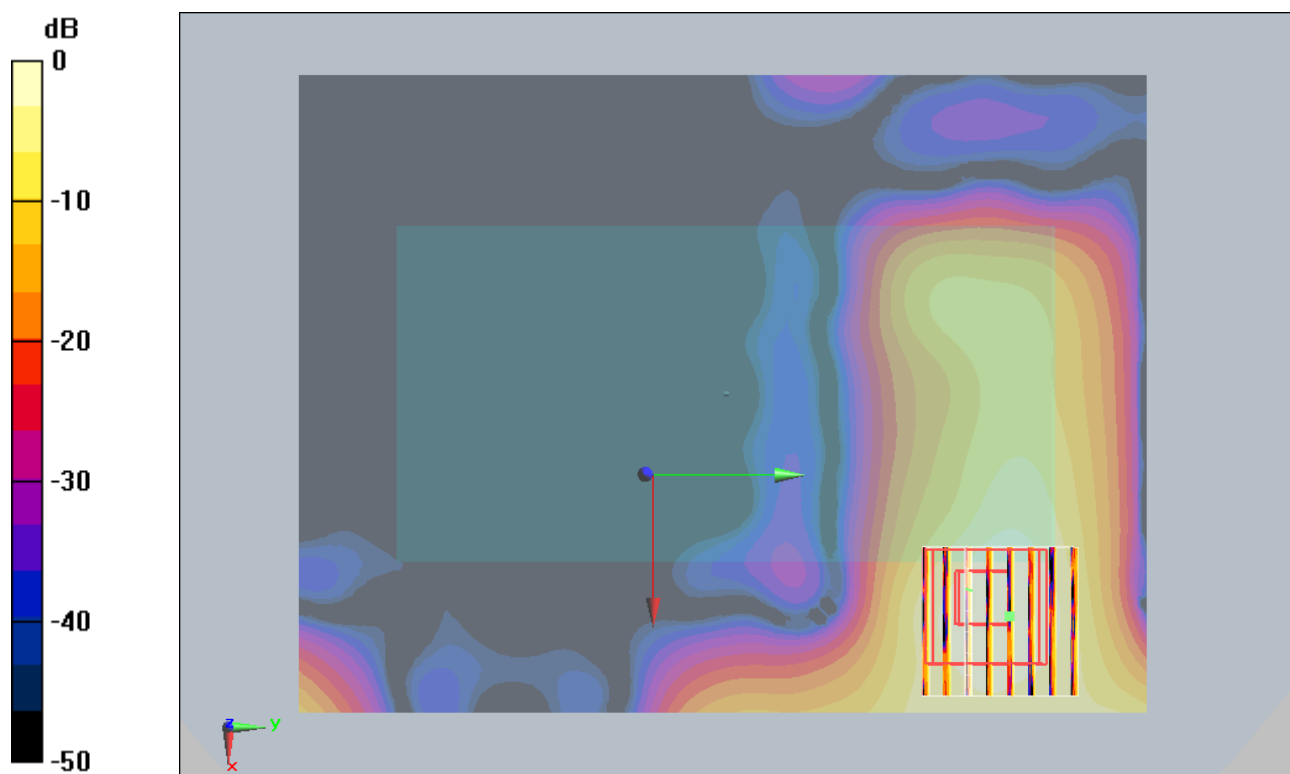

0 dB = 0.192mW/g

#50_WLAN5G_802.11a_Back_1cm_Ch60

DUT: 232306-04

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.43$ mho/m; $\epsilon_r = 48.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch60/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.877 mW/g


Ch60/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.95 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 0.613 mW/g; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 1.17 mW/g

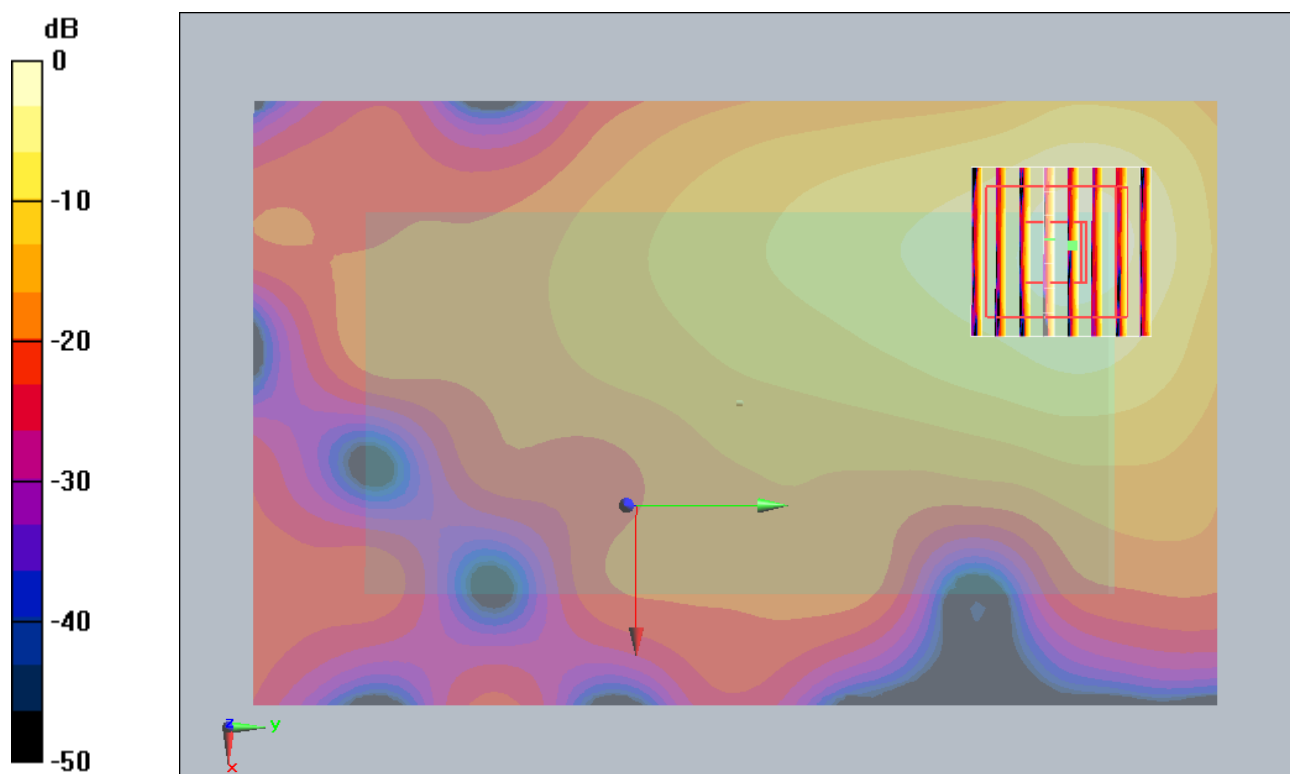

0 dB = 1.17mW/g

#51_WLAN5G_802.11a_Back_1cm_Headset_Ch60

DUT: 232306-04

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.43$ mho/m; $\epsilon_r = 48.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch60/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.02 mW/g


Ch60/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.08 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.623 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 1.22 mW/g

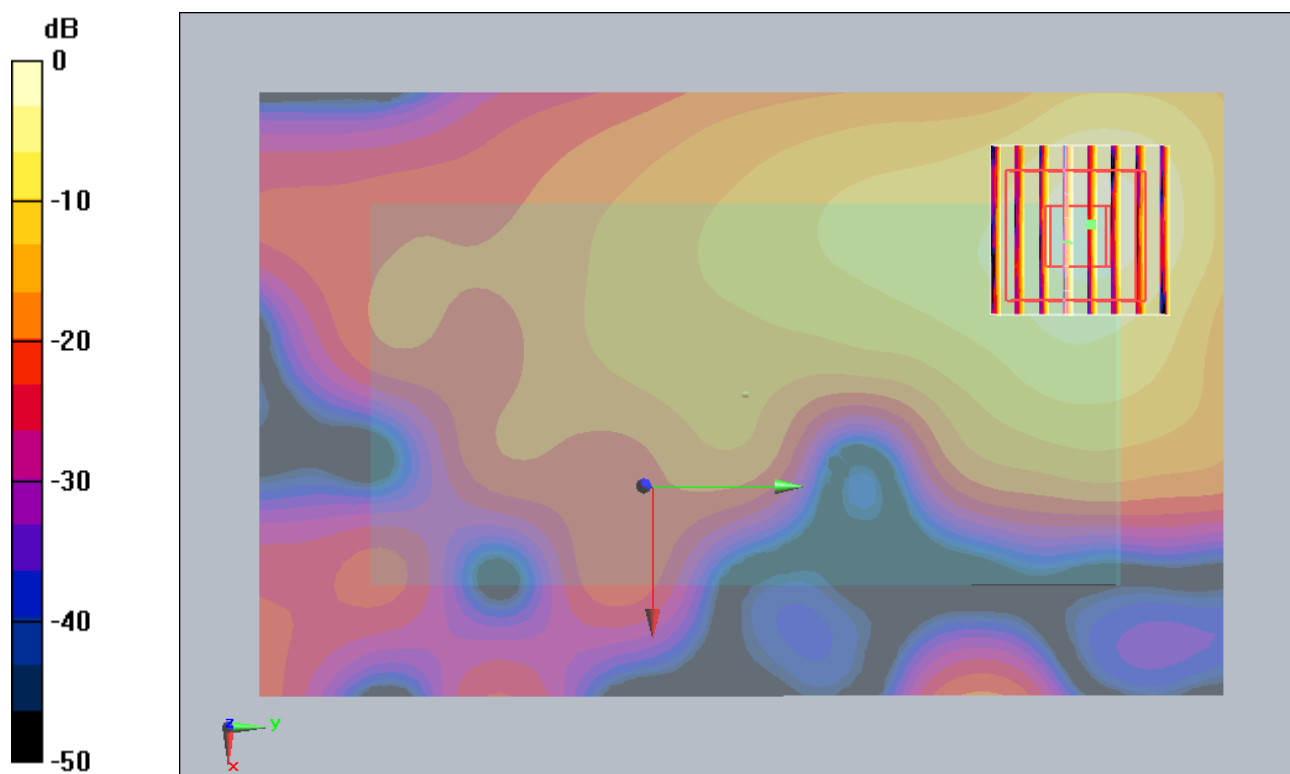

0 dB = 1.22mW/g

#51_WLAN5G_802.11a_Back_1cm_Headset_Ch60_2D**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.43$ mho/m; $\epsilon_r = 48.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.29, 4.29, 4.29); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch60/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.02 mW/g


Ch60/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.08 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.623 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 1.22 mW/g

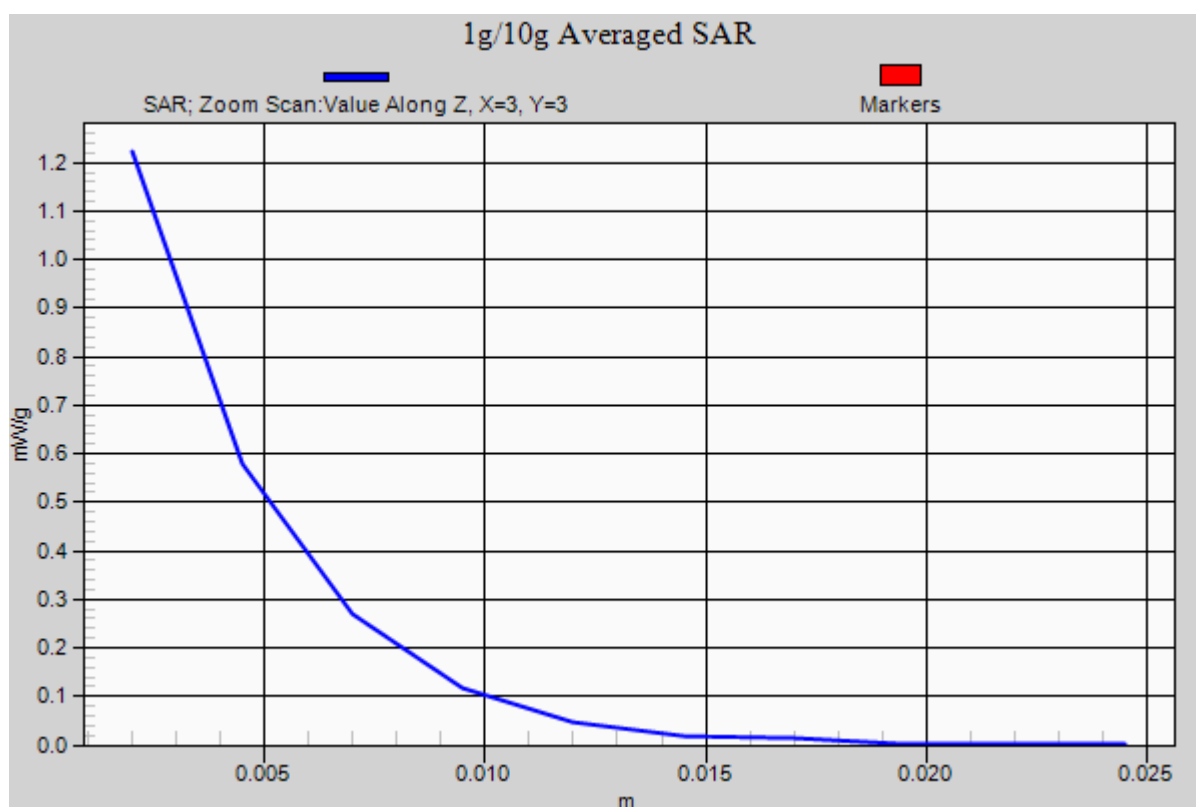

#52_WLAN5G_802.11a_Front_1cm_Ch108

DUT: 232306-04

Communication System: 802.11a; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.78$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(3.91, 3.91, 3.91); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch108/Area Scan (121x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.044 mW/g


Ch108/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00711 mW/g

Maximum value of SAR (measured) = 0.044 mW/g

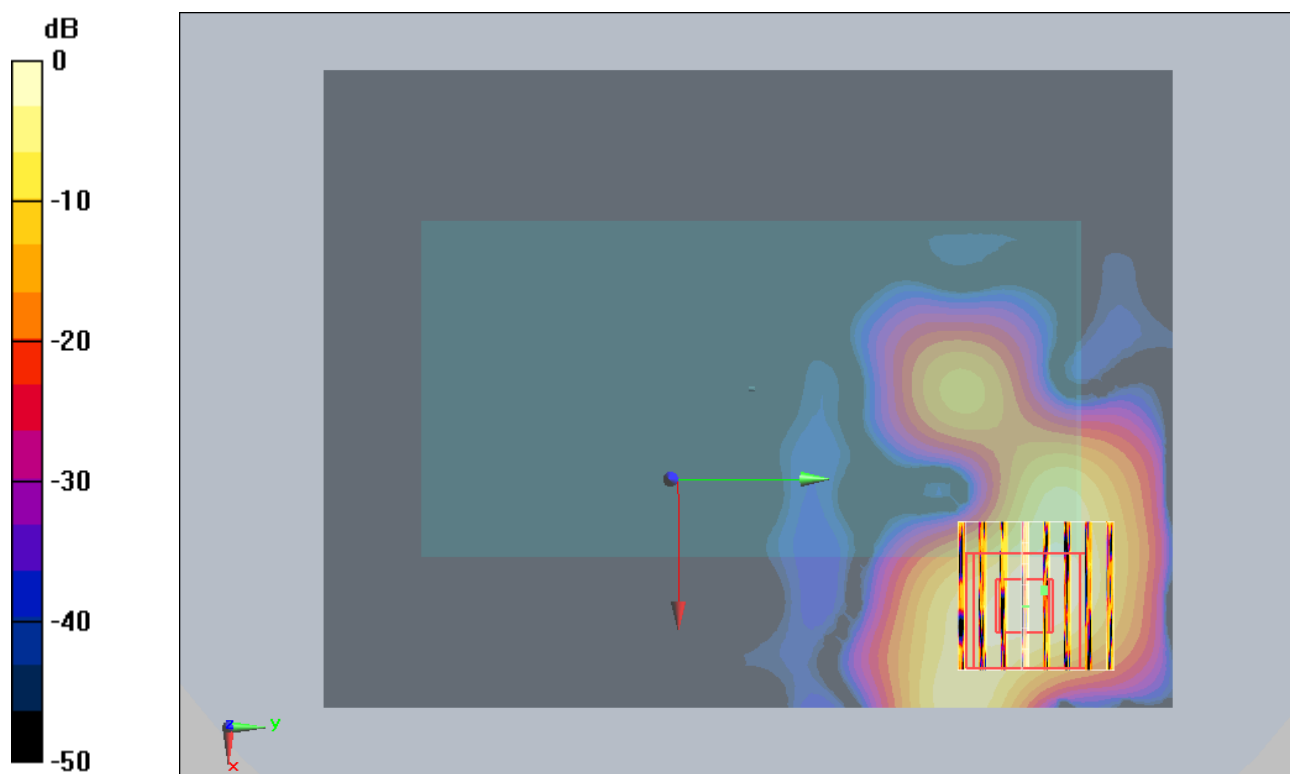

0 dB = 0.044mW/g

#53_WLAN5G_802.11a_Back_1cm_Ch108

DUT: 232306-04

Communication System: 802.11a; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used : $f = 5540$ MHz; $\sigma = 5.78$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(3.91, 3.91, 3.91); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch108/Area Scan (121x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.652 mW/g


Ch108/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.744 V/m; Power Drift = 0.104 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.474 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.997 mW/g

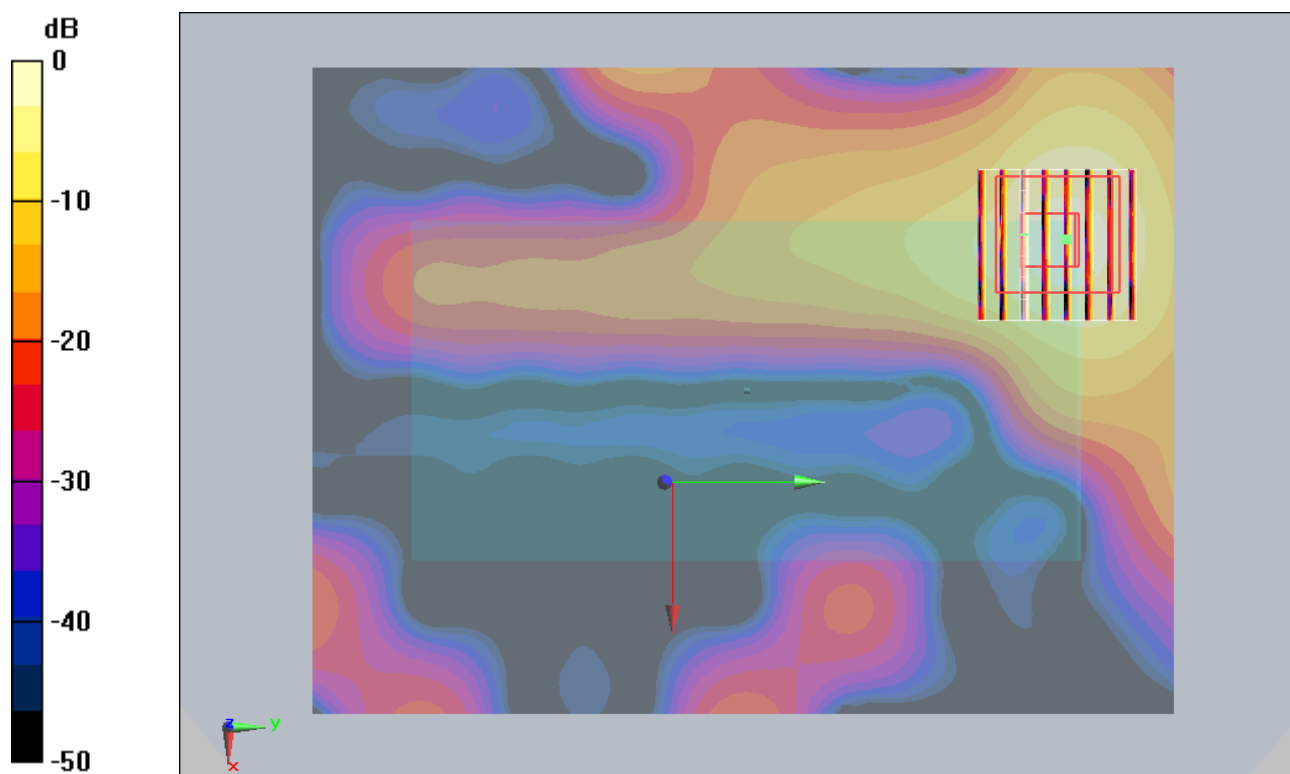

0 dB = 0.997mW/g

#53_WLAN5G_802.11a_Back_1cm_Ch108_2D

DUT: 232306-04

Communication System: 802.11a; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used : $f = 5540$ MHz; $\sigma = 5.78$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(3.91, 3.91, 3.91); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch108/Area Scan (121x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.652 mW/g


Ch108/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.744 V/m; Power Drift = 0.104 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.474 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.997 mW/g

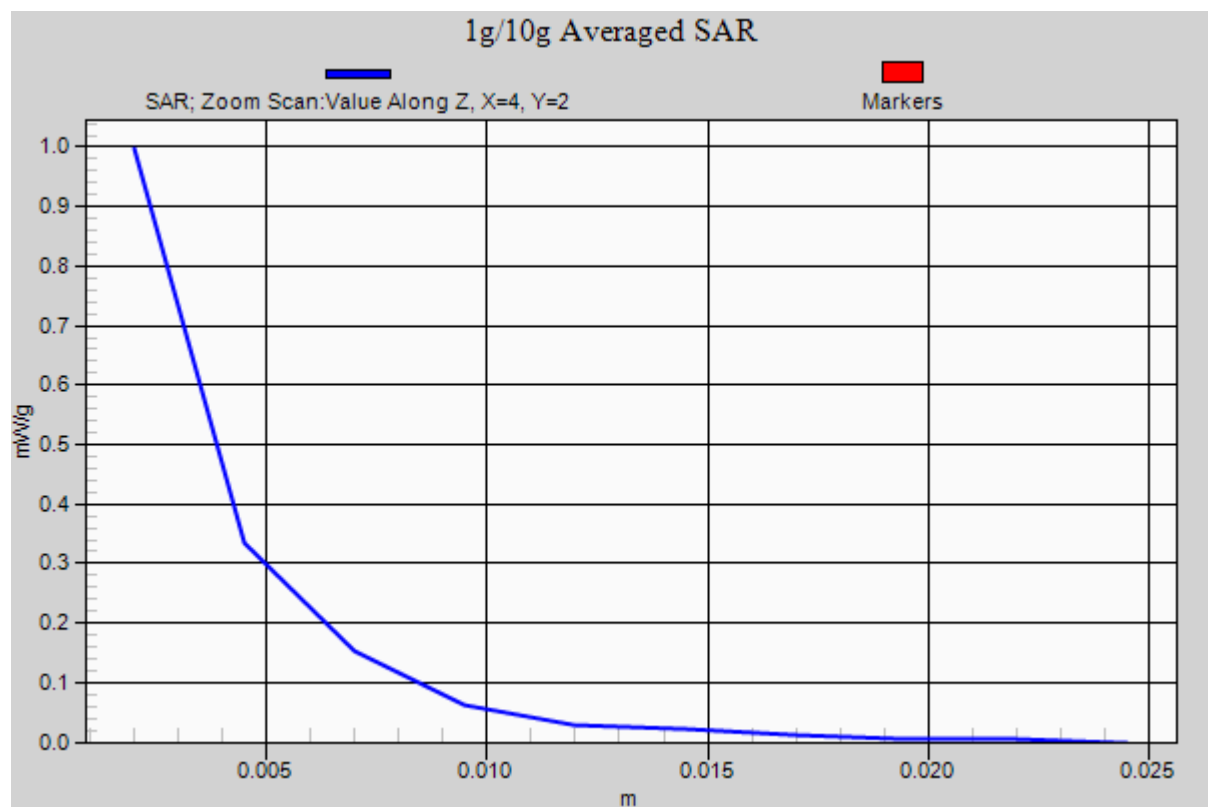

#54_WLAN5G_802.11a_Back_1cm_Ch108_Headset

DUT: 232306-04

Communication System: 802.11a; Frequency: 5540 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used : $f = 5540$ MHz; $\sigma = 5.78$ mho/m; $\epsilon_r = 48$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(3.91, 3.91, 3.91); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch108/Area Scan (121x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.522 mW/g


Ch108/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.817 mW/g

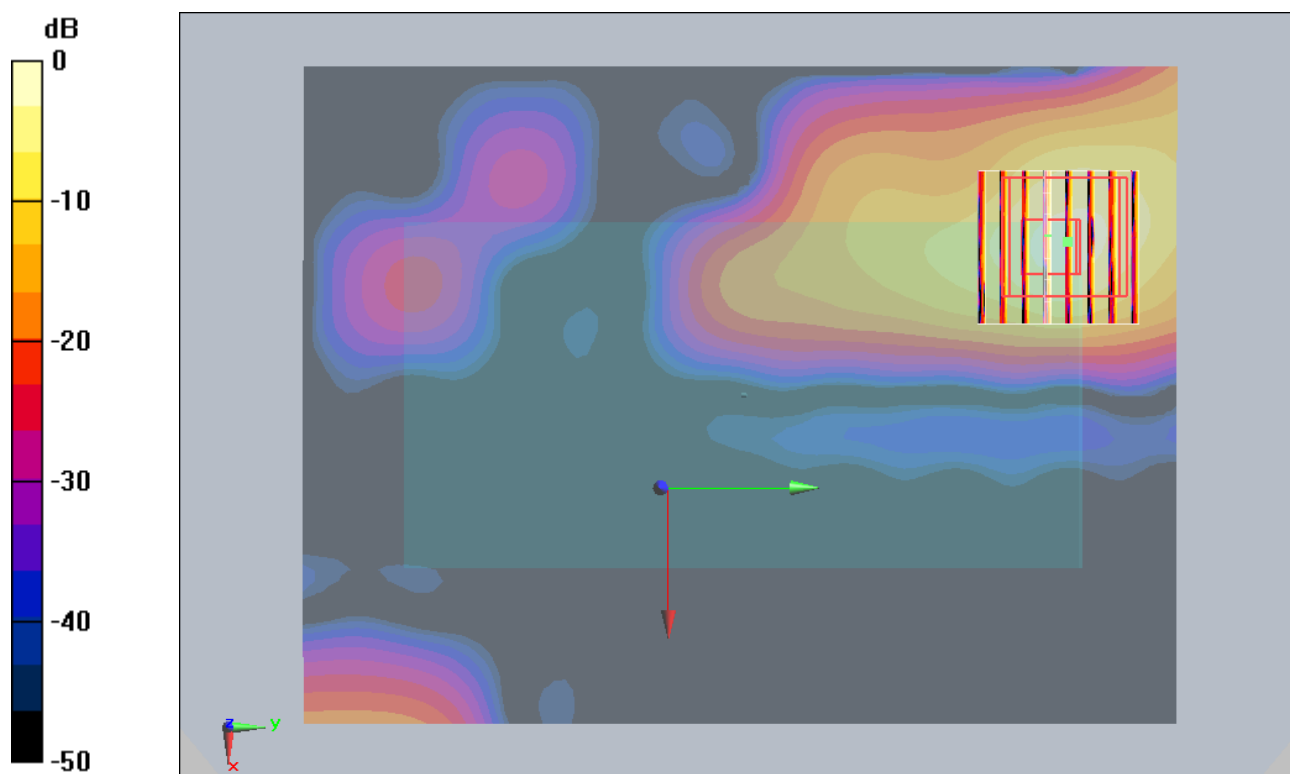

0 dB = 0.817mW/g

#55_WLAN5G_802.11a_Front_1cm_Ch149

DUT: 232306-04

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used : $f = 5745$ MHz; $\sigma = 6.06$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch149/Area Scan (121x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.055 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00741 mW/g

Maximum value of SAR (measured) = 0.050 mW/g

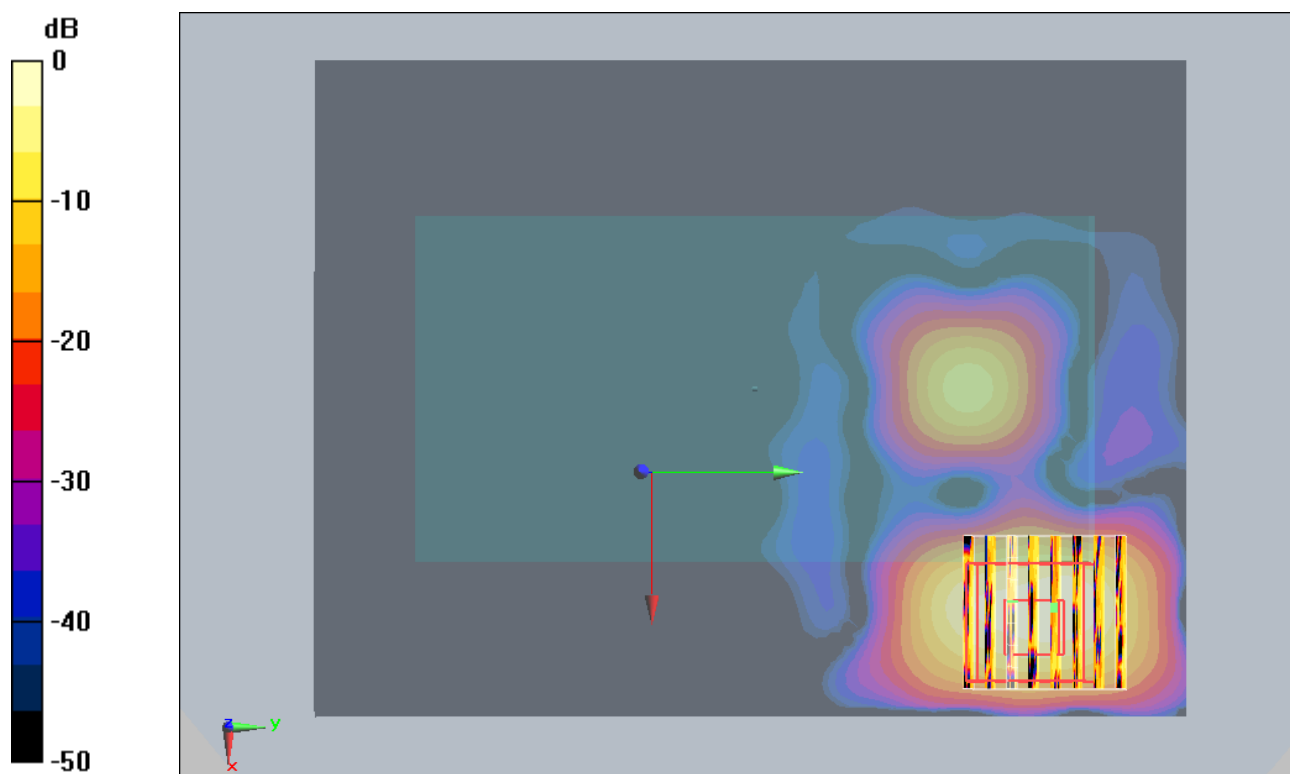

0 dB = 0.050mW/g

#56_WLAN5G_802.11a_Back_1cm_Ch149

DUT: 232306-04

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used : $f = 5745 \text{ MHz}$; $\sigma = 6.06 \text{ mho/m}$; $\epsilon_r = 47.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.5°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch149/Area Scan (121x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.174 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.635 W/kg

SAR(1 g) = 0.114 mW/g ; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.267 mW/g

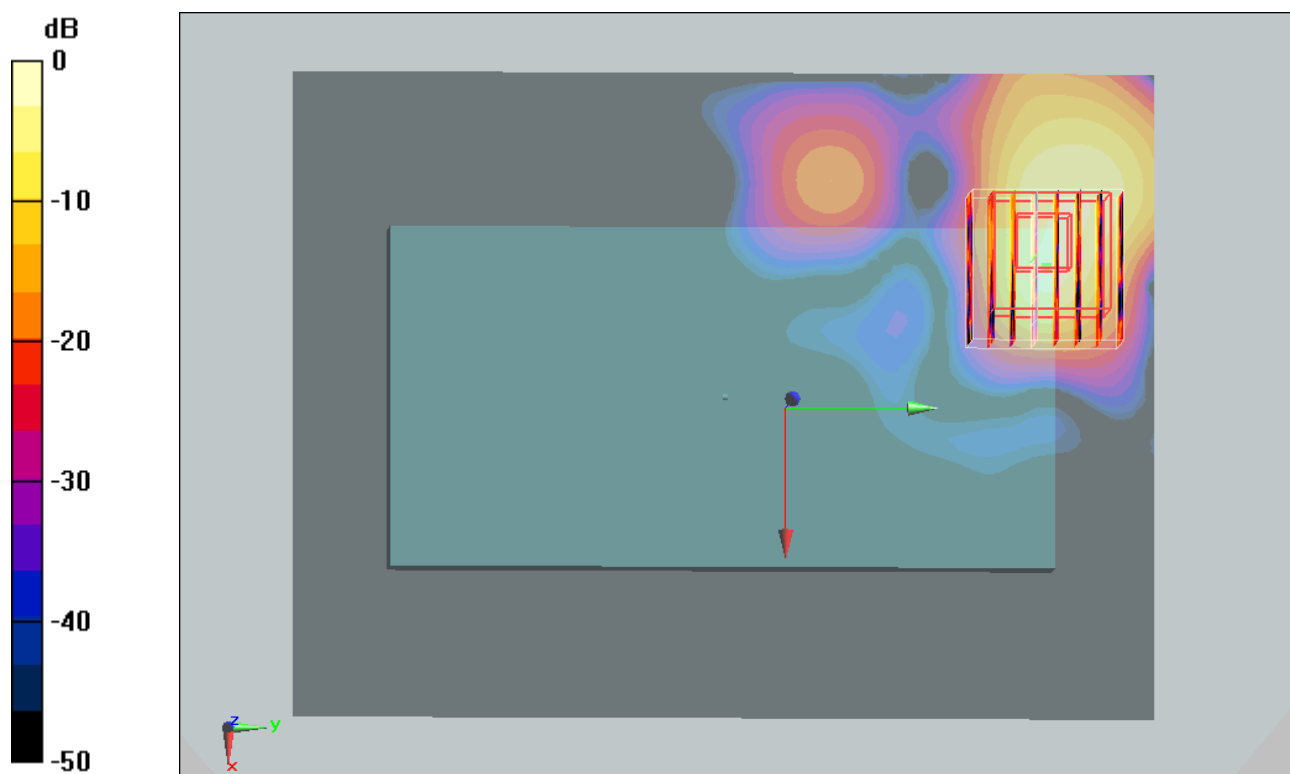

0 dB = 0.267mW/g

#57_WLAN5G_802.11a_Left Side_1cm_Ch149

DUT: 232306-04

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.06 \text{ mho/m}$; $\epsilon_r = 47.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.5°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch149/Area Scan (81x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.00144 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.031 W/kg

SAR(1 g) = $9.63\text{e-}005 \text{ mW/g}$; SAR(10 g) = $1.35\text{e-}005 \text{ mW/g}$

Maximum value of SAR (measured) = 0.031 mW/g

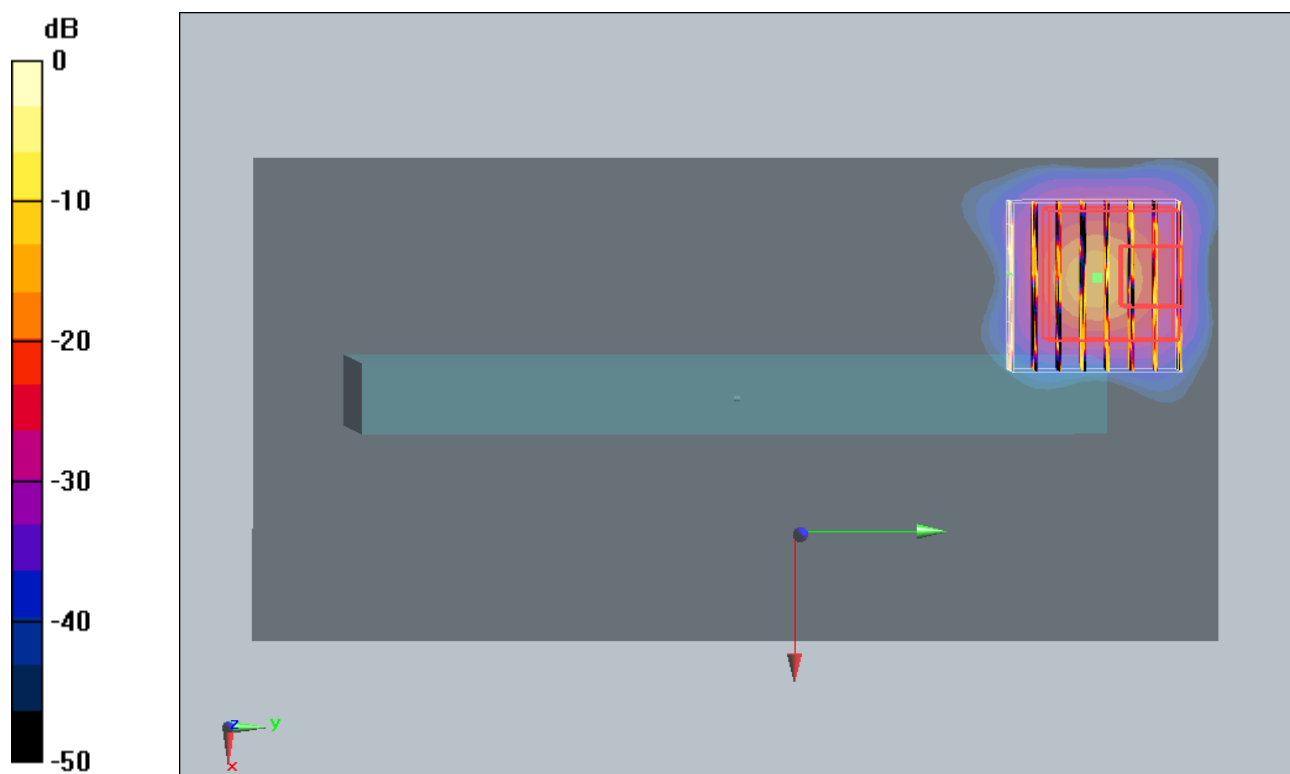

0 dB = 0.031mW/g

#58_WLAN5G_802.11a_Right Side_1cm_Ch149

DUT: 232306-04

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.06 \text{ mho/m}$; $\epsilon_r = 47.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.5°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch149/Area Scan (81x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.160 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.059 mW/g ; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.130 mW/g

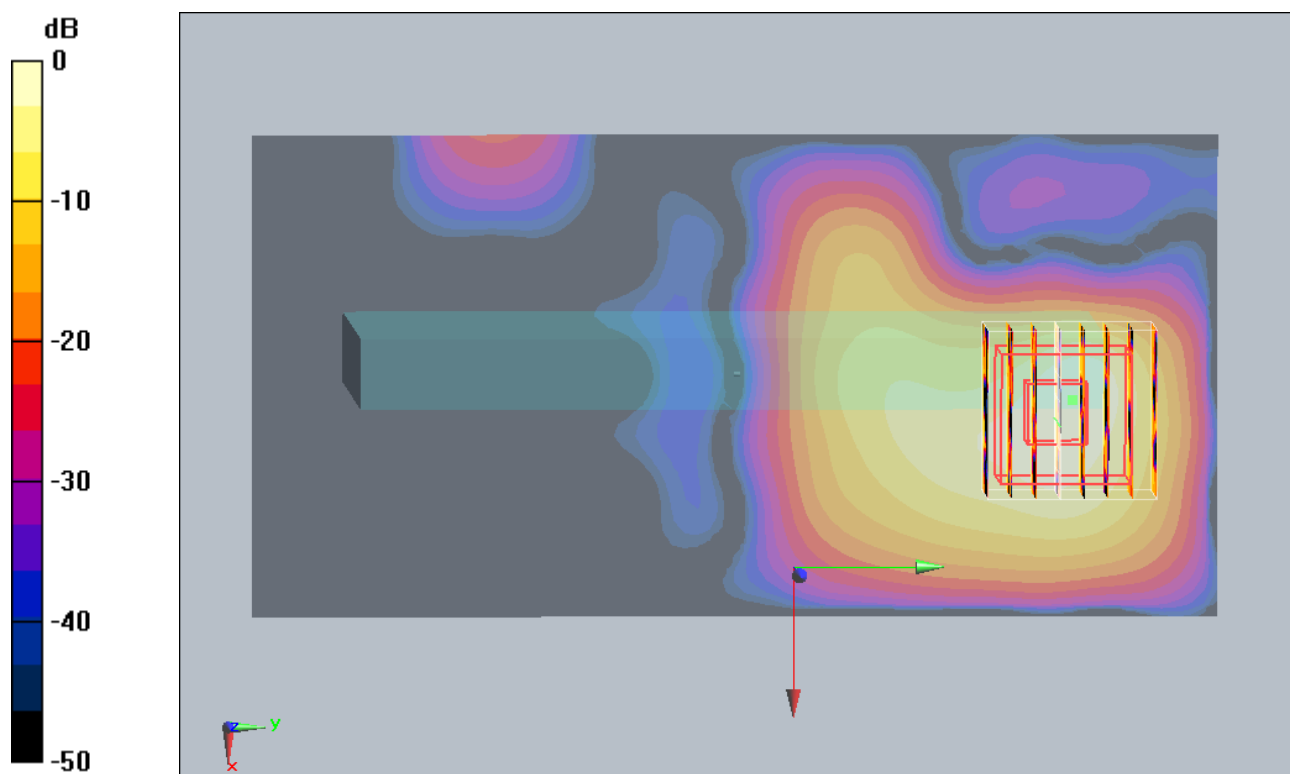

0 dB = 0.130mW/g

#59_WLAN5G_802.11a_Top Side_1cm_Ch149

DUT: 232306-04

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.06 \text{ mho/m}$; $\epsilon_r = 47.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.5°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch149/Area Scan (81x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.136 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 1.43 V/m ; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.032 mW/g ; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.077 mW/g

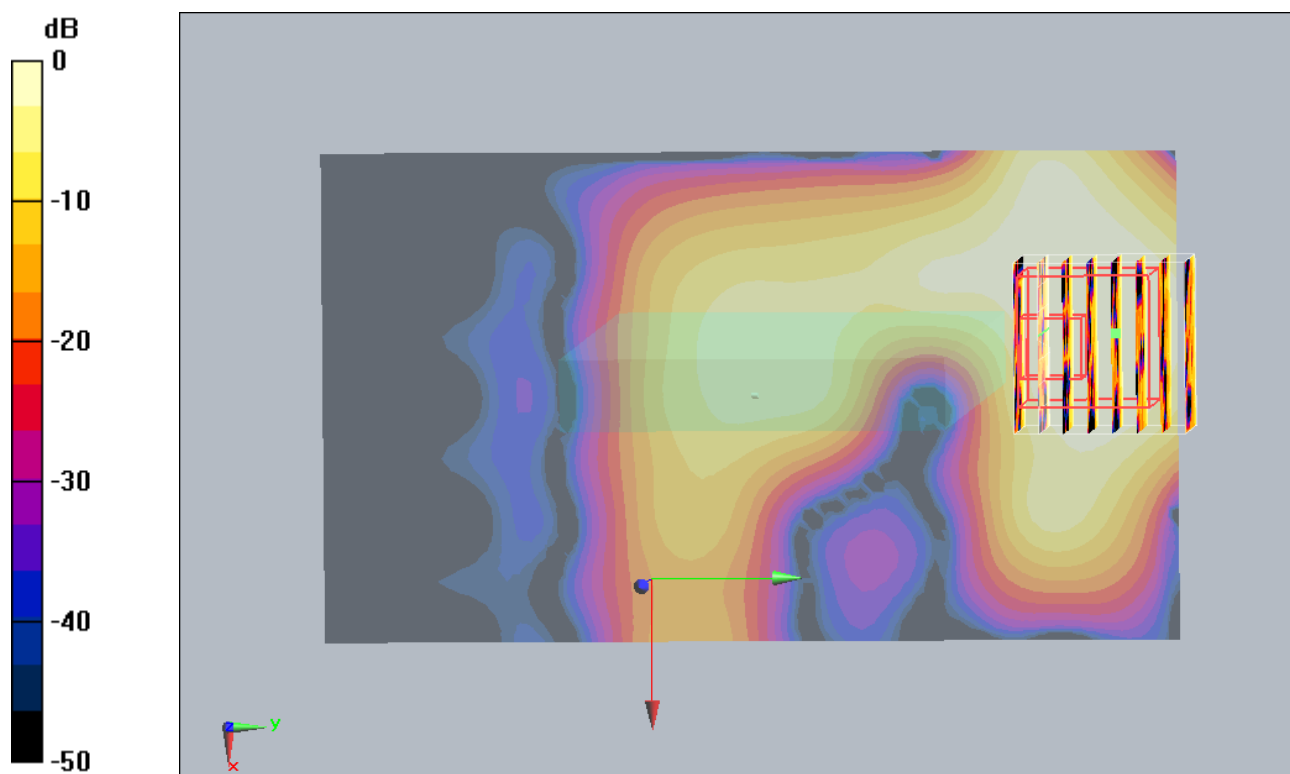

0 dB = 0.077mW/g

#60_WLAN5G_802.11a_Bottom Side_1cm_Ch149

DUT: 232306-04

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5745$ MHz; $\sigma = 6.06$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch149/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.00109 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0 W/kg

SAR(1 g) = 9.42e-005 mW/g; SAR(10 g) = 1.21e-005 mW/g

Maximum value of SAR (measured) = 0.00976 mW/g

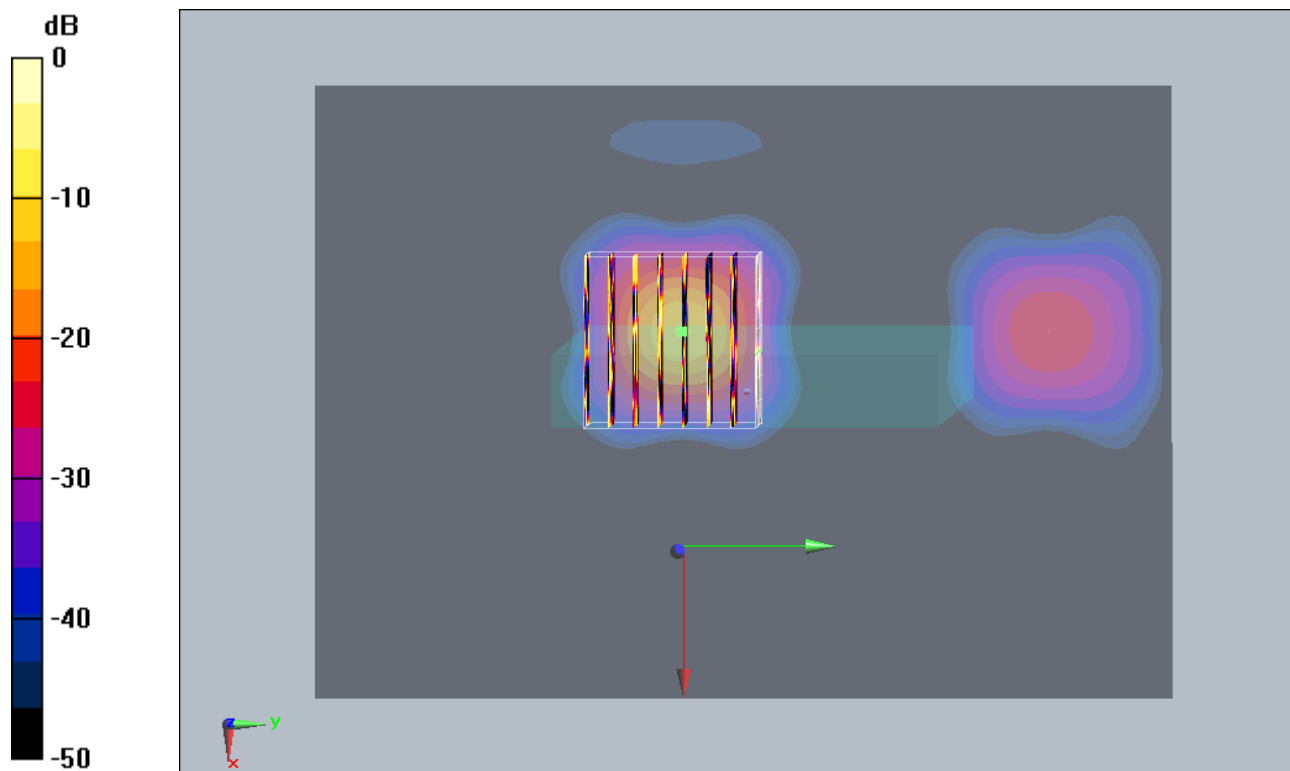

0 dB = 0.00976mW/g

#55_WLAN5G_802.11a_Front_1cm_Ch149

DUT: 232306-04

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used : $f = 5745$ MHz; $\sigma = 6.06$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch149/Area Scan (121x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.055 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00741 mW/g

Maximum value of SAR (measured) = 0.050 mW/g

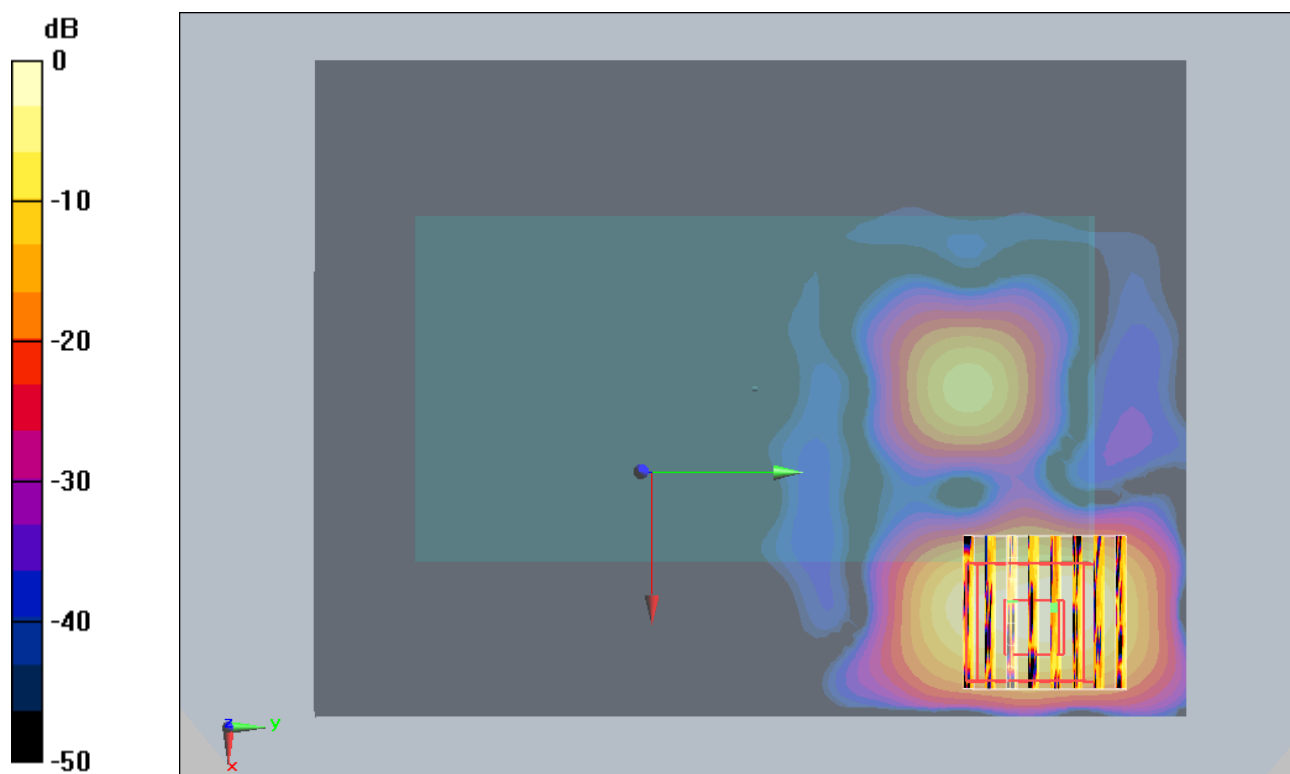

0 dB = 0.050mW/g

#56_WLAN5G_802.11a_Back_1cm_Ch149

DUT: 232306-04

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used : $f = 5745 \text{ MHz}$; $\sigma = 6.06 \text{ mho/m}$; $\epsilon_r = 47.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.5°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch149/Area Scan (121x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.174 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.635 W/kg

SAR(1 g) = 0.114 mW/g ; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.267 mW/g

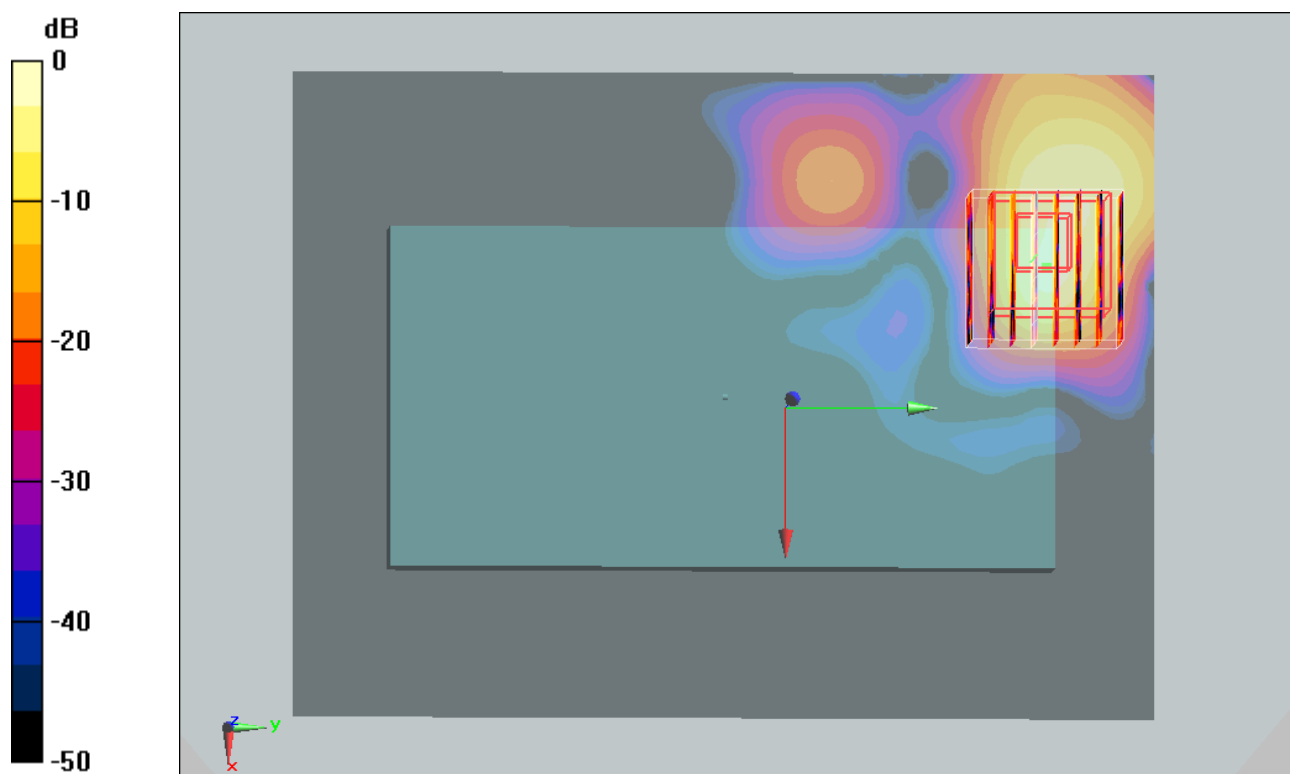

0 dB = 0.267mW/g

#61_WLAN5G_802.11a_Back_1cm_Ch149;Headset

DUT: 232306-04

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.06 \text{ mho/m}$; $\epsilon_r = 47.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.5°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch149/Area Scan (121x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.139 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2.5\text{mm}$

Reference Value = 0 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.148 mW/g ; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.322 mW/g

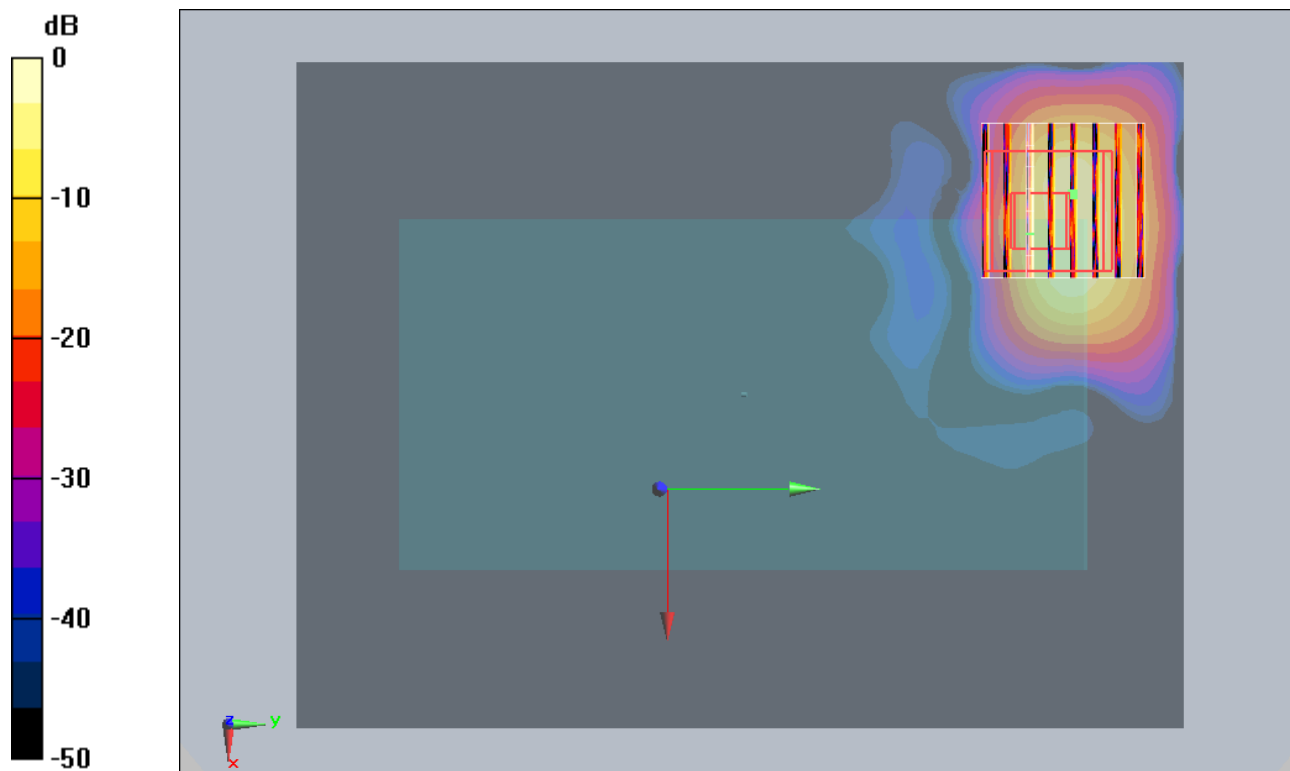

0 dB = 0.322mW/g

#61_WLAN5G_802.11a_Back_1cm_Ch149;Headset_2D**DUT: 232306-04**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_121012 Medium parameters used: $f = 5745$ MHz; $\sigma = 6.06$ mho/m; $\epsilon_r = 47.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3697; ConvF(4.06, 4.06, 4.06); Calibrated: 2012/9/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2012/5/3
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Software: DASY5 Version; SEMCAD X Version 13.4 Build 45

Ch149/Area Scan (121x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.139 mW/g

Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.148 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.322 mW/g

