



A D T

FCC DoC TEST REPORT

REPORT NO. : FD980630H04

MODEL NO. : AR5B97

RECEIVED : June 30, 2009

TESTED : July 13 to 30, 2009

ISSUED DATE: Aug. 06, 2009

APPLICANT : Atheros Communications, Inc.

ADDRESS : 5480 Great America Parkway, Santa Clara, CA
95054

ISSUED BY : Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB LOCATION : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan.

This test report consists of 26 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, NVLAP or any government agencies.





A D T

Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
2.1	MEASUREMENT UNCERTAINTY	4
3	GENERAL INFORMATION	5
3.1	GENERAL DESCRIPTION OF EUT	5
3.2	GENERAL DESCRIPTION OF TEST MODE	6
3.3	DESCRIPTION OF SUPPORT UNITS	7
3.4	CONFIGURATION OF SYSTEM UNDER TEST	7
4	EMISSION TEST	8
4.1	CONDUCTED EMISSION MEASUREMENT	8
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	8
4.1.2	TEST INSTRUMENTS	8
4.1.3	TEST PROCEDURE	9
4.1.4	DEVIATION FROM TEST STANDARD	9
4.1.5	TEST SETUP	10
4.1.6	EUT OPERATING CONDITIONS	10
4.1.7	TEST RESULTS	11
4.2	RADIATED EMISSION MEASUREMENT	13
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	13
4.2.2	TEST INSTRUMENTS	14
4.2.3	TEST PROCEDURE	15
4.2.4	DEVIATION FROM TEST STANDARD	15
4.2.5	TEST SETUP	16
4.2.6	EUT OPERATING CONDITIONS	16
4.2.7	TEST RESULTS(MODE 1)	17
4.2.8	TEST RESULTS(MODE 2)	21
5	INFORMATION ON THE TESTING LABORATORIES	25
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	26



A D T

1 CERTIFICATION

PRODUCT : 802.11n 2x2 Minicard
BRAND NAME : Atheros
MODEL NO. : AR5B97
TESTED : July 13 to 30, 2009
TEST SAMPLE : R&D SAMPLE
APPLICANT : Atheros Communications, Inc.
STANDARDS : FCC Part 15, Subpart B, Class B
CISPR 22: 1997, Class B
ANSI C63.4-2003
ICES-003: 2004, Class B

The above equipment (Model: AR5B97) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and was in compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng , **DATE:** Aug. 06, 2009
(Midoli Peng, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** Aug. 06, 2009
Responsible for RF (Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** Aug. 06, 2009
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

Standard	Test Type	Result	Remarks
FCC Part 15 Subpart B, Class B CISPR 22: 1997, Class B	Conducted Test	PASS	Meets Class B Limit Minimum passing margin is -16.68 dB at 0.209 MHz
ICES-003: Class B	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is -1.86 dB at 166.11 MHz

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.44 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11n 2x2 Minicard
MODEL NO.	AR5B97
POWER SUPPLY	DC 3.3V from host equipment
POWER CORD	NA
DATA CABLE SUPPLIED	NA
I/O PORT	NA

NOTE:

- There are two sets of antennas provided to this EUT, please refer to the following table:

Set 1					
Transmitter Circuit	Brand	Model	Antenna Type	Antenna Gain (dBi)	Antenna Connector
Chain(0)	Inpaq	DAMA1BM3000402	Dipole	3.2	RPSMA
Chain(1)	Inpaq	DAMA1BM3000402	Dipole	3.2	RPSMA
Set 2					
Transmitter Circuit	Brand	Model	Antenna Type	Antenna Gain (dBi)	Antenna Connector
Chain(0)	Wistron	81.EBJ15.005	PIFA	3.6	IPEX
Chain(1)	Wistron	81.EBJ15.005	PIFA	3.6	IPEX

- The EUT incorporates CDD function with 802.11b, 802.11g and MIMO function with draft 802.11n.
- The EUT is 2 * 2 spatial MIMO (2Tx & 2Rx) without beam forming function. The antenna configurations are two transmitter antennas and two receiver antennas, as there are 2 Dipole antennas or PIFA antennas. Spatial multiplexing modes for simultaneous transmission using 2 antennas, and for simultaneous receiver using 2 antennas.
- There are two different versions of DUT, the only difference is version -141 has switch regulator installed, and version -041 has the transistors installed instead of switch regulator. The worst-case scenario has been investigated with the same output power, which version -141 shows the worst results on conducted emission, and version -041 shows the worst results on radiated emission. The test data reflects the worst-case scenarios.
- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 GENERAL DESCRIPTION OF TEST MODE

The EUT was tested under following test mode:

For conducted test	
Test Mode	Description
Mode 1	With PIFA antenna / version -141
For radiated test	
Test Mode	Description
Mode 1	With Dipole antenna / version -041
Mode 2	With PIFA antenna / version -041

3.3 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	Lenovo	0769	0769AUU	FCC DoC
2	EXTENSION CARD	Atheros	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

3.4 CONFIGURATION OF SYSTEM UNDER TEST

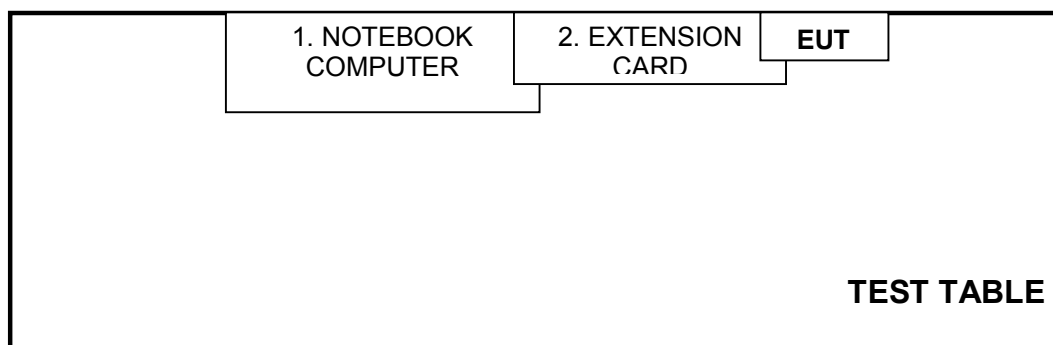

4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD:

FCC Part 15, Subpart B (Section: 15.107)

CISPR 22: 1997 (section 5)

ICES-003: 2004 (Class A: section 5.2)
(Class B: section 5.3)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 23, 2009	Mar. 22, 2010
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100071	Nov. 26, 2008	Nov. 25, 2009
Line-Impedance Stabilization Network (for EUT)	ESH3-Z5	848773/004	Nov. 05, 2008	Nov. 04, 2009
RF Cable (JYEBAO)	5DFB	COBCAB-001	Aug. 15, 2008	Aug. 14, 2009
50 ohms Terminator	50	3	Nov. 05, 2008	Nov. 04, 2009
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.



A D T

4.1.3 TEST PROCEDURE


The basic test procedure was in accordance with ANSI C63.4-2003 (section 7). CISPR 22 (section 9) and ICES-003: 2004 (section 4).

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

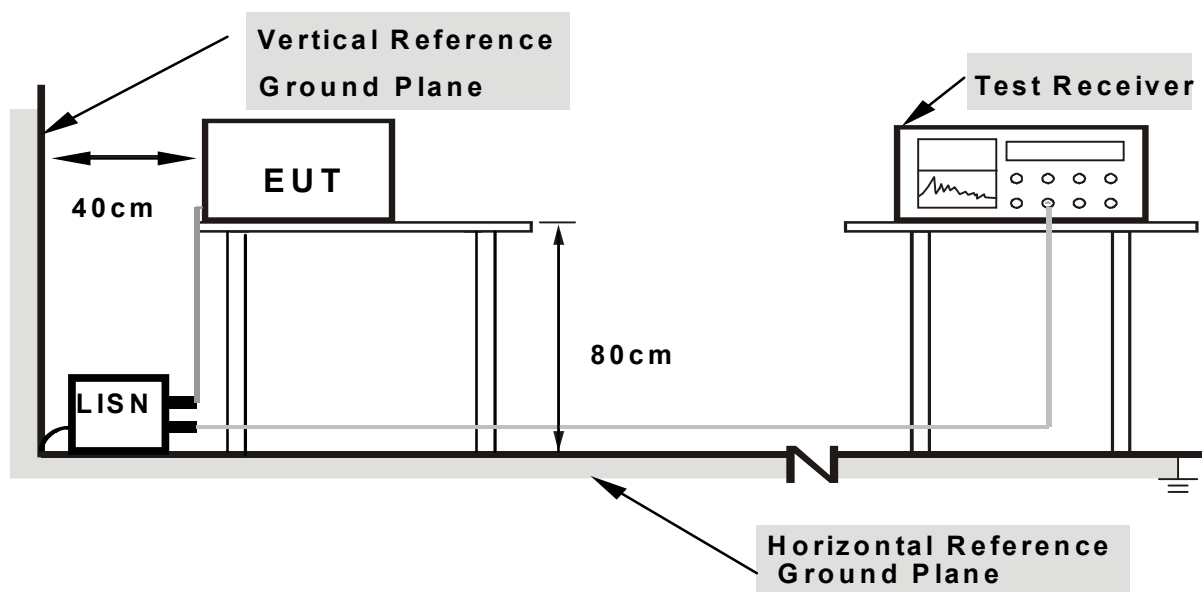

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- Connect the EUT with support unit 1 (Notebook computer) which placed on a testing table.
- Support unit 1 (Notebook computer) run test program “ART v0 9 b4” to allow EUT to transmit continuously at specific channel frequency.

4.1.7 TEST RESULTS

INPUT POWER	120Vac, 60 Hz	6DB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 60%RH, 965 hPa	PHASE	Line (L)
TESTED BY	Rex Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.19	41.70	-	41.89	-	66.00	56.00	-24.11	-
2	0.205	0.23	45.53	-	45.76	-	63.42	53.42	-17.66	-
+3	0.552	0.42	37.41	-	37.83	-	56.00	46.00	-18.17	-
4	3.102	0.50	29.17	-	29.67	-	56.00	46.00	-26.33	-
5	5.246	0.61	37.77	-	38.38	-	60.00	50.00	-21.62	-
6	9.113	0.69	30.82	-	31.51	-	60.00	50.00	-28.49	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

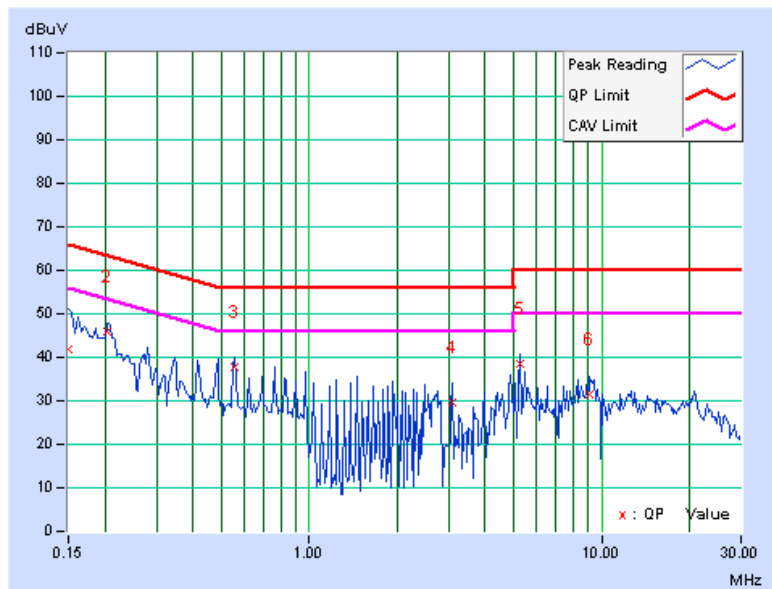

INPUT POWER	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	28 deg. C, 60%RH, 965 hPa	PHASE	Neutral (N)
TESTED BY	Rex Huang		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
+1	0.209	0.16	46.42	-	46.58	-	63.26	53.26	-16.68	-
2	0.275	0.24	40.39	-	40.63	-	60.97	50.97	-20.33	-
3	0.970	0.21	25.85	-	26.06	-	56.00	46.00	-29.94	-
4	4.074	0.51	33.72	-	34.23	-	56.00	46.00	-21.77	-
5	5.320	0.52	36.32	-	36.84	-	60.00	50.00	-23.16	-
6	13.738	0.81	26.61	-	27.42	-	60.00	50.00	-32.58	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

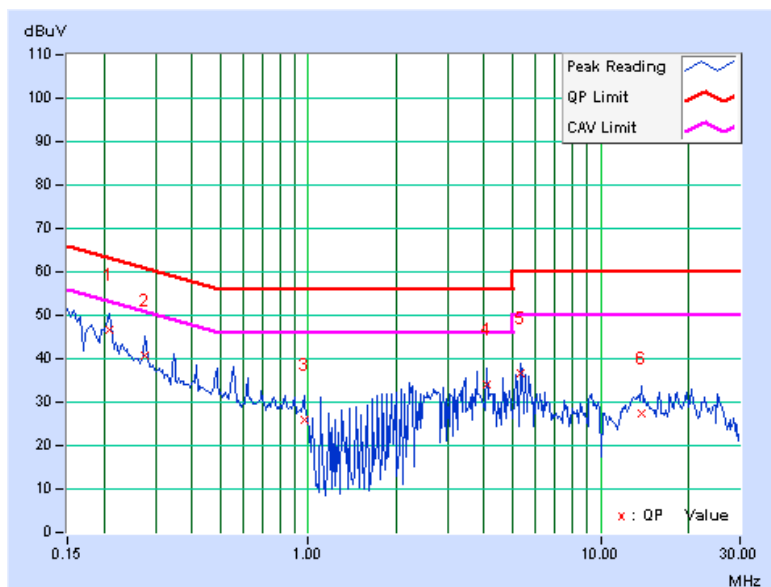

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD:

FCC Part 15, Subpart B (Section: 15.109)

CISPR 22: 1997 (section 6)

ICES-003: 2004 (Class A: Section 5.4)

(Class B: Section 5.5)

FOR FREQUENCY BELOW 1000 MHz (47 CFR Part 15 Subpart B)

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
30 – 88	90	39.1	100	40.0
88 – 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46.0
Above 960	300	49.5	500	54.0

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

- Note:** (1) The lower limit shall apply at the transition frequencies.
 (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
 (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

FREQUENCY RANGE OF RADIATED MEASUREMENT

(For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 9, 2008	Dec. 8, 2009
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	Apr. 24, 2009	Apr. 23, 2010
HP Pre_Amplifier	8449B	3008A01923	Nov. 10, 2008	Nov. 9, 2009
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 9, 2009	Sep. 8, 2010
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 29, 2009	April 28, 2010
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 09, 2008	Dec. 08, 2009
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2009	Jan. 21, 2010
RF Switches	EMH-011	08009	Oct. 07, 2008	Oct. 06, 2009
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 15, 2008	Aug. 14, 2009
RF Cable	8DFB	STCCAB-30M-1GHz	Oct. 07, 2008	Oct. 06, 2009
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

4.2.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4-2003 (section 8). CISPR 22 (section 10) and ICES-003: 2004 (section 4).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10-meter open field site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters (3m-above 1GHz) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the interference antenna.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

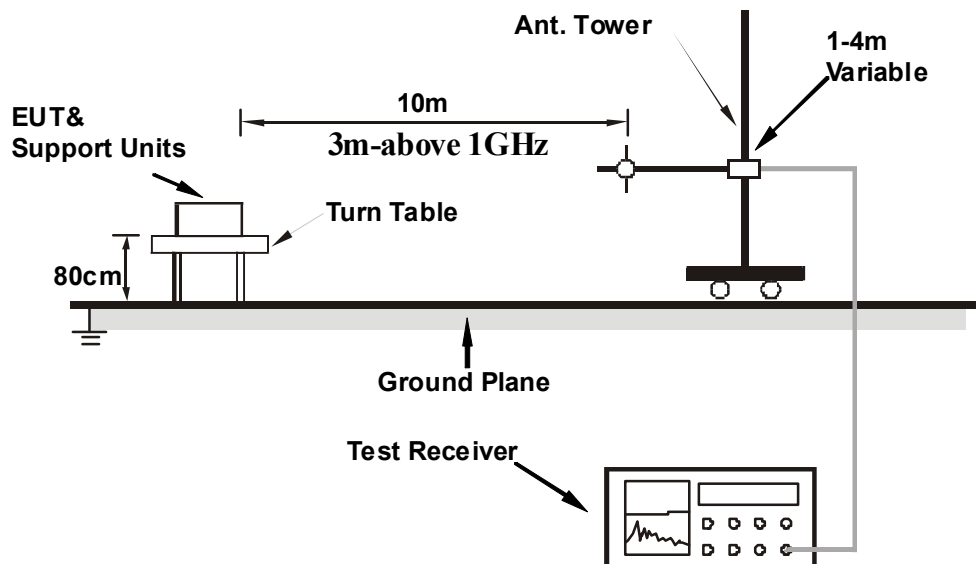

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6


4.2.7 TEST RESULTS(MODE 1)

TEST MODE	Mode 1	INPUT POWER	120Vac, 60 Hz
FREQUENCY RANGE	30-1000 MHz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	29 deg. C, 55 % RH, 960 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	38.70	22.73 QP	30.00	-7.27	1.70 H	74	8.43	14.30
2	159.80	25.07 QP	30.00	-4.93	1.00 H	4	9.70	15.37
3	166.01	27.08 QP	30.00	-2.92	2.18 H	8	11.84	15.24
4	196.50	20.96 QP	30.00	-9.04	1.94 H	172	8.35	12.61
5	255.50	22.49 QP	37.00	-14.51	1.90 H	218	7.98	14.51
6	497.89	33.03 QP	37.00	-3.97	2.05 H	63	10.60	22.43

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

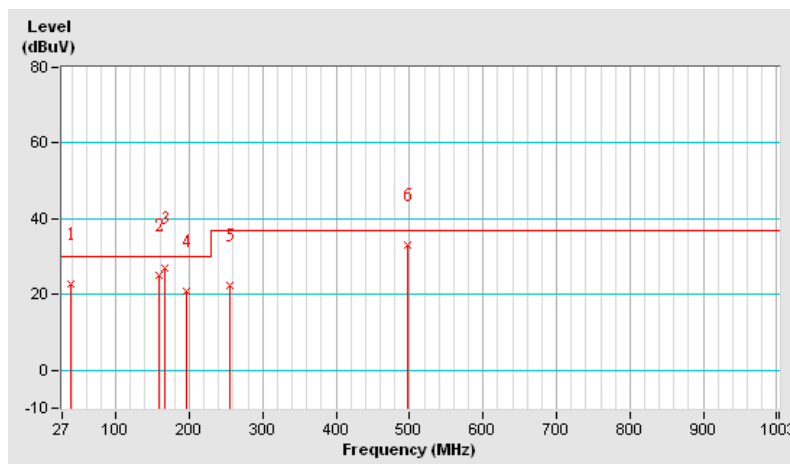


TEST MODE	Mode 1	INPUT POWER	120Vac, 60 Hz
FREQUENCY RANGE	30-1000 MHz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	29 deg. C, 55 % RH, 960 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.81	24.95 QP	30.00	-5.05	1.00 V	19	10.34	14.61
2	67.56	26.91 QP	30.00	-3.09	1.41 V	74	13.49	13.42
3	142.86	24.51 QP	30.00	-5.49	1.02 V	226	9.56	14.95
4	162.09	24.77 QP	30.00	-5.23	1.20 V	298	9.45	15.32
5	199.79	23.77 QP	30.00	-6.23	1.45 V	320	11.37	12.40
6	400.45	23.62 QP	37.00	-13.38	2.23 V	290	4.11	19.51

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

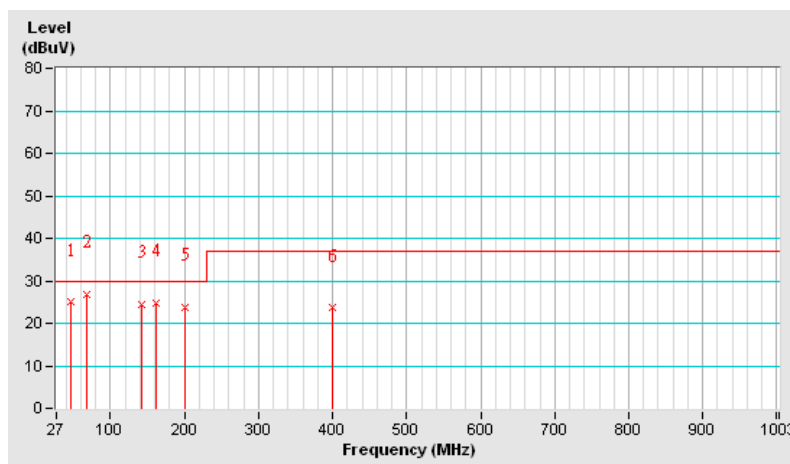


TEST MODE	Mode 1	INPUT POWER	120Vac, 60 Hz
FREQUENCY RANGE	1000-12500 MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) / Average (AV), 1MHz
ENVIRONMENTAL CONDITIONS	31 deg. C, 61 % RH, 960 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	46.25 PK	74.00	-27.75	1.25 H	3	3.23	43.02
2	4924.00	32.61 AV	54.00	-21.39	1.25 H	3	-10.41	43.02
3	7386.00	53.62 PK	74.00	-20.38	1.02 H	89	9.24	44.38
4	7386.00	38.90 AV	54.00	-15.10	1.02 H	89	-5.48	44.38

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

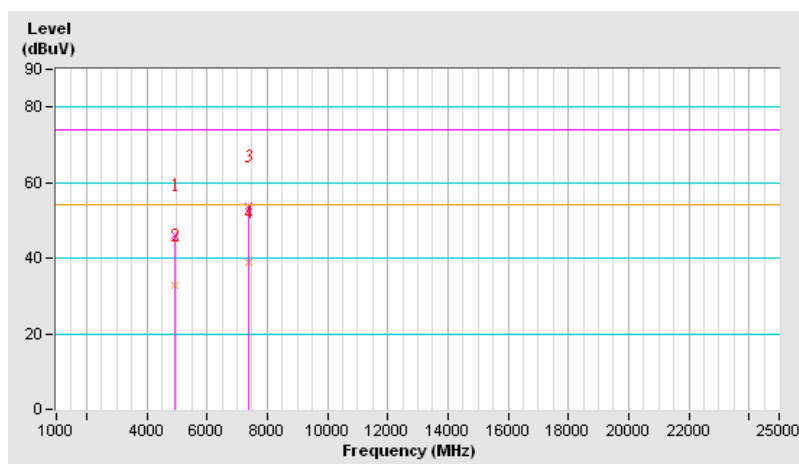


TEST MODE	Mode 1	INPUT POWER	120Vac, 60 Hz
FREQUENCY RANGE	1000-12500 MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) / Average (AV), 1MHz
ENVIRONMENTAL CONDITIONS	31 deg. C, 61 % RH, 960 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	46.95 PK	74.00	-27.05	1.24 V	74	9.89	37.06
2	4924.00	32.64 AV	54.00	-21.36	1.24 V	74	-4.42	37.06
3	7386.00	53.69 PK	74.00	-20.31	1.88 V	97	10.56	43.13
4	7386.00	39.90 AV	54.00	-14.10	1.88 V	97	-3.23	43.13

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

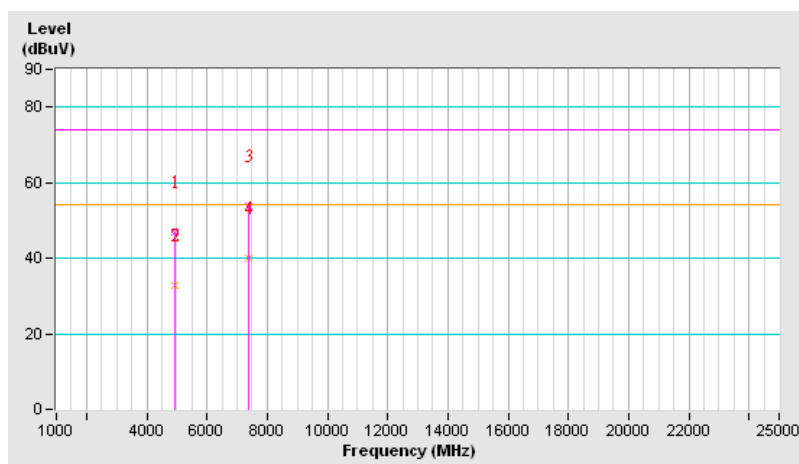


4.2.8 TEST RESULTS(MODE 2)

TEST MODE	Mode 2	INPUT POWER	120Vac, 60 Hz
FREQUENCY RANGE	30-1000 MHz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	29 deg. C, 55 % RH, 960 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.21	23.25 QP	30.00	-6.75	1.68 H	295	8.67	14.58
2	159.99	26.21 QP	30.00	-3.79	1.32 H	65	10.85	15.36
3	166.11	28.14 QP	30.00	-1.86	1.32 H	65	12.90	15.24
4	196.55	21.45 QP	30.00	-8.55	1.02 H	326	8.85	12.60
5	255.47	23.51 QP	37.00	-13.49	1.02 H	254	9.00	14.51
6	497.89	33.24 QP	37.00	-3.76	2.22 H	253	10.81	22.43

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

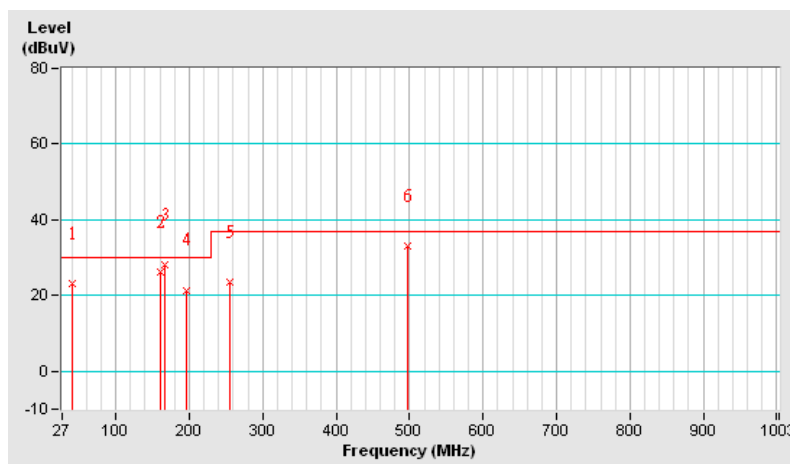


TEST MODE	Mode 2	INPUT POWER	120Vac, 60 Hz
FREQUENCY RANGE	30-1000 MHz	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	29 deg. C, 55 % RH, 960 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 10 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.83	24.84 QP	30.00	-5.16	1.02 V	214	10.23	14.61
2	67.58	26.24 QP	30.00	-3.76	1.32 V	62	12.82	13.42
3	142.88	25.12 QP	30.00	-4.88	1.32 V	23	10.16	14.96
4	162.11	25.01 QP	30.00	-4.99	1.32 V	62	9.69	15.32
5	199.81	24.12 QP	30.00	-5.88	1.56 V	324	11.72	12.40
6	400.41	24.21 QP	37.00	-12.79	1.02 V	254	4.70	19.51

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

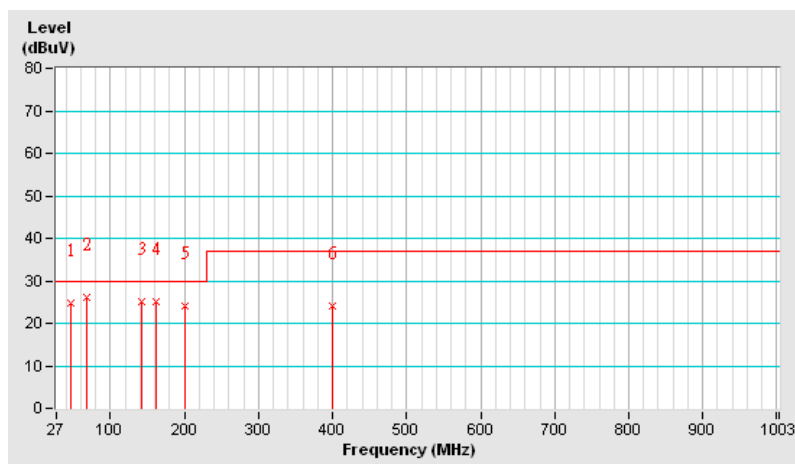


TEST MODE	Mode 2	INPUT POWER	120Vac, 60 Hz
FREQUENCY RANGE	1000-12500 MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) / Average (AV), 1MHz
ENVIRONMENTAL CONDITIONS	31 deg. C, 61 % RH, 960 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	45.20 PK	74.00	-28.80	1.54 H	84	2.18	43.02
2	4924.00	32.21 AV	54.00	-21.79	1.54 H	84	-10.81	43.02
3	7386.00	52.24 PK	74.00	-21.76	1.64 H	253	7.86	44.38
4	7386.00	39.65 AV	54.00	-14.35	1.64 H	253	-4.73	44.38

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

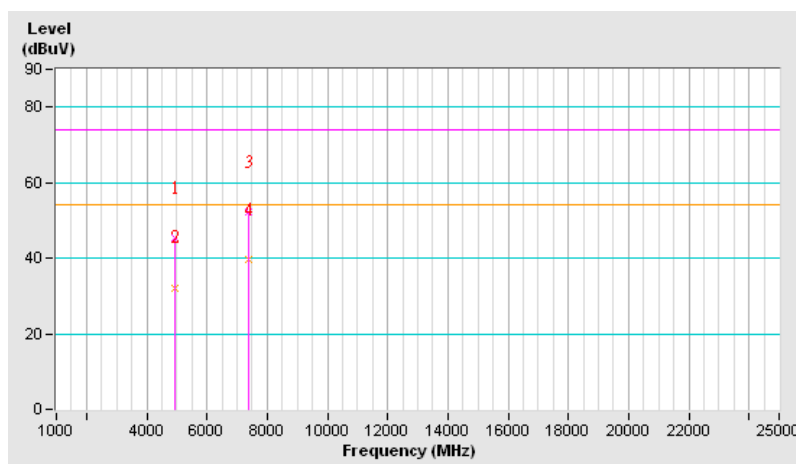


TEST MODE	Mode 2	INPUT POWER	120Vac, 60 Hz
FREQUENCY RANGE	1000-12500 MHz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) / Average (AV), 1MHz
ENVIRONMENTAL CONDITIONS	31 deg. C, 61 % RH, 960 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4924.00	46.21 PK	74.00	-27.79	1.45 V	146	9.15	37.06
2	4924.00	32.39 AV	54.00	-21.61	1.45 V	146	-4.67	37.06
3	7386.00	52.31 PK	74.00	-21.69	1.02 V	84	9.18	43.13
4	7386.00	39.60 AV	54.00	-14.40	1.02 V	84	-3.53	43.13

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

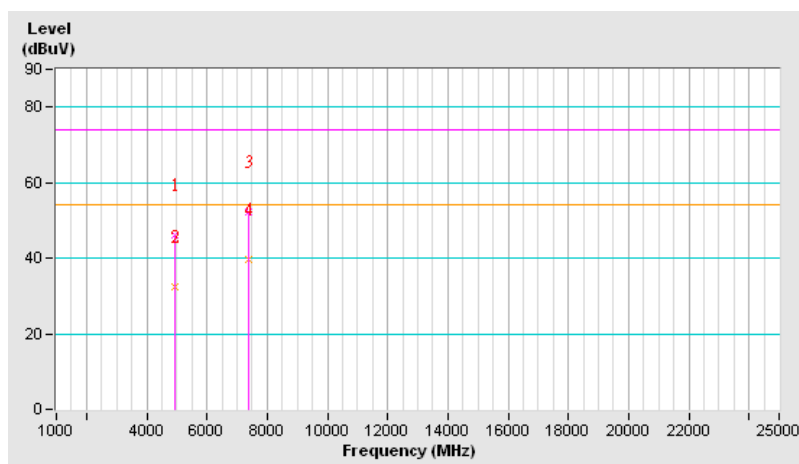

5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---